

## Report on the EMC Testing of:

KYOCERA Corporation  
Mobile Phone, Model: DB05

In accordance with FCC Part 15 Subpart B  
Class B

Prepared for: KYOCERA Corporation  
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku,  
Yokohama-shi, Kanagawa, 224-8502 Japan  
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

Add value.  
Inspire trust.

## COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-19168-0

### SIGNATURE

| NAME           | JOB TITLE                  | RESPONSIBLE FOR    | ISSUE DATE  |
|----------------|----------------------------|--------------------|-------------|
| Hiroaki Suzuki | Deputy Manager of RF Group | Approved Signatory | 16 OCT 2019 |

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC Part 15 Subpart B.



### DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.  
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

### ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.  
Yonezawa Testing Center  
5-4149-7 Hachimanpara,  
Yonezawa-shi, Yamagata,  
992-1128 Japan

Phone: +81 (0) 238 28 2881  
Fax: +81 (0) 238 28 2888  
[www.tuv-sud.jp](http://www.tuv-sud.jp)

**Additional signatures required by FCC 47 CFR Part 2, § 2.938 (b) (10)****Signatures of the individuals responsible for testing the product****ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC Part 15 Subpart B. The sample tested was found to be compliant with the requirements defined in the applied rules.

| NAME             | RESPONSIBLE FOR | SIGNATURE               |
|------------------|-----------------|-------------------------|
| Satoshi Hosoya   | Testing         | <i>Satoshi Hosoya</i>   |
| Hiroomi Tsuchiya | Testing         | <i>Hiroomi Tsuchiya</i> |
| Nobuhiko Iwasawa | Testing         | <i>Nobuhiko Iwasawa</i> |

## Contents

|          |                                              |           |
|----------|----------------------------------------------|-----------|
| <b>1</b> | <b>Summary of Test</b>                       | <b>4</b>  |
| 1.1      | Modification history of the test report      | 4         |
| 1.2      | Standards                                    | 4         |
| 1.3      | Measurement standards                        | 4         |
| 1.4      | Deviation from standards                     | 4         |
| 1.5      | List of applied test(s) of the EUT           | 4         |
| 1.6      | Test information                             | 4         |
| 1.7      | Test set up                                  | 4         |
| 1.8      | Test period                                  | 4         |
| <b>2</b> | <b>Equipment Under Test</b>                  | <b>5</b>  |
| 2.1      | EUT information                              | 5         |
| 2.2      | Modification to the EUT                      | 5         |
| 2.3      | Variation of family model(s)                 | 5         |
| 2.4      | Operation mode                               | 6         |
| <b>3</b> | <b>Configuration of Equipment</b>            | <b>7</b>  |
| 3.1      | Equipment used                               | 7         |
| 3.2      | Cable(s) used                                | 7         |
| 3.3      | System configuration                         | 8         |
| <b>4</b> | <b>Test Result</b>                           | <b>9</b>  |
| 4.1      | Conducted emission at mains port             | 9         |
| 4.2      | Radiated emission (below 1 GHz)              | 11        |
| 4.3      | Radiated emission (above 1 GHz)              | 17        |
| <b>5</b> | <b>Measurement Uncertainty</b>               | <b>24</b> |
| <b>6</b> | <b>Laboratory Information</b>                | <b>25</b> |
|          | <b>Appendix A. Test Equipment</b>            | <b>26</b> |
|          | <b>Appendix B. Configuration Photographs</b> | <b>27</b> |

## 1 Summary of Test

### 1.1 Modification history of the test report

| Document Number | Modification History | Issue Date              |
|-----------------|----------------------|-------------------------|
| JPD-TR-19168-0  | First Issue          | Refer to the cover page |

### 1.2 Standards

FCC Part 15 Subpart B

### 1.3 Measurement standards

ANSI C63.4 2014

### 1.4 Deviation from standards

None

### 1.5 List of applied test(s) of the EUT

Regarding judgment of conformance to Emission test, a value of measurement uncertainty was not taken in account.

| Test Name                        | Classification of EUT | Test    | Worst Point (Margin)                           | Result | Remarks |
|----------------------------------|-----------------------|---------|------------------------------------------------|--------|---------|
| Conducted emission at mains port | Class B               | Applied | L2 0.150 MHz QP 14.5 dB                        | Pass   | -       |
| Radiated emission (below 1 GHz)  | Class B               | Applied | Wide camera/with ADP<br>V 30.000 MHz QP 0.1 dB | Pass   | -       |
| Radiated emission (above 1 GHz)  | Class B               | Applied | MP4/with ADP<br>H 5444.996 MHz AV 12.4 dB      | Pass   | -       |

### 1.6 Test information

None

### 1.7 Test set up

Table-top

### 1.8 Test period

31-July-2019 - 05-August-2019

## 2 Equipment Under Test

### 2.1 EUT information

|                            |                                                                                                                                                          |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant                  | KYOCERA Corporation<br>Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku, Yokohama-shi, Kanagawa, 224-8502 Japan<br>Phone: +81-45-943-6253 Fax: +81-45-943-6314 |
| Equipment Under Test (EUT) | Mobile Phone                                                                                                                                             |
| Model number               | DB05                                                                                                                                                     |
| Serial number              | 35815800001779                                                                                                                                           |
| Trade name                 | KYOCERA                                                                                                                                                  |
| Authorization              | JOYDB05                                                                                                                                                  |
| Number of sample(s)        | 1                                                                                                                                                        |
| EUT condition              | Pre-Production                                                                                                                                           |
| Maximum frequency          | 2300 MHz                                                                                                                                                 |
| Power rating               | Battery: DC 3.85 V                                                                                                                                       |
| Size                       | (W) 73.0 × (D) 153.0 × (H) 8.9 mm                                                                                                                        |

### 2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

| Modification State        | Description of Modification  | Modification fitted by | Date of Modification |
|---------------------------|------------------------------|------------------------|----------------------|
| DB05, S/N: 35815800001779 |                              |                        |                      |
| 0                         | As supplied by the applicant | Not Applicable         | Not Applicable       |

### 2.3 Variation of family model(s)

#### 2.3.1 List of family model(s)

Not applicable

#### 2.3.2 Reason for selection of EUT

Not applicable



Japan

## **2.4 Operation mode**

### **1. In Camera/ with ADP mode**

- i) Power On
- ii) Record

### **2. Out Camera/ with ADP mode**

- i) Power ON
- ii) Record

### **3. Wide Camera/ with ADP mode**

- i) Power ON
- ii) Record

### **4. MP4/ with ADP mode**

- i) Power ON
- ii) Execution of Color Bar moving picture data

### **5. USB Read/ with PC mode**

- i) Power ON
- ii) EUT connects to PC via USB cable
- iii) Read / write of MP4 moving picture data

### 3 Configuration of Equipment

Numbers assigned to equipment or cables in “3.1 Equipment(s) used” and “3.2 Cable(s) used” correspond to numbers in “3.3 System configuration”.

#### 3.1 Equipment used

| No.  | Equipment         | Company | Model No.     | Serial No.                      | FCC ID /DoC | Remarks |
|------|-------------------|---------|---------------|---------------------------------|-------------|---------|
| EUT1 | Mobile Phone      | KYOCERA | DB05          | 358158100001779                 | JOYDB05     | EUT     |
| AE1  | AC adapter        | KDDI    | 0301PQA       | HS-TFA                          | N/A         | *1      |
| AE2  | Earphone          | N/A     | N/A           | N/A                             | N/A         | -       |
| AE3  | Personal Computer | Lenovo  | TYPE 7854-CTO | LR-0GDNF                        | DoC         | -       |
| AE4  | AC adapter        | Lenovo  | 42T4418       | 11S42T4418ZGWWG21<br>2MKX REV:H | N/A         | -       |


\*1: AC adapter is connected to keep operating.

#### 3.2 Cable(s) used


| No. | Cable                           | Length (m) | Shield | EUT accessory Ferrite core | Remarks |
|-----|---------------------------------|------------|--------|----------------------------|---------|
| a   | USB type C cable                | 1.0        | Yes    | -                          | -       |
| b   | Earphone cable                  | 1.25       | No     | -                          | -       |
| c   | DC cable for PC AC adapter      | 1.8        | No     | -                          | -       |
| d   | AC power cord for PC AC adapter | 0.8        | No     | -                          | -       |

### 3.3 System configuration

1. In Camera/ with ADP mode
2. Out Camera/ with ADP mode
3. Wide Camera/ with ADP mode
4. MP4/ with ADP mode

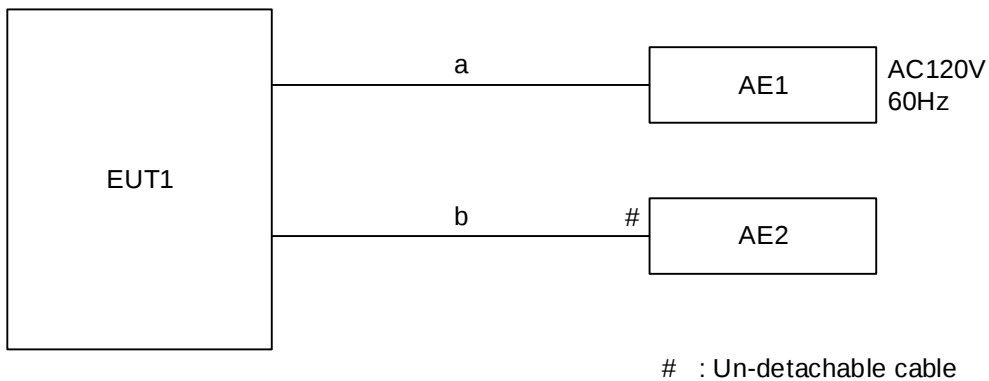

5. USB Read/ with PC mode

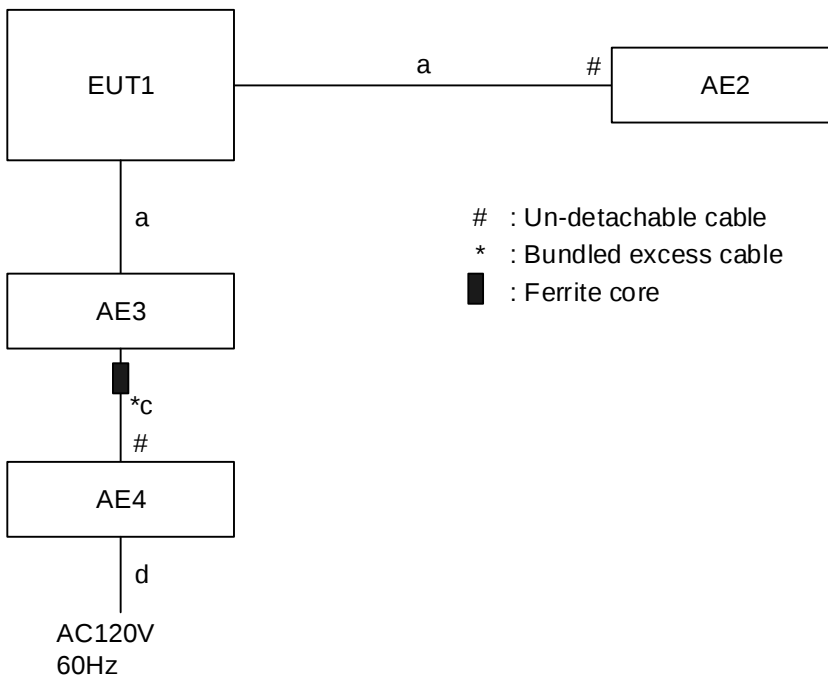

## 4 Test Result

### 4.1 Conducted emission at mains port

#### 4.1.1 Measurement condition

|                                             |                                                       |
|---------------------------------------------|-------------------------------------------------------|
| Frequency range                             | 0.15 MHz-30 MHz                                       |
| Test place                                  | 10 m Semi-Anechoic Chamber No. 1                      |
| EUT was placed on                           | FRP table (W) 2.0 × (D) 1.0 × (H) 0.8 m               |
| Metal reference plane                       | Vertical                                              |
| Test receiver setting                       | Detector: Quasi-peak, Average<br>Bandwidth: 9 kHz     |
| Line Impedance Stabilization Network (LISN) | Specification: 50 Ω/50 μH<br>Distance from EUT: 0.8 m |

EUT is placed on a non-conducting table for table-top equipment or on insulation material for a floor-standing equipment. In addition, a table-top equipment is located 0.4 m to a metal reference plane.

Line Impedance Stabilization Network (LISN) is placed 0.8 m away from the EUT. The power code of the EUT is connected to LISN and its excess part is bundled in the center. The length of bundling is 0.3-0.4 m.

A power code of a peripheral is connected to LISN and terminated into 50 Ω.

Excess cables between equipment are bundled in the center. The length of bundling is 0.3-0.4 m.

Where LISN cannot be applied, the test is performed using a voltage probe.

After overall frequency range is investigated with spectrum analyzer using peak detector, measurements are performed with test receiver in setting to the defined values.

#### 4.1.2 Calculation method

Emission level = Reading + c.f. (correction factor)\*

Margin = Limit – Emission level

\*Note: c.f. = LISN factor + Cable system loss + Attenuator loss


Example)

|                    |                                                                                                                    |
|--------------------|--------------------------------------------------------------------------------------------------------------------|
| Limit @ 6.770 MHz: | 60.0 dBμV (Quasi-peak)<br>50.0 dBμV (Average)                                                                      |
| Quasi-peak         | Reading = 41.2 dBμV    c.f. = 10.3 dB<br>Emission level = 41.2 + 10.3 = 51.5 dBμV<br>Margin = 60.0 - 51.5 = 8.5 dB |
| Average            | Reading = 35.0 dBμV    c.f. = 10.3 dB<br>Emission level = 35.0 + 10.3 = 45.3 dBμV<br>Margin = 50.0 - 45.3 = 4.7 dB |

#### 4.1.3 Test data and Configuration photographs

|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | USB Read/ with PC mode                           |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 05-August-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

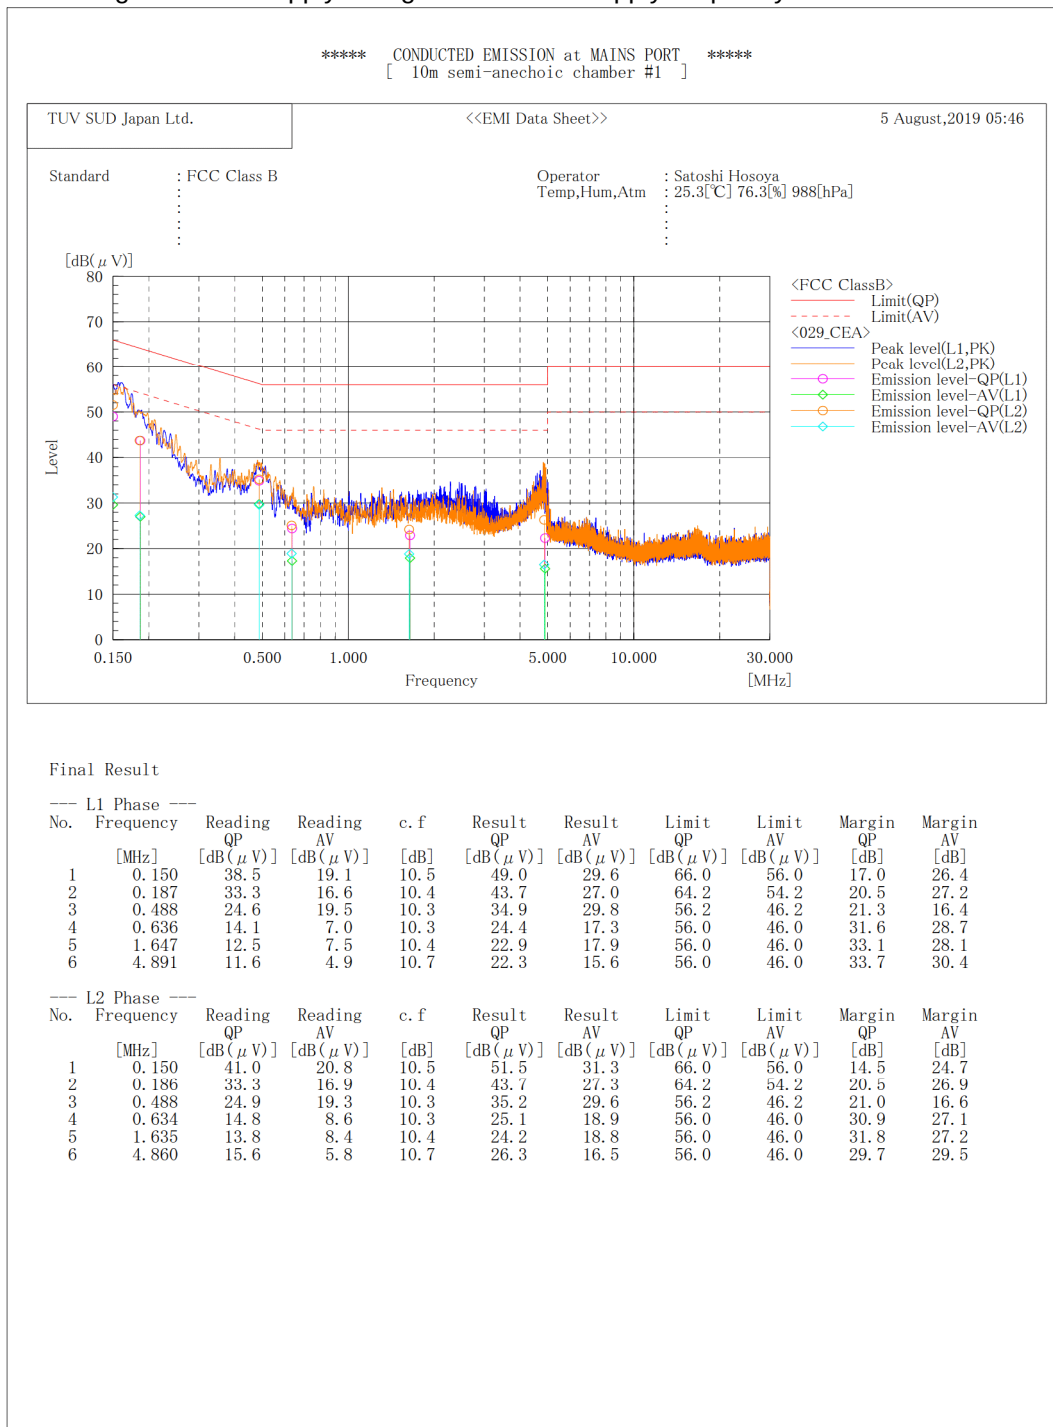

## 4.2 Radiated emission (below 1 GHz)

### 4.2.1 Measurement condition

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Frequency range       | 30 MHz-1000 MHz                                                          |
| Test place            | 10 m Semi-Anechoic Chamber No. 1                                         |
| EUT was placed on     | FRP table (W) 2.0 × (D) 1.0 × (H) 0.8 m                                  |
| Axis                  | 0°-360°                                                                  |
| Antenna               | Distance from EUT: 3 m<br>Height: 1-4 m<br>Polarity: Horizontal/Vertical |
| Test receiver setting | Detector: Quasi-peak<br>Bandwidth: 120 kHz                               |

EUT is placed on a non-conducting table for table-top equipment or on insulation material for a floor-standing equipment. The non-conducting table or the insulation material is placed on a rotating turn table.

Excess cables between equipment are bundled in the center. The length of bundling is 0.3-0.4 m.

An antenna is adjusted between 1-4 m in height and varied its polarization (horizontal and vertical), and the EUT azimuth is varied by the rotating turntable 0 to 360 degrees.

After overall frequency range is investigated with spectrum analyzer using peak detector, measurements are performed with test receiver in setting to the defined values.

### 4.2.2 Calculation method

Emission level = Reading + c.f. (correction factor)\*

Margin = Limit - Emission level

\*Note: c.f. = Antenna factor + Cable system loss + Attenuator loss - Amplifier Gain

Example)

Limit @ 350.0 MHz: 37.0 dBμV/m

Reading = 41.1 dBμV c.f. = -11.8 dB/m


Emission level = 41.1 - 11.8 = 29.3 dBμV/m

Margin = 37.0 - 29.3 = 7.7 dB

#### 4.2.3 Test data and Configuration photographs


|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | In Camera/ with ADP mode                         |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 03-August-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

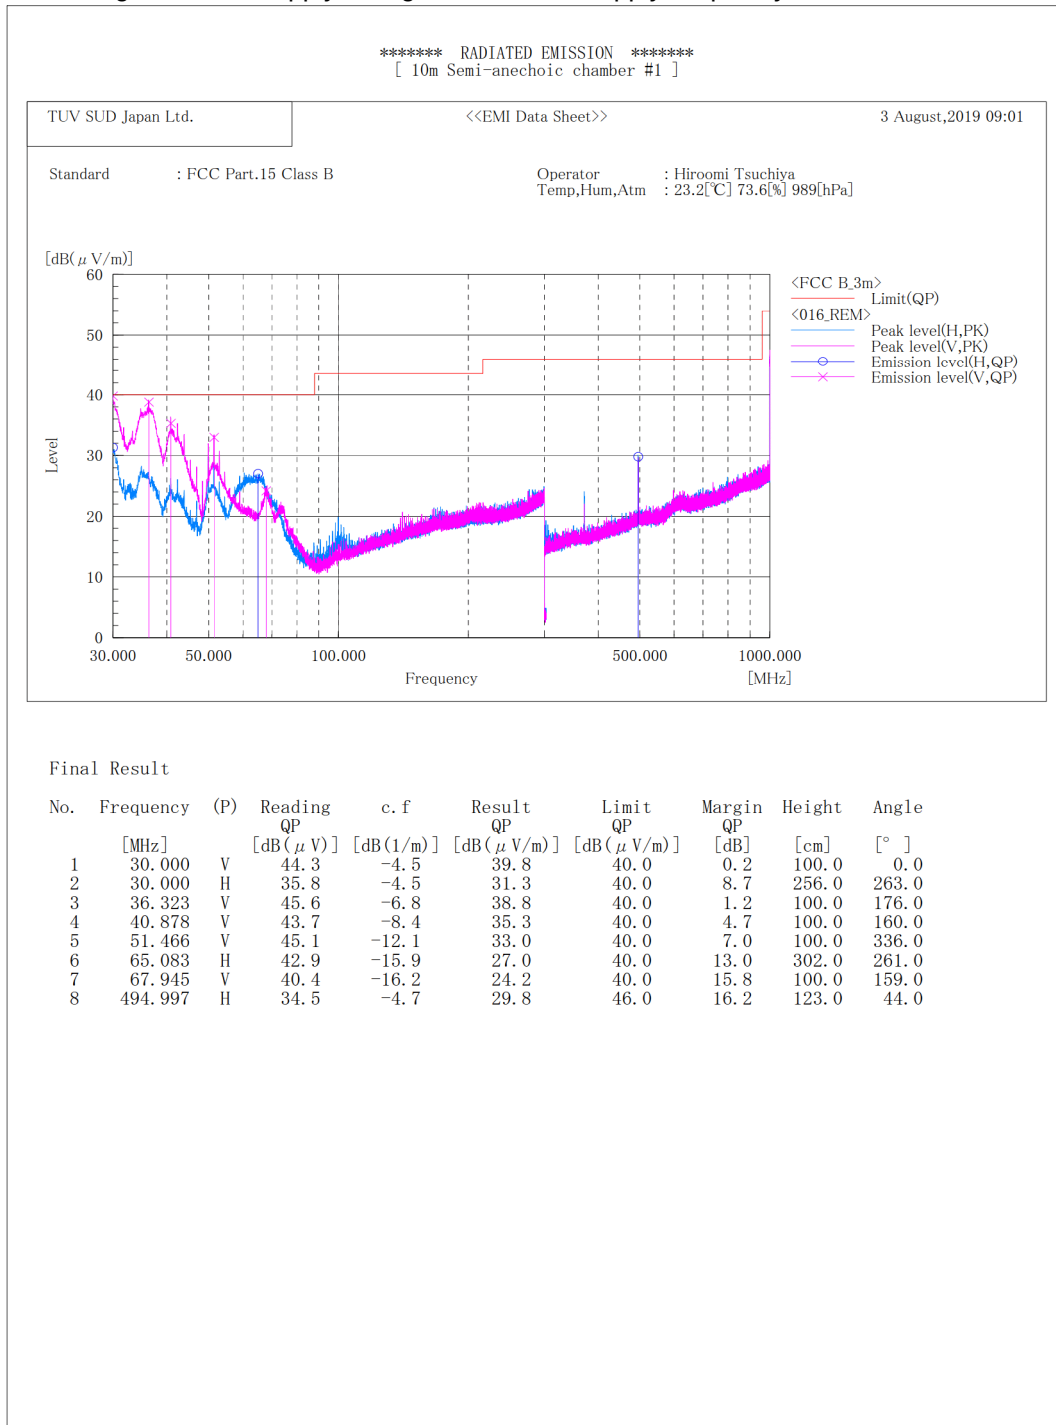


|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | Out Camera/ with ADP mode                        |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 03-August-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

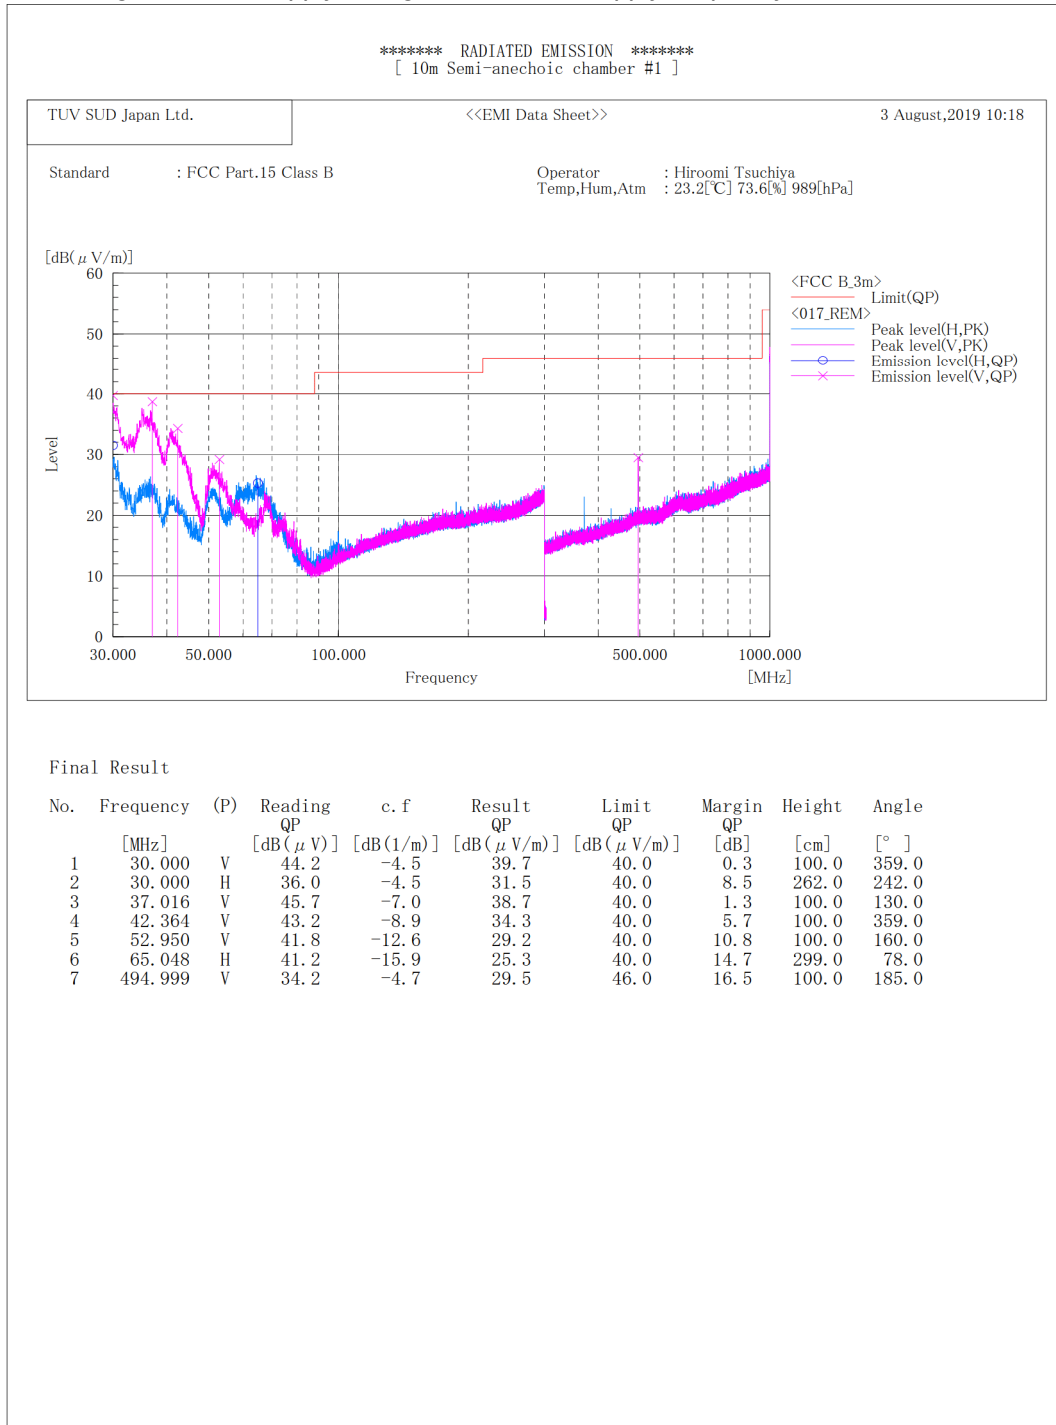


|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | MP4/ with ADP mode                               |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 03-August-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

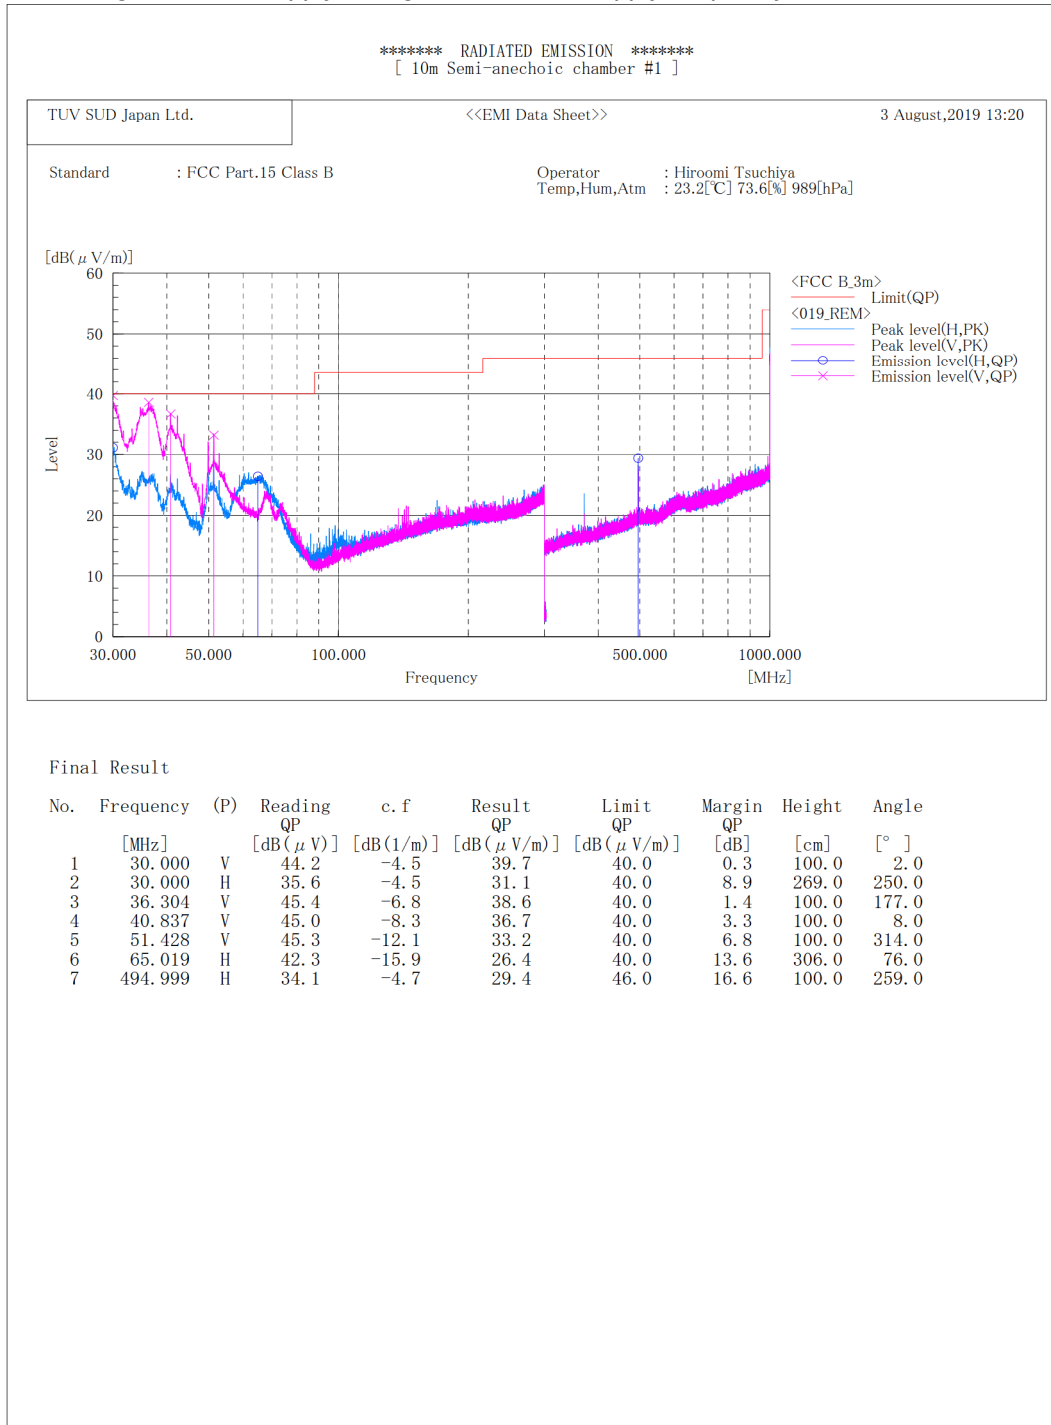


|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | USB Read/ with PC mode                           |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 01-August-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

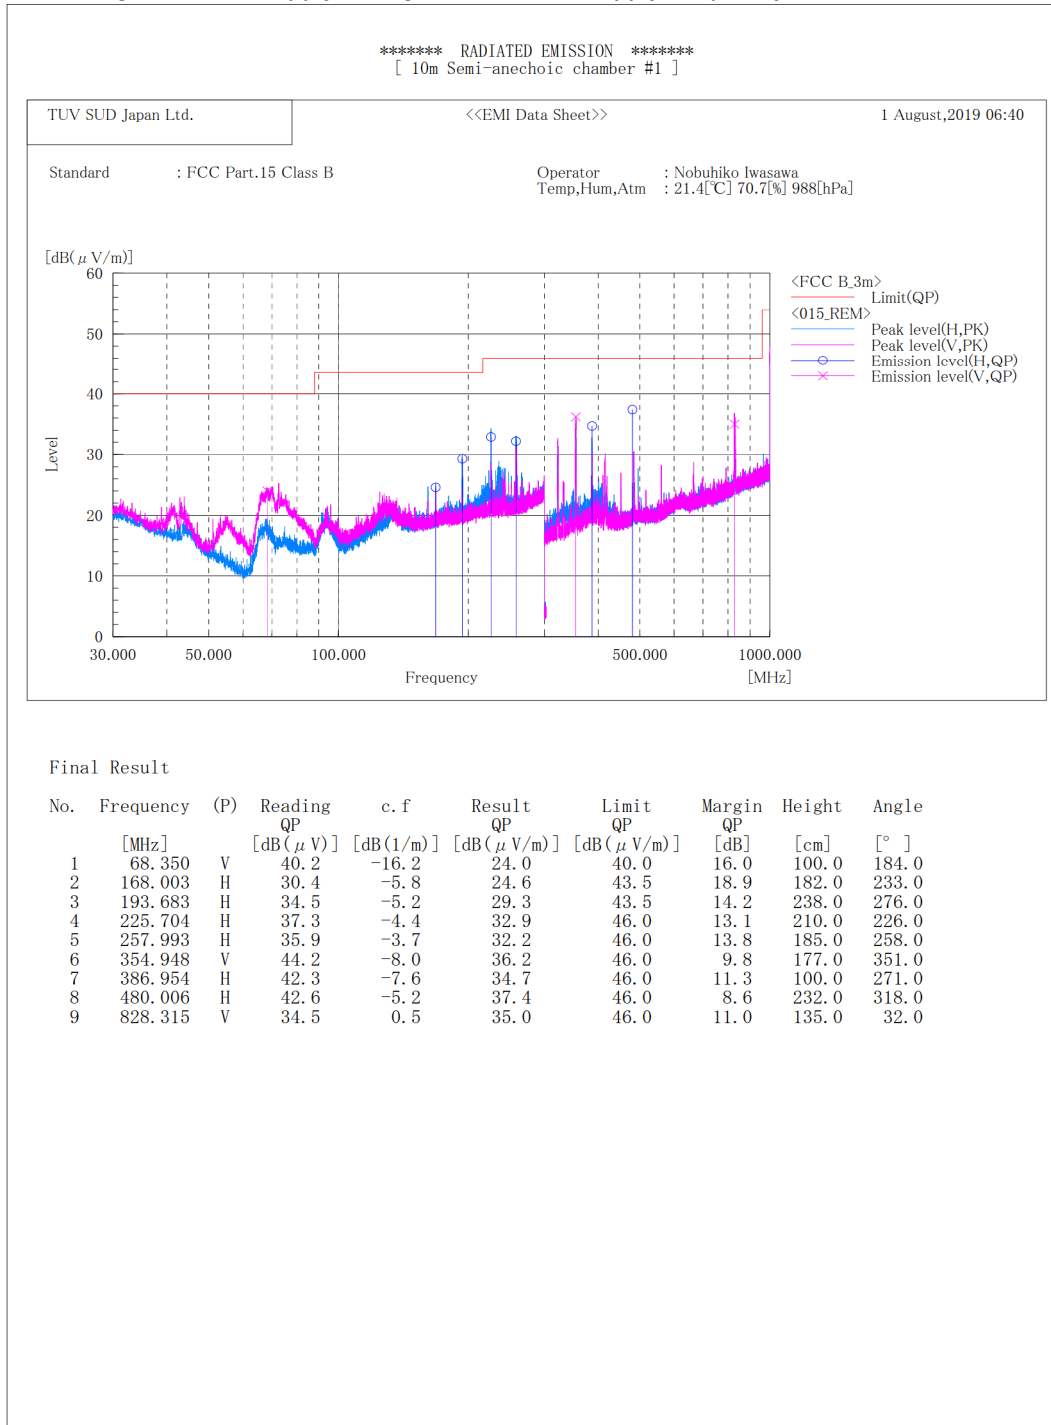

|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | Wide Camera/ with ADP mode                       |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 03-August-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

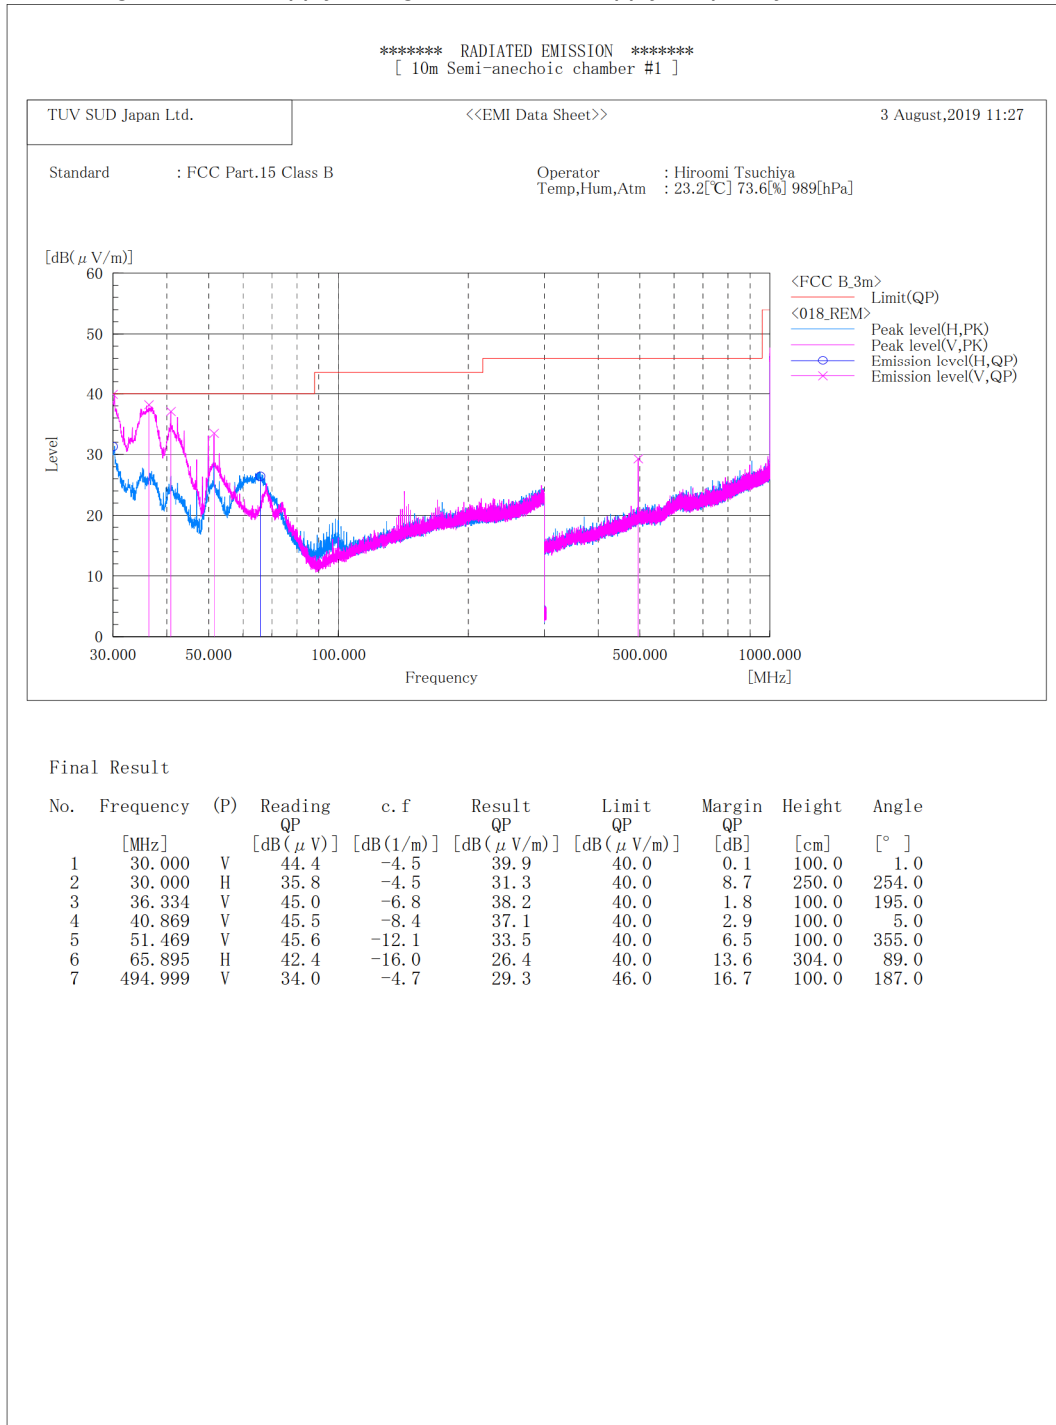

### 4.3 Radiated emission (above 1 GHz)

#### 4.3.1 Measurement condition

|                       |                                                                            |
|-----------------------|----------------------------------------------------------------------------|
| Frequency range       | 1 GHz-11.5 GHz                                                             |
| Test place            | 10 m Semi-Anechoic Chamber No. 1                                           |
| EUT was placed on     | Styrene foam table (W) 2.0 × (D) 1.0 × (H) 0.8 m                           |
| Axis                  | 0°-360°                                                                    |
| Antenna               | Distance: 3.80 m, 3.97 m<br>Height: 1-4 m<br>Polarity: Horizontal/Vertical |
| Test receiver setting | Detector: Peak, Average<br>Bandwidth: 1 MHz                                |

EUT is placed on a styrene form table for table-top equipment or on insulation material for a floor-standing equipment. The styrene form table or the insulation material is placed on a rotating turn table.

Excess cables between equipment are bundled in the center. The length of bundling is 0.3-0.4 m.

Absorbers are placed between the EUT and an antenna.

The antenna is adjusted between 1-4 m in height and varied its polarization (horizontal and vertical), and the EUT azimuth is varied by the rotating turntable 0 to 360 degrees. Where height of the antenna is changed, its angle is also adjusted to the position of the EUT.

After overall frequency range is investigated with spectrum analyzer using peak detector, measurements are performed with test receiver in setting to the defined values.

The antenna is positioned from the test volume that was predetermined by the site VSWR measurement. Since this predetermined test volume is different from maximum circumference where the EUT and the peripheral devices are actually placed, the measurement distance conversion factor is added to the measurement data.

Antenna 3 dB beamwidth (antenna used: 3117)

Antenna: 3115

| Frequency (GHz) | θ3 dB (°) | 3 dB beamwidth w (m) |
|-----------------|-----------|----------------------|
| 1.0             | 63        | 3.68                 |
| 2.0             | 47        | 2.61                 |
| 3.0             | 38        | 2.07                 |
| 4.0             | 36        | 1.95                 |
| 5.0             | 40        | 2.18                 |
| 6.0             | 44        | 2.42                 |

Antenna: 3117

| Frequency (GHz) | θ3 dB (°) | 3 dB beamwidth w (m) |
|-----------------|-----------|----------------------|
| 1.0             | 82        | 5.22                 |
| 2.0             | 60        | 3.46                 |
| 3.0             | 76        | 4.69                 |
| 4.0             | 56        | 3.19                 |
| 5.0             | 54        | 3.06                 |
| 6.0             | 50        | 2.80                 |

Measurement distance:  $d = 3.0 \text{ m}$

$W = 2 \times d \times \tan(0.5 \times \theta_{3 \text{ dB}})$

#### 4.3.2 Calculation method

Emission level = Reading + Measurement distance conversion factor + c.f. (correction factor)\*

Margin = Limit - Emission level

\*Note: c.f. = Antenna factor + Cable system loss + Attenuator loss - Amplifier Gain

Example)

Limit @ 1100.0 MHz: 70.0 dB $\mu$ V/m (Peak)  
50.0 dB $\mu$ V/m (Average)

Measurement distance: 3.25 m


Measurement distance conversion factor:  $20 \log (3.25\text{m}/3.0\text{m}) = 0.7 \text{ dB}$

|         |                                                                                                                                                                                                                  |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Peak    | Reading = 50.2 dB $\mu$ V, Measurement distance conversion factor = 0.7 dB,<br>c.f. = 1.7 dB/m<br>Emission level = $50.2 + 0.7 + 1.7 = 52.6 \text{ dB}\mu\text{V/m}$<br>Margin = $70.0 - 52.6 = 17.4 \text{ dB}$ |
| Average | Reading = 32.0 dB $\mu$ V, Measurement distance conversion factor = 0.7 dB,<br>c.f. = 1.7 dB/m<br>Emission level = $32.0 + 0.7 + 1.7 = 34.4 \text{ dB}\mu\text{V/m}$<br>Margin = $50.0 - 34.4 = 15.6 \text{ dB}$ |

### 4.3.3 Test data and Configuration photographs

|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | In Camera/ with ADP mode                         |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |


Date of test: 04-August-2019    Supply voltage: AC 120 V    Supply frequency: 60 Hz

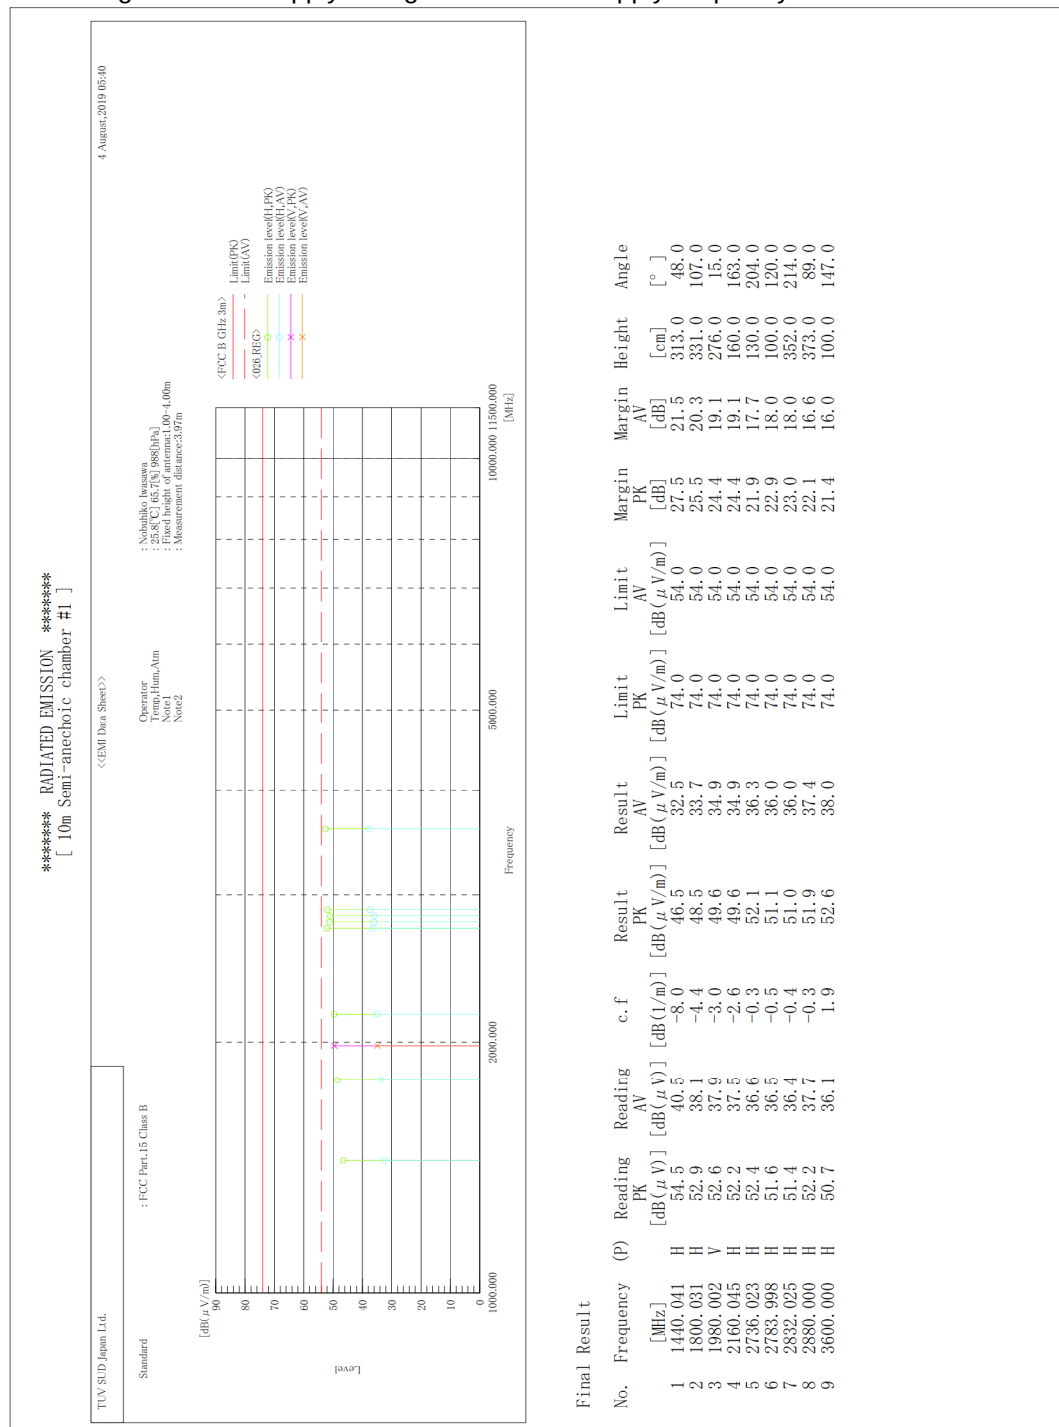

|                                                                   |  |                                |  |                    |  |                             |  |                                            |  |                                     |  |                             |  |                      |  |
|-------------------------------------------------------------------|--|--------------------------------|--|--------------------|--|-----------------------------|--|--------------------------------------------|--|-------------------------------------|--|-----------------------------|--|----------------------|--|
| TUV SUD Japan Ltd.                                                |  | Standard : FCC Part 15 Class B |  | <<EMI Data Sheet>> |  | Operator : Satoshi Hasegawa |  | Temp, Hum, Atm : 25.1[°C] 72.7[%] 987[hPa] |  | Fixed height of antenna: 1.00~4.00m |  | Measurement distance: 3.07m |  | 4 August, 2019 23:50 |  |
| ***** RADIATED EMISSION *****<br>[ 10m Semi-anechoic chamber #1 ] |  |                                |  |                    |  |                             |  |                                            |  |                                     |  |                             |  |                      |  |
|                                                                   |  | [dB(μV/m)]                     |  | Frequency [MHz]    |  | Limit(PK)                   |  | Limit(AV)                                  |  | <FCC B GHz 3m>                      |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  | - - - - -                                  |  |                                     |  |                             |  |                      |  |
|                                                                   |  |                                |  |                    |  | - - - - -                   |  |                                            |  |                                     |  |                             |  |                      |  |


|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | MP4/ with ADP mode                               |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 31-July-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

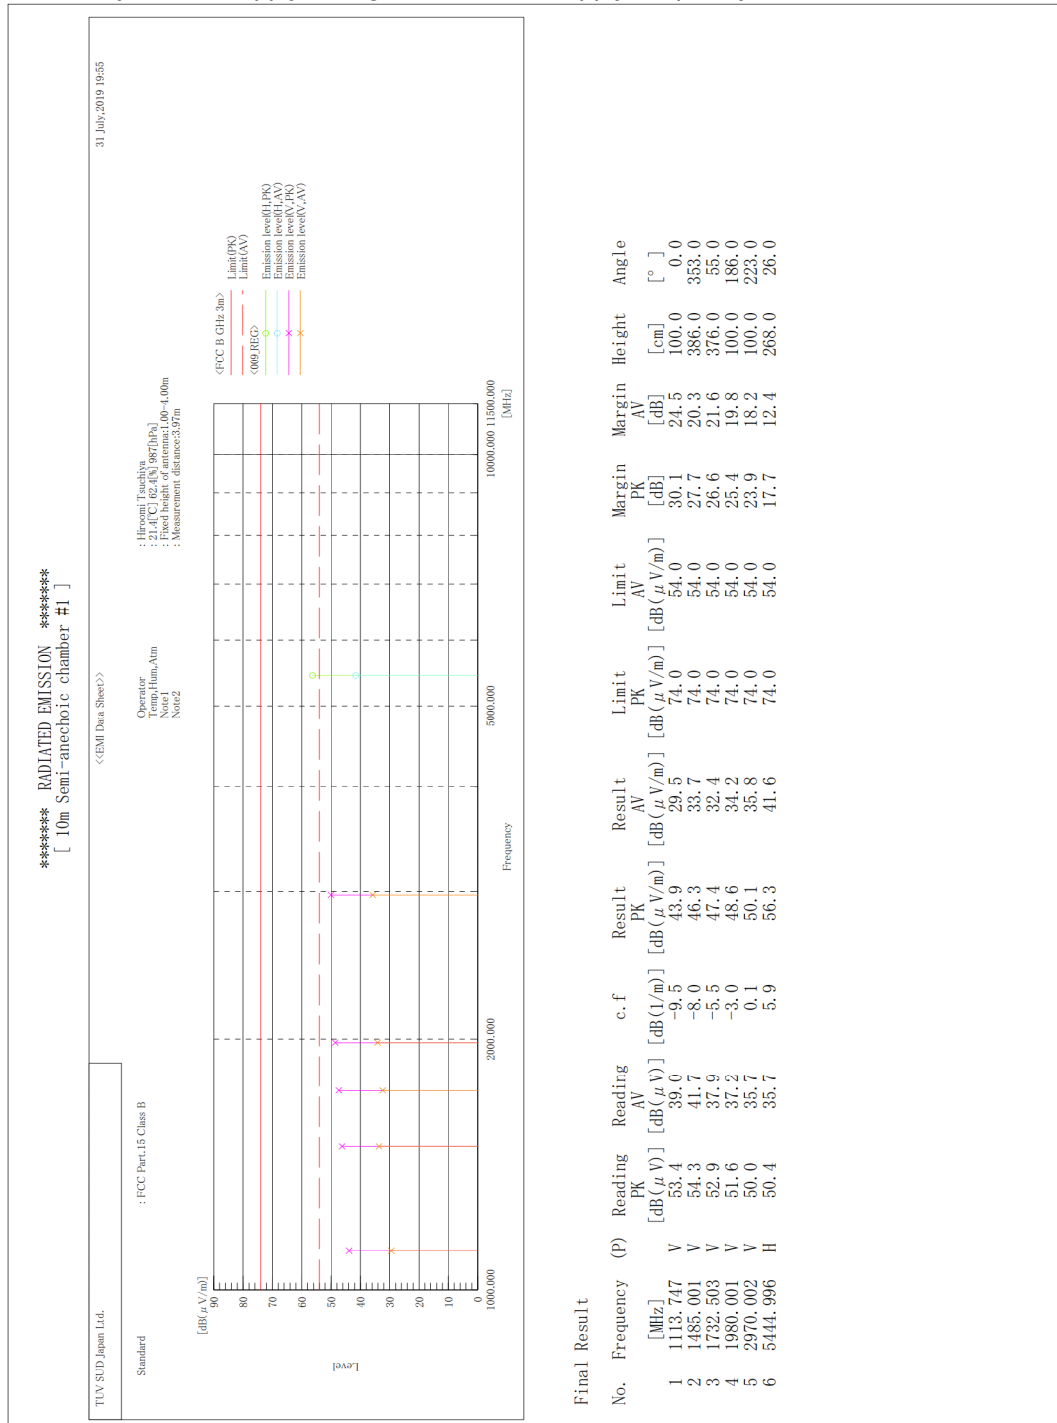


|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | USB Read/ with PC mode                           |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 31-July-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

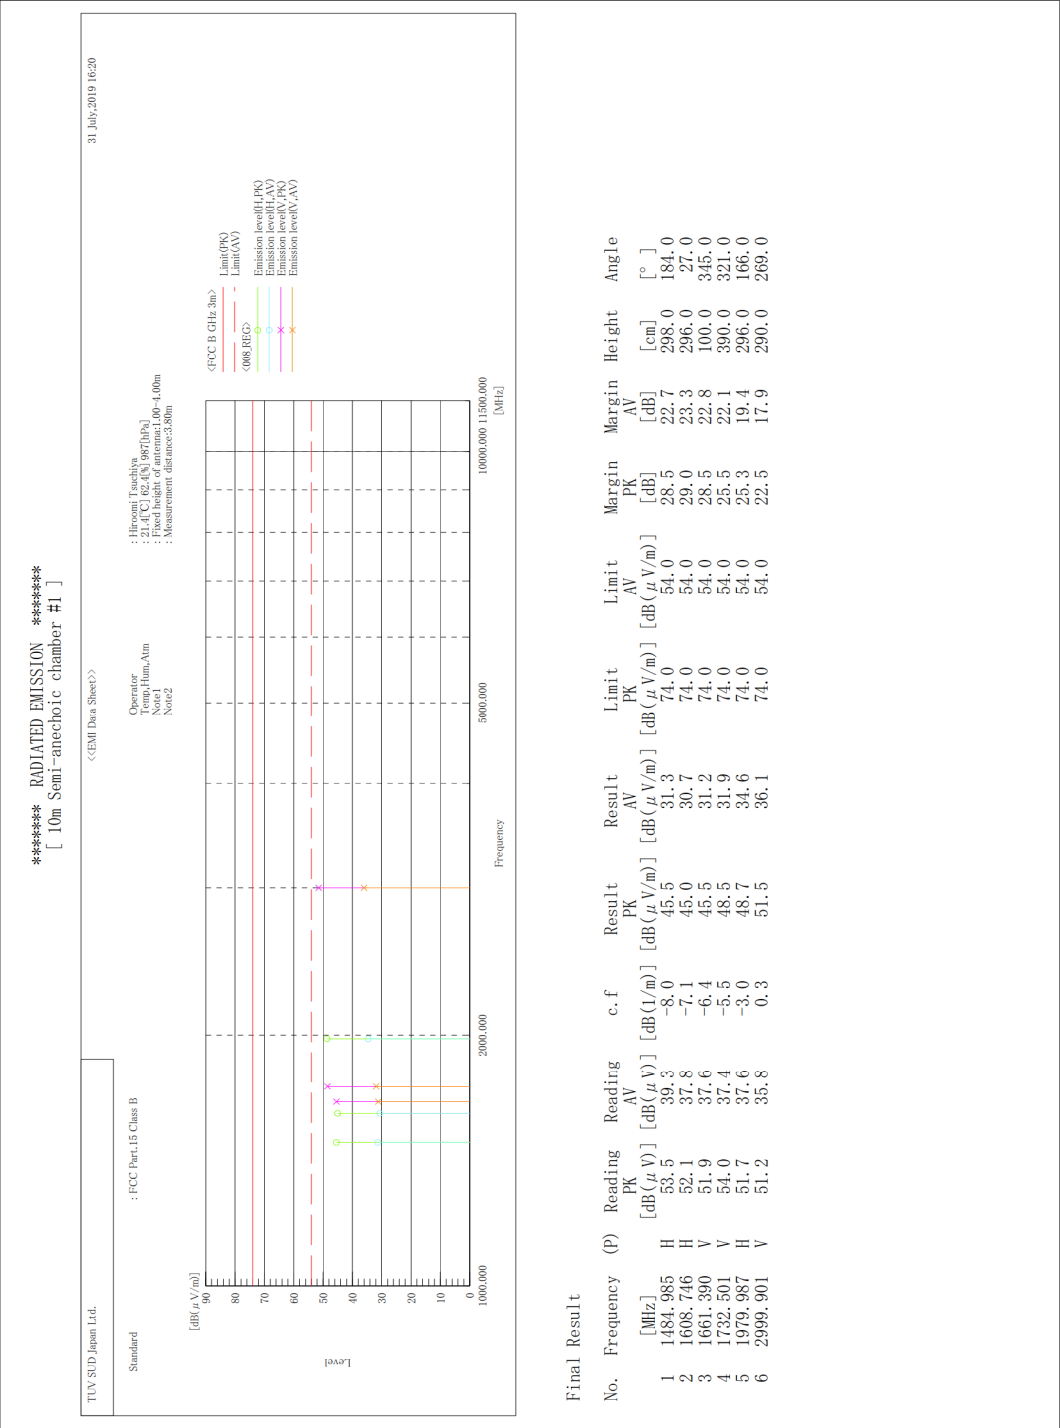

|                |                                                  |
|----------------|--------------------------------------------------|
| Operation mode | Wide Camera/ with ADP mode                       |
| EUT            | DB05, S/N: 35815800001779 - Modification State 0 |

Date of test: 05-August-2019 Supply voltage: AC 120 V Supply frequency: 60 Hz

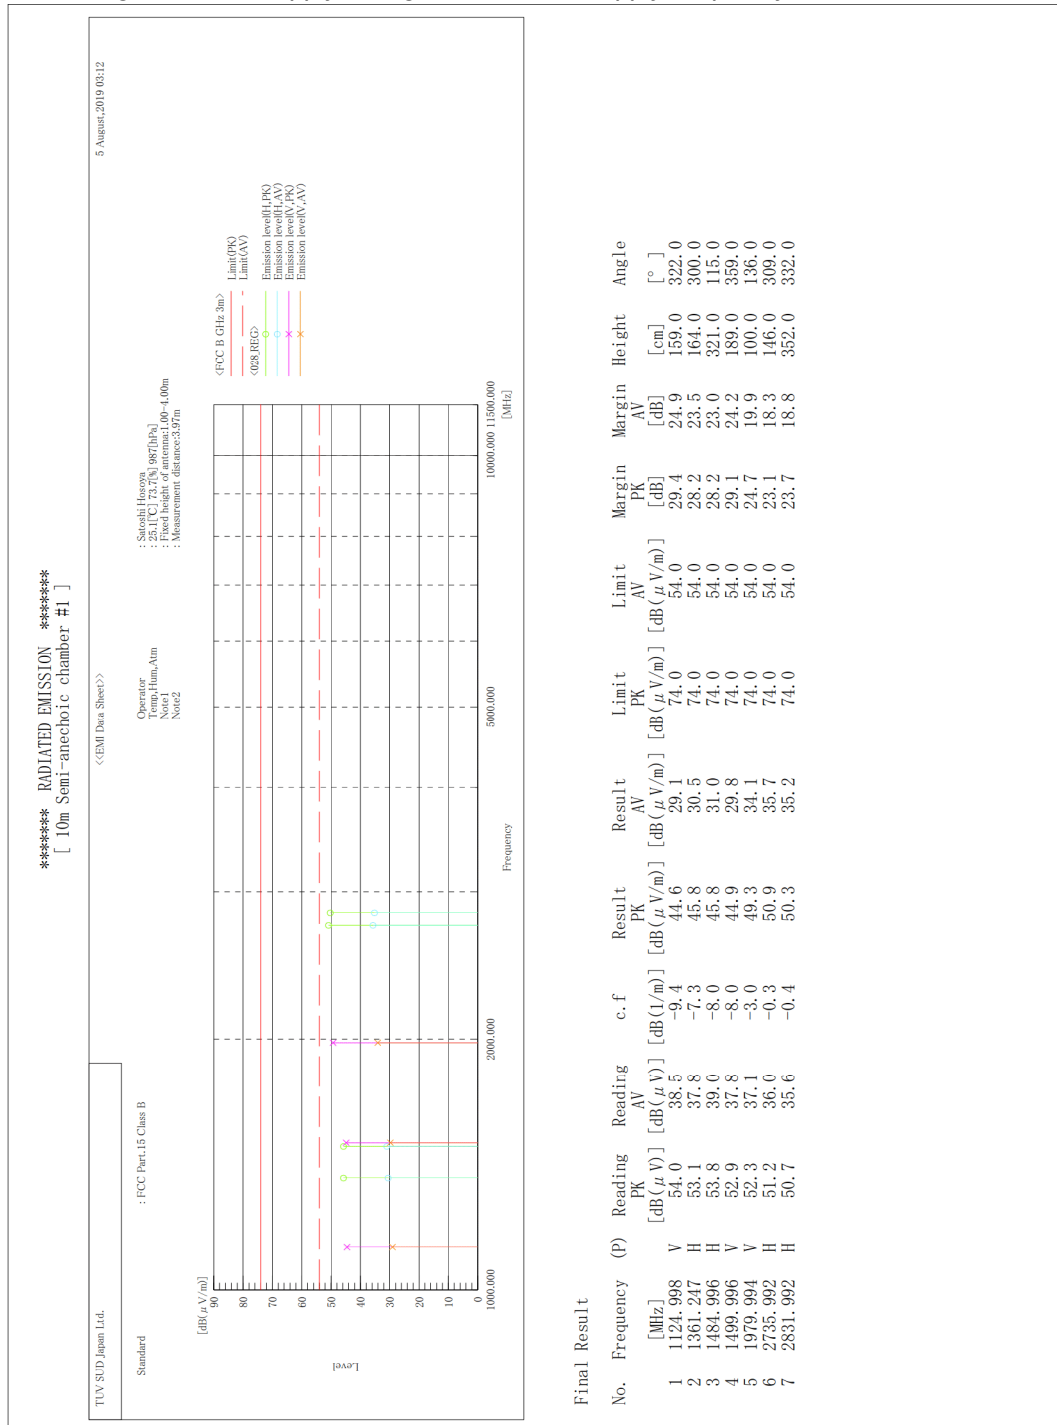

## 5 Measurement Uncertainty

The reported measurement uncertainty is based on a value obtained by multiplying standard uncertainty by coverage factor of  $k=2$ , and a level of confidence becomes 95 %.

| Item                              | Parameter        | $U_{lab}$    | $U_{cispr}$  |
|-----------------------------------|------------------|--------------|--------------|
| Conducted Emission, AMN           | 9kHz to 150kHz   | $\pm 3.8$ dB | $\pm 3.8$ dB |
| Conducted Emission, AMN           | 150kHz to 30MHz  | $\pm 3.4$ dB | $\pm 3.4$ dB |
| Conducted Emission, AN            | 150kHz to 30MHz  | $\pm 4.3$ dB | -            |
| Conducted Emission, Voltage Probe | 9kHz to 30MHz    | $\pm 2.8$ dB | $\pm 2.9$ dB |
| Conducted Emission, AAN           | 150kHz to 30MHz  | $\pm 4.9$ dB | $\pm 5.0$ dB |
| Conducted Emission, Current Probe | 150kHz to 30MHz  | $\pm 2.9$ dB | $\pm 2.9$ dB |
| Disturbance Power                 | 30MHz to 300MHz  | $\pm 4.3$ dB | $\pm 4.5$ dB |
| Radiated Emission                 | 30MHz to 1000MHz | $\pm 4.9$ dB | $\pm 6.3$ dB |
| Radiated Emission                 | 1GHz to 6GHz     | $\pm 4.6$ dB | $\pm 5.2$ dB |
| Radiated Emission                 | 6GHz to 18GHz    | $\pm 4.9$ dB | $\pm 5.5$ dB |
| Radiated Emission                 | 9kHz to 30MHz    | $\pm 3.3$ dB | -            |



Japan

## 6 Laboratory Information

Testing was performed and the report was issued at:

**TÜV SÜD Japan Ltd. Yonezawa Testing Center**

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan

Phone: +81-238-28-2881

Fax: +81-238-28-2888

**Accreditation and Registration**

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

VCCI Council

| Registration number | Expiration date |
|---------------------|-----------------|
| A-0166              | 03-July-2021    |

## Appendix A. Test Equipment

### Conducted emission at mains port

| Equipment                                    | Company                         | Model No.      | Serial No.      | Cal. due    | Cal. Date   |
|----------------------------------------------|---------------------------------|----------------|-----------------|-------------|-------------|
| EMI receiver                                 | ROHDE&SCHWARZ                   | ESR7           | 101742          | 31-Jan-2020 | 25-Jan-2019 |
| Line impedance stabilization network for EUT | Kyoritsu Technology Corporation | TNW-407F2      | 12-17-110-2     | 31-May-2020 | 16-May-2019 |
| Attenuator                                   | HUBER+SUHNER                    | 6810.01.A      | N/A(S442)       | 31-Dec-2019 | 17-Dec-2018 |
| Coaxial cable                                | FUJIKURA                        | 5D-2W/4m       | N/A(S349)       | 31-Oct-2019 | 10-Oct-2018 |
| Microwave cable                              | HUBER+SUHNER                    | SUCOFLEX104/2m | 317672/4        | 31-Oct-2019 | 10-Oct-2018 |
| Coaxial cable                                | HUBER+SUHNER                    | RG214/U/25m    | N/A(S191)       | 31-Oct-2019 | 12-Oct-2018 |
| PC                                           | HP                              | dc7800small    | JPA7450FPJ      | N/A         | N/A         |
| Software                                     | TOYO Corporation                | EP5/CE-AJ      | 0611193/V5.4.11 | N/A         | N/A         |

### Radiated emission (below 1 GHz)

| Equipment                 | Company          | Model No.       | Serial No.      | Cal. due    | Cal. date   |
|---------------------------|------------------|-----------------|-----------------|-------------|-------------|
| EMI receiver              | ROHDE&SCHWARZ    | ESR7            | 101742          | 31-Jan-2020 | 25-Jan-2019 |
| Biconical antenna         | Schwarzbeck      | VHA9103/BBA9106 | VHA91032850     | 31-Oct-2019 | 17-Oct-2018 |
| Log-periodic antenna      | Schwarzbeck      | VUSLP9111B      | 343             | 30-Apr-2020 | 08-Apr-2019 |
| Attenuator                | TDC              | TAT-43B-06      | N/A(S209)       | 31-Jul-2020 | 17-Jul-2019 |
| Attenuator                | TAMAGAWA.ELEC    | CFA-01NPJ-3     | N/A(S270)       | 31-May-2020 | 17-May-2019 |
| Microwave cable           | HUBER+SUHNER     | SUCOFLEX104/9m  | MY23758/4       | 31-Oct-2019 | 10-Oct-2018 |
| Microwave cable           | HUBER+SUHNER     | SUCOFLEX104/1m  | MY24628/4       | 31-Oct-2019 | 10-Oct-2018 |
| Microwave cable           | HUBER+SUHNER     | SUCOFLEX104/2m  | SN MY28398/4    | 31-Oct-2019 | 10-Oct-2018 |
| Microwave cable           | HUBER+SUHNER     | SUCOFLEX106/13m | MY1159/6        | 31-Oct-2019 | 12-Oct-2018 |
| Preamplifier              | ANRITSU          | MH648A          | M96057          | 31-Jan-2020 | 17-Jan-2019 |
| 10m Semi-anechoic Chamber | TOKIN            | N/A             | N/A(9001-NSA3m) | 31-Oct-2019 | 12-Oct-2018 |
| PC                        | HP               | dc7800small     | JPA7450FPJ      | N/A         | N/A         |
| Software                  | TOYO Corporation | EP5/RE-AJ       | 0611193/V5.6.0  | N/A         | N/A         |

### Radiated emission (above 1 GHz)

| Equipment                   | Company              | Model No.        | Serial No.      | Cal. due    | Cal. date   |
|-----------------------------|----------------------|------------------|-----------------|-------------|-------------|
| Spectrum analyzer           | ROHDE&SCHWARZ        | FSV40            | 101732          | 31-Jan-2020 | 15-Jan-2019 |
| Preamplifier                | TSJ                  | MLA-0118-J02-40  | 14882           | 31-Oct-2019 | 10-Oct-2018 |
| Double ridged guide antenna | ETS LINDGREN         | 3117             | 00209352        | 30-Nov-2019 | 06-Nov-2018 |
| Attenuator                  | Agilent Technologies | 8491B            | MY39268632      | 31-May-2020 | 17-May-2019 |
| Microwave cable             | HUBER+SUHNER         | SUCOFLEX104/9m   | 800693/4        | 31-May-2020 | 16-May-2019 |
| Microwave cable             | HUBER+SUHNER         | SUCOFLEX104/1.5m | SN MY19304/4    | 31-Oct-2019 | 10-Oct-2018 |
| Microwave cable             | HUBER+SUHNER         | SUCOFLEX104/2m   | SN MY28398/4    | 31-Oct-2019 | 10-Oct-2018 |
| Microwave cable             | HUBER+SUHNER         | SUCOFLEX106/13m  | MY1159/6        | 31-Oct-2019 | 12-Oct-2018 |
| Absorber                    | RIKEN                | PFP30            | N/A             | N/A         | N/A         |
| 10m Semi-anechoic Chamber   | TOKIN                | N/A              | N/A(9001-SVSWR) | 31-Oct-2019 | 13-Oct-2018 |
| PC                          | HP                   | dc7800small      | JPA7450FPJ      | N/A         | N/A         |
| Software                    | TOYO Corporation     | EP5/RE-AJ        | 0611193/V5.6.0  | N/A         | N/A         |