



Zacta

TEST REPORT

Report number : JPD-TR-17130-0

Issue date : June 5, 2017

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant	: KYOCERA Corporation
Equipment under test (EUT)	: Mobile Phone
Model number	: EA34
FCC ID	: JOYEA34

Date of test : April 28, 2017
May 15, 16, 18, 19, 30, 2017
Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
5-4149-7, Hachimanpara, Yonezawa-shi,
Yamagata, 992-1128 Japan
Phone: +81-238-28-2881 Fax: +81-238-28-2888
Test results : Complied

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.
This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Tadahiro Seino
Tadahiro Seino

Approved by : Hiroaki Suzuki
Hiroaki Suzuki
Lab Manager of RF Lab



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Operating channels and frequencies	6
2.5 Operating mode	6
2.6 Operating flow	7
3. Configuration of equipment	8
3.1 Equipment(s) used	8
3.2 Cable(s) used	8
3.3 System configuration	8
4. DTS Bandwidth / Occupied Bandwidth (99%)	9
4.1 Measurement procedure	9
4.2 Limit	9
4.3 Measurement result	9
4.4 Trace data	10
5. Maximum Conducted Output Power	13
5.1 Measurement procedure	13
5.2 Limit	13
5.3 Measurement result	13
6. Band Edge Compliance of RF Conducted Emissions	15
6.1 Measurement procedure	15
6.2 Limit	15
6.3 Measurement result	16
6.4 Trace data	17
7. Spurious emissions - Conducted -	20
7.1 Measurement procedure	20
7.2 Limit	20
7.3 Measurement result	20
8. Spurious Emissions - Radiated -	30
8.1 Measurement procedure	30
8.2 Calculation method	31
8.3 Limit	31
8.4 Test data	32
9. Restricted Band of Operation	54
9.1 Measurement procedure	54
9.2 Limit	54
9.3 Measurement Result	55



Zacta

9.4 Test data.....	55
10. Transmitter Power Spectral Density.....	62
10.1 Measurement procedure.....	62
10.2 Limit.....	62
10.3 Measurement result.....	62
11. AC Power Line Conducted Emissions.....	67
11.1 Measurement procedure.....	67
11.2 Calculation method.....	67
11.3 Limit.....	68
11.4 Test data.....	68
12. Antenna requirement.....	69
13. Uncertainty of measurement.....	70
14. Laboratory Information.....	71
Appendix A. Test equipment.....	72
Appendix B. Duty Cycle.....	73

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.2.1 Test Methods

ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(2)	DTS Bandwidth / Occupied Bandwidth (99%)	Conducted	PASS
15.247(b)(3)	Maximum conducted (average) output power	Conducted	PASS
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.247(e)	Transmitter Power Spectral Density	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	: KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	: Mobile Phone
Trade name	: Kyocera
Model number	: EA34
Serial number	: N/A
EUT condition	: Pre-Production
Power ratings	: Battery: DC 3.8V
Size	: (W) 73.0 × (D) 8.9 × (H) 146.0 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: -20°C to 60°C
RF Specification Protocol	: IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)
Frequency range	: IEEE802.11b /11g/11n (HT20): 2412MHz-2462MHz
Number of RF Channels	: 11 Channels
Modulation type	: IEEE802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE802.11g / n (HT20) : OFDM (BPSK, QPSK, 16QAM, 64QAM)
Data rate	: IEEE802.11b: 1, 2, 5.5, 11Mbps IEEE802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps
Channel separation	: 5MHz
Output power	: 50.443mW (IEEE802.11b) 98.560mW (IEEE802.11g) 87.902mW (IEEE802.11n: HT20)
Antenna type	: Internal antenna
Antenna gain	: -0.2dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2412
Middle	2437
High	2462

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	IEEE802.11b: DSSS	1Mbps
Low, Middle, High	IEEE802.11g: OFDM	6Mbps
Low, Middle, High	IEEE802.11n (HT20 LGI): OFDM	MCS0 (6.5Mbps)

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.

2.6 Operating flow

[Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode

[Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	EA34	N/A	JOYEA34	EUT
2	AC Adapter	au	N/A	N/A	N/A	*


*: AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable (for AC Adapter)	1.0	Yes	Metal	*

*: AC power line Conducted Emission Test.

3.3 System configuration

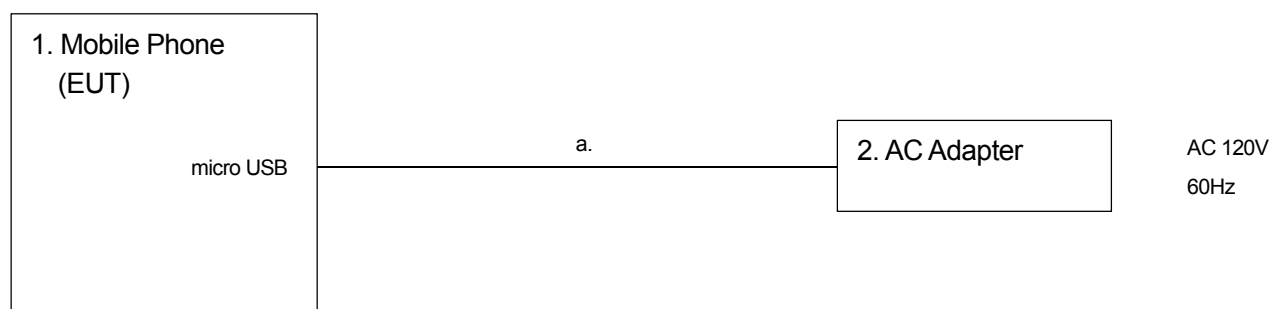

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. DTS Bandwidth / Occupied Bandwidth (99%)

4.1 Measurement procedure


[FCC 15.247(a)(2), KDB 558074 D01 v04, Section 8.2]

The bandwidth at 6dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100kHz.
- b) VBW $\geq 3 \times$ RBW.
- c) Sweep time = auto-couple.
- d) Detector = peak.
- e) Trace mode = max hold.

- Test configuration



4.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

4.3 Measurement result

Date : May 30, 2017
 Temperature : 24.0 [°C]
 Humidity : 48.0 [%]
 Test place : Shielded room No.4

Test engineer :
 Tadahiro Seino


[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

Channel	Frequency [MHz]	DTS Bandwidth [MHz]		
		IEEE802.11b	IEEE802.11g	IEEE802.11n (HT20)
Low	2412	8.576	16.414	17.614
Middle	2437	9.047	16.429	17.634
High	2462	8.585	16.405	17.627


Channel	Frequency [MHz]	Occupied Bandwidth (99%) [MHz]		
		IEEE802.11b	IEEE802.11g	IEEE802.11n (HT20)
Low	2412	13.293	16.545	17.708
Middle	2437	13.215	16.542	17.695
High	2462	13.309	16.550	17.702

4.4 Trace data
[IEEE802.11b]


Channel Low

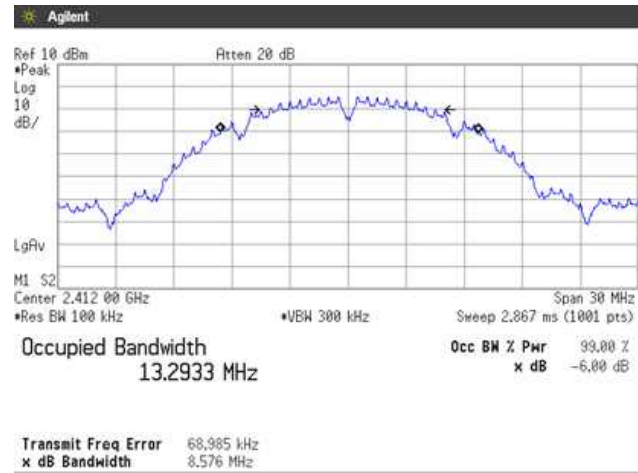

Channel Middle

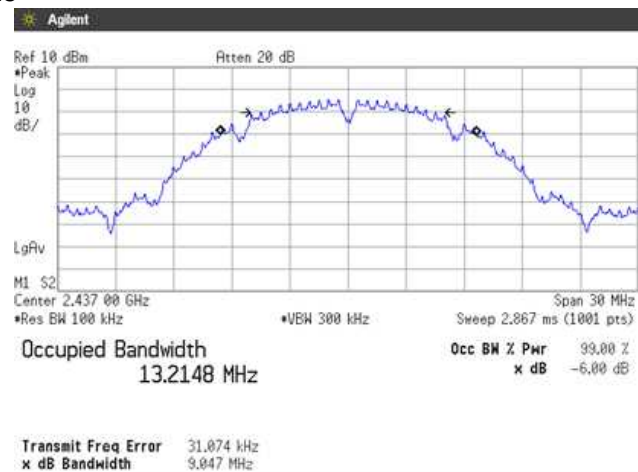

Channel High

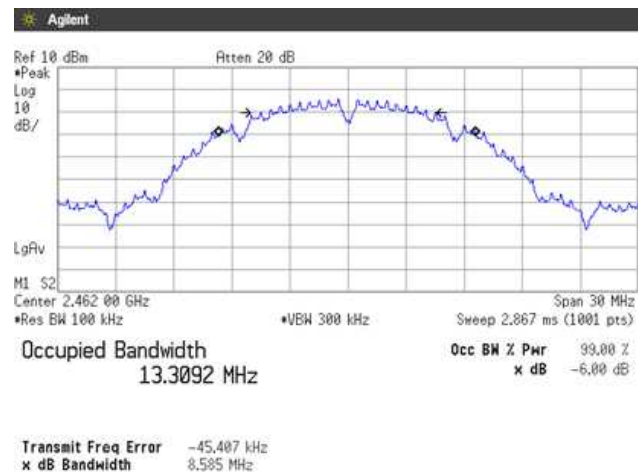





Zacta

[IEEE802.11g]


Channel Low

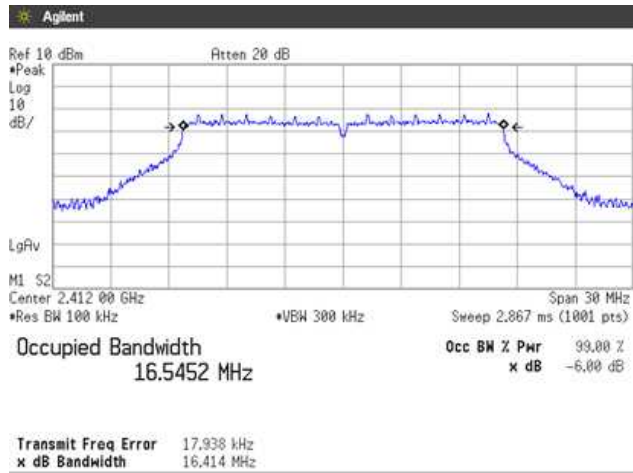

Channel Middle

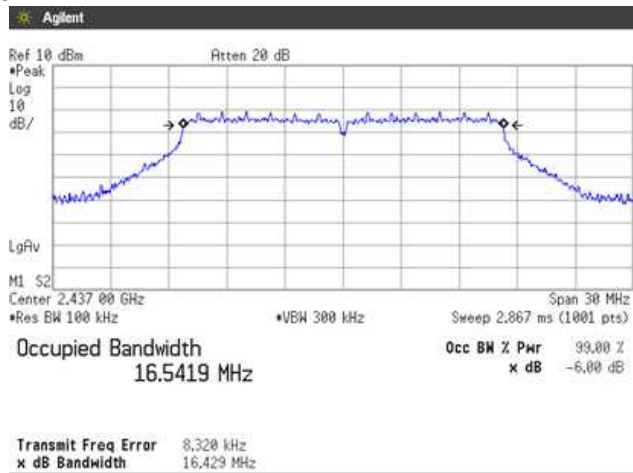

Channel High

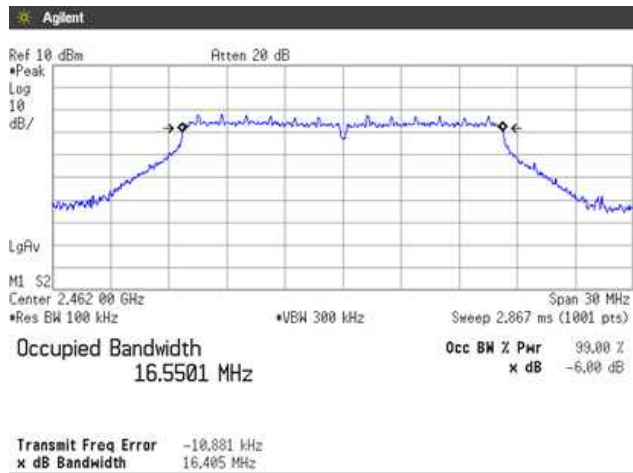





Zacta

[IEEE802.11n (HT20)]


Channel Low

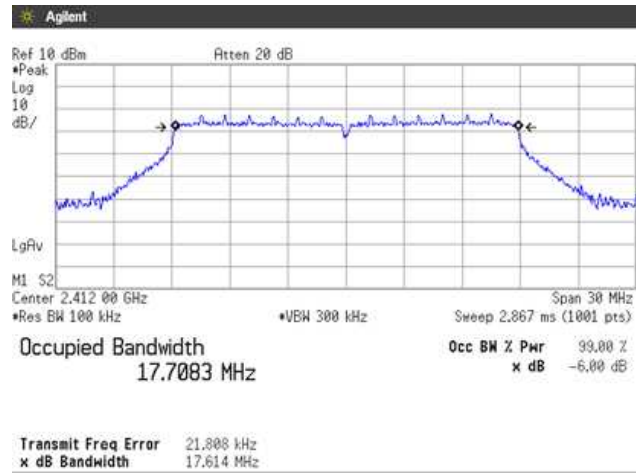

Channel Middle

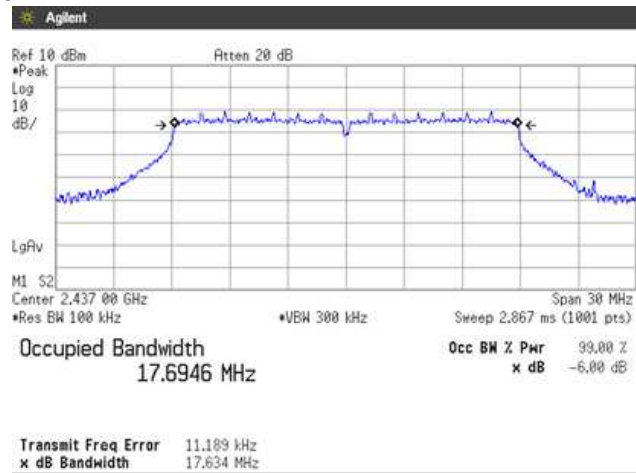

Channel High

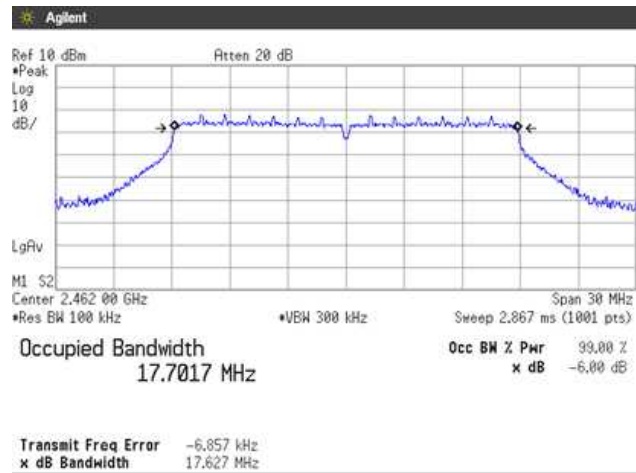


5. Maximum Conducted Output Power

5.1 Measurement procedure

[FCC 15.247(b)(3), KDB 558074 D01 v04, Section 9.1.3]

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

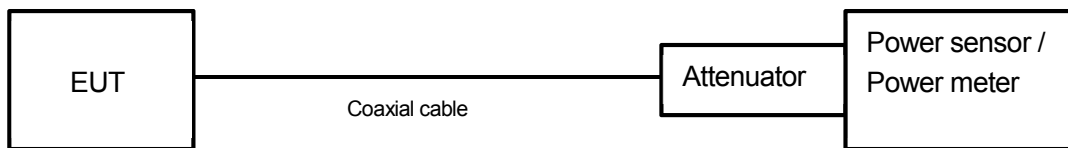

5.2 Limit

1W (1000mW) or less

5.3 Measurement result

Date : May 30, 2017
Temperature : 24.0 [°C]
Humidity : 48.0 [%]
Test place : Shielded room No.4

Test engineer : Tadahiro Seino

[IEEE802.11b]
Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412	6.38	10.53	16.91	49.091	≤ 1000	PASS
Middle	2437	6.21	10.53	16.74	47.152	≤ 1000	PASS
High	2462	6.50	10.53	17.03	50.443	≤ 1000	PASS

[IEEE802.11g]
Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412	7.47	10.53	18.00	63.139	≤ 1000	PASS
Middle	2437	9.41	10.53	19.94	98.560	≤ 1000	PASS
High	2462	7.40	10.53	17.93	62.130	≤ 1000	PASS

[IEEE802.11n (HT20)]
Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412	8.91	10.53	19.44	87.902	≤ 1000	PASS
Middle	2437	7.29	10.53	17.82	60.492	≤ 1000	PASS
High	2462	7.44	10.53	17.97	62.647	≤ 1000	PASS

Calculation;

Reading (dBm) + Factor (dB) = Level (dBm)

$10\log P = \text{Level (dBm)}$

$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$

6. Band Edge Compliance of RF Conducted Emissions

6.1 Measurement procedure


[FCC 15.247(d), KDB 558074 D01 v04, Section 11.0]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Arbitrary setting. (Setting suitable for measurement.)
- b) RBW = 100kHz.
- c) VBW $\geq 3 \times$ RBW
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

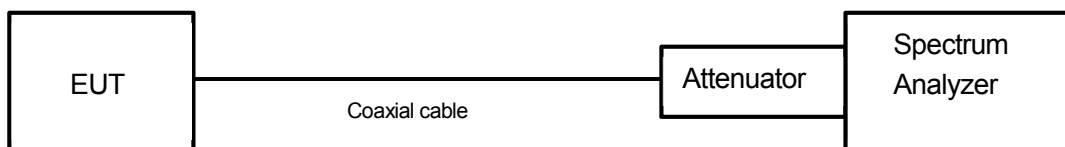

6.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.3 Measurement result

Date : May 30, 2017
 Temperature : 24.0 [°C]
 Humidity : 48.0 [%]
 Test place : Shielded room No.4

Test engineer : Tadahiro Seino

[IEEE802.11b]

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412	-4.35	2398.96	-50.53	46.18	At least 20dB below from peak of RF	PASS
High	2462	-4.31	2487.18	-65.19	60.88	At least 20dB below from peak of RF	PASS

[IEEE802.11g]


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412	-12.30	2399.52	-47.68	35.38	At least 20dB below from peak of RF	PASS
High	2462	-11.99	2483.50	-62.13	50.14	At least 20dB below from peak of RF	PASS

[IEEE802.11n (HT20)]


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412	-12.24	2399.84	-45.84	33.60	At least 20dB below from peak of RF	PASS
High	2462	-11.97	2483.66	-59.02	47.05	At least 20dB below from peak of RF	PASS

6.4 Trace data
[IEEE802.11b]

Channel Low

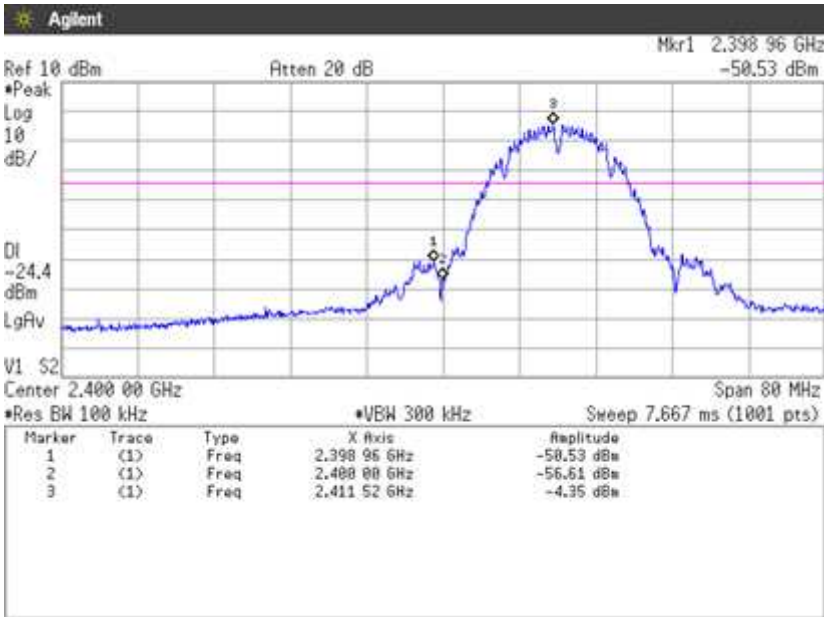


Channel High

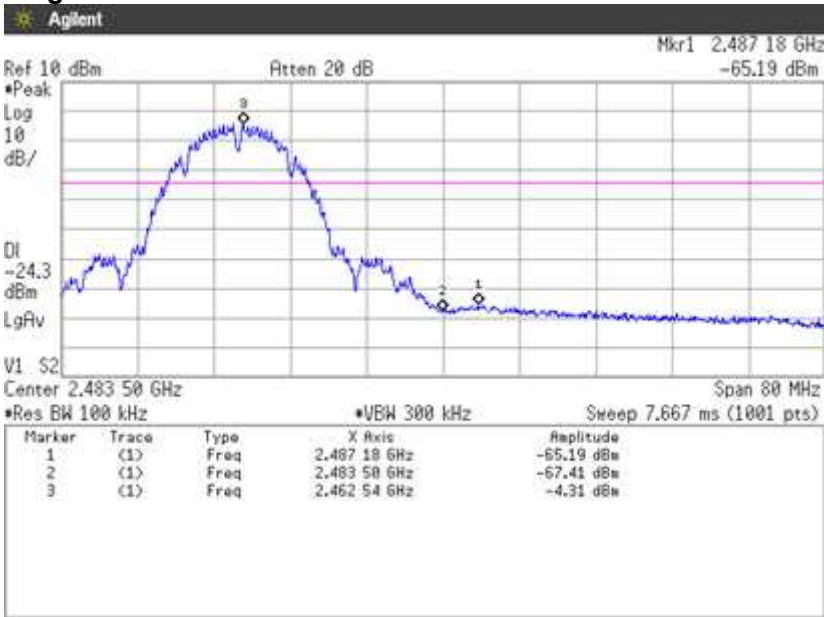


[IEEE802.11g]

Channel Low

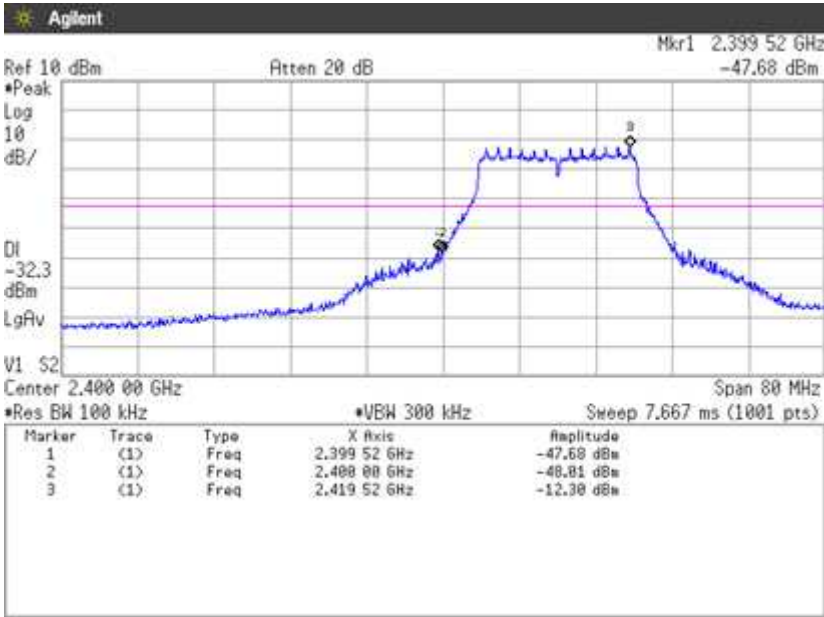


Channel High

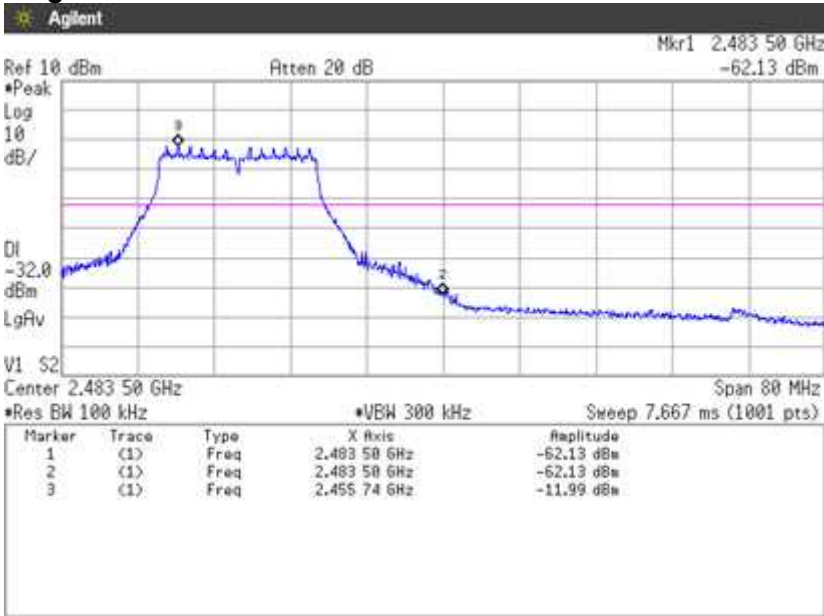


[IEEE802.11n (HT20)]

Channel Low

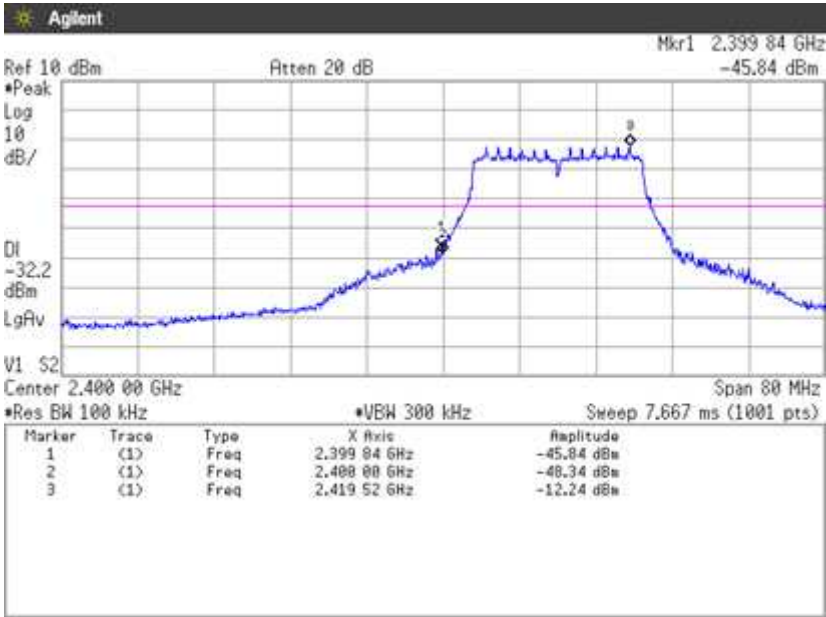

Channel High

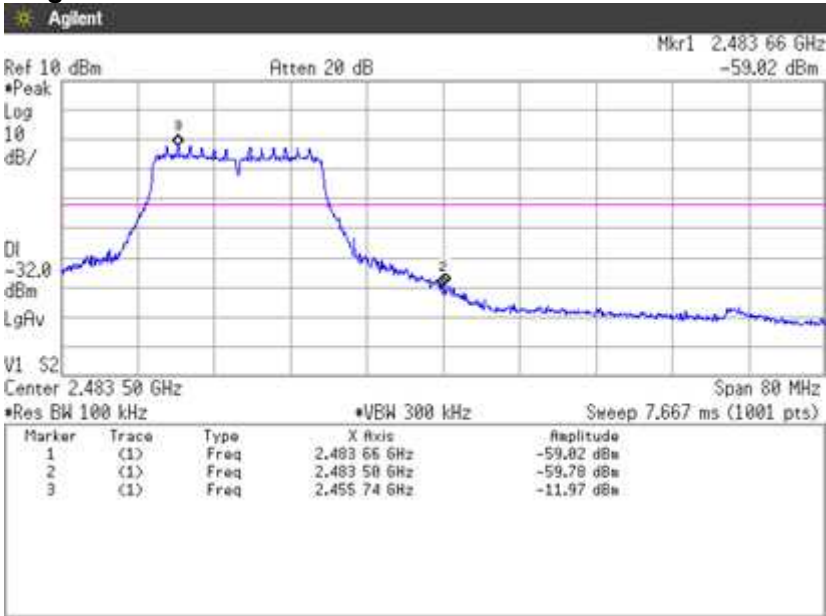

7. Spurious emissions - Conducted -

7.1 Measurement procedure


[FCC 15.247(d), KDB 558074 D01 v04, Section 11.0]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz.
- c) VBW $\geq$ RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

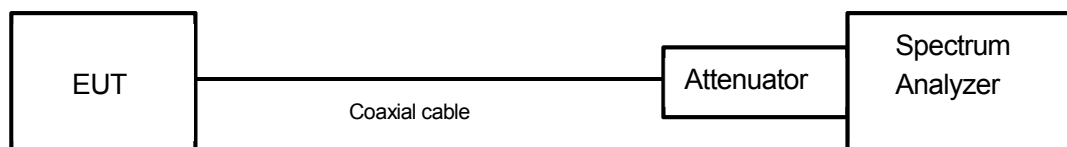

7.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3 Measurement result

Date : May 30, 2017
 Temperature : 24.0 [°C]
 Humidity : 48.0 [%]
 Test place : Shielded room No.4

Test engineer :
 Tadahiro Seino

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]


Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2412	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2437	At least 20dB below from peak of RF	See the trace Data	PASS
High	2462	At least 20dB below from peak of RF	See the trace Data	PASS

7.4 Trace data


[IEEE802.11b]

Channel Low


30MHz-1GHz

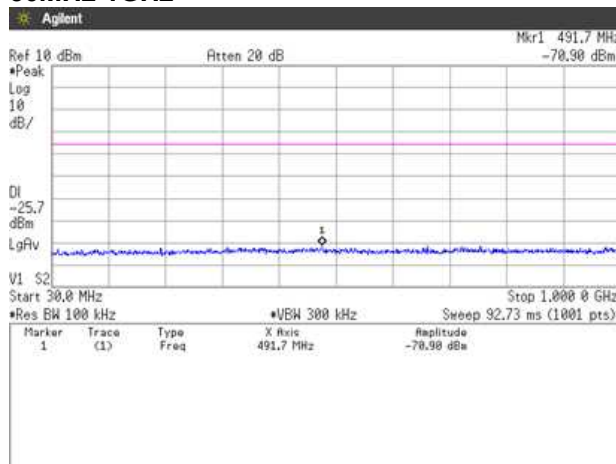


1GHz-5GHz

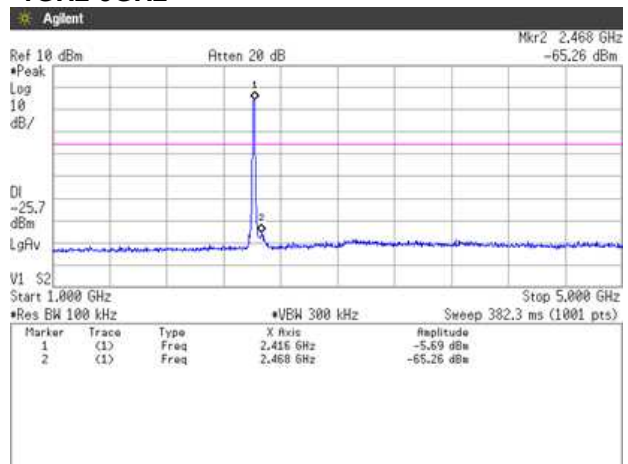


5GHz-10GHz

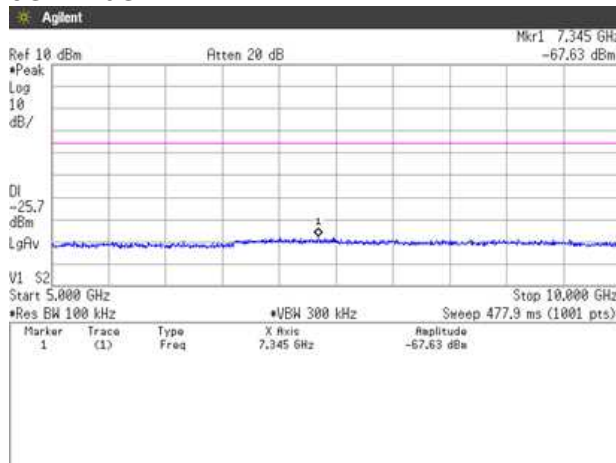


10GHz-15GHz

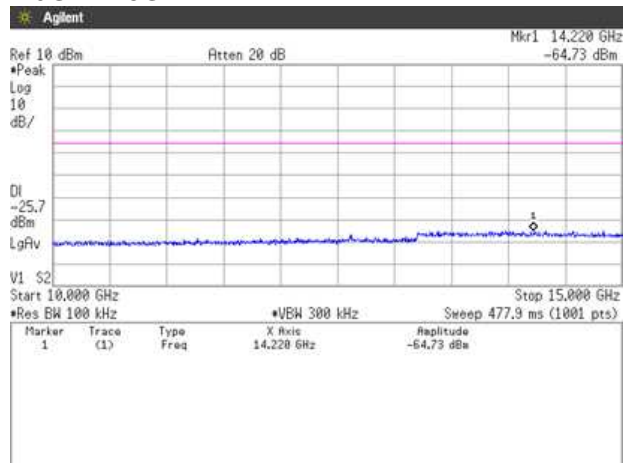


15GHz-20GHz

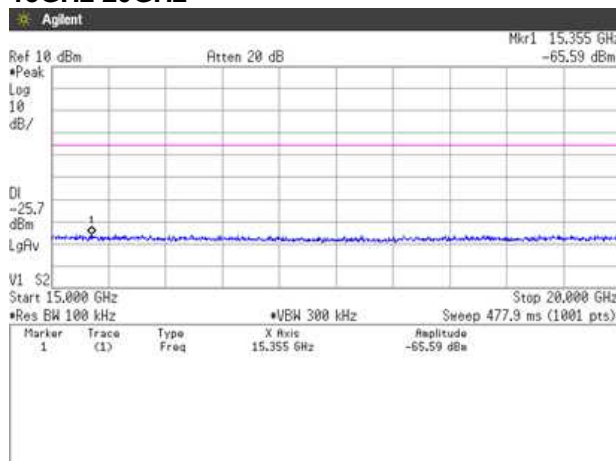


20GHz-25GHz

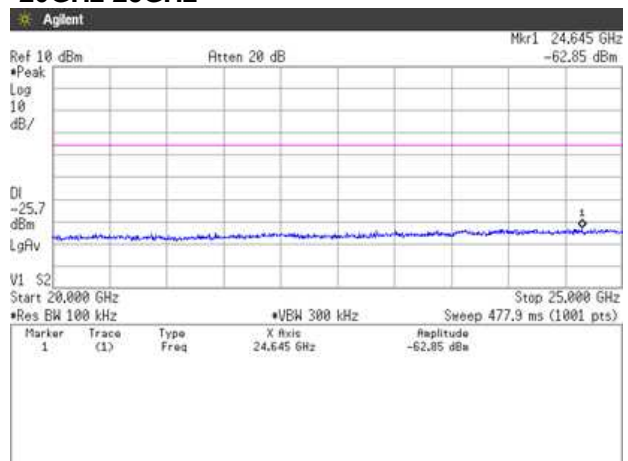


Channel Middle 30MHz-1GHz

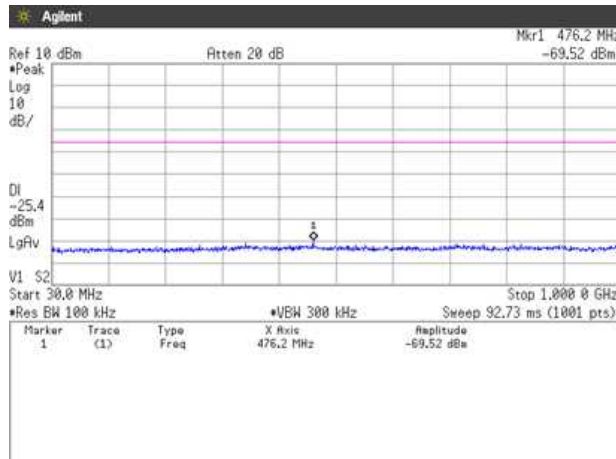


1GHz-5GHz

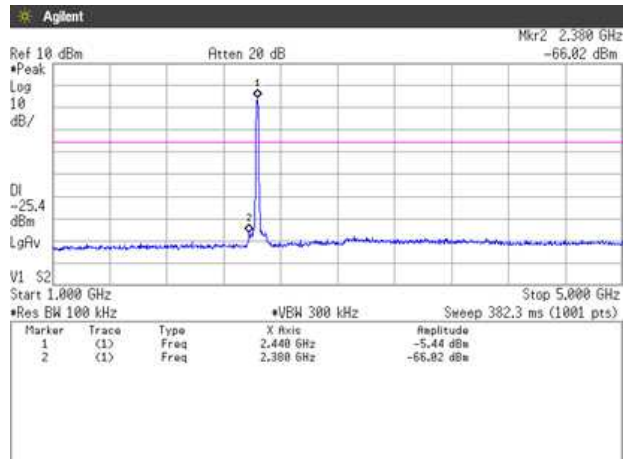


5GHz-10GHz

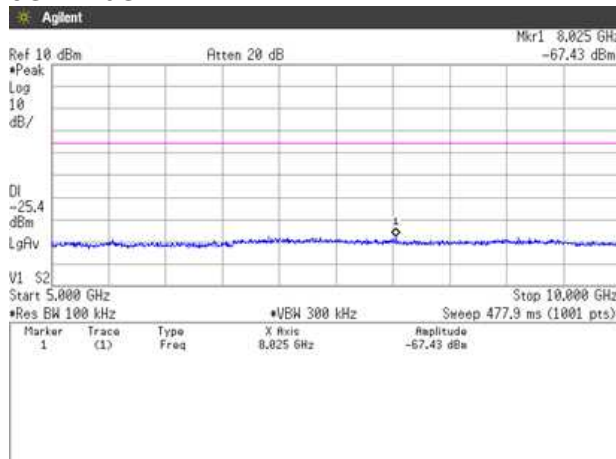


10GHz-15GHz

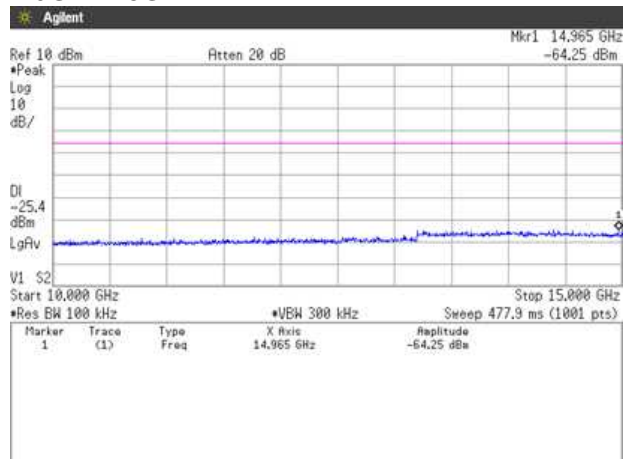


15GHz-20GHz

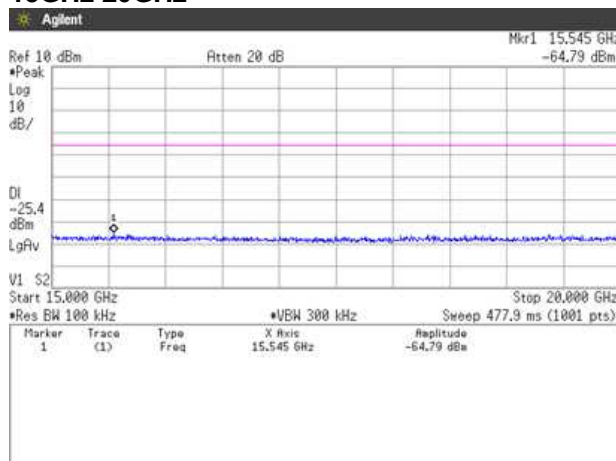


20GHz-25GHz

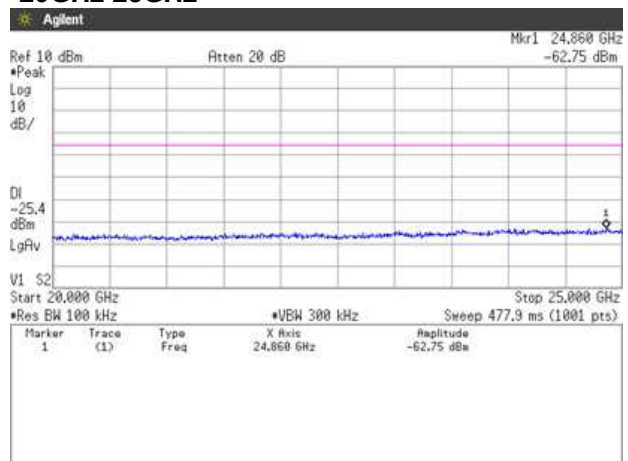


Channel High 30MHz-1GHz

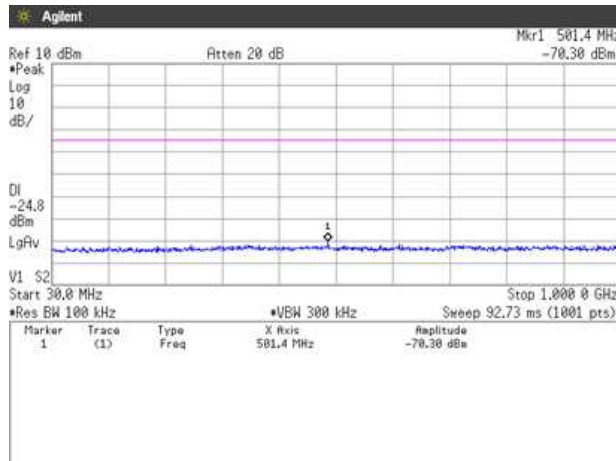


1GHz-5GHz

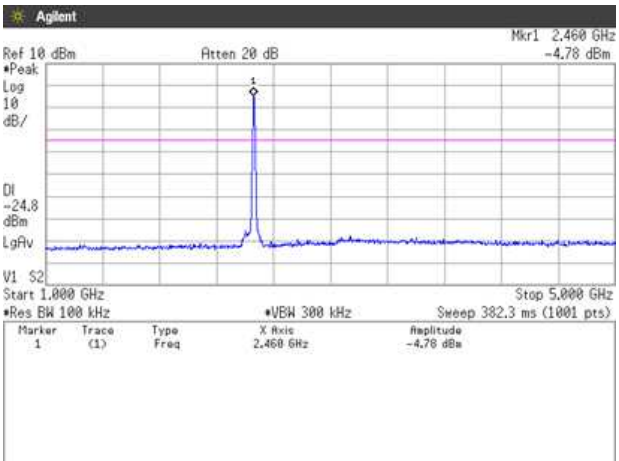


5GHz-10GHz

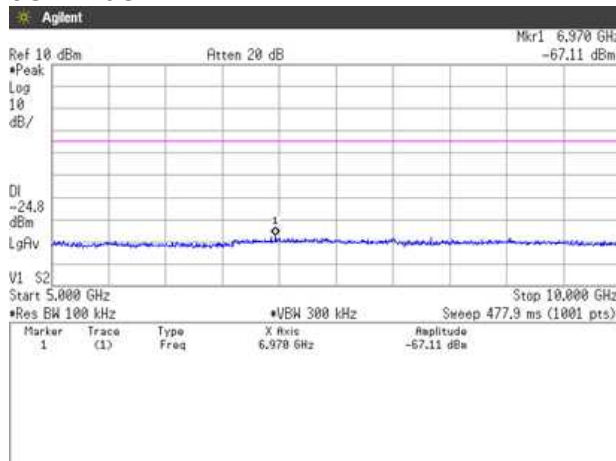


10GHz-15GHz

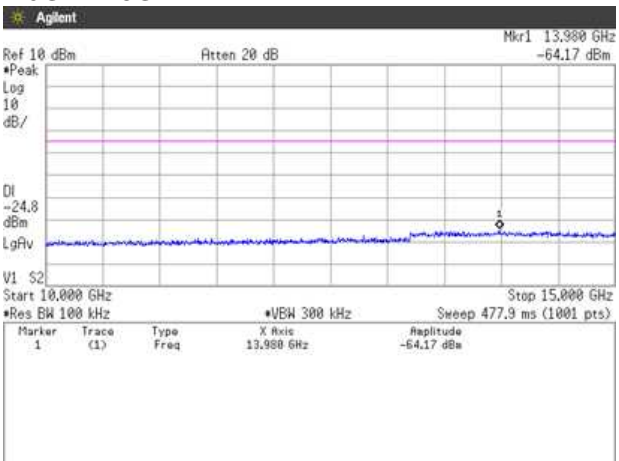


15GHz-20GHz

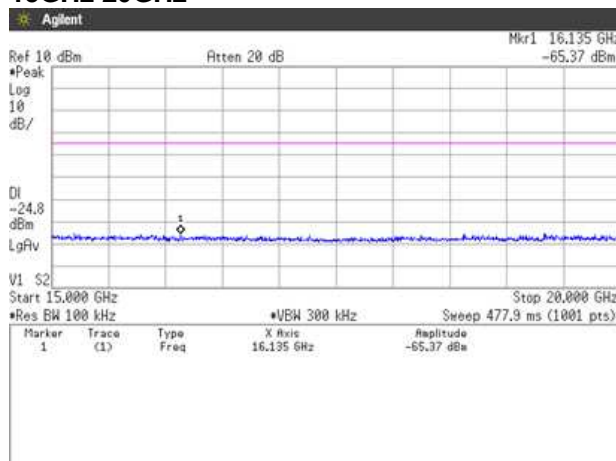


20GHz-25GHz

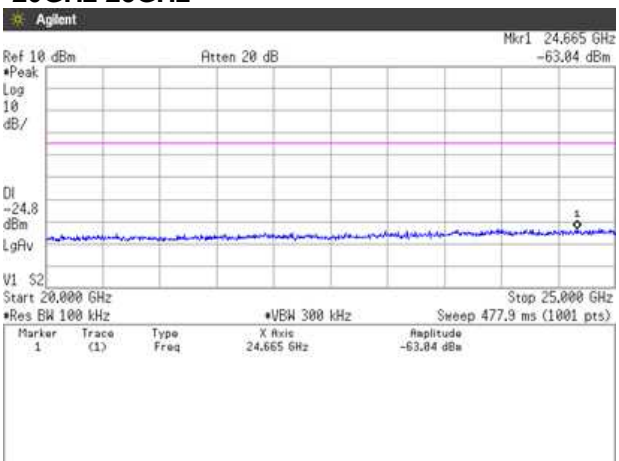


[IEEE802.11g] Channel Low 30MHz-1GHz

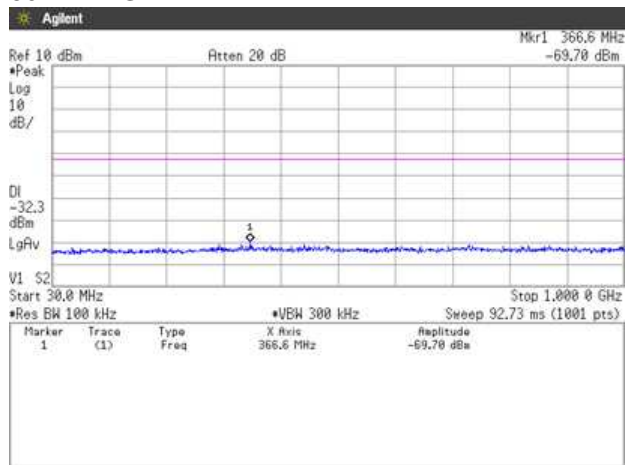


1GHz-5GHz

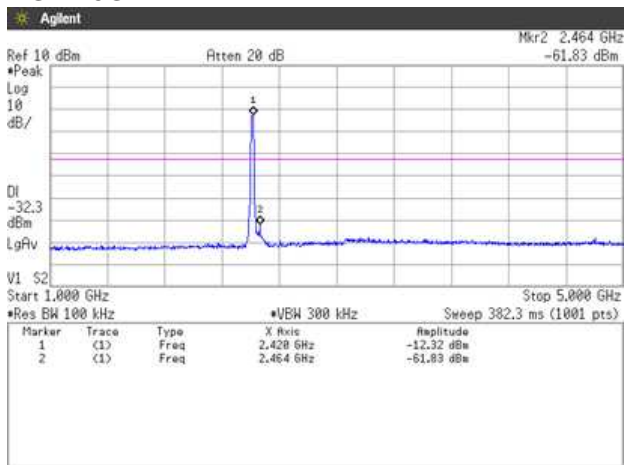


5GHz-10GHz

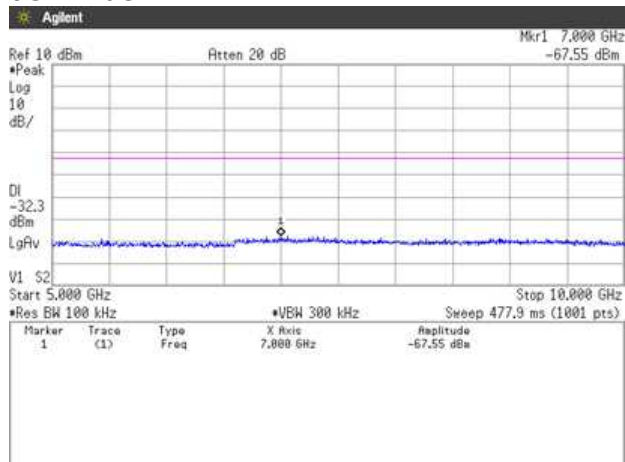


10GHz-15GHz

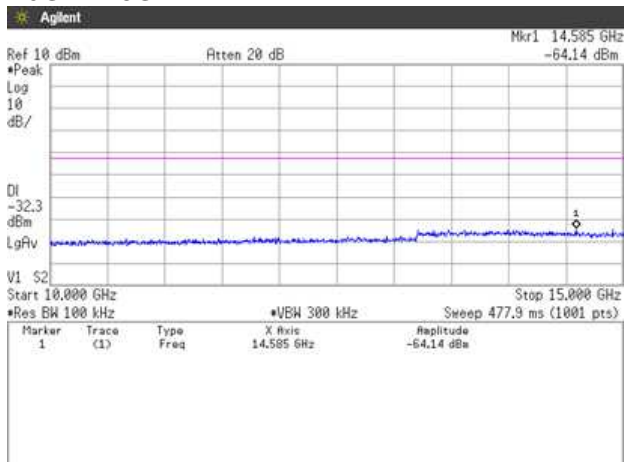


15GHz-20GHz

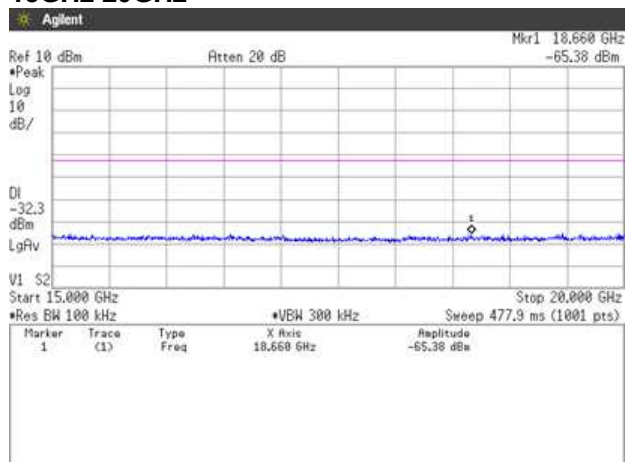


20GHz-25GHz

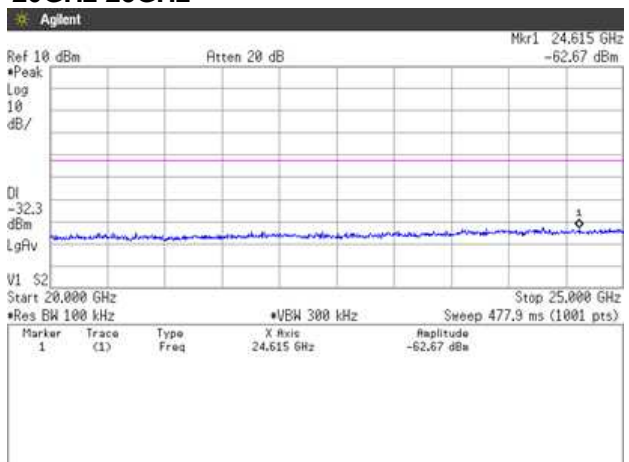


Channel Middle 30MHz-1GHz

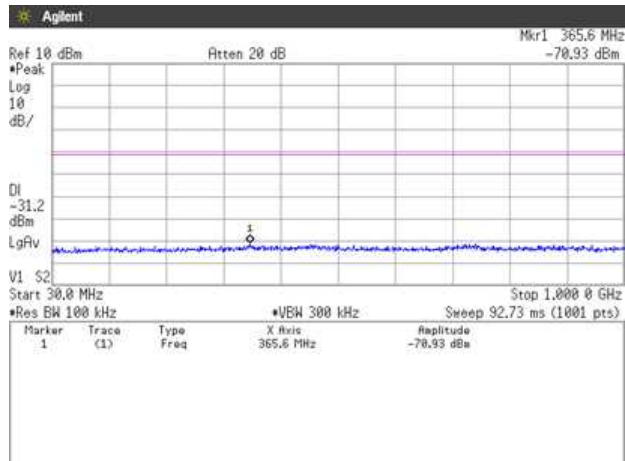


1GHz-5GHz

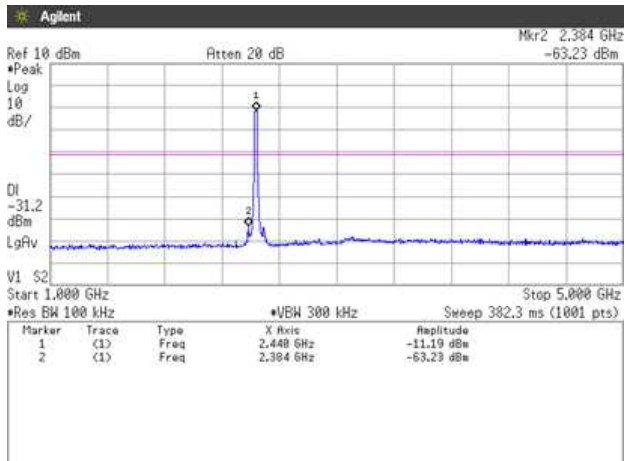


5GHz-10GHz

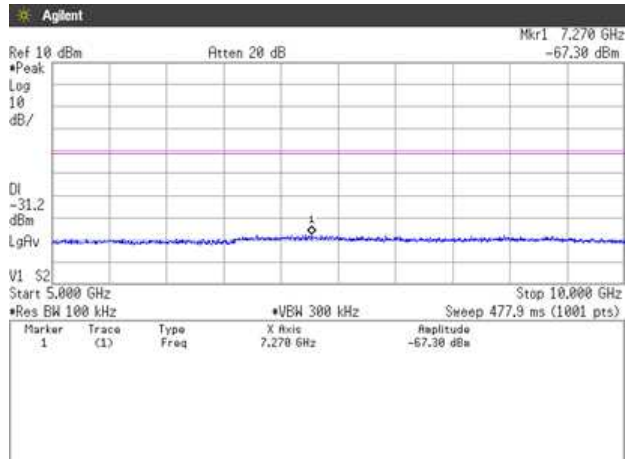


10GHz-15GHz

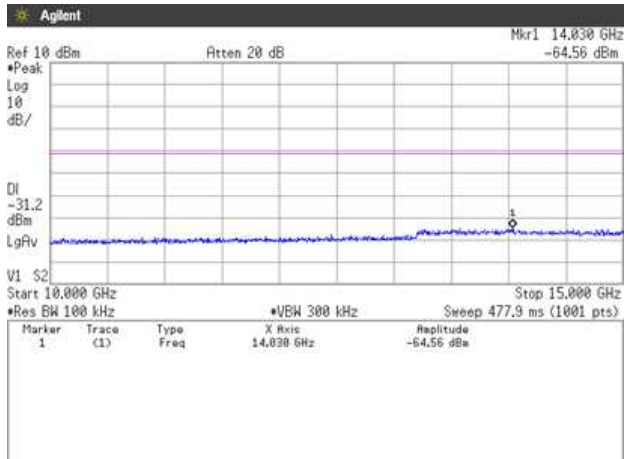


15GHz-20GHz

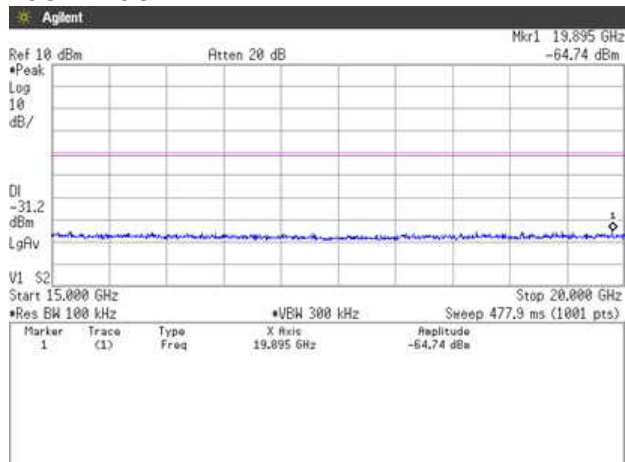


20GHz-25GHz

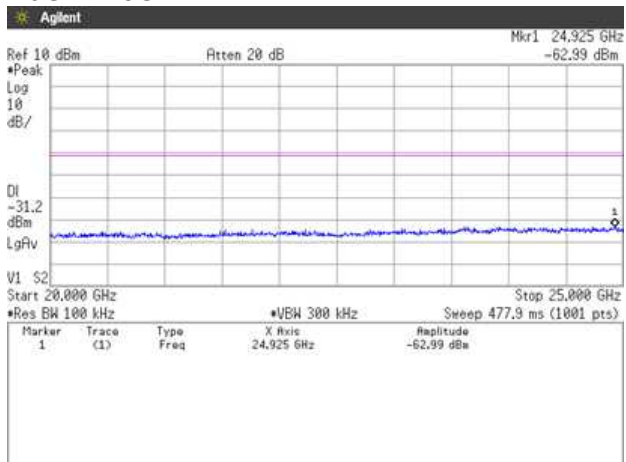


Channel High 30MHz-1GHz

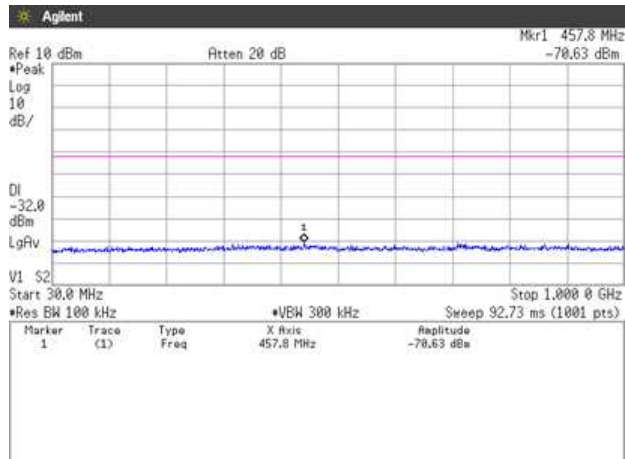


1GHz-5GHz

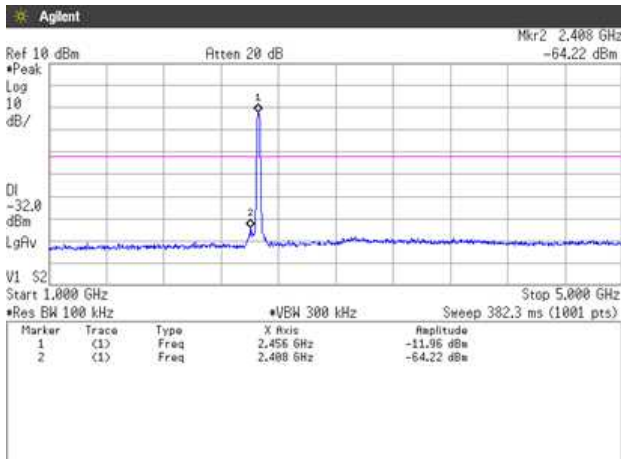


5GHz-10GHz

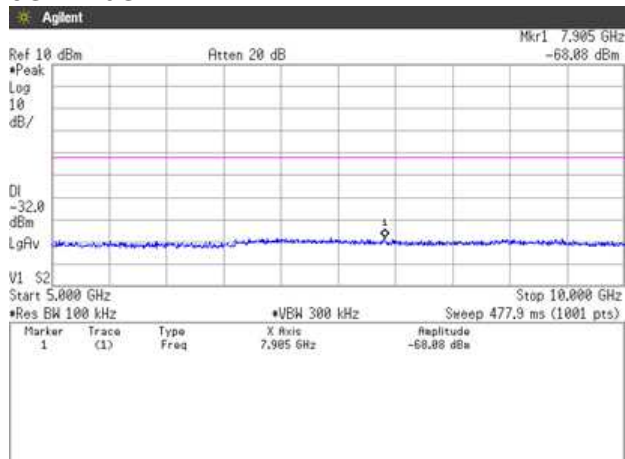


10GHz-15GHz

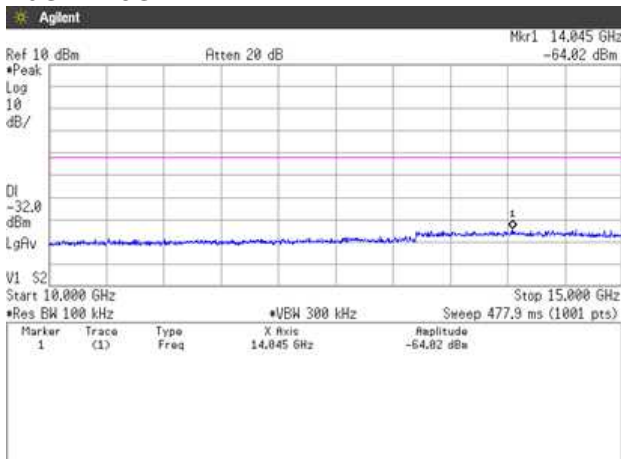


15GHz-20GHz

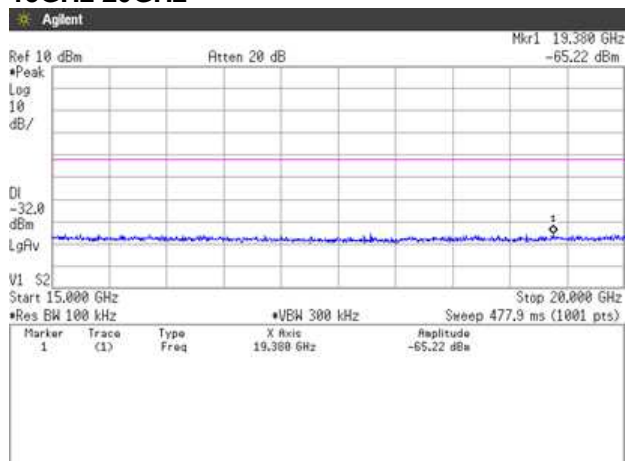


20GHz-25GHz

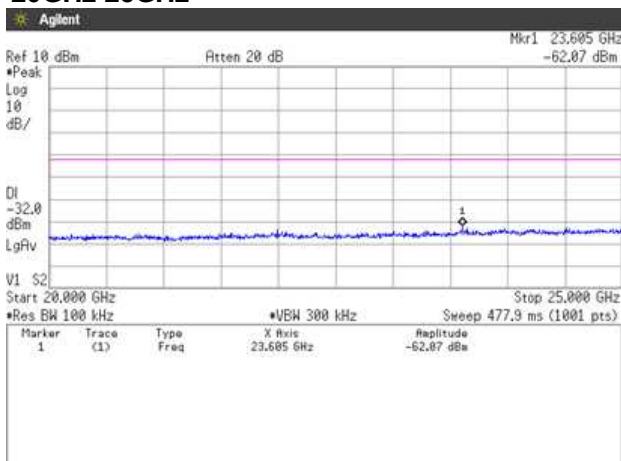


[IEEE802.11n (HT20)]
Channel Low
30MHz-1GHz

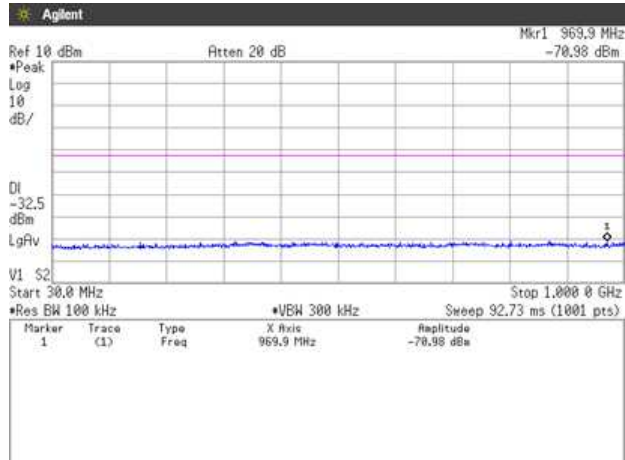


1GHz-5GHz

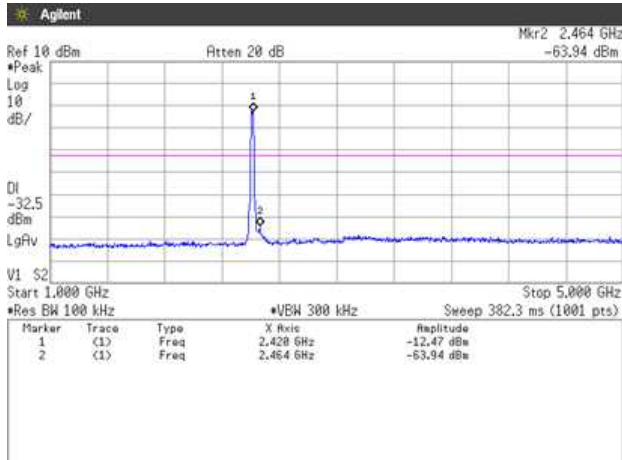


5GHz-10GHz

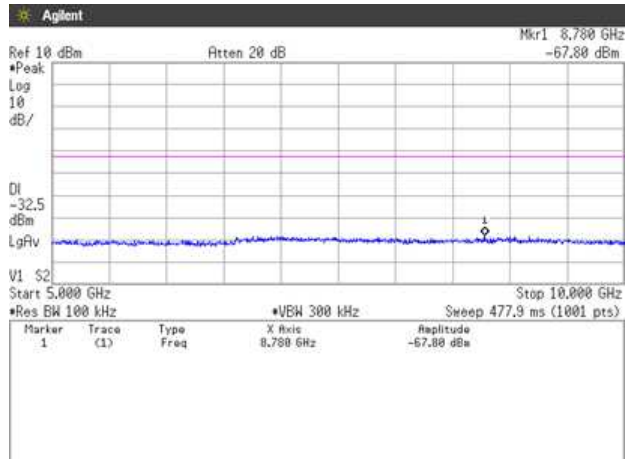


10GHz-15GHz

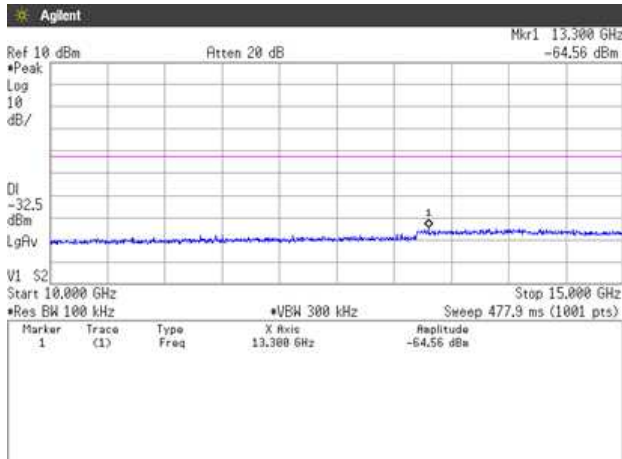


15GHz-20GHz

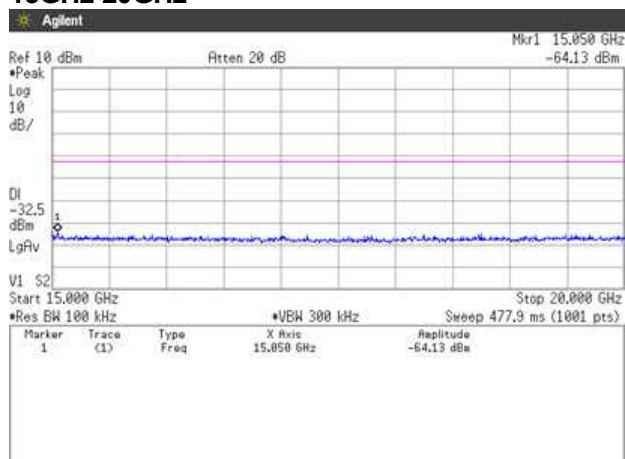


20GHz-25GHz

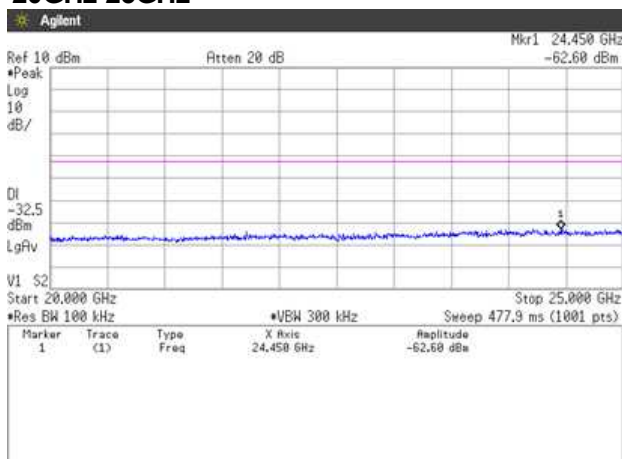


Channel Middle 30MHz-1GHz

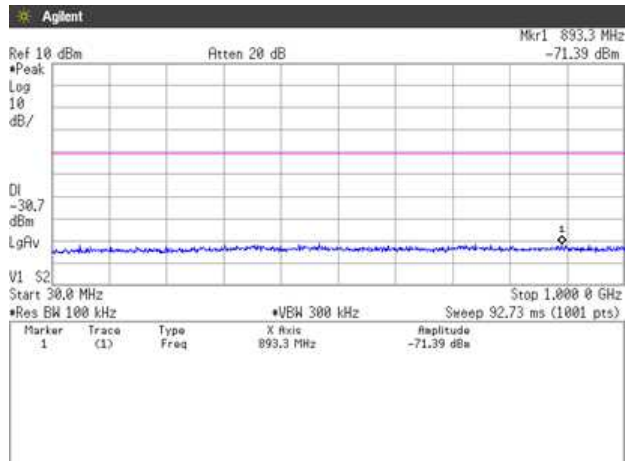


1GHz-5GHz

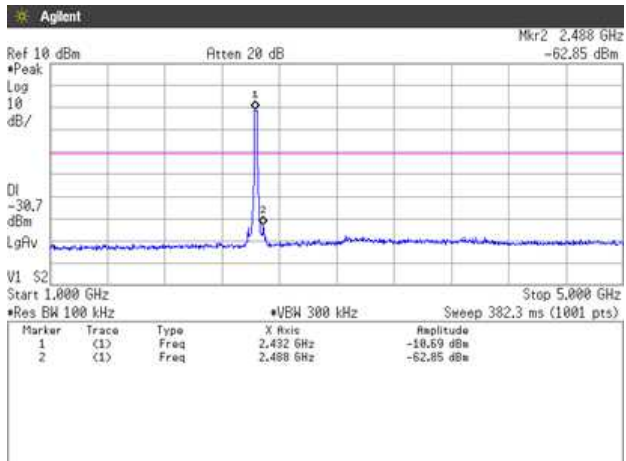


5GHz-10GHz

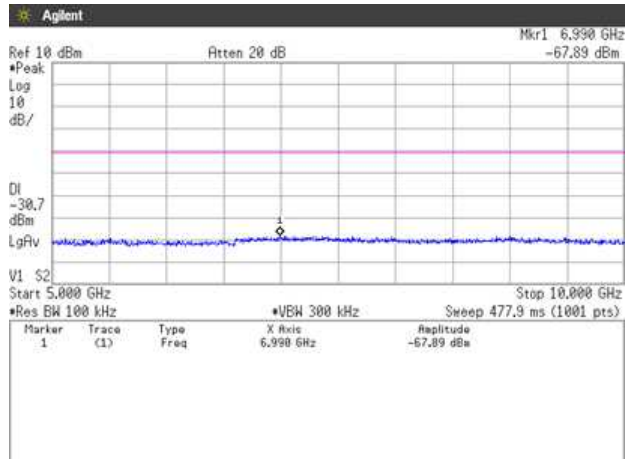


10GHz-15GHz

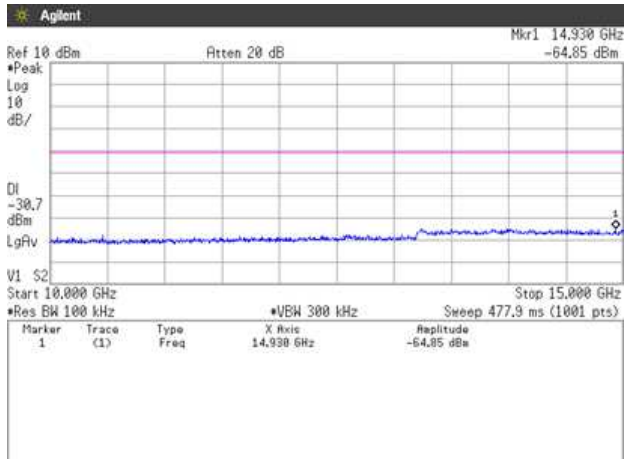


15GHz-20GHz

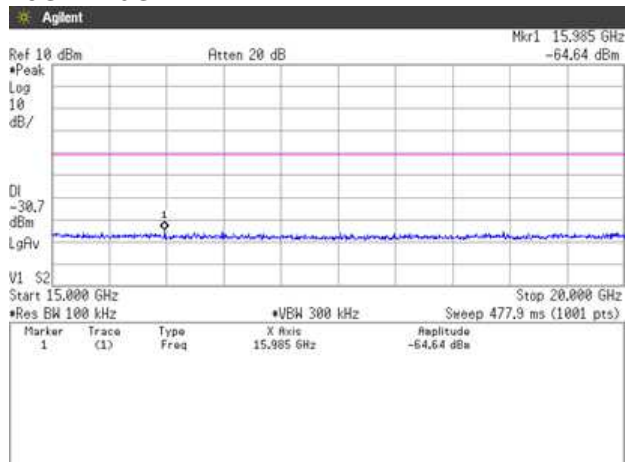


20GHz-25GHz

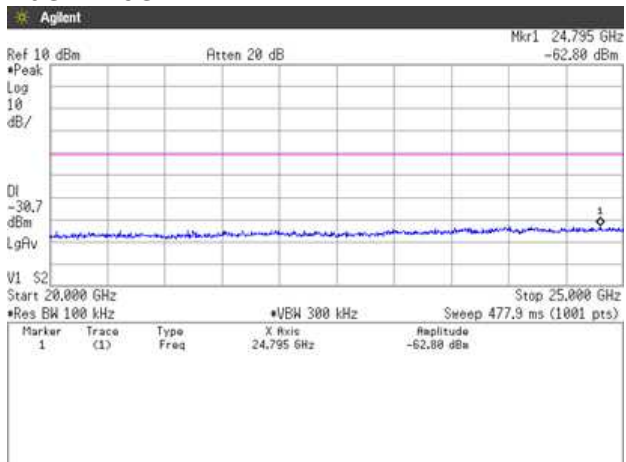


Channel High 30MHz-1GHz

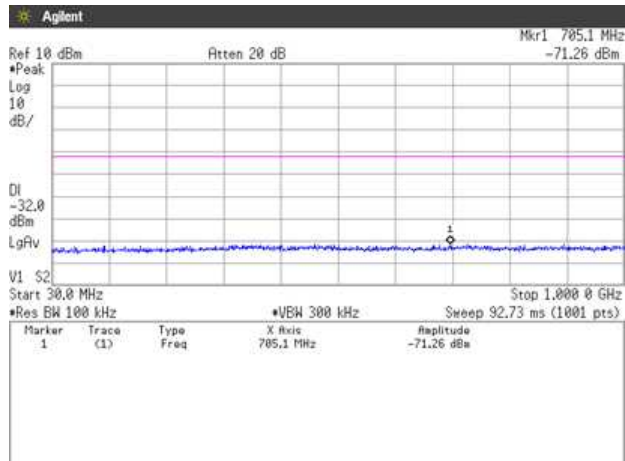


1GHz-5GHz

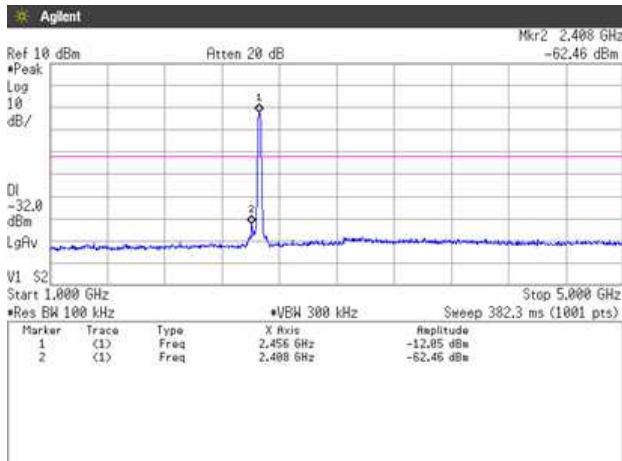


5GHz-10GHz

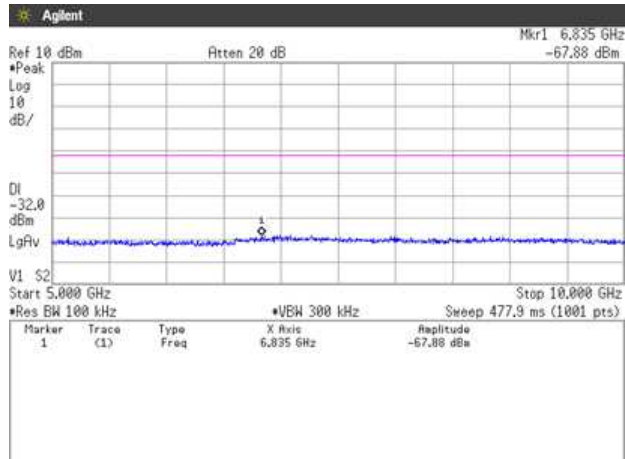


10GHz-15GHz

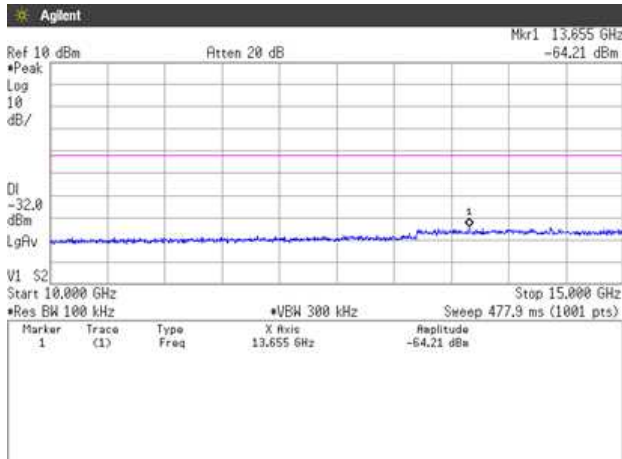

15GHz-20GHz

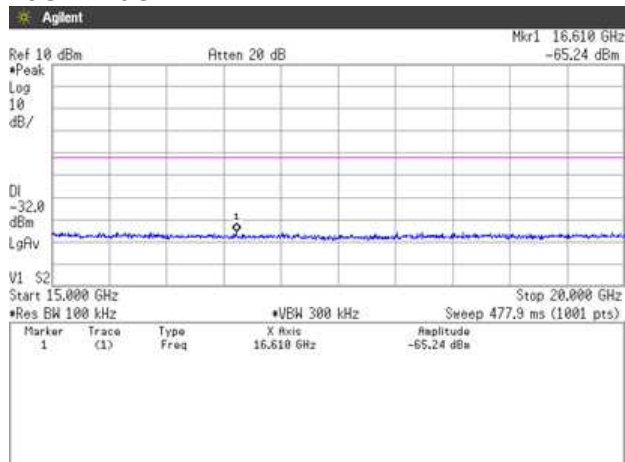

20GHz-25GHz

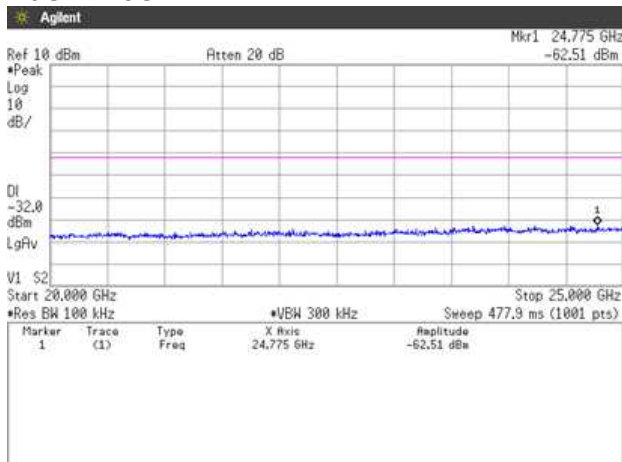

8. Spurious Emissions - Radiated -

8.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v04, Section 12.1]

Test was applied by following conditions.

Test method	: ANSI C63.10
Frequency range	: 9kHz to 25GHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	: 3m
Test receiver setting	Below 1GHz
- Detector	: Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	: 200Hz, 120kHz
Spectrum analyzer setting	Above 1GHz
- Peak	: RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	: RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto Display mode=Linear

Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	Determined VBW Setting
IEEE802.11b	99.22	1024	8	10Hz (Duty Cycle ≥ 98%)
IEEE802.11g	99.42	1364	8	10Hz (Duty Cycle ≥ 98%)
IEEE802.11n(HT20)	99.22	1276	10	10Hz (Duty Cycle ≥ 98%)


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

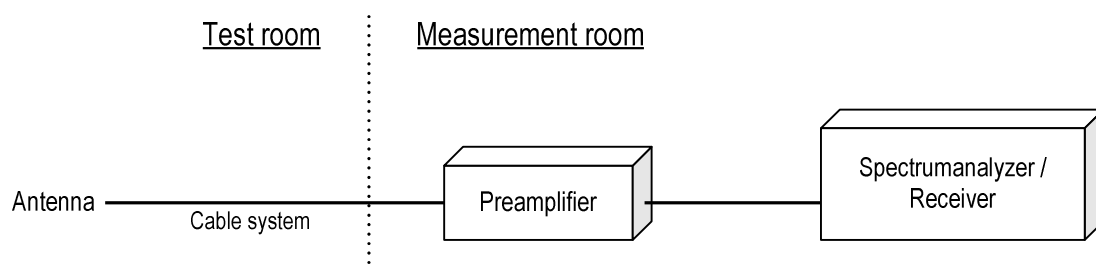

8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4824.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 49.5dBuV Cable system loss = 8.4dB

Result = 49.5 + 8.4 = 45.1dBuV/m

Margin = 74.0 - 45.1 = 16.1dB

8.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.


8.4 Test data

Date	:	May 15, 2017		
Temperature	:	23.4 [°C]		
Humidity	:	45.8 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	:	May 16, 2017		
Temperature	:	23.4 [°C]		
Humidity	:	45.8 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	:	May 18, 2017		
Temperature	:	23.8 [°C]		
Humidity	:	35.3 [%]	Test engineer	:
Test place	:	3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

8.4.1 Transmission mode

[11b]
Channel Low
BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

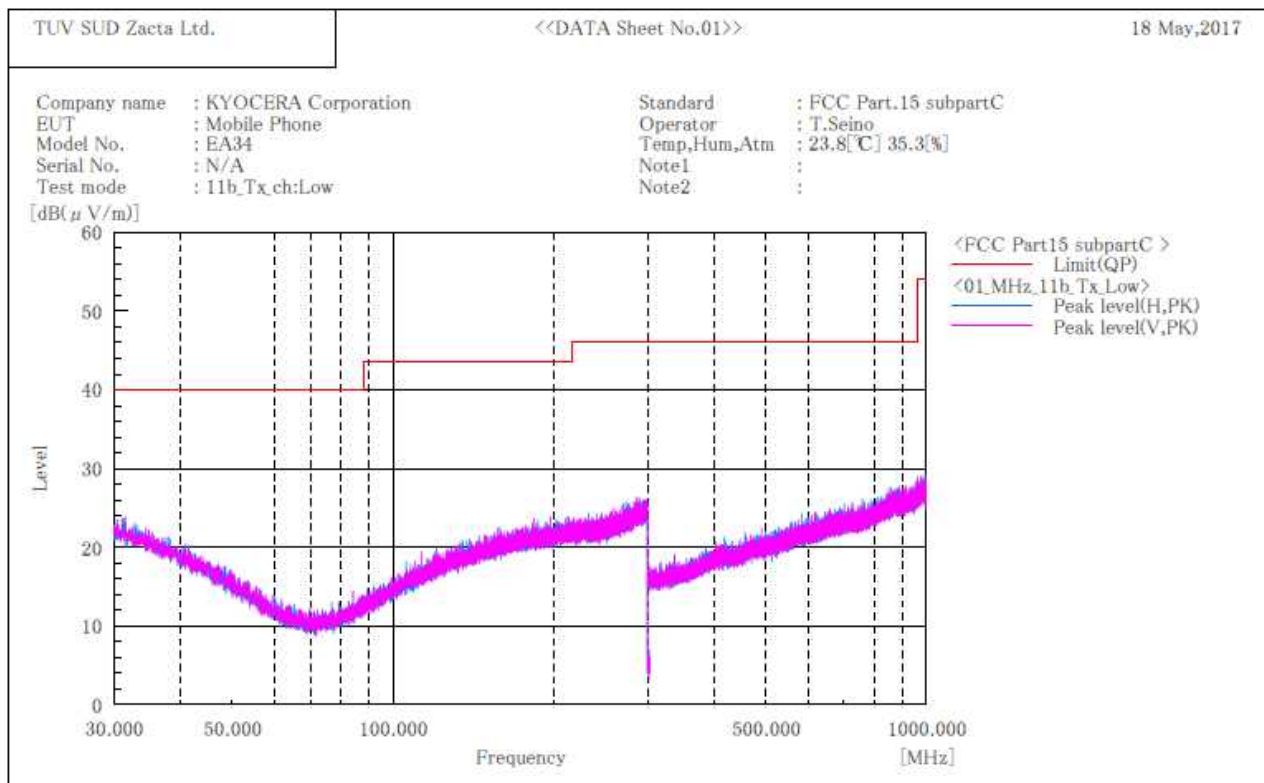

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]
Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

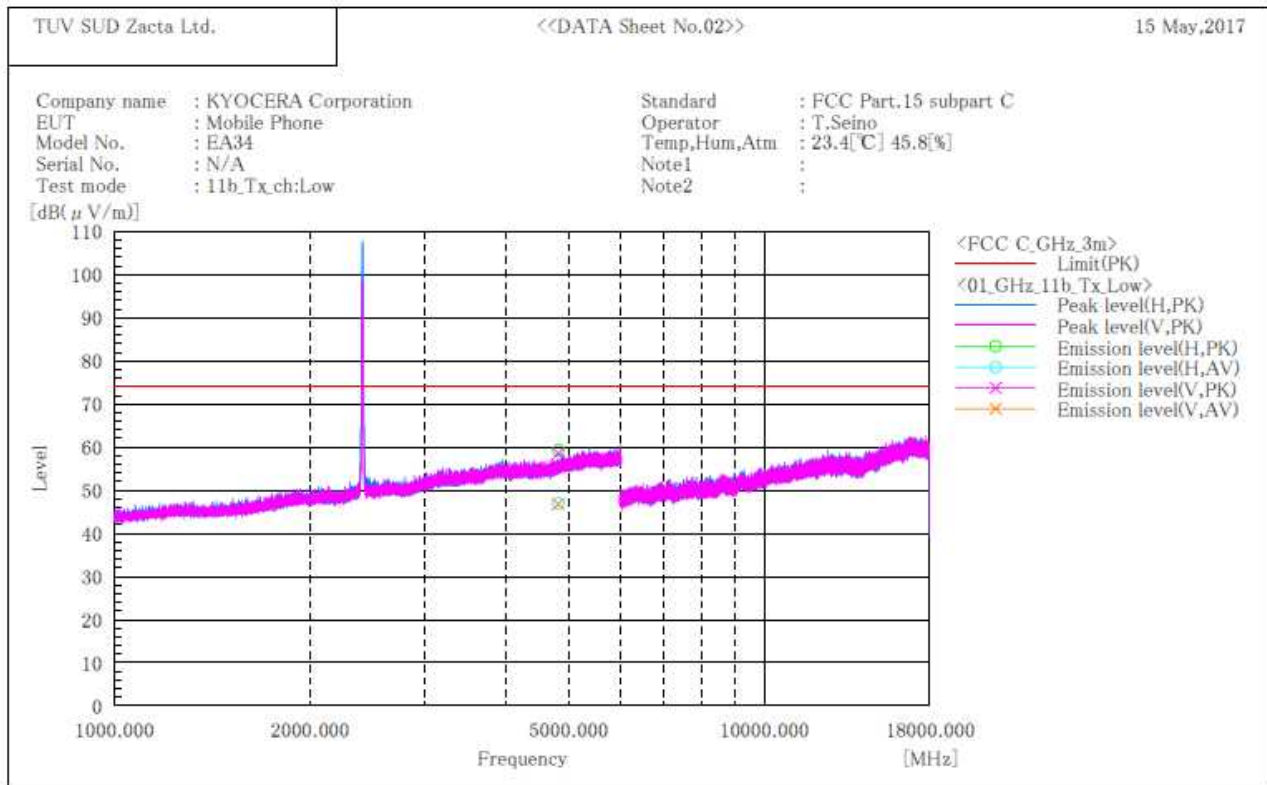

Final Result


No.	Frequency (F)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4824.000 [MHz]	H 50.9	38.6	8.4	59.3	47.0	74.0	54.0	14.7	7.0	149.0	11.0	
2	4824.000	V 50.2	38.4	8.4	58.6	46.8	74.0	54.0	15.4	7.2	218.0	289.0	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11b]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

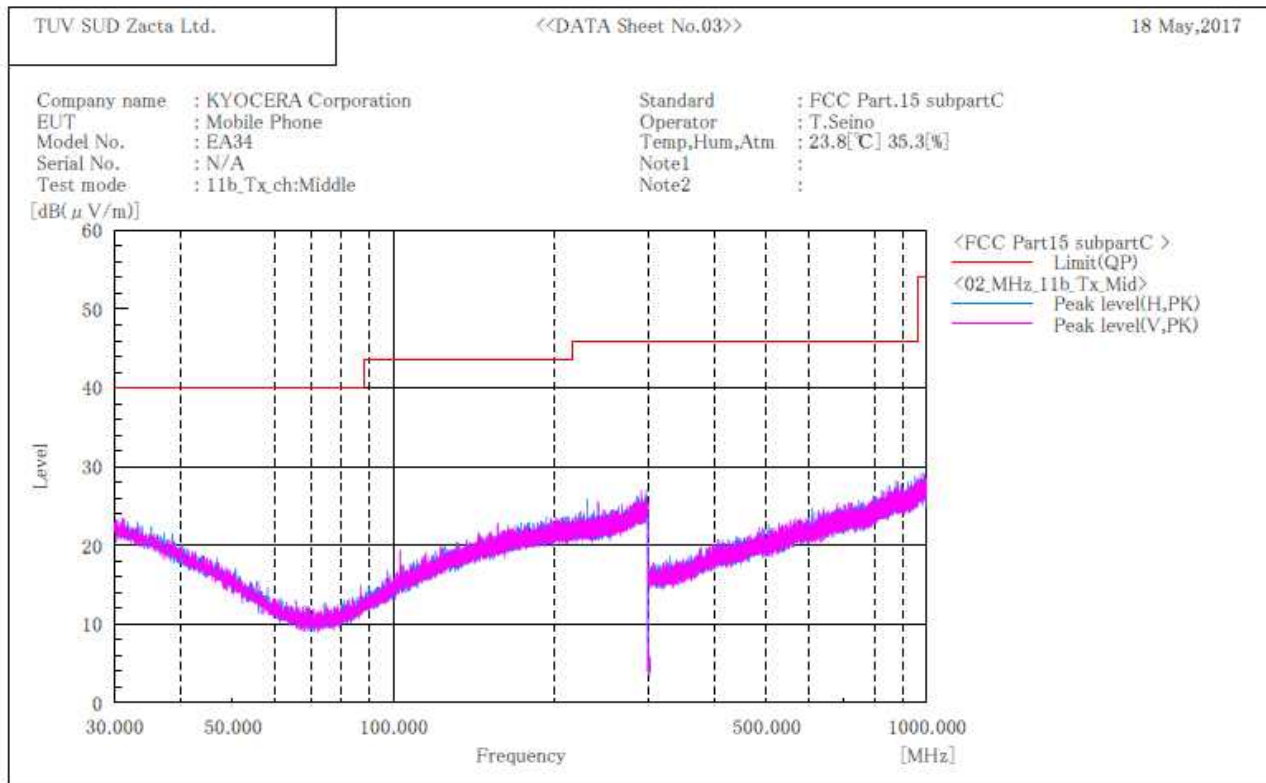

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB (1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]
Channel Middle
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

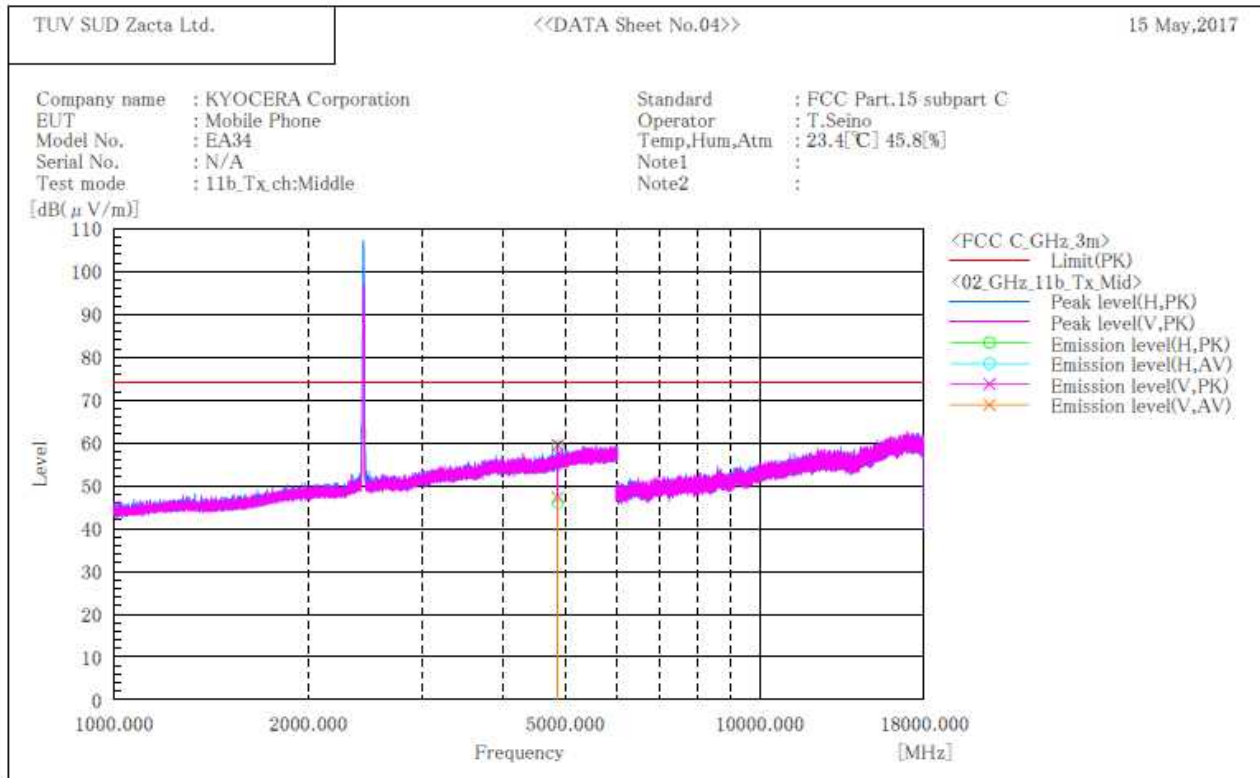

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4874.000	H	50.5	37.4	8.6	59.1	46.0	74.0	54.0	14.9	8.0	145.0	14.0	
2	4874.000	V	50.8	38.6	8.6	59.4	47.2	74.0	54.0	14.6	6.8	221.0	332.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11b]
Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

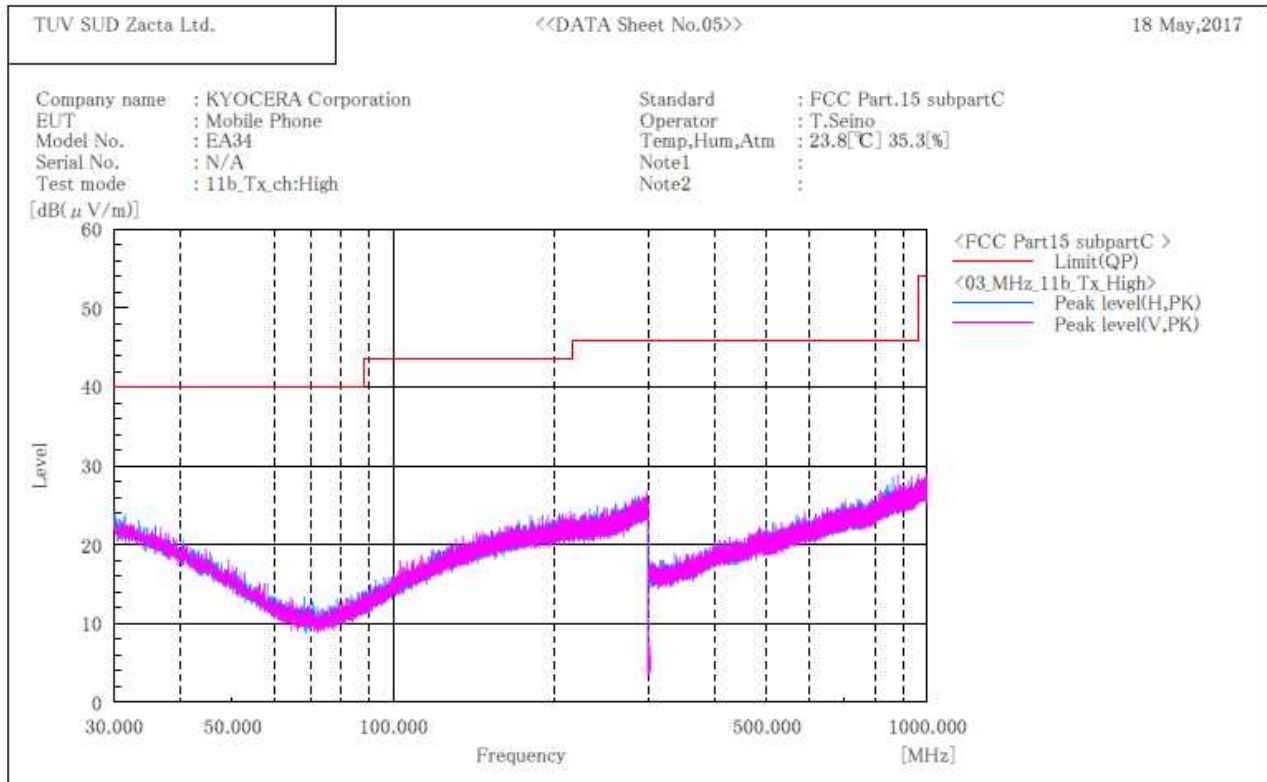

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11b]
Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

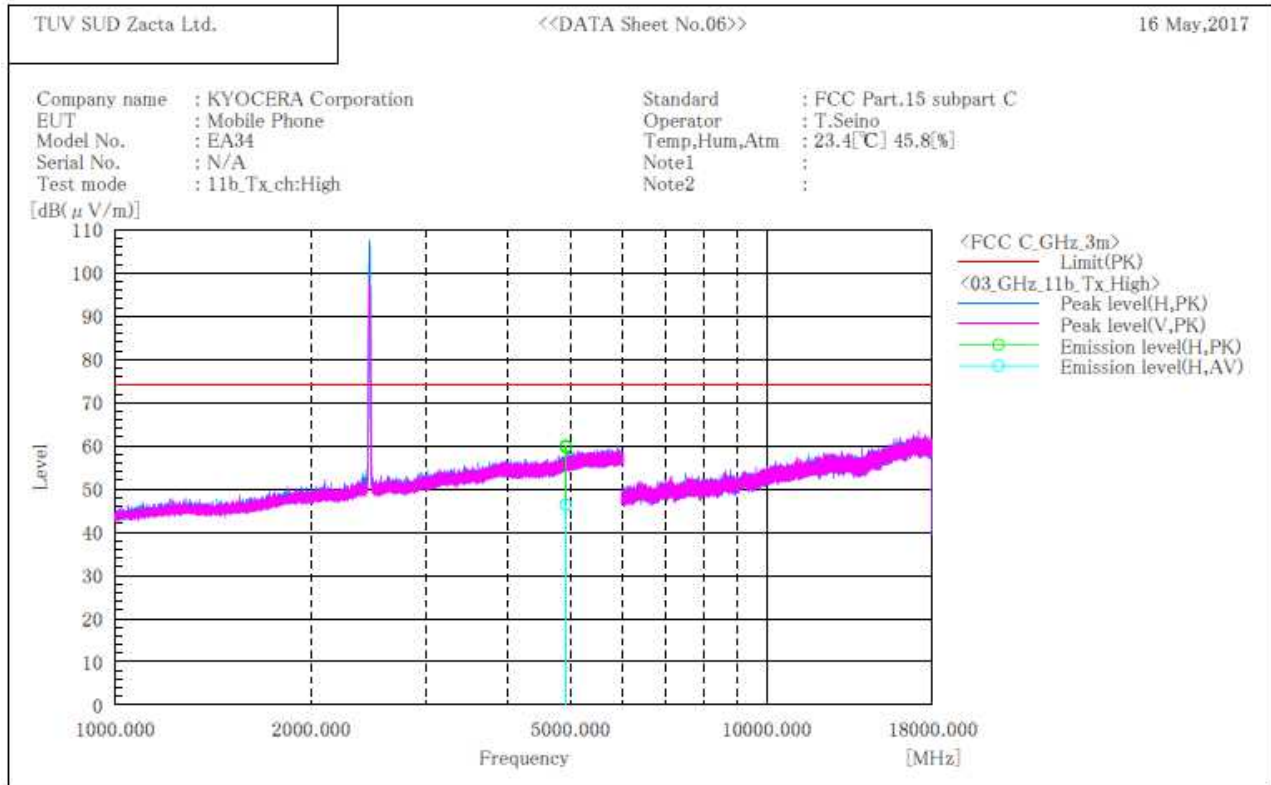

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4924.000	H	51.1	37.5	8.9	60.0	46.4	74.0	54.0	14.0	7.6	148.0	11.0	
2	4924.000	H	50.8	37.4	8.9	59.7	46.3	74.0	54.0	14.3	7.7	216.0	333.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11g]
Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

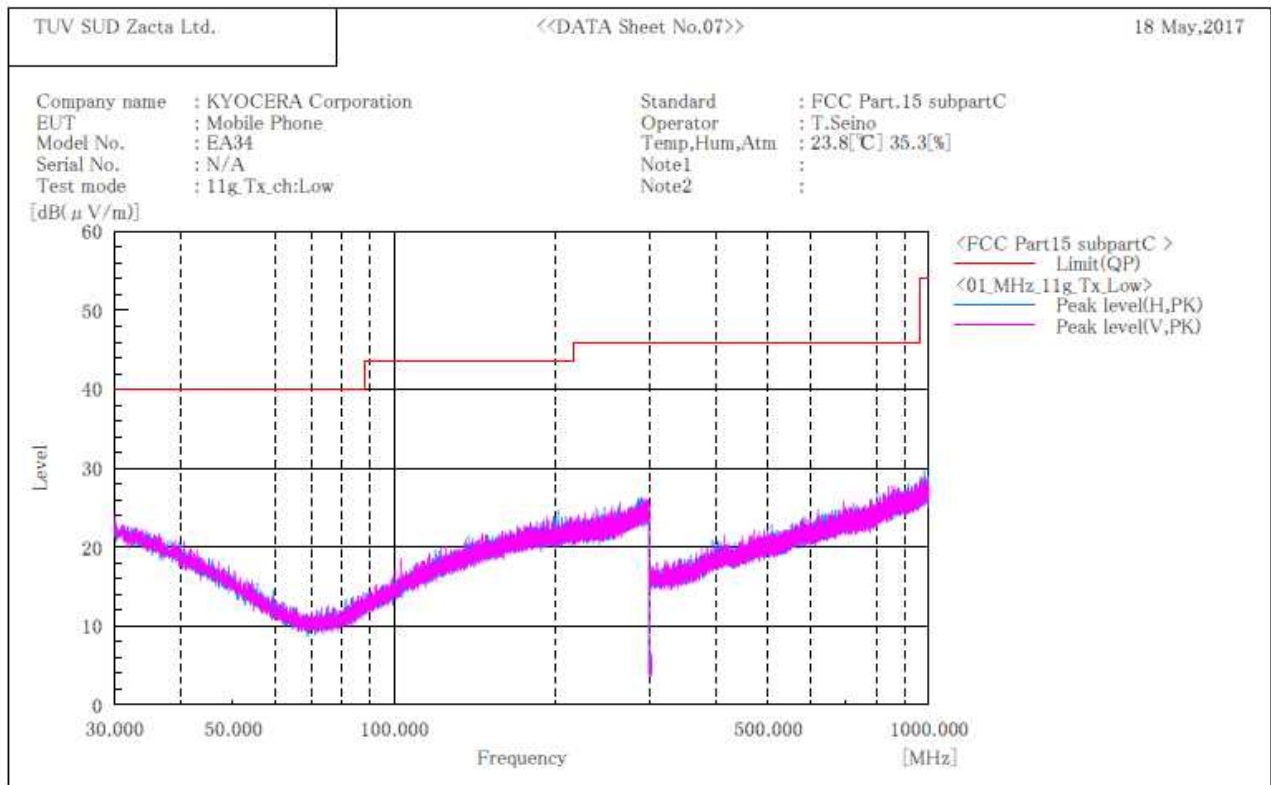

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]
Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

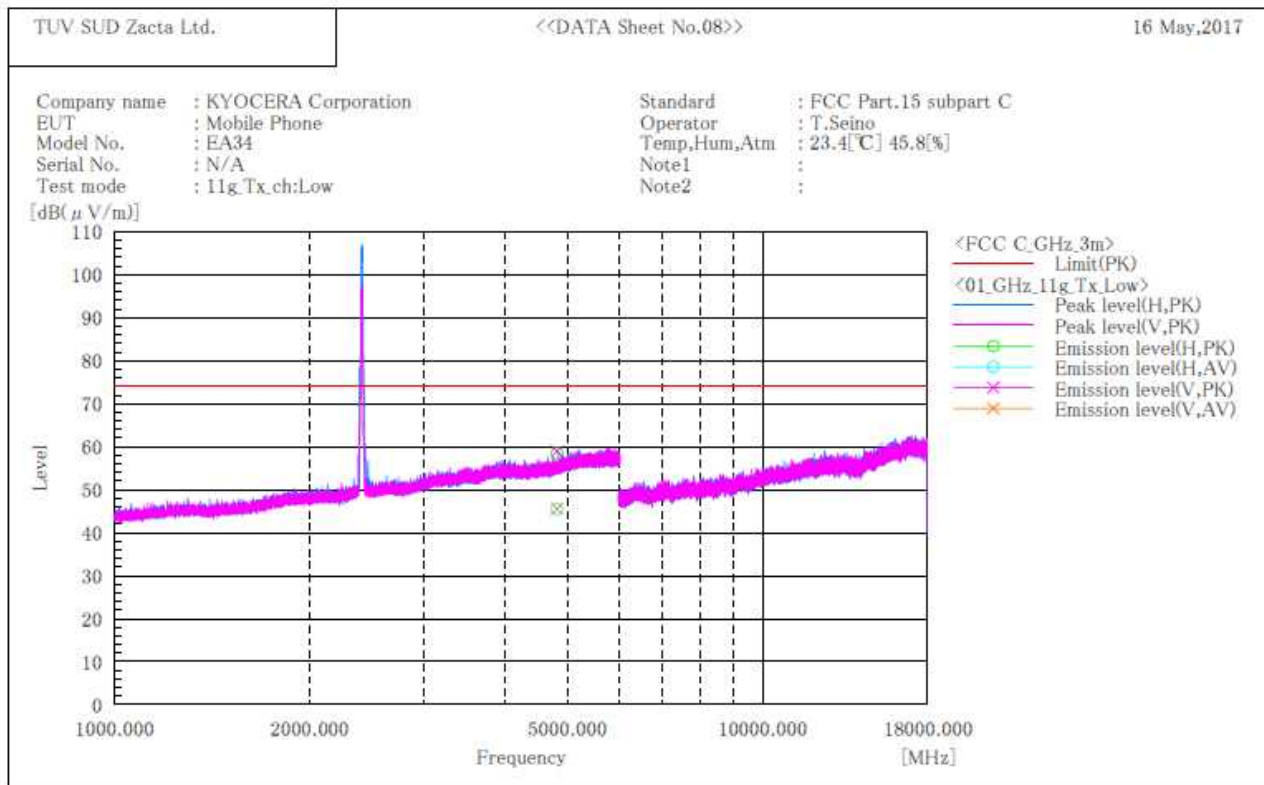

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	4824.000	H	50.1	37.1	8.4	58.5	45.5	74.0	54.0	15.5	8.5	156.0	13.0	
2	4824.000	V	50.5	37.2	8.4	58.9	45.6	74.0	54.0	15.1	8.4	234.0	322.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11g]
Channel Middle
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

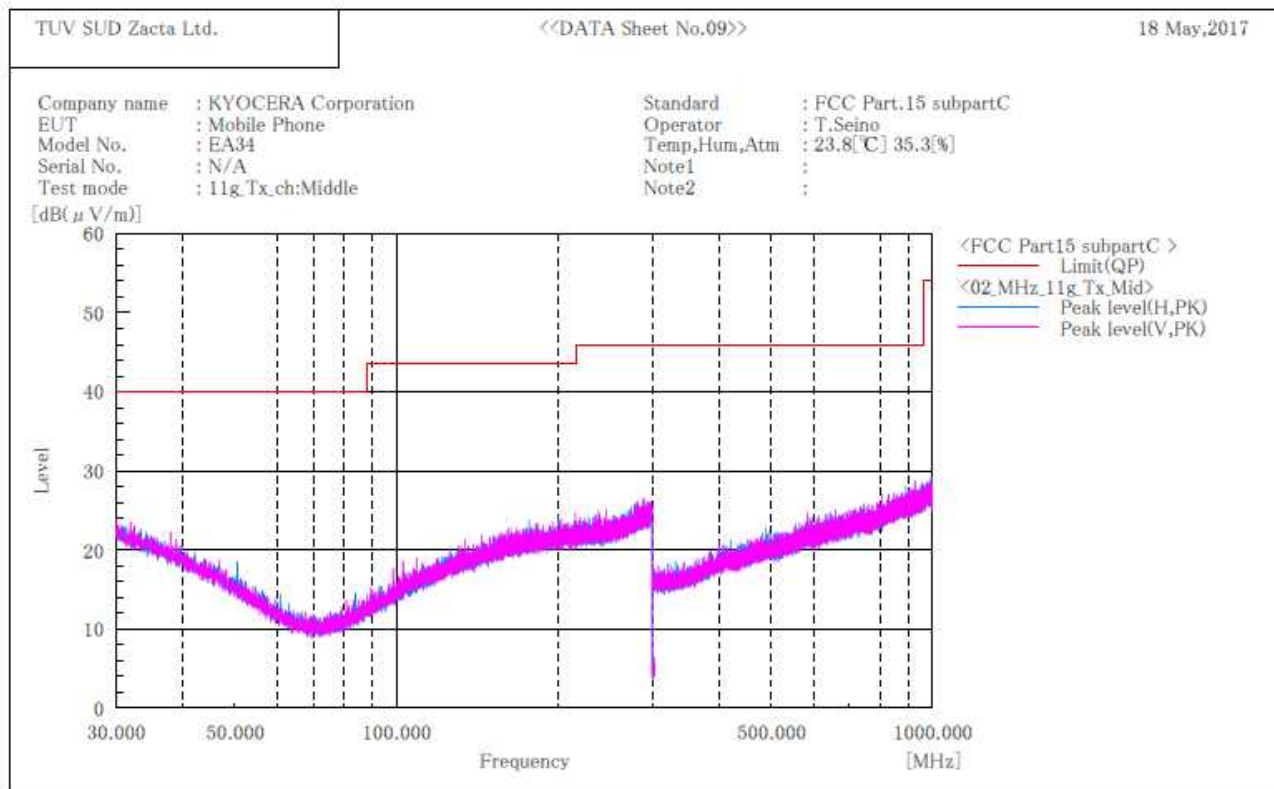

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]
Channel Middle
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

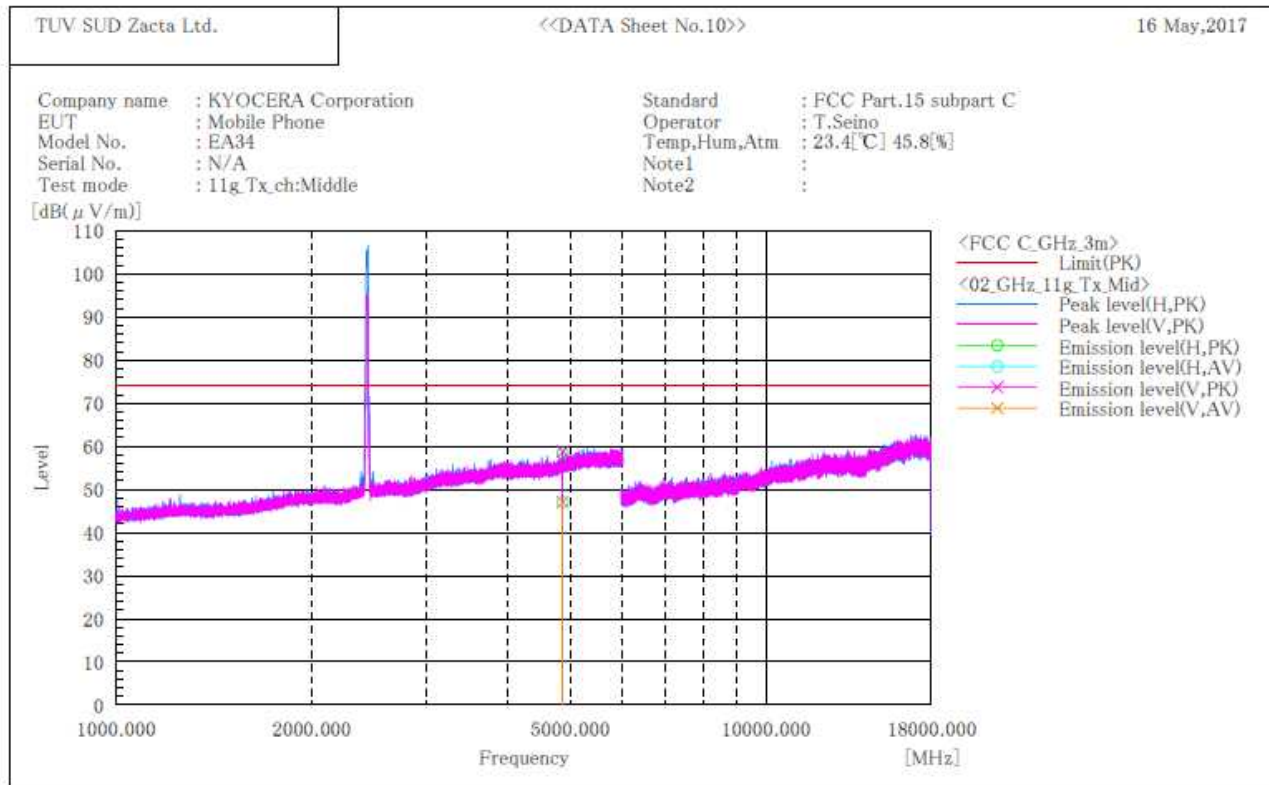

Final Result


No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark	
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]		
1	4874.000	H	49.8	38.4	8.6	58.4	47.0	74.0	54.0	15.6	7.0	167.0	17.0	
2	4874.000	V	50.2	38.5	8.6	58.8	47.1	74.0	54.0	15.2	6.9	217.0	324.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

**[11g]
Channel High
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

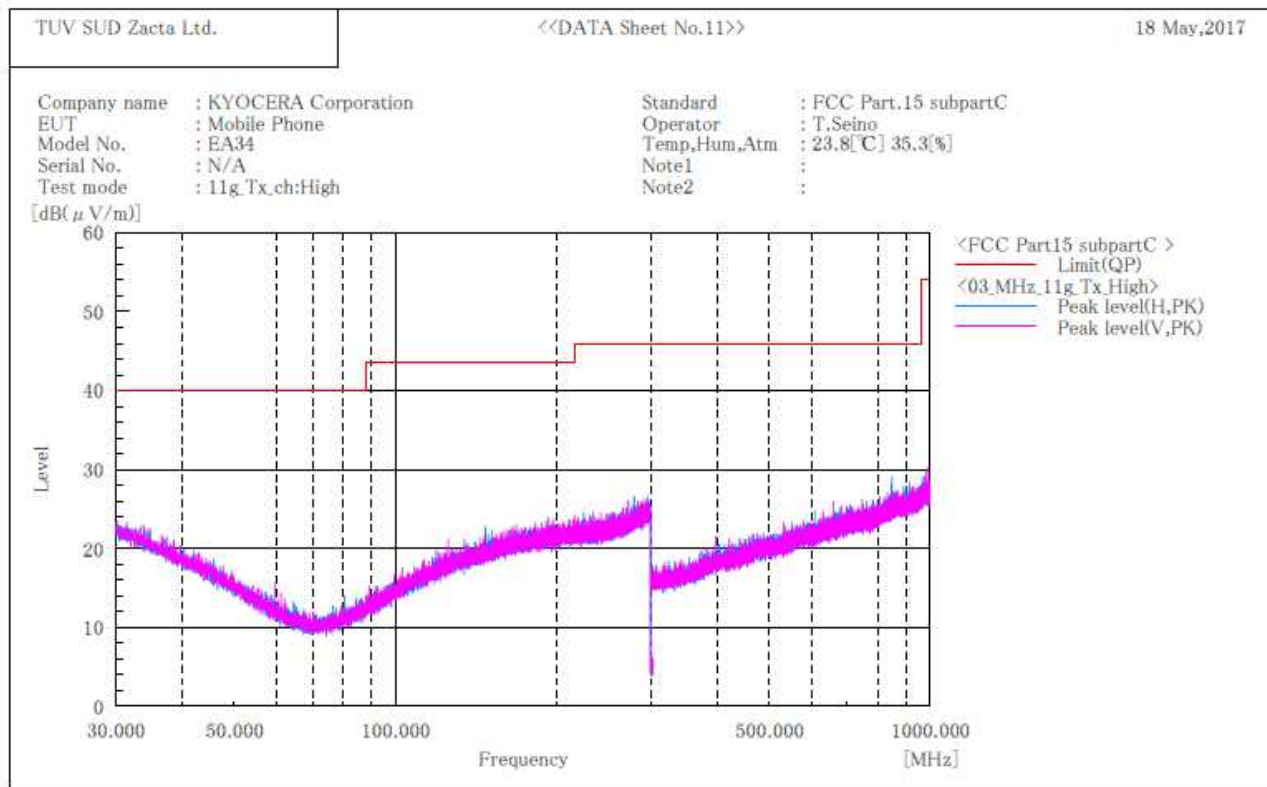

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

**[11g]
Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

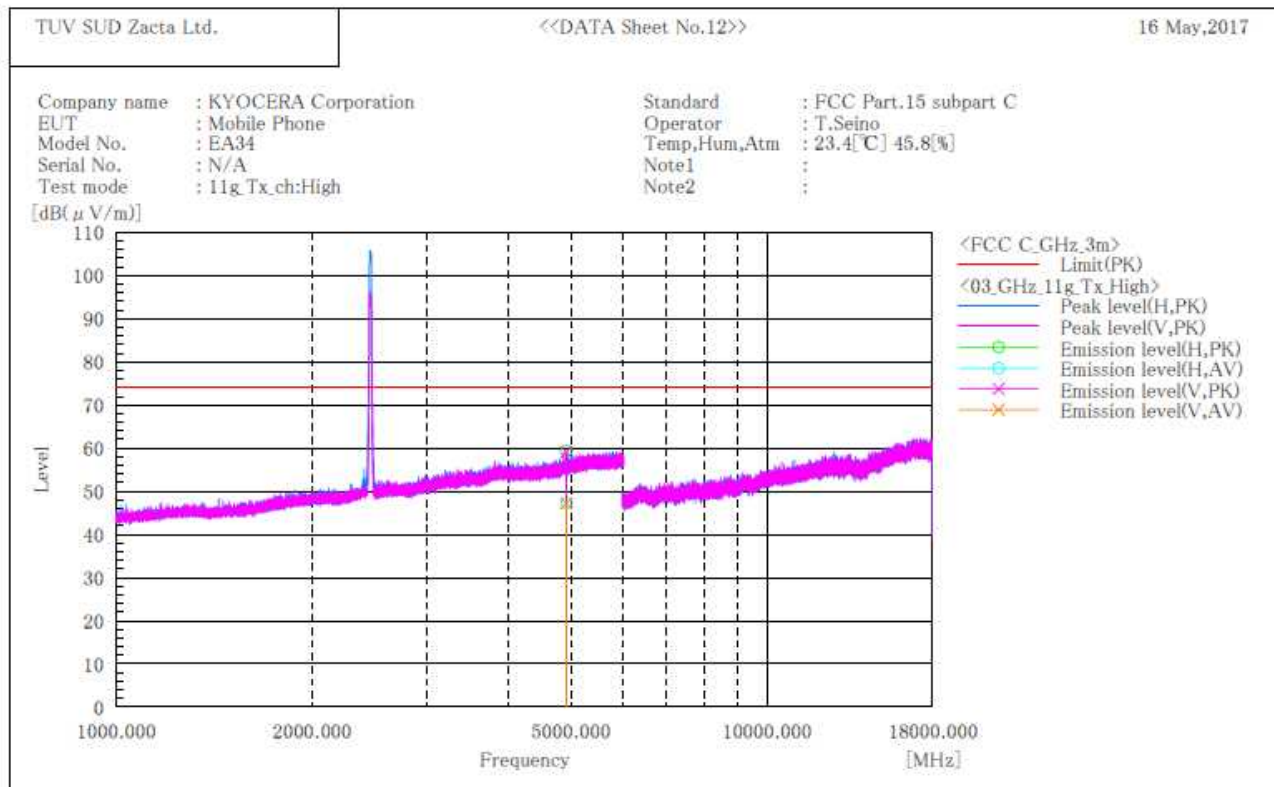

Final Result


No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
[MHz]		[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4924.000	H	50.4	38.4	8.9	59.3	47.3	74.0	54.0	14.7	6.7	159.0	18.0
2	4924.000	V	50.2	38.3	8.9	59.1	47.2	74.0	54.0	14.9	6.8	215.0	336.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel Low
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

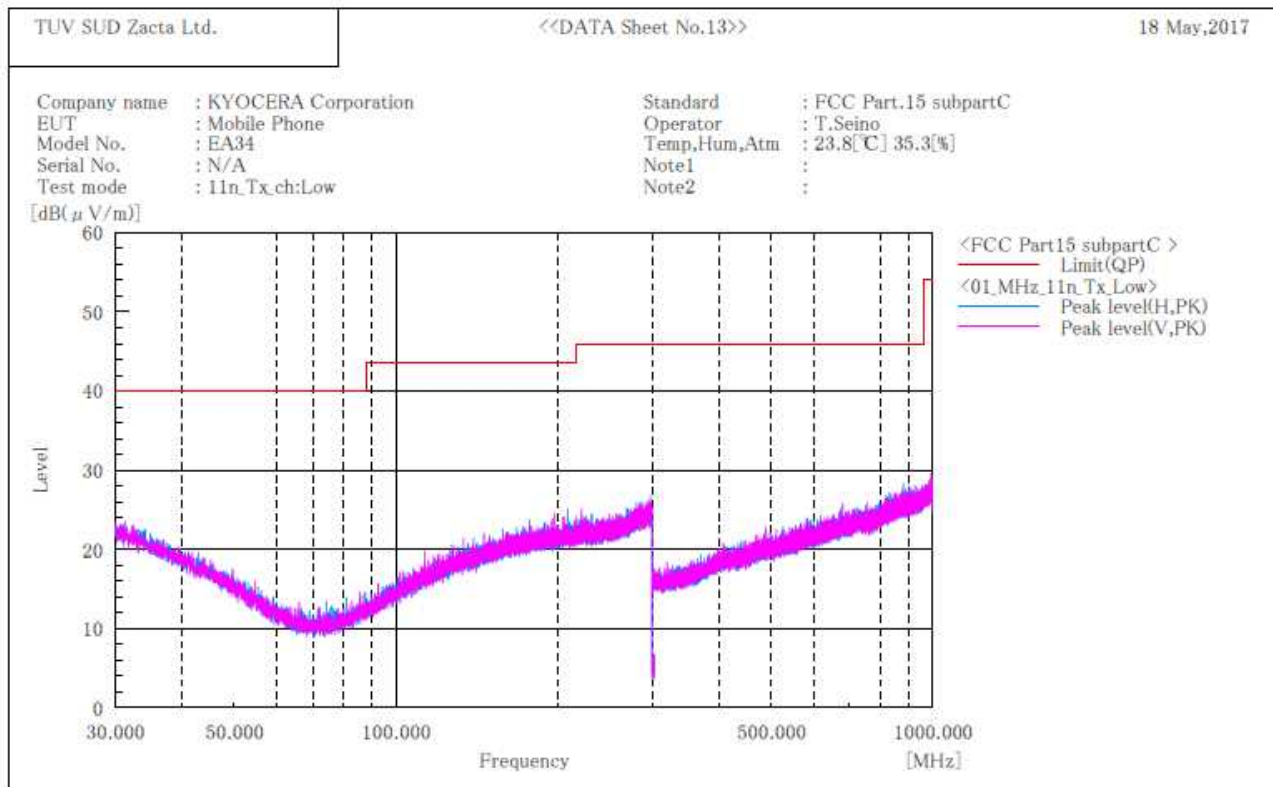

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

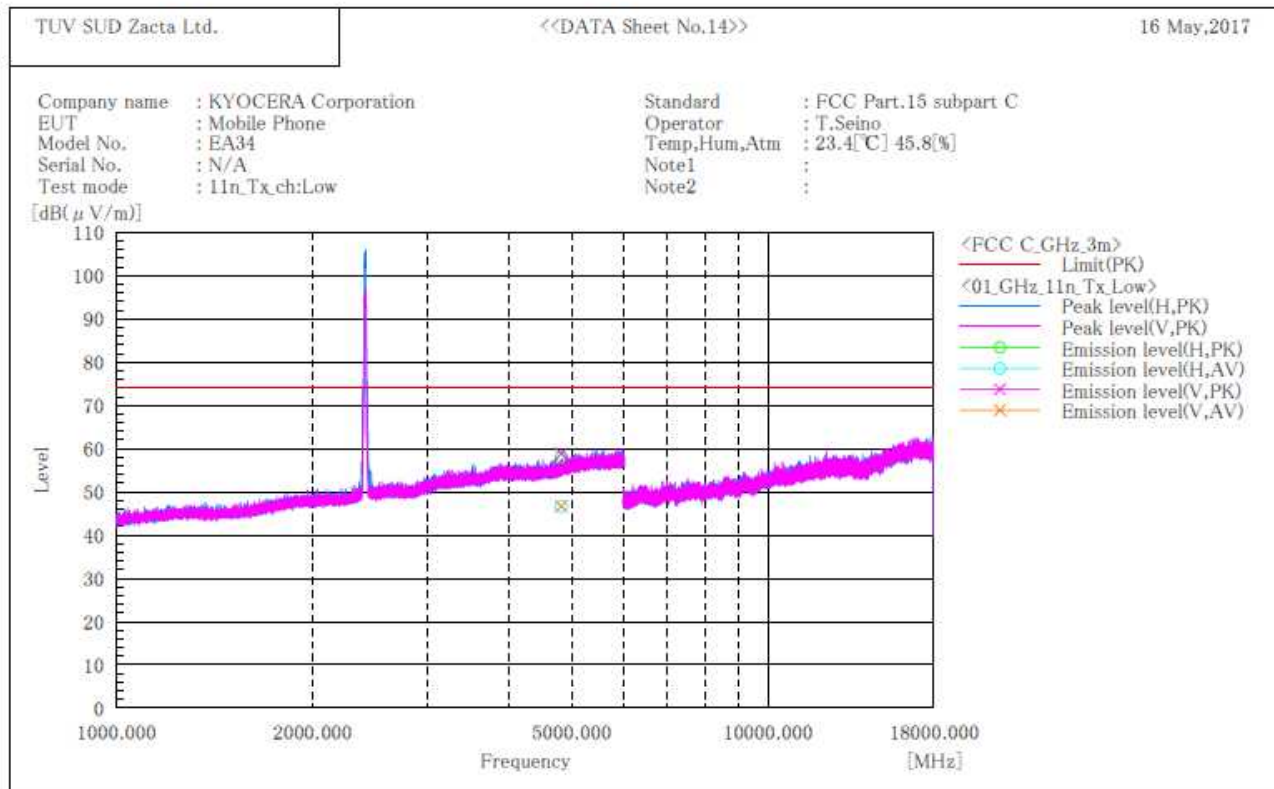

Final Result


No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4824.000 H	49.7	38.2	8.4	58.1	46.6	74.0	54.0	15.9	7.4	143.0	20.0	
2	4824.000 V	50.4	38.3	8.4	58.8	46.7	74.0	54.0	15.2	7.3	223.0	340.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

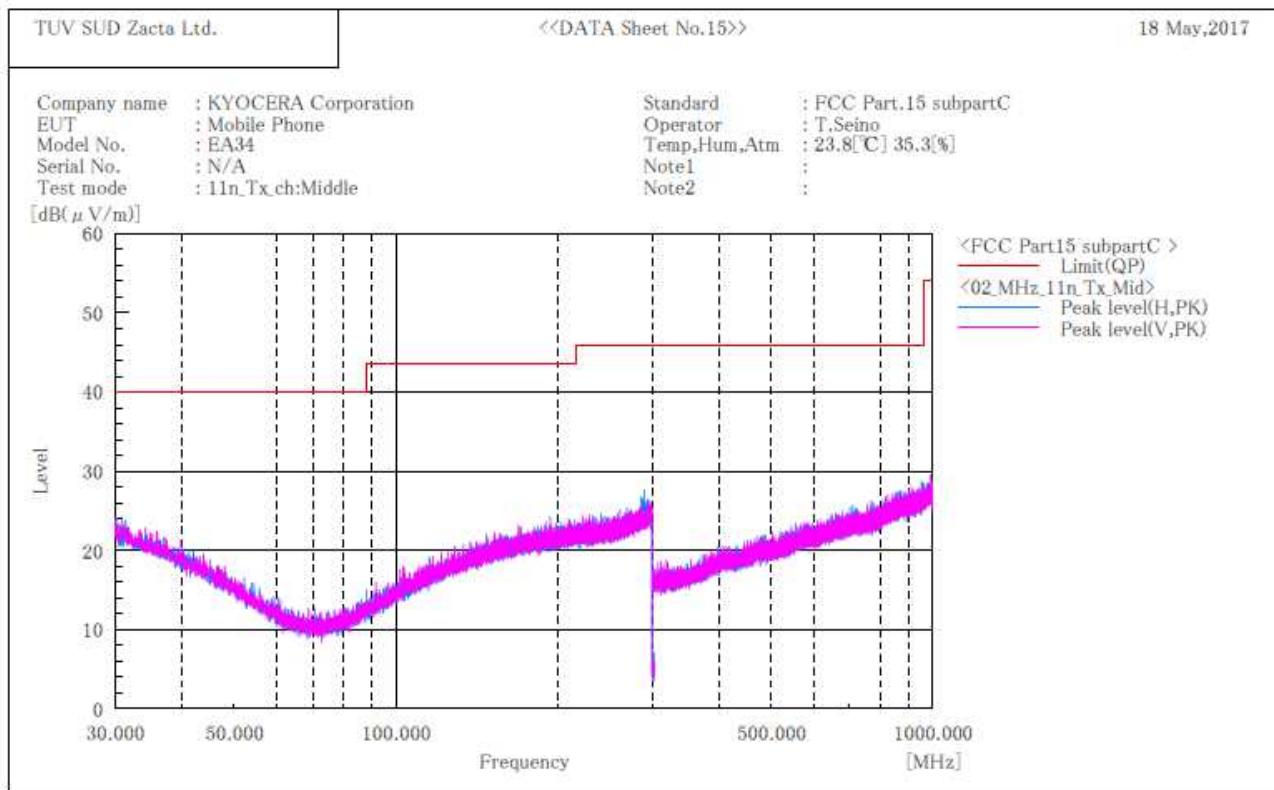

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

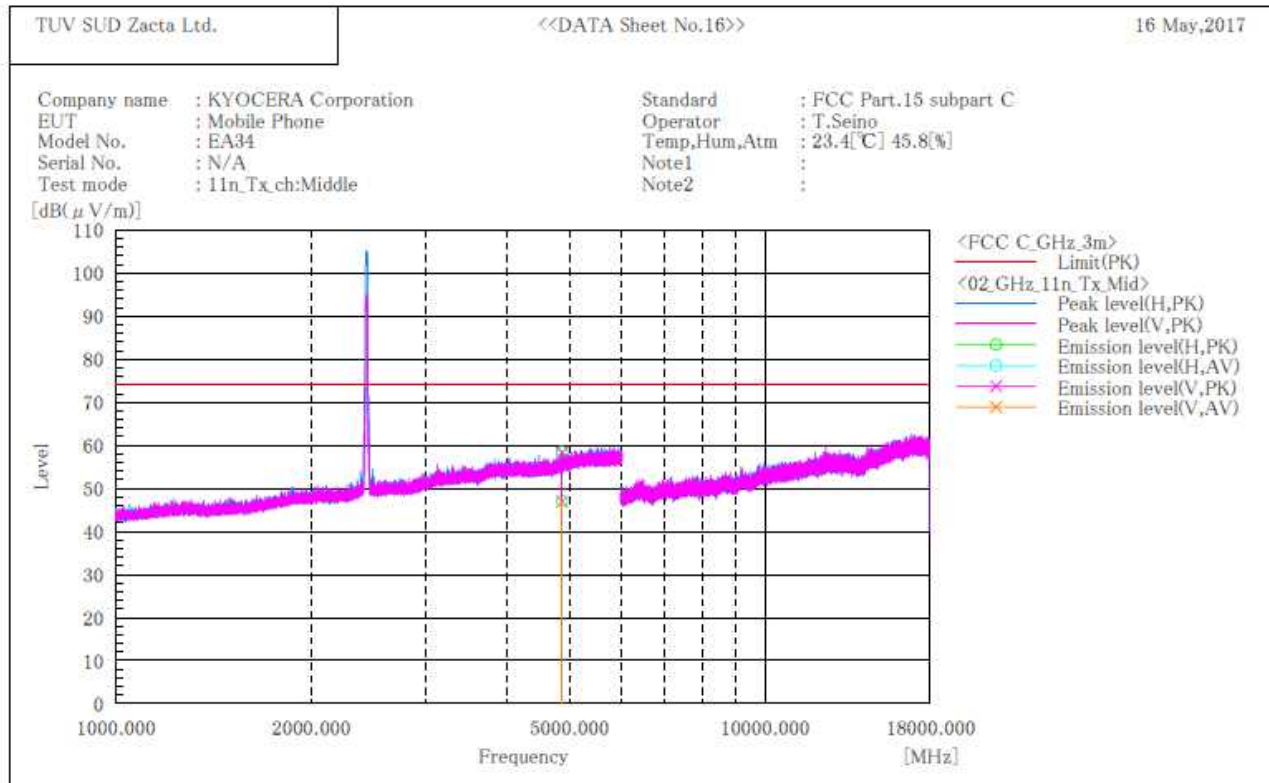

Final Result


No.	Frequency (P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark	
1	4874.000	H	49.9	38.5	8.6	58.5	47.1	74.0	54.0	15.5	6.9	144.0	16.0	
2	4874.000	V	49.7	38.3	8.6	58.3	46.9	74.0	54.0	15.7	7.1	229.0	334.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

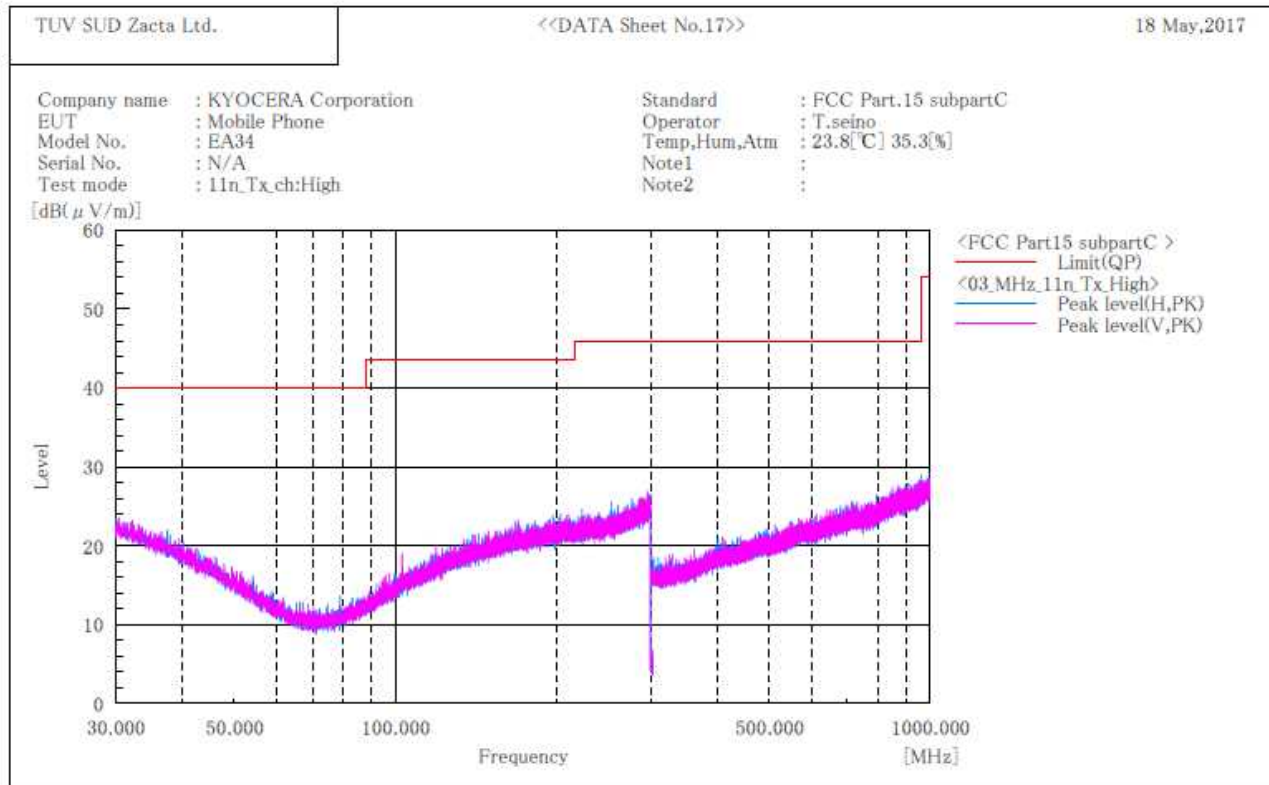

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

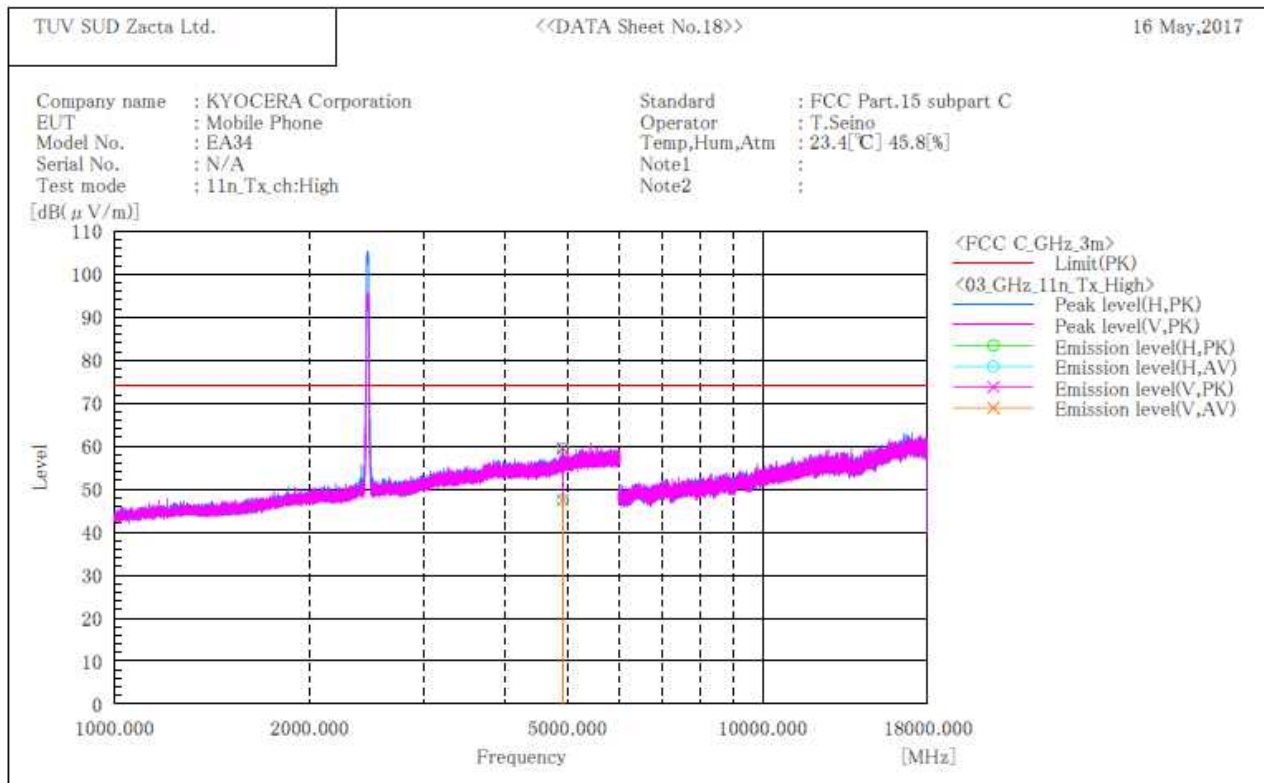

Final Result

No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	4924.000	H	50.5	38.5	8.9	59.4	74.0	54.0	14.6	6.6	149.0	12.0	
2	4924.000	V	50.6	38.6	8.9	59.5	74.0	54.0	14.5	6.5	227.0	346.0	


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

8.4.2 Receive mode

Channel Low BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

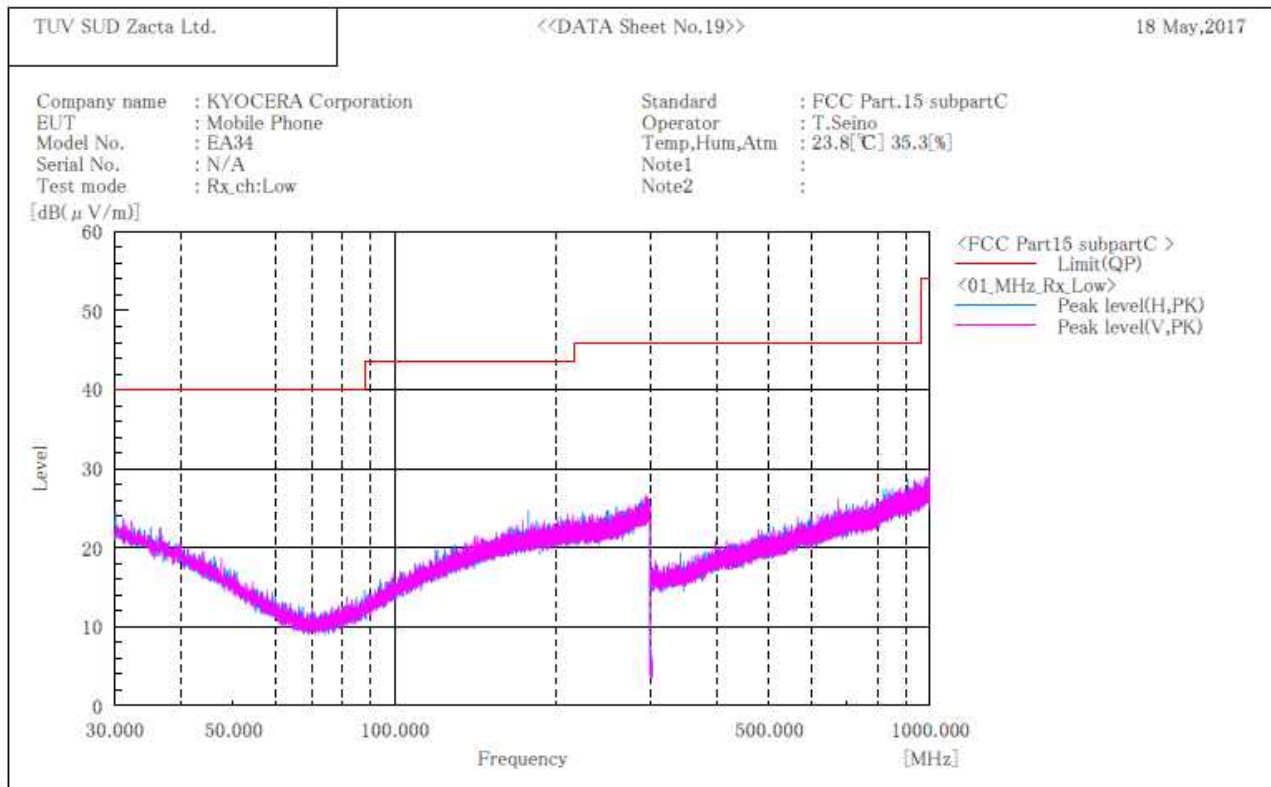

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

Channel Middle BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

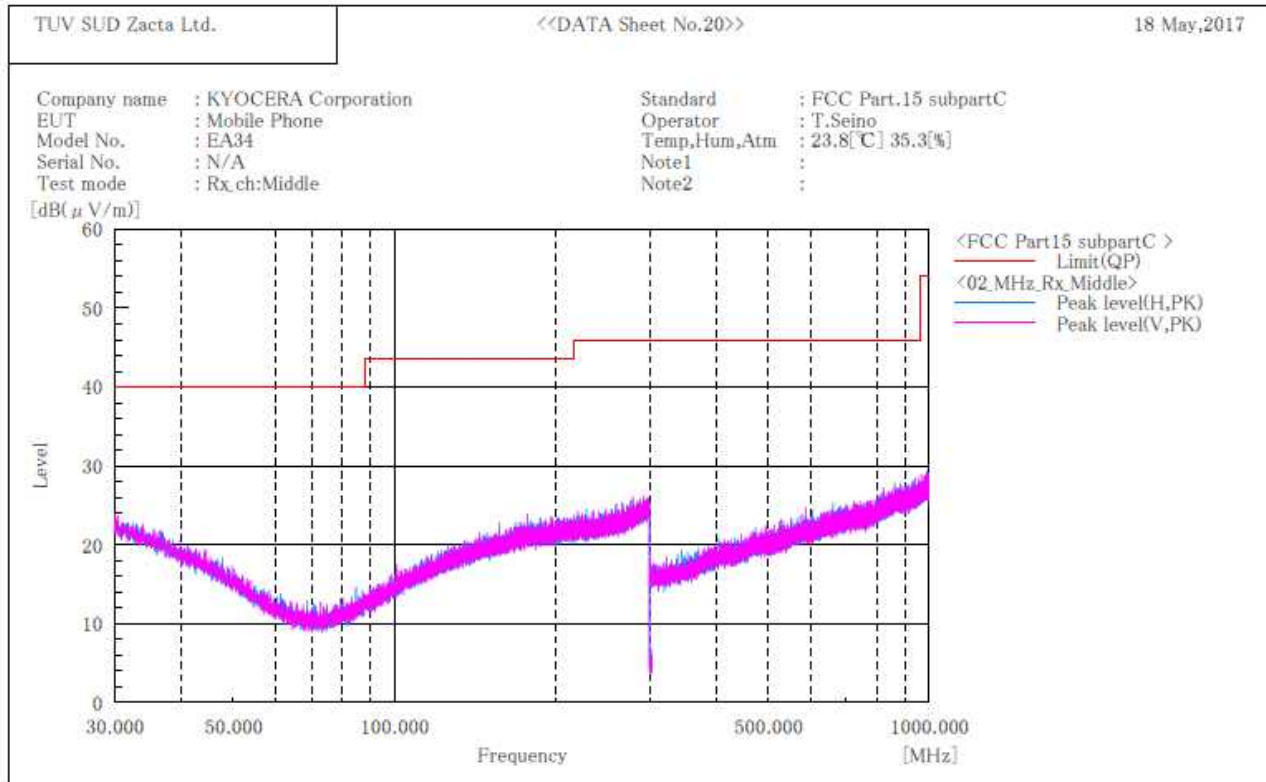

Final Result


No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

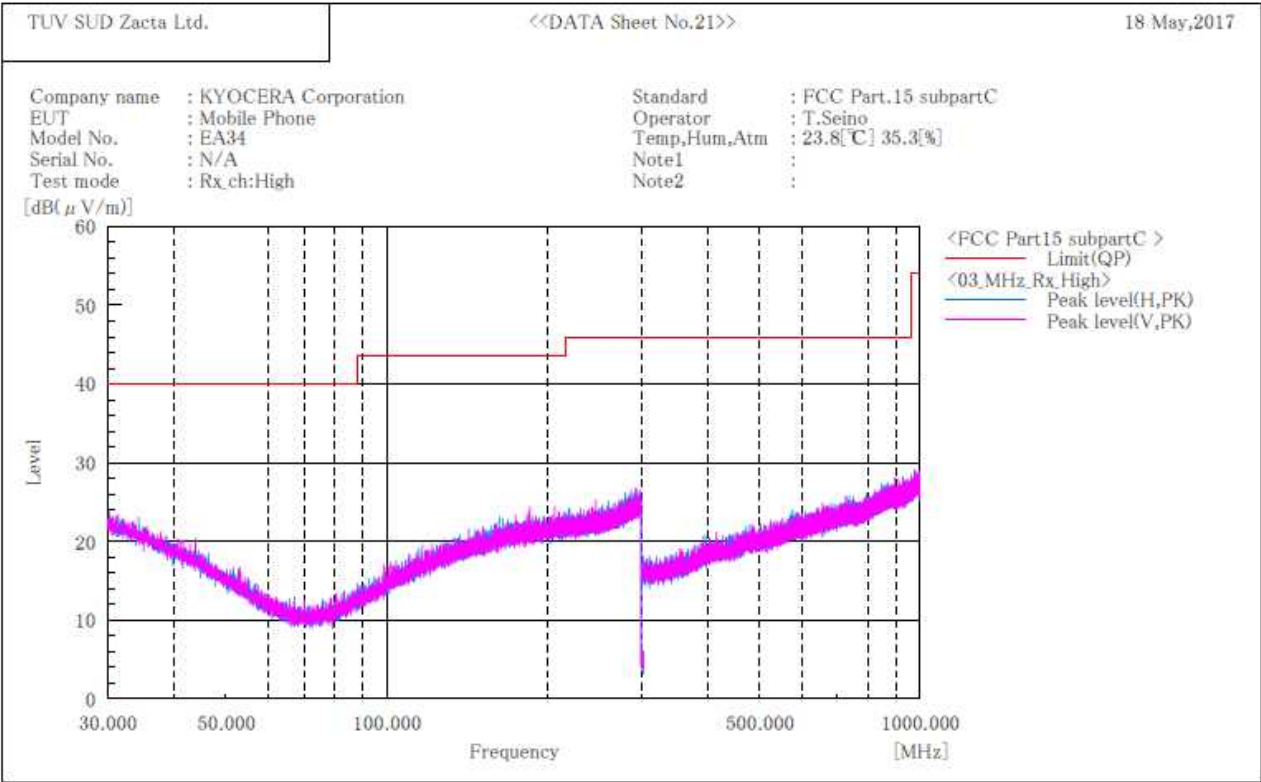

Final Result

No.	Frequency (P)	c.f	Height	Angle	Remark
	[MHz]	[dB(1/m)]	[cm]	[°]	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

9. Restricted Band of Operation

9.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209, KDB 558074 D01 v04, Section 12.0]

Test was applied by following conditions.

Test method	: ANSI C63.10
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	: 3m
Spectrum analyzer setting	
- Peak	: RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
- Average	: RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto Display mode=Linear

Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	Determined VBW Setting
IEEE802.11b	99.03	1022	10	10Hz (Duty Cycle ≥ 98%)
IEEE802.11g	99.27	1362	10	10Hz (Duty Cycle ≥ 98%)
IEEE802.11n(HT20)	99.38	1276	8	10Hz (Duty Cycle ≥ 98%)


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

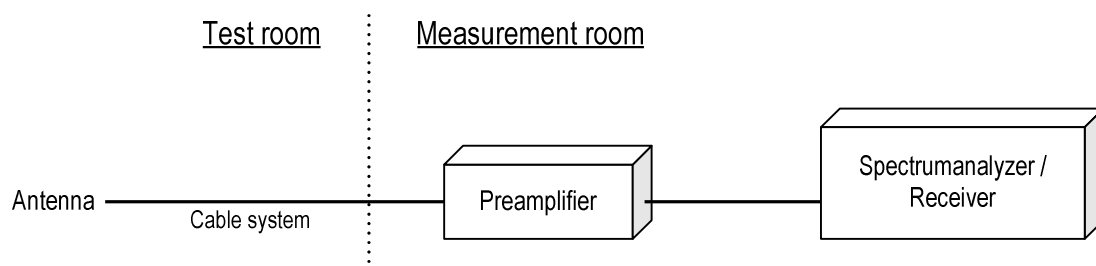

9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

9.3 Measurement Result

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]


Channel	Frequency [MHz]	Results Chart	Result
Low	2412	See the Trace Data	Pass
High	2462	See the Trace Data	Pass

9.4 Test data

Date	: May 18, 2017		
Temperature	: 24.4 [°C]		
Humidity	: 45.8 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: May 19, 2017		
Temperature	: 24.2 [°C]		
Humidity	: 45.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>


[IEEE802.11b]

Channel Low
Horizontal
Peak

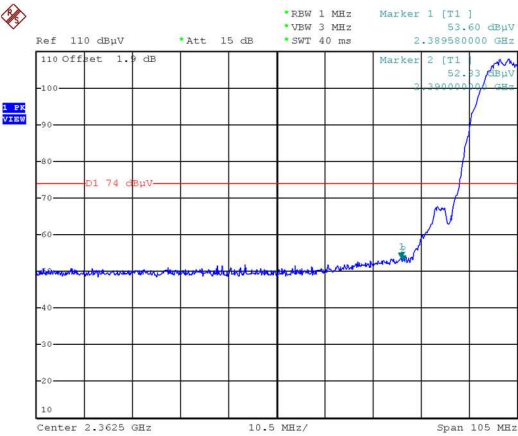


Date: 18.MAY.2017 23:01:20

Average

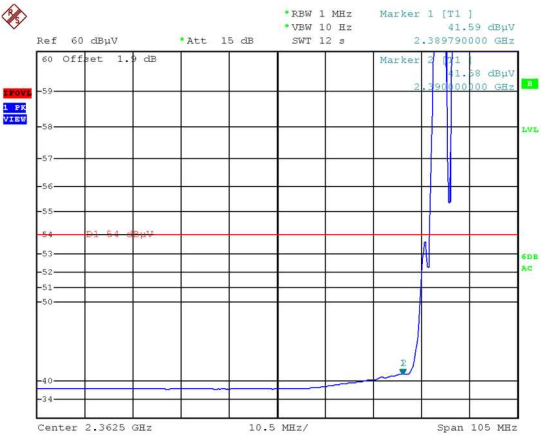


Date: 18.MAY.2017 23:02:23

Vertical
Peak

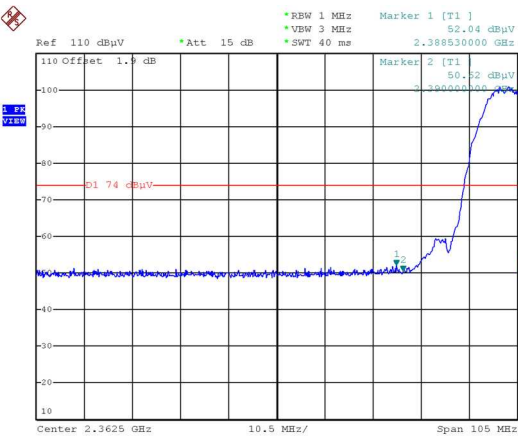


Date: 18.MAY.2017 23:05:23

Average

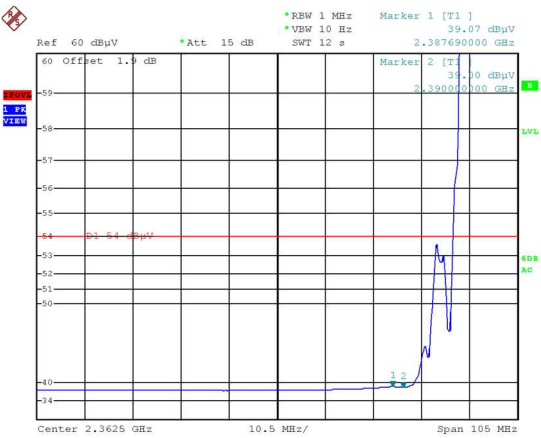


Date: 18.MAY.2017 23:06:10

**Channel High
Horizontal
Peak**

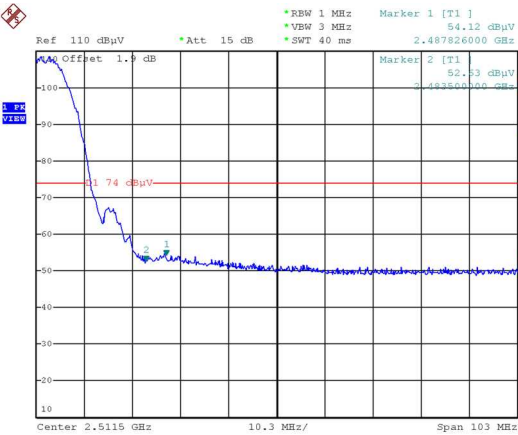


Date: 18.MAY.2017 23:09:44

Average

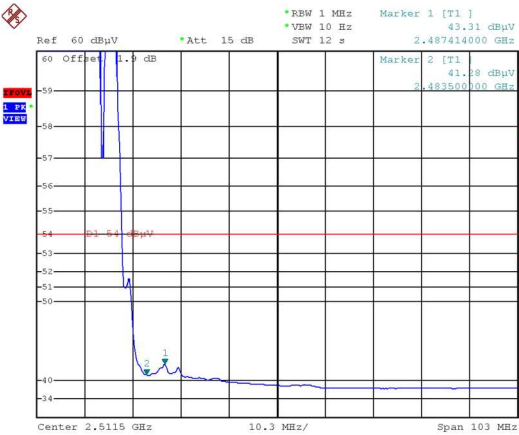


Date: 18.MAY.2017 23:10:23

**Vertical
Peak**

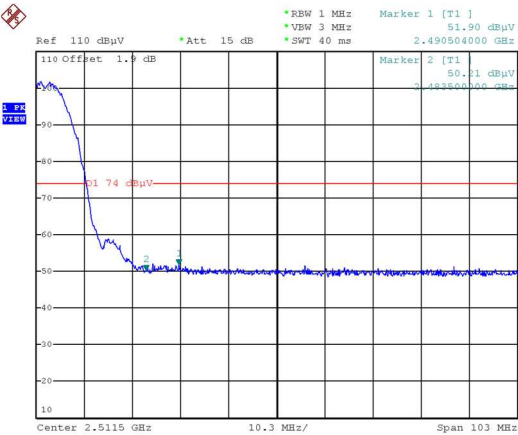

Date: 18.MAY.2017 23:12:39


Average

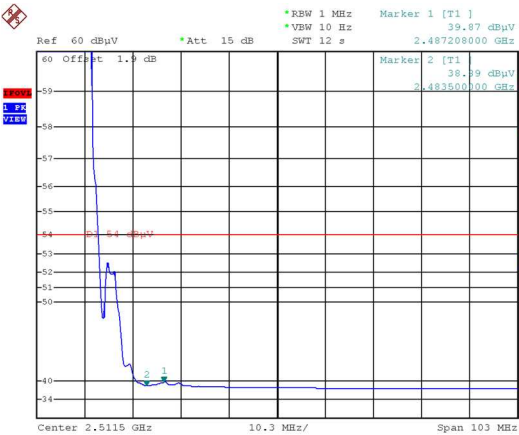

Date: 18.MAY.2017 23:13:18


[IEEE802.11g]

Channel Low
Horizontal
Peak

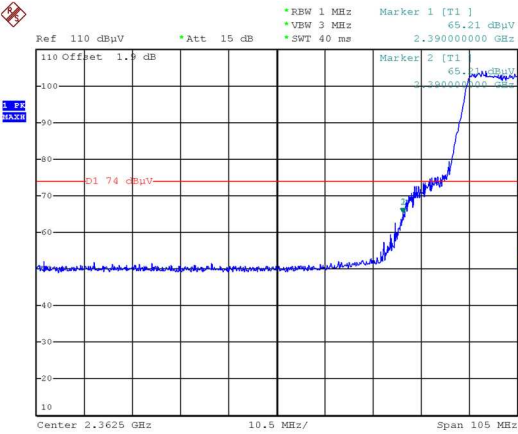


Date: 19.MAY.2017 22:39:18

Average

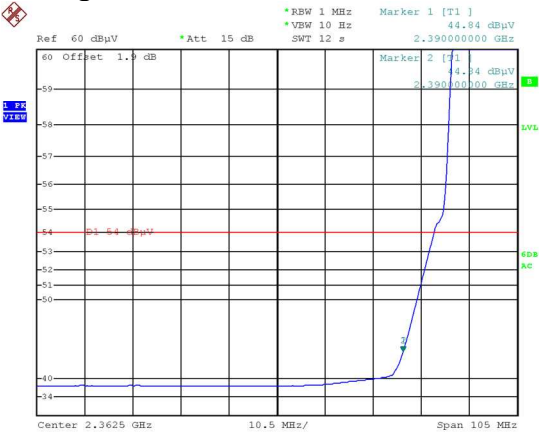


Date: 19.MAY.2017 22:39:57

Vertical
Peak

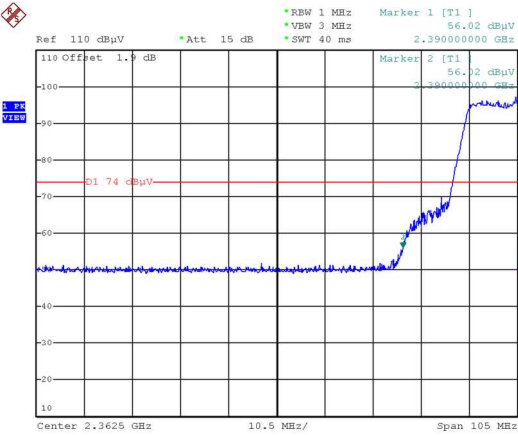


Date: 19.MAY.2017 22:42:59

Average

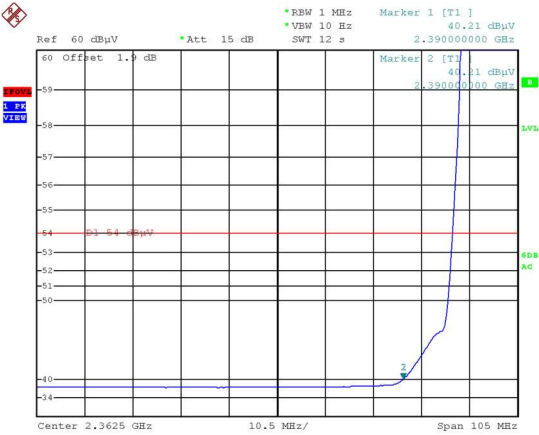


Date: 19.MAY.2017 22:43:39

Channel High
Horizontal
Peak

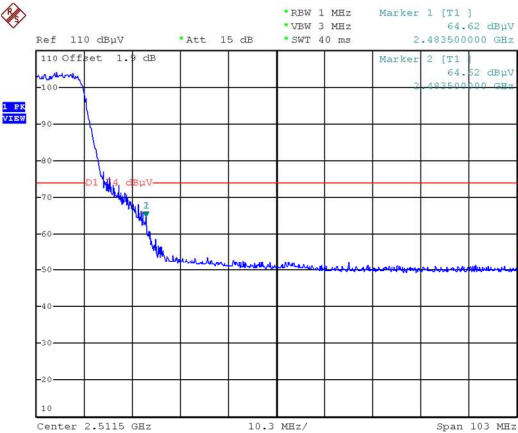


Date: 19.MAY.2017 22:48:52

Average

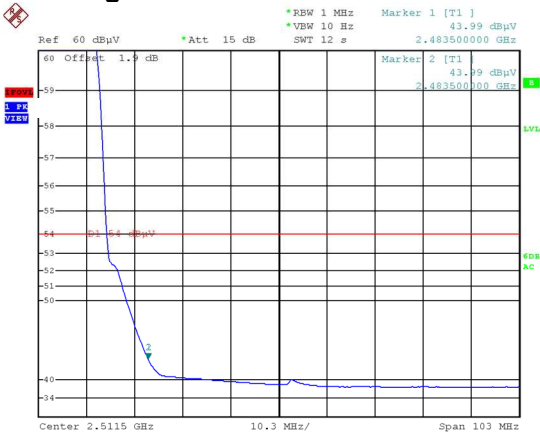


Date: 19.MAY.2017 22:49:30

Vertical
Peak

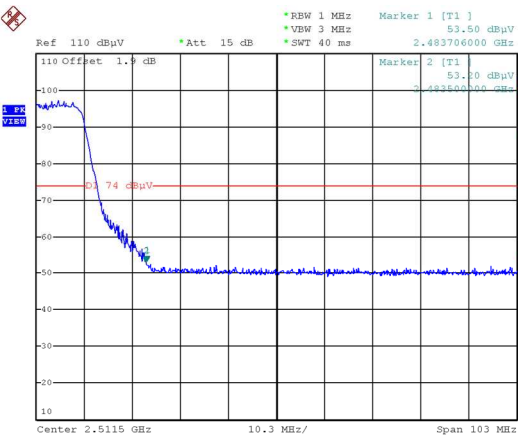

Date: 19.MAY.2017 22:53:24


Average

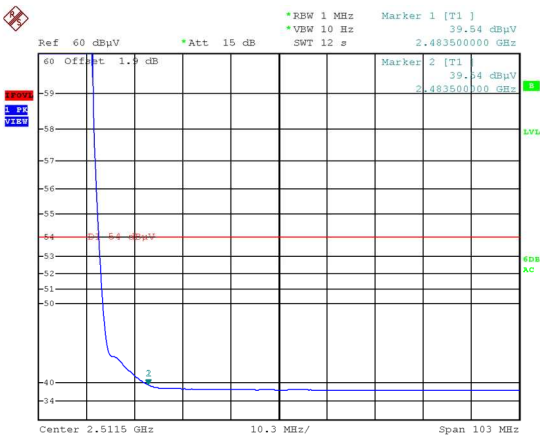

Date: 19.MAY.2017 22:53:59


[IEEE802.11n (HT20)]

Channel Low
Horizontal
Peak

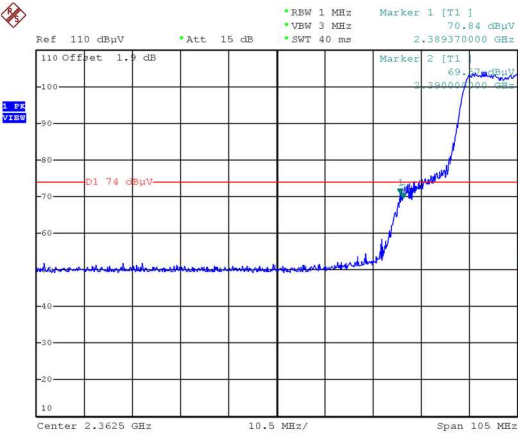


Date: 19.MAY.2017 23:13:48

Average

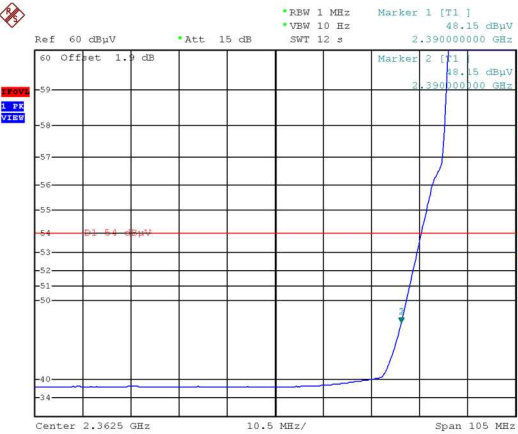


Date: 19.MAY.2017 23:15:01

Vertical
Peak

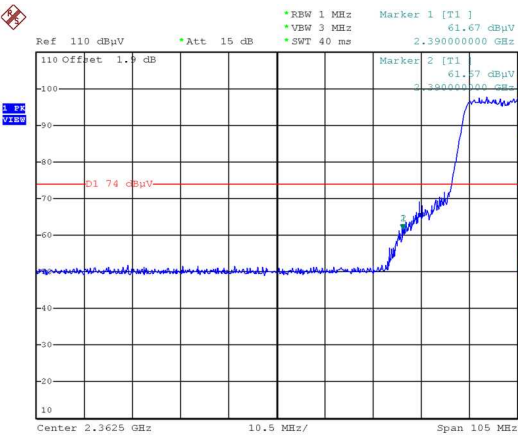


Date: 19.MAY.2017 23:21:58

Average

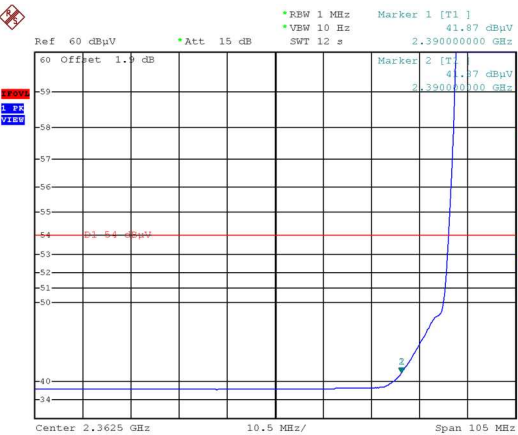


Date: 19.MAY.2017 23:22:34

Channel High
Horizontal
Peak

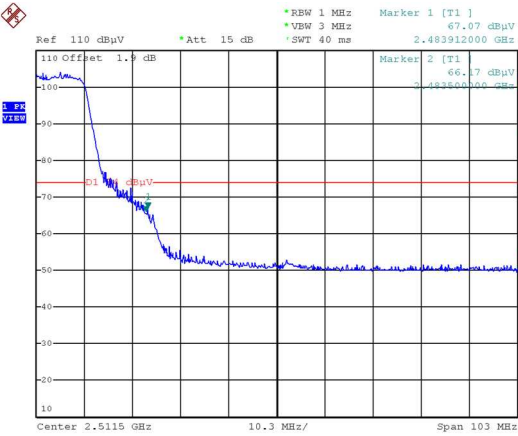


Date: 19.MAY.2017 23:29:21

Average

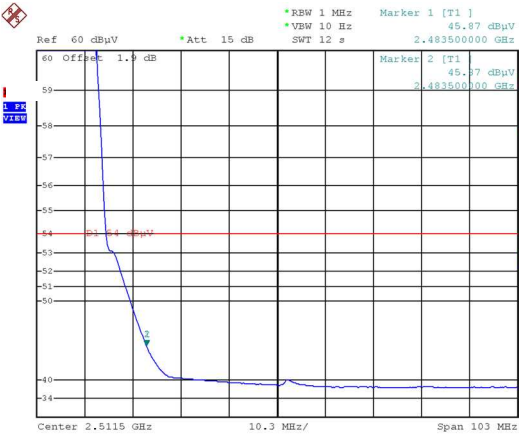


Date: 19.MAY.2017 23:29:06

Vertical
Peak

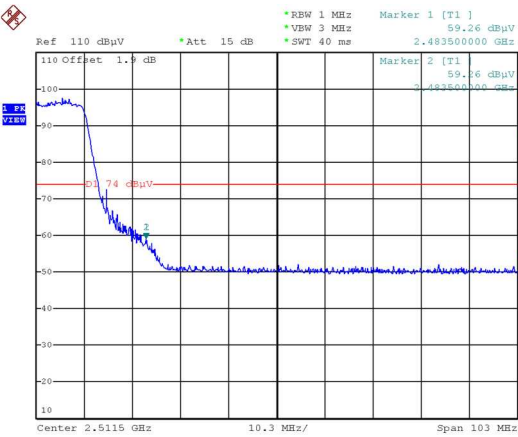

Date: 19.MAY.2017 23:33:22

Average

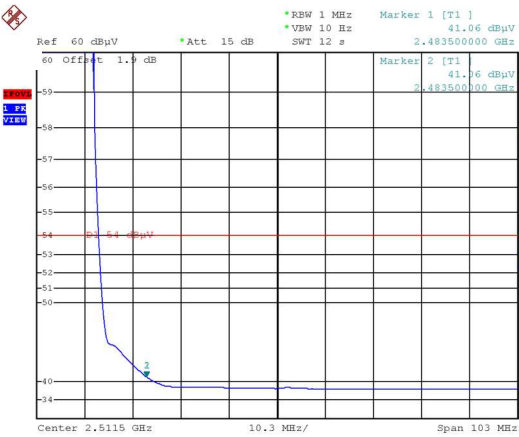

Date: 19.MAY.2017 23:33:55

10. Transmitter Power Spectral Density

10.1 Measurement procedure


[FCC 15.247(e), KDB 558074 D01 v04, Section 10.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW $\geq 3 \times$ RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

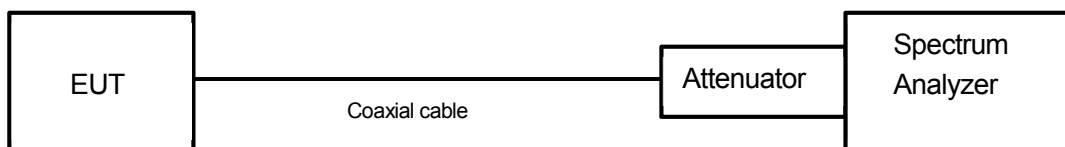

10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

10.3 Measurement result

Date : May 30, 2017
 Temperature : 24.0 [°C]
 Humidity : 48.0 [%]
 Test place : Shielded room No.4

Test engineer :
 Tadahiro Seino

[IEEE802.11b]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-17.48	10.53	-6.95	8.00	14.95	PASS
Middle	2437	-18.58	10.53	-8.05	8.00	16.05	PASS
High	2462	-17.24	10.53	-6.71	8.00	14.71	PASS

Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

[IEEE802.11g]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-25.73	10.53	-15.20	8.00	23.20	PASS
Middle	2437	-24.34	10.53	-13.81	8.00	21.81	PASS
High	2462	-24.21	10.53	-13.68	8.00	21.68	PASS

Calculation;

Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

[IEEE802.11n (HT20)]


Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-26.06	10.53	-15.53	8.00	23.53	PASS
Middle	2437	-23.49	10.53	-12.96	8.00	20.96	PASS
High	2462	-25.48	10.53	-14.95	8.00	22.95	PASS

Calculation;


Transmitter Power Spectral Density Level (Margin) = Limit – (Reading + Factor)

10.4 Trace data [IEEE802.11b]


Channel Low

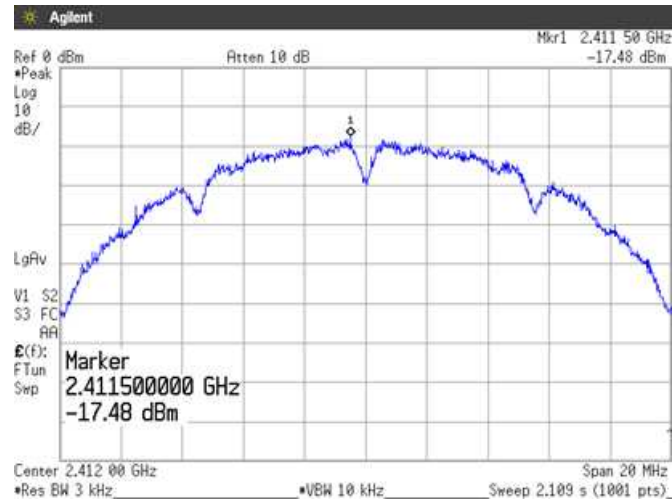

Channel Middle

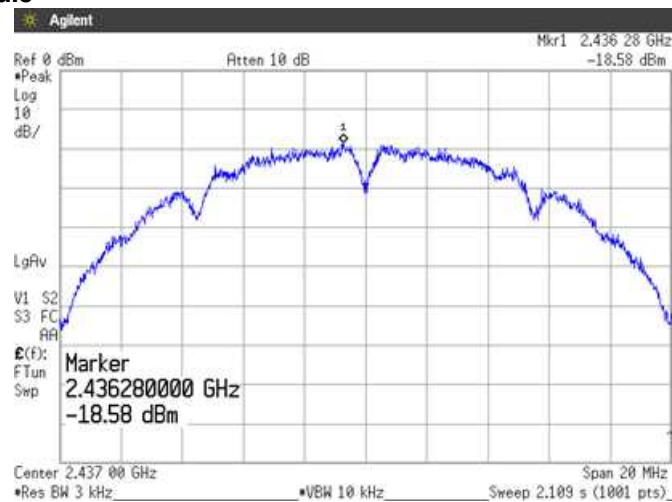


Channel High

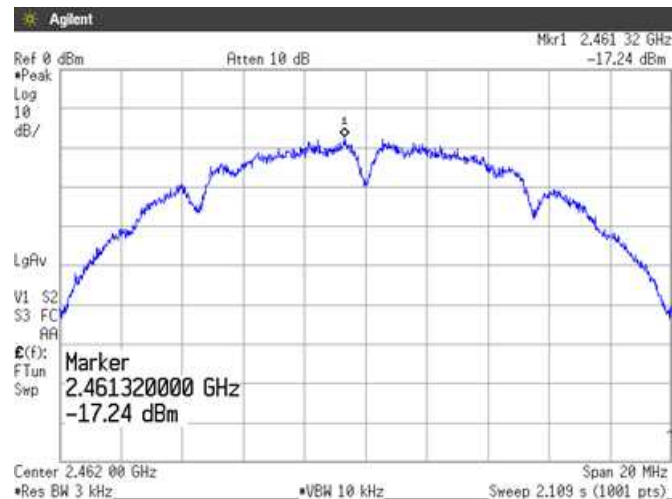


[IEEE802.11g]


Channel Low

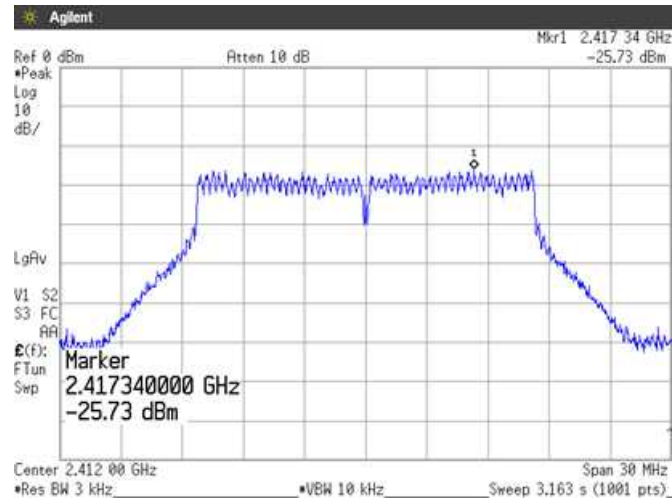




Channel Middle

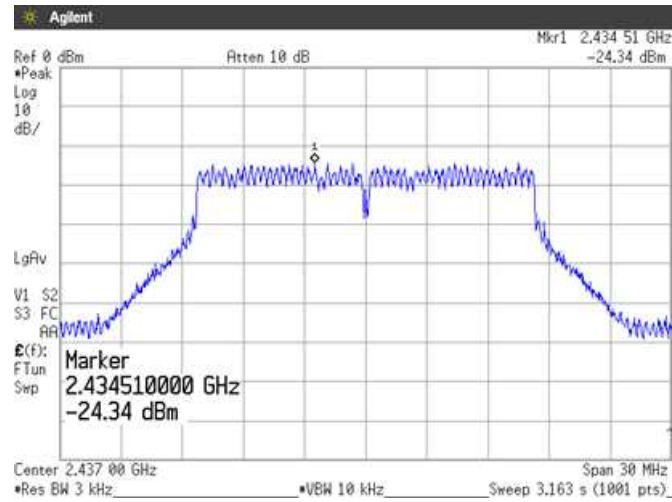

Channel High

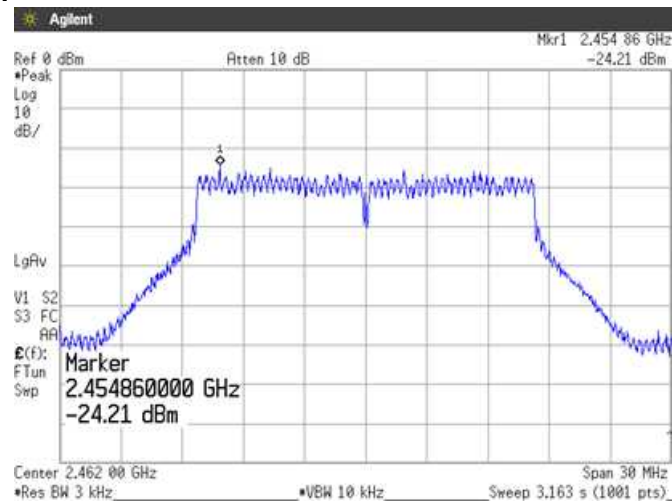

[IEEE802.11n (HT20)]

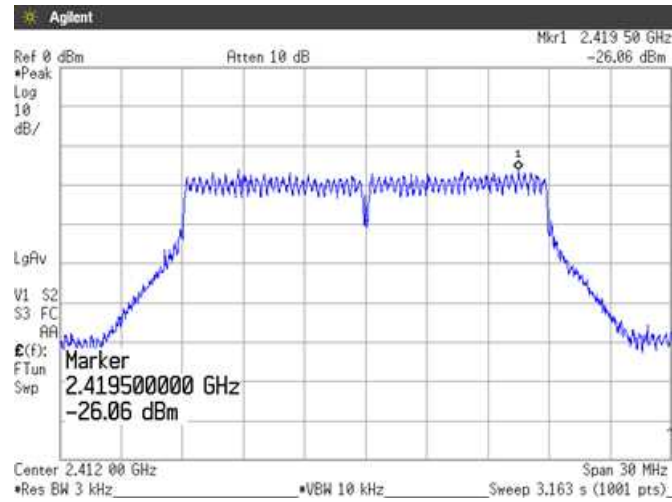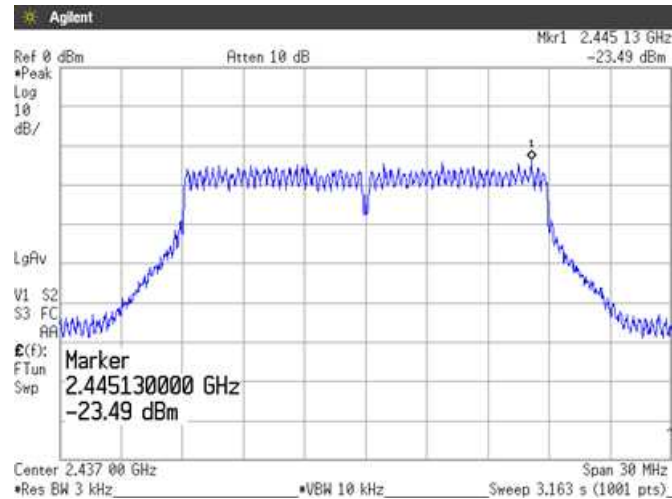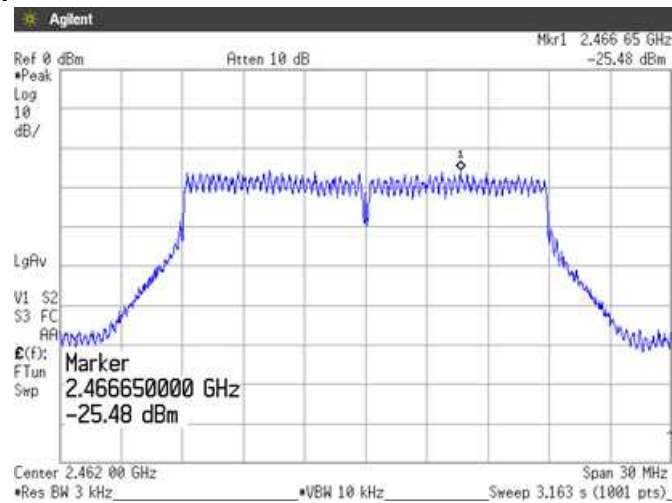Channel Low**Channel Middle****Channel High**

11. AC Power Line Conducted Emissions

11.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.10
Frequency range	: 0.15MHz to 30MHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	: (W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

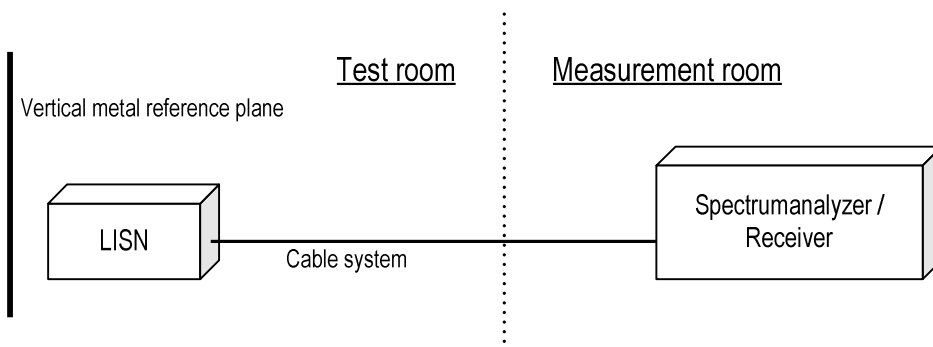

11.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level

Example:

Limit @ 0.403MHz : 57.8dBμV(Quasi-peak)
: 47.8dBμV(Average)

(Quasi peak) Reading = 22.7dBμV c.f = 10.4dB
Emission level = 22.7 + 10.4 = 33.1dBμV
Margin = 57.8 – 33.1 = 24.7dB

(Average) Reading = 6.5dBμV c.f = 10.4dB
Emission level = 6.5 + 10.4 = 16.9dBμV
Margin = 47.8 – 16.9 = 30.9dB


11.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

11.4 Test data

***** CONDUCTED EMISSION at MAINS PORT *****
[3m Semi-anechoic chamber]

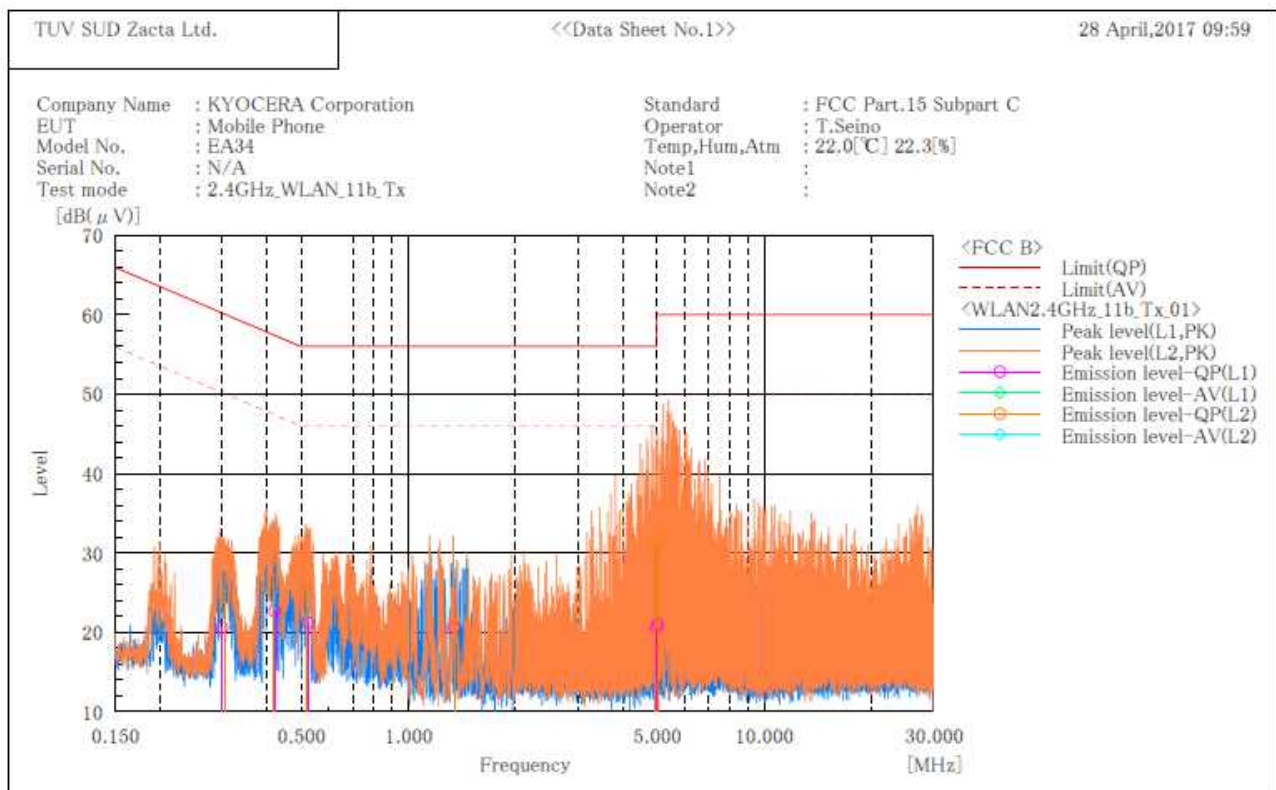

Final Result

— L1 Phase —										
No.	Frequency	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin
	[MHz]	QP	AV		QP	AV	QP	AV	QP	AV
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.300	10.2	-3.2	10.4	20.6	7.2	60.2	50.2	39.6	43.0
2	0.422	12.3	-3.1	10.4	22.7	7.3	57.4	47.4	34.7	40.1
3	0.524	10.8	-3.5	10.4	21.2	6.9	56.0	46.0	34.8	39.1
4	1.347	10.2	-3.7	10.4	20.6	6.7	56.0	46.0	35.4	39.3
5	4.989	9.9	-4.3	10.7	20.6	6.4	56.0	46.0	35.4	39.6
6	5.039	10.4	-4.3	10.7	21.1	6.4	60.0	50.0	38.9	43.6

— L2 Phase —										
No.	Frequency	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin
	[MHz]	QP	AV		QP	AV	QP	AV	QP	AV
		[dB(μV)]	[dB(μV)]	[dB]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB(μV)]	[dB]	[dB]
1	0.307	14.1	-2.3	10.4	24.5	8.1	60.1	50.1	35.6	42.0
2	0.419	16.1	-2.3	10.4	26.5	8.1	57.5	47.5	31.0	39.4
3	0.519	15.4	-2.7	10.4	25.8	7.7	56.0	46.0	30.2	38.3
4	1.350	11.3	-3.3	10.4	21.7	7.1	56.0	46.0	34.3	38.9
5	4.946	20.1	-2.6	10.7	30.8	8.1	56.0	46.0	25.2	37.9
6	5.061	20.9	-2.3	10.7	31.6	8.4	60.0	50.0	28.4	41.6

12. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

13. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$

14. Laboratory Information

1. Location

Name: Yonezawa Testing Center
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
 Phone: +81-238-28-2881
 Fax: +81-238-28-2888

2. Accreditation and Registration

- 1) NVLAP
LAB CODE: 200306-0
- 2) VLAC
Accreditation No.: VLAC-013
- 3) BSMI
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

4) Industry Canada

Site number	Facility	Expiration date
4224A-4	3m Semi-anechoic chamber	2017-12-03
4224A-5	10m Semi-anechoic chamber No.1	2017-12-03
4224A-6	10m Semi-anechoic chamber No.2	2019-12-14

5) VCCI Council

Registration number	Expiration date
A-0166	2017-07-03

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Microwave cable	RS	YH-13S5	N/A(S403)	May 31, 2017	May 24, 2016
Attenuator	Weinschel	56-10	J4993	Nov. 30, 2017	Nov. 1, 2016
Microwave cable	SUHNER	SUCOFLEX104/1.5m	322087/4	Jul. 31, 2017	Jul. 20, 2016

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Jul. 31, 2017	Jul. 15, 2016
Preamplifier	ANRITSU	MH648A	M96057	Feb. 28, 2018	Feb. 1, 2017
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Feb. 28, 2018	Feb. 17, 2017
Attenuator	TDC	TAT-43B-06	N/A(S209)	May 31, 2017	May 10, 2016
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Jun. 30, 2017	Jun. 2, 2016
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jun. 30, 2017	Jun. 2, 2016
Attenuator	TME	CFA-01NPJ-6	N/A(S275)	Feb. 28, 2018	Feb. 3, 2017
Attenuator	TME	CFA-01NPJ-3	N/A(S272)	Feb. 28, 2018	Feb. 2, 2017
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	Feb. 28, 2018	Feb. 3, 2017
Attenuator	AEROFLEX	26A-10	081217-08	May 31, 2017	May 24, 2016
Double ridged guide antenna	EMCO	3115	5205	Mar. 31, 2018	Mar. 15, 2017
Double ridged guide antenna	ETS LINDGREN	3117	00052315	Feb. 28, 2018	Feb. 23, 2017
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 28, 2018	Feb. 2, 2017
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	Jun. 30, 2017	Jun. 16, 2016
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Jun. 30, 2017	Jun. 16, 2016
Notch filter	Micro-Tronics	BRM50702	045	Apr. 30, 2017	Apr. 8, 2016
Microwave cable	SUHNER	SUCOFLEX104/9m	MY30037/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/1m	my24610/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/8m	SN MY30031/4	Feb. 28, 2018	Feb. 2, 2017
		SUCOFLEX104/1.5m	322086/4	May 31, 2017	May 10, 2016
		SUCOFLEX104/1.5m	317226/4	May 31, 2017	May 10, 2016
		SUCOFLEX104/7m	41625/6	Feb. 28, 2018	Feb. 3, 2017
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2017	May 11, 2016
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2017	May 12, 2016


Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100764	Aug. 31, 2017	Aug. 19, 2016
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	Feb. 28, 2018	Feb. 2, 2017
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 31, 2018	Mar. 13, 2017
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S350)	Feb. 28, 2018	Feb. 2, 2017
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	Feb. 28, 2018	Feb. 3, 2017
Coaxial cable	SUHNER	RG214/U/10m	N/A (S194)	Feb. 28, 2018	Feb. 3, 2017
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A


*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

Appendix B. Duty Cycle

[Plot & Calculation]

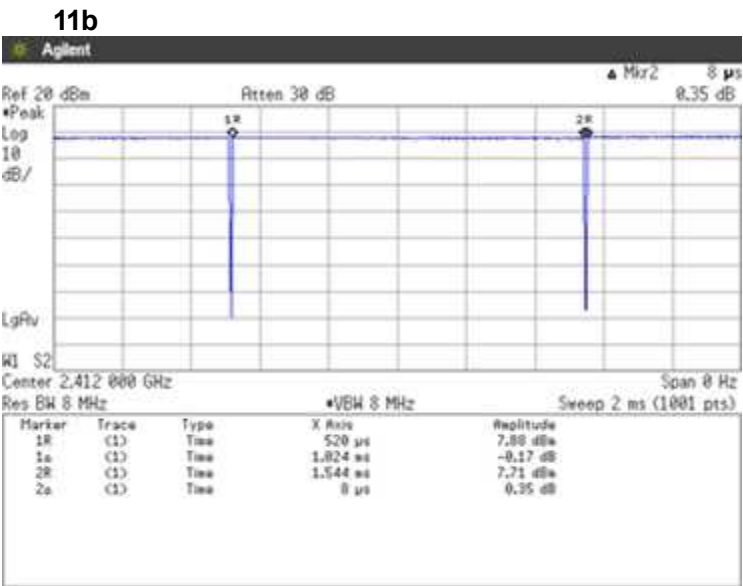

Duty Cycle = Ton / (Ton + Toff) = 1024[μ s] / (1024[μ s] + 8[μ s]) =99.22[%]

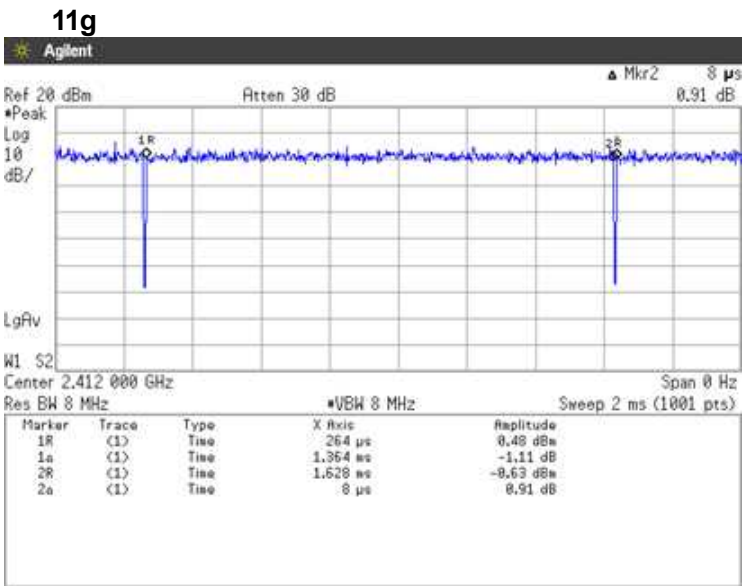


Duty Cycle = Ton / (Ton + Toff) = 1364[μ s] / (1364[μ s] + 8[μ s]) =99.42[%]



Zacta

11n (HT20)

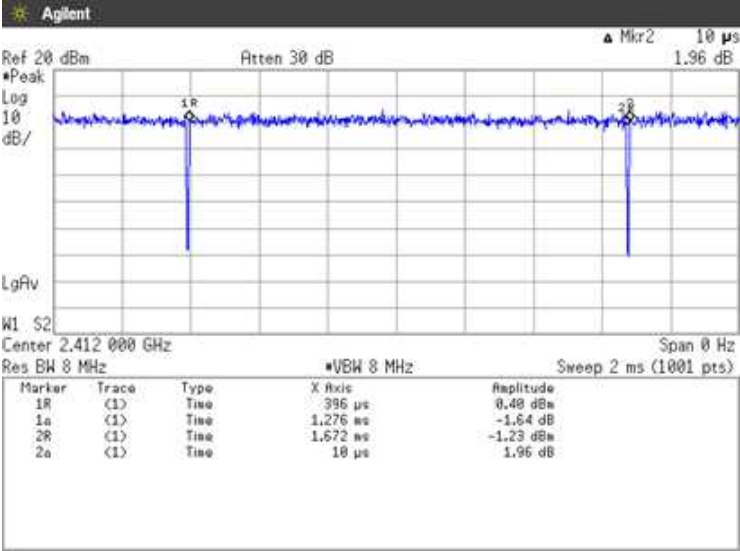

Duty Cycle = Ton / (Ton + Toff) = 1276[μs] / (1276[μs] + 10[μs]) =99.22[%]