

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: JA53
FCC ID: JOYJA53

In accordance with FCC Part 27 Subpart C
and FCC Part 27 Subpart H

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



Japan

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-19044-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	07 FEB 2019

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY

A sample(s) of this product was tested and found to be compliant with FCC Part 27 Subpart C and FCC Part 27 Subpart H.



DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
Fax: +81 (0) 238 28 2888
www.tuv-sud.jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report.....	3
1.2	Standards	3
1.3	Test methods	3
1.4	Deviation from standards.....	3
1.5	List of applied test(s) of the EUT.....	3
1.6	Test information	3
1.7	Test set up.....	3
1.8	Test period.....	3
2	Equipment Under Test	4
2.1	EUT information.....	4
2.2	Modification to the EUT	5
2.3	Variation of family model(s).....	5
2.4	Description of test mode.....	5
3	Configuration of Equipment	6
3.1	Equipment used	6
3.2	System configuration.....	6
4	Test Result	7
4.1	Effective Radiated Power	7
4.2	Peak to Average Ratio	11
4.3	Occupied Bandwidth	14
4.4	Band Edge Spurious and Harmonic at Antenna Terminals.....	18
4.5	Radiated Emissions and Harmonic Emissions	39
4.6	Frequency Stability.....	46
5	Measurement Uncertainty	48
6	Laboratory Information	49
	Appendix A. Test Equipment	50

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-19044-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 27 Subpart C
CFR47 FCC Part 27 Subpart H

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-D-2010

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
27.50	Effective Radiated Power	Radiated	PASS	-
27.50	Peak to Average Ratio	Conducted	PASS	-
2.1049	Occupied Bandwidth	Conducted	PASS	-
27.53 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	-
27.53 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
27.54 2.1055	Frequency Stability	Conducted	PASS	-

*1: Refer to RF Exposure Report (Test Report_SAR)

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

04-December-2018 - 04-February-2019

2 Equipment Under Test

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	JA53
Serial number	N/A
Trade name	Kyocera
Number of sample(s)	1
EUT condition	Pre-Production
Power rating	Battery: DC 3.8 V
Size	(W) 51.3 × (D) 17.4 × (H) 112.3 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
RF Specification	
Frequency of Operation	Up Link LTE Band X VII: 704-716 MHz Down Link LTE Band X VII: 734-746 MHz
Modulation type	QPSK, 16QAM
Emission designator	BW 5M QPSK: 4M52G7D, 16QAM: 4M53W7D BW 10M QPSK: 8M97G7D, 16QAM: 8M97W7D
Effective Radiated Power (E.R.P.)	QPSK: 0.5248 W (27.2 dBm) 16QAM: 0.4898 W (26.9 dBm)
Antenna type	Internal antenna
Antenna gain	0.19 dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: JA53, Serial Number: N/A			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

JA53 has model with camera and without camera.

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth	Channel	Frequency [MHz]
LTE Band X VII	QPSK	5 MHz	23755	706.5
			23790	710.0
			23825	713.5
		10 MHz	23780	709.0
			23790	710.0
			23800	711.0
	16QAM	5 MHz	23755	706.5
			23790	710.0
			23825	713.5
		10 MHz	23780	709.0
			23790	710.0
			23800	711.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.
The worst emission was found in X-axis, Open (Without camera), Z-axis, Open (With camera) and the worst case recorded.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	JA53	N/A	JOYJA53	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Effective Radiated Power

4.1.1 Measurement procedure

[FCC 27.50]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Log periodic antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission. The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).

The frequency of the signal generator is adjusted to the measurement frequency.


Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- Span = 1.5 times the OBW
- RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- VBW $\geq 3 \times$ RBW
- Number of sweep points $\geq 2 \times$ span / RBW
- Sweep time = auto-couple
- Detector = RMS (power averaging)
- If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges.

If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

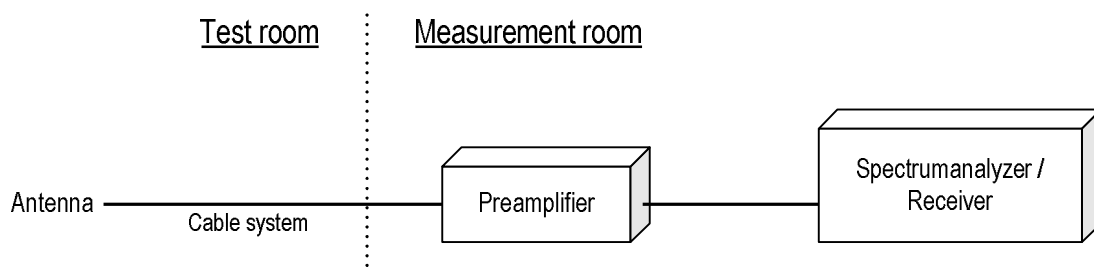



Japan

4.1.2 Calculation method

Result (ERP) = S.G Reading - Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

Example:

Limit @ 710MHz : 34.7 dBm

S.G Reading = 25.5 dBm Cable loss = 0.7 dB Ant. Gain = -10.1 dBd

Result = 25.5 - 0.7 + (-10.1) = 14.8 dBm

Margin = 34.7 – 14.8 = 19.9 dB

4.1.3 Limit

3 W (34.7 dBm)

4.1.4 Test data

Date	: 04-December-2018	Test engineer	:	Kazunori Saito
Temperature	: 22.8 [°C]			
Humidity	: 26.3 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 04~05-December-2018	Test engineer	:	Taiki Watanabe
Temperature	: 25.8 [°C]			
Humidity	: 34.3 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 05~06-December-2018	Test engineer	:	Taiki Watanabe
Temperature	: 24.2 [°C]			
Humidity	: 34.3 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 17-January-2019	Test engineer	:	Kazunori Saito
Temperature	: 18.8 [°C]			
Humidity	: 28.5 [%]			
Test place	: 3m Semi-anechoic chamber			

[LTE Band X VII - With camera]**QPSK, BW 5MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	706.5	-8.4	33.5	0.7	-5.6	27.2	34.70	7.5
H	710.0	-8.5	33.6	0.7	-5.6	27.2	34.70	7.5
H	713.5	-9.1	33.3	0.7	-5.7	26.9	34.70	7.8

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	706.5	-9.9	31.9	0.7	-5.6	25.6	34.7	9.1
H	710.0	-10.0	32.0	0.7	-5.6	25.6	34.7	9.1
H	713.5	-9.9	32.5	0.7	-5.7	26.1	34.7	8.6

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	709.0	-8.5	33.5	0.7	-5.6	27.1	34.7	7.6
H	710.0	-8.7	33.4	0.7	-5.6	27.0	34.7	7.7
H	711.0	-9.0	33.1	0.7	-5.6	26.7	34.7	8.0

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	709.0	-9.6	32.3	0.7	-5.6	25.9	34.7	8.8
H	710.0	-8.8	33.3	0.7	-5.6	26.9	34.7	7.8
H	711.0	-9.3	32.8	0.7	-5.6	26.4	34.7	8.3

[LTE Band X VII - Without camera]**QPSK, BW 5MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	706.5	-8.7	33.2	0.7	-5.6	26.9	34.7	7.8
H	710.0	-8.7	33.4	0.7	-5.6	27.0	34.7	7.7
H	713.5	-9.1	33.3	0.7	-5.7	26.9	34.7	7.8

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	706.5	-9.6	32.2	0.7	-5.6	25.9	34.7	8.8
H	710.0	-9.9	32.1	0.7	-5.6	25.7	34.7	9.0
H	713.5	-12.2	30.1	0.7	-5.7	23.7	34.7	11.0

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	709.0	-8.8	33.2	0.7	-5.6	26.8	34.7	7.9
H	710.0	-8.6	33.5	0.7	-5.6	27.1	34.7	7.6
H	711.0	-9.0	33.1	0.7	-5.6	26.7	34.7	8.0

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	709.0	-9.8	32.1	0.7	-5.6	25.7	34.7	9.0
H	710.0	-9.3	32.7	0.7	-5.6	26.3	34.7	8.4
H	711.0	-9.5	32.6	0.7	-5.6	26.2	34.7	8.5

4.2 Peak to Average Ratio

4.2.1 Measurement procedure


[FCC 27.50]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- Power Stat CCDF mode
- Set resolution / measurement bandwidth $\geq$ signal's occupied bandwidth.
- Set the number of counts to a value that stabilizes the measured CCDF curve.
- Set the measurement interval as follows:
 - For continuous transmissions, set to 1ms.
 - For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

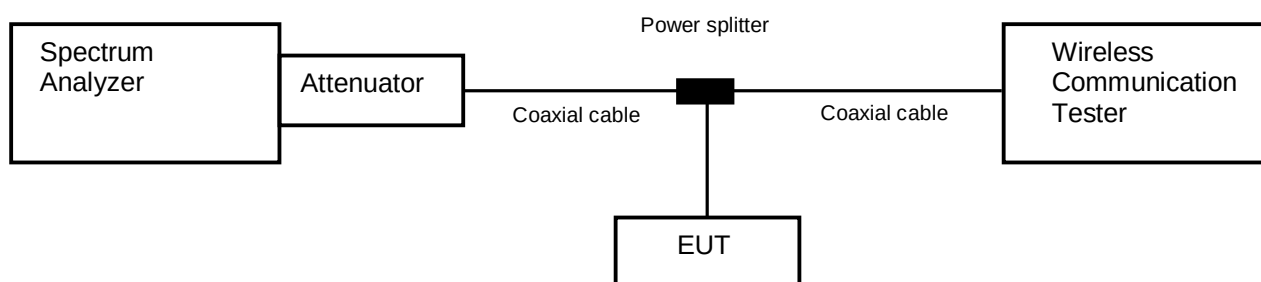

4.2.2 Limit

13 dB or less

4.2.3 Measurement result

Date : 07-December-2018
 Temperature : 21.8 [°C]
 Humidity : 36.3 [%]
 Test place : Shielded room No.4

Test engineer :
 Taiki Watanabe


Band	Channel	Frequency [MHz]	Modulation	BW [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band X VII	23790	710.0	QPSK	5	25-0	5.37	13
				10	50-0	4.62	13
			16QAM	5	25-0	6.19	13
				10	50-0	6.26	13

4.2.4 Trace data


[LTE Band X VII]

Channel: 23790


QPSK, BW 5MHz, RB25-0

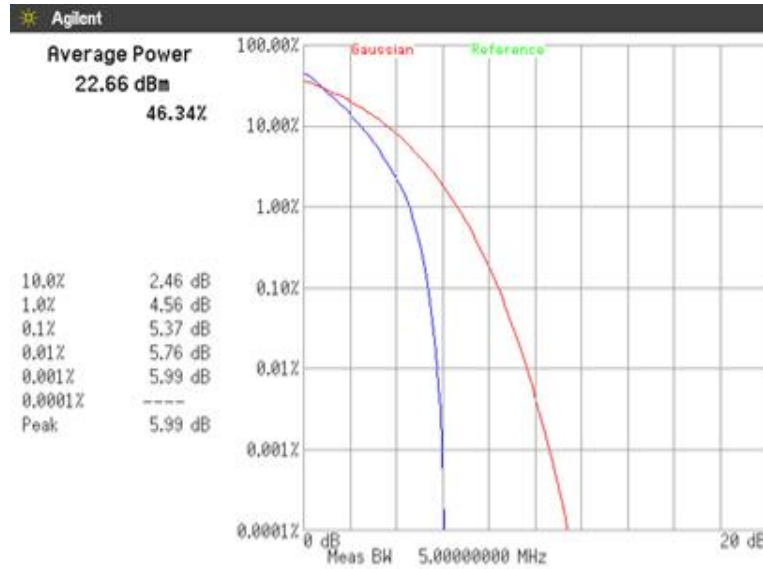


QPSK, BW 10MHz, RB50-0

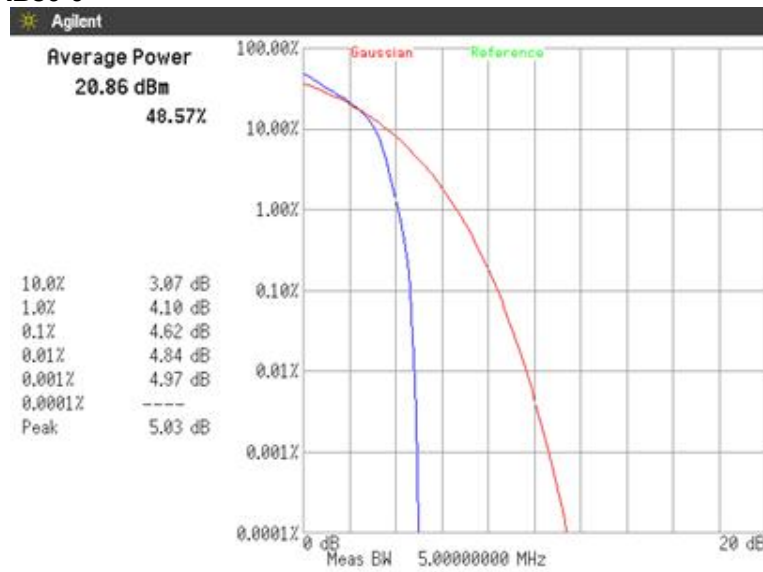

16QAM, BW 5MHz, RB25-0

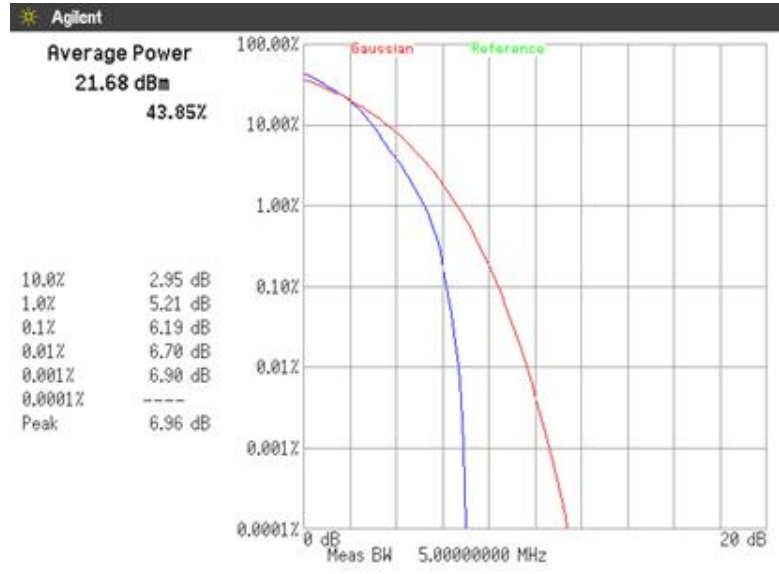

16QAM, BW 10MHz, RB50-0

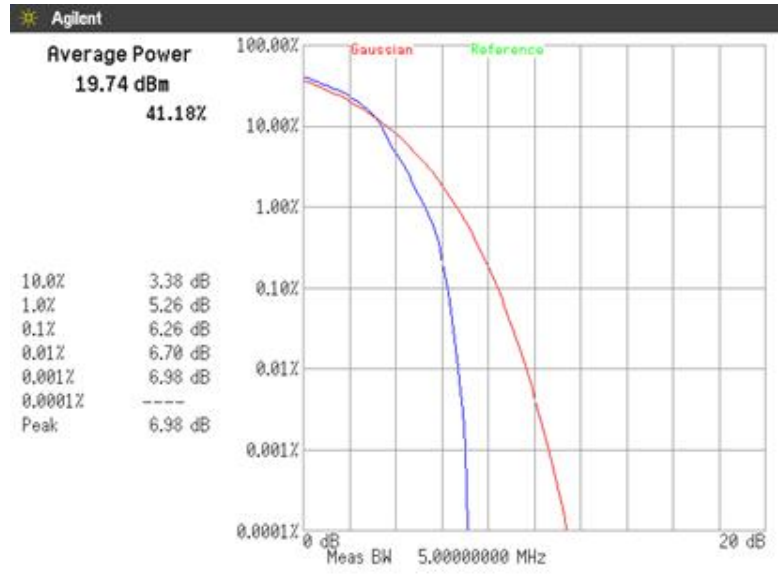

4.3 Occupied Bandwidth

4.3.1 Measurement procedure


[FCC 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

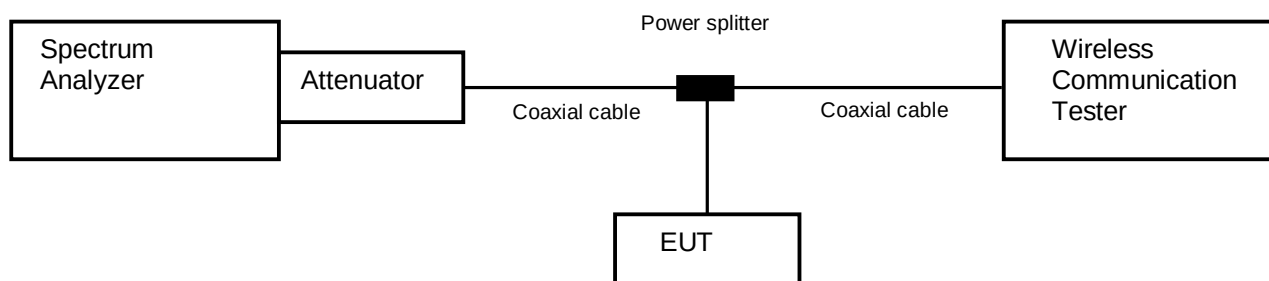

4.3.2 Limit

None

4.3.3 Measurement result

Date : 07-December-2018
 Temperature : 21.8 [°C]
 Humidity : 36.3 [%]
 Test place : Shielded room No.4


Test engineer : Taiki Watanabe

BW	Mode	UL RB Allocation	UL RB Start	Frequency [MHz]	26dB Bandwidth [MHz]	99% OBW [MHz]
5MHz	QPSK	12	7	710.0	3.191	2.3271
		25	0		5.065	4.5247
5MHz	16QAM	12	7	710.0	3.414	2.3324
		25	0		5.022	4.5272
10MHz	QPSK	25	12	710.0	6.081	4.6759
		50	0		9.871	8.9657
10MHz	16QAM	25	12	710.0	5.966	4.6872
		50	0		9.834	8.9701

4.3.4 Trace data


[LTE Band X VII]
Channel: 23790

QPSK, BW 5MHz
RB12-7

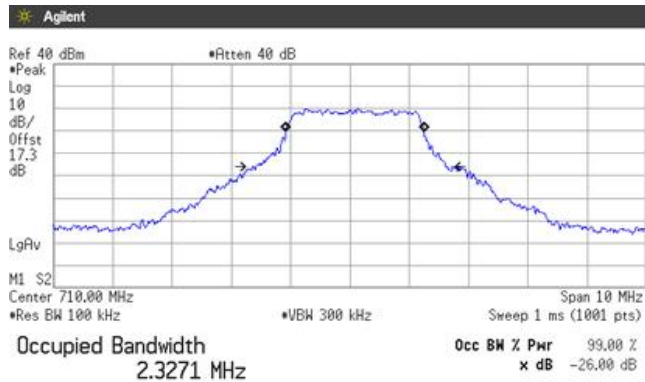


Transmit Freq Error 81.543 kHz
x dB Bandwidth 3.191 MHz

RB25-0

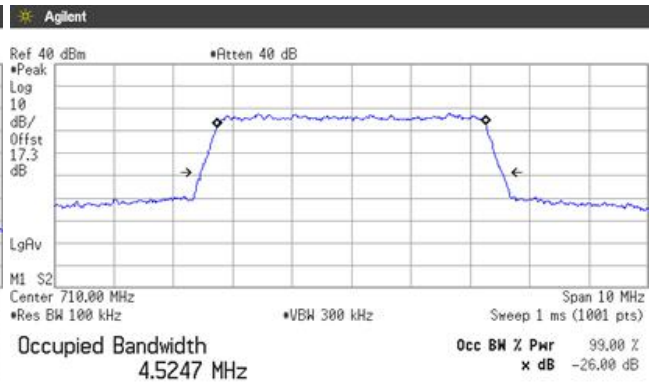


Transmit Freq Error -713.690 Hz
x dB Bandwidth 5.065 MHz

16QAM, BW 5MHz
RB12-7

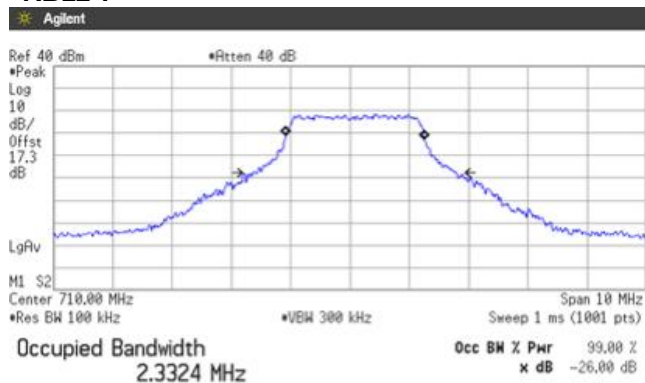


Transmit Freq Error 84.361 kHz
x dB Bandwidth 3.414 MHz

RB25-0

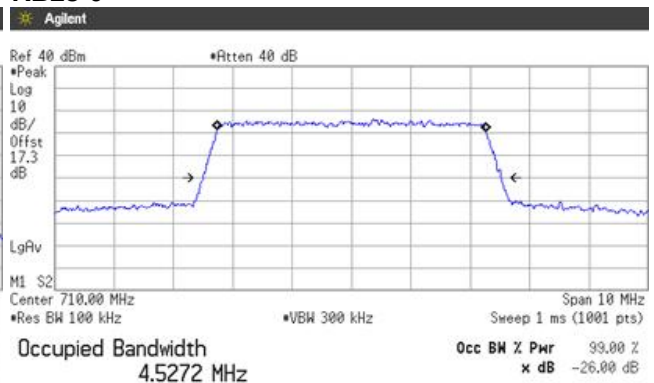


Transmit Freq Error 789.570 Hz
x dB Bandwidth 5.022 MHz

QPSK, BW 10MHz RB25-12

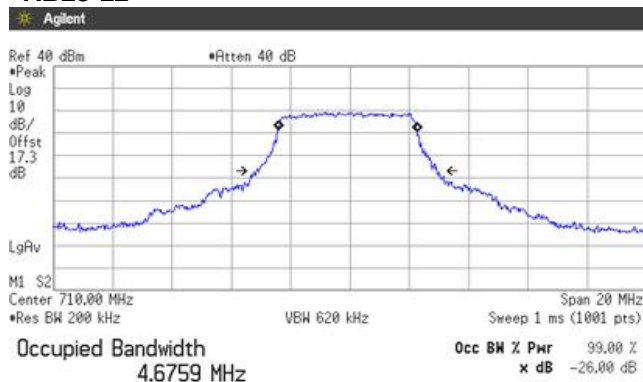


Transmit Freq Error
x dB Bandwidth -83.777 kHz
6.081 MHz

RB50-0

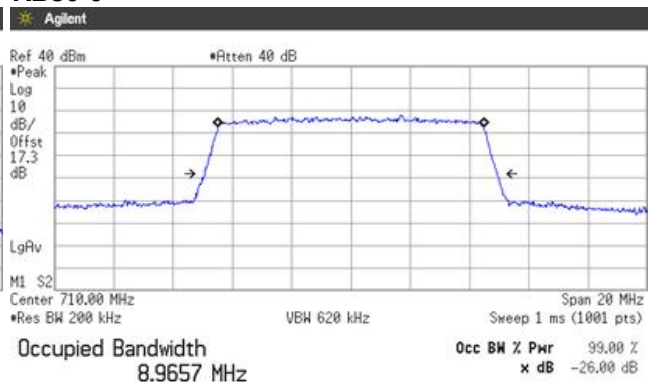


Transmit Freq Error
x dB Bandwidth -772.025 Hz
9.871 MHz

16QAM, BW 10MHz RB25-12

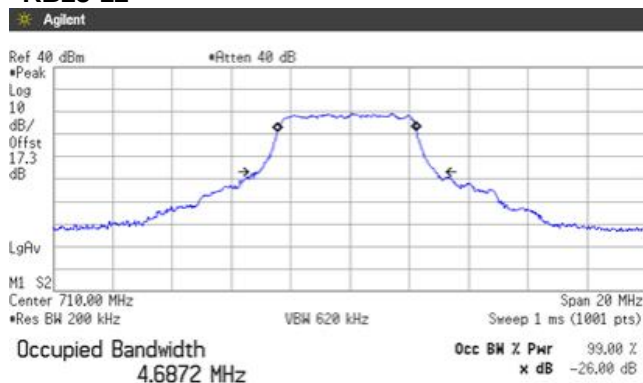

Transmit Freq Error
x dB Bandwidth -103.784 kHz
5.966 MHz

RB50-0

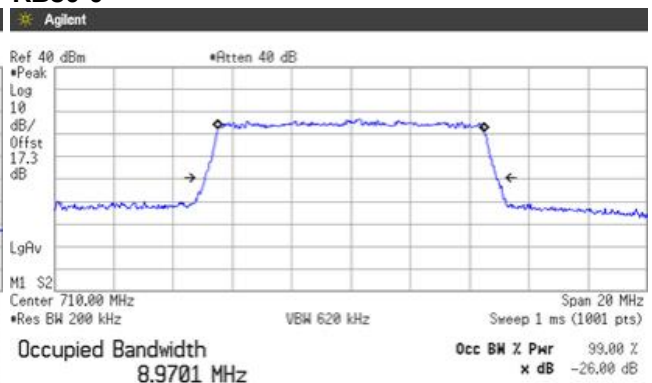

Transmit Freq Error
x dB Bandwidth 1.792 kHz
9.834 MHz

4.4 Band Edge Spurious and Harmonic at Antenna Terminals

4.4.1 Measurement procedure

[FCC 27.53, 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) $RBW \geq 1\%$ of the emission bandwidth or 2% of the emission bandwidth
- c) $VBW \geq 3 \times RBW$
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point $\geq 2 \times \text{span} / RBW$

<Spurious Emissions>

- a) $RBW = 1\text{MHz}$ & $VBW \geq 3 \times RBW$
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point $\geq 2 \times \text{span} / RBW$

- Test configuration

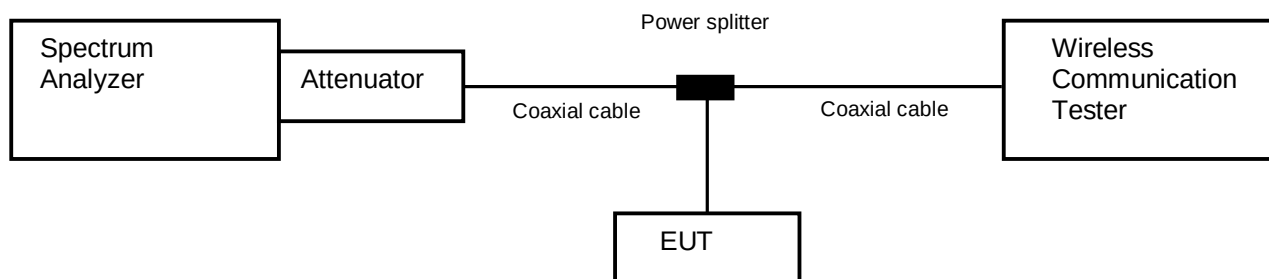

4.4.2 Limit

-13 dB or less

4.4.3 Measurement result



Date : 07-December-2018
Temperature : 21.8 [°C]
Humidity : 36.3 [%]
Test place : Shielded room No.4

Test engineer : Taiki Watanabe



Band	Modulation	Bandwidth	Results	
LTE Band X VII	QPSK	5MHz	See the trace data	PASS
		10MHz	See the trace data	PASS
	16QAM	5MHz	See the trace data	PASS
		10MHz	See the trace data	PASS

4.4.4 Trace data



[LTE Band X VII]
(Band Edge)
QPSK, BW 5MHz, RB1-0
Channel: Low

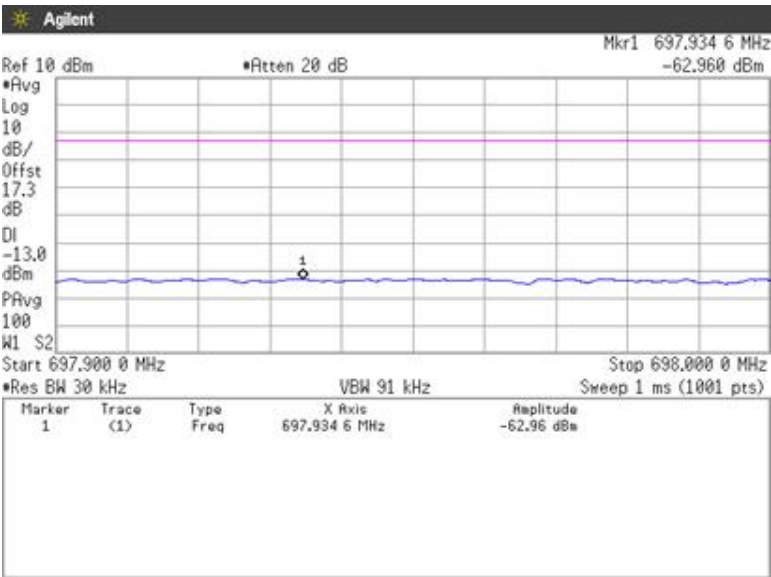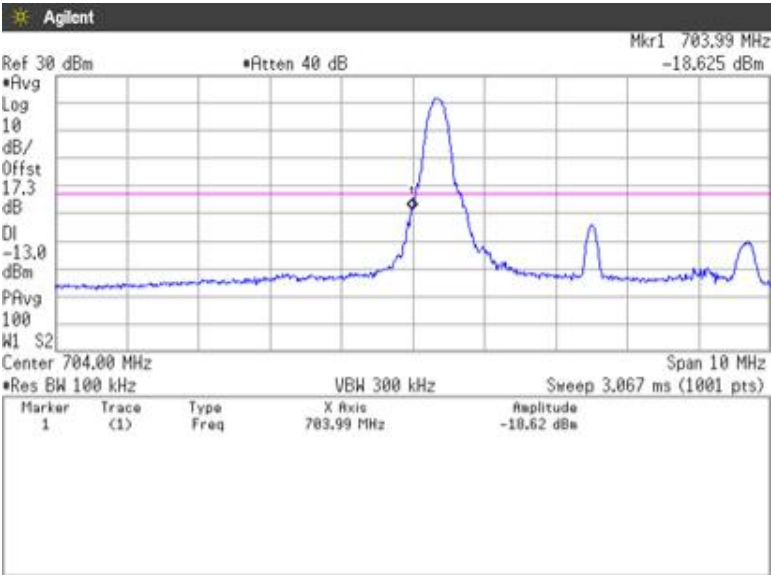



QPSK, BW 5MHz, RB1-24
Channel: High

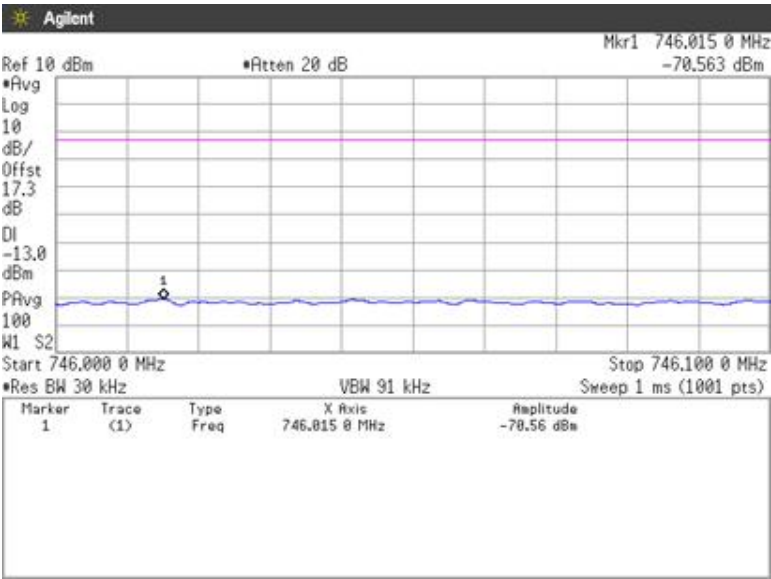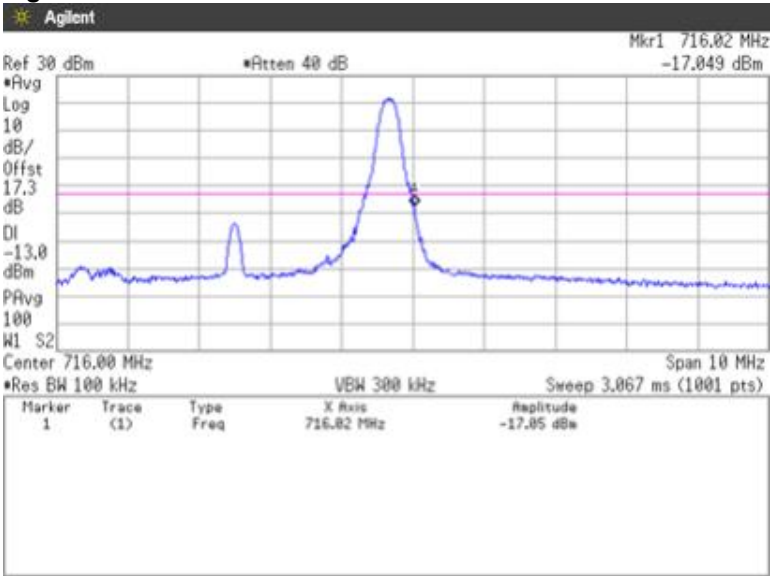

QPSK, BW 5MHz, RB25-0
Channel: Low

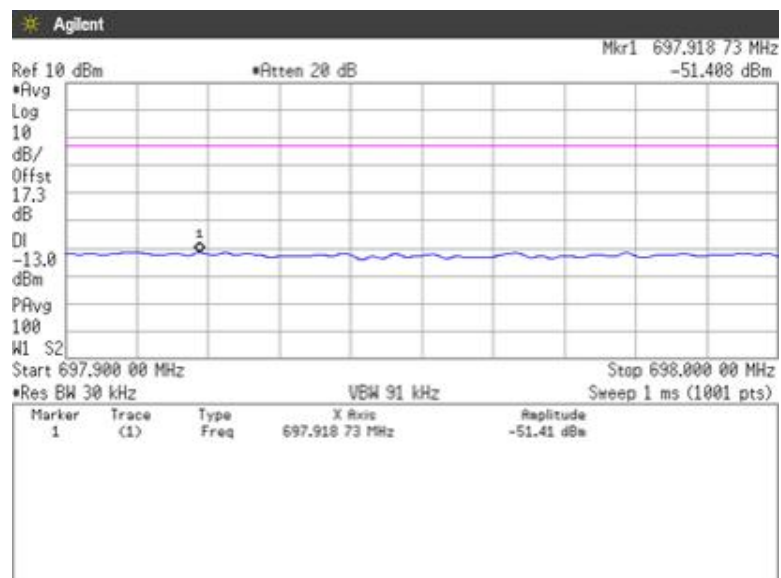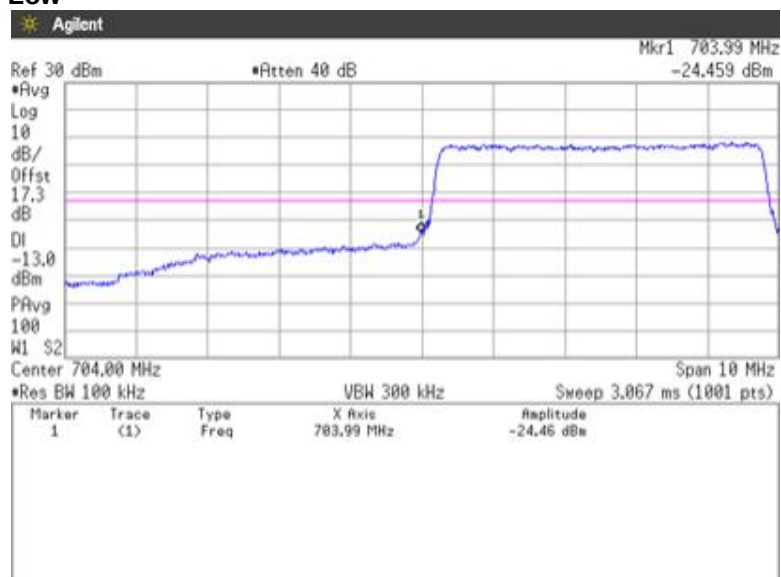



QPSK, BW 5MHz, RB25-0
Channel: High

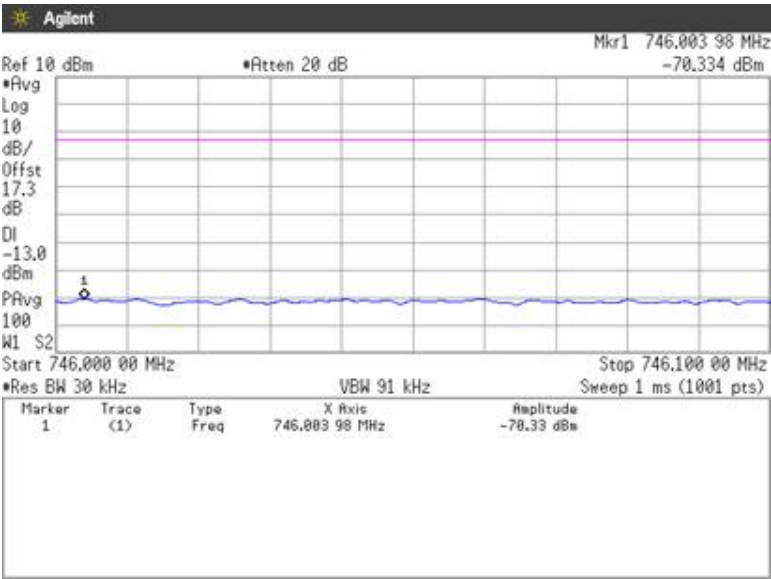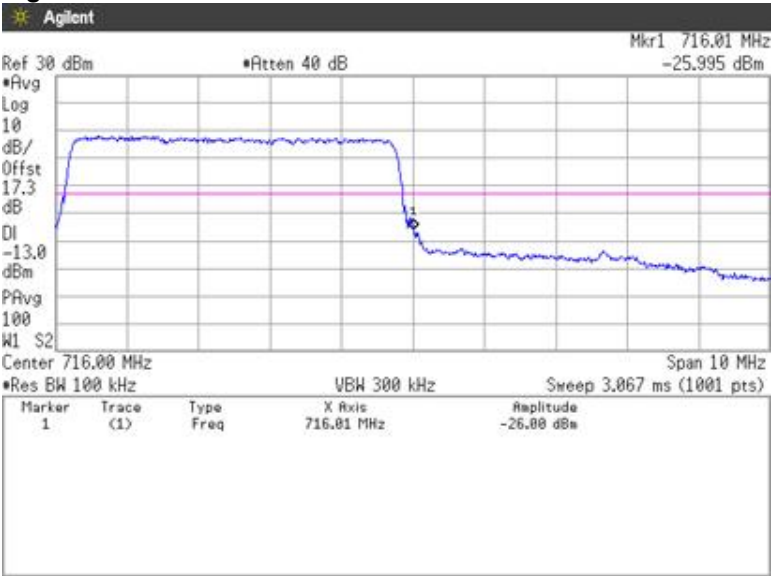





Japan



16QAM, BW 5MHz, RB1-0
Channel: Low

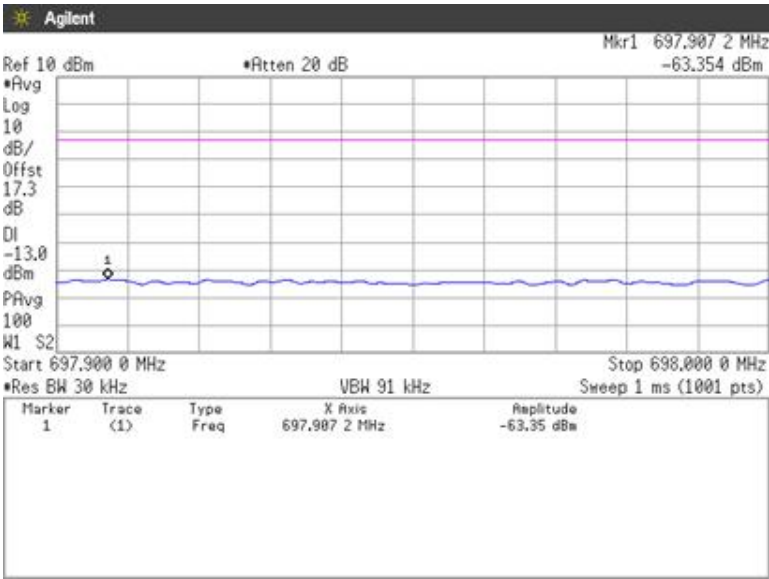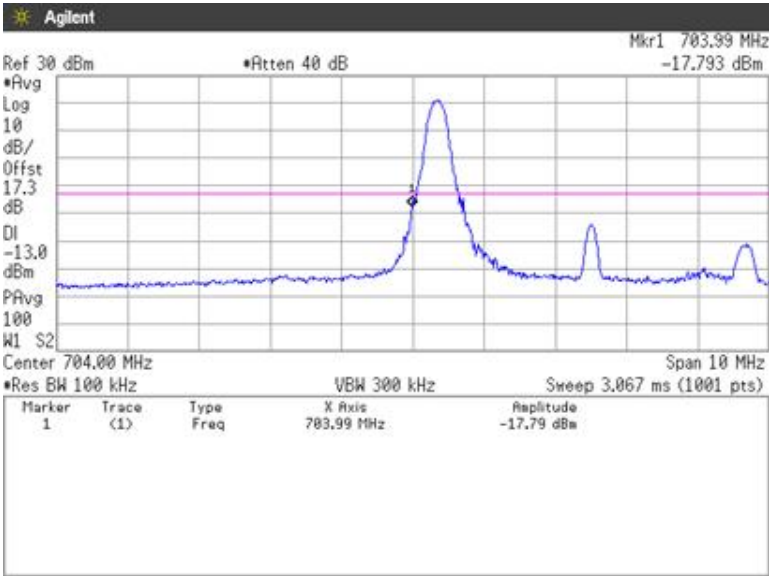



16QAM, BW 5MHz, RB1-24
Channel: High

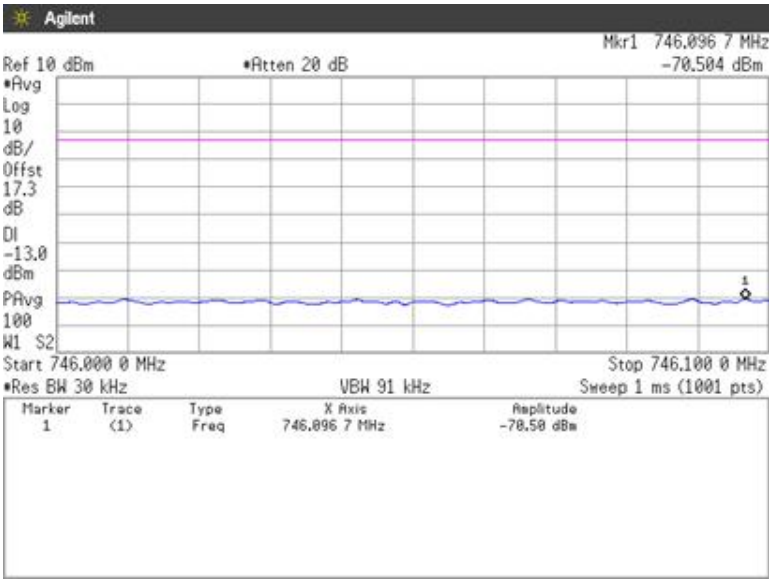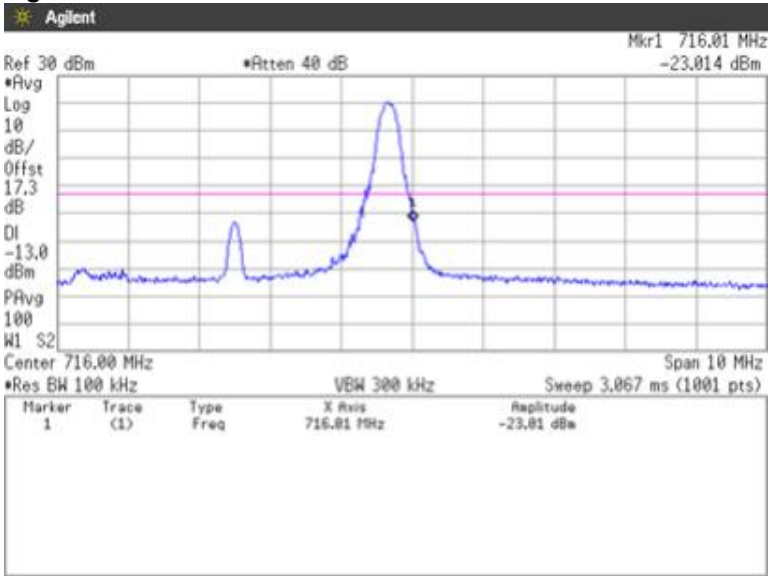

16QAM, BW 5MHz, RB25-0
Channel: Low

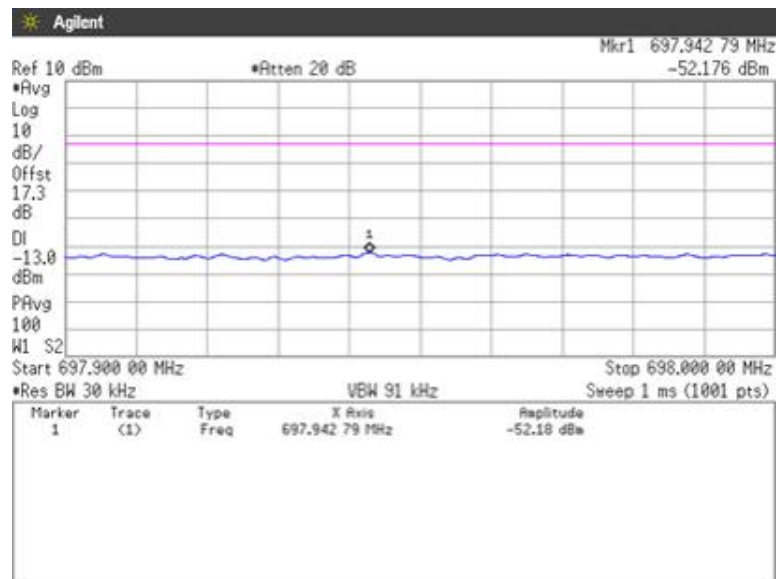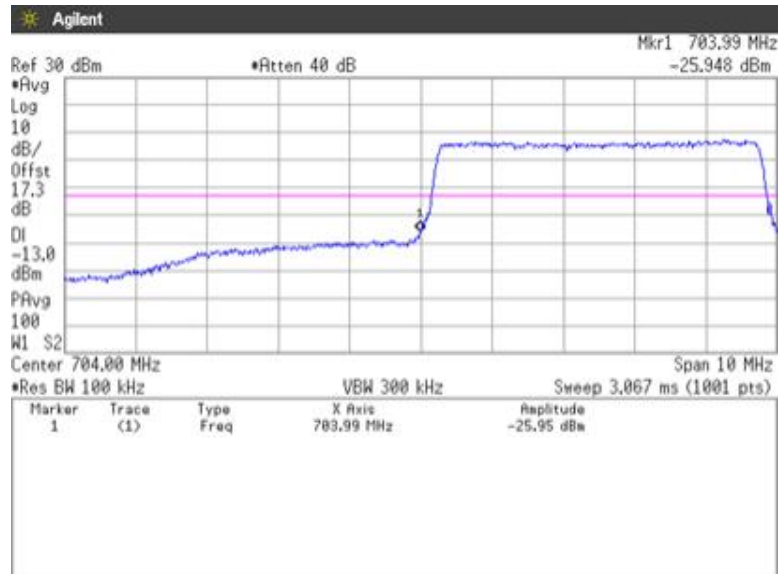



16QAM, BW 5MHz, RB25-0
Channel: High

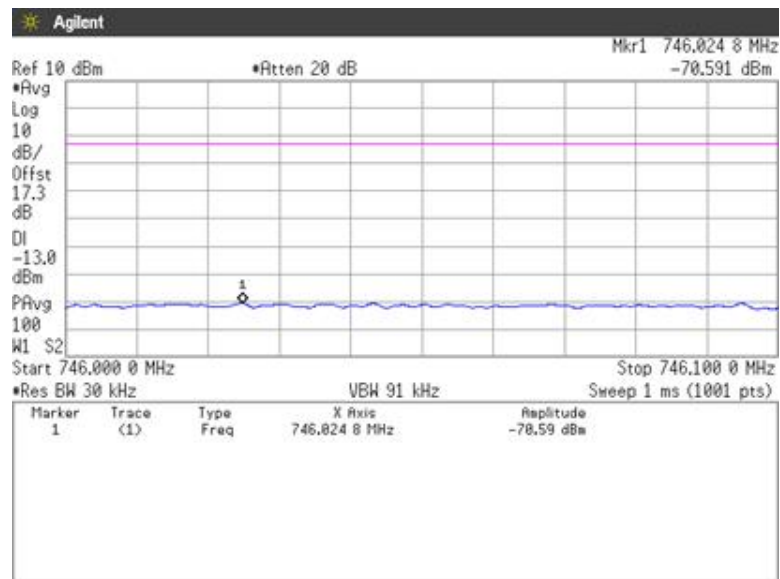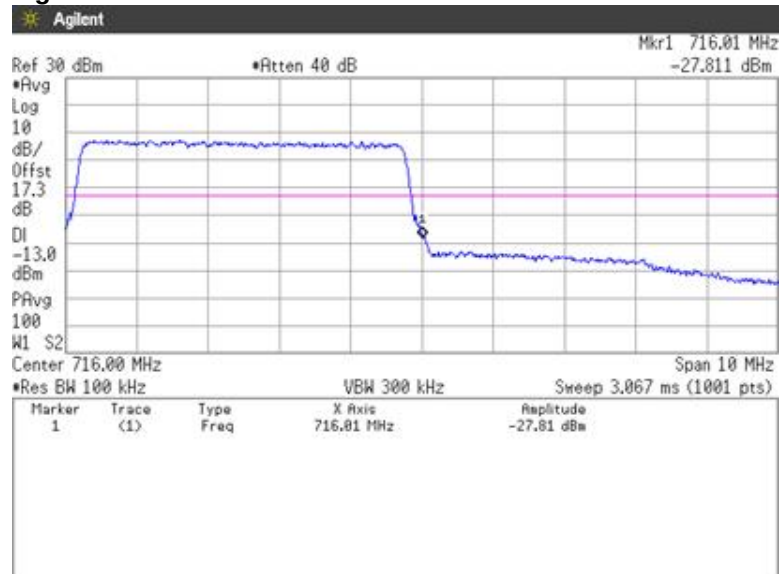





Japan



QPSK, BW 10MHz, RB1-0
Channel: Low

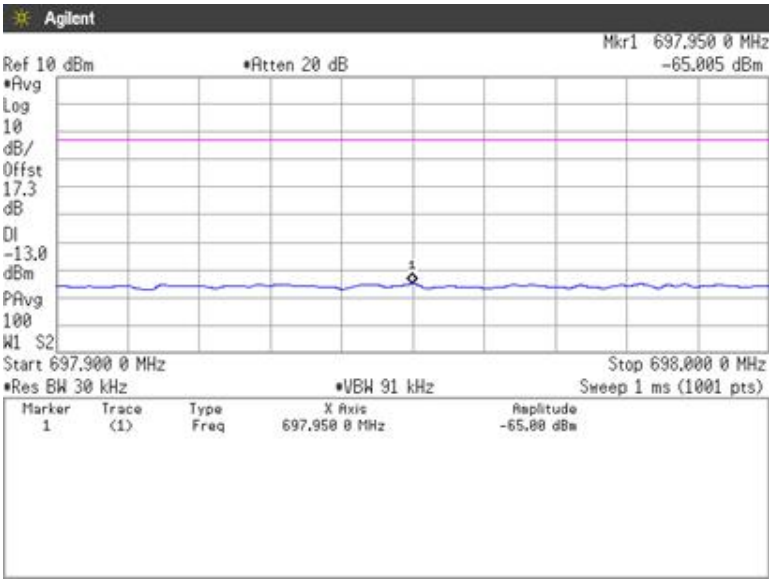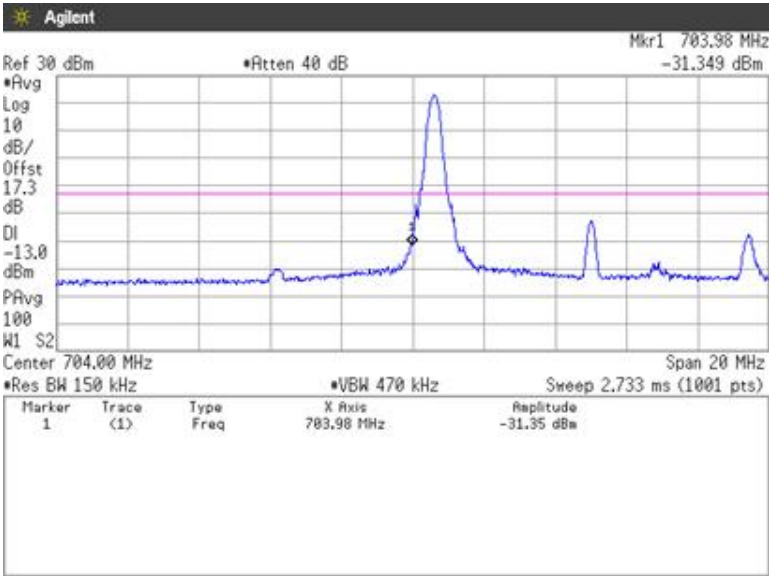



QPSK, BW 10MHz, RB1-49
Channel: High

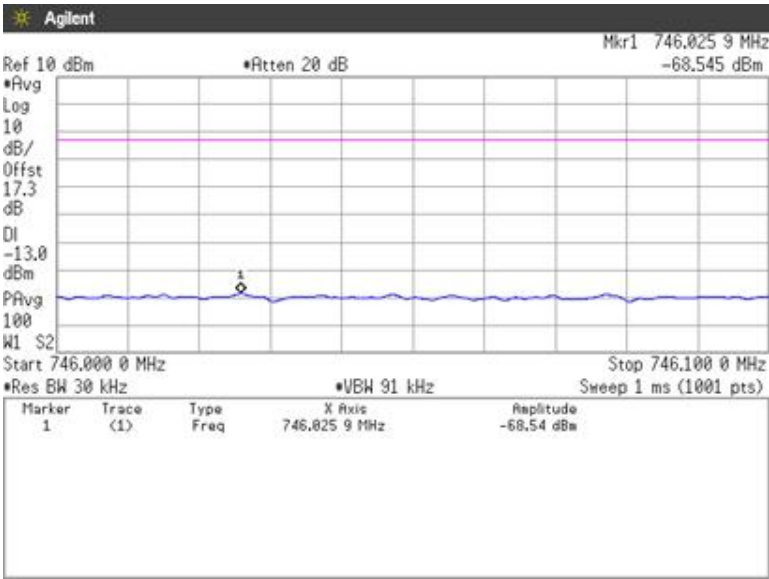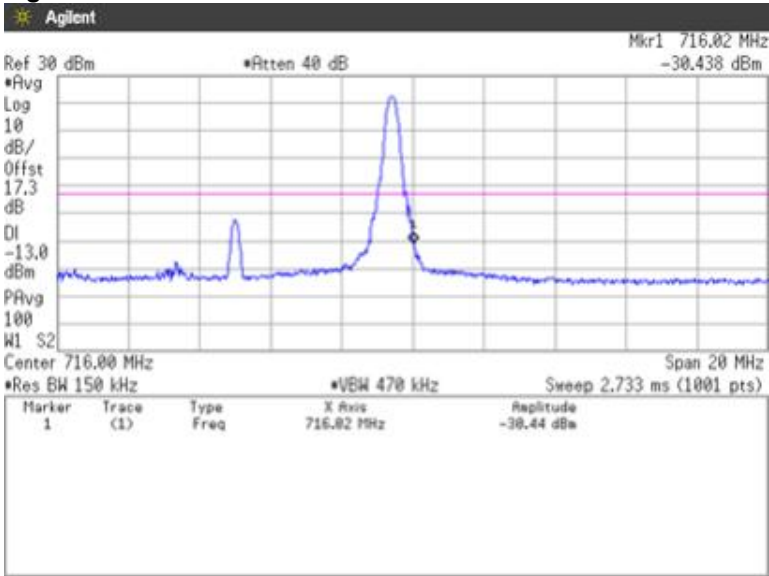



QPSK, BW 10MHz, RB50-0
Channel: Low

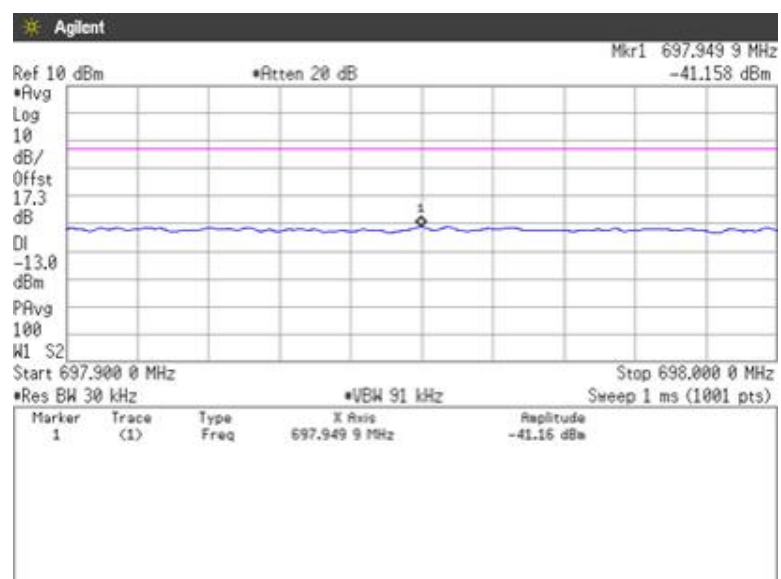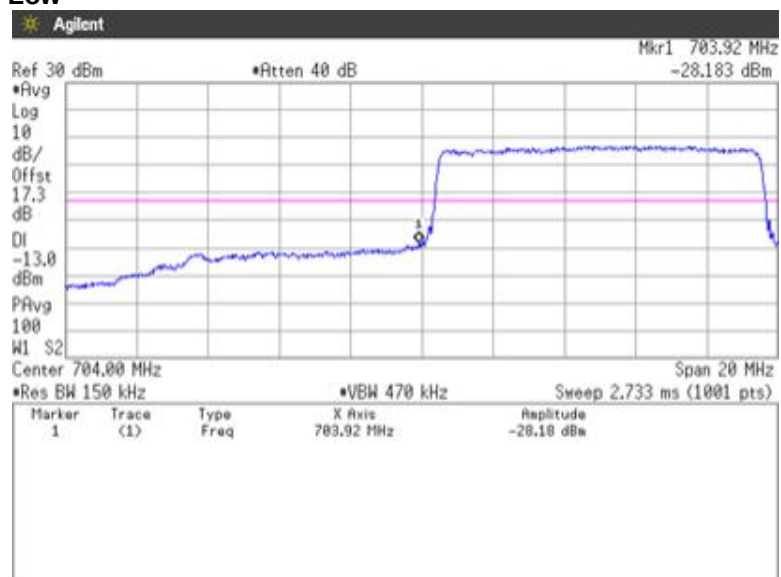



QPSK, BW 10MHz, RB50-0
Channel: High

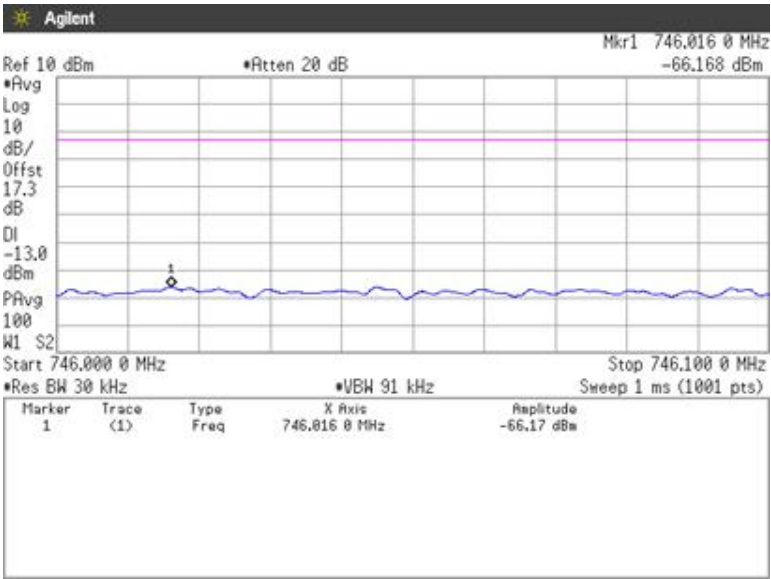
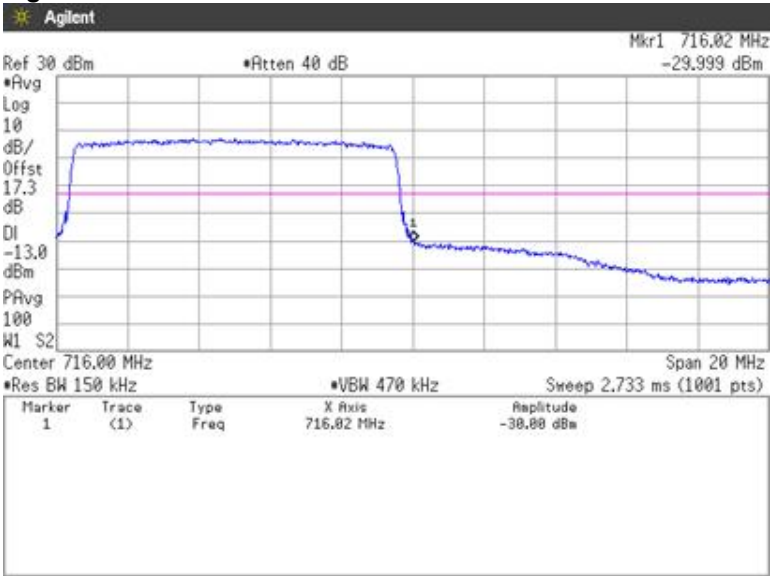


16QAM, BW 10MHz, RB1-0
Channel: Low

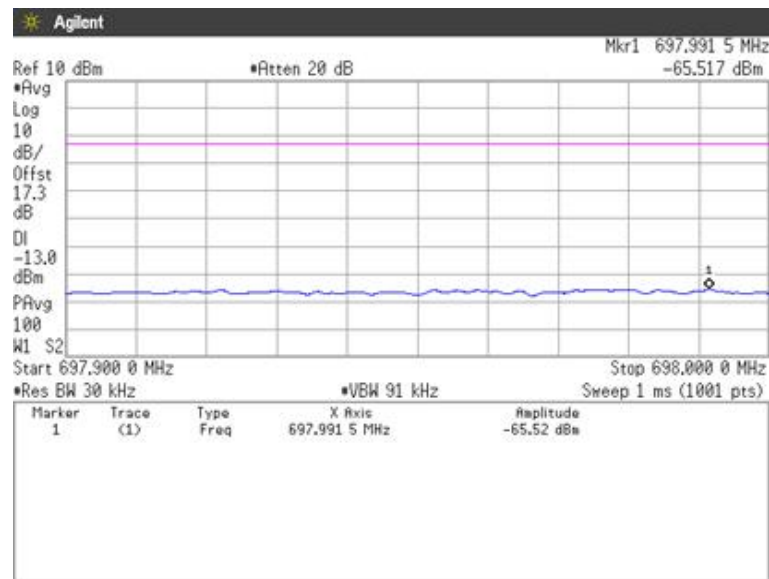
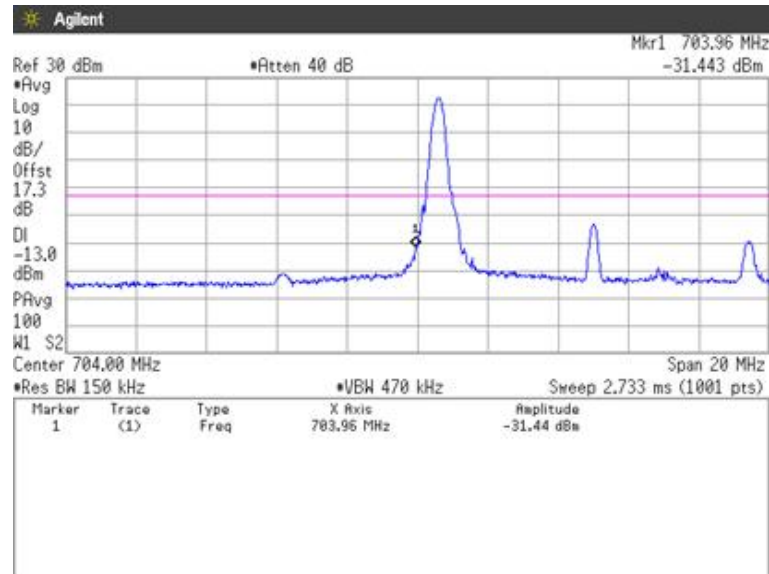


16QAM, BW 10MHz, RB1-49
Channel: High

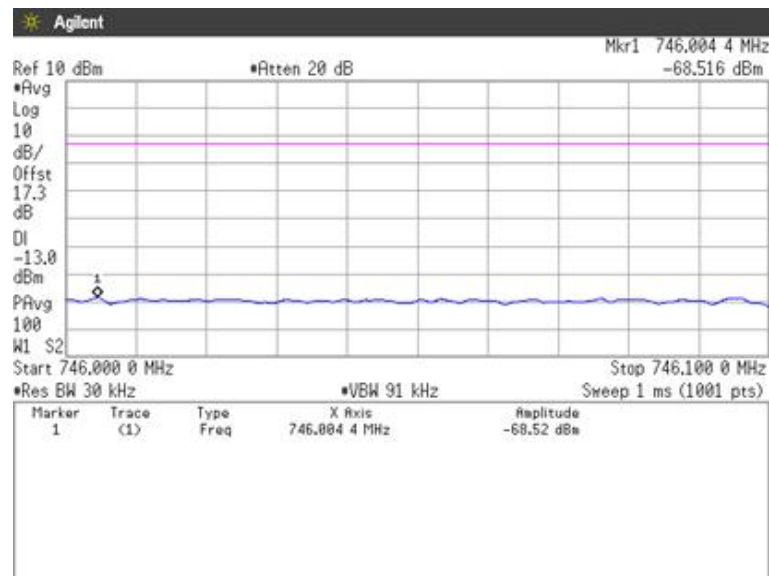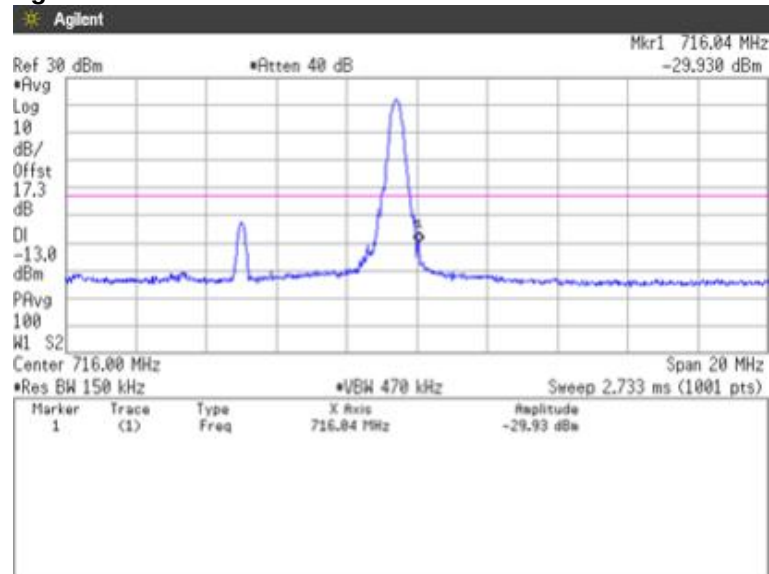

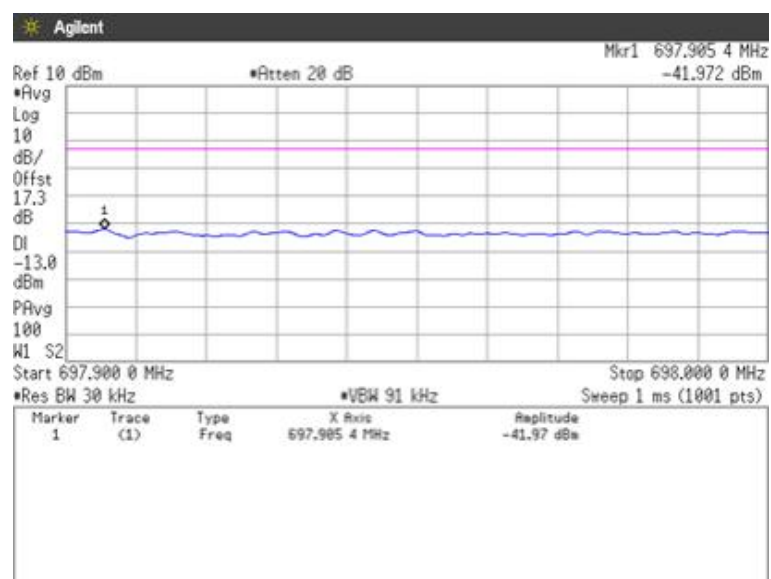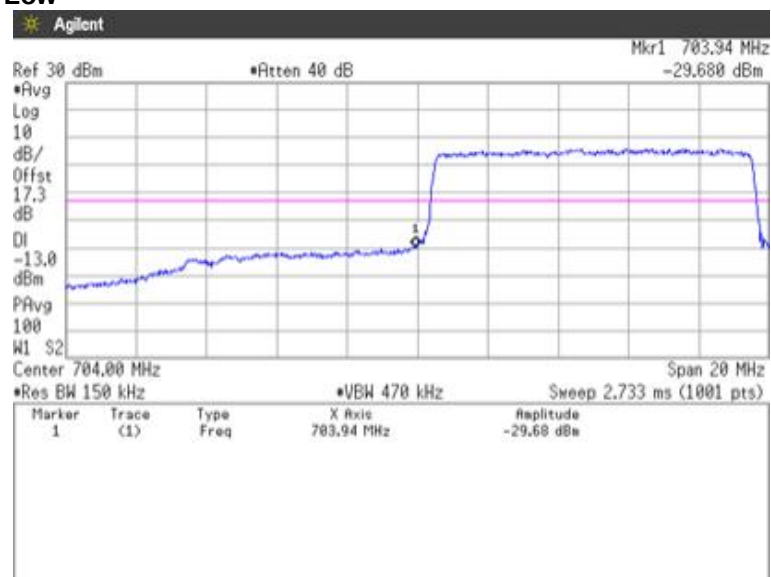16QAM, BW 10MHz, RB50-0
Channel: Low

16QAM, BW 10MHz, RB50-0
Channel: High

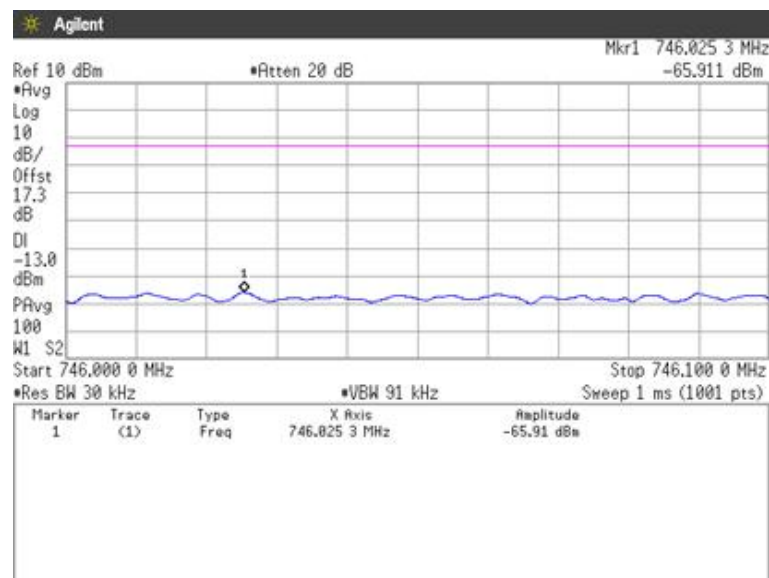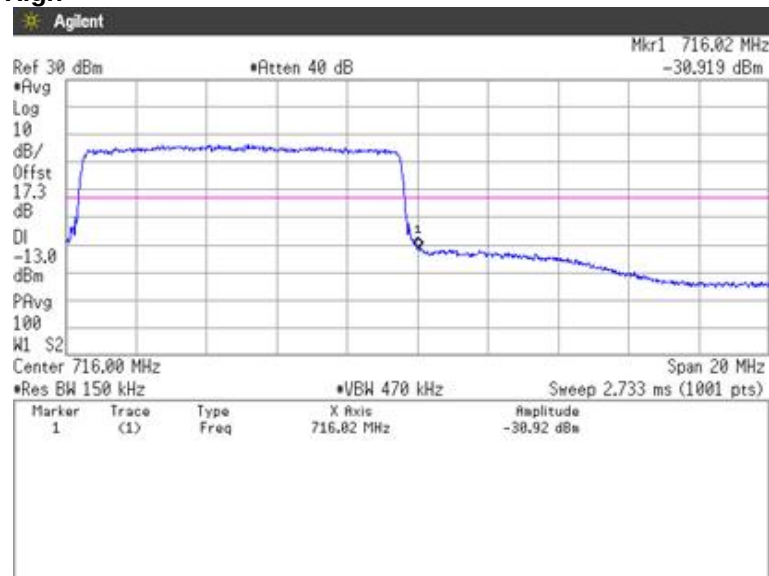


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of Effective Radiated Power.


QPSK, BW 5MHz, RB1-0

Channel: 23755


30MHz-5GHz

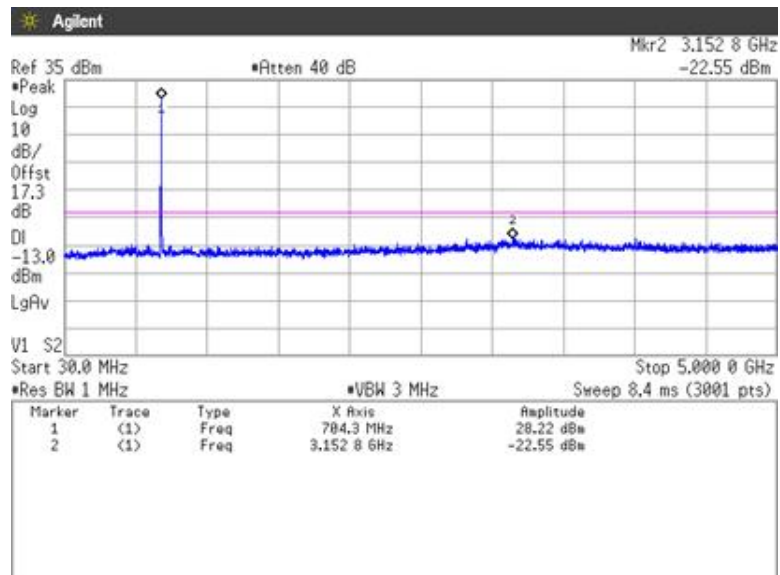


5GHz-10GHz

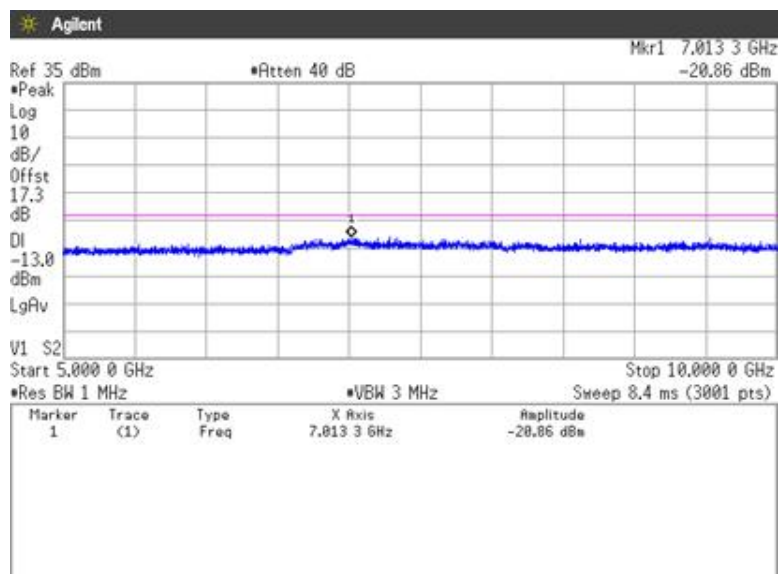


Channel: 23790
30MHz-5GHz

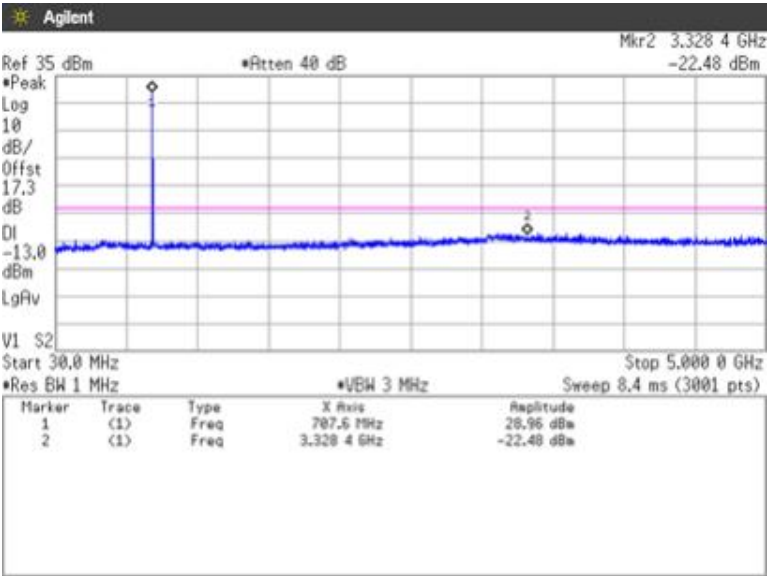


5GHz-10GHz

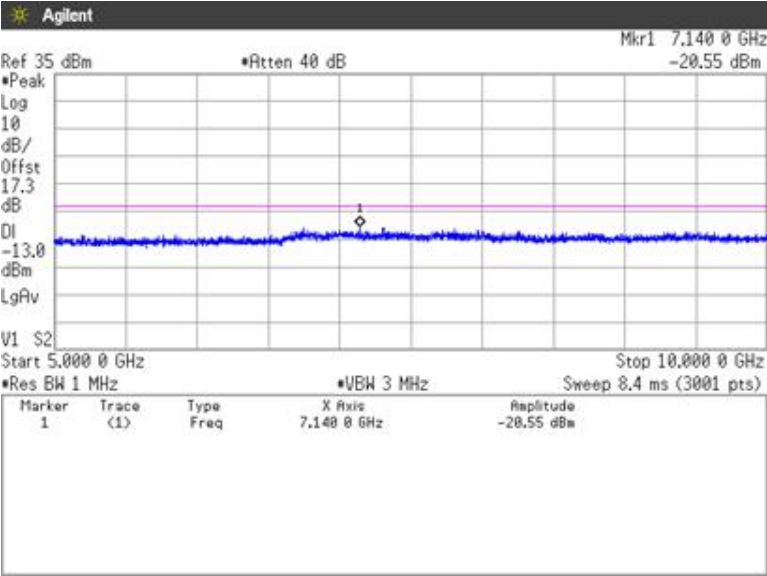

Channel: 23825
30MHz-5GHz

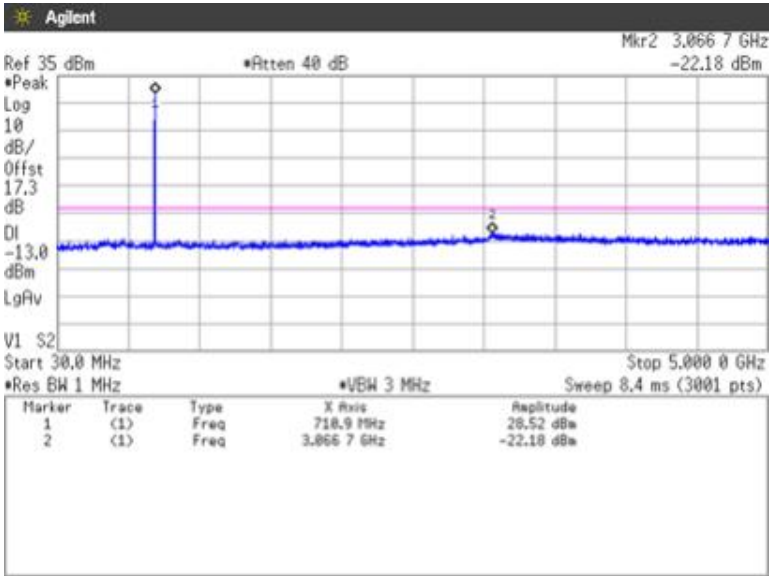

5GHz-10GHz

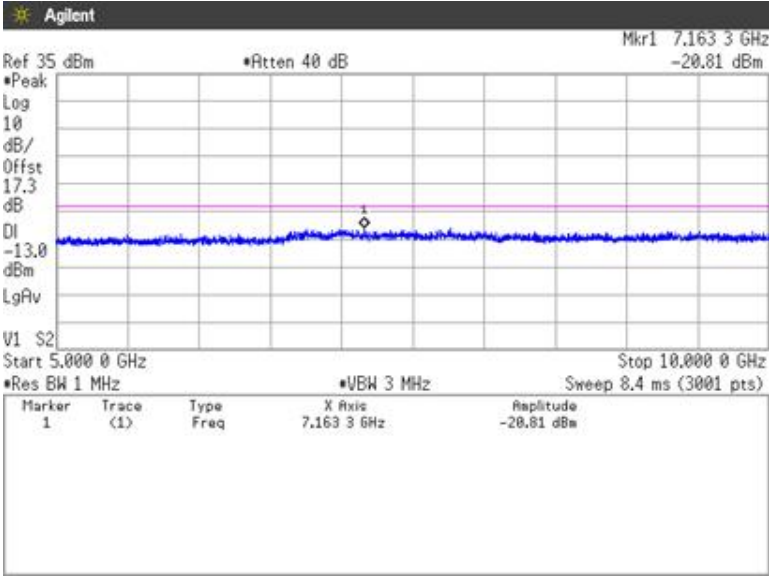

4.5 Radiated Emissions and Harmonic Emissions

4.5.1 Measurement procedure

[FCC 27.53, 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100 kHz for below 1GHz and 1MHz for above 1GHz / VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

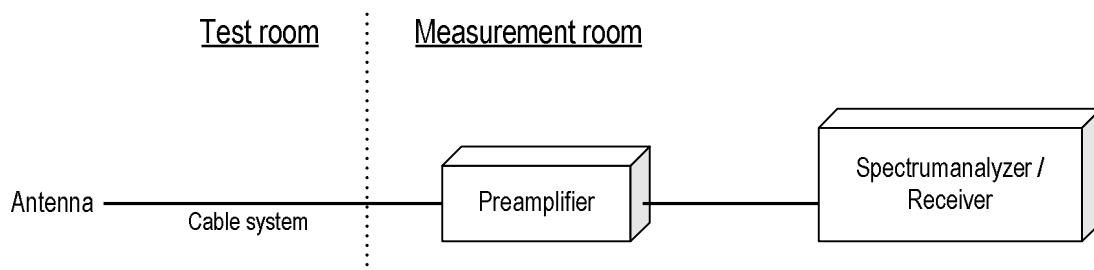



Japan

4.5.2 Calculation method

Result (ERP) = S.G Reading - Cable loss + Antenna Gain

Margin = Limit – Result (ERP)

Example:

Limit @ 1413 MHz : -13.0 dBm

S.G Reading = -55.6 dBm Cable loss = 1.0dB Ant. Gain = 5.9 dBd

Result = -55.6 - 1.0 + 5.9 = -50.7 dBm

Margin = -13.0 - (-50.7) = 37.7 dB

4.5.3 Limit

-13 dBm or less

4.5.4 Test data

Date	: 10-December-2018		
Temperature	: 18.1 [°C]		
Humidity	: 23.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		Taiki Watanabe
Date	: 11-December-2018		
Temperature	: 19.1 [°C]		
Humidity	: 22.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		Taiki Watanabe
Date	: 12-December-2018		
Temperature	: 19.5 [°C]		
Humidity	: 27.5 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		Taiki Watanabe
Date	: 31-January-2019		
Temperature	: 19.2 [°C]		
Humidity	: 31.5 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		Chiaki Kanno

[LTE Band X VII - With camera]**QPSK, BW 5MHz****Channel: 23755**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.0	-45.6	-44.6	1.0	10.4	-35.2	-13.0	22.2
V	1413.0	-48.9	-49.3	1.0	10.4	-39.9	-13.0	26.9

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-46.8	-45.7	1.0	10.4	-36.3	-13.0	23.3
V	1420.0	-50.5	-51.5	1.0	10.4	-42.1	-13.0	29.1

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-49.1	-48.0	1.0	10.5	-38.5	-13.0	25.5
V	1427.0	-51.4	-52.2	1.0	10.5	-42.7	-13.0	29.7

16QAM, BW 5MHz**Channel: 23755**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.0	-46.4	-45.4	1.0	10.4	-36.0	-13.0	23.0
V	1413.0	-49.1	-49.5	1.0	10.4	-40.1	-13.0	27.1

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-47.7	-46.6	1.0	10.4	-37.2	-13.0	24.2
V	1420.0	-50.4	-51.4	1.0	10.4	-42.0	-13.0	29.0

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-50.4	-49.3	1.0	10.5	-39.8	-13.0	26.8
V	1427.0	-53.0	-53.8	1.0	10.5	-44.3	-13.0	31.3

QPSK, BW 10MHz**Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1418.0	-45.7	-46.4	1.0	10.4	-37.0	-13.0	24.0
V	1418.0	-49.5	-50.3	1.0	10.4	-40.9	-13.0	27.9

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-47.1	-46.1	1.0	10.4	-36.7	-13.0	23.7
V	1420.0	-51.0	-52.0	1.0	10.4	-42.6	-13.0	29.6

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-48.7	-47.5	1.0	10.4	-38.1	-13.0	25.1
V	1422.0	-51.4	-52.2	1.0	10.4	-42.8	-13.0	29.8

16QAM, BW 10MHz**Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1409.2	-46.1	-46.8	1.0	10.4	-37.4	-13.0	24.4
V	1409.2	-48.7	-49.2	1.0	10.4	-39.8	-13.0	26.8

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1411.2	-46.4	-45.2	1.0	10.4	-35.8	-13.0	22.8
V	1411.2	-48.6	-49.1	1.0	10.4	-39.7	-13.0	26.7

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.2	-45.4	-44.2	1.0	10.4	-34.8	-13.0	21.8
V	1413.2	-49.2	-49.7	1.0	10.4	-40.3	-13.0	27.3

[LTE Band X VII - Without camera]**QPSK, BW 5MHz****Channel: 23755**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.0	-49.4	-48.4	1.0	10.4	-39.0	-13.0	26.0
V	1413.0	-53.0	-53.4	1.0	10.4	-44.0	-13.0	31.0

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-48.8	-47.7	1.0	10.4	-38.3	-13.0	25.3
V	1420.0	-51.9	-52.9	1.0	10.4	-43.5	-13.0	30.5

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-51.5	-50.4	1.0	10.5	-40.9	-13.0	27.9
V	1427.0	-54.5	-55.3	1.0	10.5	-45.8	-13.0	32.8

16QAM, BW 5MHz**Channel: 23755**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1413.0	-49.4	-48.4	1.0	10.4	-39.0	-13.0	26.0
V	1413.0	-52.0	-52.4	1.0	10.4	-43.0	-13.0	30.0

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-48.5	-47.4	1.0	10.4	-38.0	-13.0	25.0
V	1420.0	-52.8	-53.8	1.0	10.4	-44.4	-13.0	31.4

Channel: 23825

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1427.0	-51.7	-50.6	1.0	10.5	-41.1	-13.0	28.1
V	1427.0	-54.8	-55.6	1.0	10.5	-46.1	-13.0	33.1

QPSK, BW 10MHz**Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1418.0	-48.2	-48.9	1.0	10.4	-39.5	-13.0	26.5
V	1418.0	-53.4	-54.2	1.0	10.4	-44.8	-13.0	31.8

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-48.5	-47.5	1.0	10.4	-38.1	-13.0	25.1
V	1420.0	-54.3	-55.3	1.0	10.4	-45.9	-13.0	32.9

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-49.3	-48.1	1.0	10.4	-38.7	-13.0	25.7
V	1422.0	-53.0	-53.8	1.0	10.4	-44.4	-13.0	31.4

16QAM, BW 10MHz**Channel: 23780**

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1418.0	-48.7	-49.4	1.0	10.4	-40.0	-13.0	27.0
V	1418.0	-52.3	-53.1	1.0	10.4	-43.7	-13.0	30.7

Channel: 23790

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1420.0	-48.4	-47.4	1.0	10.4	-38.0	-13.0	25.0
V	1420.0	-52.8	-53.8	1.0	10.4	-44.4	-13.0	31.4

Channel: 23800

H/V	Frequency [MHz]	S.A Reading [dBm]	S.G Reading [dBm]	Cable loss [dB]	Ant.Gain [dBd]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1422.0	-48.4	-47.2	1.0	10.4	-37.8	-13.0	24.8
V	1422.0	-52.2	-53.0	1.0	10.4	-43.6	-13.0	30.6


4.6 Frequency Stability

4.6.1 Measurement procedure

[FCC 27.54, 2.1055]

The EUT was placed of an inside of an constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

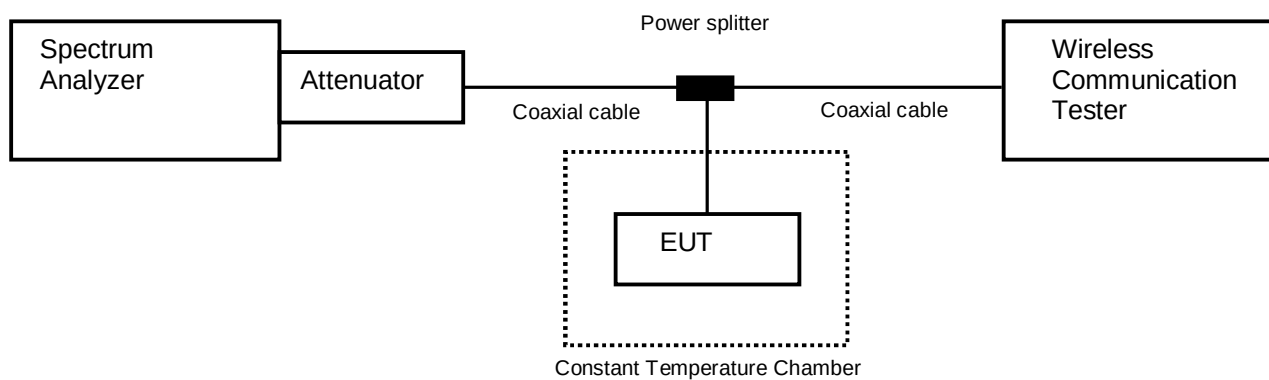

4.6.2 Limit

±2.5 ppm

4.6.3 Measurement result

Date : 04-February-2019

Temperature : 20.2 [°C]

Humidity : 41.4 [%]

Test place : Shielded room No.4

Test engineer :

Kazunori Saito

[LTE Band X VII]
(Channel: 23790)

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.80	25 (Ref.)	710,000,009	0.00000	± 2.5	Pass
	50	709,999,994	-0.02018	± 2.5	Pass
	40	709,999,983	-0.03563	± 2.5	Pass
	30	710,000,011	0.00279	± 2.5	Pass
	20	709,999,988	-0.02977	± 2.5	Pass
	10	709,999,992	-0.02383	± 2.5	Pass
	0	709,999,994	-0.02132	± 2.5	Pass
	-10	709,999,993	-0.02177	± 2.5	Pass
	-20	710,000,012	0.00527	± 2.5	Pass
	-30	710,000,008	-0.00028	± 2.5	Pass
3.42	25	709,999,990	-0.02649	± 2.5	Pass
4.18	25	709,999,994	-0.02062	± 2.5	Pass

Calculation;

Frequency Tolerance (ppm) = $\frac{\text{Measurements Frequency (Hz)} - \text{Reference Frequency (Hz)}}{\text{Reference Frequency (Hz)}} \times 1000000$

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.8 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.3 dB
Radiated emission (9 kHz – 30 MHz)	± 3.0 dB
Radiated emission (30 MHz – 1000 MHz)	± 4.7 dB
Radiated emission (1 GHz – 6 GHz)	± 4.9 dB
Radiated emission (6 GHz – 18 GHz)	± 5.2 dB
Radiated emission (18 GHz – 40 GHz)	± 5.8 dB

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
Phone: +81-238-28-2881
Fax: +81-238-28-2888

Accreditation and Registration

NVLAP

LAB CODE: 200306-0

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada

Site number	Facility	Expiration date
4224A-4	3 m Semi-anechoic chamber	27-November-2020
4224A-5	10 m Semi-anechoic chamber No. 1	27-November-2020
4224A-6	10 m Semi-anechoic chamber No. 2	14-December-2019

VCCI Council

Registration number	Expiration date
A-0166	03-July-2019

Appendix A. Test Equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	31-Jul-2019	02-Jul-2018
Attenuator	Weinschel	56-10	J4180	31-Jul-2019	12-Jul-2018
Microwave cable	HUBER+SUHNER	SUCOFLEX 104	199119/4	31-Mar-2019	01-Mar-2018
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	31-Mar-2019	01-Mar-2018
Power divider	ANRITSU	K240B	020205	31-Jul-2019	12-Jul-2018
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	31-Oct-2019	12-Oct-2018
Temperature and humidity chamber	ESPEC	PL1KP	14007261	31-Dec-2019	07-Dec-2018

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	30-Sep-2019	20-Sep-2018
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	30-Apr-2019	12-Apr-2018
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	31-Oct-2019	12-Oct-2018
Preamplifier	SONOMA	310	372170	30-Sep-2019	20-Sep-2018
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	VHA91032155	31-Aug-2019	06-Aug-2018
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	31-Aug-2019	06-Aug-2018
Attenuator	TAMAGAWA.ELEC	CFA-01/6dB	N/A(S465)	31-May-2019	16-May-2018
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	31-Jul-2019	11-Jul-2018
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	31-Jan-2019	18-Jan-2018
				31-Jan-2020	17-Jan-2019
Attenuator	AEROFLEX	26A-10	081217-08	31-Jan-2019	18-Jan-2018
				31-Jan-2020	17-Jan-2019
Double ridged guide antenna	ETS LINDGREN	3117	00052315	31-Mar-2019	14-Mar-2018
Attenuator	Agilent Technologies	8491B	MY39268633	31-Mar-2019	14-Mar-2018
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	31-Aug-2019	24-Aug-2018
Preamplifier	TSJ	MLA-1840-B03-35	1240332	31-Aug-2019	24-Aug-2018
Notch Filter	Micro-Tronics	BRM50706	003	31-Jul-2019	12-Jul-2018
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	31-Jul-2019	31-Jul-2018
RF power amplifier	R&K	CGA020M602-2633R	B40240	31-May-2019	17-May-2018
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	31-Mar-2019	01-Mar-2018
Dipole antenna	Schwarzbeck	VHAP	1020	31-Aug-2019	03-Aug-2018
Dipole antenna	Schwarzbeck	UHAP	994	31-Aug-2019	03-Aug-2018
Double ridged guide antenna	EMCO	3115	00058532	31-Jan-2019	18-Jan-2018
Double ridged guide antenna	EMCO	3115	4328	31-May-2019	08-May-2018
Double ridged guide antenna	ETS LINDGREN	3117	00218815	31-Dec-2019	27-Dec-2018
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	31-Oct-2019	12-Oct-2018
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	31-Jan-2019	18-Jan-2018
				31-Jan-2020	16-Jan-2019
		SUCOFLEX104/1m	my24610/4	31-Jan-2019	18-Jan-2018
				31-Jan-2020	16-Jan-2019
		SUCOFLEX104/8m	SN MY30031/4	31-Jan-2019	18-Jan-2018
				31-Jan-2020	16-Jan-2019
		SUCOFLEX104	MY32976/4	31-Jan-2019	18-Jan-2018
				31-Jan-2020	16-Jan-2019
		SUCOFLEX104/1.5m	MY19309/4	31-Jan-2019	19-Jan-2018
				31-Jan-2020	16-Jan-2019
		SUCOFLEX104/7m	41625/6	31-Jan-2019	19-Jan-2018
				31-Jan-2020	16-Jan-2019
PC	DELL	DIMENSION E521	75465BX	N/A	N/A

Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	31-May-2019	21-May-2018
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	31-May-2019	22-May-2018

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.