

TEST REPORT

Report number : Z101C-14066

Issue date : October 7, 2014

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant : KYOCERA Corporation

Equipment under test (EUT) : Mobile Phone

Model number : KYV31

FCC ID : JOYKYV31

Date of test : September 12, 25, 26, 2014

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888


Test results : Complied


The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : 
Chiaki Kanno

Tested by : 
Taiki Watanabe

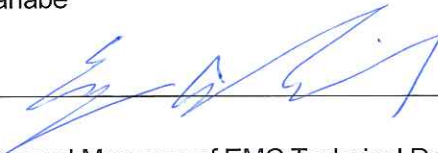Authorized by : 
Eiji Akiba
Deputy General Manager of EMC Technical Department

NVLAP[®]
NVLAP LAB CODE 200306-0

Table of contents

	Page
1. Summary of Test	3
1.1 Purpose of test.....	3
1.2 Standards	3
1.3 List of applied test to the EUT	3
1.4 Modification to the EUT by laboratory.....	3
2. Equipment Under Test	4
2.1 General Description of equipment.....	4
2.2 EUT information	4
2.3 Variation of the family model(s).....	5
2.4 Operating channels and frequencies	5
2.5 Operating mode	5
2.6 Operating flow.....	6
3. Configuration of equipment	7
3.1 Equipment(s) used.....	7
3.2 System configuration	7
4. Spurious Emissions - Radiated -.....	8
4.1 Measurement procedure.....	8
4.2 Calculation method.....	9
4.3 Limit.....	9
4.4 Test data.....	10
5. Restricted Band of Operation.....	12
5.1 Measurement procedure.....	12
5.2 Limit.....	12
5.3 Measurement Result.....	13
5.4 Test data.....	13
6. Antenna requirement	20
7. Uncertainty of measurement.....	21
8. Laboratory description	22
Appendix A. Test equipment	23
Appendix B. Duty Cycle.....	24

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.2.1 Test Methods

ANSI C63.4-2003, KDB558074

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(2)	6dB Bandwidth	Conducted	N/A *
15.247(b)(3)	Maximum Peak Output Power	Conducted	N/A *
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	N/A *
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.247(e)	Transmitter Power Spectral Density	Conducted	N/A *
15.207	AC Power Line Conducted Emissions	Conducted	N/A *

*: Since there is no change in Module from FCC ID: JOYKYY23, only the Radiated test items were performed.

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	: KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	: Mobile Phone
Trade name	: Kyocera
Model number	: KYV31
Serial number	: N/A
EUT condition	: Pre-Production
Power ratings	: Battery: DC 3.8V
Size	: (W) 70.4 × (D) 9.9 × (H) 141.0 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: -20°C to 60°C
RF Specification Protocol	: IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)
Frequency range	: 2412MHz-2462MHz
Number of RF Channels	: 11 Channels
Modulation type	: IEEE802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE802.11g / n (HT20): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Data rate	: IEEE802.11b: 1, 2, 5.5, 11Mbps IEEE802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps
Channel separation	: 5MHz
Antenna type	: Internal antenna
Antenna gain	: -0.3dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2412
Middle	2437
High	2462

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	IEEE802.11b: DSSS	1Mbps
Low, Middle, High	IEEE802.11g: OFDM	6Mbps
Low, Middle, High	IEEE802.11n (HT20 LGI): OFDM	MCS0 (6.5Mbps)

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X axis and the worst case recorded.

2.6 Operating flow

[Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode

[Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode



Zacta

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KYV31	N/A	JOYKYV31	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used".

4. Spurious Emissions - Radiated -

4.1 Measurement procedure [FCC 247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method	: ANSI C63.4
Frequency range	: 9kHz to 25GHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m
Test receiver setting	Below 1GHz
- Detector	: Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	: 200Hz, 120kHz
Spectrum analyzer setting	Above 1GHz
- Peak	: RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	: RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto
	Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode, Rx mode

- Test configuration

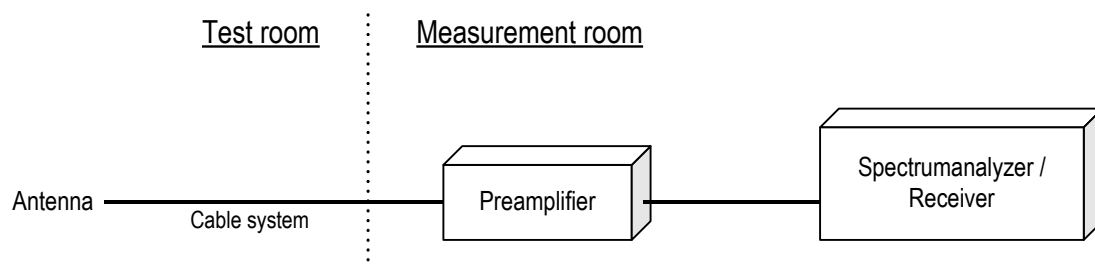

4.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

4.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.



Zacta

4.4 Test data

Date : Sep. 12, 2014
 Temperature : 24.8 [°C]
 Humidity : 59.1 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Chiaki Kanno

[IEEE802.11b]

Channel Low

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4824.000	H	41.1	28.0	13.2	54.3	41.2	74.0	54.0	19.7	12.8	100.0	0.0
2	4824.000	V	41.4	27.9	13.2	54.6	41.1	74.0	54.0	19.4	12.9	100.0	0.0
3	7236.000	H	41.9	28.4	19.3	61.2	47.7	74.0	54.0	12.8	6.3	100.0	0.0
4	7236.000	V	41.0	28.4	19.3	60.3	47.7	74.0	54.0	13.7	6.3	100.0	0.0

Channel Middle

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4874.000	H	41.2	28.4	13.4	54.6	41.8	74.0	54.0	19.4	12.2	100.0	0.0
2	4874.000	V	40.6	28.2	13.4	54.0	41.6	74.0	54.0	20.0	12.4	100.0	0.0
3	7311.000	H	41.4	28.6	19.4	60.8	48.0	74.0	54.0	13.2	6.0	100.0	0.0
4	7311.000	V	42.0	28.8	19.4	61.4	48.2	74.0	54.0	12.6	5.8	100.0	0.0

Channel High

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4924.000	H	41.4	28.1	13.7	55.1	41.8	74.0	54.0	18.9	12.2	100.0	0.0
2	4924.000	V	41.6	28.1	13.7	55.3	41.8	74.0	54.0	18.7	12.2	100.0	0.0
3	7386.000	H	42.4	28.6	19.6	62.0	48.2	74.0	54.0	12.0	5.8	100.0	0.0
4	7386.000	V	41.5	28.4	19.6	61.1	48.0	74.0	54.0	12.9	6.0	100.0	0.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.



Zacta

[IEEE802.11g] Channel Low

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4824.000	H	41.5	28.0	13.2	54.7	41.2	74.0	54.0	19.3	12.8	100.0	0.0
2	4824.000	V	41.2	28.1	13.2	54.4	41.3	74.0	54.0	19.6	12.7	100.0	0.0
3	7236.000	H	41.6	28.2	19.3	60.9	47.5	74.0	54.0	13.1	6.5	100.0	0.0
4	7236.000	V	41.5	28.2	19.3	60.8	47.5	74.0	54.0	13.2	6.5	100.0	0.0

Channel Middle

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4874.000	H	41.5	28.2	13.4	54.9	41.6	74.0	54.0	19.1	12.4	100.0	0.0
2	4874.000	V	41.7	28.2	13.4	55.1	41.6	74.0	54.0	18.9	12.4	100.0	0.0
3	7311.000	H	41.6	28.5	19.4	61.0	47.9	74.0	54.0	13.0	6.1	100.0	0.0
4	7311.000	V	42.2	28.5	19.4	61.6	47.9	74.0	54.0	12.4	6.1	100.0	0.0

Channel High

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4924.000	H	41.0	27.8	13.7	54.7	41.5	74.0	54.0	19.3	12.5	100.0	0.0
2	4924.000	V	41.0	27.8	13.7	54.7	41.5	74.0	54.0	19.3	12.5	100.0	0.0
3	7386.000	H	41.0	28.2	19.6	60.6	47.8	74.0	54.0	13.4	6.2	100.0	0.0
4	7386.000	V	40.8	28.2	19.6	60.4	47.8	74.0	54.0	13.6	6.2	100.0	0.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

[IEEE802.11n (HT20)]

Channel Low

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4824.000	H	41.3	27.8	13.2	54.5	41.0	74.0	54.0	19.5	13.0	100.0	0.0
2	4824.000	V	40.5	27.8	13.2	53.7	41.0	74.0	54.0	20.3	13.0	100.0	0.0
3	7236.000	H	41.1	28.0	19.3	60.4	47.3	74.0	54.0	13.6	6.7	100.0	0.0
4	7236.000	V	41.0	28.0	19.3	60.3	47.3	74.0	54.0	13.7	6.7	100.0	0.0

Channel Middle

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4874.000	H	41.6	28.0	13.4	55.0	41.4	74.0	54.0	19.0	12.6	100.0	0.0
2	4874.000	V	41.0	28.0	13.4	54.4	41.4	74.0	54.0	19.6	12.6	100.0	0.0
3	7311.000	H	40.5	28.2	19.4	59.9	47.6	74.0	54.0	14.1	6.4	100.0	0.0
4	7311.000	V	41.0	28.3	19.4	60.4	47.7	74.0	54.0	13.6	6.3	100.0	0.0

Channel High

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4924.000	H	41.4	28.0	13.7	55.1	41.7	74.0	54.0	18.9	12.3	100.0	0.0
2	4924.000	V	41.1	27.9	13.7	54.8	41.6	74.0	54.0	19.2	12.4	100.0	0.0
3	7386.000	H	42.3	28.3	19.6	61.9	47.9	74.0	54.0	12.1	6.1	100.0	0.0
4	7386.000	V	41.6	28.3	19.6	61.2	47.9	74.0	54.0	12.8	6.1	100.0	0.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

5. Restricted Band of Operation

5.1 Measurement procedure [FCC 247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method : ANSI C63.4
 Test place : 3m Semi-anechoic chamber
 EUT was placed on : FRP table / (W)2.0m × (D)1.0m × (H)0.8m
 Antenna distance : 3m

Spectrum analyzer setting
 - Peak : RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
 - Average : RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto
 Display mode=Linear

Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	Determined VBW Setting
IEEE802.11b	98.5	511	8	10Hz (Duty Cycle ≥ 98%)
IEEE802.11g	99.4	1364	8	10Hz (Duty Cycle ≥ 98%)
IEEE802.11n(HT20)	99.1	1150	8	10Hz (Duty Cycle ≥ 98%)

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- Channel Low: 2412MHz, Channel High: 2462MHz

The test mode of EUT is as follows.

- Tx mode

- Test configuration

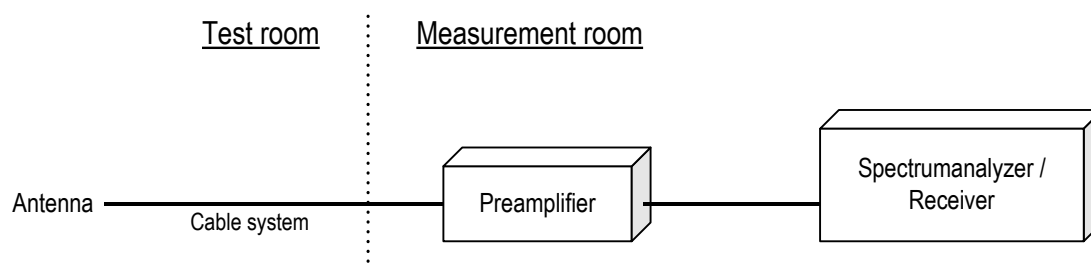

5.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

5.3 Measurement Result

Channel	Frequency [MHz]	Results Chart	Result
Low	2412	See the Trace Data	Pass
High	2462	See the Trace Data	Pass

5.4 Test data

Date : Sep. 25, 2014
 Temperature : 21.5 [°C]
 Humidity : 41.5 [%]
 Test place : 3m Semi-anechoic chamber


Test engineer :
Taiki Watanabe

Date : Sep. 26, 2014
 Temperature : 22.0 [°C]
 Humidity : 40.5 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer :
Taiki Watanabe


[IEEE802.11b]

Channel Low
Horizontal
Peak

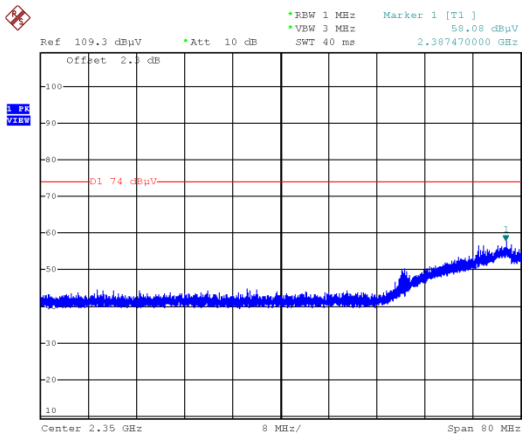


Date: 26.SEP.2014 07:39:41

Average

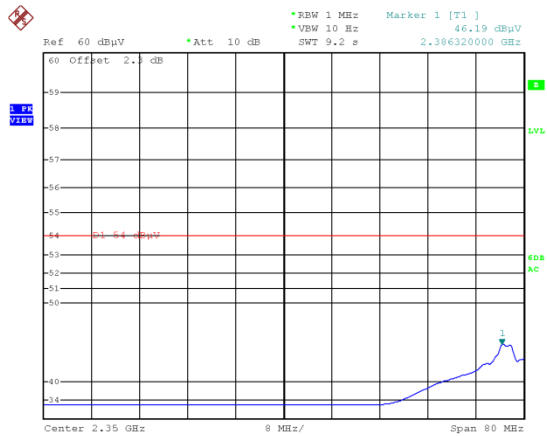


Date: 26.SEP.2014 07:40:33

Vertical
Peak

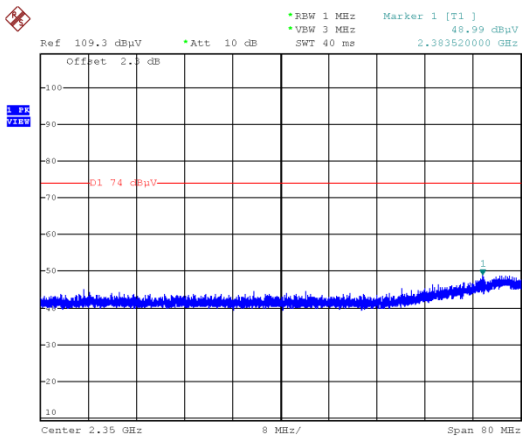


Date: 26.SEP.2014 07:42:04

Average

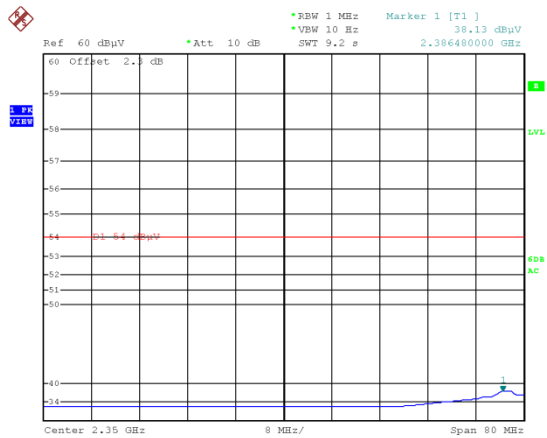


Date: 26.SEP.2014 07:42:54

Channel High
Horizontal
Peak

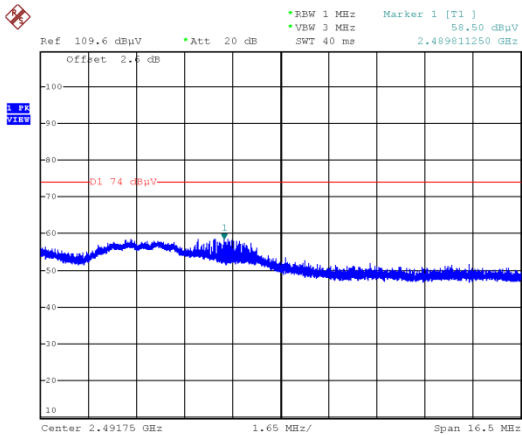


Date: 25.SEP.2014 23:49:47

Average

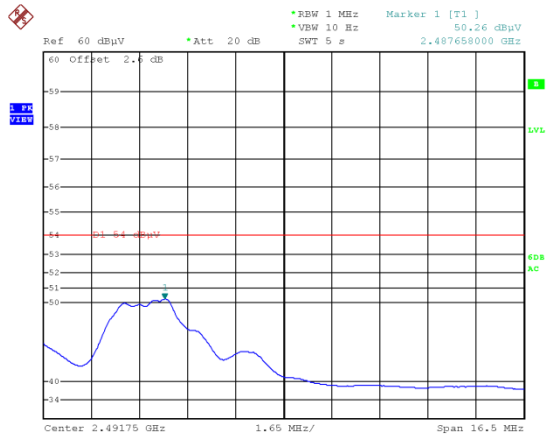


Date: 25.SEP.2014 23:50:32

Vertical
Peak

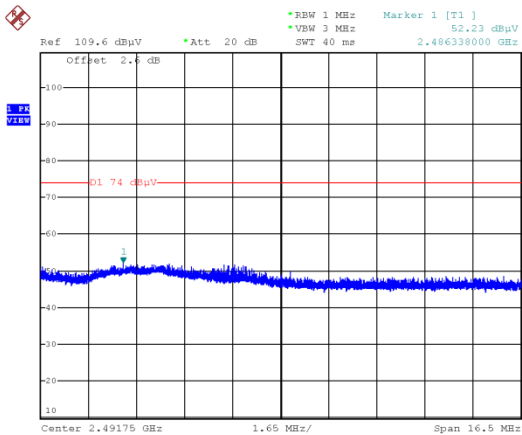

Date: 25.SEP.2014 23:52:44


Average

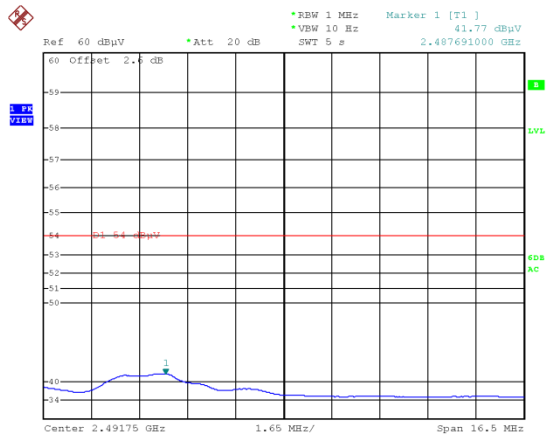

Date: 25.SEP.2014 23:56:22


[IEEE802.11g]

Channel Low
Horizontal
Peak

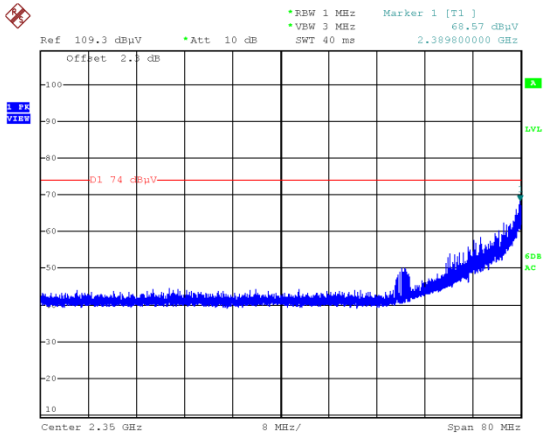


Date: 26.SEP.2014 07:51:54

Average

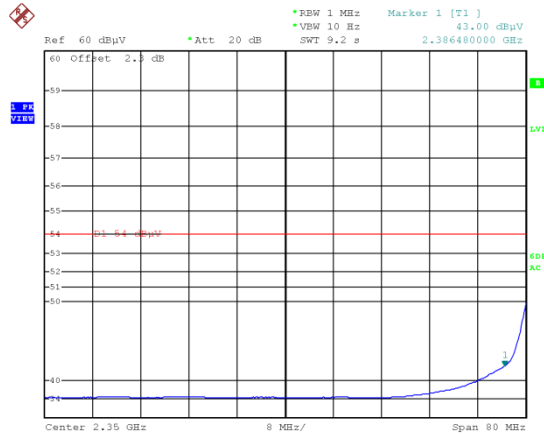


Date: 26.SEP.2014 07:53:15

Vertical
Peak

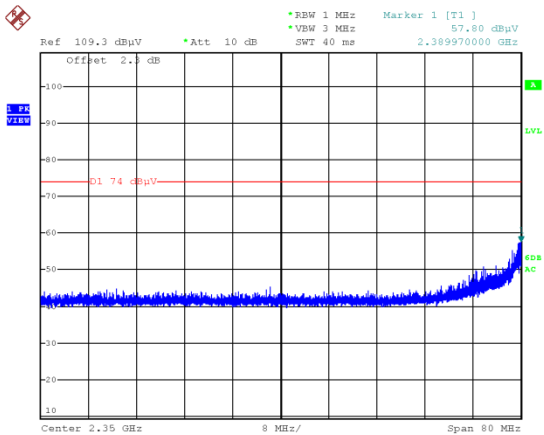


Date: 26.SEP.2014 07:54:34

Average

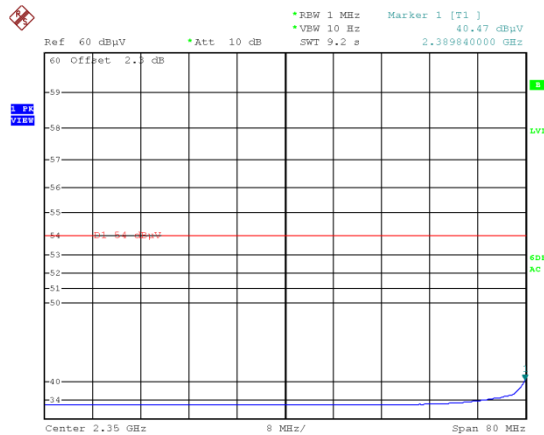


Date: 26.SEP.2014 07:55:32

Channel High
Horizontal
Peak

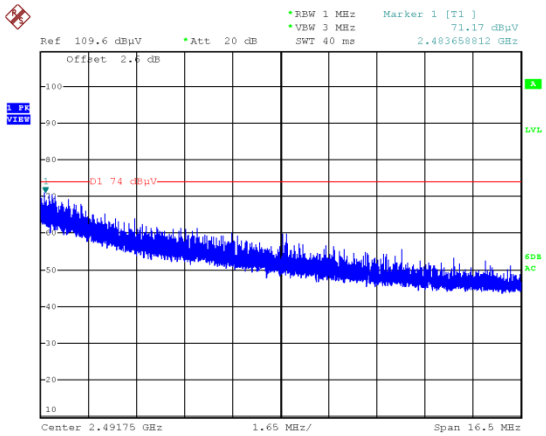


Date: 26.SEP.2014 00:06:09

Average

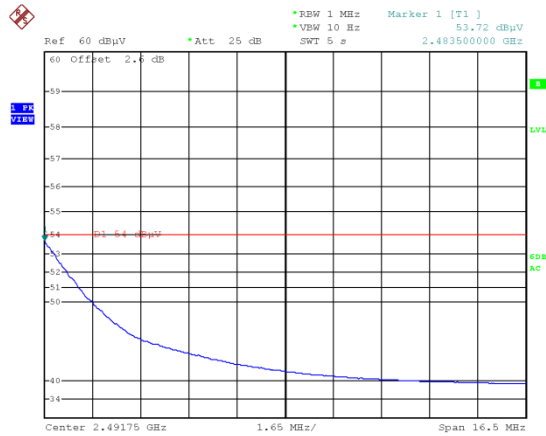


Date: 26.SEP.2014 00:08:34

Vertical
Peak

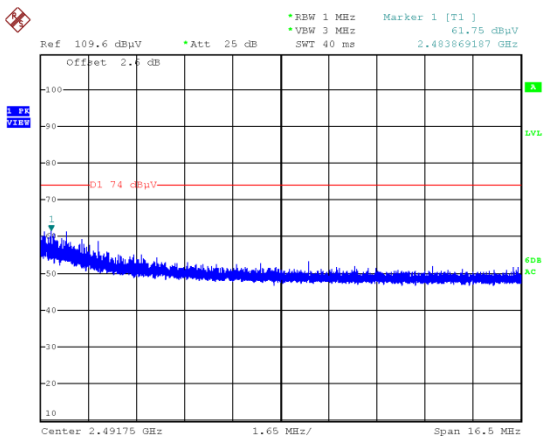

Date: 26.SEP.2014 00:10:09


Average

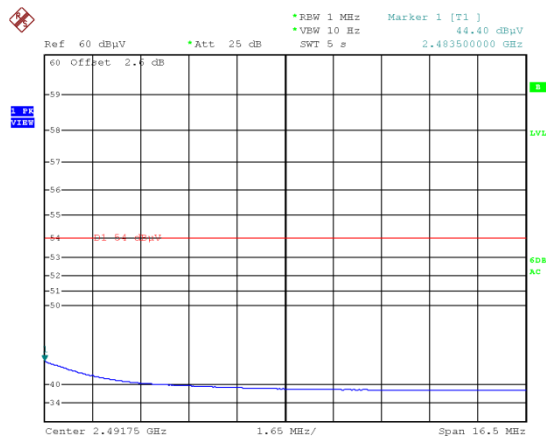

Date: 26.SEP.2014 00:11:21


[IEEE802.11n (HT20)]

Channel Low
Horizontal
Peak

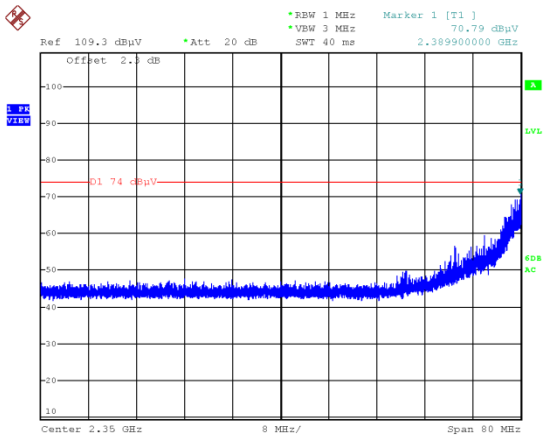


Date: 25.SEP.2014 23:22:48

Average

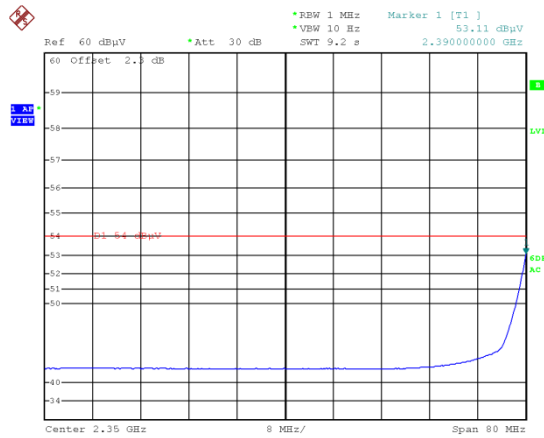


Date: 25.SEP.2014 23:37:51

Vertical
Peak

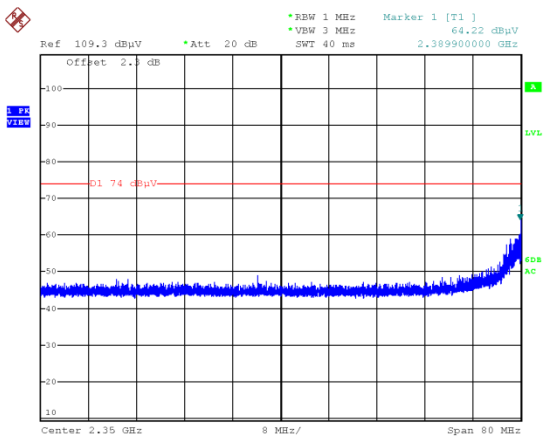

Date: 25.SEP.2014 23:39:33

Average

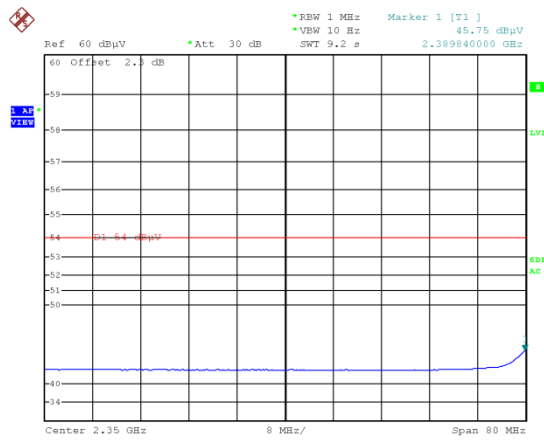

Date: 25.SEP.2014 23:40:51



Zacta

6. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

7. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$

8. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2015
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct.31, 2014
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Jan. 23, 2015
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2014 Nov. 28, 2014* (*:Telecom port)
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2015
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166		

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory



Zacta

Appendix A. Test equipment

Radiated emission


Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Nov. 30, 2014	Nov. 16, 2013
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2015	Jun. 12, 2014
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	892246/010	Oct. 31, 2014	Oct. 5, 2013
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	May 31, 2015	May 7, 2014
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 31, 2015	May 7, 2014
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2015	Jun. 9, 2014
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2015	Jun. 9, 2014
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 31, 2014	Dec. 9, 2013
Dipole antenna	Schwarzbeck	VHAP	1021	Sep. 30, 2014	Sep. 19, 2013
Dipole antenna	Schwarzbeck	UHAP	993	Sep. 30, 2014	Sep. 19, 2013
Double ridged guide antenna	EMCO	3115	5205	Dec. 31, 2014	Dec. 10, 2013
Attenuator	Agilent Technologies	8491B	MY39268633	Jan. 31, 2015	Jan. 15, 2013
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	May 31, 2015	May 2, 2013
Preamplifier	TSJ	MLA-1840-B03-35	1240332	May 31, 2015	May 2, 2013
Notch filter	Micro-Tronics	BRM50702	045	Nov. 30, 2014	Nov. 12, 2013
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1m	322084/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/7m	41625/6	Oct. 31, 2015	Oct. 31, 2014
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 31, 2015	May 6, 2014
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	May 31, 2015	May 6, 2014

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

Appendix B. Duty Cycle


[Plot & Calculation]

11b

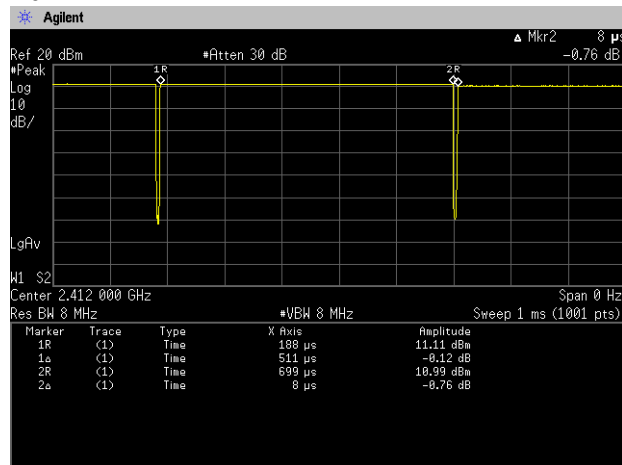


$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}}) = 511[\mu\text{s}] / (511[\mu\text{s}] + 8[\mu\text{s}]) = 98.5[\%]$$

11g

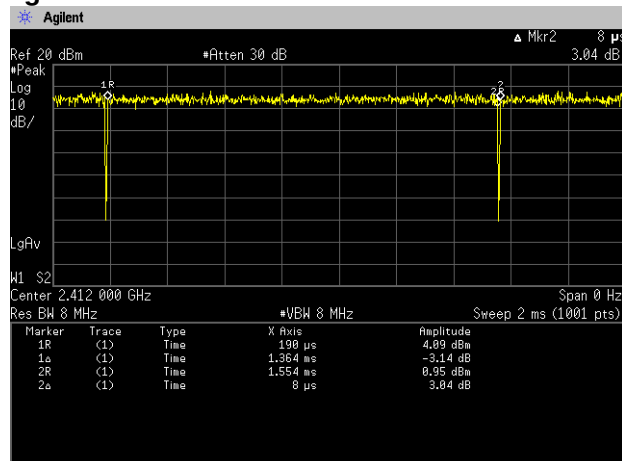

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}}) = 1364[\mu\text{s}] / (1364[\mu\text{s}] + 8[\mu\text{s}]) = 99.4[\%]$$

11n(HT:20)

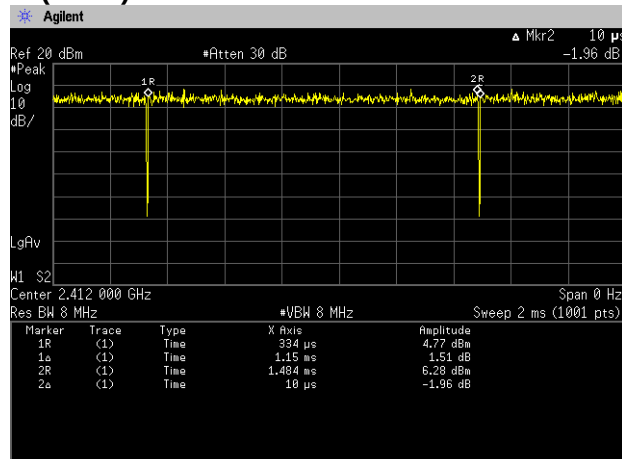

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}}) = 1150[\mu\text{s}] / (1150[\mu\text{s}] + 8[\mu\text{s}]) = 99.1[\%]$$