

TEST REPORT

Report number : Z101C-14109

Issue date : December 12, 2014

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart E

The test results are traceable to the international or national standards.

Applicant : KYOCERA Corporation

Equipment under test (EUT) : Mobile Phone

Model number : KYV32

FCC ID : JOYKYV32

Date of test : October 28, 29, 30, November 1, 4, 5, 6, 8, 11, 14, 20, 28, 2014

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : 
Taiki Watanabe

Tested by : 
Hikaru Shibata

Authorized by : 
Eiji Akiba
Deputy General Manager of EMC Technical Department

Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Operating channels and frequencies	6
2.5 Operating mode	7
2.6 Operating mode	7
3. Configuration of equipment	8
3.1 Equipment(s) used	8
3.2 Cable(s) used	8
3.3 System configuration	8
4. 26dB Bandwidth	9
4.1 Measurement procedure	9
4.2 Limit	9
4.3 Measurement result	9
4.4 Trace data	11
5. Maximum Conducted Output Power	21
5.1 Measurement procedure	21
5.2 Limit	21
5.3 Measurement result	23
5.4 Trace data	25
6. Peak Power Spectral Density	35
6.1 Measurement procedure	35
6.2 Limit	35
6.3 Measurement result	36
6.4 Trace data	38
7. Radiated Emissions (Restricted Bands of Operation)	48
7.1 Measurement procedure	48
7.2 Calculation method	49
7.3 Limit	49
7.4 Test data	50
8. Frequency Stability	55
8.1 Measurement procedure	55
8.2 Limit	55
8.3 Measurement result	56
9. AC Power Line Conducted Emissions	58
9.1 Measurement procedure	58
9.2 Calculation method	58



Zacta

9.3 Limit.....	58
9.4 Test data.....	59
10. Duty Cycle.....	62
10.1 Measurement procedure.....	62
10.2 Limit.....	62
10.3 Measurement result.....	62
10.4 Trace data	64
11. Antenna requirement.....	68
12. Uncertainty of measurement.....	69
13. Laboratory description	70
Appendix A. Test equipment	71

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart E.

1.2 Standards

CFR47 FCC Part 15 Subpart E

1.2.1 Test Methods

ANSI C63.4-2009, KDB789033 D02

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.407(a)	26dB Bandwidth	Conducted	PASS
15.407(a)	Maximum Conducted Output Power	Conducted	PASS
15.407(a)	Peak Power Spectral Density	Conducted	PASS
15.407(b) 15.205 15.209	Radiated emissions (Restricted Bands of Operation)	Radiated	PASS
15.407(g)	Frequency Stability	Conducted	PASS
15.207	AC Power Line Conducted Emissions	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	: KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku, Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	: Mobile Phone
Trade name	: Kyocera
Model number	: KYV32
Serial number	: N/A
EUT condition	: Pre-Production
Power ratings	: Battery: DC 3.8V
Size	: (W) 70.4 × (D) 10.4 × (H) 141.9 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: -20°C to 60°C
RF Specification Protocol	: IEEE802.11a, IEEE802.11n (HT20), IEEE802.11n (HT40) IEEE802.11ac (HT20), IEEE802.11ac (HT40), IEEE802.11ac (HT80)
Frequency range	: IEEE802.11a/n/ac (HT20): 5180MHz-5320MHz, 5500MHz-5700MHz IEEE802.11n/ac(HT40): 5190MHz-5310MHz, 5510MHz-5670MHz IEEE802.11ac(HT80): 5210MHz, 5290MHz, 5530MHz
Number of RF Channels	: IEEE802.11a/n/ac (HT20): 16 Channels IEEE802.11n/ac(HT40): 7 Channels IEEE802.11ac(HT80): 3 Channels
Modulation type	: IEEE802.11a/n/ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Data rate	: IEEE802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps IEEE802.11ac (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65, 78, 86.5Mbps IEEE802.11ac (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2, 86.6, 96.1Mbps IEEE802.11n (HT40 LGI): 13.5, 27, 40.5, 54, 81, 108, 121.5, 135Mbps IEEE802.11n (HT40 SGI): 15, 30, 45, 60, 90, 120, 135, 150Mbps IEEE802.11ac (HT40 LGI): 13.5, 27, 40.5, 54, 81, 108, 121.5, 135, 162, 180Mbps IEEE802.11ac (HT40 SGI): 15, 30, 45, 60, 90, 120, 135, 150, 180, 200Mbps IEEE802.11ac (HT80 LGI): 29.3, 58.5, 87.8, 117, 175.5, 234, 263.3, 292.6, 351, 390Mbps IEEE802.11ac (HT80 SGI): 32.5, 65, 97.5, 130, 195, 260, 292.5, 325, 390, 433.3Mbps

Channel separation	: IEEE802.11a/n/ac (HT20): 20MHz IEEE802.11n/ac (HT40): 40MHz IEEE802.11ac (HT80): 80MHz
Output power	: 40.738mW (IEEE802.11a) 40.365mW (IEEE802.11n: HT20) 19.099mW (IEEE802.11n: HT40) 21.437mW (IEEE802.11ac: HT80)
Antenna type	: Internal antenna
Antenna gain	: 5.15-5.25GHz, 5.25-5.35GHz band: -1.2dBi 5.47-5.725GHz band: -0.1dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

[IEEE802.11a/n/ac (HT20)]

Channel	Frequency [MHz]
36	5180
40	5200
44	5220
48	5240
52	5260
56	5280
60	5300
64	5320
100	5500
104	5520
108	5540
112	5560
116	5580
132	5660
136	5680
140	5700

[IEEE802.11n/ac (HT40)]

Channel	Frequency [MHz]
38	5190
46	5230
54	5270
62	5310
102	5510
110	5550
134	5670

[IEEE802.11ac (HT80)]

Channel	Frequency [MHz]
42	5210
58	5290
106	5530

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	IEEE802.11a/n/ac (HT20)		IEEE802.11n/ac (HT40)		IEEE802.11ac (HT80)	
	Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
5.2GHz Band	36	5180	38	5190	42	5210
	40	5200	-	-	-	-
	48	5240	46	5230	-	-
5.3GHz Band	52	5260	54	5270	58	5290
	56	5280	-	-	-	-
	64	5320	62	5310	-	-
5.6GHz Band	100	5500	102	5510	106	5530
	116	5580	110	5550	-	-
	140	5700	134	5670	-	-

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Band	Modulation Type	Data Rate
5.2GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (HT80): OFDM	MCS0 (29.3Mbps)
5.3GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (HT80): OFDM	MCS0 (29.3Mbps)
5.6GHz Band	IEEE802.11a: OFDM	6Mbps
	IEEE802.11n (HT20): OFDM	MCS0 (6.5Mbps)
	IEEE802.11n (HT40): OFDM	MCS0 (13.5Mbps)
	IEEE802.11ac (HT80): OFDM	MCS0 (29.3Mbps)

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z axis and the worst case recorded.

2.6 Operating mode

[Tx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: 5.2GHz Band, 5.3GHz Band, 5.6GHz Band
- iii) Start test mode

[Rx mode]

- i) Test program setup to the DM tool
- ii) Select a Test mode
Operating frequency: 5.2GHz Band, 5.3GHz Band, 5.6GHz Band
- iii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KYV32	N/A	JOYKYV32	EUT
2	AC Adapter	au	N/A	HS-TFA	N/A	*

*: AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable(for AC Adapter)	1.1	Yes	Metal	*

*: AC power line Conducted Emission Test.

3.3 System configuration



: Un-detachable cable

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in “3.1 Equipment(s) used” and “3.2 Cable(s) used”.

4. 26dB Bandwidth

4.1 Measurement procedure [FCC 15.407(a), KDB789033]

The bandwidth at 26dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=200kHz/430kHz/820kHz, VBW=620kHz/1.3MHz/2.4MHz, Span=40MHz/80MHz/160MHz
- Sweep=auto, Detector=Peak, Trace mode=Max hold


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

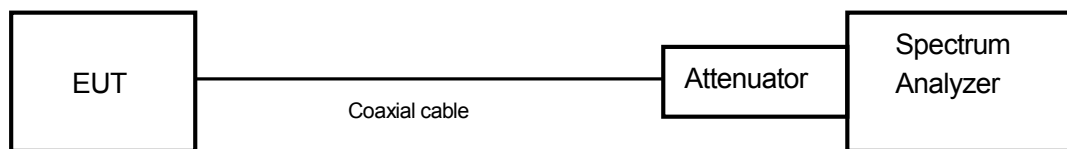

4.2 Limit

None

4.3 Measurement result

Date : November 4, 2014
 Temperature : 20.9 [°C]
 Humidity : 46.3 [%]
 Test place : Shielded room No.4

Tested by : Hikaru Shibata


Mode	Band	Channel	Frequency (MHz)	Test Result (MHz)
802.11a	5.2GHz Band	36	5180	21.873
		40	5200	21.277
		48	5240	21.429
	5.3GHz Band	52	5260	22.236
		56	5280	22.275
		64	5320	21.718
	5.6GHz Band	100	5500	21.24
		116	5580	21.729
		140	5700	21.826

Mode	Band	Channel	Frequency (MHz)	Test Result (MHz)
802.11n (20MHz)	5.2GHz Band	36	5180	22.061
		40	5200	22.045
		48	5240	22.295
	5.3GHz Band	52	5260	22.377
		56	5280	21.984
		64	5320	22.155
	5.6GHz Band	100	5500	22.217
		116	5580	21.724
		140	5700	22.025


Mode	Band	Channel	Frequency (MHz)	Test Result (MHz)
802.11n (40MHz)	5.2GHz Band	38	5190	42.612
		46	5230	42.809
	5.3GHz Band	54	5270	43.232
		62	5310	43.439
	5.6GHz Band	102	5510	43.017
		110	5550	42.539
		134	5670	42.463

Mode	Band	Channel	Frequency (MHz)	Test Result (MHz)
802.11ac (80MHz)	5.2GHz Band	42	5210	82.907
	5.3GHz Band	58	5290	82.748
	5.6GHz Band	106	5530	82.615


4.4 Trace data
[IEEE802.11a]
(5.2GHz Band)
Channel: 36

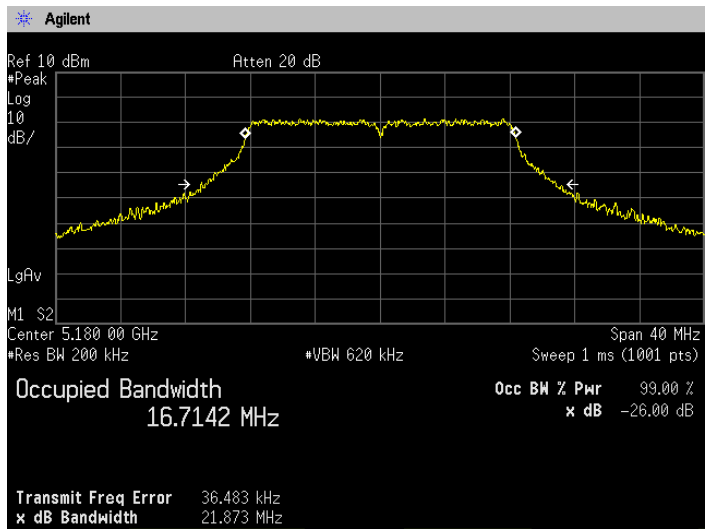


Channel: 40

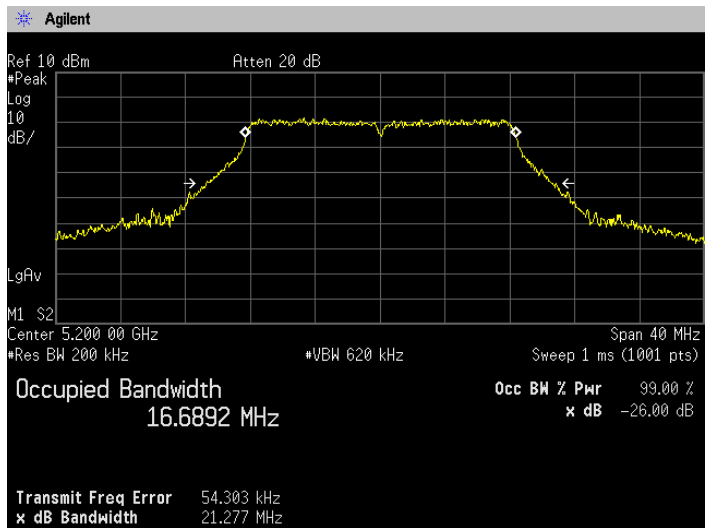


Channel: 48

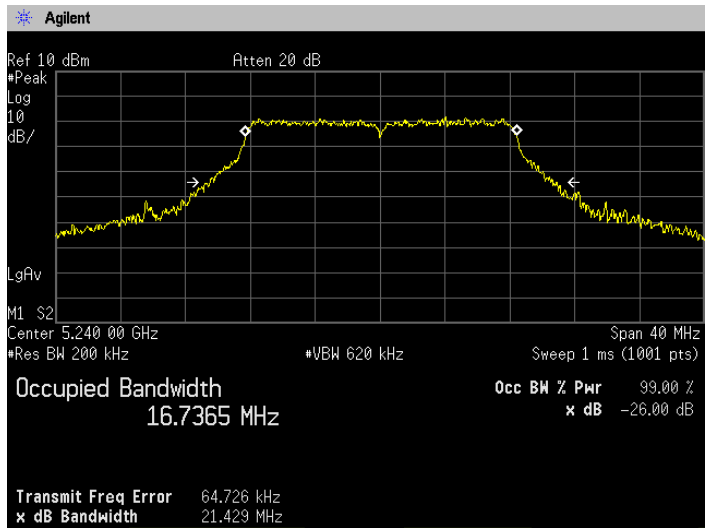


(5.3GHz Band)
Channel: 52

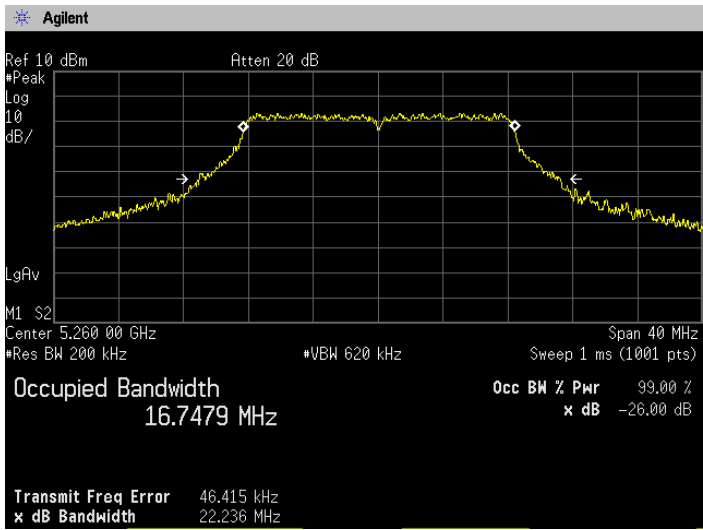


Channel: 56

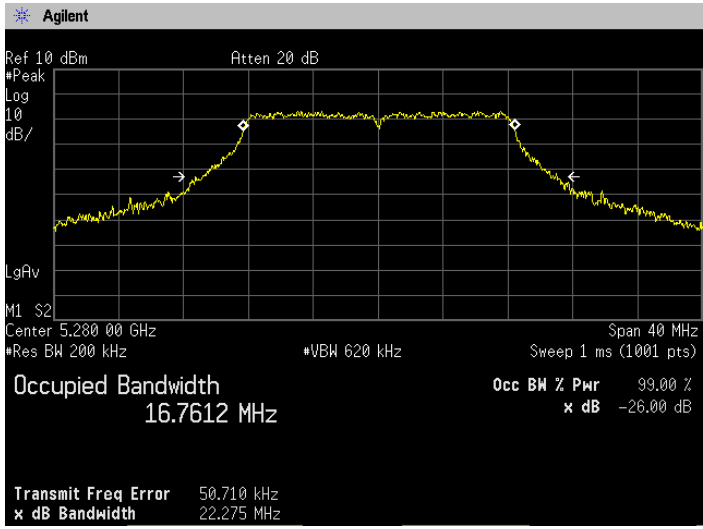


Channel: 64

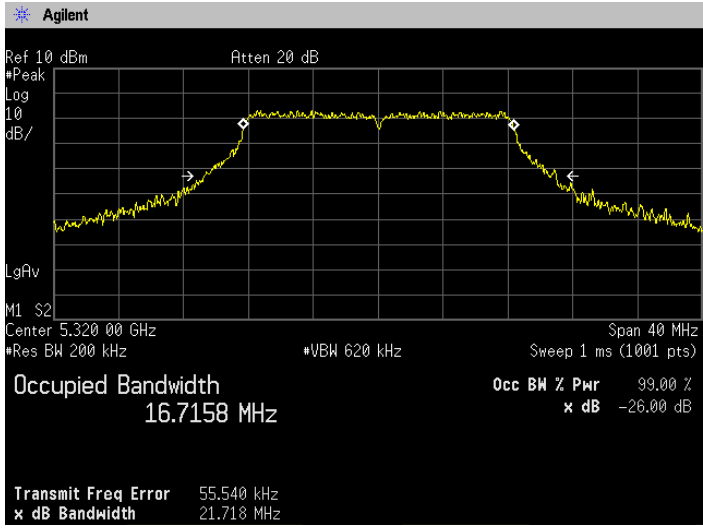


(5.6GHz Band)
Channel: 100

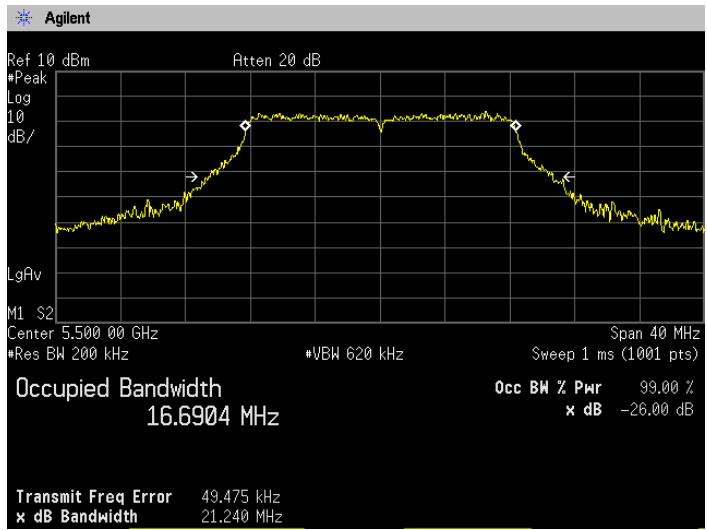


Channel: 116

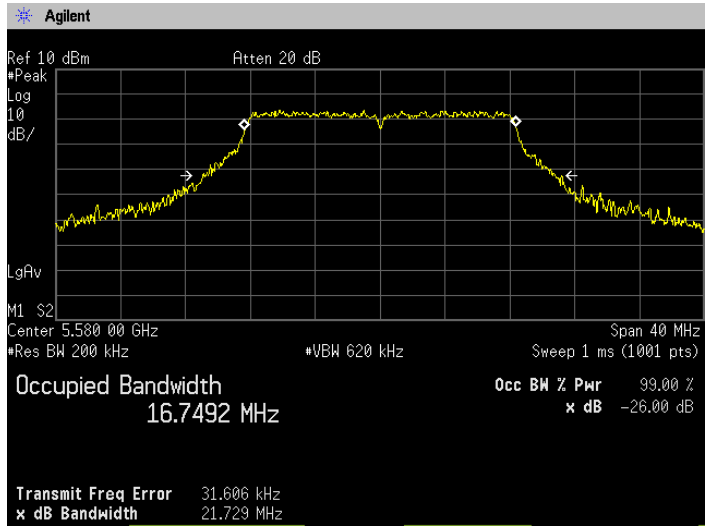


Channel: 140

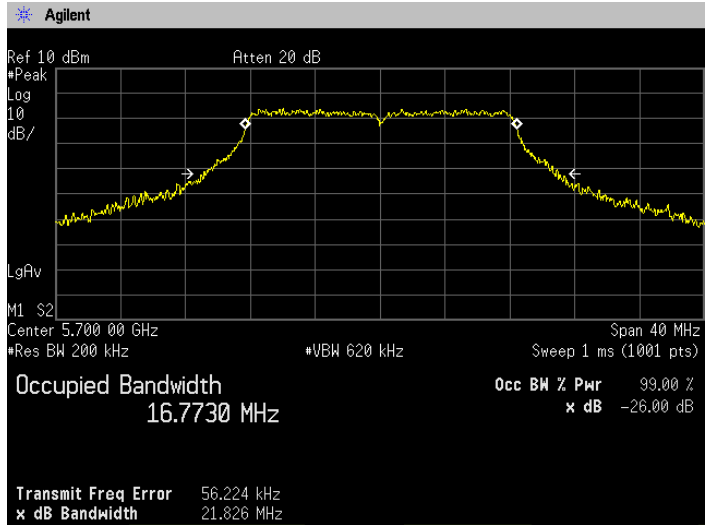


[IEEE802.11n (HT20)]
(5.2GHz Band)
Channel: 36

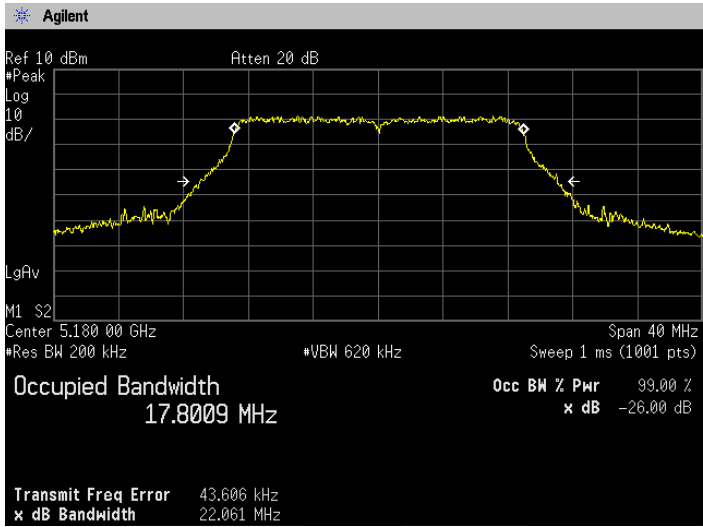

Channel: 40

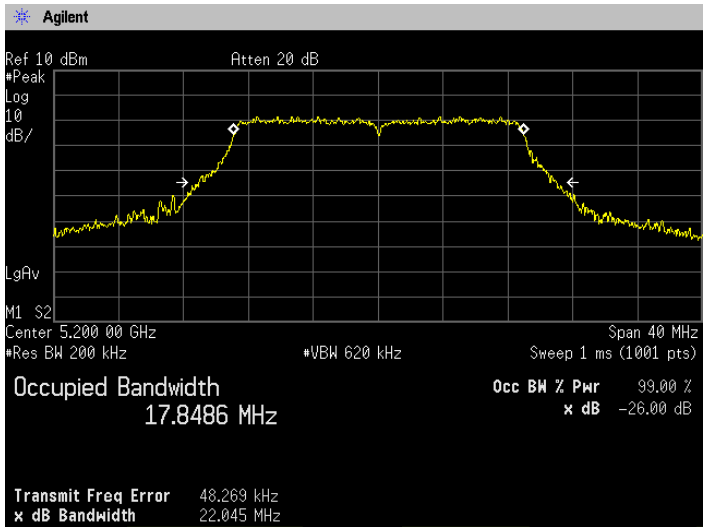


Channel: 48

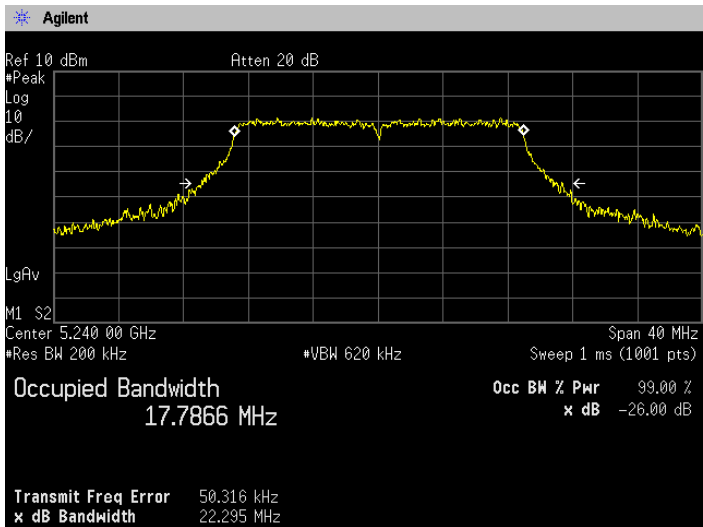


Zacta

(5.3GHz Band)


Channel: 52

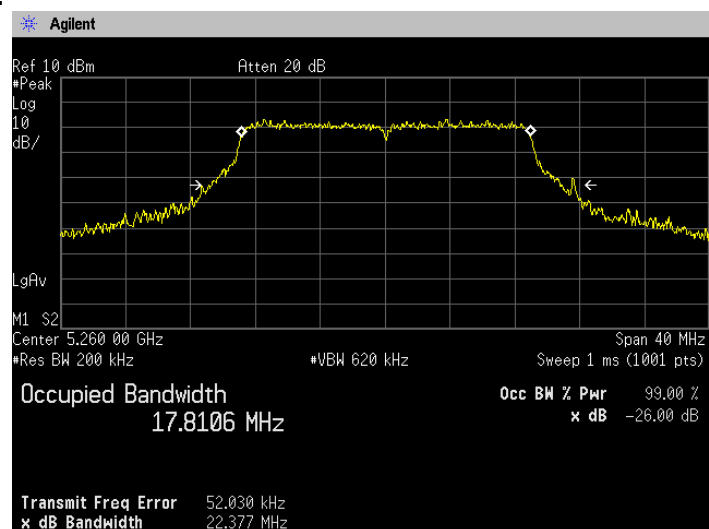


Channel: 56

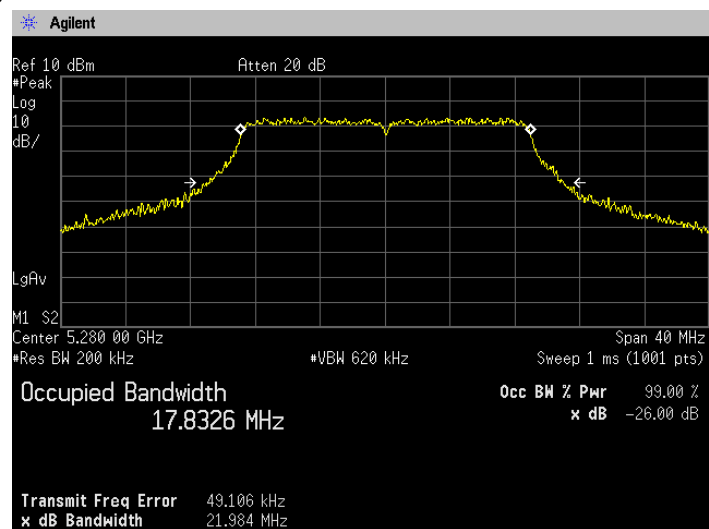


Channel: 64

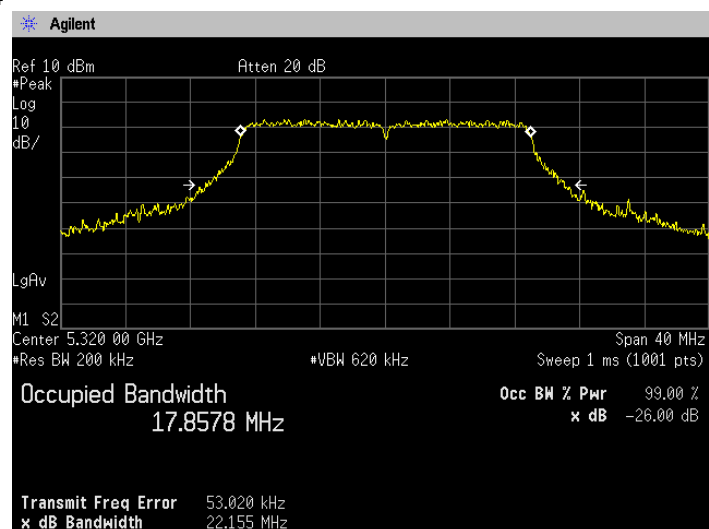


(5.6GHz Band)
Channel: 100

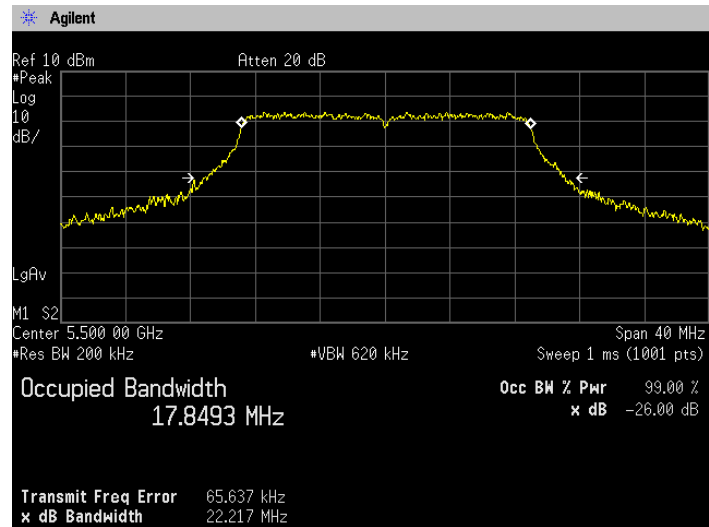


Channel: 116

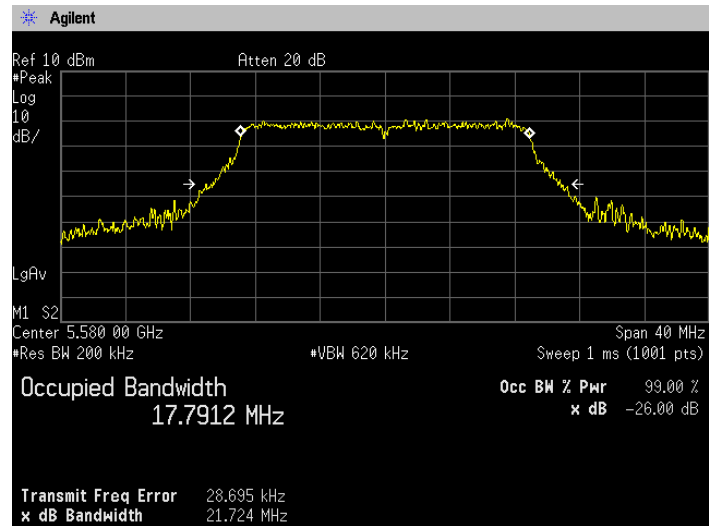


Channel: 140

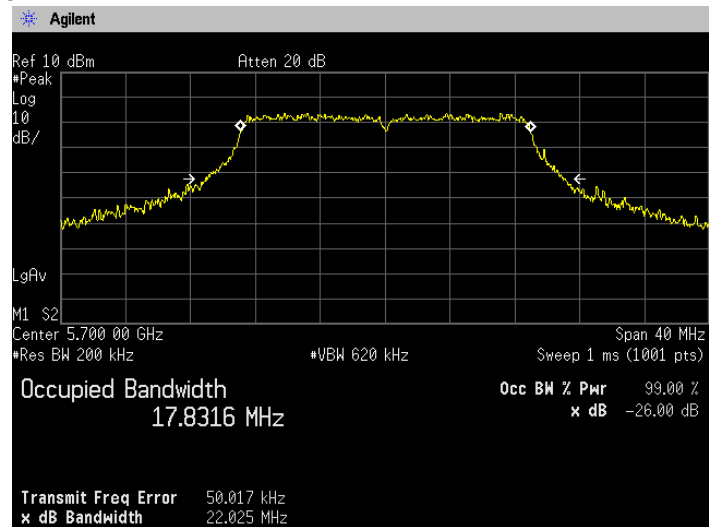


[IEEE802.11n (HT40)]
(5.2GHz Band)
Channel: 38

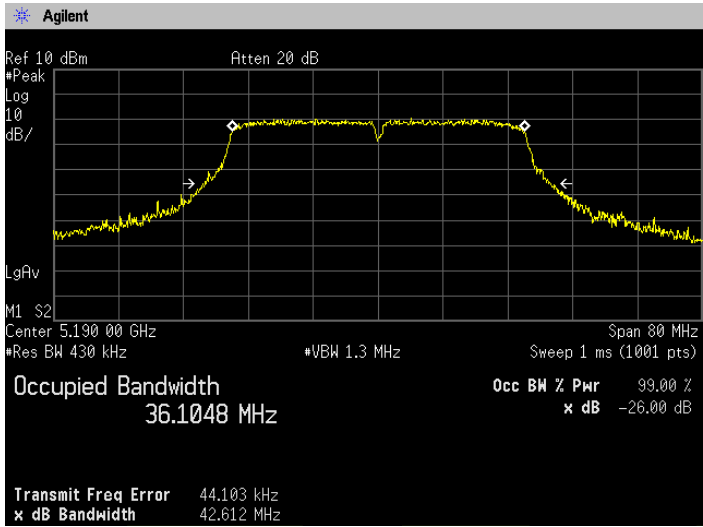


Channel: 46

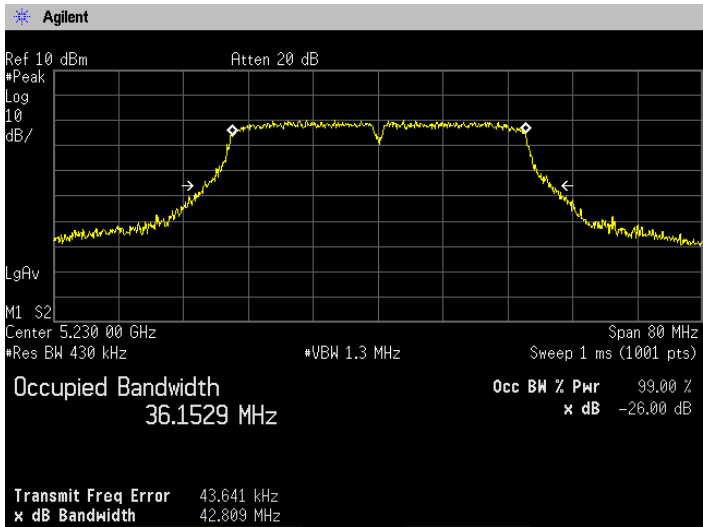


(5.3GHz Band)
Channel: 54

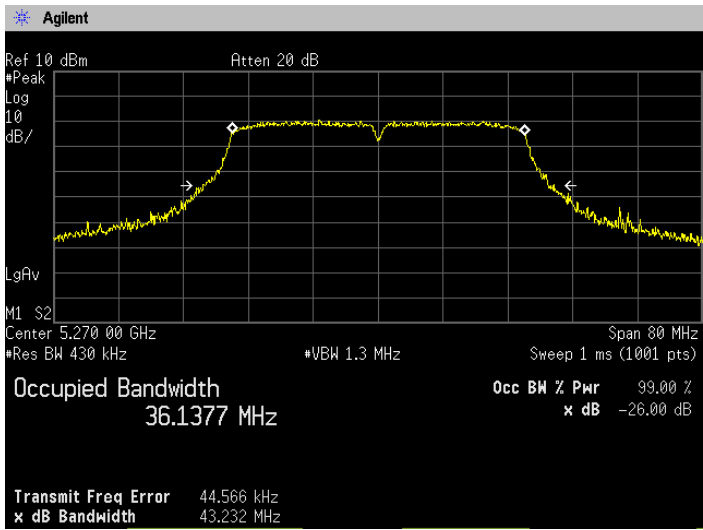


Channel: 62

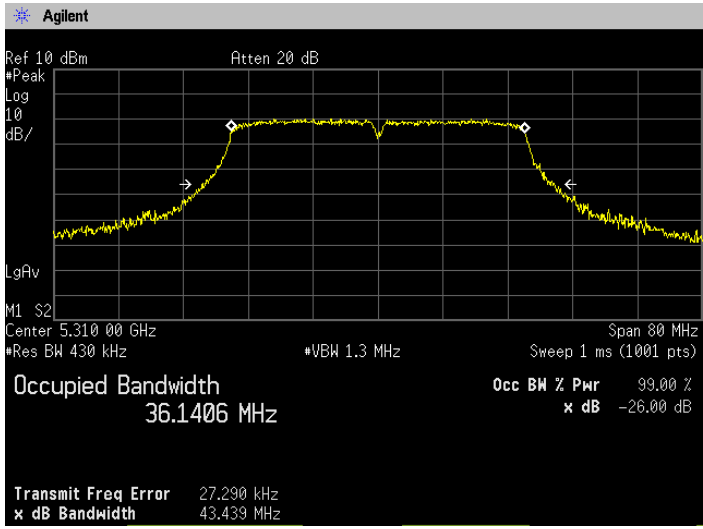


(5.6GHz Band)
Channel: 102

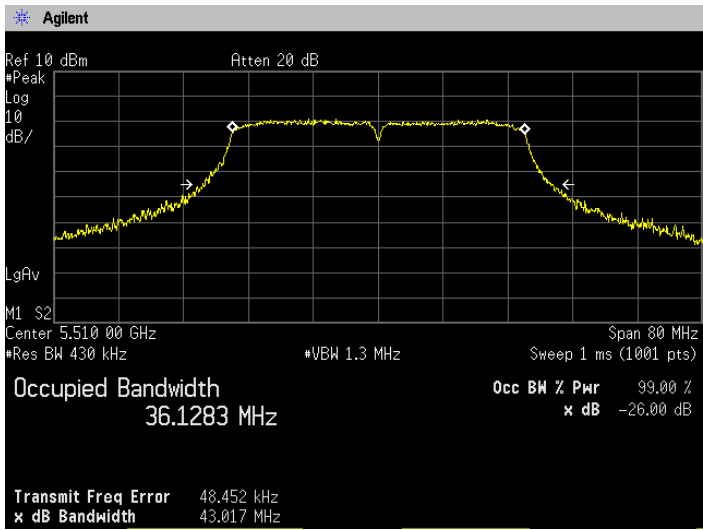


Channel: 110

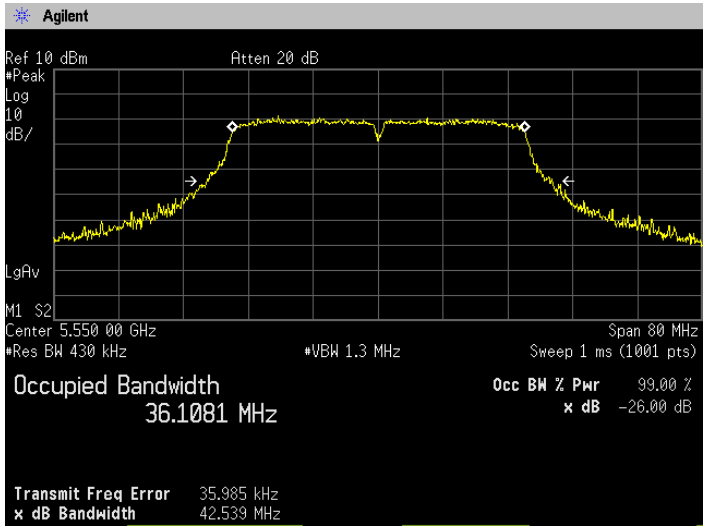


Channel: 134

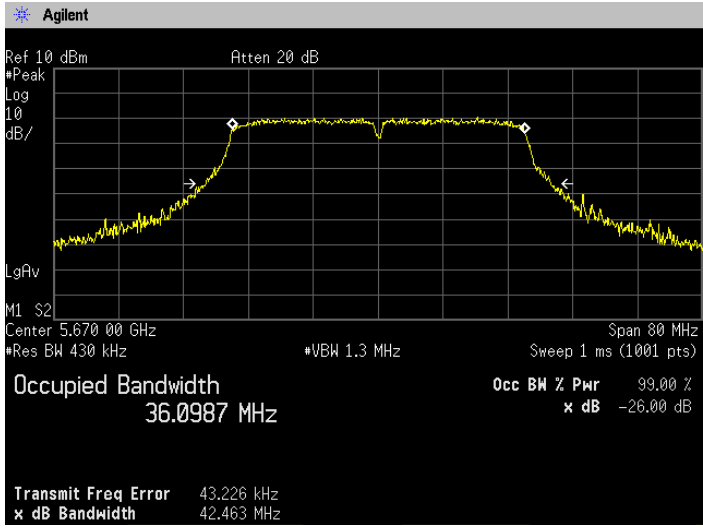


[IEEE802.11ac (HT80)]
(5.2GHz Band)
Channel: 42

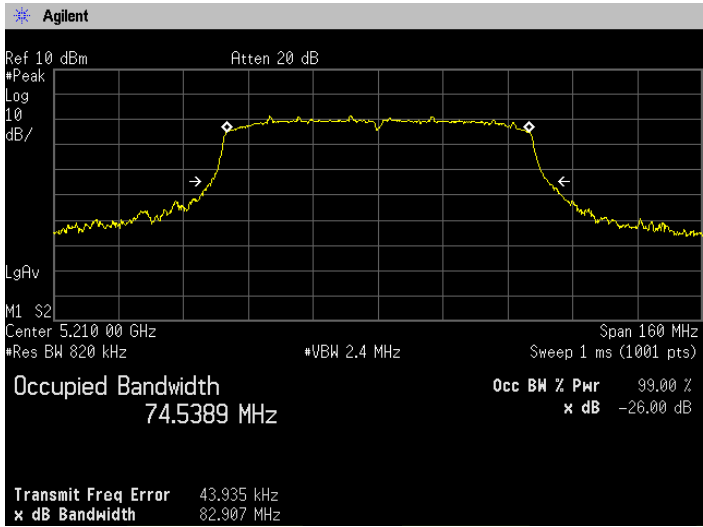

(5.3GHz Band)
Channel: 58

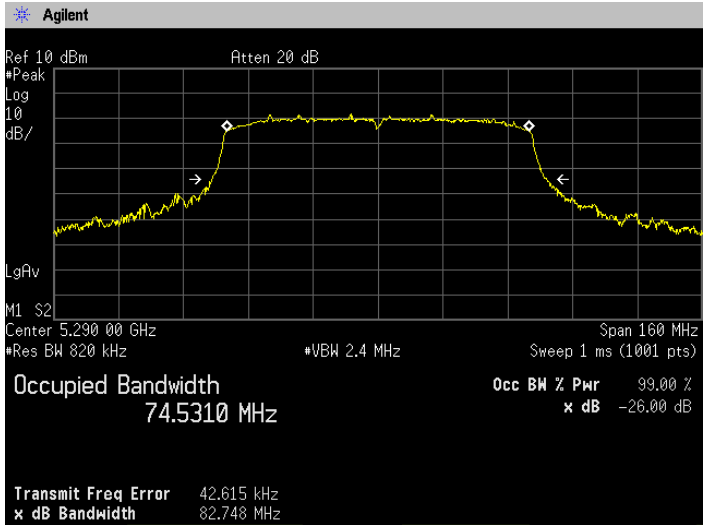

(5.6GHz Band)
Channel: 106

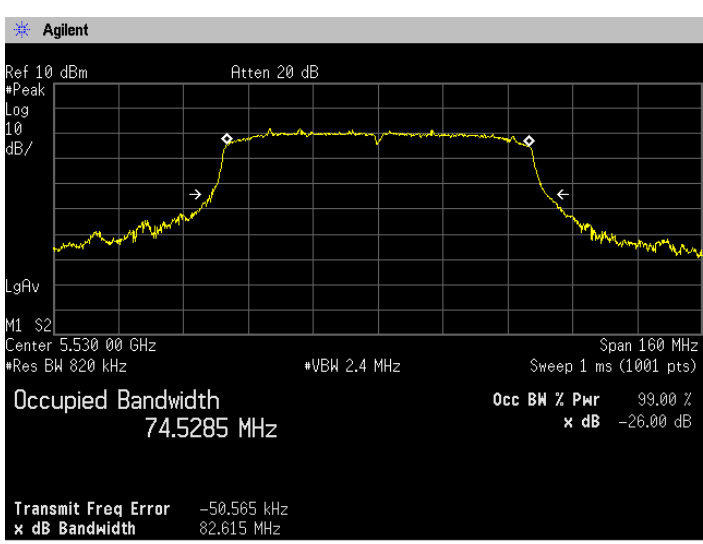

5. Maximum Conducted Output Power

5.1 Measurement procedure [FCC 15.407(a), KDB789033]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=1MHz, VBW=8MHz, Span=25MHz/50MHz/100MHz, Sweep=auto,
Detector=RMS, Trace mode=Averaging


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

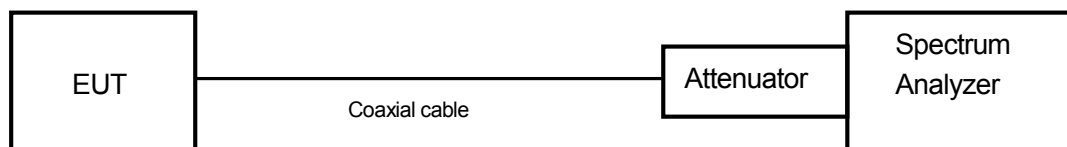

5.2 Limit

- (1) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.
- (2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in megahertz.
- (3) For the 5.725-5.85GHz bands, the maximum conducted output power over the frequency band of operation shall not exceed 1W.

<Output Power Limit Calculation>

Band	Mode	Power Limit (mW)	Antenna Gain (dBi)	Determined Limit (dBm)
5.2GHz Band	802.11a	250	-1.2	23.97
	802.11n HT20	250		23.97
	802.11n HT40	250		23.97
	802.11ac HT80	250		23.97

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
		Least 26dBc BW (MHz)			
5.3GHz Band	802.11a	250	23.97	-1.2	23.97
		22.275	24.48		
	802.11n HT20	250	23.97		23.97
		22.377	24.50		
	802.11n HT40	250	23.97		23.97
		43.439	27.38		
	802.11ac HT80	250	23.97		23.97
		82.748	30.18		

Band	Mode	Power Limit (mW)	Calculated Limit (dBm)	Antenna Gain (dBi)	Determined Limit (dBm)
		Least 26dBc BW (MHz)			
5.6GHz Band	802.11a	250	23.97	-0.1	23.97
		21.826	24.39		
	802.11n HT20	250	23.97		23.97
		22.217	24.47		
	802.11n HT40	250	23.97		23.97
		43.017	27.34		
	802.11ac HT80	250	23.97		23.97
		82.615	30.17		

5.3 Measurement result

Date : November 14, 2014
 Temperature : 23.6 [°C]
 Humidity : 47.1 [%]
 Test place : Shielded room No.4

Tested by : Hikaru Shibata

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11a	36	5180	13.920	1.362	1.372	0.993	-	13.920	24.660
	40	5200	13.770					13.770	23.823
	48	5240	13.790					13.790	23.933
	52	5260	15.660	1.364	1.372	0.994	-	15.660	36.813
	56	5280	15.800					15.800	38.019
	64	5320	15.560					15.560	35.975
	100	5500	15.900	1.362	1.372	0.993	-	15.900	38.905
	116	5580	16.100					16.100	40.738
	140	5700	15.990					15.990	39.719

Note1: X = On time / (On + Off time), DCF=10log (1/x)

Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11n (20MHz)	36	5180	13.780	1.274	1.282	0.994	-	13.780	23.878
	40	5200	13.960					13.960	24.889
	48	5240	13.670					13.670	23.281
	52	5260	15.690	1.270	1.280	0.992	-	15.690	37.068
	56	5280	15.660					15.660	36.813
	64	5320	15.690					15.690	37.068
	100	5500	15.980	1.276	1.284	0.994	-	15.980	39.628
	116	5580	16.060					16.060	40.365
	140	5700	16.060					16.060	40.365

Note1: X = On time / (On + Off time), DCF=10log (1/x)

Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11n (40MHz)	38	5190	12.570	0.633	0.645	0.981	-	12.570	18.072
	46	5230	12.450					12.450	17.579
	54	5270	12.540	0.635	0.636	0.998	-	12.540	17.947
	62	5310	12.610					12.610	18.239
	102	5510	12.670	0.635	0.636	0.998	-	12.670	18.493
	110	5550	12.810					12.810	19.099
	134	5670	12.710					12.710	18.664

Note1: X = On time / (On + Off time), DCF=10log (1/x)


Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)	Test Result (mW)
				On Time(ms)	On+Off Time(ms)	X			
802.11ac (80MHz)	42	5210	12.840	0.246	0.258	0.953	0.207	13.047	20.169
	58	5290	12.870	0.245	0.257	0.953	0.208	13.078	20.313
	106	5530	13.140	0.248	0.258	0.961	0.172	13.312	21.437


Note1: X = On time / (On + Off time), DCF=10log (1/x)

Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)


5.4 Trace data
[IEEE802.11a]
(5.2GHz Band)
Channel: 36

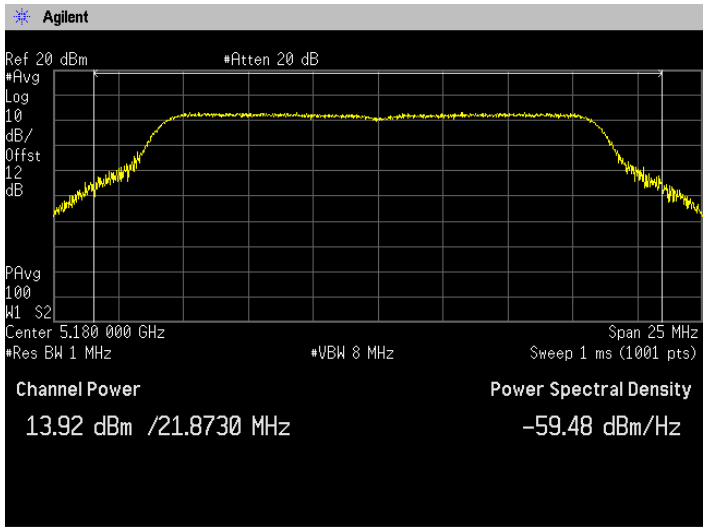


Channel: 40

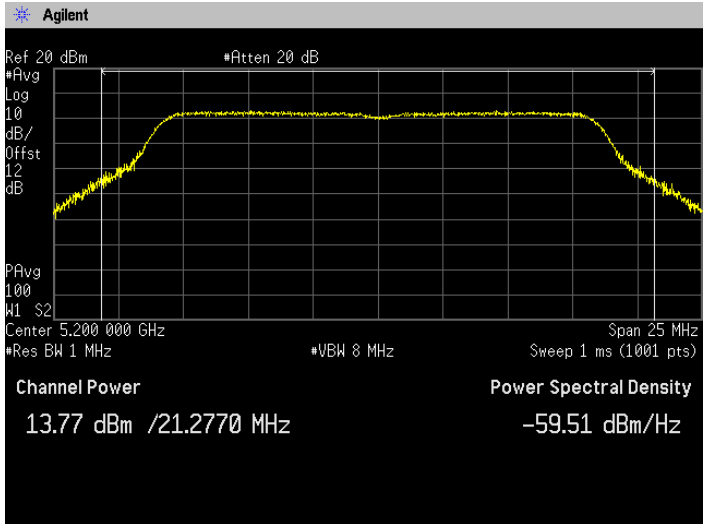


Channel: 48

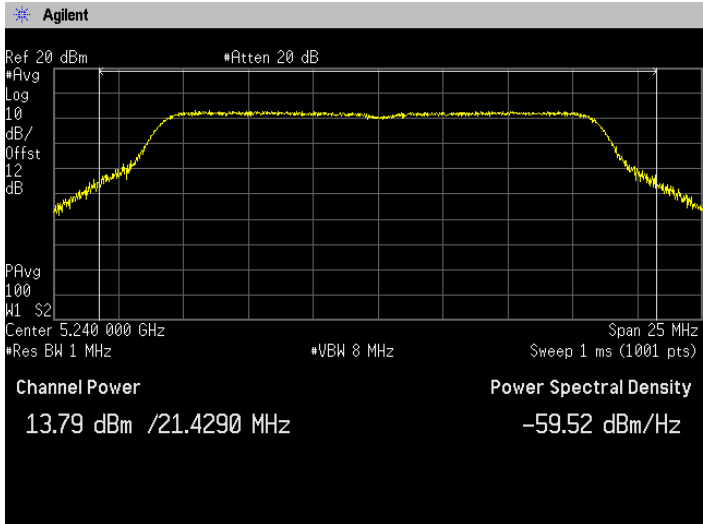


(5.3GHz Band)
Channel: 52

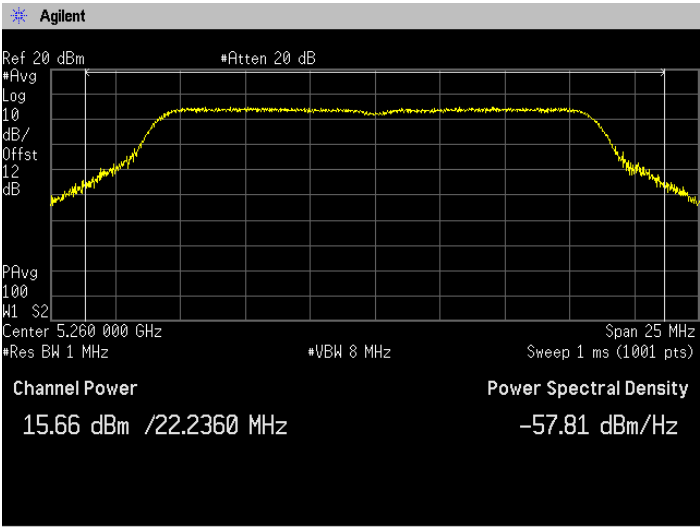

Channel: 56

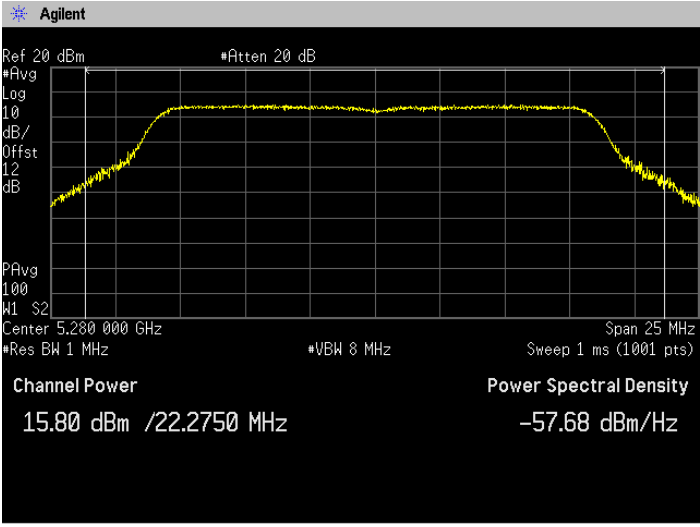


Channel: 64

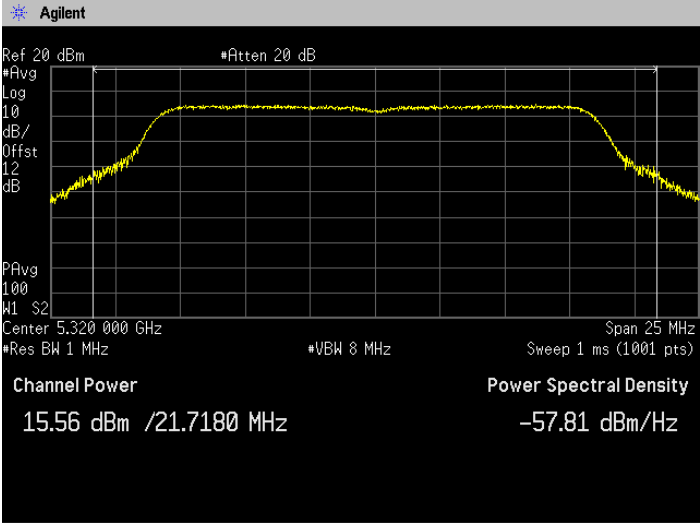


(5.6GHz Band)


Channel: 100

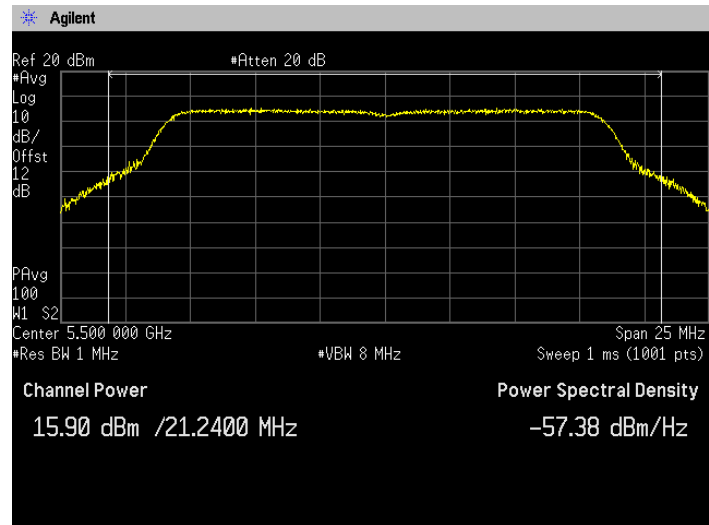


Channel: 116

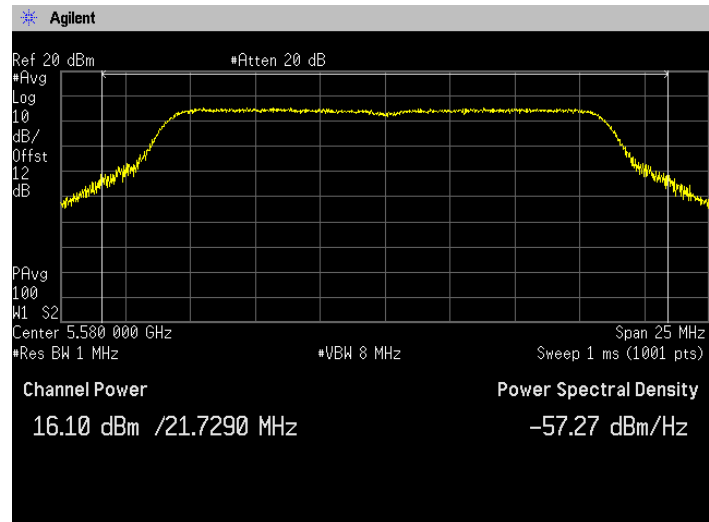


Channel: 140

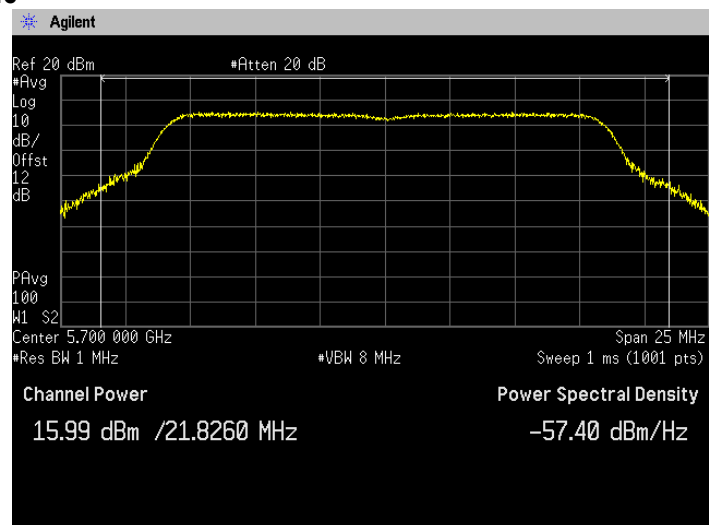


[IEEE802.11n (HT20)]
(5.2GHz Band)
Channel: 36

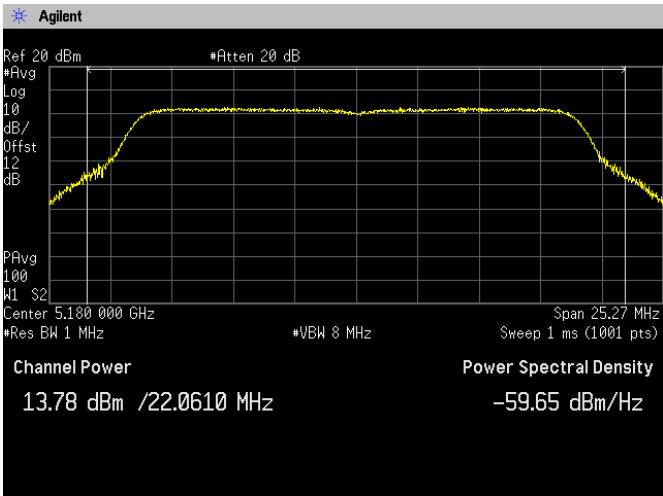


Channel: 40

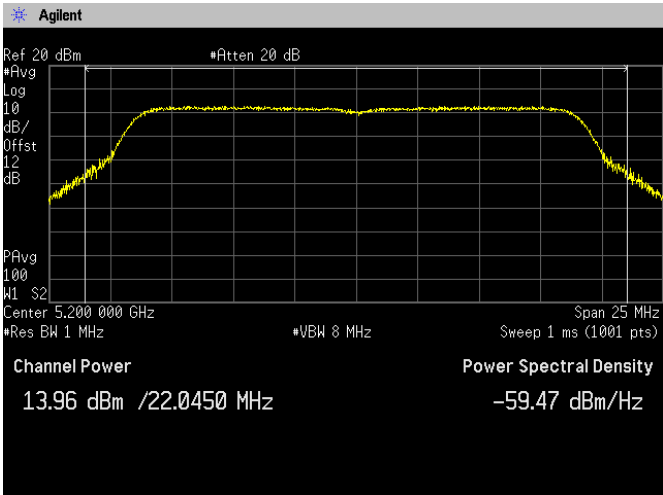


Channel: 48

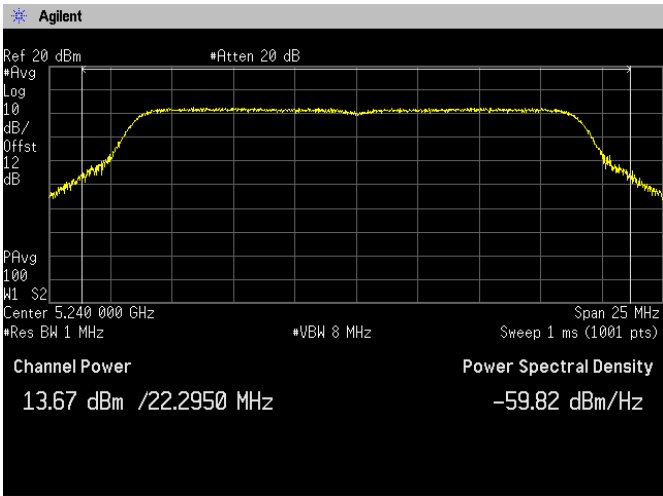


(5.3GHz Band)
Channel: 52

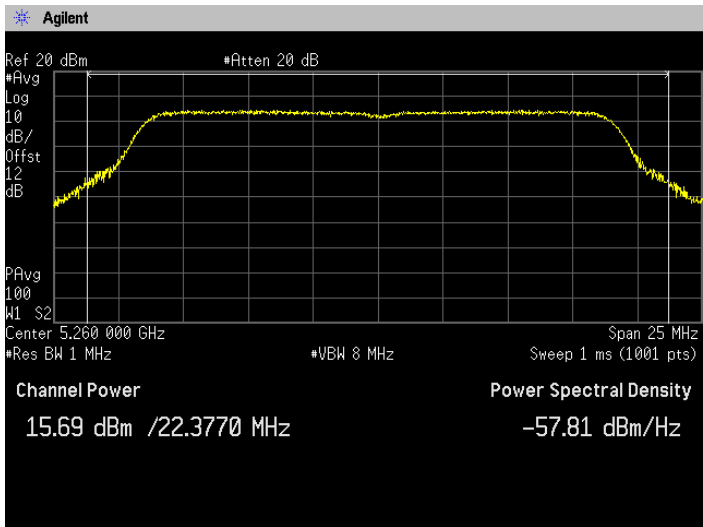

Channel: 56

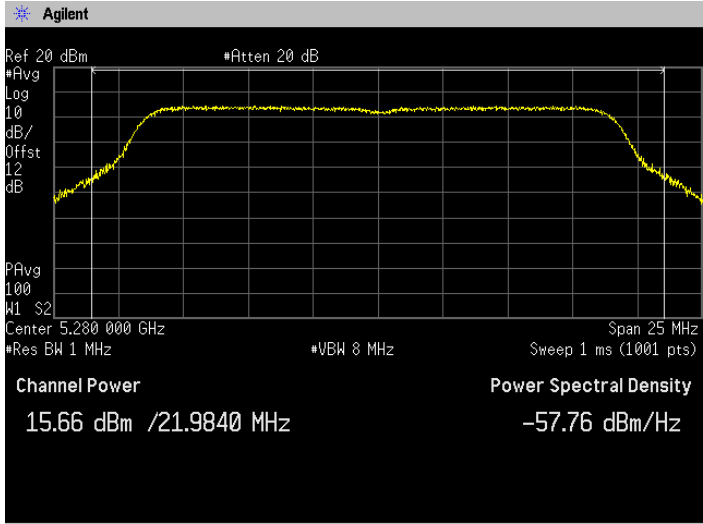


Channel: 64

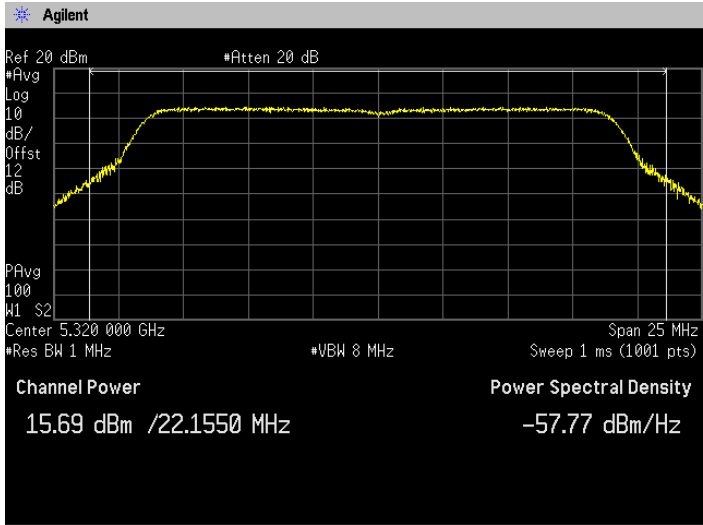


(5.6GHz Band)


Channel: 100

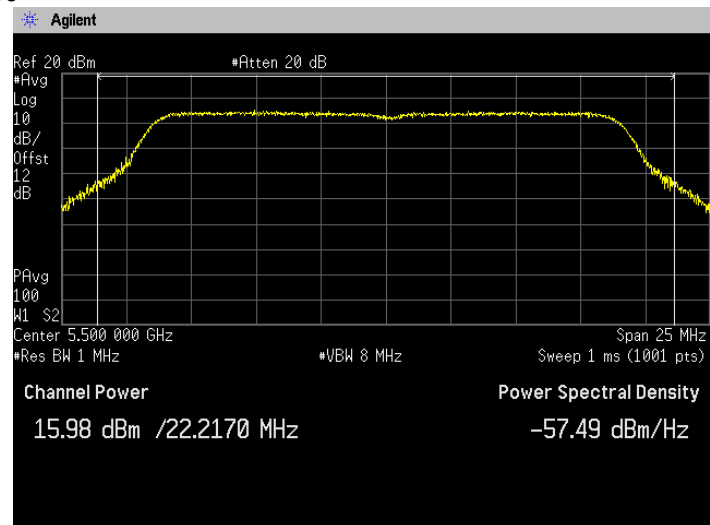


Channel: 116

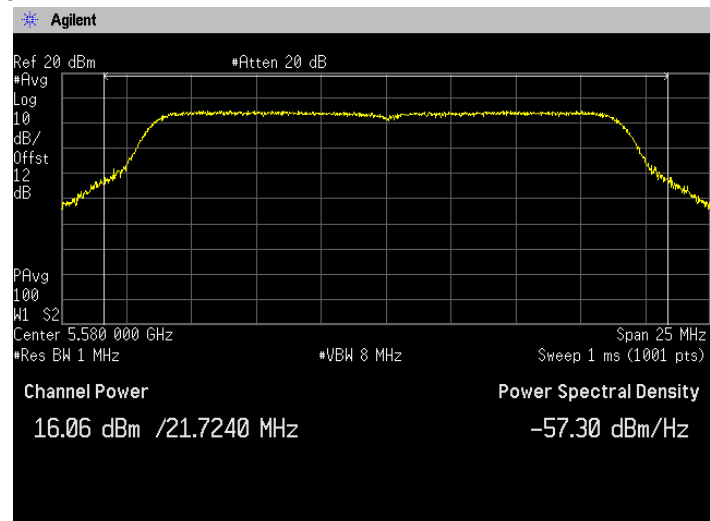


Channel: 140

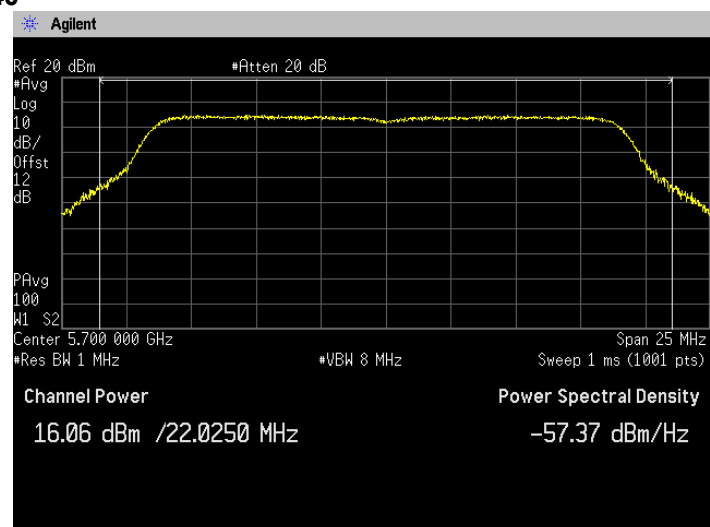


[IEEE802.11n (HT40)]
(5.2GHz Band)
Channel: 38

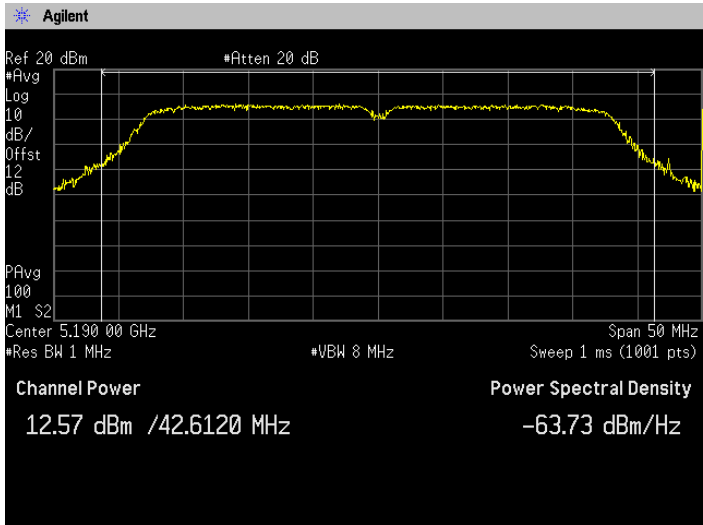


Channel: 46

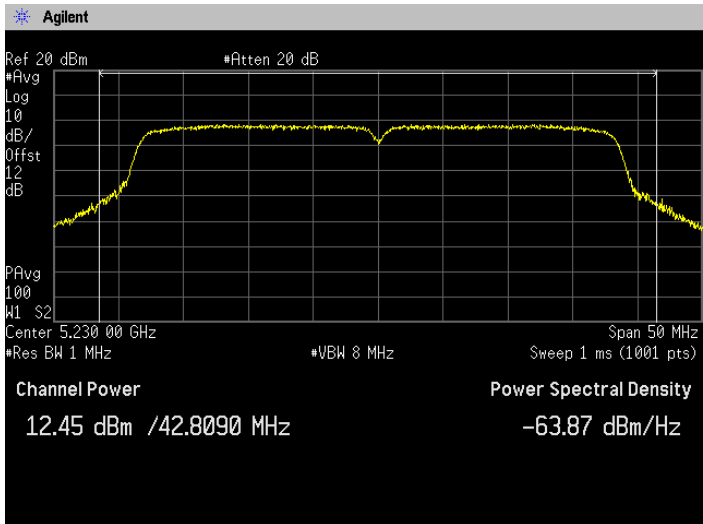


(5.3GHz Band)
Channel: 54

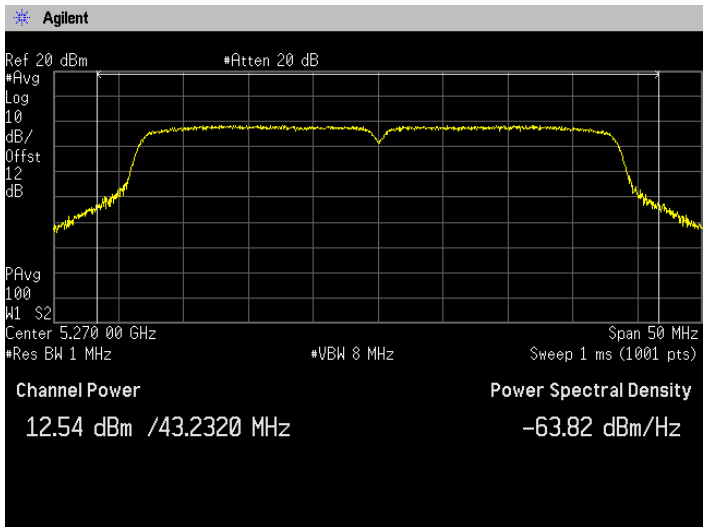


Channel: 62

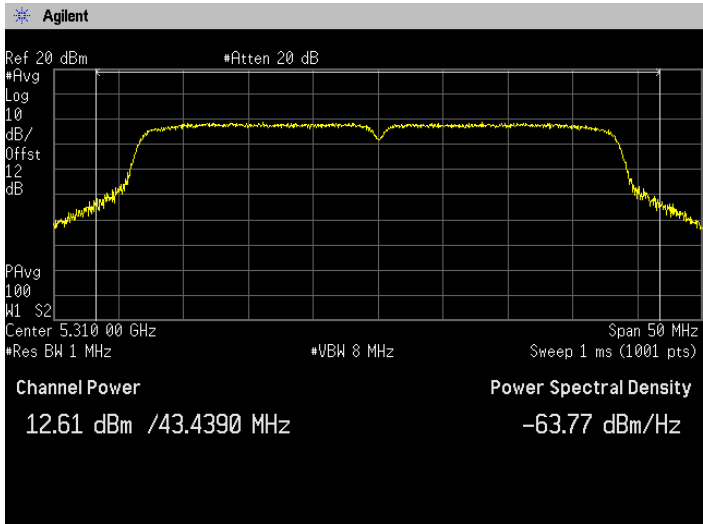


(5.6GHz Band)
Channel: 102

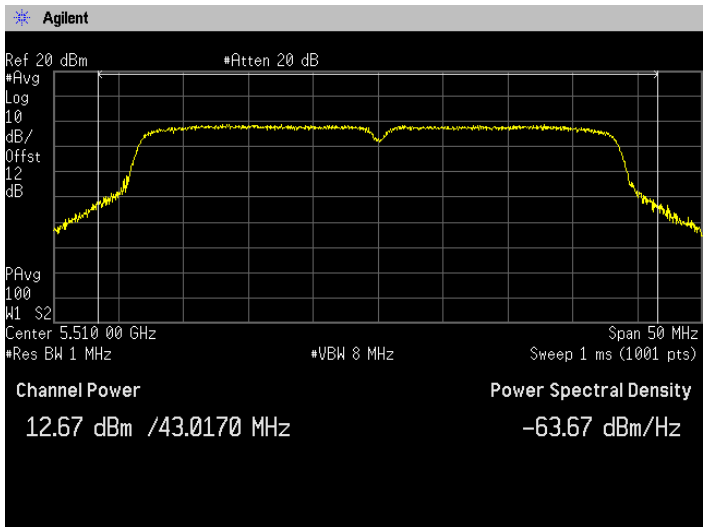


Channel: 110

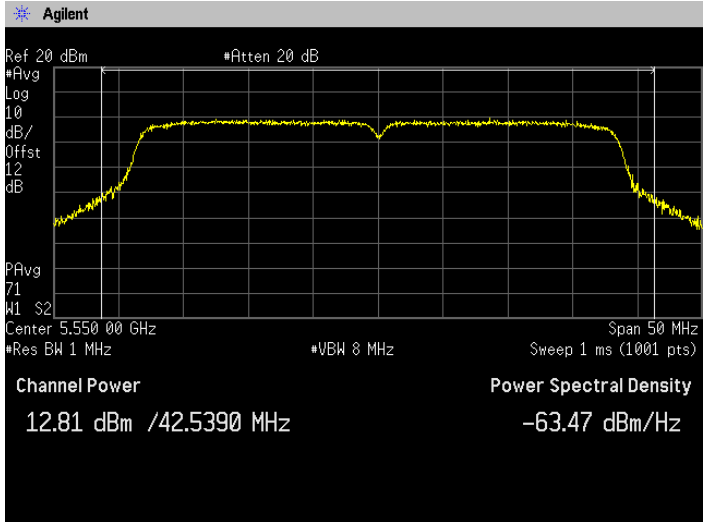


Channel: 134

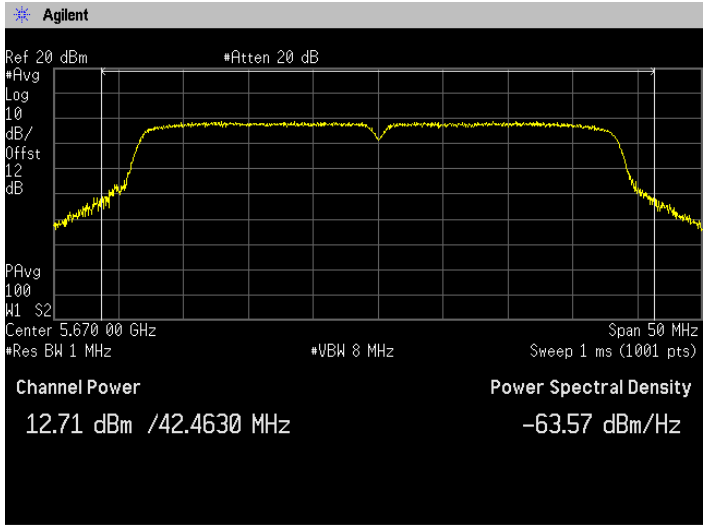


[IEEE802.11ac (HT80)]
(5.2GHz Band)
Channel: 42

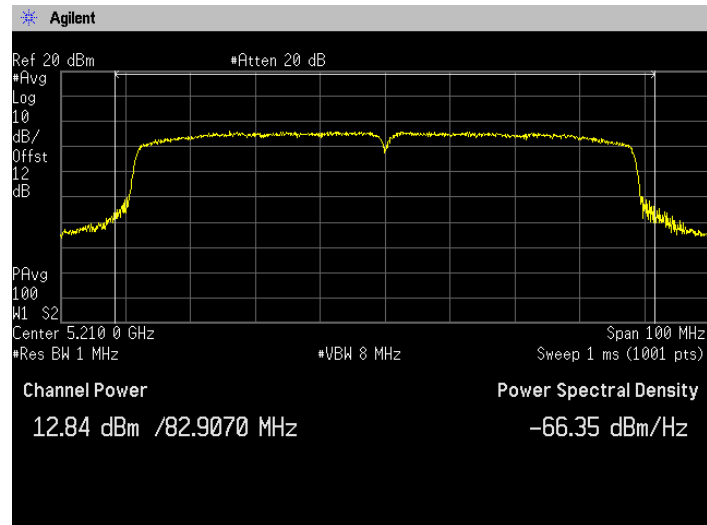

(5.3GHz Band)
Channel: 58

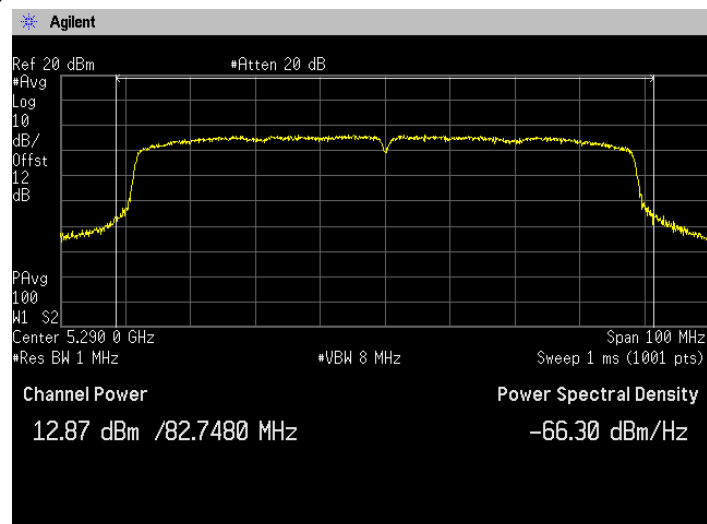

(5.6GHz Band)
Channel: 106

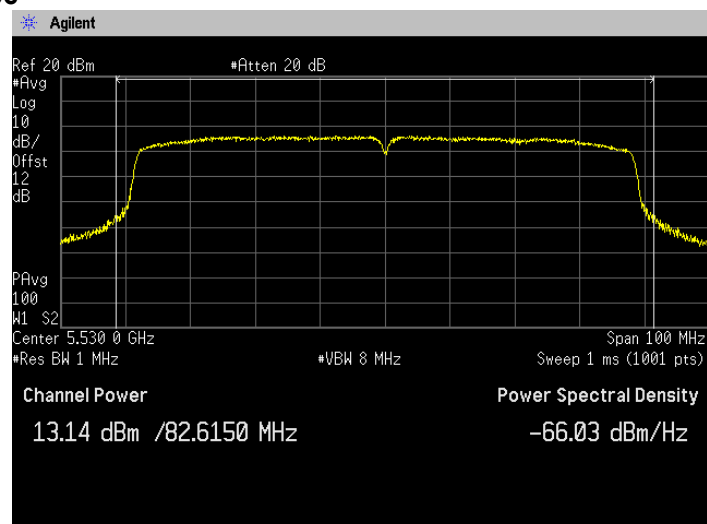

6. Peak Power Spectral Density

6.1 Measurement procedure [FCC 15.407(a), KDB789033]

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=1MHz, VBW=8MHz, Span=25MHz/50MHz/100MHz, Sweep=Auto,
- Detector=RMS, Trace mode=Averaging


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

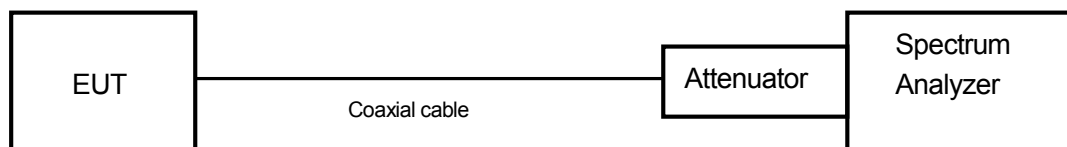

6.2 Limit

- (1) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6dBi.
- (2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6dBi.
- (3) For the 5.725-5.85GHz bands, the maximum power spectral density shall not exceed 30dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

<Peak Power Spectral Density Limit Calculation>

Band	Antenna Gain (dBi)	Limit (dBm)
5.2GHz Band	-1.2	11
5.3GHz Band	-1.2	11
5.6GHz Band	-0.1	11

6.3 Measurement result

Date : November 14, 2014
 Temperature : 23.6 [°C]
 Humidity : 47.1 [%]
 Test place : Shielded room No.4

Tested by : Hikaru shibata

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11a	36	5180	3.075	1.362	1.370	0.994	-	3.075
	40	5200	3.117					3.117
	48	5240	2.891					2.891
	52	5260	4.830	1.362	1.372	0.993	-	4.830
	56	5280	5.109					5.109
	64	5320	4.751					4.751
	100	5500	5.352	1.362	1.372	0.993	-	5.352
	116	5580	5.139					5.139
	140	5700	5.394					5.394

Note1: X = On time / (On + Off time), DCF=10log (1/x)

Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11n (20MHz)	36	5180	3.057	1.274	1.282	0.994	-	3.057
	40	5200	2.639					2.639
	48	5240	2.879					2.879
	52	5260	4.650	1.270	1.280	0.992	-	4.650
	56	5280	4.606					4.606
	64	5320	4.273					4.273
	100	5500	4.789	1.276	1.284	0.994	-	4.789
	116	5580	4.880					4.880
	140	5700	4.829					4.829

Note1: X = On time / (On + Off time), DCF=10log (1/x)

Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11n (40MHz)	38	5190	-1.599	0.633	0.645	0.981	-	-1.599
	46	5230	-1.893					-1.893
	54	5270	-1.907	0.635	0.636	0.998	-	-1.907
	62	5310	-1.682					-1.682
	102	5510	-1.484	0.635	0.636	0.998	-	-1.484
	110	5550	-1.096					-1.096
	134	5670	-1.179					-1.179

Note1: $X = \text{On time} / (\text{On} + \text{Off time})$, $\text{DCF} = 10 \log (1/x)$


Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)

Mode	Channel	Frequency (MHz)	Reading (dBm)	Duty Cycle			DCF (dB)	Test Result (dBm)
				On Time(ms)	On+Off Time(ms)	X		
802.11ac (80MHz)	42	5210	-3.891	0.246	0.258	0.953	0.207	-3.684
	58	5290	-3.932	0.245	0.257	0.953	0.208	-3.724
	106	5530	-3.804	0.248	0.258	0.961	0.172	-3.632


Note1: $X = \text{On time} / (\text{On} + \text{Off time})$, $\text{DCF} = 10 \log (1/x)$

Note2: Test Result = Reading + DCF (If transmit duty cycle < 98 percent)


6.4 Trace data
[IEEE802.11a]
(5.2GHz Band)
Channel: 36

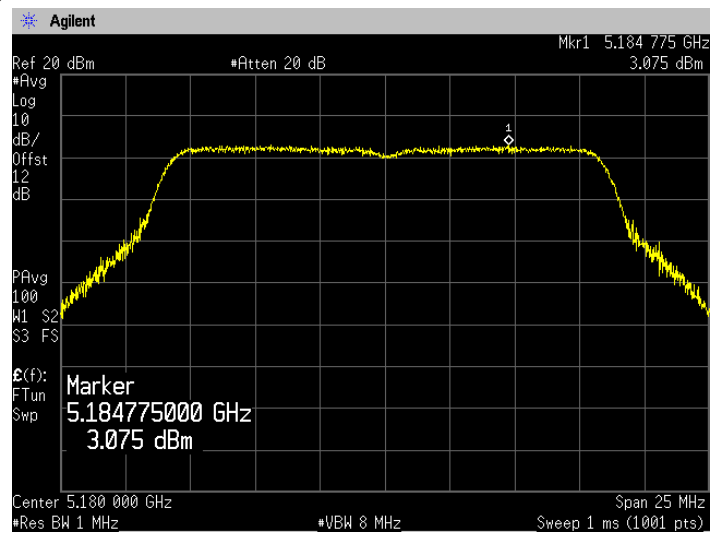

Channel: 40

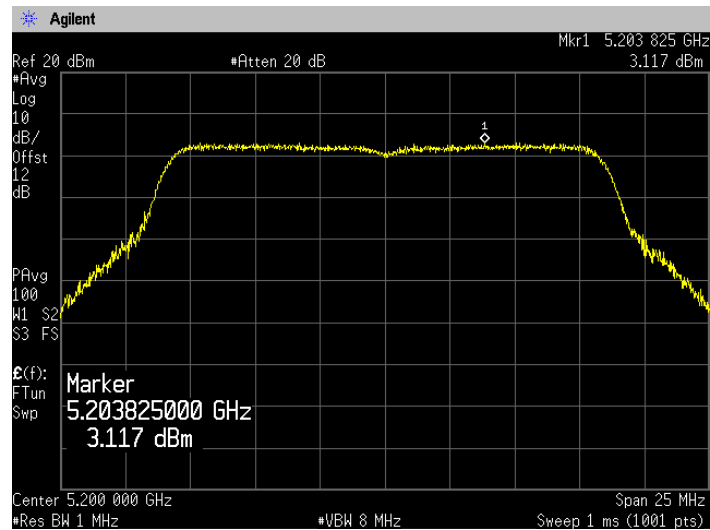


Channel: 48

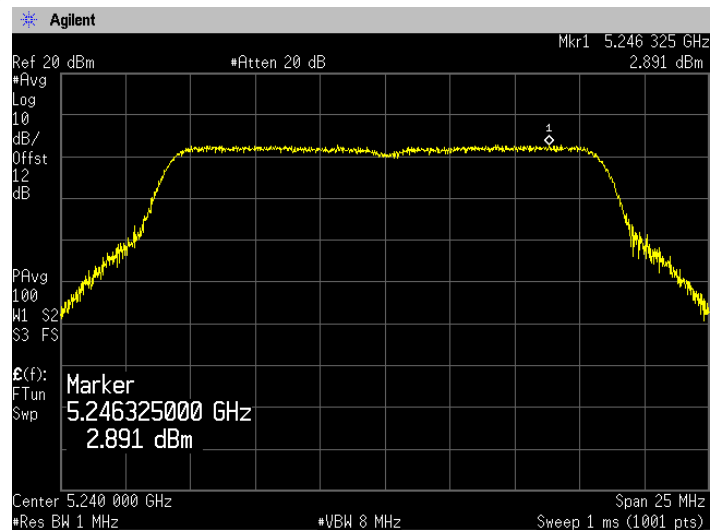


(5.3GHz Band)


Channel: 52

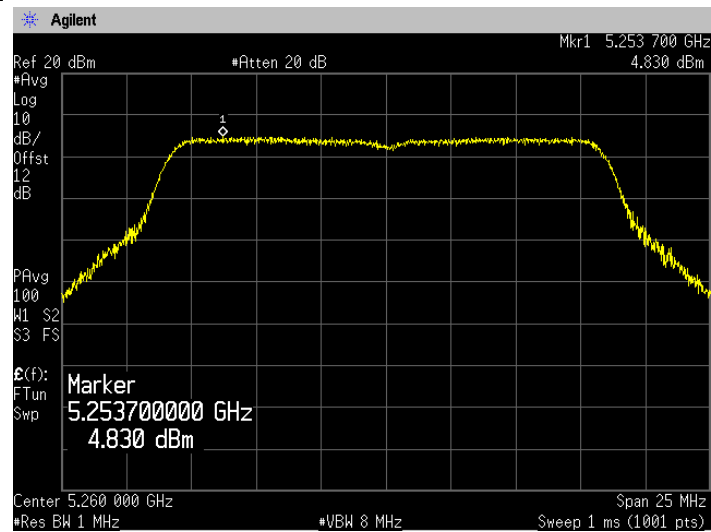

Channel: 56

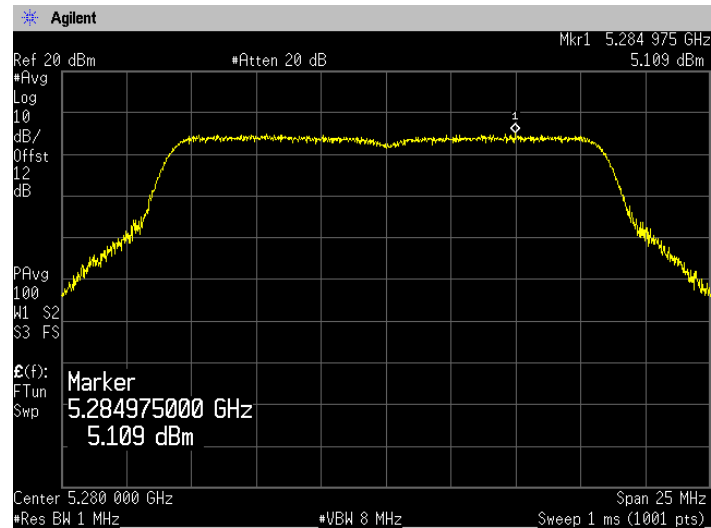


Channel: 64

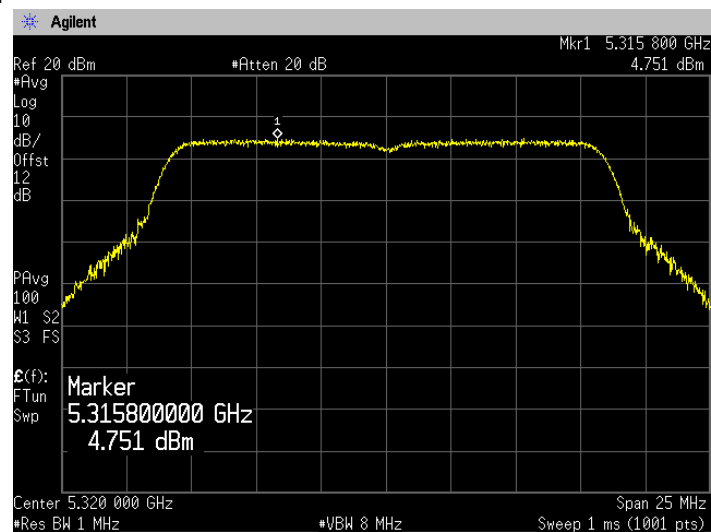


(5.6GHz Band)


Channel: 100

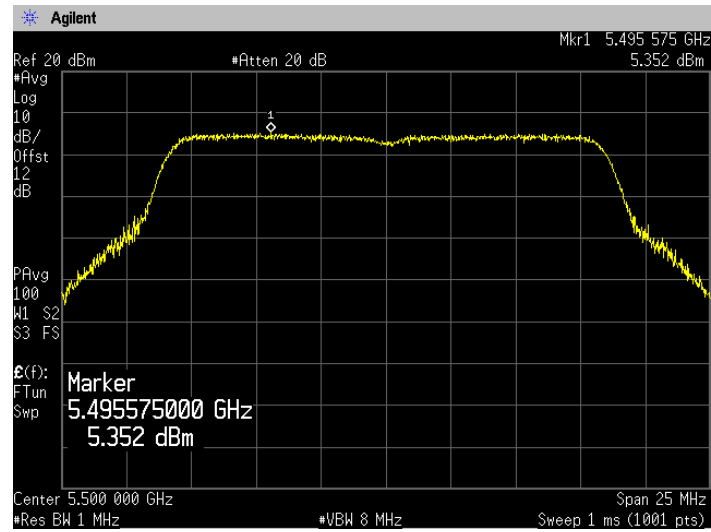


Channel: 116

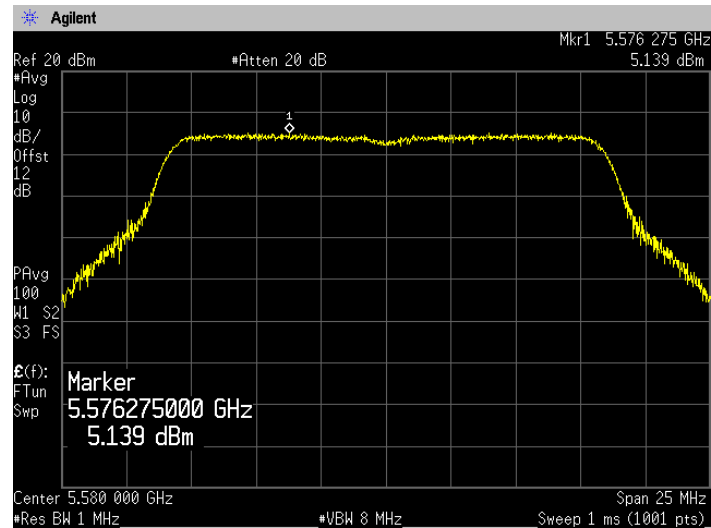


Channel: 140

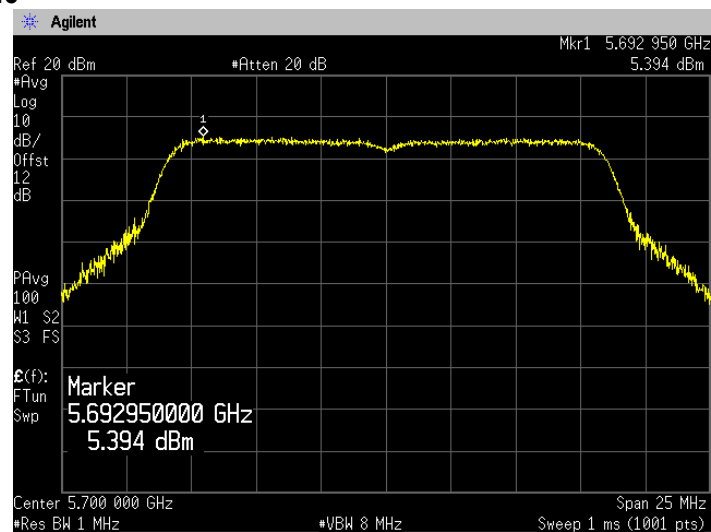


**[IEEE802.11n (HT20)]
(5.2GHz Band)
Channel: 36**

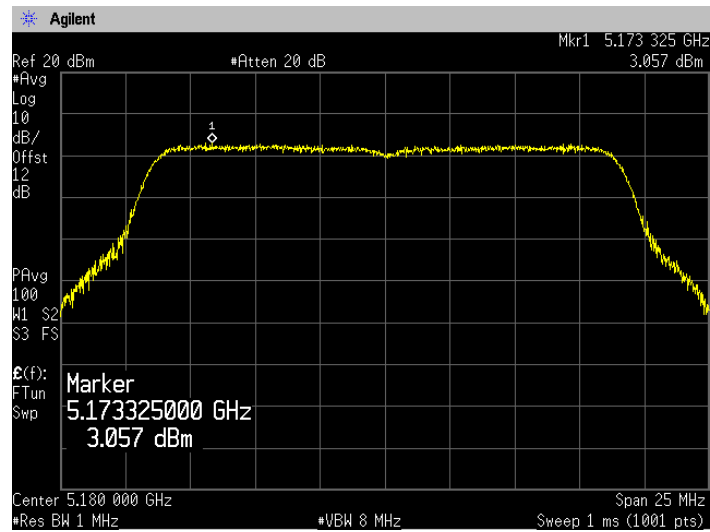

Channel: 40

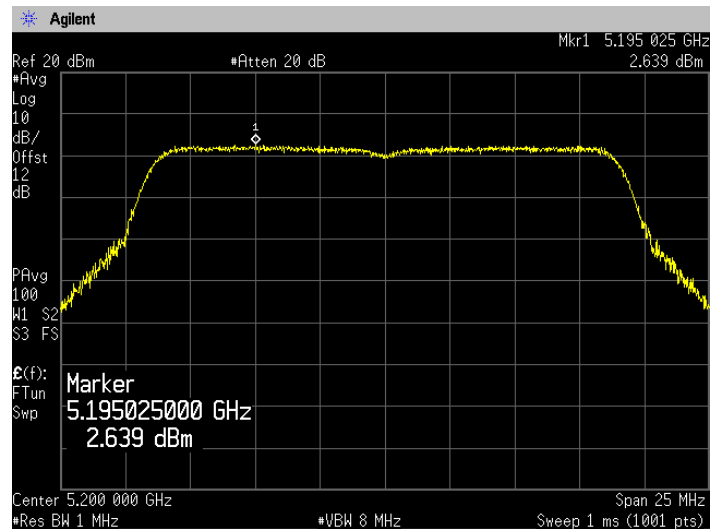


Channel: 48

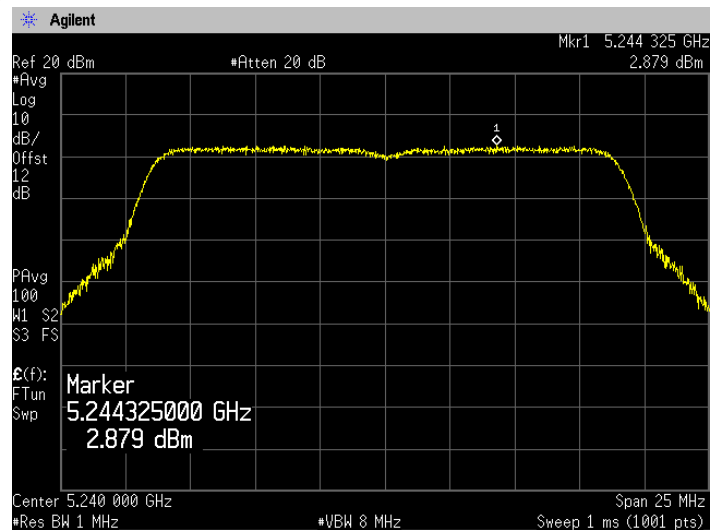


(5.3GHz Band)


Channel: 52

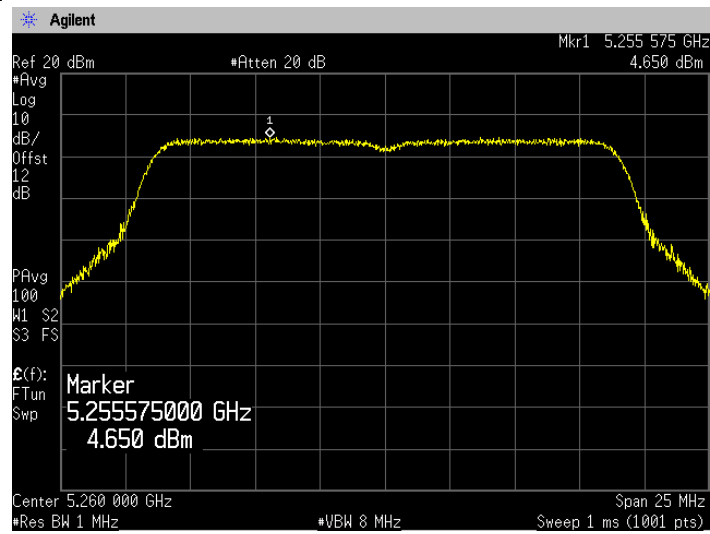

Channel: 56

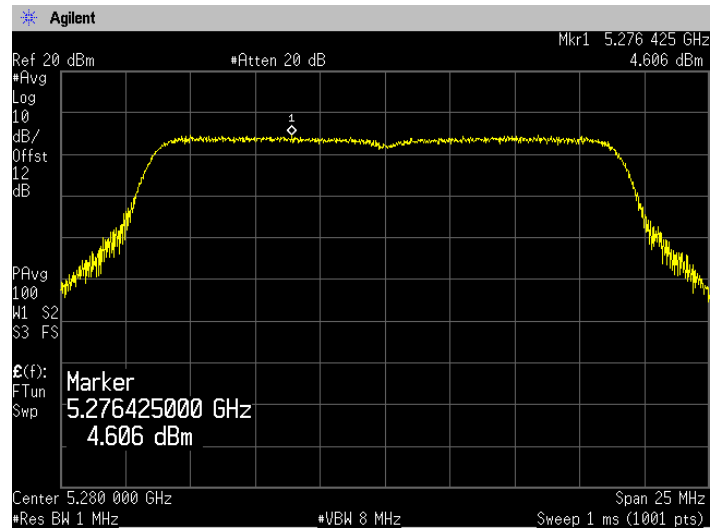


Channel: 64

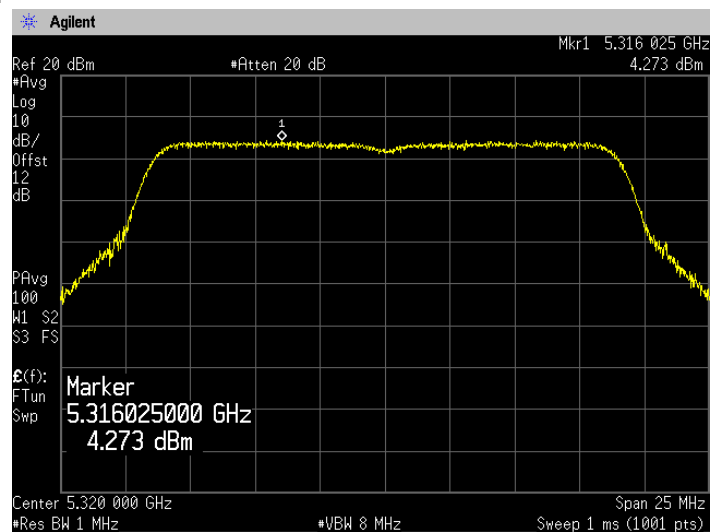


(5.6GHz Band)


Channel: 100

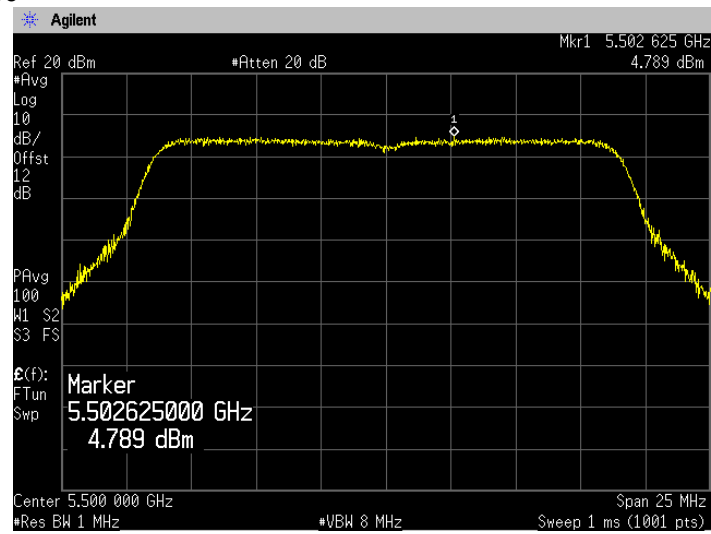


Channel: 116

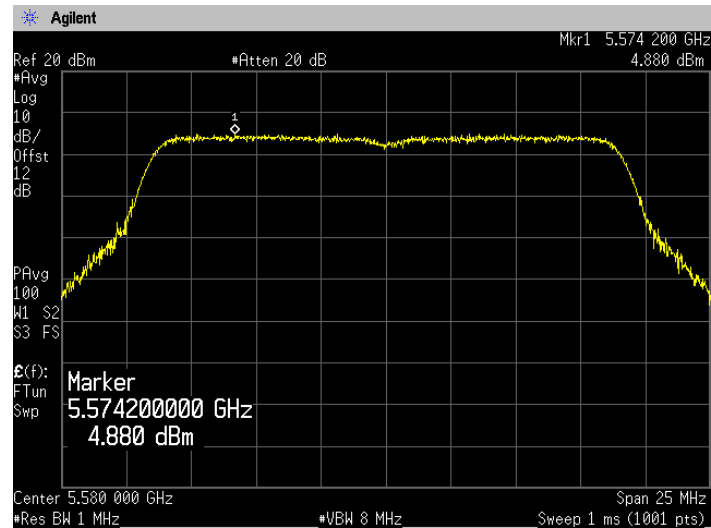


Channel: 140

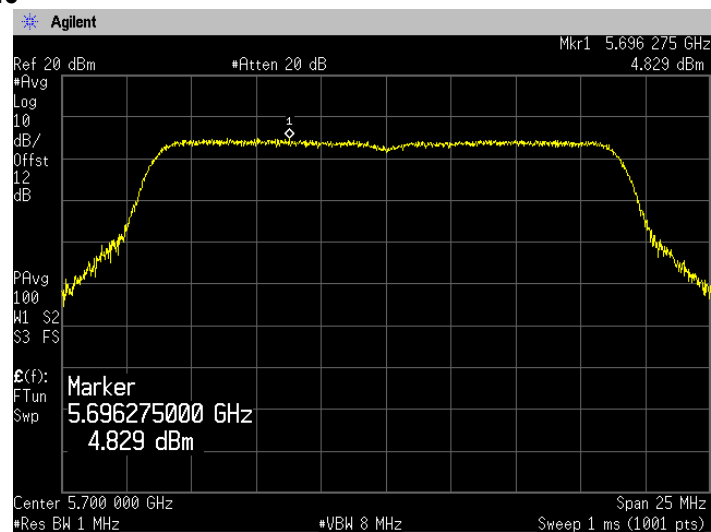


[IEEE802.11n (HT40)]
(5.2GHz Band)
Channel: 38

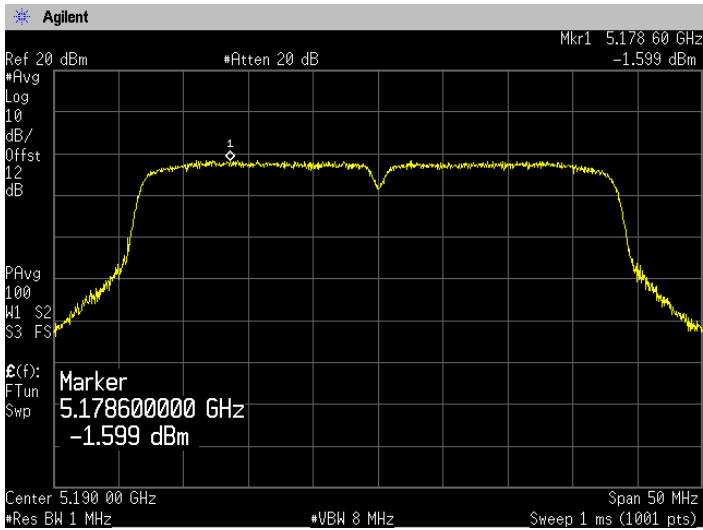


Channel: 46

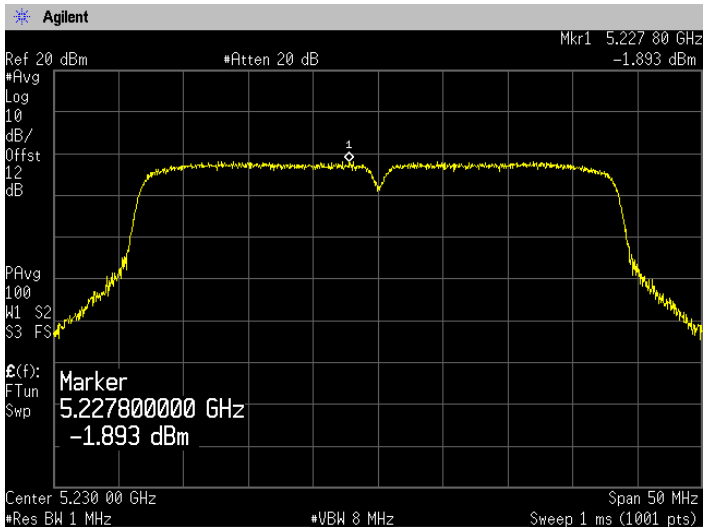


(5.3GHz Band)
Channel: 54

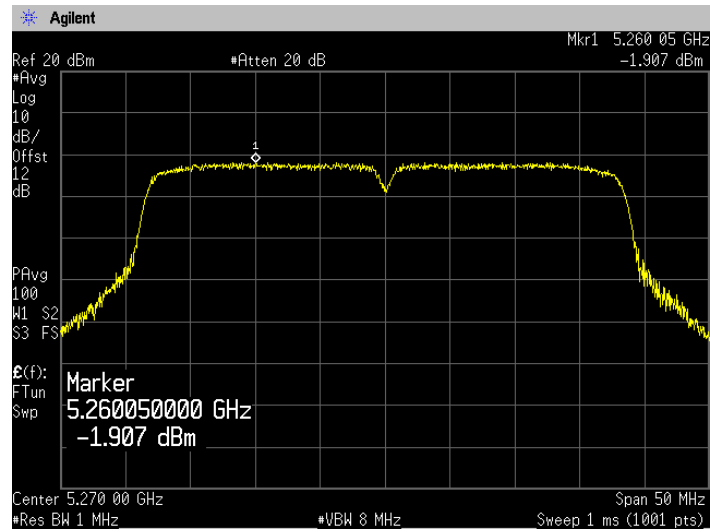


Channel: 62

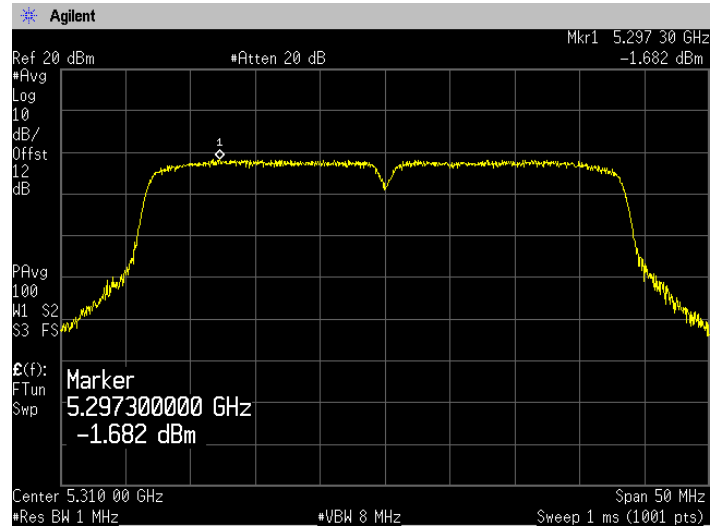


(5.6GHz Band)
Channel: 102

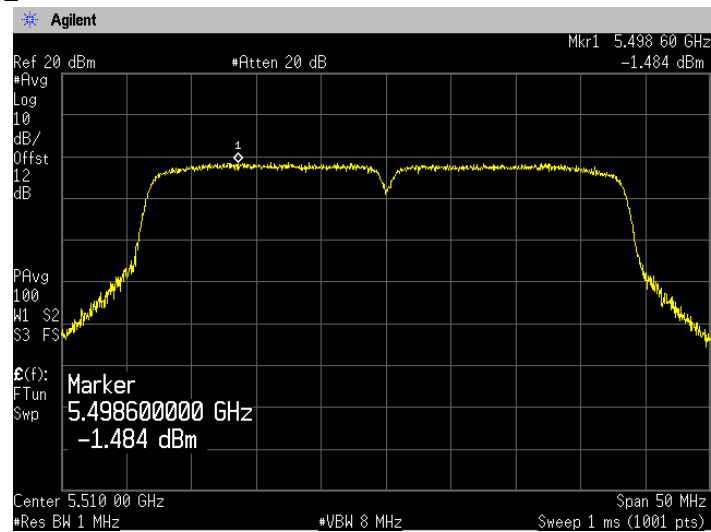


Channel: 110

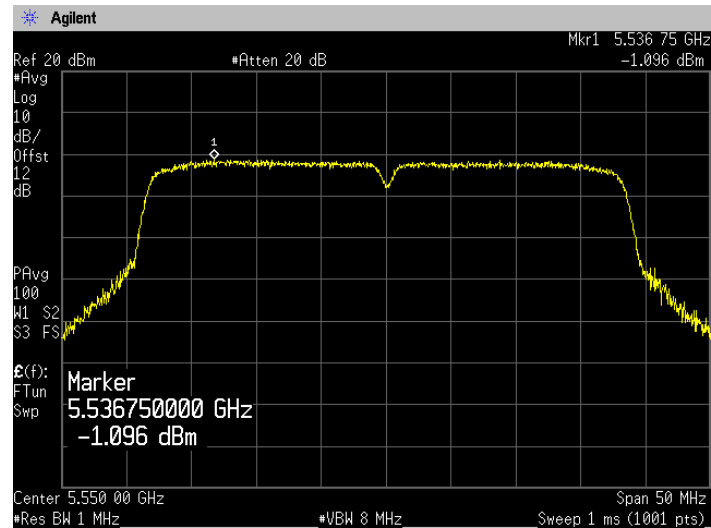


Channel: 134

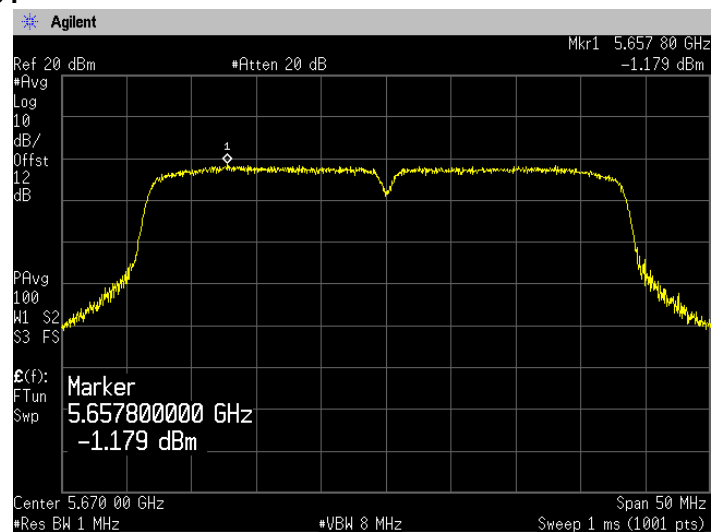


[IEEE802.11ac (HT80)]
(5.2GHz Band)
Channel: 42

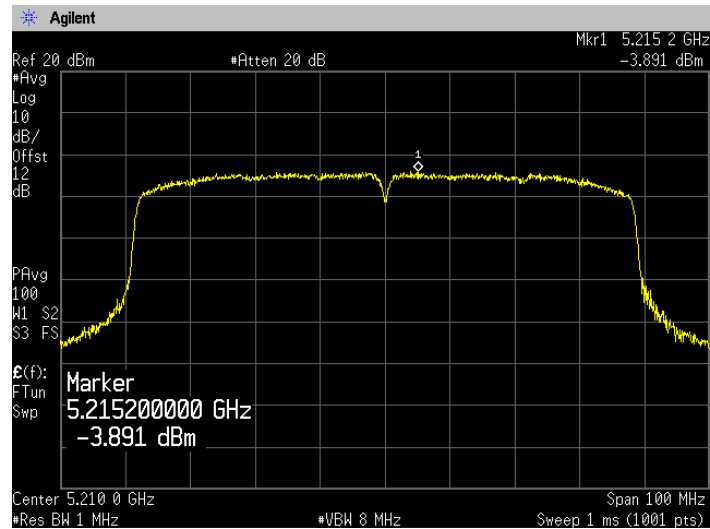

(5.3GHz Band)
Channel: 58

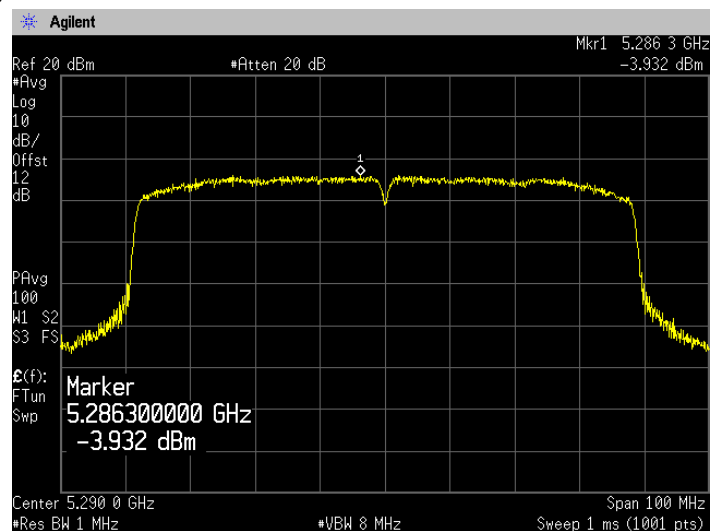

(5.6GHz Band)
Channel: 106

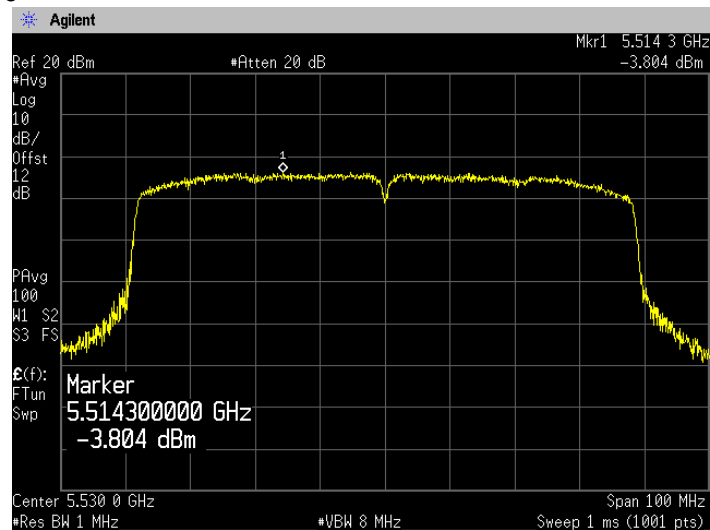

7. Radiated Emissions (Restricted Bands of Operation)

7.1 Measurement procedure

[FCC 15.407(b), 15.205, 15.209, KDB789033]

Test was applied by following conditions.

Frequency range	: 30MHz to 40GHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m
Test receiver setting	Below 1GHz
- Detector	: Quasi-peak
- Bandwidth	: 120kHz
Spectrum analyzer setting	Above 1GHz
- Peak	: RBW=1MHz, VBW=1MHz, Span=0Hz, Sweep=auto
- Average	: RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto
	Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (TRILOG antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode, Rx mode

- Test configuration

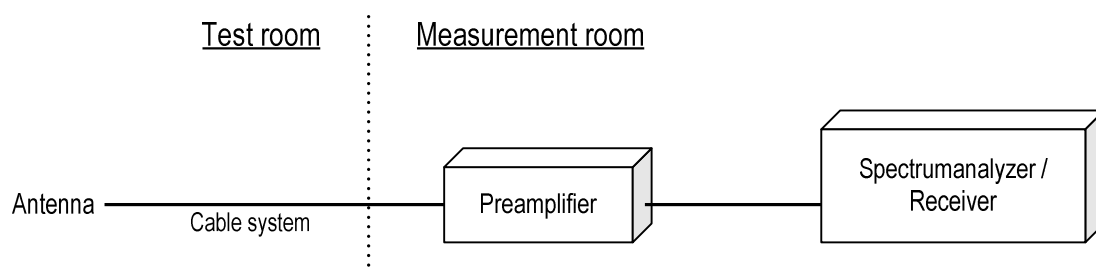

7.2 Calculation method

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

7.3 Limit

- (1) For transmitters operating in the 5.15-5.25GHz band: all emissions outside of the 5.15-5.35GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: all emissions outside of the 5.15-5.35GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: all emissions outside of the 5.47 5-5.725GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band: all emissions within the frequency range from the band edge to 10MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

7.4 Test data

Date	: October 28, 2014		
Temperature	: 23.9 [°C]		
Humidity	: 34.6 [%]	Tested by	:
Test place	: 3m Semi-anechoic chamber		<u>Taiki Watanabe</u>
Date	: October 29, 2014		
Temperature	: 21.1 [°C]		
Humidity	: 28.1 [%]	Tested by	:
Test place	: 3m Semi-anechoic chamber		<u>Taiki Watanabe</u>
Date	: October 30, 2014		
Temperature	: 21.3 [°C]		
Humidity	: 32.1 [%]	Tested by	:
Test place	: 3m Semi-anechoic chamber		<u>Taiki Watanabe</u>
Date	: November 1, 2014		
Temperature	: 20.8 [°C]		
Humidity	: 40.6 [%]	Tested by	:
Test place	: 3m Semi-anechoic chamber		<u>Taiki Watanabe</u>
Date	: November 5, 2014		
Temperature	: 20.2 [°C]		
Humidity	: 41.6 [%]	Tested by	:
Test place	: 3m Semi-anechoic chamber		<u>Taiki Watanabe</u>
Date	: November 6, 2014		
Temperature	: 16.2 [°C]		
Humidity	: 44.5 [%]	Tested by	:
Test place	: 3m Semi-anechoic chamber		<u>Taiki Watanabe</u>
Date	: November 8, 2014		
Temperature	: 25.1 [°C]		
Humidity	: 45.1 [%]	Tested by	:
Test place	: 3m Semi-anechoic chamber		<u>Taiki Watanabe</u>

**[IEEE802.11a]
(5.2GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	36	5180	5127.65	V	PK	43.7	14.2		57.9	74.0	16.1
			5127.65	V	AV	30.7	14.2		44.9	54.0	9.1
			10360.00	V	PK	38.8	24.3		63.1	68.2	5.1
	40	5200	10400.00	V	PK	38.4	24.4		62.8	68.2	5.4
	48	5240	10480.00	V	PK	37.9	24.4		62.3	68.2	5.9

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	52	5260	10520.00	V	PK	38.1	24.4		62.5	68.2	5.7
	56	5280	10560.00	V	PK	38.8	24.5		63.3	68.2	4.9
	64	5320	5372.44	V	PK	45.1	15.0		60.1	74.0	13.9
			5372.44	V	AV	31.0	15.0		46.0	54.0	8.0
			10640.00	V	PK	38.5	24.8		63.3	74.0	10.7

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	100	5500	5468.50	V	PK	49.4	15.2		64.6	74.0	9.4
			5468.50	V	AV	29.3	15.2		44.5	54.0	9.5
			11000.00	V	PK	37.9	25.8		63.7	68.2	4.5
	116	5580	11160.00	V	PK	37.6	26.3		63.9	68.2	4.3
	140	5700	5726.50	V	PK	50.2	15.8		66.0	74.0	8.0
			5726.50	V	AV	28.9	15.8		44.7	54.0	9.3
			11400.00	V	PK	37.3	26.6		63.9	68.2	4.3

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)] + DCF (If transmit duty cycle < 98 percent)
2. DCF = 20log (1/x) , x = On time / (On + Off time)
3. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
4. No emission was detected in the receive mode.

[IEEE802.11n (HT20)]
(5.2GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	36	5180	5128.40	V	PK	43.7	14.2		57.9	74.0	16.1
			5128.40	V	AV	31.8	14.2		46.0	54.0	8.0
			10360.00	V	PK	39.2	24.3		63.5	68.2	4.7
	40	5200	5148.20	V	PK	44.6	14.3		58.9	74.0	15.1
			5148.20	V	AV	32.1	14.3		46.4	54.0	7.6
			10400.00	V	PK	37.5	24.4		61.9	68.2	6.3
	48	5240	10480.00	V	PK	37.5	24.4		61.9	68.2	6.3

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	52	5260	10520.00	V	PK	38.2	24.4		62.6	68.2	5.6
	56	5280	10560.00	V	PK	38.1	24.5		62.6	68.2	5.6
	64	5320	5372.20	V	PK	43.1	15.0		58.1	74.0	15.9
			5372.20	V	AV	29.5	15.0		44.5	54.0	9.5
			10640.00	V	PK	37.9	24.8		62.7	68.2	5.5

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	100	5500	5467.90	V	PK	51.2	15.2		66.4	74.0	7.6
			5467.90	V	AV	28.7	15.2		43.9	54.0	10.1
			11000.00	V	PK	37.4	25.8		63.2	68.2	5.0
	110	5580	11160.00	V	PK	37.6	26.3		63.9	68.2	4.3
	140	5700	5727.75	V	PK	49.7	15.8		65.5	74.0	8.5
			5727.75	V	AV	27.8	15.8		43.6	54.0	10.4
			11400.00	V	PK	37.4	26.6		64.0	68.2	4.2

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)] + DCF (If transmit duty cycle < 98 percent)
2. DCF = 20log (1/x) , x = On time / (On + Off time)
3. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
4. No emission was detected in the receive mode.

[IEEE802.11n (HT40)]
(5.2GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	38	5190	5149.10	V	PK	45.3	14.3		59.6	74.0	14.4
			5149.10	V	AV	29.5	14.3		43.8	54.0	10.2
			10380.00	V	PK	38.5	24.3		62.8	68.2	5.4
	46	5230	10460.00	V	PK	38.3	24.4		62.7	68.2	5.5

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	54	5270	10540.00	V	PK	37.6	24.5		62.1	68.2	6.1
	62	5310	5351.00	V	PK	49.1	15.0		64.1	74.0	9.9
			5351.00	V	AV	30.4	15.0		45.4	54.0	8.6
			10620.00	V	PK	37.7	24.7		62.4	68.2	5.8

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	102	5510	5468.80	V	PK	47.5	15.2		62.7	74.0	11.3
			5468.80	V	AV	30.0	15.2		45.2	54.0	8.8
			11020.00	V	PK	38.3	25.9		64.2	68.2	4.0
	110	5590	11100.00	V	PK	37.7	26.2		63.9	68.2	4.3
	134	5670	11340.00	V	PK	37.4	26.5		63.9	68.2	4.3

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)] + DCF (If transmit duty cycle < 98 percent)
2. DCF = 20log (1/x) , x = On time / (On + Off time)
3. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
4. No emission was detected in the receive mode.

**[IEEE802.11ac (HT80)]
(5.2GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	42	5210	5140.40	V	PK	47.0	14.3		61.3	74.0	12.7
			5140.40	V	AV	31.3	14.3	0.414	46.0	54.0	8.0
			10420.00	V	PK	37.5	24.4		61.9	68.2	6.3

(5.3GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	58	5290	5353.36	V	PK	47.4	15.0		62.4	74.0	11.6
			5353.36	V	AV	31.9	15.0	0.415	47.3	54.0	6.7
			10580.00	V	PK	37.4	24.6		62.0	68.2	6.2

(5.6GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	106	5530	5469.50	V	PK	46.9	15.2		62.1	74.0	11.9
			5469.50	V	AV	29.4	15.2	0.343	44.9	54.0	9.1
			11060.00	V	PK	37.7	26.0		63.7	68.2	4.5

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)] + DCF (If transmit duty cycle < 98 percent)
2. DCF = 20log (1/x) , x = On time / (On + Off time)
3. No emission were detected in frequency range 30MHz to 1000MHz at the 3 meters distance.
4. No emission was detected in the receive mode.

8. Frequency Stability

8.1 Measurement procedure [FCC 15.407(g)]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and $+60^{\circ}\text{C}$. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.


The EUT was set to operate with the following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

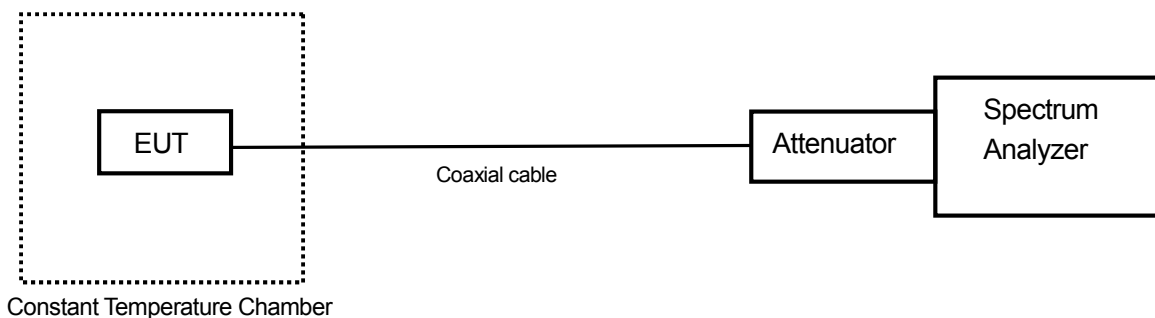

8.2 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified.

8.3 Measurement result

Date : November 20, 2014
 Temperature : 23.4 [°C]
 Humidity : 46.8 [%]
 Test place : Shielded room No.4

Tested by : Hikaru Shibata

[Channel: 36 (5180MHz)]

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [%]
3.80	25(Ref.)	5180052132	0.00000000
	60	5180029608	-4.34821879
	50	5180053396	0.24401299
	40	5180049346	-0.53783243
	30	5180039030	-2.52931817
	20	5180054776	0.51041957
	10	5180068523	3.16425387
	0	5180053478	0.25984294
	-10	5180050069	-0.39825854
	-20	5180062252	1.95364829
	-30	5180039910	-2.35943571
3.23	25	5180052562	0.08301075
4.37	25	5180029801	-4.31096048

[Channel: 64 (5320MHz)]

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [%]
3.80	25(Ref.)	5320058019	0.00000000
	60	5320042103	-2.99169670
	50	5320047192	-2.03512818
	40	5320042741	-2.87177319
	30	5320032773	-4.74543697
	20	5320054344	-0.69078194
	10	5320055451	-0.48270150
	0	5320059861	0.34623683
	-10	5320068663	2.00073006
	-20	5320066374	1.57047159
	-30	5320025661	-6.08226449
3.23	25	5320050382	-1.43551066
4.37	25	5320029632	-5.33584406

[Channel: 140 (5700MHz)]

Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]
3.80	25(Ref.)	5700046449	0.00000000
	60	5700038324	-1.42542698
	50	5700047105	0.11508678
	40	5700033061	-2.34875279
	30	5700045109	-0.23508580
	20	5700048325	0.32912013
	10	5700049172	0.47771541
	0	5700065710	3.37909527
	-10	5700061755	2.68524128
	-20	5700076800	5.32469345
	-30	5700034219	-2.14559655
3.23	25	5700033706	-2.23559582
4.37	25	5700038361	-1.41893581

9. AC Power Line Conducted Emissions

9.1 Measurement procedure [FCC 15.207]

Test was applied by following conditions.


Test method	: ANSI C63.4
Frequency range	: 0.15MHz to 30MHz
Test place	: 10m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Vertical Metal Reference Plane	: (W)2.0m × (H)2.0m 0.4m away from EUT
Test receiver setting	
- Detector	: Quasi-peak, Average
- Bandwidth	: 9kHz

EUT and peripherals are connected to 50Ω/50μH Line Impedance Stabilization Network (LISN) which are connected to reference ground plane, and are placed 80cm away from EUT. Excess of AC power cable is bundled in center.

LISN for peripheral is terminated in 50Ω.

EUT operating mode is selected to emit the maximum noise. Overall frequency range is investigated with spectrum analyzer using peak detector. Maximum emission configuration is determined by manipulating the EUT, peripherals, interconnecting cables. Then, emission measurements are performed with test receiver in above setting to each current-carrying conductor of the mains port. Sufficient time for EUT, peripherals and test equipment is provided in order for them to warm up to their normal operating condition. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits.

- Test configuration

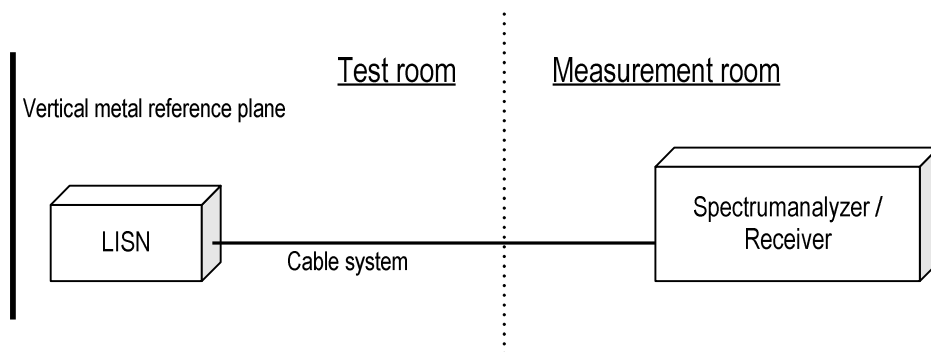

9.2 Calculation method

Emission level = Reading + (LISN. factor + Cable system loss)

Margin = Limit – Emission level


9.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

9.4 Test data

***** CONDUCTED EMISSION at MAINS PORT *****
 << 3m Semi-anechoic chamber >>

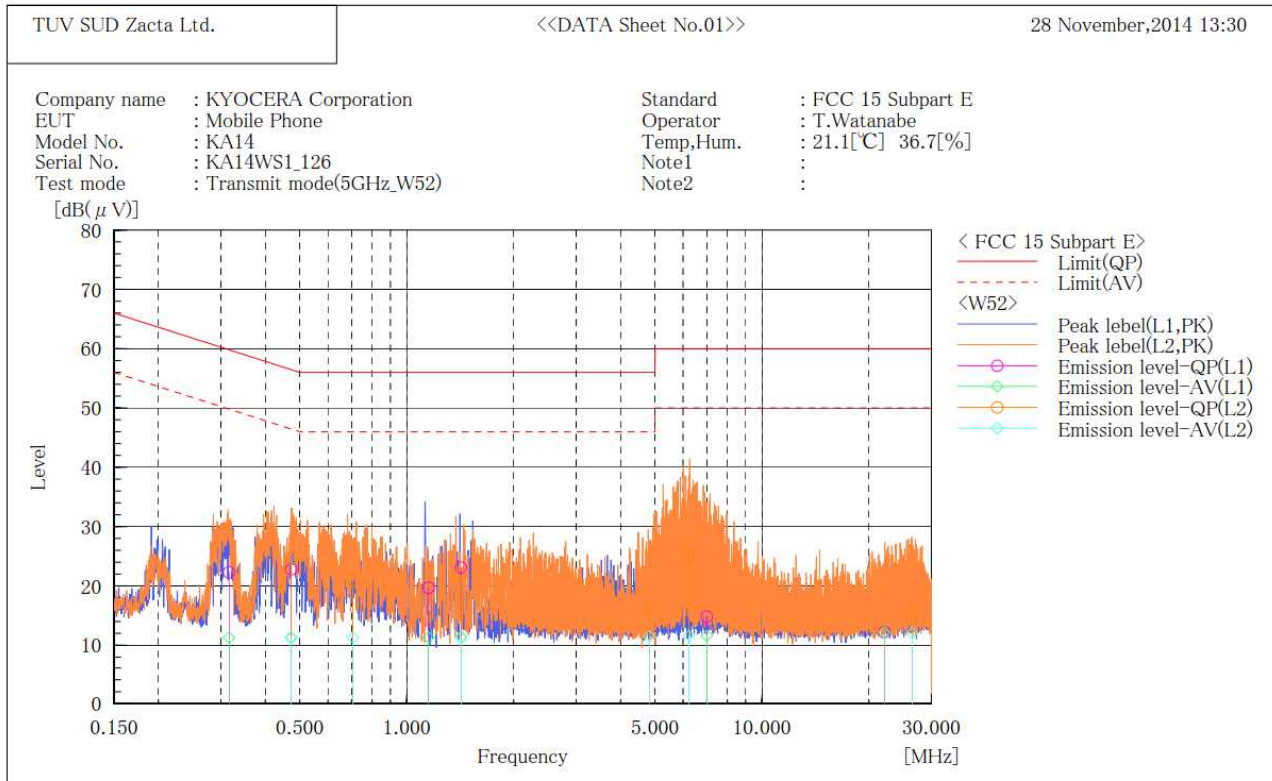

Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.316	12.0	1.0	10.3	22.3	11.3	59.8	49.8	37.5	38.5
2	0.473	12.5	1.0	10.3	22.8	11.3	56.5	46.5	33.7	35.2
3	1.152	9.4	1.0	10.3	19.7	11.3	56.0	46.0	36.3	34.7
4	1.423	12.7	1.0	10.4	23.1	11.4	56.0	46.0	32.9	34.6
5	6.999	4.2	1.0	10.6	14.8	11.6	60.0	50.0	45.2	38.4
6	22.084	1.0	1.0	11.2	12.2	12.2	60.0	50.0	47.8	37.8

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.472	14.3	1.0	10.3	24.6	11.3	56.5	46.5	31.9	35.2
2	0.706	10.6	1.0	10.3	20.9	11.3	56.0	46.0	35.1	34.7
3	1.422	11.4	1.0	10.3	21.7	11.3	56.0	46.0	34.3	34.7
4	4.813	5.9	1.0	10.5	16.4	11.5	56.0	46.0	39.6	34.5
5	6.228	14.7	1.0	10.6	25.3	11.6	60.0	50.0	34.7	38.4
6	26.456	4.6	1.0	11.1	15.7	12.1	60.0	50.0	44.3	37.9

***** CONDUCTED EMISSION at MAINS PORT *****
 << 3m Semi-anechoic chamber >>


TUV SUD Zacta Ltd.

<<DATA Sheet No.02>>

28 November,2014 13:58

Company name : KYOCERA Corporation
 EUT : Mobile Phone
 Model No. : KA14
 Serial No. : KA14WS1_126
 Test mode : Transmit mode(5GHz_W53)

Standard : FCC 15 Subpart E
 Operator : T.Watanabe
 Temp,Hum. : 21.1[°C] 36.7[%]
 Note1 :
 Note2 :

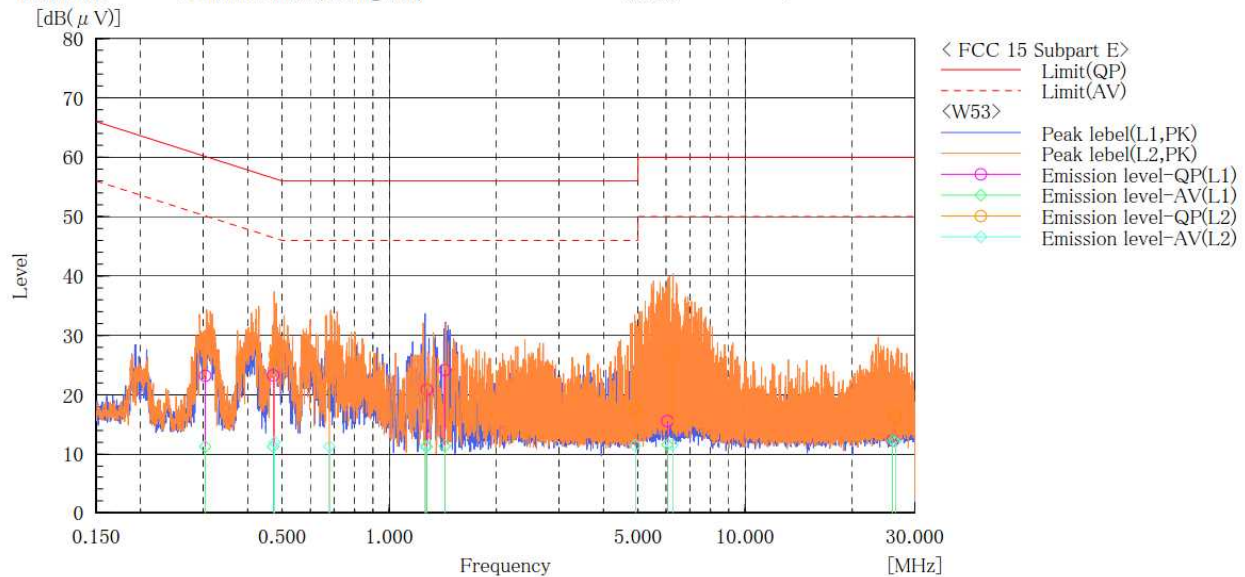

Final Result


--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.304	12.9	1.0	10.3	23.2	11.3	60.1	50.1	36.9	38.8
2	0.472	13.0	1.0	10.3	23.3	11.3	56.5	46.5	33.2	35.2
3	1.275	10.6	1.0	10.3	20.9	11.3	56.0	46.0	35.1	34.7
4	1.433	13.8	1.0	10.4	24.2	11.4	56.0	46.0	31.8	34.6
5	6.052	5.0	1.0	10.6	15.6	11.6	60.0	50.0	44.4	38.4
6	25.967	1.0	1.0	11.3	12.3	12.3	60.0	50.0	47.7	37.7

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.476	16.4	1.7	10.3	26.7	12.0	56.4	46.4	29.7	34.4
2	0.679	11.0	1.0	10.3	21.3	11.3	56.0	46.0	34.7	34.7
3	1.263	10.7	1.0	10.3	21.0	11.3	56.0	46.0	35.0	34.7
4	4.915	6.9	1.0	10.5	17.4	11.5	56.0	46.0	38.6	34.5
5	6.255	16.4	1.0	10.6	27.0	11.6	60.0	50.0	33.0	38.4
6	26.421	5.2	1.0	11.1	16.3	12.1	60.0	50.0	43.7	37.9

***** CONDUCTED EMISSION at MAINS PORT *****
 << 3m Semi-anechoic chamber >>

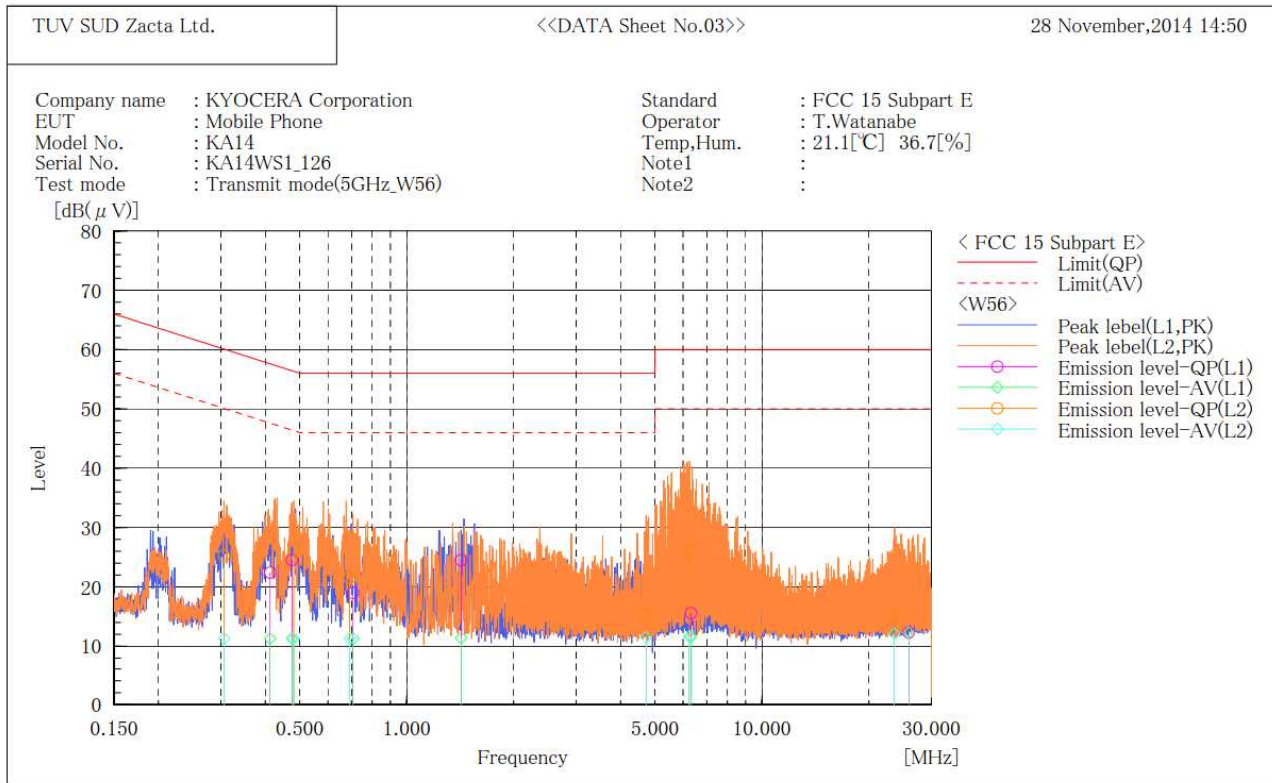

Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.413	12.1	1.0	10.3	22.4	11.3	57.6	47.6	35.2	36.3
2	0.475	14.2	1.0	10.3	24.5	11.3	56.4	46.4	31.9	35.1
3	0.707	8.7	1.0	10.3	19.0	11.3	56.0	46.0	37.0	34.7
4	1.423	14.1	1.0	10.4	24.5	11.4	56.0	46.0	31.5	34.6
5	6.316	5.0	1.0	10.6	15.6	11.6	60.0	50.0	44.4	38.4
6	25.879	1.0	1.0	11.3	12.3	12.3	60.0	50.0	47.7	37.7

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading CAV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result CAV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin CAV [dB]
1	0.306	15.0	1.0	10.3	25.3	11.3	60.1	50.1	34.8	38.8
2	0.481	15.6	1.0	10.3	25.9	11.3	56.3	46.3	30.4	35.0
3	0.691	11.2	1.0	10.3	21.5	11.3	56.0	46.0	34.5	34.7
4	4.721	4.6	1.0	10.5	15.1	11.5	56.0	46.0	40.9	34.5
5	6.241	15.6	1.0	10.6	26.2	11.6	60.0	50.0	33.8	38.4
6	23.586	4.0	1.0	11.1	15.1	12.1	60.0	50.0	44.9	37.9

10. Duty Cycle

10.1 Measurement procedure [KDB789033]

The duty cycle is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=8MHz, VBW=8MHz, Span=0Hz, Sweep=Auto, Detector=Peak, Trace mode=Single


The EUT was set to operate with following conditions.

- 5.2GHz Band, 5.3GHz Band, 5.6GHz Band

The test mode of EUT is as follows.

- Tx mode

- Test configuration

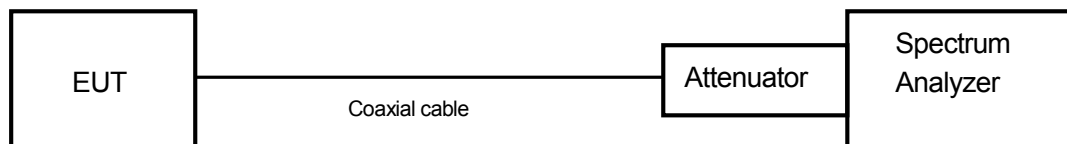

10.2 Limit

None

10.3 Measurement result

Date : November 11, 2014

Temperature : 20.9 [°C]

Humidity : 46.3 [%]

Test place : Shielded room No.4

Tested by : Hikaru Shibata

Mode	Channel	Frequency (MHz)	Duty Cycle			DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X		
802.11a	36	5180	1.364	1.370	0.996	0.019	0.038
	40	5200					
	58	5240					
	52	5260	1.364	1.372	0.994	0.025	0.051
	56	5280					
	64	5320					
	100	5500	1.362	1.370	0.994	0.025	0.051
	116	5580					
	140	5700					

Note: X = On time / (On + Off time)

Mode	Channel	Frequency (MHz)	Duty Cycle			DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X		
802.11n (20MHz)	36	5180	1.276	1.282	0.995	0.020	0.041
	40	5200					
	58	5240					
	52	5260	1.276	1.284	0.994	0.027	0.054
	56	5280					
	64	5320					
	100	5500	1.272	1.284	0.991	0.041	0.082
	116	5580					
	140	5700					

Note: X = On time / (On + Off time)

Mode	Channel	Frequency (MHz)	Duty Cycle			DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X		
802.11n (40MHz)	38	5190	0.635	0.645	0.984	0.068	0.136
	46	5230					
	54	5270	0.636	0.645	0.986	0.061	0.122
	62	5310					
	102	5510	0.634	0.645	0.983	0.075	0.149
	110	5550					
	134	5670					


Note: X = On time / (On + Off time)

Mode	Channel	Frequency (MHz)	Duty Cycle			DCF (dB) 10log(1/x)	DCF (dB) 20log(1/x)
			On Time(ms)	On+Off Time(ms)	X		
802.11ac (80MHz)	42	0.248	0.248	0.258	0.961	0.172	0.343
	58	0.248	0.248	0.258	0.961	0.172	0.343
	106	0.247	0.247	0.257	0.961	0.172	0.345


Note: X = On time / (On + Off time)

10.4 Trace data
[IEEE802.11a]


Channel: 40

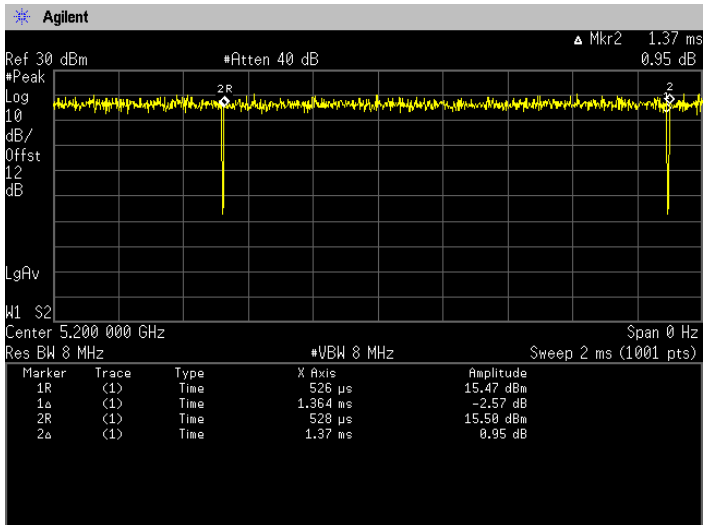

Channel: 56

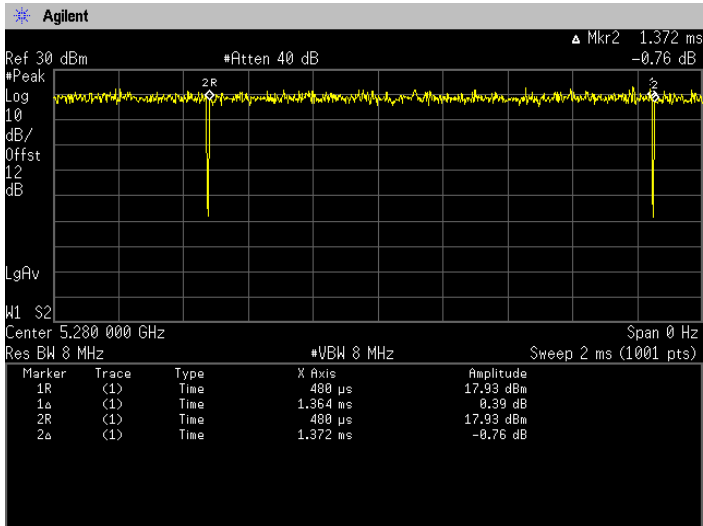


Channel: 116

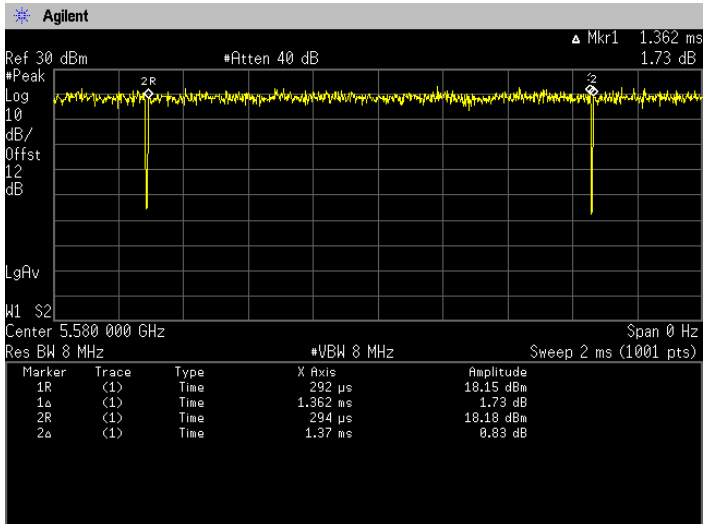


[IEEE802.11n (HT20)]


Channel: 40

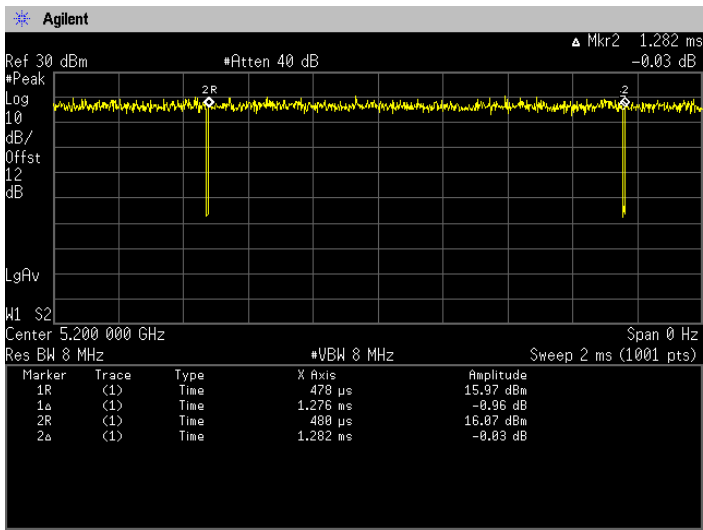

Channel: 56

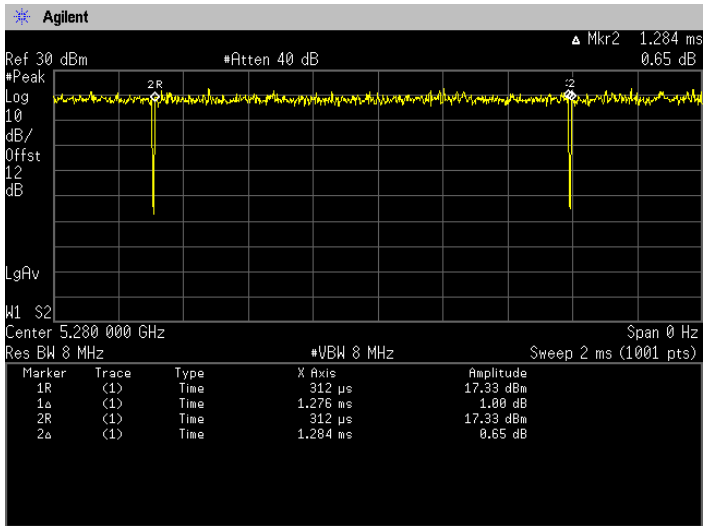


Channel: 116

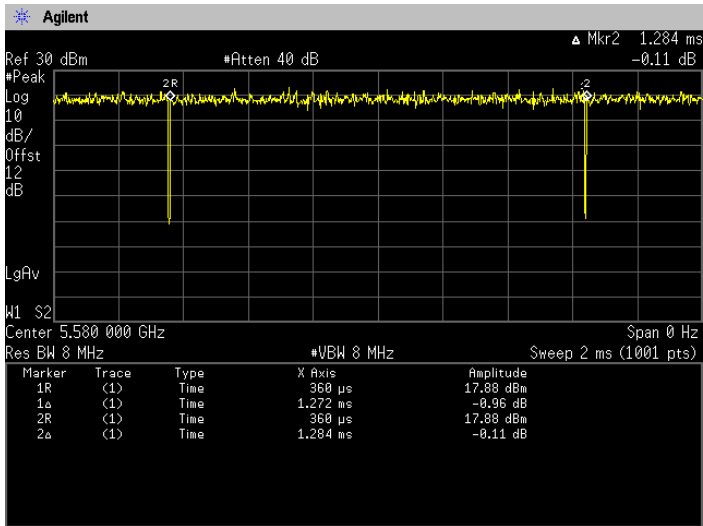


[IEEE802.11n (HT40)]


Channel: 38

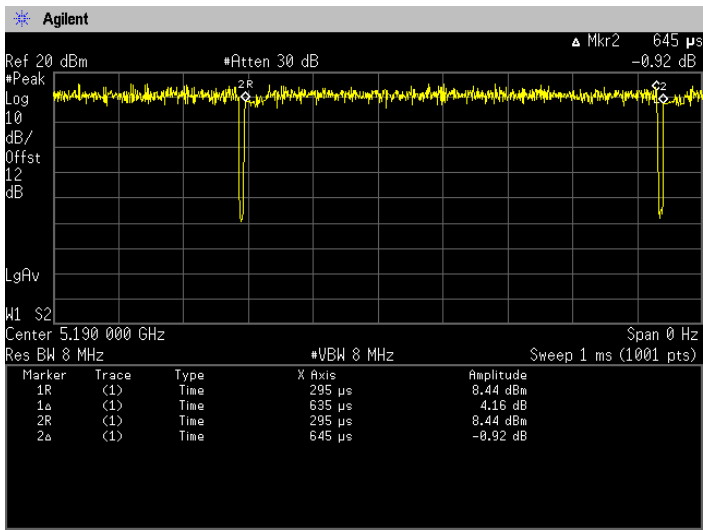

Channel: 54

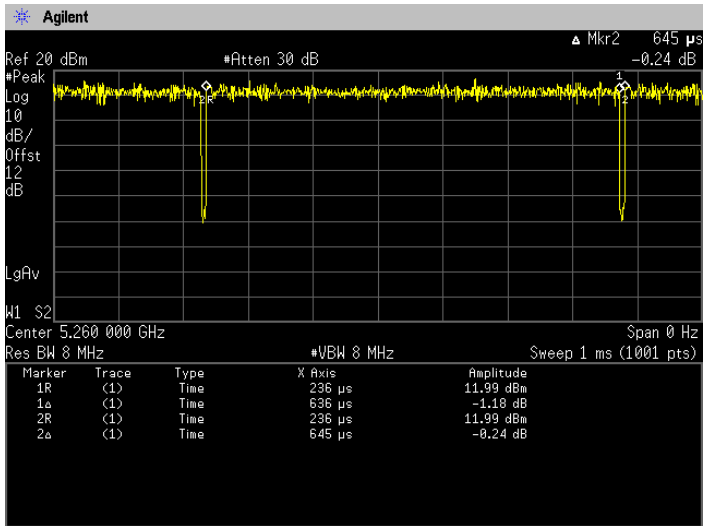


Channel: 110

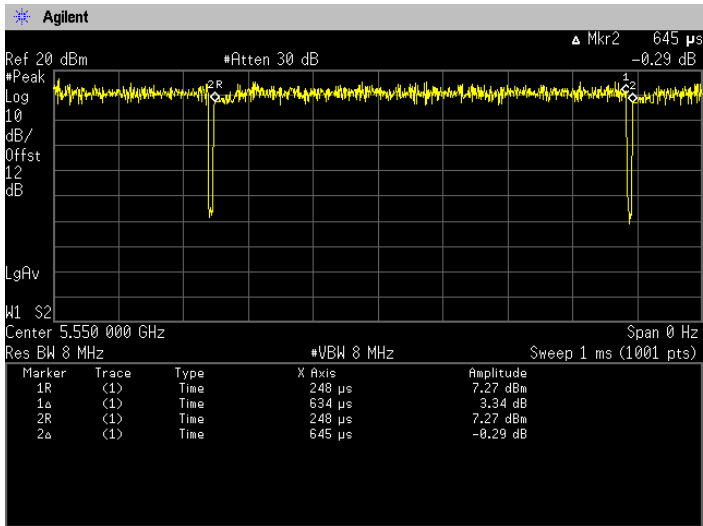


[IEEE802.11ac (HT80)]


Channel: 42

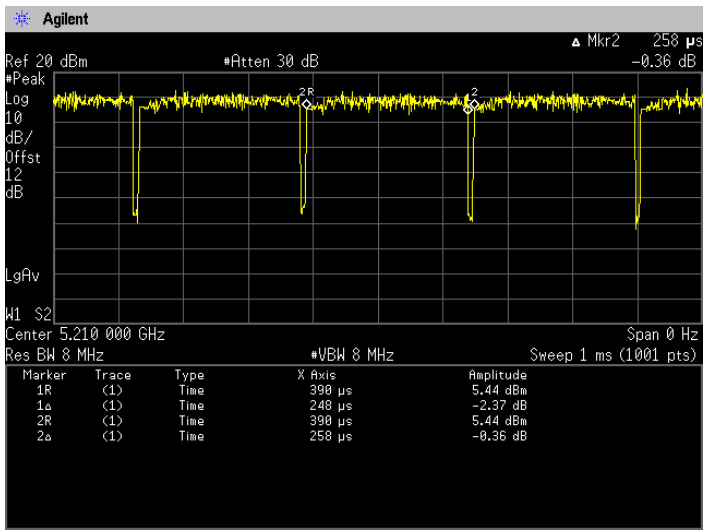

Channel: 58

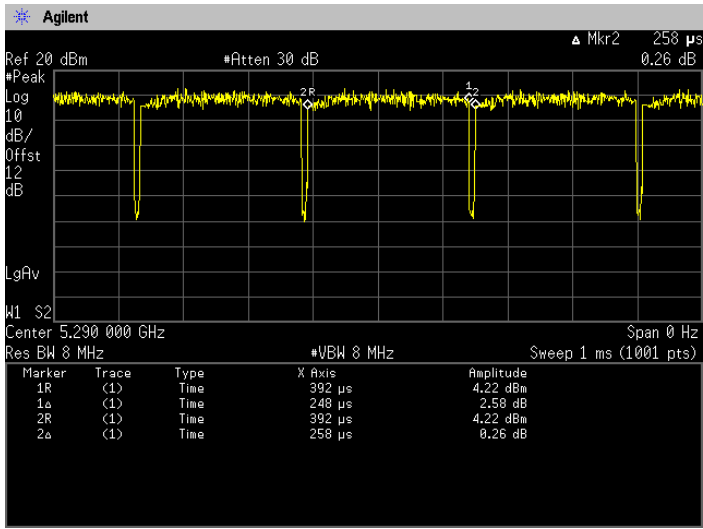

Channel: 106

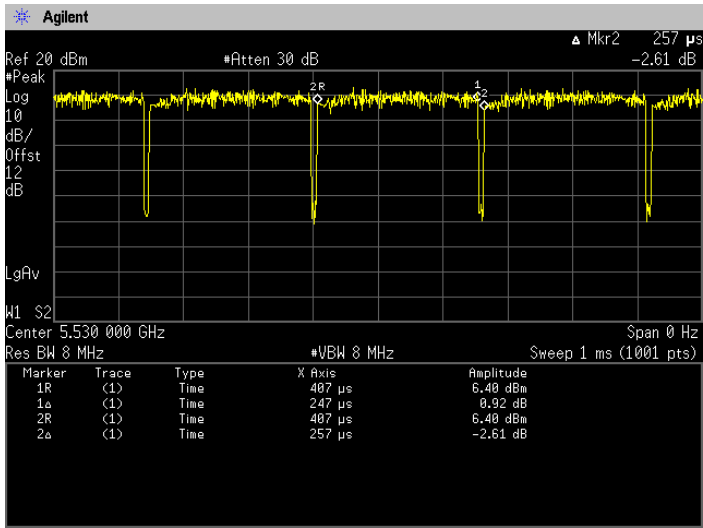

11. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

12. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$

13. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
 4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
 Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2015
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct. 1, 2017
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Jan. 23, 2015
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2017
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2015
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166		

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Microwave cable	RS	YH_13S5	N/A (S403)	May 31, 2015	May 10, 2014
Attenuator	Weinschel	56-10	J4180	Nov. 30, 2014	Nov. 12, 2013

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100451	Nov. 30, 2014	Nov. 16, 2013
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2015	Jun. 12, 2014
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	891847/17	Mar. 31, 2015	Mar. 5, 2014
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	May 31, 2015	May 7, 2014
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 31, 2015	May 7, 2014
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2015	Jun. 9, 2014
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2015	Jun. 9, 2014
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 31, 2014	Dec. 9, 2013
Double ridged guide antenna	EMCO	3115	5205	Dec. 31, 2014	Dec. 10, 2013
Attenuator	Agilent Technologies	8491B	MY39268633	Jan. 31, 2015	Jan. 15, 2013
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	May 31, 2015	May 2, 2013
Preamplifier	TSJ	MLA-1840-B03-35	1240332	May 31, 2015	May 2, 2013
Notch filter	Micro-Tronics	BRM50702	045	Nov. 30, 2014	Nov. 12, 2013
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1m	322084/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2015	Oct. 31, 2014
		SUCOFLEX104/7m	41625/6	Oct. 31, 2015	Oct. 31, 2014
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 31, 2015	May 6, 2014
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	May 31, 2015	May 6, 2014

Conducted emission at mains port

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
EMI Receiver	ROHDE&SCHWARZ	ECSI	100451	Nov. 30, 2014	Nov. 16, 2013
Attenuator	HUBER+SUHNER	6810.01.A	N/A (S411)	Feb. 28, 2015	Feb. 28, 2014
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F	8-2003-1	Mar. 31, 2015	Mar. 13, 2014
Coaxial cable	FUJIKURA	5D-2W/4m	N/A (S350)	Feb. 28, 2015	Feb. 5, 2014
Coaxial cable	FUJIKURA	5D-2W/1m	N/A (S193)	Feb. 28, 2015	Feb. 5, 2014
Coaxial cable	SUHNER	RG214/U/10m	N/A (S194)	Feb. 28, 2015	Feb. 5, 2014
PC	DELL	DIMENSION	75465BX	N/A	N/A

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.