

Test Plots

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 40.764$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(10.02, 10.02, 10.02); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

Left Touch, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.768 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.692 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 873 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.385 W/kg
 Maximum value of SAR (measured) = 0.741 W/kg

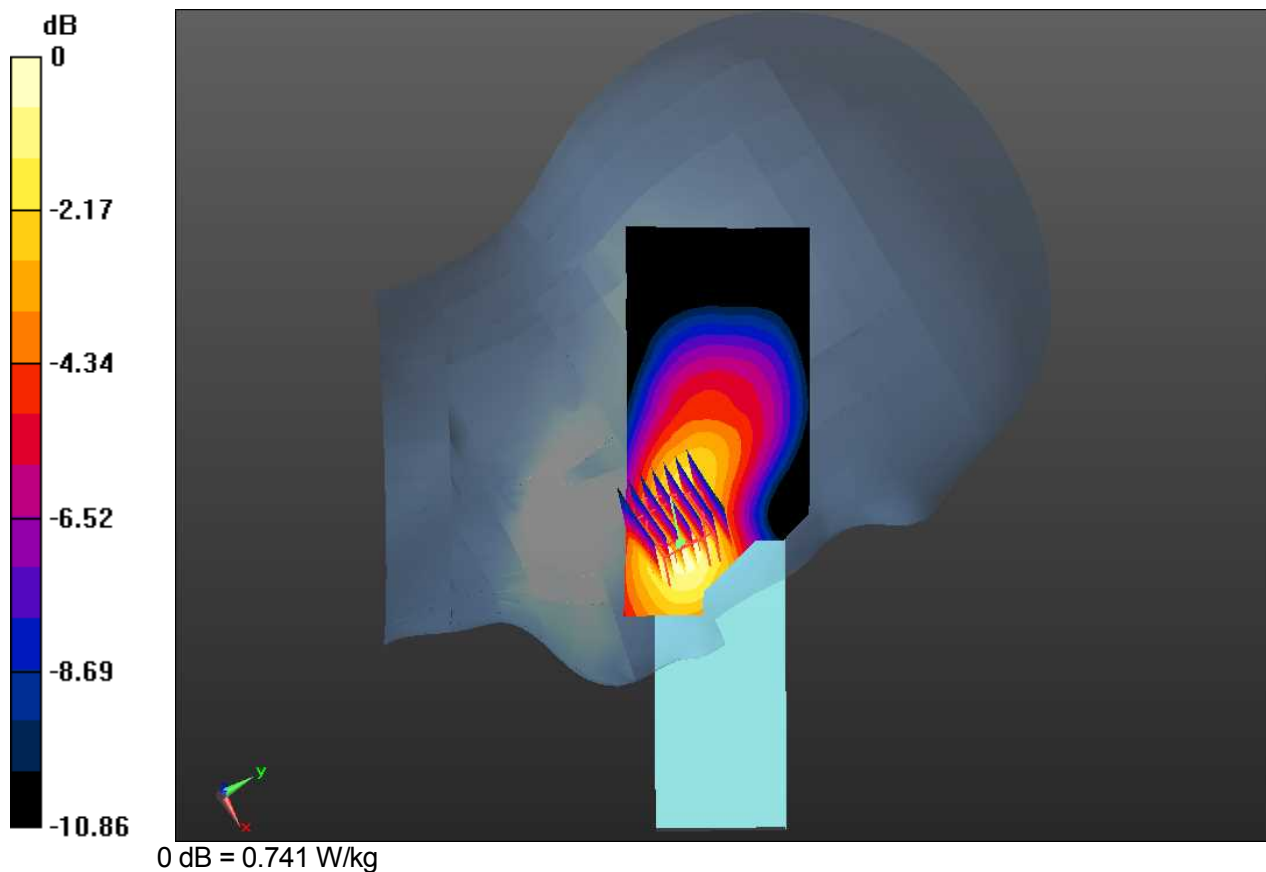

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 40.764$; $\rho = 1000$ kg/m³

Phantom section: Right section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(10.02, 10.02, 10.02); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

Right Touch, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (91x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.650 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.701 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0 W/kg

Maximum value of SAR (measured) = 0.647 W/kg

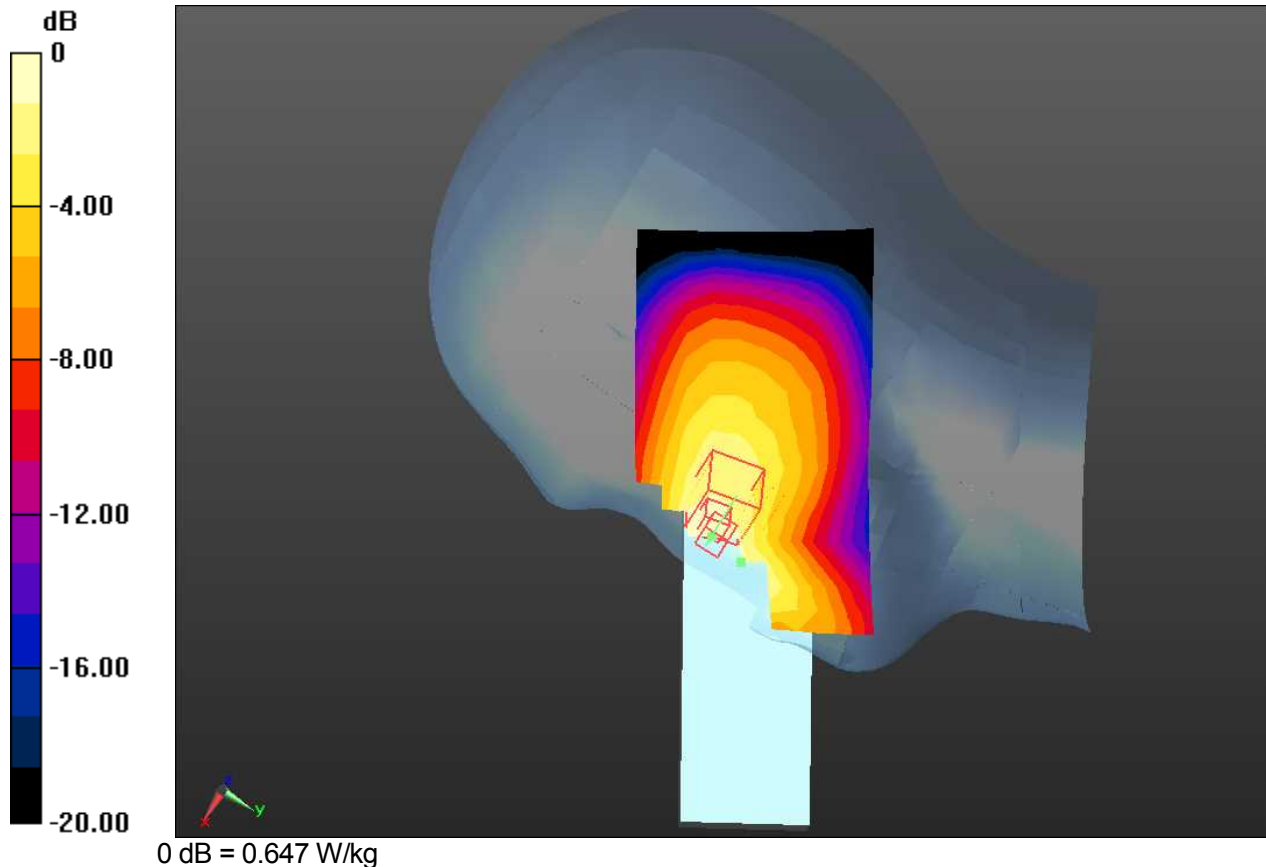

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 40.764$; $\rho = 1000$ kg/m³

Phantom section: Left section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(10.02, 10.02, 10.02); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-4-18; Ambient Temp: 22.0; Tissue Temp: 23.0

Left Tilt, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (71x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.351 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 14.90 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

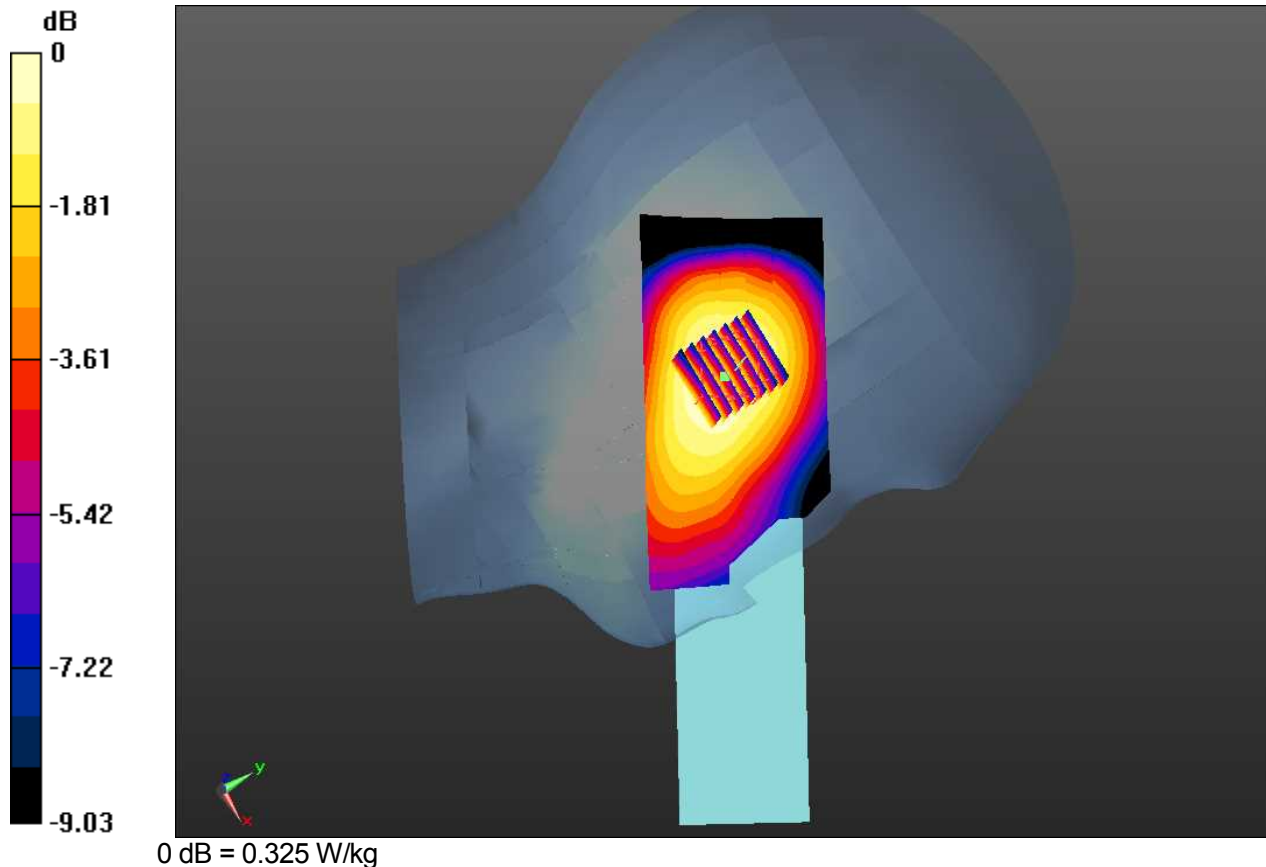

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 40.764$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(10.02, 10.02, 10.02); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-4-19; Ambient Temp: 22.0; Tissue Temp: 23.0

Right Tilt, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (91x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.345 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.36 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.213 W/kg
 Maximum value of SAR (measured) = 0.341 W/kg

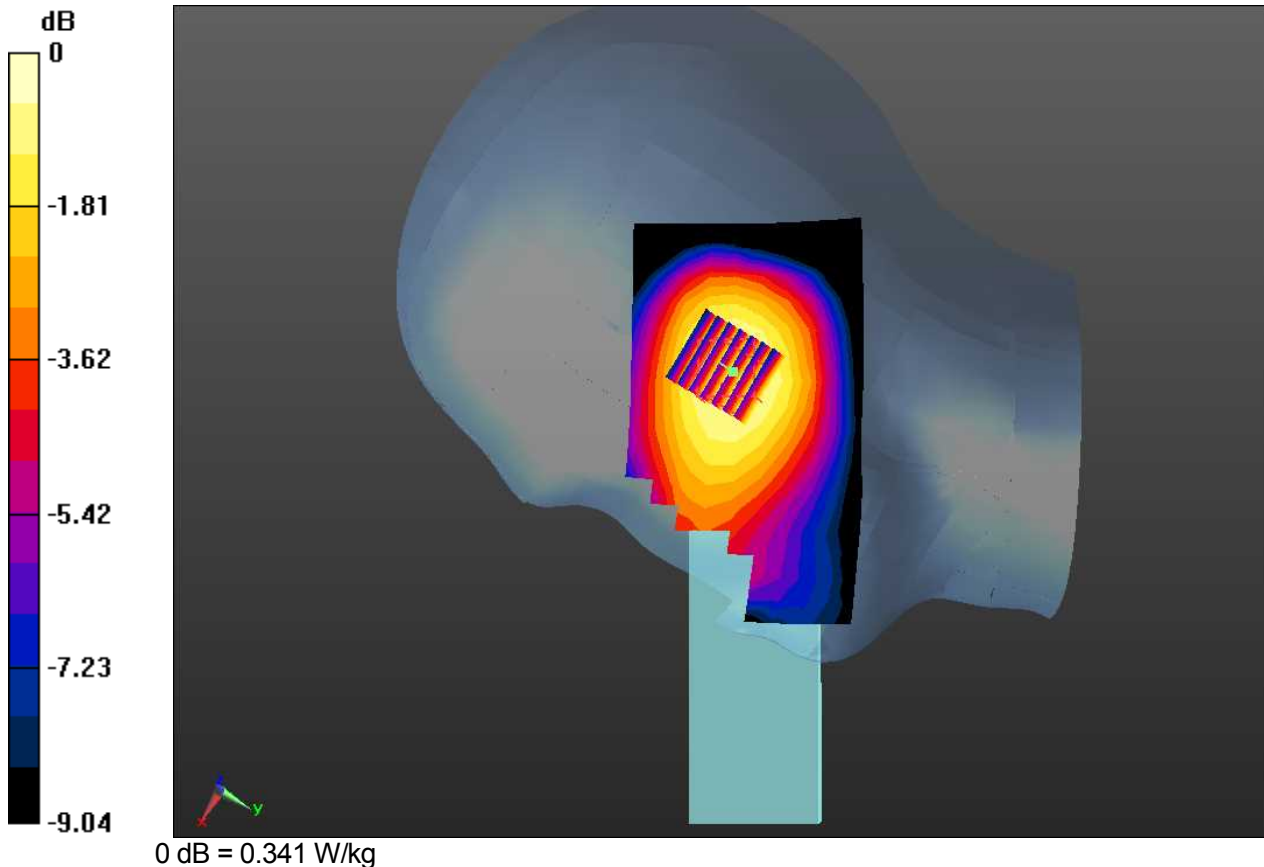

DUT: Mobile Phone; Type: KYY09

Communication System: WCDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 40.764$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(10.02, 10.02, 10.02); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

Left Touch, WCDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (71x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.768 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.692 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 873 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.385 W/kg
 Maximum value of SAR (measured) = 0.741 W/kg

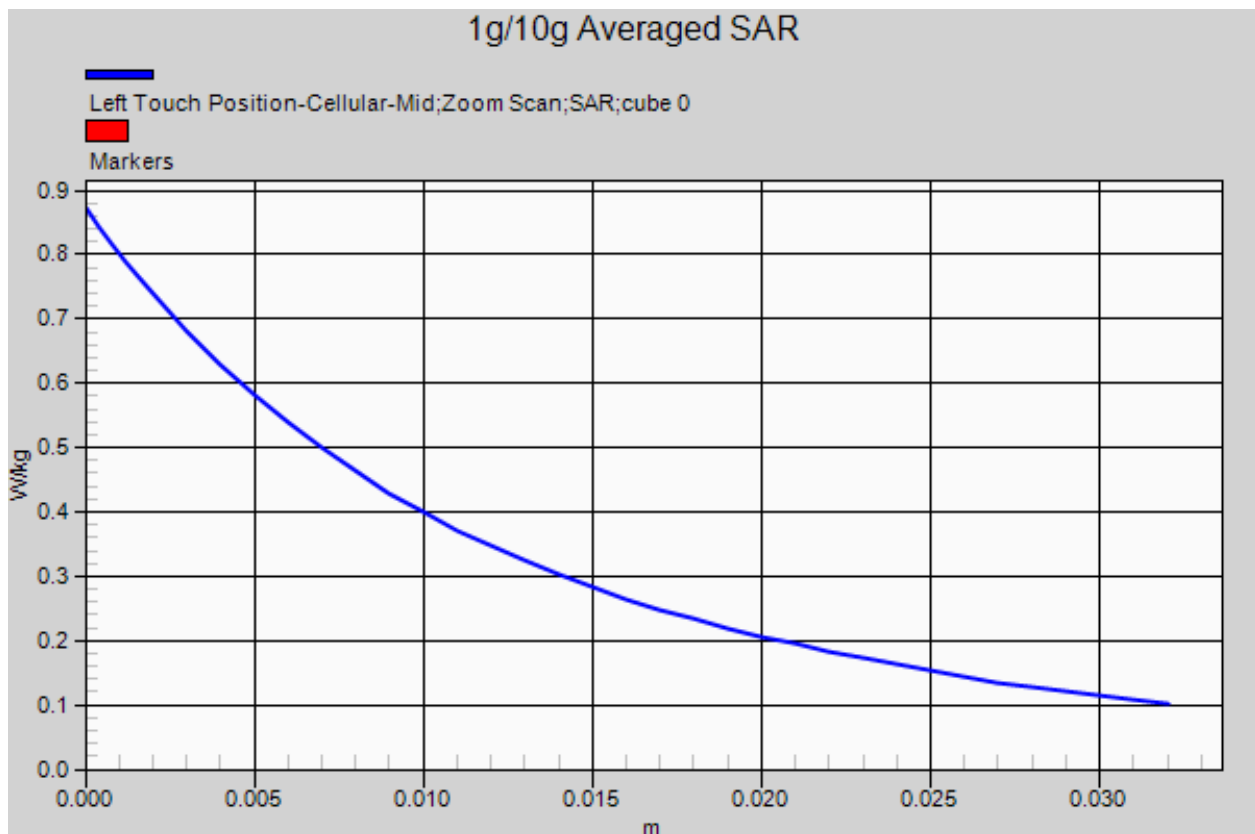

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.612$; $\rho = 1000$ kg/m³
 Phantom section: Left section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(8.35, 8.35, 8.35); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 21.9

Left Touch, PCS 1900 Ch.661, Ant Internal, Standard Battery

Area Scan (71x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.245 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 5.296 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.114 W/kg
 Maximum value of SAR (measured) = 0.263 W/kg

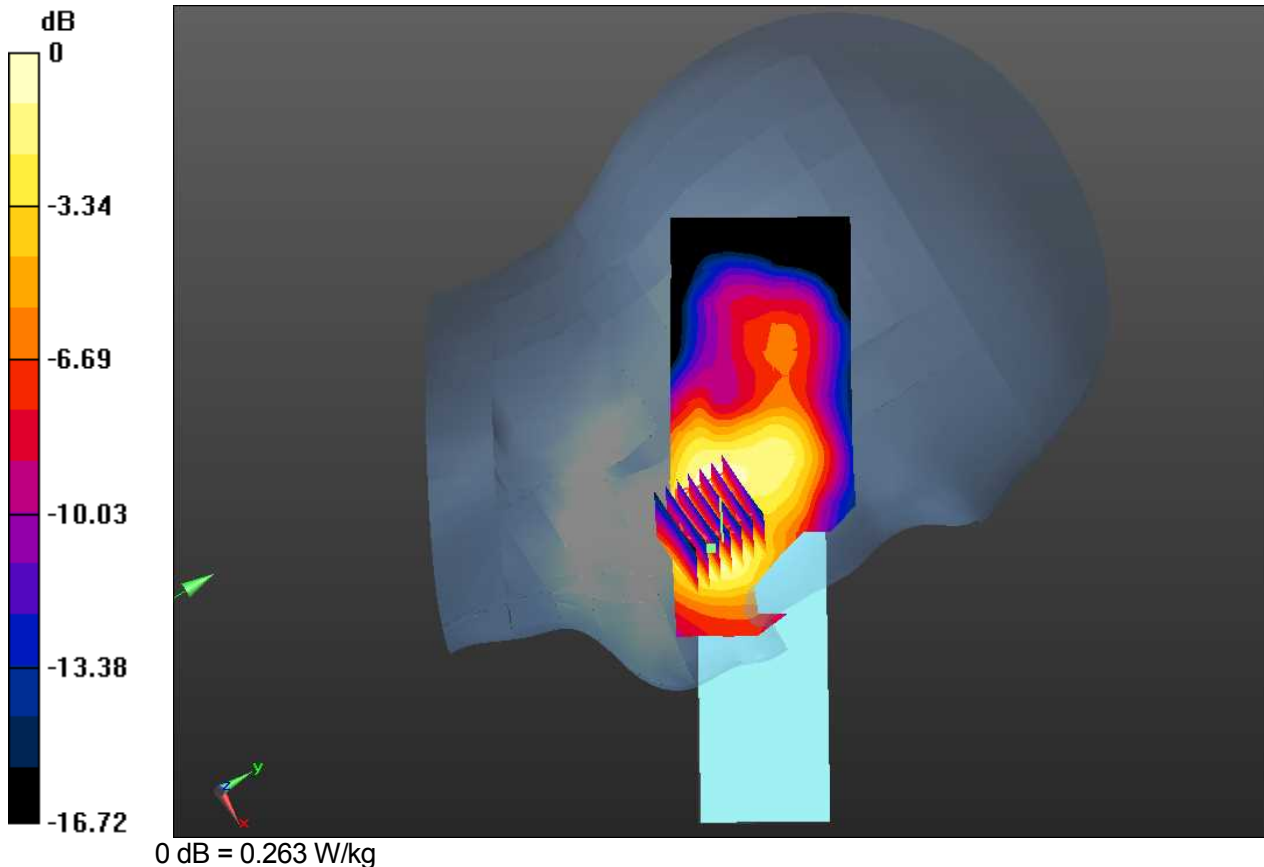

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.612$; $\rho = 1000$ kg/m³
 Phantom section: Right section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(8.35, 8.35, 8.35); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 21.9

Right Touch, PCS 1900 Ch.661, Ant Internal, Standard Battery

Area Scan (71x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.216 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 5.430 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.122 W/kg
 Maximum value of SAR (measured) = 0.229 W/kg

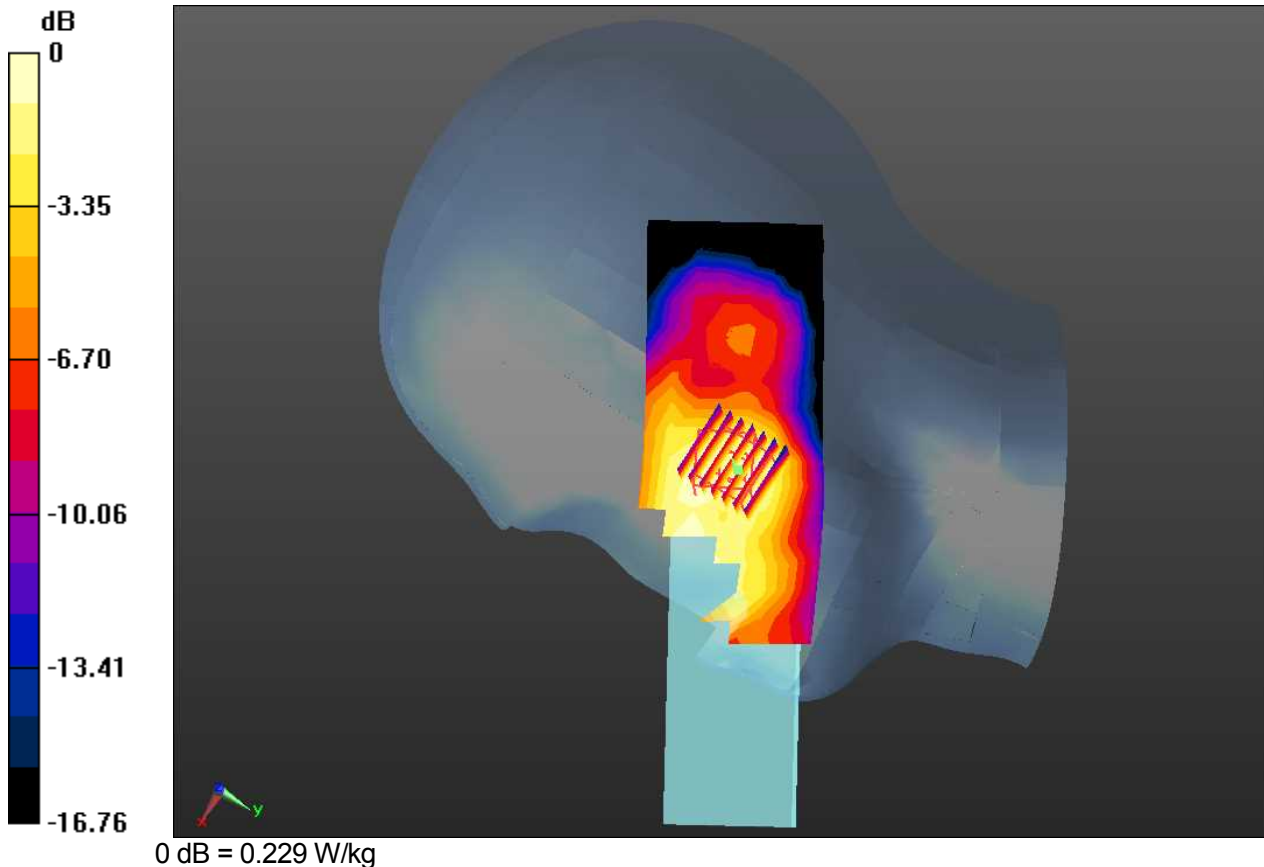

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.612$; $\rho = 1000$ kg/m³
 Phantom section: Left section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(8.35, 8.35, 8.35); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 21.9

Left Tilt, PCS 1900 Ch.661, Ant Internal, Standard Battery

Area Scan (71x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.196 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 10.52 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.093 W/kg
 Maximum value of SAR (measured) = 0.191 W/kg

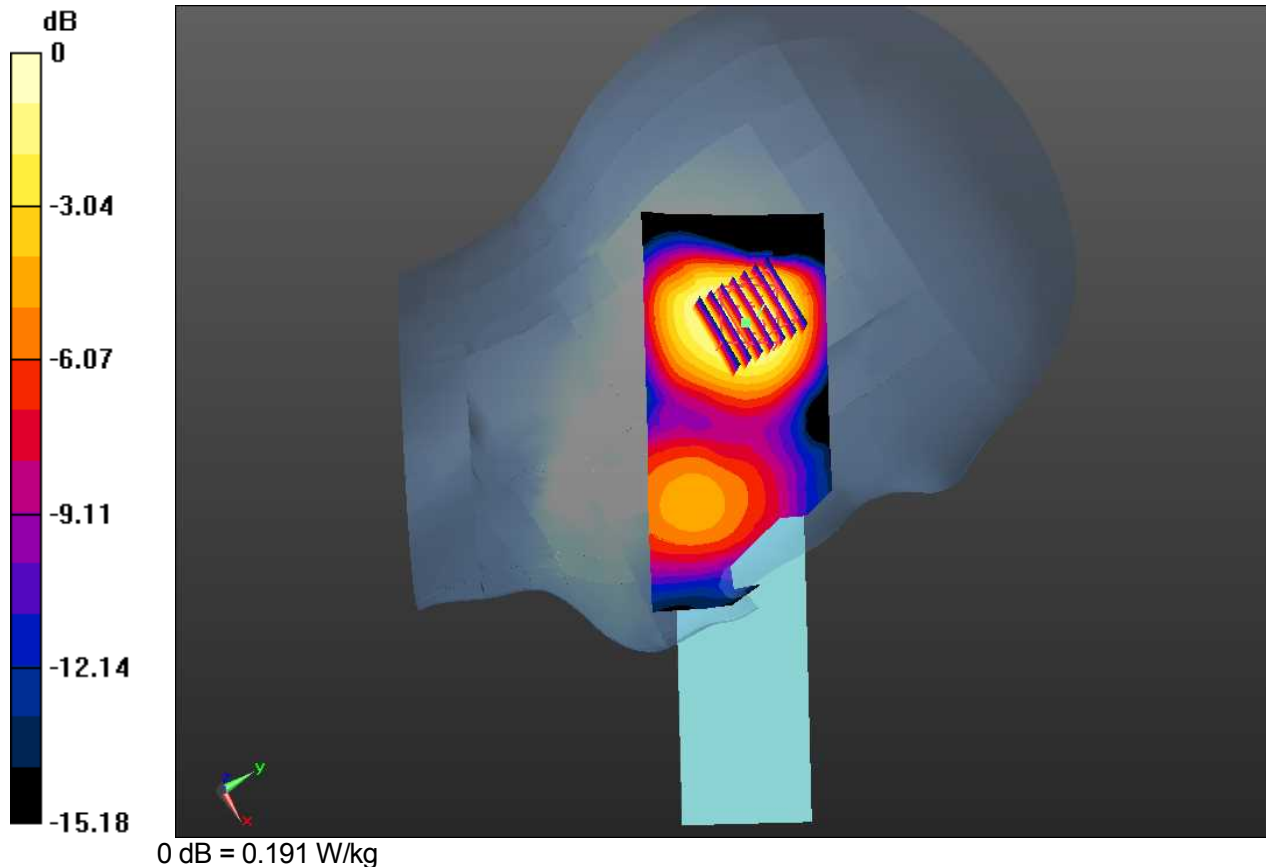

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.612$; $\rho = 1000$ kg/m³
 Phantom section: Right section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(8.35, 8.35, 8.35); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

Right Tilt, PCS 1900 Ch.661, Ant Internal, Standard Battery

Area Scan (71x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.220 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 11.57 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.110 W/kg
 Maximum value of SAR (measured) = 0.225 W/kg

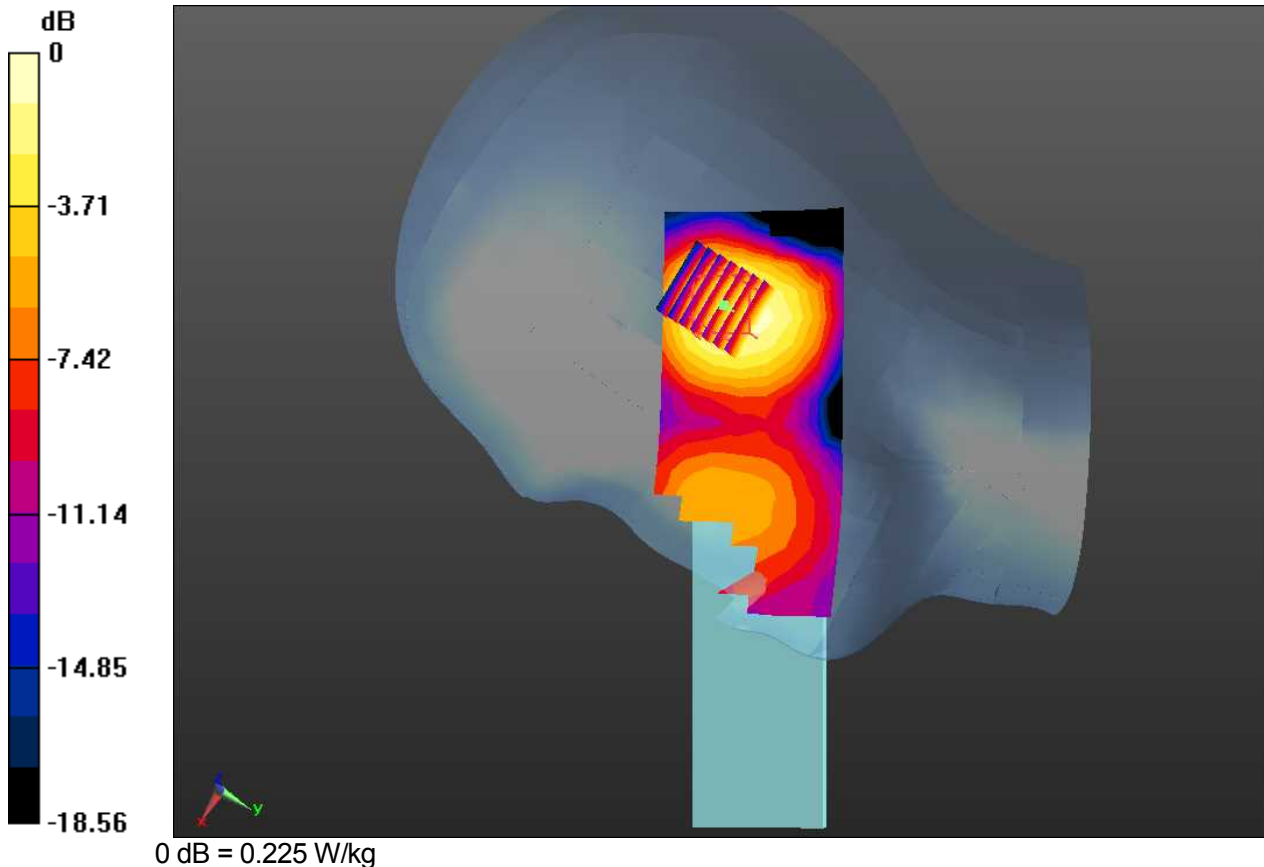

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.612$; $\rho = 1000$ kg/m³

Phantom section: Left section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(8.35, 8.35, 8.35); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 21.9

Left Touch, PCS 1900 Ch.661, Ant Internal, Standard Battery

Area Scan (71x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.245 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.296 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

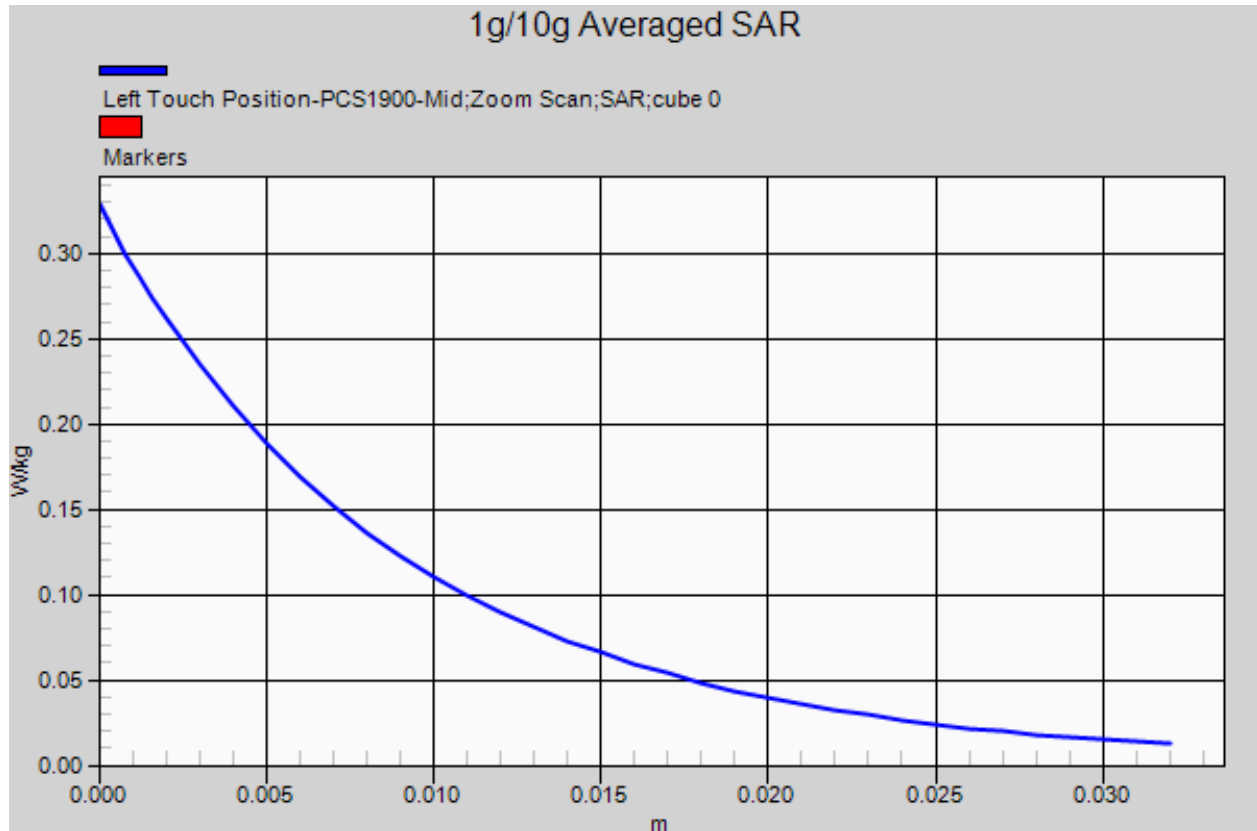

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.175$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

1.5 cm space from Body, Front, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (91x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.367 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.25 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.235 W/kg
 Maximum value of SAR (measured) = 0.365 W/kg

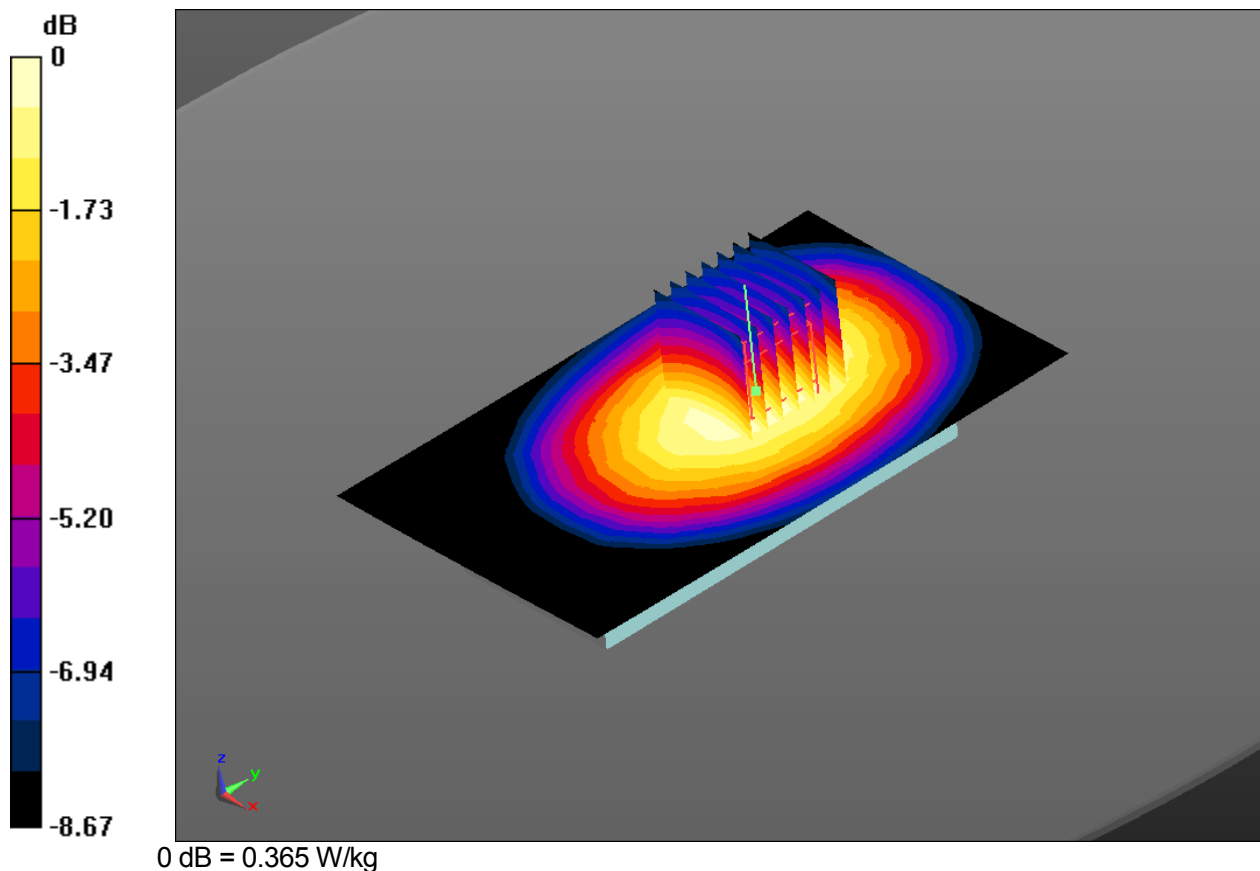

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.175$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

1.5 cm space from Body, Rear, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (91x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.535 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 21.92 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.325 W/kg
 Maximum value of SAR (measured) = 0.546 W/kg

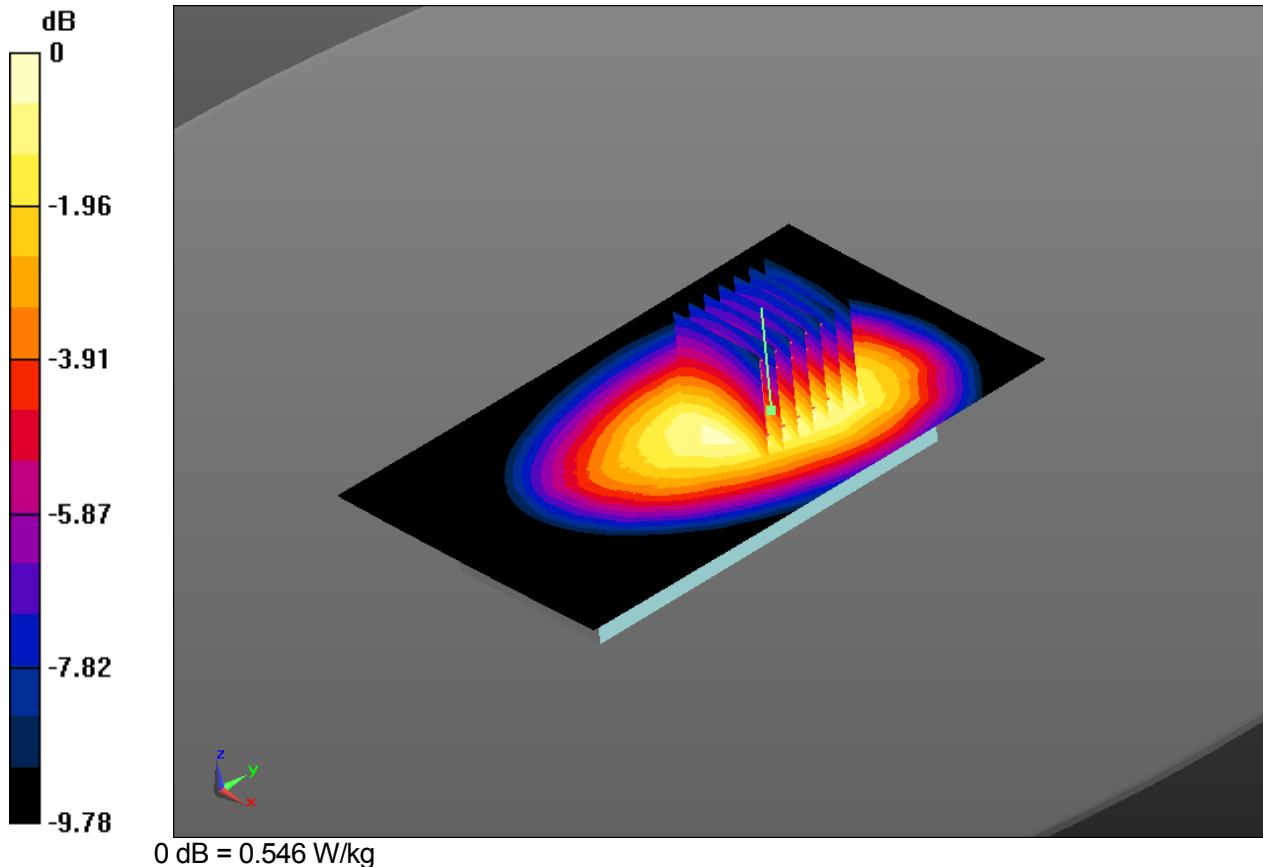

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.175$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

1.5 cm space from Body, Right side, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (91x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.277 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.90 V/m; Power Drift = -0.19 dB
 Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.159 W/kg
 Maximum value of SAR (measured) = 0.268 W/kg

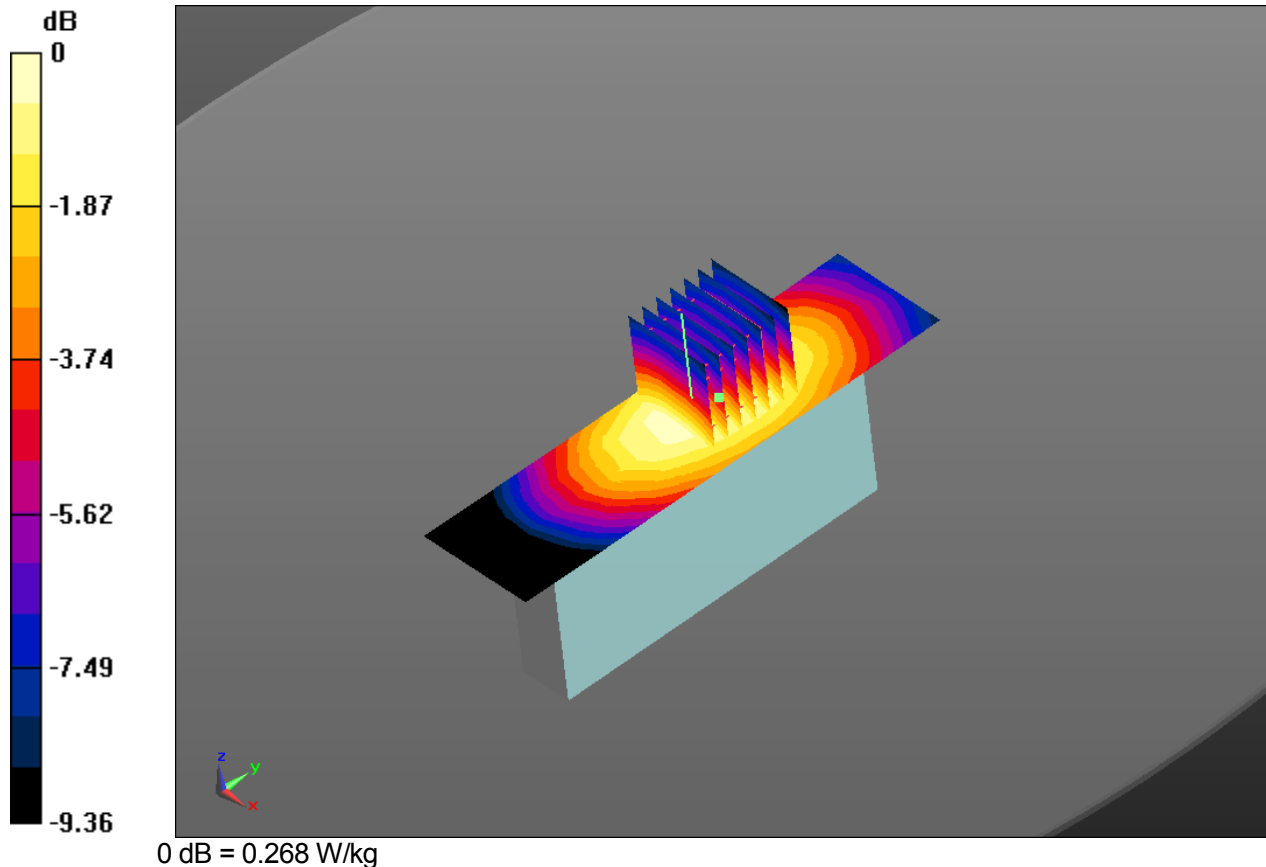

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.175$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

1.5 cm space from Body, Left side, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (41x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.294 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 17.09 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.169 W/kg
 Maximum value of SAR (measured) = 0.290 W/kg

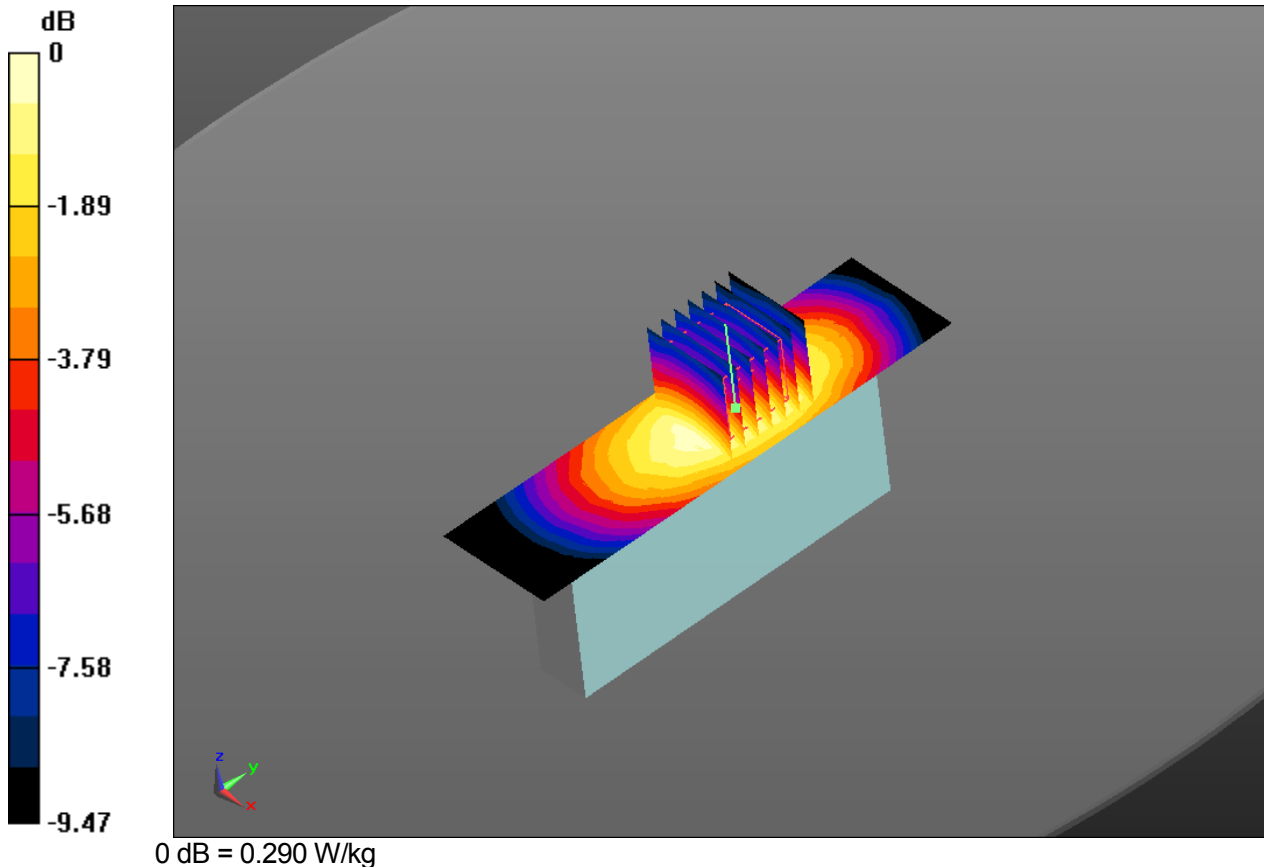

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.175$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

1.5 cm space from Body, Top, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (41x81x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.0282 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.540 V/m; Power Drift = 0.20 dB
 Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.017 W/kg
 Maximum value of SAR (measured) = 0.0309 W/kg

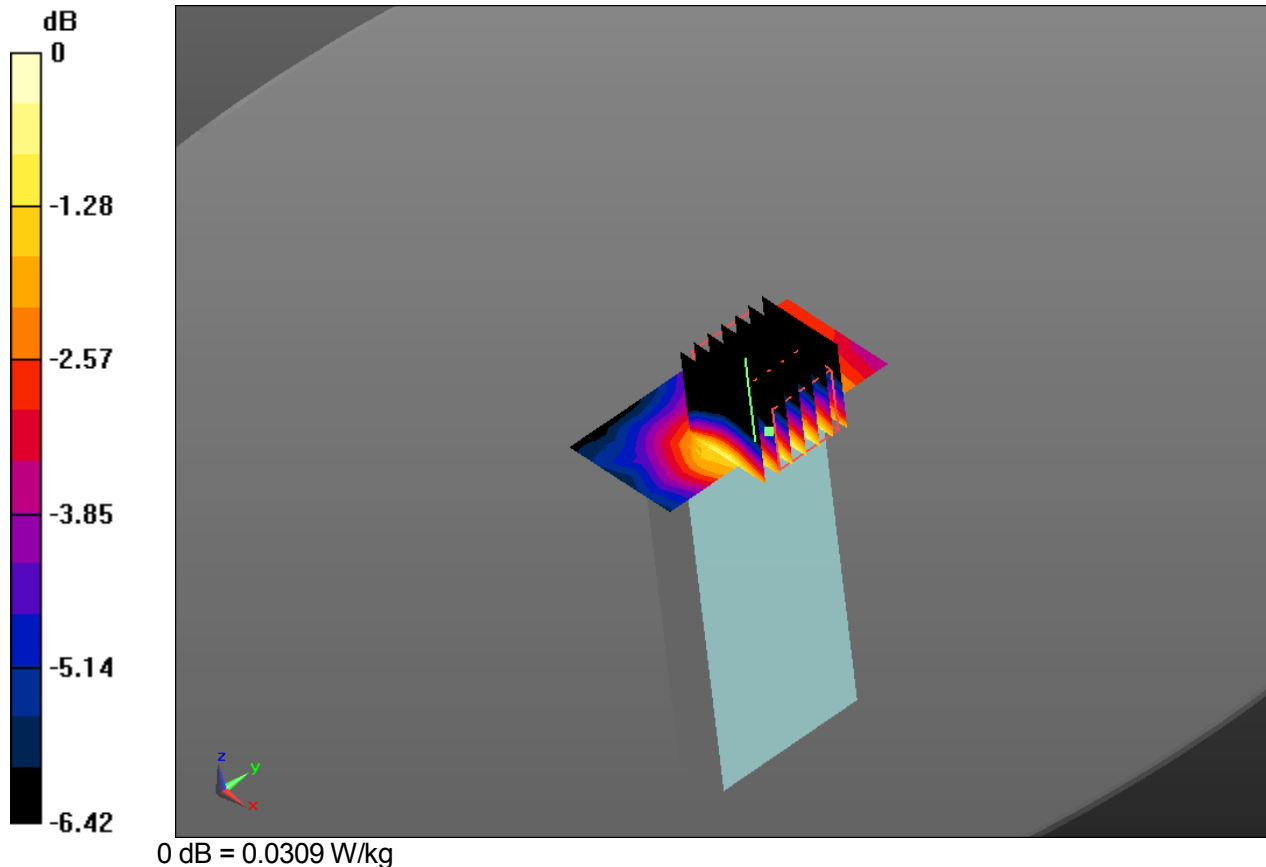

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz
 Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.175$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

1.5 cm space from Body, Bottom, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (41x81x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.0104 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.257 V/m; Power Drift = 0.20 dB
 Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.00858 W/kg; SAR(10 g) = 0.00606 W/kg
 Maximum value of SAR (measured) = 0.0106 W/kg

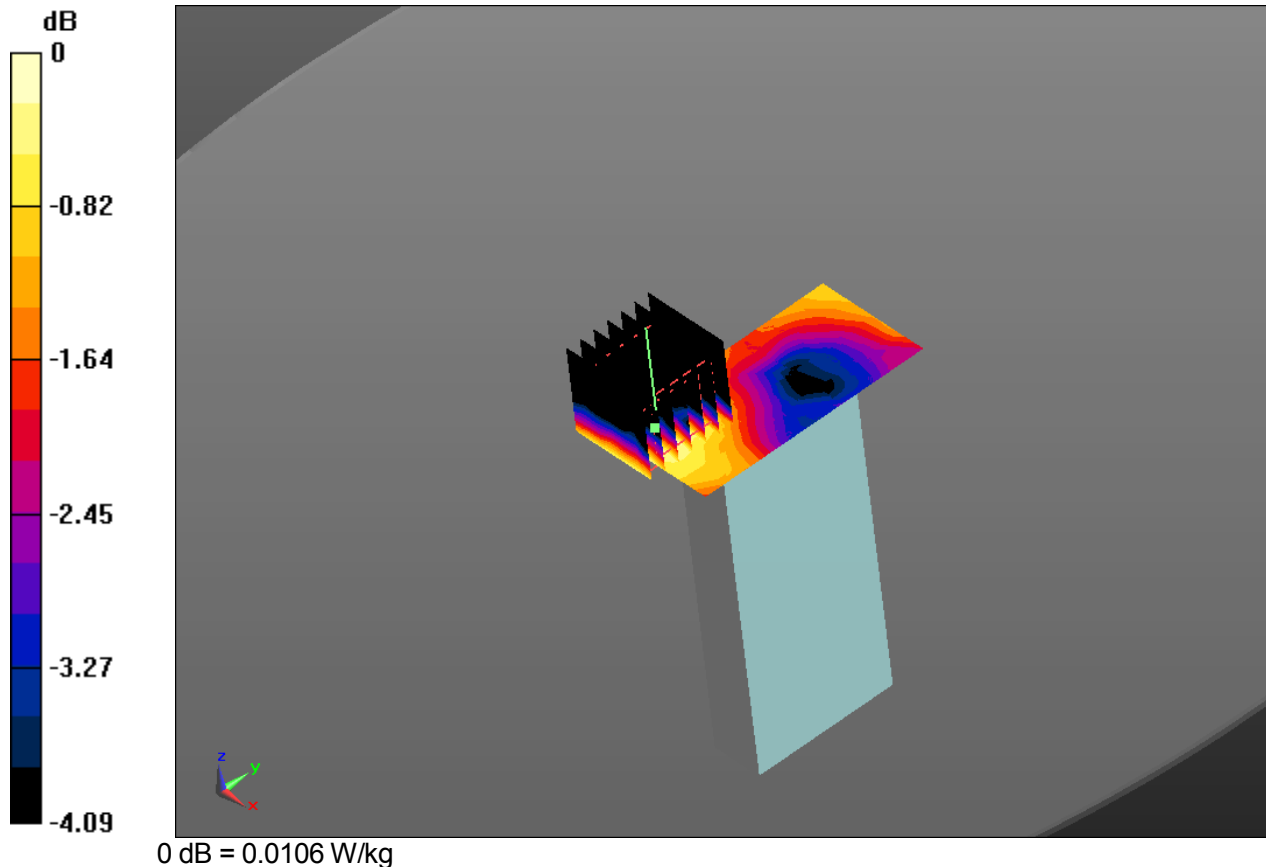

DUT: Mobile Phone; Type: KYY09

Communication System: CDMA 850; Frequency: 836.52MHz

Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.175$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(9.78, 9.78, 9.78); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-18; Ambient Temp: 22.0; Tissue Temp: 23.0

1.5 cm space from Body, Rear, CDMA 850 Ch.384, Ant Internal, Standard Battery

Area Scan (91x151x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.535 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.546 W/kg

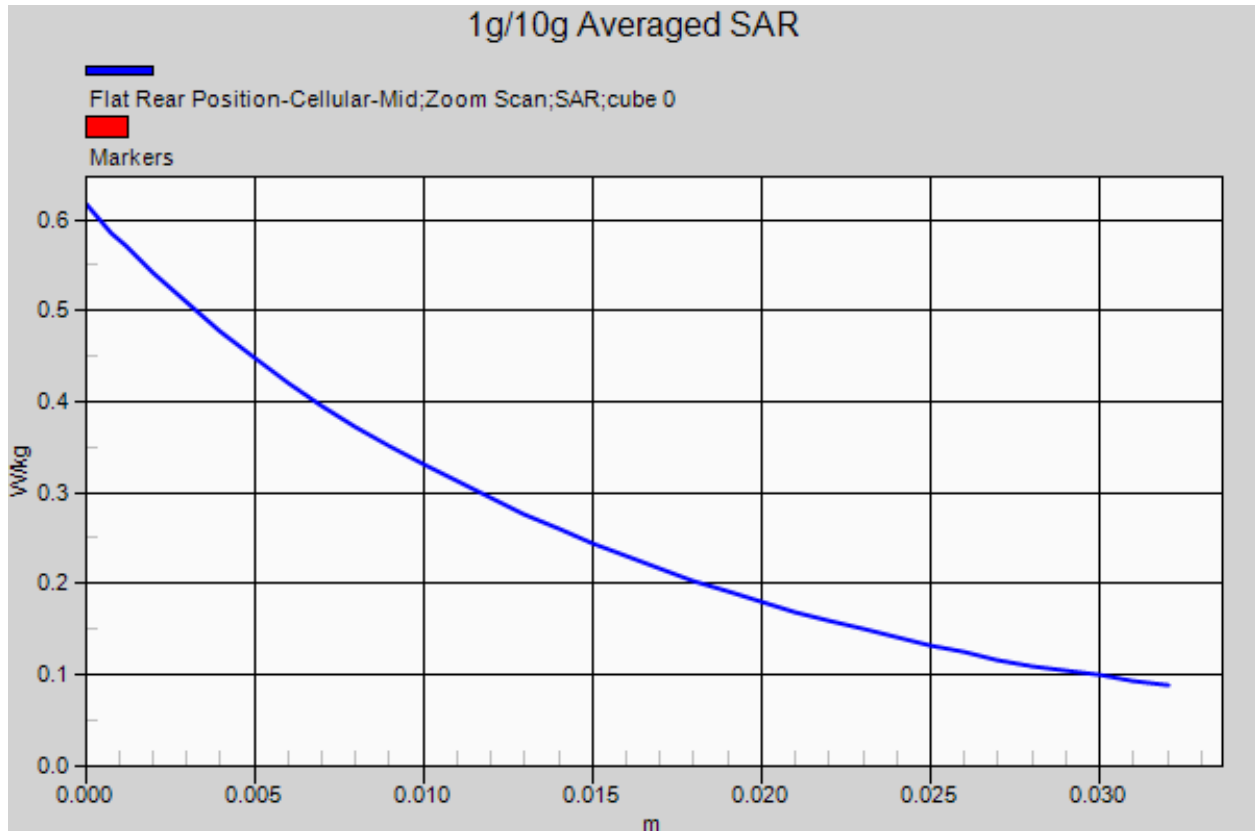

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Front, PCS 1900 PCS Ch.661, Ant Internal, Standard Battery

Area Scan (81x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.266 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 7.227 V/m; Power Drift = -0.20 dB
 Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.139 W/kg
 Maximum value of SAR (measured) = 0.280 W/kg

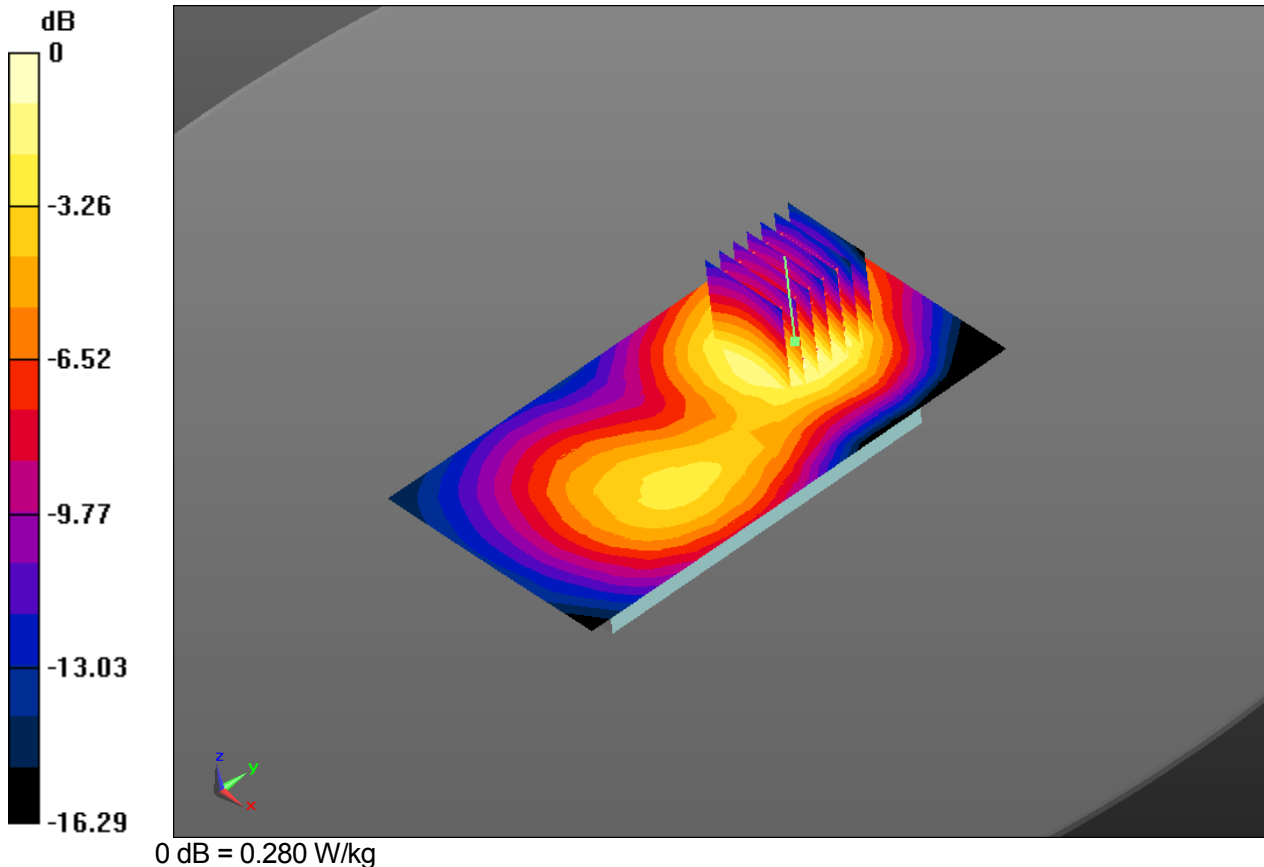

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Rear, PCS 1900 PCS Ch.661, Ant Internal, Standard Battery

Area Scan (81x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.264 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 10.62 V/m; Power Drift = 0.331 dB
 Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.127 W/kg
 Maximum value of SAR (measured) = 0.271 W/kg

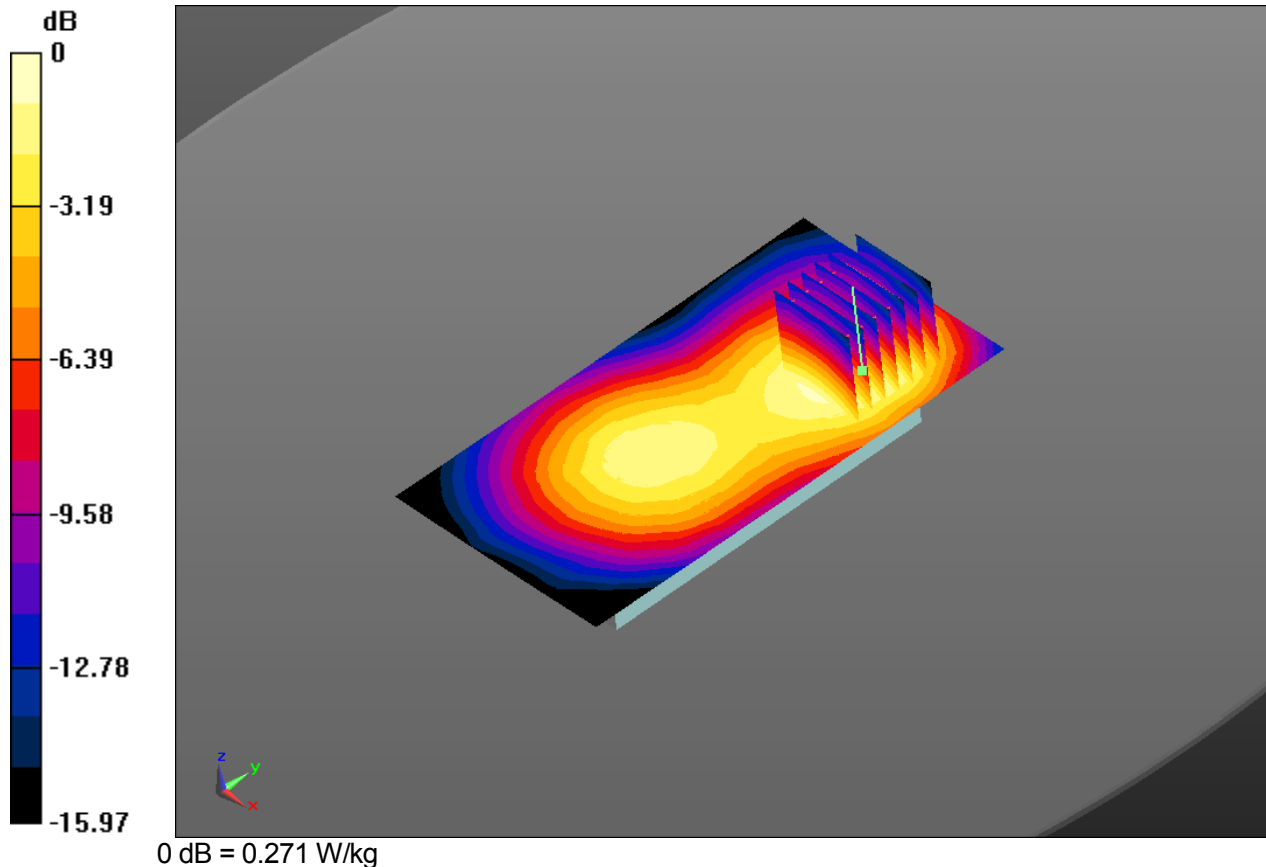

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Right side, PCS 1900 PCS Ch.661, Ant Internal, Standard Battery

Area Scan (41x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0825 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.918 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0830 W/kg

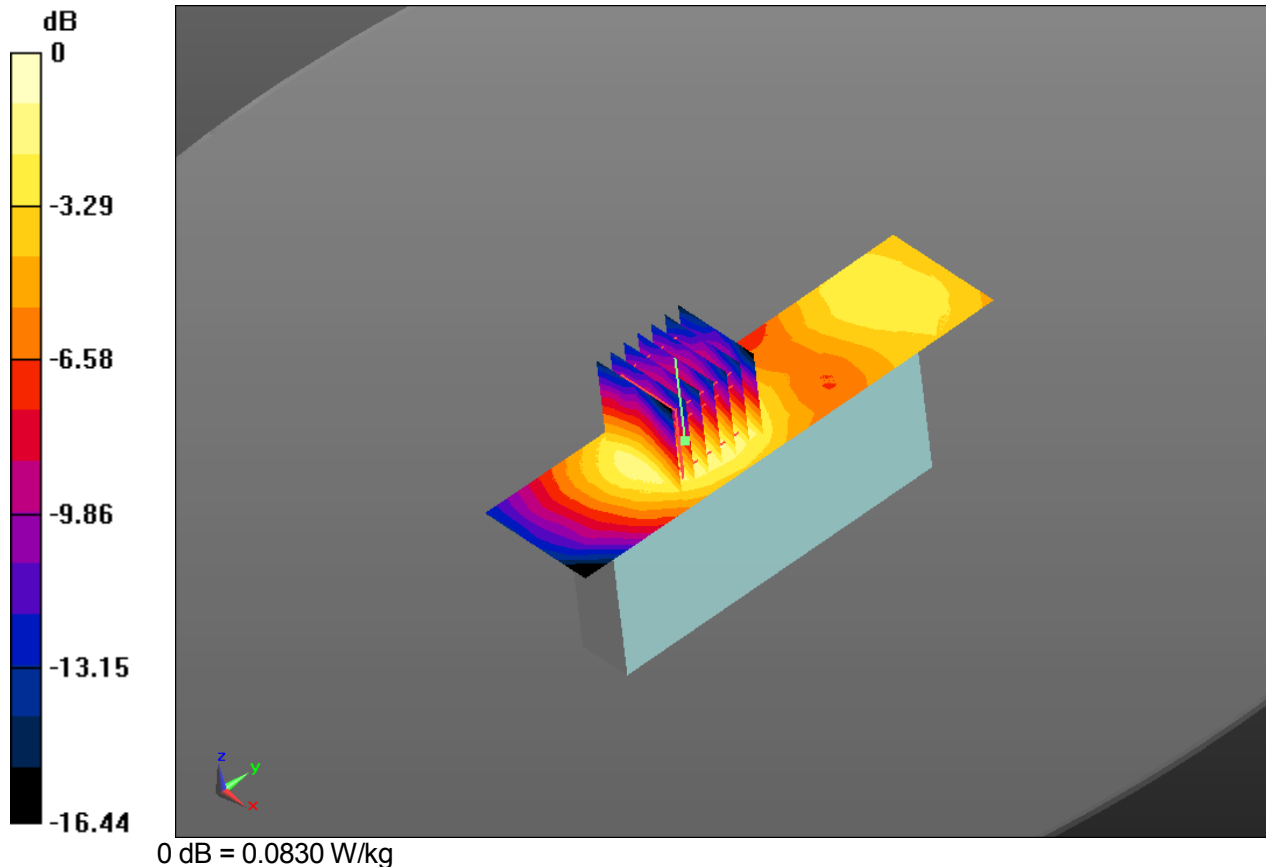

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Left side, PCS 1900 PCS Ch.661, Ant Internal, Standard Battery

Area Scan (41x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.155 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.900 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

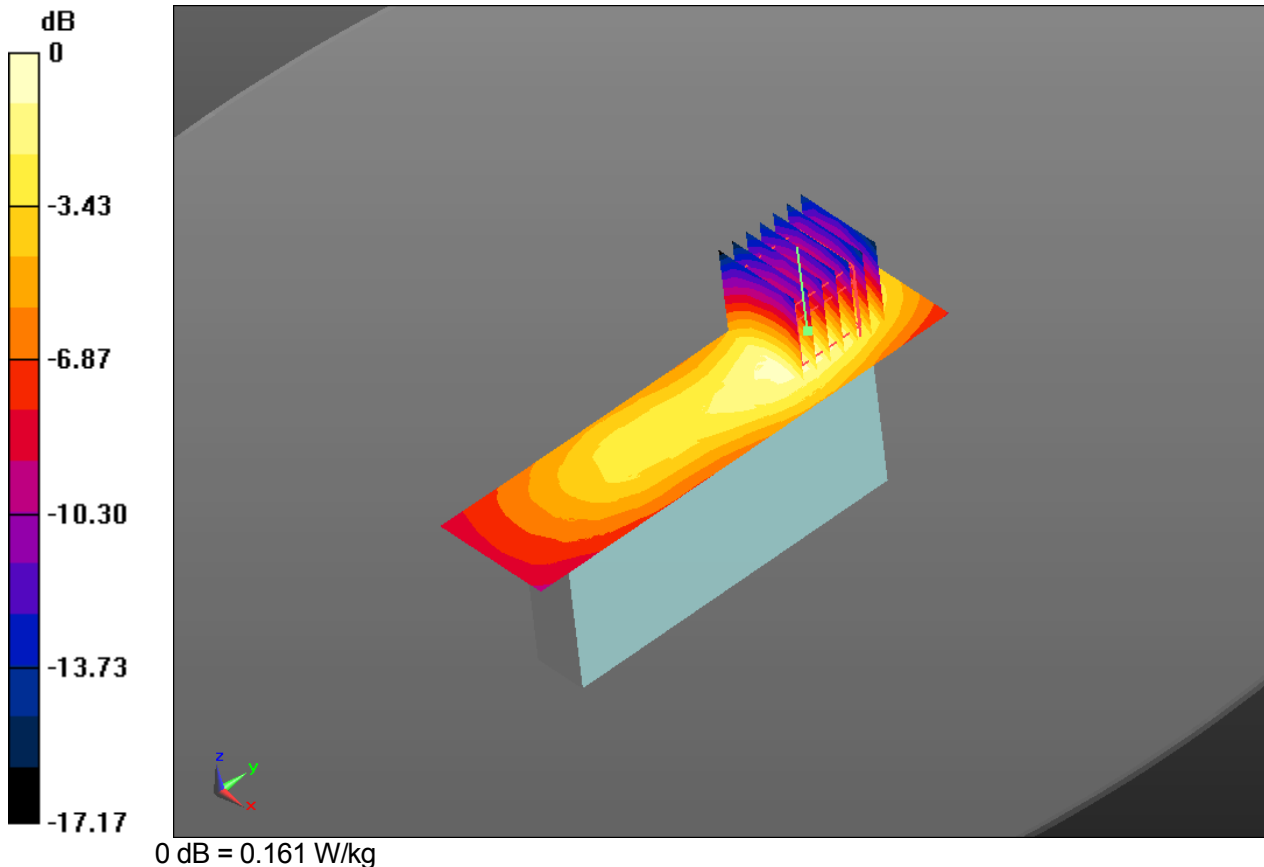

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Top, PCS 1900 PCS Ch.661, Ant Internal, Standard Battery

Area Scan (41x71x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.0280 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 3.589 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.013 W/kg
 Maximum value of SAR (measured) = 0.0262 W/kg

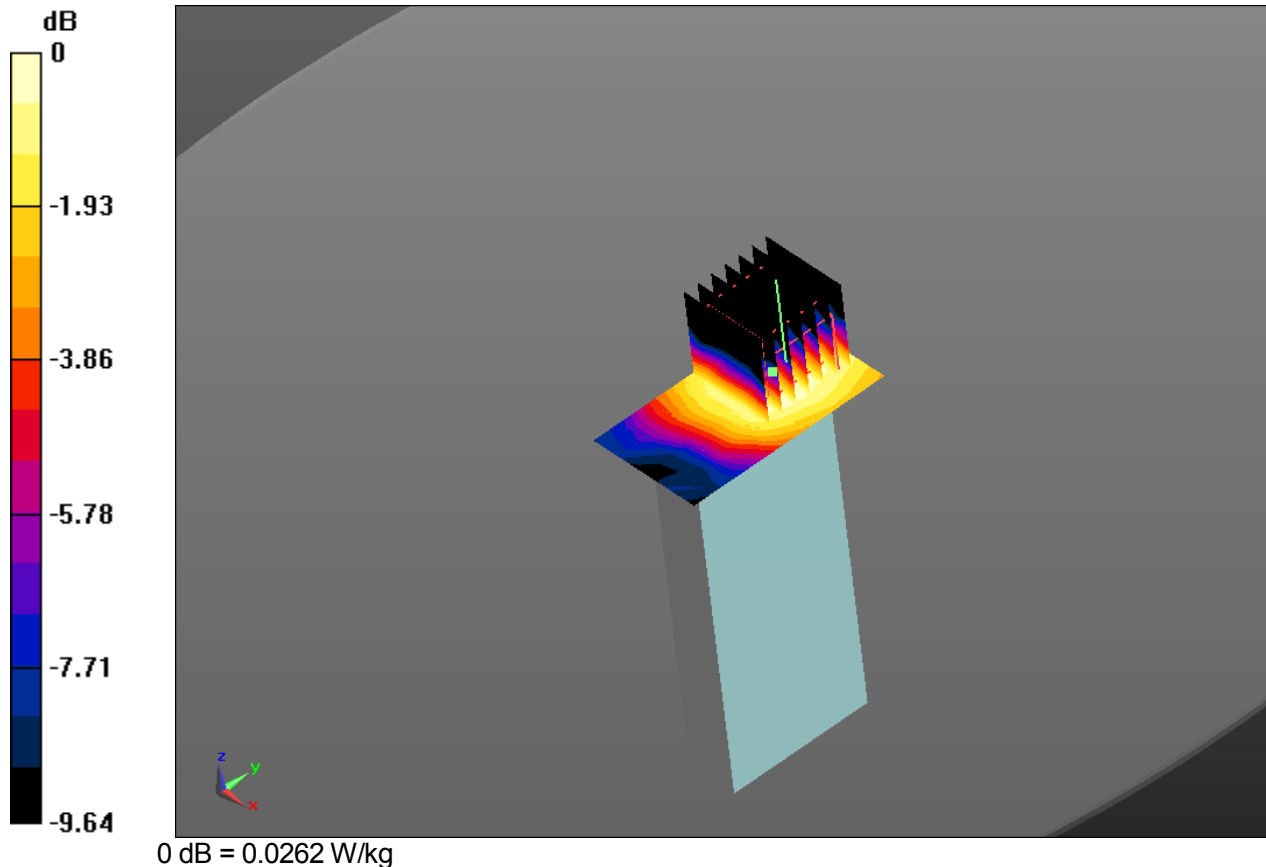

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Bottom, PCS 1900 PCS Ch.661, Ant Internal, Standard Battery

Area Scan (41x71x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0744 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.212 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0764 W/kg

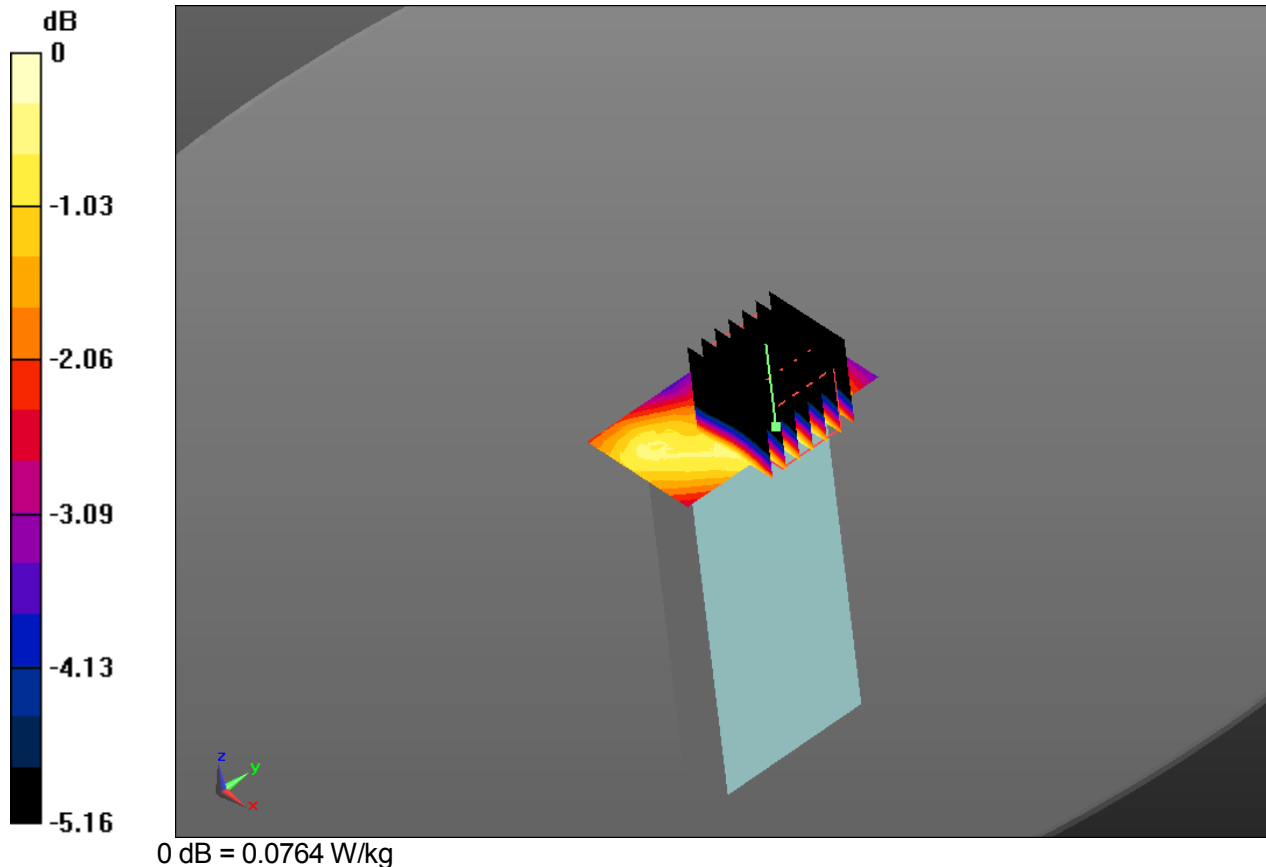

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Front, PCS 1900 Ch.661, Ant Internal, Standard Battery

Area Scan (81x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.266 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.227 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.280 W/kg

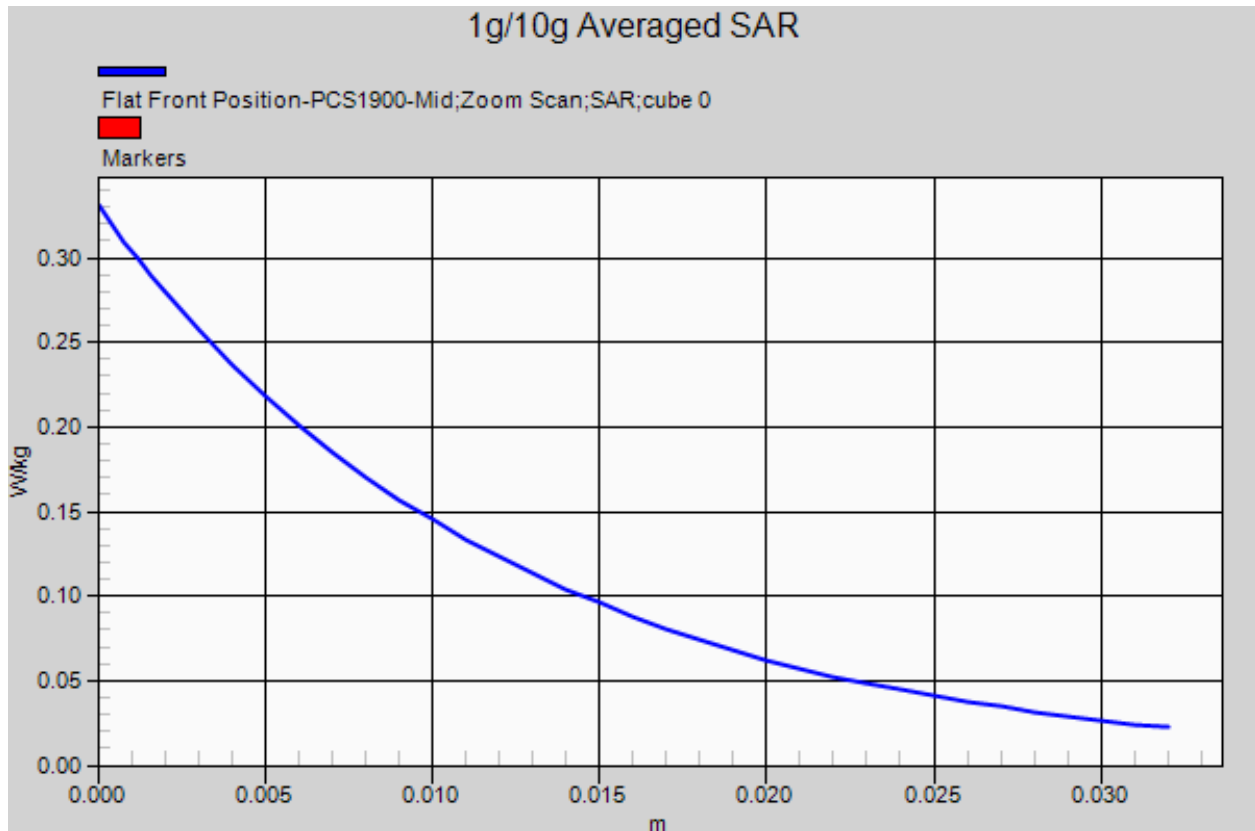

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Front, PCS 1900 GPRS 2Tx Ch.661, Ant Internal, Standard Battery

Area Scan (81x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.400 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 8.514 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.203 W/kg
 Maximum value of SAR (measured) = 0.415 W/kg

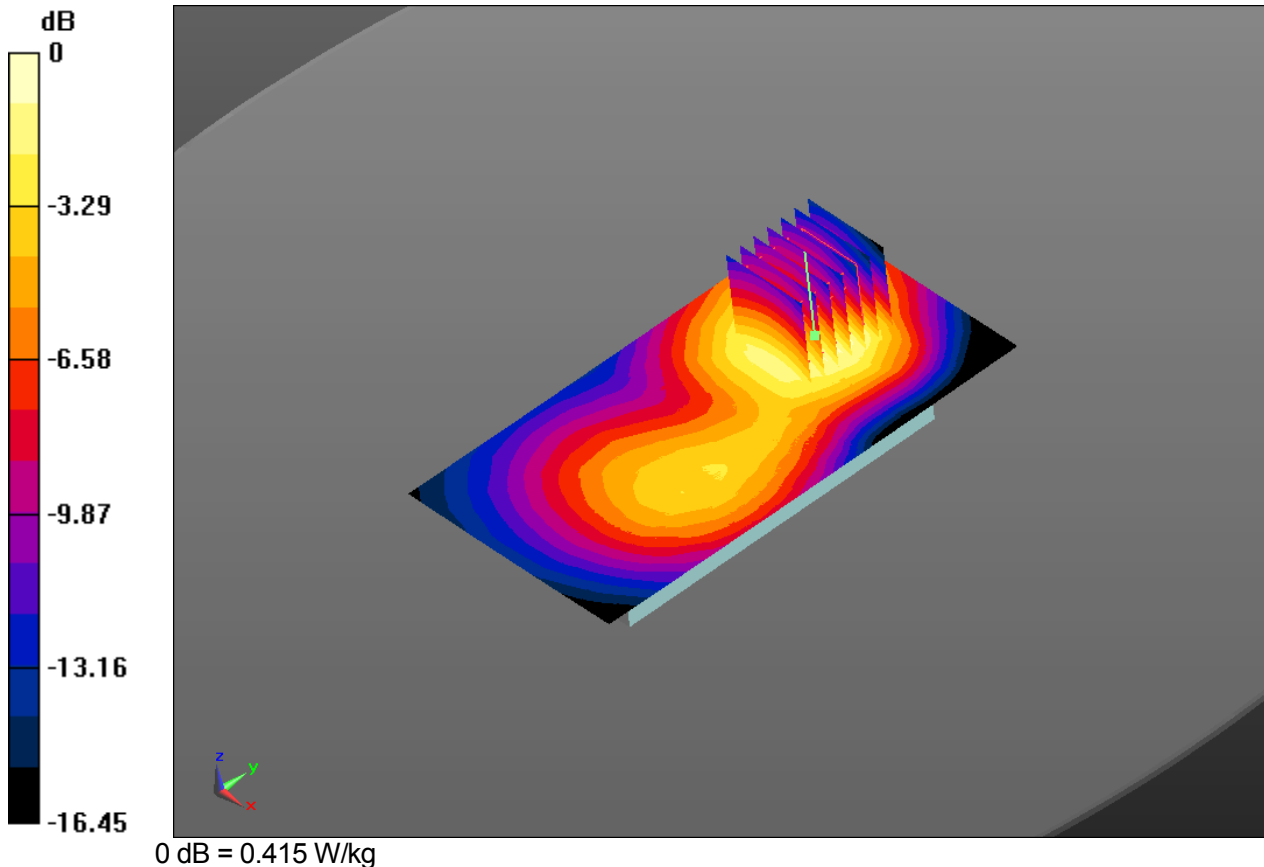

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Rear, PCS 1900 GPRS 1Tx Ch.661, Ant Internal, Standard Battery

Area Scan (81x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.257 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 10.38 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.123 W/kg
 Maximum value of SAR (measured) = 0.264 W/kg

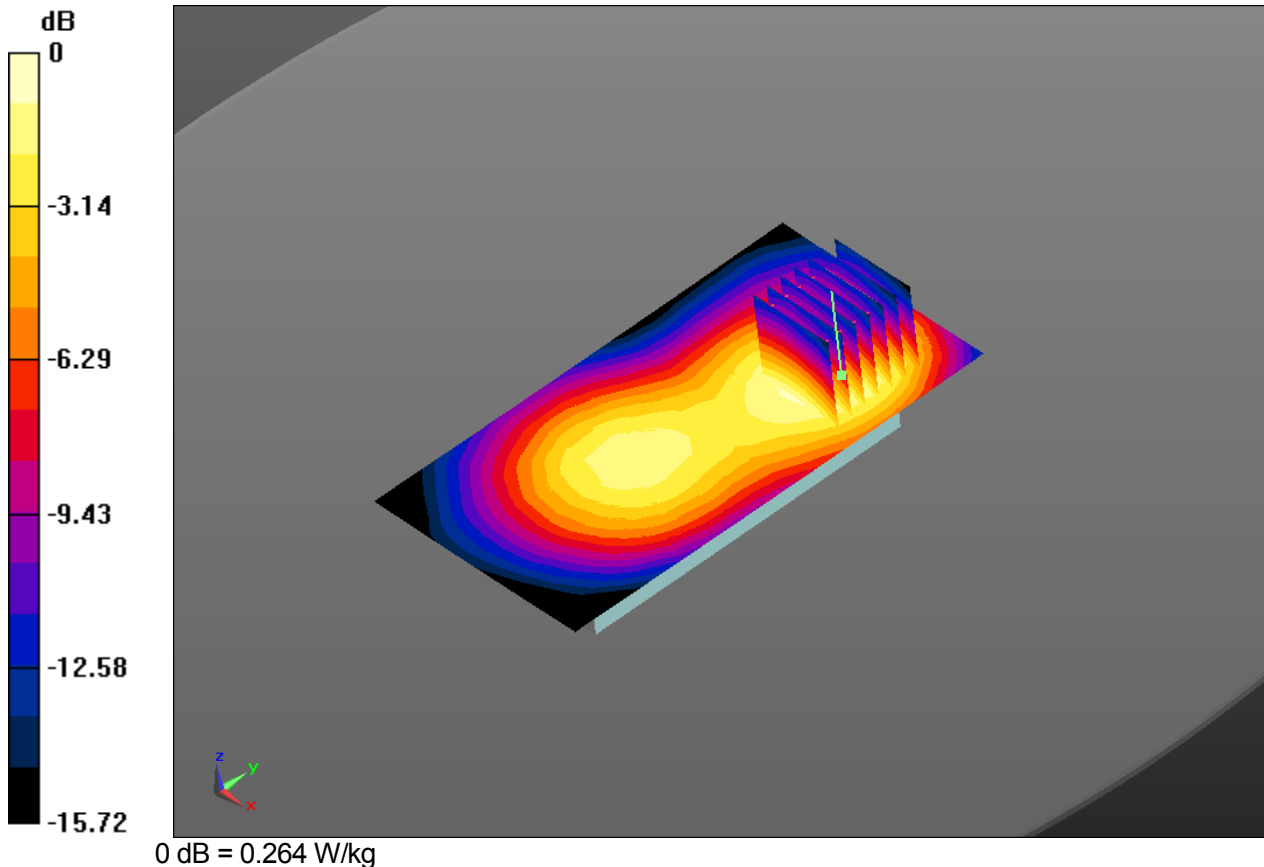

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Rear, PCS 1900 GPRS 2Tx Ch.661, Ant Internal, Standard Battery

Area Scan (81x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.393 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.92 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.403 W/kg

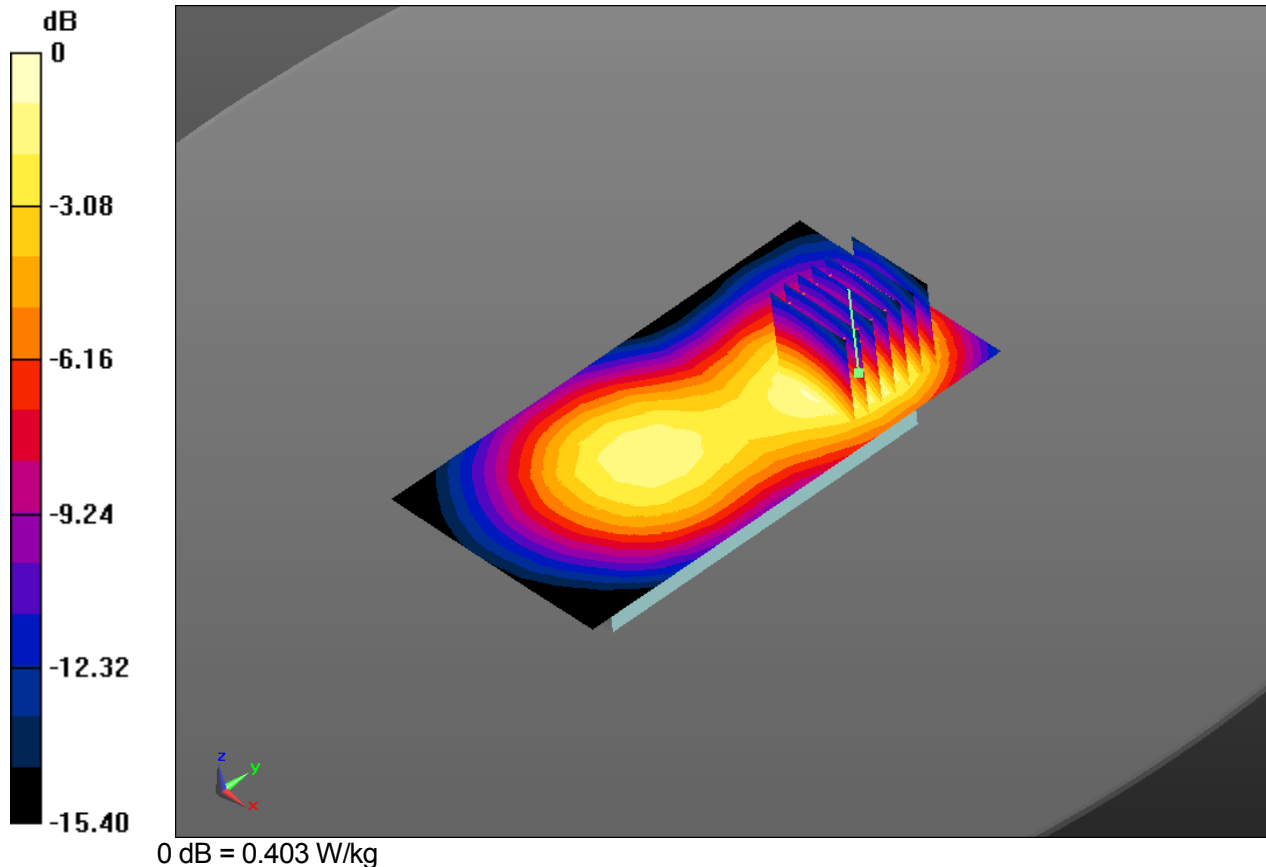

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Right side, PCS 1900 GPRS 2Tx Ch.661, Ant Internal, Standard Battery

Area Scan (41x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.116 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.229 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

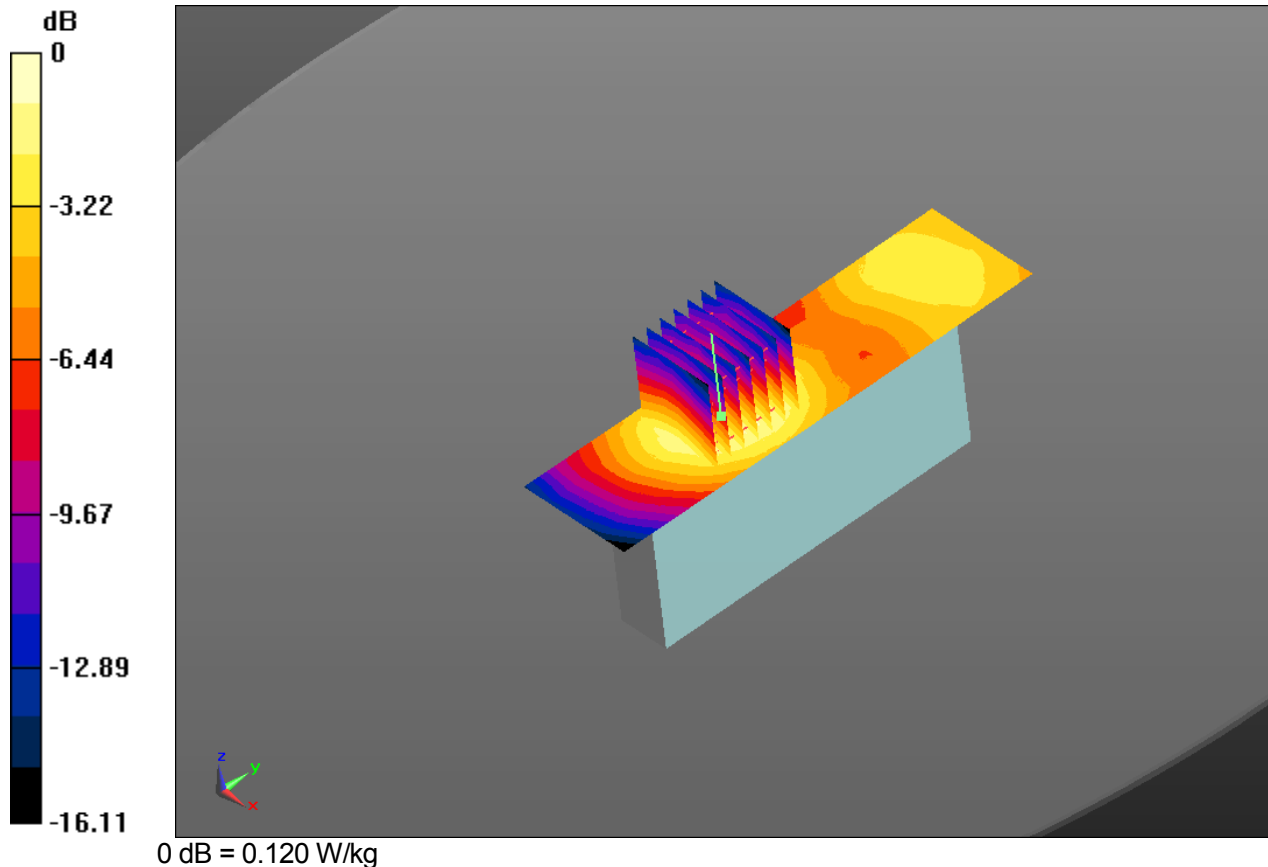

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Left side, PCS 1900 GPRS 2Tx Ch.661, Ant Internal, Standard Battery

Area Scan (41x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.230 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.694 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

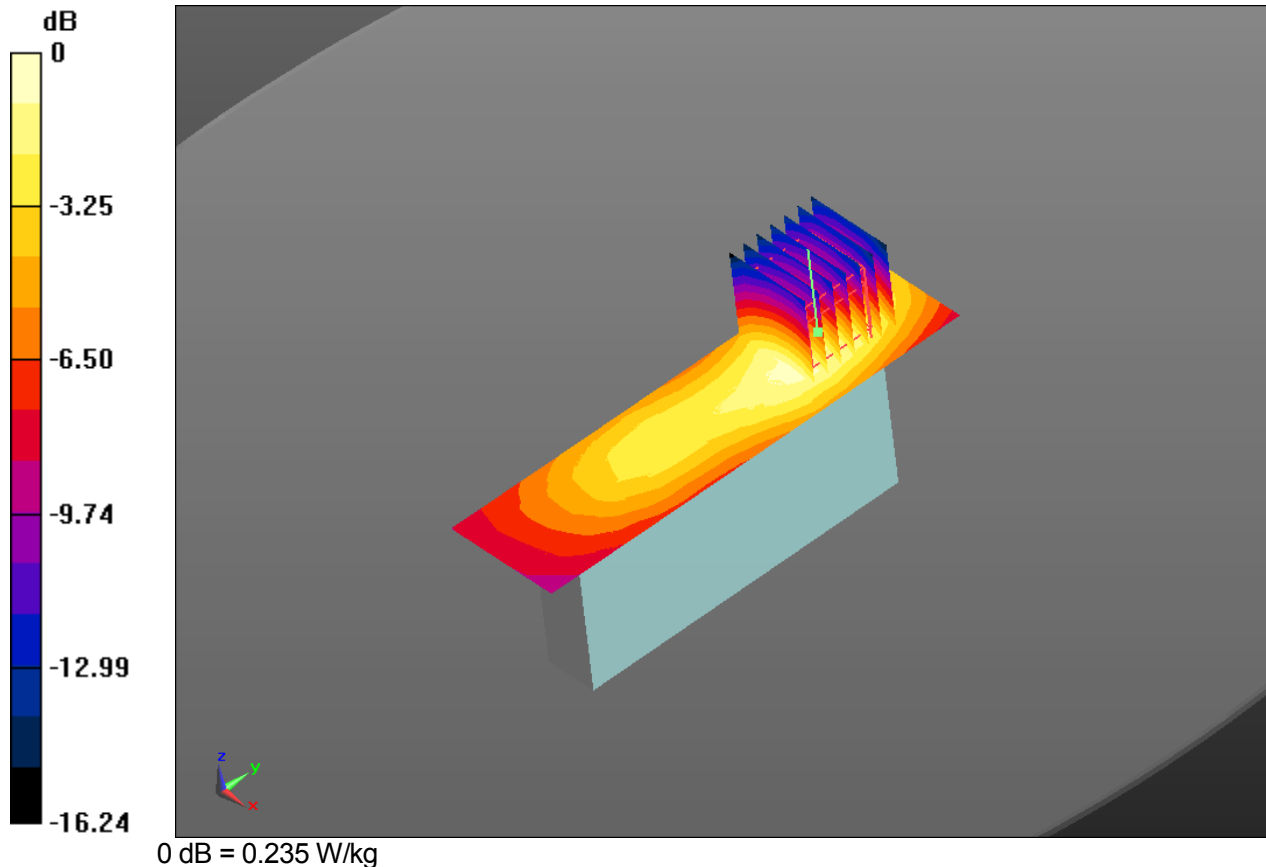

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz
 Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³
 Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;
 Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$
 Electronics: DAE4 Sn1409; Calibrated: 11/22/2013
 Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799
 DASY52 52.8 (8);


Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Top, PCS 1900 GPRS 2Tx Ch.661, Ant Internal, Standard Battery

Area Scan (41x71x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
 Maximum value of SAR (measured) = 0.115 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 7.350 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.056 W/kg
 Maximum value of SAR (measured) = 0.115 W/kg

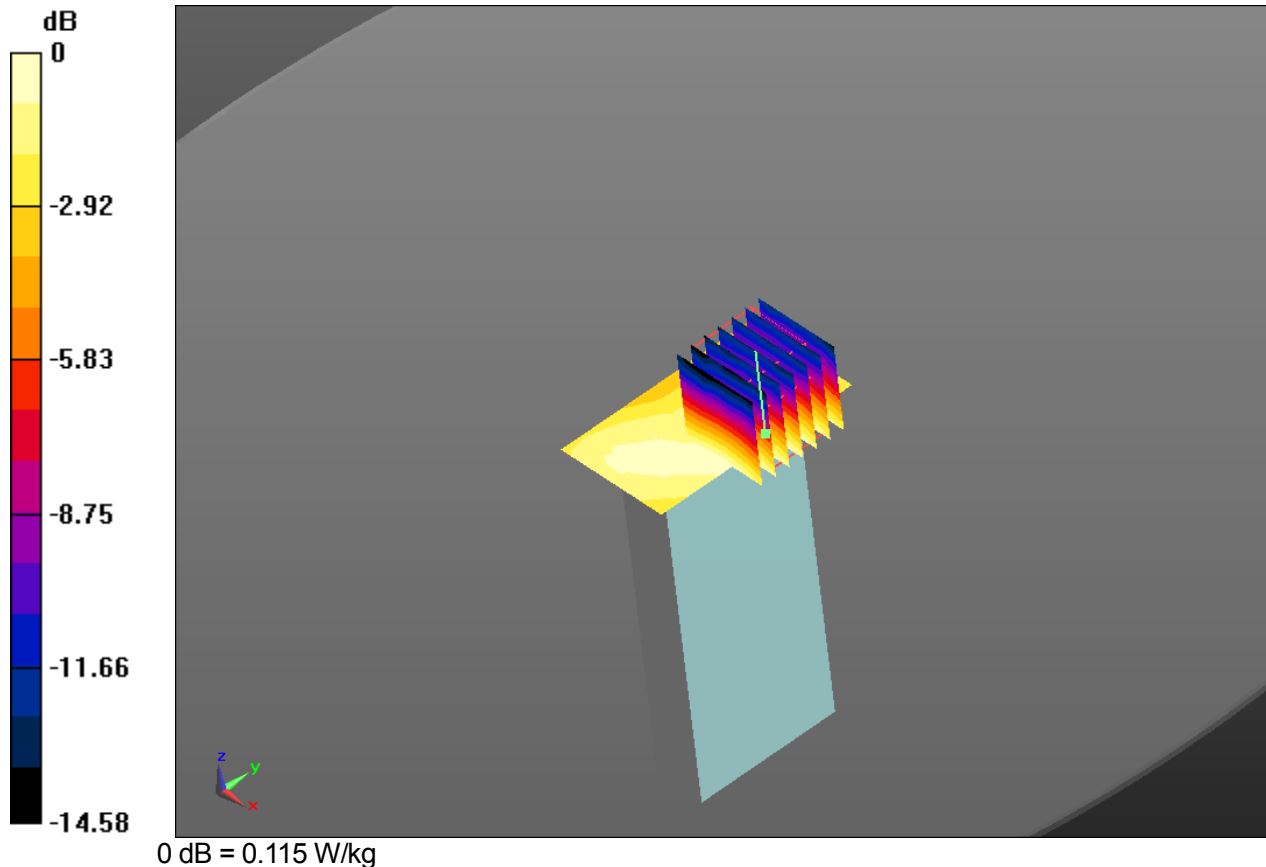

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Bottom, PCS 1900 GPRS 2Tx Ch.661, Ant Internal, Standard Battery

Area Scan (41x71x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.109 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.491 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

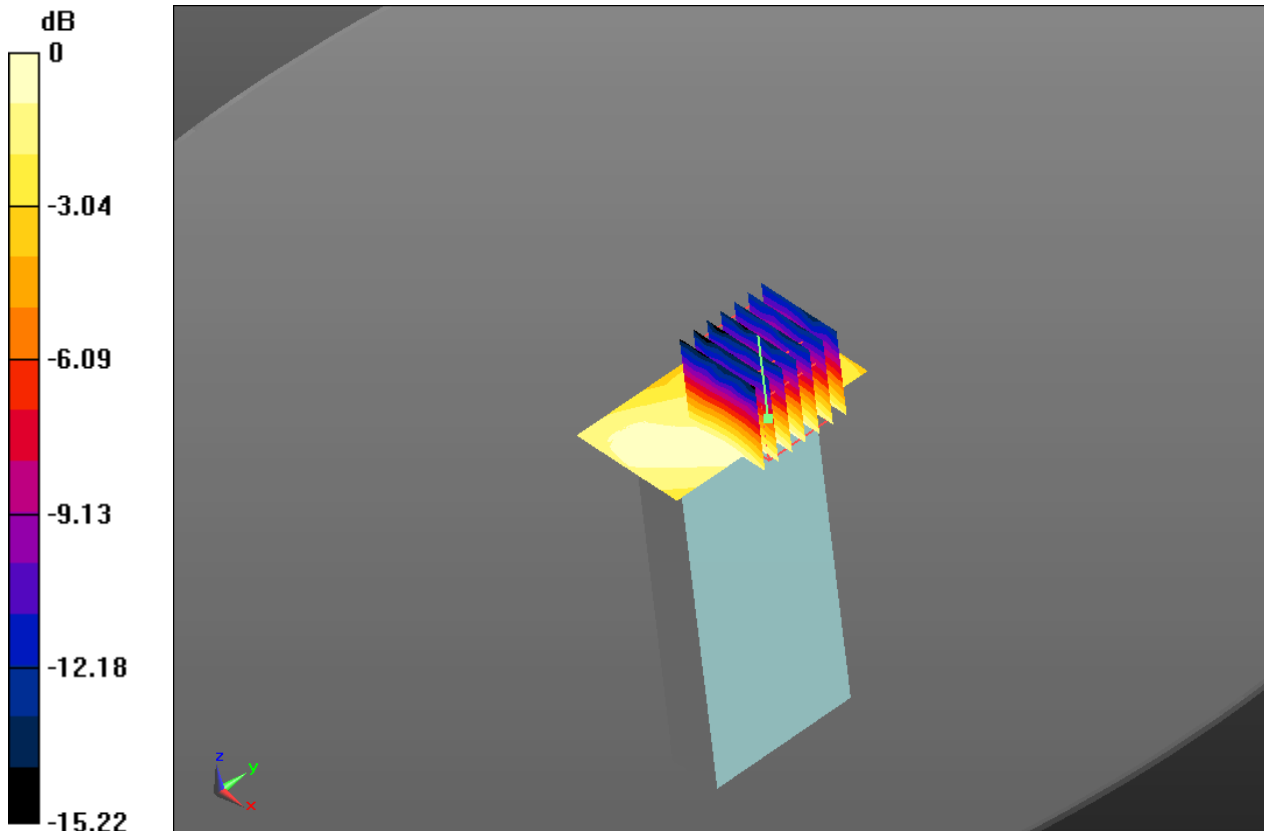

0 dB = 0.110 W/kg

DUT: Mobile Phone; Type: KYY09

Communication System: PCS 1900; Frequency: 1880.0 MHz

Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 51.872$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY Configuration

Probe: EX3DV4 - SN3957; ConvF(7.91, 7.91, 7.91); Calibrated: 12/3/2013;

Sensor-Surface: 2mm (Mechanical Surface Detection), $z = 1.0, 31.0$

Electronics: DAE4 Sn1409; Calibrated: 11/22/2013

Phantom: SAM v5.0 TP:1799; Type: QD000P40CD; Serial: TP:1799

DASY52 52.8 (8);

Test date: 2014-9-25; Ambient Temp: 23.2; Tissue Temp: 22.9

1.5 cm space from Body, Front, PCS 1900 GPRS 2Tx Ch.661, Ant Internal, Standard Battery

Area Scan (81x151x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.400 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.514 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

