

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1612-0168
2. Customer
 - Name : Kyocera Corporation
 - Address : 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa Japan 224-8502
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / YKDA25
FCC ID : JOYYKDA25
5. Test Method Used : KDB 558074, ANSI C63.10-2013
Test Specification : FCC Part 15 Subpart C.247
6. Date of Test : 2016-12-15 ~ 2016-12-22
7. Testing Environment : See appended Test Report.
8. Test Result : Refer to the attached Test Result.

| | | |
|-------------|---|---|
| Affirmation | Tested by Name : Jaejin Lee  | Technical Manager Name : Geunki Son  |
|-------------|---|---|

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2016 . 12 . 27 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

| Test Report No. | Date | Description |
|------------------------|---------------|--------------------|
| DRTFCC1612-0168 | Dec. 27, 2016 | Initial issue |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Table of Contents

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 4 |
| 1.1 Testing Laboratory | 4 |
| 1.2 Test Environment | 4 |
| 1.3 Measurement Uncertainty..... | 4 |
| 1.4 Details of Applicant | 5 |
| 1.5 Description of EUT | 5 |
| 1.6 Auxiliary equipment for testing..... | 5 |
| 2. SUMMARY OF TESTS | 6 |
| 3. TEST METHODOLOGY | 7 |
| 3.1 EUT CONFIGURATION | 7 |
| 3.2 EUT EXERCISE | 7 |
| 3.3 GENERAL TEST PROCEDURES | 7 |
| 3.4 DESCRIPTION OF TEST MODES..... | 7 |
| 4. INSTRUMENT CALIBRATION | 8 |
| 5. ANTENNA REQUIREMENTS..... | 8 |
| 6. TEST RESULT | 9 |
| 6.1 6 dB Bandwidth | 9 |
| 6.2 Maximum Peak Conducted Output Power | 18 |
| 6.3 Maximum Power Spectral Density | 21 |
| 6.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions..... | 30 |
| 6.5 Radiated Spurious Emissions..... | 63 |
| 6.6 Power-line conducted emissions | 69 |
| 7. LIST OF TEST EQUIPMENT..... | 72 |
| APPENDIX I | 73 |
| APPENDIX II | 74 |
| APPENDIX III | 77 |

1. GENERAL INFORMATION

1.1 Testing Laboratory

| DT&C Co., Ltd. | | | |
|----------------|-------------------------------------|----------------|---|
| | Standard | Site number | Address |
| FCC | <input checked="" type="checkbox"/> | 165783 | 42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935 |
| | <input type="checkbox"/> | 804488 | 42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935 |
| | <input type="checkbox"/> | 596748 | 42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935 |
| | <input type="checkbox"/> | 678747 | 683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080 |
| IC | <input type="checkbox"/> | 5740A-3 | 42, Yurim-ro 154 beon-gil, Cheoin -gu, Yongin-si, Gyeonggi -do, South Korea 449-935 |
| | <input type="checkbox"/> | 5740A-2 | 683-3, Yubang-dong, Cheoin-gu, Yongin-si, Kyeonggi-do, Korea, 449-080 |

www.dtnc.net

| | | |
|-----------|---|------------------|
| Telephone | : | + 82-31-321-2664 |
| FAX | : | + 82-31-321-1664 |

1.2 Test Environment

| Ambient Condition | |
|---------------------|--------------|
| ▪ Temperature | +20 ~ +24 °C |
| ▪ Relative Humidity | 43 % ~ 48 % |

1.3 Measurement Uncertainty

| Test items | Measurement uncertainty |
|---|---|
| Transmitter Output Power | 0.71 dB (The confidence level is about 95 %, k = 2) |
| Conducted spurious emission | 0.99 dB (The confidence level is about 95 %, k = 2) |
| AC conducted emission | 2.4 dB (The confidence level is about 95 %, k = 2) |
| Radiated spurious emission (1 GHz Below) | 5.1 dB (The confidence level is about 95 %, k = 2) |
| Radiated spurious emission (1 GHz ~ 18 GHz) | 5.4 dB (The confidence level is about 95 %, k = 2) |
| Radiated spurious emission (18 GHz Above) | 5.3 dB (The confidence level is about 95 %, k = 2) |

1.4 Details of Applicant

Applicant : Kyocera Corporation
Address : 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa Japan 224-8502
Contact person : Yoshikazu Yamamoto

1.5 Description of EUT

| | |
|------------------------------|---|
| EUT | Mobile Phone |
| Model Name | YKDA25 |
| Add Model Name | NA |
| Power Supply | DC 3.8 V |
| Hardware version | WS2 |
| Software version | 006.0.1000 |
| Frequency Range | <ul style="list-style-type: none">802.11b/g/n(20 MHz) : 2412 MHz ~ 2462 MHz802.11n(40 MHz) : 2422 MHz ~ 2452 MHz |
| Max. RF Output Power | <ul style="list-style-type: none">802.11b : 18.44 dBm802.11g : 21.13 dBm802.11n(HT20) : 21.26 dBm802.11n(HT40) : 21.34 dBm |
| Modulation Type | 802.11b : DSSS/CCK 802.11g/n(HT20/40) : OFDM |
| Antenna Specification | Internal Antenna Max. peak gain : -2.10 dBi |

1.6 Auxiliary equipment for testing

| Equipment | Model Name | Serial No. | Manufacturer | Note |
|-----------|---------------|------------|--------------|---------|
| Laptop | PSCFJK-003004 | YD068849Q | TOSHIBA | FCC DOC |
| - | - | - | - | - |

2. SUMMARY OF TESTS

| FCC Part | RSS Std. | Parameter | Limit | Test Condition | Status Note 1 |
|-------------------------------|--|---|--------------------------|-------------------|-----------------|
| 15.247(a) | RSS-247 [5.2] | 6 dB Bandwidth | > 500 kHz | Conducted | C |
| 15.247(b) | RSS-247 [5.4] | Transmitter Output Power | < 1 Watt | | C |
| 15.247(d) | RSS-247 [5.5] | Out of Band Emissions / Band Edge | 20 dBc in any 100 kHz BW | | C |
| 15.247(e) | RSS-247 [5.2] | Transmitter Power Spectral Density | < 8 dBm/3 kHz | | C |
| - | RSS-Gen [6.6] | Occupied Bandwidth (99 %) | RSS-Gen(6.6) | | C |
| 15.247(d) 15.205 15.209 | RSS-247 [5.5] RSS-GEN [8.9] RSS-GEN [8.10] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | FCC 15.209 limits | Radiated | C Note 2 |
| 15.207 | RSS-Gen [8.8] | AC Line Conducted Emissions | FCC 15.207 limits | AC Line Conducted | C |
| 15.203 | RSS-Gen [8.3] | Antenna Requirements | FCC 15.203 | - | C |

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: This test item was performed in each axis and the worst case data was reported.

3. TEST METHODOLOGY

Generally the tests were performed according to the [KDB558074 D01 v03r05](#). And [ANSI C63.10-2013](#) was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB 558074. So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB 558074. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on section 12.1 of the KDB 558074.

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes.

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. ANTENNA REQUIREMENTS

5.1 According to FCC 47 CFR §15.203:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna is attached on the main PCB using the special spring tension. (Refer to Internal Photo file.)
Therefore this E.U.T Complies with the requirement of §15.203.**

6. TEST RESULT

6.1 6 dB Bandwidth

Test Requirements and limit, §15.247(a)

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074**

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
(RBW : 100 kHz / VBW : 300 kHz)
3. Detector = **Peak**.
4. Trace mode = **Max hold**.
5. Sweep = **Auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


■ TEST RESULTS: **Comply**

| Test Mode | Data Rate | Frequency [MHz] | Test Results [MHz] |
|----------------|-----------|-----------------|--------------------|
| 802.11b | 1 Mbps | 2412 | 9.61 |
| | | 2437 | 10.03 |
| | | 2462 | 9.09 |
| 802.11g | 6 Mbps | 2412 | 16.37 |
| | | 2437 | 16.41 |
| | | 2462 | 16.35 |
| 802.11n (HT20) | MCS 0 | 2412 | 17.28 |
| | | 2437 | 17.64 |
| | | 2462 | 17.34 |
| 802.11n (HT40) | MCS 0 | 2422 | 35.81 |
| | | 2437 | 35.28 |
| | | 2452 | 35.18 |

□ RESULT PLOTS


6 dB Bandwidth

Test Mode: 802.11b & 1 Mbps & 2412 MHz

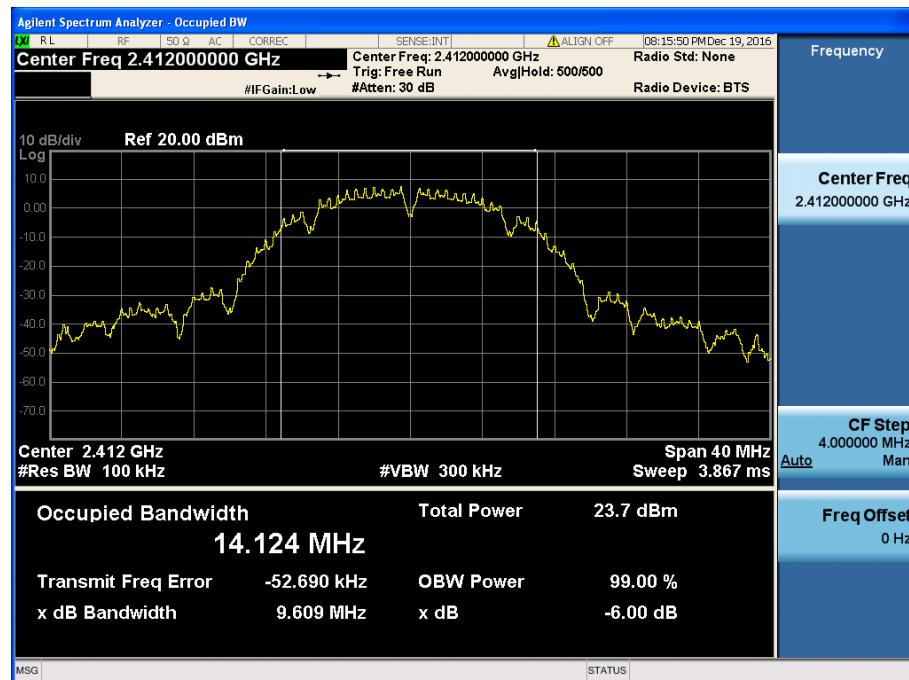


6 dB Bandwidth

Test Mode: 802.11b & 1 Mbps & 2437 MHz

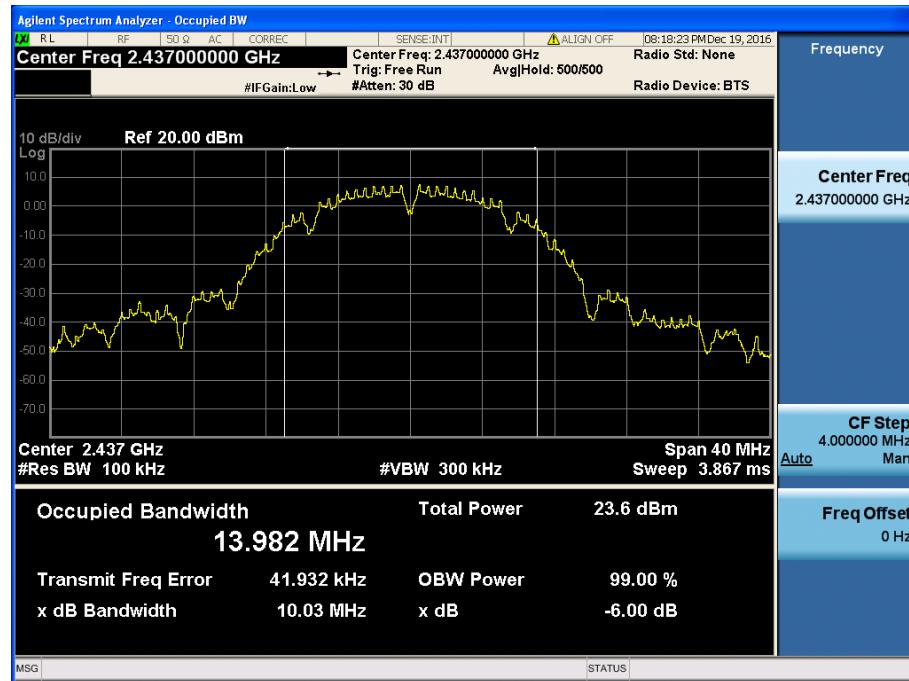


6 dB Bandwidth

Test Mode: 802.11b & 1 Mbps & 2462 MHz

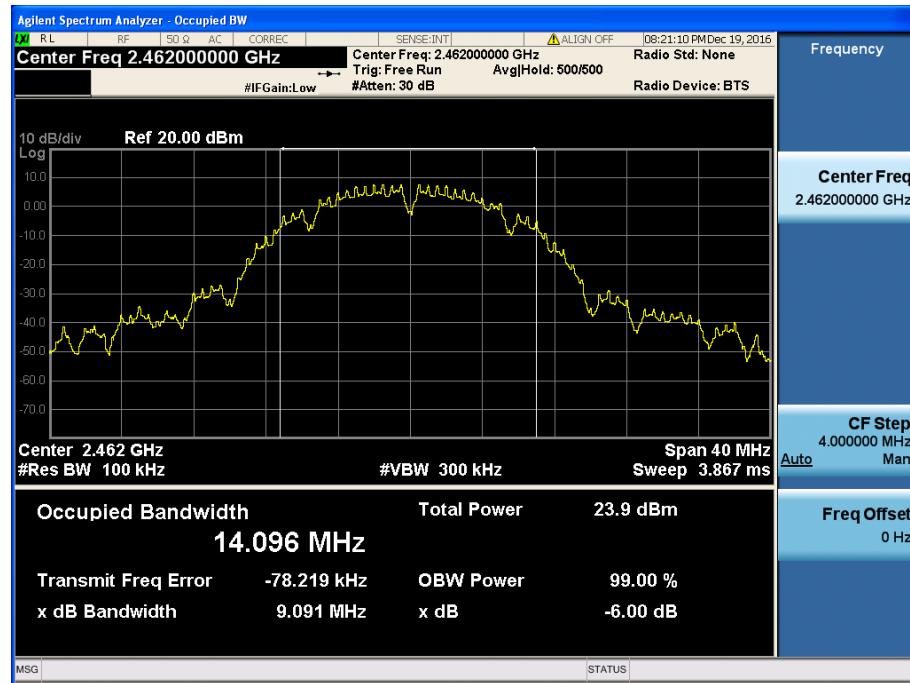


6 dB Bandwidth

Test Mode: 802.11g & 6 Mbps & 2412 MHz

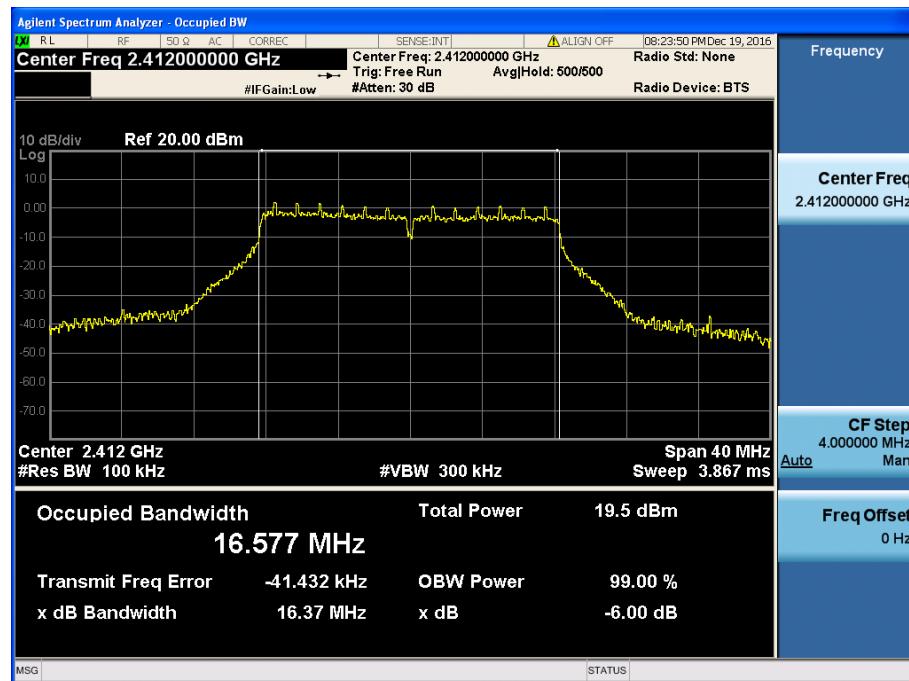


6 dB Bandwidth

Test Mode: 802.11g & 6 Mbps & 2437 MHz

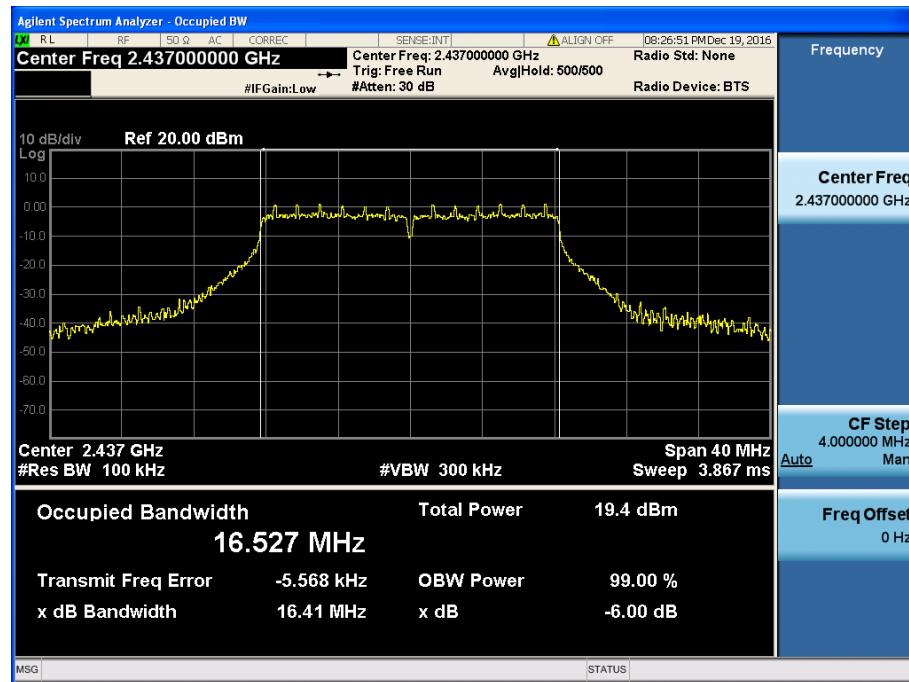


6 dB Bandwidth

Test Mode: 802.11g & 6 Mbps & 2462 MHz

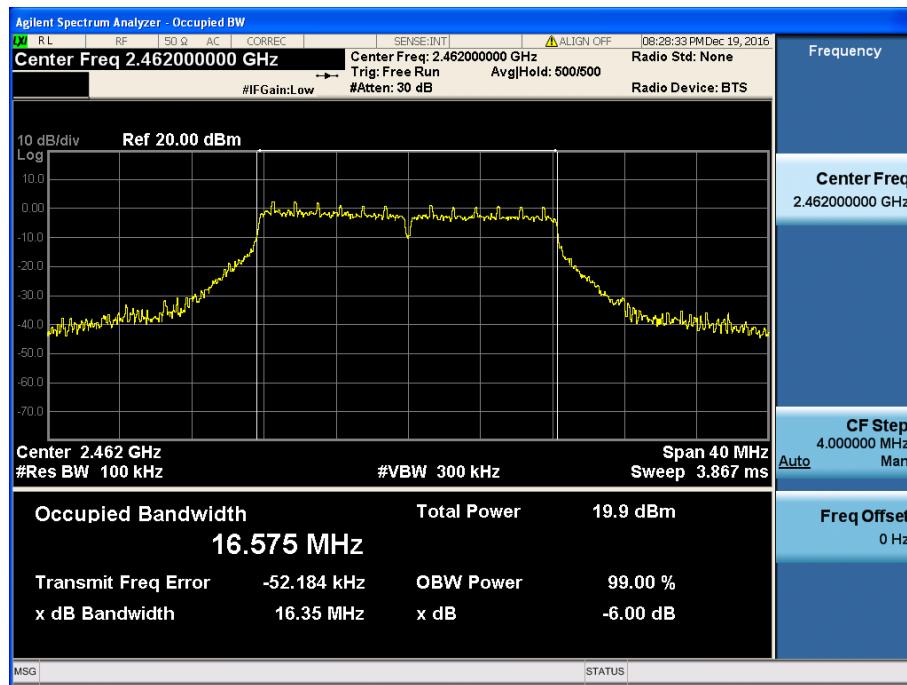


6 dB Bandwidth

Test Mode: 802.11n(HT20) & MCS 0 & 2412 MHz

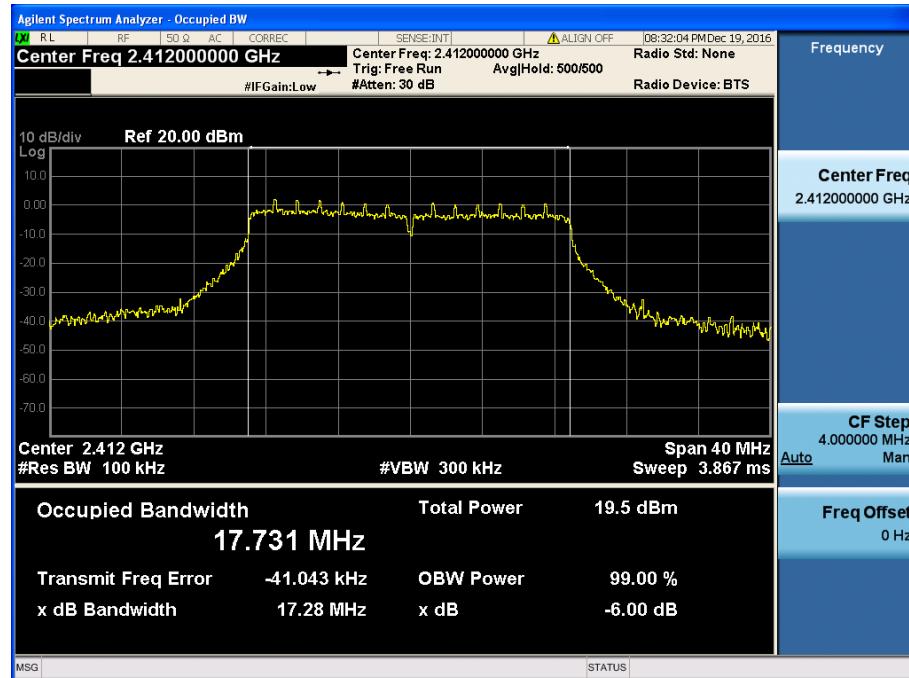


6 dB Bandwidth

Test Mode: 802.11n(HT20) & MCS 0 & 2437 MHz

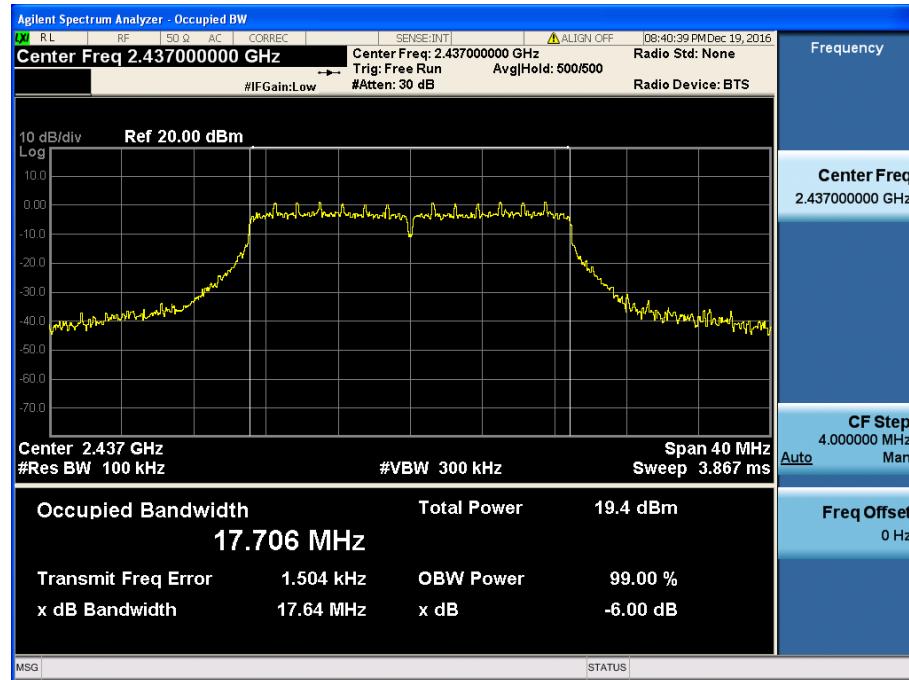


6 dB Bandwidth

Test Mode: 802.11n(HT20) & MCS 0 & 2462 MHz

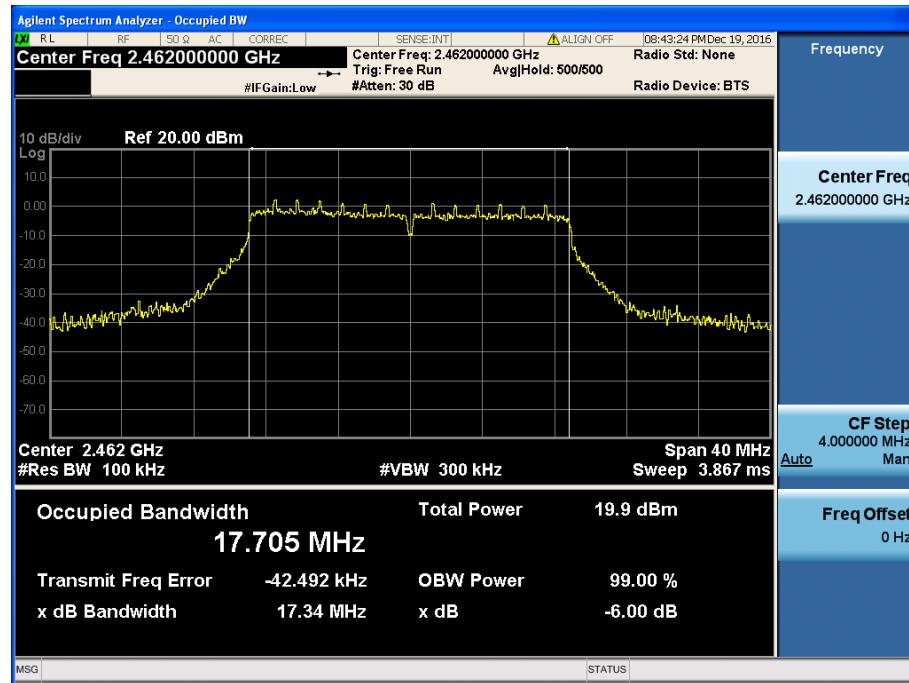


6 dB Bandwidth

Test Mode: 802.11n(HT40) & MCS 0 & 2422 MHz

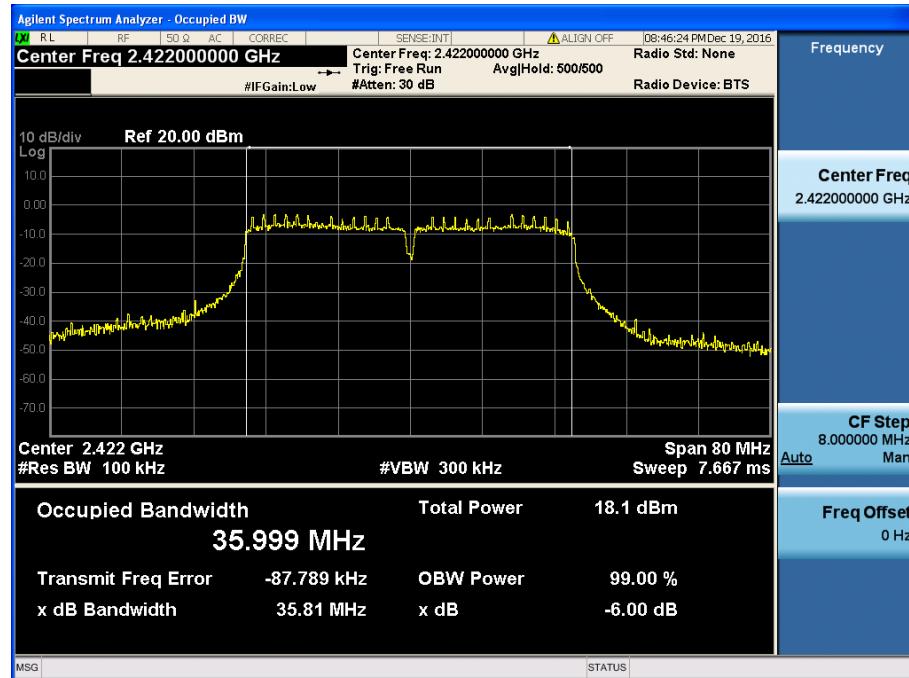


6 dB Bandwidth

Test Mode: 802.11n(HT40) & MCS 0 & 2437 MHz

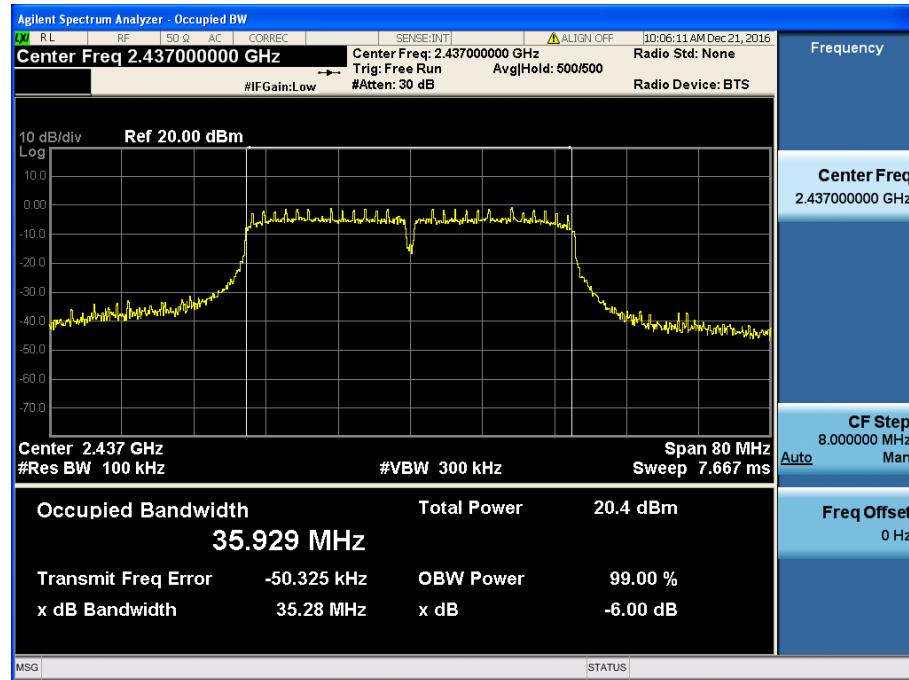

6 dB Bandwidth

Test Mode: 802.11n(HT40) & MCS 0 & 2452 MHz

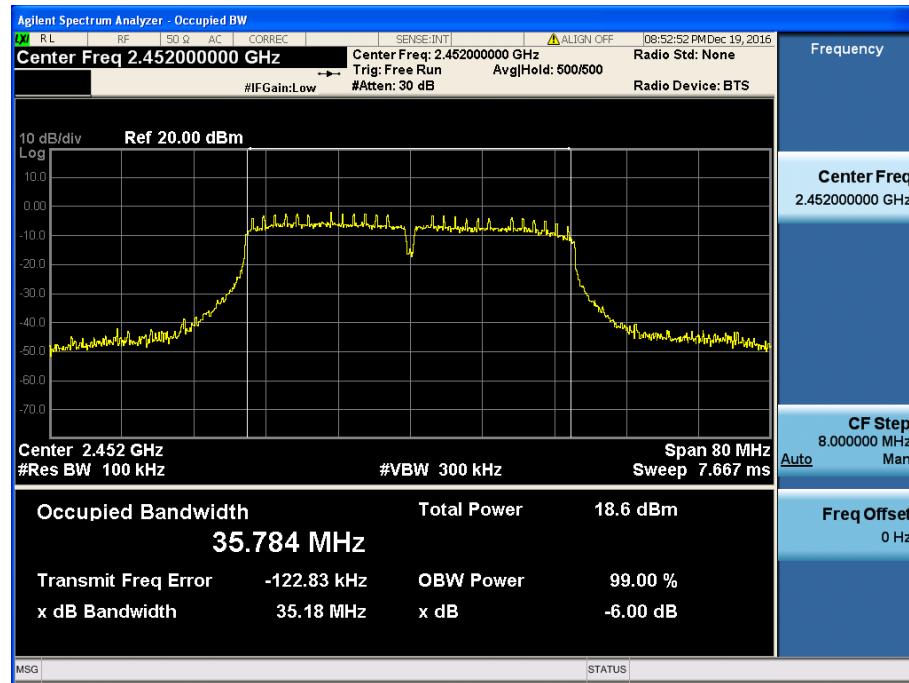


6.2 Maximum Peak Conducted Output Power

Test Requirements and limit, §15.247(b)

The maximum permissible conducted output power is **1 Watt**.

TEST CONFIGURATION

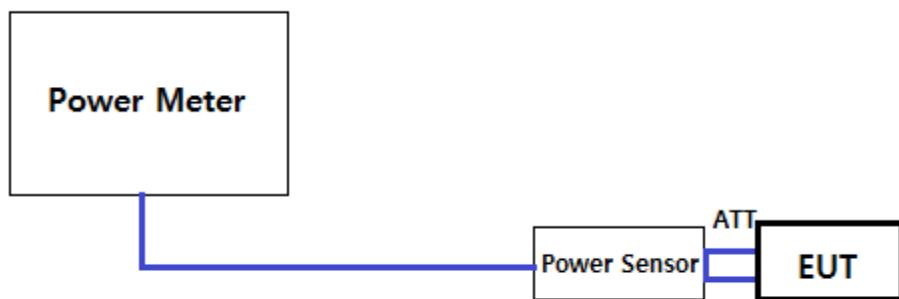

TEST PROCEDURE

1. PKPM1 Peak power meter method of KDB558074

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

2. Method AVGPM-G (Measurement using a gated RF average power meter) of KDB558074

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

TEST RESULTS: Comply

| Mode | Channel | Frequency [MHz] | Detector | Test Result [dBm] | | | | | | | |
|---------|---------|-----------------|----------|-------------------|-------|-------|-------|----|----|----|----|
| | | | | DATA RATE [Mbps] | | | | | | | |
| | | | | 1 | 2 | 5.5 | 11 | NA | NA | NA | NA |
| 802.11b | 1 | 2412 | PK | 18.31 | 18.28 | 18.22 | 18.21 | - | - | - | - |
| | | | AV | 15.81 | 15.79 | 15.75 | 15.72 | - | - | - | - |
| | 6 | 2437 | PK | 18.44 | 18.35 | 18.38 | 18.41 | - | - | - | - |
| | | | AV | 15.77 | 15.69 | 15.72 | 15.74 | - | - | - | - |
| | 11 | 2462 | PK | 18.28 | 18.25 | 18.16 | 18.21 | - | - | - | - |
| | | | AV | 15.69 | 15.66 | 15.58 | 15.62 | - | - | - | - |

| Mode | Channel | Frequency [MHz] | Detector | Test Result [dBm] | | | | | | | |
|---------|---------|-----------------|----------|-------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | DATA RATE [Mbps] | | | | | | | |
| | | | | 6 | 9 | 12 | 18 | 24 | 36 | 48 | 54 |
| 802.11g | 1 | 2412 | PK | 20.85 | 20.77 | 20.79 | 20.81 | 20.79 | 20.79 | 20.35 | 19.41 |
| | | | AV | 11.46 | 11.24 | 11.28 | 11.37 | 11.36 | 11.36 | 11.12 | 9.93 |
| | 6 | 2437 | PK | 20.81 | 20.77 | 20.78 | 20.71 | 20.65 | 20.61 | 20.25 | 19.32 |
| | | | AV | 11.44 | 11.38 | 11.41 | 11.35 | 11.33 | 11.28 | 11.08 | 10.12 |
| | 11 | 2462 | PK | 21.13 | 21.09 | 21.01 | 21.06 | 21.04 | 20.98 | 20.52 | 19.46 |
| | | | AV | 11.78 | 11.77 | 11.69 | 11.75 | 11.71 | 11.66 | 11.24 | 9.95 |

| Mode | Channel | Frequency [MHz] | Detector | Test Result [dBm] | | | | | | | |
|----------------|---------|-----------------|----------|-------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | DATA RATE [Mbps] | | | | | | | |
| | | | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 802.11n (HT20) | 1 | 2412 | PK | 21.11 | 21.06 | 21.07 | 21.05 | 21.01 | 20.81 | 20.74 | 19.82 |
| | | | AV | 11.34 | 11.28 | 11.31 | 11.29 | 11.27 | 11.09 | 11.05 | 9.75 |
| | 6 | 2437 | PK | 21.13 | 21.11 | 21.08 | 21.09 | 21.08 | 20.85 | 20.76 | 20.07 |
| | | | AV | 11.45 | 11.41 | 11.38 | 11.39 | 11.36 | 11.15 | 11.08 | 10.25 |
| | 11 | 2462 | PK | 21.26 | 21.25 | 21.17 | 21.12 | 21.11 | 20.58 | 20.52 | 19.63 |
| | | | AV | 11.79 | 11.77 | 11.78 | 11.75 | 11.71 | 11.21 | 11.15 | 9.97 |

| Mode | Channel | Frequency [MHz] | Detector | Test Result [dBm] | | | | | | | |
|-------------------|---------|-----------------|----------|-------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | | DATA RATE [MCS] | | | | | | | |
| | | | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| 802.11n (HT40) | 3 | 2422 | PK | 20.08 | 20.05 | 20.06 | 20.05 | 20.01 | 19.99 | 20.03 | 19.05 |
| | | | AV | 9.92 | 9.91 | 9.89 | 9.87 | 9.85 | 9.82 | 9.81 | 8.79 |
| | 6 | 2437 | PK | 21.34 | 21.32 | 21.25 | 21.18 | 21.22 | 20.16 | 19.14 | 18.21 |
| | | | AV | 11.47 | 11.45 | 11.42 | 11.37 | 11.41 | 10.36 | 9.34 | 8.38 |
| | 9 | 2452 | PK | 19.98 | 19.91 | 19.88 | 19.89 | 19.91 | 19.72 | 19.75 | 18.81 |
| | | | AV | 9.85 | 9.81 | 9.77 | 9.79 | 9.82 | 9.72 | 9.74 | 8.76 |

6.3 Maximum Power Spectral Density

Test requirements and limit, §15.247(e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

□ TEST CONFIGURATION

Refer to the APPENDIX I.

□ Test Procedure

Method PKPSD of KDB558074 is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW to : **3 kHz ≤ RBW ≤ 100 kHz**
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = **Peak**
6. Sweep time = **Auto couple**
7. Trace mode = **Max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


□ TEST RESULTS: Comply

| Test Mode | Data Rate | Frequency [MHz] | RBW | PKPSD [dBm] |
|--------------|-----------|-----------------|-------|-------------|
| 802.11b | 1 Mbps | 2412 | 3 kHz | -7.34 |
| | | 2437 | 3 kHz | -5.83 |
| | | 2462 | 3 kHz | -6.33 |
| 802.11g | 6 Mbps | 2412 | 3 kHz | -12.04 |
| | | 2437 | 3 kHz | -12.50 |
| | | 2462 | 3 kHz | -12.19 |
| 802.11n HT20 | MCS 0 | 2412 | 3 kHz | -11.72 |
| | | 2437 | 3 kHz | -11.30 |
| | | 2462 | 3 kHz | -11.03 |
| 802.11n HT40 | MCS 0 | 2422 | 3 kHz | -18.07 |
| | | 2437 | 3 kHz | -15.62 |
| | | 2452 | 3 kHz | -16.75 |

□ RESULT PLOTS


Maximum PKPSD

Test Mode: 802.11b & 1 Mbps & 2412 MHz

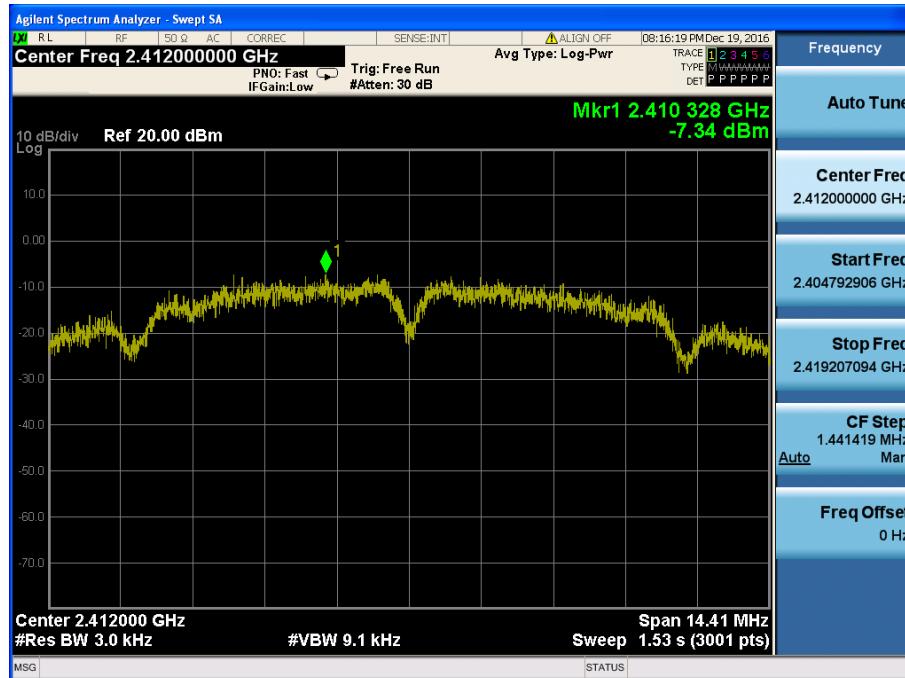


Maximum PKPSD

Test Mode: 802.11b & 1 Mbps & 2437 MHz

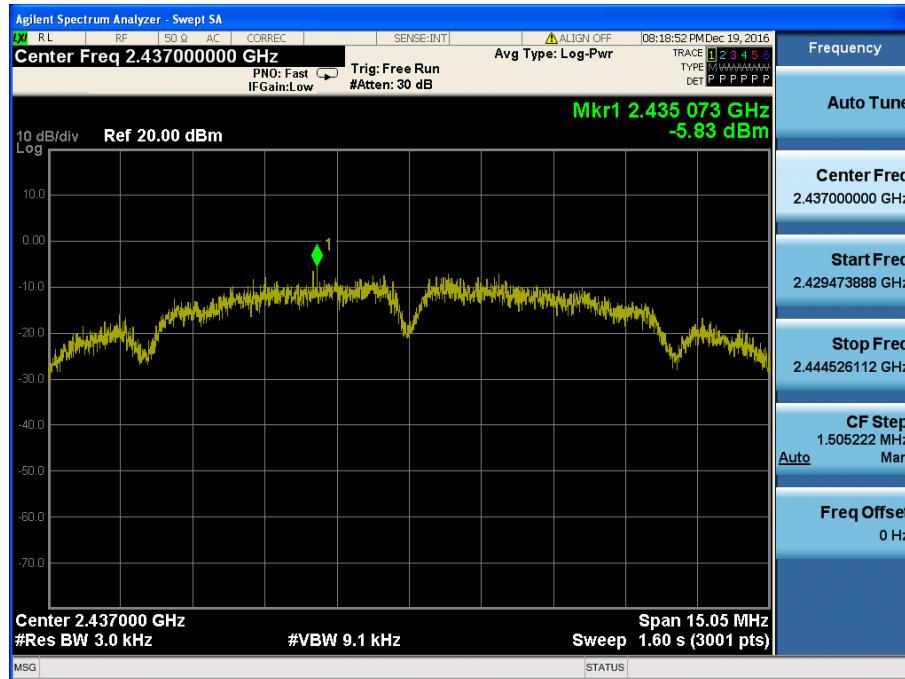


Maximum PKPSD

Test Mode: 802.11b & 1 Mbps & 2462 MHz

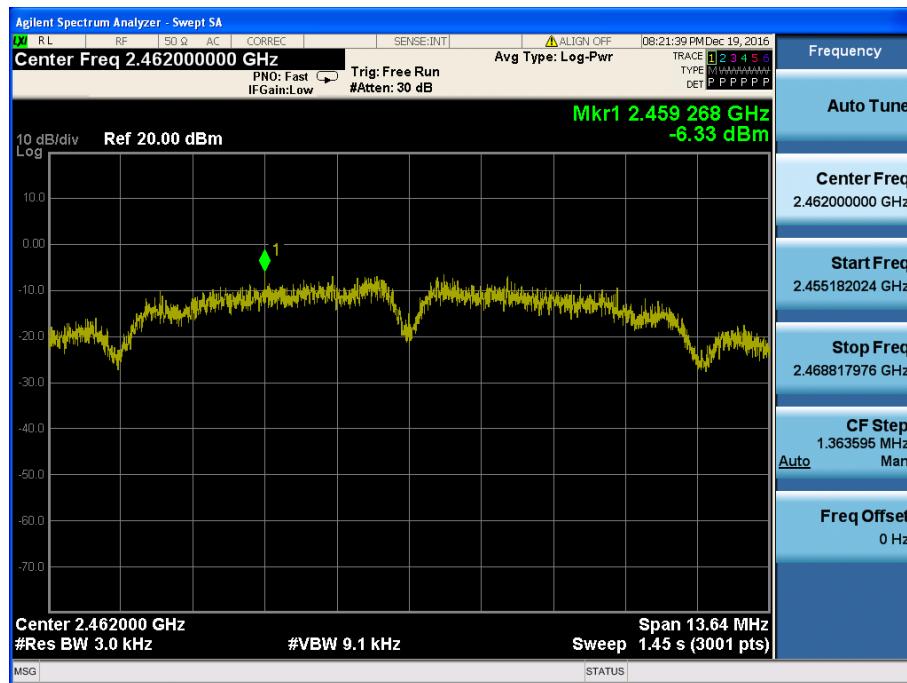


Maximum PKPSD

Test Mode: 802.11g & 6 Mbps & 2412 MHz

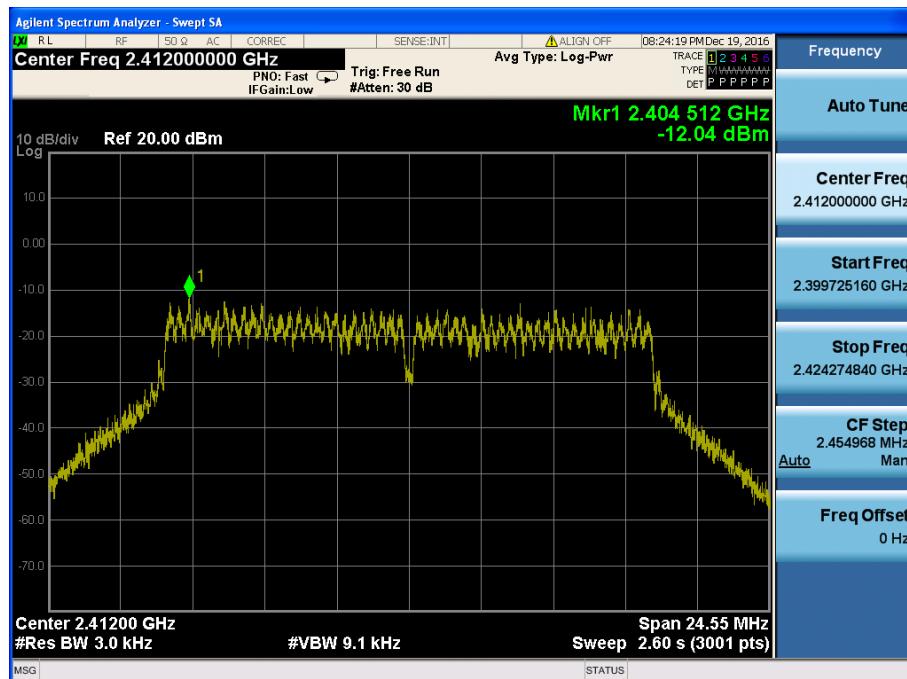


Maximum PKPSD

Test Mode: 802.11g & 6 Mbps & 2437 MHz

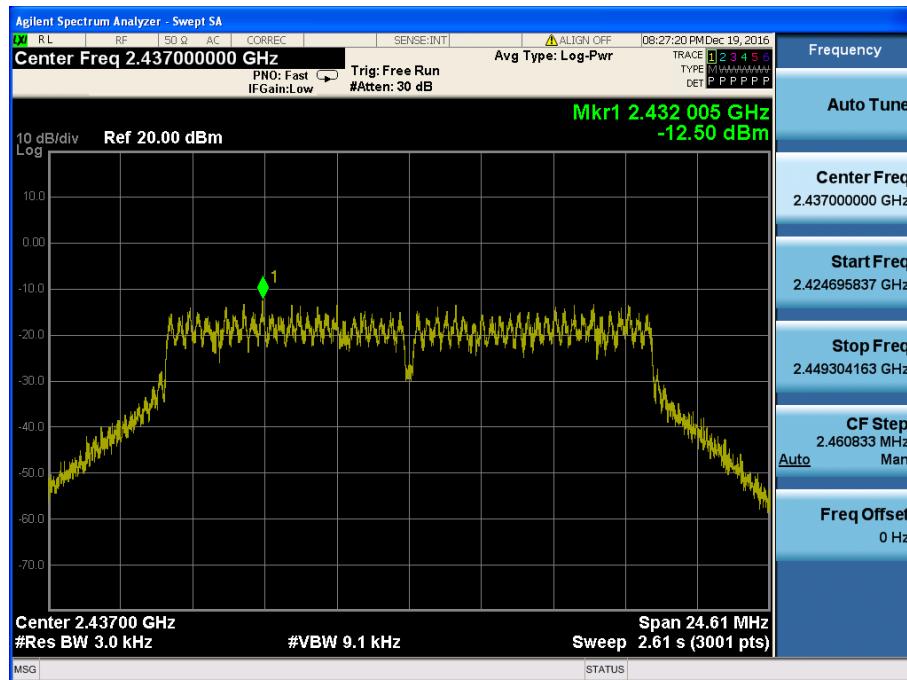


Maximum PKPSD

Test Mode: 802.11g & 6 Mbps & 2462 MHz

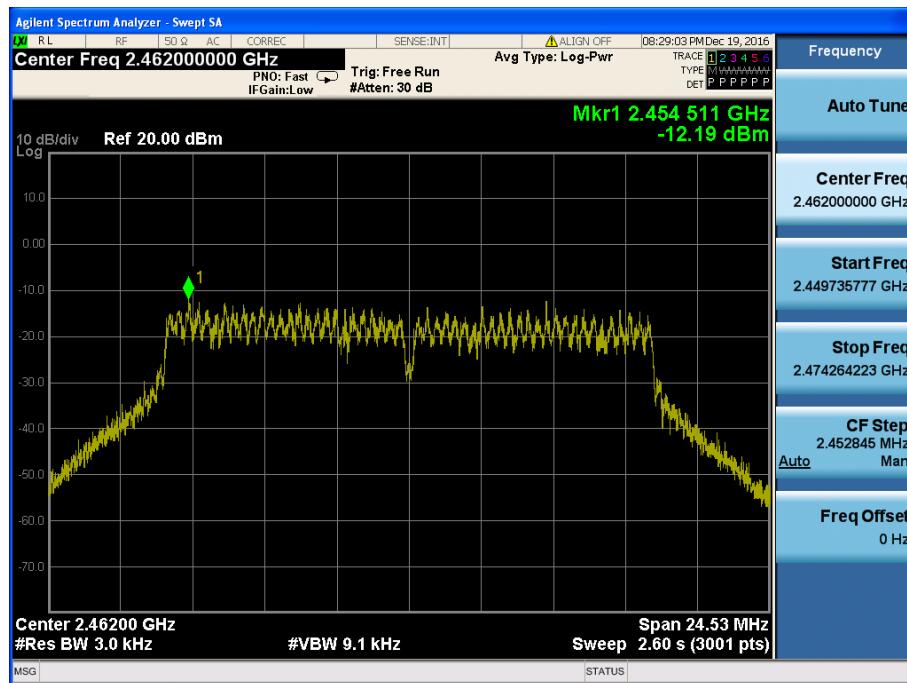


Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS 0 & 2412 MHz

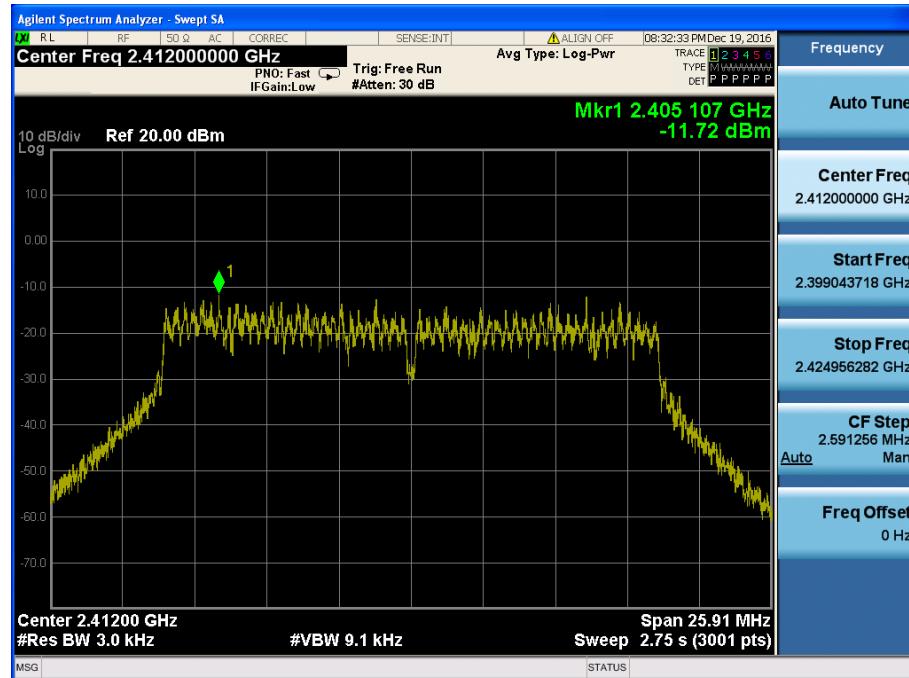


Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS 0 & 2437 MHz

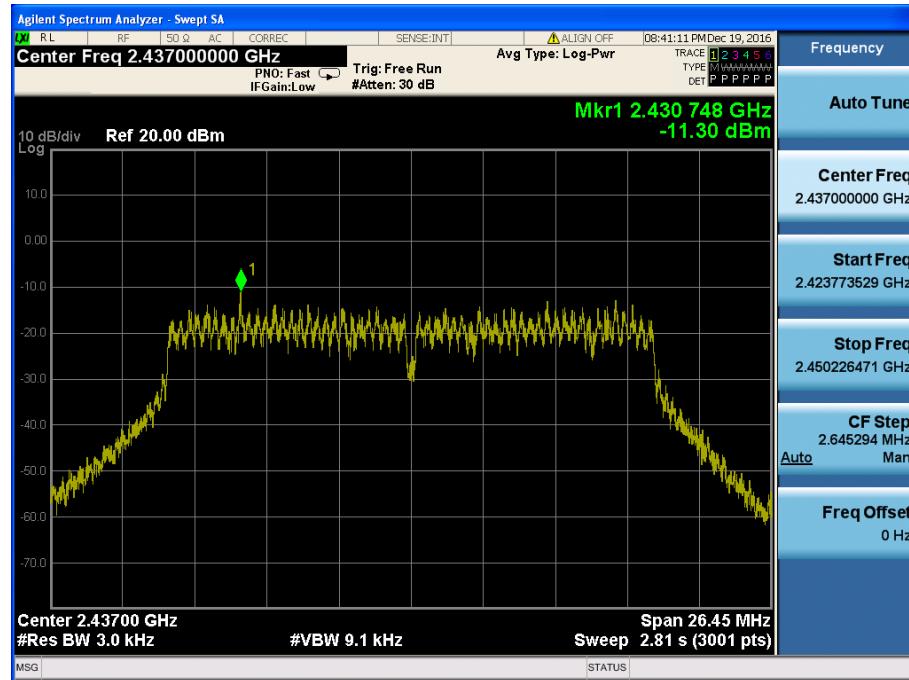


Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS 0 & 2462 MHz

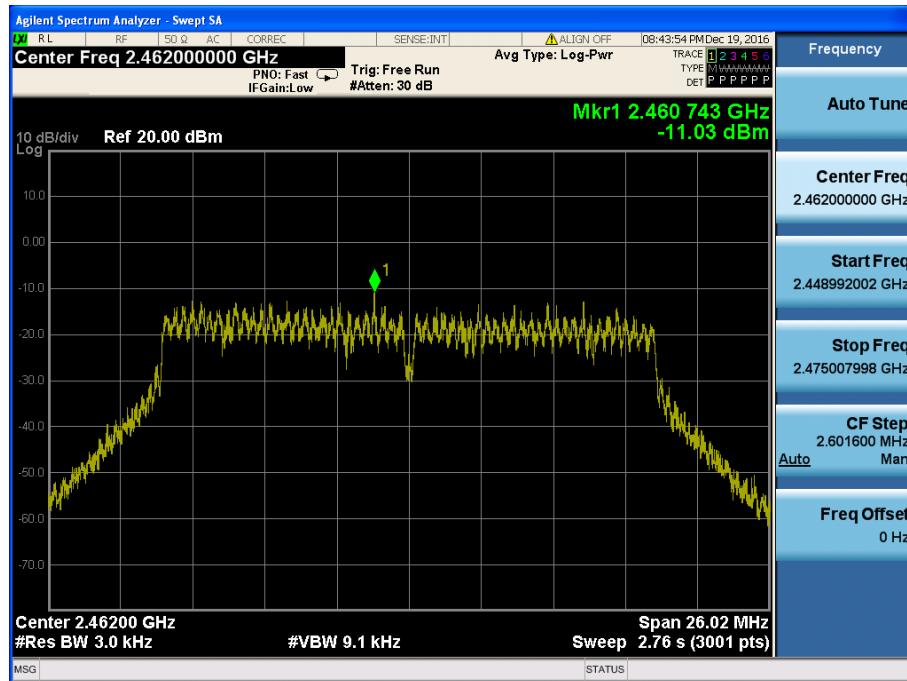


Maximum PKPSD

Test Mode: 802.11n(HT40) & MCS 0 & 2422 MHz

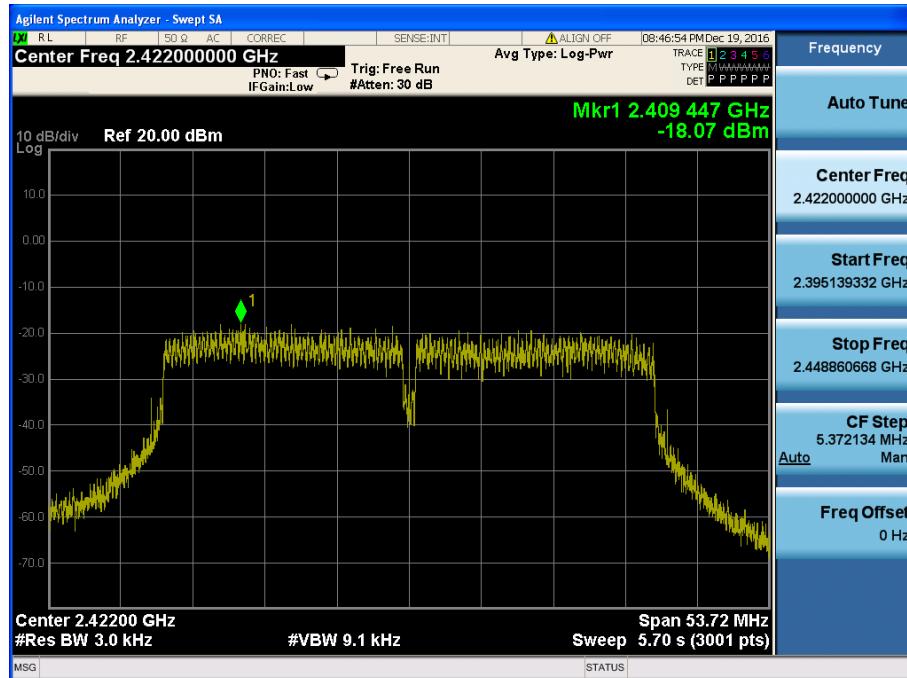


Maximum PKPSD

Test Mode: 802.11n(HT40) & MCS 0 & 2437 MHz

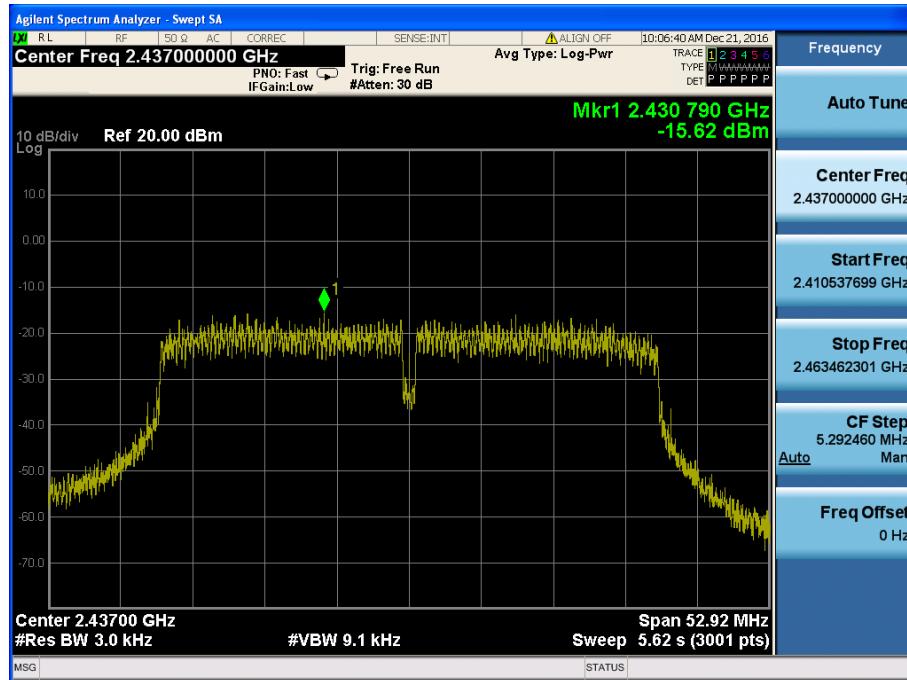

Maximum PKPSD

Test Mode: 802.11n(HT40) & MCS 0 & 2452 MHz

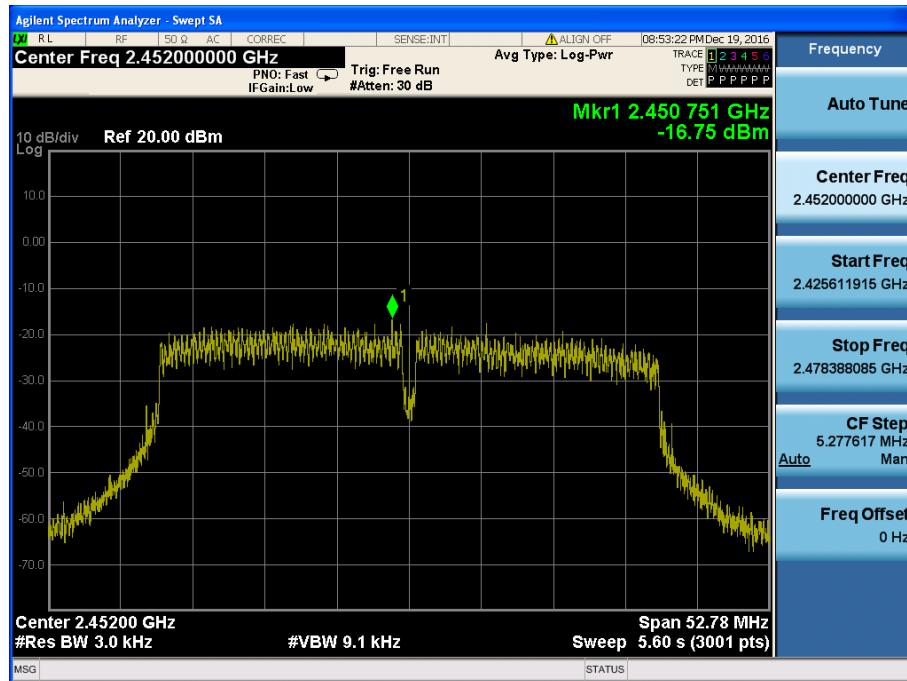

6.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions

Test requirements and limit, §15.247(d)

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions :

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

- Measurement Procedure 1 – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = **100 kHz**.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = **Peak**.
6. Sweep time = **Auto couple**.
7. Trace mode = **Max hold**.
8. **Allow trace to fully stabilize**.
9. Use the peak marker function to determine the maximum PSD level.

- Measurement Procedure 2 - Unwanted Emissions

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz**. (Actual 1 MHz , See below note)
3. Set the VBW $\geq 3 \times$ RBW. (Actual 3 MHz, See below note)
4. Detector = **Peak**.
5. Ensure that the number of measurement points \geq Span / RBW.
6. Sweep time = **Auto couple**.
7. Trace mode = **Max hold**.
8. **Allow the trace to stabilize**. (this may take some time, depending on the extent of the span)
9. Use the peak marker function to determine the maximum amplitude level.

Note: The conducted spurious emission was tested with below settings.

Frequency range: 9 kHz ~ 30 MHz

RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

Frequency range: 30 MHz ~ 10 GHz, 10 GHz ~25 GHz

RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT : 40001

LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 kHz, VBW = 300 kHz)


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

□ RESULT PLOTS

802.11b & 1 Mbps & 2412 MHz



Reference

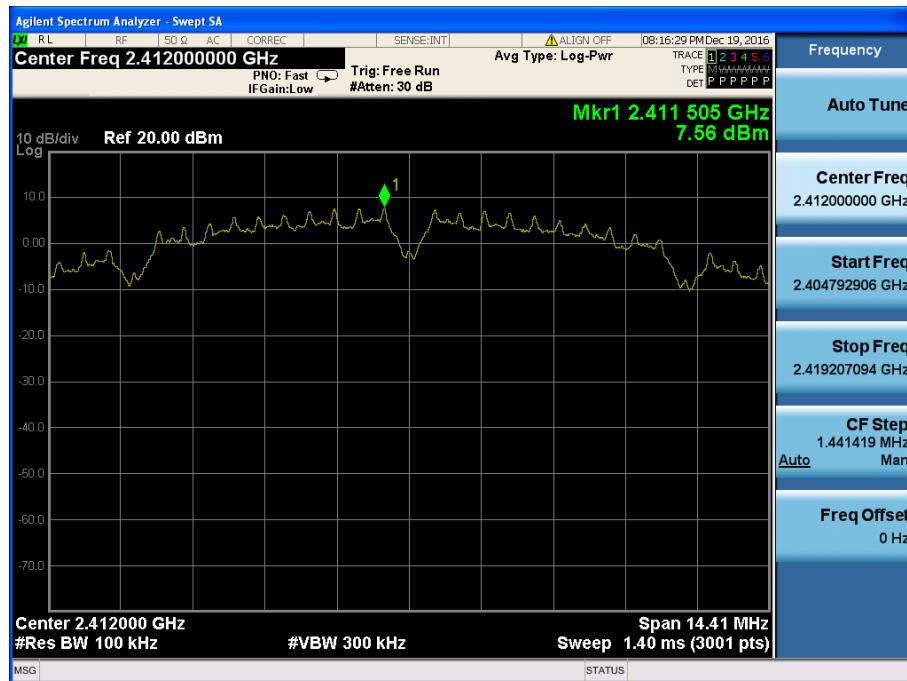


Low Band-edge



Conducted Spurious Emissions

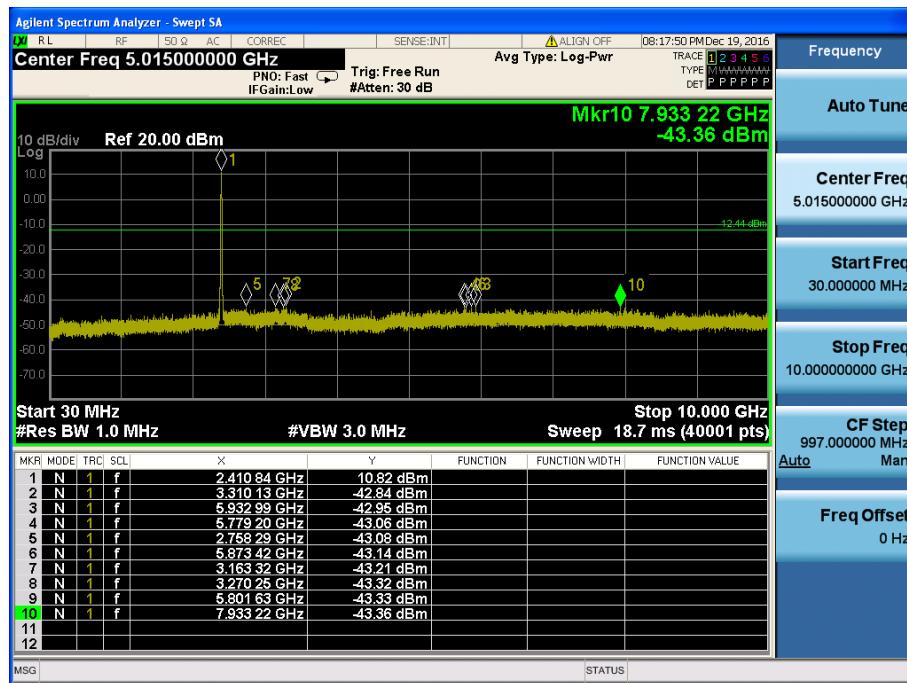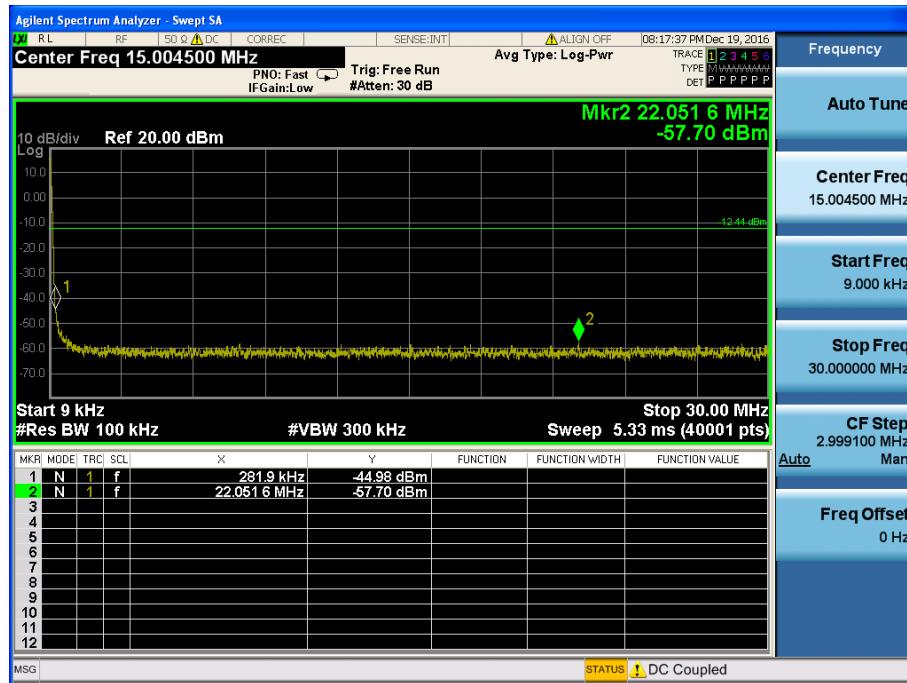


Conducted Spurious Emissions

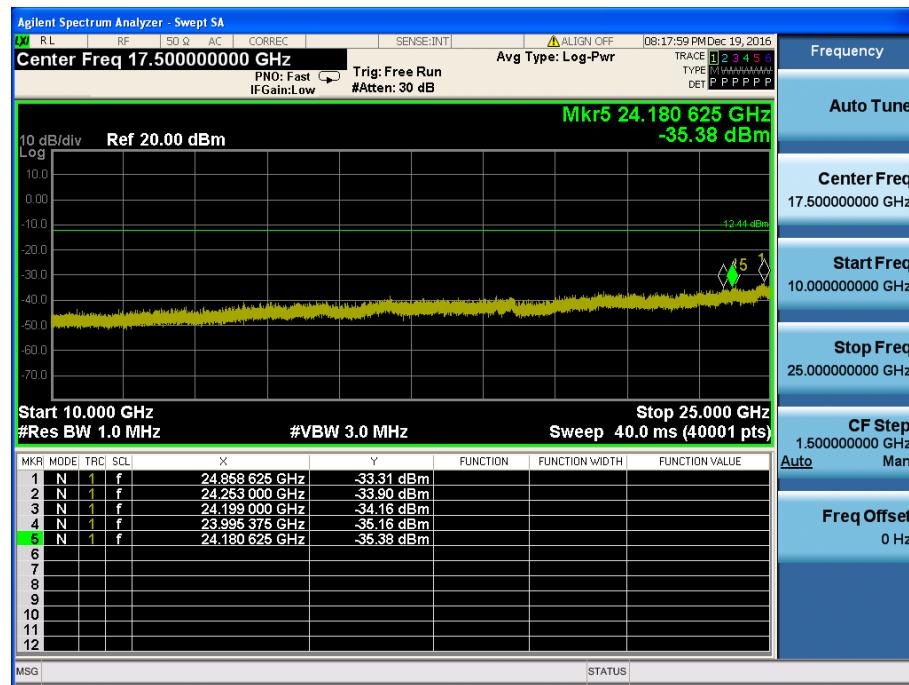


802.11b & 1 Mbps & 2437 MHz



Reference

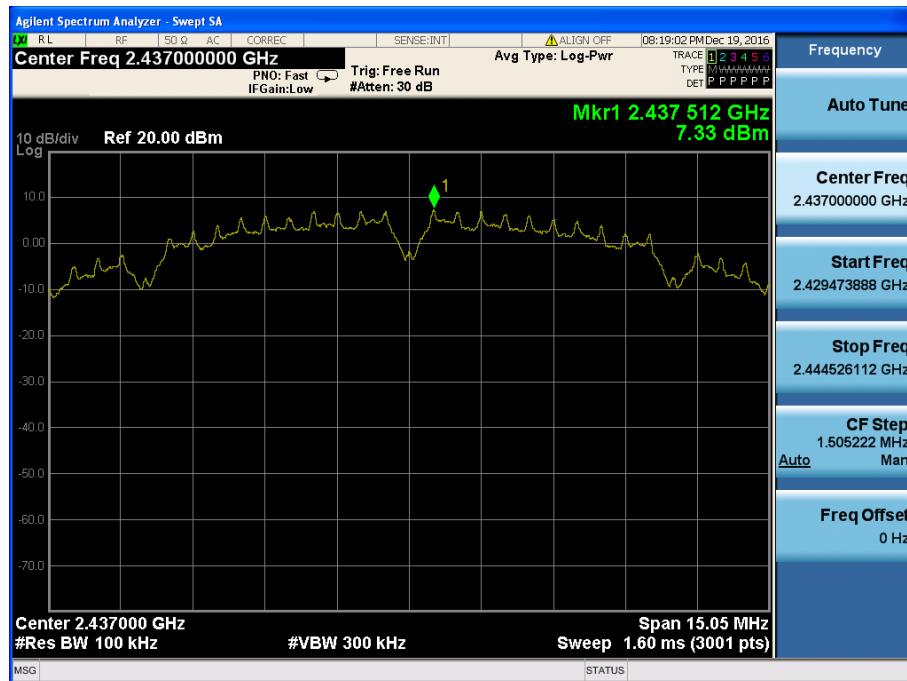

Conducted Spurious Emissions

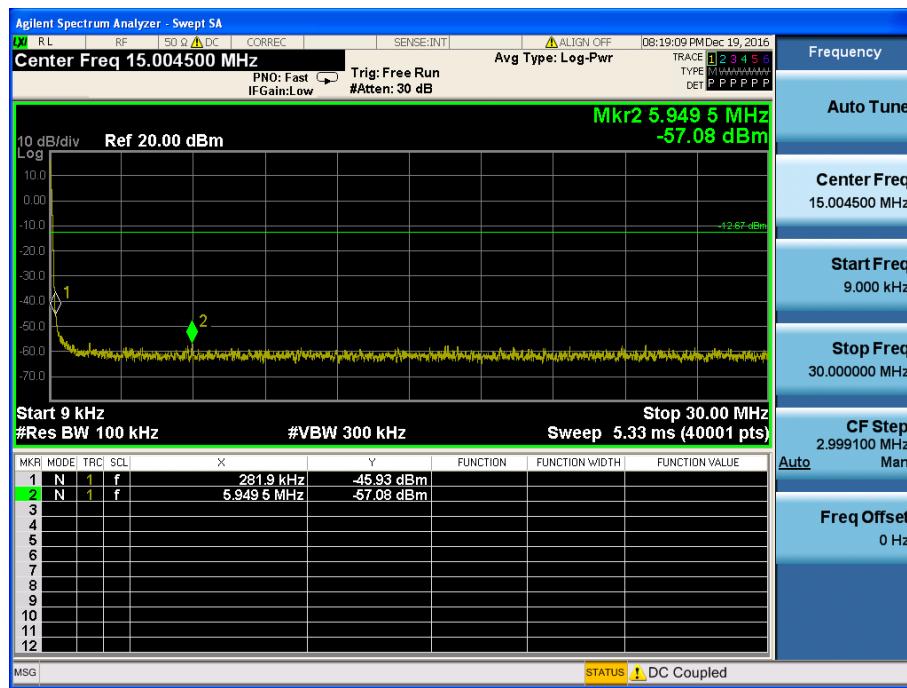


Conducted Spurious Emissions

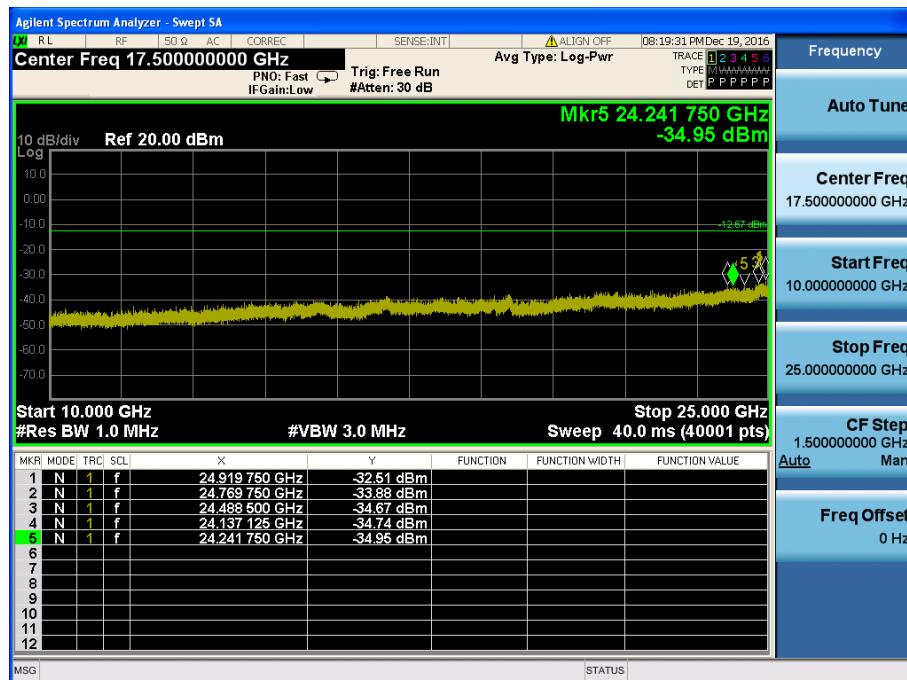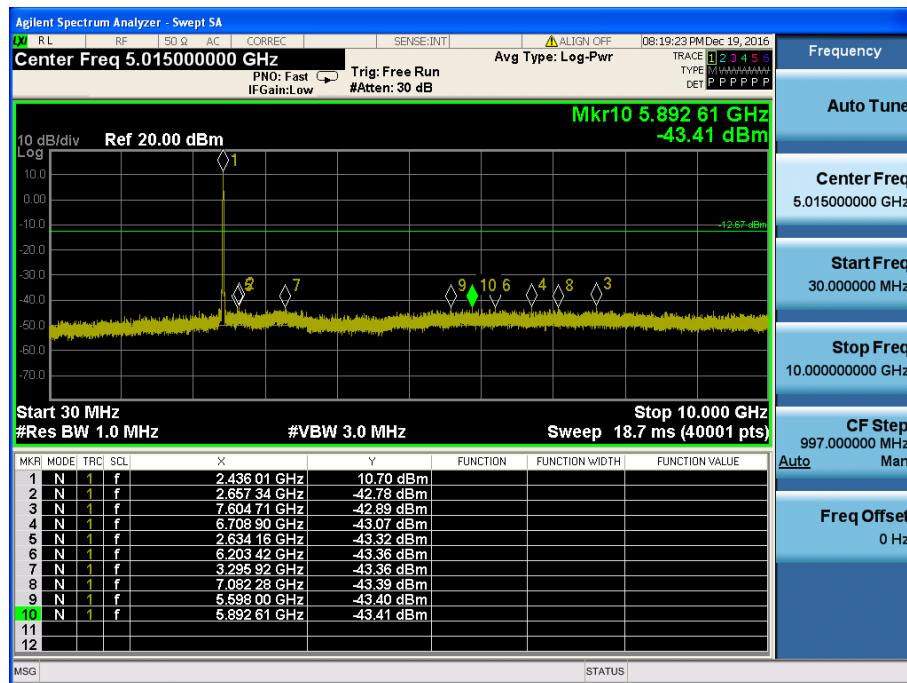

802.11b & 1 Mbps & 2462 MHz



Reference

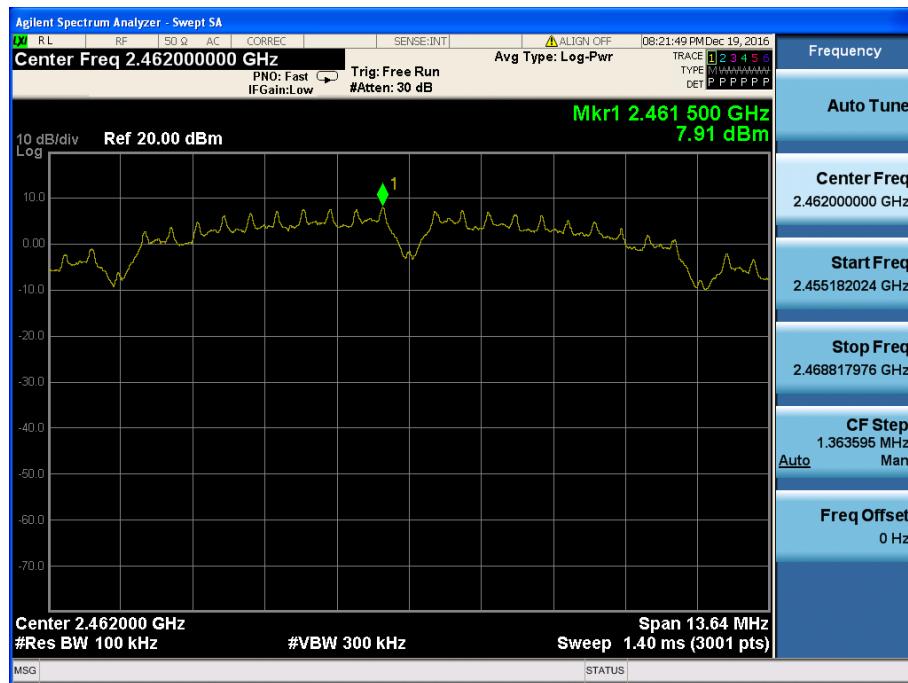


High Band-edge



Conducted Spurious Emissions

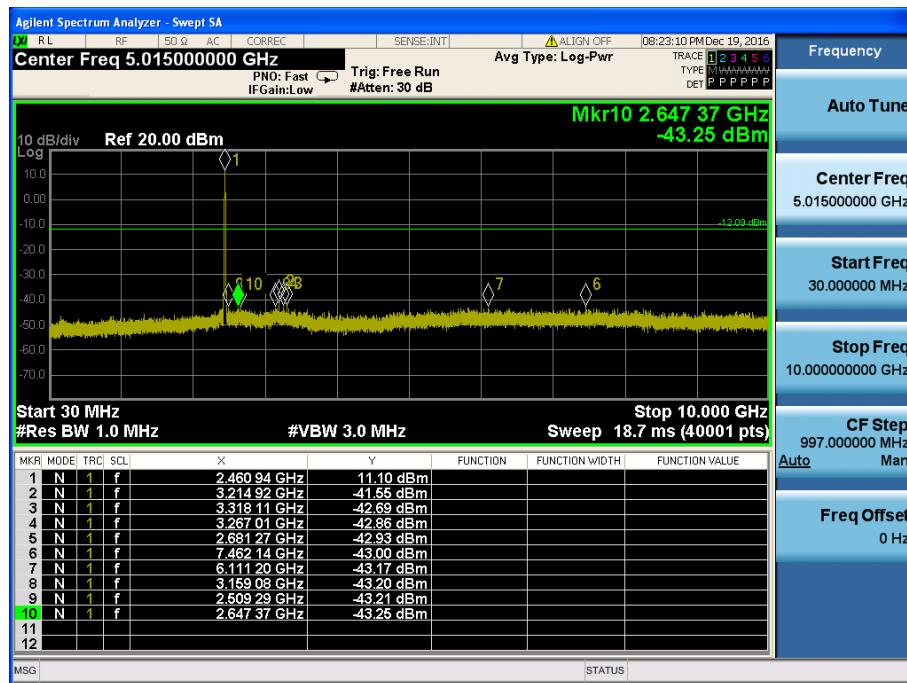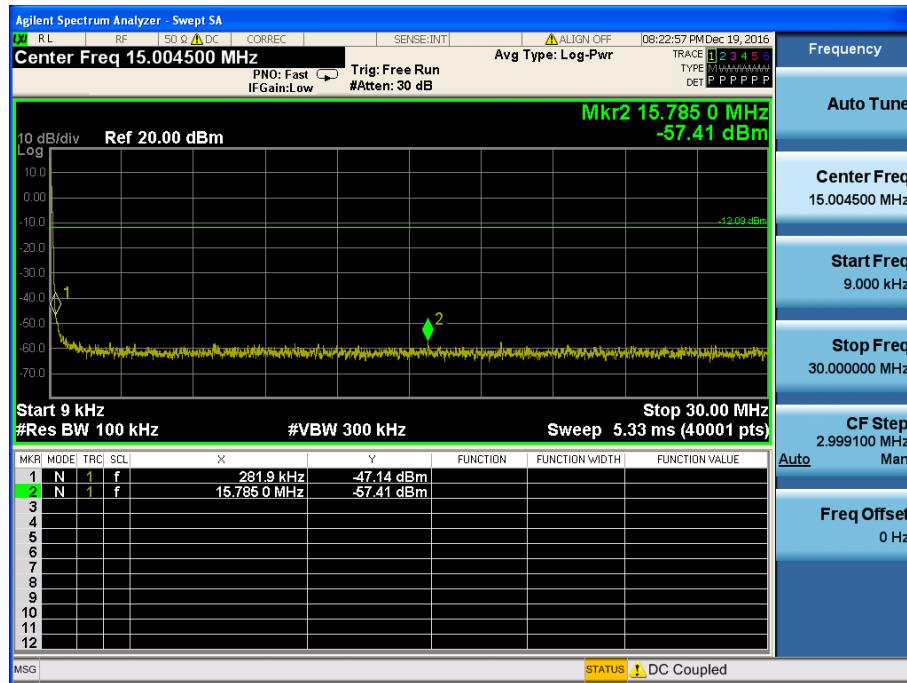


Conducted Spurious Emissions

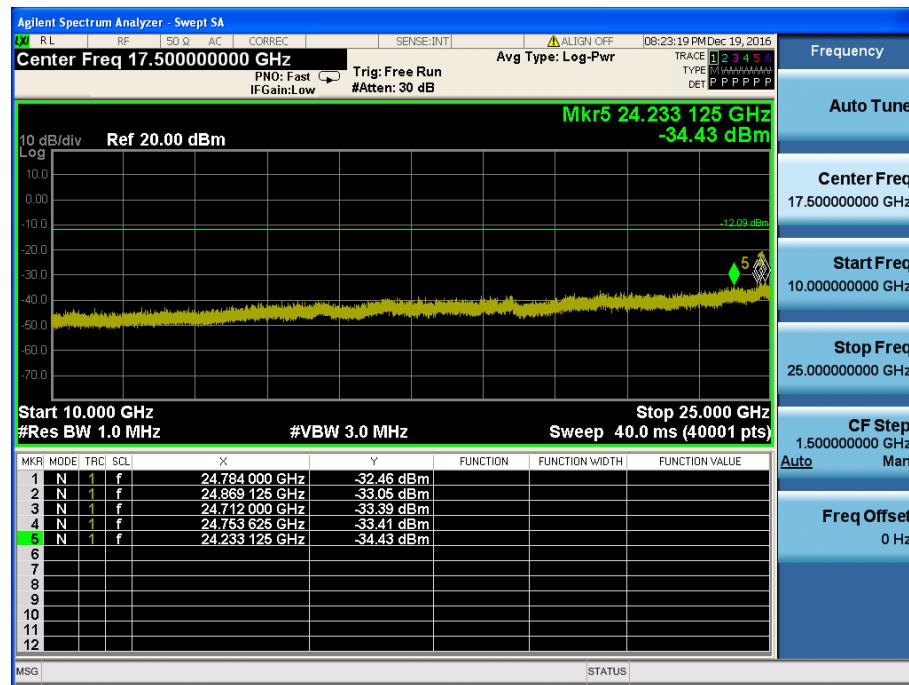


802.11g & 6 Mbps & 2412 MHz



Reference

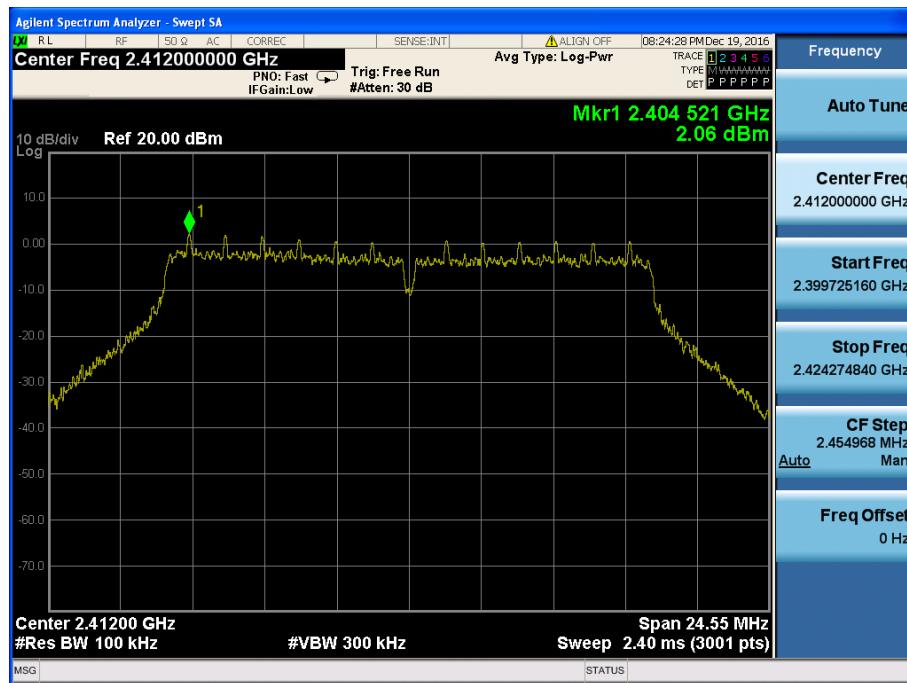


Low Band-edge

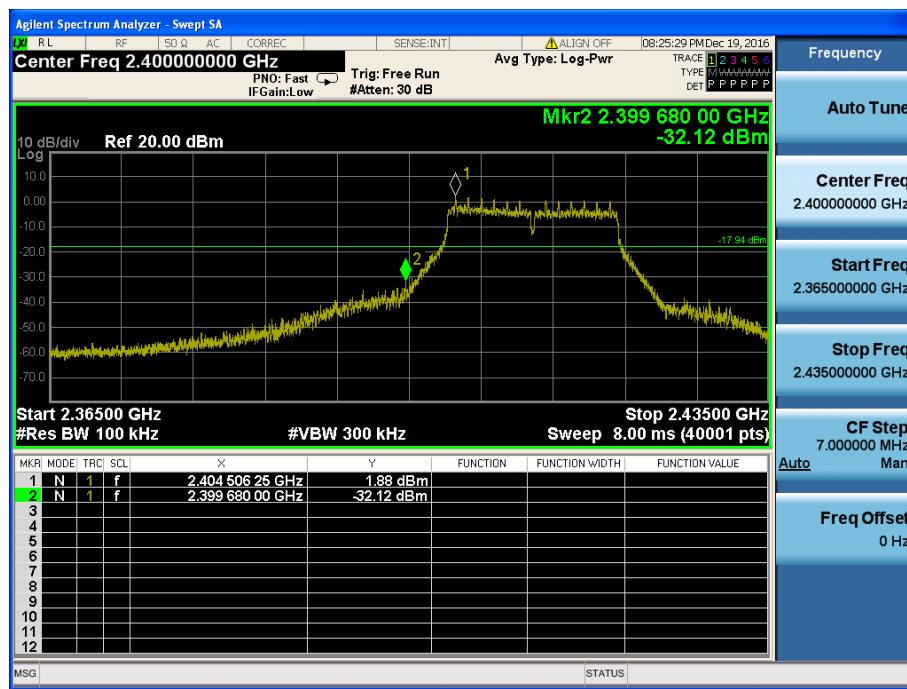

Conducted Spurious Emissions

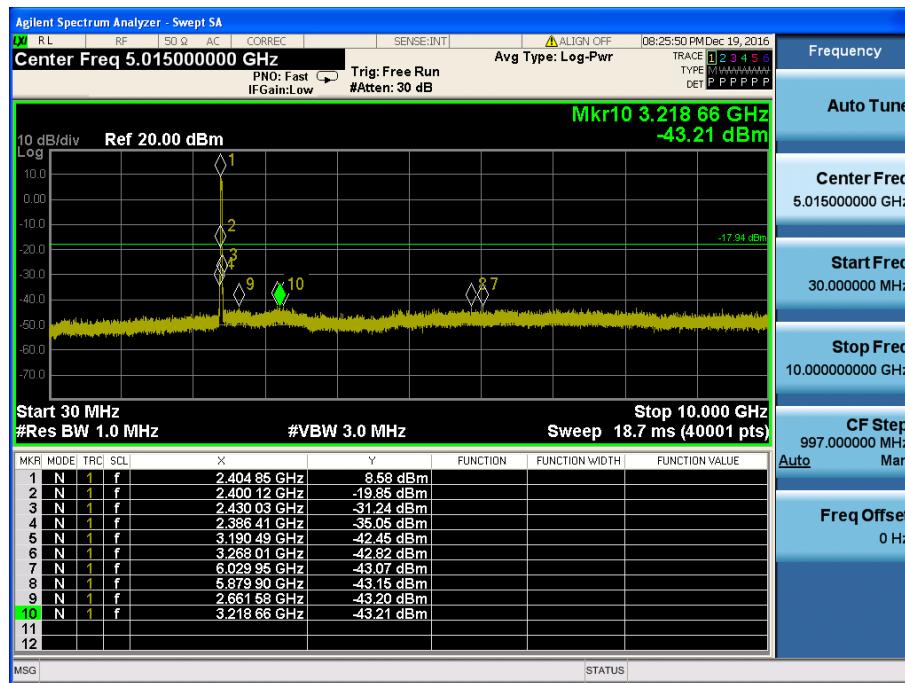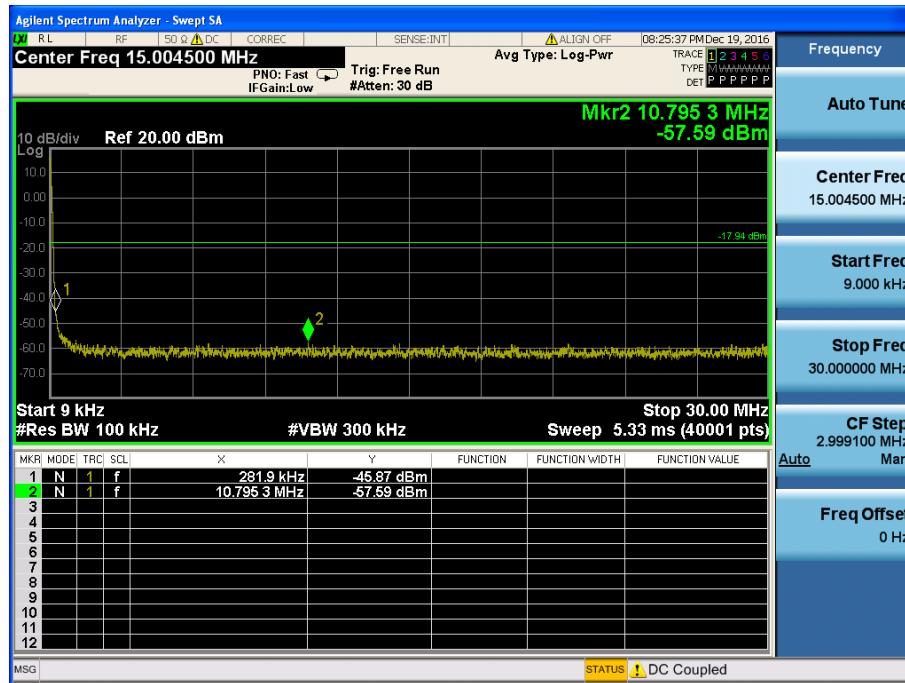

Conducted Spurious Emissions

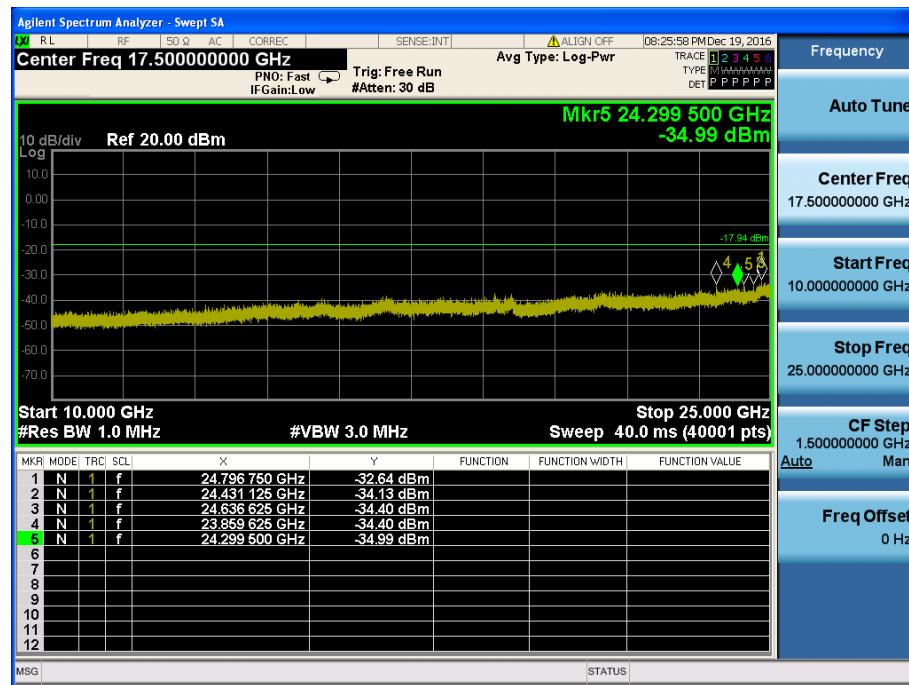


802.11g & 6 Mbps & 2437 MHz



Reference



Conducted Spurious Emissions

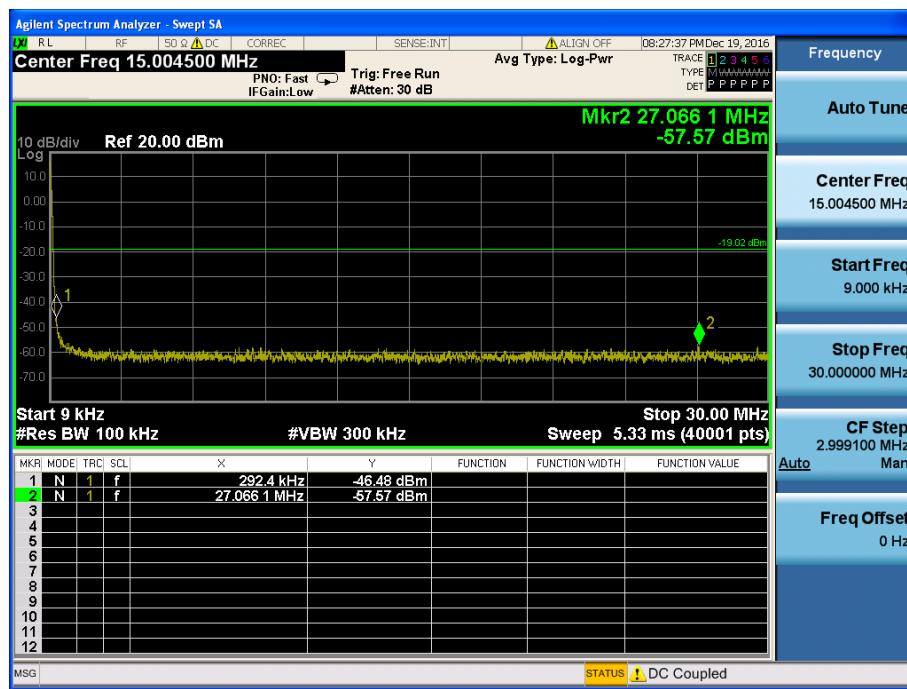

Conducted Spurious Emissions

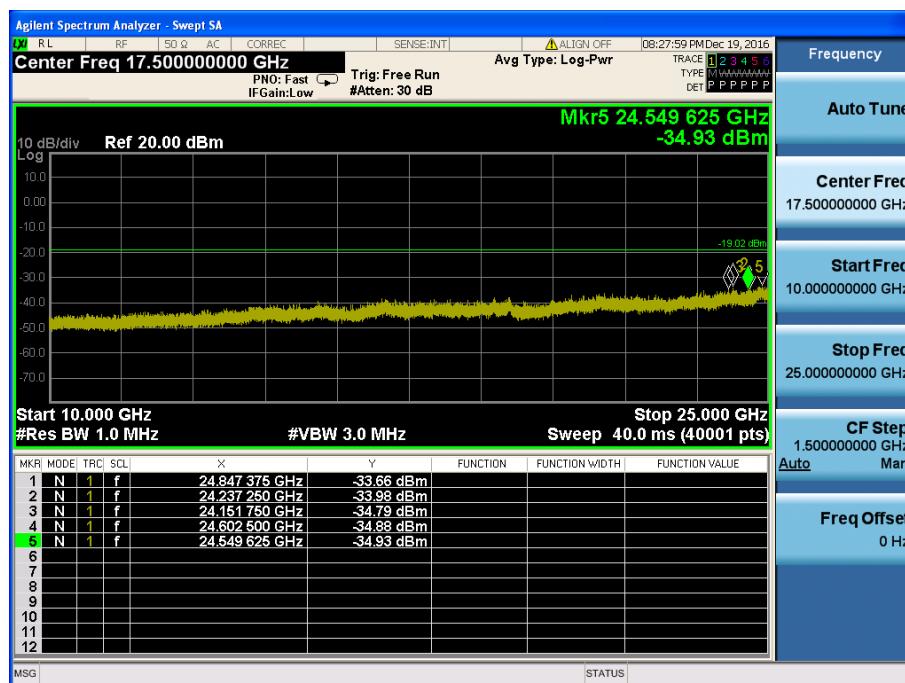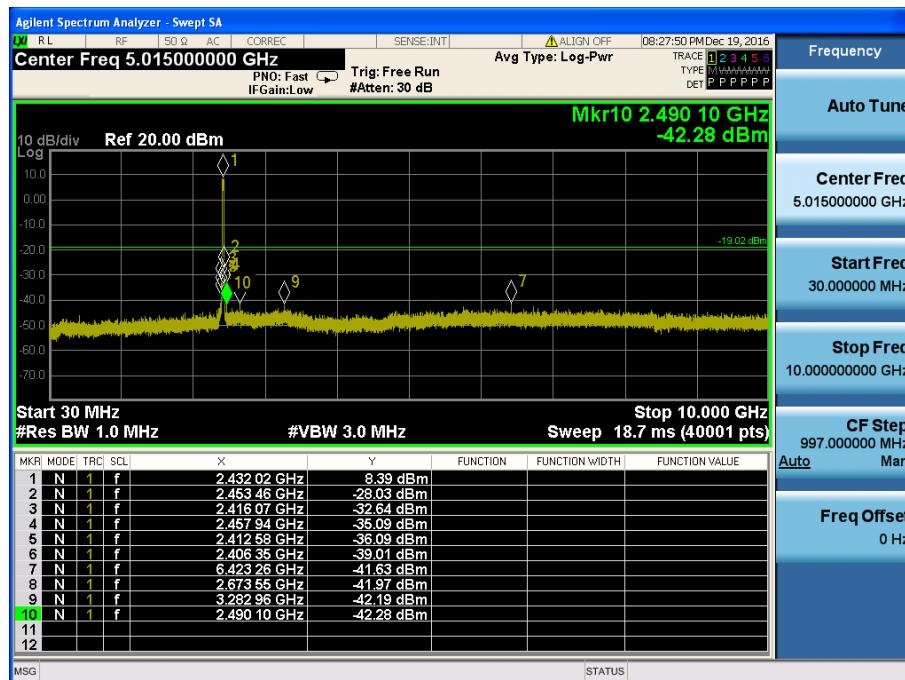


802.11g & 6 Mbps & 2462 MHz



Reference




High Band-edge

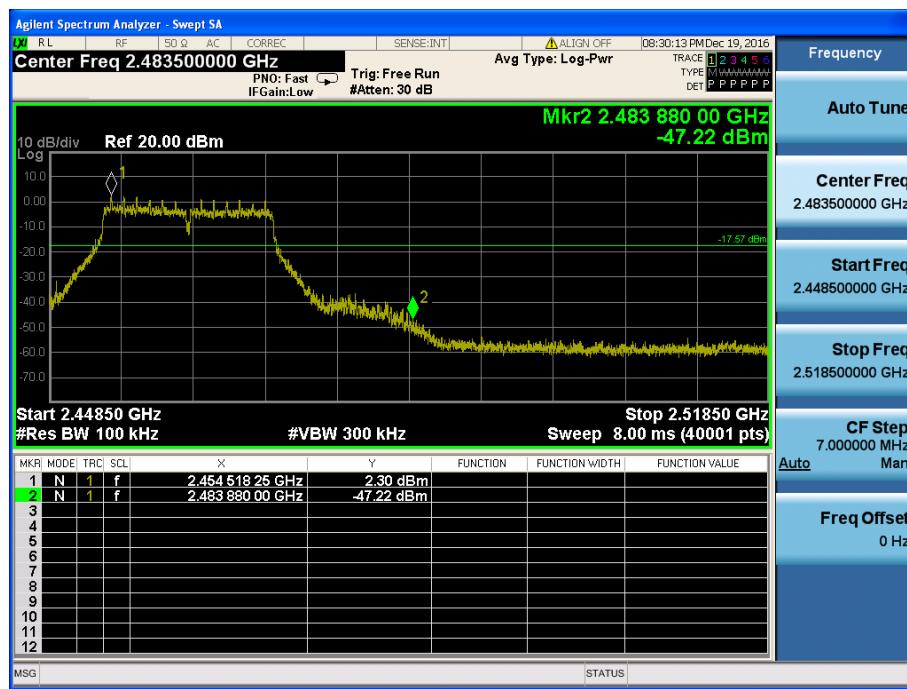

Conducted Spurious Emissions

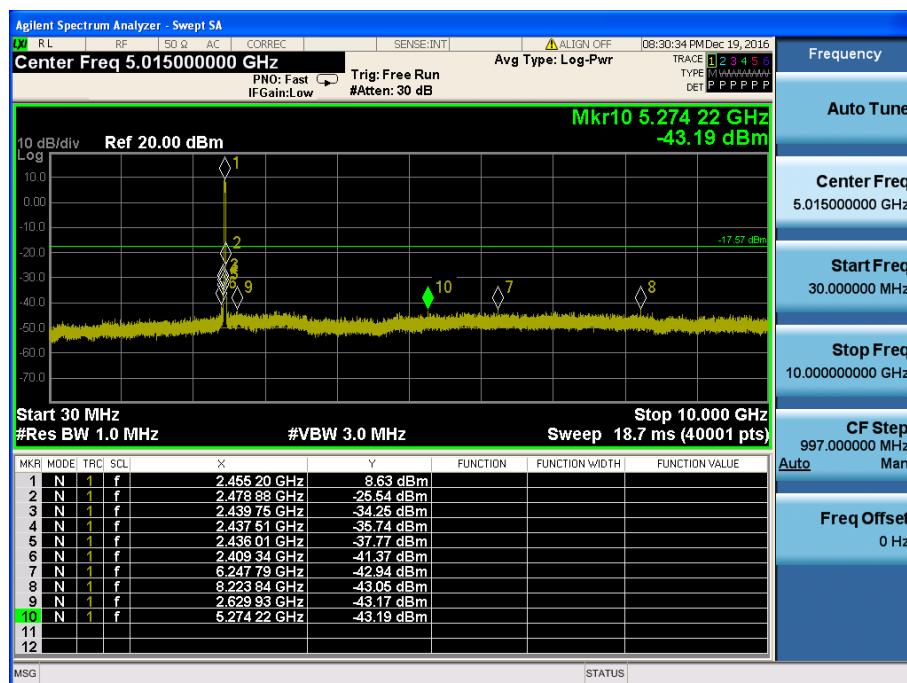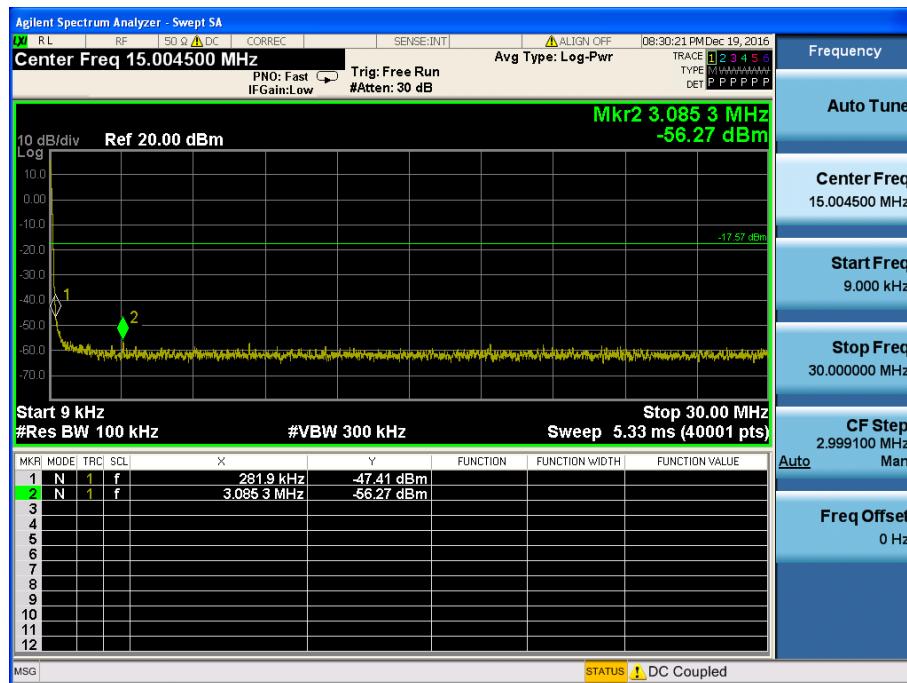


Conducted Spurious Emissions

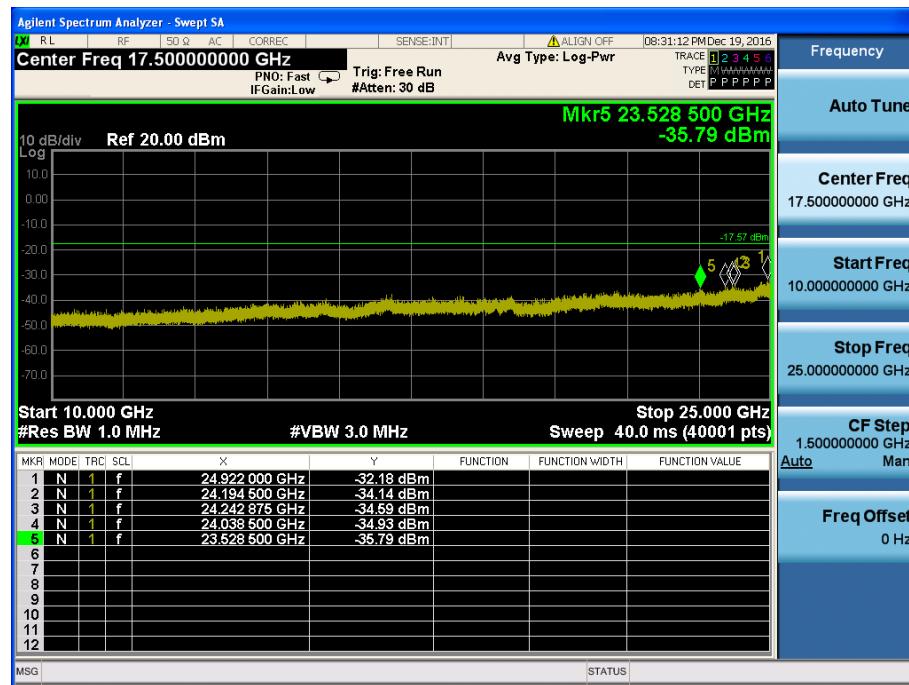


802.11n(HT20) & MCS 0 & 2412 MHz



Reference

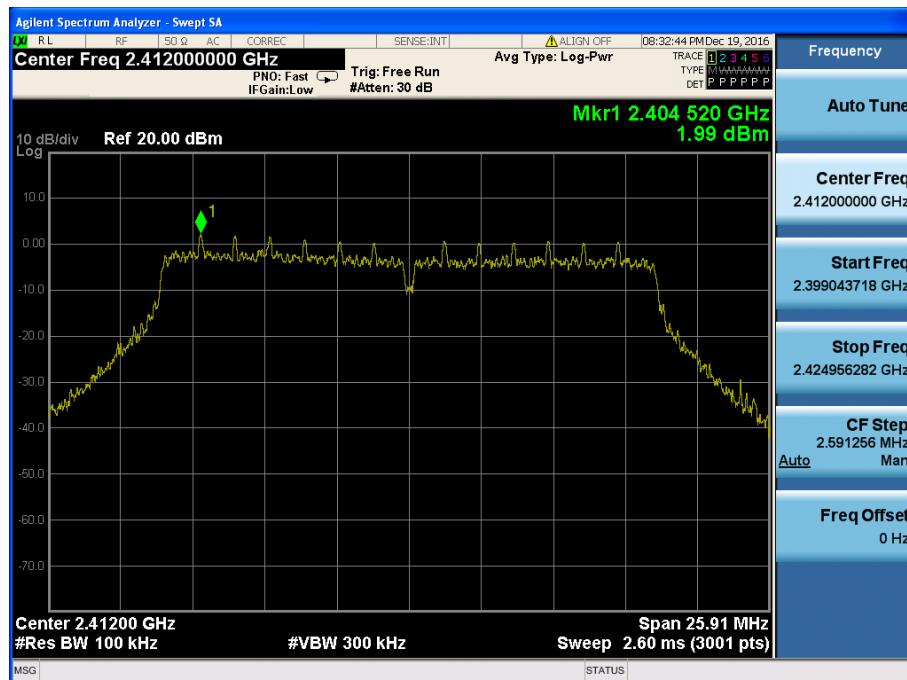


Low Band-edge

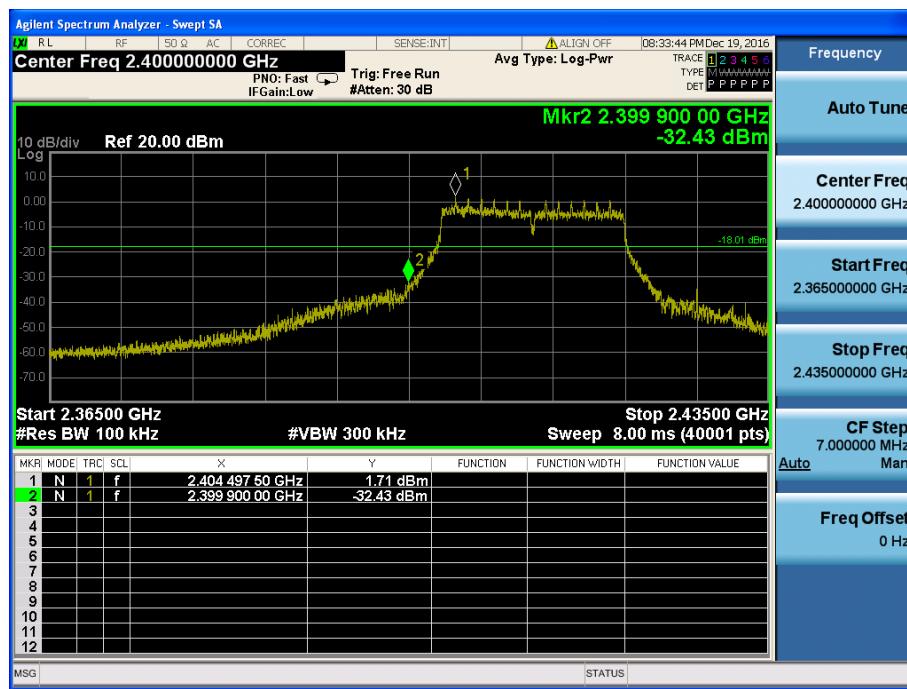

Conducted Spurious Emissions

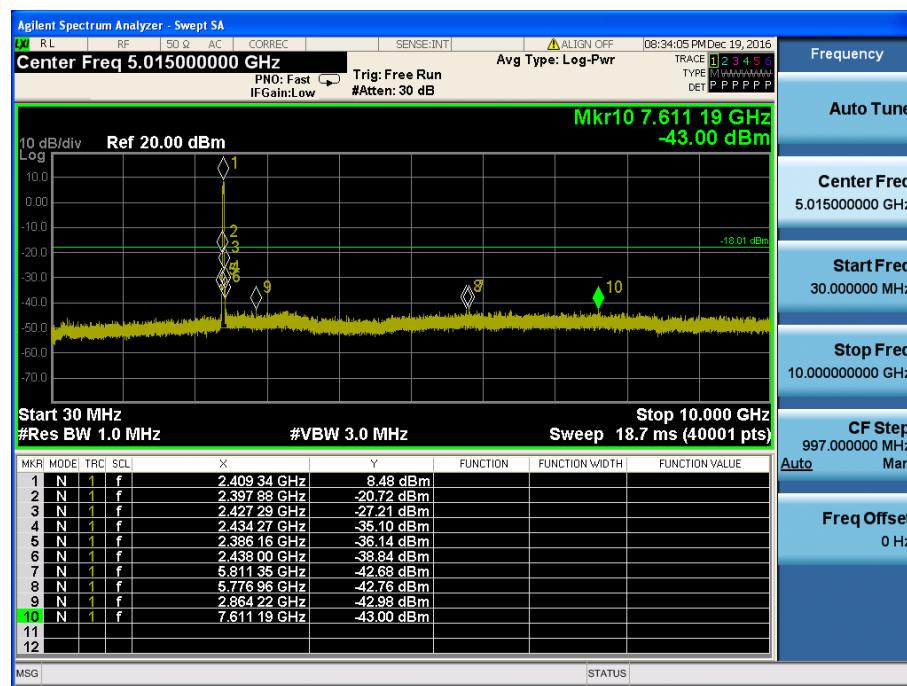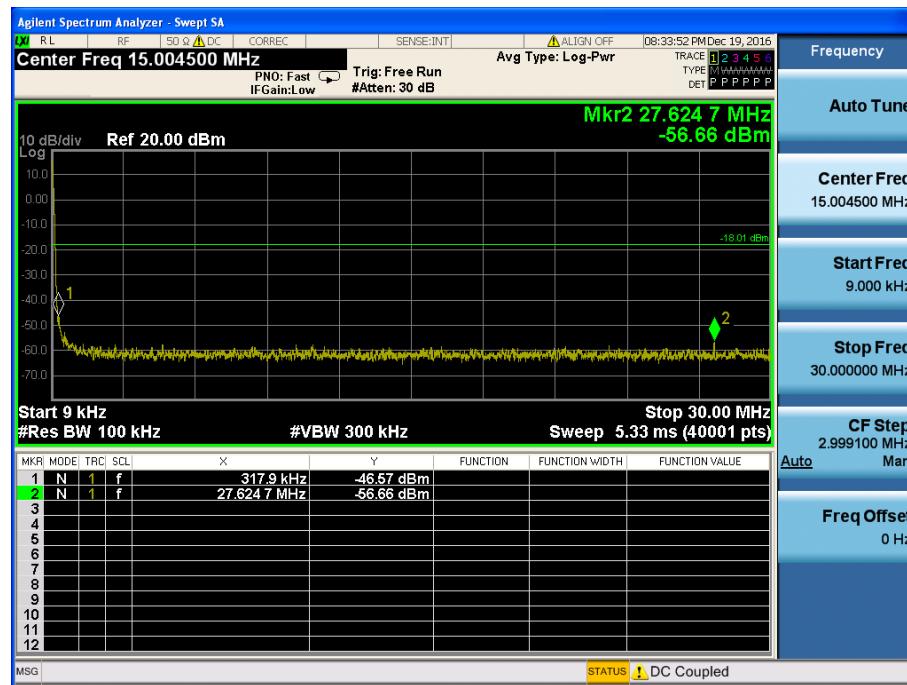


Conducted Spurious Emissions

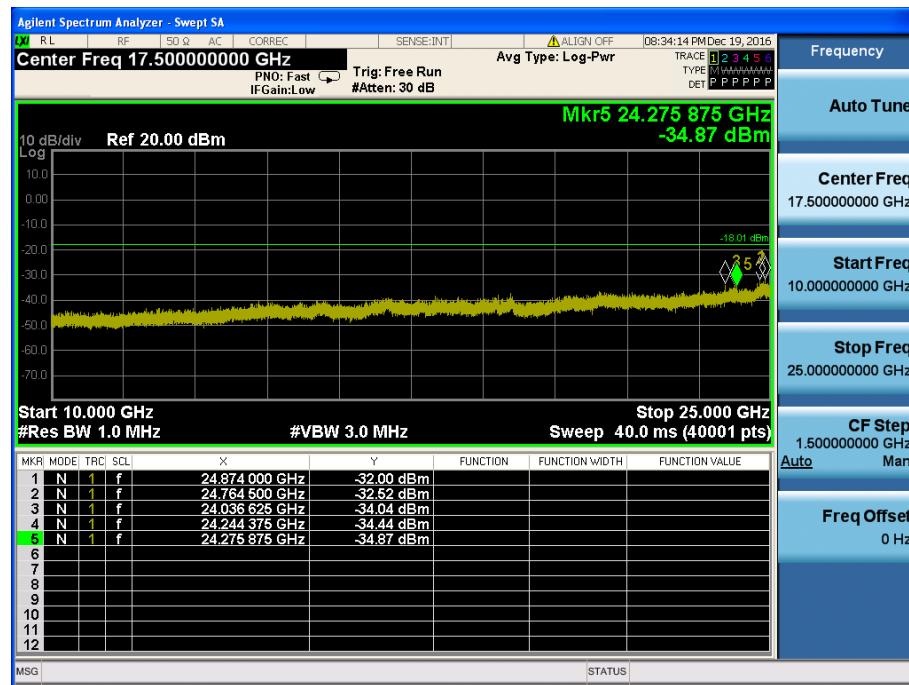


802.11n(HT20) & MCS 0 & 2437 MHz



Reference

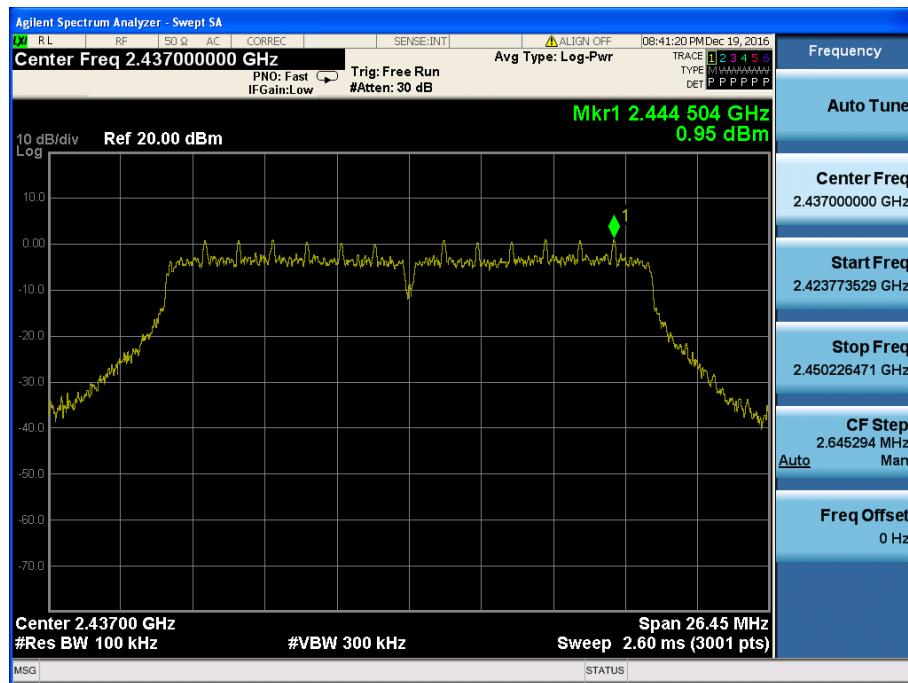

Conducted Spurious Emissions

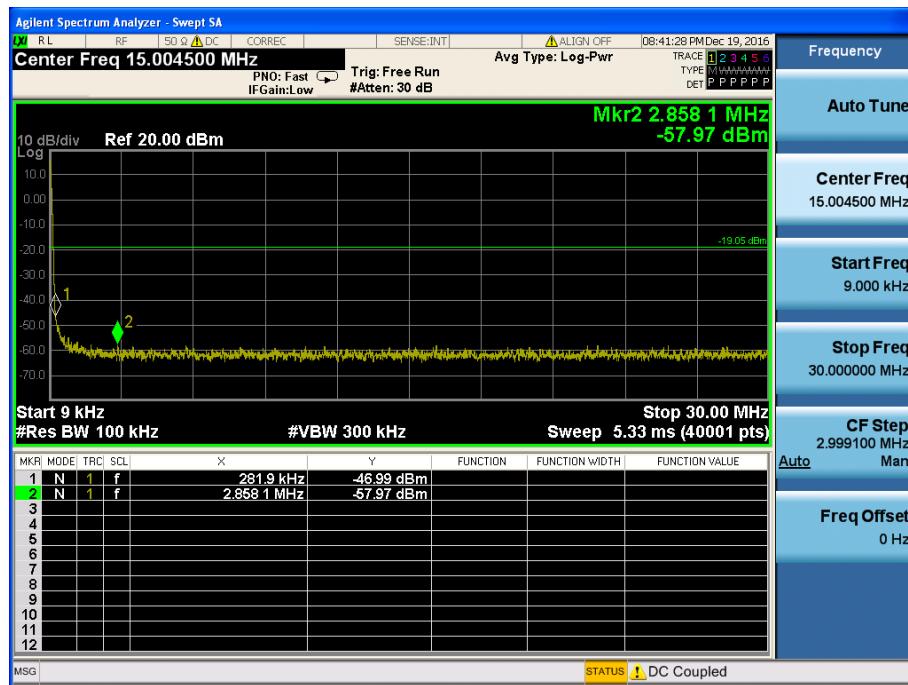


Conducted Spurious Emissions

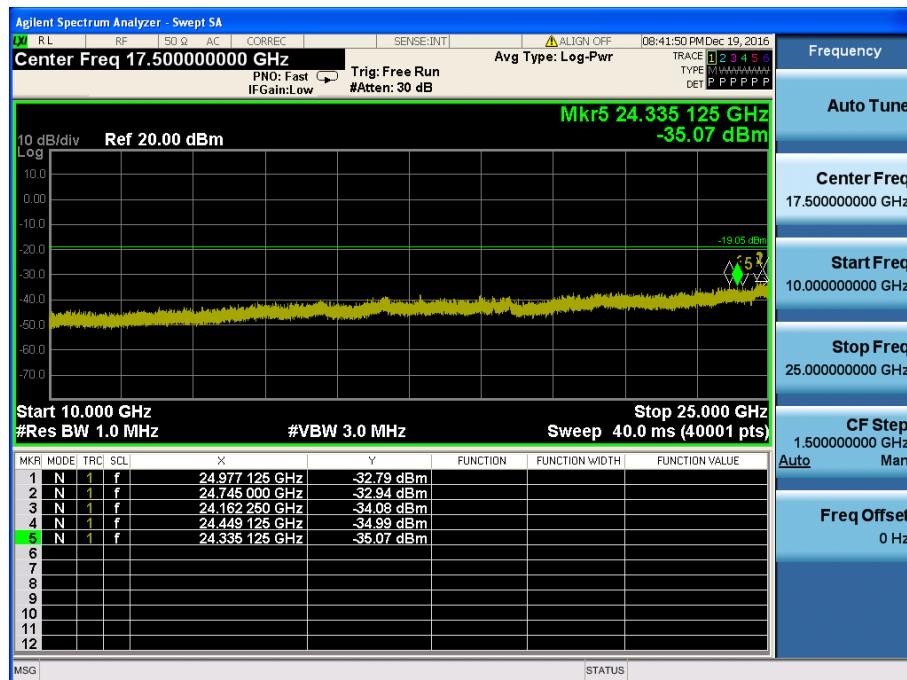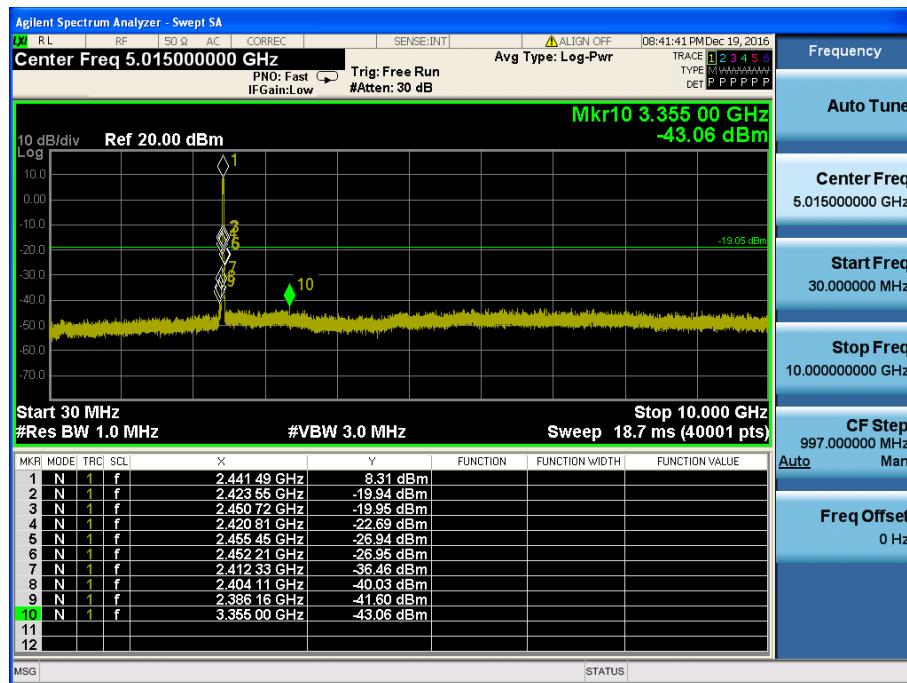


802.11n(HT20) & MCS 0 & 2462 MHz



Reference

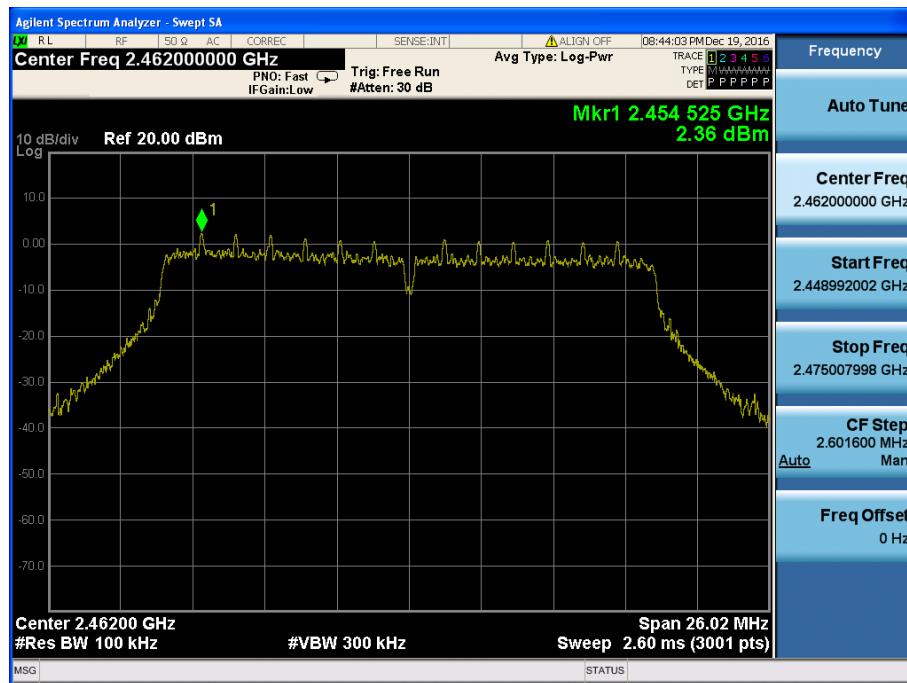


High Band-edge

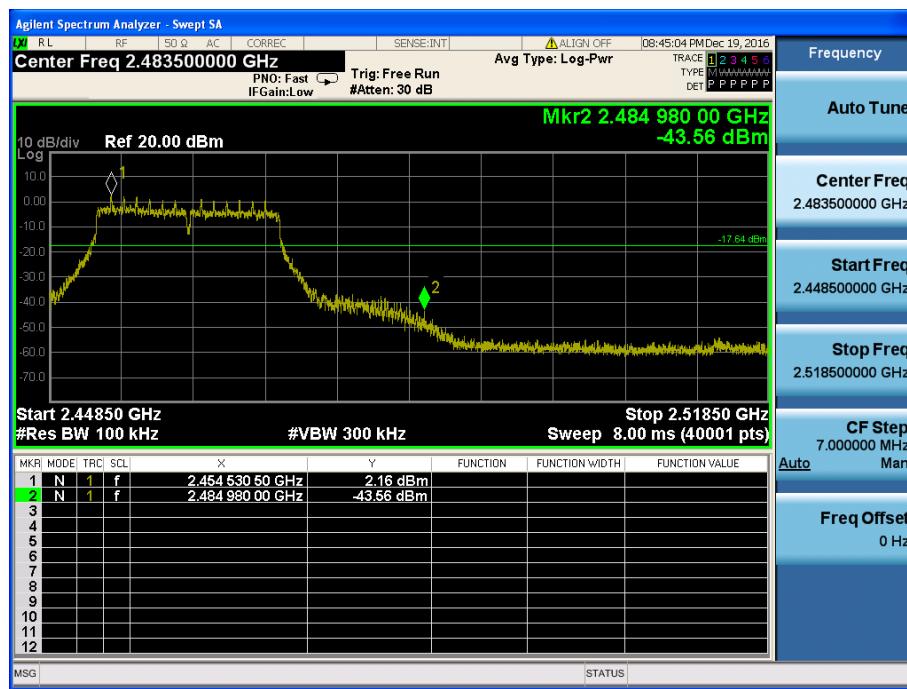

Conducted Spurious Emissions

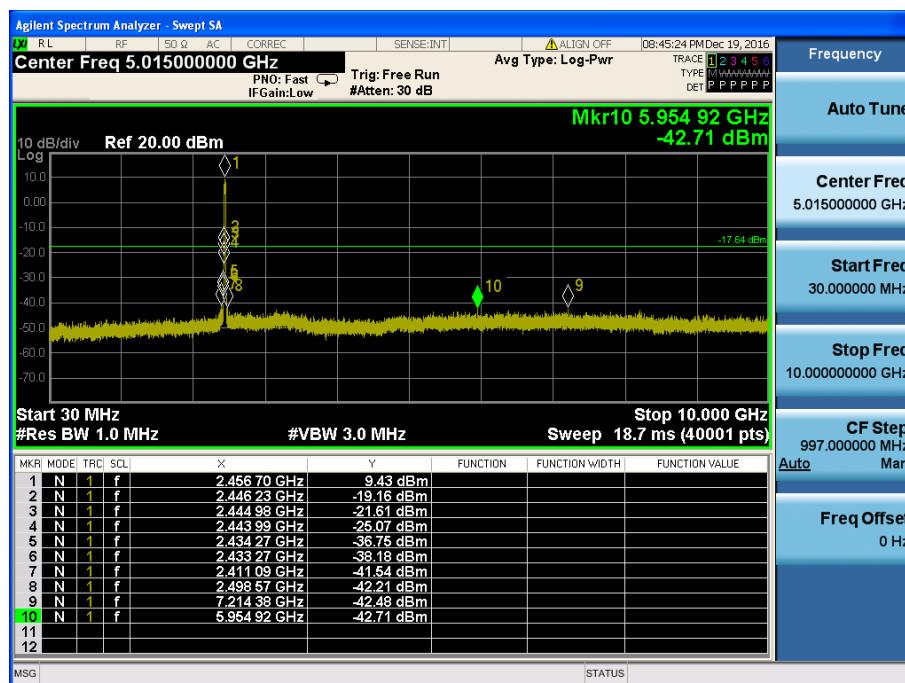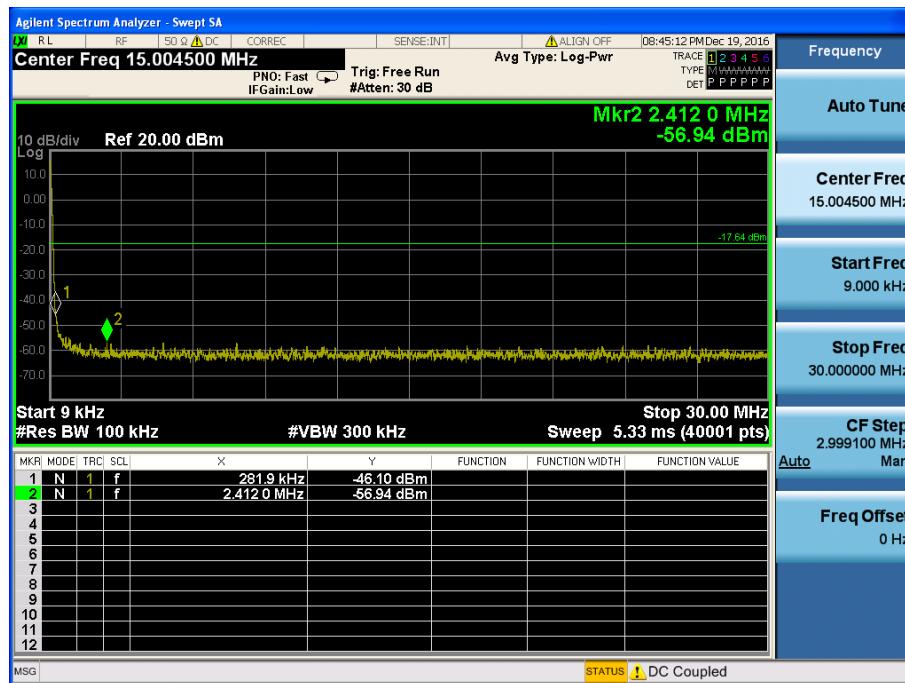


Conducted Spurious Emissions

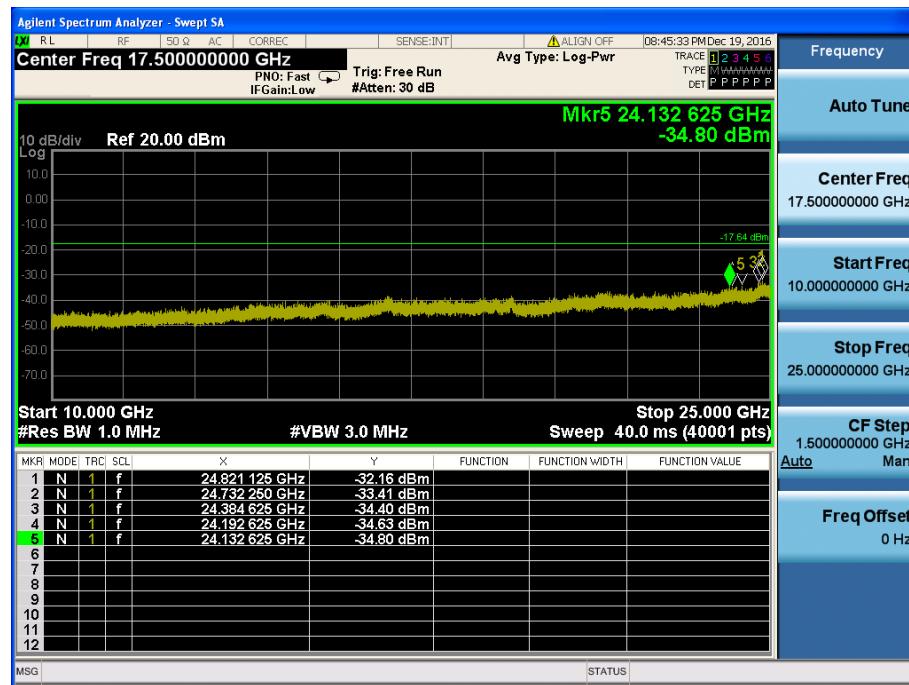


802.11n(HT40) & MCS 0 & 2422 MHz



Reference

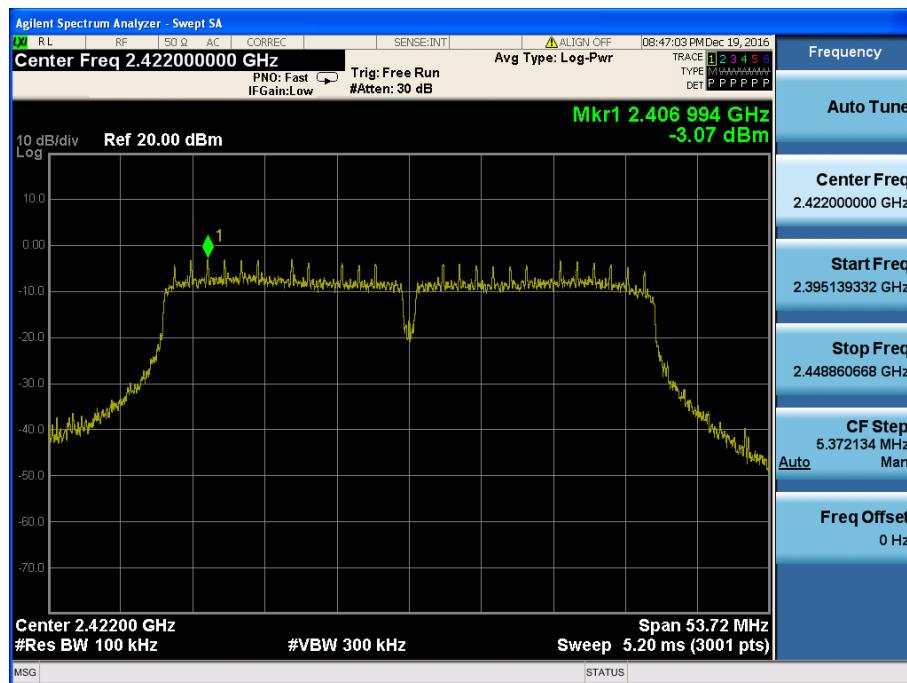


Low Band-edge

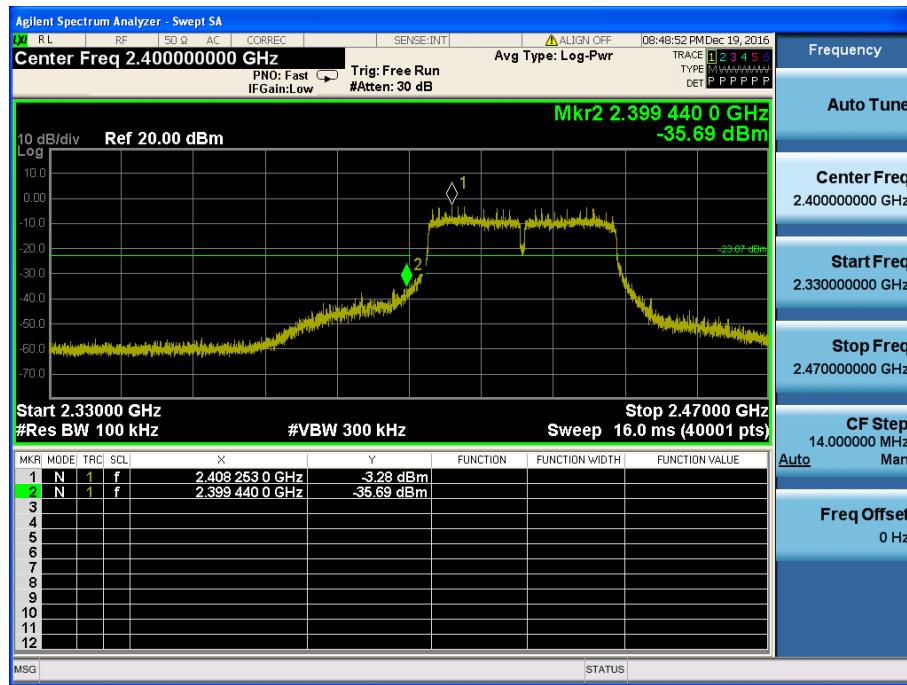

Conducted Spurious Emissions

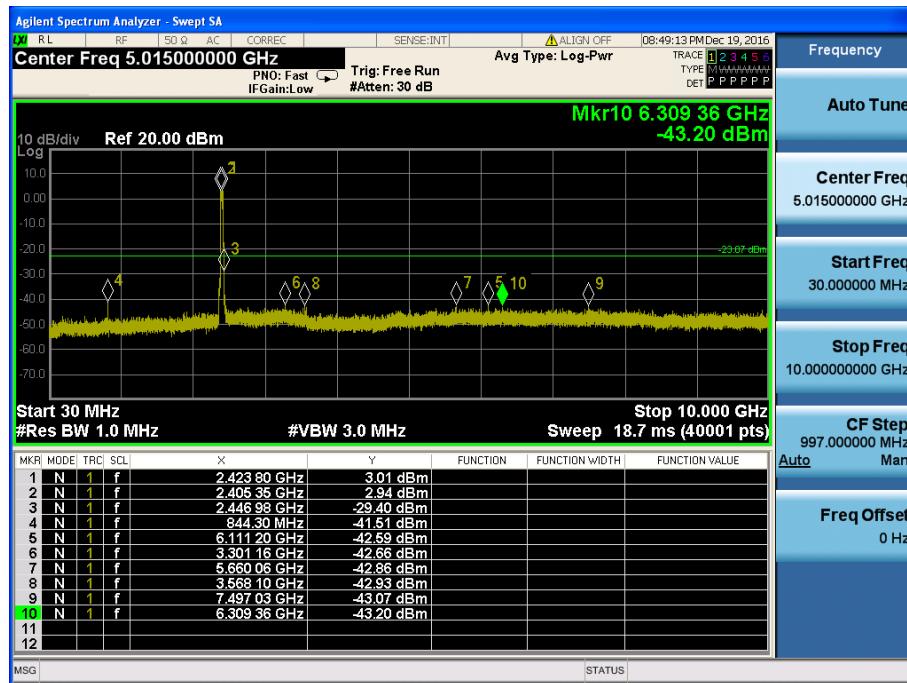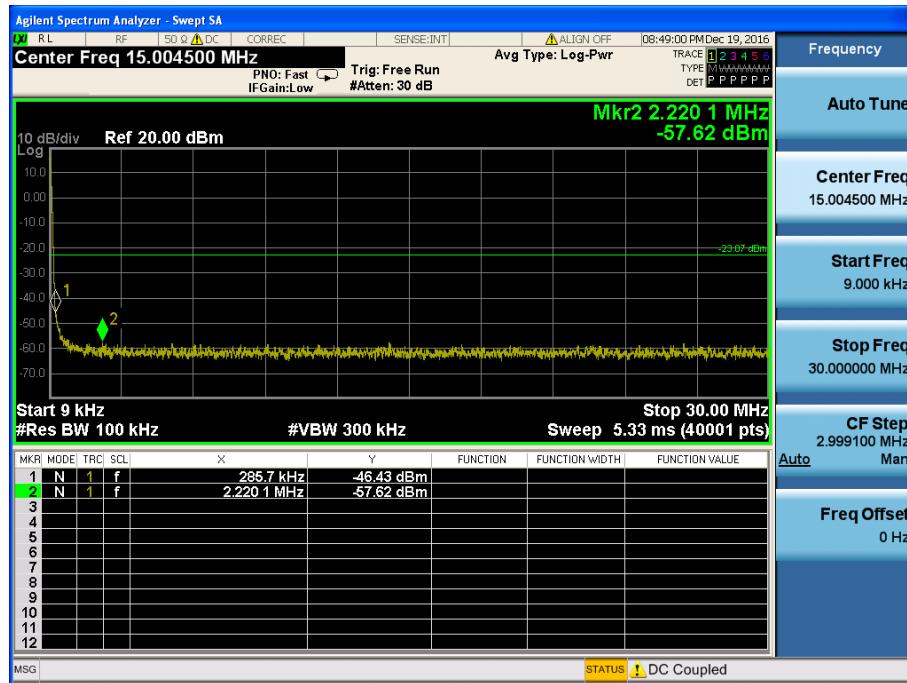


Conducted Spurious Emissions

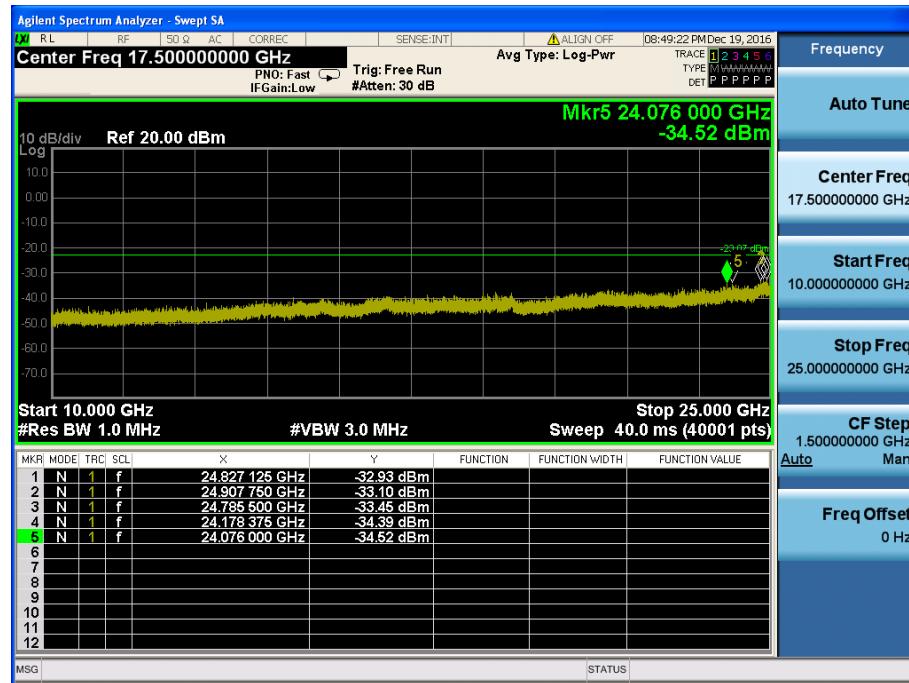


802.11n(HT40) & MCS 0 & 2437 MHz


Reference

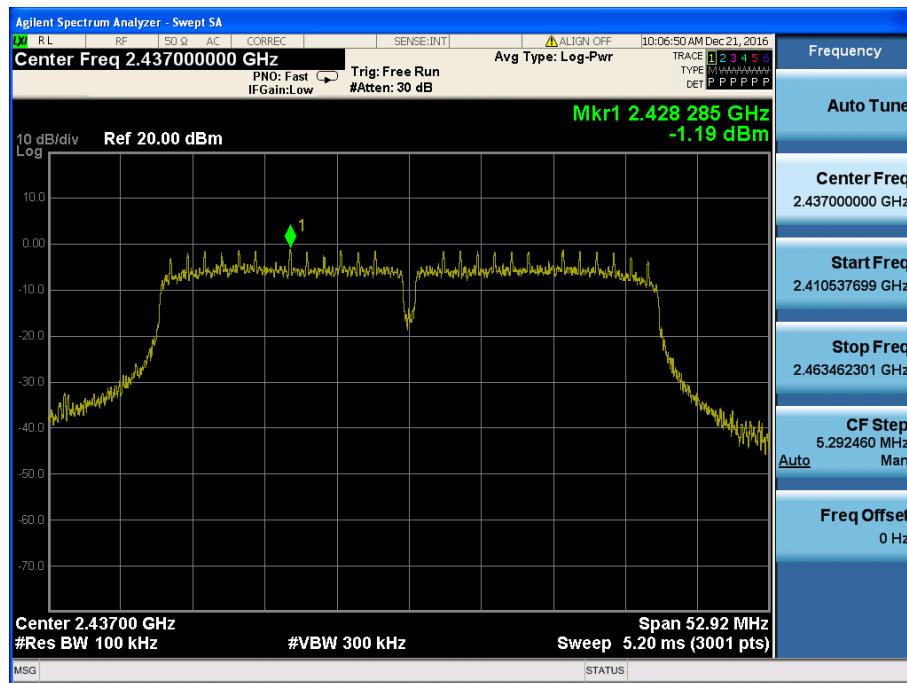

Conducted Spurious Emissions

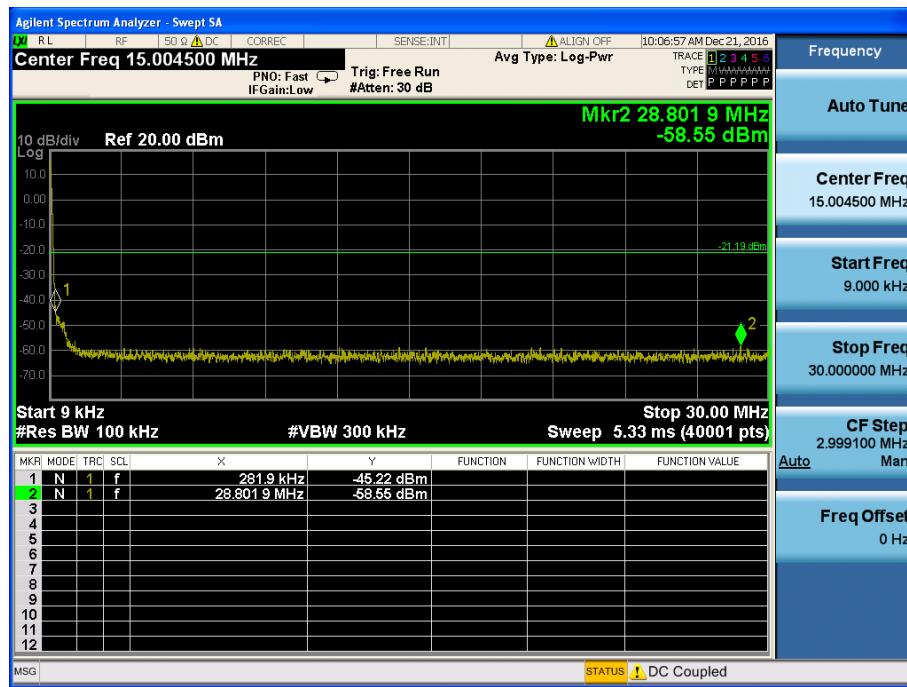


Conducted Spurious Emissions

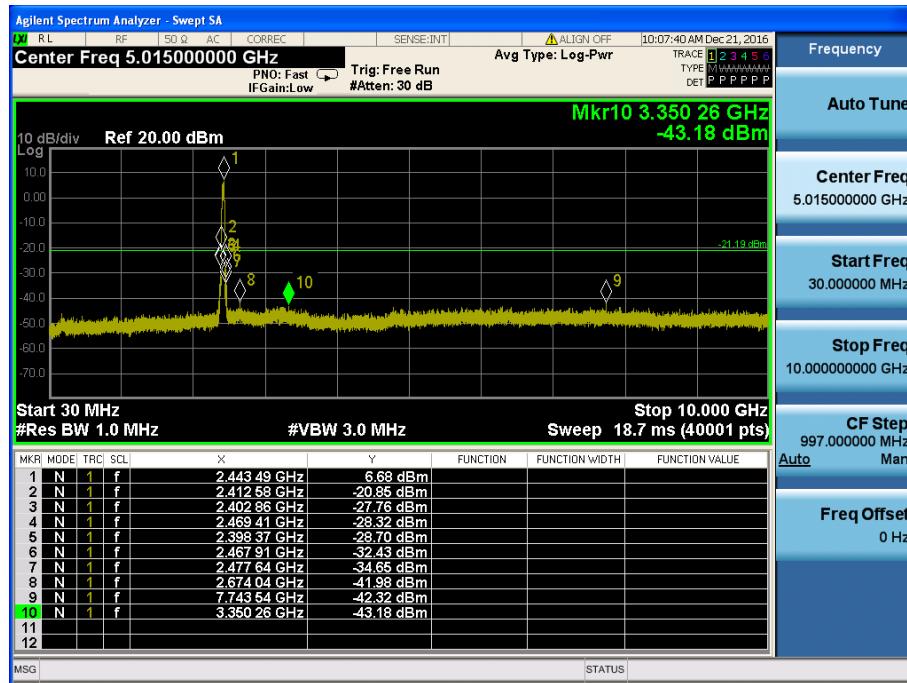


802.11n(HT40) & MCS 0 & 2452 MHz



Reference

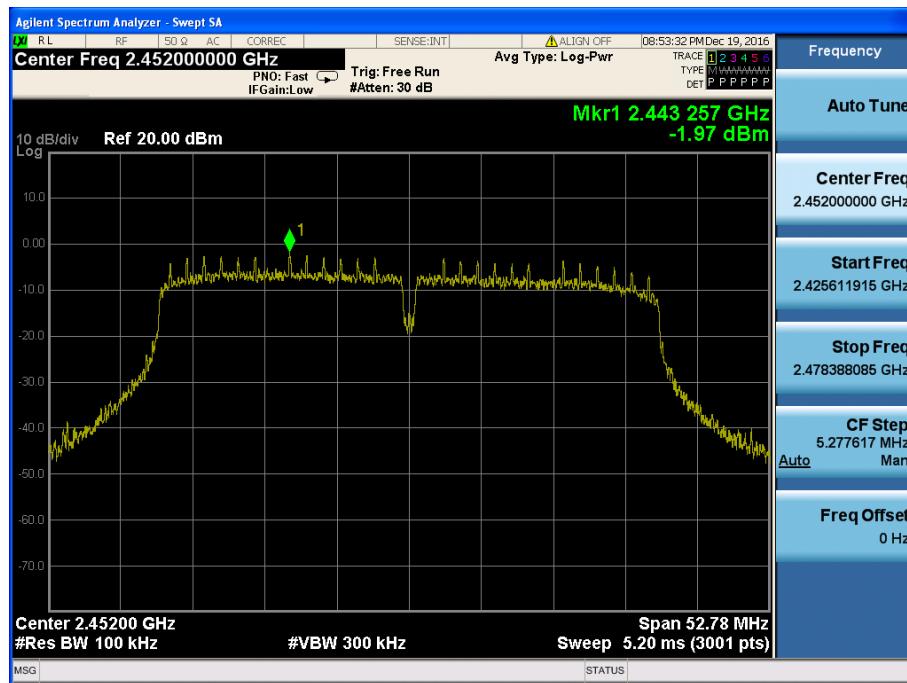


High Band-edge

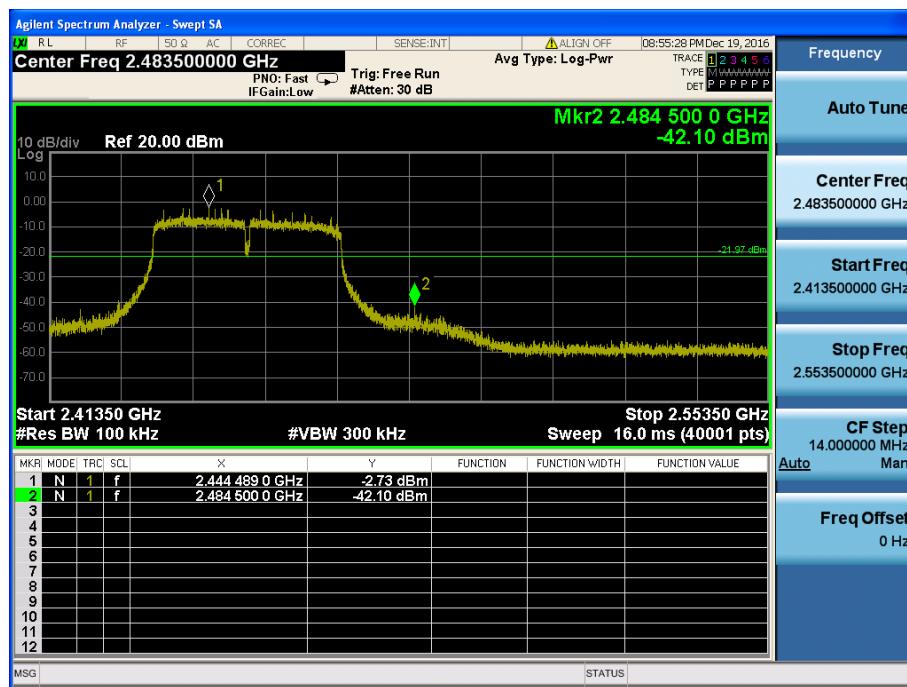

Conducted Spurious Emissions

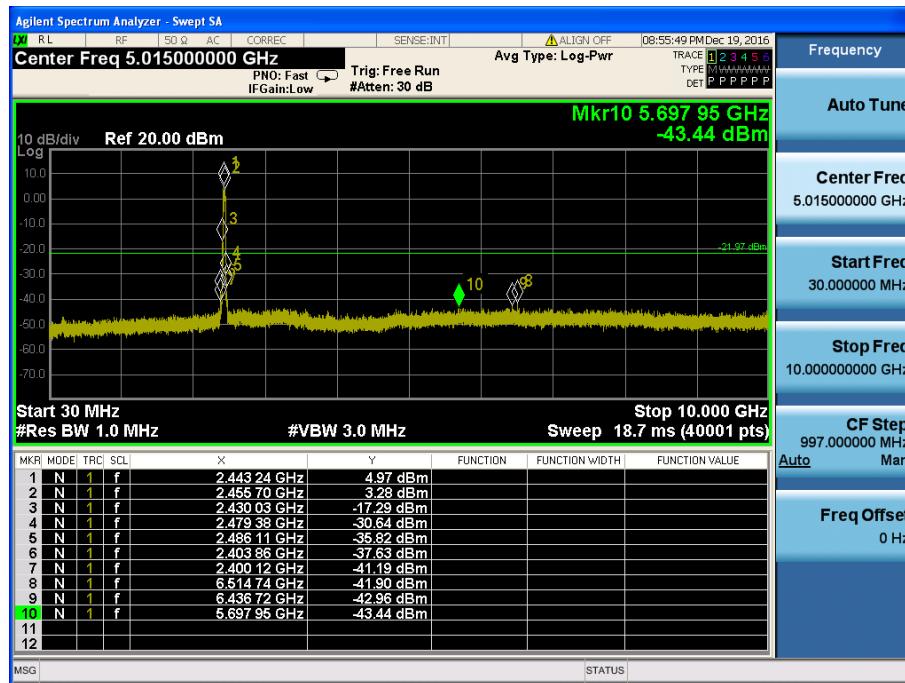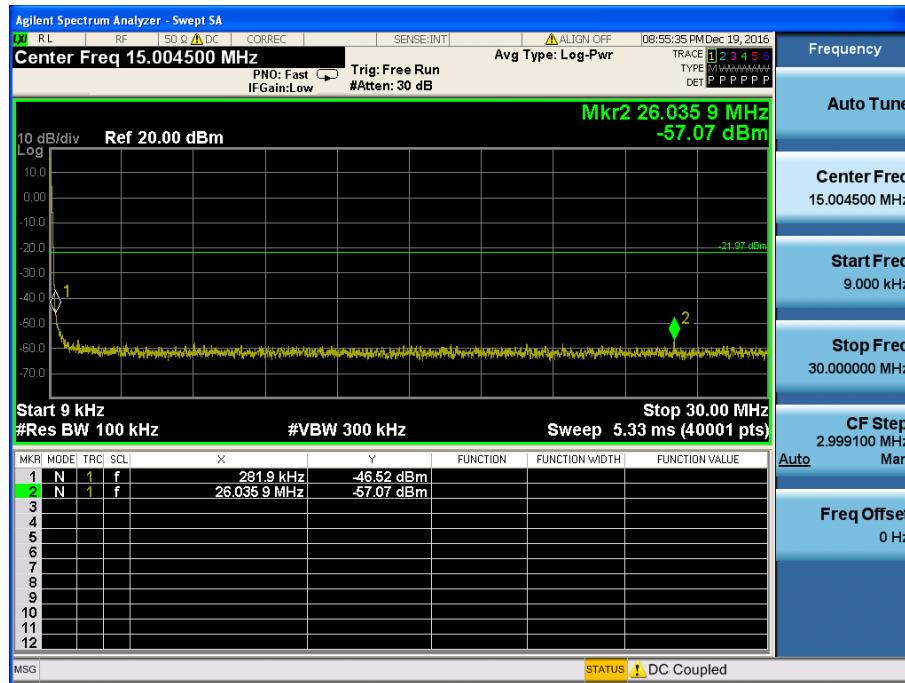

Conducted Spurious Emissions

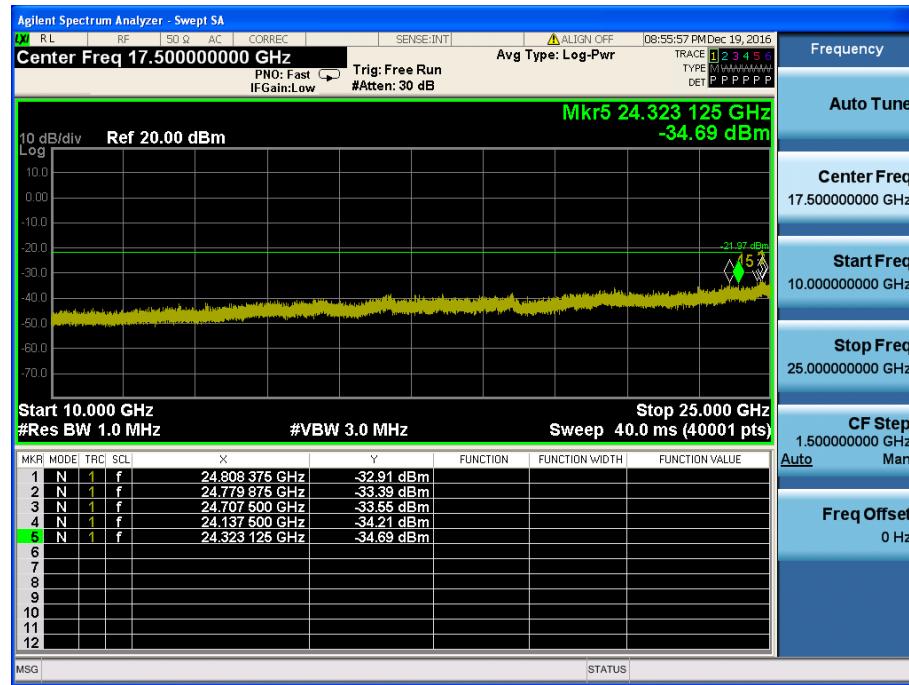

6.5 Radiated Spurious Emissions

Test Requirements and limit,

§15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

• FCC Part 15.209(a) and (b)

| Frequency (MHz) | Limit (uV/m) | Measurement Distance (meter) |
|-----------------|---------------|------------------------------|
| 0.009 – 0.490 | 2400/F (KHz) | 300 |
| 0.490 – 1.705 | 24000/F (KHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 ~ 88 | 100 ** | 3 |
| 88 ~ 216 | 150 ** | 3 |
| 216 ~ 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | MHz | GHz | GHz |
|-------------------|-------------------|-------------------|-----------------|--------------|---------------|
| 0.009 ~ 0.110 | 8.41425 ~ 8.41475 | 108 ~ 121.94 | 1300 ~ 1427 | 4.5 ~ 5.15 | 14.47 ~ 14.5 |
| 0.495 ~ 0.505 | 12.29 ~ 12.293 | 123 ~ 138 | 1435 ~ 1626.5 | 5.35 ~ 5.46 | 15.35 ~ 16.2 |
| 2.1735 ~ 2.1905 | 12.51975 ~ | 149.9 ~ 150.05 | 1645.5 ~ 1646.5 | 7.25 ~ 7.75 | 17.7 ~ 21.4 |
| 4.125 ~ 4.128 | 12.52025 | 156.52475 ~ | 1660 ~ 1710 | 8.025 ~ 8.5 | 22.01 ~ 23.12 |
| 4.17725 ~ 4.17775 | 12.57675 ~ | 156.52525 | 1718.8 ~ 1722.2 | 9.0 ~ 9.2 | 23.6 ~ 24.0 |
| 4.20725 ~ 4.20775 | 12.57725 | 156.7 ~ 156.9 | 2200 ~ 2300 | 9.3 ~ 9.5 | 31.2 ~ 31.8 |
| 6.215 ~ 6.218 | 13.36 ~ 13.41 | 162.0125 ~ 167.17 | 2310 ~ 2390 | 10.6 ~ 12.7 | 36.43 ~ 36.5 |
| 6.26775 ~ 6.26825 | 16.42 ~ 16.423 | 167.72 ~ 173.2 | 2483.5 ~ 2500 | 13.25 ~ 13.4 | Above 38.6 |
| 6.31175 ~ 6.31225 | 16.69475 ~ | 240 ~ 285 | 2655 ~ 2900 | | |
| 8.291 ~ 8.294 | 16.69525 | 322 ~ 335.4 | 3260 ~ 3267 | | |
| 8.362 ~ 8.366 | 16.80425 ~ | 399.90 ~ 410 | 3332 ~ 3339 | | |
| 8.37625 ~ 8.38675 | 16.80475 | 608 ~ 614 | 3345.8 ~ 3358 | | |
| | 25.5 ~ 25.67 | 960 ~ 1240 | 3600 ~ 4400 | | |
| | 37.5 ~ 38.25 | | | | |
| | 73 ~ 74.6 | | | | |
| | 74.8 ~ 75.2 | | | | |

• FCC Part 15.205(b): The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

Test Configuration

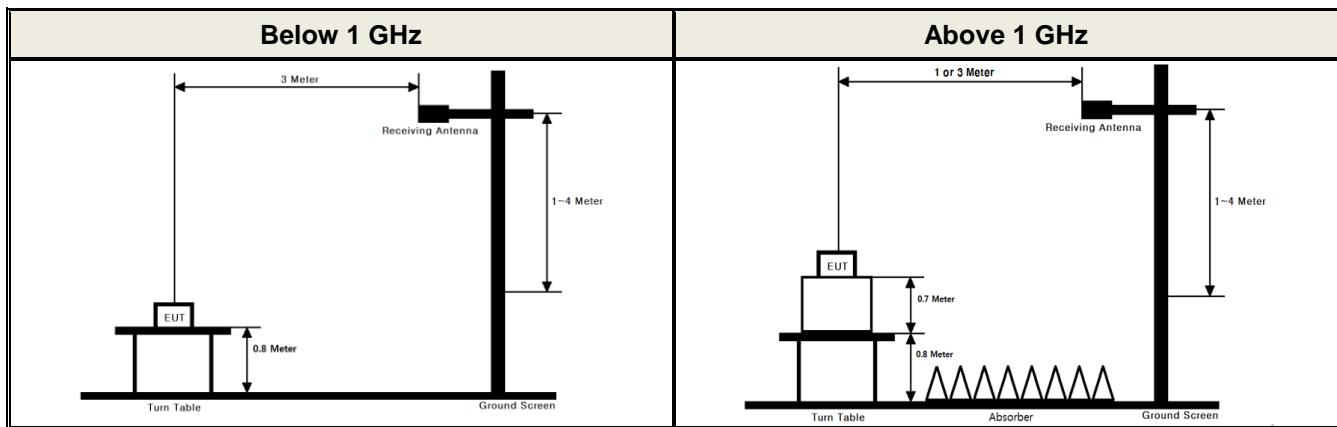

TEST PROCEDURE

1. The EUT is placed on a non-conductive table, emission measurements at below 1 GHz, the table height is 80 cm and above 1 GHz, the table height is 1.5 m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Measurement Instrument Setting for Radiated Emission Measurements.

The radiated emission was tested according to the section 6.3, 6.4, 6.5 and 6.6 of the ANSI C63.10-2013 with following settings.

Peak Measurement:

RBW = As specified in below table , VBW \geq 3 x RBW, Sweep = Auto, Detector = Peak, Trace mode = Max Hold until the trace stabilizes.

| Frequency | RBW |
|---------------|---------------|
| 9 - 150 kHz | 200 - 300 Hz |
| 0.15 - 30 MHz | 9 - 10 kHz |
| 30 - 1000 MHz | 100 - 120 kHz |
| > 1000 MHz | 1 MHz |

Average Measurement:

1. RBW = 1 MHz (unless otherwise specified).
2. VBW \geq 3 x RBW.
3. Detector = RMS (Number of points \geq 2 x Span / RBW)
4. Averaging type = power. (i.e., RMS)
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.
7. A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
- 2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous (\geq 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Duty Cycle Corrections (Refer to appendix II for duty cycle measurement procedure and plots)

| Band | Duty Cycle (%) | T _{on} (ms) | T _{on} + T _{off} (ms) | DCF = 10log(1 / Duty) (dB) |
|---------------|----------------|----------------------|---|----------------------------|
| 802.11b | 99.90 | 8.224 | 8.232 | - |
| 802.11g | 99.34 | 1.362 | 1.371 | - |
| 802.11n(HT20) | 99.30 | 1.275 | 1.284 | - |
| 802.11n(HT40) | 86.38 | 0.634 | 0.734 | 0.64 |

9 kHz~ 25 GHz Data (802.11b & 1 Mbps)**▪ 2412 MHz**

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2389.40 | V | Z | PK | 50.41 | 0.78 | N/A | N/A | 51.19 | 74.00 | 22.81 |
| 2388.08 | V | Z | AV | 40.31 | 0.78 | N/A | N/A | 41.09 | 54.00 | 12.91 |
| 4824.82 | H | Y | PK | 44.97 | 7.60 | N/A | N/A | 52.57 | 74.00 | 21.43 |
| 4824.33 | H | Y | AV | 33.35 | 7.60 | N/A | N/A | 40.95 | 54.00 | 13.05 |

▪ 2437 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 4874.41 | H | Y | PK | 44.30 | 7.54 | N/A | N/A | 51.84 | 74.00 | 22.16 |
| 4874.48 | H | Y | AV | 33.14 | 7.54 | N/A | N/A | 40.68 | 54.00 | 13.32 |

▪ 2462 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2487.88 | V | Z | PK | 50.54 | 1.12 | N/A | N/A | 51.66 | 74.00 | 22.34 |
| 2487.88 | V | Z | AV | 40.15 | 1.12 | N/A | N/A | 41.27 | 54.00 | 12.73 |
| 4922.97 | H | Y | PK | 45.19 | 7.40 | N/A | N/A | 52.59 | 74.00 | 21.41 |
| 4924.25 | H | Y | AV | 33.59 | 7.40 | N/A | N/A | 40.99 | 54.00 | 13.01 |

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.

So Distance Correction Factor : - $9.54 \text{ dB} = 20 \log(1 \text{ m} / 3 \text{ m})$

2. No other spurious and harmonic emissions were found greater than listed emissions on above table.

3. The band edge test has performed between 2310-2390 MHz and 2483.5-2500 MHz.

The worst results were reported in the table.

4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F + DCF + Distance Factor / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

9 kHz~ 25 GHz Data (802.11g & 6 Mbps)**▪ 2412 MHz**

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2388.44 | V | Z | PK | 62.77 | 0.78 | N/A | N/A | 63.55 | 74.00 | 10.45 |
| 2389.88 | V | Z | AV | 46.02 | 0.78 | N/A | N/A | 46.80 | 54.00 | 7.20 |
| 4828.62 | H | Y | PK | 45.52 | 7.60 | N/A | N/A | 53.12 | 74.00 | 20.88 |
| 4826.82 | H | Y | AV | 33.82 | 7.60 | N/A | N/A | 41.42 | 54.00 | 12.58 |

▪ 2437 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 4872.88 | H | Y | PK | 43.47 | 7.54 | N/A | N/A | 51.01 | 74.00 | 22.99 |
| 4872.06 | H | Y | AV | 32.33 | 7.54 | N/A | N/A | 39.87 | 54.00 | 14.13 |

▪ 2462 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2483.98 | V | Z | PK | 59.17 | 1.12 | N/A | N/A | 60.29 | 74.00 | 13.71 |
| 2483.50 | V | Z | AV | 42.96 | 1.12 | N/A | N/A | 44.08 | 54.00 | 9.92 |
| 4922.78 | H | Y | PK | 44.66 | 7.40 | N/A | N/A | 52.06 | 74.00 | 21.94 |
| 4922.62 | H | Y | AV | 33.71 | 7.40 | N/A | N/A | 41.11 | 54.00 | 12.89 |

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.

So Distance Correction Factor : - 9.54 dB = $20 \log(1 \text{ m} / 3 \text{ m})$

2. No other spurious and harmonic emissions were found greater than listed emissions on above table.

3. The band edge test has performed between 2310-2390 MHz and 2483.5-2500 MHz.

The worst results were reported in the table.

4. Sample Calculation.

Margin = Limit - Result / Result + T.F + DCF + Distance Factor / T.F = AF + CL - AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

9 kHz~ 25 GHz Data (802.11n HT20 & MCS 0)**▪ 2412 MHz**

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2389.40 | V | Z | PK | 63.12 | 0.78 | N/A | N/A | 63.90 | 74.00 | 10.10 |
| 2390.00 | V | Z | AV | 48.08 | 0.78 | N/A | N/A | 48.86 | 54.00 | 5.14 |
| 4819.66 | H | Y | PK | 45.62 | 7.60 | N/A | N/A | 53.22 | 74.00 | 20.78 |
| 4819.90 | H | Y | AV | 33.32 | 7.60 | N/A | N/A | 40.92 | 54.00 | 13.08 |

▪ 2437 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 4874.64 | H | Y | PK | 43.99 | 7.54 | N/A | N/A | 51.53 | 74.00 | 22.47 |
| 4874.18 | H | Y | AV | 32.51 | 7.54 | N/A | N/A | 40.05 | 54.00 | 13.95 |

▪ 2462 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2483.62 | V | Z | PK | 62.60 | 1.12 | N/A | N/A | 63.72 | 74.00 | 10.28 |
| 2483.50 | V | Z | AV | 43.70 | 1.12 | N/A | N/A | 44.82 | 54.00 | 9.18 |
| 4926.30 | H | Y | PK | 44.40 | 7.40 | N/A | N/A | 51.80 | 74.00 | 22.20 |
| 4926.08 | H | Y | AV | 33.35 | 7.40 | N/A | N/A | 40.75 | 54.00 | 13.25 |

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.

So Distance Correction Factor : - $9.54 \text{ dB} = 20 \log(1 \text{ m} / 3 \text{ m})$

2. No other spurious and harmonic emissions were found greater than listed emissions on above table.

3. The band edge test has performed between 2310-2390 MHz and 2483.5-2500 MHz.

The worst results were reported in the table.

4. Sample Calculation.

Margin = Limit - Result / Result = Reading + T.F + DCF + Distance Factor / T.F = AF + CL - AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

9 kHz~ 25 GHz Data (802.11n HT40 & MCS 0)**▪ 2422 MHz**

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2390.00 | V | Z | PK | 59.05 | 0.78 | N/A | N/A | 59.83 | 74.00 | 14.17 |
| 2390.00 | V | Z | AV | 46.47 | 0.78 | 0.64 | N/A | 47.89 | 54.00 | 6.11 |
| 4843.40 | H | Y | PK | 44.63 | 7.58 | N/A | N/A | 52.21 | 74.00 | 21.79 |
| 4842.80 | H | Y | AV | 33.84 | 7.58 | 0.64 | N/A | 42.06 | 54.00 | 11.94 |

▪ 2437 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 4882.56 | H | Y | PK | 43.97 | 7.30 | N/A | N/A | 51.27 | 74.00 | 22.73 |
| 4882.68 | H | Y | AV | 32.78 | 7.30 | 0.64 | N/A | 40.72 | 54.00 | 13.28 |

▪ 2452 MHz

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | DCF (dB) | Distance Factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|----------|---------------------|-----------------|----------------|-------------|
| 2483.50 | V | Z | PK | 56.62 | 1.12 | N/A | N/A | 57.74 | 74.00 | 16.26 |
| 2483.80 | V | Z | AV | 42.04 | 1.12 | 0.64 | N/A | 43.80 | 54.00 | 10.20 |
| 4913.56 | H | Y | PK | 44.93 | 7.37 | N/A | N/A | 52.30 | 74.00 | 21.70 |
| 4914.00 | H | Y | AV | 33.57 | 7.37 | 0.64 | N/A | 41.58 | 54.00 | 12.42 |

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.

So Distance Correction Factor : - 9.54 dB = $20 \log(1 \text{ m} / 3 \text{ m})$

2. No other spurious and harmonic emissions were found greater than listed emissions on above table.

3. The band edge test has performed between 2310-2390 MHz and 2483.5-2500 MHz.

The worst results were reported in the table.

4. Sample Calculation.

Margin = Limit - Result / Result = Reading + T.F + DCF + Distance Factor / T.F = AF + CL - AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

6.6 Power-line conducted emissions

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Conducted Limit (dBuV) | |
|--------------------------|------------------------|------------|
| | Quasi-Peak | Average |
| 0.15 ~ 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

* Decreases with the logarithm of the frequency

□ TEST CONFIGURATION

See test photographs for the actual connections between EUT and support equipment.

□ TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

□ Test Results: **Comply**(Refer to next page.)

The worst data was reported.

■ RESULT PLOTS

Test mode: 802.11b & 1Mbps & 2437MHz


AC Line Conducted Emissions (Graph)**Results of Conducted Emission**

DT&C

Date : 2016-12-22

| | | | | | |
|----------------|---|----------------|----------------|---|-----------------|
| Order No. | : | DTNC1612-07601 | Referrence No. | : | |
| Model No. | : | DA25 | Power Supply | : | 120 V 60 Hz |
| Serial No. | : | | Temp/Humi. | : | 24 'C 44 % R.H. |
| Test Condition | : | 802.11 b | Operator | : | Jaejin Lee |
| Memo | : | 2437 MHz | | | |

LIMIT : FCC P15.207 QP
FCC P15.207 AV

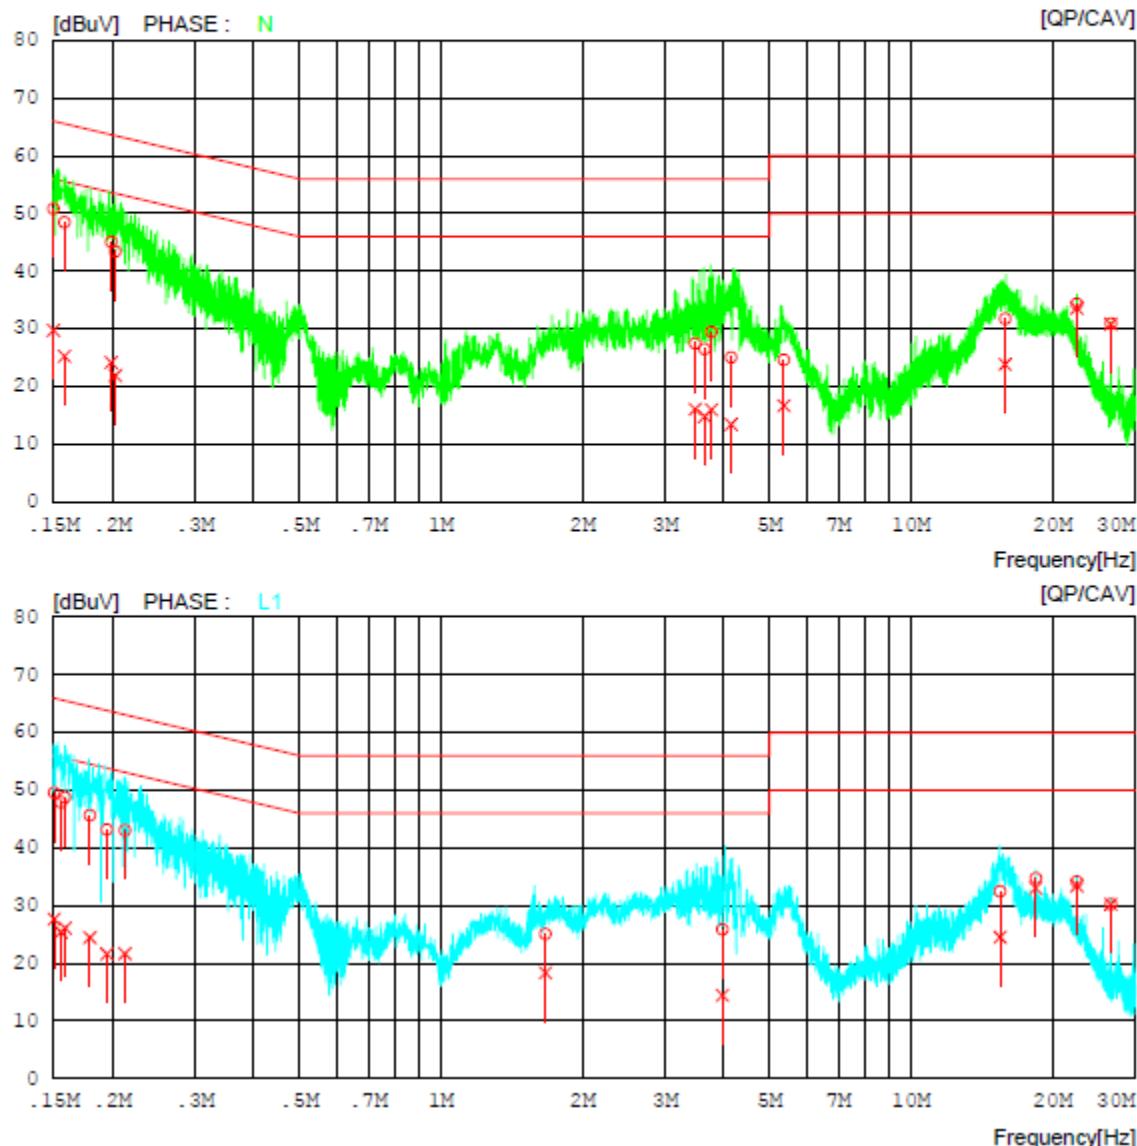

AC Line Conducted Emissions (List)

Results of Conducted Emission

DT&C

Date : 2016-12-22

| | | | | |
|----------------|---|----------------|---------------|---|
| Order No. | : | DTNC1612-07601 | Reference No. | : |
| Model No. | : | DA25 | Power Supply | : |
| Serial No. | : | | Temp/Humi. | : |
| Test Condition | : | 802.11 b | Operator | : |
| Memo | : | 2437 MHz | | |

LIMIT : FCC P15.207 QP
FCC P15.207 AV

| NO | FREQ | READING | | C.FACTOR | RESULT | | LIMIT | | MARGIN | PHASE |
|----|----------|---------|--------|----------|--------|--------|--------|--------|--------|--------|
| | | QP | CAV | | QP | CAV | QP | CAV | | |
| | [MHz] | [dBuV] | [dBuV] | [dB] | [dBuV] | [dBuV] | [dBuV] | [dBuV] | [dBuV] | [dBuV] |
| 1 | 0.15000 | 39.07 | 17.99 | 11.75 | 50.82 | 29.74 | 66.00 | 56.00 | 15.18 | 26.26 |
| 2 | 0.15826 | 36.83 | 13.62 | 11.63 | 48.46 | 25.25 | 65.55 | 55.55 | 17.09 | 30.30 |
| 3 | 0.19901 | 33.87 | 12.93 | 11.21 | 45.08 | 24.14 | 63.65 | 53.65 | 18.57 | 29.51 |
| 4 | 0.20304 | 32.23 | 10.73 | 11.19 | 43.42 | 21.92 | 63.49 | 53.49 | 20.07 | 31.57 |
| 5 | 3.47384 | 17.19 | 5.80 | 10.27 | 27.46 | 16.07 | 56.00 | 46.00 | 28.54 | 29.93 |
| 6 | 3.63900 | 16.22 | 4.53 | 10.26 | 26.48 | 14.79 | 56.00 | 46.00 | 29.52 | 31.21 |
| 7 | 3.76134 | 19.22 | 5.75 | 10.26 | 29.48 | 16.01 | 56.00 | 46.00 | 26.52 | 29.99 |
| 8 | 4.14419 | 14.78 | 3.17 | 10.26 | 25.04 | 13.43 | 56.00 | 46.00 | 30.96 | 32.57 |
| 9 | 5.36691 | 14.30 | 6.31 | 10.33 | 24.63 | 16.64 | 60.00 | 50.00 | 35.37 | 33.36 |
| 10 | 15.86611 | 21.24 | 13.35 | 10.50 | 31.74 | 23.85 | 60.00 | 50.00 | 28.26 | 26.15 |
| 11 | 22.52853 | 23.78 | 23.06 | 10.54 | 34.32 | 33.60 | 60.00 | 50.00 | 25.68 | 16.40 |
| 12 | 26.62455 | 20.32 | 20.23 | 10.59 | 30.91 | 30.82 | 60.00 | 50.00 | 29.09 | 19.18 |
| 13 | 0.15050 | 37.78 | 15.89 | 11.77 | 49.55 | 27.66 | 65.97 | 55.97 | 16.42 | 28.31 |
| 14 | 0.15550 | 36.18 | 13.69 | 11.71 | 47.89 | 25.40 | 65.70 | 55.70 | 17.81 | 30.30 |
| 15 | 0.15875 | 37.08 | 14.41 | 11.68 | 48.76 | 26.09 | 65.53 | 55.53 | 16.77 | 29.44 |
| 16 | 0.17933 | 34.22 | 13.02 | 11.43 | 45.65 | 24.45 | 64.52 | 54.52 | 18.87 | 30.07 |
| 17 | 0.19473 | 31.94 | 10.37 | 11.25 | 43.19 | 21.62 | 63.83 | 53.83 | 20.64 | 32.21 |
| 18 | 0.21282 | 31.93 | 10.53 | 11.13 | 43.06 | 21.66 | 63.09 | 53.09 | 20.03 | 31.43 |
| 19 | 1.66912 | 14.77 | 8.03 | 10.33 | 25.10 | 18.36 | 56.00 | 46.00 | 30.90 | 27.64 |
| 20 | 3.97266 | 15.58 | 4.18 | 10.29 | 25.87 | 14.47 | 56.00 | 46.00 | 30.13 | 31.53 |
| 21 | 15.46784 | 22.12 | 14.17 | 10.35 | 32.47 | 24.52 | 60.00 | 50.00 | 27.53 | 25.48 |
| 22 | 18.43205 | 24.32 | 22.61 | 10.42 | 34.74 | 33.03 | 60.00 | 50.00 | 25.26 | 16.97 |
| 23 | 22.52853 | 23.66 | 22.96 | 10.49 | 34.15 | 33.45 | 60.00 | 50.00 | 25.85 | 16.55 |
| 24 | 26.62426 | 19.71 | 19.69 | 10.53 | 30.24 | 30.22 | 60.00 | 50.00 | 29.76 | 19.78 |


7. LIST OF TEST EQUIPMENT

| Type | Manufacturer | Model | Cal.Date (yy/mm/dd) | Next.Cal.Date (yy/mm/dd) | S/N |
|-------------------------------------|----------------------|-----------------------------|------------------------|-----------------------------|-----------------|
| MXA Signal Analyzer | Agilent Technologies | N9020A | 16/08/18 | 17/08/18 | MY46471172 |
| MXA Signal Analyzer | Agilent Technologies | N9020A | 16/10/11 | 17/10/11 | MY46471251 |
| DC Power Supply | Agilent Technologies | 66332A | 16/09/08 | 17/09/08 | US37473422 |
| Multimeter | FLUKE | 17B | 16/04/21 | 17/04/21 | 26030065WS |
| Vector Signal Generator | R&S | SMBV100A | 16/01/05 | 17/01/05 | 255571 |
| Signal Generator | R&S | SMF100A | 16/06/23 | 17/06/23 | 102341 |
| Power Meter & Wide Bandwidth Sensor | Anritsu | ML2496A/MA2411B | 16/06/23 | 17/06/23 | 1338004/1306053 |
| 2W 3dB Attenuator | SMAJK | SMAJK-2-3 | 16/10/18 | 17/10/18 | 3 |
| 50W 10dB Attenuator | SMAJK | SMAJK-50-10 | 16/10/18 | 17/10/18 | 2-50-10 |
| Thermohygrometer | BODYCOM | BJ5478 | 16/02/25 | 17/02/25 | 1209 |
| Loop Antenna | Schwarzbeck | FMZB1513 | 16/04/22 | 18/04/22 | 1513-128 |
| Biglog Antenna | SCHAFFNER | VULB9160 | 16/08/05 | 18/08/05 | 3362 |
| Horn Antenna | ETS | 3117 | 16/05/03 | 18/05/03 | 140394 |
| Horn Antenna | A.H.Systems. | SAS-574 | 15/04/30 | 17/04/30 | 154 |
| Low Noise Pre Amplifier | tsj | MLA-010K01-B01-27 | 16/03/10 | 17/03/10 | 1844539 |
| Amplifier | Agilent | 8449B | 16/02/24 | 17/02/24 | 3008A00370 |
| High-pass filter | Wainwright | WHKX12-2580-3000-18000-80SS | 16/09/09 | 17/09/09 | 3 |
| High-pass filter | Wainwright | WHNX6-6320-8000-26500-40CC | 16/09/13 | 17/09/13 | 1 |
| EMI TEST RECEIVER | R&S | ESR7 | 16/02/25 | 17/02/25 | 101061 |
| EMI TEST RECEIVER | R&S | ESCI | 16/02/25 | 17/02/25 | 100364 |
| PULSE LIMITER | Rohde Schwarz | ESH3-Z2 | 16/01/05 | 17/01/05 | 101334 |
| SINGLE-PHASE MASTER | NF | 4420 | 16/09/08 | 17/09/08 | 3049354420023 |
| Artificial Mains Network | Narda S.T.S. / PMM | PMM L2-16B | 16/06/22 | 17/06/22 | 000WX20305 |

APPENDIX I

Conducted Test set up Diagram & Path loss Information

- Conducted Measurement

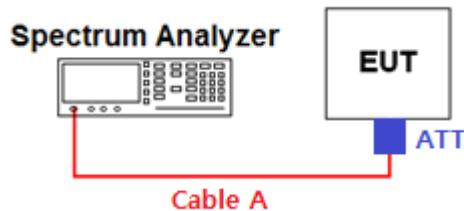

Path loss information

| Frequency (GHz) | Path Loss (dB) | Frequency (GHz) | Path Loss (dB) |
|--|----------------|-----------------|----------------|
| 0.03 | 4.03 | 15 | 5.51 |
| 1 | 4.18 | 20 | 5.78 |
| 2.412 & 2.422 & 2.437 2.452 & 2.462 | 4.41 | 25 | 6.02 |
| 5 | 4.68 | - | - |
| 10 | 5.22 | - | - |

Note. 1: The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (S/A's correction factor) = Cable A (Attenuator, Applied only when it was used externally)

APPENDIX II

Duty cycle plots

TEST PROCEDURE

Duty Cycle measured using section 6.0 b) of KDB558074

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.


Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

Test Plots :


Duty Cycle

Test Mode: 802.11b & 1Mbps & 2437 MHz

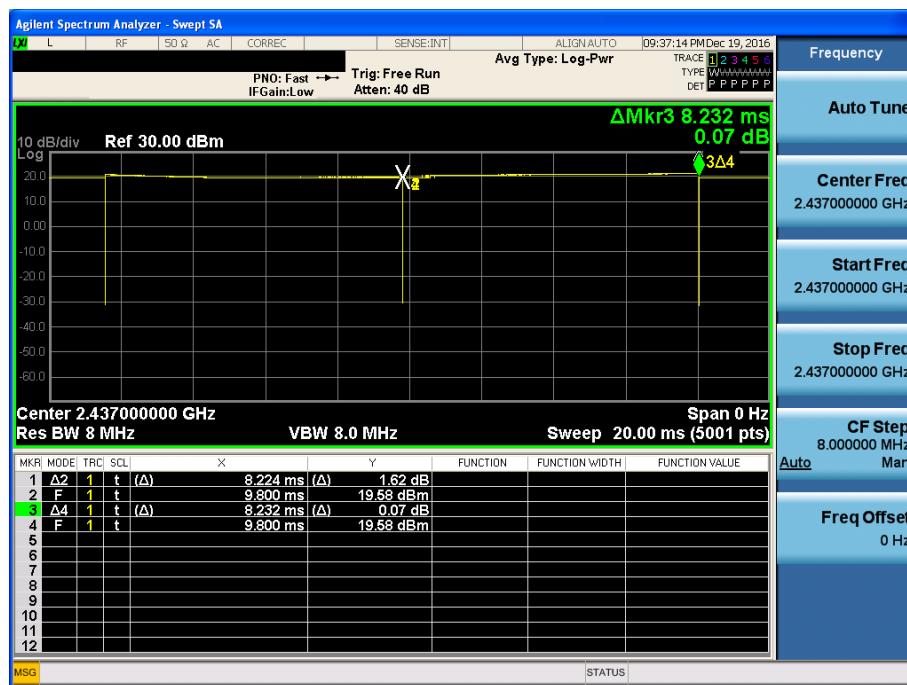


Duty Cycle

Test Mode: 802.11g & 6Mbps & 2437 MHz

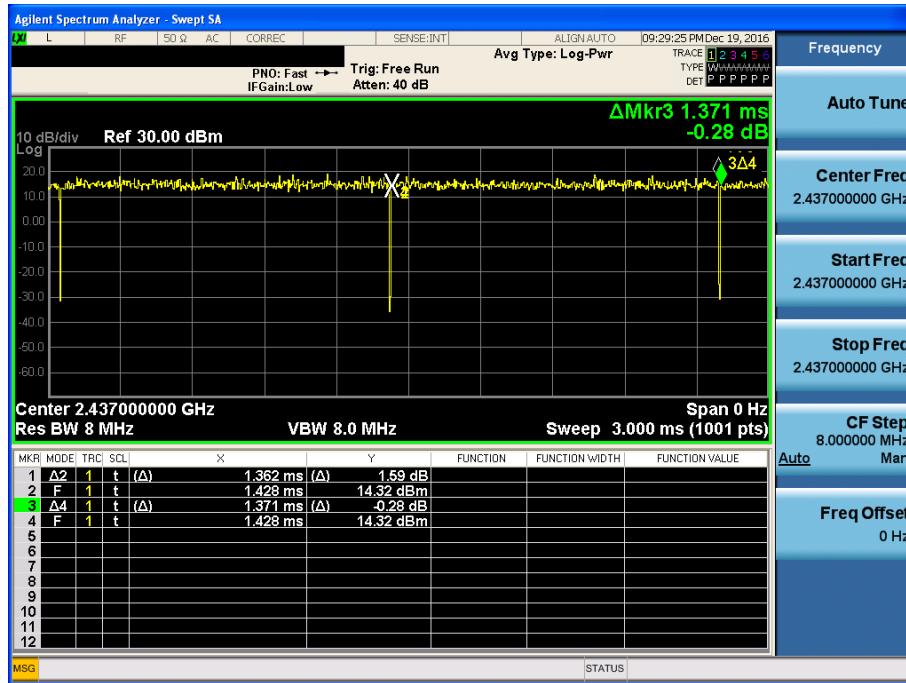


Duty Cycle

Test Mode: 802.11n(HT20) & MCS 0 & 2437 MHz

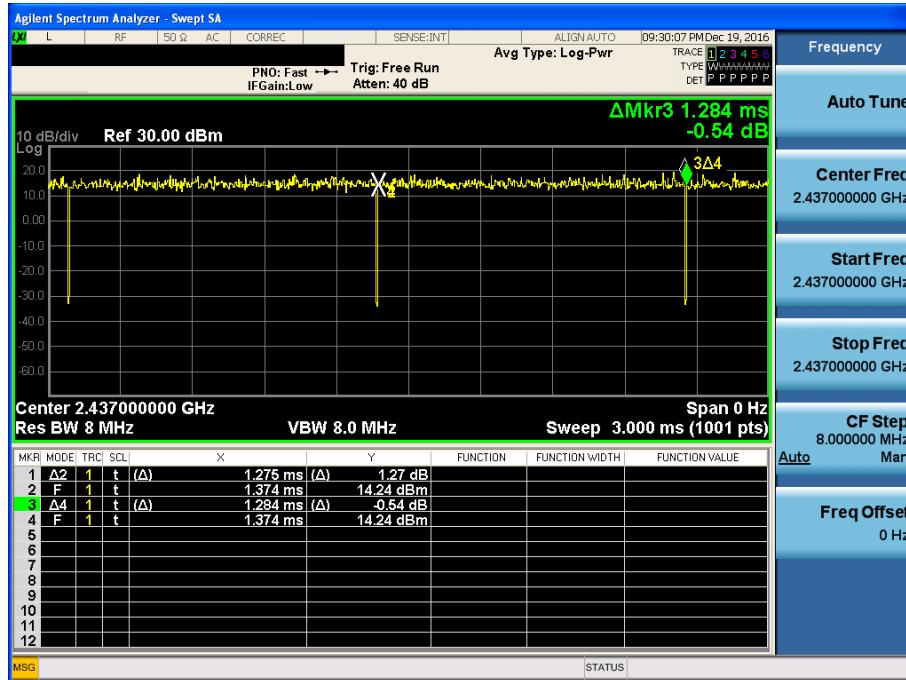

Duty Cycle

Test Mode: 802.11n(HT40) & MCS 0 & 2437 MHz

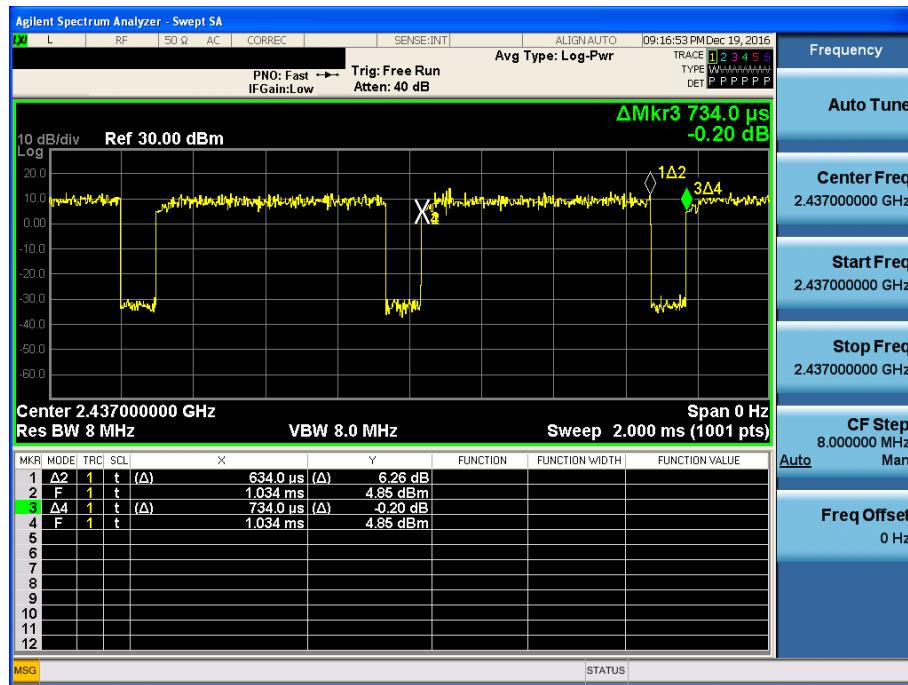


APPENDIX III

Unwanted Emissions (Radiated) Test Plot


802.11b & Lowest & Z & Ver

Detector Mode : PK

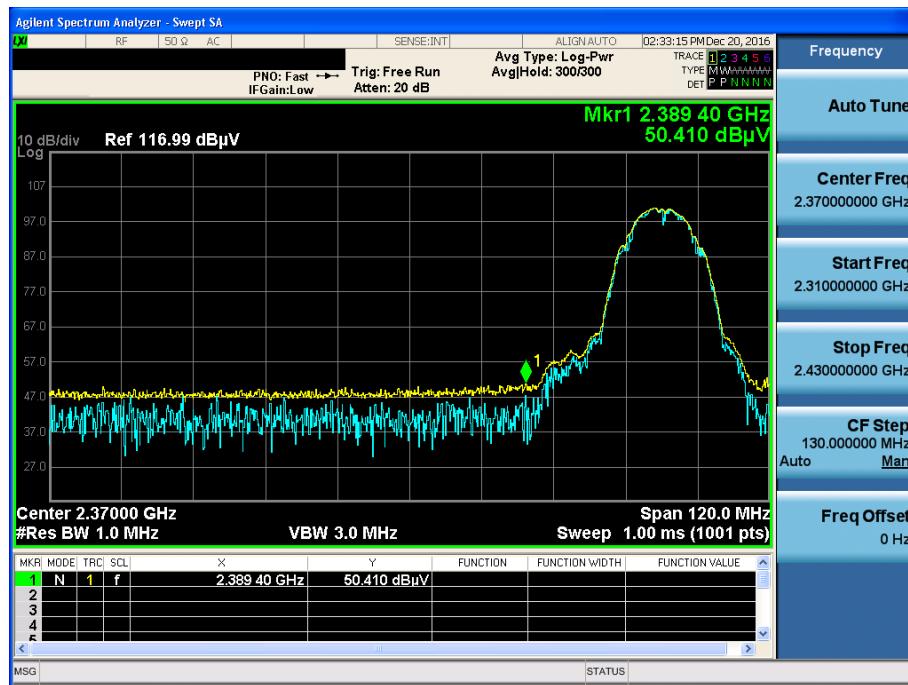


802.11b & Lowest & Z & Ver

Detector Mode : AV

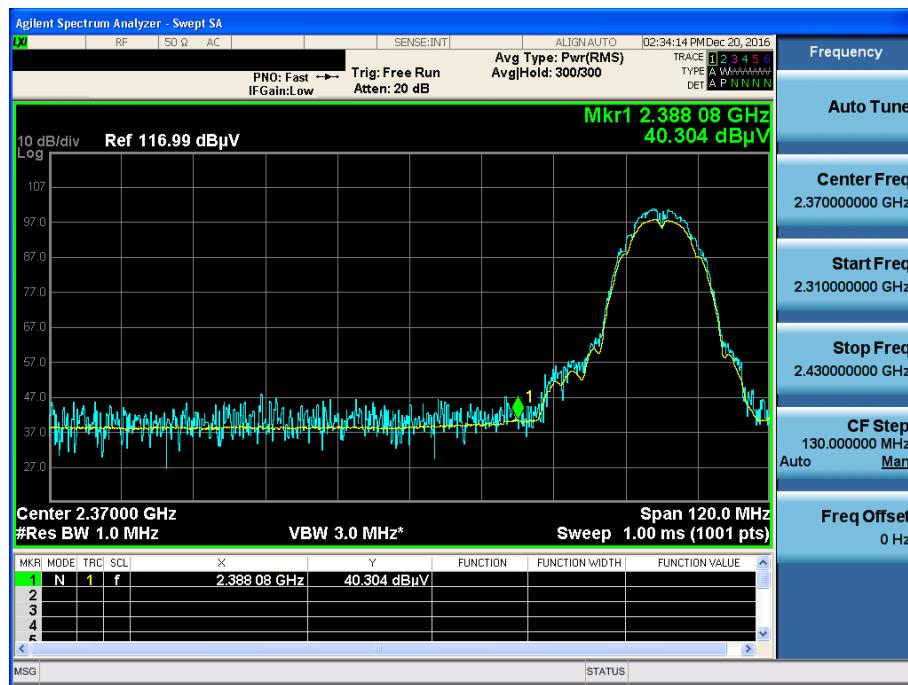


802.11b & Highest & Z & Ver

Detector Mode : PK

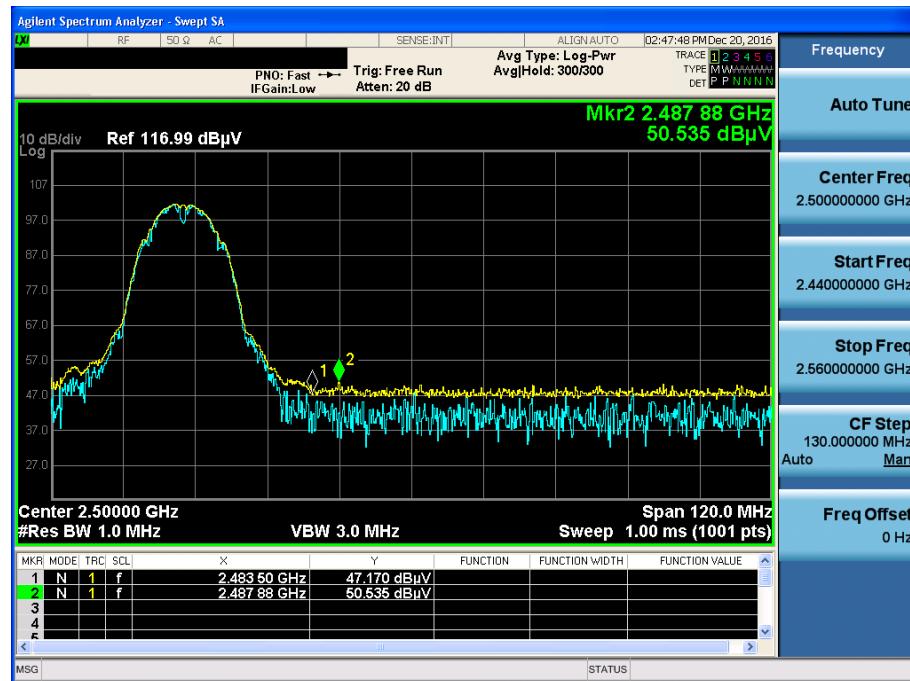


802.11b & Highest & Z & Ver

Detector Mode : AV

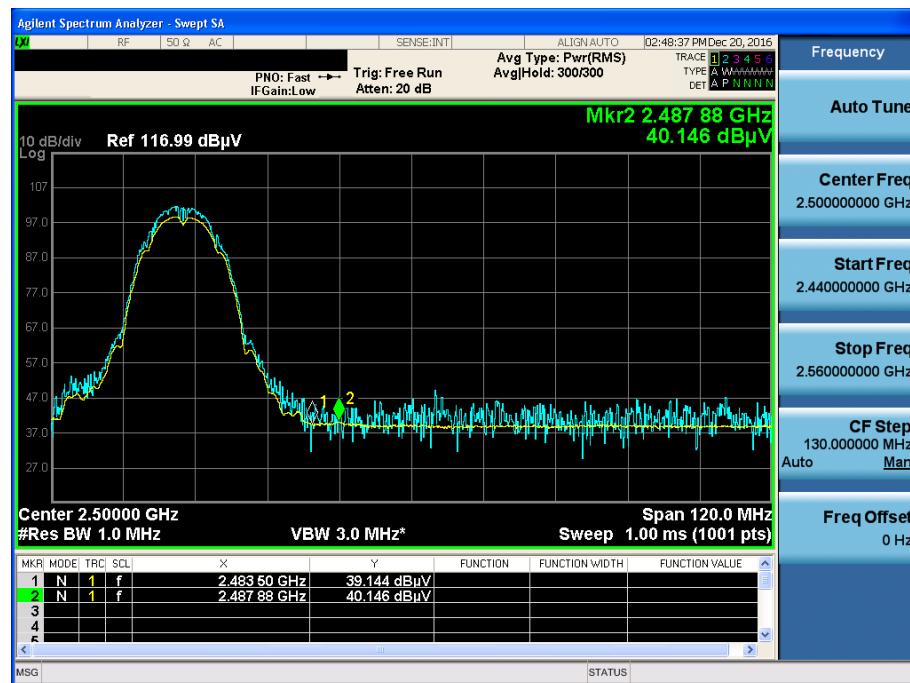

802.11g & Lowest & Z & Ver

Detector Mode : PK

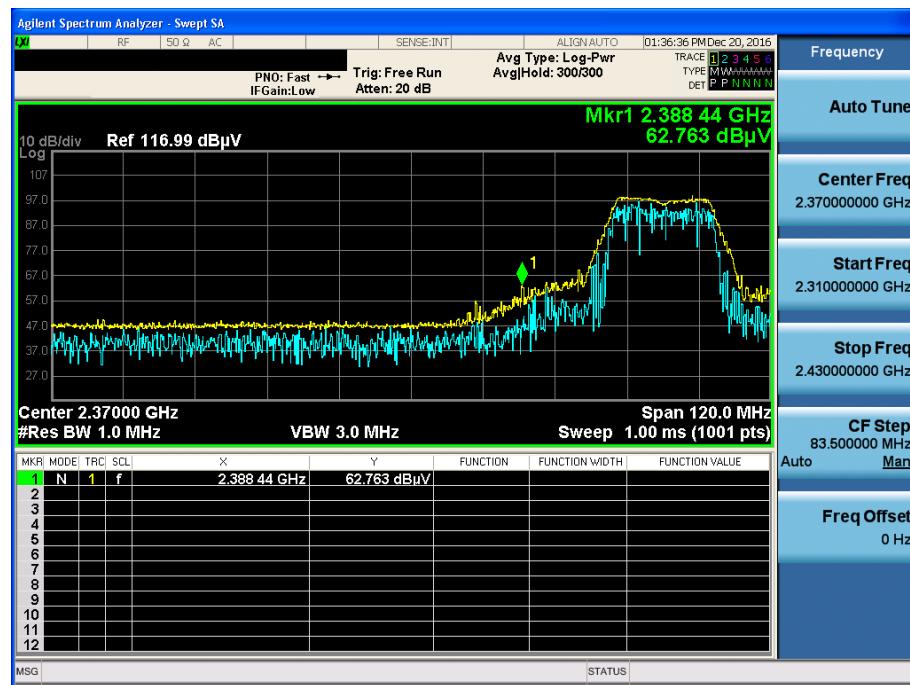


802.11g & Lowest & Z & Ver

Detector Mode : AV




802.11g & Highest & Z & Ver


Detector Mode : PK

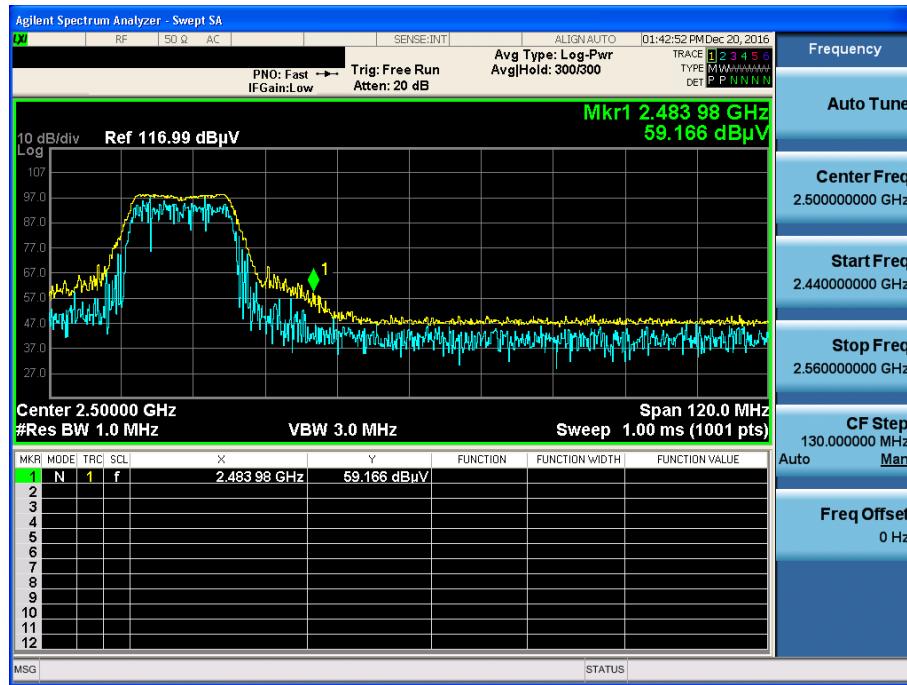

802.11g & Highest & Z & Ver


Detector Mode : AV

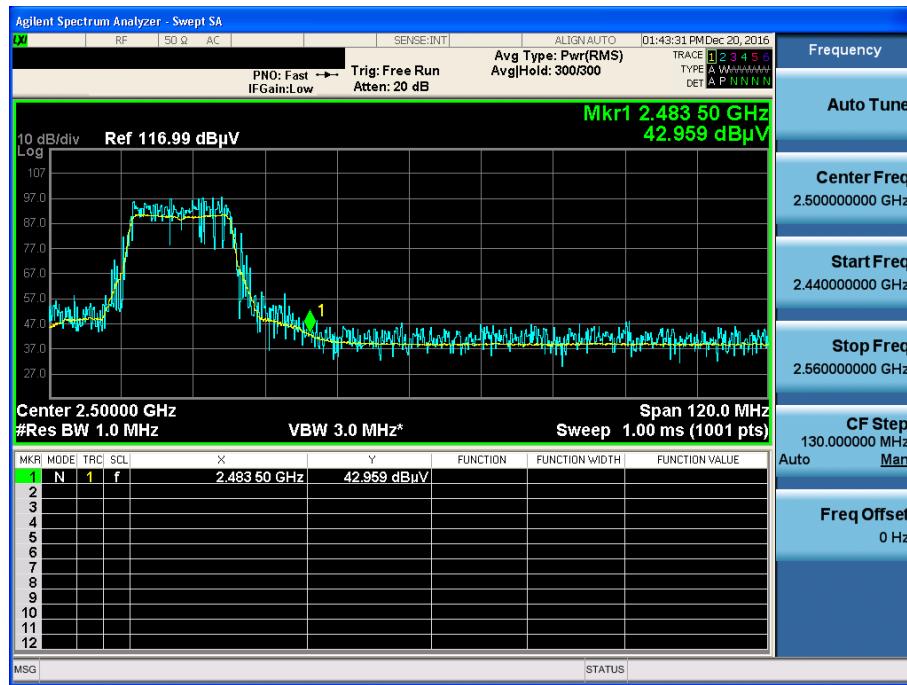

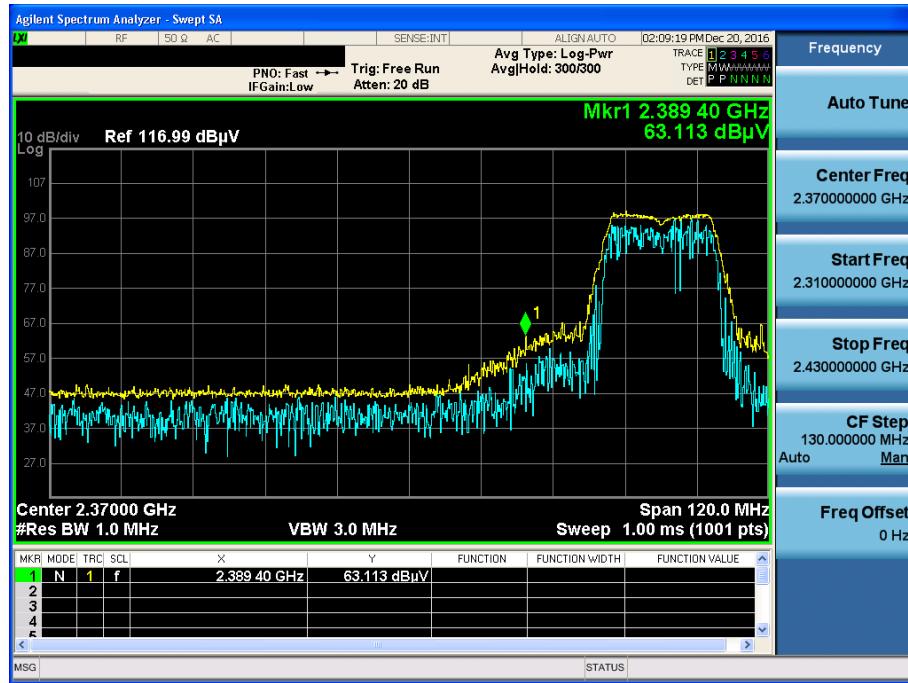802.11n(HT20) & Lowest & Z & Ver
Detector Mode : PK

802.11n(HT20) & Lowest & Z & Ver
Detector Mode : AV



802.11n(HT20) & Highest & Z & Ver


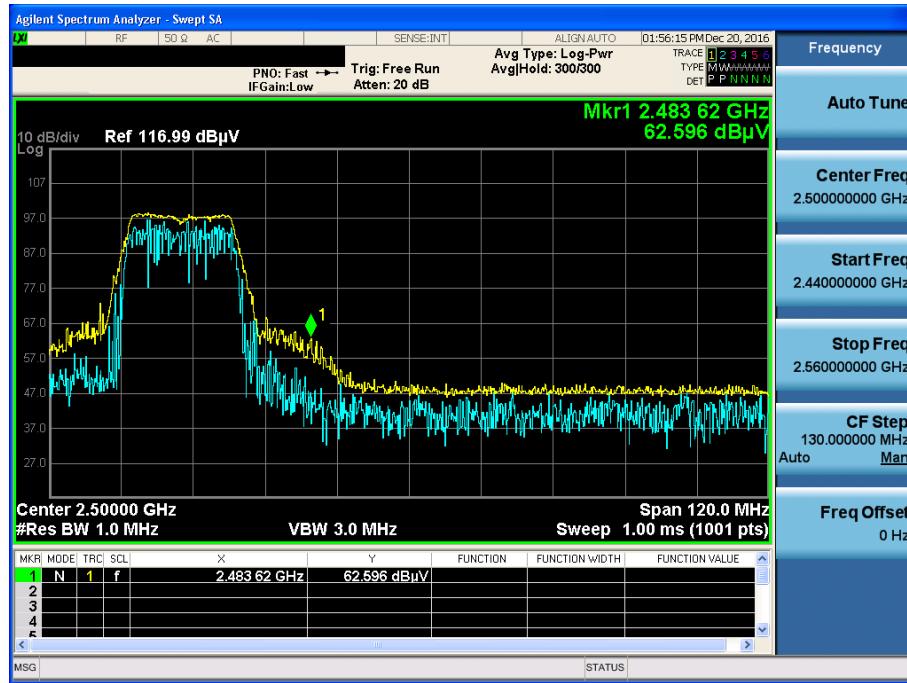
Detector Mode : PK



802.11n(HT20) & Highest & Z & Ver

Detector Mode : AV

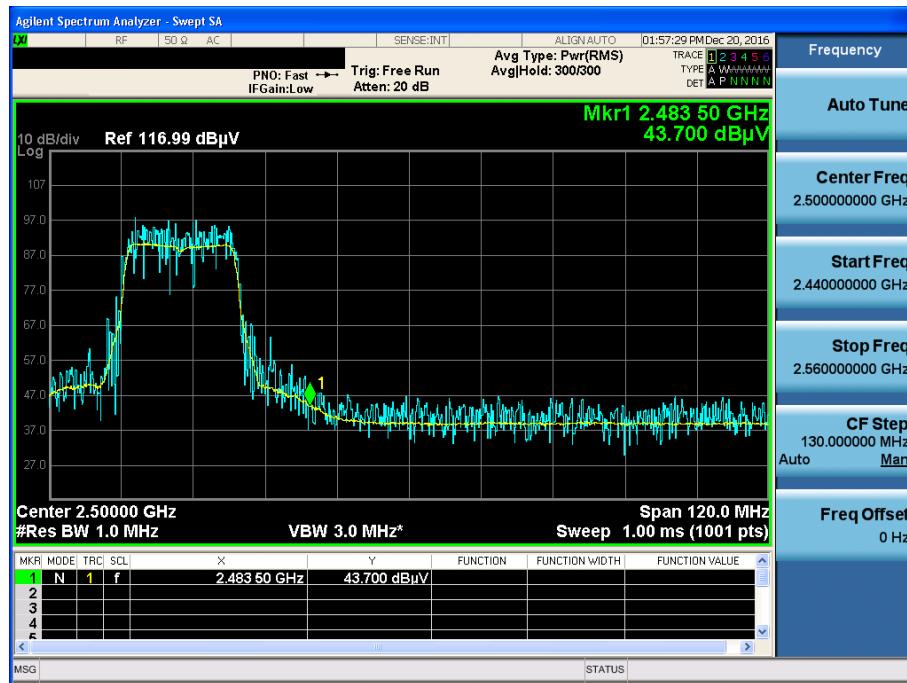

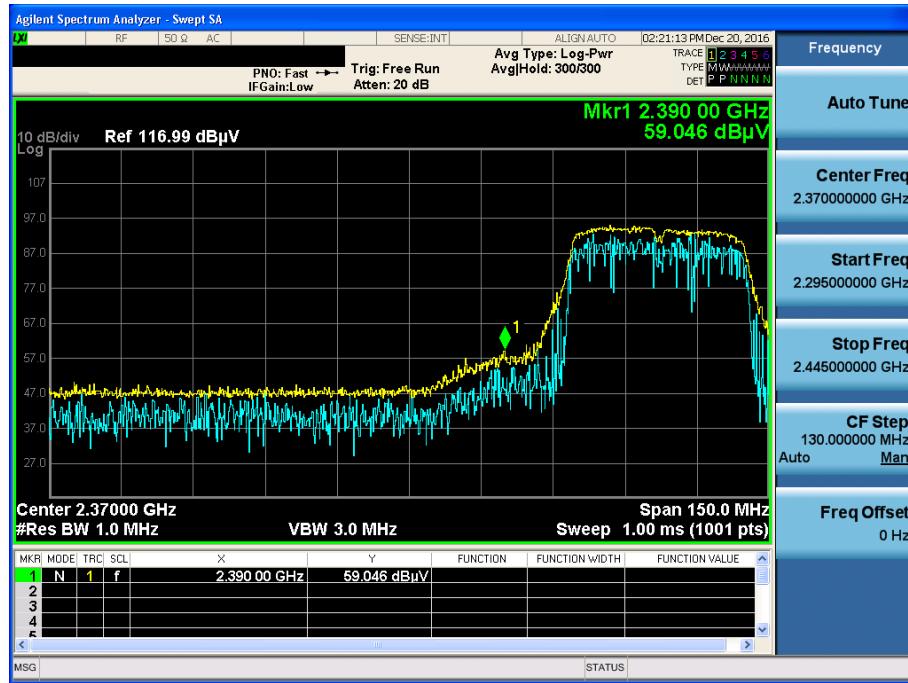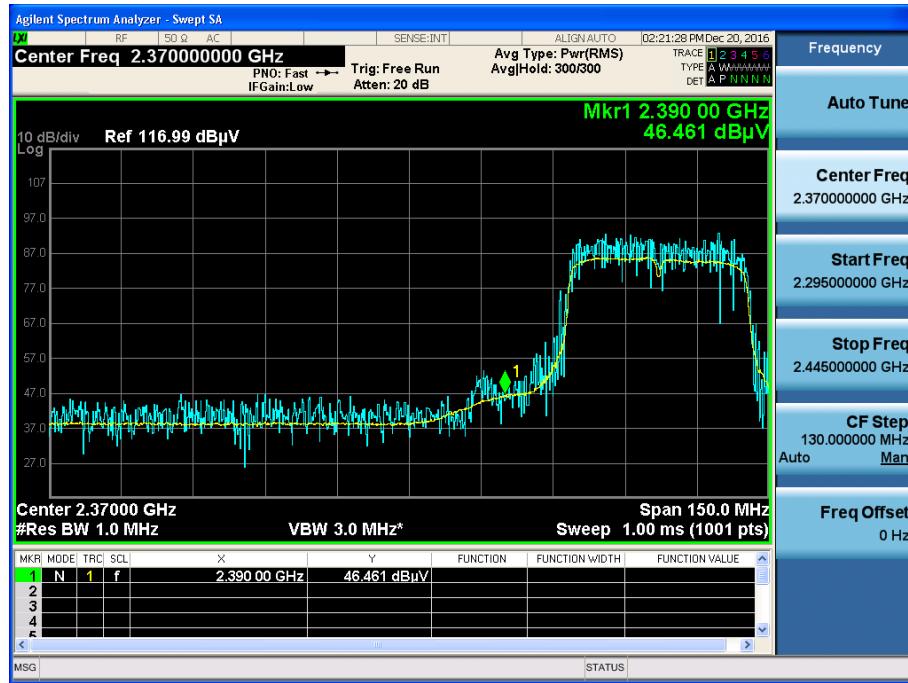802.11n(HT40) & Lowest & Z & Ver
Detector Mode : PK

802.11n(HT40) & Lowest & Z & Ver
Detector Mode : AV


802.11n(HT40) & Highest & Z & Ver

Detector Mode : PK




802.11n(HT40) & Highest & Z & Ver

Detector Mode : AV




802.11b & Highest & Y & Hor

Detector Mode : AV

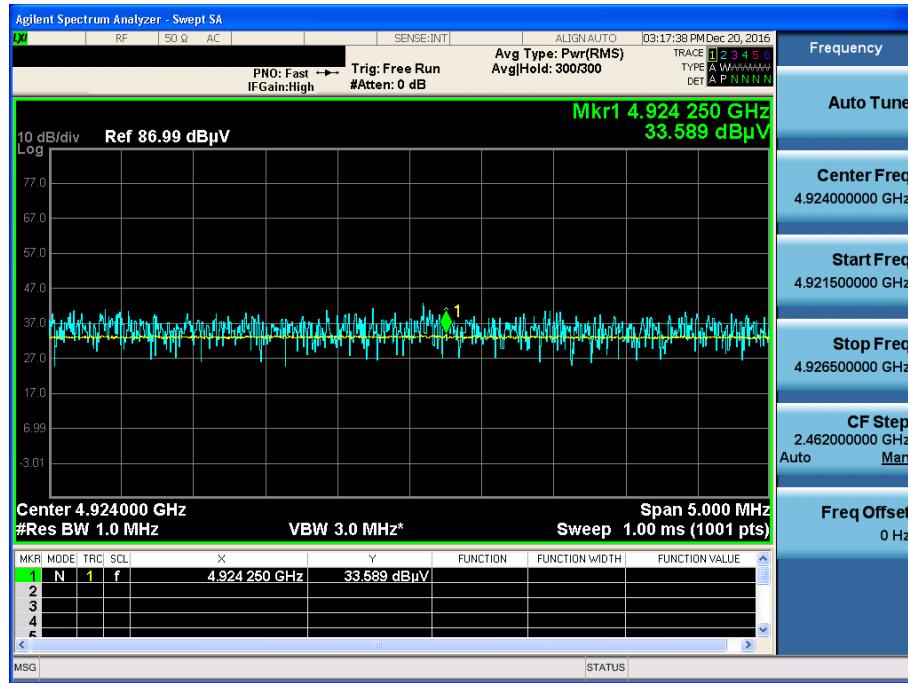


802.11g & Lowest & Y & Hor

Detector Mode : AV

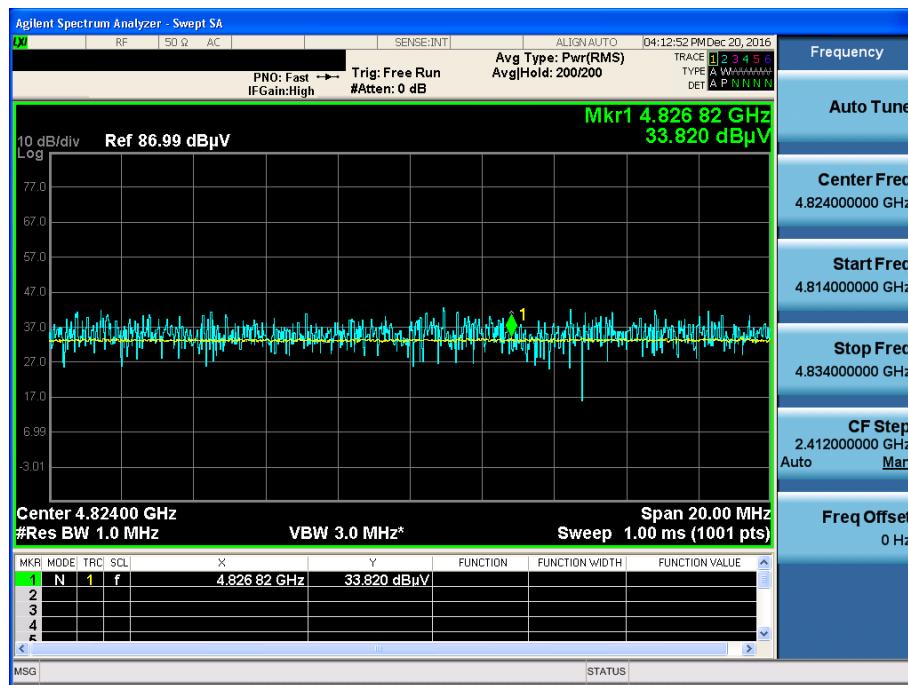

802.11n(HT20) & Lowest & Y & Hor

Detector Mode : AV

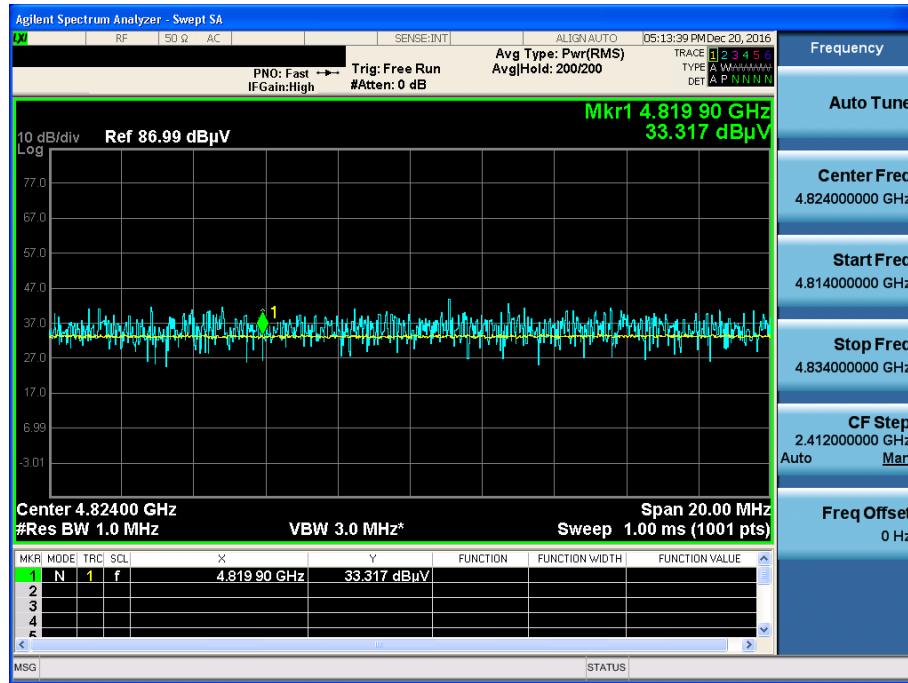

802.11n(HT40) & Lowest & Y & Hor

Detector Mode : AV

