

January 7, 2020

HID Global Corporation  
13501 McCallen Pass, Austin, TX 78753  
Eden Prairie, MN 55344

Dear Robert Cresswell,

Enclosed is the EMC test report for compliance testing of the HID Global Corporation, Model: 20, tested to the requirements of Title 47 of the CFR, Part 15.225, Subpart C for Certification as an Intentional Radiator.

Thank you for using the services of Eurofins MET Labs, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS MET LABS, INC.



Michelle Tawmging  
Documentation Department

Reference: (\HID Global Corporation\EMCA104932-FCC 225 SRD 20 Rev. 2)

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins MET Labs, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

---

## **Electromagnetic Compatibility Criteria Test Report**

for the

**HID Global Corporation  
HID Signo Reader  
Model: 20**

**Tested under**  
the FCC Certification Rules  
contained in  
15.225 Subpart C  
for Intentional Radiators

**MET Report: EMCA104932-FCC 225 SRD 20 Rev. 2**

January 7, 2020

**Prepared For:**

**HID Global Corporation  
13501 McCallen Pass, Austin, TX 78753  
Eden Prairie, MN 55344**

**Prepared By:**  
**Eurofins MET Labs, Inc.**  
13501 McCallen Pass  
Austin, TX 78753

## Electromagnetic Compatibility Criteria Test Report

for the

**HID Global Corporation  
HID Signo Reader  
Model: 20**

**Tested under**  
the FCC Certification Rules  
contained in  
15.225 Subpart C  
for Intentional Radiators




Adan Arab, Project Engineer  
Electromagnetic Compatibility Lab



Michelle Tawmging  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.225 under normal use and maintenance.

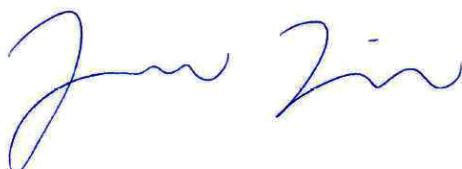

Jonathan Tavira,  
Manager, Electromagnetic Compatibility Lab

## Report Status Sheet

<b>Revision</b>	<b>Report Date</b>	<b>Reason for Revision</b>
∅	October 24, 2019	Initial Issue
1	October 29, 2019	Implemented Customer-Requested Revisions
2	January 7, 2020	Implemented TCB-Requested Revisions

## Table of Contents

<b>I.</b>	<b><i>Executive Summary</i></b> .....	<b>1</b>
	A. Purpose of Test .....	1
	B. Executive Summary .....	1
<b>II.</b>	<b><i>Equipment Configuration</i></b> .....	<b>2</b>
	A. Overview .....	2
	B. References .....	3
	C. Test Site .....	3
	D. Measurement Uncertainty .....	3
	E. Description of Test Sample .....	3
	F. Equipment Configuration .....	4
	G. Support Equipment .....	4
	H. Ports and Cabling Information .....	5
	I. Mode of Operation .....	5
	J. Method of Monitoring EUT Operation .....	5
	K. Modifications .....	5
	a) Modifications to EUT .....	5
	b) Modifications to Test Standard .....	5
	L. Disposition of EUT .....	5
<b>III.</b>	<b><i>Electromagnetic Compatibility Criteria for Intentional Radiators</i></b> .....	<b>6</b>
	§ 15.203 Antenna Requirement .....	6
	§ 15.207(a) Conducted Emissions Limits .....	7
	§ 15.215(c) 20 dB Occupied Bandwidth .....	13
	§ 15.225(a) Spurious Emission Limits, within the band 13.553 – 13.567 MHz .....	16
	§ 15.225(b) Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz .....	21
	§ 15.225(c) Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz .....	28
	§ 15.225(d) Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz .....	35
	§ 15.225(e) Frequency Stability .....	49
<b>IV.</b>	<b><i>Test Equipment</i></b> .....	<b>62</b>
<b>V.</b>	<b><i>Certification &amp; User's Manual Information</i></b> .....	<b>63</b>
	A. Certification Information .....	64
	B. Label and User's Manual Information .....	68

## List of Figures

Figure 1: Executive Summary of EMC Part 15.225 Compliance Testing .....	1
Figure 2: EUT Summary Table .....	2
Figure 3: References .....	3
Figure 4: Uncertainty Calculations Summary .....	3
Figure 5: Block Diagram of Test Configuration .....	4
Figure 6: Equipment Configuration .....	4
Figure 7: Support Equipment .....	4
Figure 8: Ports and Cabling Information .....	5
Figure 9: Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	7
Figure 10: CEV Test Setup .....	8
Figure 11: Conducted Emission Limits, Pigtail, Phase Line, Test Results .....	9
Figure 12: Conducted Emission Limits, Pigtail, Phase Line, Prescan .....	9
Figure 13: Conducted Emission Limits, Pigtail, Neutral Line, Test Results .....	10
Figure 14: Conducted Emission Limits, Pigtail, Neutral Line, Prescan .....	10
Figure 15: Conducted Emissions Limits, Terminal, Phase Line, Test Results .....	11
Figure 16: Conducted Emissions Limits, Terminal, Phase Line, Prescan .....	11
Figure 17: Conducted Emissions Limits, Terminal, Neutral Line, Test Results .....	12
Figure 18: Conducted Emissions Limits, Terminal, Neutral Line, Prescan .....	12
Figure 19: 20 dB Occupied Bandwidth, Pigtail, Test Results .....	14
Figure 20: 20 dB Occupied Bandwidth, Pigtail, 20dB 6.095 KHz .....	14
Figure 21: 20 dB Occupied Bandwidth, Terminal, Test Results .....	15
Figure 22: 20 dB Occupied Bandwidth, Terminal, -20dB 6.214 KHz .....	15
Figure 23: Radiated Emissions, Test Setup .....	16
Figure 24: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Pigtail, 0 Deg .....	17
Figure 25: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Pigtail, 90 Deg .....	18
Figure 26: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Terminal, 0 Deg .....	19
Figure 27: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Terminal, 90 Deg .....	20
Figure 28: Radiated Emissions, Test Setup .....	21
Figure 29: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail, 13.410-13.553 MHz, 0 Deg .....	22
Figure 30: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail, 13.410-13.553 MHz, 90 Deg .....	23
Figure 31: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail, 13.567-13.710 MHz, 0 Deg .....	23
Figure 32: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail, 13.567-13.710 MHz, 90 Deg .....	24
Figure 33: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.410-13.553 MHz, 0 Deg .....	25
Figure 34: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.410-13.553 MHz, 90 Deg .....	26
Figure 35: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.567-13.710 MHz, 0 Deg .....	26
Figure 36: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.567-13.710 MHz, 90 Deg .....	27
Figure 37: Radiated Emissions, Test Setup .....	28
Figure 38: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 13.110-13.410 MHz, 0 Deg .....	29
Figure 39: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 13.110-13.410 MHz, 90 Deg .....	30

Figure 40: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 3.710-14.010 MHz, 0 Deg .....	30
Figure 41: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 13.710-14.010 MHz, 90 Deg .....	31
Figure 42: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.110-13.410 MHz, 0 Deg .....	32
Figure 43: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.110-13.410 MHz, 90 Deg .....	33
Figure 44: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.710-14.010 MHz, 0 Deg .....	33
Figure 45: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.710-14.010 MHz, 90 Deg .....	34
Figure 46: Radiated Spurious Emissions Test Setup .....	36
Figure 47: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.009 MHz – 0.150 MHz, 0 Deg .....	37
Figure 48: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.009 MHz – 0.150 MHz, 90 Deg .....	38
Figure 49: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.150 MHz – 0.490 MHz, 0 Deg .....	38
Figure 50: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.150 MHz – 0.490 MHz, 90 Deg .....	39
Figure 51: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.490 MHz – 1.705 MHz, 0 Deg .....	39
Figure 52: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.490 MHz – 1.705 MHz, 90 Deg .....	40
Figure 53: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 1.705 MHz – 30 MHz, 0 Deg ..	40
Figure 54: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 1.705 MHz – 30 MHz, 90 Deg ..	41
Figure 55: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 30 MHz – 1000 MHz, Horizontal Deg .....	41
Figure 56: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 30 MHz – 1000 MHz, Vertical ..	42
Figure 57: Radiated Spurious Emissions, Pigtail, 30 MHz – 1000 MHz .....	42
Figure 58: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.009 MHz – 0.150 MHz, 0 Deg .....	43
Figure 59: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.009 MHz – 0.150 MHz, 90 Deg .....	44
Figure 60: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.150 MHz – 0.49 MHz, 0 Deg .....	44
Figure 61: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.150 MHz – 0.490 MHz, 90 Deg .....	45
Figure 62: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.490 MHz – 1.705 MHz, 0 Deg .....	45
Figure 63: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.490 – 1.705 MHz, 90 Deg ..	46
Figure 64: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 1.705 MHz -30 MHz, 0 Deg ..	46
Figure 65: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 1.705 MHz -30 MHz, 90 Deg .....	47
Figure 66: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 30 MHz – 1000 MHz, Horizontal .....	47
Figure 67: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 30 MHz – 1000 MHz, Vertical .....	48
Figure 68: Radiated Spurious Emissions, Terminal, 30 MHz – 1000 MHz .....	48
Figure 69: Temperature Stability Test Setup .....	49

Figure 70: Frequency Stability, Pigtail, Test Results .....	50
Figure 71: Frequency Stability, Pigtail, (-20) - 10.2VDC .....	51
Figure 72: Frequency Stability, Pigtail, (-20) - 12VDC .....	51
Figure 73: Frequency Stability, Pigtail, (-20) - 13.8VDC .....	52
Figure 74: Frequency Stability, Pigtail, (20) - 10.2VDC .....	52
Figure 75: Frequency Stability, Pigtail, (20) - 12VDC .....	53
Figure 76: Frequency Stability, Pigtail, (20) - 13.8VDC .....	53
Figure 77: Frequency Stability, Pigtail, (50) - 10.2VDC .....	54
Figure 78: Frequency Stability, Pigtail, (50) - 12VDC .....	54
Figure 79: Frequency Stability, Pigtail, (50) - 13.8VDC .....	55
Figure 80: Frequency Stability, Terminal, Test Results .....	56
Figure 81: Frequency Stability, Terminal, (-20) - 10.2VDC .....	57
Figure 82: Frequency Stability, Terminal, (-20) - 12VDC .....	57
Figure 83: Frequency Stability, Terminal, (-20) - 13.8VDC .....	58
Figure 84: Frequency Stability, Terminal, (20) - 10.2VDC .....	58
Figure 85: Frequency Stability, Terminal, (20) - 12VDC .....	59
Figure 86: Frequency Stability, Terminal, (20) - 13.8VDC .....	59
Figure 87: Frequency Stability, Terminal, (50) - 10.2VDC .....	60
Figure 88: Frequency Stability, Terminal, (50) - 12VDC .....	60
Figure 89: Frequency Stability, Terminal, (50) - 13.8VDC .....	61
Figure 90: Test Equipment List.....	62

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<math>\mu</math>A</b>	Decibels above one <b>microamp</b>
<b>dB<math>\mu</math>V</b>	Decibels above one <b>microvolt</b>
<b>dB<math>\mu</math>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b><math>\mu</math>H</b>	<b>microhenry</b>
$\mu$	<b>microfarad</b>
$\mu$ s	<b>microseconds</b>
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts <b>per meter</b>
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

### A. Purpose of Test

An EMC evaluation was performed to determine compliance of the HID Global Corporation Model: 20, with the requirements of Part 15, §15.225. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Model: 20. HID Global Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Model: 20, has been **permanently** discontinued.

### B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.225, in accordance with HID Global Corporation, quote number 1HID1903R1. All tests were conducted using measurement procedure ANSI C63.4-2014.

<b>FCC Reference 47 CFR Part 15.225</b>	<b>Description</b>	<b>Compliance Model: 20 Pigtail</b>	<b>Compliance Model: 20 Terminal</b>
Part 15 §15.203	Antenna Requirement	Compliant	Compliant
Part 15 §15.207(a)	Conducted Emission Limits	Compliant	Compliant
Part 15 §15.215	20dB Occupied Bandwidth	Compliant	Compliant
Part 15 §15.225(a)	Field Strength emissions within the band 13.553 – 13.567 MHz	Compliant	Compliant
Part 15 §15.225(b)	Field Strength emissions within the band 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	Compliant	Compliant
Part 15 §15.225(c)	Field Strength emissions within the band 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	Compliant	Compliant
Part 15 §15.225(d)	Outside-Band Field Strength emissions per 15.209 - 13.110 – 14.010 MHz	Compliant	Compliant
Part 15 §15.225(e)	Frequency Tolerance of the Carrier	Compliant	Compliant

**Figure 1: Executive Summary of EMC Part 15.225 Compliance Testing**

## II. Equipment Configuration

### A. Overview

Eurofins MET Labs, Inc. was contracted by HID Global Corporation to perform testing on the Model: 20, under HID Global Corporation's quote number 1HID1903R1.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the HID Global Corporation, Model: 20.

The results obtained relate only to the item(s) tested.

<b>Models Tested:</b>	20 Pigtail and Terminal
<b>Models Covered:</b>	20
<b>EUT Specifications:</b>	Primary Power: 12 VDC
	FCC ID: JQ6-SIGNO20
	<b>Type of Modulations:</b> FSK
	<b>Equipment Code:</b> DXX
	<b>Maximum field Strength (dB<math>\mu</math>V/m):</b> 38.88 dB $\mu$ V/m
	<b>EUT Frequency Ranges:</b> 13.56 MHz
	<b>Antenna Type:</b> Inductive Loop
	<b>Antenna Gain:</b> 1 dBi
	<b>Firmware Version:</b> R9.1.0.19
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C
	Relative Humidity: 30-60%
	Barometric Pressure: 860-1060 mbar
<b>Evaluated by:</b>	Jonathan Tavira and Adan Arab
<b>Report Date:</b>	January 7, 2020

Figure 2: EUT Summary Table

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2017</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices

**Figure 3: References**

## C. Test Site

All testing was performed at Eurofins MET Labs, Inc., 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.


## D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
<b>RF Frequencies</b>	±4.52 Hz	2	95%
<b>RF Power Conducted Emissions</b>	±2.32 dB	2	95%
<b>RF Power Conducted Spurious Emissions</b>	±2.25 dB	2	95%
<b>RF Power Radiated Emissions</b>	±3.01 dB	2	95%

**Figure 4: Uncertainty Calculations Summary**

## E. Description of Test Sample

The Model: 20, Equipment Under Test (EUT), is typically installed near doorway as part of physical access system, to control access to that door. A user will approach the door and present a BLE or RFID credentials to the reader with intention of entering the door. The reader will read the credential and send its data to a connected access control panel, which determine whether or not grant the user access to the door. Optionally, a personal identification number (PIN) may also be required, in which case the user will enter the PIN on the reader's keypad.

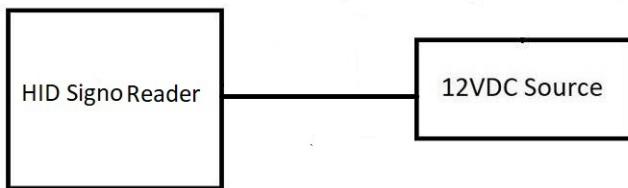

**Figure 5: Block Diagram of Test Configuration**

## F. Equipment Configuration

The EUT was set up as outlined in Figure 5. All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Rev. #
	N/A	HID Signo Reader	20	N/A	N/A	N/A

**Figure 6: Equipment Configuration**

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part number	Serial Number	Rev. #
N/A	N/A	12VDC Source	DURACELL Battery	N/A	N/A	N/A
N/A	N/A	Tablet	Galaxy Tab 4	N/A	N/A	N/A

**Figure 7: Support Equipment**

## H. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length(m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	+VDC	Power	1	0.3	0.3	Y	
2	GND	Power	1	0.3	0.3	Y	
3	Data1	Data	1	0.3	0.3	Y	
4	Data0	Data	1	0.3	0.3	Y	
5	GLED	Data	1	0.3	0.3	Y	
6	RLY1	Data	1	0.3	0.3	Y	
7	RLY2	Data	1	0.3	0.3	Y	
8	RLED	Data	1	0.3	0.3	Y	
9	HOLD	Data	1	0.3	0.3	Y	
10	Beep	Data	1	0.3	0.3	Y	

Figure 8: Ports and Cabling Information

## I. Mode of Operation

A 12V DC provided to the EUT, once booting process done and LED's on readers turn solid RED the unit is ready to be tested. An HF/LF credential were presented to the reader for a continuously operation. The unit will beep every few seconds and LED's flashing constantly means that the unit is reading and data is going back and forth between the credential and the reader. In order to operate the BT radio, a tablet was paired to the unit via BT link and signal information presented via the HID app to insure connection is constant.

## J. Method of Monitoring EUT Operation

HF/LF: once the LED's presented a solid RED light the unit is ready to use. An HF/LF card presented to the reader, which cause the unit to beep every few second and the LED to flash.

## K. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## L. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to HID Global Corporation upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

#### **§ 15.203 Antenna Requirement**

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Model: 20 Pigtail****Test Result:**

The EUT as tested is **compliant** with the requirements of **§ 15.203**. The 20 Pigtail Card Reader implements a loop antenna that is permanently installed. Therefore, the 20 Pigtail Card Reader satisfies all requirements under section **§15.203**.

**Test Engineer:**

Jonathan Tavira

**Test Date:**

September 12, 2019

**Model: 20 Terminal****Test Result:**

The EUT as tested is **compliant** with the requirements of **§ 15.203**. The 20 Terminal Card Reader implements a loop antenna that is permanently installed. Therefore, the 20 Terminal Card Reader satisfies all requirements under section **§15.203**.

**Test Engineer:**

Jonathan Tavira

**Test Date:**

September 12, 2019

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):** **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

**Figure 9: Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

Note: \*Decreases with the logarithm of the frequency.

**Test Procedure:**

The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.10-2013*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

**Sample Calculation:**

$$Rr - S = M$$

where:

Rr = Receiver Reading in dB $\mu$ V

S = Specification Limit in dB $\mu$ V

M = Margin to Specification in +/- dB

**Sample formula for calculating the Corrected Data for the Conducted Emissions Measurements:**

Line	Freq (MHz)	Uncorrected QP** Amplitude (dB $\mu$ V)	LISN IL (dB)	CBL (dB)	Corrected QP** Amplitude (dB $\mu$ V)	QP** Limit (dB $\mu$ V)	Delta (dB)	Results
XYZ	0.18	42.65	10	0.58	53.23	79	-25.77	Pass

*Corrected QP\*\* Amplitude (dB $\mu$ V) = Uncorrected Amplitude (dB $\mu$ V) + LISN IL (dB) + CBL (dB) = 42.65 + 10 + 0.58 = 53.23*

*\*\* Same Calculation applies to Corrected Avg. amplitude as well.*

## Conducted Emissions Voltage Test Setup

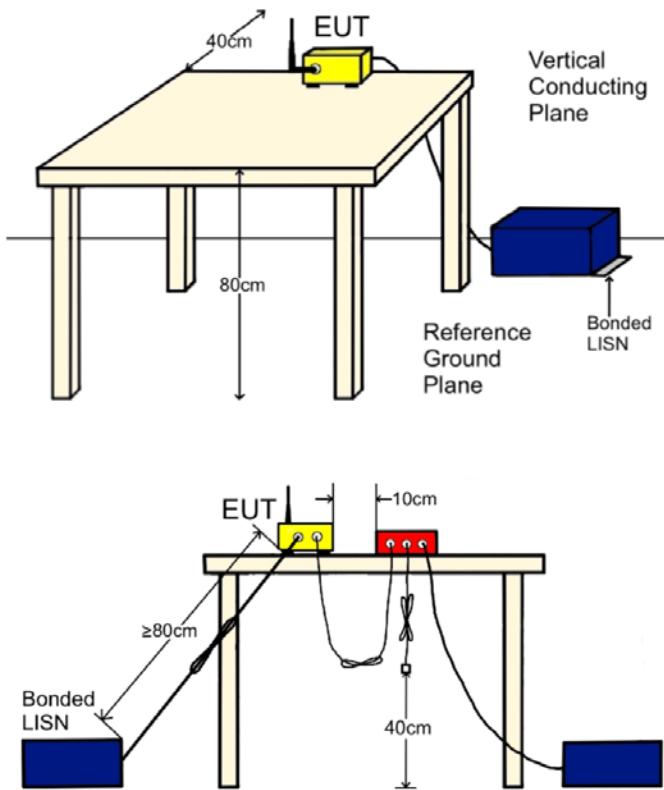


Figure 10: CEV Test Setup

**Model: 20 Pigtail**

**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.207(a). Measured emissions were below applicable limits.

**Test Engineer:** Adan Arab


**Test Date:** August 6, 2019

**Test Data, Model: 20 Pigtail**

Meas. Location	Meas. mΩ	Limit	Pass/Fail
<b>Bonding measurement from LISN ground to ground plane</b>	0.893	< 2.5 mΩ	Pass


Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Line1_120VAC 60Hz	0.470	48.60	56.528	-7.93	Pass	40.20	46.529	-6.33	Pass
Line1_120VAC 60Hz	0.522	44.70	56.00	-11.30	Pass	35.60	46.000	-10.40	Pass
Line1_120VAC 60Hz	0.406	41.10	57.752	-16.65	Pass	30.40	47.752	-17.35	Pass
Line1_120VAC 60Hz	0.234	42.10	62.317	-20.22	Pass	35.00	52.317	-17.32	Pass
Line1_120VAC 60Hz	0.290	42.50	60.539	-18.04	Pass	35.00	50.539	-15.54	Pass
Line1_120VAC 60Hz	1.338	39.60	56.000	-16.40	Pass	30.30	46.000	-15.70	Pass

**Figure 11: Conducted Emission Limits, Pigtail, Phase Line, Test Results**

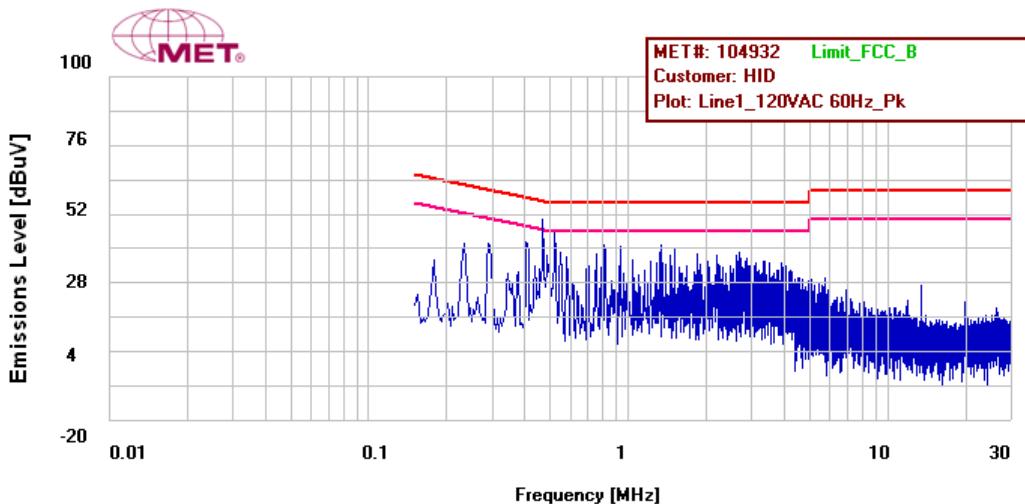

**Figure 12: Conducted Emission Limits, Pigtail, Phase Line, Prescan**

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Neutral_120VAC 60Hz	1.278	36.70	56.000	-19.30	Pass	23.50	46.000	-22.50	Pass
Neutral_120VAC 60Hz	0.878	36.10	56.000	-19.90	Pass	23.80	46.000	-22.20	Pass
Neutral_120VAC 60Hz	0.466	49.80	56.602	-6.80	Pass	38.80	46.602	-7.80	Pass
Neutral_120VAC 60Hz	0.498	39.50	56.034	-16.53	Pass	25.20	46.034	-20.83	Pass
Neutral_120VAC 60Hz	0.354	35.00	58.888	-23.88	Pass	23.10	48.888	-25.78	Pass
Neutral_120VAC 60Hz	1.886	29.90	56.000	-26.10	Pass	16.00	46.000	-30.00	Pass

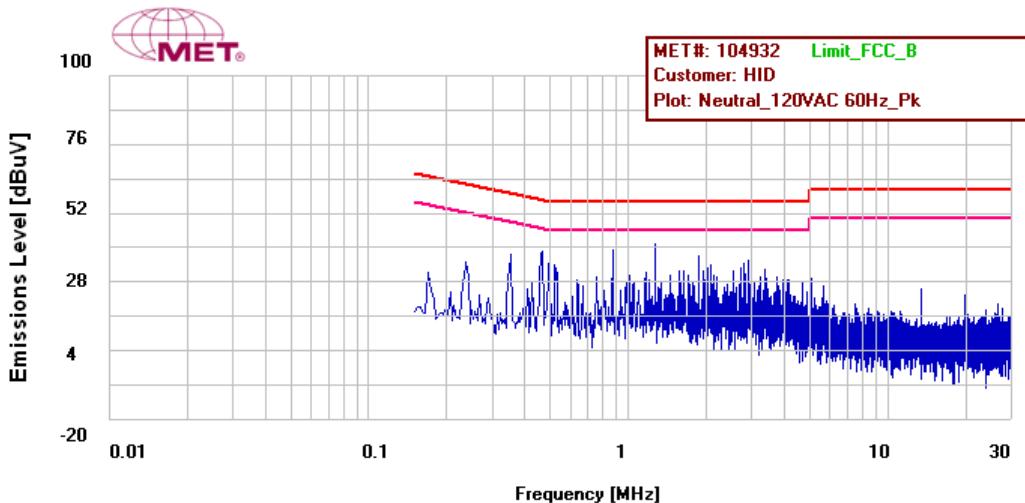**Figure 13: Conducted Emission Limits, Pigtail, Neutral Line, Test Results**

**Figure 14: Conducted Emission Limits, Pigtail, Neutral Line, Prescan**

**Model: 20 Terminal**

**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.207(a). Measured emissions were below applicable limits.

**Test Engineer:** Adan Arab


**Test Date:** August 5, 2019

**Test Data, Model: 20 Terminal**

Meas. Location	Meas. mΩ	Limit	Pass/Fail
<b>Bonding measurement from LISN ground to ground plane</b>	0.9987	< 2.5 mΩ	Pass


Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Line1_120VAC 60Hz	0.494	47.70	56.103	-8.40	Pass	35.80	46.103	-10.30	Pass
Line1_120VAC 60Hz	0.478	43.90	56.384	-12.48	Pass	32.80	46.384	-13.58	Pass
Line1_120VAC 60Hz	0.438	43.00	57.124	-14.12	Pass	31.90	47.124	-15.22	Pass
Line1_120VAC 60Hz	0.234	41.90	62.317	-20.42	Pass	34.40	52.317	-17.92	Pass
Line1_120VAC 60Hz	0.818	40.20	56.000	-15.80	Pass	30.40	46.000	-15.60	Pass
Line1_120VAC 60Hz	0.526	41.60	56.000	-14.40	Pass	31.70	46.000	-14.30	Pass

**Figure 15: Conducted Emissions Limits, Terminal, Phase Line, Test Results**

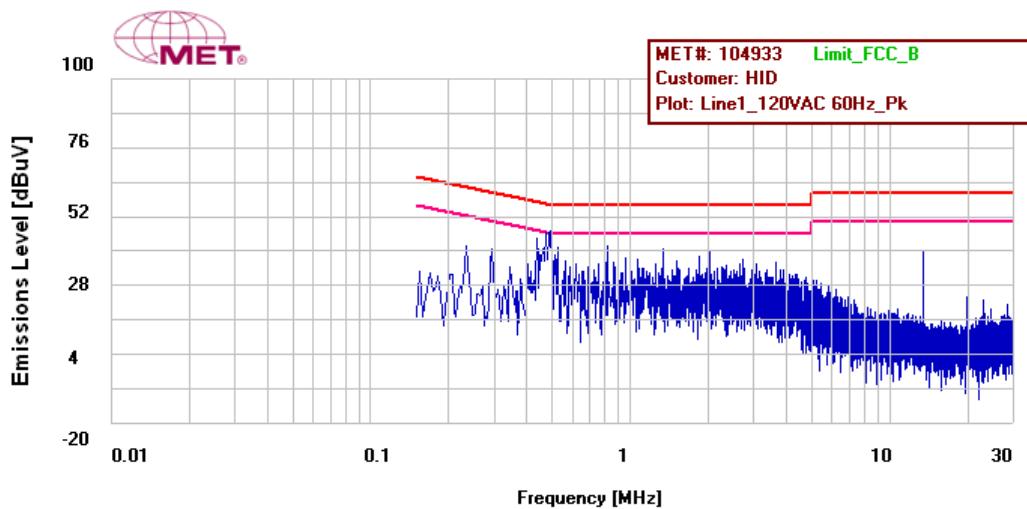

**Figure 16: Conducted Emissions Limits, Terminal, Phase Line, Prescan**

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Neutral_120VAC 60Hz	0.234	39.50	62.317	-22.82	Pass	29.50	52.32	-22.82	Pass
Neutral_120VAC 60Hz	2.038	35.10	56.000	-20.90	Pass	24.90	46.00	-21.10	Pass
Neutral_120VAC 60Hz	0.758	36.90	56.000	-19.10	Pass	27.00	46.00	-19.00	Pass
Neutral_120VAC 60Hz	0.486	37.40	56.243	-18.84	Pass	24.70	46.24	-21.54	Pass
Neutral_120VAC 60Hz	0.670	34.00	56.000	-22.00	Pass	21.40	46.00	-24.60	Pass
Neutral_120VAC 60Hz	3.086	30.30	56.000	-25.70	Pass	19.90	46.00	-26.10	Pass

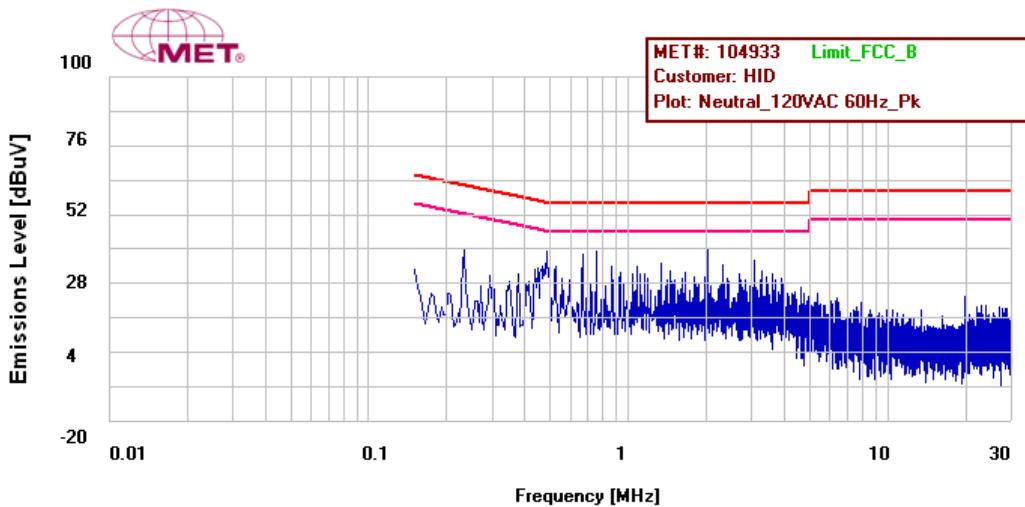**Figure 17: Conducted Emissions Limits, Terminal, Neutral Line, Test Results**

**Figure 18: Conducted Emissions Limits, Terminal, Neutral Line, Prescan**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### **§ 15.215(c) 20 dB Occupied Bandwidth**

**Test Requirement(s):**

**§ 15.215 (c)** Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

**Test Procedure:**

The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using an RBW approximately 1% of the total emission bandwidth. The 20 dB Bandwidth was measured and recorded.

**Model: 20 Pigtail**


**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.215(c). No anomalies noted.

**Test Engineer:** Adan Arab

**Test Date:** August 26, 2019

**Test Data, Model: 20 Pigtail**

Center Frequency (MHz)	20 dB Bandwidth of Emission (kHz)
13.56	6.095

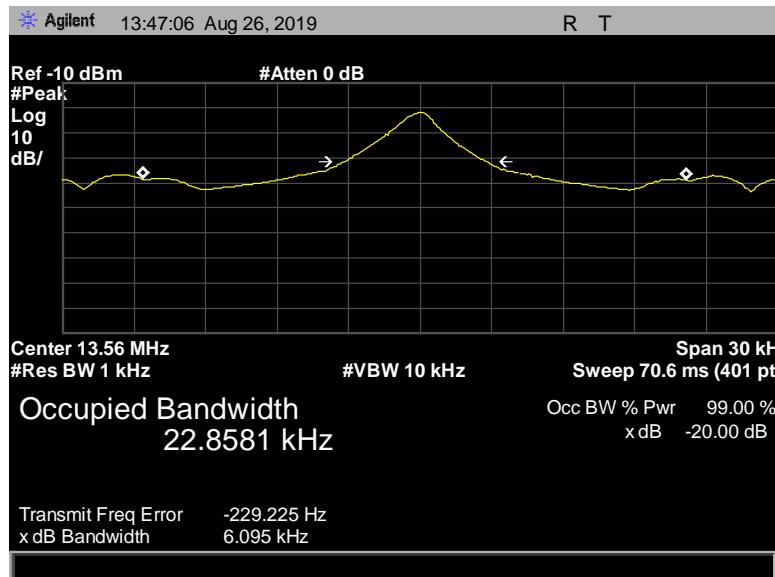**Figure 19: 20 dB Occupied Bandwidth, Pigtail, Test Results****Figure 20: 20 dB Occupied Bandwidth, Pigtail, 20dB 6.095 KHz**

**Model: 20 Terminal**


**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.215(c). No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 9, 2019

**Test Data, Model: 20 Terminal**

Center Frequency (MHz)	20 dB Bandwidth of Emission (kHz)
13.56	6.214

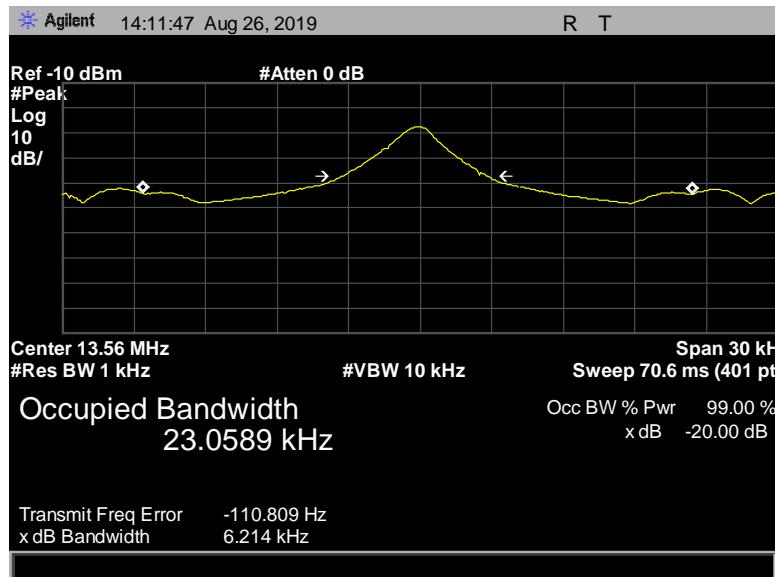**Figure 21: 20 dB Occupied Bandwidth, Terminal, Test Results****Figure 22: 20 dB Occupied Bandwidth, Terminal, -20dB 6.214 KHz**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(a) Field Strength emissions within the band 13.553 – 13.567 MHz

**Test Requirement(s):** **15.225 (a)** The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

**Test Procedure:** The EUT was set to transmit and placed on a 0.8m-high acrylic table inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. The loop antenna was located 3 m from the EUT. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. A1peak detector was used.

The measurements were made at 3m and then extrapolated to 30m using the following correction factor.

$$40\log(3/30) = -40 \text{ dB}$$

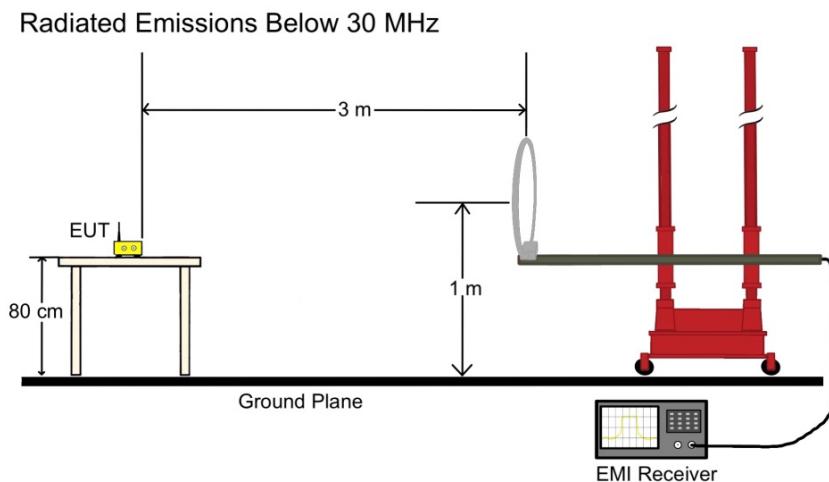


Figure 23: Radiated Emissions, Test Setup

**Model: 20 Pigtail**

**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.225(a). No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 13, 2019

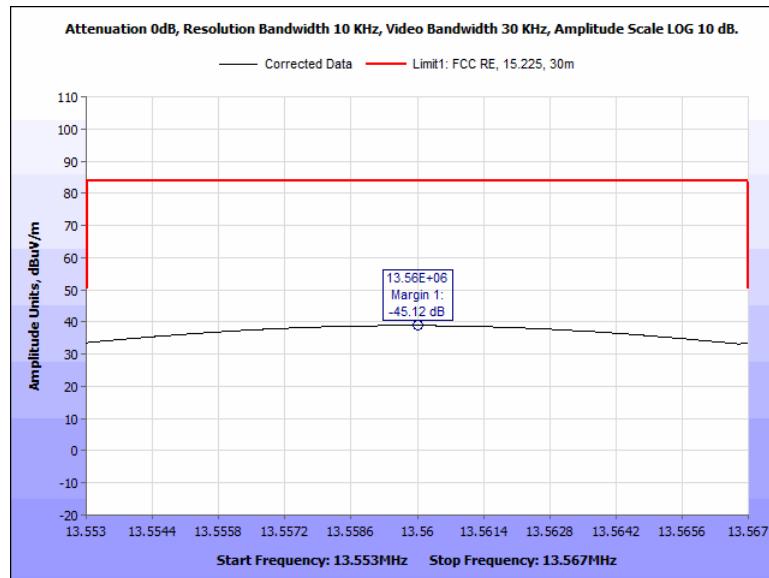
**Test Data, Model: 20 Pigtail**

Figure 24: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Pigtail, 0 Deg

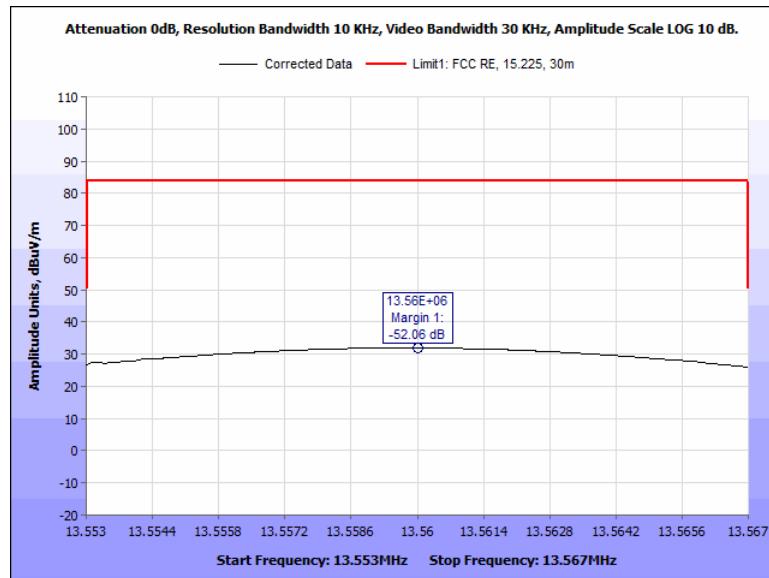


Figure 25: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Pigtail, 90 Deg

**Model: 20 Terminal**

**Test Result:** The EUT as tested is **compliant** with the requirements of **§ 15.225(a)**. No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 9, 2019

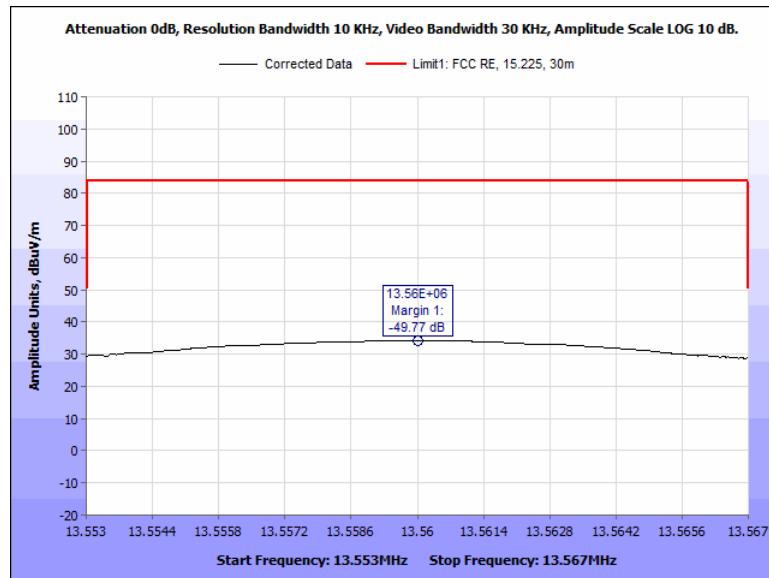
**Test Data, Model: 20 Terminal**

Figure 26: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Terminal, 0 Deg

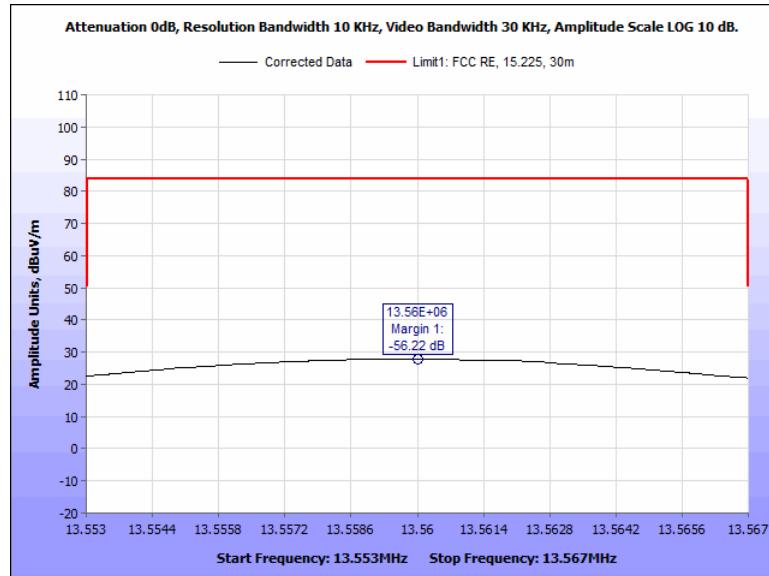


Figure 27: Spurious Emission Limits, within the band 13.553 – 13.567 MHz, Terminal, 90 Deg

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(b) Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz

**Test Requirement(s):** **15.225 (b)** Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

**Test Procedures:** The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. The loop antenna was located 3 m from the EUT. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. A peak detector was used.

The measurements were made at 3m and then extrapolated to 30m using the following correction factor.

$$40\log(3/30) = -40 \text{ dB}$$

Radiated Emissions Below 30 MHz

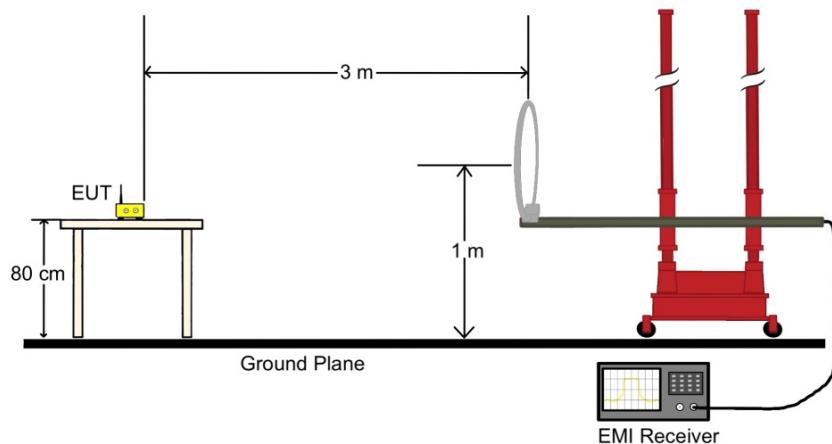



Figure 28: Radiated Emissions, Test Setup

**Model: 20 Pigtail**


**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.225(b). No anomalies noted.

**Test Engineer:** Jonathan Tavira


**Test Date:** August 9, 2019

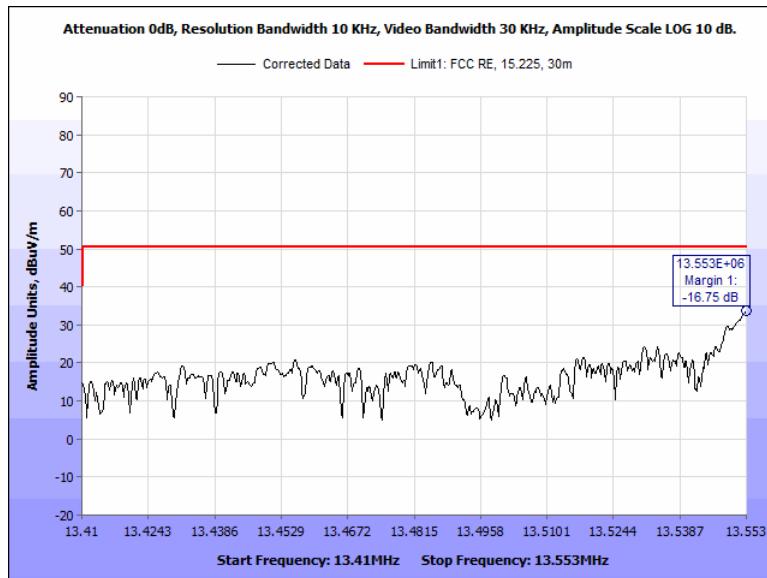**Test Data, Model: 20 Pigtail**

**Figure 29: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail, 13.410-13.553 MHz, 0 Deg**

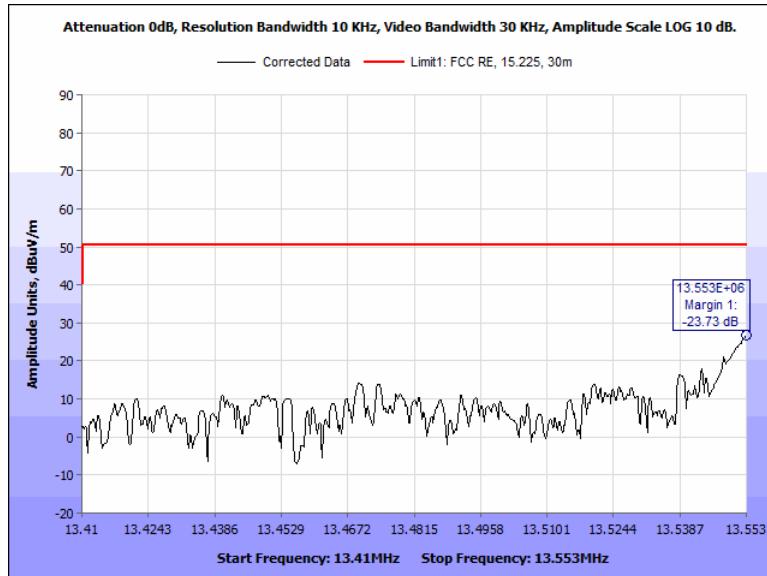

**Figure 30: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail, 13.410-13.553 MHz, 90 Deg**

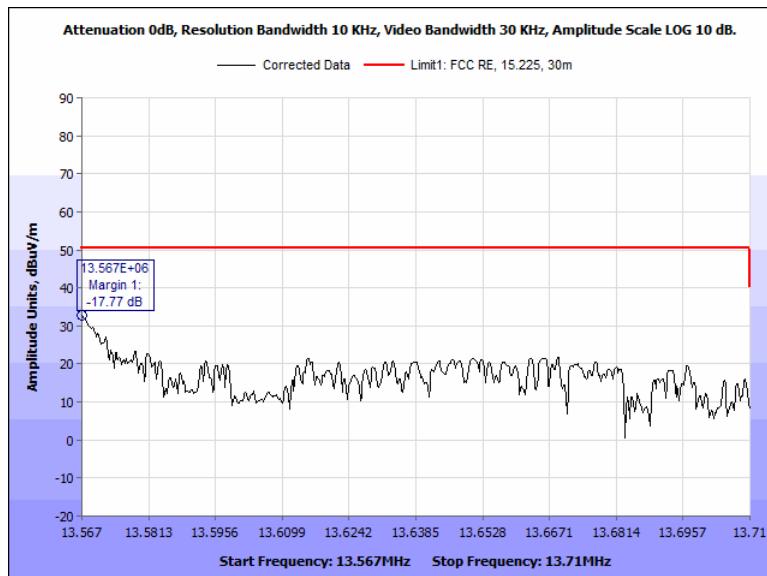

**Figure 31: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail, 13.567-13.710 MHz, 0 Deg**

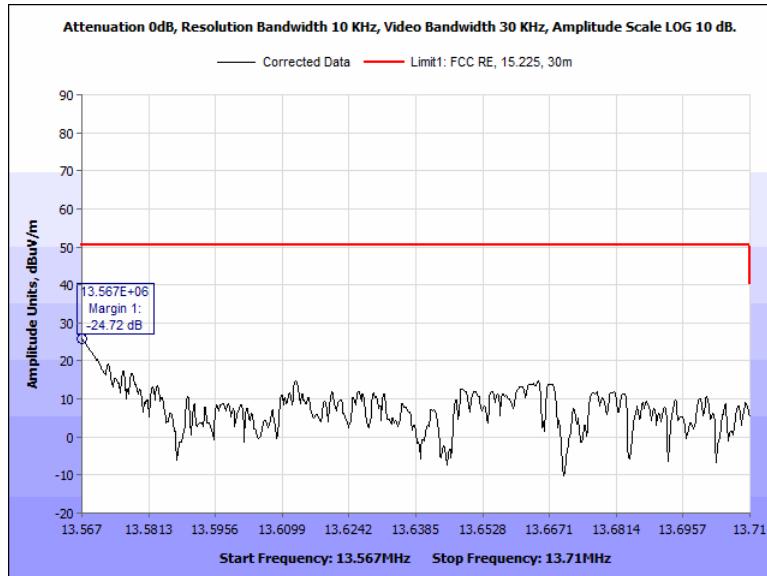


Figure 32: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Pigtail,  
13.567-13.710 MHz, 90 Deg

**Model: 20 Terminal**

**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.225(b). No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 9, 2019



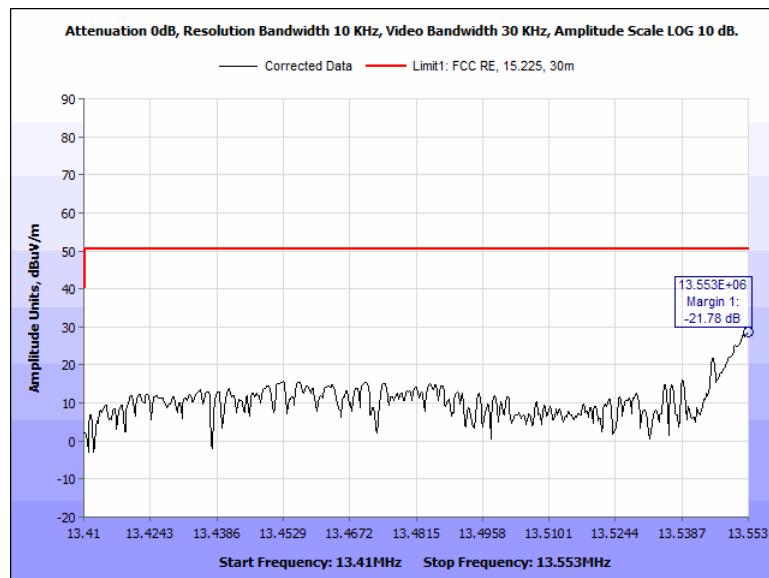
**Test Data, Model: 20 Terminal**

Figure 33: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.410-13.553 MHz, 0 Deg

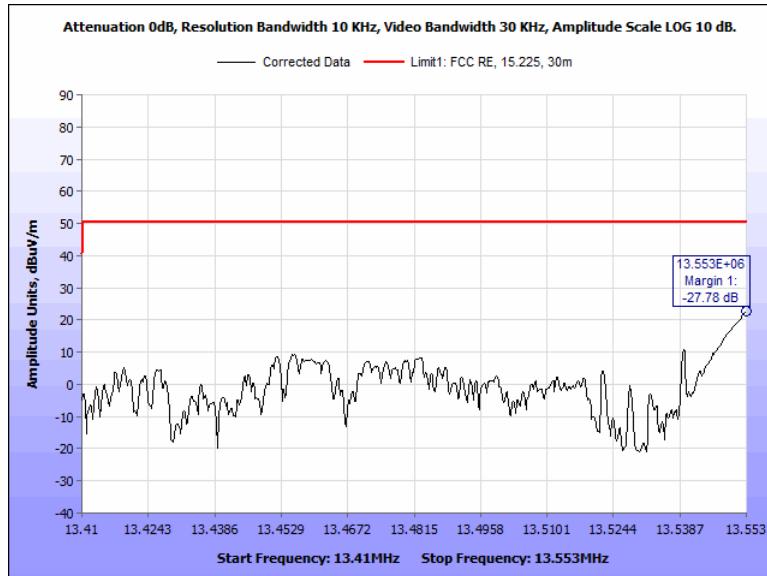

**Figure 34: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.410-13.553 MHz, 90 Deg**

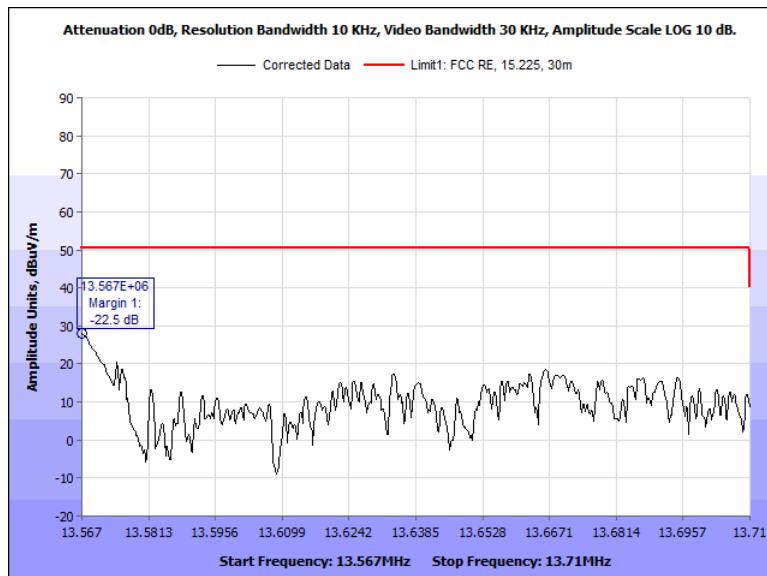

**Figure 35: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.567-13.710 MHz, 0 Deg**

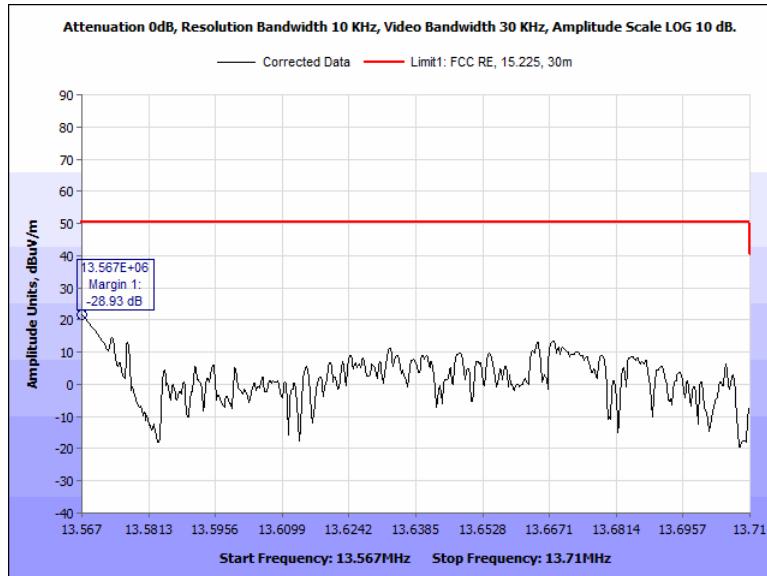


Figure 36: Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, Terminal, 13.567-13.710 MHz, 90 Deg

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(c) Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz

**Test Requirement(s):**

15.225 (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

**Test Procedures:**

The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. The loop antenna was located 3 m from the EUT. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. A peak detector was used.

The measurements were made at 3m and then extrapolated to 30m using the following correction factor.

$$40\log(3/30) = -40 \text{ dB}$$

#### Radiated Emissions Below 30 MHz

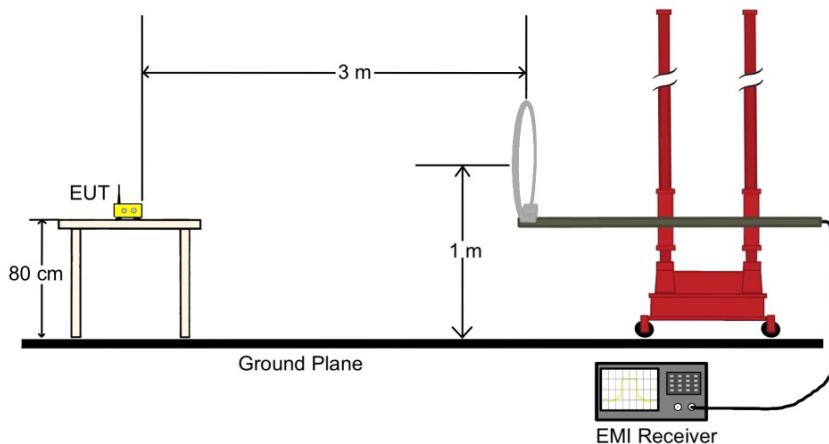



Figure 37: Radiated Emissions, Test Setup

**Model: 20 Pigtail**


**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.225(c). No anomalies noted.

**Test Engineer:** Jonathan Tavira


**Test Date:** August 9, 2019

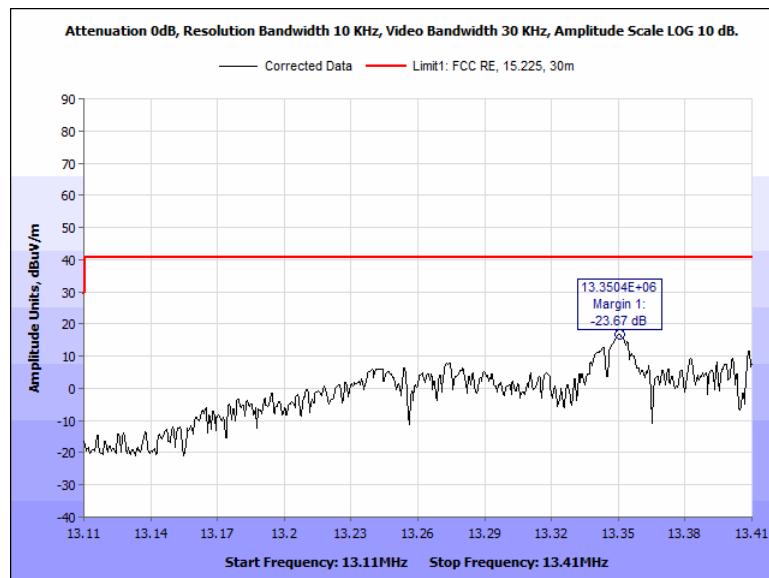**Test Data, Model: 20 Pigtail**

**Figure 38: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 13.110-13.410 MHz, 0 Deg**

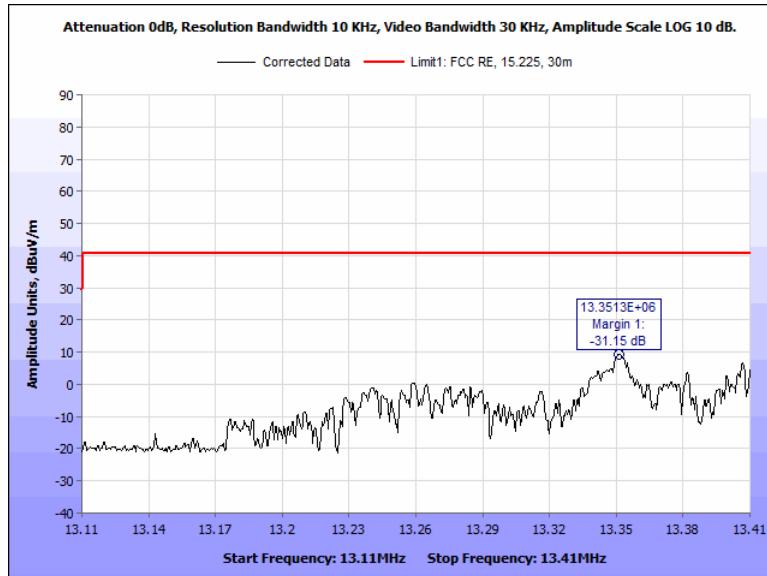

**Figure 39: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 13.110-13.410 MHz, 90 Deg**

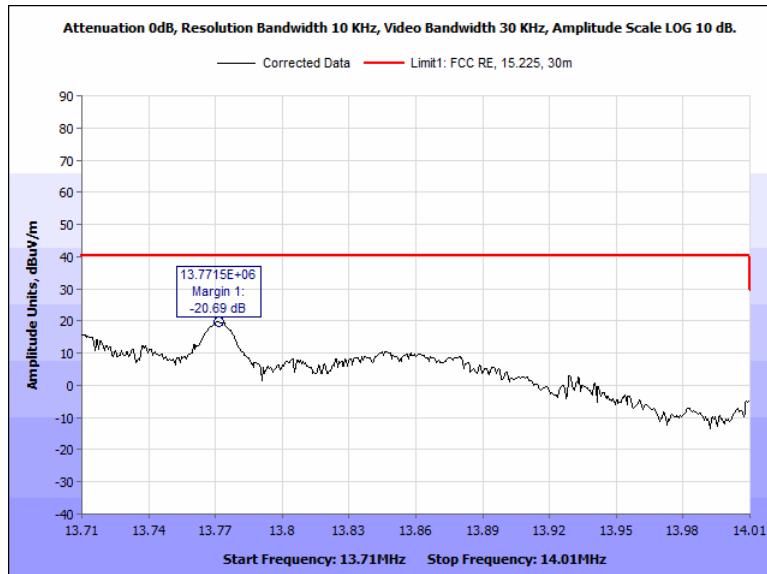

**Figure 40: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 3.710-14.010 MHz, 0 Deg**

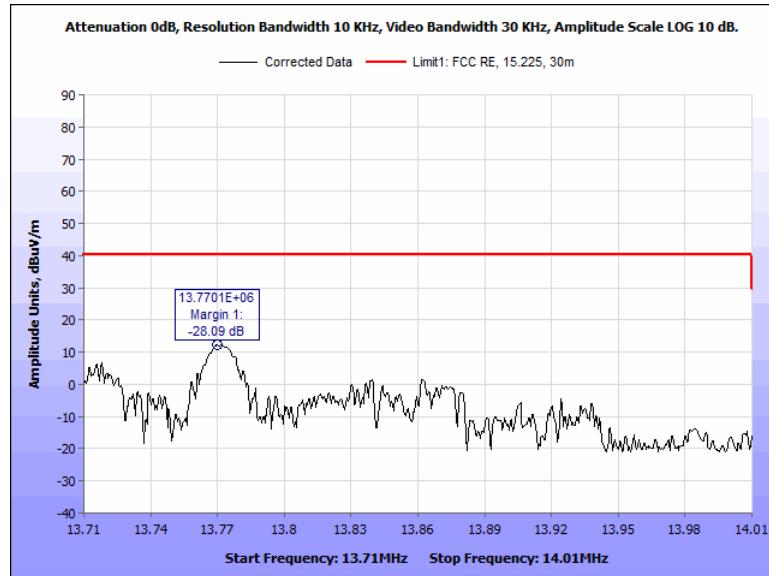


Figure 41: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Pigtail, 13.710-14.010 MHz, 90 Deg

**Model: 20 Terminal**

**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.225(c). No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 9, 2019



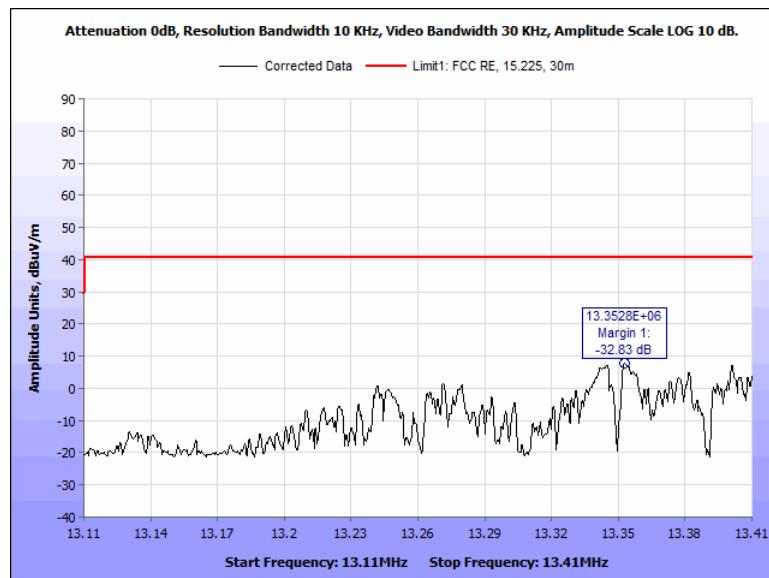
**Test Data, Model: 20 Terminal**

Figure 42: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.110-13.410 MHz, 0 Deg

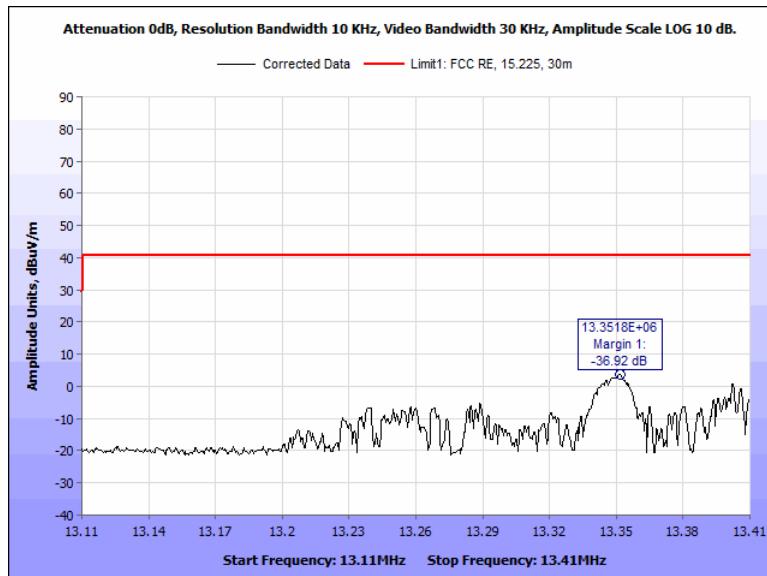

**Figure 43: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.110-13.410 MHz, 90 Deg**

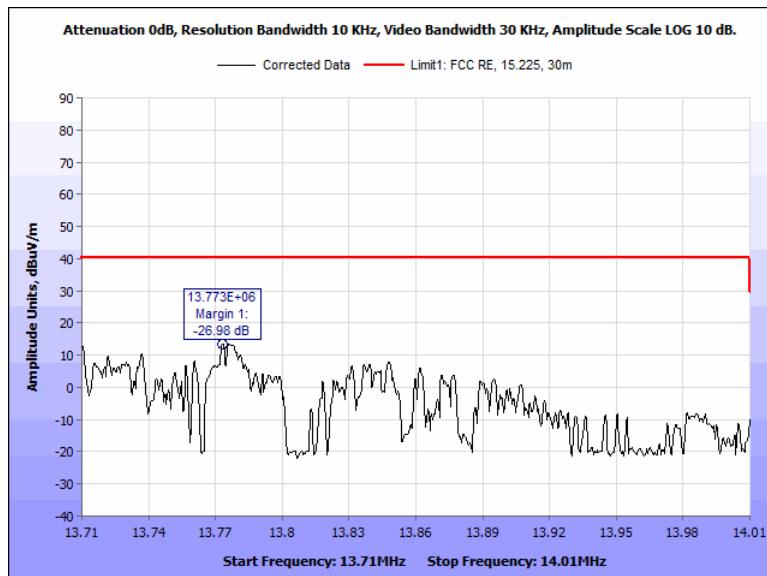

**Figure 44: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.710-14.010 MHz, 0 Deg**

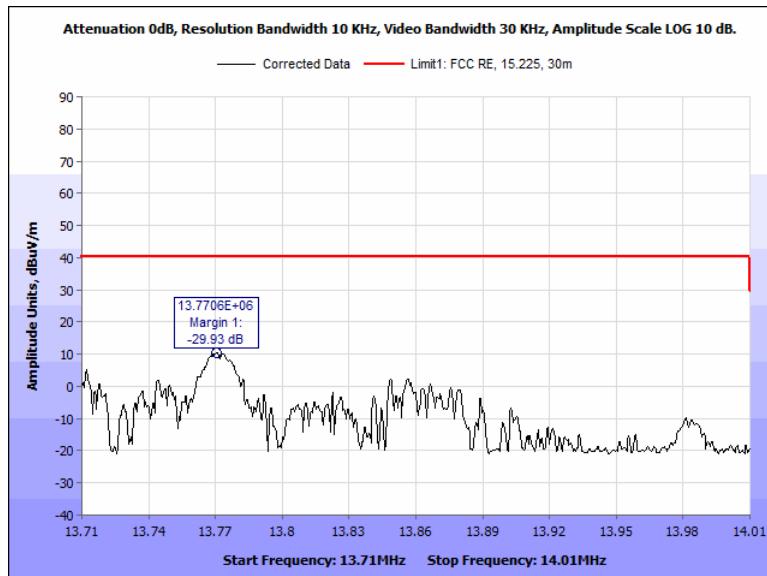


Figure 45: Spurious Emission Limits, within the bands 13.110 – 13.410 MHz and 13.710 – 14.010 MHz, Terminal, 13.710-14.010 MHz, 90 Deg

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(d) Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz

**Test Requirement(s):** 15.225 (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2014 and ANSI C63.10: 2013 were used. For measurements below 30 MHz a loop antenna placed 3m away from the unit was used. For measurements above 30 MHz a biconalog antenna placed 10m away from the unit was used. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. Below 150 kHz, the RBW was set to 300 Hz and the VBW set to 1 kHz. Above 30 MHz, the RBW was set to 100 kHz and the VBW set to 300 kHz. A peak detector was used below 30 MHz and a Quasi-peak detector was used for measurements for above 30 MHz.

The measurements made at 3m with the loop antenna were then extrapolated to 30m or 300 m using the following correction factors.


$$40\log(3/30) = -40 \text{ dB}$$

$$40\log(3/300) = -80 \text{ dB}$$

The measurements made at 10m with the biconilog antenna were then extrapolated to the 3m using the following correction factor.

$$20\log(10/3) = +10.46 \text{ dB}$$

## Spurious Emissions Test Setup

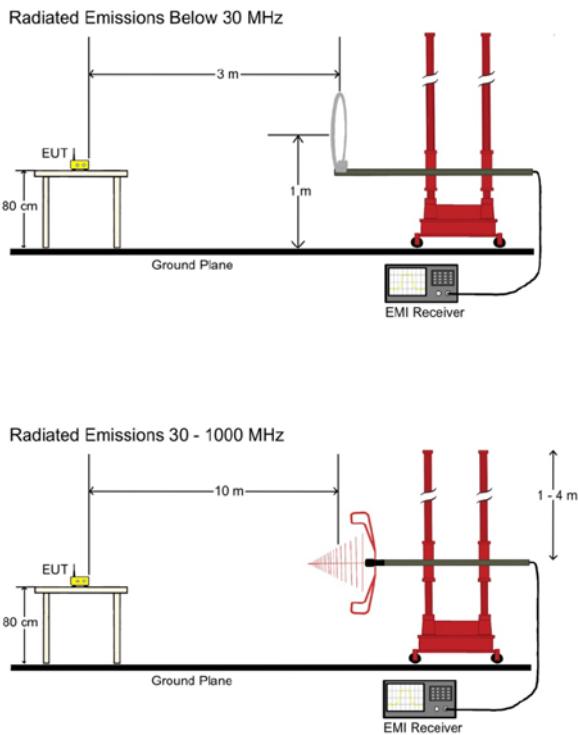

**Figure 46: Radiated Spurious Emissions Test Setup**

### Sample Calculation for Distance Correction factor (DCF) measurement:

$$F_d = 20 \cdot \log_{10} (D_m/D_s)$$

where:

$F_d$  = Distance Factor in dB

$D_m$  = Measurement Distance in meters

$D_s$  = Specification Distance in meters

### Sample formula for calculating the Corrected Data for the Radiated Emissions Measurements:

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dB $\mu$ V/m)	ACF (dB/m) (+)	Pre Amp Gain + CBL (dB)(-)	DCF (dB) (+)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
249.99	V	359.9	240.7	55.46	11.4	28.335	10.46	38.525	47	-8.475

$$\begin{aligned} \text{Corrected Amplitude (dB}\mu\text{V/m)} &= \text{Uncorrected Amplitude (dB}\mu\text{V/m)} + \text{ACF (dB/m)} - (\text{Preamp Gain (dB)} + \text{CBL (dB)} + \text{DCF (dB)}) \\ &= 55.46 + 11.4 - 28.335 + 10.46 = 38.525 \end{aligned}$$

\*\* DCF Column represents the appropriate correction factor used when the measurement distance differs from the specification distance.

**Model: 20 Pigtail**

**Test Result:** The EUT as tested is **compliant** with the requirements of **§ 15.225(d)**. No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 12, 2019



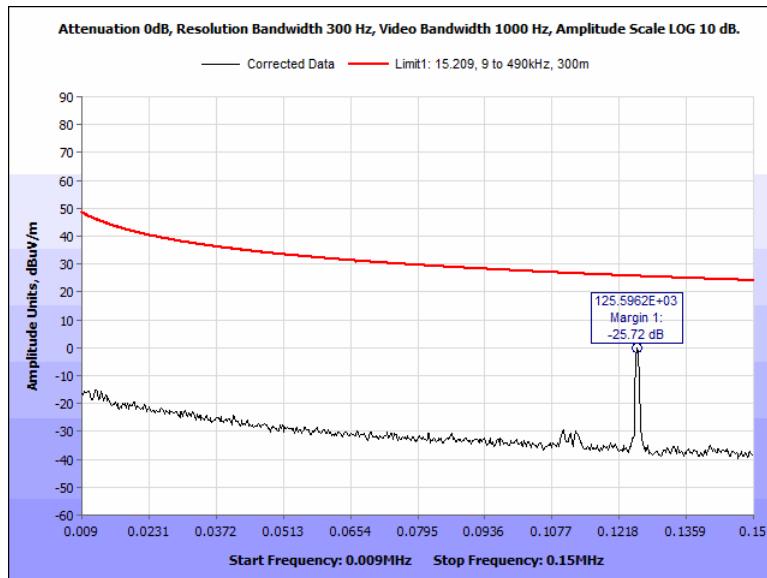
**Test Data, Model: 20 Pigtail**


Figure 47: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.009 MHz – 0.150 MHz, 0 Deg

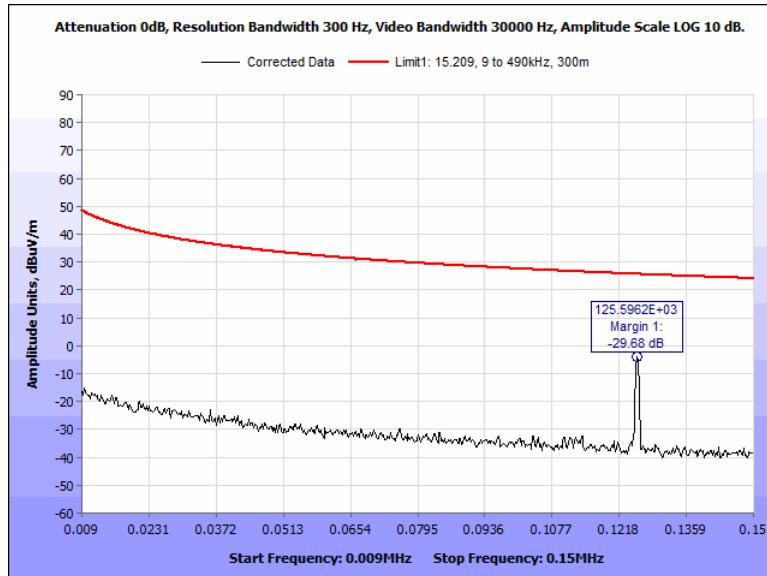


**Figure 48: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.009 MHz – 0.150 MHz, 90 Deg**

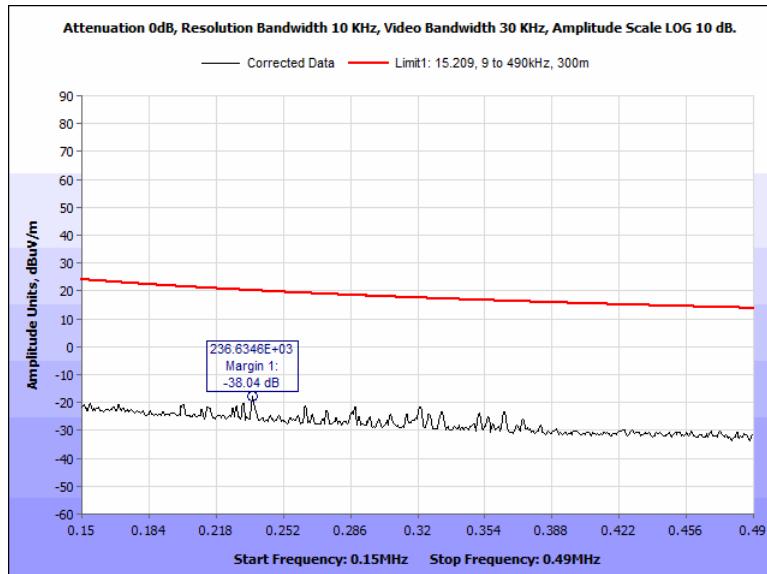


**Figure 49: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.150 MHz – 0.490 MHz, 0 Deg**

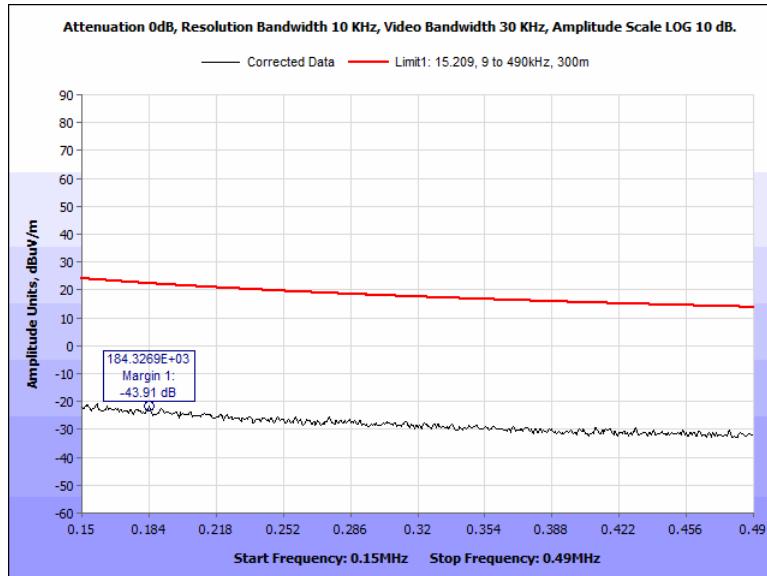


**Figure 50: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.150 MHz – 0.490 MHz, 90 Deg**

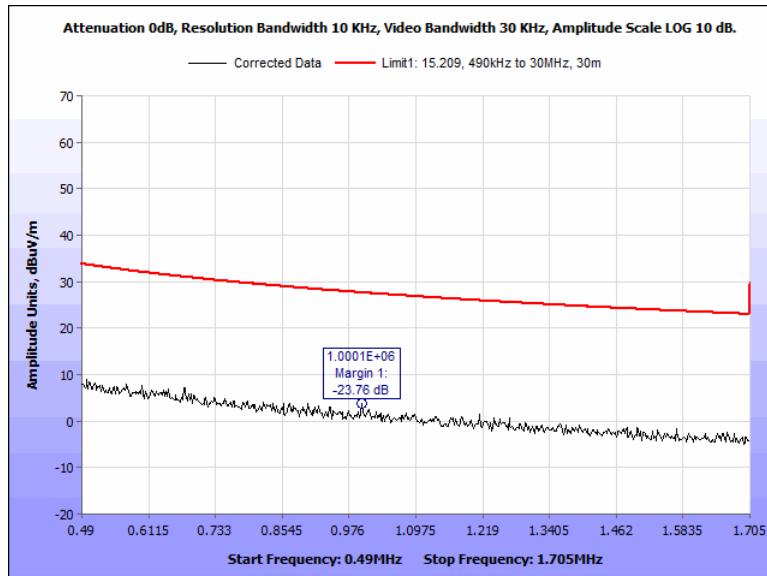

**Figure 51: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.490 MHz – 1.705 MHz, 0 Deg**

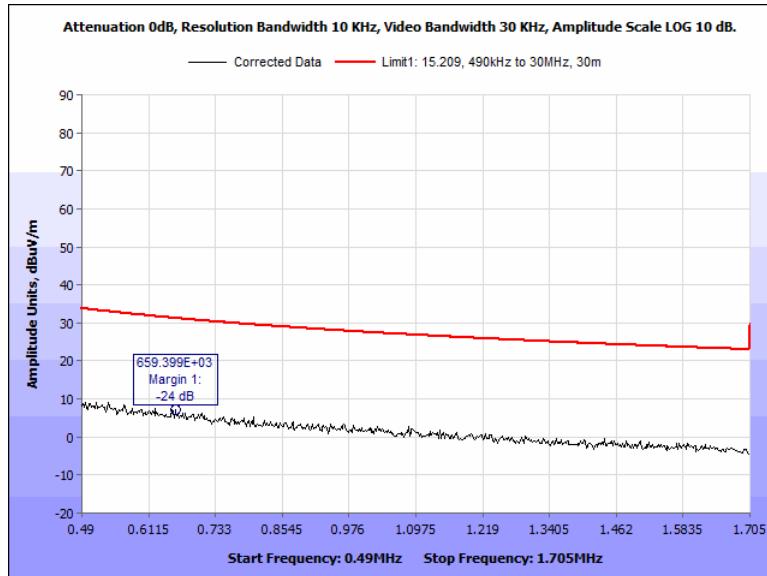


**Figure 52: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 0.490 MHz – 1.705 MHz, 90 Deg**

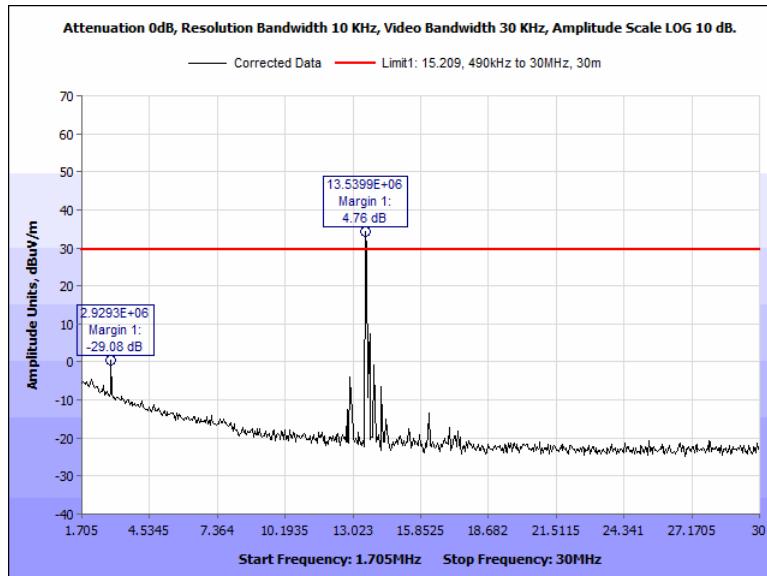


**Figure 53: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 1.705 MHz – 30 MHz, 0 Deg**


\*Note: Emission that appears over the spurious limit is the fundamental frequency

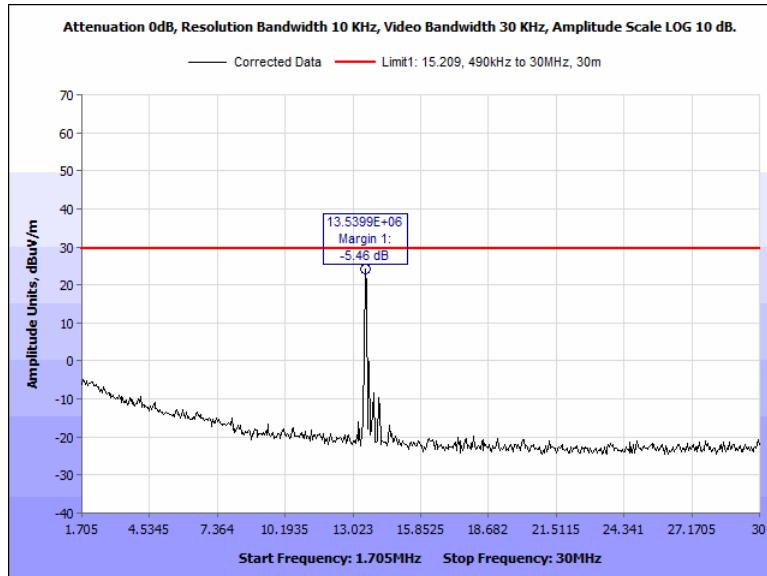

**Figure 54: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 1.705 MHz – 30 MHz, 90 Deg**

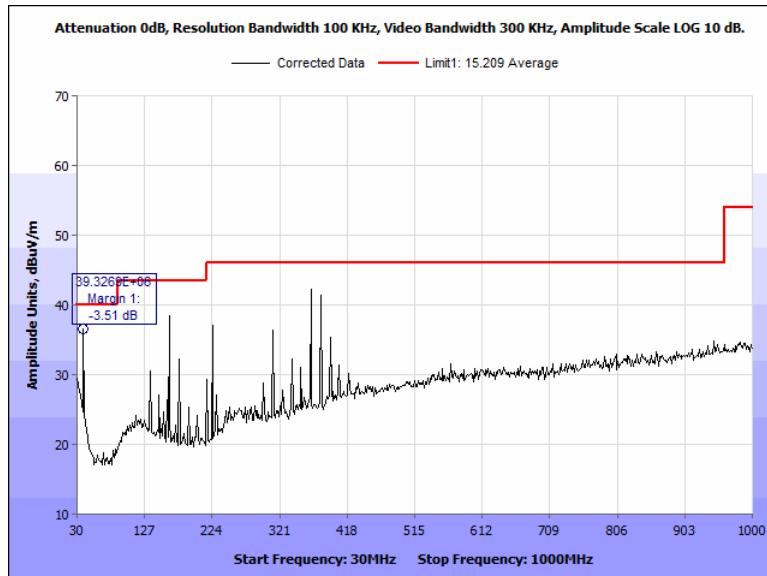

**Figure 55: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 30 MHz – 1000 MHz, Horizontal**

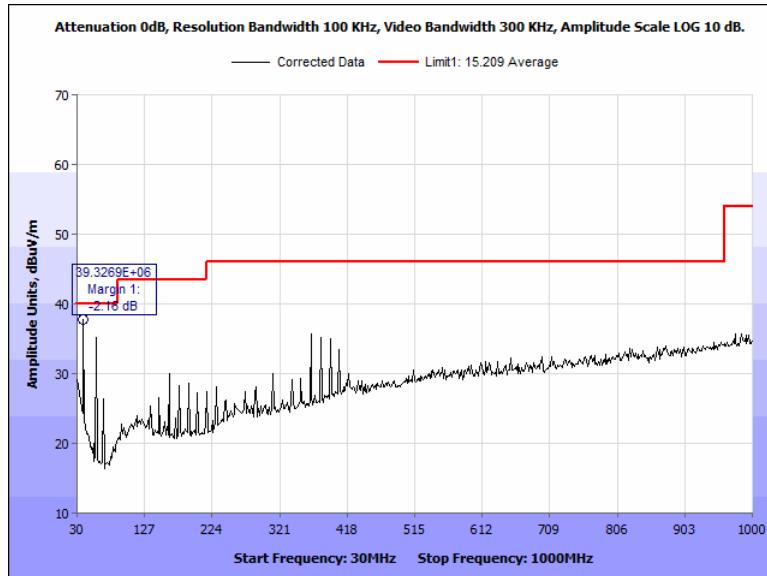

**Figure 56: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Pigtail, 30 MHz – 1000 MHz, Vertical**

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (cm)	Uncorrected EMI Meter Reading (dB $\mu$ V)	Antenna Correction Factor (dB/m) (+)	Distance Correction Factor (dB) (+)	Cable Loss/Pre-amp (dB) (-)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
366.137	190.30	H	229.50	32.92	19	10.46	22.172	40.208	46	-5.792
379.695	291.70	H	211.10	27.25	19.2	10.46	22.149	34.761	46	-11.239
325.448	267.90	H	194.80	28.13	17.9	10.46	22.417	34.073	46	-11.927
162.708	321.30	H	334.10	33.96	14.229	10.46	23.12	35.529	43.5	-7.971
149.182	306.60	H	400.00	32.39	14.782	10.46	23.363	34.269	43.5	-9.231
203.397	325.90	H	297.60	27.03	13.74	10.46	22.952	28.278	43.5	-15.222

**Figure 57: Radiated Spurious Emissions, Pigtail, 30 MHz – 1000 MHz**

**Model: 20 Terminal**

**Test Result:** The EUT as tested is **compliant** with the requirements of **§ 15.225(d)**. No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 12, 2019



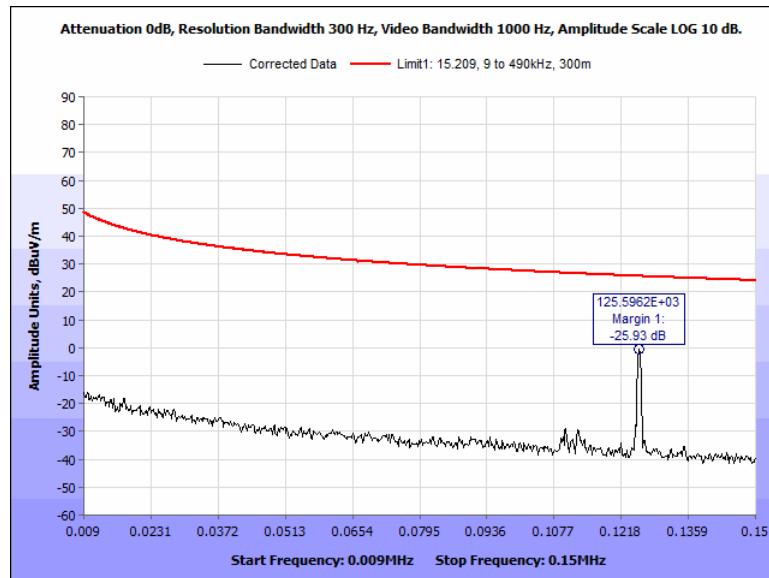
**Test Data, Model: 20 Terminal**


Figure 58: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.009 MHz – 0.150 MHz, 0 Deg

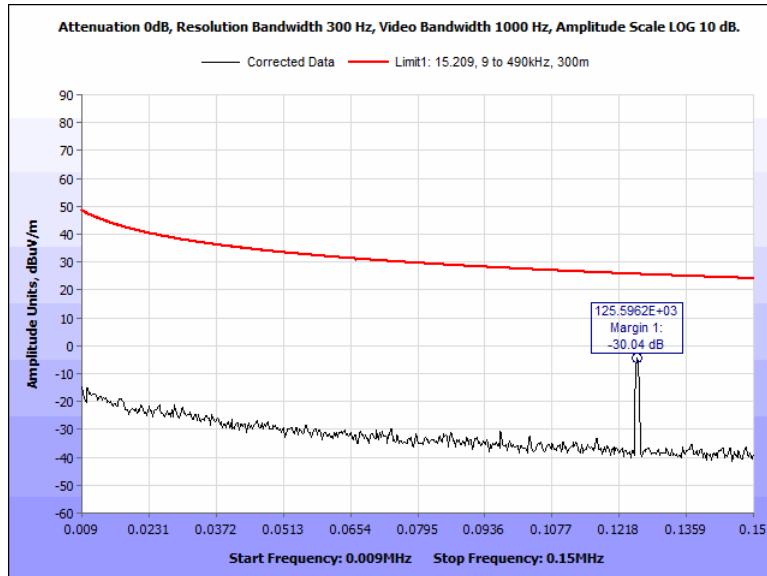


**Figure 59: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.009 MHz – 0.150 MHz, 90 Deg**

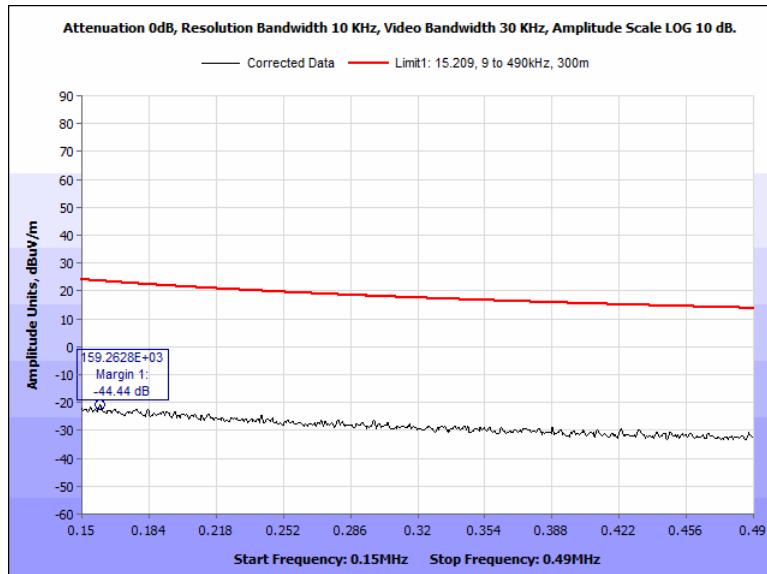


**Figure 60: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.150 MHz – 0.49 MHz, 0 Deg**

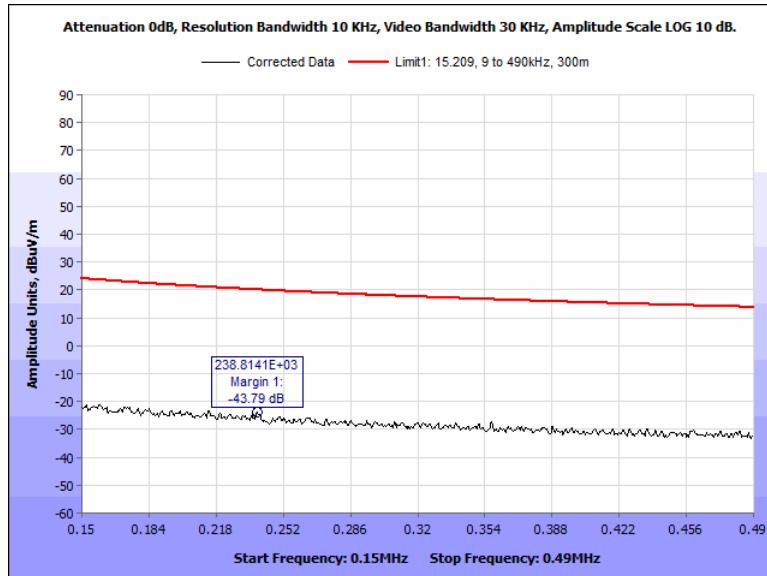


**Figure 61: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.150 MHz – 0.490 MHz, 90 Deg**

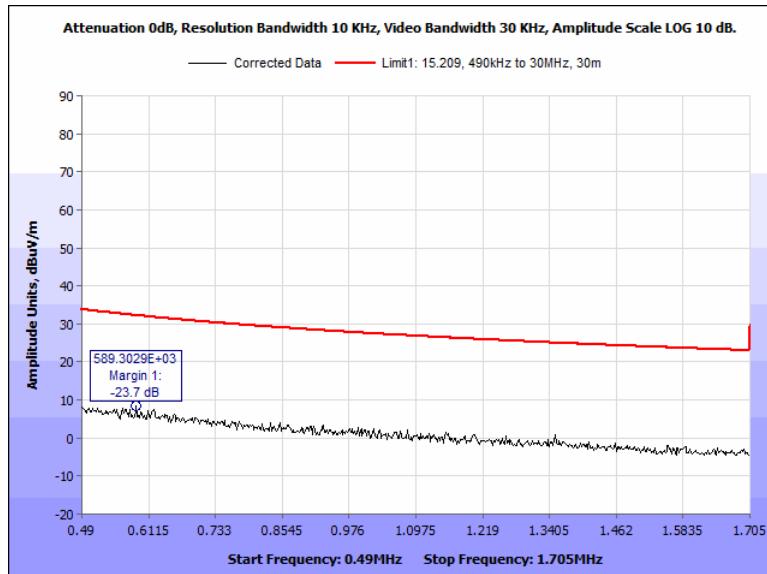

**Figure 62: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.490 MHz – 1.705 MHz, 0 Deg**

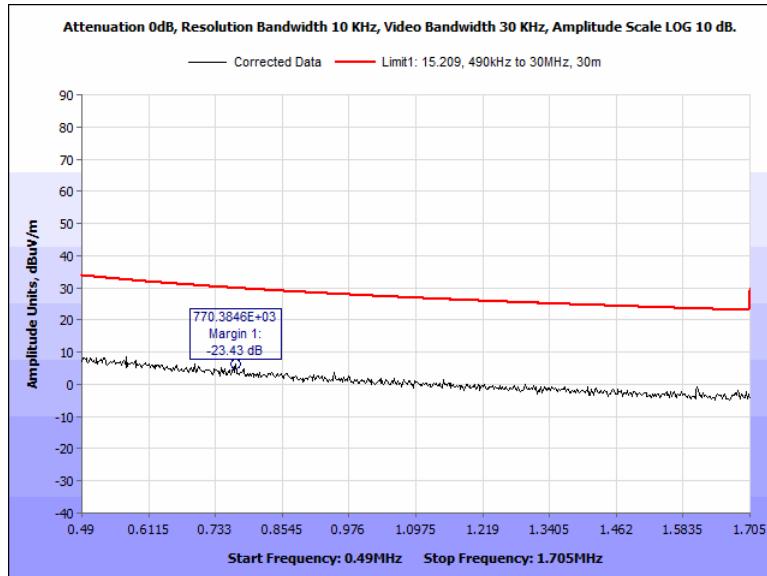


**Figure 63: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 0.490 – 1.705 MHz, 90 Deg**

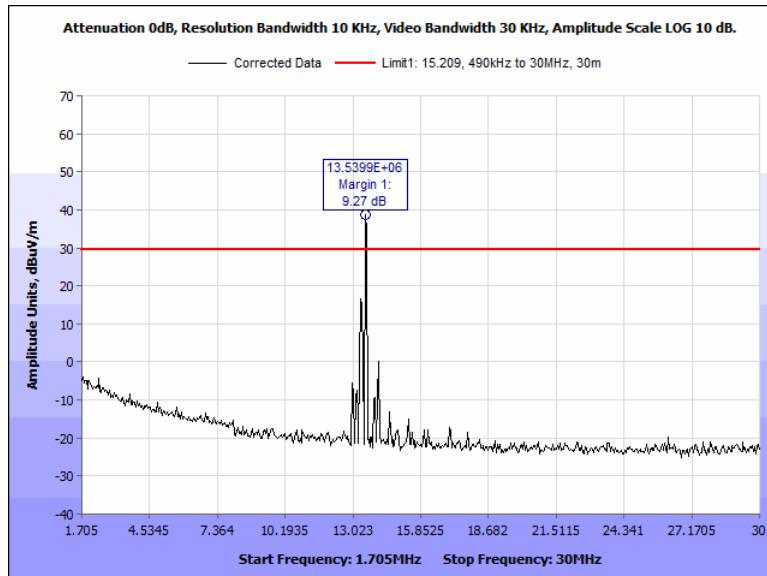


**Figure 64: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 1.705 MHz -30 MHz, 0 Deg**


\*Note: Emission that appears over the spurious limit is the fundamental frequency

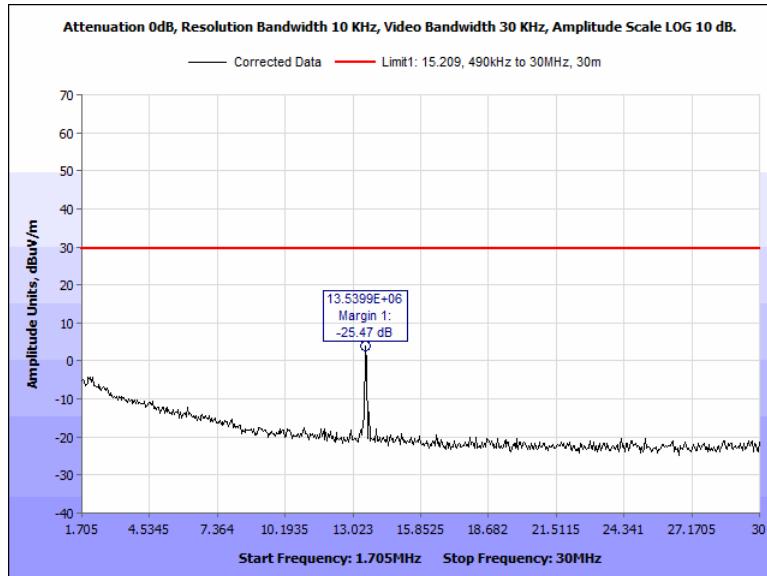

**Figure 65: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 1.705 MHz -30 MHz, 90 Deg**

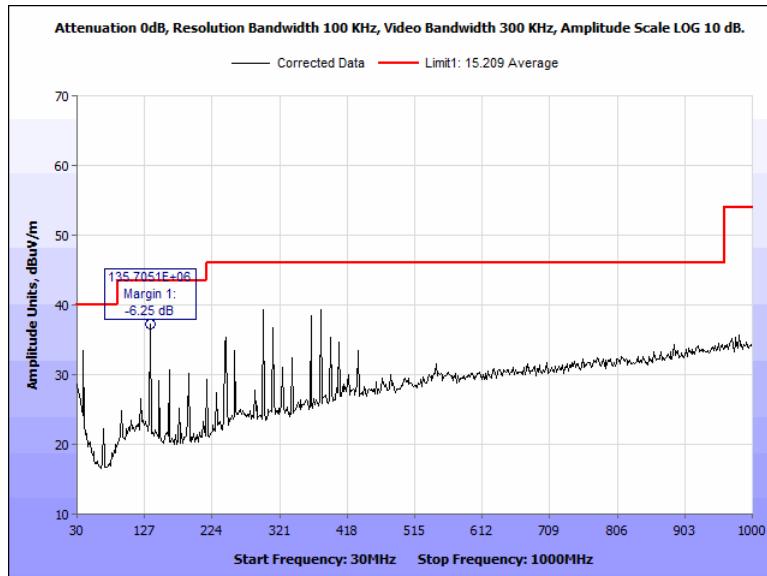

**Figure 66: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 30 MHz – 1000 MHz, Horizontal**

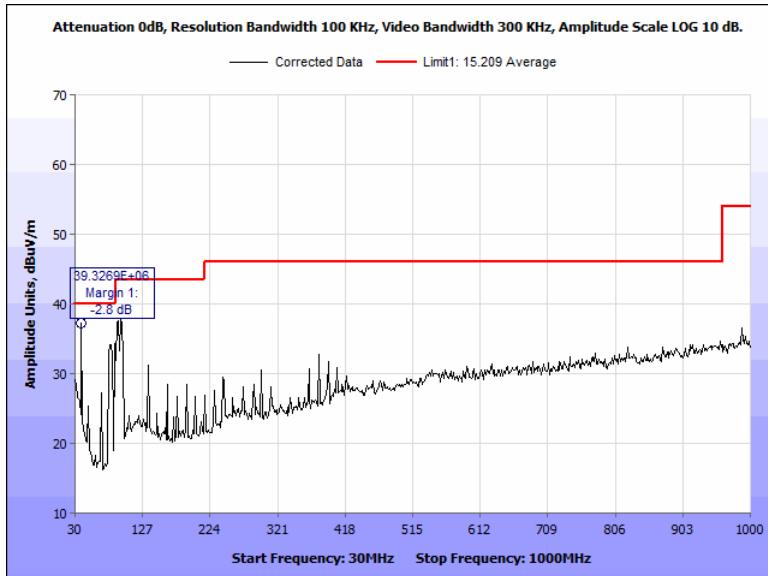

**Figure 67: Spurious Emission Limits, outside the bands 13.110 – 14.010 MHz, Terminal, 30 MHz – 1000 MHz, Vertical**

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (cm)	Uncorrected EMI Meter Reading (dB $\mu$ V)	Antenna Correction Factor (dB/m) (+)	Distance Correction Factor (dB) (+)	Cable Loss/Pre-amp (dB) (-)	Corrected Amplitude (dB $\mu$ V /m)	Limit (dB $\mu$ V /m)	Margin (dB)
230.528	132.10	H	318.00	21.8	14.553	10.46	22.747	24.066	46	-21.934
257.628	299.70	H	362.20	31.94	17.526	10.46	22.579	37.347	46	-8.653
311.875	359.10	H	211.00	31.91	17.787	10.46	22.214	37.943	46	-8.057
366.122	110.40	H	237.70	35.8	19	10.46	22.173	43.087	46	-2.913
379.679	108.90	H	240.80	31.95	19.2	10.46	22.149	39.461	46	-6.539
393.237	111.50	H	187.50	28.96	19.6	10.46	22.104	36.916	46	-9.084

**Figure 68: Radiated Spurious Emissions, Terminal, 30 MHz – 1000 MHz**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.225(e) Frequency Stability

**Test Requirement(s):**

**15.225(e)** The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 Degrees to +50 Degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 Degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**Test Procedure:**

Measurements are in accordance with Part 2.1055. The EUT was placed in the Environmental Chamber and allowed to reach desired temperature. A spectrum analyzer was used to measure the frequency drift. The EUT was set to transmit in the operating frequency range. Frequency drift was investigated for the extreme temperatures and nominal temperature, until the unit is stabilized then recorded the reading in tabular format with the temperature range of -20° to 50°C.

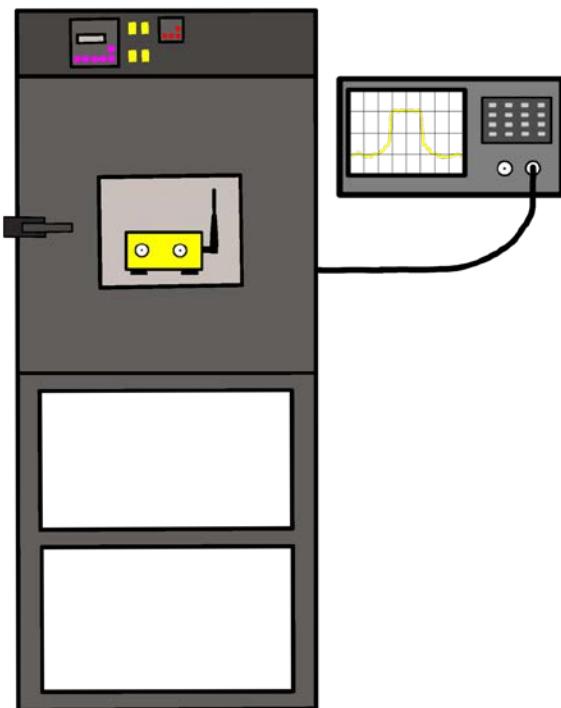


Figure 69: Temperature Stability Test Setup

**Model: 20 Pigtail**

**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.225(e). No anomalies noted.

**Test Engineer:** Jonathan Tavira

**Test Date:** August 12, 2019

**Test Data, Model: 20 Pigtail**

Operating Frequency	13,560,000 Hz
Reference Voltage	12VDC
Deviation Limit	±0.01% = 100 PPM = 1356 Hz

	Voltage Variation (%)	Temperature (°C)	Nominal Freq (MHz)	Result (MHz)	PPM
13.8VDC	15	-20	13.56	13.560056	4.1298
		20	13.56	13.56	0.0000
		50	13.56	13.559981	1.4012
12VDC	0	-20	13.56	13.559971	2.1386
		20	13.56	13.560006	0.4425
		50	13.56	13.559986	1.0324
10.2VDC	-15	-20	13.56	13.559982	1.3274
		20	13.56	13.560008	0.5900
		50	13.56	13.559978	1.6224

**Figure 70: Frequency Stability, Pigtail, Test Results**



Figure 71: Frequency Stability, Pigtail, (-20) - 10.2VDC

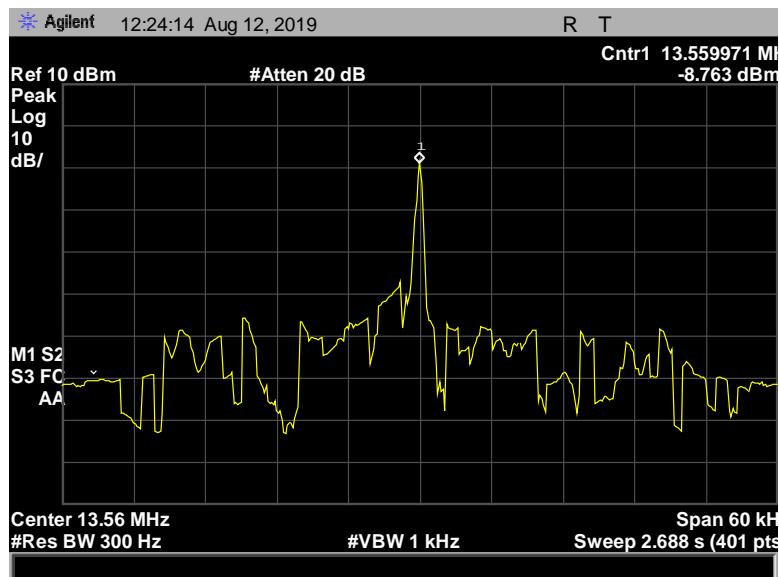


Figure 72: Frequency Stability, Pigtail, (-20) - 12VDC

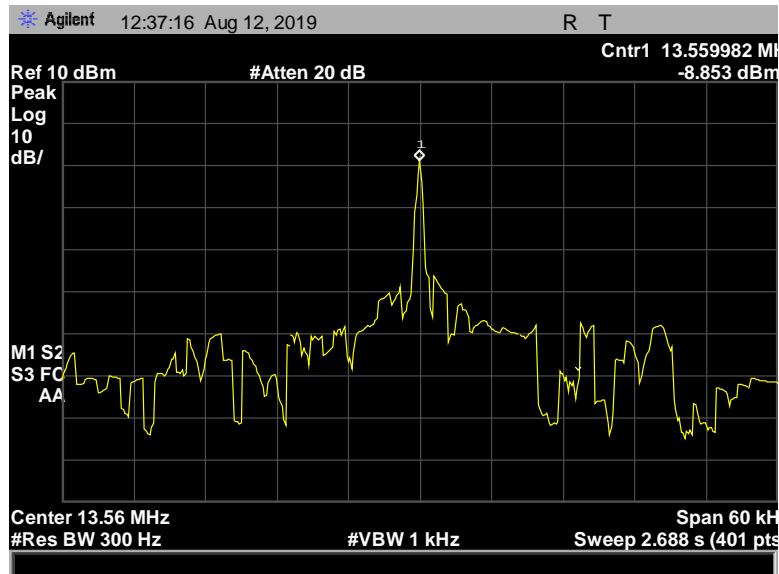


Figure 73: Frequency Stability, Pigtail, (-20) - 13.8VDC



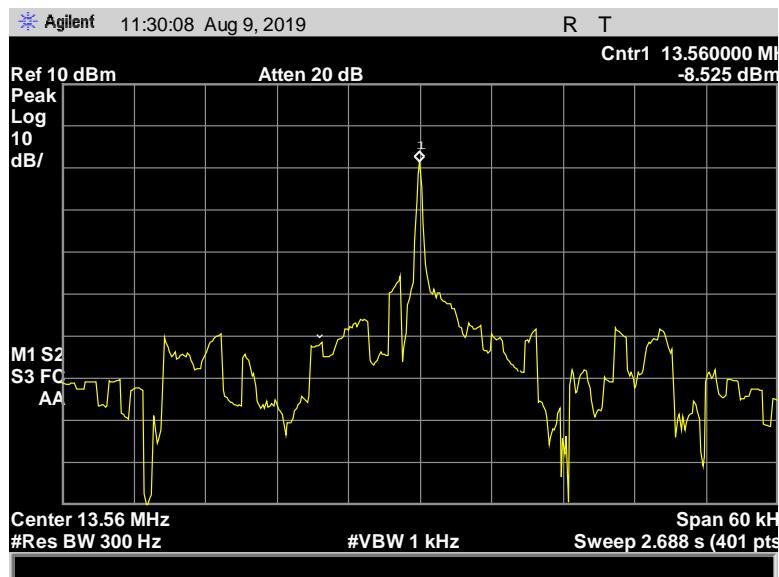


Figure 74: Frequency Stability, Pigtail, (20) - 10.2VDC

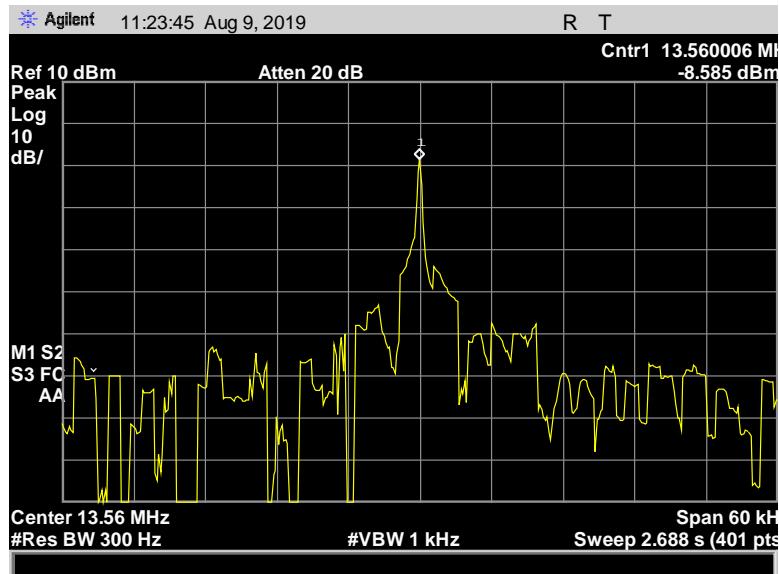

**Figure 75: Frequency Stability, Pigtail, (20) - 12VDC**

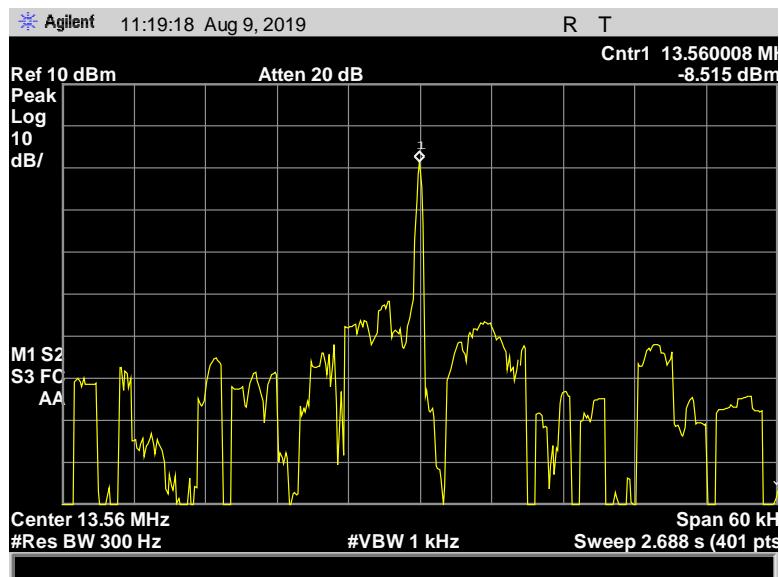

**Figure 76: Frequency Stability, Pigtail, (20) - 13.8VDC**



Figure 77: Frequency Stability, Pigtail, (50) - 10.2VDC

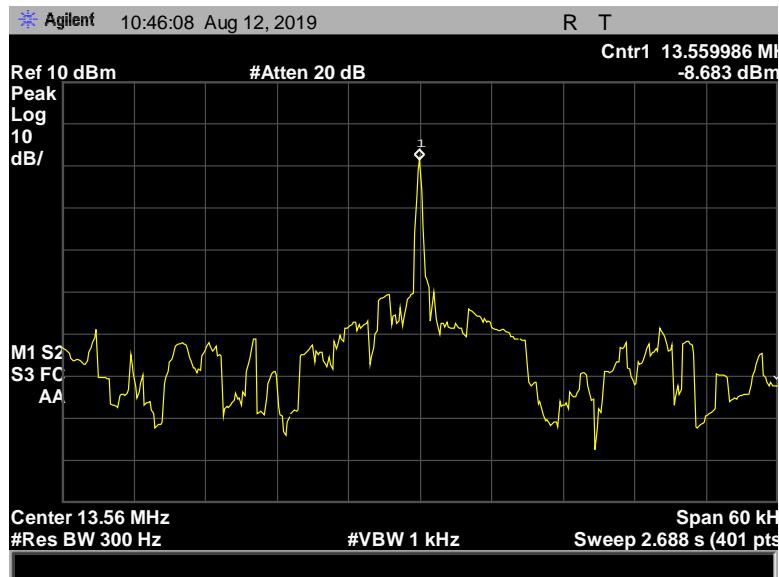


Figure 78: Frequency Stability, Pigtail, (50) - 12VDC

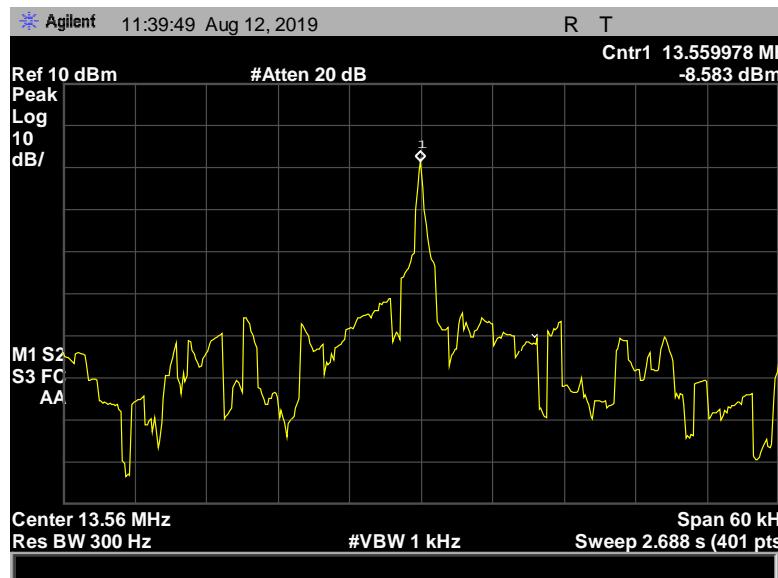


Figure 79: Frequency Stability, Pigtail, (50) - 13.8VDC

**Model: 20 Terminal**

**Test Result:** The EUT as tested is **compliant** with the requirements of § 15.225(e). No anomalies noted.

**Test Engineer:** Adan Arab


**Test Date:** August 21, 2019

**Test Data, Model: 20 Terminal**

Operating Frequency	13,560,000 Hz
Reference Voltage	12VDC
Deviation Limit	±0.01% = 100 PPM = 1356 Hz

	Voltage Variation (%)	Temperature (°C)	Nominal Freq (MHz)	Result (MHz)	PPM
13.8VDC	15	-20	13.56	13.559994	0.4425
		20	13.56	13.559977	1.6962
		50	13.56	13.559974	1.9174
12VDC	0	-20	13.56	13.559985	1.1062
		20	13.56	13.559978	1.6224
		50	13.56	13.559971	2.1386
10.2VDC	-15	-20	13.56	13.55998	1.4749
		20	13.56	13.5600066	0.4867
		50	13.56	13.559979	1.5487


**Figure 80: Frequency Stability, Terminal, Test Results**

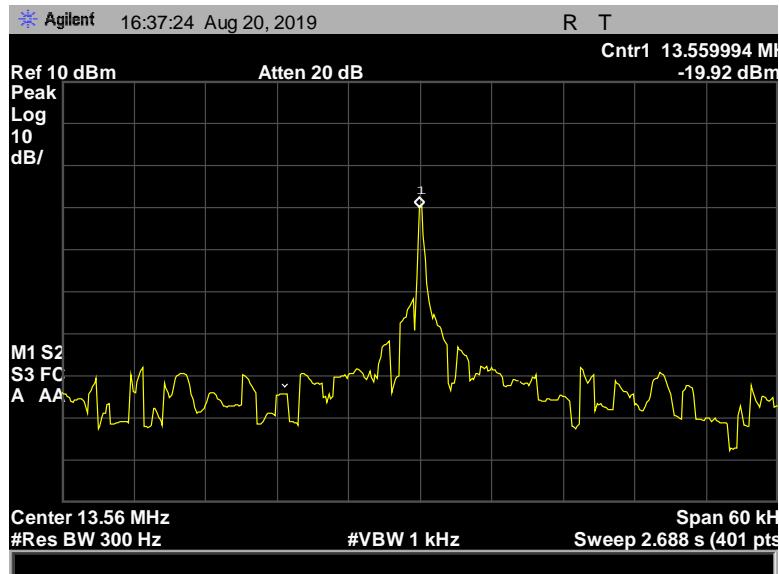


**Figure 81: Frequency Stability, Terminal, (-20) - 10.2VDC**




**Figure 82: Frequency Stability, Terminal, (-20) - 12VDC**

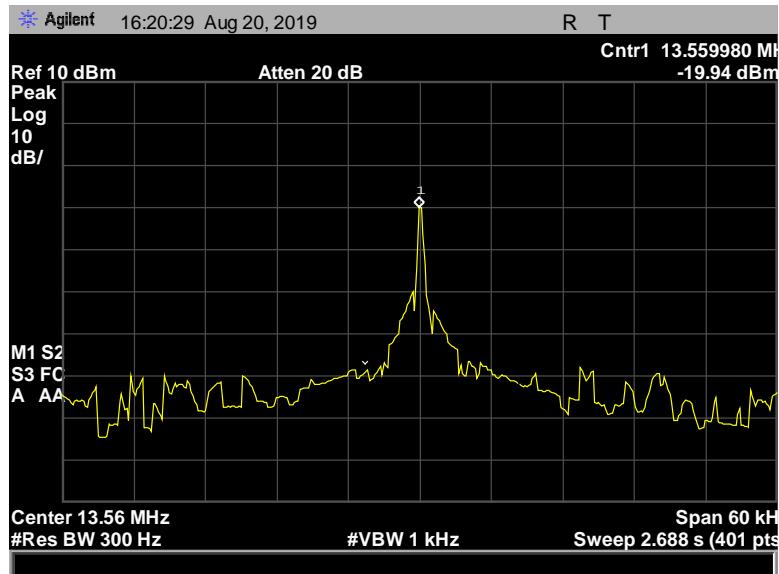


**Figure 83: Frequency Stability, Terminal, (-20) - 13.8VDC**

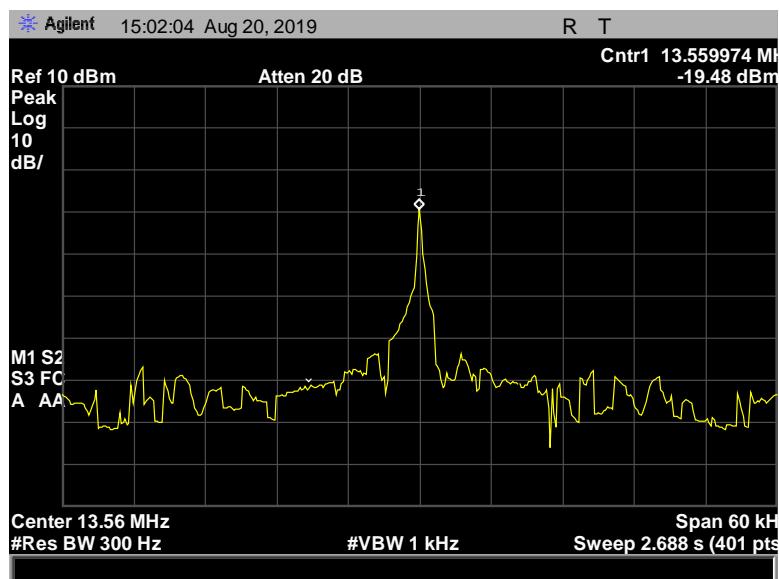


**Figure 84: Frequency Stability, Terminal, (20) - 10.2VDC**

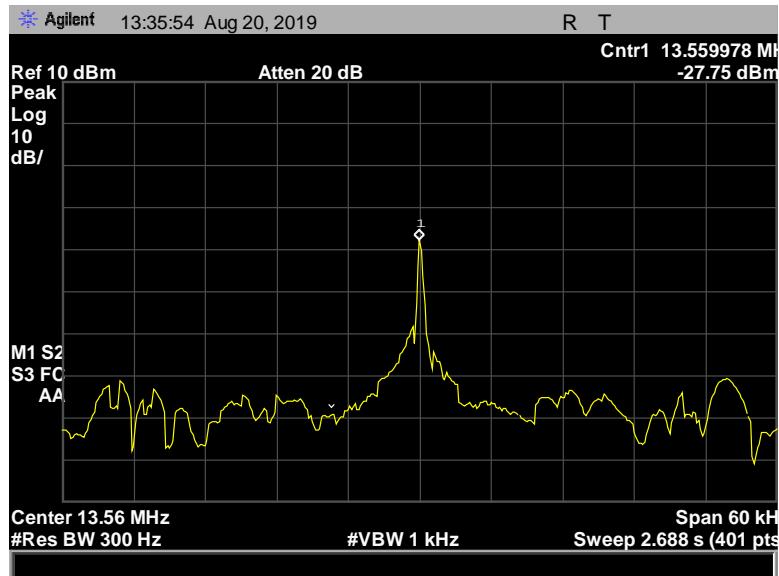


**Figure 85: Frequency Stability, Terminal, (20) - 12VDC**

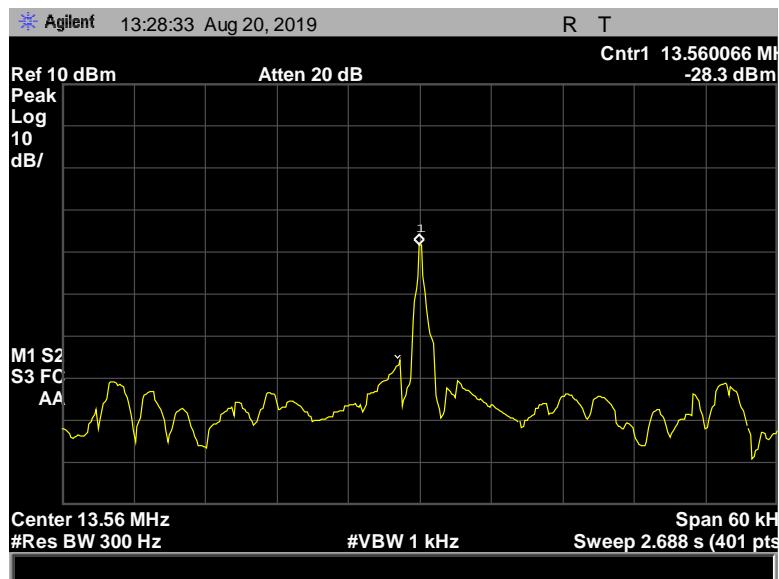

**Figure 86: Frequency Stability, Terminal, (20) - 13.8VDC**

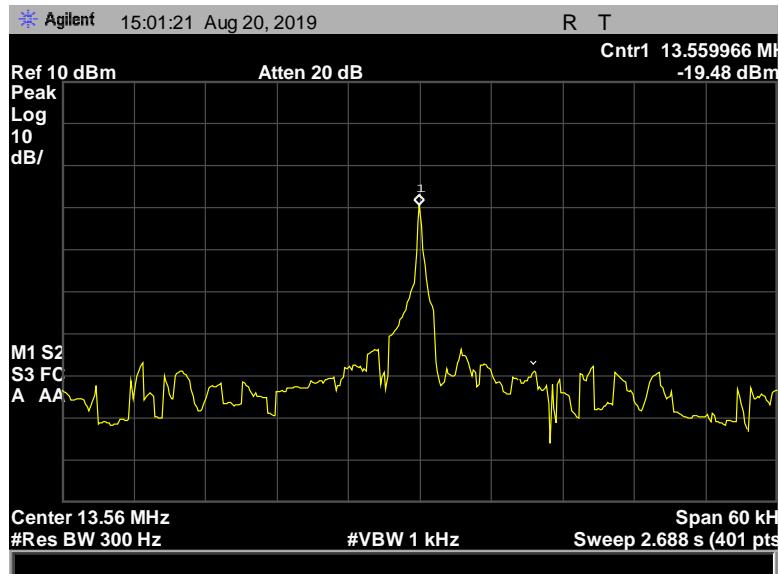

**Figure 87: Frequency Stability, Terminal, (50) - 10.2VDC**

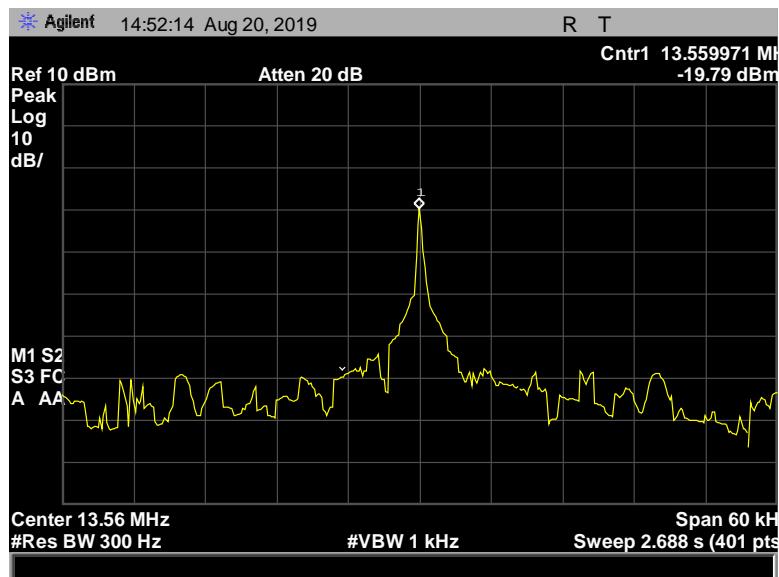

**Figure 88: Frequency Stability, Terminal, (50) - 12VDC**

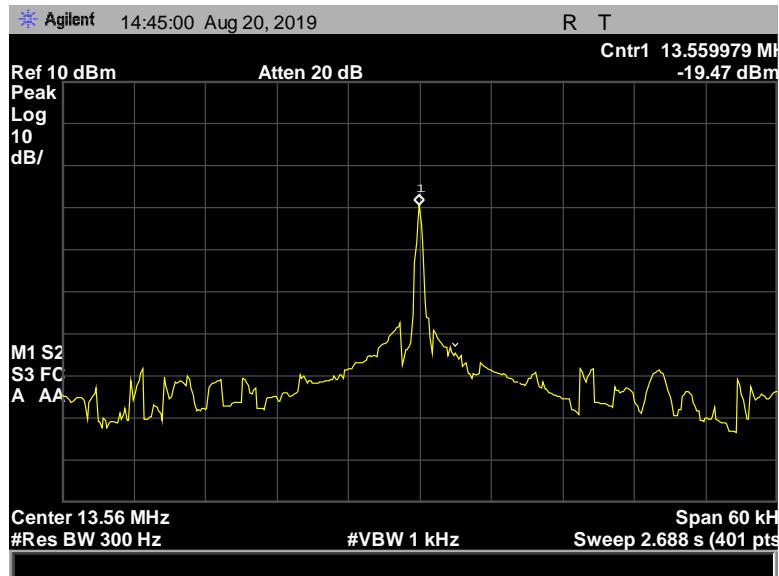


Figure 89: Frequency Stability, Terminal, (50) - 13.8VDC

## IV. Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET ASSET #	EQUIPMENT	MANUFACTURER	MODEL	LAST CAL DATE	CAL DUE DATE
1A1044	GENERATOR	COM-POWER CORP	CG-520	SEE NOTE	
1A1079	CONDUCTED COMB GENERATOR	COM-POWER CORP	CGC-255	SEE NOTE	
1A1050	BILOG ANTENNA (30 MHZ TO 1 GHZ)	SCHAFFNER	CBL 6112D	08/29/2018	02/29/2020
1A1050-A	4 DB FIXED ATTENUATOR	FAIRVIEW MICROWAVE	SA6N5WA-04	08/29/2018	02/29/2020
1A1088	PRE-AMP	RHODE & SCHWARZ	TS-PR1	SEE NOTE	
1A1073	MULTI DEVICE CONTROLLER	ETS LINDGREN	2090	SEE NOTE	
1A1195	PREAMPLIFIER	A.H. SYSTEMS	PAM-0018P	SEE NOTE	
1A1074	SYSTEM CAMERA CONTROLLER	PANASONIC	WV-CU101	SEE NOTE	
1A1075	SYSTEM CAMERA CONTROLLER	PANASONIC	V-CU101	SEE NOTE	
1A1080	MULTI DEVICE CONTROLLER	ETS LINDGREN	2090	SEE NOTE	
1A1176	ACTIVE LOOP ANTENNA	ETS-LINDGREN	6502	04/03/2019	04/03/2020
1A1122	LISN	TESEQ	NNB 51	08/09/2019	08/09/2020
1A1065	EMI RECEIVER	ROHDE & SCHWARZ	SCI	05/01/2019	05/01/2020
1A1149	MILLIOHM METER	GW INSTEK	GOM-802	04/19/2019	04/19/2020
1A1184	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	06/25/2019	06/25/2020
1A1225	ENVIRONMENTAL CHAMBER	ASPEC	EXP-2H/NEW	02/21/2019	02/21/2020
1A1119	TEST AREA	CUSTOM MADE	N/A	SEE NOTE	
1A1177	PULSE LIMITER / ATTENUATOR	ROHDE & SCHWARZ	ESH3Z2	11/30/2018	05/30/2020
1A1083	EMI RECEIVER	ROHDE & SCHWARZ	ESU 40	10/17/2018	10/17/2019
1A1106	10 M CHAMBER (NSA)	ETS LINDGREN	SEMI-ANECHOIC	SEE NOTE	

**Figure 90: Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

v. **Certification & User's Manual  
Information**

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### **§ 2.801 Radio-frequency device defined.**

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### **§ 2.803 Marketing of radio frequency devices prior to equipment authorization.**

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:**

### **§ 2.901 Basis and Purpose**

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### **§ 2.907 Certification.**

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### 1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### **§ 15.19 Labeling requirements.**

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### **§ 15.21 Information to user.**

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



HID Global Corporation  
Model: 20

MET Labs

Electromagnetic Compatibility  
End of Report  
CFR Title 47, Part 15.225

# End of Report