

TEST REPORT

Report Number: R15701621-E1f

Applicant : HID Global Corporation
611 Center Ridge Dr
Austin, TX 78753, USA

Model : 40TCV2

FCC ID : JQ6-SIGNO40TCV2

IC : 2236B-SIGNO40TCV2

EUT Description : Signo V2 Reader

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C: 2025
RSS-210 ISSUE 11: 2024
RSS-GEN ISSUE 5 + A1 + A2: 2021

Date Of Issue:
2025-07-07

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2025-06-11	Initial Issue	Manish Baral
V2	2025-07-07	Revised Worst-Case Declaration Statement and updated report number	Chandler Stanley

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. SUMMARY OF TEST RESULTS	5
4. FACILITIES AND ACCREDITATION	5
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	6
5.1. METROLOGICAL TRACEABILITY	6
5.2. DECISION RULES	6
5.3. MEASUREMENT UNCERTAINTY	6
5.4. SAMPLE CALCULATION	6
6. EQUIPMENT UNDER TEST	7
6.1. DESCRIPTION OF EUT	7
6.2. MAXIMUM ELECTRIC FIELD STRENGTH	7
6.3. SOFTWARE AND FIRMWARE	7
6.4. WORST-CASE CONFIGURATION AND MODE	7
6.5. DESCRIPTION OF TEST SETUP	8
7. TEST AND MEASUREMENT EQUIPMENT	9
8. OCCUPIED BANDWIDTH	10
8.1. Tag On	11
8.2. Tag Off	12
9. RADIATED EMISSION TEST RESULTS	13
9.1. LIMITS AND PROCEDURE	13
9.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (Below 30MHz)	15
9.2.1. Tag On	15
9.2.2. Tag Off	17
9.3. TX SPURIOUS EMISSION 30 TO 1000 MHz	19
9.3.1. Tag On	19
9.3.2. Tag Off	21
10. AC MAINS LINE CONDUCTED EMISSIONS	23
10.1. AC Mains Tag Off	24
10.2. AC Mains Tag On	26
10.3. Terminated Sample	28
11. SETUP PHOTOS	30

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: HID Global Corporation
611 Center Ridge Dr
Austin, TX 78753, USA

EUT DESCRIPTION: Signo V2 Reader

MODEL: 40TCV2

SERIAL NUMBER: H250013339

SAMPLE RECEIPT DATE: 2025-03-10

DATE TESTED: 2025-03-20 TO 2025-3-28

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C: 2025	Refer to Section 3
ISED RSS-210 Issue 11: 2024	Refer to Section 3
ISED RSS-GEN Issue 5 + A1 + A2: 2021	Refer to Section 3

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document.

Approved & Released
For UL LLC By:

Prepared By:



Mike Antola
Sr. Staff Engineer
Consumer, Medical and IT Segment
UL LLC



Manish Baral
Engineer
Consumer, Medical and IT Segment
UL LLC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with:

- ANSI C63.10-2020
- FCC 47 CFR Part 2
- FCC 47 CFR Part 15C
- RSS-GEN Issue 5 + A1 + A2: 2021
- RSS-210 Issue 11: 2024

3. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

Below is a list of the data provided by the customer:

1. RFID radio similarities (see section 6.4)
2. Intended EUT orientation (see section 6.4)
3. RFID radio operational specifications (see section 6.4)

Requirement Description	Requirement Clause Number	Result	Remarks
Occupied Bandwidth	FCC §15.215 (c) RSS-Gen 6.7	Compliant	None
Fundamental Measurements.	FCC §15.225 (a-d) FCC §15.209 (d)		
Tx Spurious Emissions	IC RSS-210, Annex B.6 IC RSS-GEN, Section 8.9 (Transmitter)		
Frequency Stability	FCC FCC §15.225 (e) RSS-210, Annex B.6		
AC Mains Line Conducted Emissions	FCC §15.207 IC RSS-GEN, Section 8.8		

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number #0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
☒	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

Signo Reader is a smartcard reader typically installed near doorway as part of physical access system, to control access to that door. A user will approach the door and present a BLE or RFID credentials to the reader with intention of entering the door. The reader will read the credential and send its data to a connected access control panel, which determine whether or not grant the user access to the door. Optionally, a personal identification number (PIN) may also be required, in which case the user will enter the PIN on the reader's keypad.

The EUT supports the following technologies:

Wireless technologies	Frequency Band(s)	Operating mode(s)
NFC	13.56MHz	Type A 106, 212, 424 & 848 Kbps
	125KHz	4 Kbps
Bluetooth	2.4 GHz	LE 1 & 2 Mbps

Notes:

1. The EUT operated in a 1x1 SISO mode.
2. The EUT only supports 1 type(s) of NFC tag.

6.2. MAXIMUM ELECTRIC FIELD STRENGTH

The transmitter has a maximum peak radiated electric field strength as follows:

Fundamental Frequency (kHz)	E-Field (dBuV/m)
125	2

6.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 10.1
The test utility software used during testing was Rev H

6.4. WORST-CASE CONFIGURATION AND MODE

The EUT is meant to be installed and operated in one orientation; therefore, all testing was performed with the EUT in its intended orientation. The EUT is meant to be powered via an auxiliary device (access controller) that does not come with the product. Therefore, for AC Lines, the scan was run using a DC power supply as representative

The 125 kHz RFID signal only supports a 4-kbps data-rate. A terminal cable and pigtail cable were investigated and it was found that the terminal cable is worst-case; therefore, all testing was performed with the terminal cable. All testing was performed for tag on and tag off modes.

The distance between the EUT and tag was also investigated, and the worst-case condition occurs when the tag and EUT are separated by 2.5 cm; therefore, all final radiated testing was performed with the EUT and tag separated by 2.5 cm.

6.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Badge 125 kHz	HID	NA	NA	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Power	1	Terminal	Unshielded	<3m	Supplies Power

TEST SETUP

The EUT is connected to a test laptop during the tests. Test software exercised the radio card.

SETUP DIAGRAM

Please refer to 15701621-EP1f for setup diagrams

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
0.009-30MHz					
135144	Active Loop Antenna	ETS-Lindgren	6502	2024-10-02	2025-10-02
30-1000 MHz					
90628	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2024-01-02	2026-01-02
Gain-Loss Chains					
207638	Gain-loss string: 0.009-30MHz	Various	Various	2024-05-22	2025-05-22
207639	Gain-loss string: 25-1000MHz	Various	Various	2024-05-22	2025-05-22
Receiver & Software					
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2024-04-16	2025-04-16
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Additional Equipment used					
241204	Environmental Meter	Fisher Scientific	15-077-963	2023-09-05	2025-09-05

Test Equipment Used - Wireless Conducted Attenuators, Cables, and Couplers

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Attenuators/Cables					
246811	SMA Coaxial 10dB Attenuator	CentricRF	C18S2-20	2024-03-07	2025-03-31
CBL105	SMA Cable	-	-	2025-03-07	2026-03-07

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
70374	EMI Test Receiver	ROHDE & SCHWARZ	ESC17	2024-07-30	2025-07-30
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2024-04-04	2025-04-04
179892	Environmental Meter	Fisher Scientific	15-077-963	2024-08-12	2025-08-12
80391	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2024-08-01	2025-08-01
52859	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2024-04-04	2025-04-04
236852	CW-AC Power Source	Ametek	CW2501	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		

8. OCCUPIED BANDWIDTH

LIMITS

FCC §15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1-5% of the 20dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Note*: Because the measured signal is CW or CW-like, adjusting the RBW per C63.10 would not be practical since the measured bandwidth will always follow the RBW.


8.1. Tag On

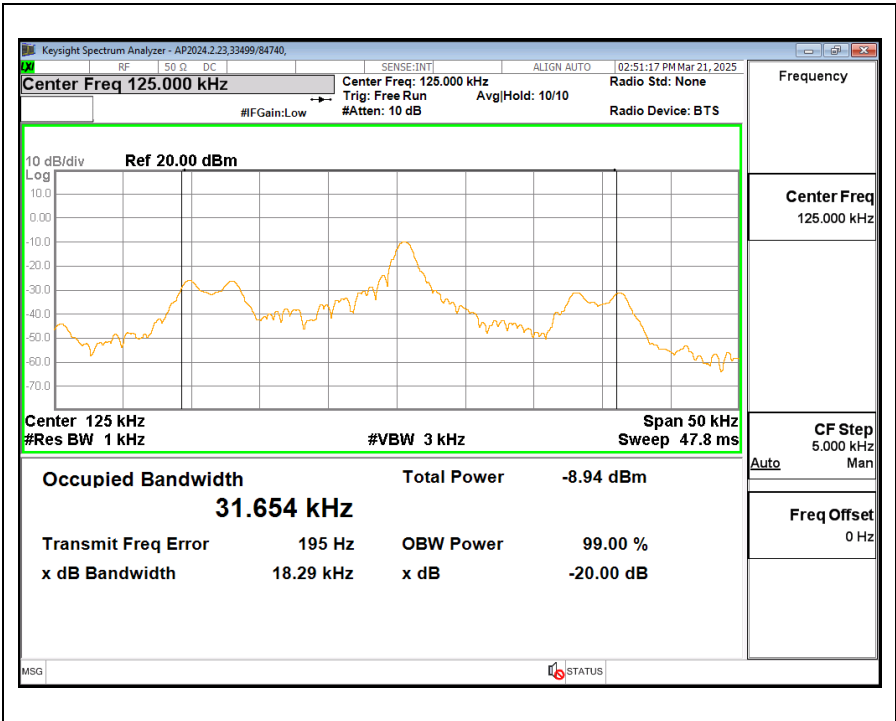

Tag On

Frequency (KHz)	99% Bandwidth (KHz)	20dB Bandwidth (KHz)
125	31.654	18.29

8.2. Tag Off

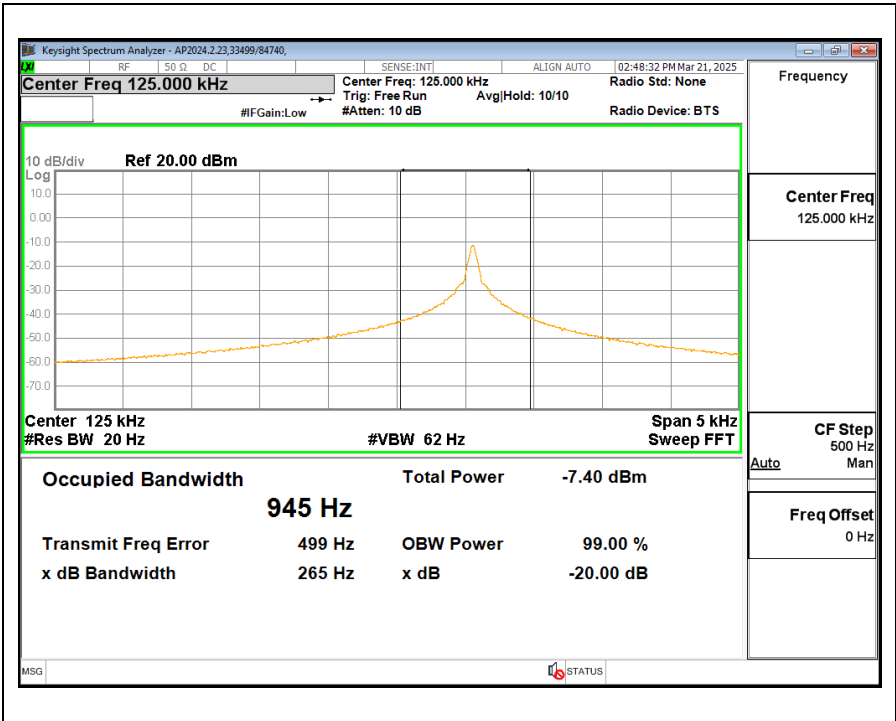

Tag Off

Frequency (KHz)	99% Bandwidth (Hz)	20dB Bandwidth (Hz)
125	945	265

9. RADIATED EMISSION TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMIT

FCC §15.209 (a)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		

IC RSS-GEN, Section 8.9 (Transmitter)

Frequency (MHz)	Field Strength (microamps/meter)	Measurement Distance (m)
0.009–0.490	6.37/F(kHz)	300
0.490–1.705	63.7/F(kHz)	30
1.705–30.0	0.08	30
Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (m)
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3
Note: The lower limit shall apply at the transition frequency.		

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz measurements. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

KDB 414788 Open Field Site(OFS) and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.


OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

RESULTS

9.2. FUNDAMENTAL AND SPURIOUS EMISSIONS (Below 30MHz)

9.2.1. Tag On

SPURIOUS EMISSION – E FIELD

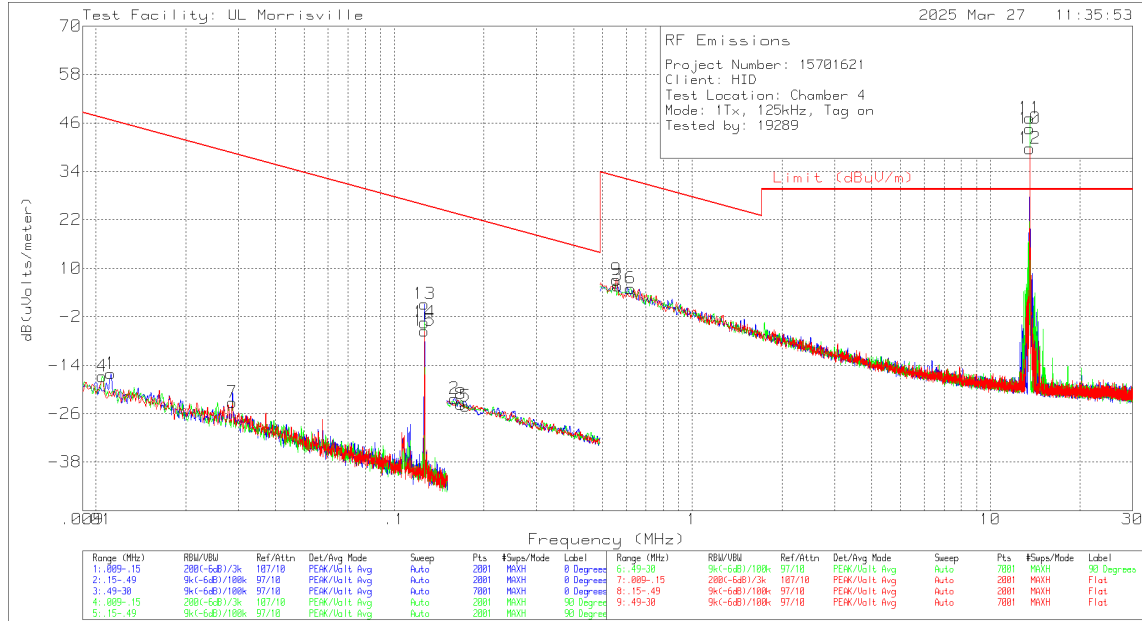


BL30MHz SPURIOUS EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PKLimit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
4	.01049	44.44	Pk	18.7	.1	-80	-16.76	47.19	67.19	-63.95	0-360	90 degs
1	.0112	45.49	Pk	18.3	.1	-80	-16.11	46.62	66.62	-62.73	0-360	0 degs
7	.02867	43.48	Pk	13.2	.1	-80	-23.22	38.46	58.46	-61.68	0-360	Flat
13	.12636	70.06	Pk	11	.1	-80	1.16	25.57	45.57	-24.41	0-360	0 degs
14	.12636	65.46	Pk	11	.1	-80	-3.44	25.57	45.57	-29.01	0-360	90 degs
15	.12636	63.39	Pk	11	.1	-80	-5.51	25.57	45.57	-31.08	0-360	Flat
2	.15935	46.6	Pk	11	.1	-80	-22.3	23.56	43.56	-45.86	0-360	0 degs
8	.16768	45.26	Pk	11	.1	-80	-23.64	23.11	43.11	-46.75	0-360	Flat
5	.1738	44.73	Pk	11	.1	-80	-24.17	22.8	42.8	-46.97	0-360	90 degs
9	.55746	36.03	Pk	11	.1	-40	7.13	32.68	-	-25.55	0-360	Flat
3	.56167	34.61	Pk	11	.1	-40	5.71	32.61	-	-26.9	0-360	0 degs
6	.6207	33.93	Pk	11	.1	-40	5.03	31.75	-	-26.72	0-360	90 degs
*10	13.5596	73.48	Pk	10.6	.5	-40	-	-	-	-	0-360	0 degs
*11	13.5596	76.08	Pk	10.6	.5	-40	-	-	-	-	0-360	90 degs
*12	13.5596	68.56	Pk	10.6	.5	-40	-	-	-	-	0-360	Flat

Pk - Peak detector

* - Indicates 13.56MHz NFC Transmitter not subject to test in this report.

SPURIOUS EMISSION – H FIELD

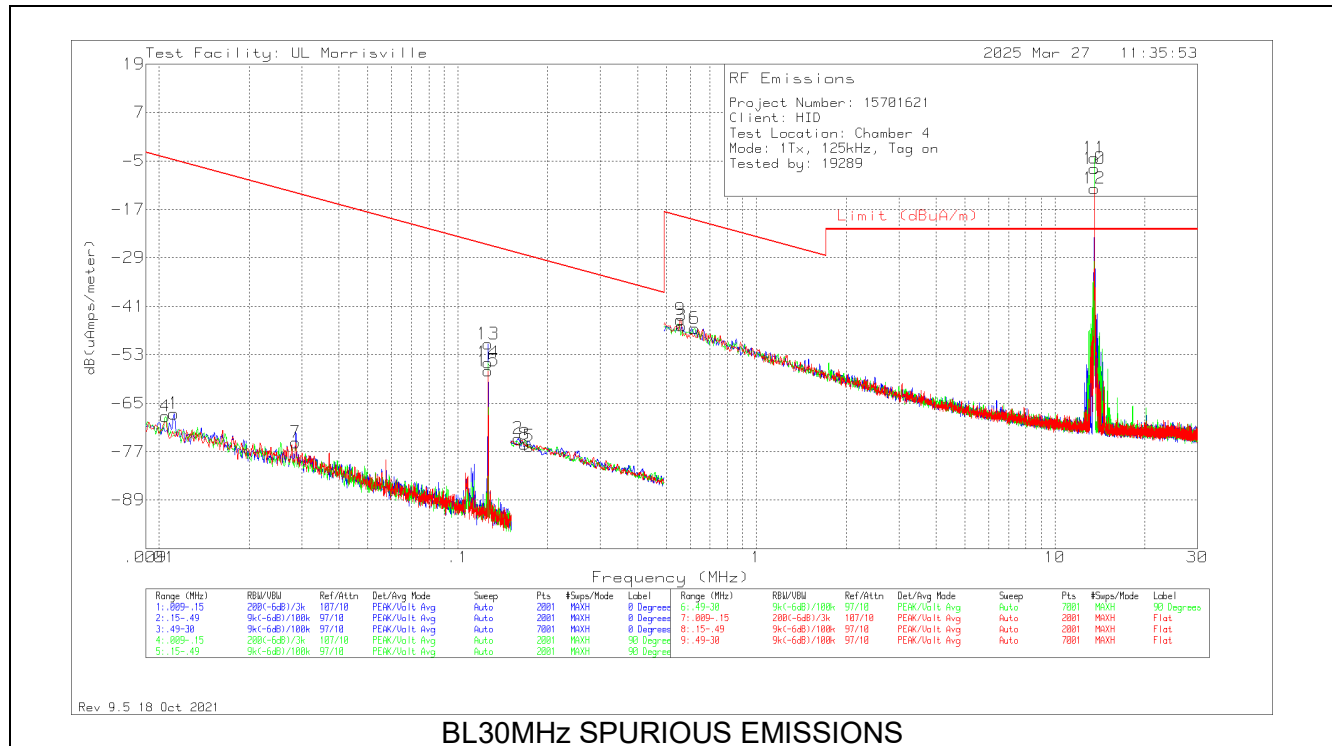

BL30MHz SPURIOUS EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uAmps/meter)	QP/AV Limit (dBuA/m)	PK Limit (dBuA/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
4	.01049	44.44	Pk	-32.8	.1	-80	-68.26	-4.31	-15.69	-63.95	0-360	90 degs
1	.0112	45.49	Pk	-33.2	.1	-80	-67.61	-4.88	15.12	-62.73	0-360	0 degs
7	.02867	43.48	Pk	-38.3	.1	-80	-74.72	-13.04	6.96	-61.68	0-360	Flat
13	.12636	70.06	Pk	-40.5	.1	-80	-50.34	-25.93	-5.93	-24.41	0-360	0 degs
14	.12636	65.46	Pk	-40.5	.1	-80	-54.94	-25.93	-5.93	-29.01	0-360	90 degs
15	.12636	63.39	Pk	-40.5	.1	-80	-57.01	-25.93	-5.93	-31.08	0-360	Flat
2	.15935	46.6	Pk	-40.5	.1	-80	-73.8	-27.94	-7.94	-45.86	0-360	0 degs
8	.16768	45.26	Pk	-40.5	.1	-80	-75.14	-28.39	-8.39	-46.75	0-360	Flat
5	.1738	44.73	Pk	-40.5	.1	-80	-75.67	-28.7	-8.7	-46.97	0-360	90 degs
9	.55746	36.03	Pk	-40.5	.1	-40	-44.37	-18.82	-	-25.55	0-360	Flat
3	.56167	34.61	Pk	-40.5	.1	-40	-45.79	-18.89	-	-26.9	0-360	0 degs
6	.6207	33.93	Pk	-40.5	.1	-40	-46.47	-19.75	-	-26.72	0-360	90 degs
*10	13.5596	73.48	Pk	-40.9	.5	-40	-	-	-	-	0-360	0 degs
*11	13.5596	76.08	Pk	-40.9	.5	-40	-	-	-	-	0-360	90 degs
*12	13.5596	68.56	Pk	-40.9	.5	-40	-	-	-	-	0-360	Flat

Pk - Peak detector

* - Indicates 13.56MHz NFC Transmitter not subject to test in this report.

9.2.2. Tag Off


SPURIOUS EMISSION – E FIELD

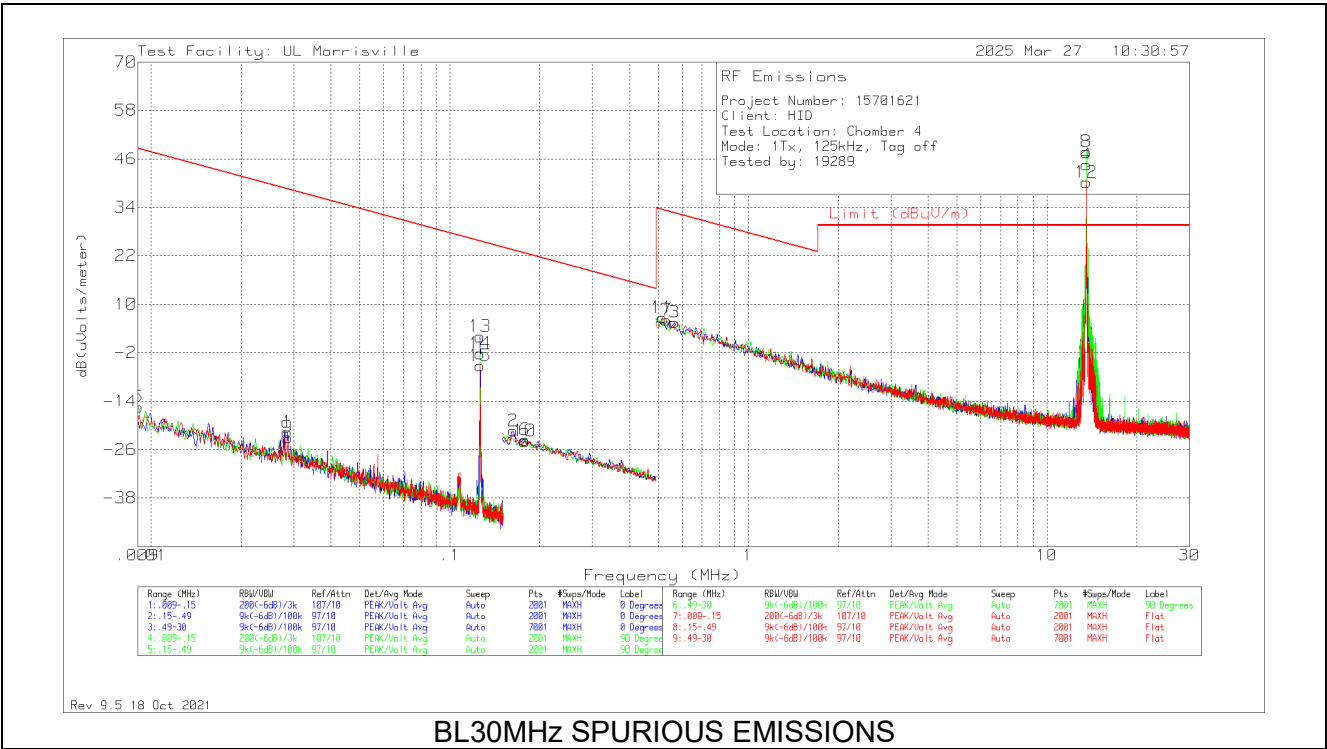

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uVolts/meter)	QP/AV Limit (dBuV/m)	PK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Loop Angle
5	.00907	44.89	Pk	19.6	.1	-80	-15.41	48.45	68.45	-63.86	0-360	90 degs
1	.0286	45.02	Pk	13.2	.1	-80	-21.68	38.48	58.48	-60.16	0-360	0 degs
9	.0286	43.73	Pk	13.2	.1	-80	-22.97	38.48	58.48	-61.45	0-360	Flat
13	.12636	70.9	Pk	11	.1	-80	2	25.57	45.57	-23.57	0-360	0 degs
14	.12636	66.68	Pk	11	.1	-80	-2.22	25.57	45.57	-27.79	0-360	90 degs
15	.12636	63.64	Pk	11	.1	-80	-5.26	25.57	45.57	-30.83	0-360	Flat
2	.16326	47.55	Pk	11	.1	-80	-21.35	23.35	43.35	-44.7	0-360	0 degs
10	.17831	45.01	Pk	11	.1	-80	-23.89	22.58	42.58	-46.47	0-360	Flat
6	.17865	45.29	Pk	11	.1	-80	-23.61	22.56	42.56	-46.17	0-360	90 degs
11	.5153	35.58	Pk	11	.1	-40	6.68	33.36	-	-26.68	0-360	Flat
7	.53216	34.98	Pk	11	.1	-40	6.08	33.08	-	-27	0-360	90 degs
3	.56589	34.42	Pk	11	.1	-40	5.52	32.55	-	-27.03	0-360	0 degs
*4	13.5596	73.46	Pk	10.6	.5	-40	-	-	-	-	0-360	0 degs
*8	13.5596	76.62	Pk	10.6	.5	-40	-	-	-	-	0-360	90 degs
*12	13.5596	69.1	Pk	10.6	.5	-40	-	-	-	-	0-360	Flat

Pk - Peak detector
* - Indicates 13.56MHz NFC Transmitter not subject to test in this report.

SPURIOUS EMISSION – H FIELD

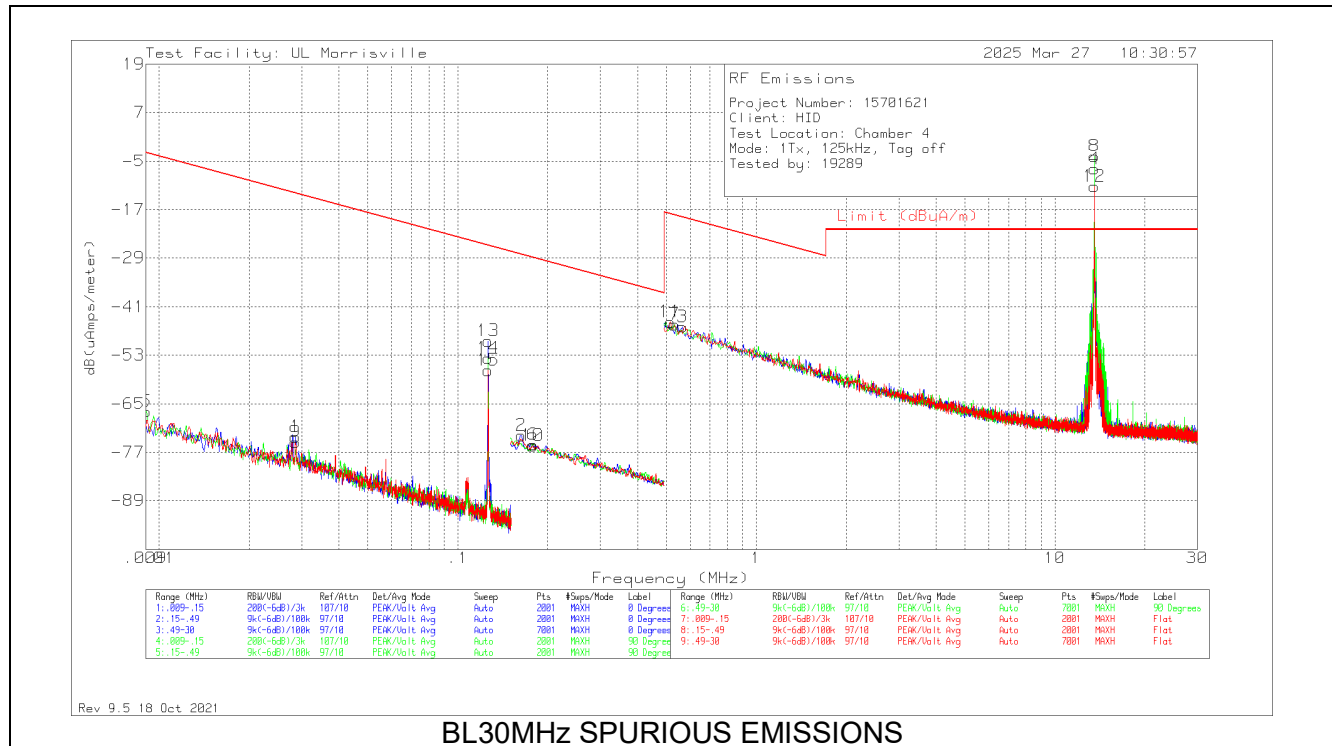

BL30MHz SPURIOUS EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	ANT (dB/m)	Gain/Loss (dB)	Dist. Corr. Factor (dB)	Corrected Reading dB(uAmps/meter)	QP/AV Limit (dBuA/m)	PK Limit (dBuA/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Loop Angle
5	.00907	44.89	Pk	-31.9	.1	-80	-66.91	-3.05	16.95	-63.86	0-360	400	90 degs
1	.0286	45.02	Pk	-38.3	.1	-80	-73.18	-13.02	6.98	-60.16	0-360	400	0 degs
9	.0286	43.73	Pk	-38.3	.1	-80	-74.47	-13.02	6.98	-61.45	0-360	400	Flat
13	.12636	70.9	Pk	-40.5	.1	-80	-49.5	-25.93	-5.93	-23.57	0-360	400	0 degs
14	.12636	66.68	Pk	-40.5	.1	-80	-53.72	-25.93	-5.93	-27.79	0-360	400	90 degs
15	.12636	63.64	Pk	-40.5	.1	-80	-56.76	-25.93	-5.93	-30.83	0-360	400	Flat
2	.16326	47.55	Pk	-40.5	.1	-80	-72.85	-28.15	-8.15	-44.7	0-360	400	0 degs
10	.17831	45.01	Pk	-40.5	.1	-80	-75.39	-28.92	-8.92	-46.47	0-360	400	Flat
6	.17865	45.29	Pk	-40.5	.1	-80	-75.11	-28.94	-8.94	-46.17	0-360	400	90 degs
11	.5153	35.58	Pk	-40.5	.1	-40	-44.82	-18.14	-	-26.68	0-360	400	Flat
7	.53216	34.98	Pk	-40.5	.1	-40	-45.42	-18.42	-	-27	0-360	400	90 degs
3	.56589	34.42	Pk	-40.5	.1	-40	-45.98	-18.95	-	-27.03	0-360	400	0 degs
*4	13.5596	73.46	Pk	-40.9	.5	-40	-	-	-	-	0-360	400	0 degs
*8	13.5596	76.62	Pk	-40.9	.5	-40	-	-	-	-	0-360	400	90 degs
*12	13.5596	69.1	Pk	-40.9	.5	-40	-	-	-	-	0-360	400	Flat


Pk – Peak Detector

* - Indicates 13.56MHz NFC Transmitter not subject to test in this report.

9.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

9.3.1. Tag On

SPURIOUS EMISSION

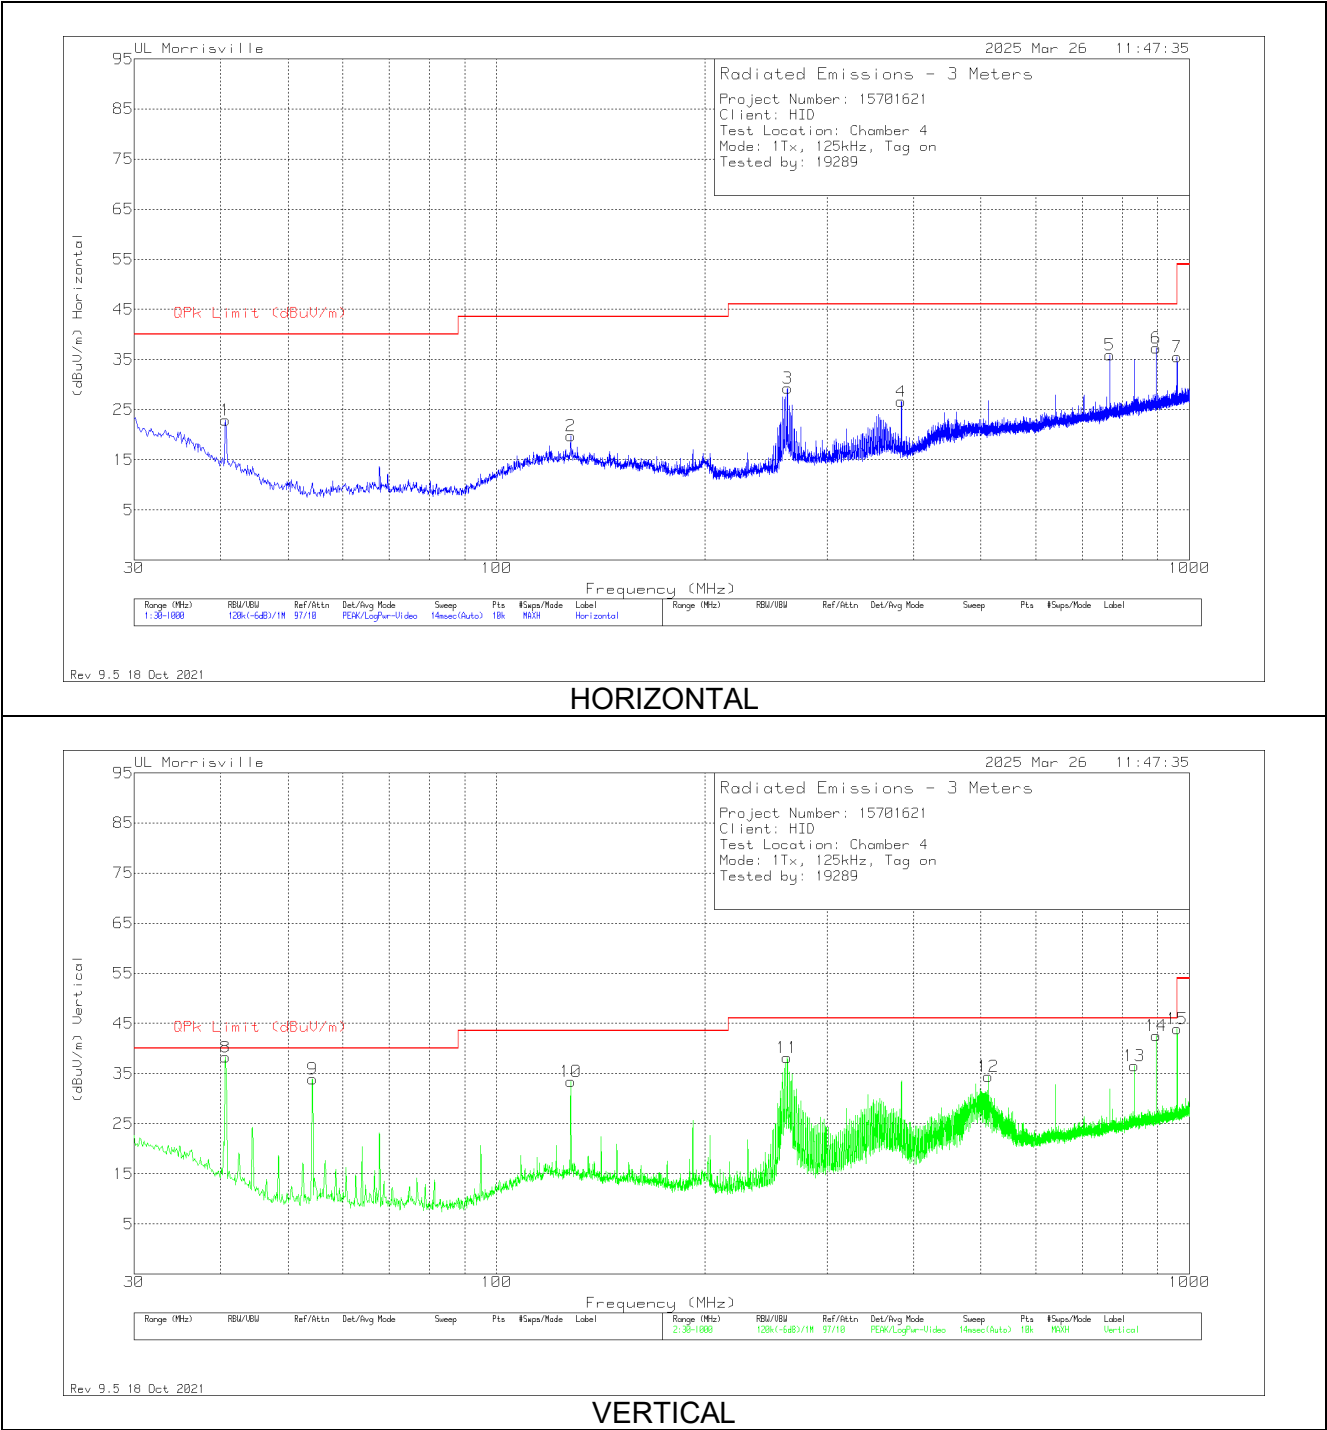

DATA


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	90628 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.67	35.39	Pk	19.5	-32	22.89	40	-17.11	0-360	100	H
8	40.66952	48.35	Qp	19.5	-32	35.85	40	-4.15	186	102	V
9	54.25	52.3	Pk	13.5	-31.9	33.9	40	-6.1	0-360	100	V
2	127.97	30.97	Pk	20	-31.2	19.77	43.52	-23.75	0-360	300	H
10	127.97	44.65	Pk	20	-31.2	33.45	43.52	-10.07	0-360	100	V
11	262.8	50.02	Pk	18.6	-30.4	38.22	46.02	-7.8	0-360	100	V
3	262.897	41.07	Pk	18.6	-30.4	29.27	46.02	-16.75	0-360	100	H
4	383.953	35.41	Pk	21.1	-29.9	26.61	46.02	-19.41	0-360	100	H
12	511.993	40.09	Pk	23.8	-29.5	34.39	46.02	-11.63	0-360	100	V
5	767.976	37.5	Pk	26.9	-28.5	35.9	46.02	-10.12	0-360	100	H
13	831.996	36.72	Pk	27.7	-27.9	36.52	46.02	-9.5	0-360	100	V
6	896.016	36.37	Pk	28.1	-27.2	37.27	46.02	-8.75	0-360	100	H
14	895.9997	42.57	Qp	28.1	-27.2	43.47	46.02	-2.55	282	114	V
7	960.036	33.12	Pk	28.9	-26.5	35.52	53.97	-18.45	0-360	100	H
15	960.036	41.56	Pk	28.9	-26.5	43.96	53.97	-10.01	0-360	100	V

Pk - Peak detector


Qp - Quasi-Peak detector

9.3.2. Tag Off

SPURIOUS EMISSION

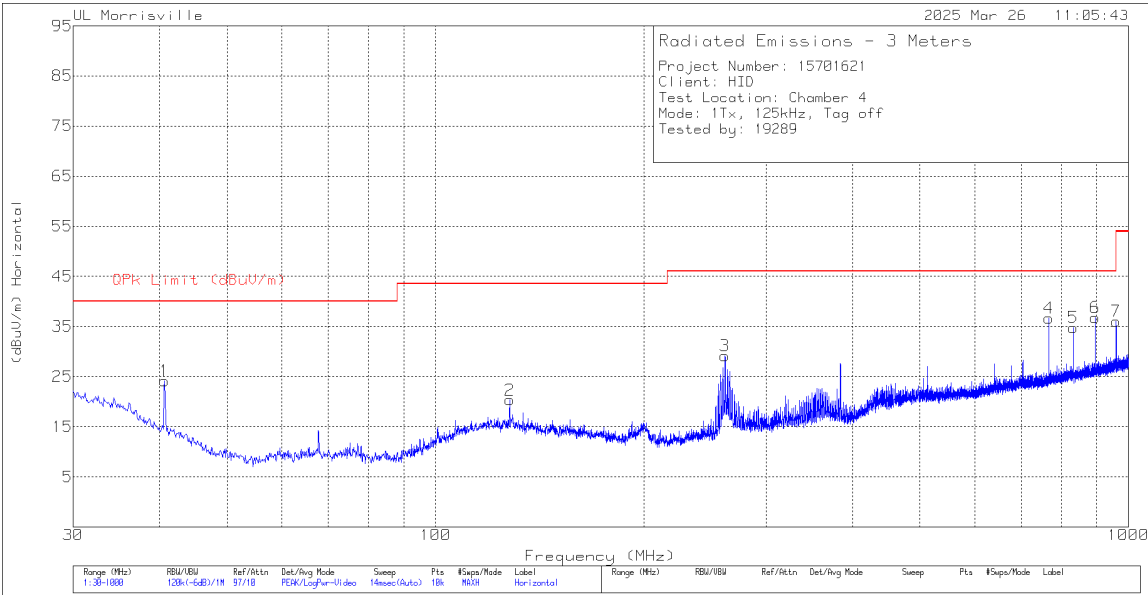

HORIZONTAL

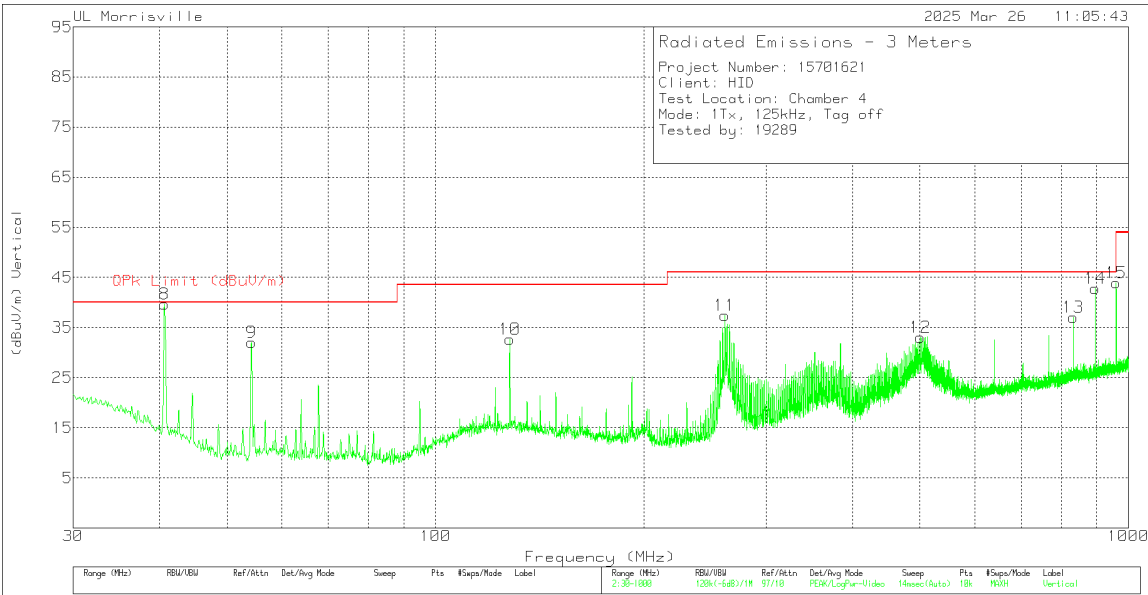

VERTICAL

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	90628 (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.67	36.67	Pk	19.5	-32	24.17	40	-15.83	0-360	100	H
8	40.67719	51.01	Qp	19.5	-32	38.51	40	-1.49	246	103	V
9	54.25	50.42	Pk	13.5	-31.9	32.02	40	-7.98	0-360	100	V
2	127.97	31.54	Pk	20	-31.2	20.34	43.52	-23.18	0-360	200	H
10	127.97	43.92	Pk	20	-31.2	32.72	43.52	-10.8	0-360	100	V
11	261.442	49.57	Pk	18.4	-30.5	37.47	46.02	-8.55	0-360	100	V
3	261.733	41.23	Pk	18.4	-30.5	29.13	46.02	-16.89	0-360	100	H
12	500.741	38.88	Pk	23.8	-29.6	33.08	46.02	-12.94	0-360	100	V
4	767.976	38.23	Pk	26.9	-28.5	36.63	46.02	-9.39	0-360	100	H
5	831.996	34.97	Pk	27.7	-27.9	34.77	46.02	-11.25	0-360	100	H
13	831.996	37.3	Pk	27.7	-27.9	37.1	46.02	-8.92	0-360	100	V
6	896.016	35.92	Pk	28.1	-27.2	36.82	46.02	-9.2	0-360	100	H
14	895.9829	42.8	Qp	28.1	-27.2	43.7	46.02	-2.32	269	111	V
7	960.036	33.61	Pk	28.9	-26.5	36.01	53.97	-17.96	0-360	100	H
15	960.036	41.51	Pk	28.9	-26.5	43.91	53.97	-10.06	0-360	100	V

Pk - Peak detector

Qp - Quasi-Peak detector

10. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207

IC RSS-GEN, Section 8.8

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Notes: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

10.1. AC Mains Tag Off

LINE 1 RESULTS

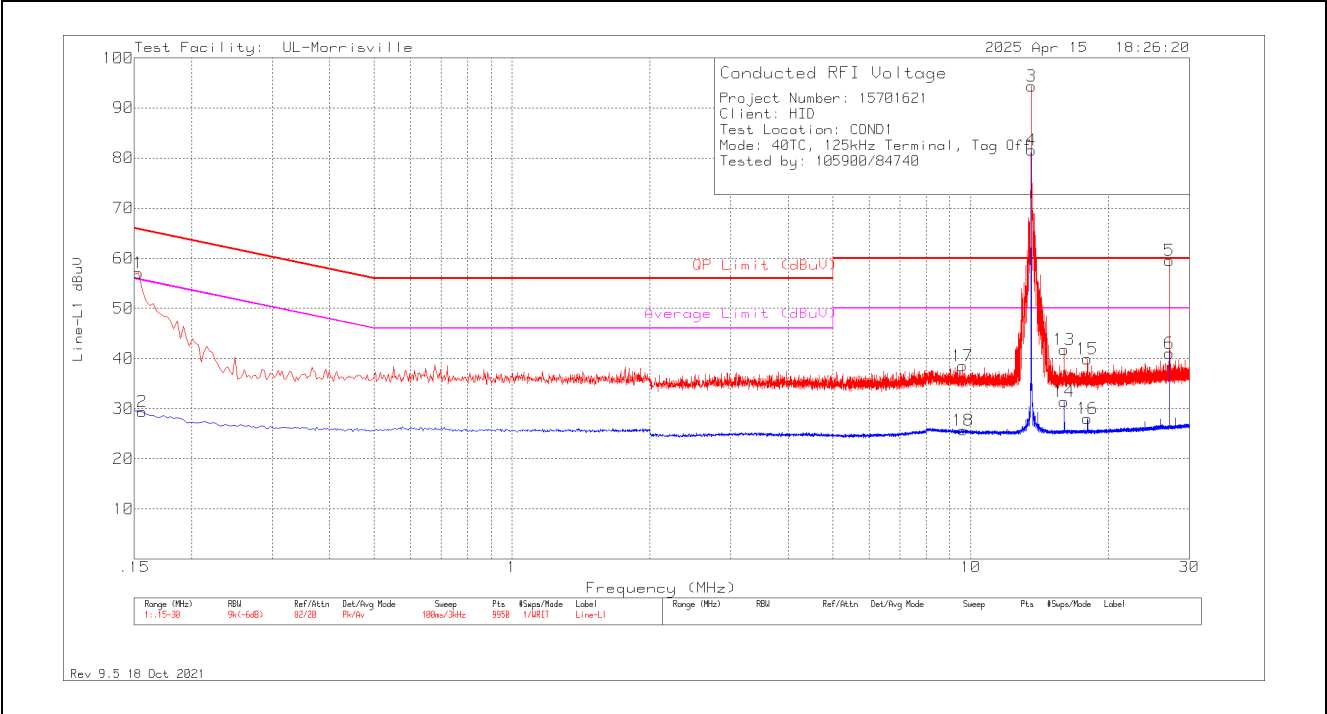


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	171083 (dB)	Atten (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.153	36.9	Pk	.2	0	20	57.1	65.84	-8.74	-	-
2	.156	9.26	Av	.2	0	20	29.46	-	-	55.67	-26.21
17	9.615	18.29	Pk	.1	.2	20	38.59	60	-21.41	-	-
18	9.627	5.41	Av	.1	.2	20	25.71	-	-	50	-24.29
3	13.56032	71.69	Qp	.1	.3	20	92.09	60	32.09	-	-
4	13.56032	62.3	Ca	.1	.3	20	82.7	-	-	50	32.7
13	15.999	21.27	Pk	.2	.3	20	41.77	60	-18.23	-	-
14	16.002	10.9	Av	.2	.3	20	31.4	-	-	50	-18.6
15	17.982	19.4	Pk	.2	.3	20	39.9	60	-20.1	-	-
16	17.985	7.5	Av	.2	.3	20	28	-	-	50	-22
5	27.12004	35.75	Qp	.4	.4	20	56.55	60	-3.45	-	-
6	27.12	20.26	Av	.4	.4	20	41.06	-	-	50	-8.94

Pk - Peak detector
Av - Average detection
Qp - Quasi-Peak detector
Ca - CISPR average detection

*Note: Markers 3 and 4 are the fundamentals of the device, and not spurious emissions. Section 10.3 shows compliance with an NFC/HF terminated sample.

LINE 2 RESULTS

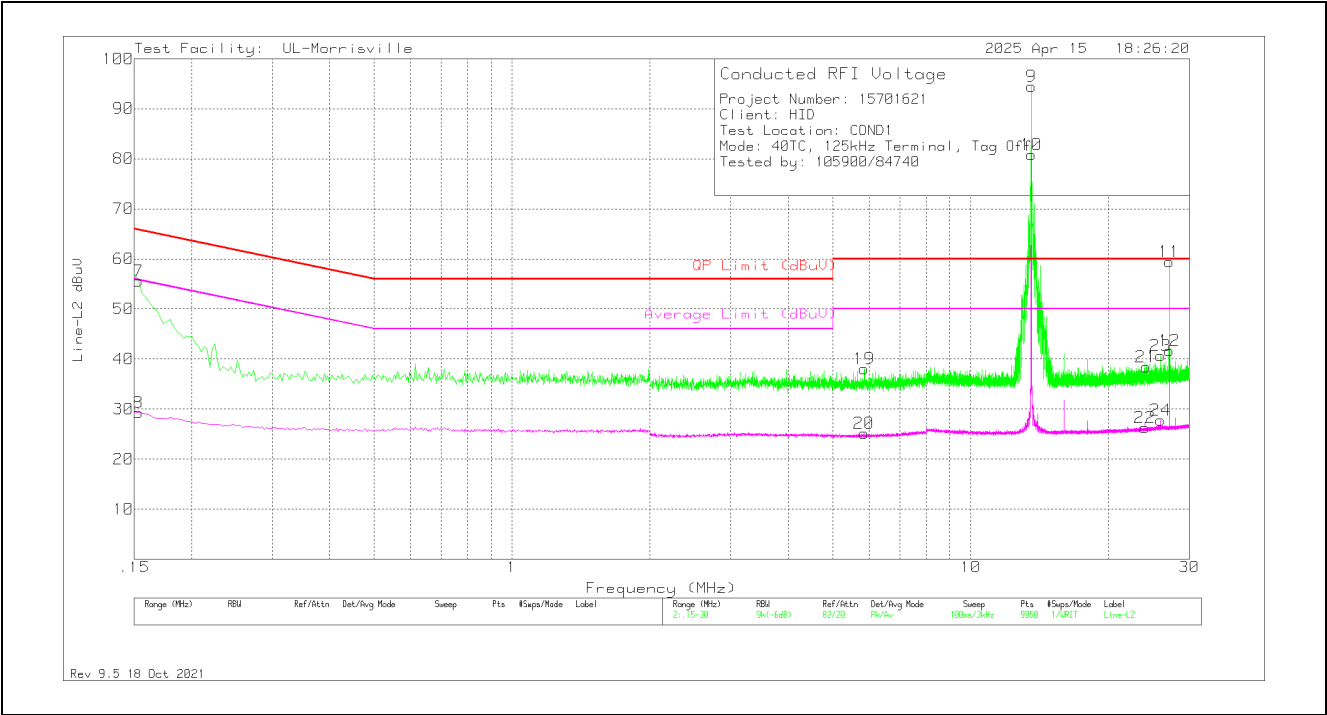


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	171083 (dB)	Atten (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
7	.153	35.32	Pk	.2	0	20	55.52	65.84	-10.32	-	-
8	.153	9.13	Av	.2	0	20	29.33	-	-	55.84	-26.51
20	5.85	4.84	Av	.1	.2	20	25.14	-	-	50	-24.86
19	5.853	17.72	Pk	.1	.2	20	38.02	60	-21.98	-	-
9	13.56011	71.91	Qp	.1	.3	20	92.31	60	32.31	-	-
10	13.56011	62.22	Ca	.1	.3	20	82.62	-	-	50	32.62
22	24.015	5.55	Av	.3	.4	20	26.25	-	-	50	-23.75
21	24.12	17.69	Pk	.3	.4	20	38.39	60	-21.61	-	-
23	25.959	19.87	Pk	.4	.4	20	40.67	60	-19.33	-	-
24	25.962	6.97	Av	.4	.4	20	27.77	-	-	50	-22.23
11	27.1214	35.82	Qp	.4	.4	20	56.62	60	-3.38	-	-
12	27.12	20.91	Av	.4	.4	20	41.71	-	-	50	-8.29

Pk - Peak detector
Av - Average detection
Qp - Quasi-Peak detector
Ca - CISPR average detection

*Note: Markers 9 and 10 are the fundamentals of the device, and not spurious emissions. Section 10.3 shows compliance with an NFC/HF terminated sample.

10.2. AC Mains Tag On

LINE 1 RESULTS

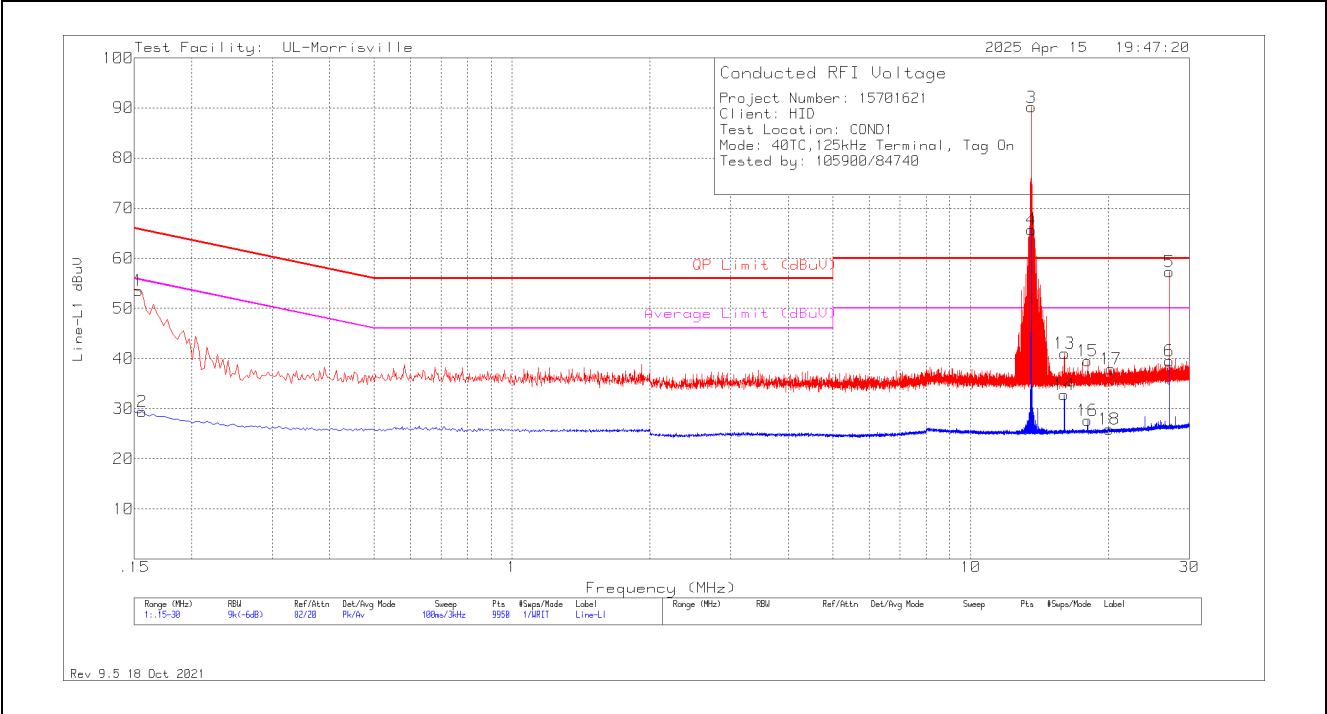


Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	171083 (dB)	Atten (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.153	33.41	Pk	.2	0	20	53.61	65.84	-12.23	-	-
2	.156	9.26	Av	.2	0	20	29.46	-	-	55.67	-26.21
3	13.56074	66.19	Qp	.1	.3	20	86.59	60	26.59	-	-
4	13.56074	61.11	Ca	.1	.3	20	81.51	-	-	50	31.51
14	16.008	12.28	Av	.2	.3	20	32.78	-	-	50	-17.22
13	16.014	20.51	Pk	.2	.3	20	41.01	60	-18.99	-	-
15	17.988	19.06	Pk	.2	.3	20	39.56	60	-20.44	-	-
16	17.988	7.19	Av	.2	.3	20	27.69	-	-	50	-22.31
18	20.064	5.23	Av	.3	.4	20	25.93	-	-	50	-24.07
17	20.22	17.27	Pk	.3	.4	20	37.97	60	-22.03	-	-
5	27.1199	30.23	Qp	.4	.4	20	51.03	60	-8.97	-	-
6	27.123	18.8	Av	.4	.4	20	39.6	-	-	50	-10.4

Pk - Peak detector
Av - Average detection
Qp - Quasi-Peak detector
Ca - CISPR average detection

*Note: Markers 3 and 4 are the fundamentals of the device, and not spurious emissions. Section 10.3 shows compliance with an NFC/HF terminated sample.

LINE 2 RESULTS

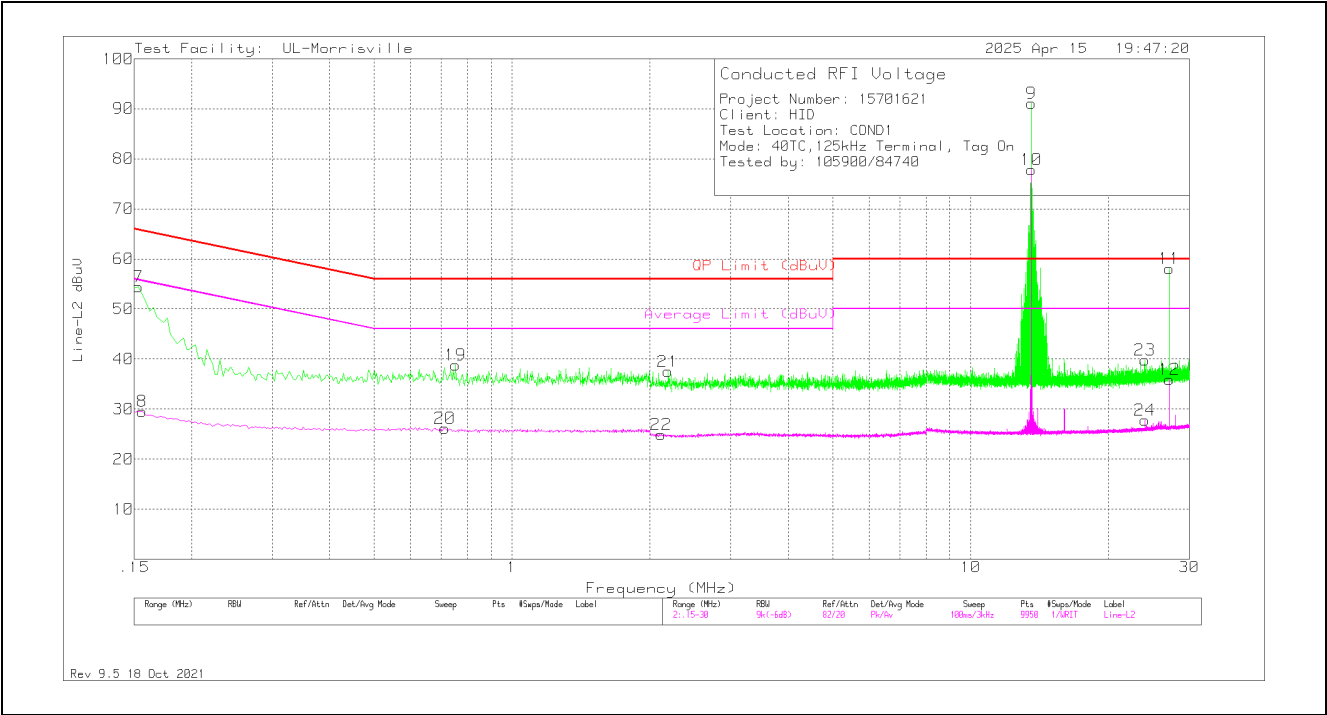


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	171083 (dB)	Atten (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
7	.153	34.25	Pk	.2	0	20	54.45	65.84	-11.39	-	-
8	.156	9.33	Av	.2	0	20	29.53	-	-	55.67	-26.14
20	.714	6.1	Av	0	.1	20	26.2	-	-	46	-19.8
19	.753	18.73	Pk	0	.1	20	38.83	56	-17.17	-	-
22	2.115	4.85	Av	0	.1	20	24.95	-	-	46	-21.05
21	2.19	17.39	Pk	0	.1	20	37.49	56	-18.51	-	-
9	13.56132	66.38	Qp	.1	.3	20	86.78	60	26.78	-	-
10	13.56132	61.14	Ca	.1	.3	20	81.54	-	-	50	31.54
24	24.009	7.06	Av	.3	.4	20	27.76	-	-	50	-22.24
23	24.015	19.12	Pk	.3	.4	20	39.82	60	-20.18	-	-
11	27.12109	30.76	Qp	.4	.4	20	51.56	60	-8.44	-	-
12	27.123	15.14	Av	.4	.4	20	35.94	-	-	50	-14.06

Pk - Peak detector
Av - Average detection
Qp - Quasi-Peak detector
Ca - CISPR average detection

*Note: Markers 9 and 10 are the fundamentals of the device, and not spurious emissions. Section 10.3 shows compliance with an NFC/HF terminated sample.


10.3. Terminated Sample

LINE 1 RESULTS

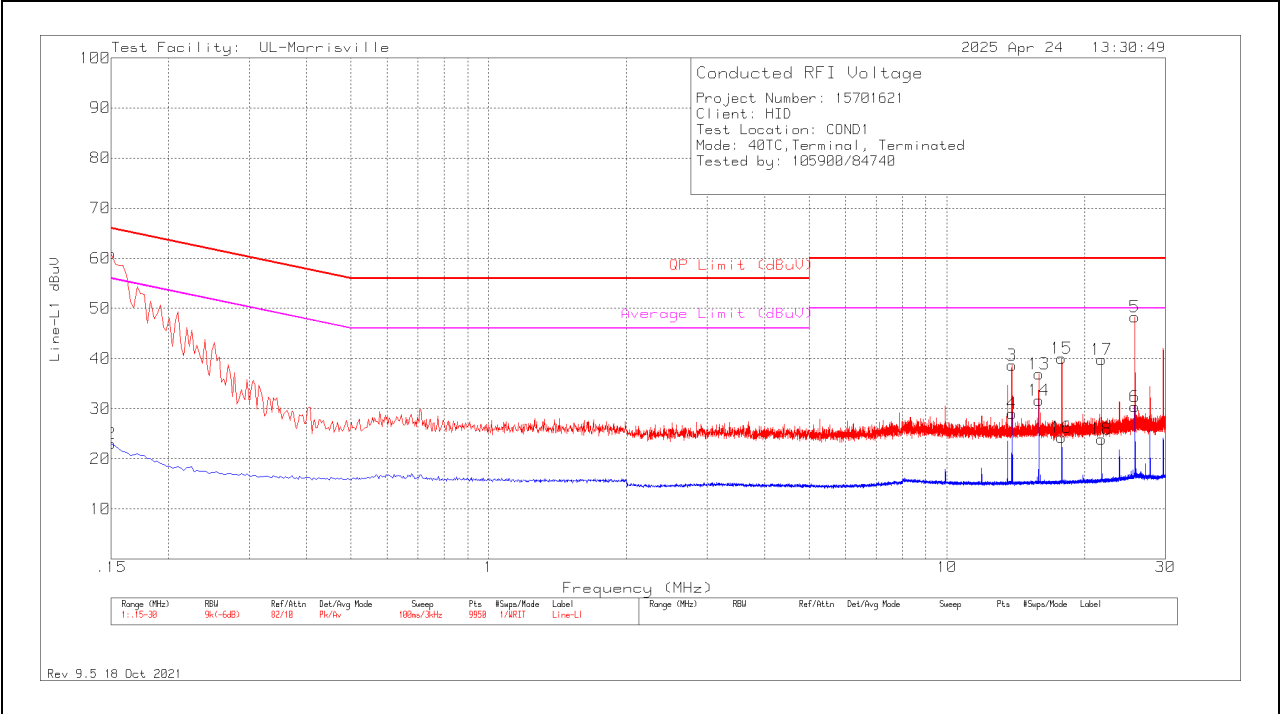

Qp - Quasi-Peak detector
Pk - Peak detector
Av - Average detection

LINE 2 RESULTS

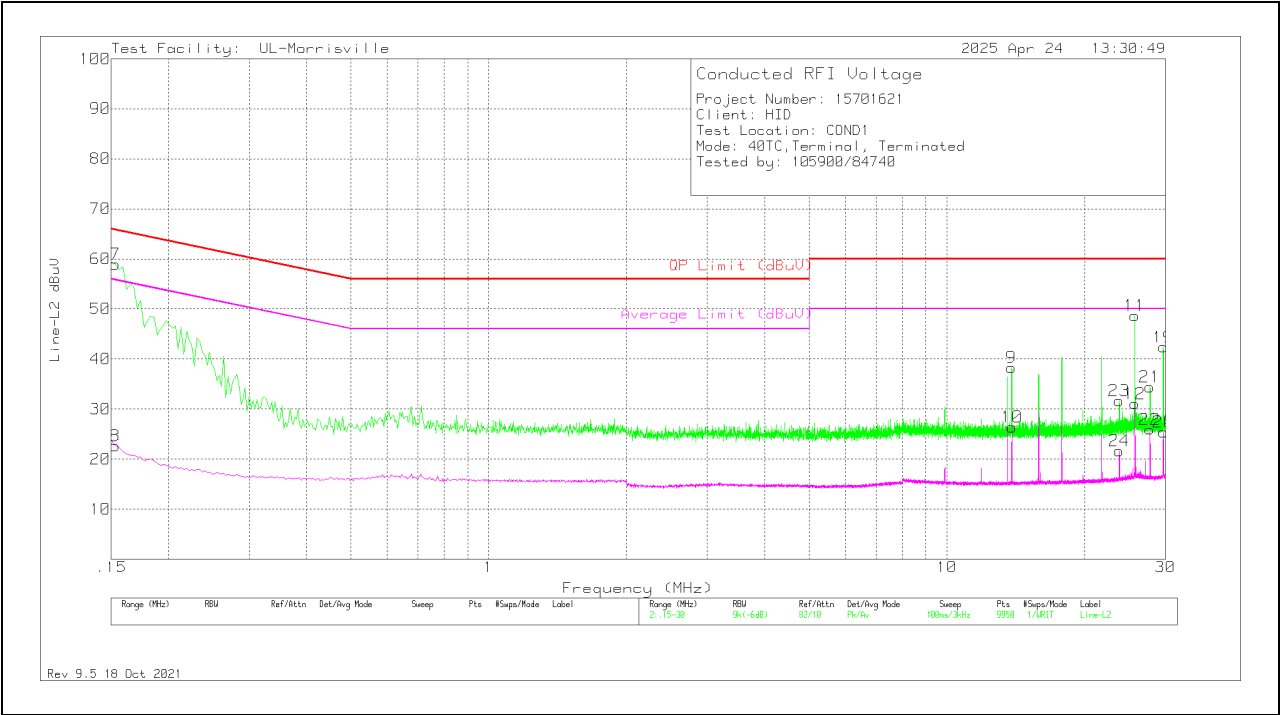

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VDF (dB)	171083 (dB)	Atten (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
7	.153	38.78	Pk	.2	0	20	58.98	65.84	-6.86	-	-
8	.153	2.43	Av	.2	0	20	22.63	-	-	55.84	-33.21
9	13.848	17.94	Pk	.1	.3	20	38.34	60	-21.66	-	-
10	13.884	5.98	Av	.1	.3	20	26.38	-	-	50	-23.62
23	23.778	10.99	Pk	.3	.4	20	31.69	60	-28.31	-	-
24	23.799	.98	Av	.3	.4	20	21.68	-	-	50	-28.32
12	25.71	10.29	Av	.4	.4	20	31.09	-	-	50	-18.91
11	25.731	27.84	Pk	.4	.4	20	48.64	60	-11.36	-	-
21	27.759	13.62	Pk	.4	.4	20	34.42	60	-25.58	-	-
22	27.759	5.16	Av	.4	.4	20	25.96	-	-	50	-24.04
19	29.664	21.37	Pk	.5	.5	20	42.37	60	-17.63	-	-
20	29.67	4.4	Av	.5	.5	20	25.4	-	-	50	-24.6

Pk - Peak detector
Av - Average detection

11. SETUP PHOTOS

Please refer to 15701621-EP1f for setup photos

END OF TEST REPORT