


APPENDIX E


DATA SHEETS




***RF OUTPUT POWER
DATA SHEETS***



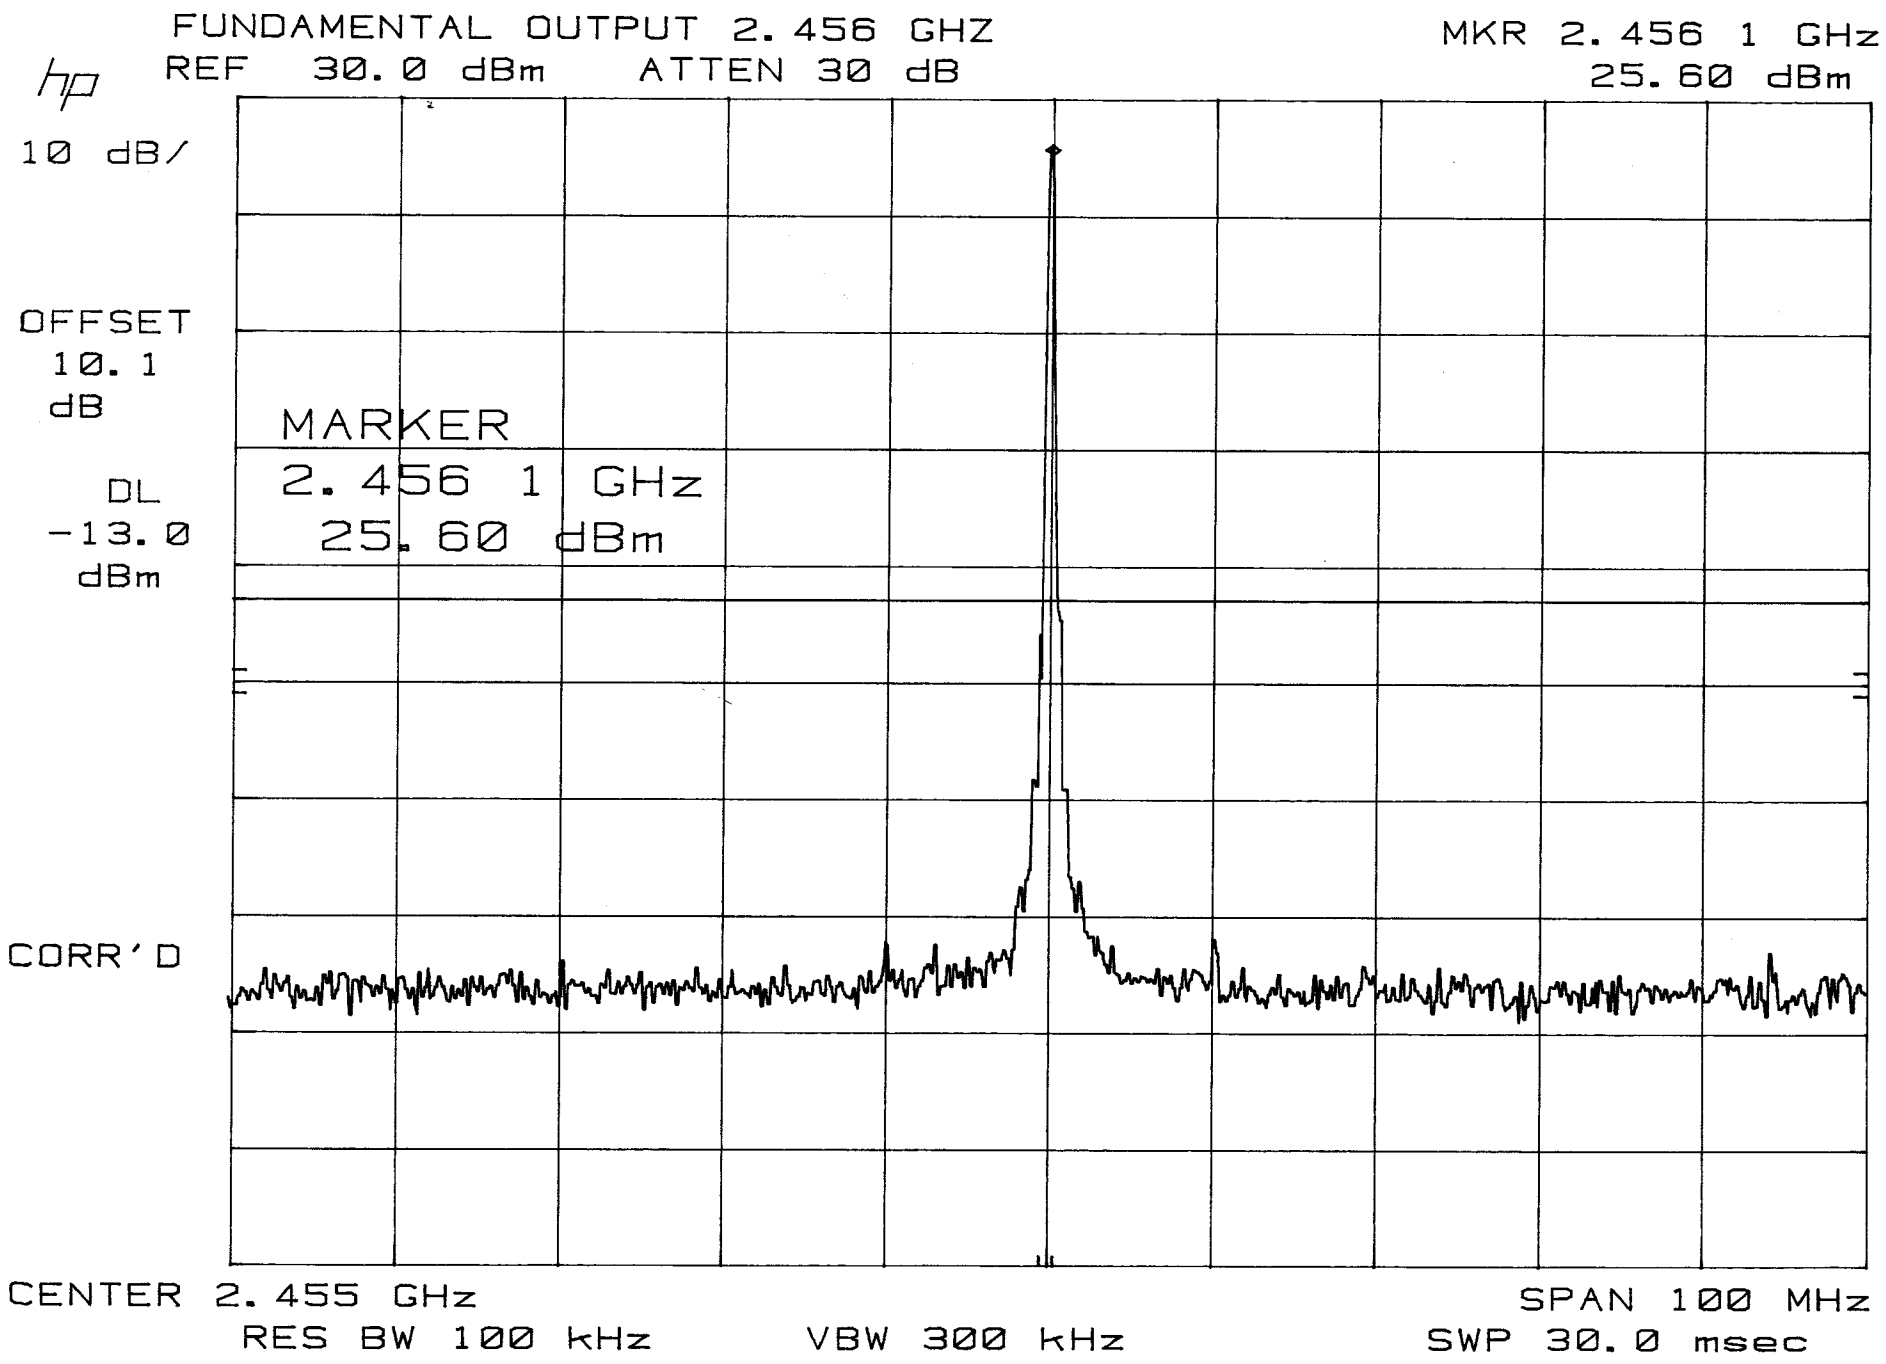

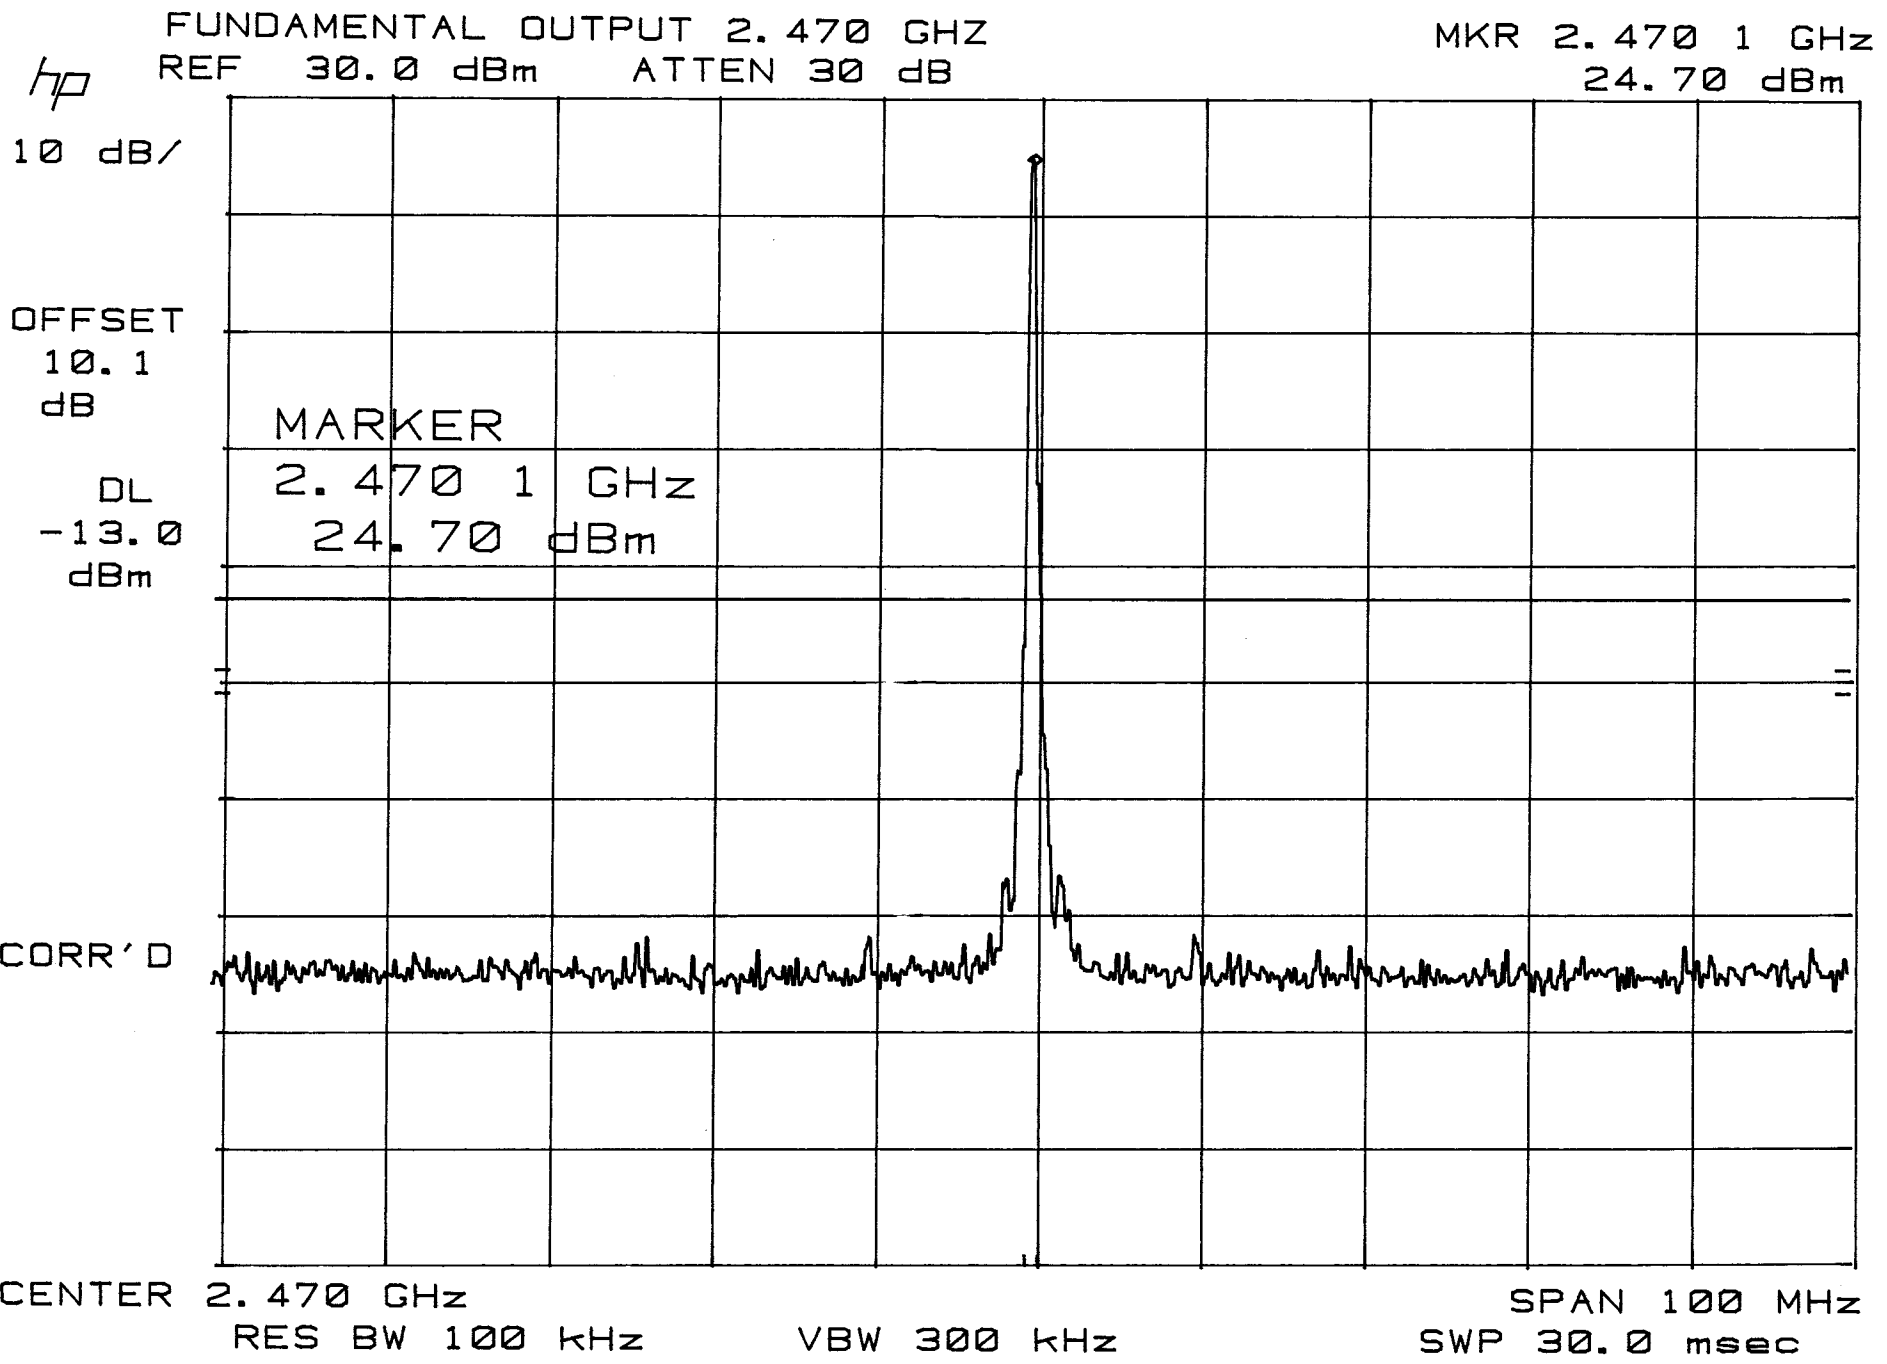

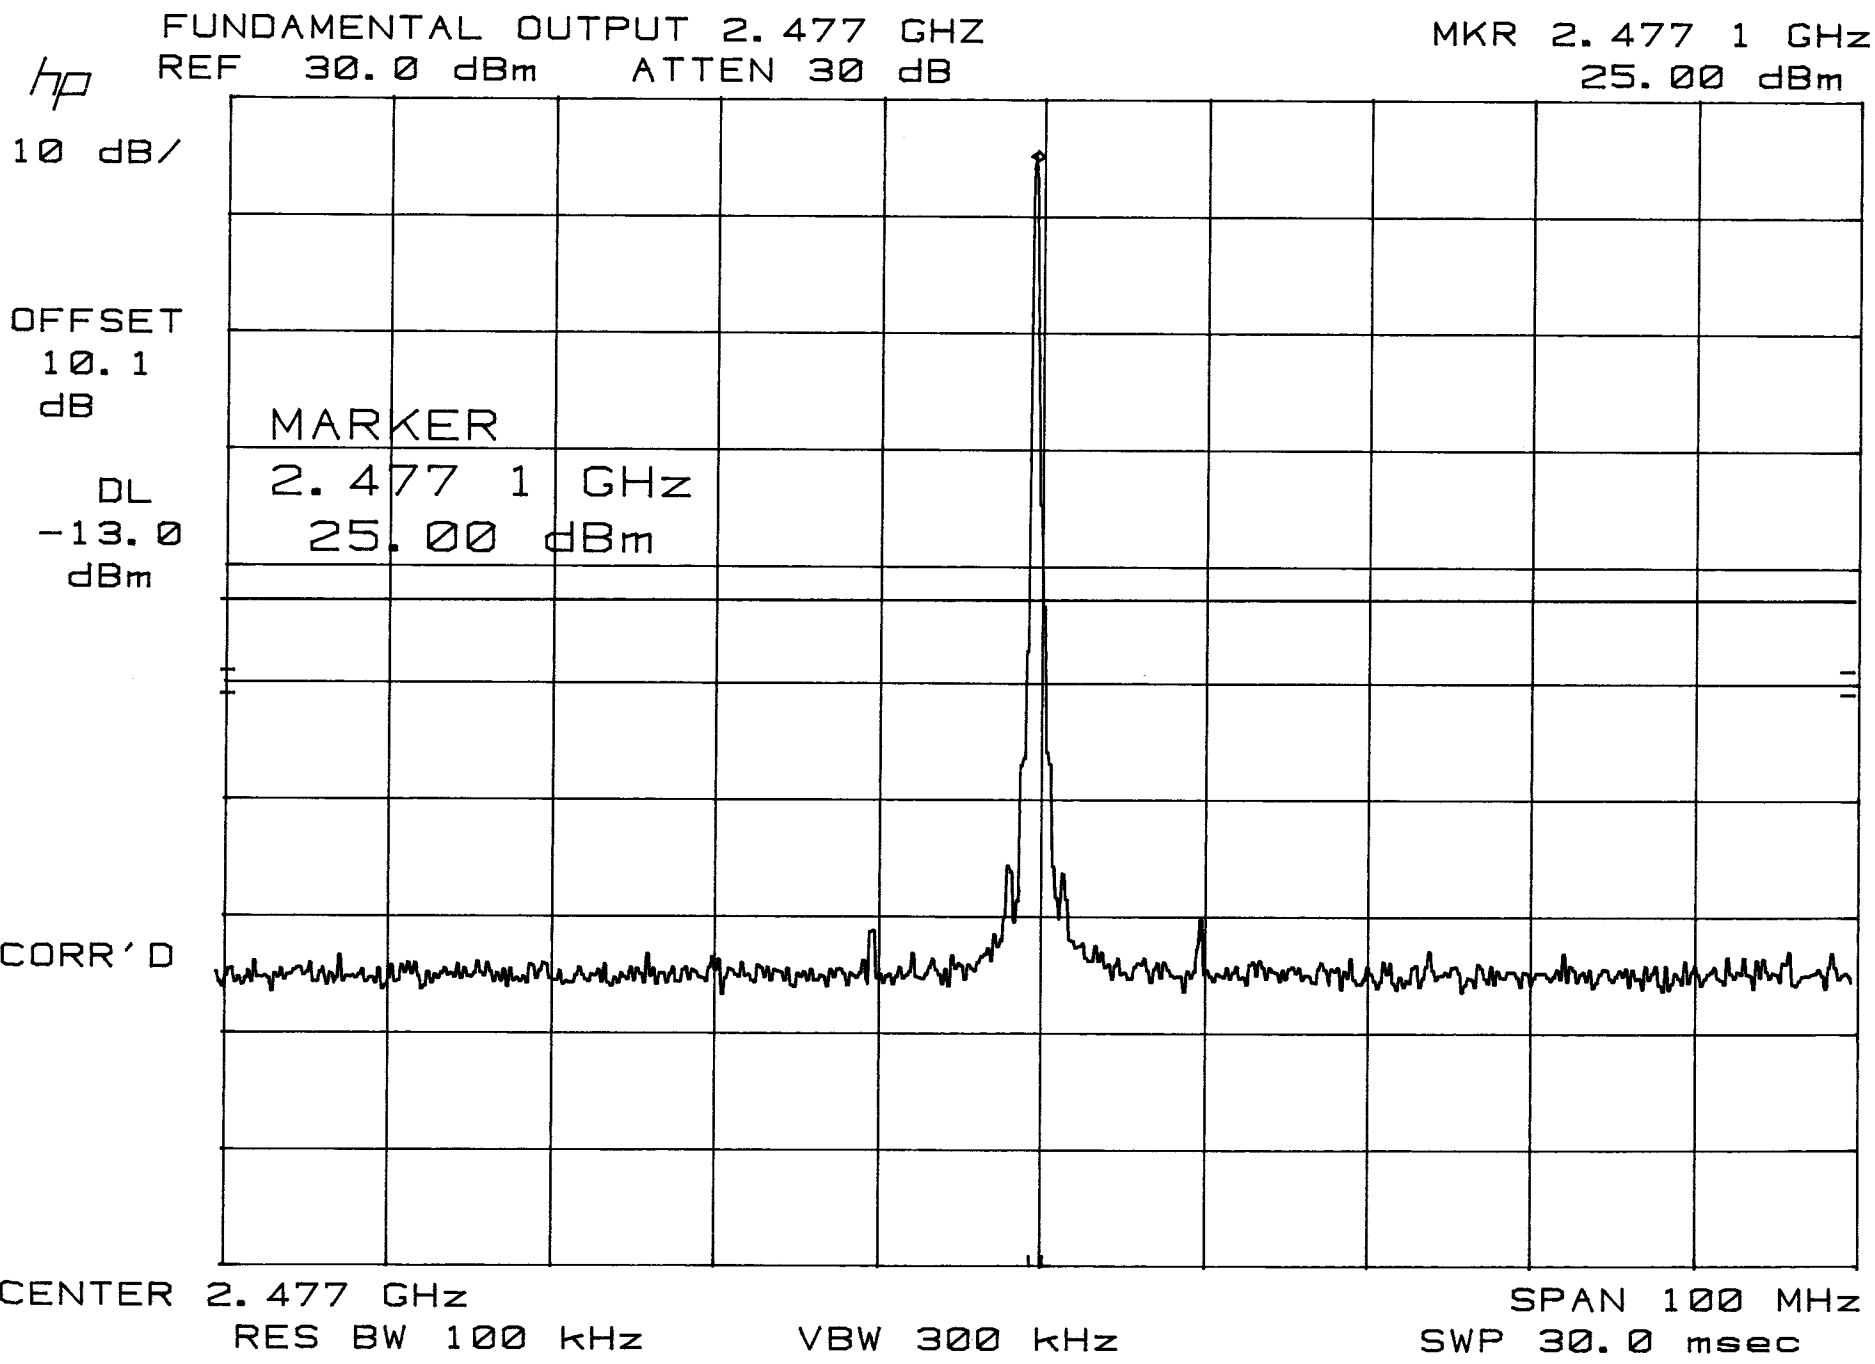

PEAK OUTPUT POWER**MICROTEK ELECTRONICS, INC.****VIDEO TRANSMITTER****MODEL: 2.4THP-90**

CHANNEL	PEAK POWER OUTPUT (Watts)
LOW	0.363
MIDDLE	0.295
HIGH	0.316



***OCCUPIED BANDWIDTH
DATA SHEETS***



MODULATION CHAR. 2.456 GHz
REF 30.0 dBm ATTEN 30 dB

MKR 2.449 3 GHz
-21.90 dBm

hp
10 dB/

OFFSET
10.1
dB

DL
-13.0
dBm


MARKER
2.449 3 GHz
-21.90 dBm

CORR'D

CENTER 2.456 GHz
RES BW 100 kHz

VBW 300 kHz

SPAN 100 MHz
SWP 30.0 msec

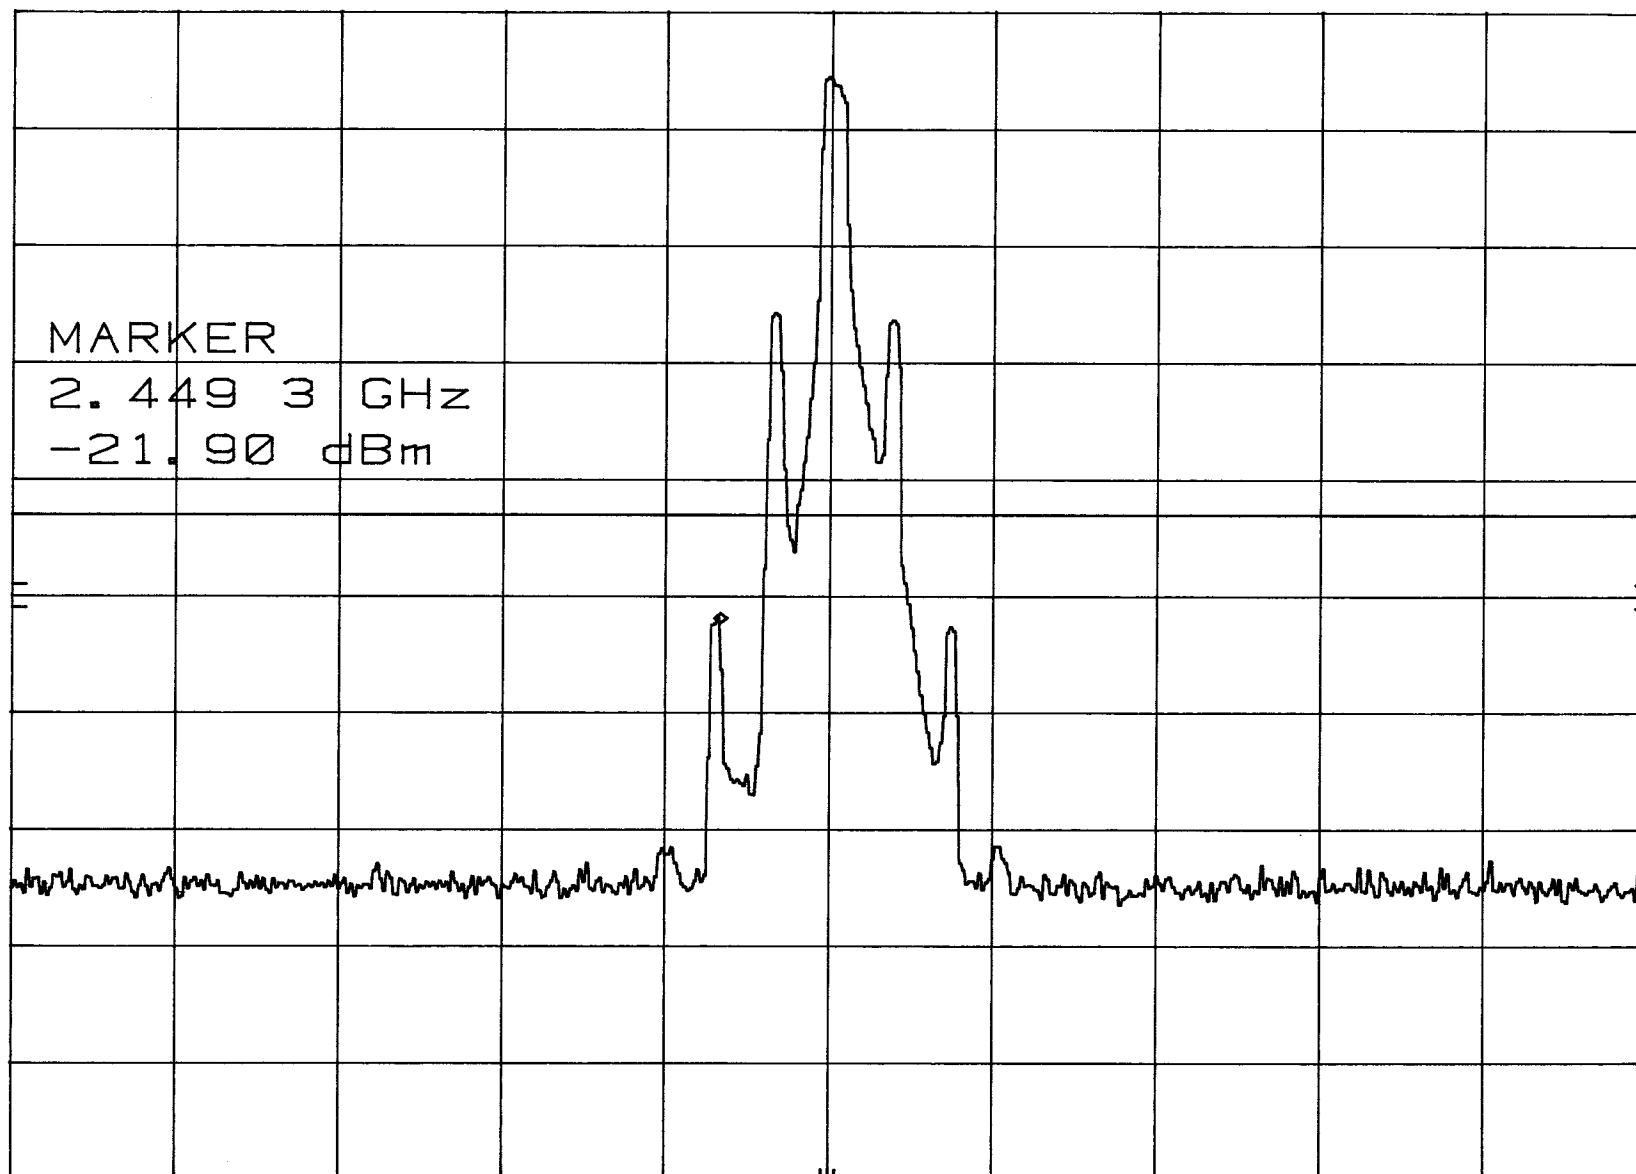

hp

MODULATION CHAR. 2.470 GHz
REF 30.0 dBm ATTN 30 dB

MKR 2.463 1 GHz
-20.40 dBm

10 dB/

OFFSET
10.1
dB

DL
-13.0
dBm

MARKER

2.463 1 GHz
-20.40 dBm


CORR'D

CENTER 2.470 GHz

RES BW 100 kHz

VBW 300 kHz

SPAN 100 MHz
SWP 30.0 msec

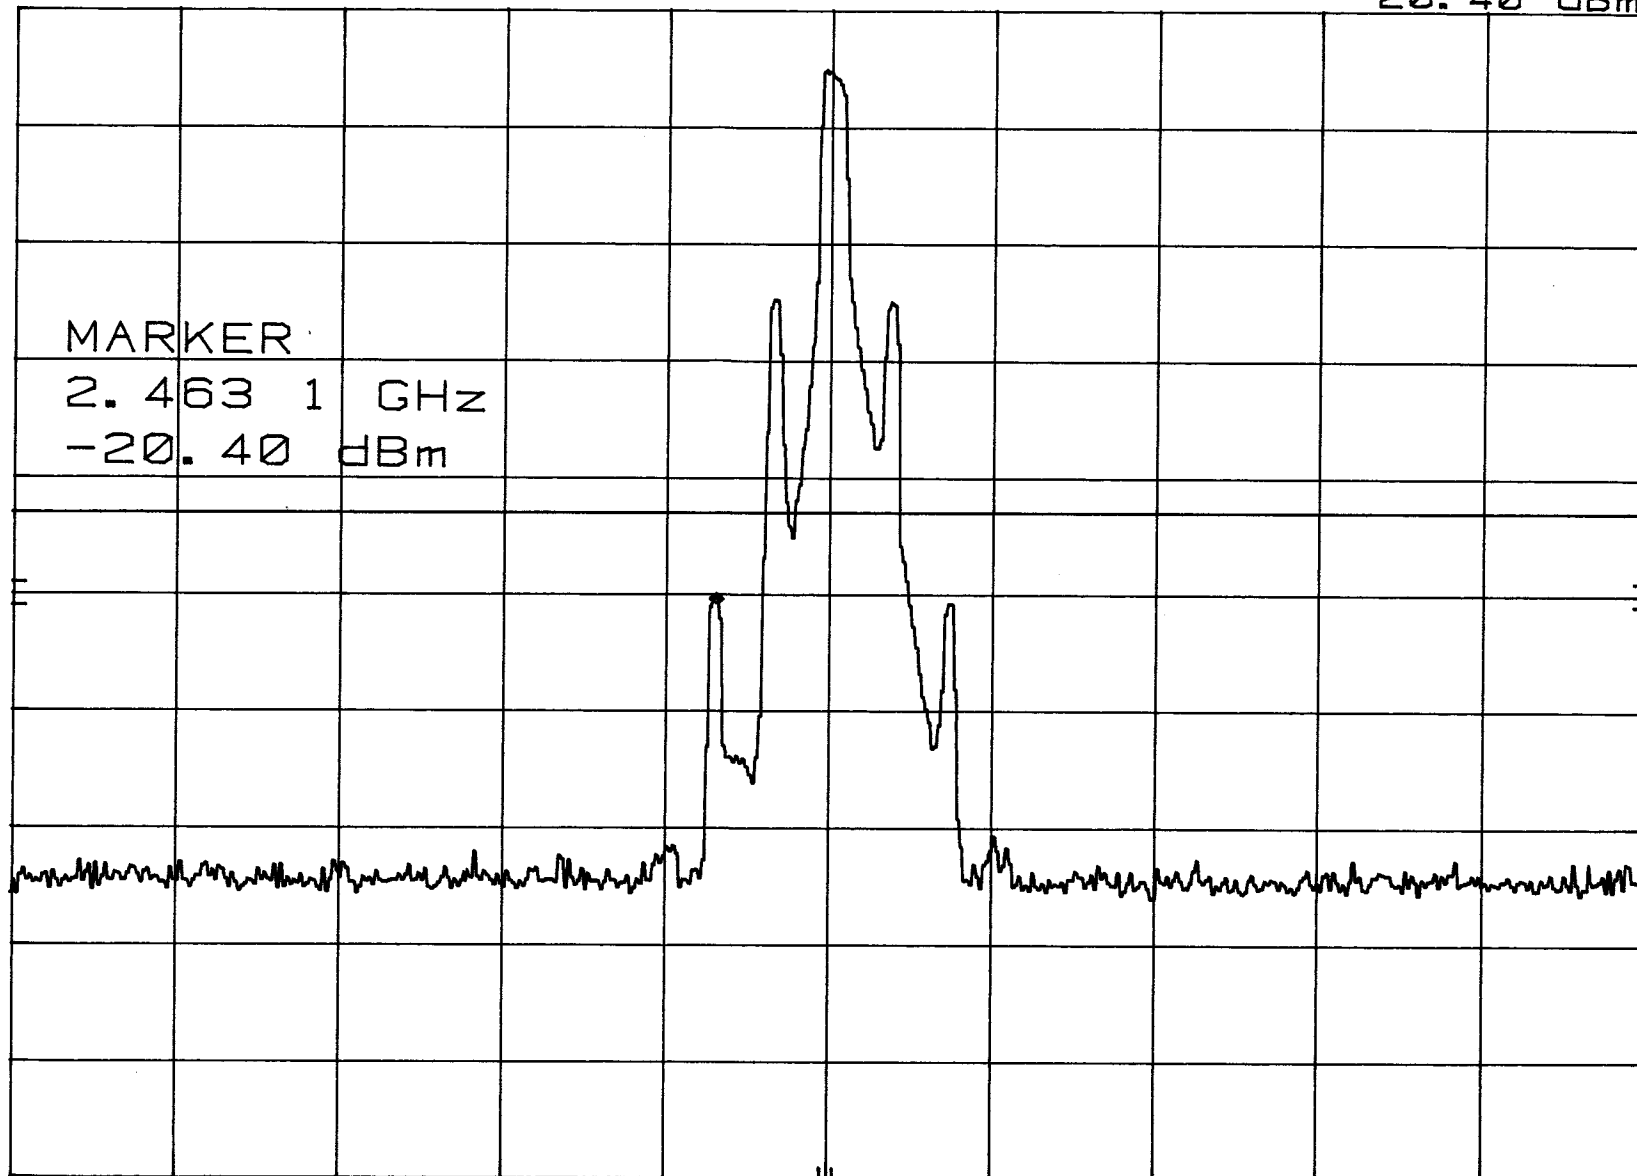

MODULATION CHAR. 2.477 GHz
hp REF 30.0 dBm ATTN 30 dB

MKR 2.484 6 GHz
-21.00 dBm

10 dB/

OFFSET
10.1
dB

DL
-13.0
dBm

MARKER

2.484 6 GHz
-21.00 dBm


CORR'D

CENTER 2.476 GHz

RES BW 100 kHz

VBW 300 kHz

SPAN 100 MHz
SWP 30.0 msec

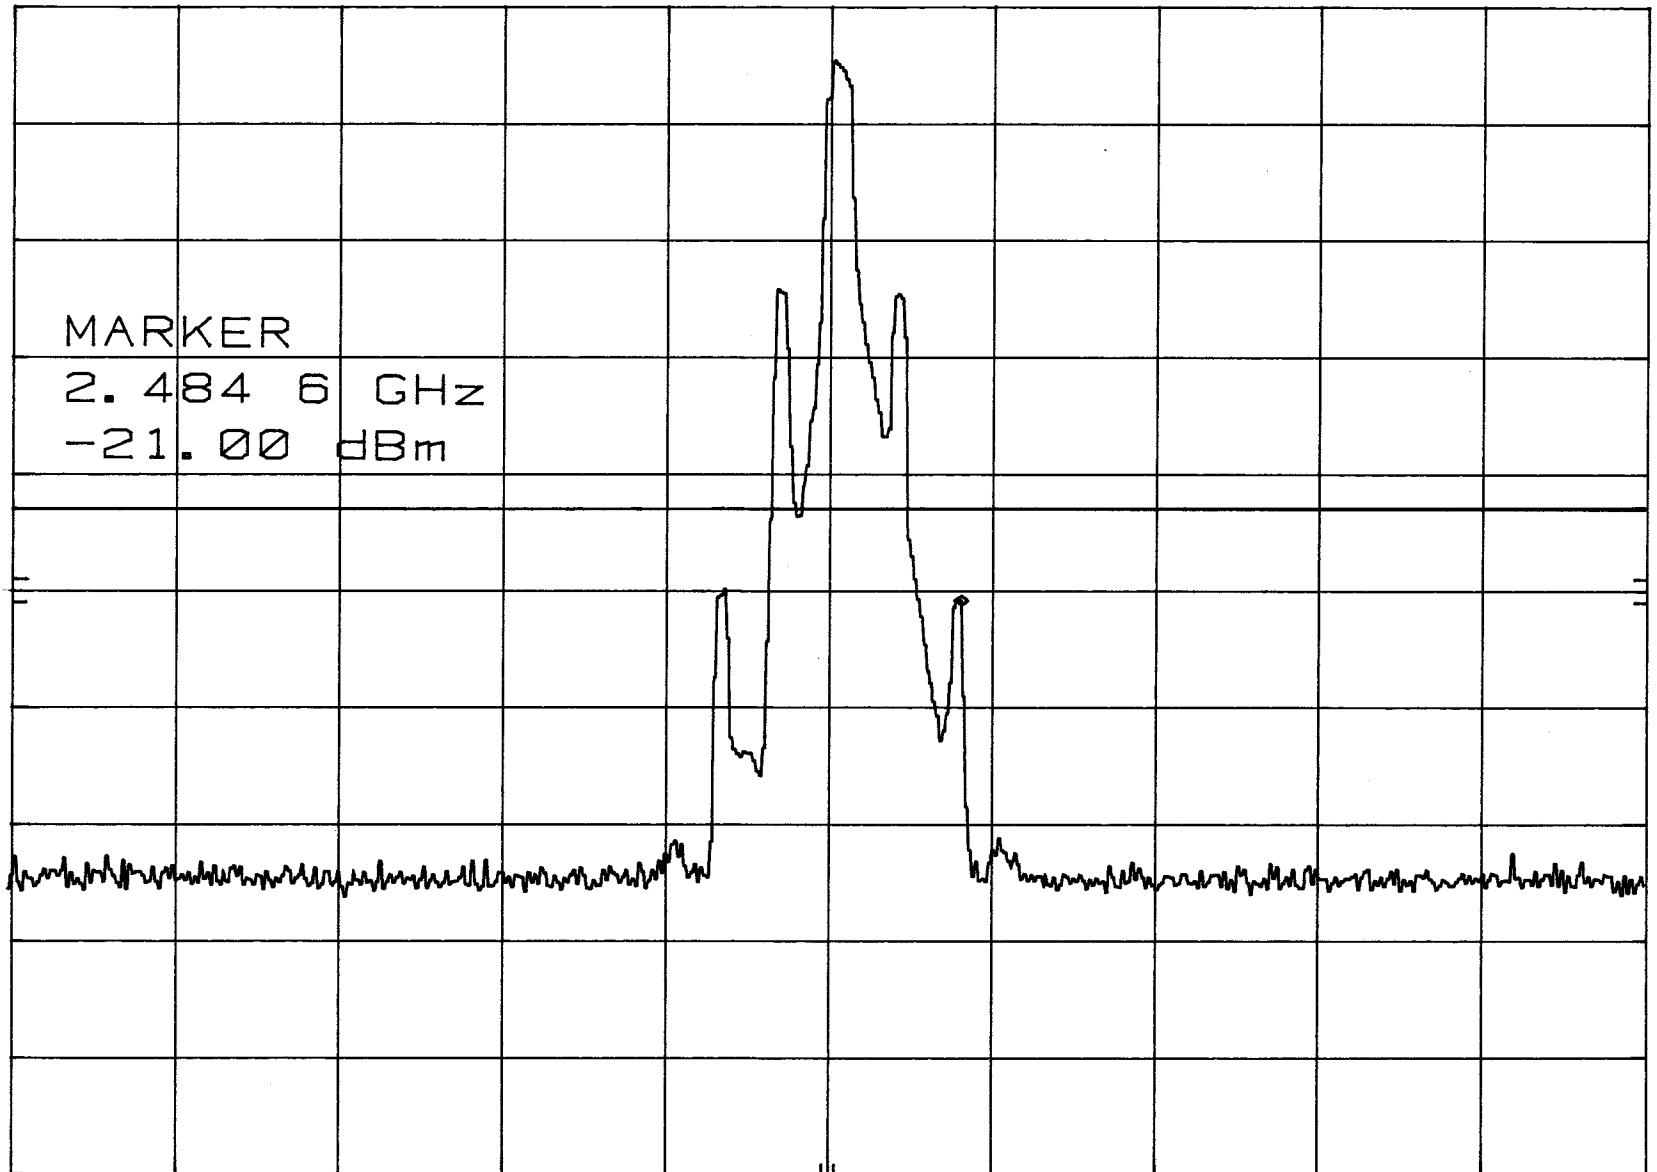

RADIATED EMISSIONS ON THE DIGITAL PORTION
DATA SHEETS



Page: 1 of 1

Test location: Compatible Electronics
Customer : MICROTEK ELECTRONICS, INC. Date : 1/14/2003
Manufacturer : MICROTEK ELECTRONICS, INC. Time : 17.56
EUT name : VIDEO TRANSMITTER Model: 2.4THP-90
Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
Distance correction factor($20 \cdot \log(\text{test}/\text{spec})$) : 0.00
Test Mode :

SPURIOUS EMISSIONS FROM THE DIGITAL PORTION 10 kHz to 25000 MHz
VERTICAL and HORIZONTAL POLARIZATIONS
TEMPERATURE 69 DEGREES F., RELATIVE HUMIDITY 42%
TESTED BY: KYLE FUJIMOTO

NO SPURIOUS EMISSIONS FOUND FROM THE DIGITAL PORTION BETWEEN 10 kHz AND
25000 MHz IN EITHER POLARIZATION FOR THE EUT FROM THE DIGITAL PORTION



***RADIATED SPURIOUS EMISSIONS
ON THE TRANSMITTER PORTION
DATA SHEETS***



FCC Part 90

Microtek Electronics, Inc.

Video Transmitter

Model: 2.4THP-90

Temperature: 16 Degrees Celsius, Relative Humidity 65%

Date: 01/14/03

Lab: D

Tested By: Kyle Fujimoto

Test Description: Operating Mode - Spurious Emissions**Vertical Polarization - Using the Substitution Method**

Freq. (MHz)	Reference Level (dBm)*	Power** (dBm)	Antenna Gain*** (dBi)	Corr'd Power^ (dBm)	Delta (dB)	Power Limit (dBm)
4912.02	-45.9	-34.6	9.55	-25.05	-12.05	-13
7368.03	-59.8	-48.3	8.76	-39.54	-26.54	-13
9824.04	-70.4	-44.9	10.54	-34.36	-21.36	-13
4940	-50.1	-38.2	9.5	-28.7	-15.7	-13
7410	-60.5	-48.6	8.81	-39.79	-26.79	-13
9880	-71.2	-48	10.55	-37.45	-24.45	-13
4954.1	-50.3	-37.7	9.47	-28.23	-15.23	-13
7431	-61.7	-48.6	8.83	-39.77	-26.77	-13
9908	-71.5	-49.5	10.5	-39	-26	-13

*The Reference Level is the meter reading off the Spectrum Analyzer after maximizing the EUT for Field Strength.

** Power = Output of Signal Generator where the signal is injected into the Substitution Ant. The Output of the Signal Generator is obtained when the output matches the Reference Level

*** The gain of the substitution antenna

^ The Corr'd Power (dBm) = Power (dBm) + Antenna Gain (dBi).

No Emissions were Found after the 3rd Harmonic



FCC Part 90

Microtek Electronics, Inc.

Video Transmitter

Model: 2.4THP-90

Temperature: 16 Degrees Celsius, Relative Humidity 65%

Date: 01/14/03

Lab: D

Tested By: Kyle Fujimoto

Test Description: Operating Mode - Spurious Emissions**Horizontal Polarization - Using the Substitution Method**

Freq. (MHz)	Reference Level (dBm)*	Power** (dBm)	Antenna Gain*** (dBi)	Corr'd Power^ (dBm)	Delta (dB)	Power Limit (dBm)
4912.02	-50.5	-35.8	9.55	-26.25	-13.25	-13
7368.03	-59.7	-45.1	8.76	-36.34	-23.34	-13
9824.04	-68.1	-43.7	10.54	-33.16	-20.16	-13
4940	-50.4	-36.9	9.5	-27.4	-14.4	-13
7410	-59.8	-45.3	8.81	-36.49	-23.49	-13
9880	-69.9	-43.5	10.55	-32.95	-19.95	-13
4954.1	-50.7	-36.3	9.47	-26.83	-13.83	-13
7431	-59.5	-43.8	8.83	-34.97	-21.97	-13
9908	-69.4	-43.5	10.5	-33	-20	-13

*The Reference Level is the meter reading off the Spectrum Analyzer after maximizing the EUT for Field Strength.

** Power = Output of Signal Generator where the signal is injected into the Substitution Ant. The Output of the Signal Generator is obtained when the output matches the Reference Level

*** The gain of the substitution antenna

^ The Corr'd Power (dBm) = Power (dBm) + Antenna Gain (dBi).

No Emissions were Found after the 3rd Harmonic



SPURIOUS EMISSIONS AT THE ANTENNA TERMINAL
DATA SHEETS




hp CONDUCTED SPURIOUS 2.456 GHZ MKR 1.706 GHz
REF 30.0 dBm ATTN 30 dB -42.90 dBm

10 dB/

OFFSET
10.1
dB

DL
17.0
dBm

CORR'D

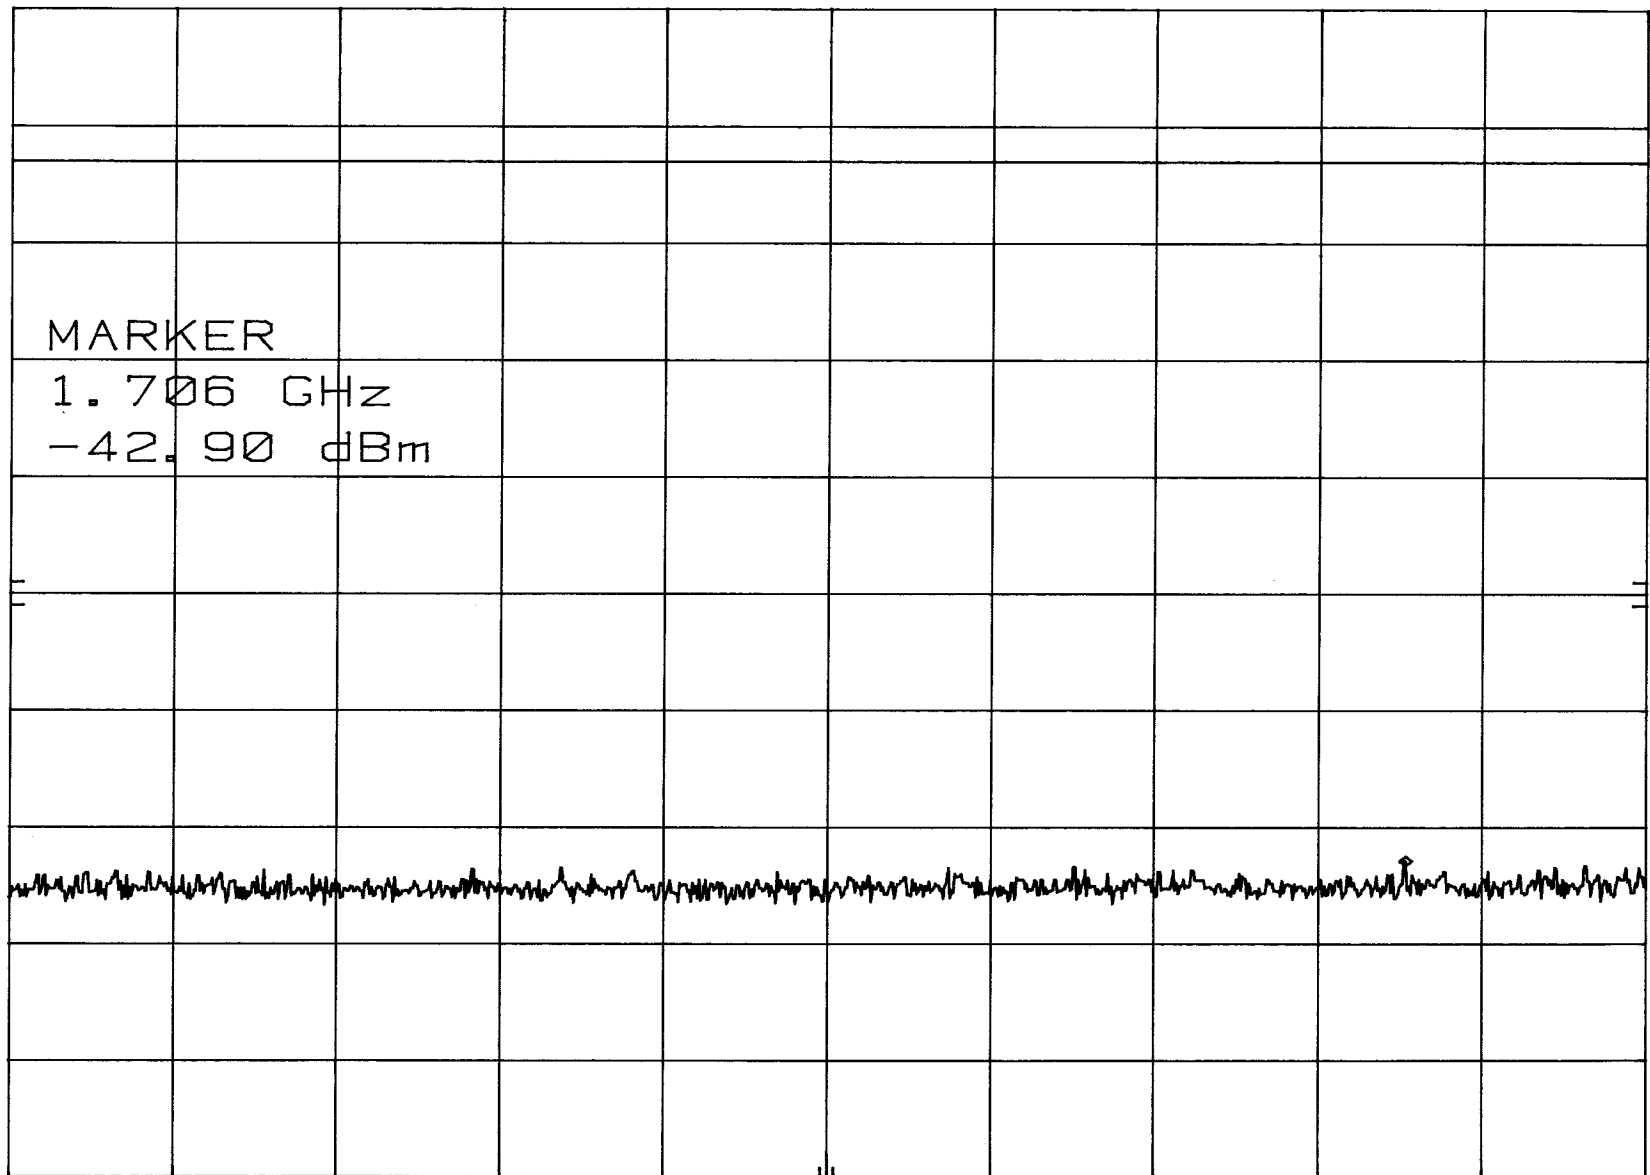

START 2 MHz RES BW 100 kHz VBW 300 kHz STOP 2.00 GHz
SWP 599 msec