

**Equipment Under Test:  
(EUT)** 970, 971, 972, 973  
Proximity Reader

**In Accordance With:** FCC Part 15, Subpart C, 15.209

**Tested By:** Nemko Canada Inc.  
3325 River Road, R.R. 5  
Ottawa, Ontario K1V 1H2

**Authorized By:**

A handwritten signature in blue ink, appearing to read 'G. Westwell'.

G. Westwell, Wireless Technologist

**Date:** January 15, 2002

**Total Number of Pages:** 11

**Authorized Copy:** Soft Copy

---

## Table Of Contents

<b>Section 1. Summary Of Test Results.....</b>	<b>3</b>
<b>Section 2. General Equipment Specification .....</b>	<b>5</b>
<b>Section 3. Radiated Emissions.....</b>	<b>7</b>
<b>Section 4. Block Diagrams.....</b>	<b>10</b>
<b>Section 5. Test Equipment List .....</b>	<b>11</b>

---

## Section 1.      Summary Of Test Results

### General

#### All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Subpart C for low power devices. All tests were conducted using measurement procedure ANSI C63.4-1992. Radiated Emissions were made on an open area test site. A description of the test facility is on file with the FCC.

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



TESTED BY:

Russell Grant, Wireless Group Manager

DATE: January 11, 2002

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation. The results apply only to the samples tested.

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

**Summary Of Test Data**

Name Of Test	Para. No.	Result
Powerline Conducted Emissions	15.207	N/A
Radiated Emissions	15.209	Complies

**Footnotes For N/A's:** 12 VDC external power supply.**Test Conditions:****Indoor** Temperature: 20 °C  
Humidity: 60 %**Outdoor** Temperature: 20 °C  
Humidity: 60 %

---

**Section 2. General Equipment Specification****Manufacturer:** Casi Rusco**Model No.:** 970**Serial No.:** H03302 25/01**Date Received In Laboratory:** July 17, 2001**Nemko Identification No.:** Item #1**Tx:** 125 kHz**Emission Designator:** NON


**Nemko Canada Inc.**

FCC PART 15, SUBPART C, 15.209

PROJECT NO.: 2W04609

*EQUIPMENT: 970, 971, 972, 973 - Proximity Reader*

---

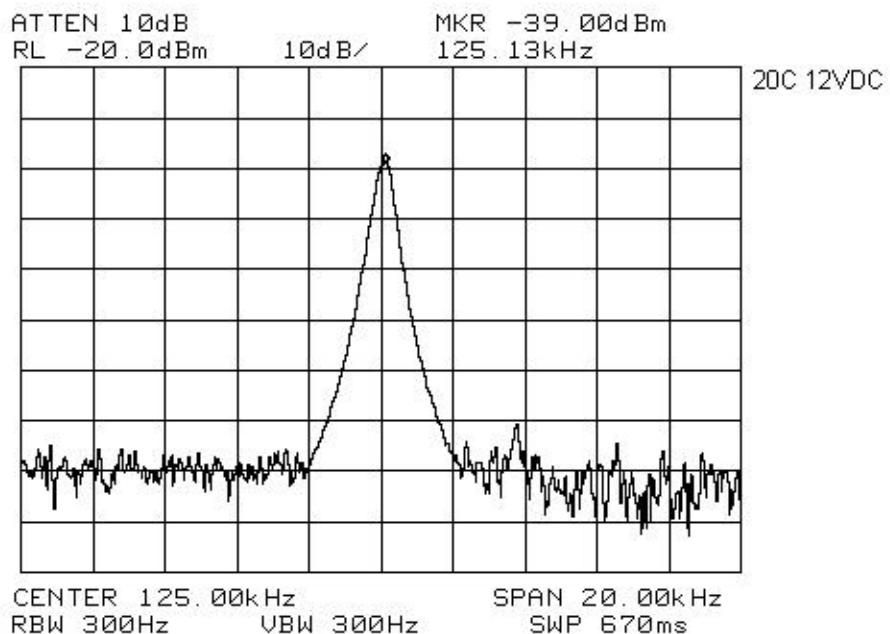

**Section 3. Radiated Emissions****Para. No.: 15.209****Test Performed By:** Russell Grant**Date of Test:** September 20, 2001**Minimum Standard:**

<b>Fundamental (MHz)</b>	<b>Field Strength (<math>\mu</math>V/m)</b>	<b>Field Strength (dB<math>\mu</math>V)</b>
0.009 - 0.490	2400/F(kHz) @ 300m	—
0.490 - 1.705	24000/F(kHz) @ 30m	—
1.705 - 30	30 @ 30m	—
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

**Test Results:** Complies.**Measurement Data:** See attached table.

*EQUIPMENT: 970, 971, 972, 973 - Proximity Reader***Test Data - Radiated Emissions**

Frequency of Emission (MHz)	Received Signal (dBuV/m@2m)	Received Signal (dBuV/m@4m)	Extrapolated Signal (dBuV/m)	Limit (dBuV/m)	Margin (dB)
0.125	111.2	92.8	-21.8	25.7	47.5
0.250	56.8	37.4	-83.4	19.6	103.1
0.375	62.7	44.1	-71.8	16.1	87.9
0.500	40.4		-115.9	33.6	149.5
0.625	42.4	24.5	-27.5	31.7	59.2
0.750	31.4		-124.9	30.1	155.0
0.875	44.9	28.0	-21.1	28.8	49.9
1.125	40.7		-115.6	26.6	142.2
1.375	40.7	21.2	-35.5	24.8	60.3
1.625	40.0	21.8	-31.1	23.4	54.5
1.750	17.0		-139.3	29.5	168.8
1.875	37.8	19.6	-33.3	29.5	62.8
2.125	37.2	19.8	-30.8	29.5	60.3
2.375	35.4	18.2	-31.8	29.5	61.3
2.625	33.2	16.8	-30.9	29.5	60.4
2.875	33.1	16.7	-31.0	29.5	60.5
3.125	33.0	16.8	-30.3	29.5	59.8
3.375	32.9	16.1	-32.7	29.5	62.3
3.875	30.7	14.0	-34.5	29.5	64.1

**Notes:**

Emissions measured at 2m only were extrapolated to 10m using 40dB/decade.

Measured: Active Loop Antenna, 10 kHz RBW, Peak Detector

Test Distance (meters) : 3		Range: A Tower		Receiver: E8VP		RBW(kHz): 120		Detector: Q-Peak	
Freq. (MHz)	Ant. *	Pol. (V/H)	RCVD Signal (dB $\mu$ V/m)	Ant. Factor (dB)**	Amp. Gain (dB)***	Dist. Corr. (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
176.0	B/C1	V	20.0	13.8			33.8	43.5	9.7
176.0	B/C1	H	22.0	13.8			35.8	43.5	7.7
214.0	B/C1	V	20.0	16.6			36.6	43.5	6.9
214.0	B/C1	H	25.0	16.6			41.6	43.5	1.9

**Notes:**

B/C = Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole

\* Re-measured using dipole antenna.

\*\* Includes cable loss when amplifier is not used.


\*\*\* Includes cable loss.



( ) Denotes failing emission level.

N.D. = Not Detected

**Radiated Emissions Photographs**

**Front View**

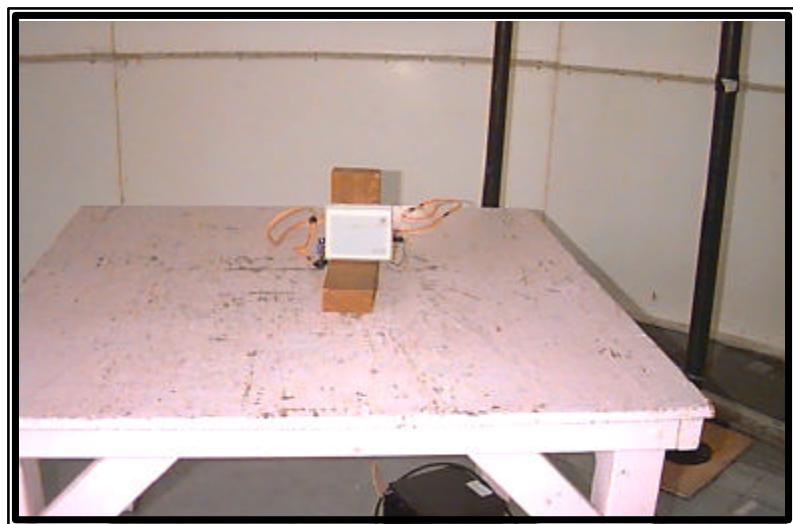

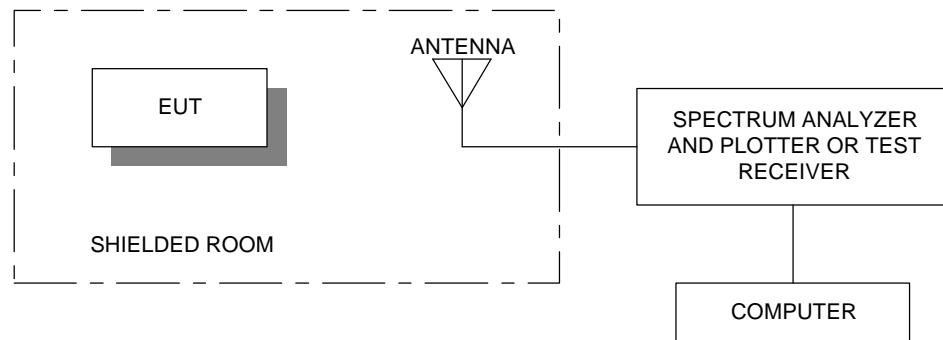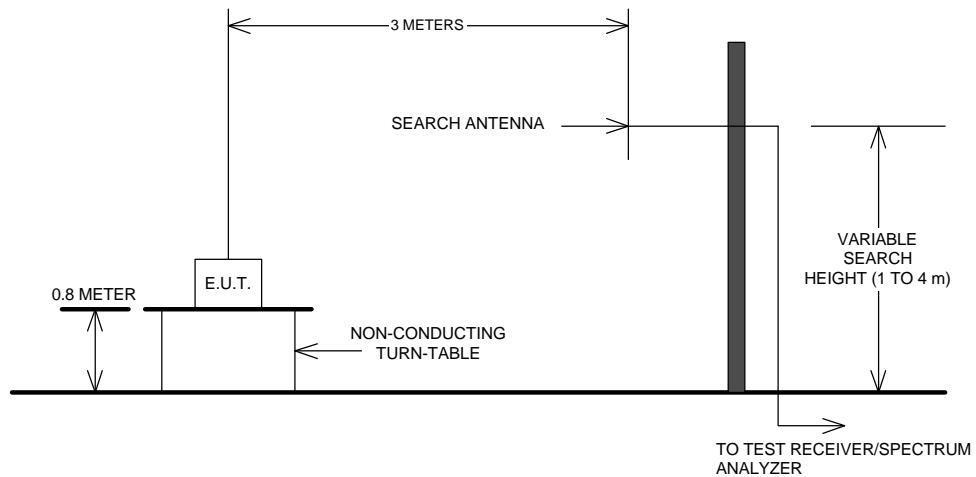**Section 4. Block Diagrams****Radiated Prescan****Test Site For Radiated Emissions**

**Section 5. Test Equipment List**

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	June 08/01	June 08/02
1 Year	Receiver	Rohde & Schwarz	ESH3	892473/002	Jan. 3/01	Jan. 3/02
1 Year	Receiver	Rohde & Schwarz	ESVP	892661/014	Apr. 3/01	Apr. 3/02
1 Year	Log Periodic Antenna 1	EMCO	LPA-25	1141	Aug. 28/01	Aug. 28/02
1 Year	Biconical (1) Antenna	EMCO	3109	9204-2708	Aug. 22/01	Aug. 22/02
1 Year	Active Loop Antenna	Rohde & Schwarz	HFH2-Z2	FA000631	March 20/01	March 20/02

NA: Not Applicable

NCR: No Cal Required

COU: CAL On Use