

# FCC Test Report

APPLICANT : Trimble Navigation Ltd.  
EQUIPMENT : PDA  
BRAND NAME : Trimble  
MODEL NAME : Juno SA  
FCC ID : JUP66430  
STANDARD : FCC 47 CFR FCC Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Nov. 19, 2010 and completely tested on Dec. 01, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Anderson Chiu / Deputy Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Feature of Equipment Under Test..... 5

    1.4. Test Site ..... 6

    1.5. Applied Standards ..... 6

    1.6. Ancillary Equipment List..... 6

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

    2.1. Test Mode ..... 7

    2.2. Connection Diagram of Test System ..... 8

    2.3. Test Software ..... 8

**3. TEST RESULT ..... 9**

    3.1. Test of AC Conducted Emission Measurement ..... 9

    3.2. Test of Radiated Emission Measurement ..... 13

**4. LIST OF MEASURING EQUIPMENT ..... 17**

**5. UNCERTAINTY OF EVALUATION ..... 18**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC801703-03	Rev. 01	Initial issue of report	Dec. 06, 2010



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	7.2.2	AC Conducted Emission	< 15.107 limits < RSS-Gen table 2 limits	PASS	Under limit 7.4 dB at 0.422 MHz
3.2	15.109	7.2.3.2	Radiated Emission	< 15.109 limits or < RSS-Gen table 1 limits (Section 6)	PASS	Under limit 3.46 dB at 300.00 MHz



# 1. General Description

## 1.1. Applicant

Trimble Navigation Ltd.  
No. 935, Stewart Drive, Sunnyvale, CA94088-3642, U.S.A.

## 1.2. Manufacturer

GOLDTEK Technology Co., Ltd.  
3F., No. 3, Ln. 768, Sec. 4, Pateh Rd., Taipei 115, Taiwan, R.O.C.

## 1.3. Feature of Equipment Under Test

Product Feature & Specification	
Equipment	PDA
Brand Name	Trimble
Model Name	Juno SA
FCC ID	JUP66430
Rx Frequency Range	1.57542 GHz
Antenna Type	Fixed Internal Antenna
HW Version	1.0
SW Version	1.0
Type of Modulation	BPSK
EUT Stage	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4. Test Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO05-HY	03CH07-HY	722060/4086B-1

### 1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC RSS-Gen Issue 2

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

### 1.6. Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
4.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A

## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition	
		EMI AC	EMI RE
1.	Operating Mode (EUT with notebook)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>


**Abbreviations:**

- EMI AC: AC conducted emissions
- EMI RE: EUT radiated emissions

**Note 1:** Testing for this mode is not required or not the worst case.

Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1	Mode 1: GPS Rx + MP3 + USB Cable (Link with Notebook)
Radiated Emissions	1	Mode 1: GPS Rx + MP3 + USB Cable (Link with Notebook)

## 2.2. Connection Diagram of Test System

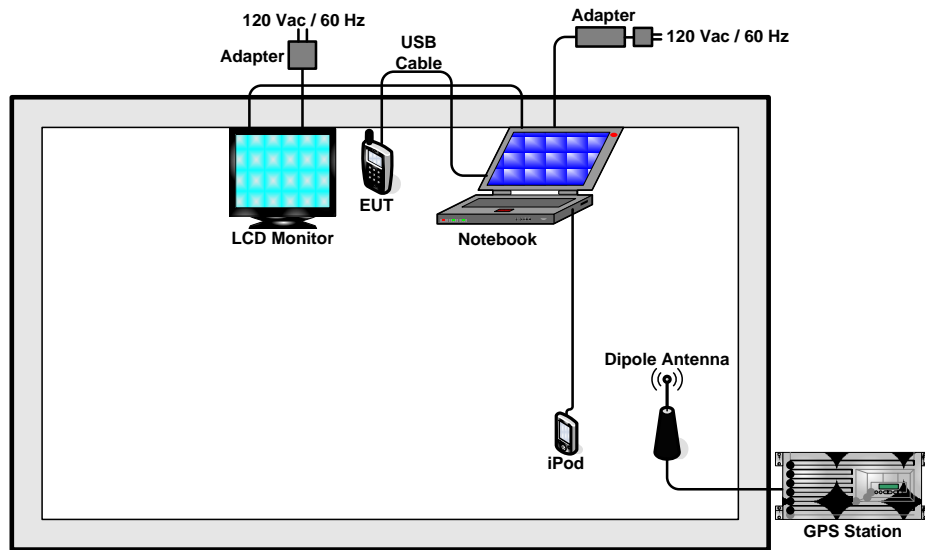

## 2.3. Test Software

The EUT was executed program, "mGpsCmd" to make the EUT receive signals from GPS station continuously, and the following programs installed in the EUT were programmed during the test.

1. Execute the program, "Activesync.exe", installed in notebook for active sync files transfer with EUT via USB cable.
2. Execute "Music Player" to play MP3 file.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.1.4 Test Setup

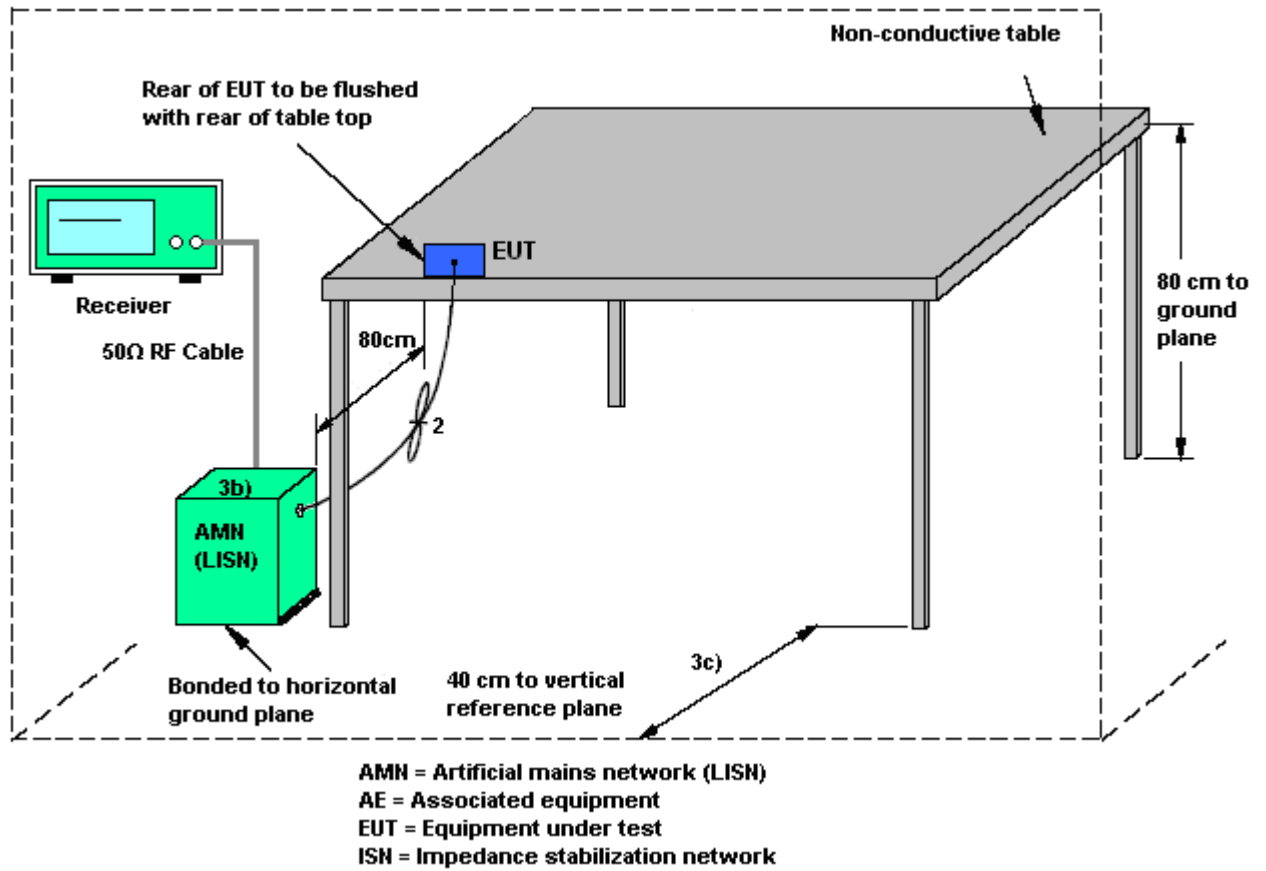

### 3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Hayden Wu	Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GPS Rx + MP3 + USB Cable (Link with Notebook)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

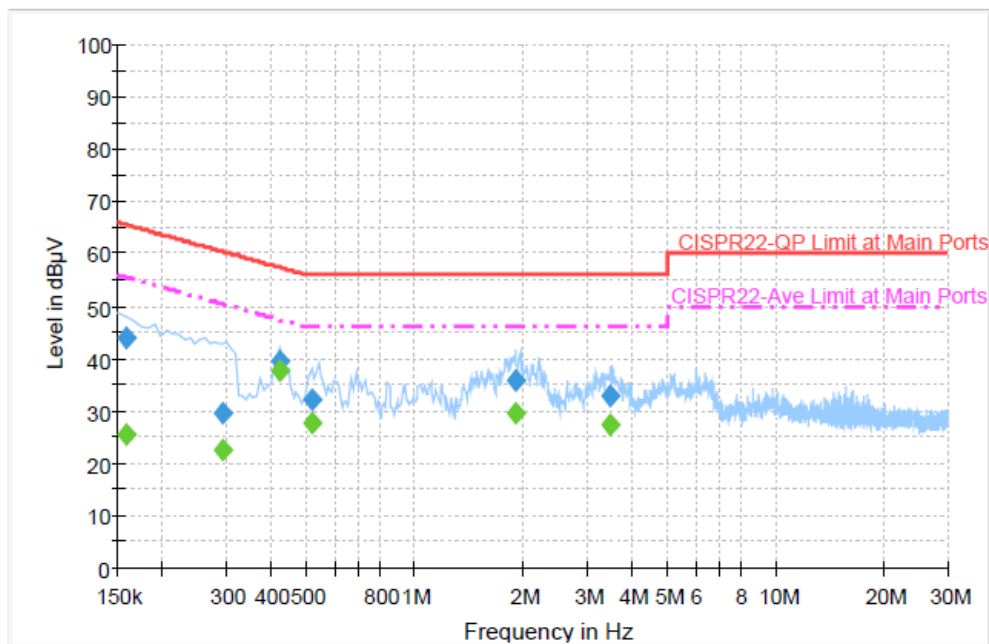


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	43.9	Off	L1	19.3	21.7	65.6
0.294000	29.6	Off	L1	19.3	30.8	60.4
0.422000	39.6	Off	L1	19.4	17.8	57.4
0.518000	32.0	Off	L1	19.3	24.0	56.0
1.902000	35.8	Off	L1	19.5	20.2	56.0
3.478000	33.0	Off	L1	19.5	23.0	56.0

#### Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	25.3	Off	L1	19.3	30.3	55.6
0.294000	22.4	Off	L1	19.3	28.0	50.4
0.422000	37.8	Off	L1	19.4	9.6	47.4
0.518000	27.5	Off	L1	19.3	18.5	46.0
1.902000	29.7	Off	L1	19.5	16.3	46.0
3.478000	27.1	Off	L1	19.5	18.9	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Hayden Wu	Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GPS Rx + MP3 + USB Cable (Link with Notebook)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

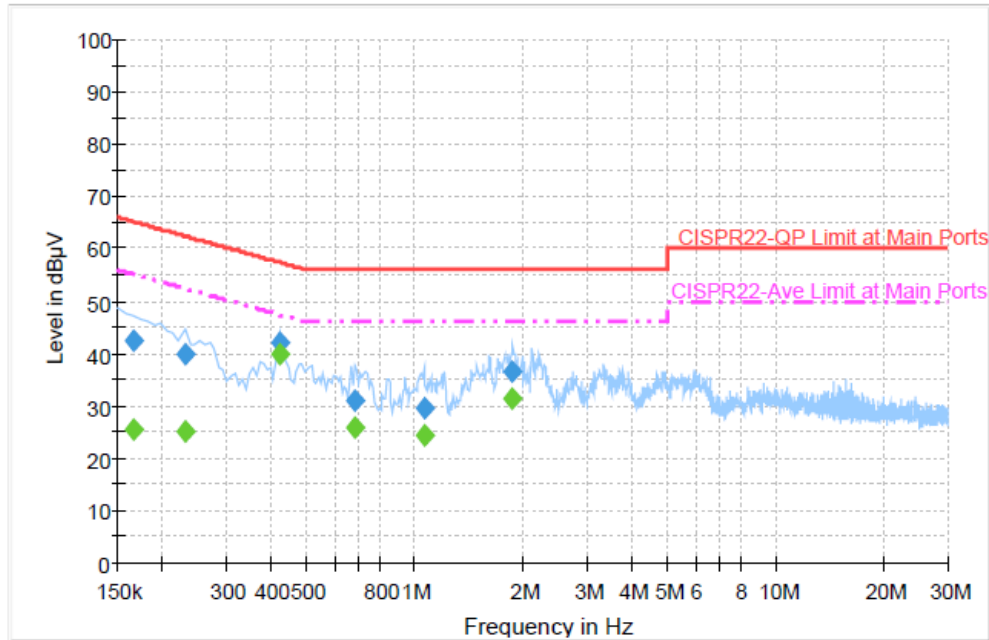

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	42.6	Off	N	19.3	22.6	65.2
0.230000	40.0	Off	N	19.4	22.4	62.4
0.422000	42.0	Off	N	19.4	15.4	57.4
0.686000	31.1	Off	N	19.5	24.9	56.0
1.062000	29.5	Off	N	19.4	26.5	56.0
1.870000	36.7	Off	N	19.4	19.3	56.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	25.3	Off	N	19.3	29.9	55.2
0.230000	25.2	Off	N	19.4	27.2	52.4
0.422000	40.0	Off	N	19.4	7.4	47.4
0.686000	25.8	Off	N	19.5	20.2	46.0
1.062000	24.5	Off	N	19.4	21.5	46.0
1.870000	31.3	Off	N	19.4	14.7	46.0



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


#### 3.2.2. Measuring Instruments

See list of measuring instruments of this test report.

**3.2.3. Test Procedures**

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


**3.2.4. Test Setup of Radiated Emission**

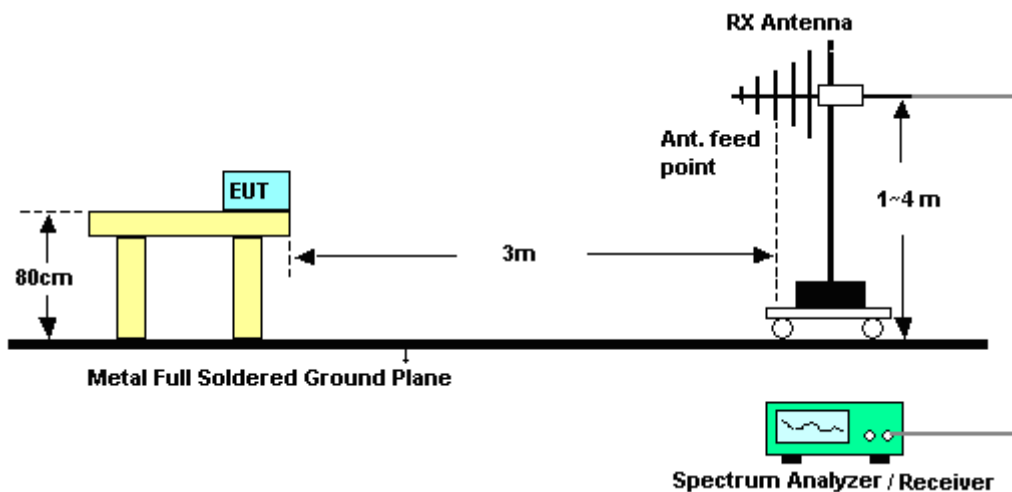




3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	David Yang	Relative Humidity :	47~48%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GPS Rx + MP3 + USB Cable (Link with Notebook)		

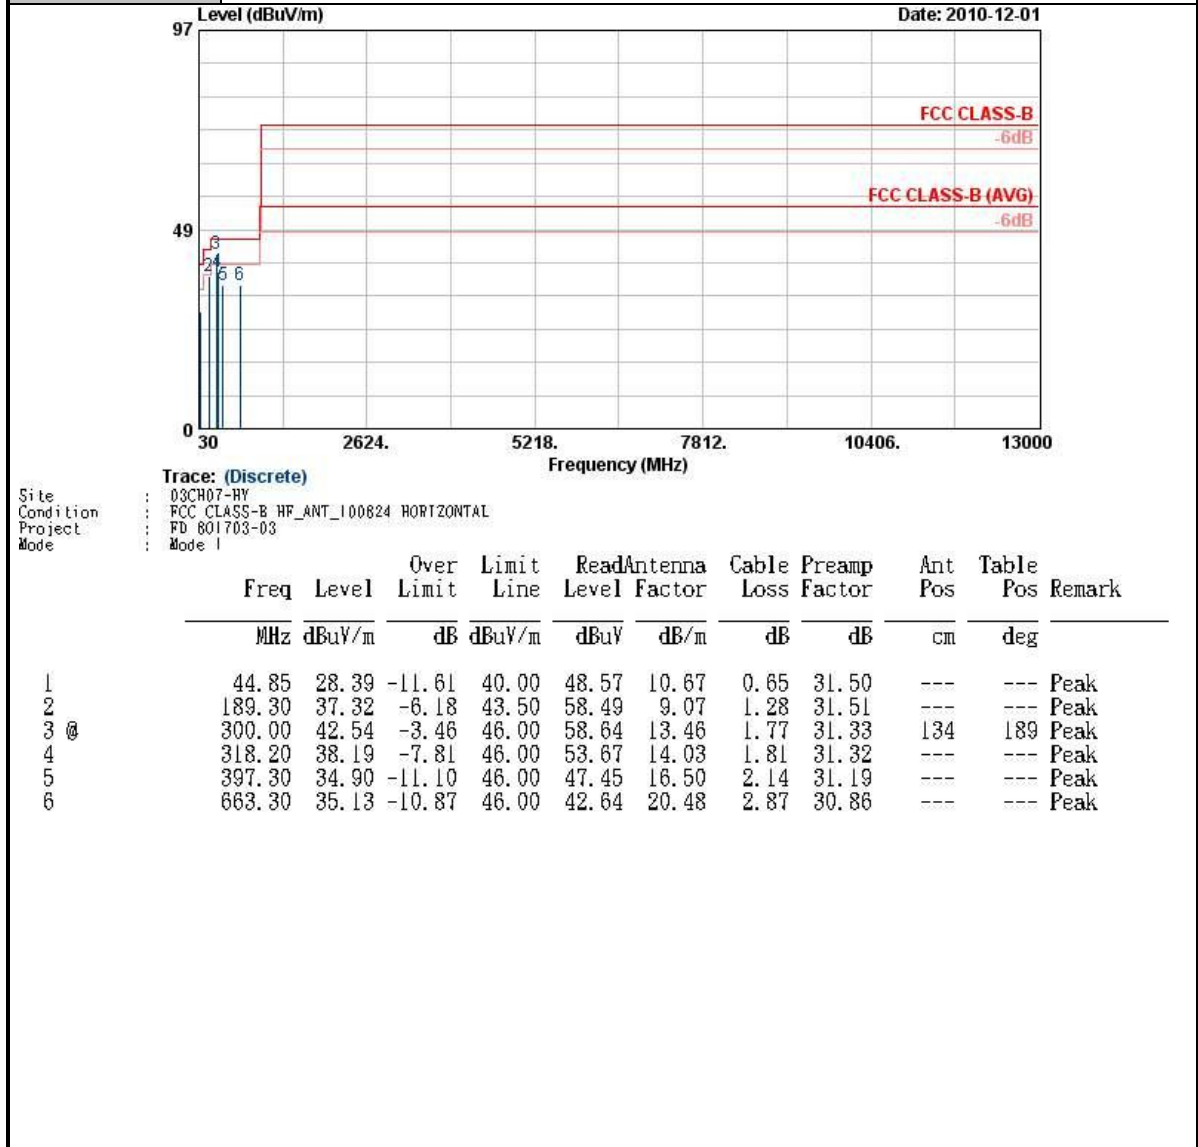



Test Mode :	Mode 1	Temperature :	23~24°C
Test Engineer :	David Yang	Relative Humidity :	47~48%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GPS Rx + MP3 + USB Cable (Link with Notebook)		

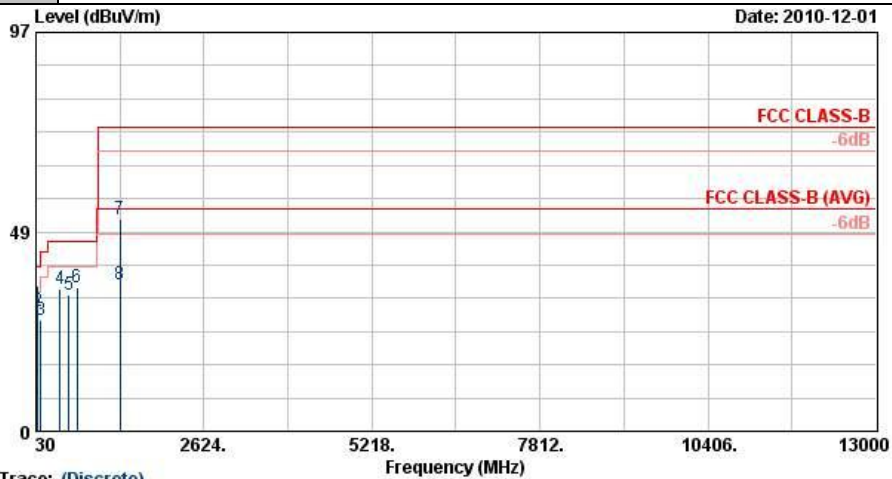

Site : D3CH07-HY  
 Condition : FCC CLASS-B HF\_ANT\_100624 VERTICAL  
 Project : FD 601703-03  
 Mode : Mode 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	44.85	35.21	-4.79	40.00	55.39	10.67	0.65	31.50	109	305	Peak
2	64.02	29.38	-10.62	40.00	54.21	5.92	0.79	31.54	---	---	Peak
3	107.49	26.93	-16.57	43.50	46.98	10.45	1.04	31.55	---	---	Peak
4	399.40	34.57	-11.43	46.00	47.05	16.56	2.14	31.18	---	---	Peak
5	533.80	33.19	-12.81	46.00	42.94	18.74	2.52	31.01	---	---	Peak
6	663.30	34.97	-11.03	46.00	42.48	20.48	2.87	30.86	---	---	Peak
7	1326.00	51.55	-22.45	74.00	73.96	27.83	4.31	54.56	100	349	Peak
8	1326.00	35.81	-18.19	54.00	58.22	27.83	4.31	54.56	100	349	Average





#### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2010	Oct. 30, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 04, 2009	Dec. 03, 2010	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec.09,2009	Dec. 08, 2010	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32 dB.GAIN	Mar. 27, 2010	Mar. 26, 2011	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH07-HY)
GPS Station	T&E	GS-50	N/A	N/A	N/A	N/A	-

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>Uc(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2Uc(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>Uc(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2Uc(y)</math>)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	$\pm 0.10$	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	$\pm 1.70$	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	$\pm 0.50$	Normal (k=2)	0.25	1	0.25
Receiver Correction	$\pm 2.00$	Rectangular	1.15	1	1.15
Antenna Factor Directional	$\pm 1.50$	Rectangular	0.87	1	0.87
Site Imperfection	$\pm 2.80$	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP8O1703-03 as below.