

TEST REPORT

Applicant	Benq Corporation
Address	16 Jihu Road, Neihu, Taipei 114, Taiwan

Manufacturer or Supplier	Benq Corporation
Address	16 Jihu Road, Neihu, Taipei 114, Taiwan
Product Name	InstaShow S Host
Brand Name	BenQ
Model	WDC20R
Additional Model & Model Difference	N/A
Date of tests	Jul. 30, 2019 ~ Oct. 10, 2019

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart E, Section 15.407**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Andy Zhu Project Engineer/ EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	 Date: Nov. 04, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. SUMMARY OF TEST RESULTS.....	5
1.1 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT.....	6
2.2 DESCRIPTION OF TEST MODES.....	6
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
2.3 DUTY CYCLE OF TEST SIGNAL	10
2.4 DESCRIPTION OF SUPPORT UNITS.....	11
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	11
3. TEST TYPES AND RESULTS.....	12
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	12
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	12
3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	13
3.1.3 TEST INSTRUMENTS.....	14
3.1.4 TEST PROCEDURES	15
3.1.5 DEVIATION FROM TEST STANDARD	15
3.1.6 TEST SETUP	16
3.1.7 EUT OPERATING CONDITION	17
3.1.8 TEST RESULTS	18
3.2 CONDUCTED EMISSION MEASUREMENT	20
3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	30
3.2.2 TEST INSTRUMENTS.....	30
3.2.3 TEST PROCEDURES	31
3.2.4 DEVIATION FROM TEST STANDARD	31
3.2.5 TEST SETUP	31
3.2.6 EUT OPERATING CONDITIONS	31
3.2.7 TEST RESULTS	32
3.3 TRANSMIT POWER MEASUREMENT	34

3.3.1	LIMITS OF TRANSMIT POWER MEASUREMENT	34
3.3.2	TEST SETUP	34
3.3.3	TEST INSTRUMENTS.....	35
3.3.4	TEST PROCEDURE.....	35
3.3.5	DEVIATION FROM TEST STANDARD	36
3.3.6	EUT OPERATING CONDITIONS	36
3.3.7	TEST RESULTS	37
3.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	40
3.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	40
3.4.2	TEST SETUP	40
3.4.3	TEST INSTRUMENTS.....	40
3.4.4	TEST PROCEDURES	40
3.4.5	DEVIATION FROM TEST STANDARD	41
3.4.6	EUT OPERATING CONDITIONS	41
3.4.7	TEST RESULTS	42
3.5	FREQUENCY STABILITY	46
3.5.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	46
3.5.2	TEST SETUP	46
3.5.3	TEST INSTRUMENTS.....	46
3.5.4	TEST PROCEDURE.....	47
3.5.5	DEVIATION FROM TEST STANDARD	47
3.5.6	EUT OPERATING CONDITION	47
3.5.7	TEST RESULTS	48
4.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	49
5.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	50



Test Report No.: RF190730N005-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190730N005-2	Original release.	Nov. 04, 2019

1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407 UNDER NEW RULE)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emissions	PASS	Meet the requirement of limit.
15.407(b)(1/4/6)	Radiated Emissions & Band Edge Measurement	PASS	Meet the requirement of limit.
15.407(a)(1/3)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(1/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT NAME	InstaShow S Host
MODEL NO.	WDC20R
FCC ID	JVPWDC20R
POWER SUPPLY	DC 12V From Adapter Input 100-240V~ 50/60Hz 0.6A max
MODULATION TECHNOLOGY	OFDM
MODULATION TYPE	256QAM, 64QAM, 16QAM, QPSK, BPSK
TRANSFER RATE	802.11ac up to 400Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	Refer to 2.2 section
CONDUCTED OUTPUT POWER	12.34dBm for 5150 ~ 5250MHz (Maximum AVG Power) 6.60dBm for 5725 ~ 5850MHz (Maximum AVG Power)
ANTENNA TYPE	5180 ~ 5240MHz: Dipole antenna with 3.58dBi gain 5745 ~ 5825MHz: Dipole antenna with 4.72dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	DC Line: Unshielded, Detachable 30cm

NOTES:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

MODULATION MODE	TX FUNCTION
802.11n (HT20) 802.11ac (VHT20)	2TX
802.11n (HT40) 802.11ac (VHT40)	2TX

* The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 802.11ac mode for VHT20 / VHT40, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

- Please refer to the EUT photo document (Reference No.: 190730N005) for detailed product photo.
- The EUT was powered by the following adapter:

Adapter	
BRAND:	N/A
MODEL:	FJ-SW1202000N
INPUT:	100-240V~ 50/60Hz 0.6A max
OUTPUT:	DC 12V, 2000mA
DC LINE:	Unshielded, Undetachable 120cm

2.2 DESCRIPTION OF TEST MODES

FOR 5150 ~ 5250MHz

4 channels are provided for 802.11n (HT20), 802.11ac (VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

FOR 5725 ~ 5850MHz

5 channels are provided for 802.11n (HT20), 802.11ac (VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	153	5765MHz
157	5785MHz	161	5805MHz
165	5825MHz	--	--

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	Powered by Adapter with wifi(5G) link

Where **RE≥1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	5150-5250	36 to 48	36, 40, 48	OFDM	BPSK	6.5
-	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	13.5
-	802.11n (20MHz)	5725-5850	149 to 165	149, 157, 165	OFDM	BPSK	6.5
-	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	5150-5250 5725-5850	36 to 48 140 to 165	36	OFDM	BPSK	6.5

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	5180-5240 5725-5850	36 to 48 149 to 165	36	OFDM	BPSK	6.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	5150-5250	36 to 48	36, 40, 48	OFDM	BPSK	6.5
-	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	13.5
-	802.11n (20MHz)	5725-5850	149 to 165	149, 157, 165	OFDM	BPSK	6.5
-	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	13.5

TEST CONDITION:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 51%RH	DC 12V from Adapter	Walker
RE≥1G	25deg. C, 51%RH	DC 12V from Adapter	Walker
PLC	20deg. C, 56%RH	DC 12V from Adapter	Dragon
APCM	20deg. C, 55%RH	DC 12V from Adapter	Robert Cheng

2.3 DUTY CYCLE OF TEST SIGNAL

802.11n (20MHz): Duty cycle of test signal is >98 %, duty factor is not required.

802.11n (40MHz): Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11n (40MHz): Duty cycle = $2.405/2.472 = 0.973$, Duty factor = $10 * \log(1/0.973) = 0.12$

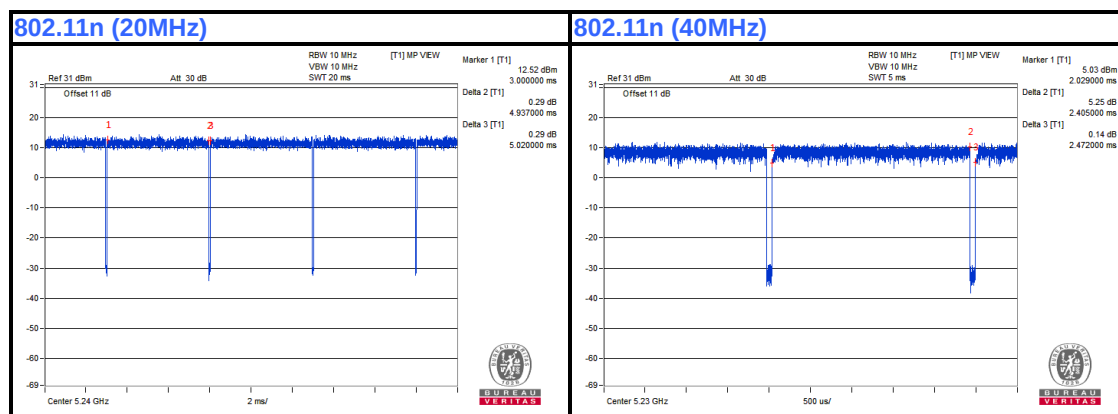

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01r03

KDB 662911 D01 v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3. TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 30dB under any condition of modulation.

3.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
789033 D02 General UNII Test Procedures New Rules v01r03	FIELD STRENGTH AT 3m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
APPLICABLE TO	EIRP LIMIT	EQUIVALENT FIELD STRENGTH AT 3m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)	Note	Note

NOTE: For transmitters operating in the 5.725-5.85 GHz band:

Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 12,19	Mar. 11,20
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 22,19	May 21,20
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 04,19	May 03,20
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Apr. 21,19	Apr. 20,20
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Aug. 11, 19	Aug. 10, 20
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jul. 21, 19	Jul. 20, 20
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	May 05,19	May 04,20
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 21,19	Apr. 20,20
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 21,19	Apr. 20,20
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 09,18	Nov. 08,19
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTES:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

3.1.5 DEVIATION FROM TEST STANDARD


No deviation.

3.1.6 TEST SETUP

Below 30MHz test setup

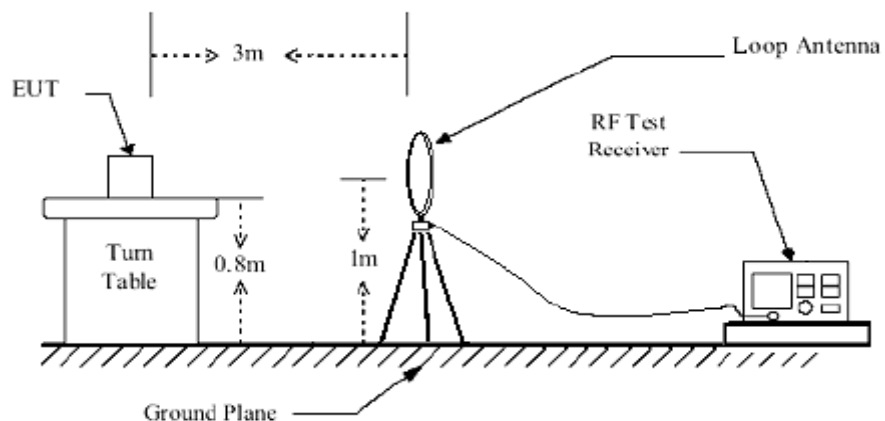


Below 1GHz test setup

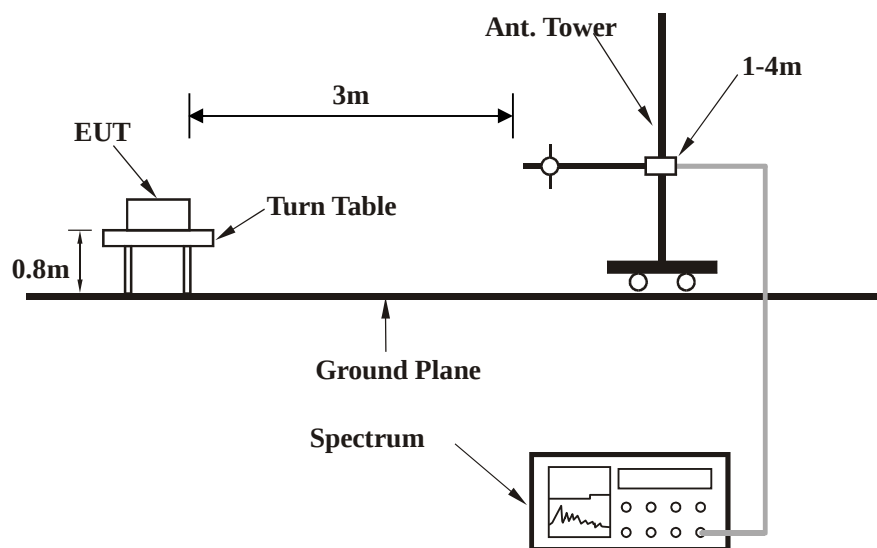

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

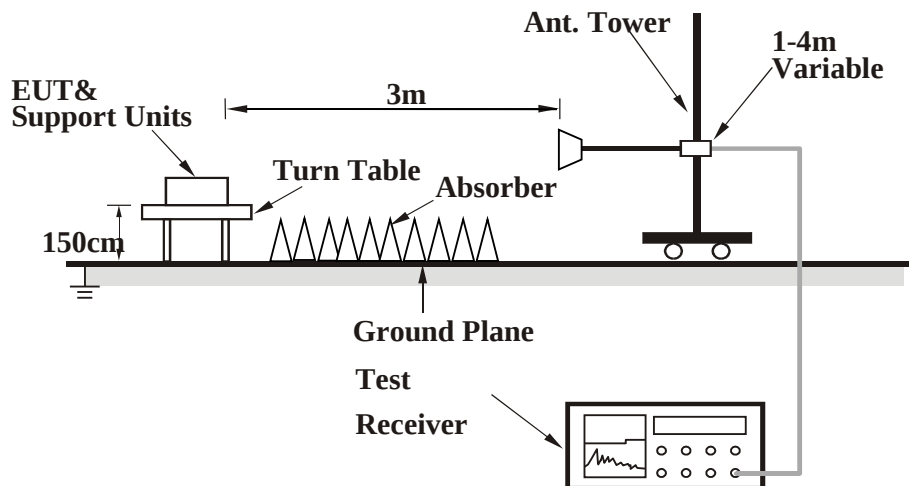

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

3.1.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


802.11n (HT 20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	31.67 QP	40.00	-8.33	1.00 H	12	42.87	-11.20
2	297.37	31.61 QP	46.00	-14.39	1.00 H	23	44.21	-12.60
3	359.55	37.03 QP	46.00	-8.97	1.00 H	37	47.33	-10.30
4	527.44	38.03 QP	46.00	-7.97	1.00 H	2	44.22	-6.19
5	749.73	38.46 QP	46.00	-7.54	1.00 H	1	41.11	-2.65
6	875.03	43.50 QP	46.00	-2.50	1.00 H	0	43.69	-0.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

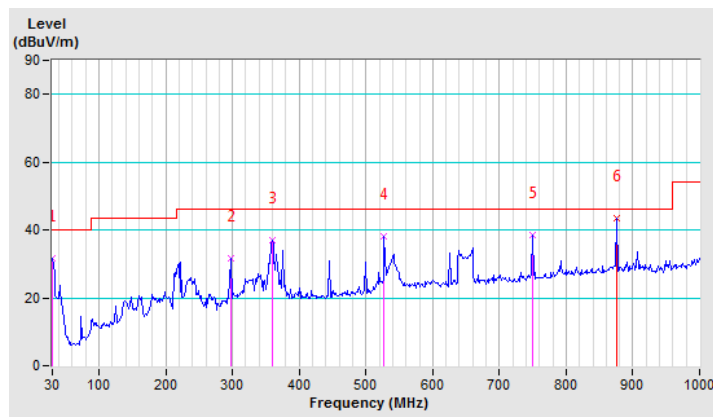


CHANNEL	TX Channel 36	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.54	27.56 QP	40.00	-12.44	1.00 H	117	40.10	-17.88
2	297.37	29.08 QP	46.00	-16.92	1.00 H	242	40.36	-12.60
3	375.10	31.50 QP	46.00	-14.50	1.00 H	183	37.61	-10.05
4	527.44	37.11 QP	46.00	-8.89	1.00 H	159	43.98	-6.19
5	625.37	33.50 QP	46.00	-12.50	1.00 H	194	40.03	-4.48
6	875.64	36.36 QP	46.00	-9.64	1.00 H	302	44.11	-0.19

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

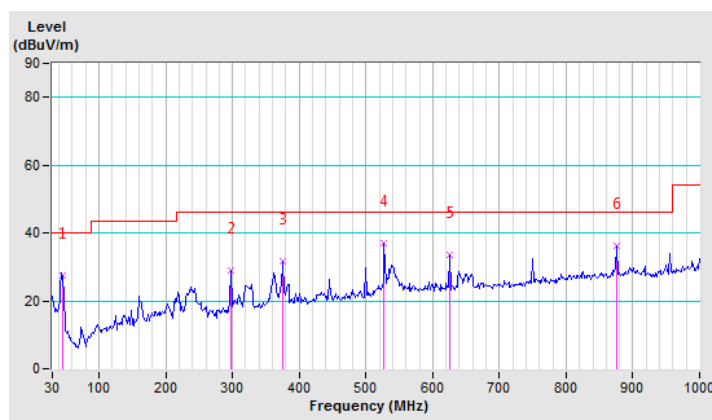

Band 1 (5150-5250MHz):

ABOVE 1GHz DATA

802.11n (HT 20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	49.05 PK	74.00	-24.95	1.00 H	265	42.87	6.18
2	5140.00	35.87 AV	54.00	-18.13	1.00 H	265	29.69	6.18
3	5150.00	50.38 PK	74.00	-23.62	1.00 H	265	44.16	6.22
4	5150.00	36.26 AV	54.00	-17.74	1.00 H	265	30.04	6.22
5	*5180.00	104.20 PK			1.00 H	265	97.85	6.35
6	*5180.00	90.97 AV			1.00 H	265	84.62	6.35
7	#10360.00	56.28 PK	68.20	-11.92	1.00 H	115	41.90	14.38
8	15540.00	63.34 PK	74.00	-10.66	1.00 H	215	42.23	21.11
9	15540.00	49.21 AV	54.00	-4.79	1.00 H	215	28.10	21.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	47.26 PK	74.00	-26.74	1.00 V	254	41.08	6.18
2	5140.00	35.21 AV	54.00	-18.79	1.00 V	254	29.03	6.18
3	5150.00	48.14 PK	74.00	-25.86	1.00 V	254	41.92	6.22
4	5150.00	35.26 AV	54.00	-18.74	1.00 V	254	29.04	6.22
5	*5180.00	100.50 PK			1.00 V	254	94.15	6.35
6	*5180.00	88.60 AV			1.00 V	254	82.25	6.35
7	#10360.00	55.96 PK	68.20	-12.24	1.00 V	315	41.58	14.38
8	15540.00	62.56 PK	74.00	-11.44	1.00 V	0	41.45	21.11
9	15540.00	43.75 AV	54.00	-10.25	1.00 V	0	22.64	21.11

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	49.33 PK	74.00	-24.67	1.00 H	260	43.15	6.18
2	5140.00	36.55 AV	54.00	-17.45	1.00 H	260	30.37	6.18
3	5150.00	50.43 PK	74.00	-23.57	1.00 H	260	44.21	6.22
4	5150.00	36.80 AV	54.00	-17.20	1.00 H	260	30.58	6.22
5	*5200.00	103.46 PK			1.00 H	260	97.02	6.44
6	*5200.00	90.56 AV			1.00 H	260	84.12	6.44
7	#10400.00	56.32 PK	68.20	-11.88	1.00 H	200	41.85	14.47
8	15600.00	63.06 PK	74.00	-10.94	1.00 H	51	41.77	21.29
9	15600.00	49.52 AV	54.00	-4.48	1.00 H	51	28.23	21.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	47.69 PK	74.00	-26.31	1.00 V	220	41.51	6.18
2	5140.00	34.72 AV	54.00	-19.28	1.00 V	220	28.54	6.18
3	5150.00	48.03 PK	74.00	-25.97	1.00 V	220	41.81	6.22
4	5150.00	35.02 AV	54.00	-18.98	1.00 V	220	28.80	6.22
5	*5200.00	100.60 PK			1.00 V	220	94.16	6.44
6	*5200.00	88.23 AV			1.00 V	220	81.79	6.44
7	#10400.00	61.74 PK	68.20	-6.46	1.00 V	172	47.27	14.47
8	15600.00	62.39 PK	74.00	-11.61	1.00 V	152	41.10	21.29
9	15600.00	48.92 AV	54.00	-5.08	1.00 V	152	27.63	21.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	49.42 PK	74.00	-24.58	1.00 H	273	43.24	6.18
2	5140.00	36.18 AV	54.00	-17.82	1.00 H	273	30.00	6.18
3	5150.00	48.68 PK	74.00	-25.32	1.00 H	273	42.46	6.22
4	5150.00	35.92 AV	54.00	-18.08	1.00 H	273	29.70	6.22
5	*5240.00	102.46 PK			1.00 H	273	95.84	6.62
6	*5240.00	90.19 AV			1.00 H	273	83.57	6.62
7	5350.00	53.08 PK	74.00	-20.92	1.00 H	273	45.97	7.11
8	5350.00	37.25 AV	54.00	-16.75	1.00 H	273	30.14	7.11
9	5360.00	54.06 PK	74.00	-19.94	1.00 H	273	46.91	7.15
10	5360.00	37.85 AV	54.00	-16.15	1.00 H	273	30.70	7.15
11	#10480.00	61.32 PK	68.20	-6.88	1.00 H	182	46.67	14.65
12	15720.00	63.21 PK	74.00	-10.79	1.00 H	73	41.56	21.65
13	15720.00	49.85 AV	54.00	-4.15	1.00 H	73	28.20	21.65
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	47.92 PK	74.00	-26.08	1.00 V	217	41.74	6.18
2	5140.00	35.86 AV	54.00	-18.14	1.00 V	217	29.68	6.18
3	5150.00	48.02 PK	74.00	-25.98	1.00 V	217	41.80	6.22
4	5150.00	35.10 AV	54.00	-18.90	1.00 V	217	28.88	6.22
5	*5240.00	100.05 PK			1.00 V	217	93.43	6.62
6	*5240.00	87.28 AV			1.00 V	217	80.66	6.62
7	5350.00	50.12 PK	74.00	-23.88	1.00 V	217	43.01	7.11
8	5350.00	36.77 AV	54.00	-17.23	1.00 V	217	29.66	7.11
9	5360.00	49.11 PK	74.00	-24.89	1.00 V	217	41.96	7.15
10	5360.00	37.15 AV	54.00	-16.85	1.00 V	217	30.00	7.15
11	#10480.00	60.13 PK	68.20	-8.07	1.00 V	177	45.48	14.65
12	15720.00	62.11 PK	74.00	-11.89	1.00 V	152	40.46	21.65
13	15720.00	48.44 AV	54.00	-5.56	1.00 V	152	26.79	21.65

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	49.33 PK	74.00	-24.67	1.00 H	266	43.15	6.18
2	5140.00	36.45 AV	54.00	-17.55	1.00 H	266	30.27	6.18
3	5150.00	50.17 PK	74.00	-23.83	1.00 H	266	43.95	6.22
4	5150.00	37.05 AV	54.00	-16.95	1.00 H	266	30.83	6.22
5	*5190.00	101.97 PK			1.00 H	266	95.57	6.40
6	*5190.00	90.05 AV			1.00 H	266	83.65	6.40
7	#10380.00	57.39 PK	68.20	-10.81	1.00 H	159	42.97	14.42
8	15570.00	63.92 PK	74.00	-10.08	1.00 H	119	42.72	21.20
9	15570.00	50.35 AV	54.00	-3.65	1.00 H	119	29.15	21.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	48.71 PK	74.00	-25.29	1.00 V	219	42.53	6.18
2	5140.00	35.42 AV	54.00	-18.58	1.00 V	219	29.24	6.18
3	5150.00	49.66 PK	74.00	-24.34	1.00 V	219	43.44	6.22
4	5150.00	36.42 AV	54.00	-17.58	1.00 V	219	30.20	6.22
5	*5190.00	99.53 PK			1.00 V	219	93.13	6.40
6	*5190.00	86.61 AV			1.00 V	219	80.21	6.40
7	#10380.00	56.73 PK	68.20	-11.47	1.00 V	132	42.31	14.42
8	15570.00	62.11 PK	74.00	-11.89	1.50 V	173	40.91	21.20
9	15570.00	49.11 AV	54.00	-4.89	1.50 V	173	27.91	21.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	49.40 PK	74.00	-24.60	1.00 H	281	43.22	6.18
2	5140.00	37.02 AV	54.00	-16.98	1.00 H	281	30.84	6.18
3	5150.00	49.13 PK	74.00	-24.87	1.00 H	281	42.91	6.22
4	5150.00	36.25 AV	54.00	-17.75	1.00 H	281	30.03	6.22
5	*5230.00	100.95 PK			1.00 H	281	94.38	6.57
6	*5230.00	88.62 AV			1.00 H	281	82.05	6.57
7	#10460.00	57.85 PK	68.20	-10.35	1.00 H	85	43.25	14.60
8	15690.00	63.67 PK	74.00	-10.33	1.00 H	303	42.11	21.56
9	15690.00	49.72 AV	54.00	-4.28	1.00 H	303	28.16	21.56
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5140.00	46.58 PK	74.00	-27.42	1.00 V	210	40.40	6.18
2	5140.00	36.02 AV	54.00	-17.98	1.00 V	210	29.84	6.18
3	5150.00	47.58 PK	74.00	-26.42	1.00 V	210	41.36	6.22
4	5150.00	36.72 AV	54.00	-17.28	1.00 V	210	30.50	6.22
5	*5230.00	97.80 PK			1.00 V	210	91.23	6.57
6	*5230.00	86.85 AV			1.00 V	210	80.28	6.57
7	#10460.00	56.75 PK	68.20	-11.45	1.00 V	233	42.15	14.60
8	15690.00	62.11 PK	74.00	-11.89	1.00 V	172	40.55	21.56
9	15690.00	49.25 AV	54.00	-4.75	1.00 V	172	27.69	21.56

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Band 4 (5725-5850MHz):

ABOVE 1GHz DATA

802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5653.75	50.52 PK	70.99	-20.47	2.00 H	0	43.73	6.79
2	#5725.00	51.00 PK	122.20	-71.20	1.00 H	0	44.06	6.94
3	*5745.00	97.57 PK			1.00 H	55	90.59	6.98
4	*5745.00	86.52 AV			1.00 H	55	79.54	6.98
5	#5992.00	50.93 PK	68.20	-17.27	2.00 H	0	43.42	7.51
6	11490.00	56.29 PK	74.00	-17.71	1.00 H	103	40.34	15.95
7	#17235.00	66.58 PK	68.20	-1.62	1.00 H	125	42.49	24.09
8	#17235.00	50.32 AV	54.00	-3.68	1.00 H	125	26.23	24.09
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.50	50.30 PK	68.20	-17.90	1.00 V	0	43.54	6.76
2	#5725.00	49.03 PK	122.20	-73.17	1.00 V	0	42.09	6.94
3	*5745.00	97.32 PK			1.00 V	239	90.34	6.98
4	*5745.00	84.44 AV			1.00 V	239	77.46	6.98
5	#5988.25	56.46 PK	68.20	-11.74	1.00 V	0	48.96	7.50
6	11490.00	56.85 PK	74.00	-17.15	1.00 V	0	40.90	15.95
7	#17235.00	64.43 PK	68.20	-3.77	1.00 V	0	40.34	24.09
8	#17235.00	50.06 AV	54.00	-3.94	1.00 V	0	25.97	24.09

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL		TX Channel 157			DETECTOR FUNCTION		Peak (PK)	
FREQUENCY RANGE		1GHz ~ 40GHz					Average (AV)	
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5561.50	51.02 PK	68.20	-17.18	2.00 H	0	44.42	6.60
2	#5625.25	50.65 PK	68.20	-17.55	2.00 H	0	43.92	6.73
3	*5785.00	96.11 PK			1.00 H	32	89.04	7.07
4	*5785.00	85.51 AV			1.00 H	32	78.44	7.07
5	#5992.00	55.62 PK	68.20	-12.58	2.00 H	0	48.11	7.51
6	11570.00	57.29 PK	74.00	-16.71	1.00 H	121	41.12	16.17
7	#17355.00	67.03 PK	68.20	-1.17	1.00 H	158	42.85	24.18
8	#17355.00	50.66 AV	54.00	-3.34	1.00 H	158	26.48	24.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5569.75	50.91 PK	68.20	-17.29	1.00 V	0	44.29	6.62
2	#5626.75	51.19 PK	68.20	-17.01	1.00 V	0	44.46	6.73
3	*5785.00	96.64 PK			1.00 V	240	89.57	7.07
4	*5785.00	85.08 AV			1.00 V	240	78.01	7.07
5	#5992.75	52.52 PK	68.20	-15.68	1.00 V	0	45.01	7.51
6	11570.00	58.32 PK	74.00	-15.68	1.00 V	0	42.15	16.17
7	#17355.00	66.39 PK	68.20	-1.81	1.00 V	267	42.21	24.18
8	#17355.00	50.17 AV	54.00	-3.83	1.00 V	267	25.99	24.18

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5590.75	50.29 PK	68.20	-17.91	1.00 H	0	43.63	6.66
2	#5659.75	50.14 PK	75.44	-25.30	1.00 H	0	43.33	6.81
3	*5825.00	97.59 PK			1.00 H	52	90.44	7.15
4	*5825.00	87.89 AV			1.00 H	52	80.74	7.15
5	#5850.00	48.72 PK	122.20	-73.48	1.00 H	0	41.52	7.20
6	11650.00	58.33 PK	74.00	-15.67	1.00 H	115	41.93	16.40
7	#17475.00	67.02 PK	68.20	-1.18	1.00 H	0	42.75	24.27
8	#17475.00	50.15 AV	54.00	-3.85	1.00 H	0	25.88	24.27
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5505.25	59.32 PK	68.20	-8.88	1.00 V	360	52.83	6.49
2	*5825.00	97.31 PK			1.00 V	240	90.16	7.15
3	*5825.00	89.02 AV			1.00 V	240	81.87	7.15
4	#5850.00	51.20 PK	122.20	-71.00	1.00 V	0	44.00	7.20
5	#5994.25	52.14 PK	68.20	-16.06	1.00 V	0	44.64	7.50
6	11650.00	60.33 PK	74.00	-13.67	1.00 V	145	43.93	16.40
7	#17475.00	65.92 PK	68.20	-2.28	1.00 V	0	41.65	24.27
8	#17475.00	49.72 AV	54.00	-4.28	1.00 V	0	25.45	24.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.75	50.53 PK	68.76	-18.23	2.00 H	216	43.74	6.79
2	#5725.00	53.93 PK	122.20	-68.27	1.00 H	0	46.99	6.94
3	*5755.00	94.16 PK			1.00 H	215	87.15	7.01
4	*5755.00	84.63 AV			1.00 H	215	77.62	7.01
5	#5989.00	51.06 PK	68.20	-17.14	2.00 H	216	43.56	7.50
6	11510.00	59.77 PK	74.00	-14.23	1.00 H	0	43.77	16.00
7	#17265.00	65.77 PK	68.20	-2.43	1.00 H	0	41.66	24.11
8	#17265.00	50.69 AV	54.00	-3.31	1.00 H	0	26.58	24.11
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.50	50.86 PK	68.20	-17.34	1.00 V	0	44.12	6.74
2	#5725.00	50.75 PK	122.20	-71.45	1.00 V	0	43.81	6.94
3	*5755.00	93.01 PK			1.00 V	17	86.00	7.01
4	*5755.00	83.26 AV			1.00 V	17	76.25	7.01
5	#5993.50	54.26 PK	68.20	-13.94	1.00 V	0	46.76	7.50
6	11510.00	60.11 PK	74.00	-13.89	1.00 V	0	44.11	16.00
7	#17265.00	64.79 PK	68.20	-3.41	1.00 V	145	40.68	24.11
8	#17265.00	49.88 AV	54.00	-4.12	1.00 V	145	25.77	24.11

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5622.25	50.64 PK	68.20	-17.56	1.00 H	0	43.91	6.73
2	*5795.00	95.11 PK			1.00 H	53	88.02	7.09
3	*5795.00	84.57 AV			1.00 H	53	77.48	7.09
4	#5850.00	48.50 PK	122.20	-73.70	1.00 H	0	41.30	7.20
5	#5989.75	53.18 PK	68.20	-15.02	1.00 H	0	45.68	7.50
6	11590.00	57.72 PK	74.00	-16.28	1.00 H	0	41.50	16.22
7	#17385.00	64.48 PK	68.20	-3.72	1.00 H	121	40.27	24.21
8	#17385.00	50.02 AV	54.00	-3.98	1.00 H	121	25.81	24.21
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5626.00	51.22 PK	68.20	-16.98	2.00 V	0	44.49	6.73
2	*5795.00	94.15 PK			1.00 V	240	87.06	7.09
3	*5795.00	83.71 AV			1.00 V	240	76.62	7.09
4	#5850.00	48.67 PK	122.20	-73.53	1.00 V	0	41.47	7.20
5	#5989.00	54.97 PK	68.20	-13.23	2.00 V	0	47.47	7.50
6	11590.00	61.30 PK	74.00	-12.70	1.00 V	0	45.08	16.22
7	#17385.00	66.33 PK	68.20	-1.87	1.00 V	0	42.12	24.21
8	#17385.00	50.52 AV	54.00	-3.48	1.00 V	0	26.31	24.21

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 13,19	Mar. 12,20
Voltage probe	SCHWARZBEC K	TK 9421	TK 9421-176	Jan. 17,19	Jan. 16,20
Test software	ADT	ADT_Conc_V7.3.7	N/A	N/A	N/A

- NOTES:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

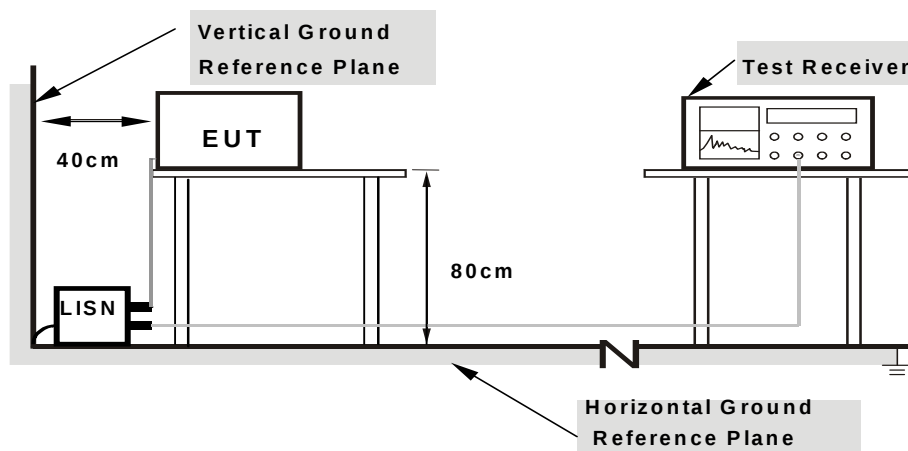

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.6


3.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11a

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.21802	10.29	33.22	22.57	43.51	32.86	62.89	52.89	-19.38	-20.03
2	0.29616	9.66	28.66	14.20	38.32	23.86	60.35	50.35	-22.03	-26.49
3	0.43430	10.24	29.74	21.79	39.98	32.03	57.17	47.17	-17.19	-15.14
4	0.82933	10.38	23.53	13.54	33.91	23.92	56.00	46.00	-22.09	-22.08
5	7.39275	9.76	32.23	23.30	41.99	33.06	60.00	50.00	-18.01	-16.94
6	12.26625	9.77	32.84	24.94	42.61	34.71	60.00	50.00	-17.39	-15.29


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

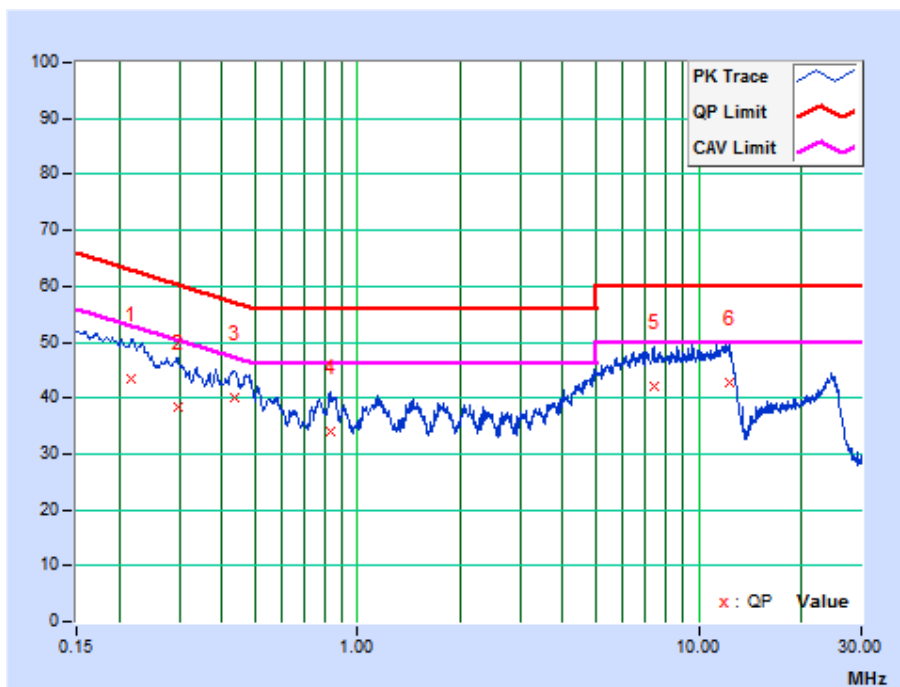

PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16966	10.33	34.67	22.42	45.00	32.75	64.98	54.98	-19.98	-22.23
2	0.26250	9.81	26.21	14.50	36.02	24.31	61.35	51.35	-25.33	-27.04
3	0.36775	10.35	22.73	9.79	33.08	20.14	58.55	48.55	-25.48	-28.42
4	1.15800	9.68	18.90	10.08	28.58	19.76	56.00	46.00	-27.42	-26.24
5	8.12625	10.03	27.01	18.80	37.04	28.83	60.00	50.00	-22.96	-21.17
6	12.06600	9.88	28.07	19.88	37.95	29.76	60.00	50.00	-22.05	-20.24

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

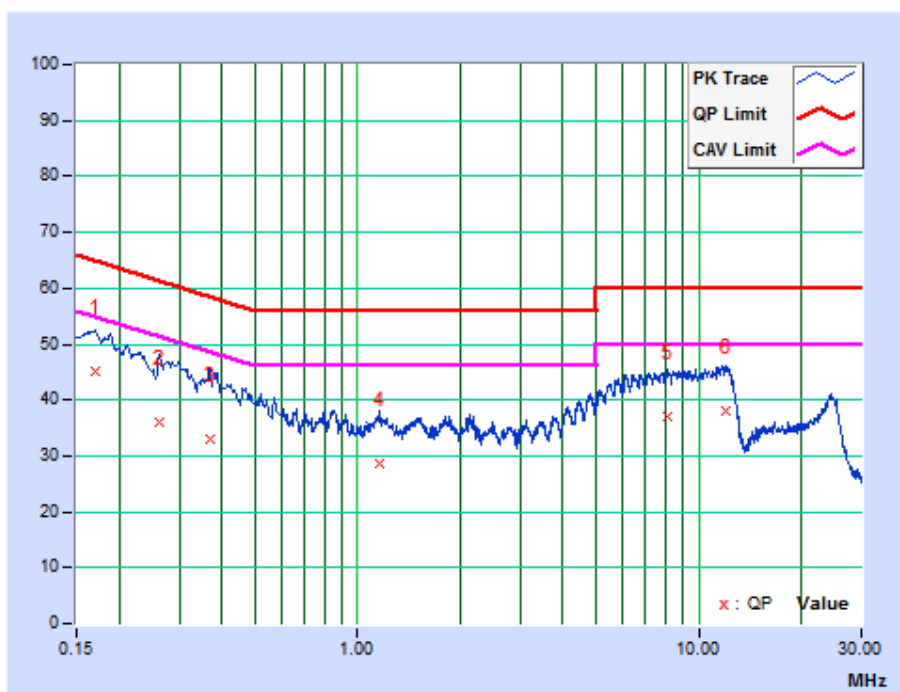

3.3 TRANSMIT POWER MEASUREMENT

3.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1	-	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	-	Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
	-	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	-		250mW(24dBm) or 11 dBm+10LogB*
U-NII-2C	-		250mW(24dBm) or 11 dBm+10LogB*
U-NII-3	√		1 Watt (30 dBm)

NOTE: 1. Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

3.3.2 TEST SETUP

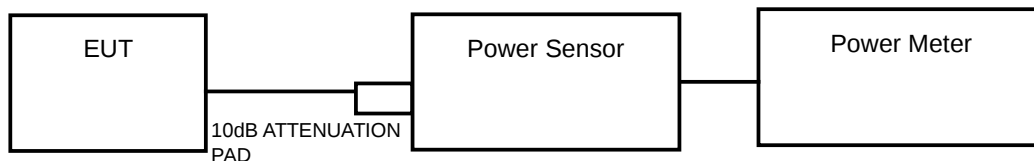

FOR 6/26dB BANDWIDTH



3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 22,19	May 21,20
Power Sensor	Keysight	U2021XA	MY55060018	May 22,19	May 21,20
Power Meter	Anritsu	ML2495A	1139001	Mar. 12,19	Mar. 11,20
Power Sensor	Anritsu	MA2411B	1531155	Mar. 12,19	Mar. 11,20
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct.16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Nov.15,18	Nov. 14,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 09,18	Nov. 08,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	May 22,19	May 21,20
Signal Generator	Agilent	N5183A	MY50140980	Dec. 07,18	Dec. 06,19
Agile Signal Generator	Agilent	8645A	Agilent	Oct.27, 18	Oct.26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 12,19	Mar. 11,20
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec. 07, 18	Dec. 06, 19
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTES:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = RMS.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

FOR 6dB BANDWIDTH

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) ≥ 3 RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

3.3.7 TEST RESULTS

Power Output:

802.11n (20MHz)

CHAN.	FREQ. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass/Fail
		CHAIN 0	CHAIN 1				
36	5180	8.40	8.15	13.449	11.29	30	Pass
40	5200	8.68	7.83	13.446	11.29	30	Pass
48	5240	9.08	7.39	13.574	11.33	30	Pass
149	5745	6.09	2.58	5.875	7.69	30	Pass
157	5785	6.12	2.39	5.827	7.65	30	Pass
165	5825	6.04	2.56	5.821	7.65	30	Pass

802.11n (40MHz)

CHAN.	FREQ. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass/Fail
		CHAIN 0	CHAIN 1				
38	5190	9.50	9.15	17.135	12.34	30	Pass
46	5230	9.79	8.25	16.211	12.10	30	Pass
151	5755	6.50	2.52	6.253	7.96	30	Pass
159	5795	6.60	3.01	6.571	8.18	30	Pass


26dB BANDWIDTH for 5150-5250MHz:

802.11n (20MHz)

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	20.59	21.21
40	5200	20.75	21.11
48	5240	20.81	20.91

802.11n (40MHz)

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	40.50	40.68
46	5230	40.87	40.85

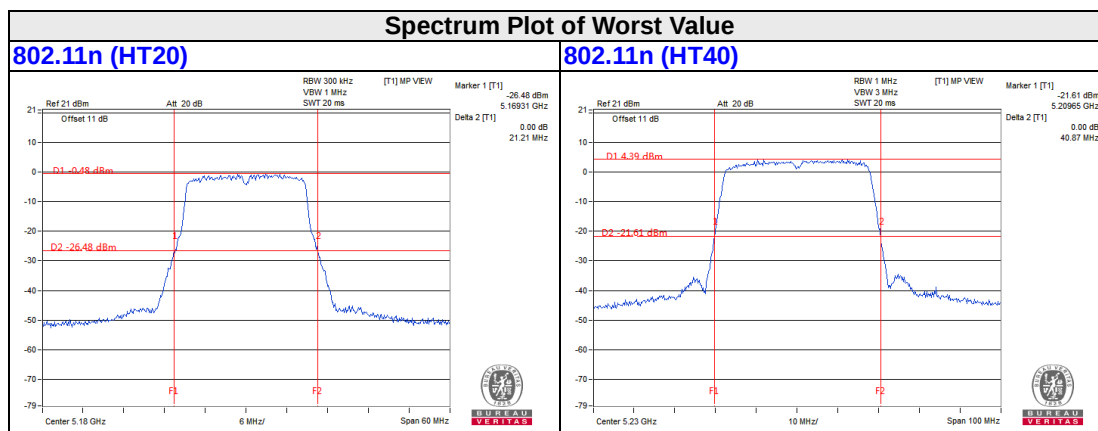


6dB BANDWIDTH for 5725-5850MHz

802.11n (20M)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.26	17.62	0.5	Pass
157	5785	17.31	17.62	0.5	Pass
165	5825	17.27	17.62	0.5	Pass

802.11n (40M)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.22	35.82	0.5	Pass
159	5795	35.18	35.43	0.5	Pass

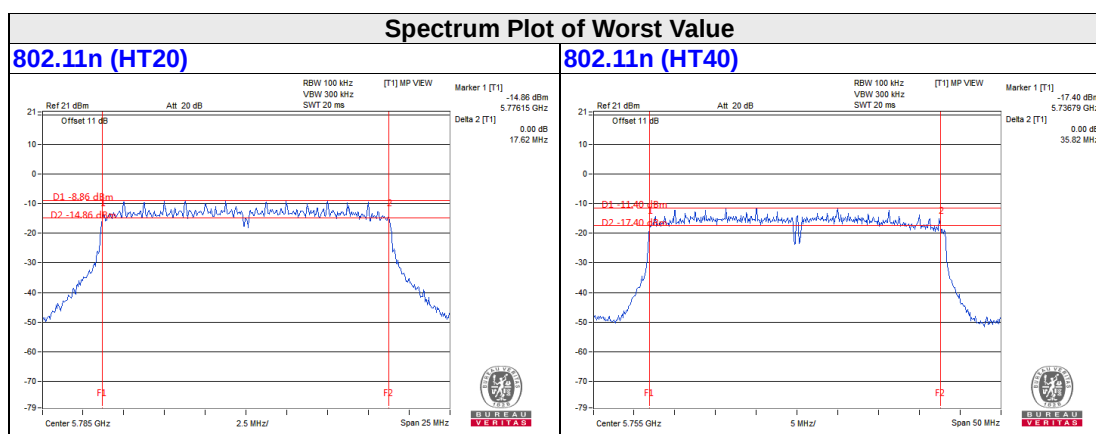


3.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1	-	Outdoor Access Point	17dBm/ MHz
	-	Fixed point-to-point Access Point	
	√	Indoor Access Point	
	-	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	-		11dBm/ MHz
U-NII-2C	-		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW = 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW = 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.3.6

3.4.7 TEST RESULTS

**For 5.180~5.240GHz
802.11n (20MHz)**

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Total PSD (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
36	5180	-5.18	-5.46	-2.31	16.41	Pass
40	5200	-5.28	-5.84	-2.54	16.41	Pass
48	5240	-4.80	-6.51	-2.56	16.41	Pass

Note: 1. Directional gain = $3.58\text{dBi} + 10\log(2) = 6.59\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (6.59 - 6) = 16.41\text{dBm}$.

2. Refer to section 2.3 for duty cycle spectrum plot.


802.11n (40MHz)

Chan.	Chan. Freq. (MHz)	PSD (dBm)		Duty Factor (dB)	Total PSD With Duty Factor (dBm)	MAX. Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	-6.93	-7.31	0.12	-3.98	16.41	Pass
46	5230	-6.73	-8.38	0.12	-4.35	16.41	Pass


Note: 1. Directional gain = $3.58\text{dBi} + 10\log(2) = 6.59\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (6.59 - 6) = 16.41\text{dBm}$.

2. Refer to section 2.3 for duty cycle spectrum plot.

CHAIN 0

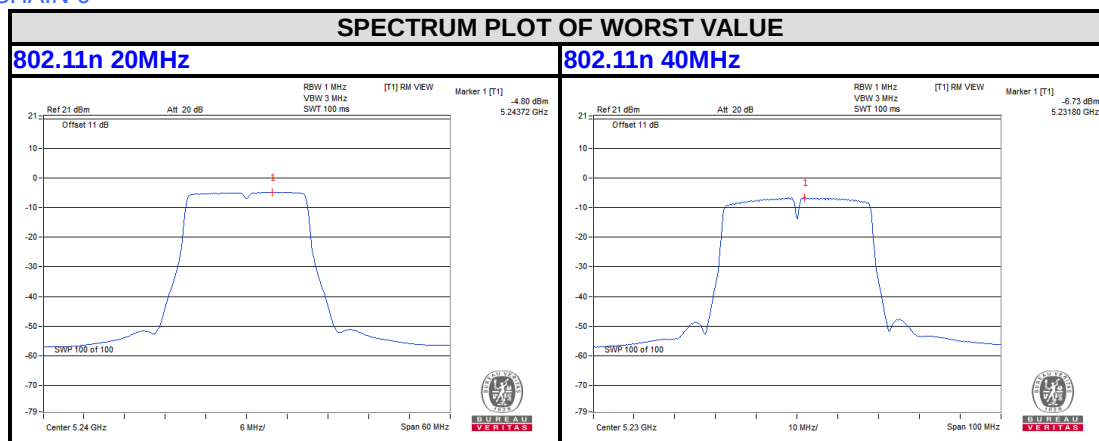

CHAIN 1

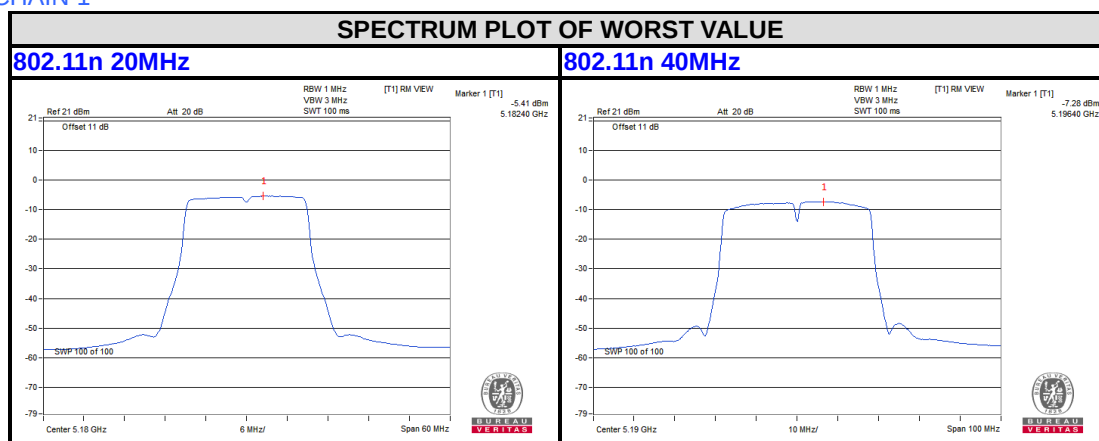

**For 5.745~5.825GHz
802.11n (20MHz)**

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	-15.71	-13.49	3.01	-10.48	28.27	Pass
	157	5785	-15.67	-13.45	3.01	-10.44	28.27	Pass
	165	5825	-15.50	-13.28	3.01	-10.27	28.27	Pass
1	149	5745	-19.72	-17.50	3.01	-14.49	28.27	Pass
	157	5785	-19.34	-17.12	3.01	-14.11	28.27	Pass
	165	5825	-19.01	-16.79	3.01	-13.78	28.27	Pass

Note: 1. Directional gain = $4.72\text{dBi} + 10\log(2) = 7.73\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.73-6) = 28.27\text{dBm}$.

2. Refer to section 2.3 for duty cycle spectrum plot.


802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	151	5755	-15.99	-13.77	3.01	-10.76	28.27	Pass
	159	5795	-15.22	-13.00	3.01	-9.99	28.27	Pass
1	151	5755	-20.41	-18.19	3.01	-15.18	28.27	Pass
	159	5795	-21.37	-19.15	3.01	-16.14	28.27	Pass


Note: 1. Directional gain = $4.72\text{dBi} + 10\log(2) = 7.73\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(7.73-6) = 28.27\text{dBm}$.

2. Refer to section 2.3 for duty cycle spectrum plot.

CHAIN 0

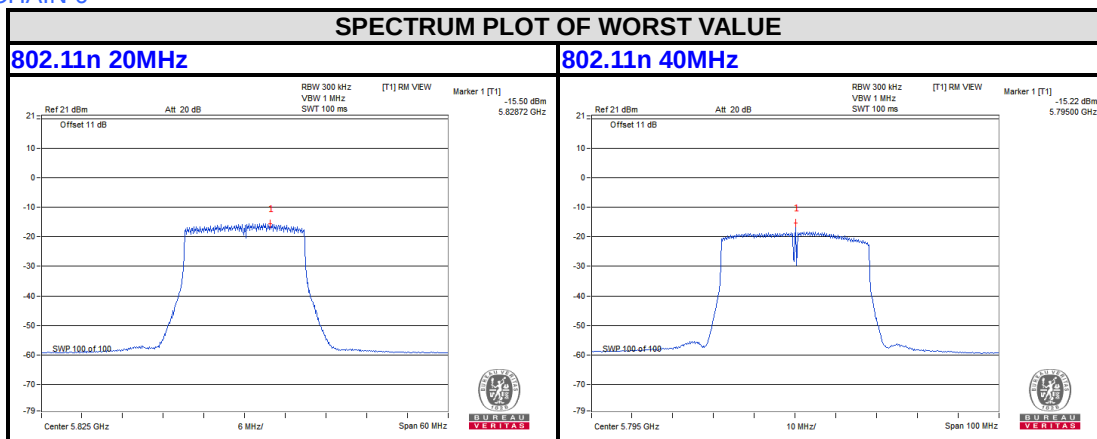

CHAIN 1

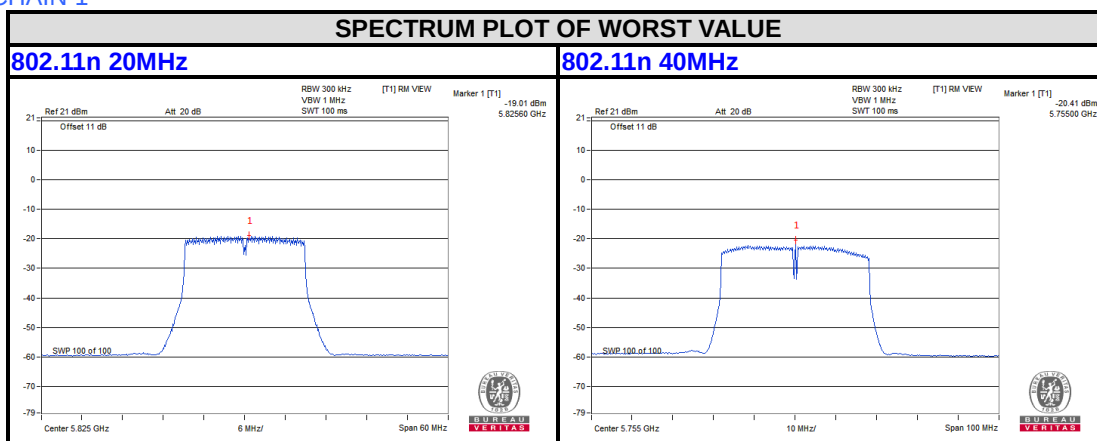


3.5 FREQUENCY STABILITY

3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation.

3.5.2 TEST SETUP

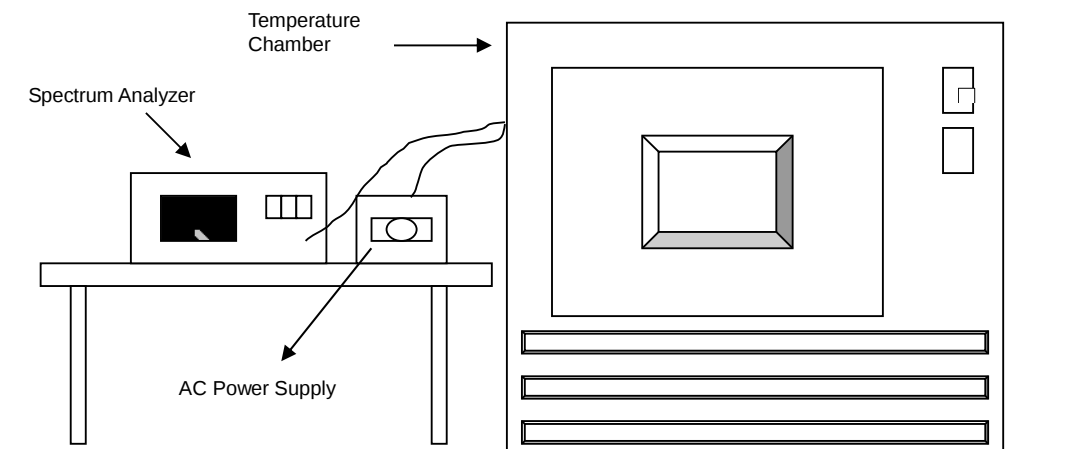

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.5.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.

3.5.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
50	120	5744.9996	-0.00001	5745.0031	0.00005	5745	0.00000	5745.0042	0.00007
40	120	5744.9993	-0.00001	5744.9973	-0.00005	5744.9972	-0.00005	5744.9999	0.00000
30	120	5745.0019	0.00003	5745.0004	0.00001	5745.0039	0.00007	5744.999	-0.00002
20	120	5745.004	0.00007	5745.0036	0.00006	5745.0008	0.00001	5745.0019	0.00003
10	120	5745.0104	0.00018	5745.0074	0.00013	5745.0091	0.00016	5745.0085	0.00015
0	120	5745.0135	0.00023	5745.0112	0.00019	5745.0132	0.00023	5745.0116	0.00020
-10	120	5744.9936	-0.00011	5744.9911	-0.00015	5744.9932	-0.00012	5744.994	-0.00010
-20	120	5744.973	-0.00047	5744.9695	-0.00053	5744.9719	-0.00049	5744.9699	-0.00052
-30	120	5745.0046	0.00008	5745.0037	0.00006	5745.0045	0.00008	5745.0016	0.00003

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5180MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift	Measured Frequency (MHz)	Frequency Drift
20	138	5745.003	0.00005	5745.0039	0.00007	5744.9999	0.00000	5745.0011	0.00002
	120	5745.004	0.00007	5745.0036	0.00006	5745.0008	0.00001	5745.0019	0.00003
	102	5745.0036	0.00006	5745.0035	0.00006	5744.9998	0.00000	5745.0012	0.00002



Test Report No.: RF190730N005-2

4. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF190730N005-2

5. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---