

HCT CO., LTD.**CERTIFICATE OF COMPLIANCE**
FCC Certification**Applicant Name:**
Pantech Co.,Ltd.**Address:**
Pantech Bldg, I-2, DMC, Sangam-dong, Mapo-gu, Seoul,
121-792, Korea**Date of Issue:**

July 19, 2012

Location:HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,
Icheon-si, Kyunggi-Do, Korea**Test Report No.:** HCTR1206FR21-1**HCT FRN:** 0005866421**FCC ID:** **JYCP9090****APPLICANT:** **Pantech Co., Ltd.****FCC Model(s):** P9090**EUT Type:** 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)**FCC Rule Part(s):** §2, § 22, §24, §27**Tx Frequency:** 706.5 MHz – 713.5 MHz (LTE – Band 17), 1852.5 MHz – 1907.5 MHz (LTE – Band 2),
1712.5 MHz – 1752.5 MHz (LTE – Band 4), 826.5 MHz – 846.5 MHz (LTE – Band 5)**Max. RF Output Power:** Band 17, 10 MHz : 0.117 W EIRP (QPSK) (20.69 dBm)

0.114 W EIRP (16-QAM) (20.59 dBm)

Band 17, 5 MHz : 0.104 W EIRP (QPSK) (20.21 dBm)

0.095 W EIRP (16-QAM) (19.82 dBm)

Band 2, 10 MHz : 0.626 W EIRP (QPSK) (27.97 dBm)

0.638 W EIRP (16-QAM) (28.05 dBm)

Band 2, 5 MHz: 0.609 W EIRP (QPSK) (27.85 dBm)

0.592 W EIRP (16-QAM) (27.73 dBm)

Band 4, 10 MHz : 0.479 W EIRP (QPSK) (26.81 dBm)

0.437 W EIRP (16-QAM) (26.41 dBm)

Band 4, 5 MHz : 0.555 W EIRP (QPSK) (27.45 dBm)

0.537 W EIRP (16-QAM) (27.30 dBm)

Band 5, 10 MHz : 0.248 W EIRP (QPSK) (23.95 dBm)

0.247 W EIRP (16-QAM) (23.93 dBm)

Band 5, 5 MHz : 0.246 W EIRP (QPSK) (23.92 dBm)

0.231 W EIRP (16-QAM) (23.64 dBm)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

**Report prepared by**
: Hyo Sun Kwak

Test engineer of RF Team

Approved by
: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 1 of 96

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1206FR21	July 06, 2012	First Approval Report
HCTR1206FR21-1	July 19, 2012	- Modified page 9,17.18

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 2 of 96

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION.....	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER.....	6
3.2 OCCUPIED BANDWIDTH.....	7
3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz).....	8
3.4 AWS – MOBILE FREQUENCY BLOCKS	8
3.5 CELLULAR – MOBILE FREQUENCY BLOCKS	8
3.6 PEAK-AVERAGE RATIO.	9
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	9
3.8 RADIATED SPURIOUS AND HARMONIC EMISSIONS	10
3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	11
4. LIST OF TEST EQUIPMENT	12
5. SUMMARY OF TEST RESULTS	13
6. SAMPLE CALCULATION.....	14
7. TEST DATA	15
7.1 CONDUCTED OUTPUT POWER.....	15
7.2 EFFECTIVE RADIATED POWER OUTPUT	22
7.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT	24
7.4 RADIATED SPURIOUS EMISSIONS.....	26
7.4.1 RADIATED SPURIOUS EMISSIONS (Band 17).....	26
7.4.2 RADIATED SPURIOUS EMISSIONS (Band 2).....	28
7.4.3 RADIATED SPURIOUS EMISSIONS (Band 4).....	30
7.4.4 RADIATED SPURIOUS EMISSIONS (Band 5).....	32
7.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
7.5.1 FREQUENCY STABILITY (LTE Band 17).....	34
7.5.2 FREQUENCY STABILITY (LTE Band 2).....	35
7.5.3 FREQUENCY STABILITY (LTE Band 4).....	36
7.5.4 FREQUENCY STABILITY (LTE Band 5).....	37
8. TEST PLOTS.....	38

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: Pantech Co., Ltd.

Address: Pantech Bldg, I-2, DMC, Sangam-Dong, Mapo-gu, Seoul, 121-792, Korea

FCC ID: JYCP9090

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2, § 22, §24, §27

EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC

FCC Model(s): P9090

Tx Frequency: 706.5 MHz – 713.5 MHz (LTE – Band 17), 1852.5 MHz – 1907.5 MHz (LTE – Band 2), 1712.5 MHz – 1752.5 MHz (LTE – Band 4), 826.5 MHz – 846.5 MHz (LTE – Band 5)

Max. RF Output Power:

Band 17, 10 MHz :	0.117 W ERP (QPSK) (20.69 dBm)
	0.114 W ERP (16-QAM) (20.59 dBm)
Band 17, 5 MHz :	0.104 W ERP (QPSK) (20.21 dBm)
	0.095 W ERP (16-QAM) (19.82 dBm)
Band 2, 10 MHz :	0.626 W EIRP (QPSK) (27.97 dBm)
	0.638 W EIRP (16-QAM) (28.05 dBm)
Band 2, 5 MHz:	0.609 W EIRP (QPSK) (27.85 dBm)
	0.592 W EIRP (16-QAM) (27.73 dBm)
Band 4, 10 MHz :	0.479 W EIRP (QPSK) (26.81 dBm)
	0.437 W EIRP (16-QAM) (26.41 dBm)
Band 4, 5 MHz :	0.555 W EIRP (QPSK) (27.45 dBm)
	0.537 W EIRP (16-QAM) (27.30 dBm)
Band 5, 10 MHz :	0.248 W ERP (QPSK) (23.95 dBm)
	0.247 W ERP (16-QAM) (23.93 dBm)
Band 5, 5 MHz :	0.246 W ERP (QPSK) (23.92 dBm)
	0.231 W ERP (16-QAM) (23.64 dBm)

Emission Designator(s):

Band 17, 10 MHz :	8M97G7D (QPSK) / 8M98W7D (16-QAM)
Band 17, 5 MHz :	4M58G7D (QPSK) / 4M57W7D (16-QAM)
Band 2, 10 MHz :	8M97G7D (QPSK) / 8M94W7D (16-QAM)
Band 2, 5MHz :	4M51G7D (QPSK) / 4M50W7D (16-QAM)
Band 4, 10 MHz :	8M96G7D (QPSK) / 8M96W7D (16-QAM)
Band 4, 5MHz :	4M50G7D (QPSK) / 4M50W7D (16-QAM)
Band 5, 10 MHz :	8M98G7D (QPSK) / 8M96W7D (16-QAM)
Band 5, 5 MHz :	4M49G7D (QPSK) / 4M49W7D (16-QAM)

Date(s) of Tests: May 28, 2012 ~ June 21, 2012

Antenna Specification

Manufacturer:	MicroRF Co., Ltd.
Antenna type:	INTENNA Antenna
Peak Gain:	-0.695 dBi

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 4 of 96



2. INTRODUCTION

2.1. EUT DESCRIPTION

The Pantech Co., Ltd. P9090 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC consists of GSM850, GSM1900, GPRS Class10, GPRS mode Class B(GPRS and GSM, but not simultaneously), EDGE, WCDMA850, WCDMA1900, HSDPA and HSUPA.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 5 of 96

3. DESCRIPTION OF TESTS

3.1 EFFECTIVE RADIATED POWER/EQUIVALENT ISOTROPIC RADIATED POWER

Test Set-up

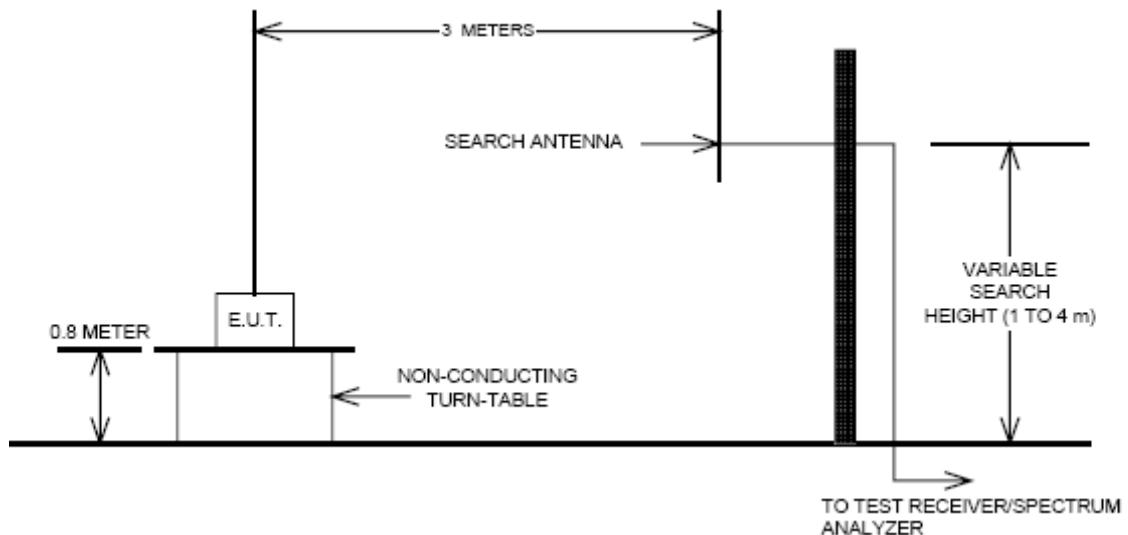

Test Procedure

Radiated emission measurements were performed at an Fully-anechoic chamber.


The equipment under test is placed on a non-conductive table 3-meters from the receive antenna. A turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 6 of 96

3.2 OCCUPIED BANDWIDTH.

Test set-up

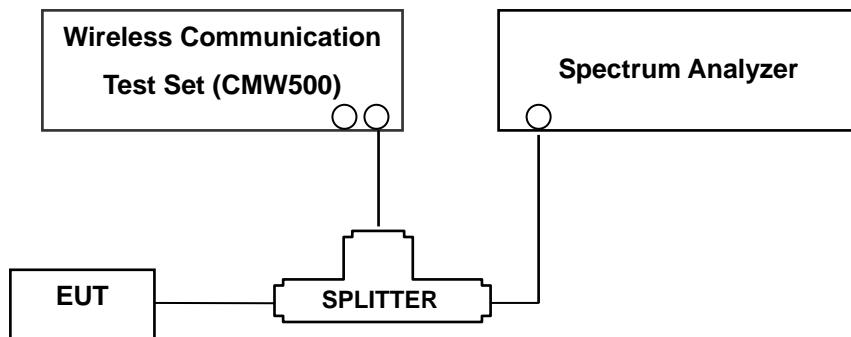

(Configuration of conducted Emission measurement)

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 7 of 96


3.3 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz)

§27.5(c)

Three paired channel blocks of 12 MHz each are available for assignment as follows : Block A: 698 – 704 MHz and 728 – 734 MHz ; Block B : 704 – 710 MHz and 734 – 740 MHz ; and Block C : 710 – 716 MHz and 740 – 746 MHz. Two unpaired channel blocks of 6 MHz each are available for assignment as follows : Block D : 716 – 722 MHz ; and Block E : 722- 728 MHz.


3.4 AWS – MOBILE FREQUENCY BLOCKS

§27.5(h)

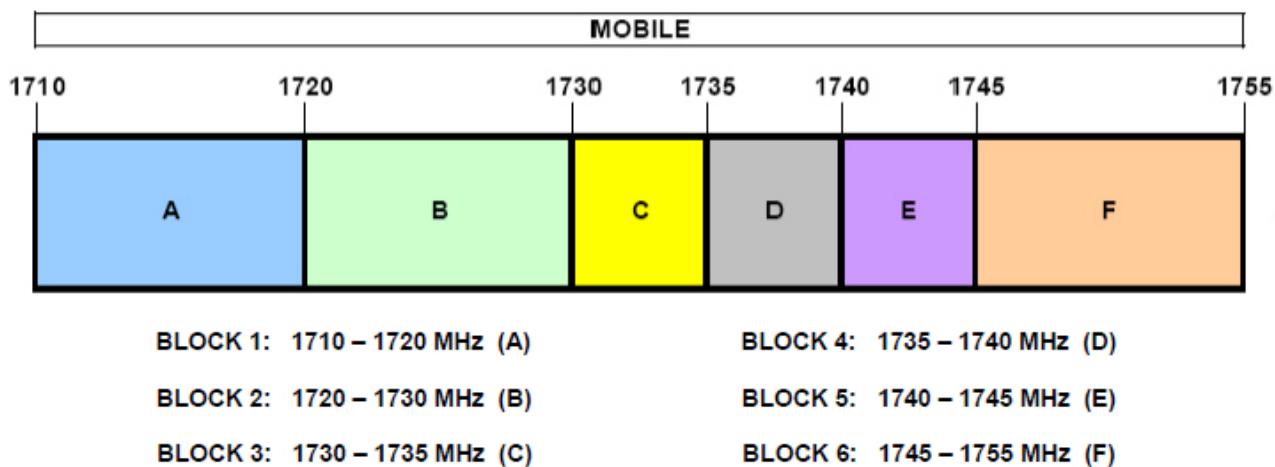

3.5 CELLULAR – MOBILE FREQUENCY BLOCKS

§22.917(a)

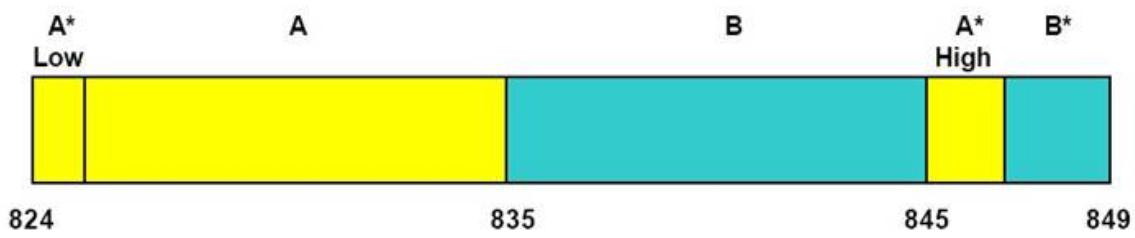



3.6 PEAK-AVERAGE RATIO.

§27.50(d)(5)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

- Plots of the EUT's Peak- to- Average Ratio are shown Page 27, 59, 74, 91

Band	Channel	Frequency(MHz)	Bandwidth	Modulation	P A R
LTE BAND 17	23790	710	5	QPSK	5.42
			10	QPSK	4.47
LTE BAND 5	20525	836.5	5	QPSK	5.04
			10	QPSK	5.03
LTE BAND 4	20175	1732.5	5	QPSK	4.98
			10	QPSK	4.89
LTE BAND 2	18900	1880	5	QPSK	4.43
			10	QPSK	4.87

3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 30 MHz to 26.5 GHz. A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

- Band Edge Requirement : In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC			FCC ID: JYCP9090
HCTR1206FR21-1	July 19, 2017				Page 9 of 96

3.8 RADIATED SPURIOUS AND HARMONIC EMISSIONS

Test Set-up

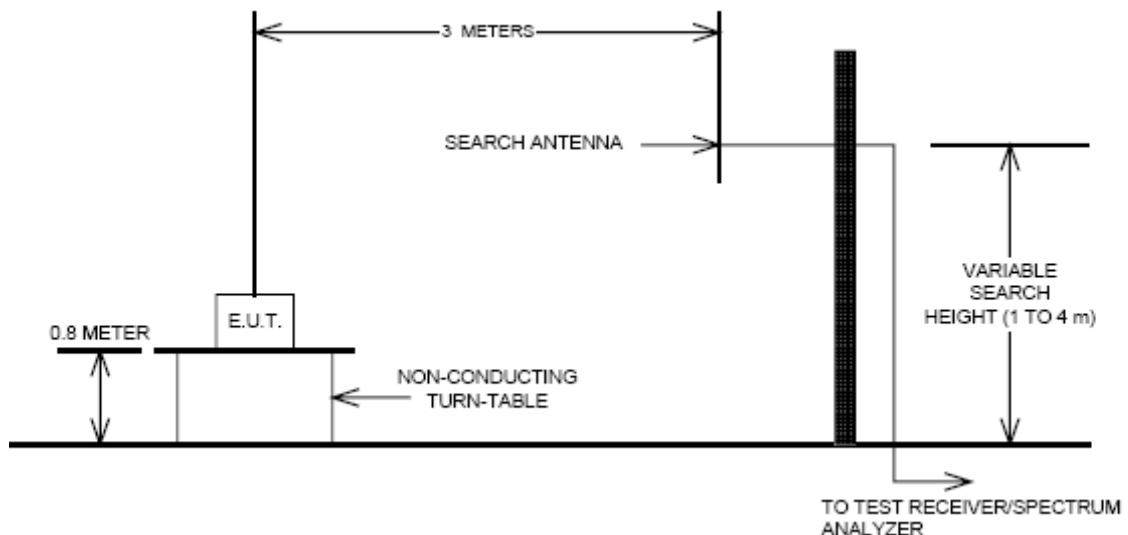

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section § 2.948. The Fully-anechoic chamber meets requirements in ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a rotatable platform mounted at three from the antenna mast.

- 1) The unit mounted on a turntable 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turntable is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.

Test Procedure


The equipment under test is placed on a non-conductive table 3-meters from the receive antenna. A turntable was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. A half wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the previously recorded signal was duplicated.

The maximum EIRP was calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps were carried out with the receiving antenna in both vertical and horizontal polarization. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 10 of 96
HCTR1206FR21-1	July 19, 2017			

3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

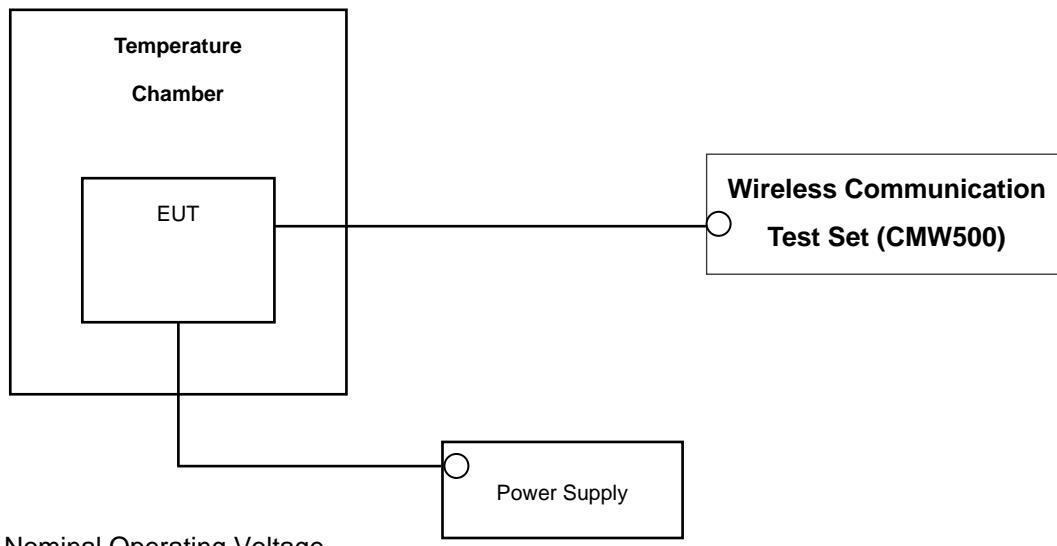

Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.000\ 25\% (\pm 2.5\ ppm)$ of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 11 of 96

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
R&S	N9020A	MY51110020	Annual	09/23/2012
Agilent	E9327A/ Power Sensor	MY4442009	Annual	05/02/2013
R&S	CMW500/ Base Station	1201.0002K50_116858	Annual	01/17/2013
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/24/2012
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	05/02/2013
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	05/02/2013
Hewlett Packard	11667B / Power Splitter	10126	Annual	11/04/2012
Digital	EP-3010/ Power Supply	3110117	Annual	11/07/2012
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/11/2013
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/11/2013
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	11/07/2012
Schwarzbeck	BBHA 9120D/ Horn Antenna	296	Biennial	02/20/2014
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	05/02/2013
WEINSCHEL	ATTENUATOR	BR0592	Annual	11/07/2012
REOHDE&SCHWARZ	FSP30/Spectrum Analyzer	839117/011	Annual	02/09/2013
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/10/2013

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a) 27.53(h)(1)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a), 27.53(h)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 +10 log ₁₀ (P[Watts]) at Band Edge and for all-of-band emissions		PASS
24.232(d), 27.50(d)(5)	Peak-Average Ratio	< 13 dB		PASS
2.1046	Conducted Output Power	N/A		PASS
2.1055, 22.355, 24.235, 27.54	Frequency stability / variation of ambient temperature	< 2.5 ppm		PASS
22.913(a)(2),	Effective Radiated Power(Band 5)	< 7 Watts max. ERP	RADIATED	PASS
27.50(c)(10)	Effective Radiated Power(Band 17)	< 3 Watts max. ERP		
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS
2.1053,22.917(a), 24.238(a), 27.53(h),27.53(g)	Undesirable Out-of-Band Emissions	< 43 +10 log ₁₀ (P[Watts]) for all out-of-band emissions		PASS

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
LTE	23230	782	-11.56	34.28	-8.32	1.17	H	0.30	24.79

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**ERP**).

B. Emission Designator

QPSK Modulation

Emission Designator = 8M95G7D

LTE BW = 8.95 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M94W7D

LTE BW = 8.94 MHz

D = Amplitude/Angle Modulated

7 = Quantized/Digital Info


W = Combination (Audio/Data)

FCC CERTIFICATION REPORT						www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC			FCC ID:	Page 14 of 96
HCTR1206FR21-1	July 19, 2017				JYCP9090	

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

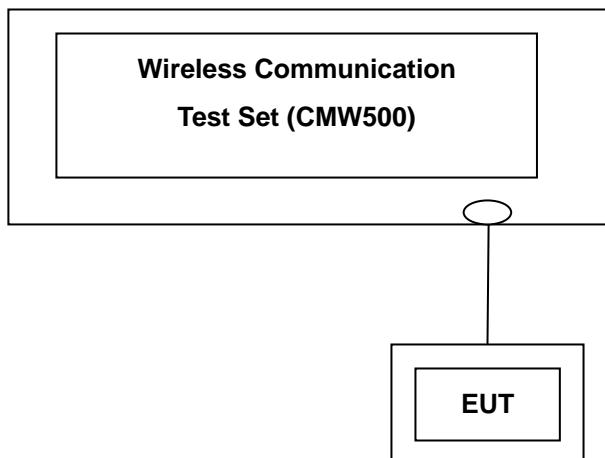

Test Result

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	709	23780	1	0	22.97	21.54
			1	49	22.97	21.63
			25	13	21.64	20.74
			50	0	21.64	20.71

LTE Conducted Average Output Powers (10 MHz Band 17 LTE)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	710	23790	1	0	22.82	21.52
			1	49	22.98	21.68
			25	13	21.65	20.82
			50	0	21.68	20.74

LTE Conducted Average Output Powers (10 MHz Band 17 LTE)

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC			FCC ID: JYCP9090
HCTR1206FR21-1	July 19, 2017				Page 15 of 96

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	711	73800	1	0	22.92	21.46
			1	49	22.82	21.49
			25	13	21.86	20.91
			50	0	21.63	20.70

LTE Conducted Average Output Powers (10 MHz Band 17 LTE)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1855	18650	1	0	23.00	22.10
			1	49	23.30	22.20
			25	13	22.10	20.90
			50	0	22.10	20.90

LTE Conducted Average Output Powers (10 MHz Band 2 LTE – Low Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1880	18900	1	0	22.93	21.93
			1	49	22.63	21.97
			25	13	21.86	20.88
			50	0	21.69	20.72

LTE Conducted Average Output Powers (10 MHz Band 2 LTE – Mid Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1905	19150	1	0	23.20	22.00
			1	49	22.90	21.70
			25	13	22.00	21.00
			50	0	22.20	21.00

LTE Conducted Average Output Powers (10 MHz Band 2 LTE – High Channel)

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC			FCC ID: JYCP9090
HCTR1206FR21-1	July 19, 2017				Page 16 of 96

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1715	20000	1	0	22.95	22.15
			1	49	23.00	22.24
			25	13	22.13	20.87
			50	0	22.11	20.75

LTE Conducted Average Output Powers (10 MHz Band 4 LTE – Low Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1732.5	20175	1	0	23.10	22.21
			1	49	22.82	21.91
			25	13	22.05	21.06
			50	0	22.03	20.80

LTE Conducted Average Output Powers (10 MHz Band 4 LTE – Mid Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1750	20350	1	0	22.92	21.55
			1	49	22.93	21.68
			25	13	21.80	20.63
			50	0	21.82	20.58

LTE Conducted Average Output Powers (10 MHz Band 4 LTE – High Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	829	20450	1	0	22.95	21.49
			1	49	22.77	21.50
			25	13	21.81	20.60
			50	0	21.70	20.76

LTE Conducted Average Output Powers (10 MHz Band 5 LTE – Low Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	836.5	20525	1	0	22.97	21.62
			1	49	22.92	21.49
			25	13	21.77	20.87
			50	0	21.88	20.96

LTE Conducted Average Output Powers (10 MHz Band 5 LTE – Mid Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	844	20600	1	0	22.90	21.82
			1	49	22.82	21.69
			25	13	21.68	20.82
			50	0	21.56	20.80

LTE Conducted Average Output Powers (10 MHz Band 5 LTE – High Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	706.5	23755	1	0	22.98	21.74
			1	24	22.89	21.62
			12	6	21.89	20.60
			25	0	21.76	20.63

LTE Conducted Average Output Powers (5 MHz Band 17 LTE - Low Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	710	23790	1	0	22.90	21.66
			1	24	22.96	21.80
			12	6	21.85	20.77
			25	0	21.78	20.68

LTE Conducted Average Output Powers (5 MHz Band 17 LTE - Mid Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	713.5	23825	1	0	22.99	21.88
			1	24	22.98	21.69
			12	6	22.00	21.03
			25	0	21.90	20.96

LTE Conducted Average Output Powers (5 MHz Band 17 LTE – High Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1852.5	18625	1	0	23.16	22.00
			1	24	23.19	22.17
			12	6	22.31	21.36
			25	0	22.12	21.26

LTE Conducted Average Output Powers (5 MHz Band 2 LTE – Low Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1880	18900	1	0	22.93	22.14
			1	24	22.86	21.99
			12	6	21.99	21.04
			25	0	21.96	21.04

LTE Conducted Average Output Powers (5 MHz Band 2 LTE – Mid Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1907.5	19175	1	0	23.33	22.28
			1	24	23.08	22.06
			12	6	22.34	21.23
			25	0	22.21	21.20

LTE Conducted Average Output Powers (5 MHz Band 2 LTE – High Channel)

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC			FCC ID: JYCP9090
HCTR1206FR21-1	July 19, 2017				Page 19 of 96

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1712.5	19975	1	0	23.22	22.03
			1	24	23.09	22.02
			12	6	22.11	21.08
			25	0	22.08	21.09

LTE Conducted Average Output Powers (5 MHz Band 4 LTE – Low Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1732.5	20175	1	0	23.10	22.00
			1	24	23.10	22.00
			12	6	22.10	21.00
			25	0	21.94	21.00

LTE Conducted Average Output Powers (5 MHz Band 4 LTE – Mid Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	1752.5	20375	1	0	22.92	21.98
			1	24	23.05	22.14
			12	6	21.95	20.74
			25	0	22.02	20.55

LTE Conducted Average Output Powers (5 MHz Band 4 LTE – High Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	826.5	20425	1	0	22.90	21.65
			1	24	22.97	21.71
			12	6	21.94	20.72
			25	0	21.82	20.74

LTE Conducted Average Output Powers (5 MHz Band 5 LTE – Low Channel)

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC			FCC ID: JYCP9090
HCTR1206FR21-1	July 19, 2017				Page 20 of 96

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	836.50	20525	1	0	22.98	21.90
			1	24	22.83	21.65
			12	6	22.09	20.82
			25	0	21.91	20.84

LTE Conducted Average Output Powers (5 MHz Band 5 LTE – Mid Channel)

Band	Frequency(MHz)	Channel	Resource Block Size	Resource Block Offset	Average Power [dBm]	
					QPSK	16-QAM
LTE	713.5	23825	1	0	22.89	21.58
			1	24	22.88	21.49
			12	6	21.82	20.85
			25	0	21.73	20.84

LTE Conducted Average Output Powers (5 MHz Band 5 LTE – High Channel)

Note : Detecting mode is average.



7.2 EFFECTIVE RADIATED POWER OUTPUT

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-16.83	31.72	-10.12	1.44	V	0.104	20.16
		16-QAM	-16.92	31.63	-10.12	1.44	V	0.102	20.07
		QPSK	-16.30	32.25	-10.12	1.44	H	0.117	20.69
		16-QAM	-16.40	32.15	-10.12	1.44	H	0.115	20.59
		QPSK	-16.88	31.67	-10.12	1.44	H	0.103	20.11
		16-QAM	-16.94	31.61	-10.12	1.44	H	0.101	20.05

Effective Radiated Power Data (Band 17 – 10 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-16.78	31.77	-10.12	1.44	V	0.105	20.21
		16-QAM	-17.17	31.38	-10.12	1.44	V	0.096	19.82
		QPSK	-16.94	31.61	-10.12	1.44	H	0.101	20.05
		16-QAM	-17.24	31.31	-10.12	1.44	H	0.094	19.75
		QPSK	-16.88	31.67	-10.12	1.44	H	0.103	20.11
		16-QAM	-17.19	31.36	-10.12	1.44	H	0.095	19.80

Effective Radiated Power Data (Band 17 – 5 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane (y plane 23755 ch) in LTE mode. Also worst case of detecting Antenna is horizontal polarization (vertical polarization 23755 ch) in LTE mode.

FCC CERTIFICATION REPORT							www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC				FCC ID:	Page 22 of 96
HCTR1206FR21-1	July 19, 2017					JYCP9090	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP	
								W	dBm
829.00	10 MHz	QPSK	-13.89	35.04	-10.54	1.64	V	0.19	22.86
		16-QAM	-14.09	34.84	-10.54	1.64	V	0.18	22.66
		QPSK	-12.80	36.12	-10.50	1.67	V	0.25	23.95
		16-QAM	-12.82	36.10	-10.50	1.67	V	0.25	23.93
		QPSK	-15.03	33.85	-10.47	1.65	V	0.15	21.73
		16-QAM	-15.15	33.73	-10.47	1.65	V	0.14	21.61

Equivalent Isotropic Radiated Power Output Data (Band 5 – 10 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
826.50	5 MHz	QPSK	-12.86	36.07	-10.54	1.61	V	0.25	23.92
		16-QAM	-13.14	35.79	-10.54	1.61	V	0.23	23.64
		QPSK	-12.95	35.97	-10.50	1.67	V	0.24	23.80
		16-QAM	-13.39	35.53	-10.50	1.67	V	0.22	23.36
		QPSK	-14.91	33.97	-10.47	1.65	V	0.15	21.85
		16-QAM	-14.90	33.98	-10.47	1.65	V	0.15	21.86

Equivalent Isotropic Radiated Power Output Data (Band 5 – 5 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is vertical polarization LTE mode.

FCC CERTIFICATION REPORT							www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC				FCC ID:	Page 23 of 96
HCTR1206FR21-1	July 19, 2017					JYCP9090	

7.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP	
								W	dBm
1850.0	10 MHz	QPSK	-12.14	19.66	10.02	1.71	H	0.627	27.97
		16-QAM	-12.06	19.74	10.02	1.71	H	0.638	28.05
		QPSK	-12.96	19.02	10.04	1.77	H	0.536	27.29
		16-QAM	-13.08	18.90	10.04	1.77	H	0.521	27.17
		QPSK	-13.61	18.65	10.05	1.80	H	0.490	26.90
		16-QAM	-13.64	18.62	10.05	1.80	H	0.486	26.87

Equivalent Isotropic Radiated Power Output Data (Band 2 – 10 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
1852.5	5 MHz	QPSK	-12.26	19.54	10.02	1.71	H	0.610	27.85
		16-QAM	-12.38	19.42	10.02	1.71	H	0.593	27.73
		QPSK	-12.88	19.10	10.04	1.77	H	0.546	27.37
		16-QAM	-13.00	18.98	10.04	1.77	H	0.531	27.25
		QPSK	-13.48	18.78	10.05	1.80	H	0.505	27.03
		16-QAM	-13.62	18.64	10.05	1.80	H	0.489	26.89

Equivalent Isotropic Radiated Power Output Data (Band 2 – 5 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC CERTIFICATION REPORT						www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC			FCC ID:	Page 24 of 96
HCTR1206FR21-1	July 19, 2017				JYCP9090	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	ERP		
								W	dBm	
1715.00	10 MHz	QPSK	-13.46	17.90	9.55	1.64	H	0.38	25.81	
		16-QAM	-13.54	17.82	9.55	1.64	H	0.37	25.73	
1732.50		QPSK	-12.69	18.81	9.65	1.65	H	0.48	26.81	
		16-QAM	-13.09	18.41	9.65	1.65	H	0.44	26.41	
1750.00		QPSK	-14.44	17.08	9.75	1.69	H	0.33	25.14	
		16-QAM	-14.42	17.10	9.75	1.69	H	0.33	25.16	

Equivalent Isotropic Radiated Power Output Data (Band 4 – 10 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP		
								W	dBm	
1712.50	5 MHz	QPSK	-13.75	17.61	9.55	1.64	H	0.36	25.52	
		16-QAM	-14.00	17.36	9.55	1.64	H	0.34	25.27	
1732.50		QPSK	-12.05	19.45	9.65	1.65	H	0.56	27.45	
		16-QAM	-12.20	19.30	9.65	1.65	H	0.54	27.30	
1752.50		QPSK	-14.54	16.98	9.75	1.69	H	0.32	25.04	
		16-QAM	-14.66	16.86	9.75	1.69	H	0.31	24.92	

Equivalent Isotropic Radiated Power Output Data (Band 4 – 5 MHz)

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 1 MHz BW signals, a peak detector is used, with RBW = VBW = 1 MHz. For 10 MHz BW signals, a peak detector is used, with RBW = VBW = 10 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC CERTIFICATION REPORT							www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC				FCC ID:	Page 25 of 96
HCTR1206FR21-1	July 19, 2017					JYCP9090	

7.4 RADIATED SPURIOUS EMISSIONS

7.4.1 RADIATED SPURIOUS EMISSIONS (Band 17)

OPERATING FREQUENCY : 710.00 MHz
 MEASURED OUTPUT POWER: 20.69 dBm = 0.117W
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 33.69 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitution Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1418.00	-55.17	7.69	-58.52	2.44	H	-53.27	-73.96
	2127.00	-50.88	10.61	-52.65	3.24	H	-45.28	-65.97
	2836.00	-56.83	10.99	-59.30	3.72	H	-52.03	-72.72
23790 (710.00)	1420.00	-49.11	7.69	-52.46	2.44	H	-47.21	-67.90
	2130.00	-51.32	10.61	-53.09	3.24	H	-45.72	-66.41
	2840.00	-55.60	10.99	-58.07	3.72	V	-50.80	-71.49
23800 (711.00)	1422.00	-56.07	7.69	-59.42	2.44	H	-54.17	-74.86
	2133.00	-52.04	10.61	-53.81	3.24	V	-46.44	-67.13
	2844.00	-56.44	10.99	-58.91	3.72	H	-51.64	-72.33

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.

OPERATING FREQUENCY : 706.50 MHz

MEASURED OUTPUT POWER: 20.21 dBm = 0.105W
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 33.21 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitution Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1413.00	-49.32	7.69	-52.67	2.44	H	-47.42	-67.63
	2119.50	-49.32	10.61	-51.09	3.24	H	-43.72	-63.93
	2826.00	-54.76	10.99	-57.23	3.72	V	-49.96	-70.17
23790 (710.00)	1420.00	-50.05	7.69	-53.40	2.44	H	-48.15	-68.36
	2130.00	-48.70	10.61	-50.47	3.24	V	-43.10	-63.31
	2840.00	-54.94	10.99	-57.41	3.72	H	-50.14	-70.35
23825 (713.50)	1427.00	-51.43	7.69	-54.78	2.44	V	-49.53	-69.74
	2140.50	-49.23	10.61	-51.00	3.24	H	-43.63	-63.84
	2854.00	-54.98	10.99	-57.45	3.72	V	-50.18	-70.39

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.

7.4.2 RADIATED SPURIOUS EMISSIONS (Band 2)

OPERATING FREQUENCY : 1850.0 MHz
 MEASURED OUTPUT POWER: 28.05 dBm = 0.638W
 MODULATION SIGNAL: 10 MHz 16QAM
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 41.05 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
18650 (1850.00)	3710.00	-45.17	12.36	-46.96	4.87	H	-39.47	-67.52
	5565.00	-47.95	12.61	-44.40	6.66	H	-38.45	-66.50
	7420.00	-48.94	10.96	-37.75	6.55	V	-33.34	-61.39
18900 (1880.00)	3760.00	-44.57	12.40	-46.29	4.88	V	-38.77	-66.82
	5640.00	-51.34	12.66	-47.46	6.64	H	-41.44	-69.49
	7520.00	-51.08	10.84	-38.70	7.32	V	-35.18	-63.23
19150 (1905.00)	3810.00	-49.54	12.45	-51.77	5.02	V	-44.34	-72.39
	5715.00	-50.51	12.71	-46.98	6.54	H	-40.81	-68.86
	7620.00	-52.79	10.87	-39.88	7.78	V	-36.79	-64.84

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.

OPERATING FREQUENCY : 1852.5 MHz
 MEASURED OUTPUT POWER: 27.85 dBm = 0.610W
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 40.85 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitution Level (dBm)	C.L	Pol	ERP (dBm)	dBc
18625 (1852.50)	3705.00	-47.30	12.36	-49.09	4.87	H	-41.60	-69.45
	5557.50	-47.88	12.61	-44.33	6.66	H	-38.38	-66.23
	4701.00	-49.10	10.96	-37.91	6.55	H	-33.50	-61.35
18900 (1880.00)	3760.00	-44.49	12.40	-46.21	4.88	V	-38.69	-66.54
	5640.00	-49.00	12.66	-45.12	6.64	H	-39.10	-66.95
	7520.00	-53.26	10.84	-40.88	7.32	V	-37.36	-65.21
19175 (1907.50)	3815.00	-49.14	12.45	-51.37	5.02	V	-43.94	-71.79
	5722.50	-47.91	12.71	-44.38	6.54	H	-38.21	-66.06
	7630.00	-52.21	10.87	-39.30	7.78	V	-36.21	-64.06

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.



7.4.3 RADIATED SPURIOUS EMISSIONS (Band 4)

OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 26.81 dBm = 0.480W
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 log₁₀(W)) = - 39.81 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitution Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20000 (1715.00)	3430.00	-48.54	12.05	-52.63	5.14	H	-45.74	-72.55
	5145.00	-44.26	12.49	-40.01	6.33	H	-33.86	-60.67
	6860.00	-52.72	11.60	-44.90	6.53	H	-39.82	-66.63
20175 (1732.50)	3465.00	-45.87	12.12	-50.13	4.56	H	-42.57	-69.38
	5197.50	-47.63	12.50	-43.69	6.54	H	-37.73	-64.54
	6930.00	-49.54	11.54	-50.13	4.56	H	-42.57	-69.38
20350 (1750.00)	3500.00	-47.61	12.21	-50.56	5.07	H	-43.41	-70.22
	5250.00	-40.97	12.52	-37.97	6.32	H	-31.77	-58.58
	7000.00	-53.78	11.49	-44.28	6.69	H	-39.48	-66.29

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC		FCC ID: JYCP9090	Page 30 of 96

OPERATING FREQUENCY : 1732.50 MHz
 MEASURED OUTPUT POWER: 27.45 dBm = 0.556W
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 log₁₀ (W)) = - 40.45 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitution Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20000 (1712.50)	3425.0	-49.23	12.05	-53.32	5.14	H	-46.43	-73.88
	5137.5	-43.04	12.49	-38.79	6.33	H	-32.64	-60.09
	6850.0	-51.13	11.60	-43.31	6.53	H	-38.23	-65.68
20175 (1732.50)	3465.0	-44.20	12.12	-48.46	4.56	H	-40.90	-68.35
	5197.5	-44.17	12.50	-40.23	6.54	H	-34.27	-61.72
	6930.0	-48.37	11.54	-40.01	6.70	H	-35.17	-62.62
20350 (1752.50)	3505.0	-48.05	12.21	-51.00	5.07	H	-43.85	-71.30
	5257.5	-40.00	12.52	-37.00	6.32	H	-30.80	-58.25
	7010.0	-55.63	11.49	-46.13	6.69	H	-41.33	-68.78

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.



7.4.4 RADIATED SPURIOUS EMISSIONS (Band 5)

OPERATING FREQUENCY : 836.50 MHz
 MEASURED OUTPUT POWER: 24.21 dBm = 0.248W
 MODULATION SIGNAL: 10 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 log₁₀ (W)) = - 36.95 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20450 (829.00)	1,658.00	-46.98	9.66	-51.61	2.63	V	-44.58	-68.53
	2,487.00	-48.19	10.79	-51.03	3.55	H	-43.79	-67.74
	3,316.00	-48.98	11.76	-52.35	4.79	H	-45.38	-69.33
20525 (836.50)	1,673.00	-51.89	9.77	-56.59	2.67	H	-49.49	-73.44
	2,509.50	-51.59	10.82	-54.70	3.61	H	-47.49	-71.44
	3,346.00	-47.02	11.87	-51.25	4.94	H	-44.32	-68.27
20600 (844.00)	1,688.00	-46.88	9.94	-52.01	2.61	H	-44.68	-68.63
	2,532.00	-48.92	10.84	-52.56	3.60	H	-45.32	-69.27
	3,376.00	-46.54	11.98	-51.61	4.11	H	-43.74	-67.69

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC		FCC ID: JYCP9090	Page 32 of 96

OPERATING FREQUENCY : 846.50 MHz
 MEASURED OUTPUT POWER: 23.92 dBm = 0.247W
 MODULATION SIGNAL: 5 MHz QPSK
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 log₁₀ (W)) = - 36.92 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitution Level (dBm)	C.L	Pol	ERP (dBm)	dBc
20425 (826.50)	1,653.00	-53.09	9.66	-57.72	2.63	H	-50.69	-74.61
	2,479.50	-52.06	10.79	-54.90	3.55	H	-47.66	-71.58
	3,306.00	-47.52	11.76	-50.89	4.79	H	-43.92	-67.84
20525 (836.50)	1,673.00	-47.84	9.77	-52.54	2.67	H	-45.44	-69.36
	2,509.50	-49.67	10.82	-52.78	3.61	H	-45.57	-69.49
	3,346.00	-47.09	11.87	-51.32	4.94	H	-44.39	-68.31
20625 (846.50)	1,693.00	-41.29	9.94	-46.42	2.61	V	-39.09	-63.01
	2,539.50	-51.00	10.84	-54.64	3.60	H	-47.40	-71.32
	3,386.00	-48.43	11.98	-53.50	4.11	H	-45.63	-69.55

NOTES:


1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Worst case is 1 resource block.

7.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.5.1 FREQUENCY STABILITY (LTE Band 17)

OPERATING FREQUENCY: 710,000,000 Hz
 CHANNEL: 23790 (5 MHz)
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	709 999 986	0	0.0000 000	0.000
100%		-30	709 999 983	-1.54	-0.0000 002	-0.002
100%		-20	709 999 978	-2.03	-0.0000 003	-0.003
100%		-10	709 999 985	-2.39	-0.0000 003	-0.003
100%		0	709 999 990	-1.66	-0.0000 002	-0.002
100%		+10	710 000 000	-1.80	-0.0000 003	-0.003
100%		+30	710 000 009	-1.76	-0.0000 002	-0.002
100%		+40	709 999 963	-1.40	-0.0000 002	-0.002
100%		+50	710 000 015	-1.23	-0.0000 002	-0.002
115%	4.255	+20	709 999 977	-2.00	-0.0000 003	-0.003
Batt. Endpoint	3.400	+20	709 999 960	-1.09	-0.0000 002	-0.002

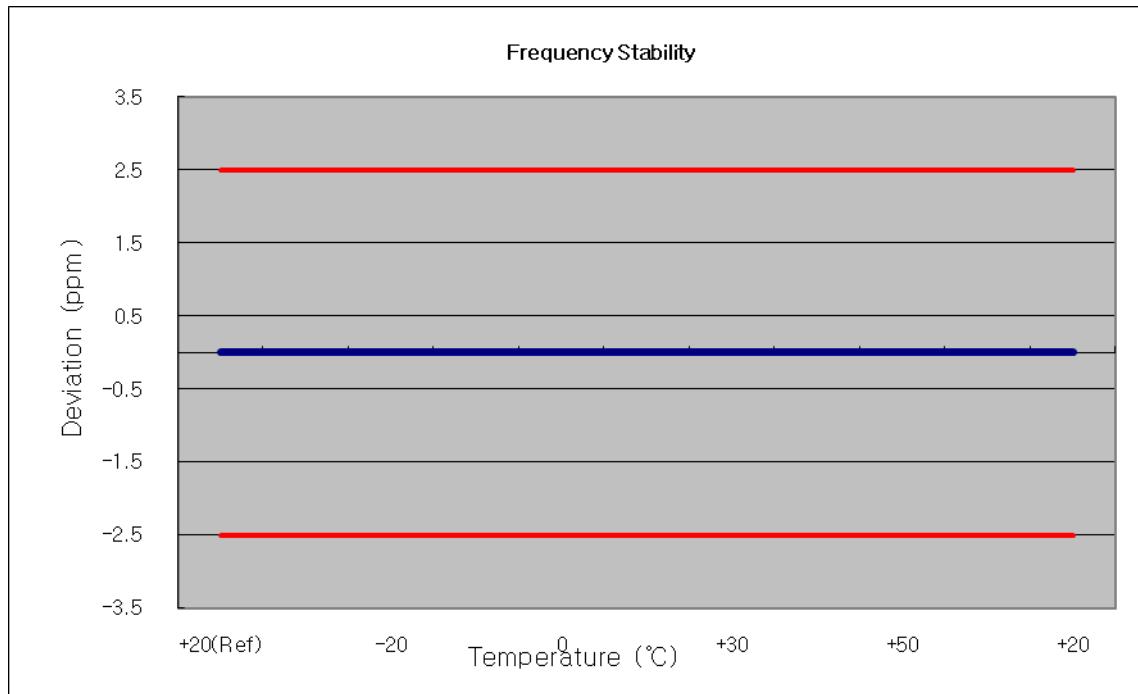

7.5.2 FREQUENCY STABILITY (LTE Band 2)

OPERATING FREQUENCY: 1880.000,000 Hz
 CHANNEL: 18900 (5MHZ)
 REFERENCE VOLTAGE: 3.70 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1880 000 006	0	0.000 000	0.000
100%		-30	1879 999 999	-1.17	0.000 000	-0.001
100%		-20	1880 000 000	0.39	0.000 000	0.000
100%		-10	1879 999 984	-15.86	-0.000 001	-0.008
100%		0	1879 999 984	-15.84	-0.000 001	-0.008
100%		+10	1879 999 986	-14.12	-0.000 001	-0.008
100%		+30	1879 999 990	-9.57	-0.000 001	-0.005
100%		+40	1879 999 992	-7.51	0.000 000	-0.004
100%		+50	1879 999 994	-5.75	0.000 000	-0.003
115%	4.255	+20	1879 999 996	-4.45	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1879 999 998	-1.90	0.000 000	-0.001

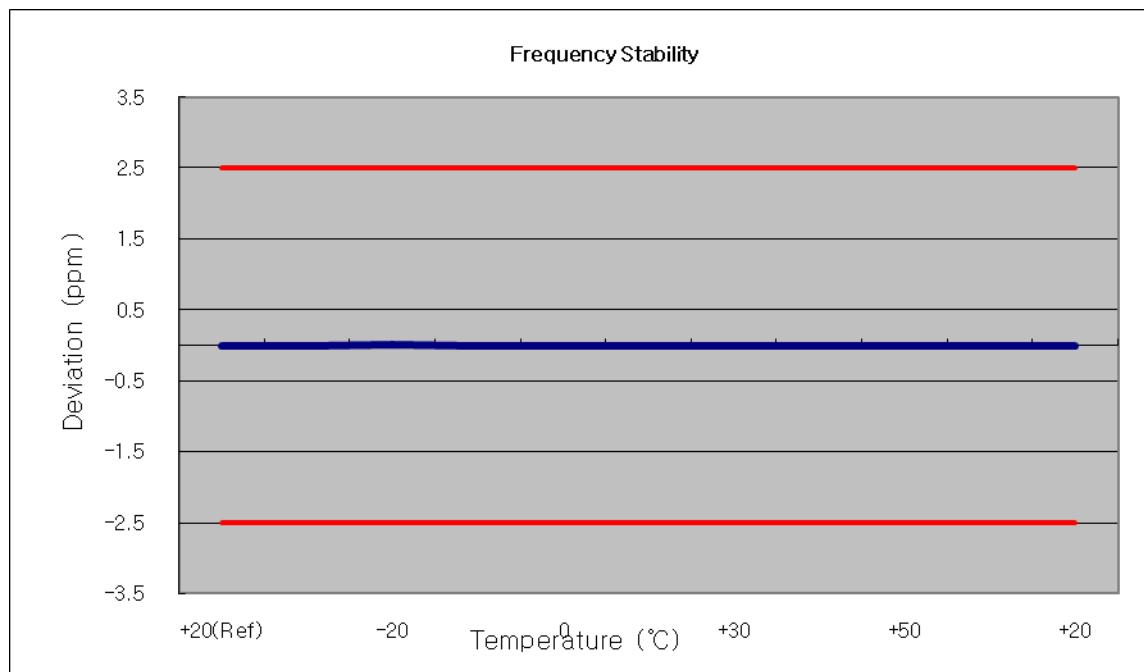

7.5.3 FREQUENCY STABILITY (LTE Band 4)

OPERATING FREQUENCY: 1732,500,000 Hz
 CHANNEL: 20175 (5 MHz)
 REFERENCE VOLTAGE: 3.70 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1732 499 999	0	0.000 000	0.000
100%		-30	1732 500 001	0.89	0.000 000	0.001
100%		-20	1732 500 000	0.34	0.000 000	0.000
100%		-10	1732 500 000	0.21	0.000 000	0.000
100%		0	1732 500 000	0.49	0.000 000	0.000
100%		+10	1732 500 001	1.03	0.000 000	0.001
100%		+30	1732 499 999	-0.63	0.000 000	0.000
100%		+40	1732 500 001	0.69	0.000 000	0.000
100%		+50	1732 500 002	1.8	0.000 000	0.001
115%	4.255	+20	1732 500 001	1.17	0.000 000	0.001
Batt. Endpoint	3.400	+20	1732 500 002	2.35	0.000 000	0.001

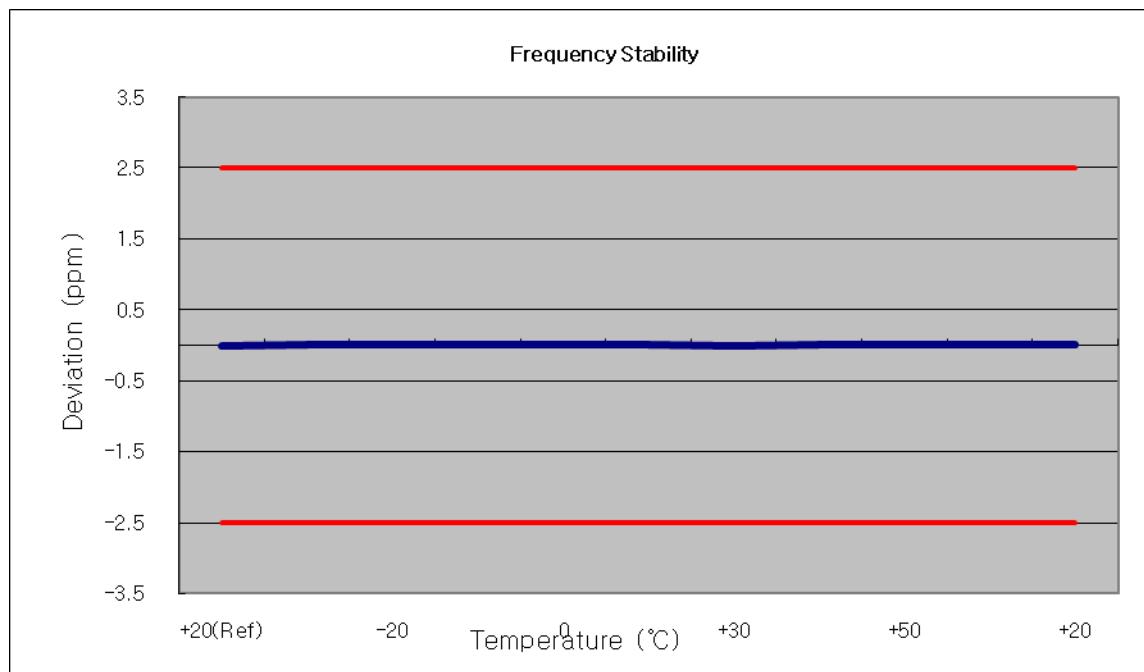

7.5.4 FREQUENCY STABILITY (LTE Band 5)

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525 (5 MHz)
 REFERENCE VOLTAGE: 3.70 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 499 998	0	0.000 000	0.000
100%		-30	836 499 999	1.39	0.000 000	0.002
100%		-20	836 500 000	2.42	0.000 000	0.003
100%		-10	836 499 999	1.65	0.000 000	0.002
100%		0	836 499 998	0.59	0.000 000	0.001
100%		+10	836 499 997	-0.30	0.000 000	0.000
100%		+30	836 499 997	-0.77	0.000 000	-0.001
100%		+40	836 499 995	-2.36	0.000 000	-0.003
100%		+50	836 499 998	-0.06	0.000 000	0.000
115%	4.255	+20	836 500 002	4.08	0.000 000	0.005
Batt. Endpoint	3.400	+20	836 500 001	3.23	0.000 000	0.004

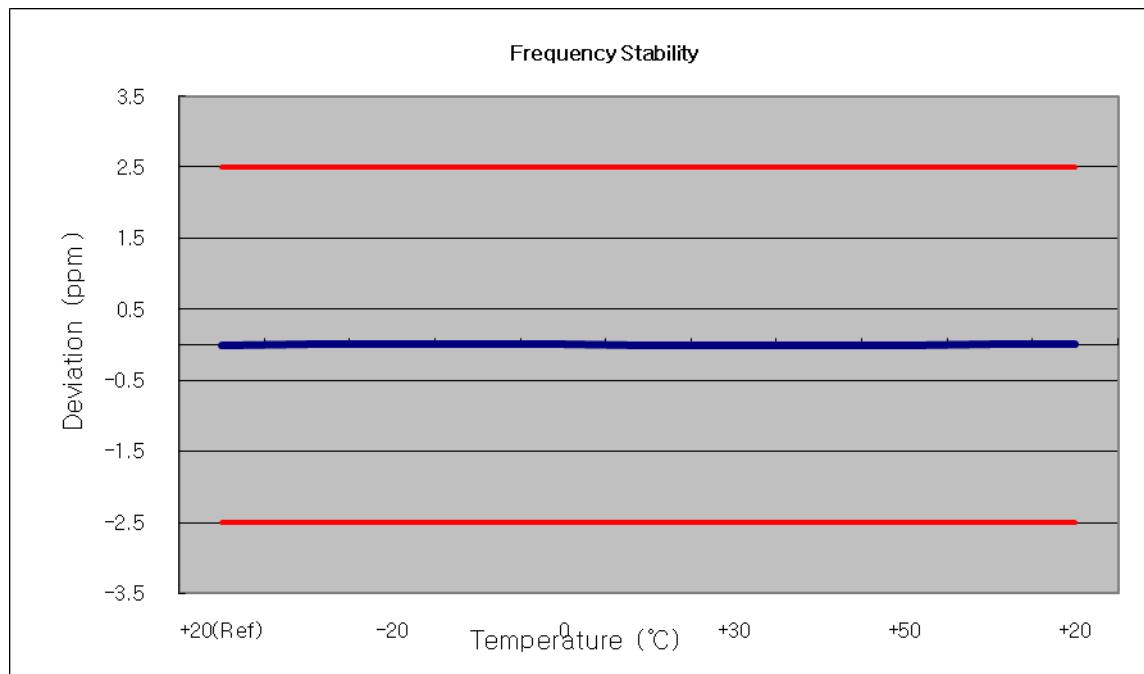



8. TEST PLOTS

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 38 of 96

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)-1



Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)-2




FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 39 of 96

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – Mid Channel)-1



Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – Mid Channel)-2

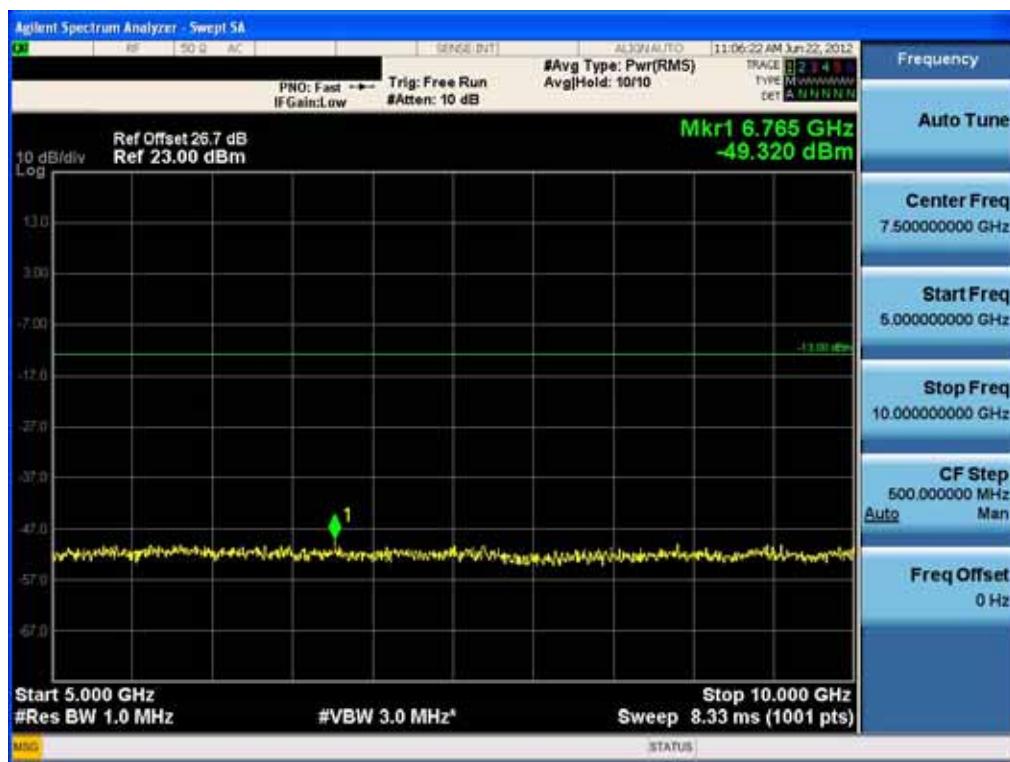


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 40 of 96
HCTR1206FR21-1	July 19, 2017			

Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 49 – Mid Channel)-1

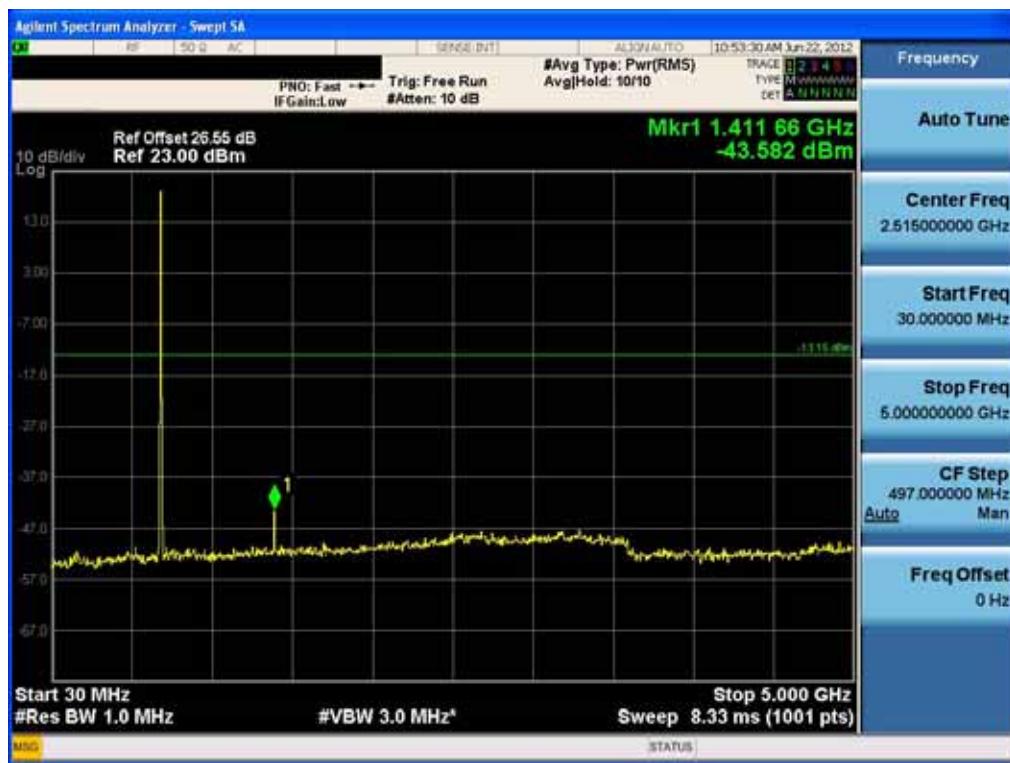

Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 49 – Mid Channel)-2

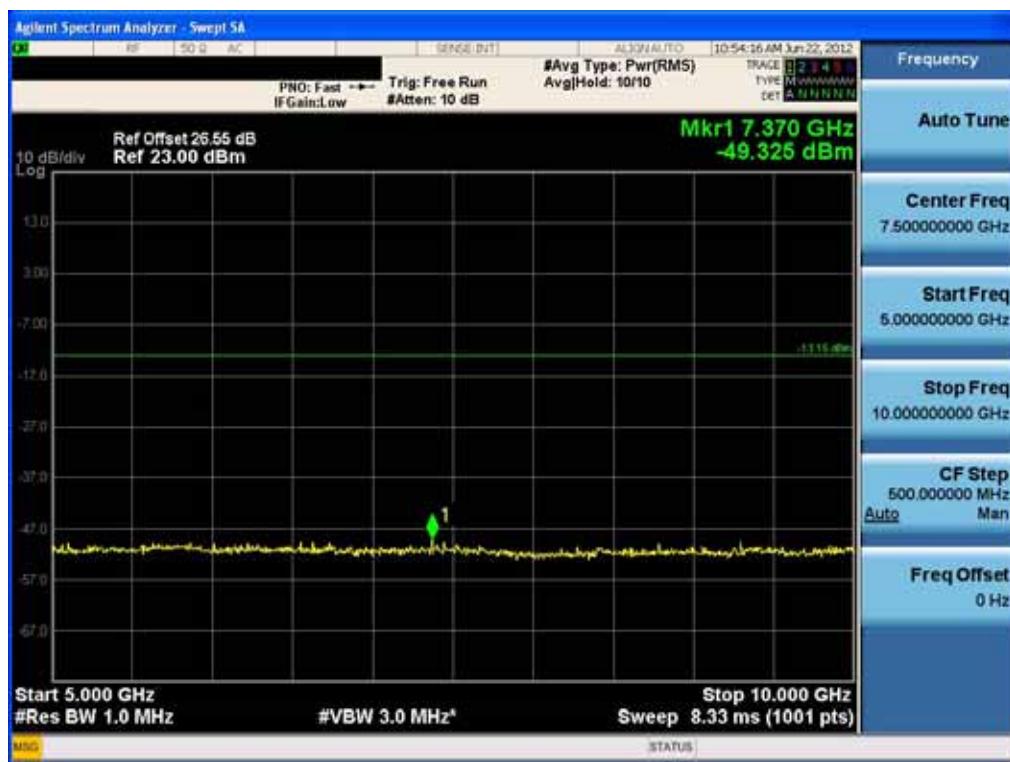

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – High Channel)-1



Conducted Spurious Plot (5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)-2



FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page	42 of 96

Lower Band Edge Plot (5MHz QPSK - RB Size 1, Offset 0)



Lower Band Edge Plot (5MHz QPSK - RB Size 25, Offset 0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 43 of 96
HCTR1206FR21-1	July 19, 2017			

Lower Band Edge Plot (10MHz QPSK - RB Size 1, Offset 0)



Lower Band Edge Plot (10MHz QPSK - RB Size 50, Offset 0)



FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 44 of 96


Occupied Bandwidth Plot (5MHz QPSK - RB Size 25)




Occupied Bandwidth Plot (5MHz 16-QAM - RB Size 25)



Occupied Bandwidth Plot (10MHz QPSK – RB Size 25)

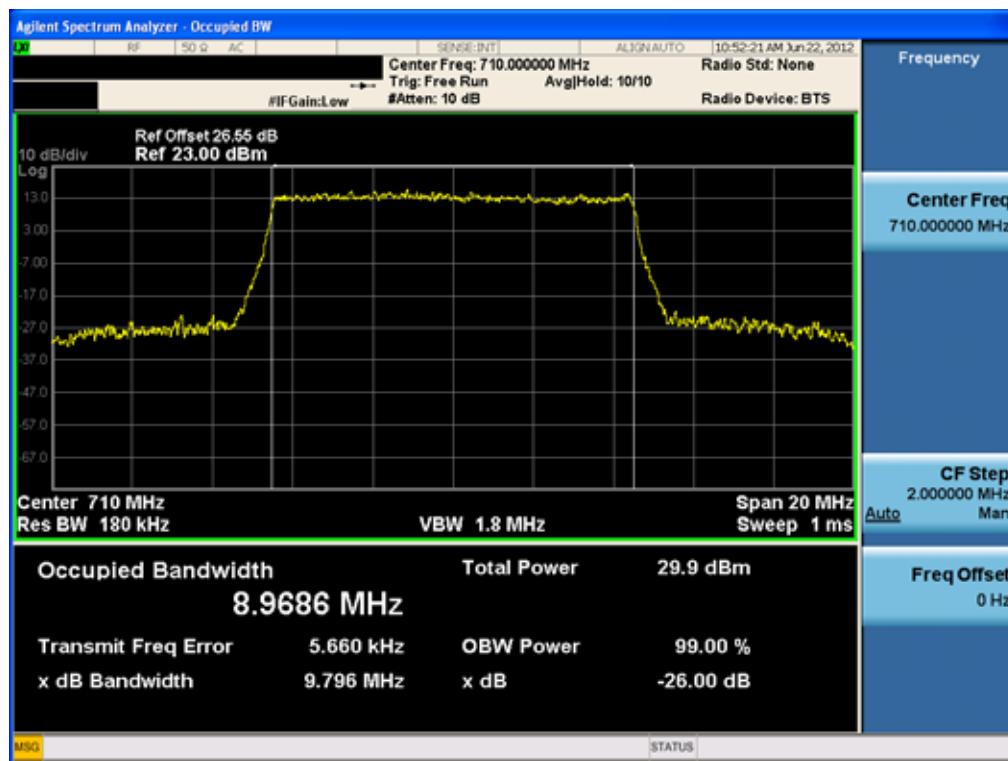


Occupied Bandwidth Plot (10MHz 16-QAM – RB Size 25)

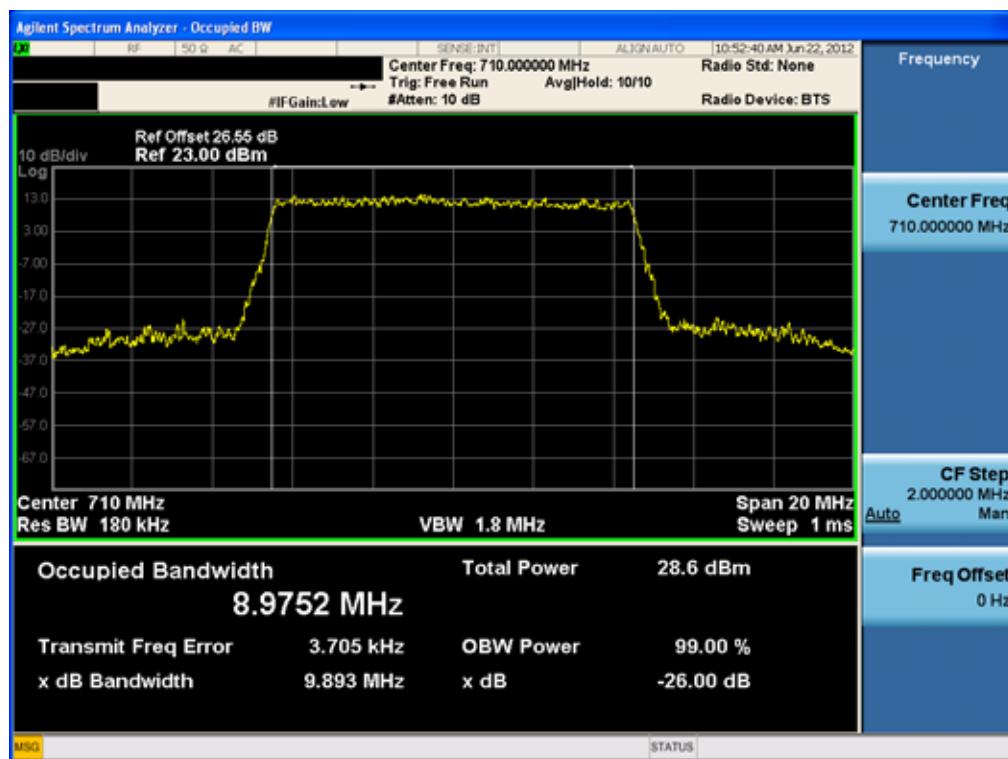

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 46 of 96

Upper Band Edge Plot (5MHz QPSK – RB Size 1, Offset 24)

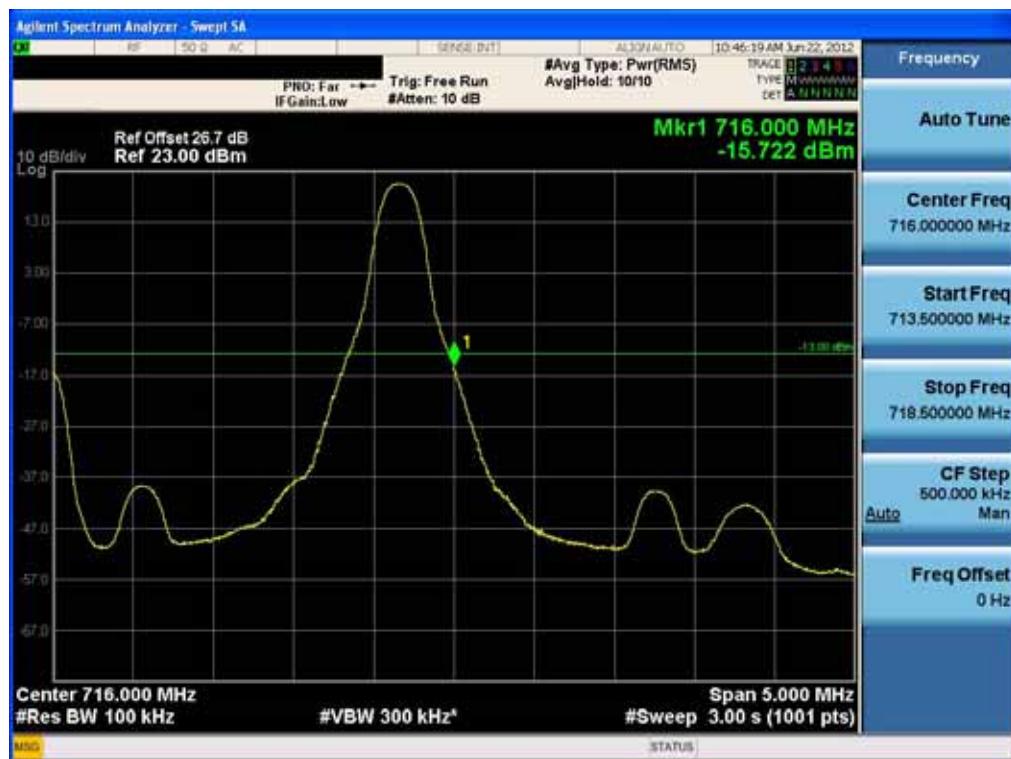

Upper Band Edge Plot (5MHz QPSK – RB Size 25, Offset 0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 47 of 96
HCTR1206FR21-1	July 19, 2017			

Upper Band Edge Plot (10MHz QPSK - RB Size 1, Offset 49)



Upper Band Edge Plot (10MHz QPSK - RB Size 50, Offset 0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 48 of 96
HCTR1206FR21-1	July 19, 2017			

PAR Plot (5MHz QPSK – RB Size 1)



PAR Plot (10MHz QPSK – RB Size 1)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 49 of 96
-----------------------------------	---------------------------------	---	---------------------	---------------

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – Low Channel)-1



Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – Low Channel)-2



FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 50 of 96
HCTR1206FR21-1	July 19, 2017			

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)-1



Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)-2

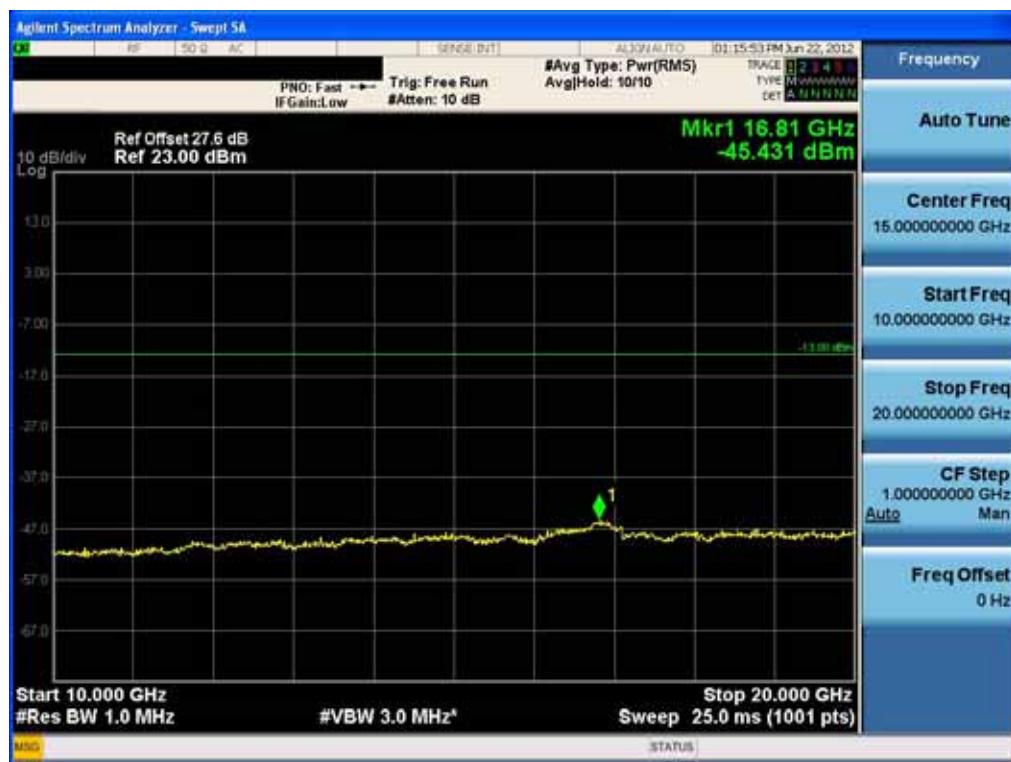

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 51 of 96
HCTR1206FR21-1	July 19, 2017			

Conducted Spurious Plot (5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)-1



Conducted Spurious Plot (5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)-2



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID:	Page 52 of 96
HCTR1206FR21-1	July 19, 2017		JYCP9090	

Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 49 – Low Channel)-1



Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 49 – Low Channel)-2



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 53 of 96
HCTR1206FR21-1	July 19, 2017			

Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)-1




Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)-2



Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 0 – High Channel)-1



Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 0 – High Channel)-2

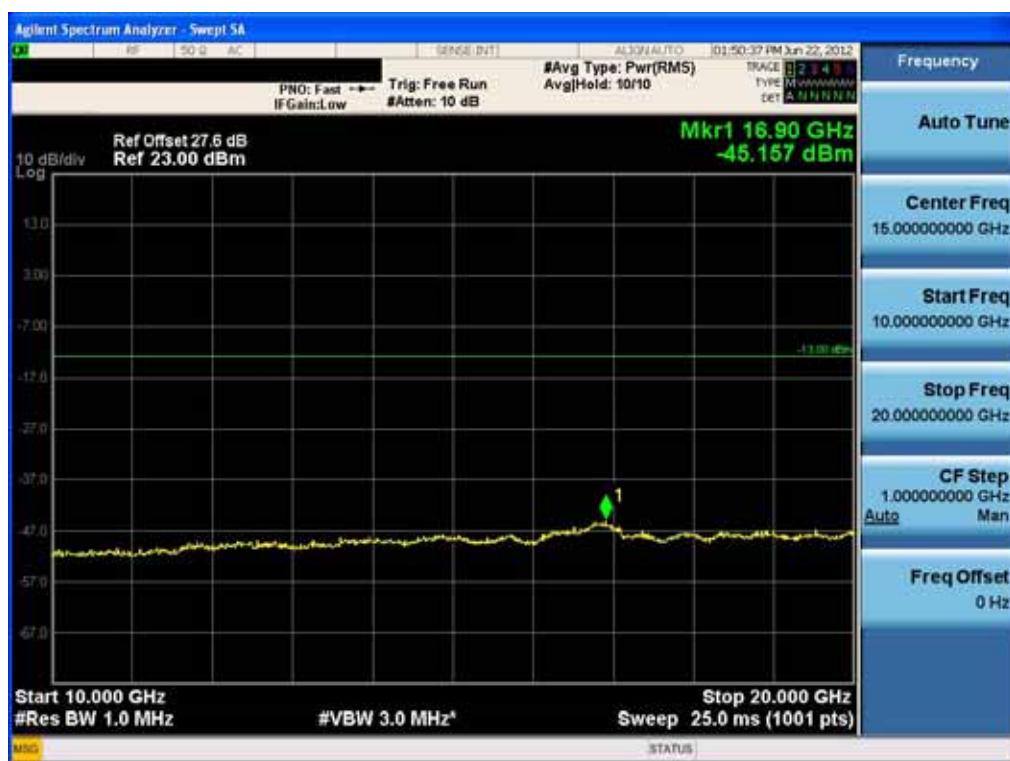


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 55 of 96

Occupied Bandwidth Plot (5MHz QPSK - RB Size 25)



Occupied Bandwidth Plot (5MHz 16-QAM - RB Size 25)

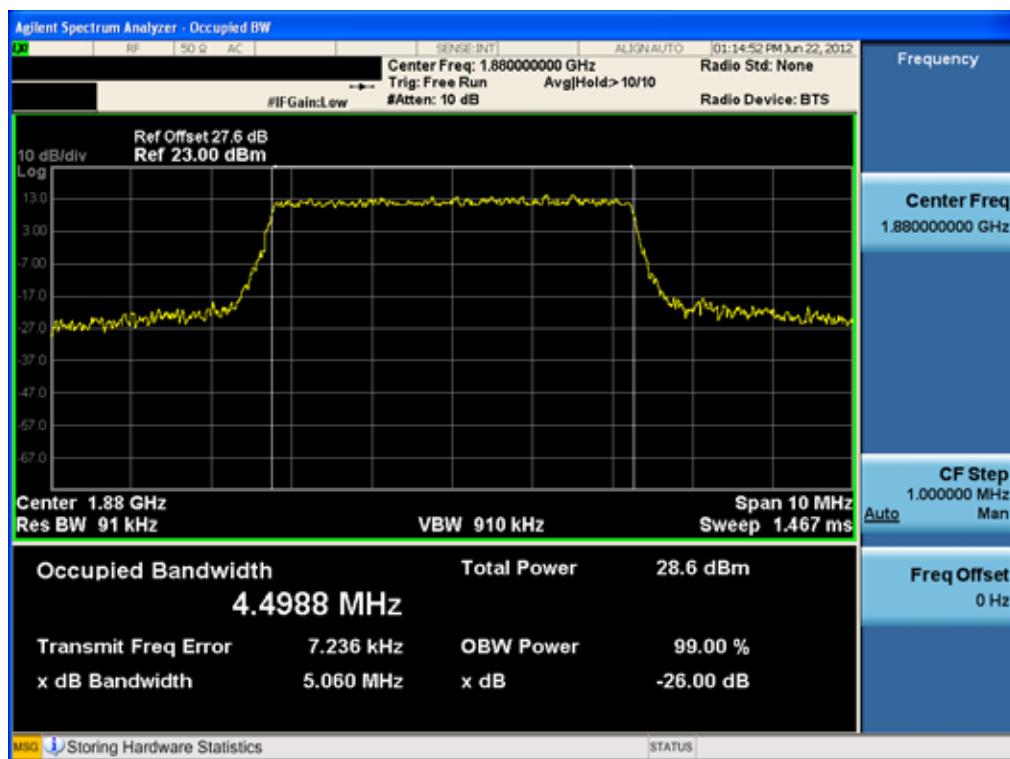


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 56 of 96
HCTR1206FR21-1	July 19, 2017			

Occupied Bandwidth Plot (10MHz QPSK – RB Size 25)

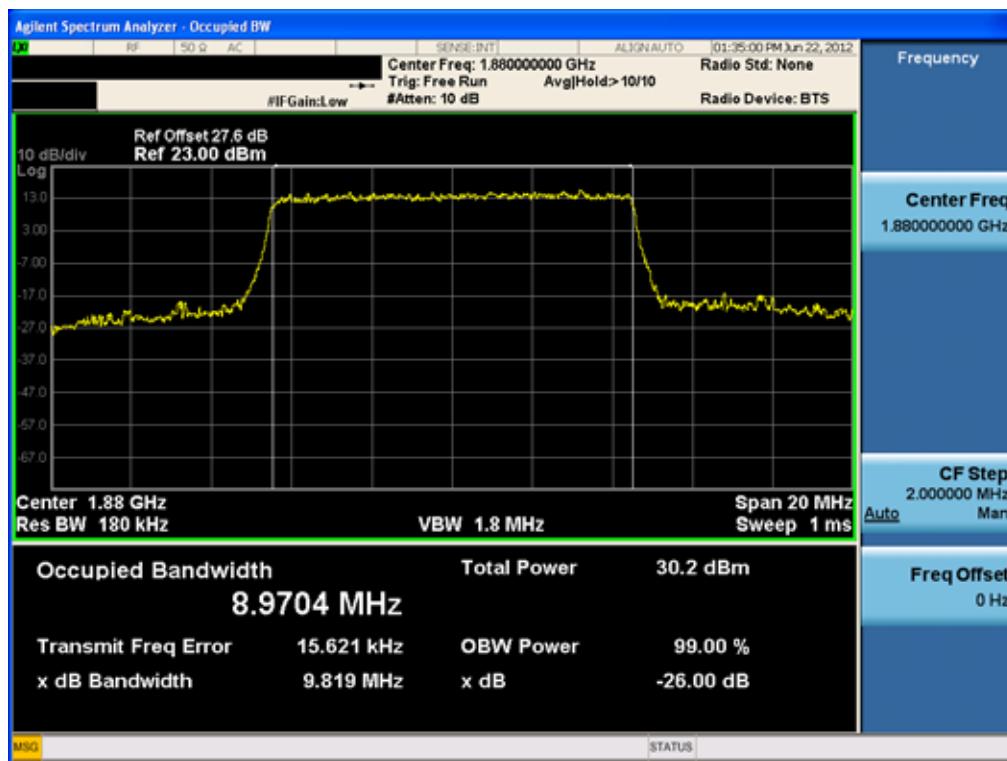

Occupied Bandwidth Plot (10MHz 16-QAM – RB Size 25)

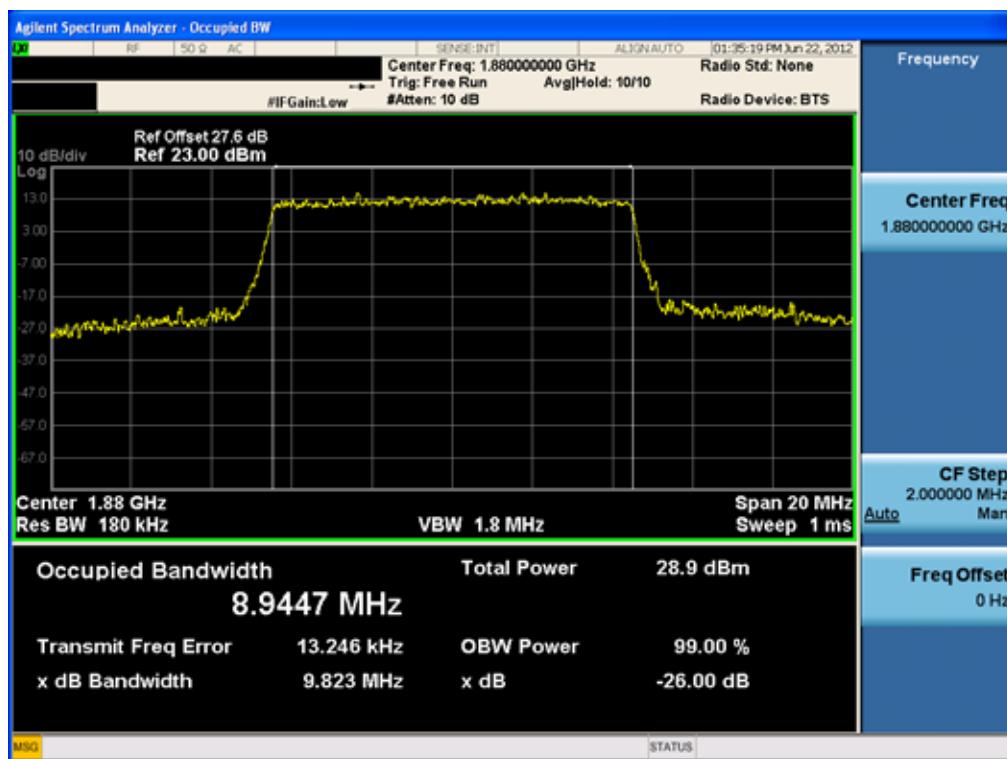


FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 57 of 96
HCTR1206FR21-1	July 19, 2017			

PAR Plot (5MHz QPSK – RB Size 1)

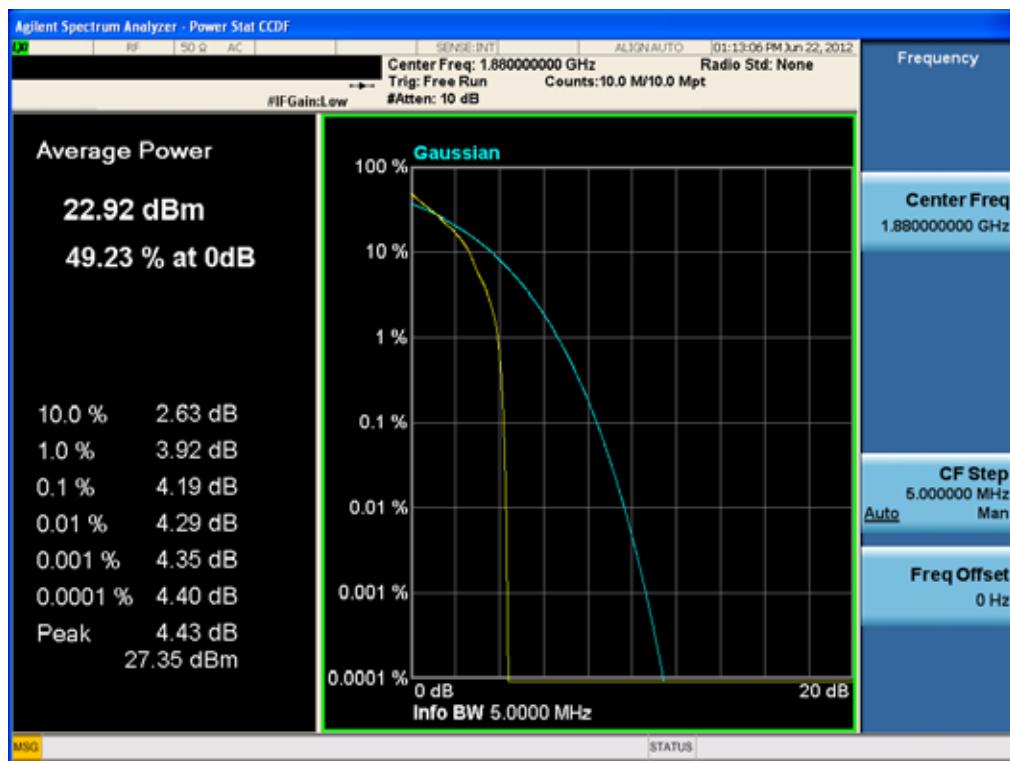

PAR Plot (10MHz QPSK – RB Size 1)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 58 of 96
HCTR1206FR21-1	July 19, 2017			

Lower Band Edge Plot (5MHz QPSK - RB Size 1, Offset 0)



Lower Band Edge Plot (5MHz QPSK - RB Size 25, Offset 0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 59 of 96
HCTR1206FR21-1	July 19, 2017			

Lower Band Edge Plot (10MHz QPSK - RB Size 1, Offset 0)



Lower Band Edge Plot (10MHz QPSK - RB Size 50, Offset 0)




FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 60 of 96

Lower Extended Band Edge Plot (5MHz QPSK – RB Size 1, Offset 0)



Lower Extended Band Edge Plot (5MHz QPSK – RB Size 25, Offset 0)

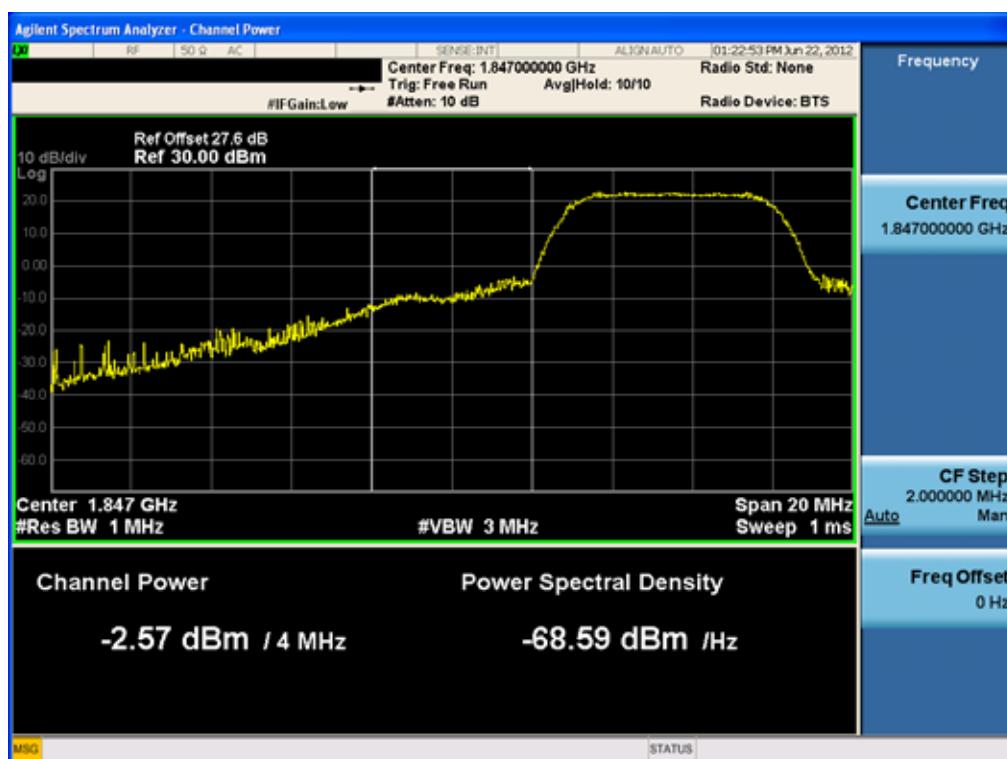


FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 61 of 96
HCTR1206FR21-1	July 19, 2017			

Lower Extended Band Edge Plot (10MHz QPSK – RB Size 1, Offset 0)

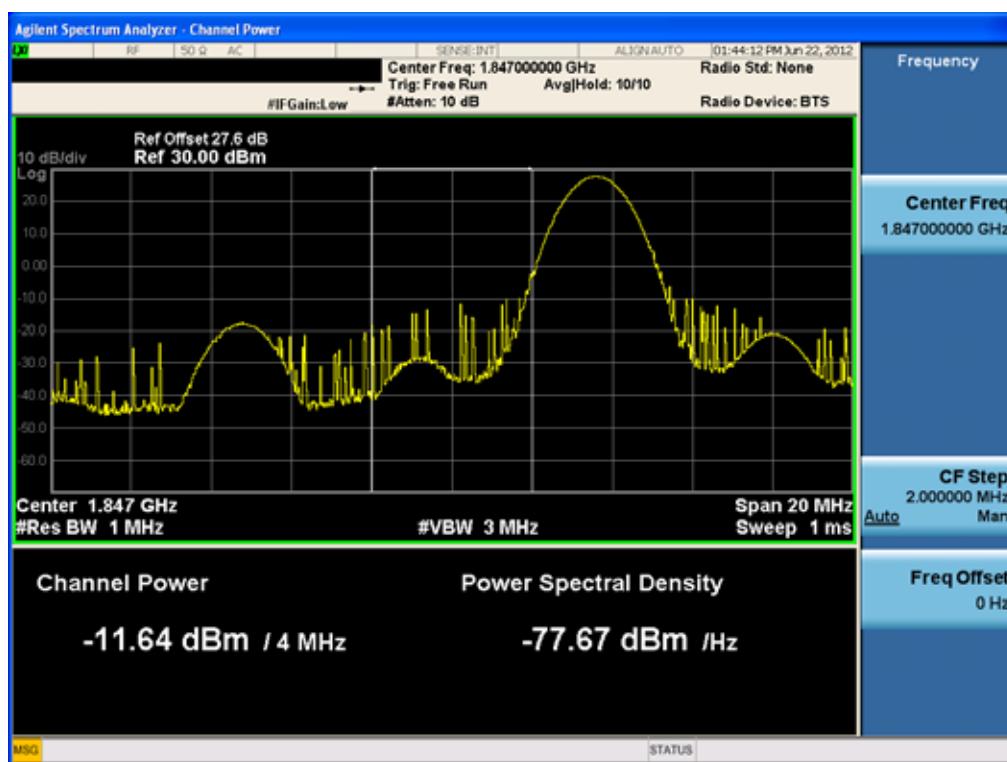

Lower Extended Band Edge Plot (10MHz QPSK – RB Size 50, Offset 0)



FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 62 of 96

Upper Band Edge Plot (5MHz QPSK – RB Size 1, Offset 24)



Upper Band Edge Plot (5MHz QPSK – RB Size 25, Offset 0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID:	Page 63 of 96
HCTR1206FR21-1	July 19, 2017		JYCP9090	

Upper Band Edge Plot (10MHz QPSK - RB Size 1, Offset 49)



Upper Band Edge Plot (10MHz QPSK - RB Size 50, Offset 0)




FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 64 of 96
HCTR1206FR21-1	July 19, 2017			

Upper Extended Band Edge Plot (5MHz QPSK - RB Size 1, Offset 24)

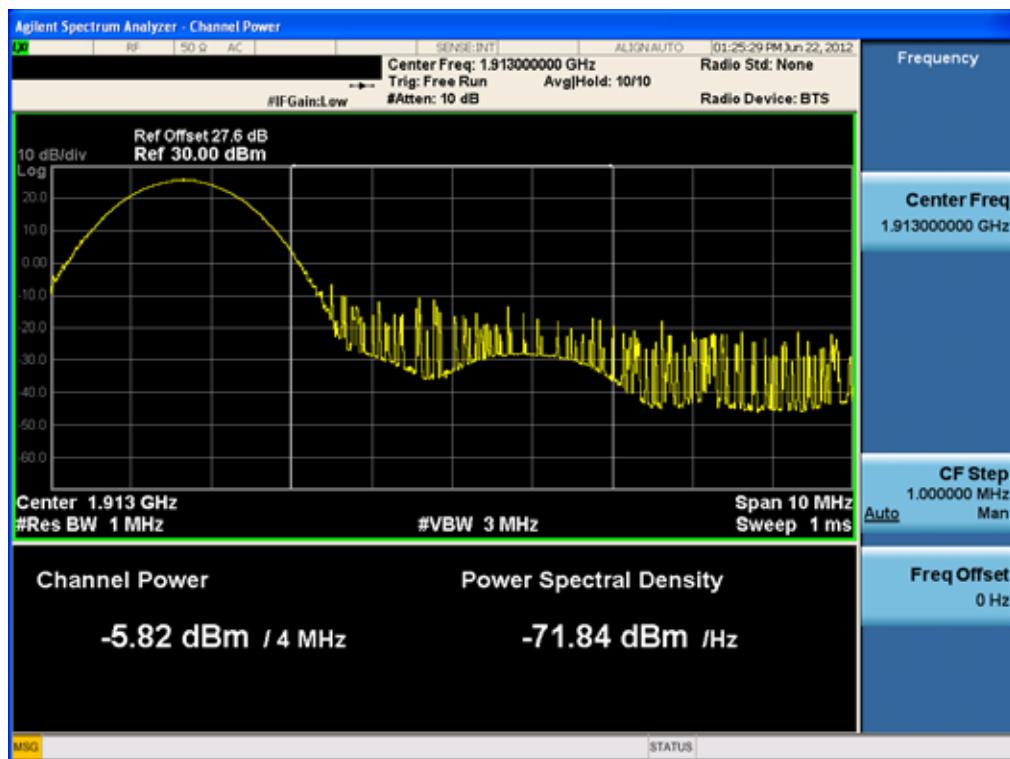


Upper Extended Band Edge Plot (5MHz QPSK - RB Size 25, Offset 0)



FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 65 of 96

Upper Extended Band Edge Plot (10MHz QPSK – RB Size 1, Offset 49)

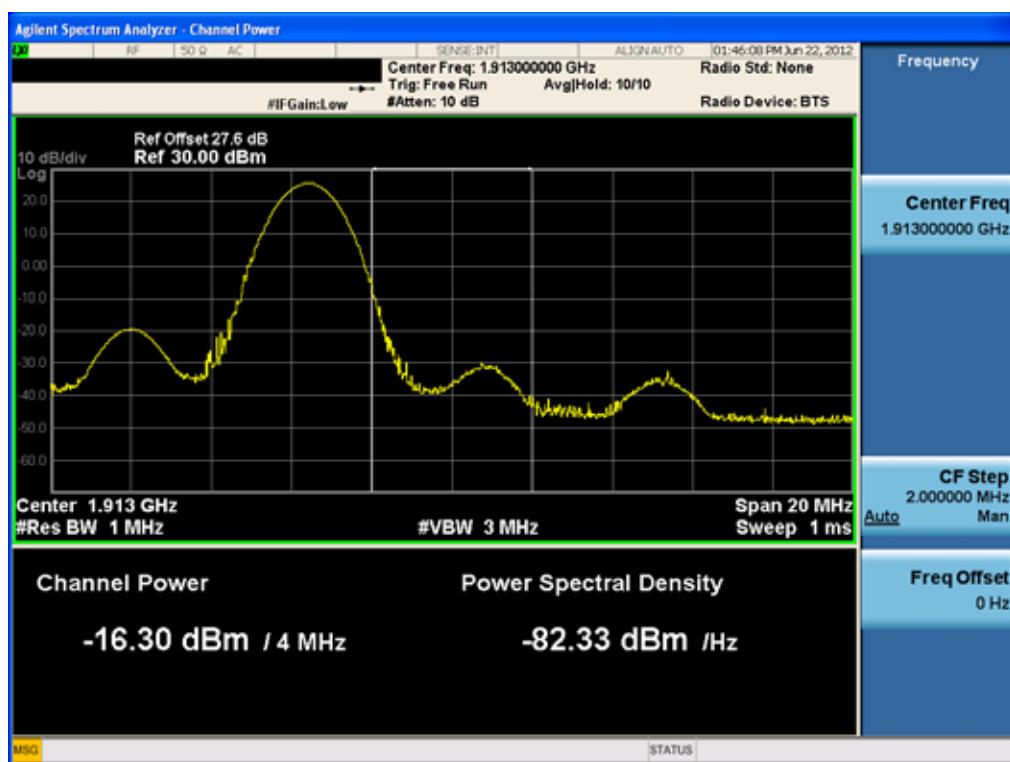

Upper Extended Band Edge Plot (10MHz QPSK – RB Size 1, Offset 49)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 66 of 96
HCTR1206FR21-1	July 19, 2017			

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)-1



Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)-2



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID:	Page 67 of 96
HCTR1206FR21-1	July 19, 2017		JYCP9090	

Conducted Spurious Plot (5MHz QPSK - RB Size 1, RB Offset 24 - Mid Channel)-1



Conducted Spurious Plot (5MHz QPSK - RB Size 1, RB Offset 24 - Mid Channel)-2



FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 68 of 96

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – High Channel)-1



Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – High Channel)-2



FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 69 of 96
-----------------------------------	---------------------------------	---	---------------------	---------------

Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 49 – Low Channel)-1



Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 49 – Low Channel)-2

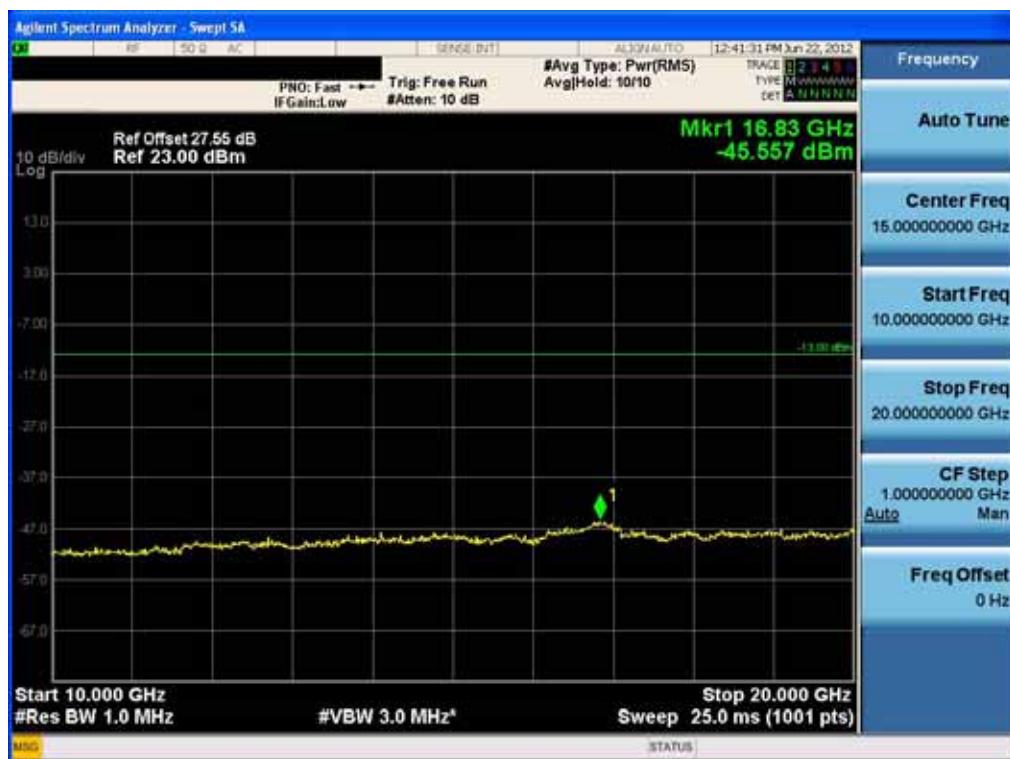

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 70 of 96
-----------------------------------	---------------------------------	---	---------------------	---------------

Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)-1



Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)-2



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 71 of 96
-----------------------------------	---------------------------------	---	---------------------	---------------

Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 49 - High Channel)-1




Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 49 - High Channel)-2



FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090		Page 72 of 96

PAR Plot (5MHz QPSK – RB Size 1)

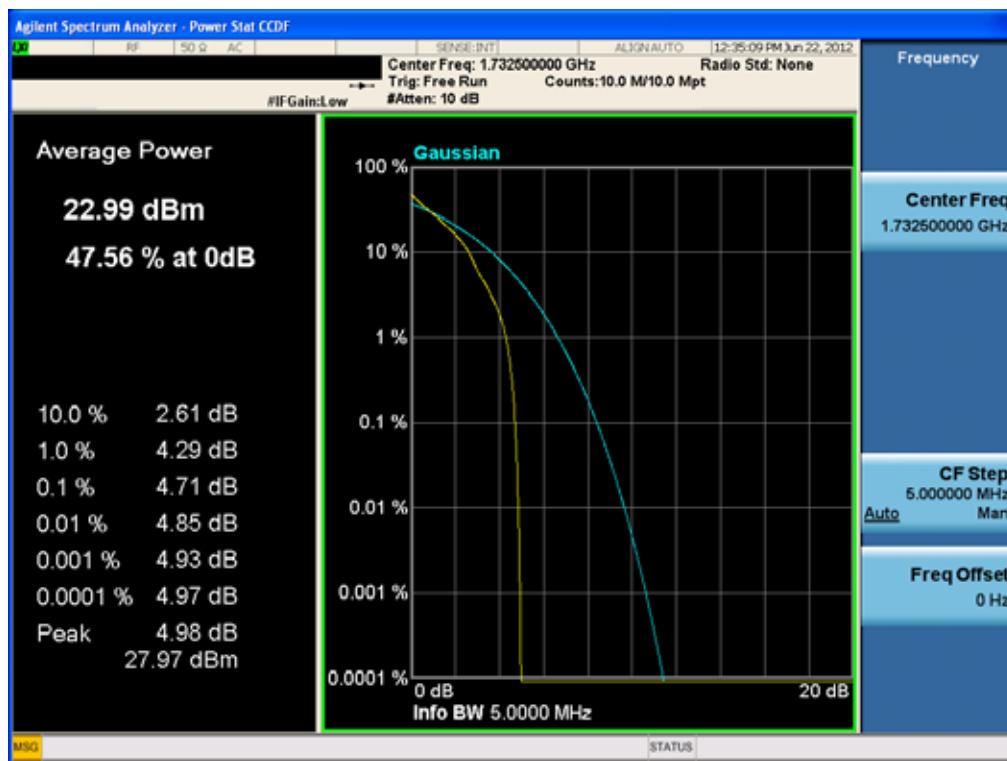

PAR Plot (10MHz QPSK – RB Size 1)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 73 of 96
-----------------------------------	---------------------------------	---	---------------------	---------------

Lower Band Edge Plot (5MHz QPSK - RB Size 1, Offset 0)



Lower Band Edge Plot (5MHz QPSK - RB Size 25, Offset 0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 74 of 96
HCTR1206FR21-1	July 19, 2017			

Lower Band Edge Plot (10MHz QPSK – RB Size 1, Offset 0)



Lower Band Edge Plot (10MHz QPSK – RB Size 50, Offset 0)



FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 75 of 96
HCTR1206FR21-1	July 19, 2017			

Lower Extended Band Edge Plot (5MHz QPSK – RB Size 1, Offset 0)




Lower Extended Band Edge Plot (5MHz QPSK – RB Size 25, Offset 0)

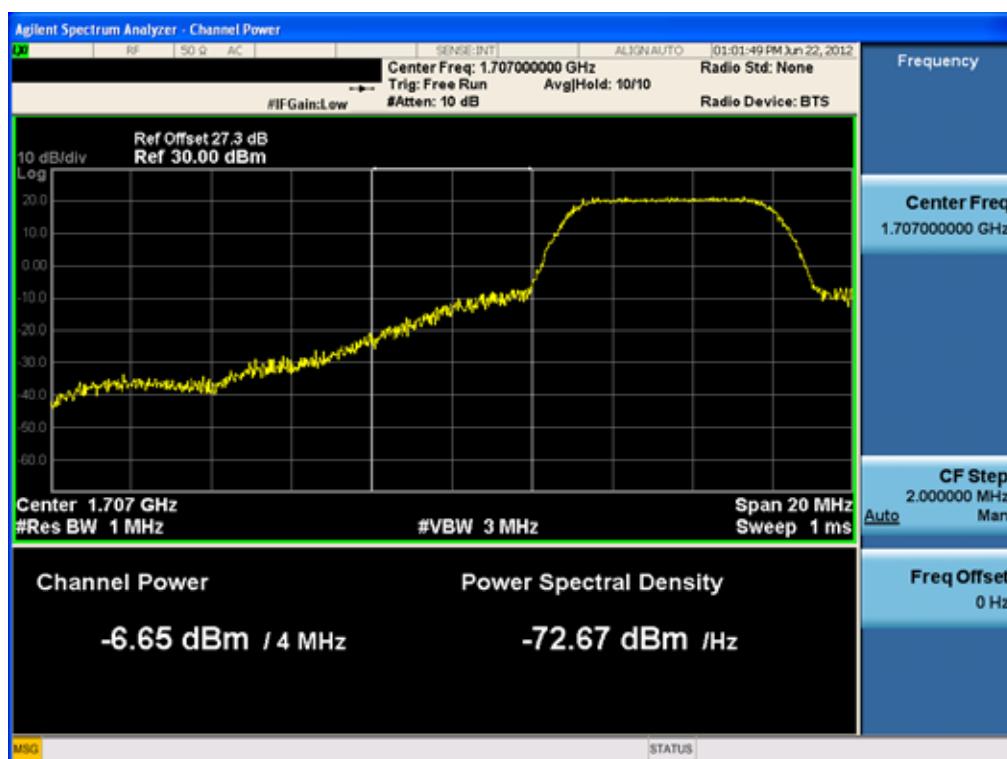

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 76 of 96

Lower Extended Band Edge Plot (10MHz QPSK – RB Size 1, Offset 0)

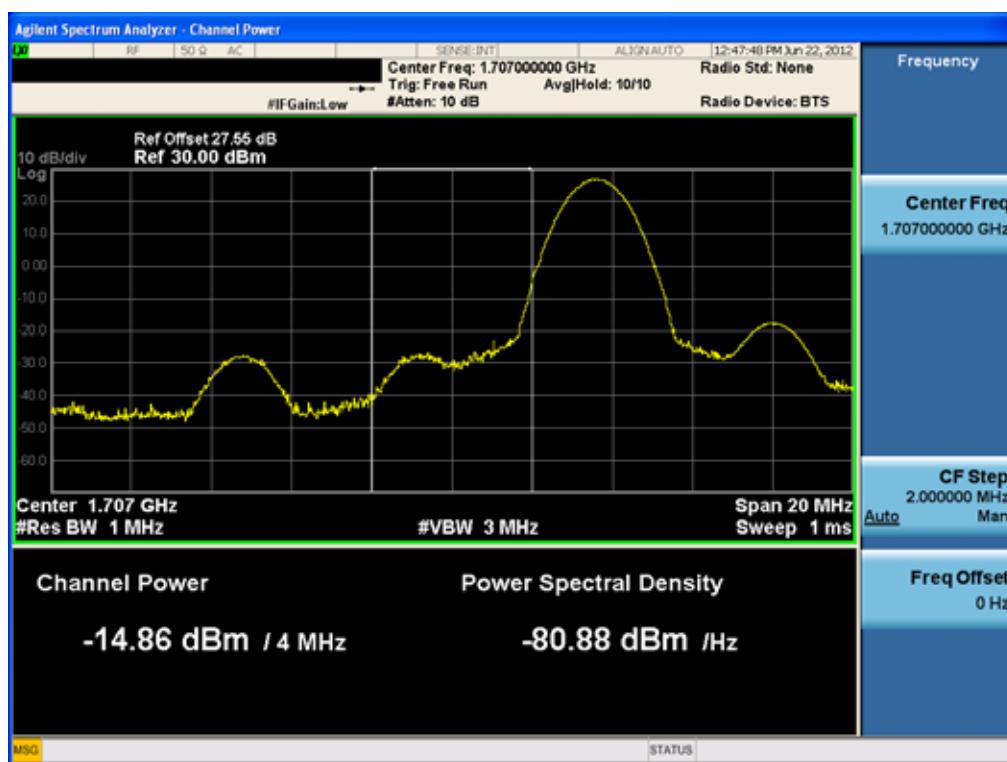

Lower Extended Band Edge Plot (10MHz QPSK – RB Size 50, Offset 0)




FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 77 of 96
HCTR1206FR21-1	July 19, 2017			

Occupied Bandwidth Plot (5MHz QPSK - RB Size 25)

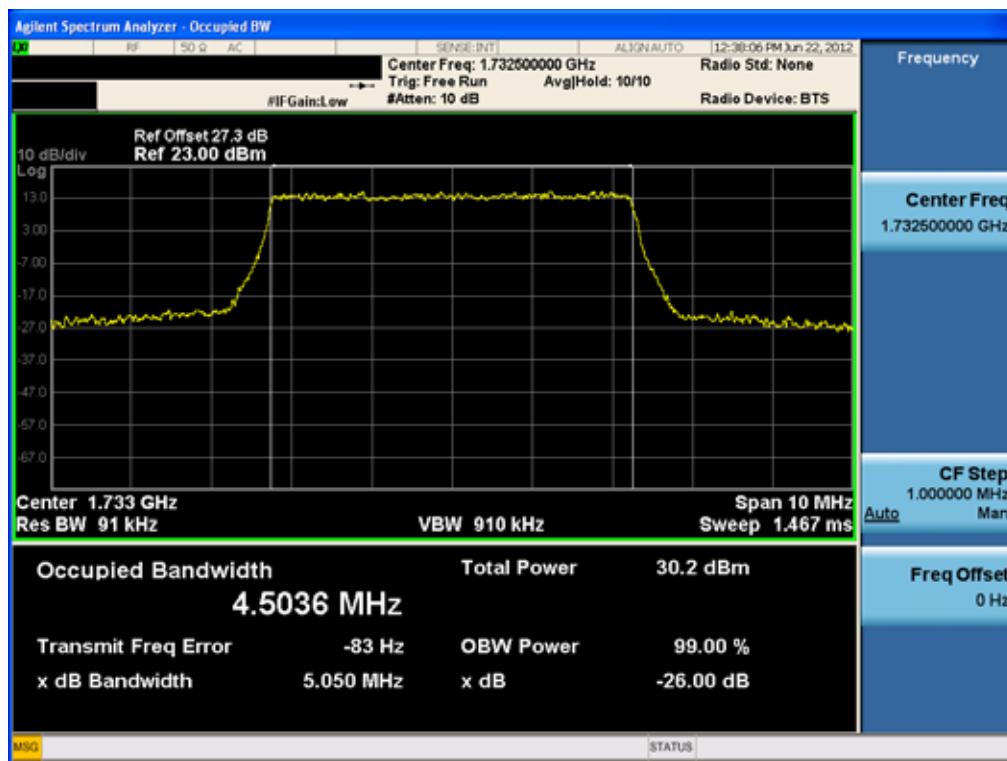

Occupied Bandwidth Plot (5MHz 16-QAM - RB Size 25)

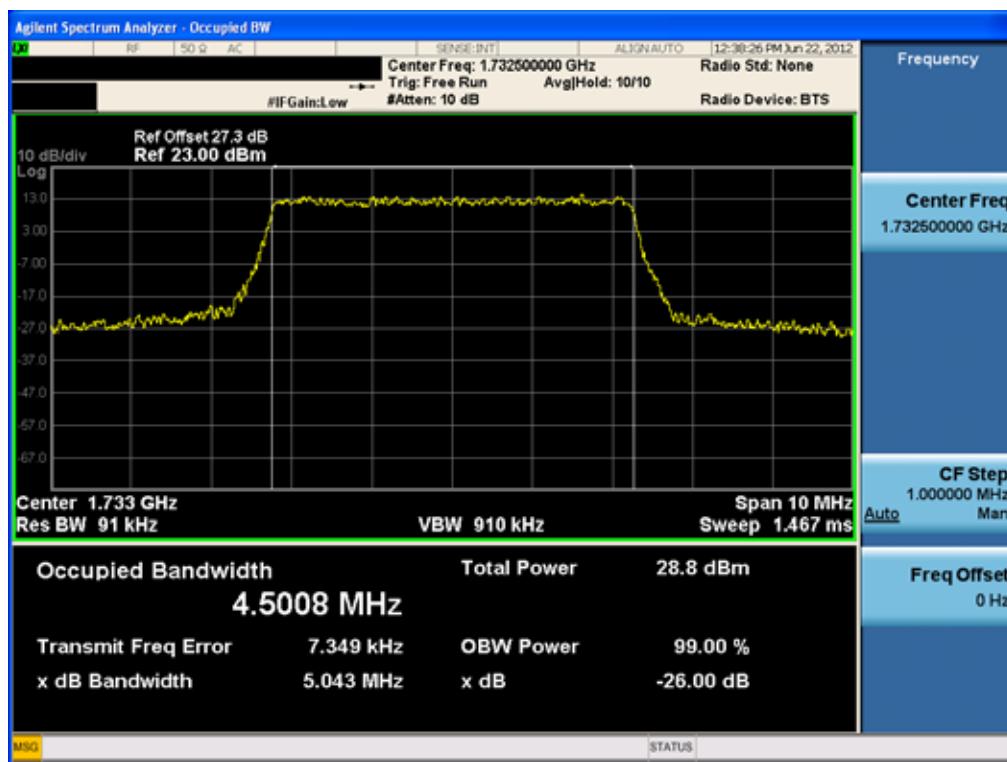


FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 78 of 96
HCTR1206FR21-1	July 19, 2017			

Occupied Bandwidth Plot (10MHz QPSK – RB Size 25)

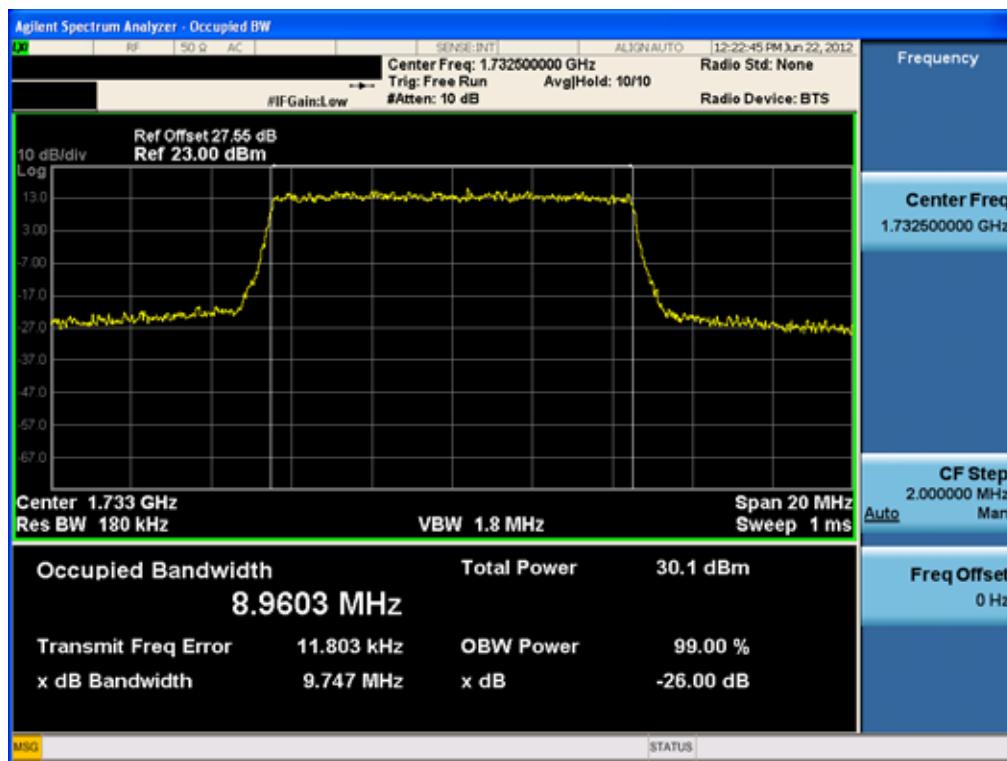

Occupied Bandwidth Plot (10MHz 16-QAM – RB Size 25)

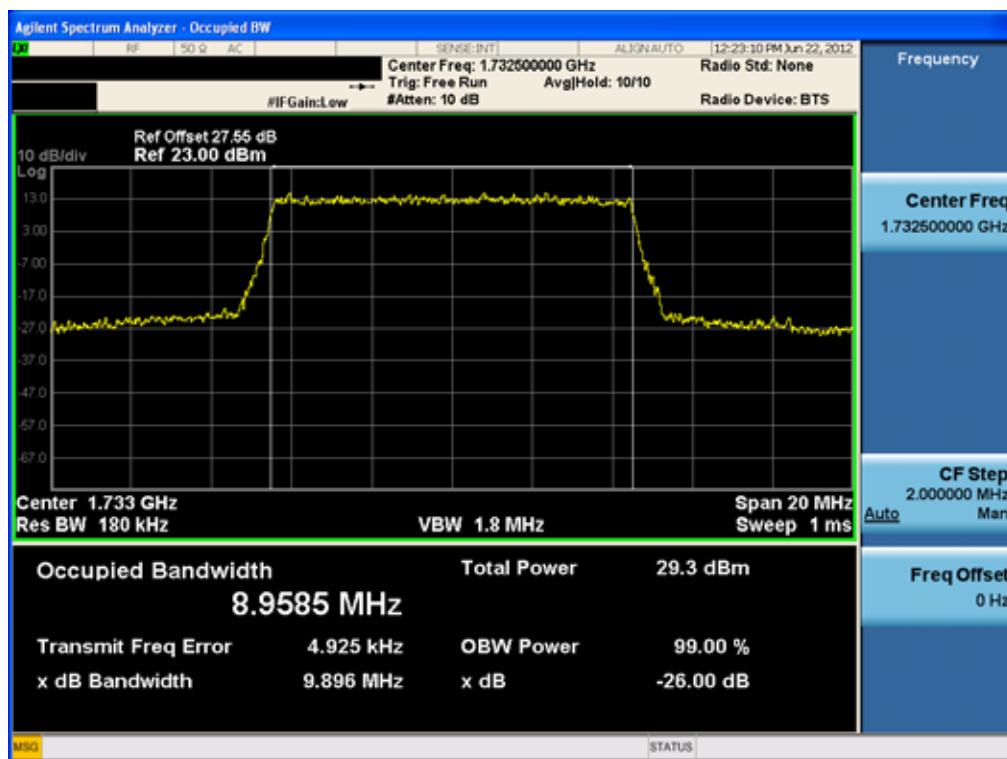

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 79 of 96
HCTR1206FR21-1	July 19, 2017			

Upper Band Edge Plot (5MHz QPSK – RB Size 1, Offset 24)



Upper Band Edge Plot (5MHz QPSK – RB Size 25, Offset 0)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 80 of 96
HCTR1206FR21-1	July 19, 2017			

Upper Band Edge Plot (10MHz QPSK - RB Size 1, Offset 49)



Upper Band Edge Plot (10MHz QPSK - RB Size 50, Offset 0)



FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 81 of 96
HCTR1206FR21-1	July 19, 2017			

Upper Extended Band Edge Plot (5MHz QPSK - RB Size 1, Offset 24)




Upper Extended Band Edge Plot (5MHz QPSK - RB Size 25, Offset 0)

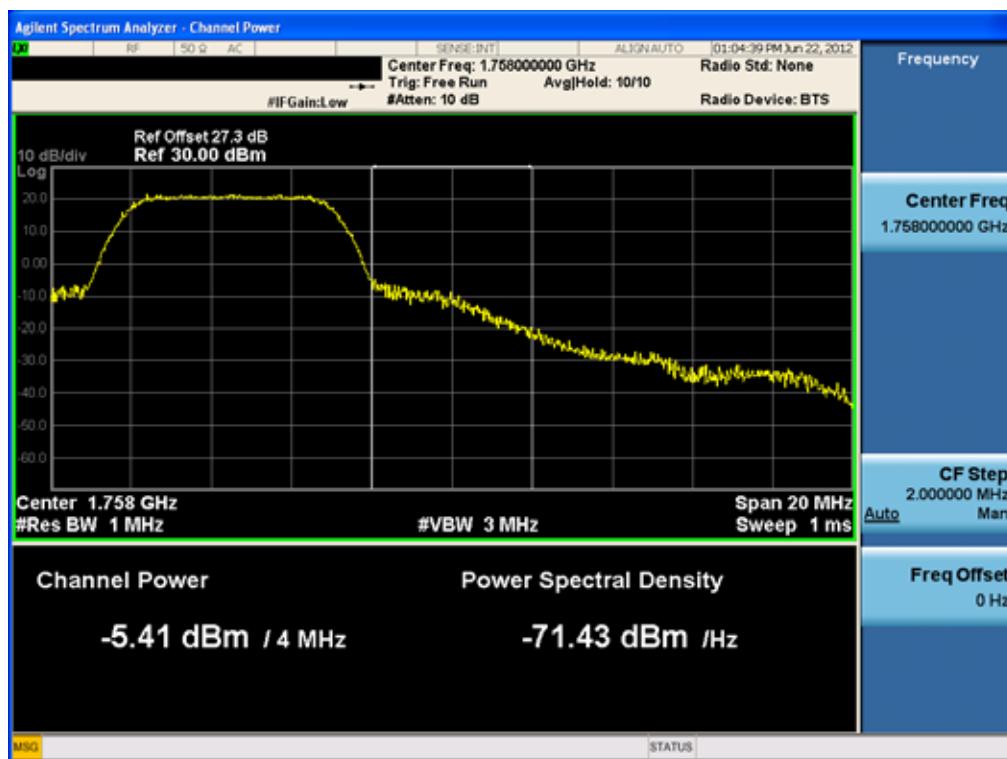


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 82 of 96

Upper Extended Band Edge Plot (10MHz QPSK – RB Size 1, Offset 49)

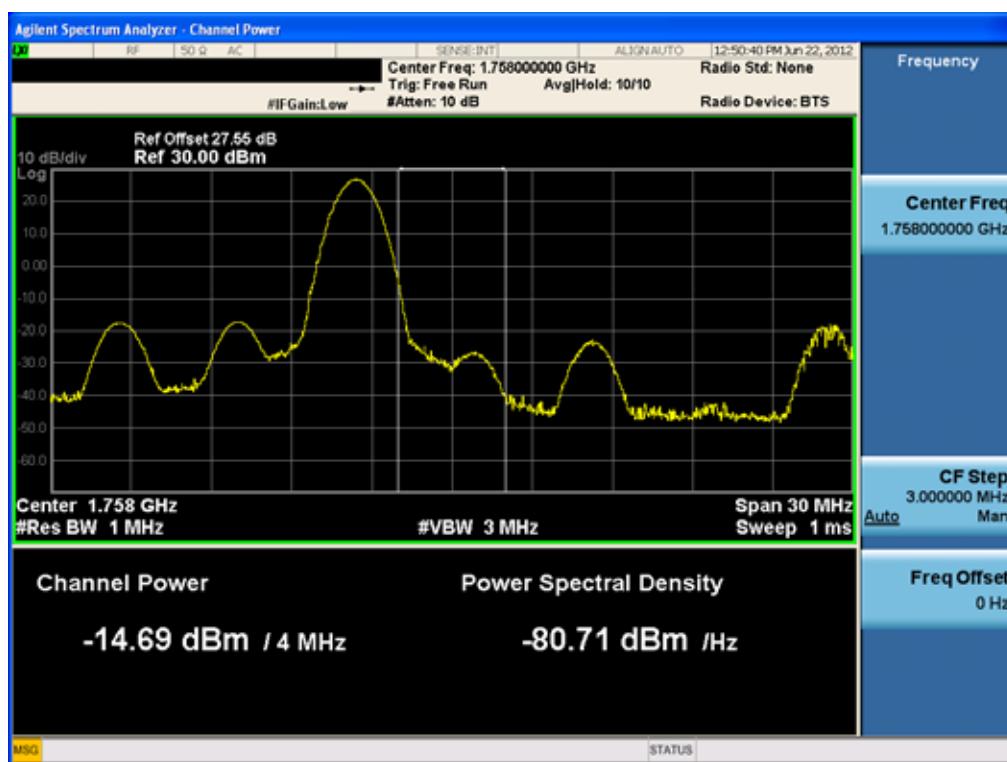


Upper Extended Band Edge Plot (10MHz QPSK – RB Size 50, Offset 0)

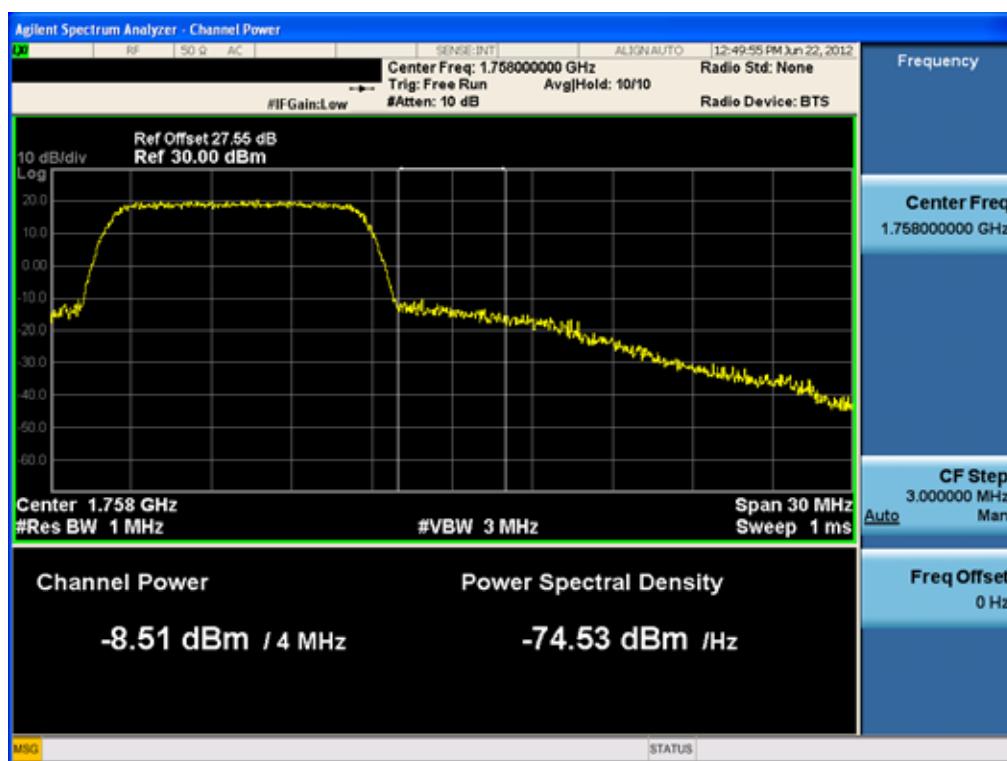


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 83 of 96


Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – Low Channel)-1

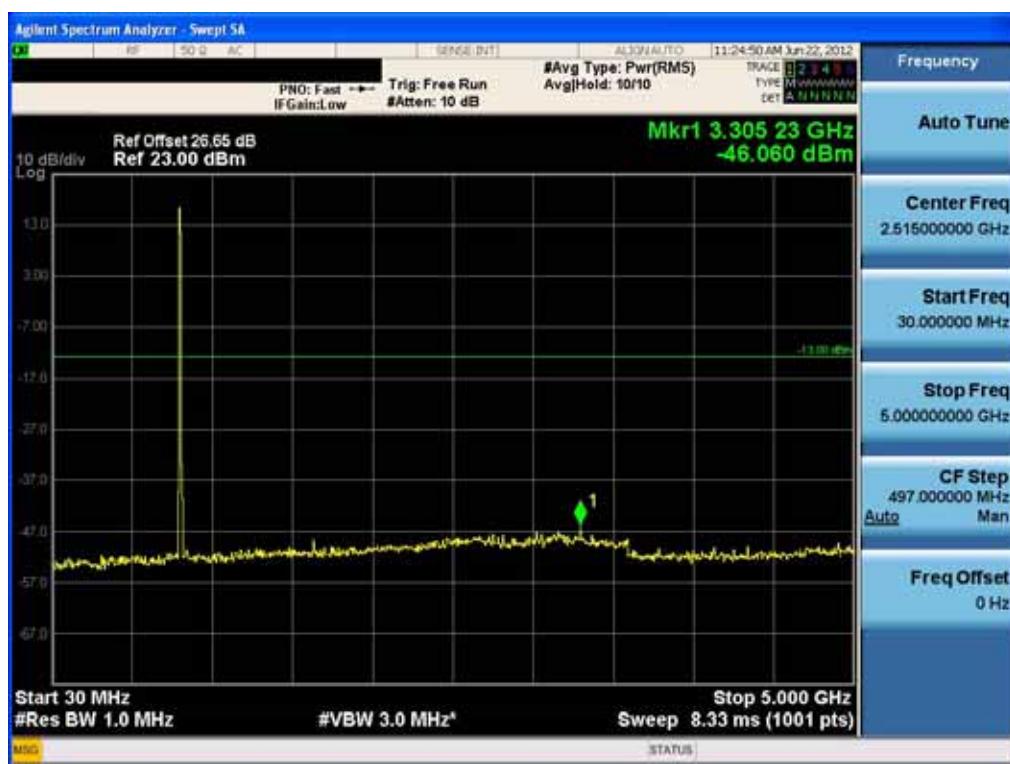

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 24 – Low Channel)-2

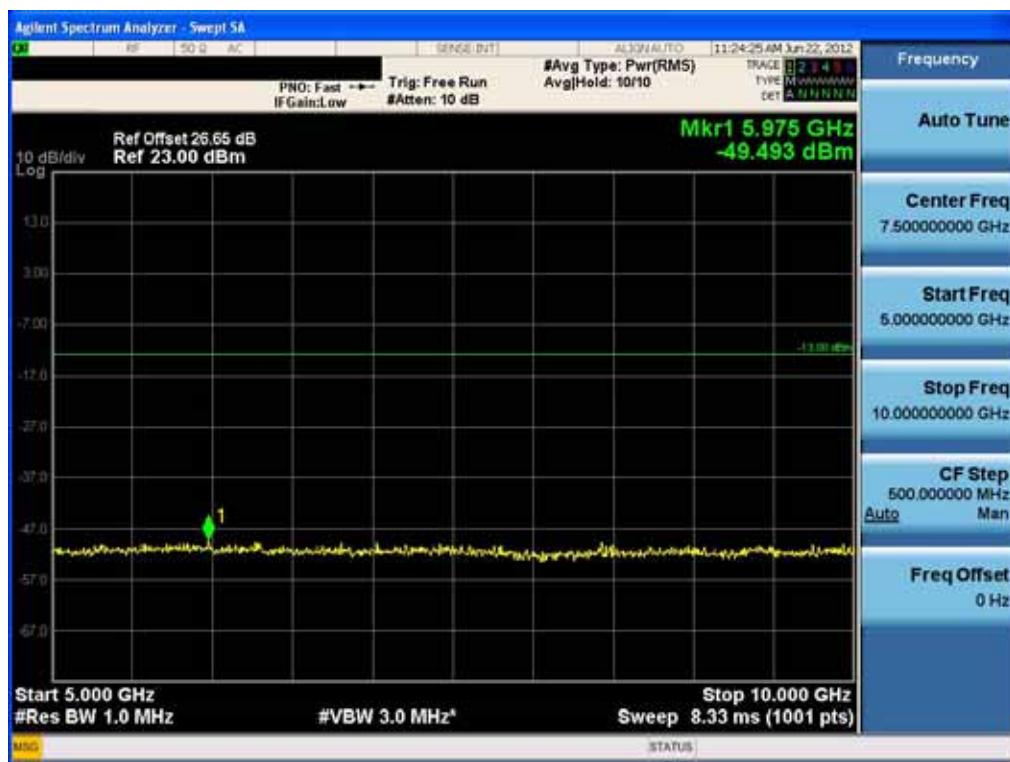

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)-1

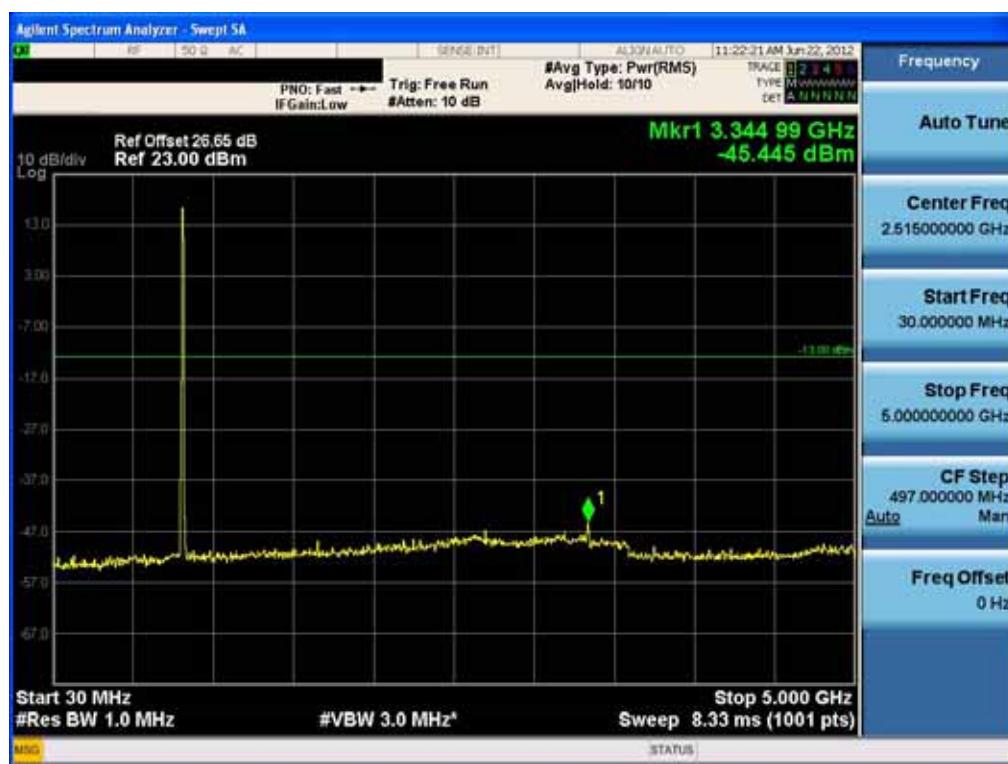

Conducted Spurious Plot (5MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)-2



FCC CERTIFICATION REPORT


www.hct.co.kr

Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 85 of 96
-----------------------------------	---------------------------------	---	---------------------	---------------

Conducted Spurious Plot (5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)-1



Conducted Spurious Plot (5MHz QPSK - RB Size 1, RB Offset 0 - High Channel)-2

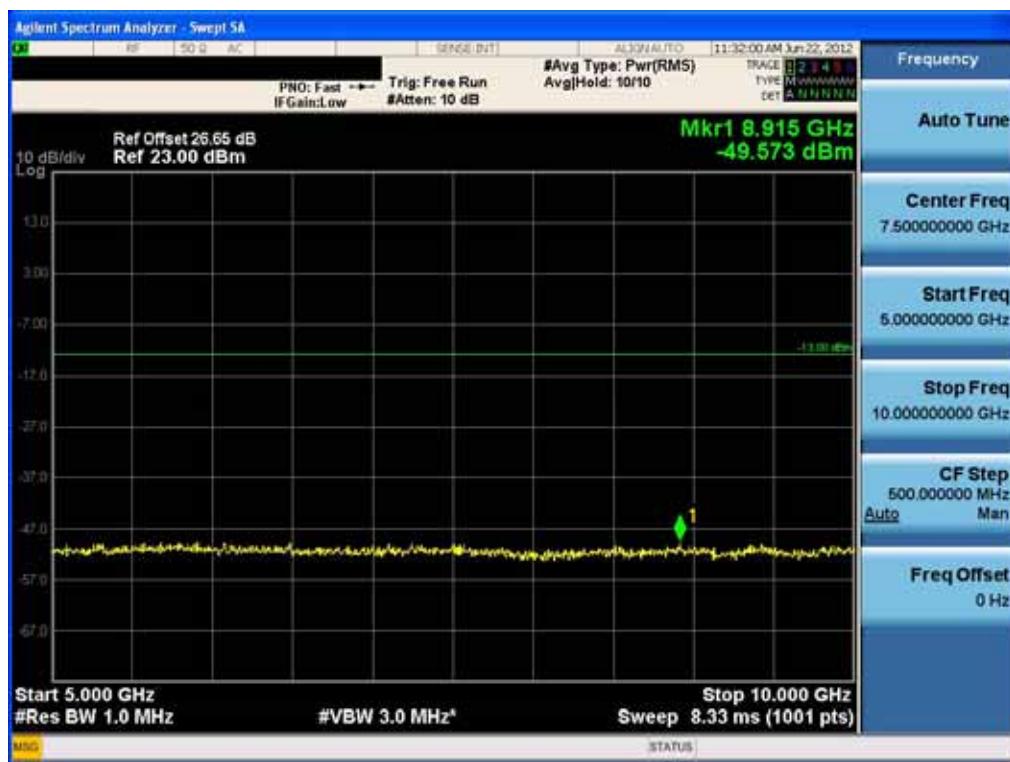

Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)-1



Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)-2



Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)-1



Conducted Spurious Plot (10MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)-2



FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 88 of 96

Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 0 – High Channel)-1



Conducted Spurious Plot (10MHz QPSK – RB Size 1, RB Offset 0 – High Channel)-2



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 89 of 96
-----------------------------------	---------------------------------	---	---------------------	---------------

PAR Plot (5MHz QPSK – RB Size 1)



PAR Plot (10MHz QPSK – RB Size 1)



FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 90 of 96
HCTR1206FR21-1	July 19, 2017			

Lower Band Edge Plot (5MHz QPSK - RB Size 1, Offset 0)



Lower Band Edge Plot (5MHz QPSK - RB Size 25, Offset 0)



FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 91 of 96

Lower Band Edge Plot (10MHz QPSK - RB Size 1, Offset 0)



Lower Band Edge Plot (10MHz QPSK - RB Size 50, Offset 0)




FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 92 of 96

Occupied Bandwidth Plot (5MHz QPSK - RB Size 25)




Occupied Bandwidth Plot (5MHz 16-QAM - RB Size 25)

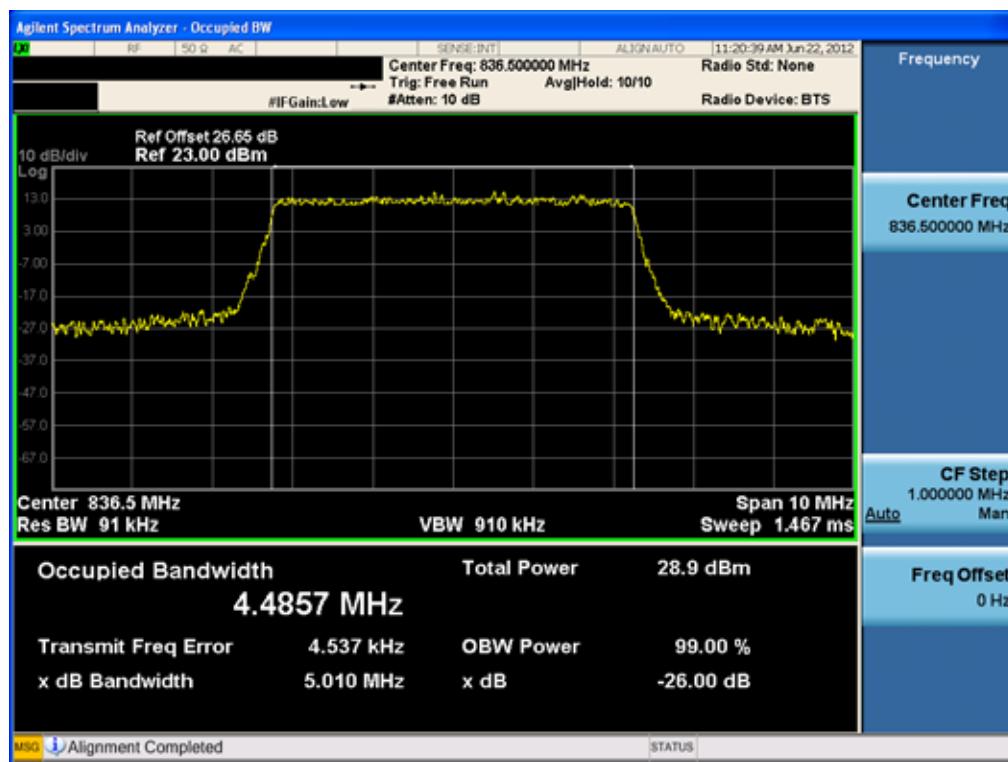


FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 93 of 96

Occupied Bandwidth Plot (10MHz QPSK – RB Size 25)

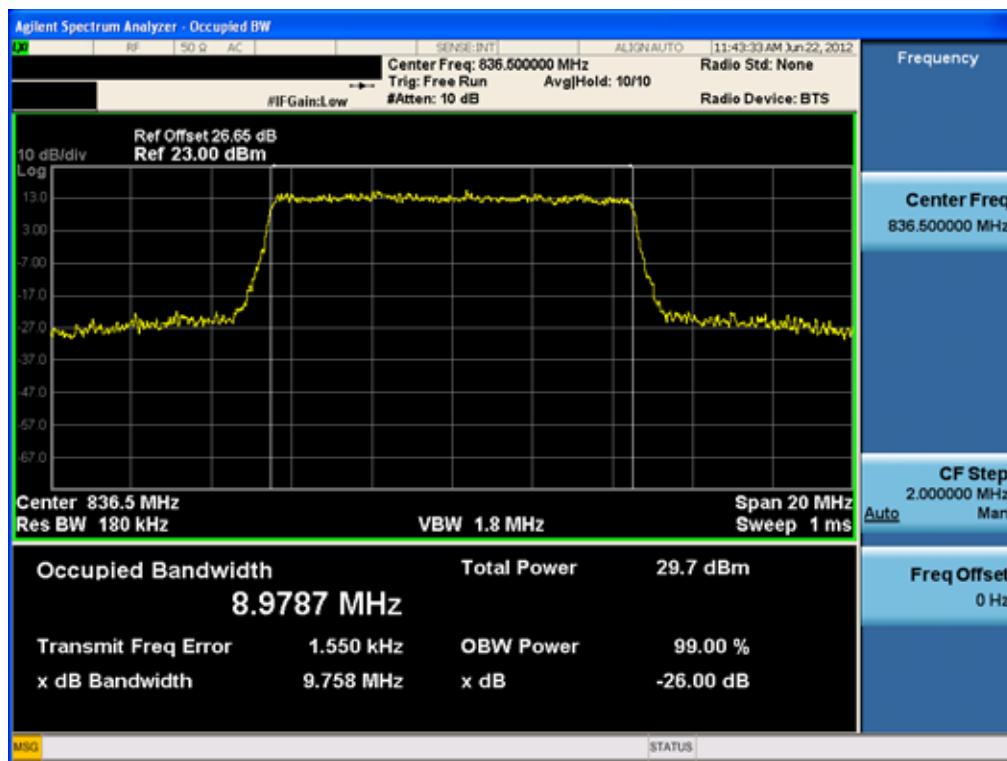

Occupied Bandwidth Plot (10MHz 16-QAM – RB Size 25)

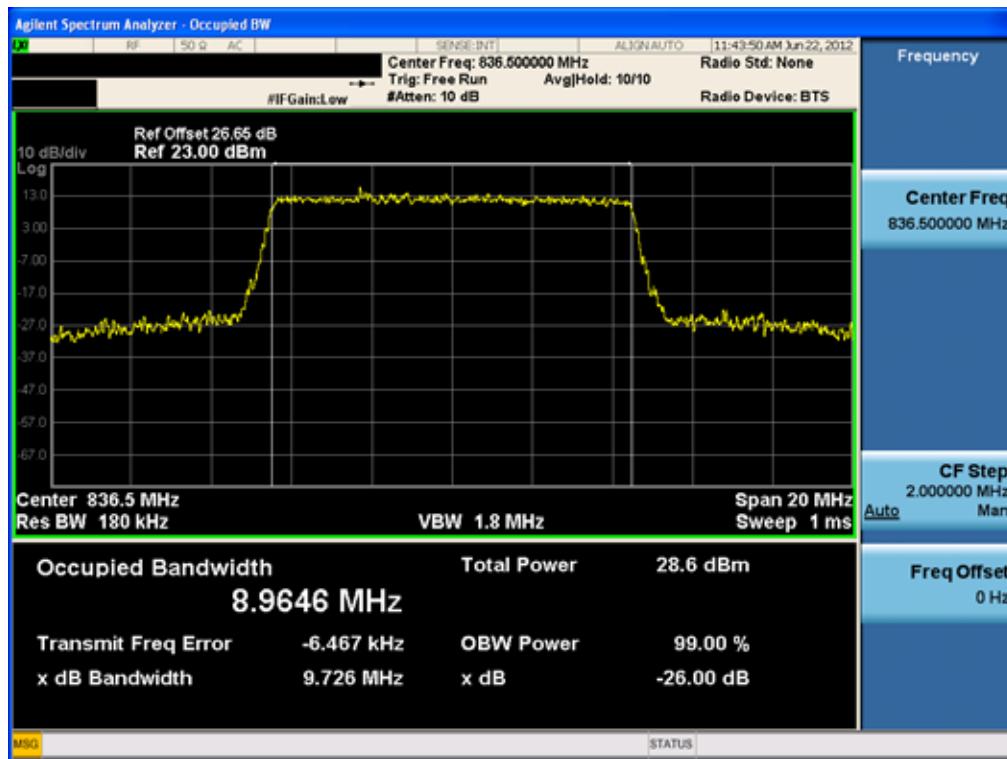

FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No.	Date of Issue:	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090	Page 94 of 96
HCTR1206FR21-1	July 19, 2017			

Upper Band Edge Plot (5MHz QPSK - RB Size 1, Offset 24)



Upper Band Edge Plot (5MHz QPSK - RB Size 25, Offset 0)



FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090		Page 95 of 96

Upper Band Edge Plot (10MHz QPSK - RB Size 1, Offset 49)



Upper Band Edge Plot (10MHz QPSK – RB Size 50, Offset 0)



FCC CERTIFICATION REPORT					www.hct.co.kr
Test Report No. HCTR1206FR21-1	Date of Issue: July 19, 2017	EUT Type: 850/1900 GSM/GPRS/EDGE/WCDMA Phone with Bluetooth/WLAN/NFC	FCC ID: JYCP9090		Page 96 of 96