

HCT CO., LTD.**CERTIFICATE OF COMPLIANCE**
FCC Certification**Applicant Name:**
Pantech Co., Ltd.**Address:**
Pantech Bldg, I-2, DMC, Sangam-dong, Mapo-gu, Seoul,
121-792, Korea**Date of Issue:**

March 08, 2012

Test Site/Location:HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si,
Kyunggi-Do, Korea**Report No.:** HCTR1202FR24-1**HCT FRN:** 0005866421**FCC ID:** JYCSTARQ**APPLICANT:** Pantech Co., Ltd.**FCC Model(s):** ADR910L**EUT Type:** CDMA/LTE Phone with Bluetooth & WLAN**Max. RF Output Power:** 10.47 dBm**Frequency Range:** 2402 MHz -2480 MHz**Modulation type** GFSK(BT4.0 LE Mode)**FCC Classification:** Digital Transmission System(DTS)**FCC Rule Part(s):** Part 15.247**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by****: Jong Seok Lee****Test engineer of RF Team****Approved by****: Sang Jun Lee****Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1202FR24	February 24, 2012	- First Approval Report
HCTR1202FR24-1	March 08, 2012	- Revised 6 dB BW unit(MHz → kHz)

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. SUMMARY TEST OF RESULTS	8
8. TEST RESULT	9
8.1 6dB BANDWIDTH MEASUREMENT	9
8.2 OUTPUT POWER MEASUREMENT	12
8.3 POWER SPECTRAL DENSITY	18
8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	22
8.5 RADIATED MEASUREMENT	28
8.5.1 RADIATED SPURIOUS EMISSIONS	28
8.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	36
8.6 POWERLINE CONDUCTED EMISSIONS	38
9. LIST OF TEST EQUIPMENT	43

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

1. GENERAL INFORMATION

Applicant: Pantech Co., Ltd.

Address: Pantech Bldg, I-2, DMC, Sangam-dong, Mapo-gu, Seoul, 121-792, Korea

FCC ID: JYCSTARQ

EUT Type: CDMA/LTE Phone with Bluetooth & WLAN

Model name(s): ADR910L

Date(s) of Tests: January 27, 2012 ~ February 12, 2012

Contact Person:
Name: Jung Hwan Kim
Phone #: +82-2-2030-1269

Place of Tests:
HCT Co., Ltd.
105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	CDMA/LTE Phone with Bluetooth & WLAN	
FCC Model Name	ADR910L	
Power Supply	DC 3.7 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX: 2402 MHz ~ 2480 MHz RX: 2402 MHz ~ 2480 MHz	
Max. RF Output Power:	Peak:	10.47 dBm
	Average:	10.36 dBm
BT Operating Mode	BT 4.0_Low Energy Mode	
Modulation Type	GFSK(BT 4.0 LE Mode)	
Number of Channels	40 Channels(BT 4.0 LE Mode)	
Antenna Specification	Manufacturer: DONGNAM Antenna type: FPCB Antenna Peak Gain : 0.3 dBi	

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ



6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

8. TEST RESULT


8.1 6dB BANDWIDTH MEASUREMENT

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

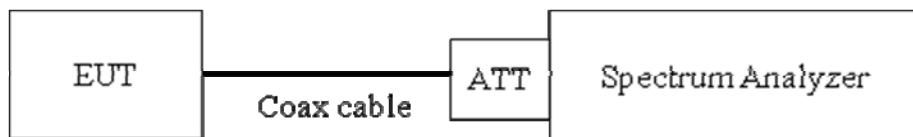

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 100 kHz

VBW: 300 MHz

SPAN: 5 MHz

■ TEST RESULTS


Conducted 6dB Bandwidth Measurements

LE Mode		Measured Bandwidth [kHz]	Minimum Bandwidth [kHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2402	0	671.911	500	Pass
2440	19	668.475	500	Pass
2480	38	674.477	500	Pass

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

RESULT PLOTS

6dB Bandwidth plot (Low-CH 0)

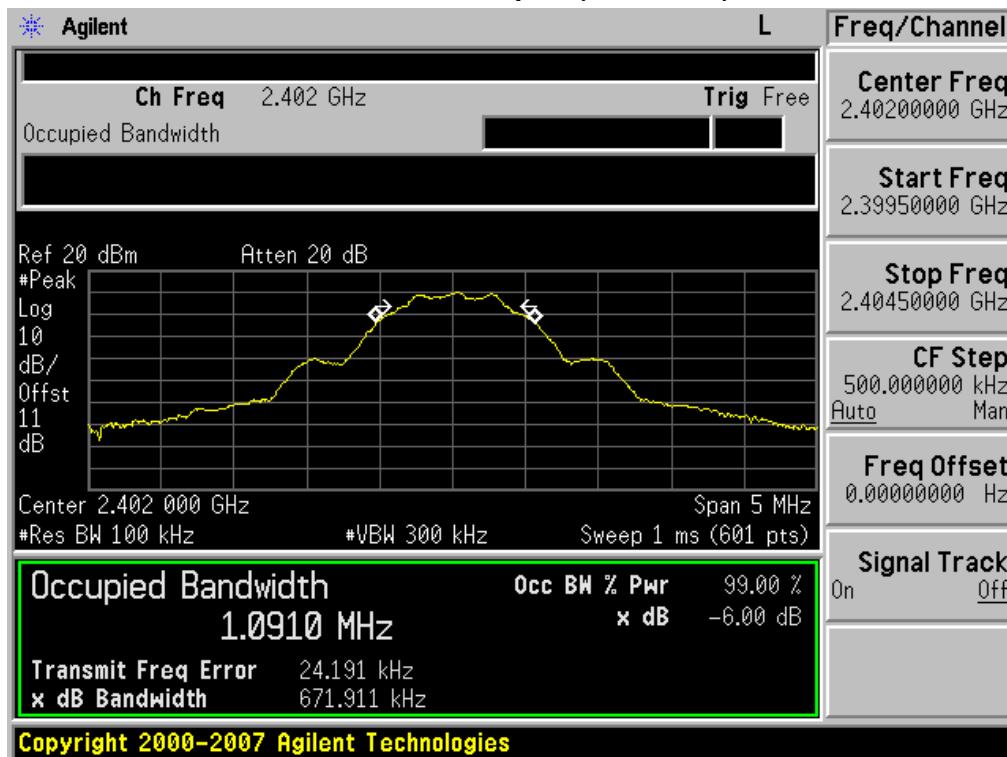

6dB Bandwidth plot (Mid-CH 19)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

6dB Bandwidth plot (High-CH 38)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

8.2 OUTPUT POWER MEASUREMENT


Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ TEST CONFIGURATION

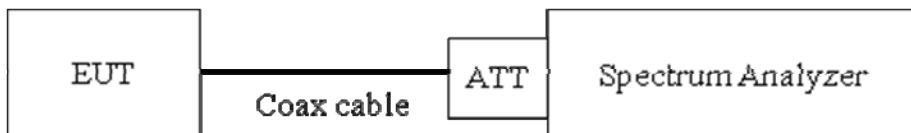

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to 718828 DTS Measurement Guidance DR01.

This EUT TX condition is actual operating mode(not near 100 % duty cycle) by WLAN test program.

The Spectrum Analyzer is set to

- Peak Power

RBW = 1 MHz

VBW = 3 MHz

SPAN = 5 – 30 % greater than the EBW

Detector Mode = Peak

Integrated bandwidth = EBW

- Average Power

RBW = 1 MHz

VBW = 3 MHz

SPAN = 5 – 30 % greater than the EBW

Detector Mode = Average

Integrated bandwidth = EBW

■ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = 10 dBm + 10 dB + 0.8 dB = 20.8 dBm

Where) Spectrum offset = ATT loss + Cable loss(1 ea)

Note: Power values in plot are applied offset.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

TEST RESULTS-Peak

Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2402	0	10.09	30
2440	19	10.47	30
2480	38	9.72	30



TEST RESULTS-Average

Conducted Output Power Measurements

LE Mode		Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.		
2402	0	9.96	30
2440	19	10.36	30
2480	38	9.62	30


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

□ RESULT PLOTS-Peak

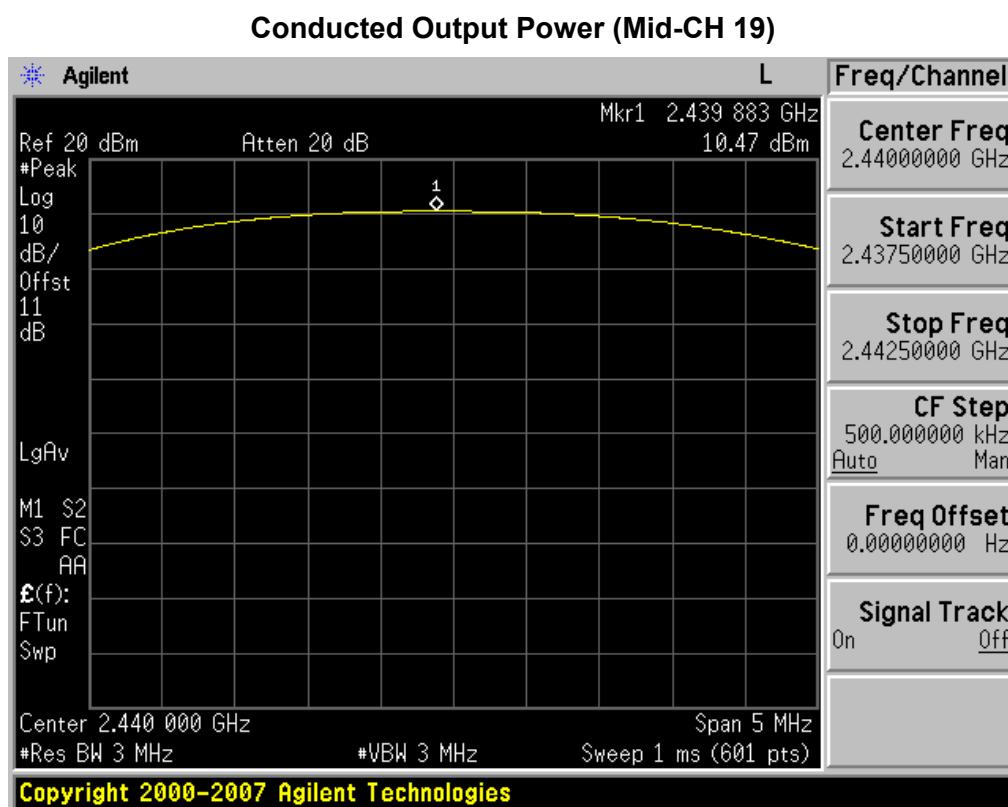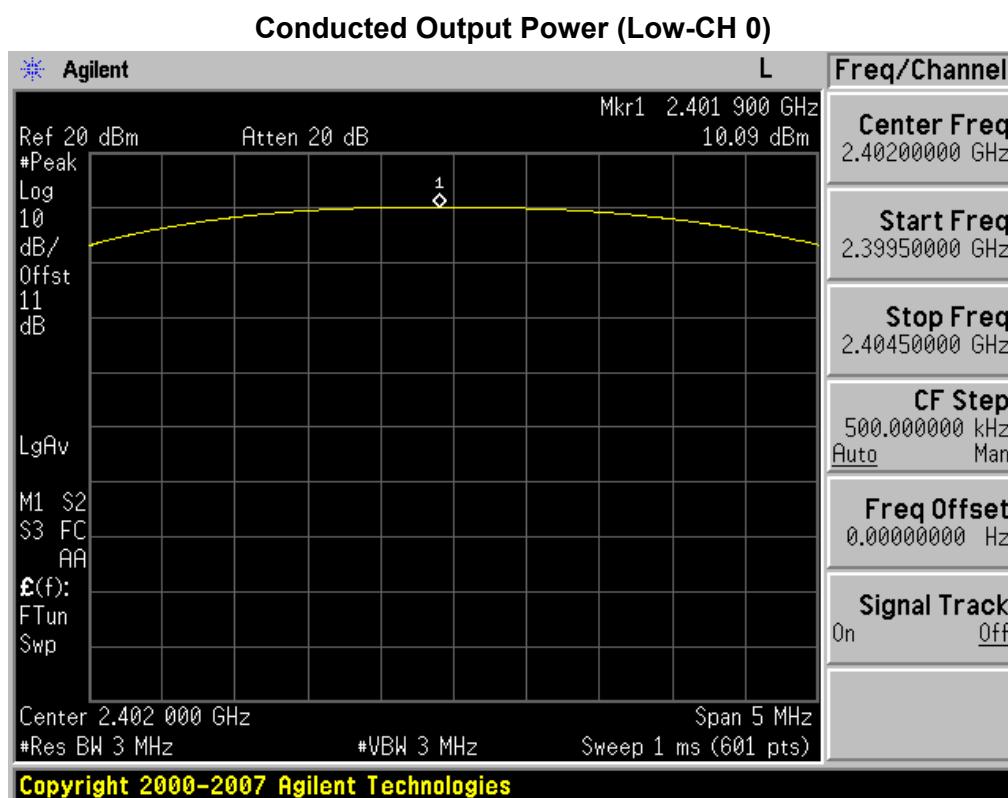



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Conducted Output Power (High-CH 38)

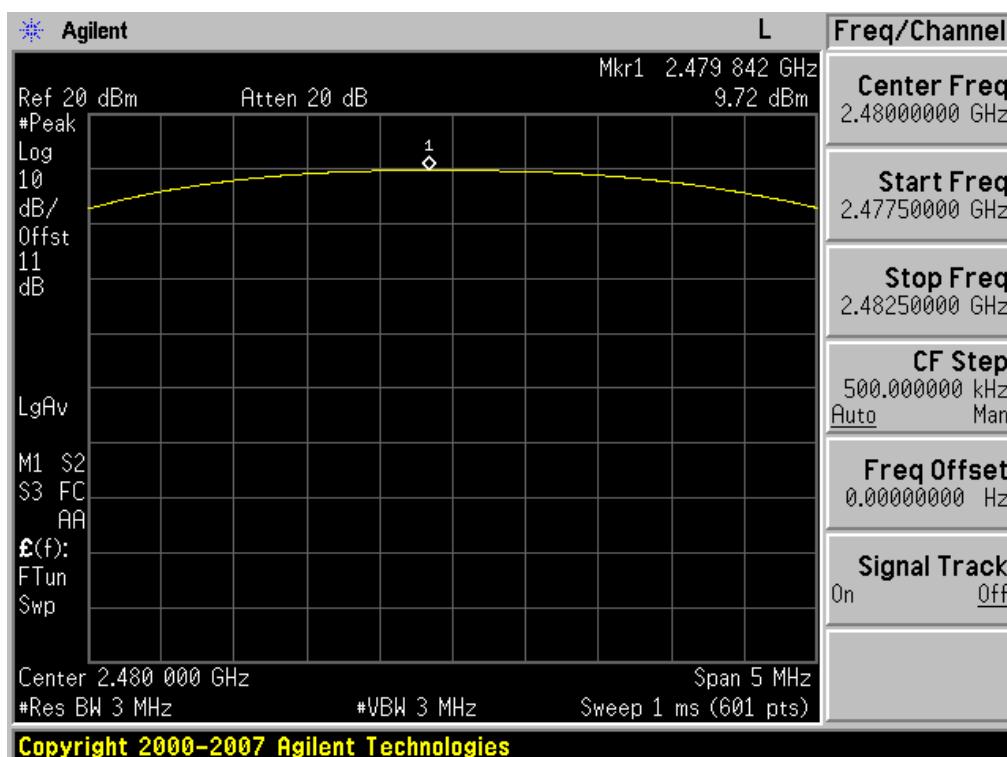


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

□ RESULT PLOTS-Average

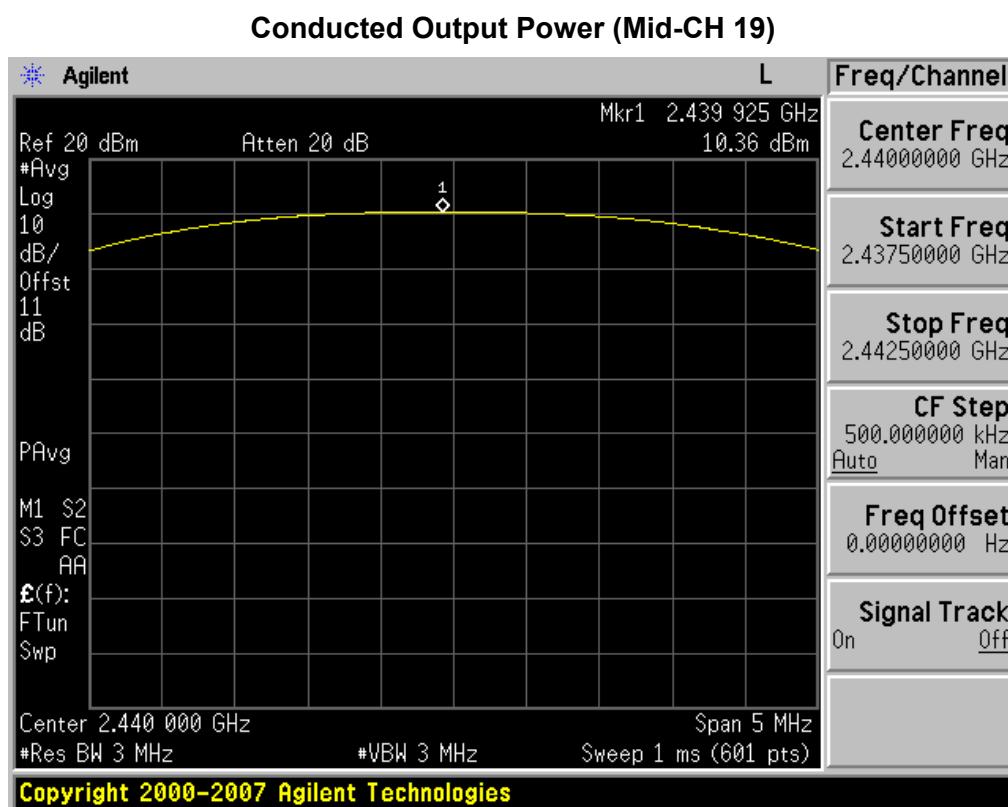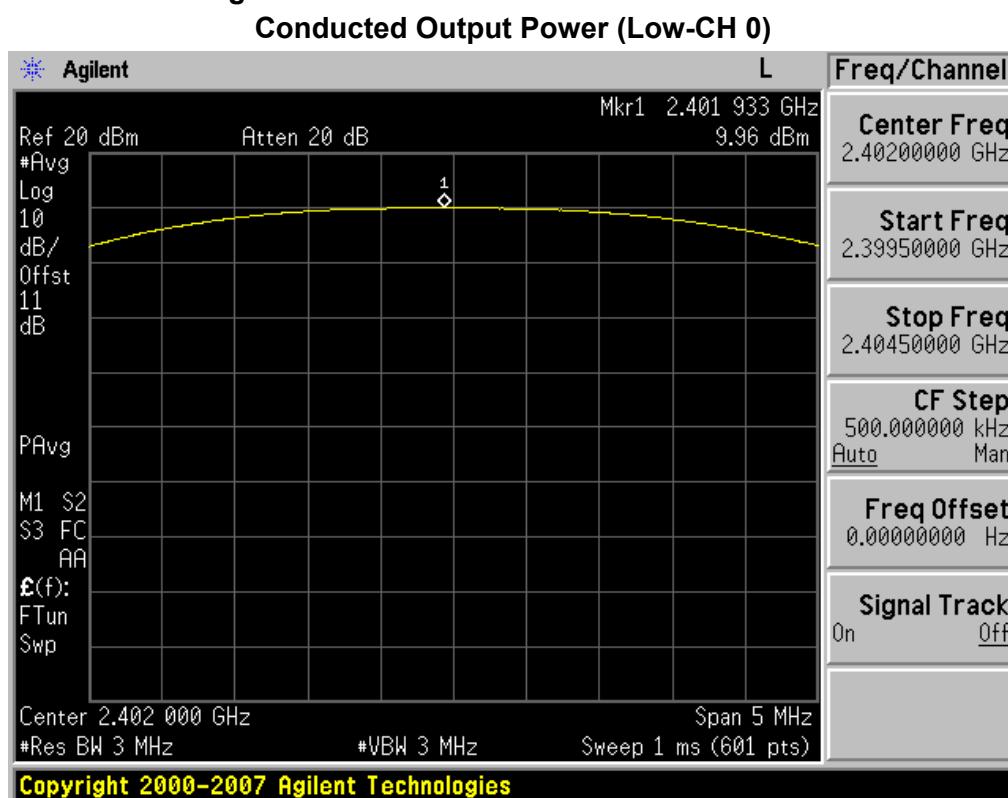

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Conducted Output Power (High-CH 38)

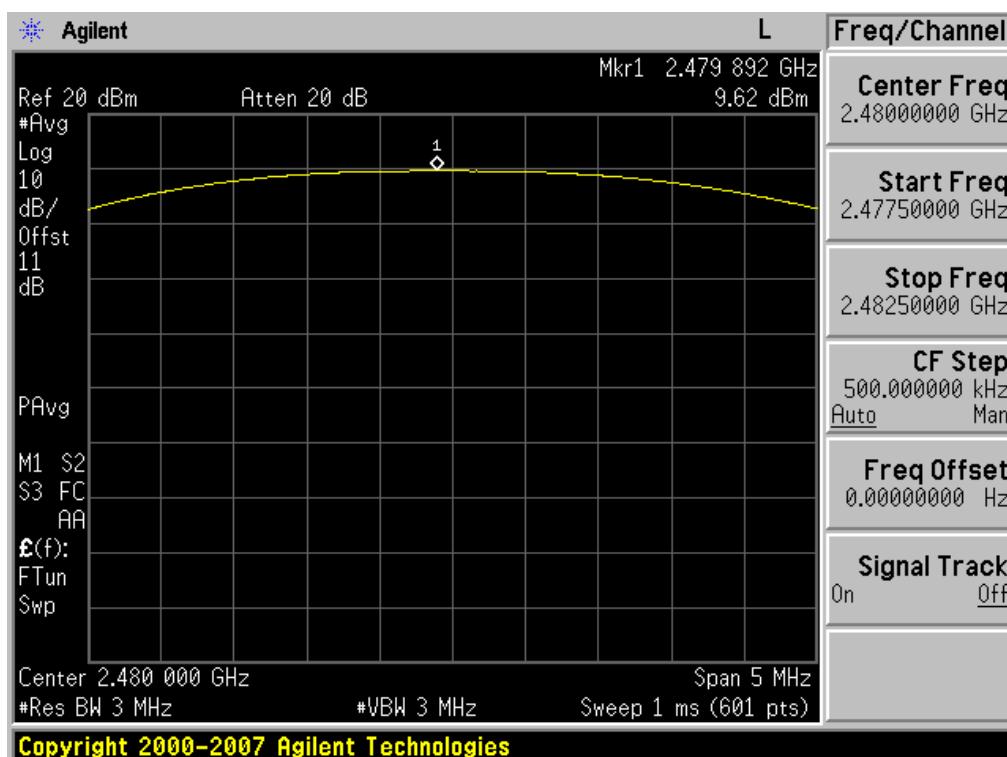

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ


8.3 POWER SPECTRAL DENSITY

Test Requirements and limit, §15.247(e)

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

■ TEST CONFIGURATION

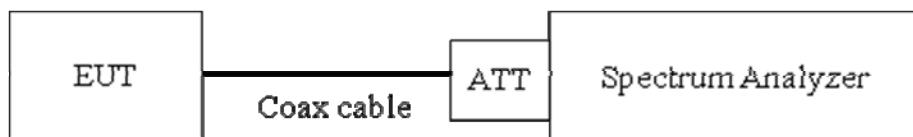

■ TEST PROCEDURE

The spectrum analyzer is set to :

1. Span = 300 kHz
2. RBW = 3 kHz
3. VBW = 3 kHz
4. Sweep = 100 sec
5. Detector Mode = Peak

■ Sample Calculation

$$\begin{aligned} \text{PSD} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss(1 ea)} \\ &= -5 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 5.8 \text{ dBm} \end{aligned}$$

Where) Spectrum offset = ATT loss + Cable loss(1 ea)

Note: Power values in plot is applied offset.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ



TEST RESULTS


Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result	
			Power Density (dBm)	Pass/Fail
2402	0	LE	-6.30	Pass
2440	19		-5.83	Pass
2480	38		-6.55	Pass


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

RESULT PLOTS

Power Spectral Density (Low-CH 0)

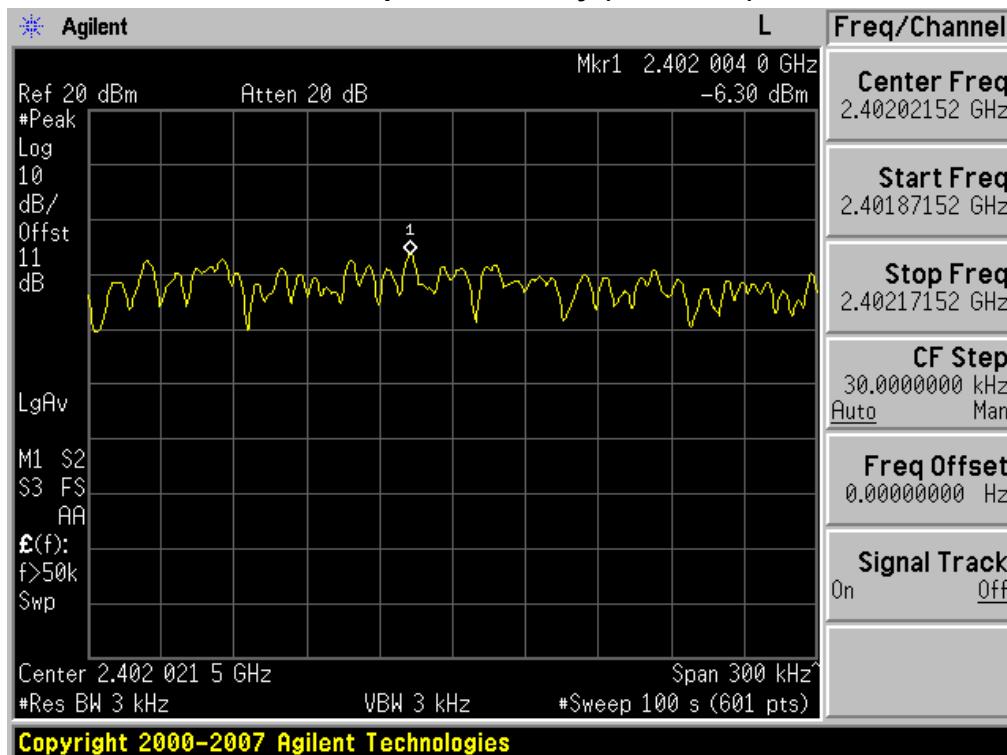


Power Spectral Density (Mid-CH 19)

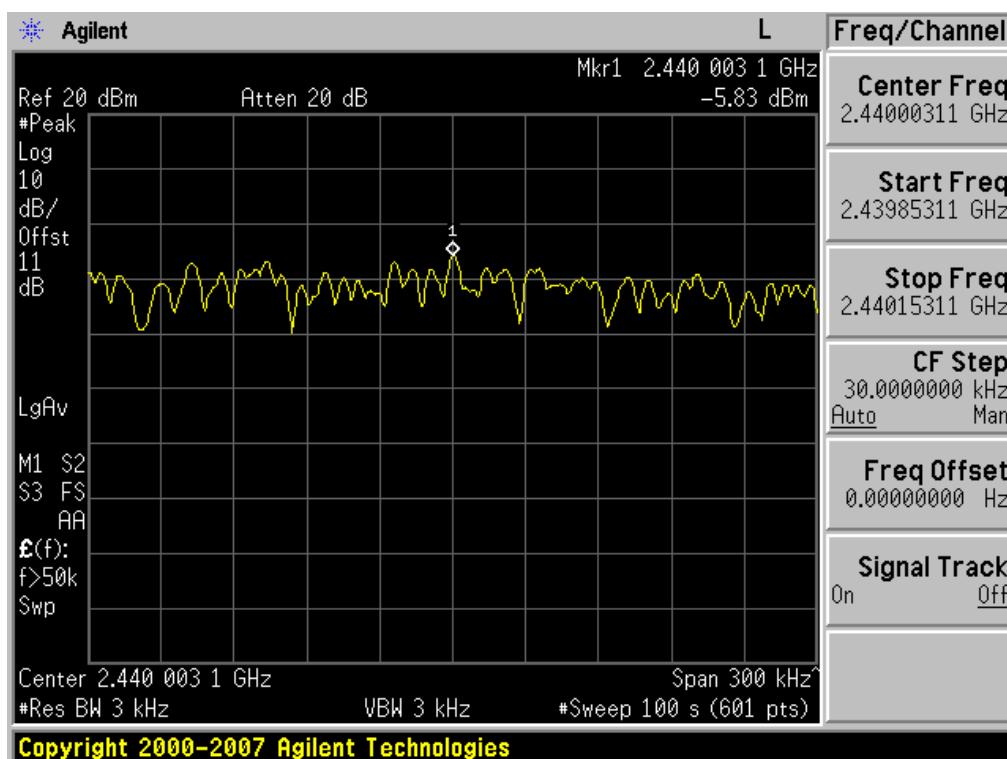

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Power Spectral Density (High-CH 38)

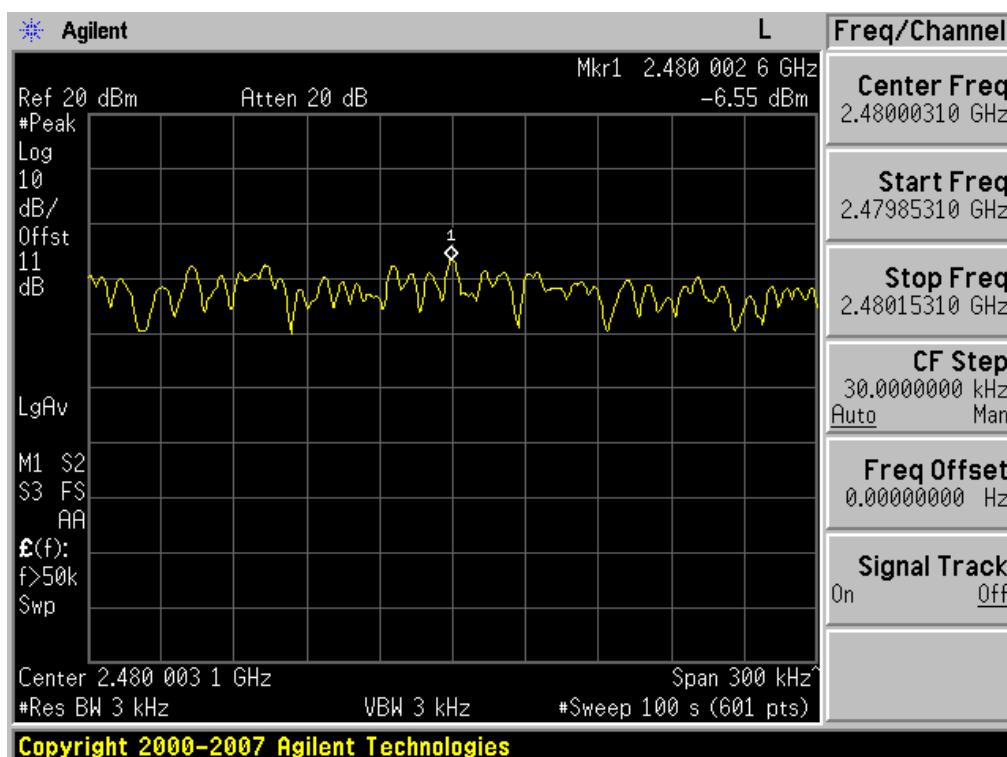


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in§ 15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

■ TEST CONFIGURATION

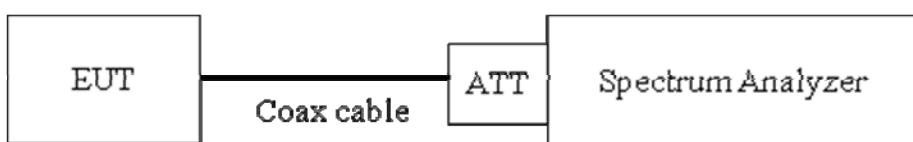

■ TEST PROCEDURE



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Detector Mode is set to a peak detector Mode.

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ


□ RESULT PLOTS

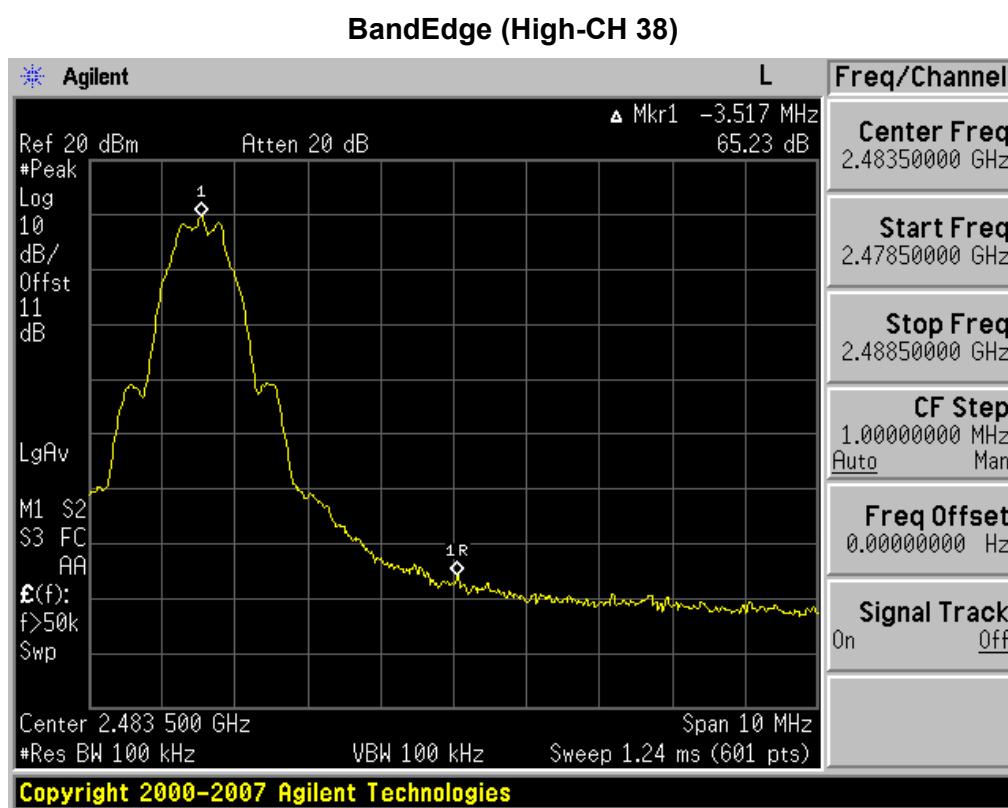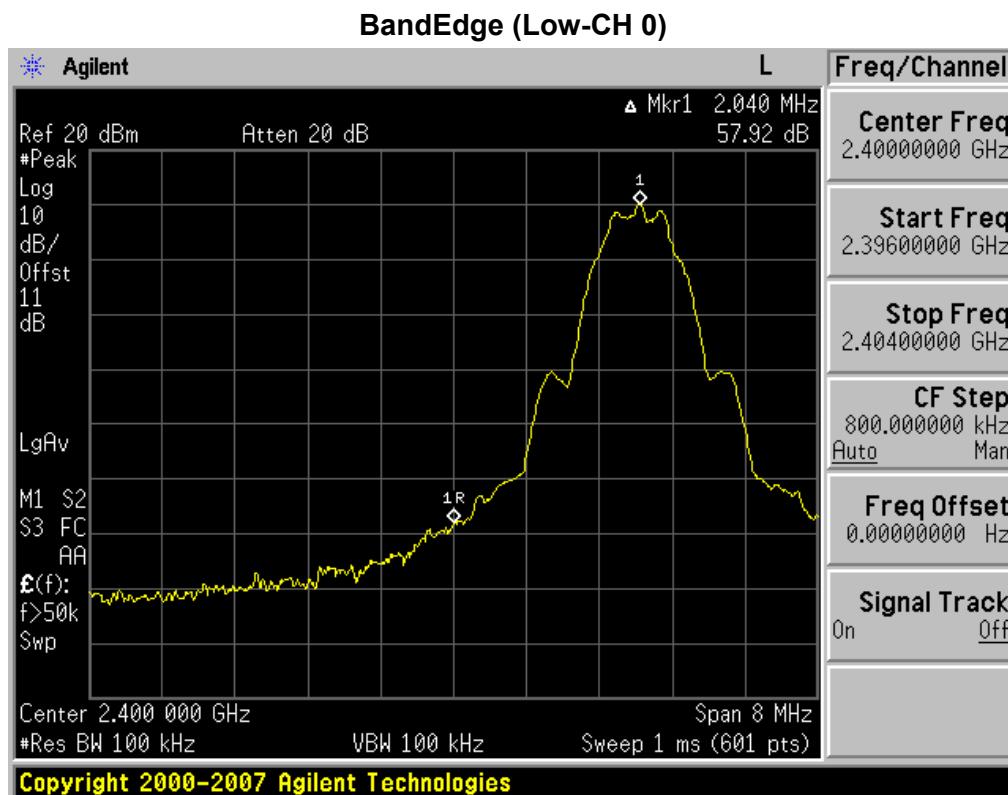


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

30 MHz ~ 1 GHz

Conducted Spurious Emission (Low-CH 0)

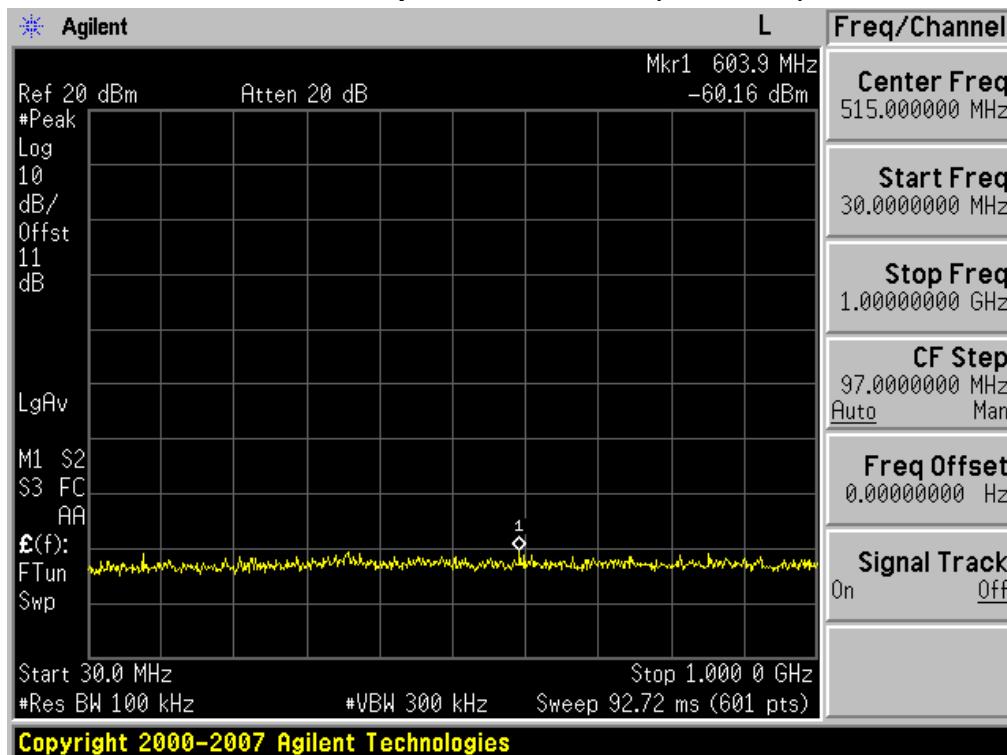


Conducted Spurious Emission (Mid-CH 19)

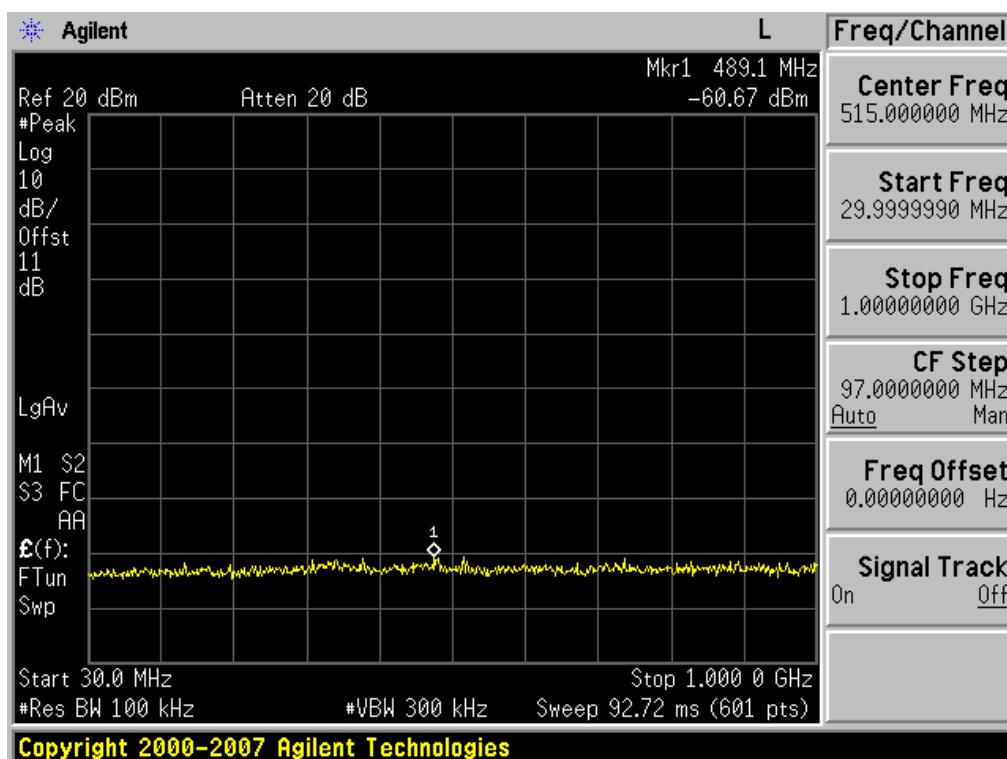

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ


Conducted Spurious Emission (High-CH 38)

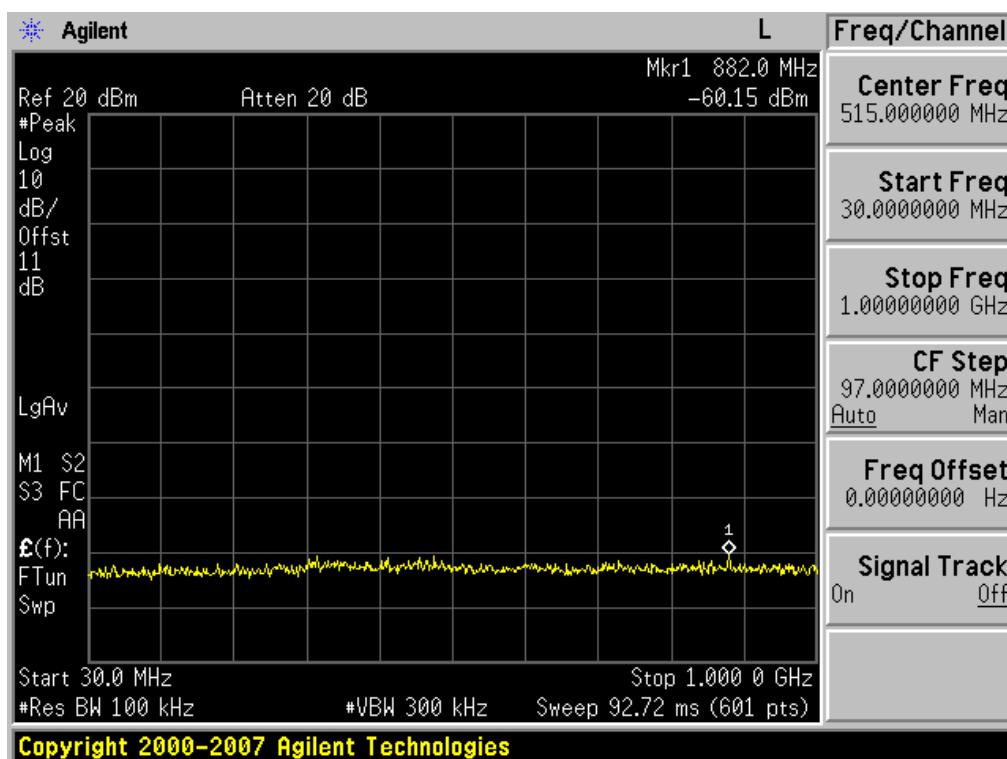


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

1 GHz ~ 26 GHz

Conducted Spurious Emission (Low-CH 0)

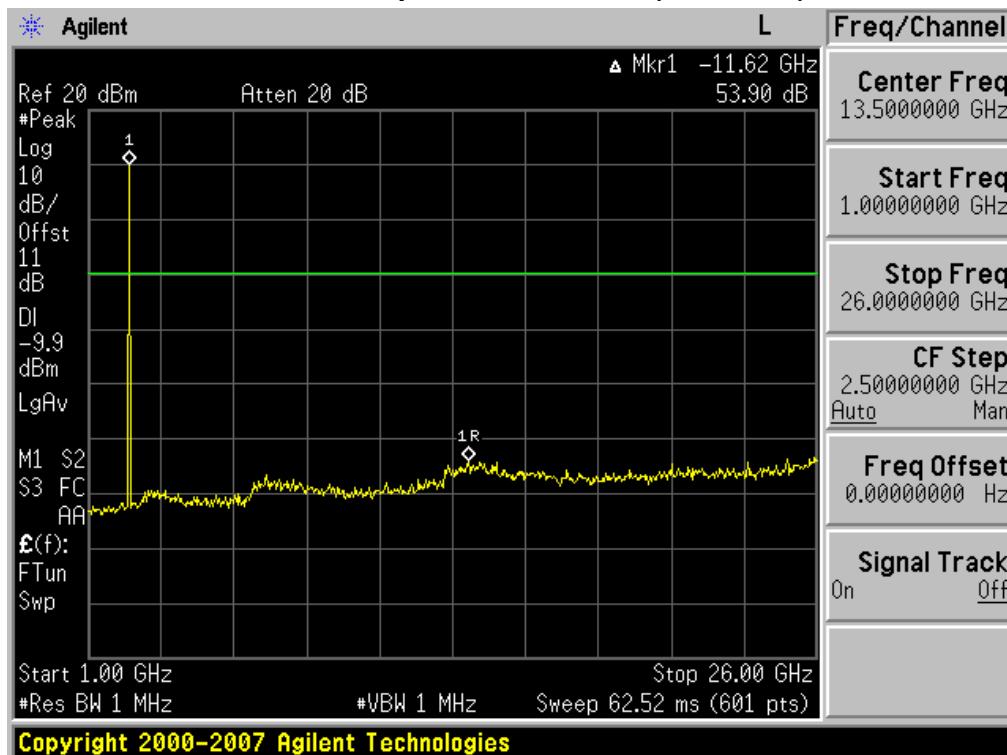


Conducted Spurious Emission (Mid-CH 19)

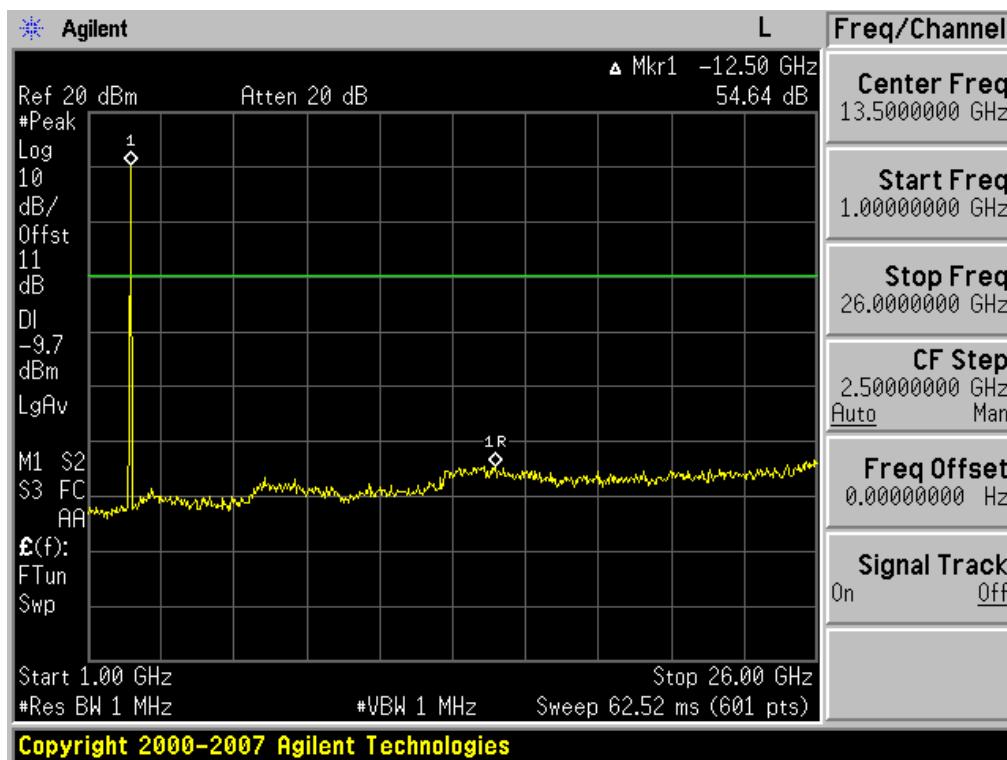

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Conducted Spurious Emission (High-CH 38)

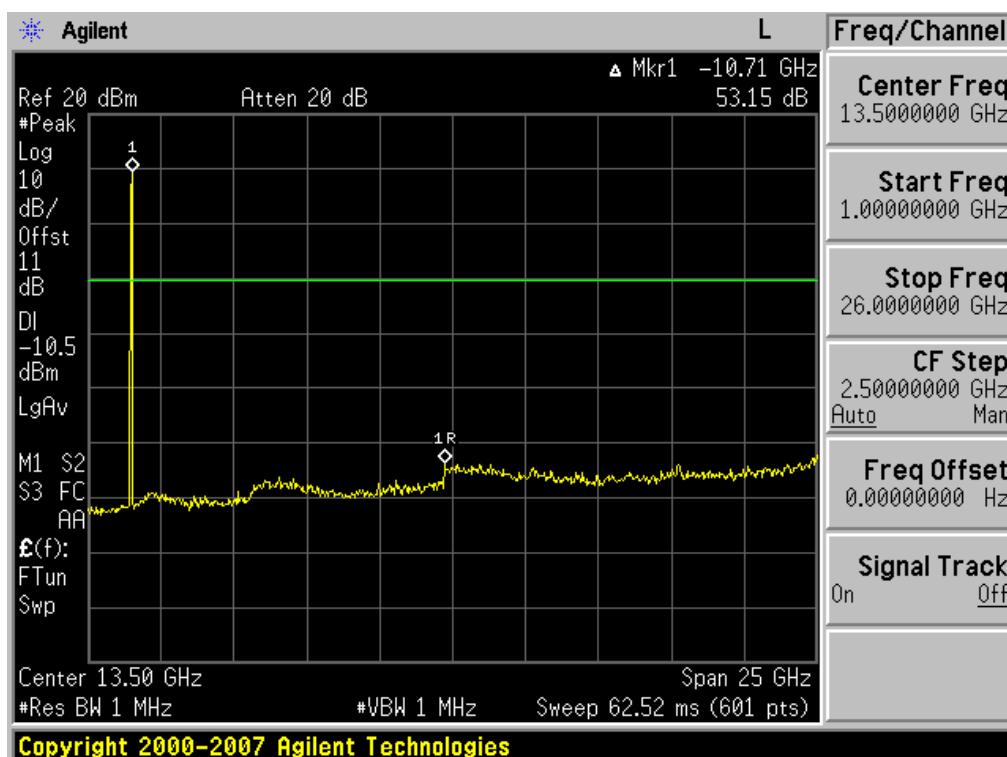

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

8.5 RADIATED MEASUREMENT.

8.5.1 RADIATED SPURIOUS EMISSIONS.


Test Requirements and limit, §15.205, §15.209

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Test Configuration

Below 30 MHz

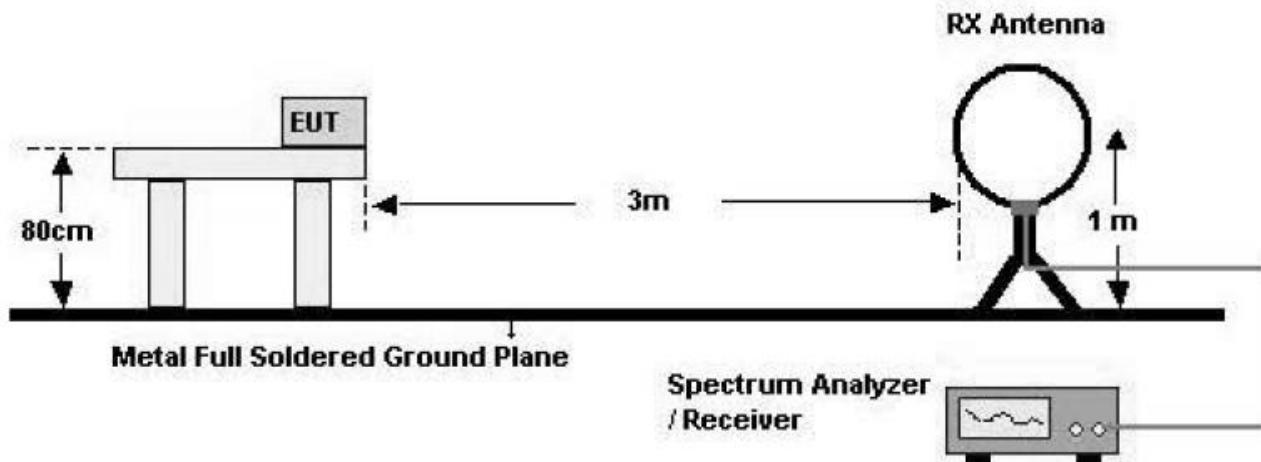


30 MHz - 1 GHz

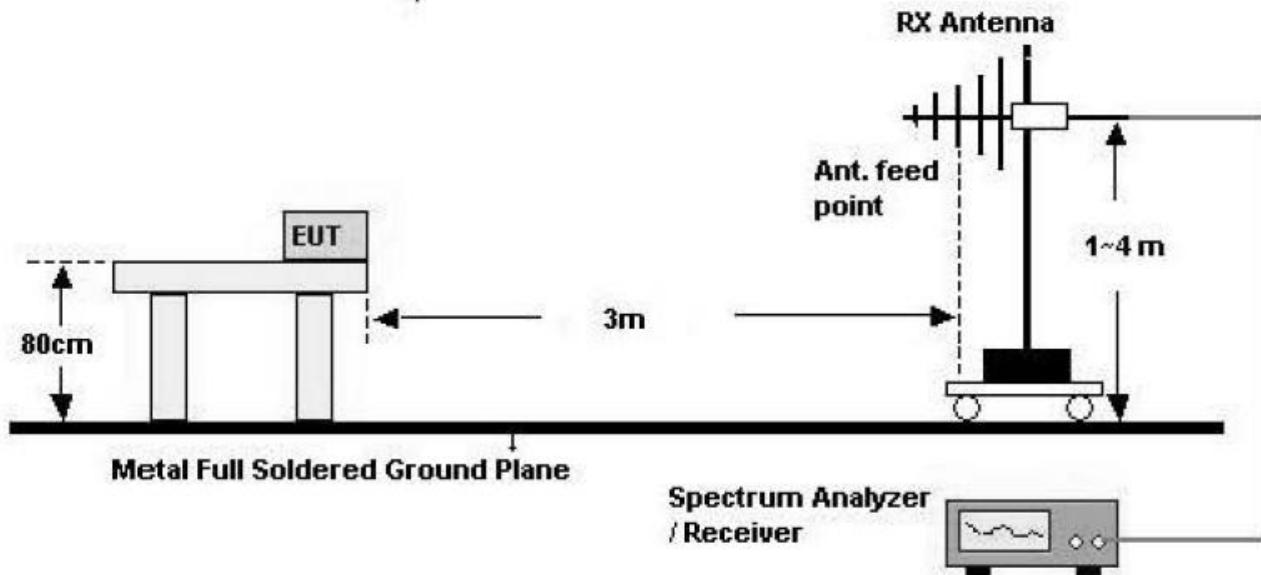

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

Above 1 GHz

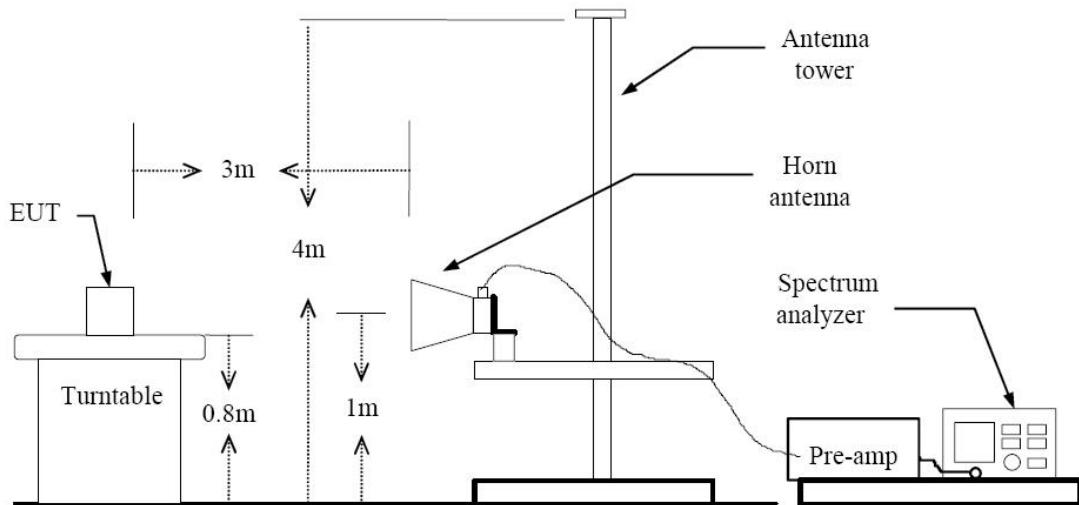

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

TEST RESULTS
Below 1 GHz
Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ N	dB /m	dB	(H/V)	dB μ N/m	dB μ N/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN			FCC ID: JYCSTARQ



Above 1 GHz

Operation Mode: CH Low(LE Mode)

Frequency [MHz]	Reading dBuV	※A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4804	48.72	-0.20	V	48.52	74	25.48	PK
4804	35.98	-0.20	V	35.78	54	18.22	AV
7206	47.94	10.34	V	58.28	74	15.72	PK
7206	34.29	10.34	V	44.63	54	9.37	AV
4804	49.39	-0.20	H	49.19	74	24.81	PK
4804	35.44	-0.20	H	35.24	54	18.76	AV
7206	47.70	10.34	H	58.04	74	15.96	PK
7206	34.22	10.34	H	44.56	54	9.44	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Operation Mode: CH Mid(LE Mode)

Frequency [MHz]	Reading dBuV	※A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4882	48.90	0.25	V	49.15	74	24.85	PK
4882	35.33	0.25	V	35.58	54	18.42	AV
7323	48.21	10.01	V	58.22	74	15.78	PK
7323	34.52	10.01	V	44.53	54	9.47	AV
4882	49.64	0.25	H	49.89	74	24.11	PK
4882	35.50	0.25	H	35.75	54	18.25	AV
7323	47.89	10.01	H	57.90	74	16.10	PK
7323	34.57	10.01	H	44.58	54	9.42	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Operation Mode: CH High(LE Mode)

Frequency [MHz]	Reading dBuV	※A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4960	49.37	0.75	V	50.12	74	23.88	PK
4960	36.08	0.75	V	36.83	54	17.17	AV
7440	48.58	10.11	V	58.69	74	15.31	PK
7440	34.36	10.11	V	44.47	54	9.53	AV
4960	49.58	0.75	H	50.33	74	23.67	PK
4960	36.26	0.75	H	37.01	54	16.99	AV
7440	47.91	10.11	H	58.02	74	15.98	PK
7440	34.48	10.11	H	44.59	54	9.41	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MH.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

8.5.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode:	BT 4.0_LE	
Operating Frequency	2402 MHz, 2480 MHz	
Channel No.	0 Ch, 38 Ch	

Frequency [MHz]	*Fund. Reading dBuV	⌘ A.F.+CL [dB]	Ant. Pol. [H/V]	*Fundamental [dBuV/m]	Delta Value [dBuV/m]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	72.83	33.86	H	106.69	54.82	51.87	74	22.13	PK
2390.0	49.84	33.86	H	83.70	54.82	28.88	54	25.12	AV
2390.0	72.59	33.86	V	106.45	53.90	52.55	74	21.45	PK
2390.0	49.63	33.86	V	83.49	53.90	29.59	54	24.41	AV
2483.5	71.80	34.02	H	105.82	56.70	49.12	74	24.88	PK
2483.5	49.40	34.02	H	83.42	56.70	26.72	54	27.28	AV
2483.5	69.29	34.02	V	103.31	53.12	50.19	74	23.81	PK
2483.5	47.63	34.02	V	81.65	53.12	28.53	54	25.47	AV

Notes:

1. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.
2. Radiated Restricted Band Edge measures by marker-delta method according to FCC guideline.
3. Marker-Delta Method

In making radiated band-edge measurements, there can be a problem obtaining meaningful data since a measurement instrument that is tuned to a band-edge frequency may also capture some in-band signals when using the resolution bandwidth (RBW) required by measurement procedure ANSI C63.4-1992 (hereafter C63.4). In an effort to compensate for this problem, we have developed the following technique for determining band-edge compliance.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ



STEP 1) Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4 and our Rules for the frequency being measured. For example, for a device operating in the 902-928 MHz band under Section 15.249, use a 120 kHz RBW with a CISPR QP detector (a peak detector with 100 kHz RBW may alternatively be used). For transmitters operating above 1 GHz, use a 1 MHz RBW, a 1 MHz VBW, and a peak detector (as required by Section 15.35). Repeat the measurement with an average detector (i.e., 1 MHz RBW with 10 Hz VBW). Note: For pulsed emissions, other factors must be included. Please contact the FCC Lab for details if the emission under investigation is pulsed. Also, please note that radiated measurements of the fundamental emission of a transmitter operating under 15.247 are not normally required, but they are necessary in connection with this procedure.

STEP 2) Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.

STEP 3) Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

8.6 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for Ch.19 on BT 4.0 LE mode.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN	FCC ID: JYCSTARQ

□ RESULT PLOTS

Conducted Emissions (Line 1)


HCT

EMC

EUT: ADR910L
 Manufacturer: PANTECH
 Operating Condition: BT4.0 MODE
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15 CLASS B
 Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

FCC PART 15 CLASS B						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

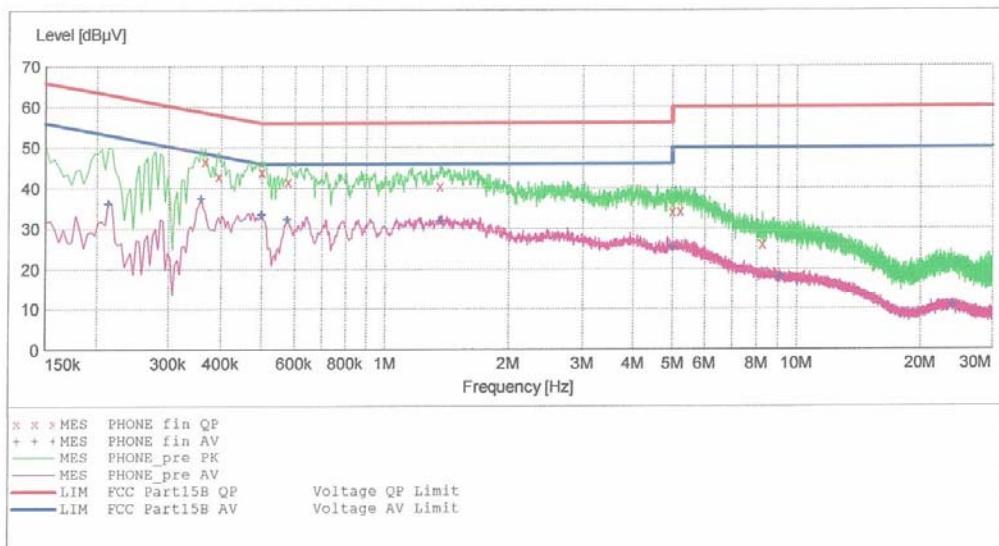

MEASUREMENT RESULT: "PHONE_fin QP"

2/24/2012 8:47AM	Frequency	Level	Transd	Limit	Margin	Line	PE
	MHz	dB μ V	dB	dB μ V	dB		
	0.366010	46.70	10.3	59	11.9	---	---
	0.394010	43.00	10.3	58	15.0	---	---
	0.500000	44.00	10.3	56	12.0	---	---
	0.500000	43.90	10.3	56	12.1	---	---
	0.580000	41.60	10.3	56	14.4	---	---
	1.368000	40.40	10.4	56	15.6	---	---
	5.000000	34.20	10.7	56	21.8	---	---
	5.236000	34.30	10.7	60	25.7	---	---
	8.268000	26.30	11.0	60	33.7	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:			FCC ID:
HCTR1202FR24-01	March 08, 2012	CDMA/LTE Phone with Bluetooth & WLAN			JYCASTARQ



MEASUREMENT RESULT: "PHONE_fin AV"

2/24/2012 8:47AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line dB	PE
0.214010	36.10	10.3	53	16.9	---	---
0.358010	37.40	10.3	49	11.4	---	---
0.498010	33.50	10.3	46	12.5	---	---
0.500000	33.60	10.3	46	12.4	---	---
0.576000	32.40	10.3	46	13.6	---	---
1.380000	32.10	10.4	46	13.9	---	---
5.000000	25.40	10.7	46	20.6	---	---
9.104000	18.10	11.0	50	31.9	---	---
23.932000	10.80	11.8	50	39.2	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

Conducted Emissions (Line 2)


HCT

EMC

EUT: ADR910L
Manufacturer: PANTECH
Operating Condition: BT4.0 MODE
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: FCC PART15 CLASS B
Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

FCC PART 15 CLASS B						
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

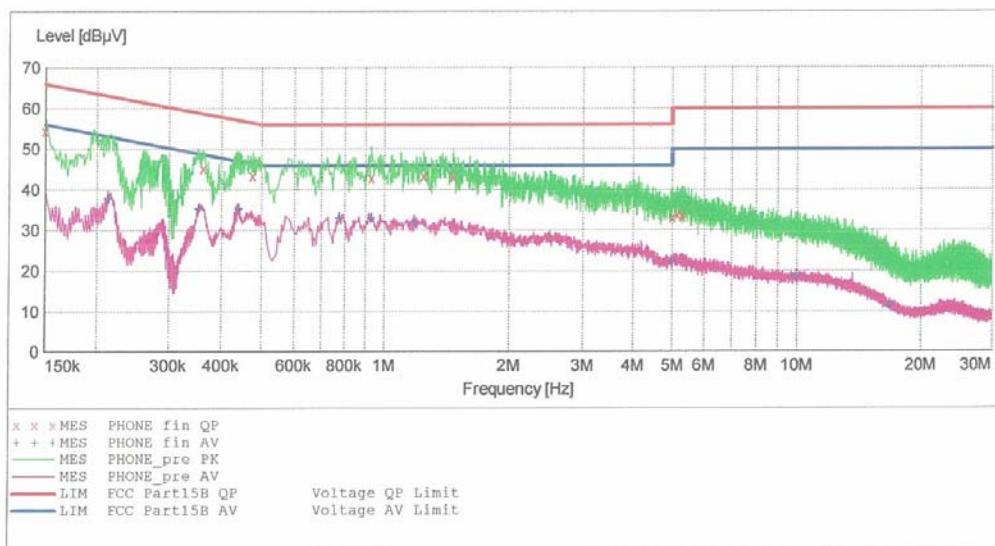

MEASUREMENT RESULT: "PHONE_fin_QP"

2/24/2012 8:42AM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.150010	54.50	10.1	66	11.5	---	---
0.362010	45.40	10.1	59	13.3	---	---
0.476010	43.50	10.1	56	12.9	---	---
0.932000	42.90	10.1	56	13.1	---	---
1.248000	43.40	10.2	56	12.6	---	---
1.472000	43.30	10.2	56	12.7	---	---
5.000000	33.10	10.5	56	22.9	---	---
5.152000	33.90	10.5	60	26.1	---	---
5.296000	33.40	10.6	60	26.6	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN			FCC ID: JYCSTARQ

MEASUREMENT RESULT: "PHONE_fin AV"

2/24/2012 8:42AM

Frequency MHz	Level dB _µ V	Transd dB	Limit dB _µ V	Margin dB	Line ---	PE ---
0.213010	37.80	10.1	53	15.3	---	---
0.353010	35.30	10.1	49	13.5	---	---
0.440010	35.30	10.1	47	11.8	---	---
0.776000	33.00	10.1	46	13.0	---	---
0.932000	33.00	10.1	46	13.0	---	---
1.184000	31.80	10.2	46	14.2	---	---
5.000000	22.30	10.5	46	23.7	---	---
9.980000	18.40	10.9	50	31.6	---	---
16.700000	11.30	11.6	50	38.7	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ

9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	02/03/2013	861741/013
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	05/26/2012	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	09/23/2012	MY51110020
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	08/01/2012	375.8810.352
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/19/2012	10094
MITEQ	AFS44-00102650-42-10P-44-PS/ POWER AMP	Annual	09/23/2012	1532439
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	10/17/2013	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/26/2012	BBHA9170342
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/09/2013	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	E4416A /Power Meter	Annual	11/07/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2012	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2012	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2012	1
Hewlett Packard	11636B/Power Divider	Annual	11/07/2012	11377
Hewlett Packard	11667B / Power Splitter	Annual	11/04/2012	10126
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	11/07/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/07/2012	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	11/14/2012	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2012	100422
EMCO	6502 LOOP ANTENNA	Biennial	01/11/2014	9009-2536
MITEQ	AMF-6D-001180-35-20P/ POWER AMP	Annual	12/26/2012	990893

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1202FR24-01	Date of Issue: March 08, 2012	EUT Type: CDMA/LTE Phone with Bluetooth & WLAN		FCC ID: JYCSTARQ