



FCC REPORT

Applicant: Primos Inc

Address of Applicant: 604 First Street Flora Mississippi United States 39071

Equipment Under Test (EUT)

Product Name: WAGGIN' WHITETAIL

Model No.: 62606

FCC ID: K2R62606T

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.231:2011

Date of sample receipt: January 05, 2013

Date of Test: January 06-08, 2013

Date of report issued: January 09, 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.


This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	January 09, 2013	Original

Prepared By:



Date:

January 09, 2013

Project Engineer

Check By:



Date:

January 09, 2013

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	6
5.4 TEST FACILITY.....	6
5.5 TEST LOCATION	6
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA.....	8
7.1 ANTENNA REQUIREMENT:.....	8
7.2 RADIATED EMISSION METHOD	9
7.2.1 Field Strength of The Fundamental Signal	11
7.2.2 Spurious emissions.....	13
7.3 20dB OCCUPY BANDWIDTH	16
7.4 RELEASE TIME:.....	17
8 TEST SETUP PHOTO	18
9 EUT CONSTRUCTIONAL DETAILS	19

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
Field strength of the fundamental signal	15.231 (b)	Pass
Spurious emissions	15.231 (b)/15.209	Pass
20dB Bandwidth	15.231 (c)	Pass
Release time	15.231 (a)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Primos Inc
Address of Applicant:	604 First Street Flora Mississippi United States 39071
Manufacturer:	TAT MAN INVESTEMENT LIMITED
Address of Manufacturer	Room 910, 9/F, Hang Bong Commercial Centre, 28 ShangHai Street, TsimShaTsui, HK
Factory:	YaoBiao Manufactory
Address of Factory:	C Tower, YaoBiao Factory, AoDing Village, GuangDong Community GuanLan Street, BaoAn County, SZ City, GuangDong, China

5.2 General Description of EUT

Product Name:	WAGGIN' WHITETAIL
Model No.:	62606
Operation Frequency:	315.14MHz
Modulation technology:	ASK
Antenna Type:	PCB antenna
Antenna gain:	2dBi (declare by Manufacturer)
Power supply:	DC 12V

5.3 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
<i>Remark: During the test, the New Battery was used.</i>	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	80.82	78.41	79.05

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”:
X axis (see the test setup photo)

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS —Registration No.: CNAS L5775

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

• Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.


6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 06 2012	Dec. 05 2013
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 03 2012	Jul. 02 2013
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Mar. 10 2012	Mar. 09 2013
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	Mar. 10 2012	Mar. 09 2013
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 10 2012	Mar. 09 2013
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Jul. 03 2012	Jul. 02 2013
10	Coaxial Cable	GTS	N/A	GTS211	Jul. 03 2012	Jul. 02 2013
11	Coaxial cable	GTS	N/A	GTS210	Jul. 03 2012	Jul. 02 2013
12	Coaxial Cable	GTS	N/A	GTS212	Jul. 03 2012	Jul. 02 2013
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 03 2012	Jul. 02 2013
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 03 2012	Jul. 02 2013
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2012	June 28 2013
16	Band filter	Amindeon	82346	GTS219	Mar. 31 2012	Mar. 30 2013
17	D.C. Power Supply	Instek	PS-3030	GTS232	Mar. 31 2012	Mar. 30 2013
18	Thermo meter	KTJ	TA328	GTS256	Jul. 06 2012	Jul. 05 2013


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 10 2012	July 09 2013


7 Test results and Measurement Data

7.1 Antenna requirement:

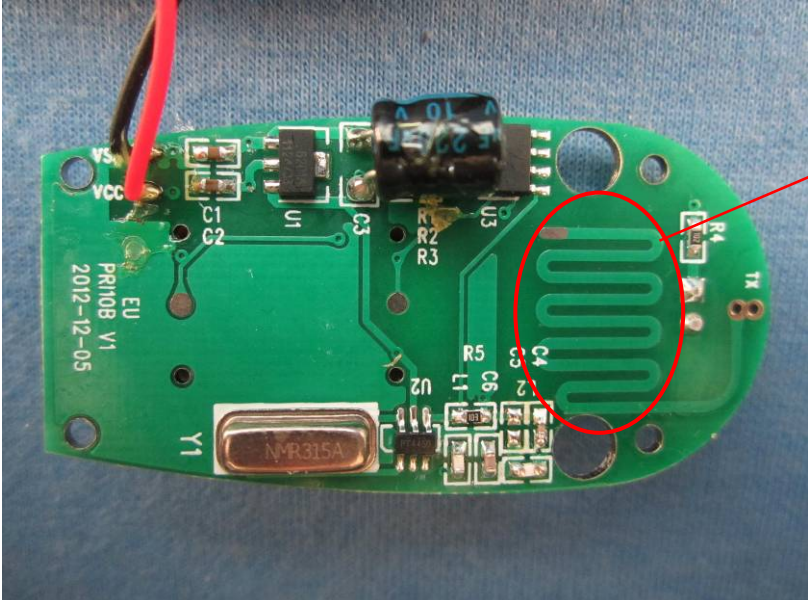Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The EUT make use of a PCB antenna, the typical gain of the antenna is 2dBi.	
	

7.2 Radiated Emission Method

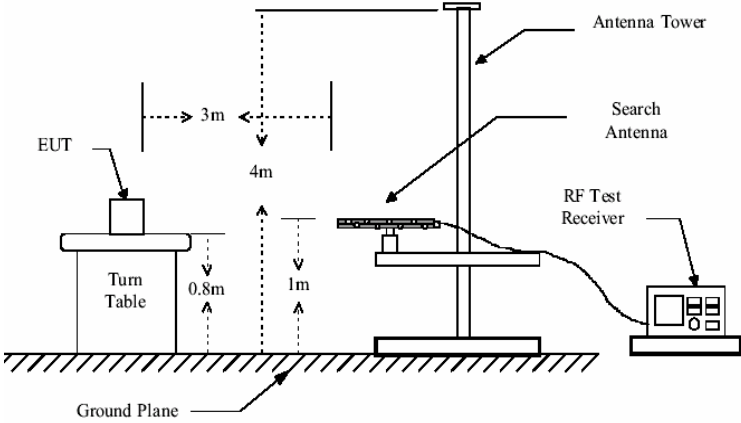Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	30MHz to 3200MHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	315.14MHz		75.60		Average Value
			95.60		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.00		Quasi-peak Value
	88MHz-216MHz		43.50		Quasi-peak Value
	216MHz-960MHz		46.00		Quasi-peak Value
	960MHz-1GHz		54.00		Quasi-peak Value
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits a higher field strength.					
Test setup:	Below 1GHz				
					
Above 1GHz					

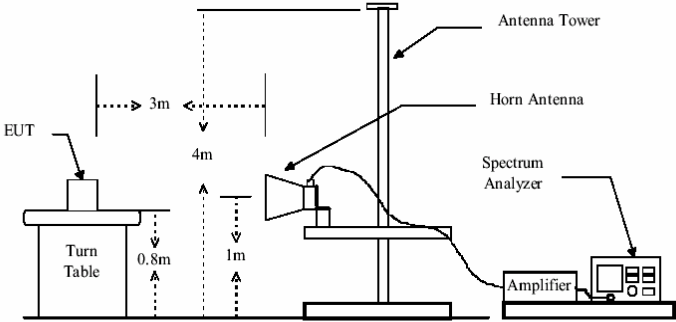	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a Turn Table at a height of 0.8m. The Turn Table is 3m away from the Antenna Tower. The Antenna Tower has a Horn Antenna at a height of 1m to 4m. A Spectrum Analyzer is connected to the Antenna Tower via an Amplifier.
Test Procedure:	1. During the test, the New Battery was used. 2. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 3. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 4. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 7. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement data:

7.2.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
315.14	94.25	16.26	2.44	32.13	80.82	95.60	-14.78	Horizontal
315.14	91.37	16.26	2.44	32.13	77.94	95.60	-17.66	Vertical

Average value:


Frequency (MHz)	Peak Value (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
315.14	80.82	-7.03	73.79	75.60	-1.81	Horizontal
315.14	77.94	-7.03	70.91	75.60	-4.69	Vertical

Average value:



Calculate Formula:	Average value=Peak value + Duty Cycle Factor
	Duty cycle factor=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =5 + 1.833 * 7 + 0.6 * 6=21.43ms
	T period =48.17ms
	Duty cycle= 21.43/48.17=44.49%
	duty cycle factor= -7.03

Test plot as follows:

T period:

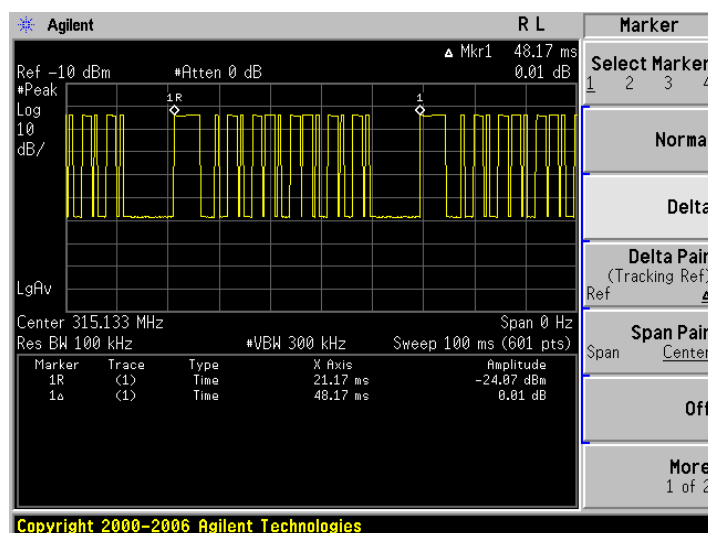

T on time slot:

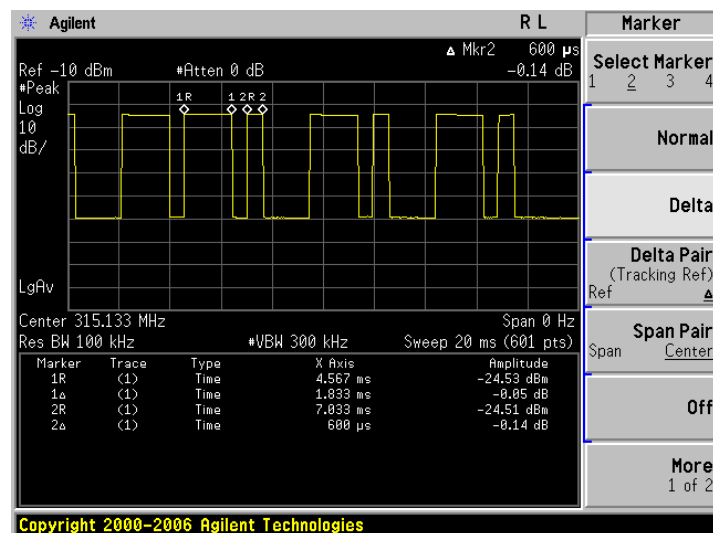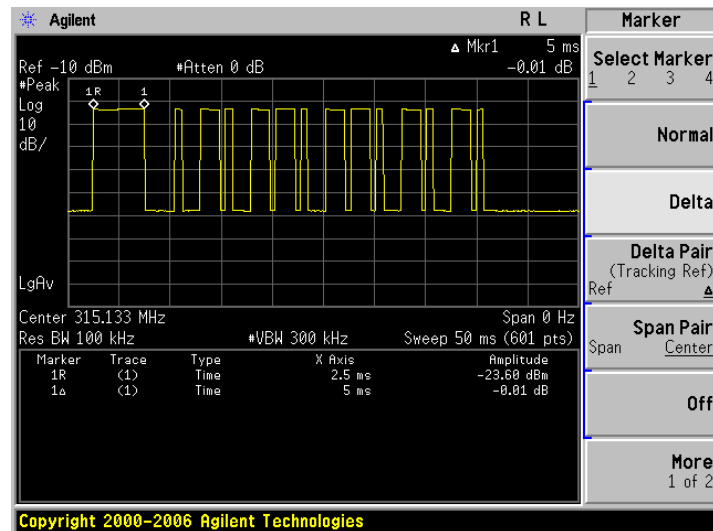

7.2.2 Spurious emissions

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
43.58	37.73	16.57	0.70	32.02	22.98	40.00	-17.02	Vertical
100.81	37.22	16.06	1.20	31.76	22.72	43.50	-20.78	Vertical
561.56	37.60	19.77	3.57	31.24	29.70	46.00	-16.30	Vertical
757.50	37.99	22.53	4.31	31.27	33.56	46.00	-12.44	Vertical
46.49	37.00	16.55	0.74	31.99	22.30	40.00	-17.70	Horizontal
94.02	39.94	15.82	1.14	31.74	25.16	43.50	-18.34	Horizontal
576.11	36.45	20.09	3.63	31.15	29.02	46.00	-16.98	Horizontal
801.15	41.84	23.06	4.46	31.31	38.05	46.00	-7.95	Horizontal

Harmonic emissions

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
630.28	61.01	20.91	3.84	31.09	54.67	75.60	-20.93	Vertical
945.42	55.04	23.92	5.03	31.21	52.78	75.60	-22.82	Vertical
1260.56	50.40	25.04	4.51	31.53	48.42	75.60	-27.18	Vertical
1575.70	59.74	25.85	4.73	31.64	58.68	74.00	-15.32	Vertical
1890.84	54.51	27.99	4.91	31.23	56.18	75.60	-19.42	Vertical
2205.98	52.13	29.64	5.19	31.44	55.52	74.00	-18.48	Vertical
2521.12	39.69	31.69	5.51	31.78	45.11	75.60	-30.49	Vertical
2836.26	42.86	32.49	5.79	30.88	50.26	74.00	-23.74	Vertical
3151.40	31.81	32.71	5.92	30.43	40.01	75.60	-35.59	Vertical
630.28	57.40	20.91	3.84	31.09	51.06	75.60	-24.54	Horizontal
945.42	62.10	23.92	5.03	31.21	59.84	75.60	-15.76	Horizontal
1260.56	51.83	25.04	4.51	31.53	49.85	75.60	-25.75	Horizontal
1575.70	60.70	25.85	4.73	31.64	59.64	74.00	-14.36	Horizontal
1890.84	50.04	27.99	4.91	31.23	51.71	75.60	-23.89	Horizontal
2205.98	55.26	29.64	5.19	31.44	58.65	74.00	-15.35	Horizontal
2521.12	43.08	31.69	5.51	31.78	48.50	75.60	-27.10	Horizontal
2836.26	47.34	32.49	5.79	30.88	54.74	74.00	-19.26	Horizontal
3151.40	31.37	32.71	5.92	30.43	39.57	75.60	-36.03	Horizontal


Average value:

Frequency (MHz)	Level (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
630.28	54.67	-7.03	47.64	55.60	-7.96	Vertical
945.42	52.78	-7.03	45.75	55.60	-9.85	Vertical
1260.56	48.42	-7.03	41.39	55.60	-14.21	Vertical
1575.70	58.68	-7.03	51.65	54.00	-2.35	Vertical
1890.84	56.18	-7.03	49.15	55.60	-6.45	Vertical
2205.98	55.52	-7.03	48.49	54.00	-5.51	Vertical
2521.12	45.11	-7.03	38.08	55.60	-17.52	Vertical
2836.26	50.26	-7.03	43.23	54.00	-10.77	Vertical
3151.40	40.01	-7.03	32.98	55.60	-22.62	Vertical
630.28	51.06	-7.03	44.03	55.60	-11.57	Horizontal
945.42	59.84	-7.03	52.81	55.60	-2.79	Horizontal
1260.56	49.85	-7.03	42.82	55.60	-12.78	Horizontal
1575.70	59.64	-7.03	52.61	54.00	-1.39	Horizontal
1890.84	51.71	-7.03	44.68	55.60	-10.92	Horizontal
2205.98	58.65	-7.03	51.62	54.00	-2.38	Horizontal
2521.12	48.50	-7.03	41.47	55.60	-14.13	Horizontal
2836.26	54.74	-7.03	47.71	54.00	-6.29	Horizontal
3151.40	39.57	-7.03	32.54	55.60	-23.06	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *Average value = Peak value + Duty cycle factor*

7.3 20dB Occupy Bandwidth

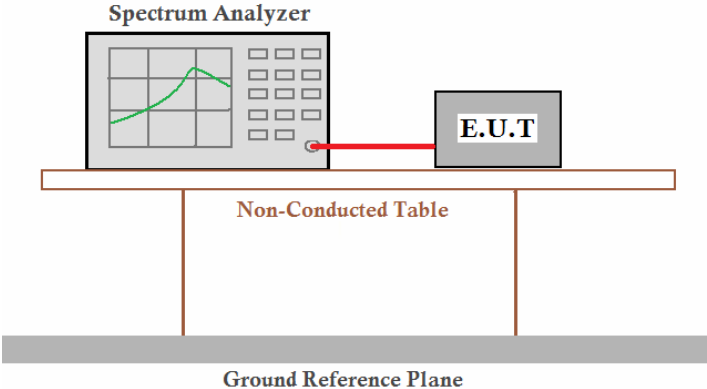
Test Requirement:	FCC Part15 C Section 15.231 (c)
Test Method:	ANSI C63.4:2003
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test setup:	 The diagram illustrates the test setup for conducted emission testing. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Test Frequency (MHz)	20dB bandwidth (MHz)	Limit (MHz)	Result
315.14	0.154	0.788 MHz	Pass

Note: Limit= Fundamental frequency $\times$ 0.25%=315.14 $\times$ 0.25%=0.788MHz

Test plot as follows:

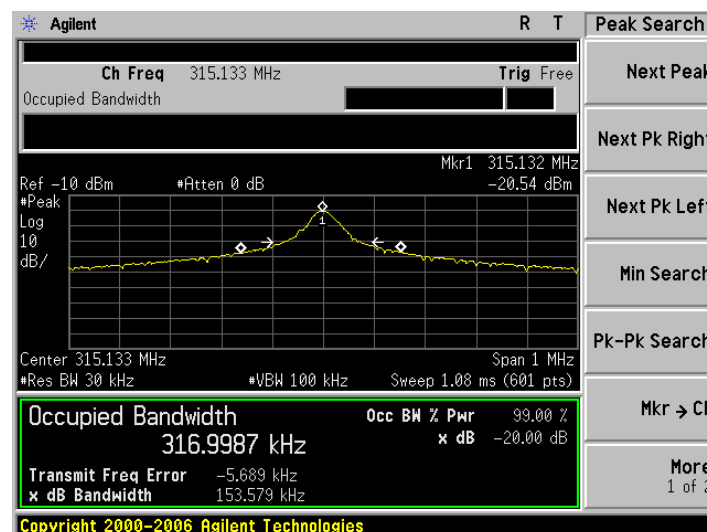


7.4 Release time:

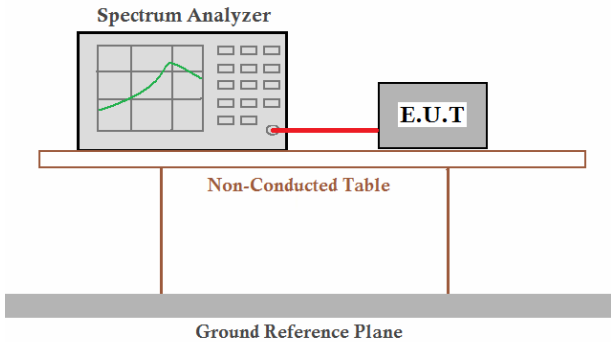Test Requirement:	FCC Part15 C Section 15.231 (e)
Test Method:	ANSI C63.4:2003
Receiver setup:	RBW=100KHz, VBW=300KHz, span=0Hz, detector: Peak
Limit:	Not more than 5 seconds
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement data:



Dwell time (second)	Limit (second)	Result
0.5167	<5.0	Pass

Test plot as follows:

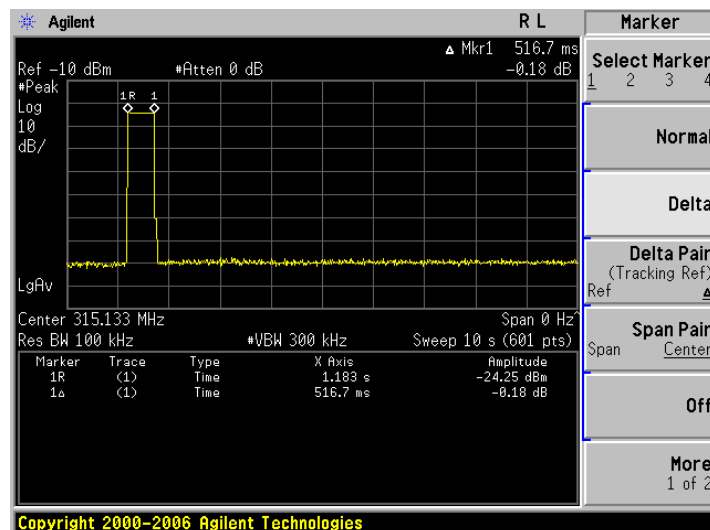

8 Test Setup Photo



Radiated Emission

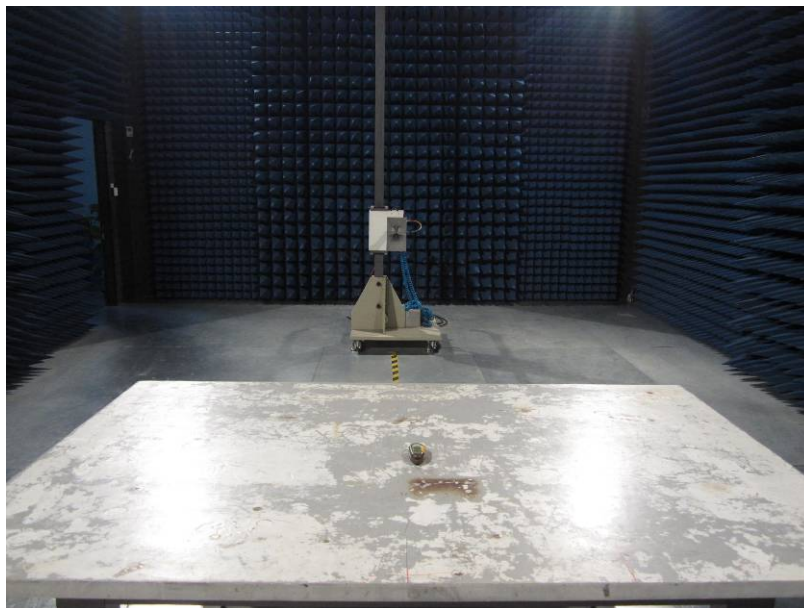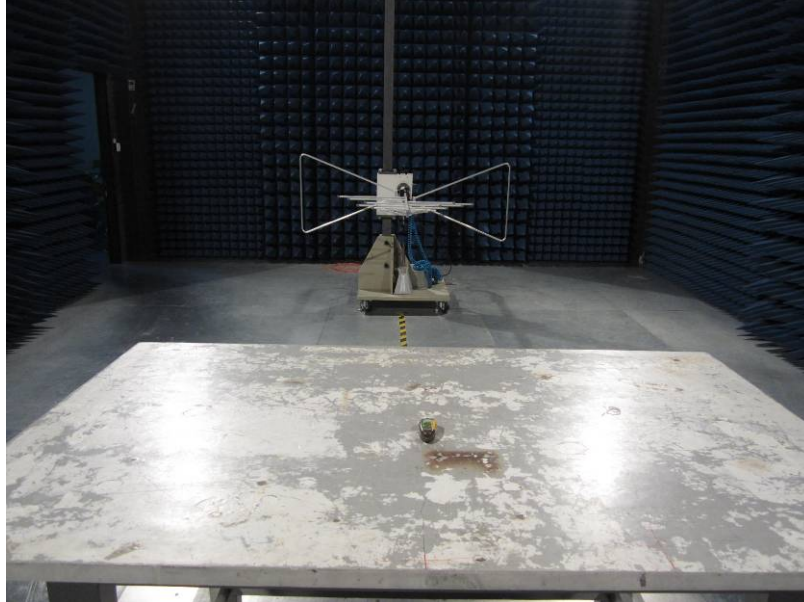


9 EUT Constructional Details





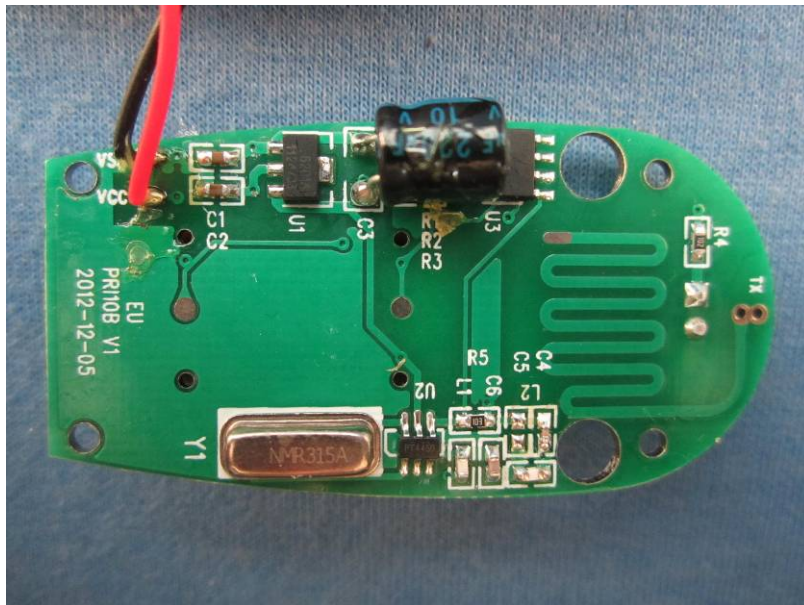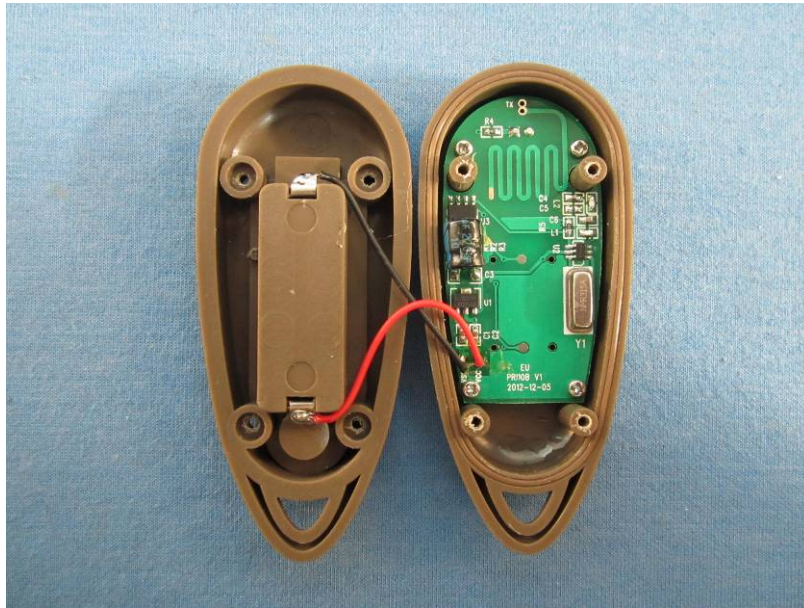

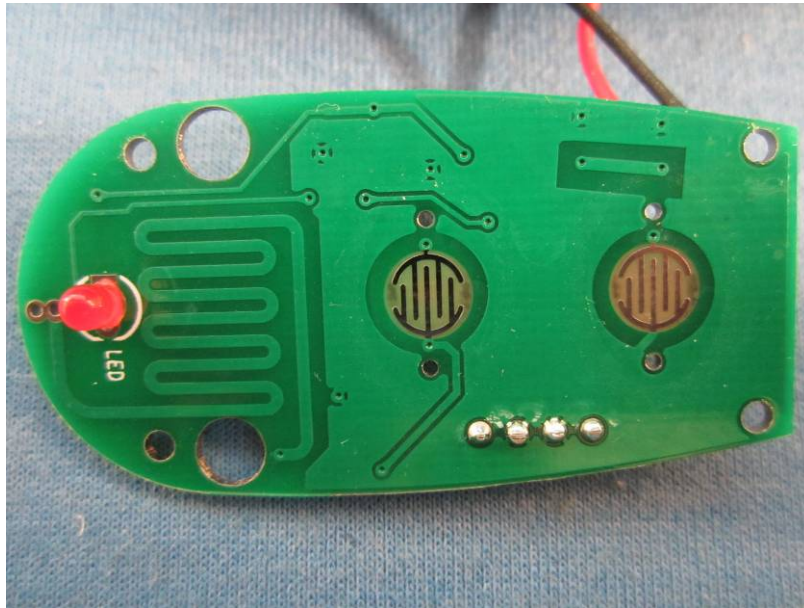

----- end -----