

FCC PART 15 SUBPART B
CERTIFICATION REPORT

KENWOOD CORPORATION COMMUNICATION EQUIPMENT DIVISION

SCANNING RECEIVER

FCC ID : K4428871110

Z02C-98264

October, 1998

ZACTA TECHNOLOGY CORPORATION

4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata
992-11 Japan

TABLE OF CONTENTS

CERTIFICATE COMPLIANCE	3
TECHNICAL INFORMATION	4
DESCRIPTION FOR TEST SITE	4
DESCRIPTION OF RADIATED EMISSION TESTING	6
DESCRIPTION OF CONDUCTED EMISSION TESTING	7
DESCRIPTION OF ANTENNA POWER CONDUCTION TEST FOR RECEIVERS	8
TEST EQUIPMENT	9
SAMPLE OF FIELD STRENGTH CALCULATION	10
LABORATORY MEASUREMENTS	11
JUSTIFICATION / ENGINEERING COMMENT	11
SUMMARY OF TEST DATA	12
TEST SITE CONDITION	15
INSTRUMENTATION USED	15
CONFIGURATION INFORMATION	16
SYSTEM CONFIGURATION	17
FCC CFR 47 PART 15.121 DESIGN REQUIREMENTS	18

CERTIFICATE COMPLIANCE

ZACTA TECHNOLOGY CORPORATION
YONEZAWA TESTING CENTER
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128
Japan

This device was measured pursuant to ANSI C63.4-1992 by Zacta Technology Corporation. The data in this application complies with the applicable technical standards as indicated in the measurements report and FCC Part 15 Class B limits. The EUT complies with section 15.37 "Transition provision for compliance with the rules".

APPLICANT : KENWOOD CORPORATION COMMUNICATION EQUIPMENT
DIVISION :
FCC ID : K4428871110
FCC RULE PART : FCC Part 15 Subpart B, Docket 87-389
EQUIPMENT CLASS : Class B
EUT TYPE : SCANNING RECEIVER
FREQ. RANGE : VHF 118MHz - 173.995MHz
 UHF 400MHz - 469.995MHz
DATE OF TEST : September 2-3, 1998
MEASUREMENT : ANSI C63.4-1992
TEST RESULT : PASS
REPORT NO. : Z02C-98264
REMARKS : No modification was made during testing.
 Power cord is not connected to AC line.

Zacta Technology Corporation certifies that no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21U.S.C. 853(a).

Authorized by : Shin-ichi Abe

General Manager, Zacta Technology Corporation Yonezawa
Testing Center

The results in this test report apply only to the samples tested.

This report shall not be re-product except in full without the written approval of Zacta Technology Corporation.

FCC ID: K4428871110

Zacta Technology Corp.

TECHNICAL INFORMATION

DESCRIPTION FOR TEST SITE

1. LOCATION: ZACTA TECHNOLOGY CORPORATION YONEZAWA TESTING CENTER
4149-7 Hachimanpara 5-chome, Yonezawa-shi Yamagata 992-
1128 Japan Phone: +81-238-28-2880 Fax: +81-238-28-2888

```

2. THE NUMBER OF SITE:  Total: 4 sites  #1 site
                                #2 site
                                #3 site
                                #4 site

```

3. THE TYPE OF SITE : Weather protected site


4. TEST TYPE : All site could perform as follows tests:

- 1) 3/10m Radiated emission test
- 2) Conducted emission test


5. NORMALIZED SITE ATTENUATION GRAPH

.....

ANSI Site Attenuation
SITE 3m VER 1

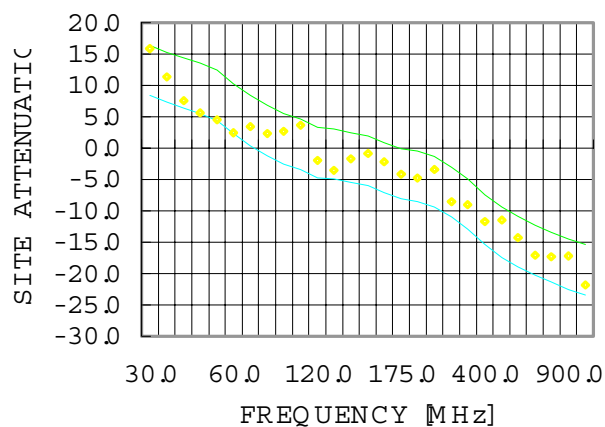

ANSISite Attenuation
SITE3 3m HOR`

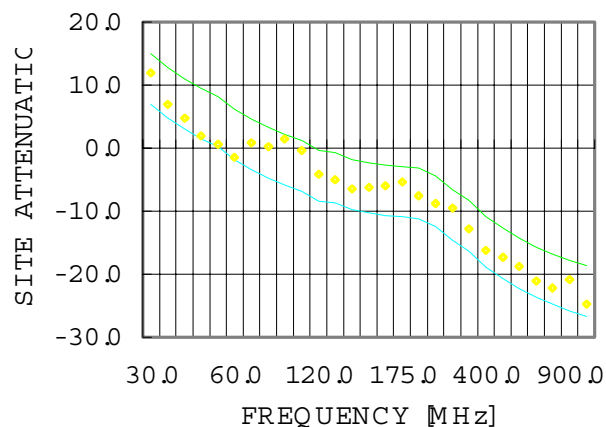

6. FACILITY FILING INFORMATION

FCC FINAL SITE FILING: January 29, 1997 (Final date)
§2.948 Pursuant to ANSI C63.4-1992

#1 site

#2 site

#3 site

- #4 site (Final date: June 18, 1998)

*3m/10m Radiated emission test & Conducted emission test could be performed on each site

VCCI FINAL SITE FILING: April 1, 1997 (Final date)

Registration of V-5/97.04 Pursuant to VCCI Regulations for measurement facilities

#1 site R - 136 C - 132

#2 site R - 137 C - 133

#3 site R - 138 C - 134

#4 site R - 752 C - 775 (Final date: June 23, 1998)

NVLAP ACCREDITATION :

NVLAP CODE: 200306-0

NVLAP INFORMATION

NVLAP accreditation does not constitute any product endorsement by NVLAP or any agent of the U.S. Government

DESCRIPTION OF RADIATED EMISSION TESTING

Measurements: were made at 3 meter using broadband antenna (Biconical Antenna and log-periodic antenna) & Test receiver. Frequency Range : 30MHz - 1GHz was scanned and investigated using receiver. Six highest emissions (Min.) was reported. The test results represents the worst case emissions for each emission with manipulating the EUT, support equipment and interconnecting cables maximize the worst emissions in this test report.

Condition:

The detector function of the test receiver was set to CISPR Quasi-peak mode and the bandwidth was set to 120kHz. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition.

The EUT and support equipment were placed on a top of a 0.8 meter height wooden table.

For Floor-Standing devices, the EUT and all cables were installed on electrical insulating material.

The antenna height was varied 1 to 4 meters and stopped at height producing the maximum emission. The turntable was rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

Interconnecting cables which are connected to a peripheral was bundled in center, and its length was not exceed 1 meter.

Each emission was maximized by: varying the mode of operation; clock or data exchange speed; scrolling H pattern to the EUT and support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet; changing the polarity of the antenna, whichever determined the worst case emission.

The normalized site attenuation graph for the both horizontal and vertical polarization are shown in Description for site.

As specified in CFR section 15.33, in case of the highest frequency used in the device is from 108MHz to 500MHz, the frequency range was investigated from 30MHz up to the frequency 2GHz.

For measurements above 1GHz, double-ridged guide antenna was used as specified in ANSI C63.4-1992 section 4.1.5.4.

Pursuant to CFR section 15.35(b) and ANSI C63.4-1992 section 4.2., peak and average detectors were used for measurements above 1GHz. The bandwidth of spectrum analyzer was set to 1MHz.

When measuring emissions above 1GHz, the frequencies of maximum emissions were determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. The beam width of the antenna at that time was larger than EUT.

DESCRIPTION OF CONDUCTED EMISSION TESTING

The line-conducted emissions testing facility is located inside of the site which used for radiated emissions testing.

A 1 meter x 1.5 meter surface, 0.8 meter height from conducting ground plane wooden table is placed 40 cm away from the vertical conducting surface. Two 50•/50•H Line Impedance Stabilization Network (LISN) are placed on the conducting ground plane.

The EUT was powered from the CDI LISN and the support Equipment were another CDI LISN. 50•BNC connector of the CDI LISN (for peripheral) is terminated in 50• isolation transformer has 50A which is large enough to not affect the peak consumption•current by the EUT.

All interconnecting cables more than 1 meter were bundled to 1 meter length. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The frequency range was scanned from 450KHz to 30 MHz. The detector function of the test receiver was set to CISPR quasi-peak mode and the bandwidth was set to 10KHz.

The EUT, support equipment and interconnecting cables were arranged and manipulated to maximize worst emissions for each emission in this test report.

DESCRIPTION OF ANTENNA POWER CONDUCTION TEST FOR RECEIVERS

Since the EUT is the receiver that provide terminals for the connection of an external receiving antenna, in addition to section 15.109 radiated emission limits, the test for Antenna power conduction limits was demonstrated pursuant to section 15.111.

The receiver antenna terminal was connected to the spectrum analyzer which resistive termination is equal to the antenna impedance. The exchange connector was used between antenna termination and coaxial cable. Spectrum analyzer was set to read picowatts as specified in charts of the spectrum analyzer display and it converted to the value of nanowatts. The measurement data was investigated at bottom, middle, top of the band and scanning mode.

TEST EQUIPMENT

Equipment No.	Cal. date	Manufacture	Model name / Serial
Spectrum Analyzer		HEWLETT-PACKARD Co	HP8568B / 2732A03847 Mar.19
Spectrum Analyzer		HEWLETT-PACKARD Co	HP8568B / 2634A02803 Apr.19
Spectrum Analyzer		ADVANTEST	R3271A / 65050042 Feb.19
RF Preamplifier		Anritsu	MH648A / M96157 Jan.19
RF Preamplifier		HEWLETT-PACKARD	HP8449B / 3008A00589 Jan.19
RF Preamplifier		HEWLETT-PACKARD Co	HP8447F / 2805A03056 May.19
Signal Generator		HEWLETT-PACKARD	HP8657A / 2750U00157 Jul.19
Test Receiver		ROHDE & SCHWARZ	ESV / 89237 Feb.19
Test Receiver		ROHDE & SCHWARZ	ESH2 / 892237/012 Jan.19
Test Receiver		ROHDE & SCHWARZ	ESHS10 / 61360022 Aug.19
Test Receiver		Kyouritsu	KNM-5002/ 4N-187-2 Sep.19
		Electrical	KCV-6002/ 4-288-1 97
Test Receiver		Works, Ltd.	KNM-5002/ 4N-187-10 Jan.19
		Electrical	KCV-6002/ 4-257-1 98
Test Receiver		Works, Ltd.	KNM-5002/ 4N-195-2 Aug.19
		Electrical	KNM-6002/ 4-269-2 98
Test Receiver		Works, Ltd.	KNM-2402/ 4N-192-1 Aug.19
		Electrical	98
Test Receiver		Works, Ltd.	KNM-2402/ 4N-220-1 Feb.19
		Electrical	98
Line Impedance Stabilization Network		COMPLIANCE DESIGN	8012-50-R-24- Nov.19
		Inc	BNC/887121 97
Line Impedance Stabilization Network		Kyouritsu	KNW-242C / 8-875-19 Oct.19
		Electrical	97
Double Antenna		COMPLIANCE DESIGN	ROBERTS ANTENNA (TM) May.19
Biconical Antenna		Schwarzbeck	May.19
Log Periodic Antenna		Electro-Mechanics	3146 / 8901-2336 May.19
Antenna		Electro-Mechanics	3146 / 8901-2332 Mar.19
Antenna		ROHDE & SCHWARZ	HFH2-Z2 / 892246/010 Nov.19
Double Ridged Guide Antenna		Electro-Mechanics Co.	9408-4328 Sep.19
			96

Calibration traceable to NIST or an equivalent standards reference organization.

SAMPLE OF FIELD STRENGTH CALCULATION

$$\text{dB}\bullet V \bullet = 20\log_{10} (\bullet V)$$

$$\text{dB}\bullet\text{V} / \text{m}\bullet = 20\log_{10} (\bullet\text{V}/\text{m})$$

[Sample Calculation]

*For Conduction

Class B limit = $250 \bullet V = 48.0 \text{ dB} \bullet V$

@ 3.332MHz

Reading = 41.6dB•V

Cable Loss = 0.2dB

$$\text{Total} = 41.6 + 0.2 = 41.8\text{dB}\bullet\text{V}$$
$$\text{Margin} = 41.8 - 48.0 = -6.2\text{dB}$$

6.2 dB below the limit

*For Radiation

Class B limit = $150 \bullet \text{V/m} = 43.5 \text{dB} \bullet \text{V/m}$

@ 181.0MHz

Reading = 35.7dB•V

$$\begin{aligned} \text{Ant. Factor} + \text{Cable Loss} - \text{Amp. Gain} &= 15.8 + 1.4 - 15.0 = \\ 2.2\text{dB} \quad \text{Total} &= 35.7 + 2.2 = 37.9\text{dB} \bullet \text{V/m} \end{aligned}$$
$$\text{Margin} = 37.9 - 43.5 = -5.6\text{dB}$$

limit 5.6 dB below the

LABORATORY MEASUREMENTS

PURSUANT TO PART 15, SUBPART B

COMPANY NAME : KENWOOD CORPORATION COMMUNICATION
EQUIPMENT DIVISION
EUT : SCANNING RECEIVER
MODEL NO. : TH-D7A
FCC ID : K4428871110
SERIAL NO. : N/A
DATE OF TESTS : September 2-3, 1998
MEASUREMENT : ANSI C63.4-1992
FCC CLASS : B
DISTANCE : 3m
POWER SUPPLIED : DC 13.8V (From DC Power Supply)
or 6.0V (From Battery)
REPORT NO. : Z02C-98264

JUSTIFICATION / ENGINEERING COMMENT

The detector function in frequency range of 30MHz-1GHz was set to Quasi-peak mode. Peak and average detectors were used for measurements above 1GHz. Cables were manipulated to produce the worst case emissions.

All operating configuration, combination of Accessory: Microphone, Battery charger and DC power supply were investigated in preliminary testing. The worst case data were reported.

Sufficient warm up time is proved for these testing.

Four points of frequency: at bottom, middle, top of the band and scanning mode were measured, and VHF 118.05MHz in battery charge mode was the worst case. Antenna power conduction for external receiving antenna were measured.

ENGINEER : Tomokazu Kato

SMMURY OF TEST DATA

RADIATED EMISSION DATA

OPERATING CONFIGURATION (Battery charge)		RESULT
TEST MODE	FREQUENCY	MARGIN
VHF 118.05MHz	32.32MHz	-5.1dB
VHF 146.05MHz	31.99MHz	-15.4dB
VHF 173.95MHz	31.66MHz	-12.5dB
VHF 118-174MHz ALL	33.51MHz	-21.2dB
SCAN		
UHF 400.05MHz	32.31MHz	-15.6dB
UHF 440.05MHz	32.93MHz	-15.7dB
UHF 479.95MHz	32.83MHz	-19.8dB
UHF 400-480MHz ALL	32.59MHz	-14.5dB
SCAN		

CONDUCTED EMISSION DATA

OPERATING CONFIGURATION (Battery charge)		RESULT
TEST MODE	FREQUENCY	MARGIN
VHF 118.05MHz	29.775MHz	-8.2dB
VHF 146.05MHz	29.930MHz	-8.2dB
VHF 173.95MHz	29.679MHz, 29.917MHz	-8.3dB
VHF 118-174MHz ALL	29.946MHz	-8.2dB
SCAN		
UHF 400.05MHz	29.677MHz	-8.6dB
UHF 440.05MHz	29.704MHz	-8.6dB
UHF 479.95MHz	29.733MHz	-9.3dB
UHF 400-480MHz ALL	29.701MHz, 29.785MHz	-9.0dB
SCAN		

POWER CONDUCTED EMISSION DATA

OPERATING CONFIGURATION (Battery charge)			RESULT
TEST MODE		FREQUENCY	MARGIN
VHF	118.05MHz	156.864MHz	-1.9862nW
VHF	146.05MHz	184.890MHz	-1.9787nW
VHF	173.95MHz	212.837MHz	-1.9876nW
VHF	118-174MHz ALL	192.355MHz	-1.9741nW
SCAN			
UHF	400.05MHz	354.971MHz	-1.9889nW
UHF	440.05MHz	394.984MHz	-1.9595nW
UHF	479.95MHz	434.908MHz	-1.9586nW
UHF	400-480MHz ALL	428.571MHz	-1.9529nW
SCAN			

= FCC Part 15B Class B Power Conduction Data Sheet =

Date of Test: 98/09/09 Site: 3 Chart: Sheet: 17
Company: KENWOOD Model: TH-D7A Mode:
Comment: Battery Charger

Scanning Mode (VHF)

Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
192.355	0.0259	2.0000	-1.9741
190.551	0.0233	2.0000	-1.9767
190.054	0.0241	2.0000	-1.9759
189.560	0.0229	2.0000	-1.9771
188.636	0.0233	2.0000	-1.9767
193.237	0.0220	2.0000	-1.9780

Scanning Mode (UHF)

Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
428.571	0.0471	2.0000	-1.9529
431.369	0.0458	2.0000	-1.9542
430.906	0.0423	2.0000	-1.9577
399.944	0.0417	2.0000	-1.9583
393.748	0.0408	2.0000	-1.9592
434.509	0.0435	2.0000	-1.9565

EUT Freq. [MHz]	Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
118.05	156.864	0.0138	2.0000	-1.9862

EUT Freq. [MHz]	Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
146.05	184.890	0.0213	2.0000	-1.9787

EUT Freq. [MHz]	Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
173.95	212.837	0.0124	2.0000	-1.9876

EUT Freq. [MHz]	Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
400.05	354.971	0.0111	2.0000	-1.9889

EUT Freq. [MHz]	Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
440.05	394.984	0.0405	2.0000	-1.9595

EUT Freq. [MHz]	Freq. [MHz]	Read [nW]	Limit [nW]	Margin [nW]
479.98	434.908	0.0414	2.0000	-1.9586

TEST SITE CONDITION

DATE	SITE #	WEATGER	TEMPERTURE	HUMIDITY
09/ 02/ 1998	3	CLOUDY	24●	55%
09/ 03/ 1998	3	SUNNY	28●	58%

INSTRUMENTATION USED

[*] RECEIVER

RADIATED [] R/S ESV (DET [] QP [] PEAK)
 [*] KYORITSU KNM-5002,KCV-6002 (DET [*] QP [] PEAK)
 IF BANDWIDTH [*] 120kHz [] OTHER
 kHz CONDUCTED [] R/S ESH2 (DET [] QP [] PEAK []
 AVERAGE) [*] KYORITSU KNM-2402 (DET [*] QP [] PEAK []
 AVERAGE) IF BANDWIDTH [] 200Hz [] 500Hz [] 24kHz [*]
 10kHz PRI AMP [] HP8449B (1GHz-26.5GHz) [*] ANRITSU MH648A (100kHz-
 1.2GHz) [] NOT USED

[*] SPECTRUM ANALYZER

[] HP8568B (DET [] QP [] PEAK [] AVERAGE)
 [] HP8590A (DET [] PEAK [] AVERAGE)
 [*] ADVANTEST R3271(100Hz-26.5GHz) (DET [*] PEAK [*]
 AVERAGE) RESOLUTION BANDWIDTH
 [] 10kHz [] 30kHz [*] 100kHz [] 120kHz []
 300kHz VIDEO BANDWIDTH
 [] 3kHz [] 10kHz [] 30kHz [] 100kHz
 [] 300kHz [*] 1MHz [] 3MHz
 CONDUCTED: RESOLUTION BANDWIDTH
 [] 100Hz [] 300Hz [] 1kHz [] 3kHz []
 10kHz VIDEO BANDWIDTH
 [] 100Hz [] 300Hz [] 1kHz [] 3kHz []
 10kHz [] 30kHz [] 100kHz [] 300kHz [] 1MHz []
 3MHz PRI AMP [] HP85685A [*] HP8449B [] NOT USED

ANTENNAS

[*] SCHWARZBEC BBA9106/VHA9103LE
 [*] EMCO LOGPERIODIC DIPOLE MODEL 3146
 [] R/S LOOP ANTENNA HFH2-Z2 (10kHz-30MHz)
 [] ADVANTEST LOG SPIRAL ANTENNA MODEL TR17205 (1-10GHz)
 [*] EMCO DOUBLE RIDGED GUIDE ANTENNA MODEL 3115 (1-18GHz)

COAXIAL CABLE

[*] 8D-2W 15m
 [*] 23D-HA 30m, 8D-2W 8m [] OTHER (m)
 [] 23D-HA 30m, 8D-2W 15m [*] SUCOFLEX 104 15m

ANTENNA LOCATION

[] 1m CLOSE FROM EUT [*] 3m METHOD STANDARD
 [] 10m METHOD STANDARD [] OTHER ()

LISN

[*] CDI 8012-50-R-24-BNC [] KYORITSU KNW-242C

MEMO

CONFIGURATION INFORMATION
DEVICE INFORMATION

COMMENT:

NO	EQUIPMENT	COMPAN	MODEL NO.	SERIAL NO.	FCC ID	COMMENT
1	Scanning	KENWOOD	TH-D7A	N/A	K442887111	EUT
2	Receiver	KENWOOD	N/A	N/A	N/A	Accessor
3	Battery	KENWOOD	BC-19	N/A	N/A	Accessor
4	Charger	KENWOOD	N/A	N/A	N/A	For Battery
5	Microphone	KENWOOD	SMC-34	N/A	N/A	Charger


D

CABLES INFORMATION

NO	CABLE	COMPANY	LENGTH	SHIELDED	COMMENT
a	Microphone	KENWOOD	1m	Unshield	Coiled
b	Cable	KENWOOD	2.0	Unshield	For Battery

ed Charger

SYSTEM CONFIGURATION

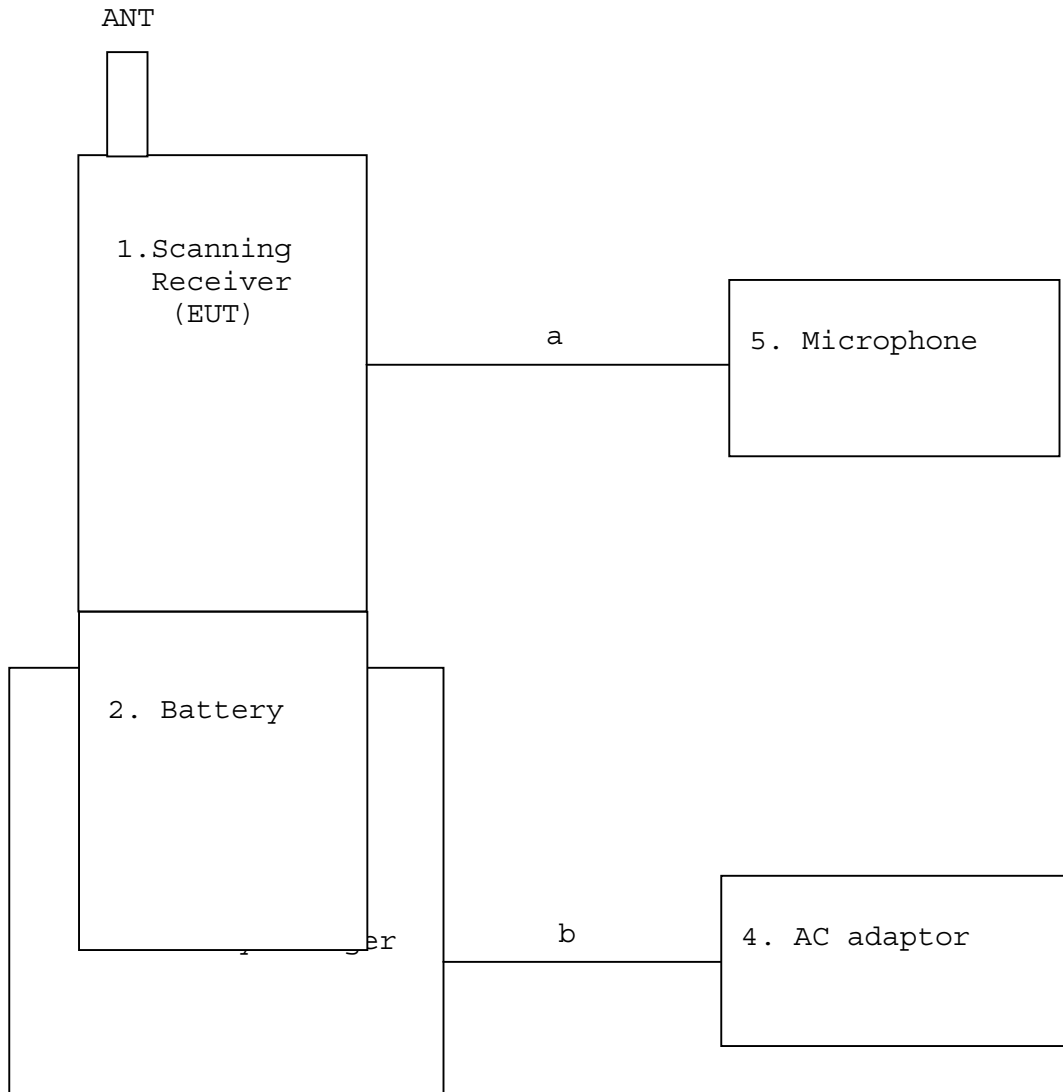

FCC CFR 47 Part 15.121 Design Requirements

KENWOOD SCANNING RECEIVER

FCC ID: K4428871110

This device (FCC ID: K4428871110) is incapable of operating (tuning) or being altered by the user to operate within the frequency bands allocated to the Domestic Cellular Radio Telecommunications Service in part 22 of this chapter (Cellular telephone bands). The TH-D7A (FCC ID: K4428871110) is already designed "not locked" the Cellular Telephone Bands by "PLL circuit" from "CPU".

Therefore, the TH-D7A (FCC ID: K4428871110) is not designed to the ability to receive in the Cellular Telephone Bands if Modification (: Installing parts or replacing parts) are performed by the user.