

TEST REPORT

STANDARD : FCC Part15B Class B

Applicant	Testing Laboratory
Kenwood Corporation 1-16-2, Hakusan, Midori-ku, Yokohama-shi, Kanagawa 226-8525 Japan Tel.: +81 45 939 6254	Intertek Japan K.K. Matsuda Laboratory (Open area test site) 1283 Yadoriki, Matsuda-machi, Ashigarakami-gun, Kanagawa-ken, 258-0001 Japan Tel.: +81 465 89 2316 Fax.: +81 465 89 2160 (Anechoic chamber) 1386 Yadoriki, Matsuda-machi, Ashigarakami-gun, Kanagawa-ken, 258-0001 Japan Tel.: +81 465 88 4100 Fax.: +81 465 88 4300 URL: http://www.japan.intertek-etlsemko.com

Equipment Type	USB PROGRAMMING INTERFACE CABLE
Trademark	KENWOOD
Model(s)	KPG-22U / KPG-36U / KPG-43U / KPG-46U
Serial No.	None
Equipment Authorization	Certification (FCC ID : K44433200)
Test Result	Complied
Report Number	JM10110020
Report Issue Date	November 19, 2010

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Yoshiaki Yoneyama
[Manager]



Tested by

Hideaki Kosemura




Responsible Party of Test Item (Product)

Responsible Party	:
Add.	:
Tel.	:
Fax.	:
Contact Person	:

TABLE OF CONTENTS

	Page
SECTION 1. GENERAL INFORMATION	3
SECTION 2. SUMMARY OF TEST RESULTS	4
SECTION 3. EQUIPMENT UNDER TEST	5
SECTION 4. SUPPORT EQUIPMENT.....	6
SECTION 5. USED CABLE(S).....	7
SECTION 6. TEST CONFIGURATION	8
SECTION 7. OPERATING CONDITION	12
SECTION 8. TEST PROCEDURE(S)	13
SECTION 9. MEASUREMENT UNCERTAINTY	15
SECTION 10. EVALUATION OF TEST RESULTS	16
SECTION 11. PHOTOGRAPHS OF MAXIMUM EMISSION SET-UP	24
SECTION 12. LIST OF MEASURING INSTRUMENTS.....	34

SECTION 1. GENERAL INFORMATION

TEST PERFORMED

Location	Matsuda No.4 Test Site
EUT Received	October 28, 2010
Date of Test	From November 11, 2010 to November 12, 2010
Standard Applied	FCC Part15B Class B
Measurement methods	ANSI C63.4-2003
Test Procedure	Document number : RJP-EM001, RJP-EM003
Deviation from Standard(s)	None

QUALIFICATIONS OF TESTING LABORATORY

ACCREDITATION	SCOPE	LAB. CODE	Remarks
VLAC	EMC Testing	VLAC-008-3	JAPAN
BSMI	EMC Testing	SL2-IN-E-6009	TAIWAN
FILING			
VCCI	EMC Testing	R-252, C-287, C-255, T-1723 R-253, C-288, C-256, T-1724 R-254, C-289, C-257, T-1725 R-255, C-290, C-258, T-1728 R-256, C-291, C-259, T-1729, G-122	JAPAN
FCC	EMC Testing	Designation Number : JP0009	USA
CB-Scheme	EMC Testing	TL223	IECEE
SAUDI ARABIA	EMC Testing	N/A	

ABBREVIATIONS

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment	HDMI	High-Definition Multimedia Interface

SECTION 2. SUMMARY OF TEST RESULTS

The minimum margins to the limits are as follows:

Conducted disturbance at mains terminals	Communication mode (KPG-46U)	12.6 dB (0.1500 MHz)
Radiated disturbance	Communication mode (KPG-36U)	3.1 dB (48.01 MHz)

Note :

1. See Section 10 for details.

< Measurement data correction >

* Conducted disturbance at mains terminals

Emission Level [dBμV] = Meter Reading [dBμV] + Factor [dB]

Margin [dB] = Limit [dBμV] - Emission Level [dBμV]

* Factor = LISN Factor + Cable Loss + ATT

* Radiated disturbance

Emission Level [dBμV/m] = Meter Reading [dBμV] + Factor [dB/m]

Margin [dB] = Limit [dBμV/m] - Emission Level [dBμV/m]

* Factor = Antenna Factor + Cable Loss - Amplifier Gain + ATT

(– Distance Conversion Factor)

SECTION 3. EQUIPMENT UNDER TEST

The equipment under test (EUT) consisted of the following apparatus.

3.1 System Configuration

Symbol	Item	Model No.	Serial No.	Manufacturer	Remarks	FCC ID
A1	USB PROGRAMMING INTERFACE CABLE	KPG-22U	None	Kenwood		K44433200
A2	USB PROGRAMMING INTERFACE CABLE	KPG-36U	None	Kenwood		K44433200
A3	USB PROGRAMMING INTERFACE CABLE	KPG-43U	None	Kenwood		K44433200
A4	USB PROGRAMMING INTERFACE CABLE	KPG-46U	None	Kenwood		K44433200
Rated Power : DC 5V / 30mA (USB Bus Powered)						
Supplied Power : DC 5V (AC Adaptor for Personal Computer : AC120 V, 60 Hz)						
Condition of Equipment		Prototype				
Type		Tabletop (Handheld type)				
Suppression Devices		No Modifications by the laboratory were made to the device				

3.2 Port(s)/Connector(s)

Port Name	Connector Type	Connector Pin	Remarks
USB	Type A	4pin	
Radio	F-type	2pin	KPG-22U
Radio	Universal	14pin	KPG-36U
Radio	Universal	12pin	KPG-43U
Radio	Modular	8pin	KPG-46U

3.3 Highest Frequency Oscillator(s) / Crystal(s)

Base Clock	Operating Frequency	Board Name	Remarks
48 MHz	48 MHz	Main Unit	

3.4 Frequency Range of Measurements

	Required Measurement Frequency Range	Measured Frequency Range
Conducted	0.15 – 30 MHz	0.15 – 30 MHz
Radiated	30 – 1000 MHz	30 – 1000 MHz

3.5 Difference of Model(s)

Model No.	Connector Type	Radio Interface Cable	Remarks
KPG-22U	2Pin F-type Jack for Portable	Universal cable	Tested model
KPG-36U	14Pin Universal connector for Portable	Universal cable	Tested model
KPG-43U	12Pin Universal connector for Mobile	Universal cable	Tested model
KPG-46U	8Pin Modular connector for Mobile	Modular cable	Tested model

Note : Each model is the same other than the specifications of the connector type and the radio interface cable.

SECTION 4. SUPPORT EQUIPMENT

The EUT was supported by the following equipment during the test.

Symbol	Item	Model No.	Serial No.	Manufacturer	Remarks	FCC ID
B	Personal Computer	PP05S	25159423029	DELL		DoC
C	AC Adaptor	ADP-50HH	CN-0U6166-48 661-566-0YTH	DELL		N/A
D	HUB	LSW4-GT-8 NS/WH	164864943991 50	BUFALLO		DoC
E	Transceiver	TK-3360-K	A9C90027	Kenwood	Jig for KPG-22U	ALH415100
F	Ni-MH Battery	KNB-56N	None	Kenwood	Battery for TK-3360-K	N/A
G	Transceiver	NX-300-K	A9402132	Kenwood	Jig for KPG-36U	ALH378500
H	Li-ion Battery	KNB-48L	None	Kenwood	Battery for NX-300-K	N/A
I	Transceiver	TK-5810-K2	B0700006	Kenwood	Jig for KPG-43U	K4439923120
J	Transceiver	NX-700-K	B0300544	Kenwood	Jig for KPG-46U	K44378600
K	Power Supply	PS-53	60800014	Kenwood		N/A
L	50ohm Terminator	1430-4	BW5572	Aeroflex/ Weinschel		N/A
Supplied Power:						
C, D, K	AC120 V, 60 Hz					

SECTION 5. USED CABLE(S)

The following cable(s) was used for the test.

No.	Name	Length (m)	Shield	Metal Connector	Ferrite Core
1	Universal cable	1.10	No	No	
2	Modular cable	1.10	No	No	
3	USB cable	0.37	Yes	Yes	
4	LAN cable	2.00	No	No	
5	Antenna cable	1.00	Yes	Yes	
6	Power cable for Personal Computer (DC)	1.85	No	No	Fixed x 1
7	Power cable for Personal Computer (AC)	0.90	No	No	
8	Power cable for HUB	1.80	No	No	
9	Power cable for Transceiver (DC)	0.25	No	No	
10	Power cable for Transceiver (DC)	3.00	No	No	
11	Power cable for Power Supply	1.80	No	No	
12	ACC cable	0.25	No	No	


Note :

1. No.1 or No.2 cable is fixed-mounted to the EUT.
2. No.3 cable is fixed-mounted to the EUT.
3. No.6 cable is supplied together with AC Adaptor (C).

SECTION 6. TEST CONFIGURATION

6.1 KPG-22U


* : EUT
■ : Ferrite core

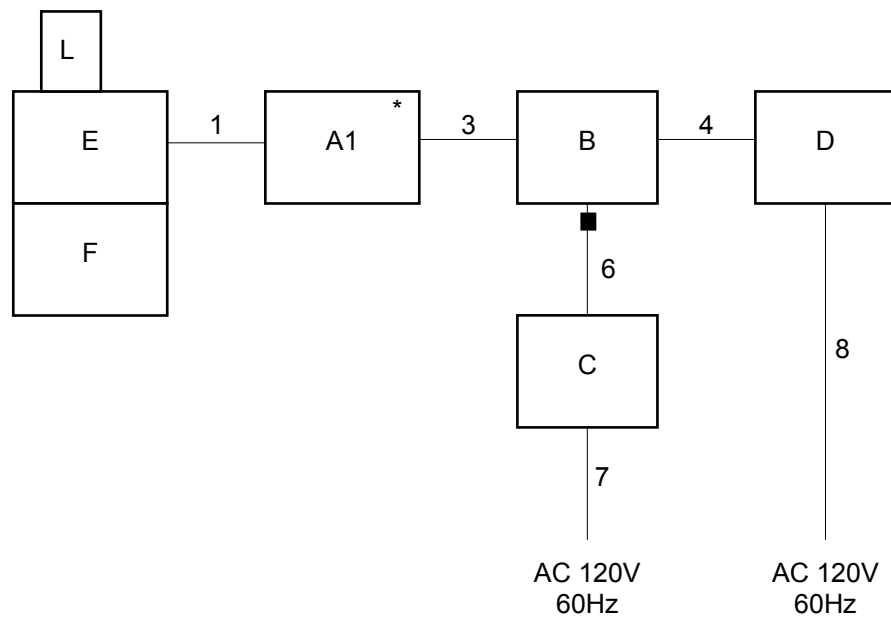

The symbols and numbers assigned to the equipments and cables on this diagram correspond to the ones in Sections 3 to 5.

6.2 KPG-36U


* : EUT
■ : Ferrite core

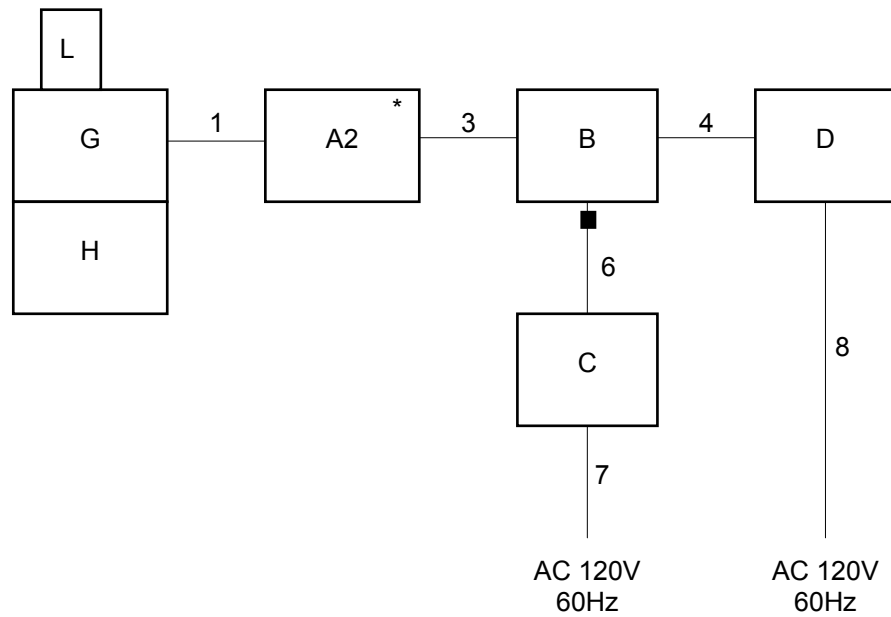

The symbols and numbers assigned to the equipments and cables on this diagram correspond to the ones in Sections 3 to 5.

6.3 KPG-43U


* : EUT
 ■ : Ferrite core
 □ : Joint connector

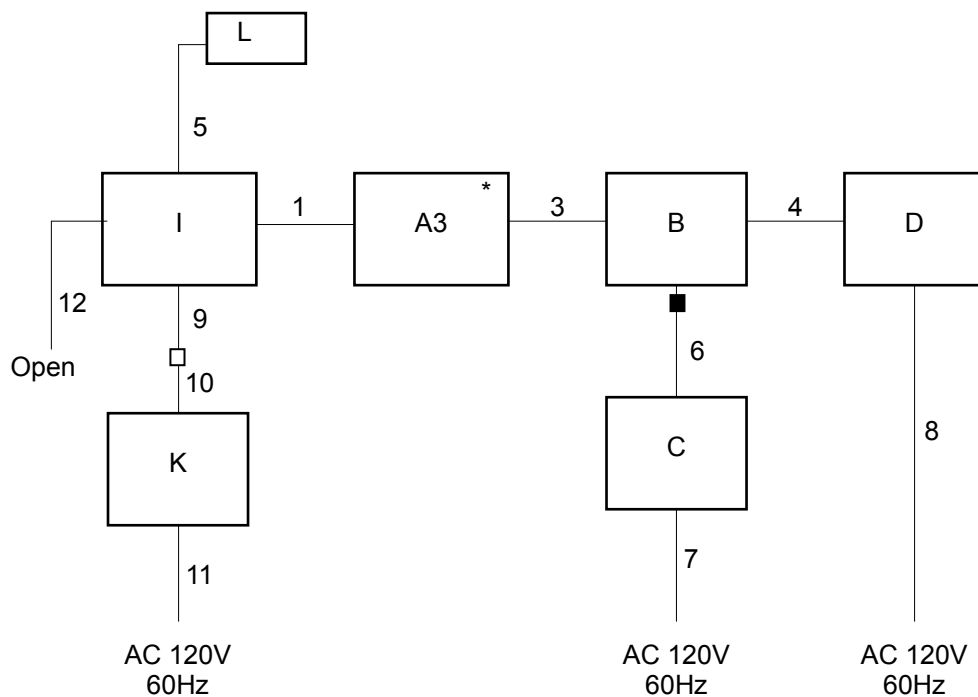

The symbols and numbers assigned to the equipments and cables on this diagram correspond to the ones in Sections 3 to 5.

6.4 KPG-46U

* : EUT
 ■ : Ferrite core
 □ : Joint connector

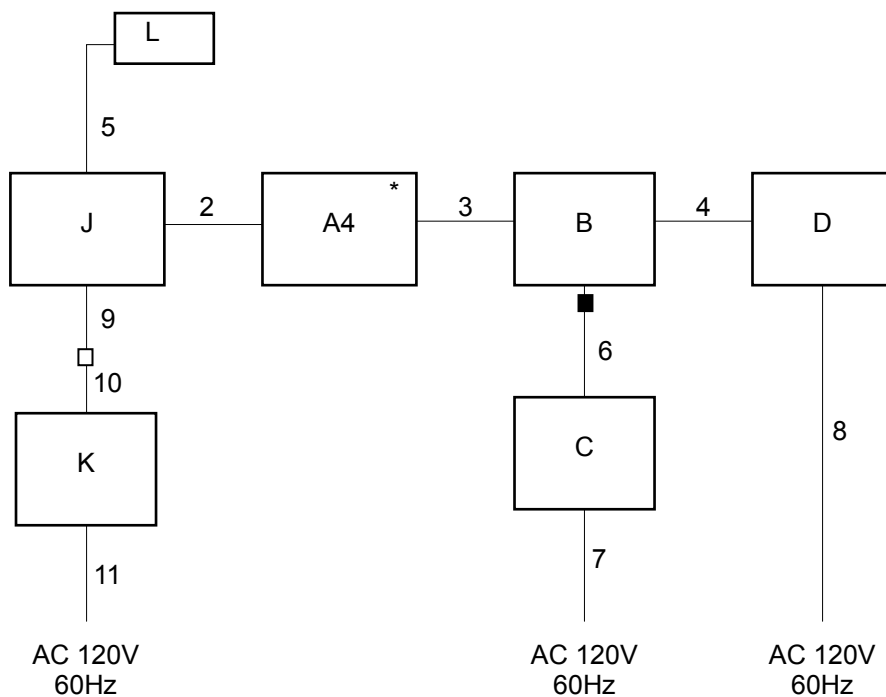

The symbols and numbers assigned to the equipments and cables on this diagram correspond to the ones in Sections 3 to 5.

SECTION 7. OPERATING CONDITION

The EUT was operated under the following conditions during the test.


7.1 Operating Condition

The test was carried out under Communication mode.

EUT was examined in the operating conditions that had maximum emissions.

7.2 Operating Flow [Communication mode]

Following operations were performed continuously.

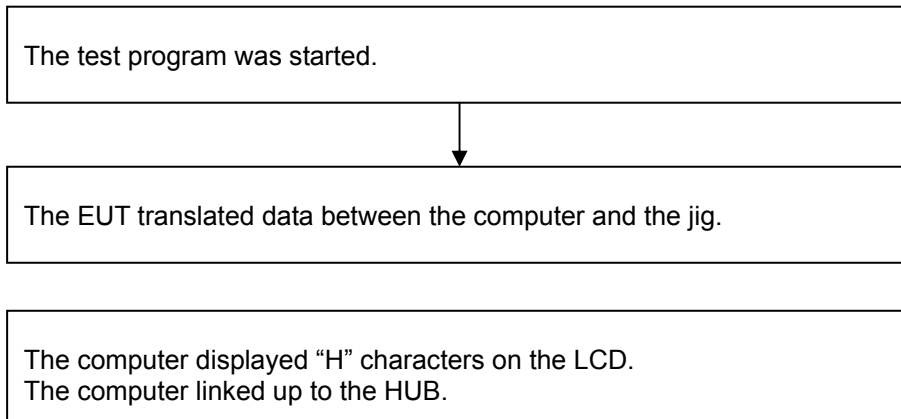

Radiated disturbance
Test setup as per standard


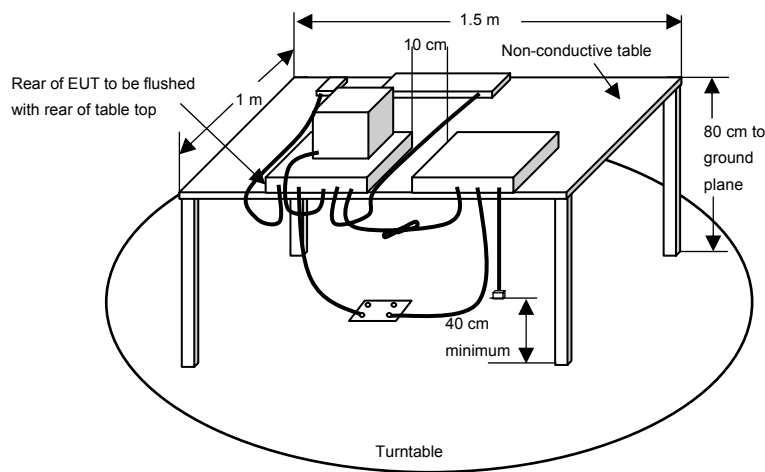


Diagram of the measuring instruments (30-1000MHz)

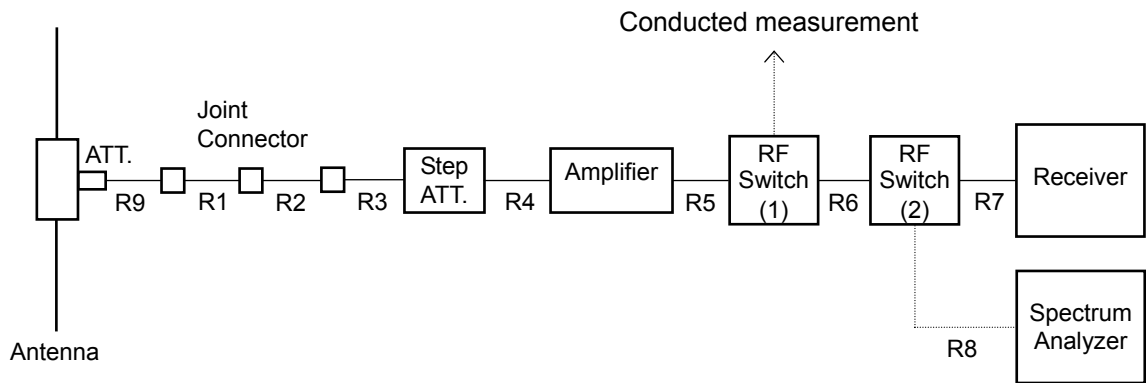

Setting for the instruments

Frequency [MHz]	Instrument	Detector Function	Resolution Bandwidth	Video Bandwidth
30 – 1000	Receiver	Quasi Peak	120 kHz	N/A
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
		Average	1 MHz	10 Hz

[Preliminary Measurement]

EUT is tested on all operating conditions.

The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree, And find the worst emission conditions in configuration, operating mode, or ambient noise notation.

[Final Measurement]

The EUT operated in the worst emission condition found by the preliminary test.

The turntable azimuth (EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition. At least six highest spectrums are measured by the test receiver (quasi-peak) and spectrum analyzer (peak and average). When the uncertain result was obtained (30 – 1000 MHz), the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.

SECTION 9. MEASUREMENT UNCERTAINTY

Radiated disturbance at 3m	U _{lab}	U _{cispr}
30 MHz – 1000 MHz	+/- 4.74 dB	5.2 dB
Above 1 GHz CISPR22	+/- 4.20 dB	
ANCI 63.4	+/- 4.47 dB	
Radiated disturbance at 10m		
30 MHz – 1000 MHz	+/- 4.64 dB	5.1 dB
Above 1 GHz	+/- 4.37 dB	
Radiated disturbance at 30m		
	N/A	5.2 dB
Radiated disturbance (power)		
11.7 GHz – 12.7 GHz	N/A	Nil
Conducted disturbance at mains terminals		
9 kHz – 150 kHz	+/- 2.87 dB	4.0 dB
150 kHz – 30 MHz		3.6 dB
Conducted disturbance at telecommunication ports (voltage)		
9 kHz – 30 MHz	+/- 3.02 dB	Nil
Conducted disturbance at telecommunication ports (current)		
9 kHz – 30 MHz	+/- 3.12 dB	Nil
Conducted disturbance at terminals		
150 kHz – 30 MHz	+/- 3.07 dB	Nil
Disturbance power		
30 MHz – 300 MHz	+/- 3.27 dB	4.5 dB

The above expanded instrumentation uncertainty, U_{lab} , is estimated in accordance with CISPR 16-4-2. Traceability to national standard in SI units is ensured with these values. Compliance with the limits in this standard are determined without in consideration of the measurement uncertainty of the measurement instrumentation.

SECTION 10. EVALUATION OF TEST RESULTS

10.1 Conducted disturbance at mains terminals


10.1.1 KPG-22U

Intertek Japan K.K.

Matsuda No.4 Test Site

Conducted Voltages on Mains Port

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE :
MODEL NO. : KPG-22U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : AC 120V / 60Hz
DATE TESTED : Nov 12 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
TEMPERATURE : 17.0 [degC]
HUMIDITY : 59.0 [%]
NOTE :

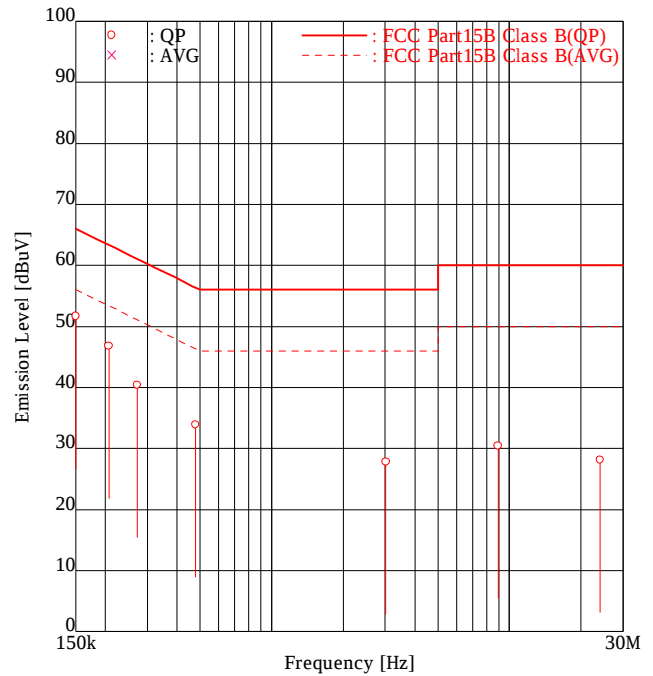

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	MODE [MHz]	MODE	READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
			Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.1500	QP	41.4	<u>41.6</u>	10.1	10.1	51.5	<u>51.7</u>	66.0	14.5	<u>14.3</u>
2	0.2066	QP	36.2	<u>36.7</u>	10.1	10.1	46.3	<u>46.8</u>	63.3	17.0	<u>16.5</u>
3	0.2727	QP	29.8	<u>30.3</u>	10.1	10.1	39.9	<u>40.4</u>	61.0	21.1	<u>20.6</u>
4	0.4794	QP	19.0	<u>23.8</u>	10.1	10.1	29.1	<u>33.9</u>	56.3	27.2	<u>22.4</u>
5	3.0199	QP	<u>17.4</u>	15.3	10.4	10.4	<u>27.8</u>	25.7	56.0	<u>28.2</u>	30.3
6	8.9452	QP	19.5	<u>19.7</u>	10.7	10.7	30.2	<u>30.4</u>	60.0	29.8	<u>29.6</u>
7	24.0364	QP	16.6	17.0	11.0	11.1	27.6	28.1	60.0	32.4	31.9

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(LISN,Pad,Cable)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


10.1.2 KPG-36U

Intertek Japan K.K.

Matsuda No.4 Test Site

Conducted Voltages on Mains Port

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE :
MODEL NO. : KPG-36U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : AC 120V / 60Hz
DATE TESTED : Nov 12 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
TEMPERATURE : 17.0 [degC]
HUMIDITY : 59.0 [%]
NOTE :

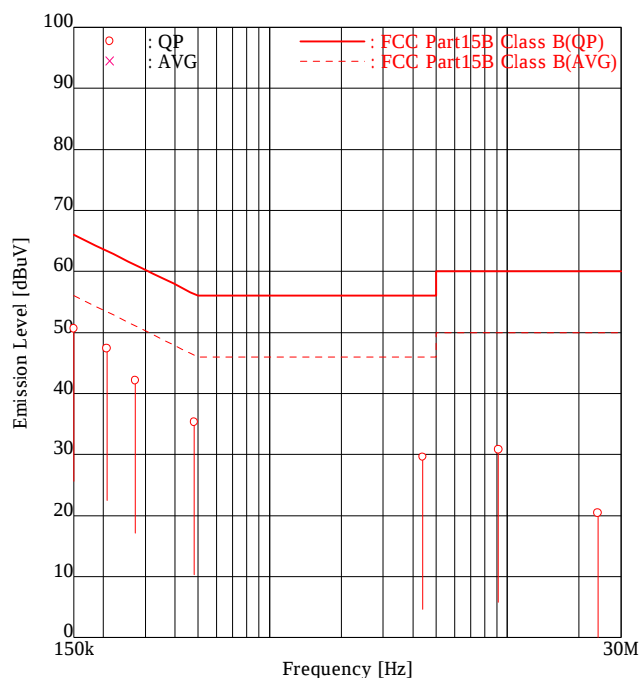

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
			Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.1500	QP	40.4	<u>40.5</u>	10.1	10.1	50.5	<u>50.6</u>	66.0	15.5	<u>15.4</u>
2	0.2066	QP	35.7	<u>37.3</u>	10.1	10.1	45.8	<u>47.4</u>	63.3	17.5	<u>15.9</u>
3	0.2725	QP	28.9	<u>32.0</u>	10.1	10.1	39.0	<u>42.1</u>	61.0	22.0	<u>18.9</u>
4	0.4805	QP	18.7	<u>25.2</u>	10.1	10.1	28.8	<u>35.3</u>	56.3	27.5	<u>21.0</u>
5	4.3939	QP	12.5	<u>19.1</u>	10.5	10.5	23.0	<u>29.6</u>	56.0	33.0	<u>26.4</u>
6	9.1587	QP	<u>20.1</u>	20.0	10.7	10.7	<u>30.8</u>	30.7	60.0	<u>29.2</u>	29.3
7	23.9991	QP	9.1	9.3	11.1	11.1	20.2	20.4	60.0	39.8	39.6

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(LISN,Pad,Cable)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


10.1.3 KPG-43U

Intertek Japan K.K.

Matsuda No.4 Test Site

Conducted Voltages on Mains Port

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE
MODEL NO. : KPG-43U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : AC 120V / 60Hz
DATE TESTED : Nov 12 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
TEMPERATURE : 17.0 [degC]
HUMIDITY : 59.0 [%]
NOTE :

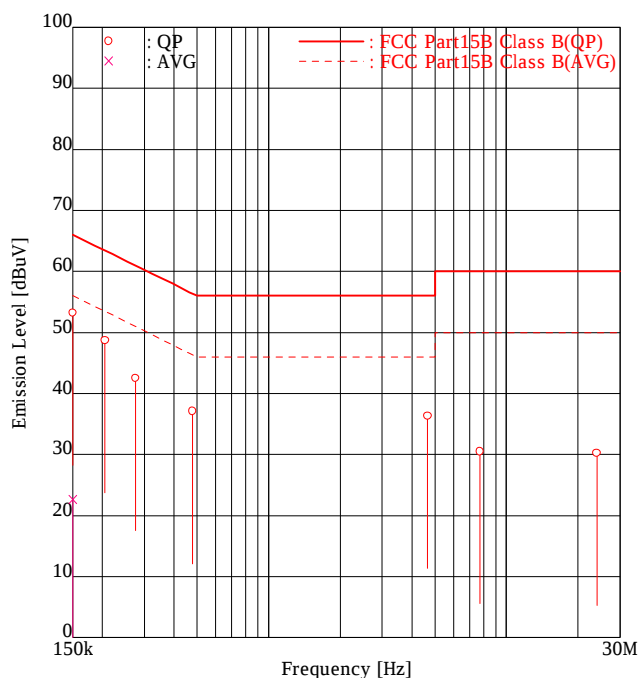

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
			Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.1500	QP	42.9	<u>43.1</u>	10.1	10.1	53.0	<u>53.2</u>	66.0	13.0	<u>12.8</u>
2	0.1500	AVG	12.5	12.5	10.1	10.1	22.6	22.6	56.0	33.4	33.4
3	0.2051	QP	37.6	<u>38.6</u>	10.1	10.1	47.7	<u>48.7</u>	63.4	15.7	<u>14.7</u>
4	0.2752	QP	31.4	<u>32.4</u>	10.1	10.1	41.5	<u>42.5</u>	61.0	19.5	<u>18.5</u>
5	0.4791	QP	21.2	<u>27.0</u>	10.1	10.1	31.3	<u>37.1</u>	56.4	25.1	<u>19.3</u>
6	4.6648	QP	<u>25.8</u>	24.7	10.5	10.5	<u>36.3</u>	35.2	56.0	<u>19.7</u>	20.8
7	7.7350	QP	<u>19.8</u>	19.7	10.7	10.7	<u>30.5</u>	30.4	60.0	<u>29.5</u>	29.6
8	23.9820	QP	18.8	19.1	11.1	11.1	29.9	30.2	60.0	30.1	29.8

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(LISN,Pad,Cable)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.


10.1.4 KPG-46U

Intertek Japan K.K.

Matsuda No.4 Test Site

Conducted Voltages on Mains Port

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE :
MODEL NO. : KPG-46U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : AC 120V / 60Hz
DATE TESTED : Nov 12 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
TEMPERATURE : 17.0 [degC]
HUMIDITY : 59.0 [%]
NOTE :

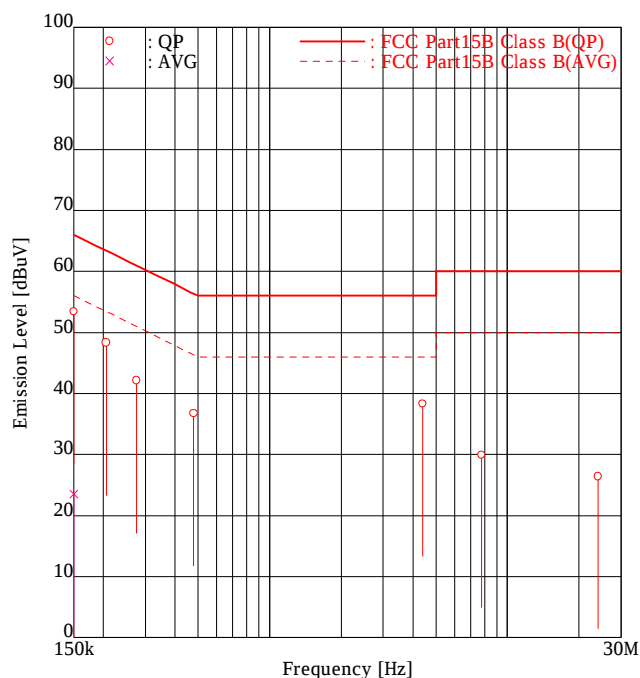

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	MODE [MHz]		READING [dBuV]		FACTOR [dB]		EMISSION [dBuV]		LIMIT [dBuV]	MARGIN [dB]	
			Line1	Line2	Line1	Line2	Line1	Line2		Line1	Line2
1	0.1500	QP	<u>43.3</u>	42.4	10.1	10.1	<u>53.4</u>	52.5	66.0	<u>12.6</u>	13.5
2	0.1500	AVG	13.2	13.4	10.1	10.1	23.3	23.5	56.0	32.7	32.5
3	0.2053	QP	37.5	<u>38.2</u>	10.1	10.1	47.6	<u>48.3</u>	63.4	15.8	<u>15.1</u>
4	0.2750	QP	31.7	<u>32.0</u>	10.1	10.1	41.8	<u>42.1</u>	61.0	19.2	<u>18.9</u>
5	0.4797	QP	22.6	<u>26.6</u>	10.1	10.1	32.7	<u>36.7</u>	56.3	23.6	<u>19.6</u>
6	4.3940	QP	<u>27.8</u>	27.1	10.5	10.5	<u>38.3</u>	37.6	56.0	<u>17.7</u>	18.4
7	7.7938	QP	19.0	<u>19.2</u>	10.7	10.7	29.7	<u>29.9</u>	60.0	30.3	<u>30.1</u>
8	24.0436	QP	15.1	15.3	11.0	11.1	26.1	26.4	60.0	33.9	33.6

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(LISN,Pad,Cable)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

10.2 Radiated disturbance


10.2.1 KPG-22U

Intertek Japan K.K.

Matsuda No.4 Test Site

Radiated Electric Field

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE
MODEL NO. : KPG-22U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : DC 5V (HOST : AC 120V / 60Hz)
DATE TESTED : Nov 12 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 17.0 [degC]
HUMIDITY : 59.0 [%]
NOTE :

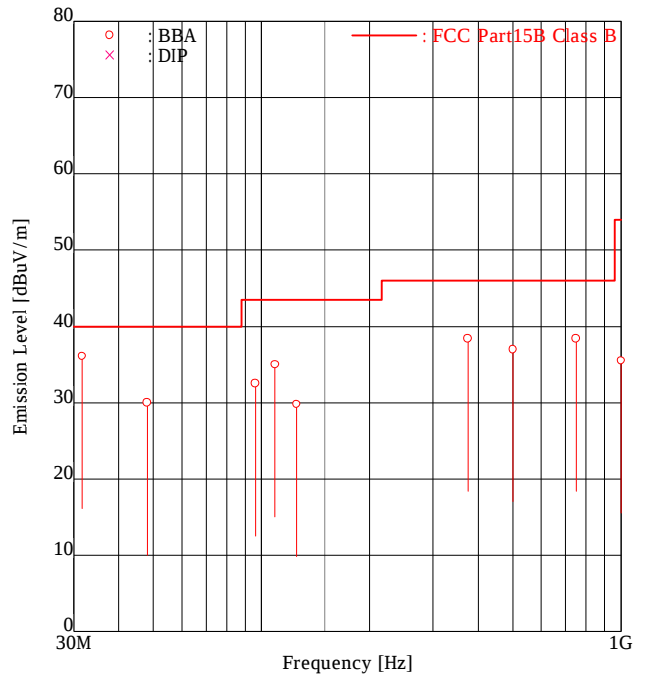

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	FREQ. [MHz]	ANT.	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	31.64	BBA	27.3	<u>44.2</u>	-8.1	-8.1	19.2	<u>36.1</u>	40.0	20.8	<u>3.9</u>
2	48.05	BBA	29.1	<u>36.2</u>	-6.2	-6.2	22.9	<u>30.0</u>	40.0	17.1	<u>10.0</u>
3	96.12	BBA	-	<u>43.8</u>	-11.3	-11.3	-	<u>32.5</u>	43.5	-	<u>11.0</u>
4	108.96	BBA	-	<u>44.3</u>	-9.3	-9.3	-	<u>35.0</u>	43.5	-	<u>8.5</u>
5	125.00	BBA	-	<u>37.1</u>	-7.3	-7.3	-	<u>29.8</u>	43.5	-	<u>13.7</u>
6	375.00	BBA	<u>40.9</u>	-	-2.5	-2.5	<u>38.4</u>	-	46.0	<u>7.6</u>	-
7	500.00	BBA	<u>35.8</u>	-	1.2	1.2	<u>37.0</u>	-	46.0	<u>9.0</u>	-
8	750.00	BBA	<u>32.0</u>	-	6.4	6.4	<u>38.4</u>	-	46.0	<u>7.6</u>	-
9	1000.00	BBA	25.3	-	10.2	10.2	35.5	-	54.0	18.5	-

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

10.2.2 KPG-36U

Intertek Japan K.K.
Matsuda No.4 Test Site
Radiated Electric Field

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE
MODEL NO. : KPG-36U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : DC 5V (HOST : AC 120V / 60Hz)
DATE TESTED : Nov 11 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 22.0 [degC]
HUMIDITY : 35.0 [%]
NOTE :

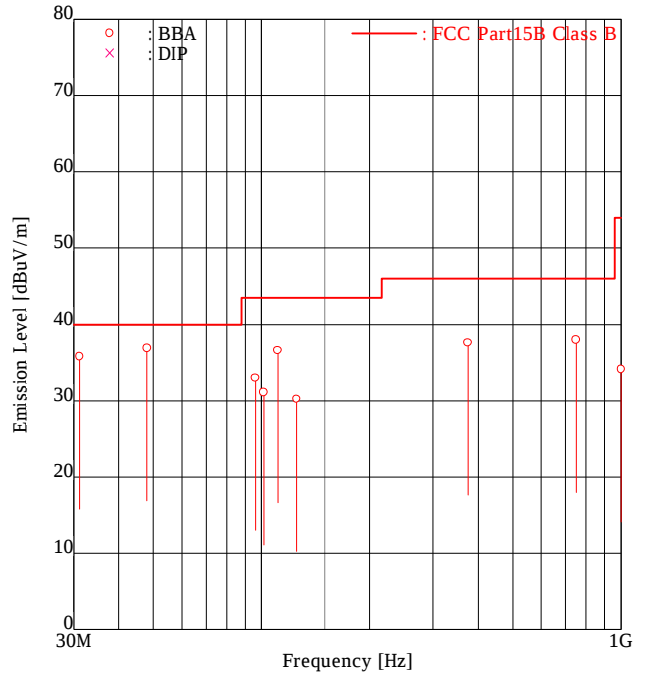

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	FREQ [MHz]	ANT.	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	31.17	BBA	-	<u>43.9</u>	-8.1	-8.1	-	<u>35.8</u>	40.0	-	<u>4.2</u>
2	48.01	BBA	32.0	<u>43.1</u>	-6.2	-6.2	25.8	<u>36.9</u>	40.0	14.2	<u>3.1</u>
3	96.11	BBA	-	<u>44.3</u>	-11.3	-11.3	-	<u>33.0</u>	43.5	-	<u>10.5</u>
4	101.30	BBA	-	<u>41.6</u>	-10.5	-10.5	-	<u>31.1</u>	43.5	-	<u>12.4</u>
5	110.94	BBA	35.1	<u>45.6</u>	-9.0	-9.0	26.1	<u>36.6</u>	43.5	17.4	<u>6.9</u>
6	125.00	BBA	-	37.5	-7.3	-7.3	-	30.2	43.5	-	13.3
7	375.00	BBA	<u>40.1</u>	-	-2.5	-2.5	<u>37.6</u>	-	46.0	<u>8.4</u>	-
8	750.00	BBA	<u>31.6</u>	-	6.4	6.4	<u>38.0</u>	-	46.0	<u>8.0</u>	-
9	1000.00	BBA	23.9	-	10.2	10.2	34.1	-	54.0	19.9	-

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

10.2.3 KPG-43U

Intertek Japan K.K.
Matsuda No.4 Test Site
Radiated Electric Field

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE
MODEL NO. : KPG-43U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : DC 5V (HOST : AC 120V / 60Hz)
DATE TESTED : Nov 12 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 17.0 [degC]
HUMIDITY : 59.0 [%]
NOTE :

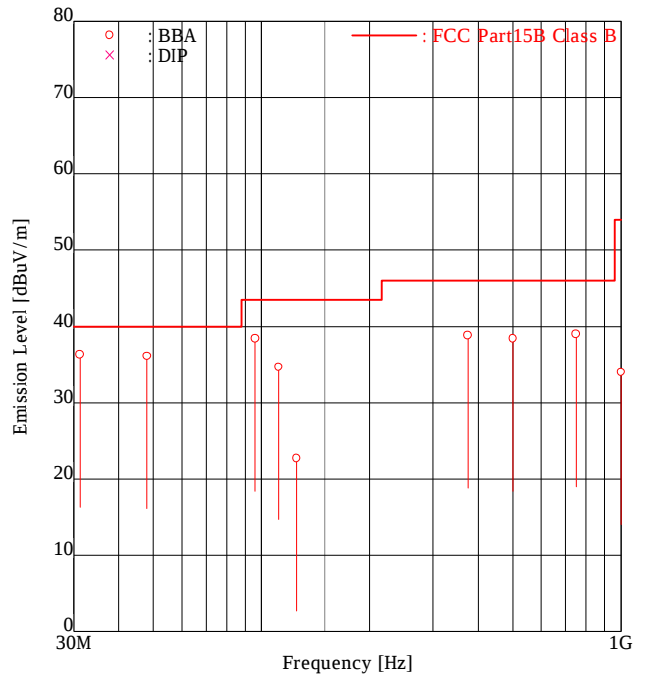

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	FREQ. [MHz]	ANT.	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	31.24	BBA	-	<u>44.4</u>	-8.1	-8.1	-	<u>36.3</u>	40.0	-	<u>3.7</u>
2	47.97	BBA	-	<u>42.3</u>	-6.2	-6.2	-	<u>36.1</u>	40.0	-	<u>3.9</u>
3	95.95	BBA	<u>49.7</u>	44.9	-11.3	-11.3	<u>38.4</u>	33.6	43.5	<u>5.1</u>	9.9
4	111.47	BBA	-	43.6	-8.9	-8.9	-	34.7	43.5	-	8.8
5	125.00	BBA	-	30.0	-7.3	-7.3	-	22.7	43.5	-	20.8
6	375.00	BBA	<u>41.3</u>	-	-2.5	-2.5	<u>38.8</u>	-	46.0	<u>7.2</u>	-
7	500.00	BBA	<u>37.2</u>	-	1.2	1.2	<u>38.4</u>	-	46.0	<u>7.6</u>	-
8	750.00	BBA	<u>32.6</u>	30.8	6.4	6.4	<u>39.0</u>	37.2	46.0	<u>7.0</u>	8.8
9	1000.00	BBA	23.8	-	10.2	10.2	34.0	-	54.0	20.0	-

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)


emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

10.2.4 KPG-46U

Intertek Japan K.K.
Matsuda No.4 Test Site
Radiated Electric Field

APPLICANT : Kenwood Corporation
EUT NAME : USB PROGRAMMING INTERFACE
CABLE
MODEL NO. : KPG-46U
SERIAL NO. : None
TEST MODE : Communication mode
POWER SOURCE : DC 5V (HOST : AC 120V / 60Hz)
DATE TESTED : Nov 12 2010
FILE NO. : JM10110020
REGULATION : FCC Part15B Class B
TEST METHOD : ANSI C63.4-2003
DISTANCE : 3.00 [m]
TEMPERATURE : 17.0 [degC]
HUMIDITY : 59.0 [%]
NOTE :

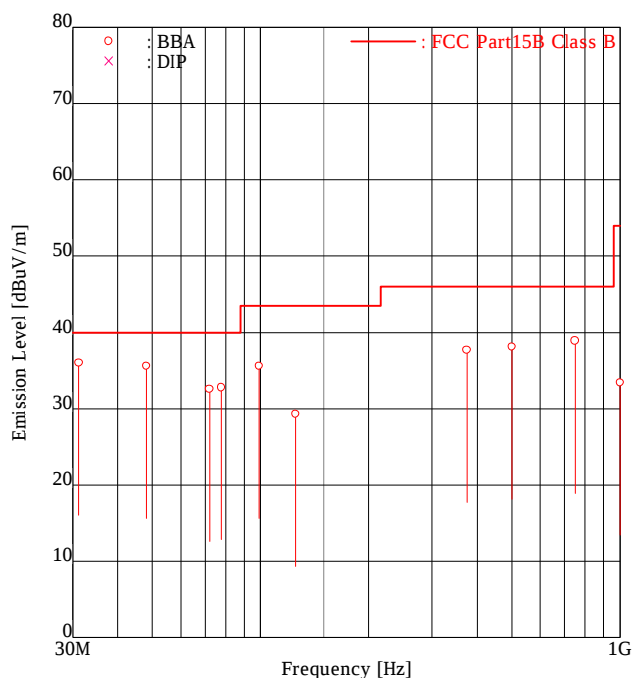

ENGINEER : Hideaki Kosemura

FREQUENCY [No]	FREQ [MHz]	ANT.	READING [dBuV]		FACTOR [dB/m]		EMISSION [dBuV/m]		LIMIT [dBuV/m]	MARGIN [dB]	
			Hori	Vert	Hori	Vert	Hori	Vert		Hori	Vert
1	31.19	BBA	24.5	<u>44.1</u>	-8.1	-8.1	16.4	<u>36.0</u>	40.0	23.6	<u>4.0</u>
2	48.10	BBA	-	<u>41.8</u>	-6.2	-6.2	-	<u>35.6</u>	40.0	-	<u>4.4</u>
3	72.14	BBA	40.0	<u>41.1</u>	-8.5	-8.5	31.5	<u>32.6</u>	40.0	8.5	<u>7.4</u>
4	77.67	BBA	-	<u>42.7</u>	-9.9	-9.9	-	<u>32.8</u>	40.0	-	<u>7.2</u>
5	99.15	BBA	-	<u>46.4</u>	-10.8	-10.8	-	<u>35.6</u>	43.5	-	<u>7.9</u>
6	125.00	BBA	-	36.6	-7.3	-7.3	-	29.3	43.5	-	14.2
7	375.00	BBA	40.2	-	-2.5	-2.5	37.7	-	46.0	8.3	-
8	500.00	BBA	<u>36.9</u>	-	1.2	1.2	<u>38.1</u>	-	46.0	<u>7.9</u>	-
9	750.00	BBA	<u>32.5</u>	30.2	6.4	6.4	<u>38.9</u>	36.6	46.0	<u>7.1</u>	9.4
10	1000.00	BBA	23.2	-	10.2	10.2	33.4	-	54.0	20.6	-

Higher six points are underlined.
Other frequencies : Below the FCC Part15B Class B limit
Emission Level = Read + Factor(Antenna,Antenna Pad,Cable,Preamp)
ANT. : Used antenna(BBA = Broadband antenna, DIP = Dipole antenna)

emiT 3, 0, 0, 0

Copyright(c)2007 Intertek Japan K.K.

SECTION 12. LIST OF MEASURING INSTRUMENTS

Instrument	Model No.	Serial No.	Manufacturer	Cal. date	Due date
Conducted disturbance at mains terminals					
LISN(EUT)	ESH2-Z5	882395/019	Rohde & Schwarz	Jul.28,2010	Jul.31,2011
LISN(Peripheral)	KNW-242	8-851-25	Kyoritsu	Jul.28,2010	Jul.31,2011
10dB LISN Pad	090-0110A	E04AT10A	Misumi	Aug.3,2010	Aug.31,2011
50Ω Termination	65BNC-50-0-2/133NE	E04TRM50B	SUHNER	Jul.28,2010	Jul.31,2011
Coaxial Cable (C1)	3D-2W(5.0m)	MTS04CSR-1	Intertek	Aug.3,2010	Aug.31,2011
Coaxial Cable (C2)	RG-5A/U(4.0m)	MTS04CSR-2	Intertek	Aug.3,2010	Aug.31,2011
Coaxial Cable (C3)	RG214HF(1.5m)	MTS04CSR-3	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (C4)	RG214HF(1.5m)	MTS04CSR-4	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (C5)	RG214HF(1.5m)	MTS04CSR-5	SUHNER	Aug.3,2010	Aug.31,2011
Radiated disturbance					
Broad Band Antenna	VULB9168	332	Schwarzbeck	Nov.5,2009	Nov.30,2010
Amplifier	8447D	1937A02669	Hewlett Packard	Aug.3,2010	Aug.31,2011
6dB Attenuator	6806.17.AC	None	HUBER+SUHNER	Aug.3,2010	Aug.31,2011
Step Attenuator	8494A	1510A08521	Hewlett Packard	Aug.3,2010	Aug.31,2011
Coaxial Cable (R1)	RG214HF(9.0m)	MTS04R3-1	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (R2)	8D-2W(15.0m)	MTS04R3-2	Intertek	Aug.3,2010	Aug.31,2011
Coaxial Cable (R3)	RG214HF(2.0m)	MTS04R3-3	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (R4)	RG214HF(0.4m)	MTS04R3-4	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (R5)	RG214HF(0.4m)	MTS04R3-5	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (R6)	RG214HF(1.5m)	MTS04R3-6	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (R7)	RG214HF(1.5m)	MTS04R3-7	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (R8)	RG214HF(1.5m)	MTS04R3-8	SUHNER	Aug.3,2010	Aug.31,2011
Coaxial Cable (R9)	RG214HF(6.0m)	MTS04R3-9	SUHNER	Aug.3,2010	Aug.31,2011
Site Attenuation				Apr.15,2010	Apr.30,2011
Common					
Test Receiver	ESS (Firmware Version 1.08)	845637/001	Rohde & Schwarz	Dec.22,2009	Dec.31,2010
RF Switch(1)	MP59B	M21448	ANRITSU	Aug.3,2010	Aug.31,2011
RF Switch(2)	ACX-150-1	E04301501	Intertek	Aug.3,2010	Aug.31,2011
Testing Software	emiT (Version 3,0,0,0)				

Note : Test instruments are calibrated according to Quality Manual and Calibration Rules of Intertek Japan K.K.