



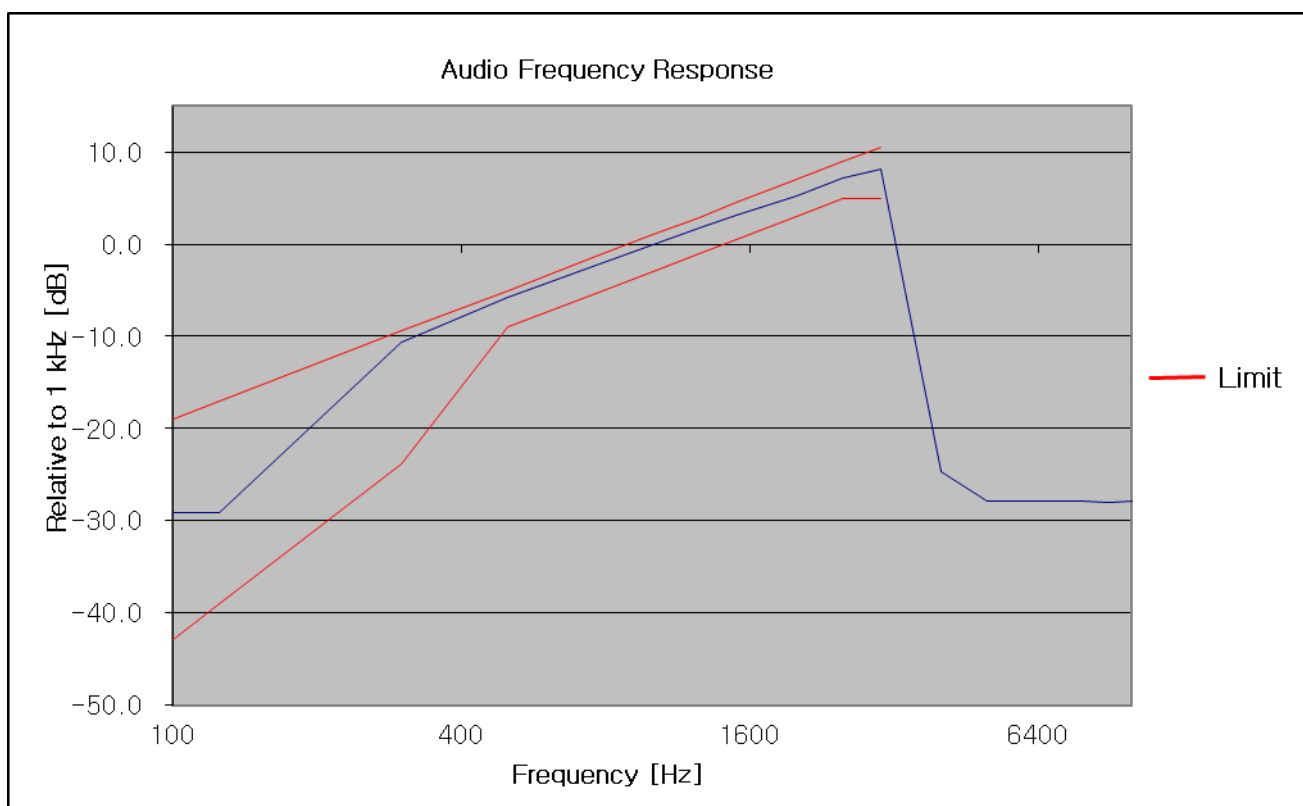

469.95 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-29.58	-18.93	-42.86
125	-29.58	-17.00	-39.00
300	-10.62	-9.42	-23.84
500	-5.84	-5.00	-9.00
750	-2.41	-1.49	-5.49
1000	-0.03	1.00	-3.00
1250	1.75	2.93	-1.07
1500	3.18	4.51	0.51
2000	5.21	7.00	3.00
2500	7.17	8.93	4.93
3000	8.16	10.51	4.93
4000	-27.30	-	-
5000	-27.53	-	-
6000	-27.62	-	-
7000	-27.64	-	-
8000	-27.60	-	-
9000	-27.55	-	-
10000	-27.68	-	-
20000	-27.60	-	-
30000	-27.66	-	-
40000	-27.51	-	-

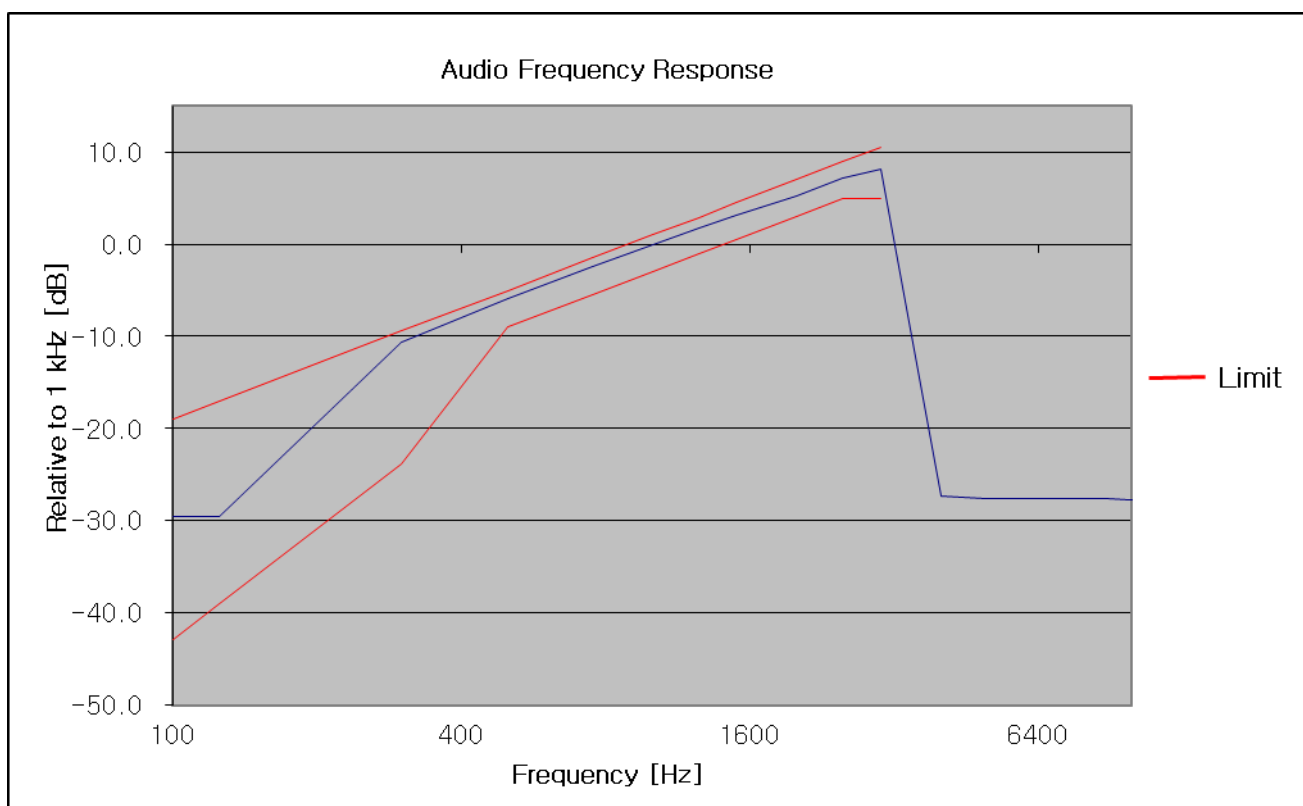


TEST RESULTS (16K0F3E)

HIGH POWER


406.15 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.77	-18.93	-42.86
125	-34.24	-17.00	-39.00
300	-10.81	-9.42	-23.84
500	-5.87	-5.00	-9.00
750	-2.36	-1.49	-5.49
1000	0.00	1.00	-3.00
1250	1.76	2.93	-1.07
1500	3.18	4.51	0.51
2000	5.18	7.00	3.00
2500	7.13	8.93	4.93
3000	8.13	10.51	4.93
4000	-20.60	-	-
5000	-24.24	-	-
6000	-24.41	-	-
7000	-24.29	-	-
8000	-24.29	-	-
9000	-24.28	-	-
10000	-24.29	-	-
20000	-24.32	-	-
30000	-24.28	-	-
40000	-24.34	-	-

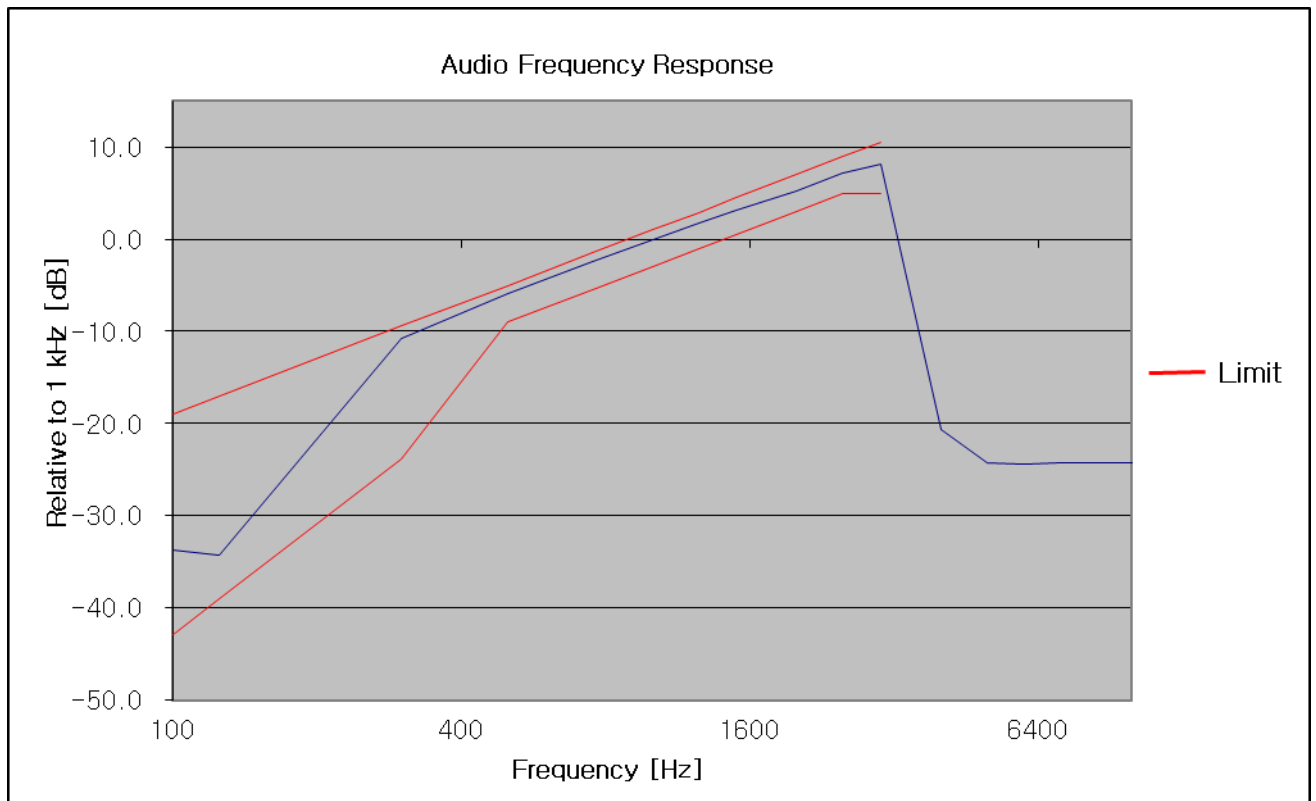


429.95 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.35	-18.93	-42.86
125	-33.77	-17.00	-39.00
300	-10.93	-9.42	-23.84
500	-5.90	-5.00	-9.00
750	-2.34	-1.49	-5.49
1000	0.03	1.00	-3.00
1250	1.74	2.93	-1.07
1500	3.19	4.51	0.51
2000	5.19	7.00	3.00
2500	7.13	8.93	4.93
3000	8.14	10.51	4.93
4000	-20.55	-	-
5000	-24.17	-	-
6000	-24.22	-	-
7000	-24.34	-	-
8000	-24.17	-	-
9000	-24.19	-	-
10000	-24.34	-	-
20000	-24.27	-	-
30000	-24.41	-	-
40000	-24.27	-	-

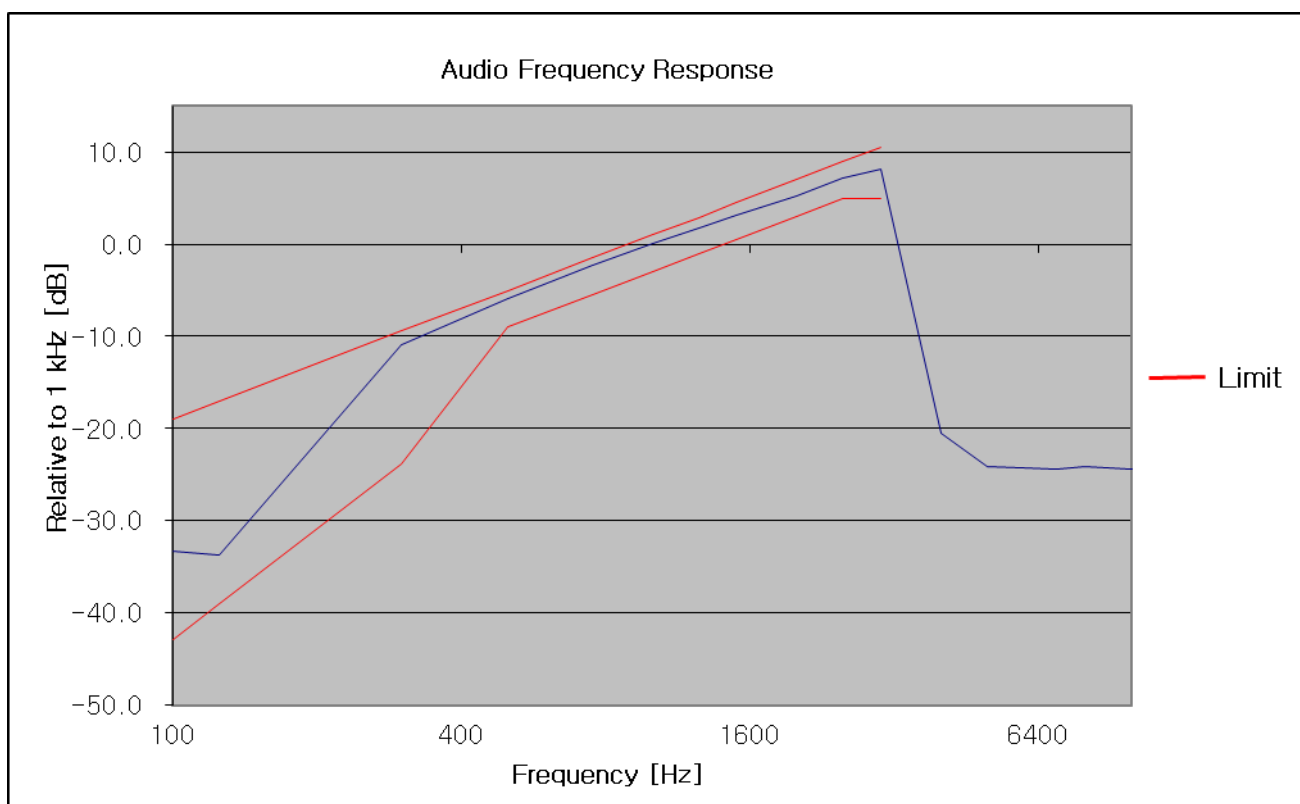


450.05 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.15	-18.93	-42.86
125	-33.03	-17.00	-39.00
300	-10.61	-9.42	-23.84
500	-5.85	-5.00	-9.00
750	-2.43	-1.49	-5.49
1000	-0.01	1.00	-3.00
1250	1.77	2.93	-1.07
1500	3.21	4.51	0.51
2000	5.25	7.00	3.00
2500	7.20	8.93	4.93
3000	8.20	10.51	4.93
4000	-21.84	-	-
5000	-23.77	-	-
6000	-23.68	-	-
7000	-23.69	-	-
8000	-23.73	-	-
9000	-23.65	-	-
10000	-23.77	-	-
20000	-23.68	-	-
30000	-23.76	-	-
40000	-23.81	-	-

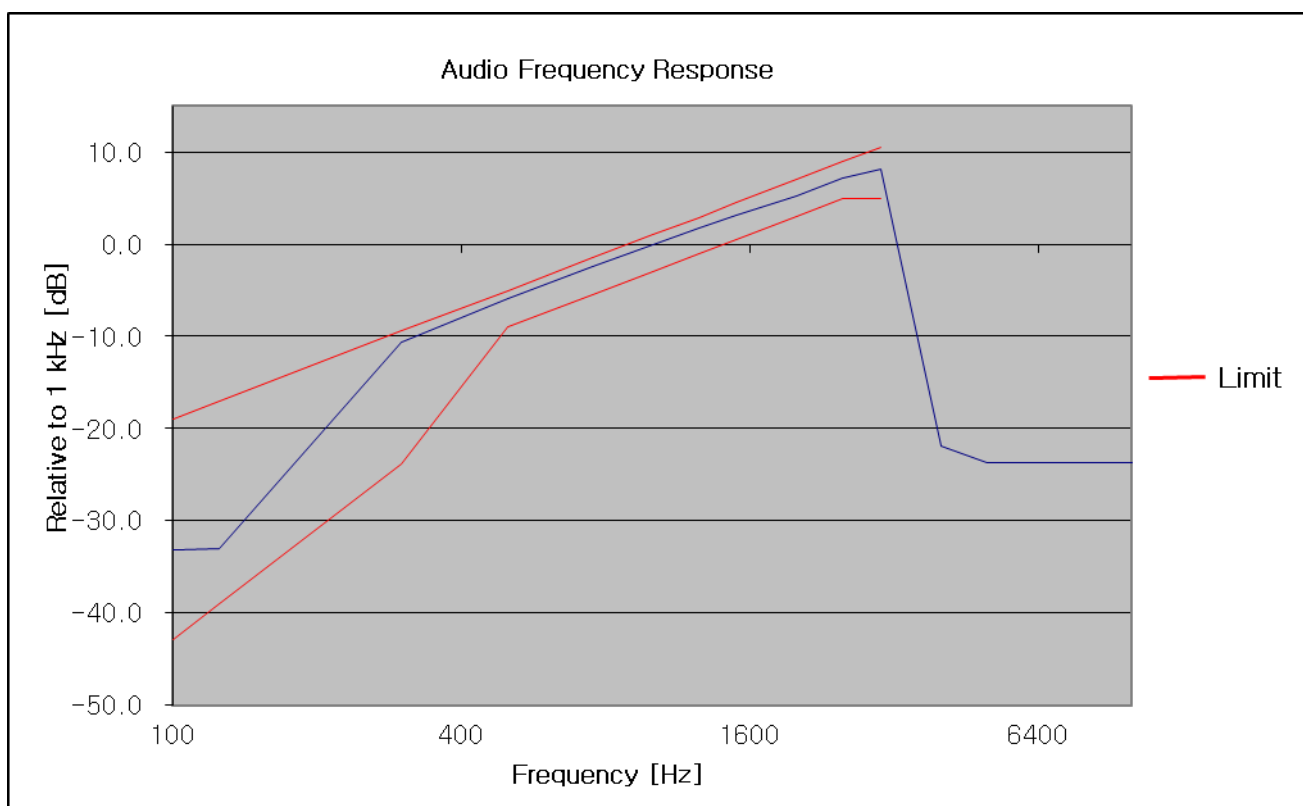

469.95 MHz


Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.47	-18.93	-42.86
125	-33.15	-17.00	-39.00
300	-10.69	-9.42	-23.84
500	-5.87	-5.00	-9.00
750	-2.41	-1.49	-5.49
1000	-0.01	1.00	-3.00
1250	1.73	2.93	-1.07
1500	3.18	4.51	0.51
2000	5.20	7.00	3.00
2500	7.16	8.93	4.93
3000	8.16	10.51	4.93
4000	-20.43	-	-
5000	-23.44	-	-
6000	-23.38	-	-
7000	-23.48	-	-
8000	-23.48	-	-
9000	-23.48	-	-
10000	-23.47	-	-
20000	-23.44	-	-
30000	-23.55	-	-
40000	-23.47	-	-

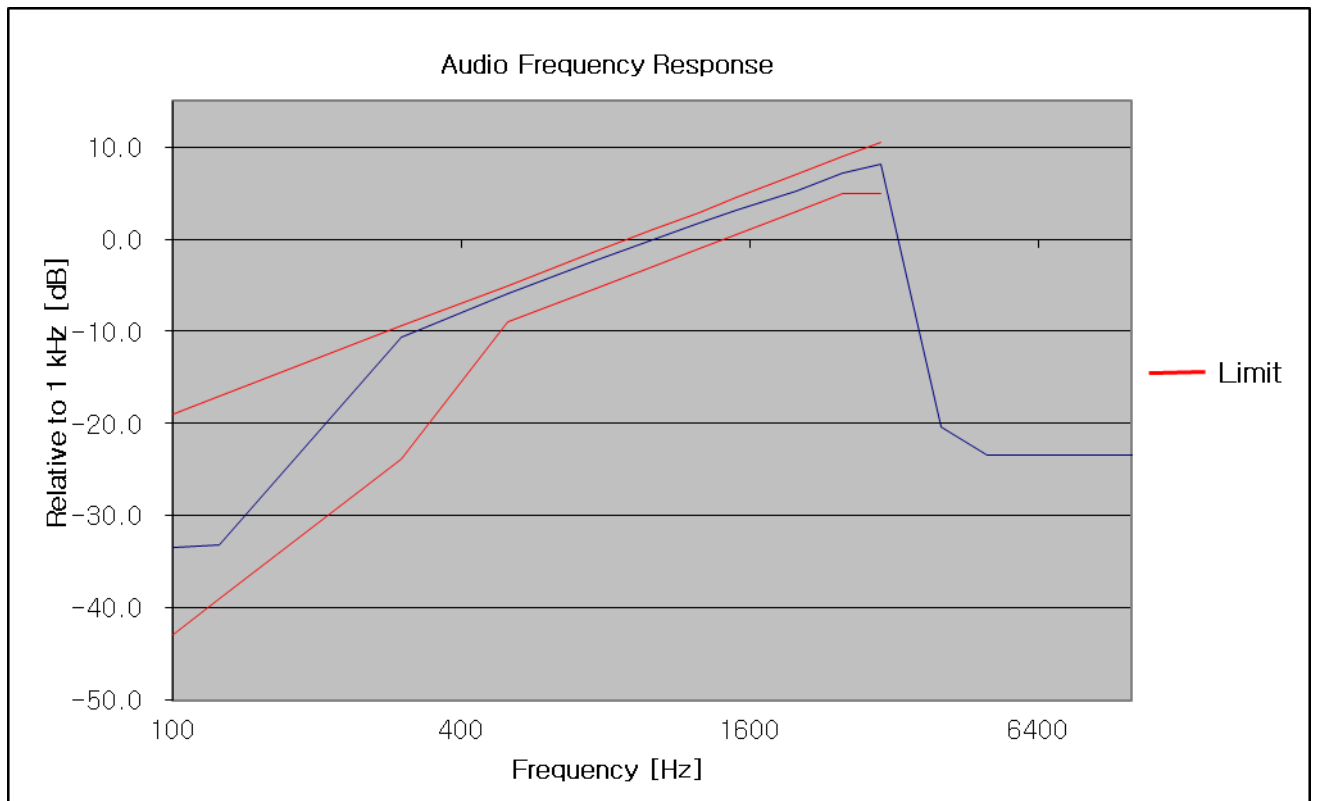

LOW POWER


406.15 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.81	-18.93	-42.86
125	-33.51	-17.00	-39.00
300	-10.71	-9.42	-23.84
500	-5.88	-5.00	-9.00
750	-2.41	-1.49	-5.49
1000	-0.04	1.00	-3.00
1250	1.73	2.93	-1.07
1500	3.16	4.51	0.51
2000	5.18	7.00	3.00
2500	7.11	8.93	4.93
3000	8.13	10.51	4.93
4000	-20.33	-	-
5000	-24.18	-	-
6000	-24.27	-	-
7000	-24.31	-	-
8000	-24.28	-	-
9000	-24.22	-	-
10000	-24.18	-	-
20000	-24.44	-	-
30000	-24.28	-	-
40000	-24.27	-	-

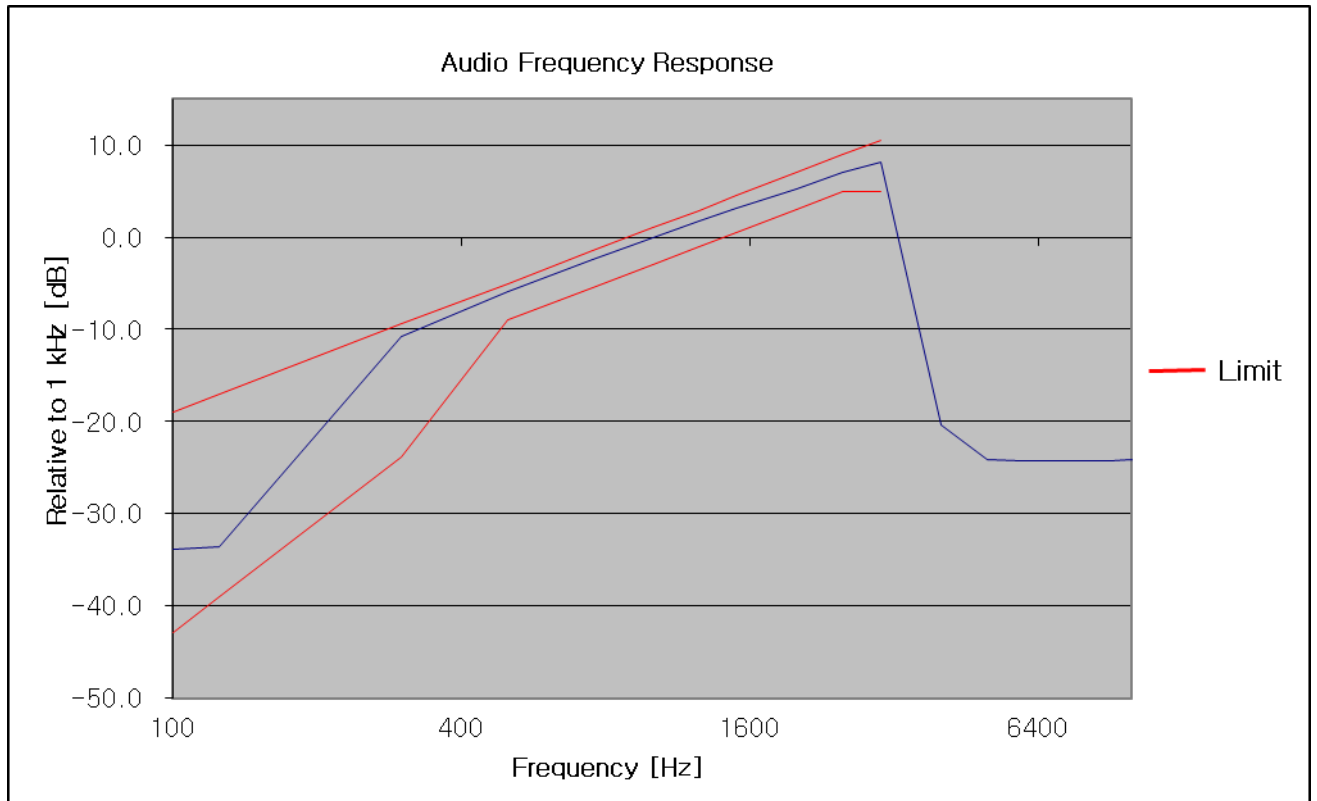


429.95 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.94	-18.93	-42.86
125	-33.60	-17.00	-39.00
300	-10.94	-9.42	-23.84
500	-5.88	-5.00	-9.00
750	-2.39	-1.49	-5.49
1000	0.00	1.00	-3.00
1250	1.74	2.93	-1.07
1500	3.18	4.51	0.51
2000	5.21	7.00	3.00
2500	7.13	8.93	4.93
3000	8.13	10.51	4.93
4000	-20.88	-	-
5000	-24.15	-	-
6000	-24.28	-	-
7000	-24.15	-	-
8000	-24.24	-	-
9000	-24.28	-	-
10000	-24.28	-	-
20000	-24.24	-	-
30000	-24.34	-	-
40000	-24.18	-	-

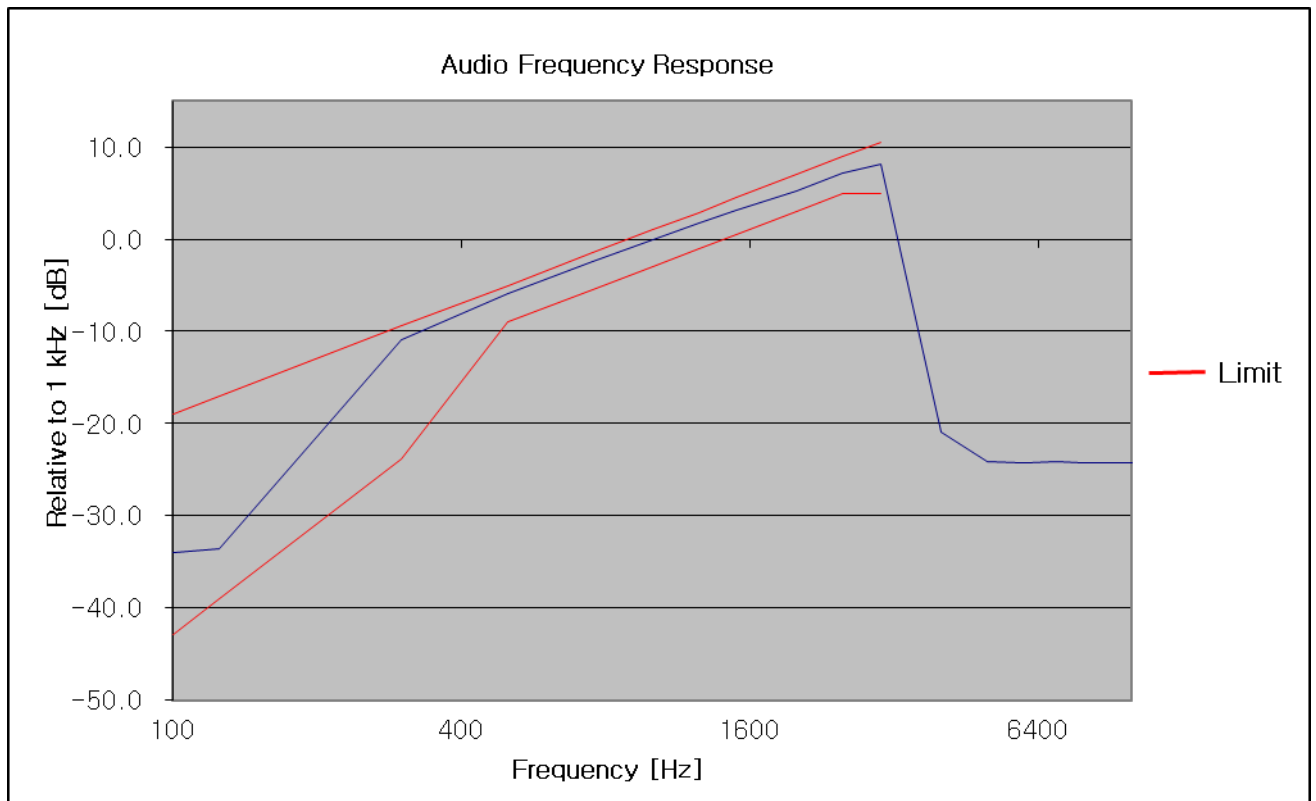


450.05 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.11	-18.93	-42.86
125	-33.56	-17.00	-39.00
300	-10.56	-9.42	-23.84
500	-5.80	-5.00	-9.00
750	-2.40	-1.49	-5.49
1000	-0.03	1.00	-3.00
1250	1.78	2.93	-1.07
1500	3.22	4.51	0.51
2000	5.24	7.00	3.00
2500	7.21	8.93	4.93
3000	8.23	10.51	4.93
4000	-21.32	-	-
5000	-23.76	-	-
6000	-23.62	-	-
7000	-23.56	-	-
8000	-23.70	-	-
9000	-23.70	-	-
10000	-23.62	-	-
20000	-23.74	-	-
30000	-23.82	-	-
40000	-23.68	-	-

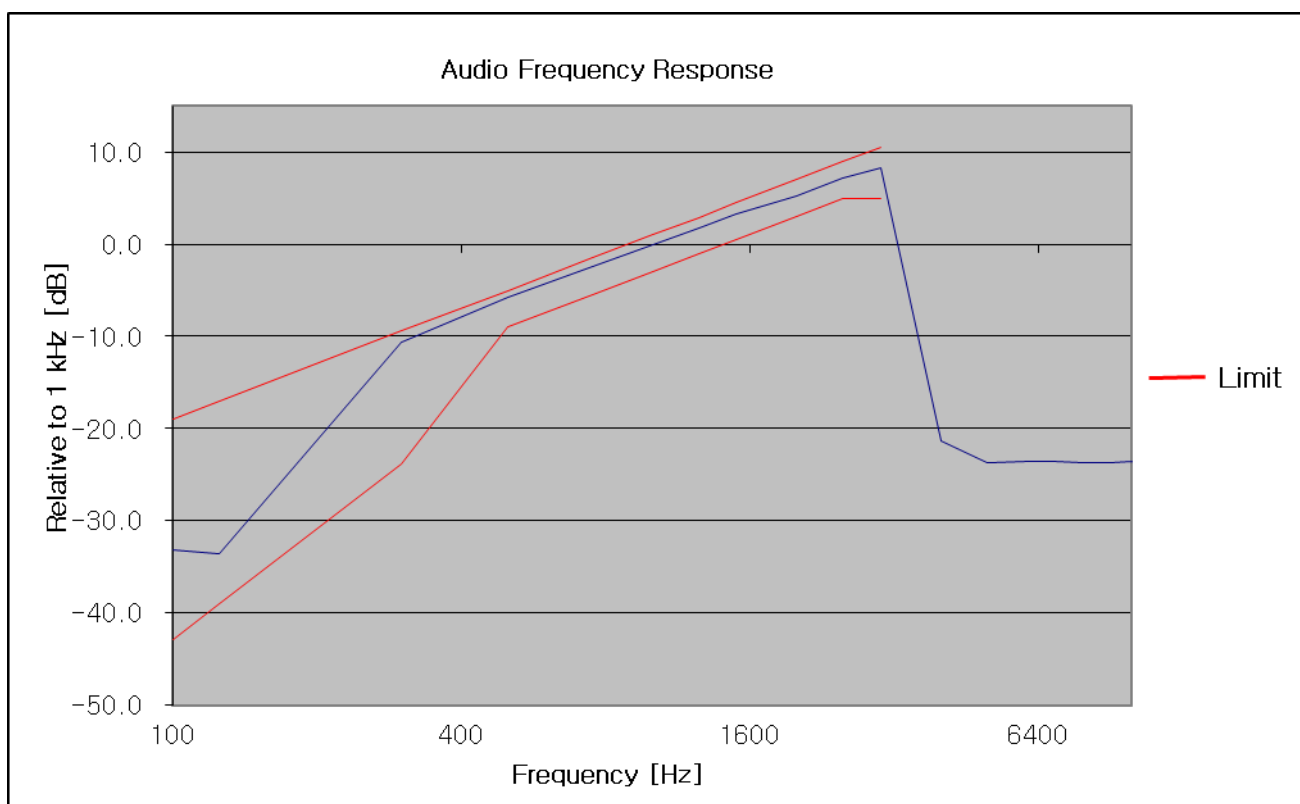

469.95 MHz

Frequency (Hz)	Attenuation Rel. to 1kHz (dB)	Upper limit (dB)	Lower limit (dB)
100	-33.60	-18.93	-42.86
125	-33.81	-17.00	-39.00
300	-10.70	-9.42	-23.84
500	-5.85	-5.00	-9.00
750	-2.40	-1.49	-5.49
1000	0.03	1.00	-3.00
1250	1.75	2.93	-1.07
1500	3.20	4.51	0.51
2000	5.23	7.00	3.00
2500	7.17	8.93	4.93
3000	8.18	10.51	4.93
4000	-20.52	-	-
5000	-23.46	-	-
6000	-23.56	-	-
7000	-23.42	-	-
8000	-23.60	-	-
9000	-23.40	-	-
10000	-23.52	-	-
20000	-23.52	-	-
30000	-23.33	-	-
40000	-23.48	-	-

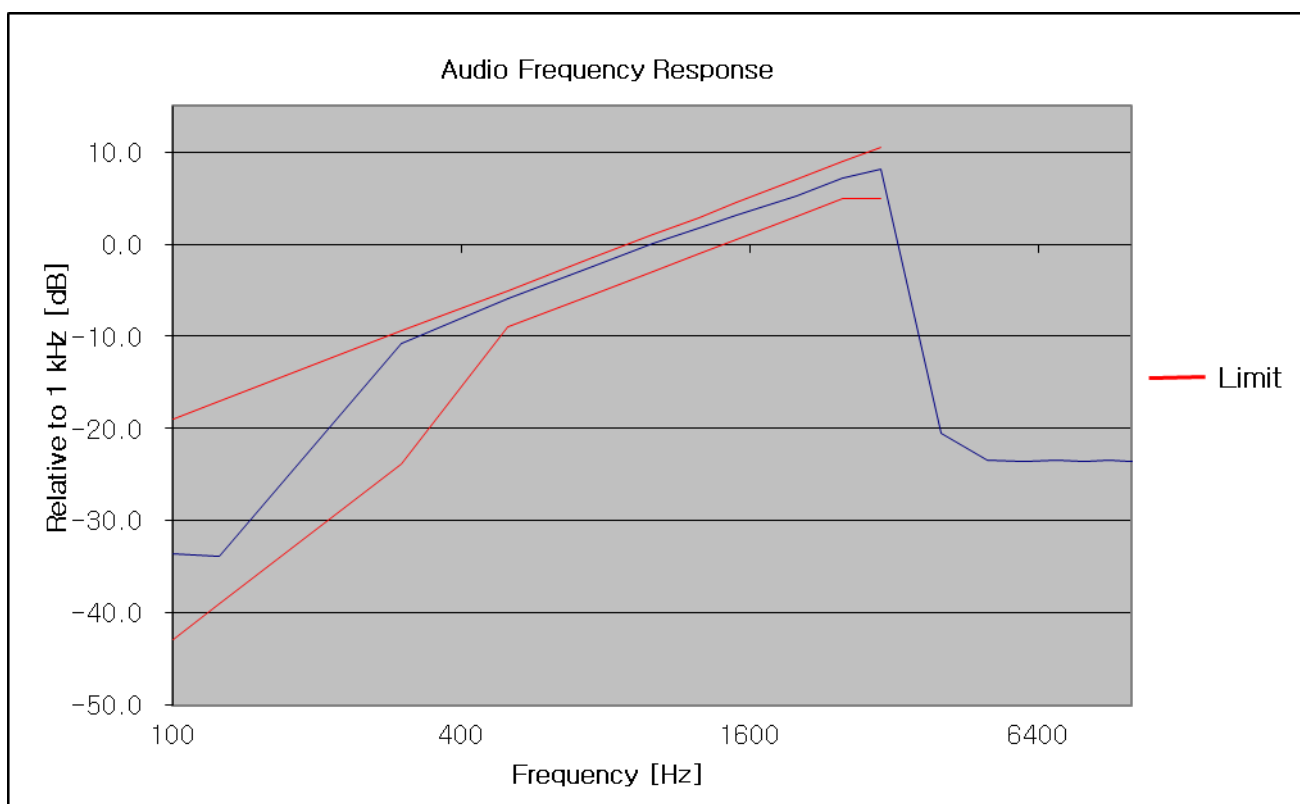


8.6 Emission Mask

■ Definition

The transmitter sideband spectrum denotes the sideband power produced at a discrete frequency separation from the carrier up to the test bandwidth (see 1.3.4.4) due to all sources of unwanted noise within the transmitter in a modulated condition.

■ TEST CONFIGURATION

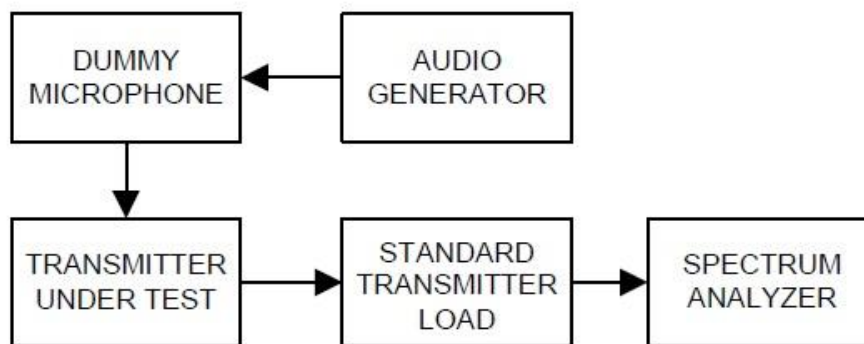

■ TEST PROCEDURE

According to 2.2.11 in TIA-603-E Standard.

- a) Connect the equipment as illustrated. Use the table to determine the spectrum analyzer resolution bandwidth:

Spectrum Analyzer Resolution Bandwidth			
Frequency Band (MHz)	Mask for Equipment with Audio Low Pass Filter	Mask for Equipment without Low Pass Filter	Spectrum Analyzer Resolution Bandwidth (Hz)
25-50	B	C	300
72-76	B	C	300
138-174	NTIA	NTIA	300
150-174	B	C	300
150-174	D or E	D or E	100
406-420	NTIA	NTIA	300
421-512	B	C	300
421-512	D or E	D or E	100
806-821/851-866	B or EA	G or EA	300
821-824/866-869	B	H	300
896-901/935-940	I	J	300


- b) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth per the above table

- 2) Video Bandwidth at least 10 times the resolution bandwidth.
- 3) Sweep Speed slow enough to maintain measurement calibration.
- 4) Detector Mode = Positive Peak.
- 5) Span that will allow proper viewing of the test bandwidth (see 1.3.4.4).
- c) Set the center frequency of the spectrum analyzer to the assigned transmitter frequency. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0 dB reference for the measurement.
- d) Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation. The input level shall be established at the frequency of maximum response of the audio modulating circuit. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- e) Record the resulting spectrum analyzer presentation of the emission level with an on-line recording device or in a photograph. It is recommended that the emission limit (as given in 3.2.11) be drawn on the plotted graph or photograph. The spectrum analyzer presentation is the sideband spectrum.


Plots of Emission Mask

16K0F3E_IC


(406.15 MHz)_High

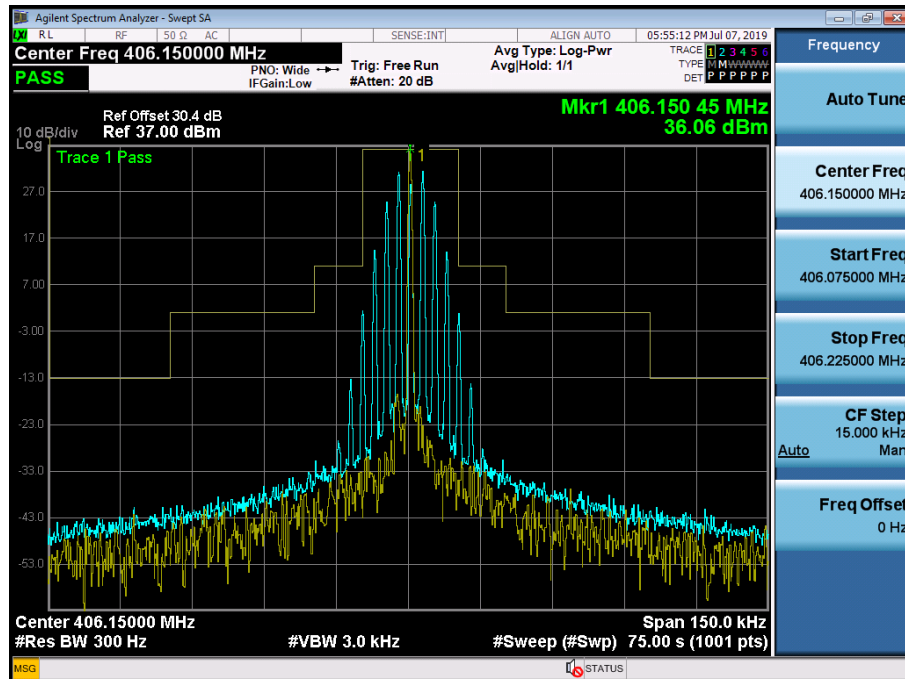


(429.95 MHz)_High

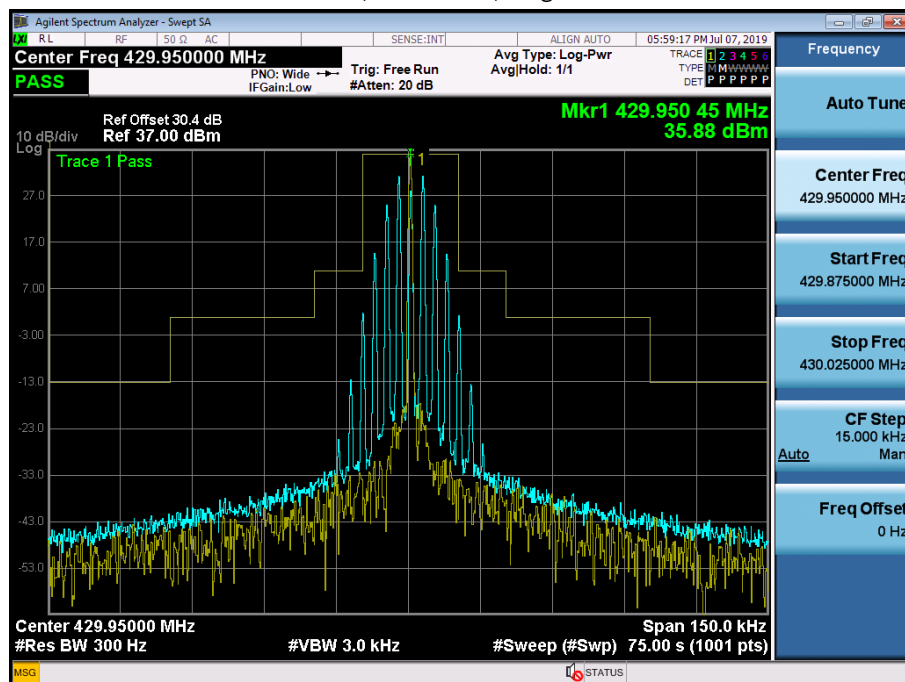


(450.05 MHz)_High

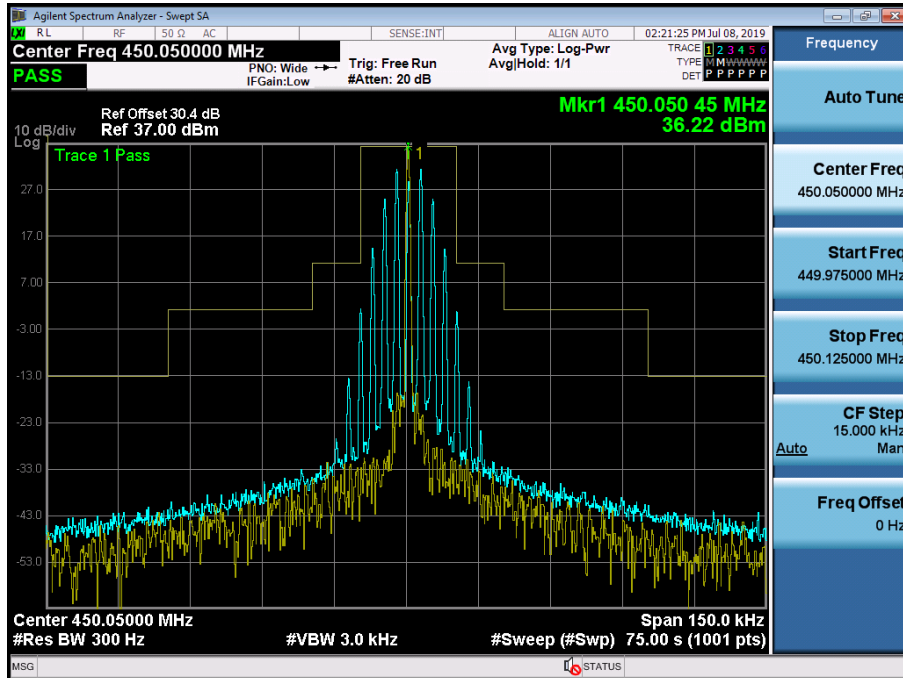


(469.95 MHz)_High

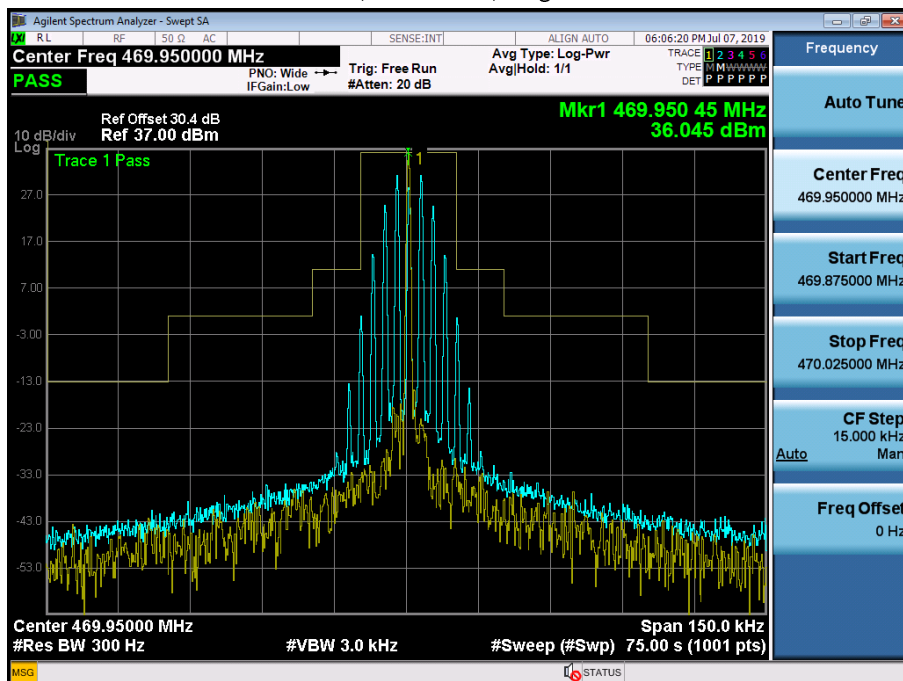


(406.15 MHz)_Low

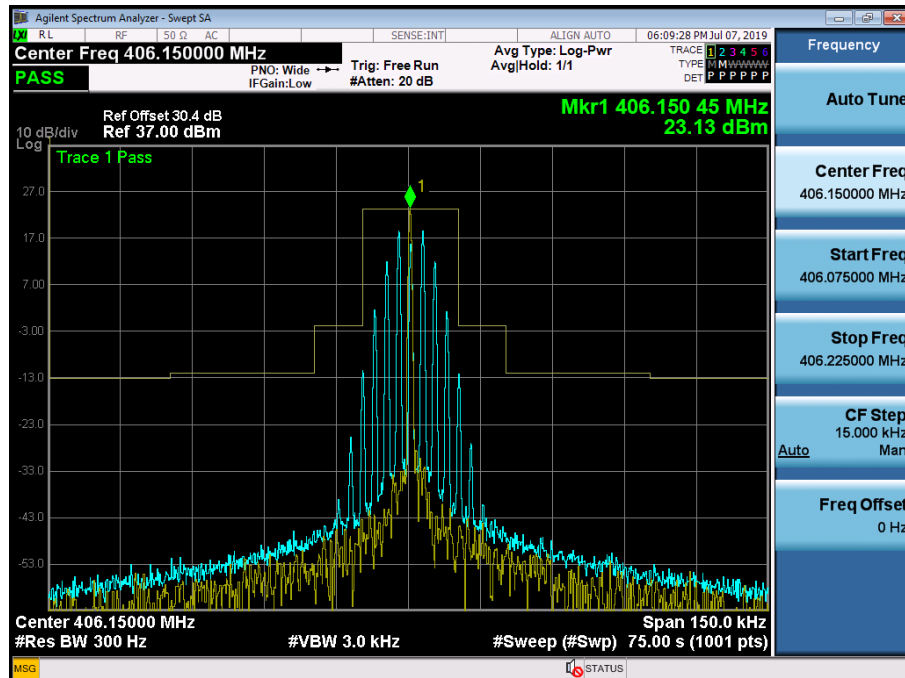


(429.95 MHz)_Low

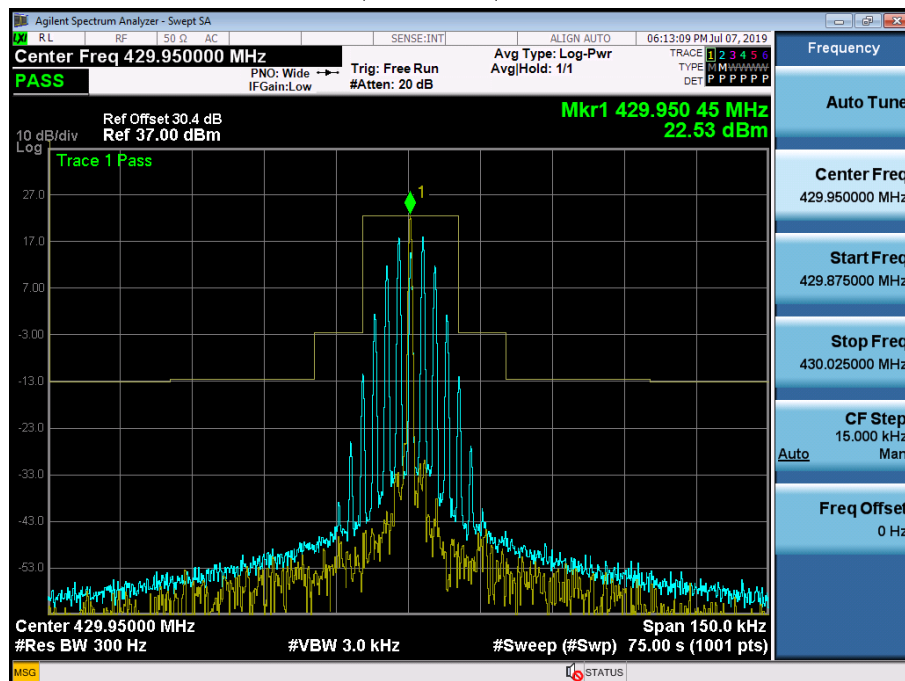

(450.05 MHz)_ Low

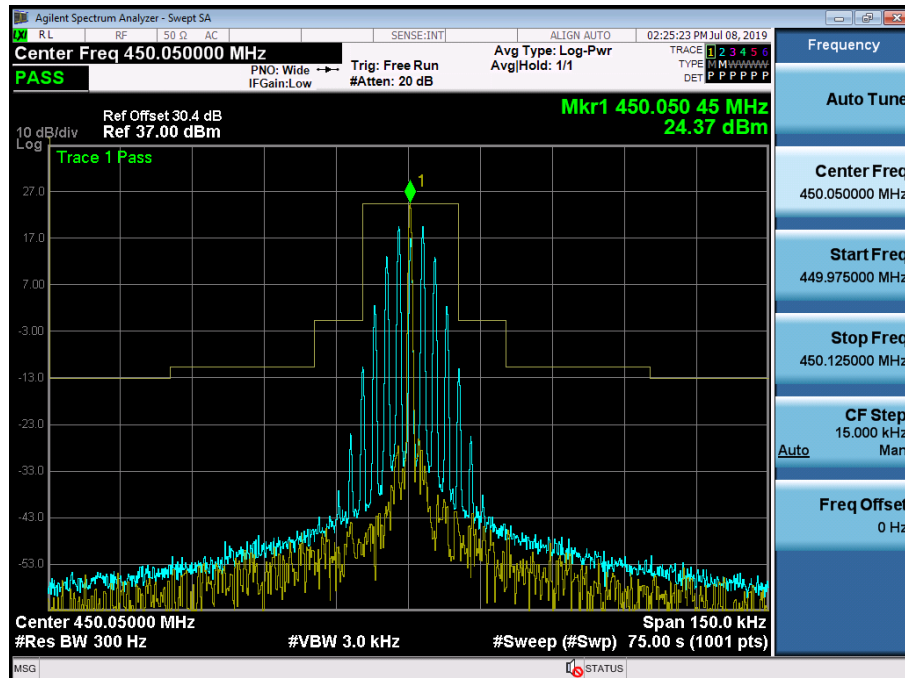


(469.95 MHz)_ Low

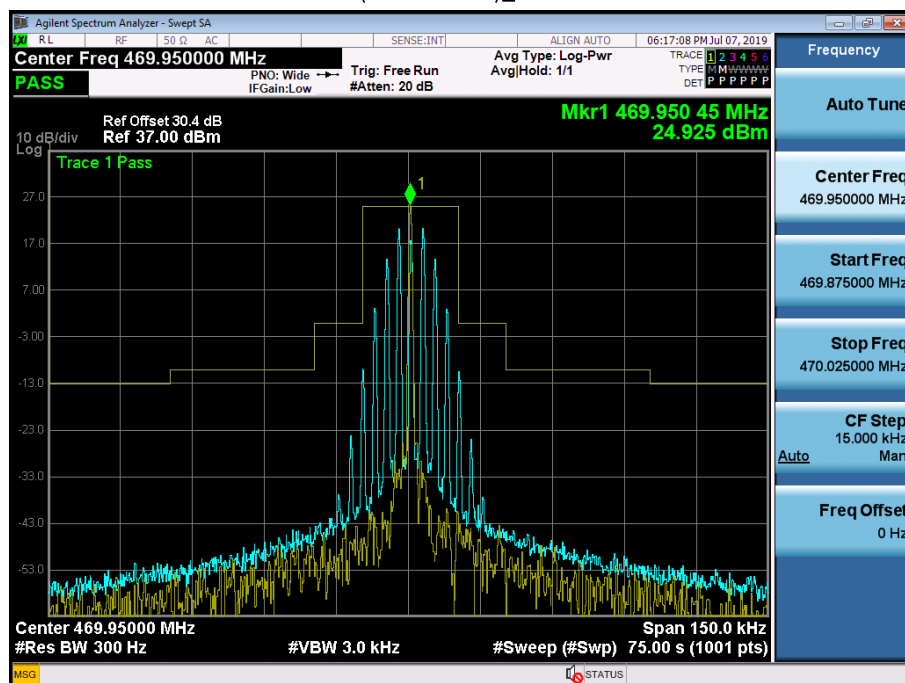


11K0F3E_FCC/IC


(406.15 MHz)_High

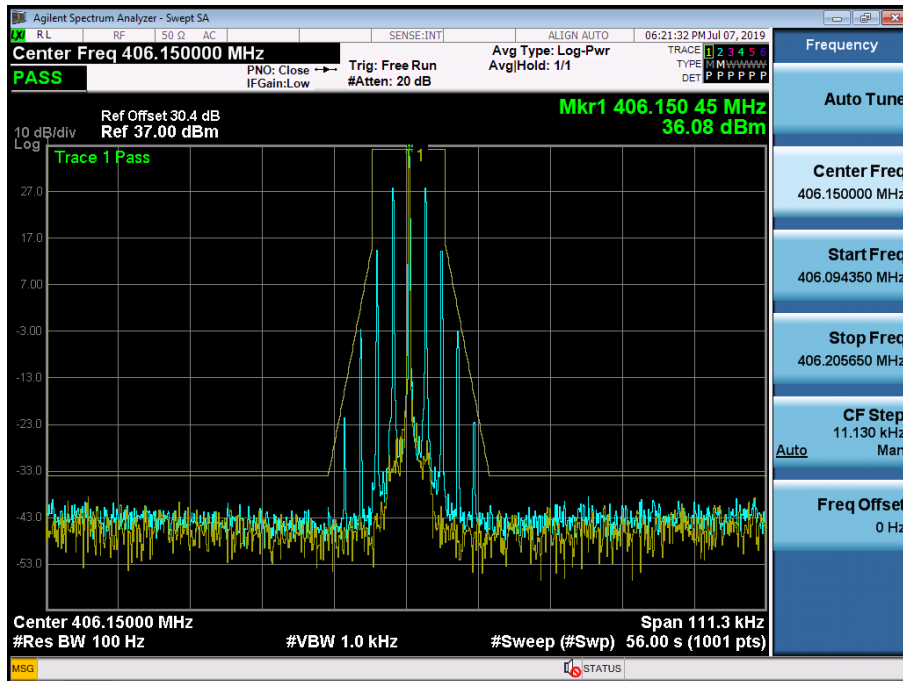


(429.95 MHz)_High

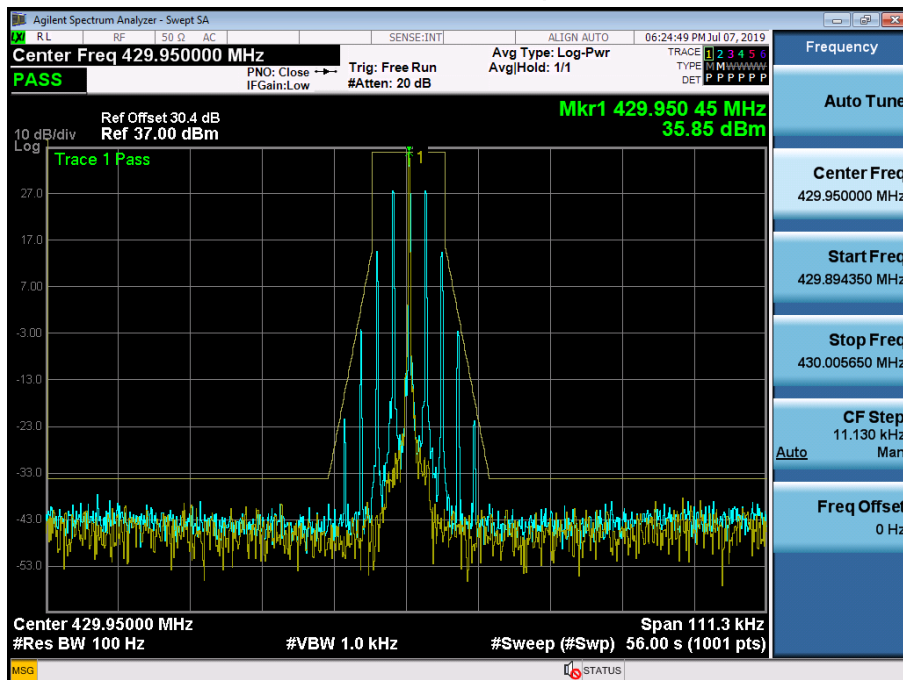


(450.05 MHz)_High

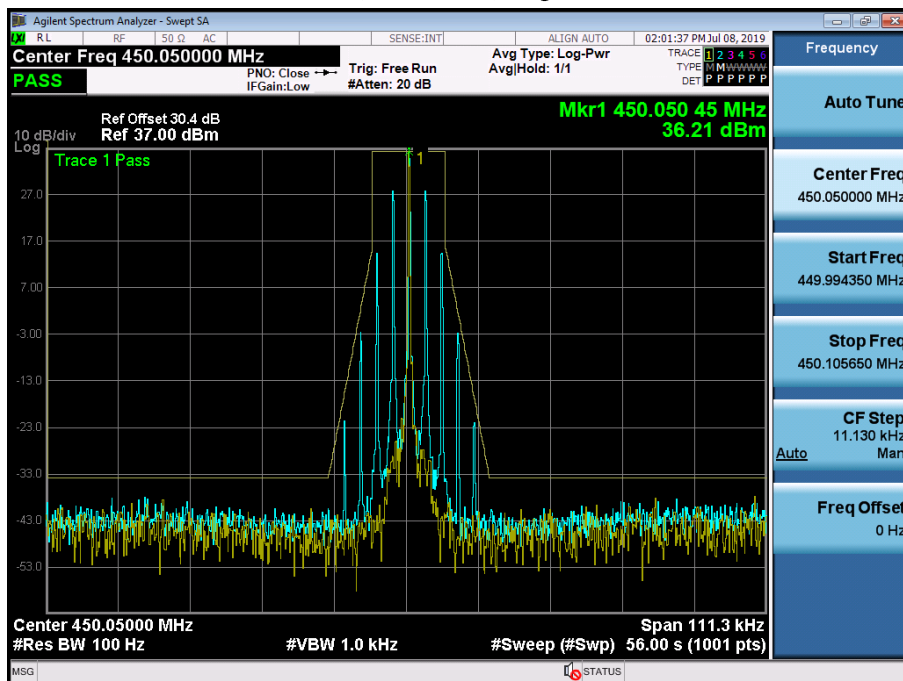


(469.95 MHz)_High

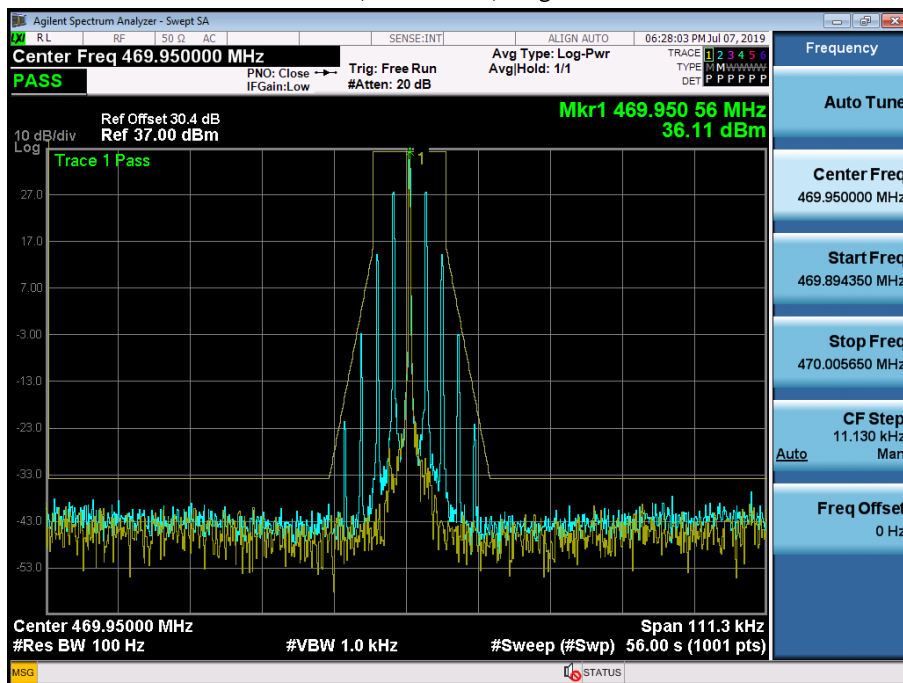


(406.15 MHz)_Low

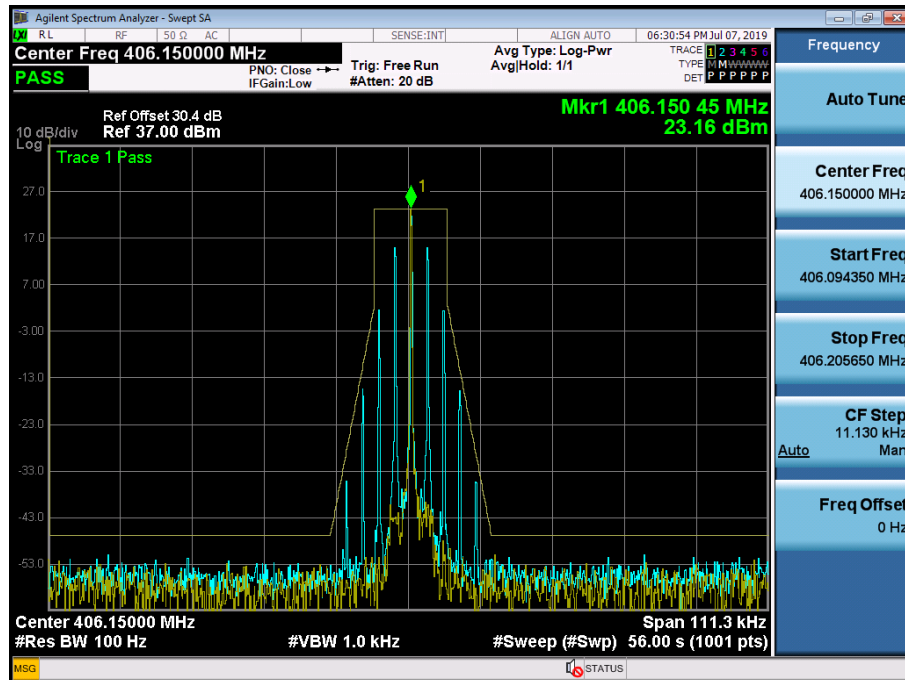


(429.95 MHz)_Low

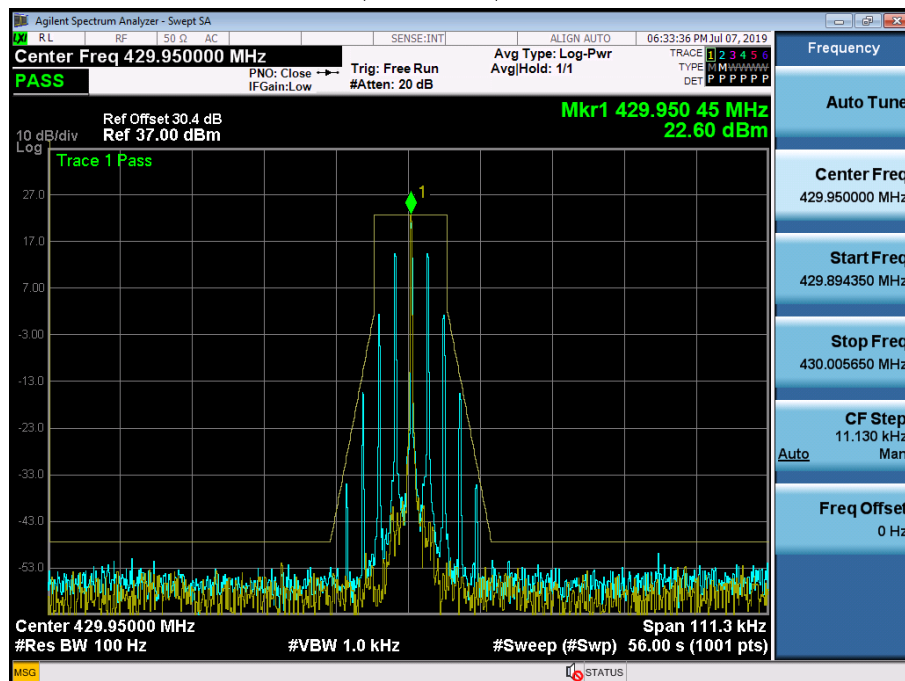

(450.05 MHz)_Low

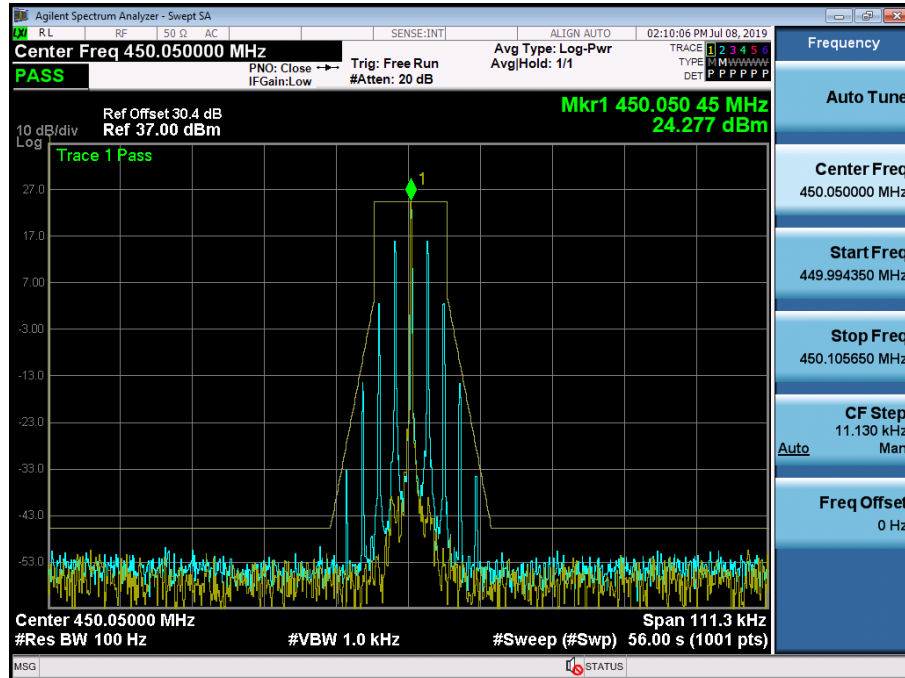


(469.95 MHz)_Low

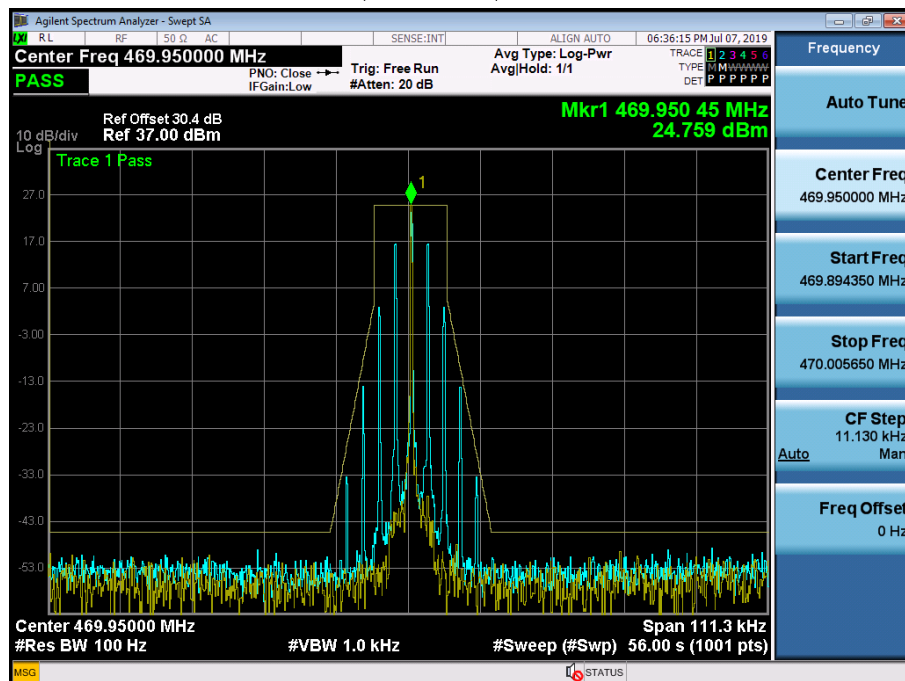


8K30F1E, 8K30F1D, 8K30F7W_FCC/IC


(406.15 MHz)_High

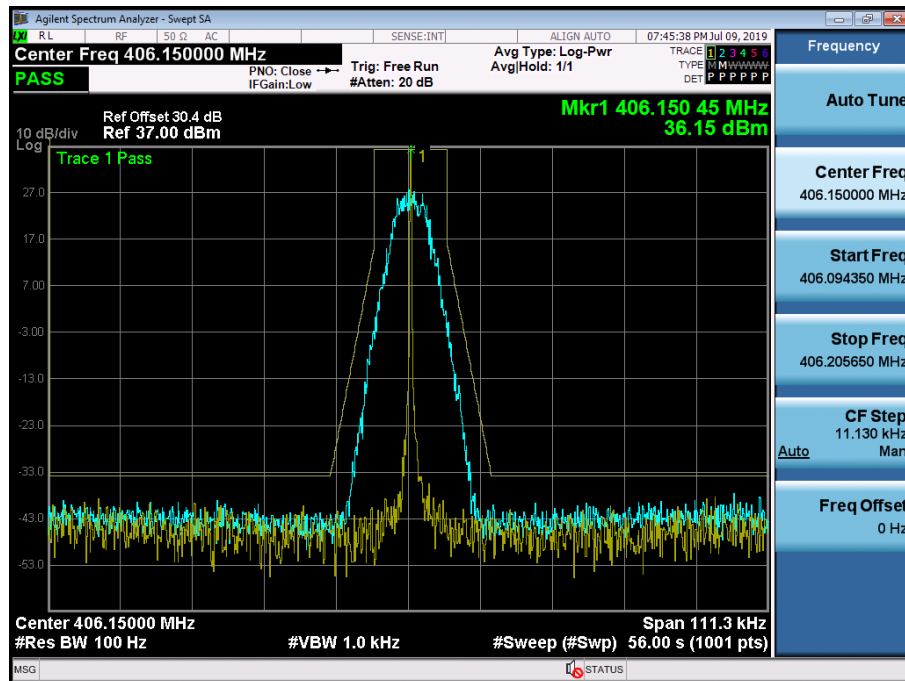


(429.95 MHz)_High

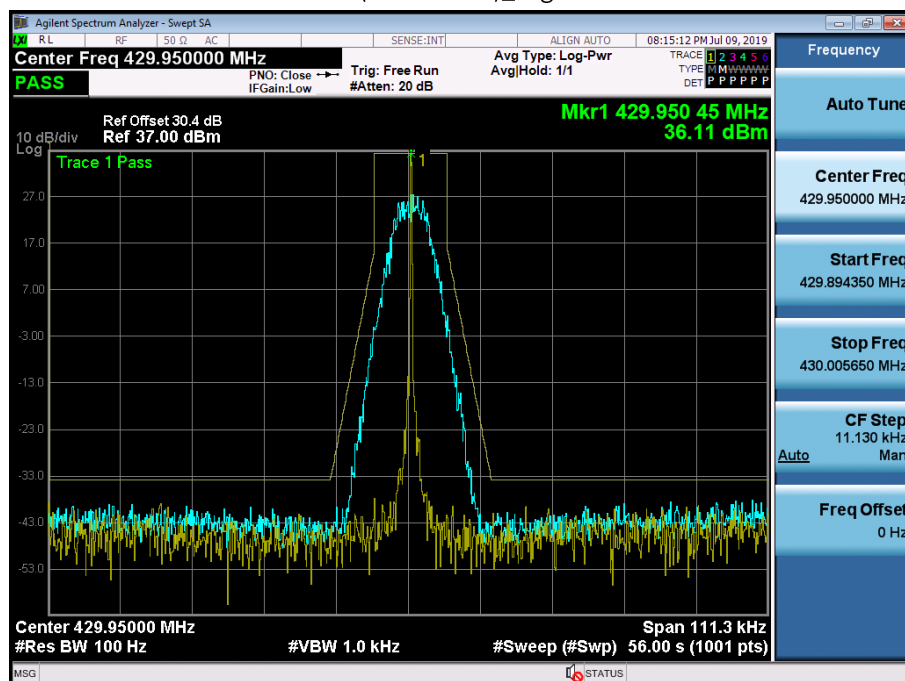


(450.05 MHz)_High

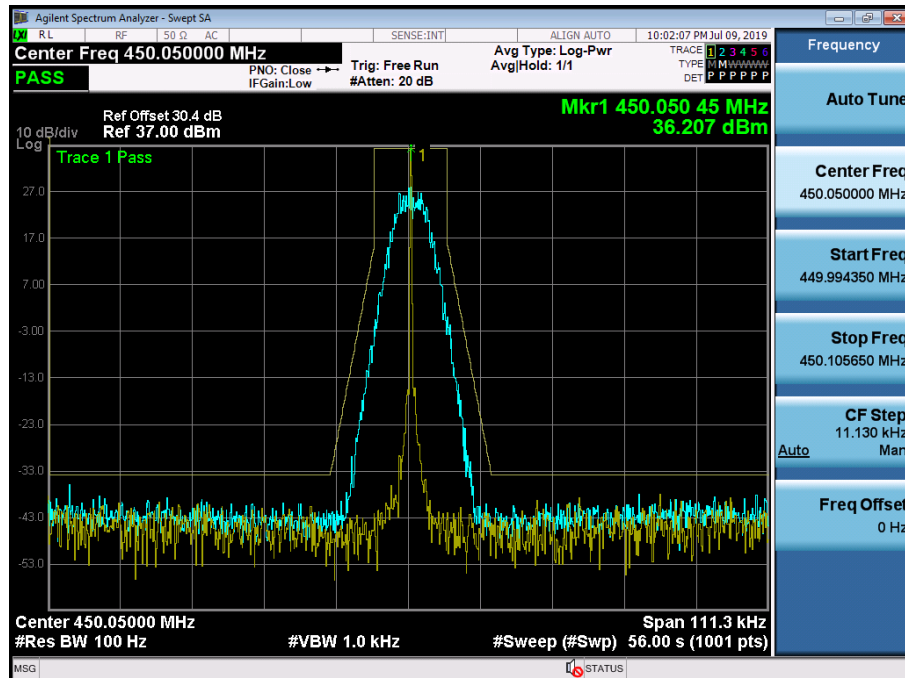


(469.95 MHz)_High

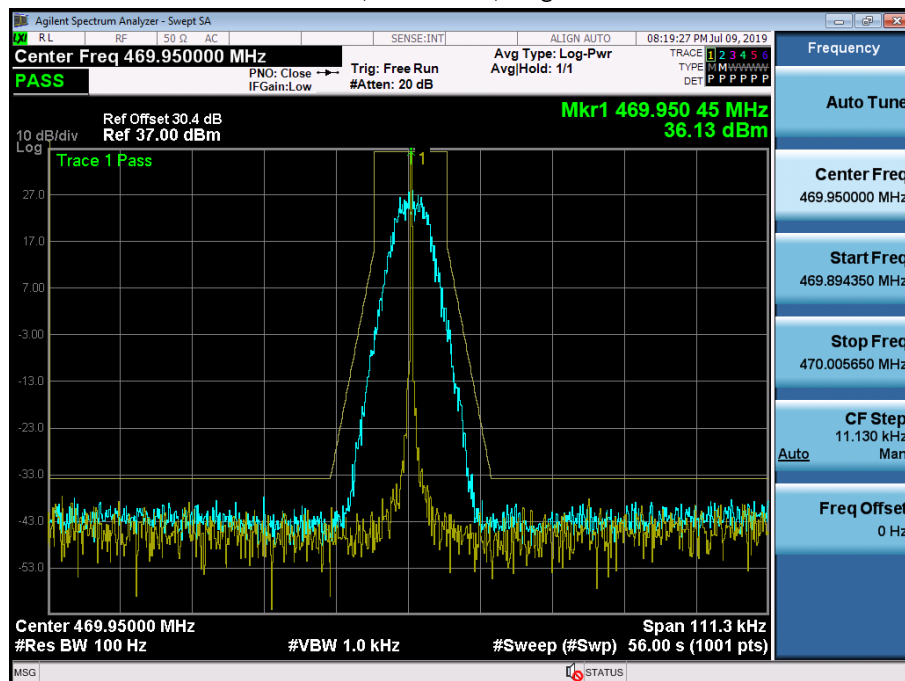

(406.15 MHz)_Low

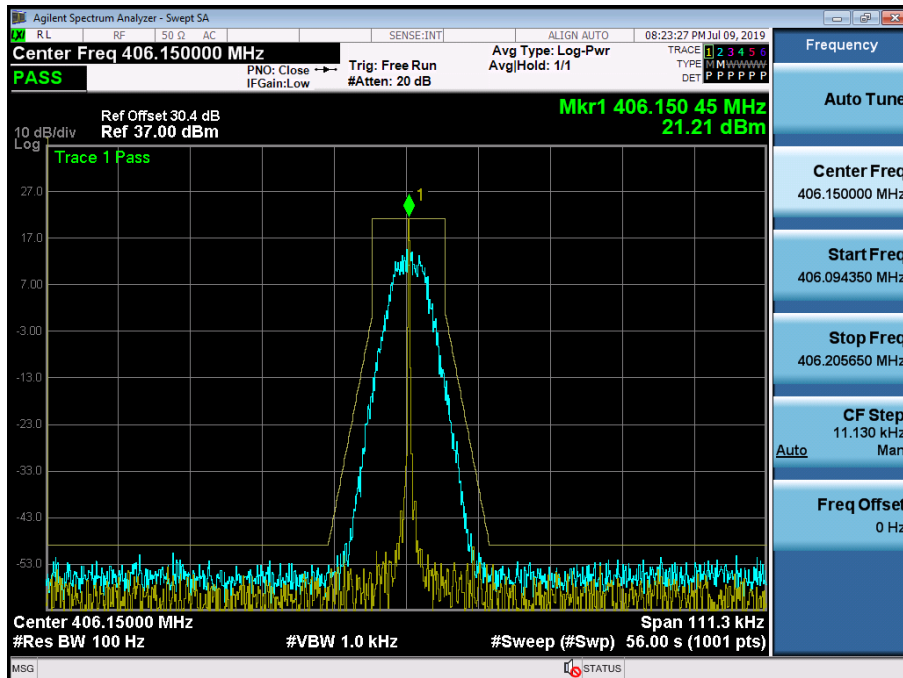

(429.95 MHz)_Low

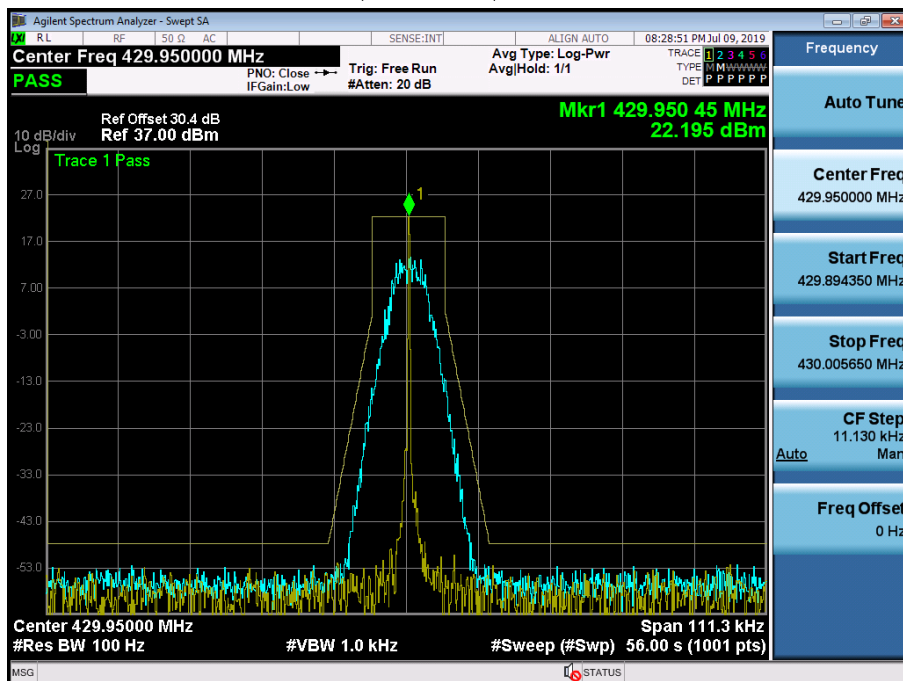

Agilent Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE[INT] ALIGN AUTO 10:05:35 PM Jul 09, 2019

Center Freq 450.050000 MHz Avg Type: Log-Pwr
 #Res 100 Hz Trg: Free Run #Atten: 20 dB TYPE: MAXIMUM
 PNO: Close → IF Gain: Low DET: P P P P P P

Ref Offset 30.4 dB
 Ref 37.00 dBm

Mkr1 450.050 45 MHz
 22.13 dBm

10 dB/div
 Log

Trace 1 Pass

Center 450.05000 MHz Span 111.3 kHz
 #VBW 1.0 kHz #Sweep (#Swp) 56.00 s (1001 pts)

MSG STATUS

Agilent Spectrum Analyzer - Sweep SA

RL RF 50 Ω AC SENSE:INT ALIGN AUTO 08:33:24 PM Jul 09, 2019

Center Freq 469.950000 MHz Avg Type: Log-Pwr Avg|Hold: 1/1 TRACE 1 2 3 4 5 6 TYPE M M W W W W W W W W DET P P P P P P P P

PASS PNO: Close IF Gain: Low Trig: Free Run #Atten: 20 dB

Ref Offset 30.4 dB Ref 37.00 dBm Mkr1 469.950 45 MHz 22.48 dBm

10 dB/div Log


Trace 1 Pass

Center 469.950000 MHz Span 111.3 kHz
#Res BW 100 Hz #VBW 1.0 kHz #Sweep (#Swp) 56.00 s (1001 pts)


MSG STATUS

7K60FXD, 7K60FXE_FCC/IC


(406.15 MHz)_High

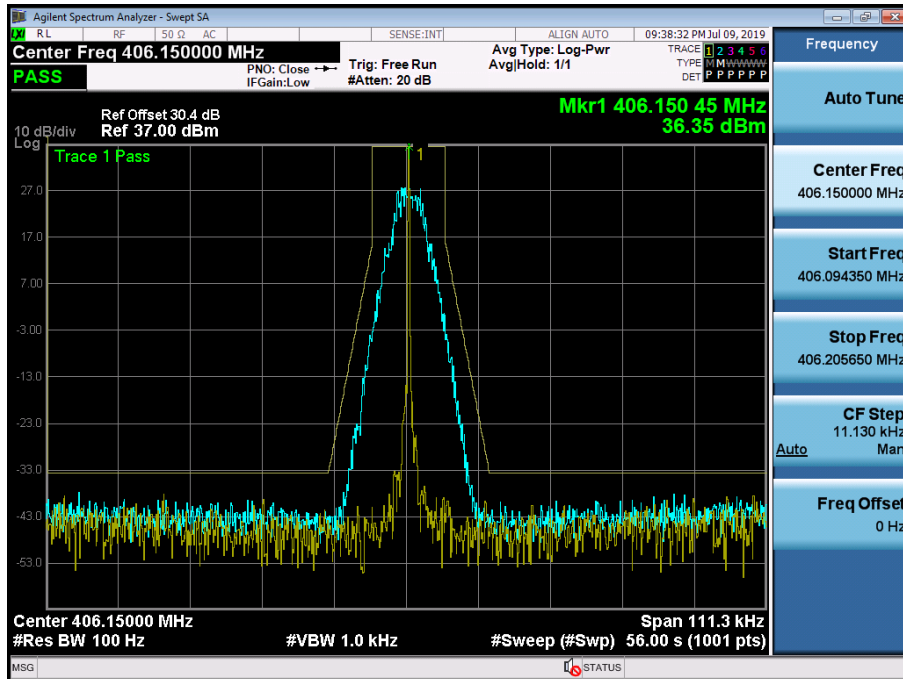


(429.95 MHz)_High

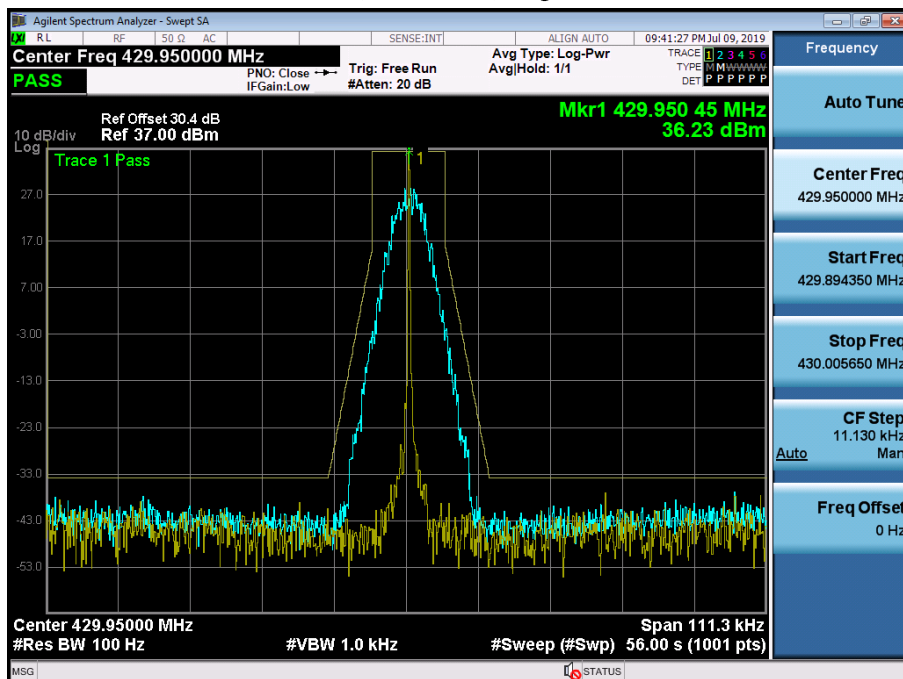


(450.05 MHz)_High

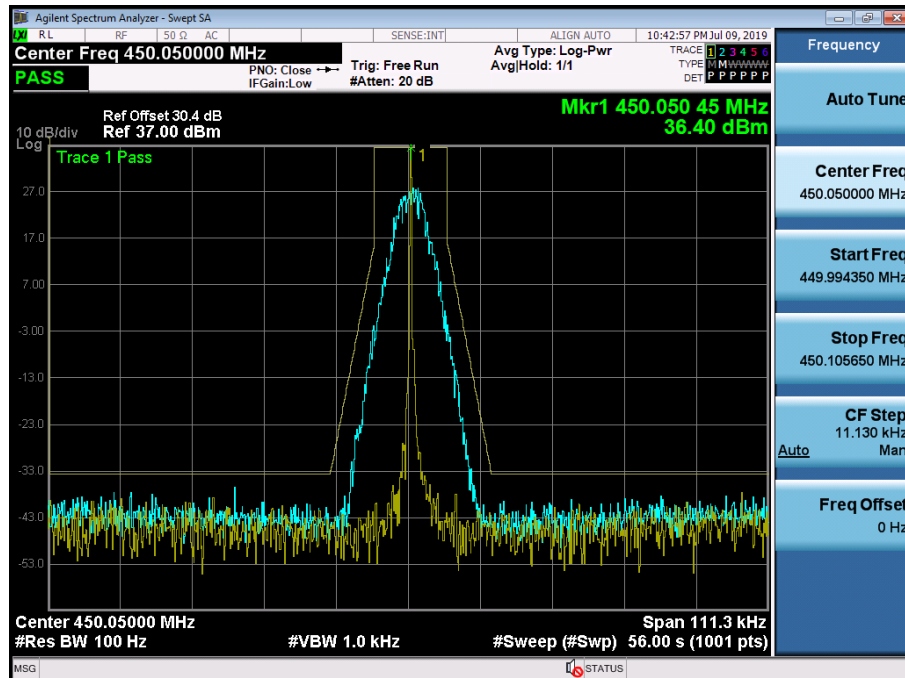


(469.95 MHz)_High

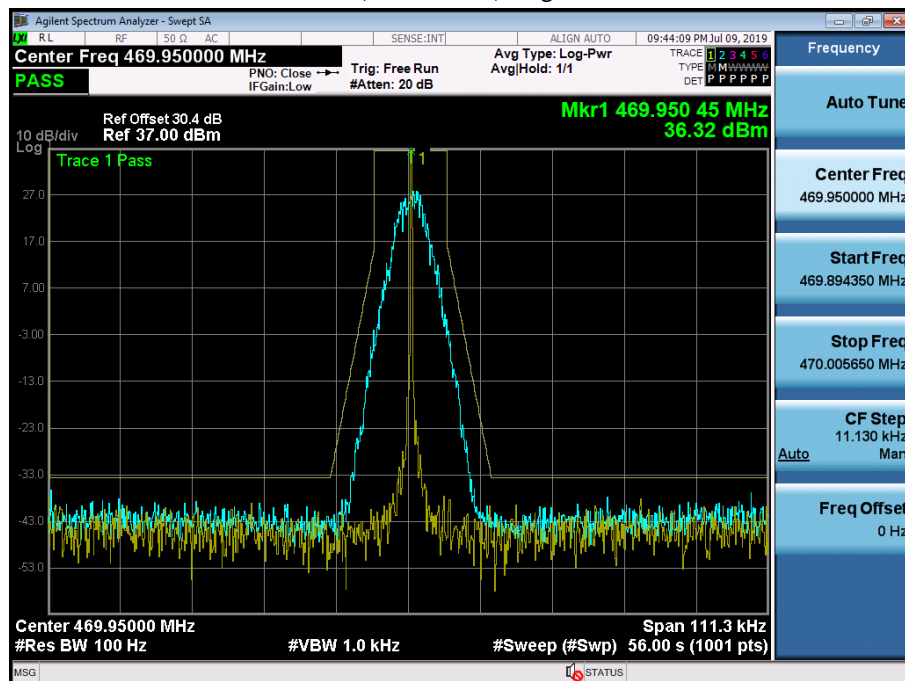


(406.15 MHz)_Low

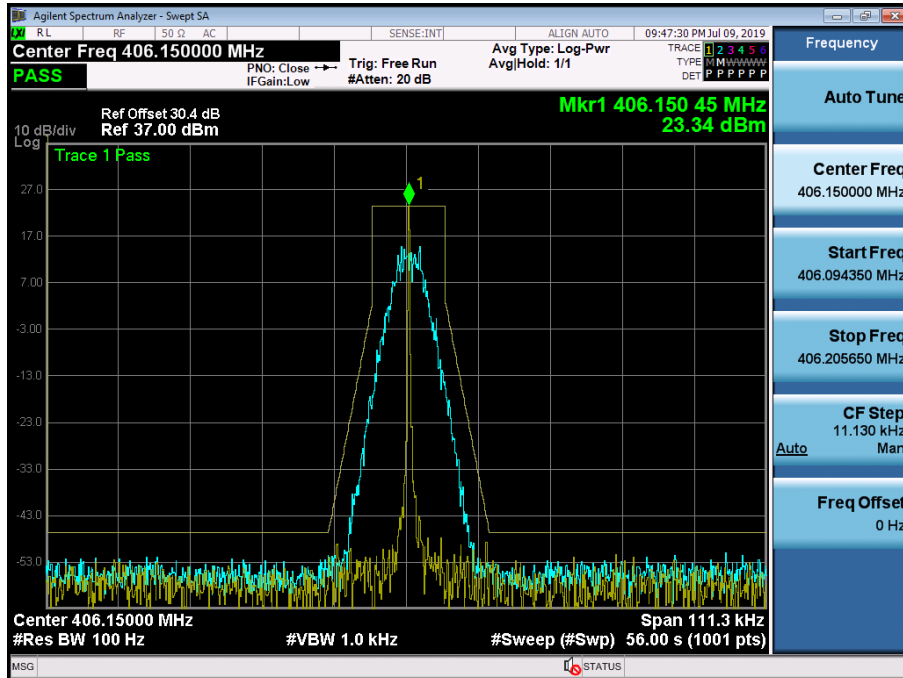


(429.95 MHz)_Low

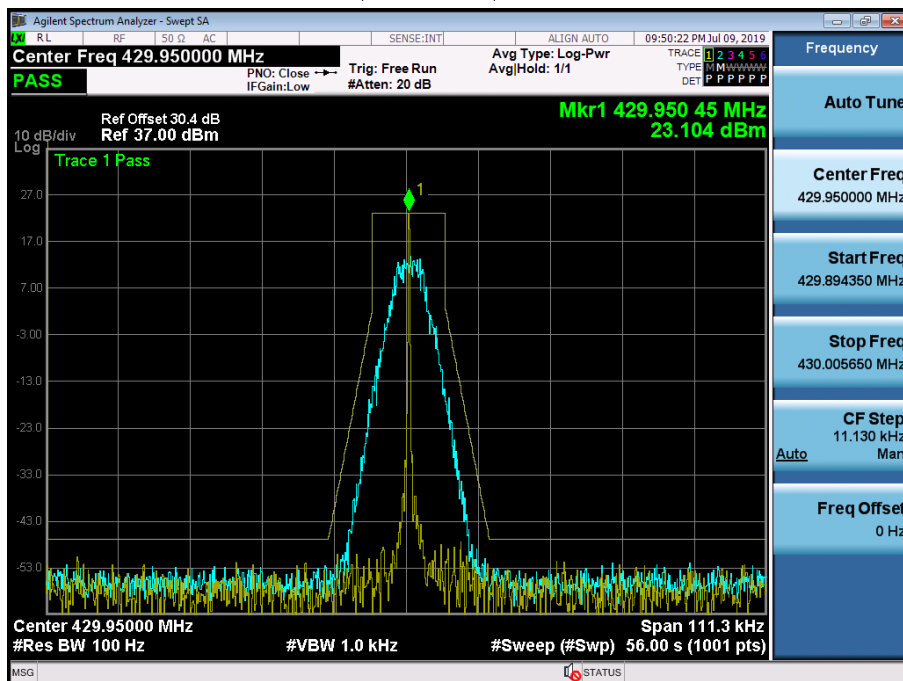

(450.05 MHz)_Low

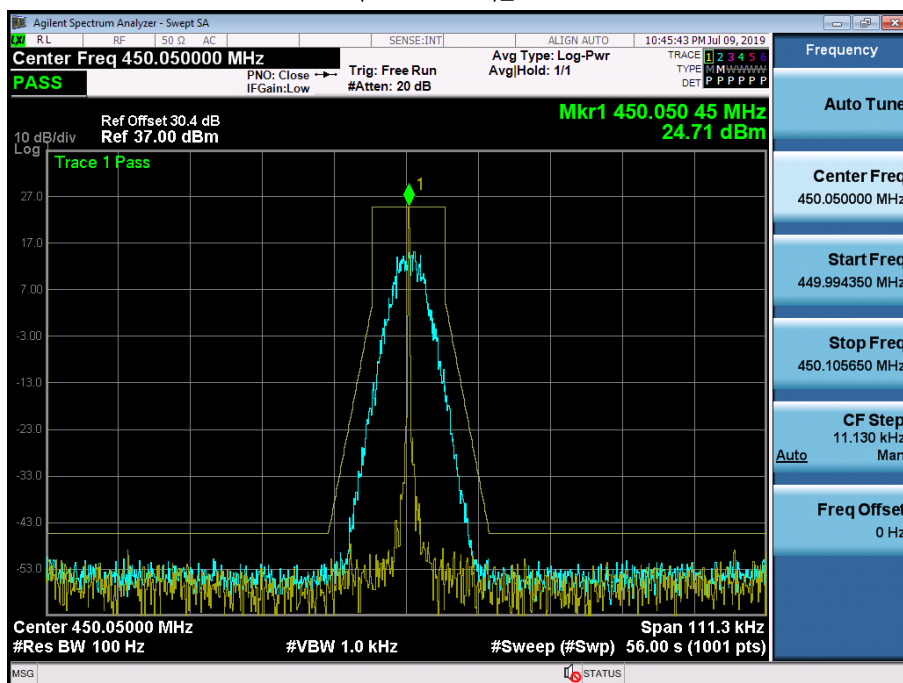


(469.95 MHz)_Low

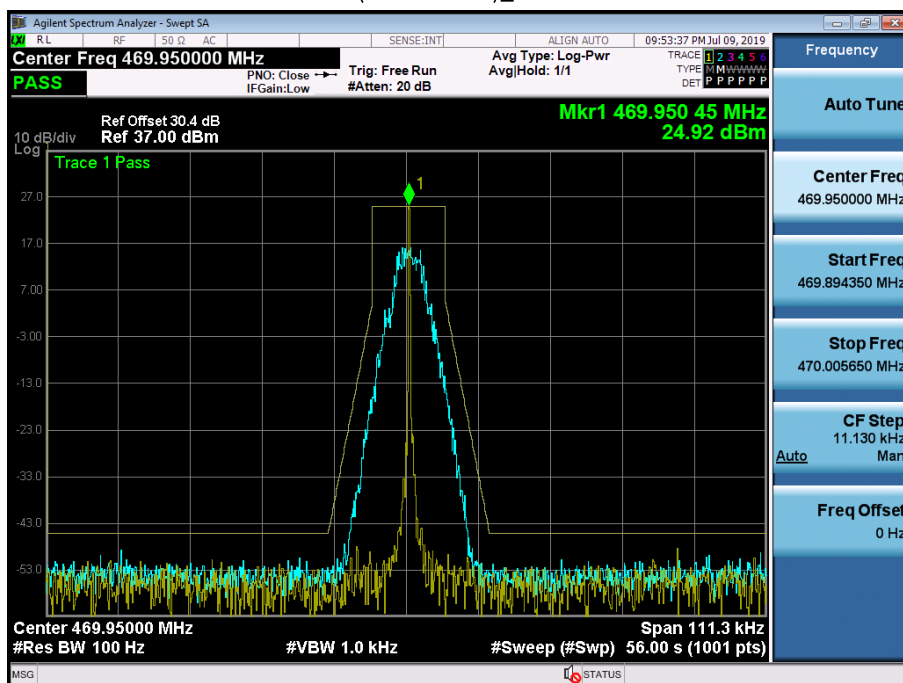


4K00F1E, 4K00F1D, 4K00F7W_FCC/IC


(406.15 MHz)_High

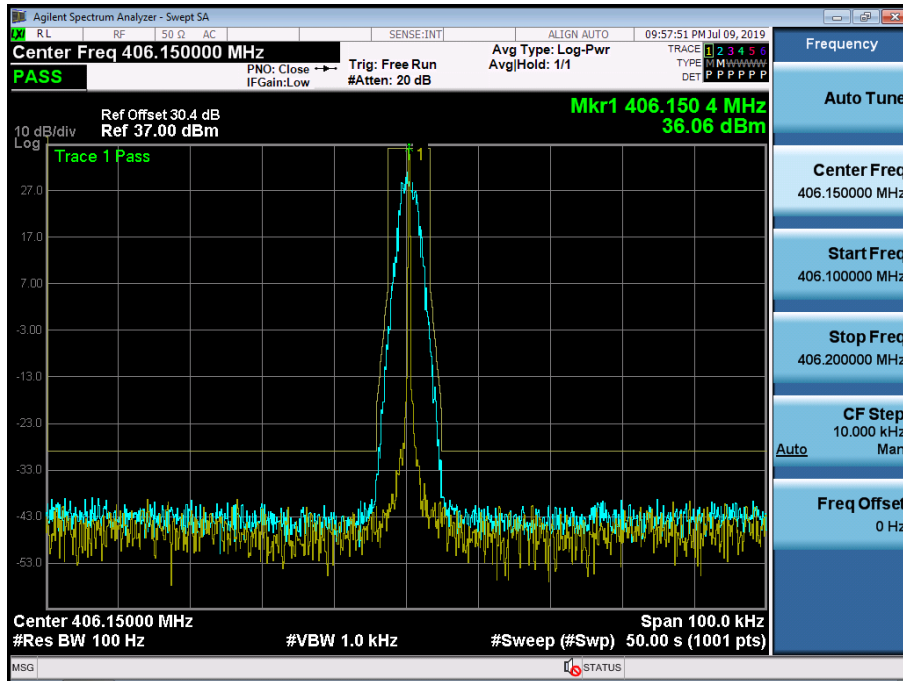


(429.95 MHz)_High

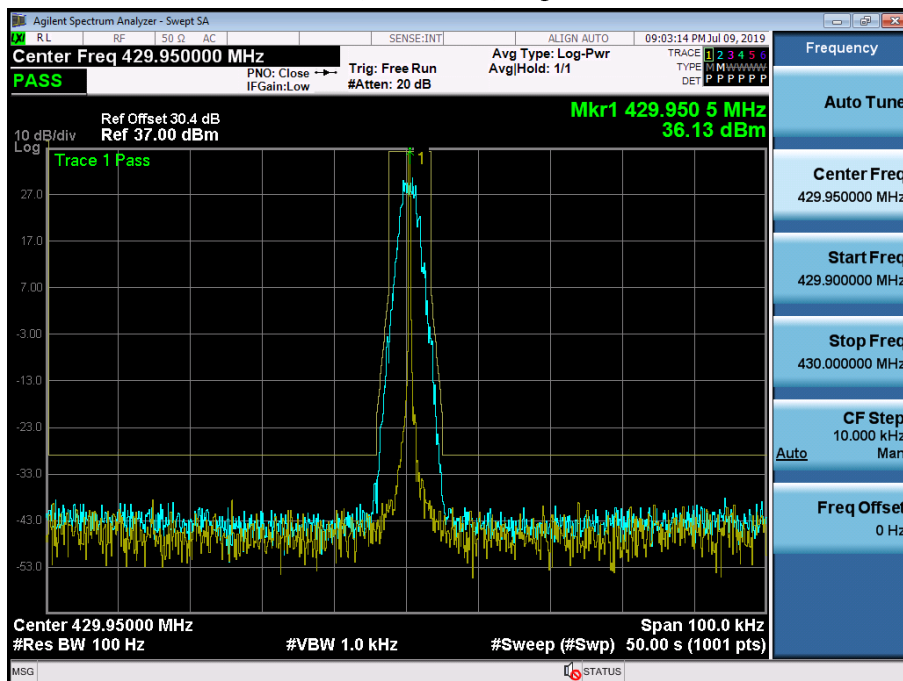


(450.05 MHz)_High

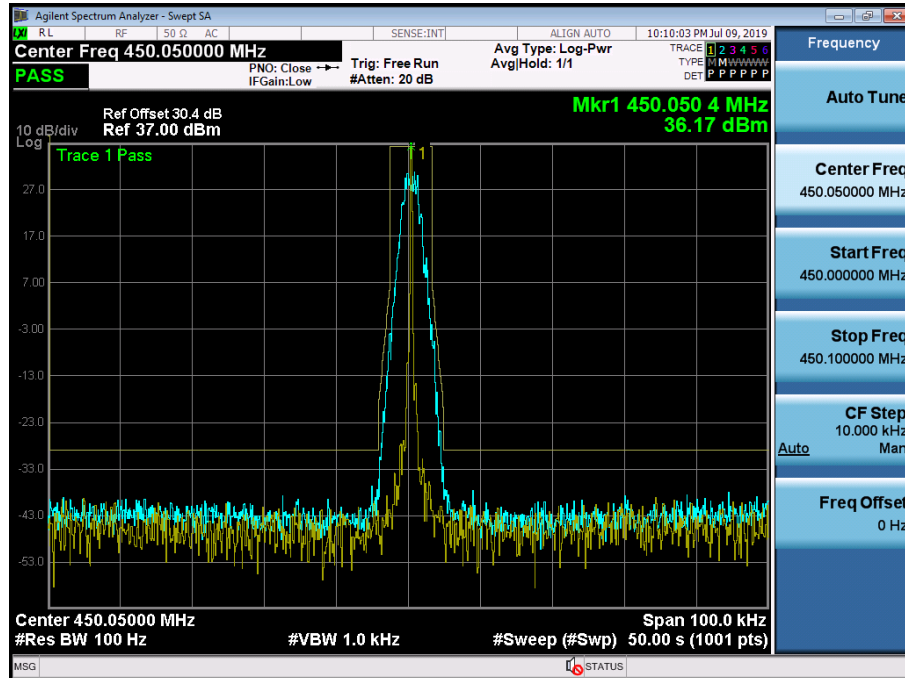


(469.95 MHz)_High

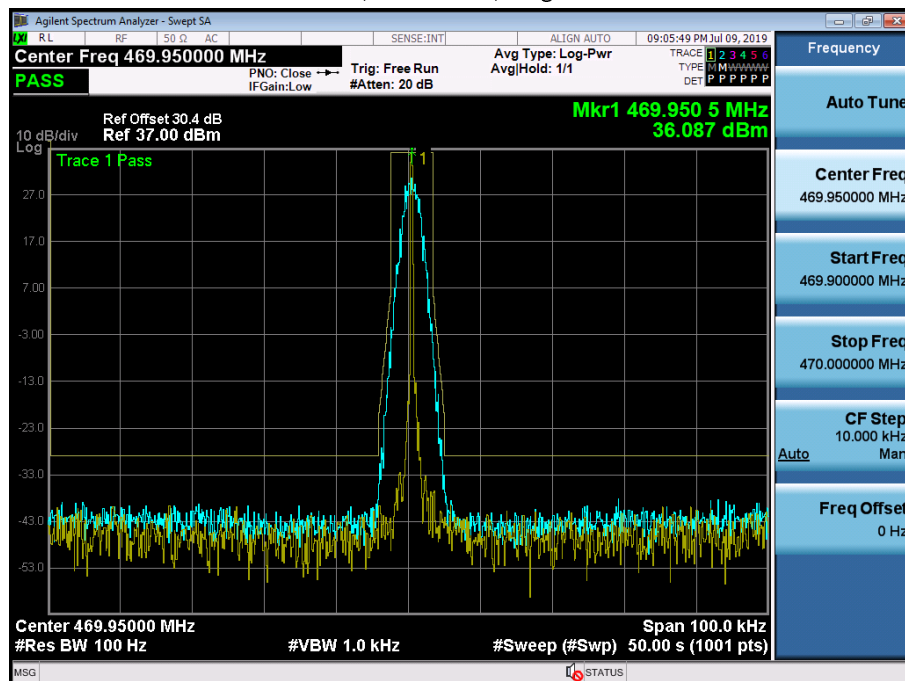


(406.15 MHz)_Low

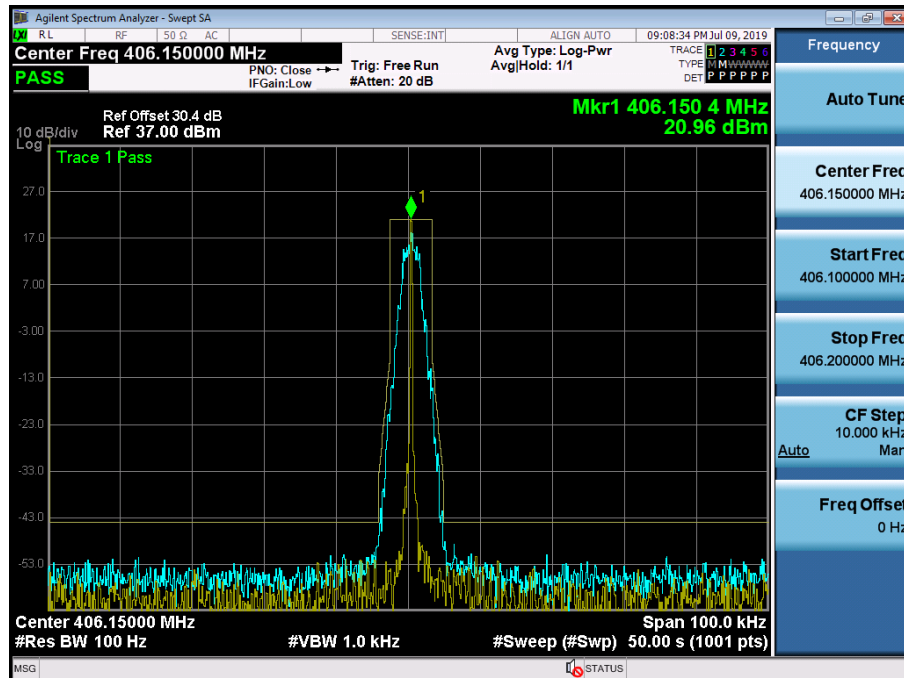


(429.95 MHz)_Low

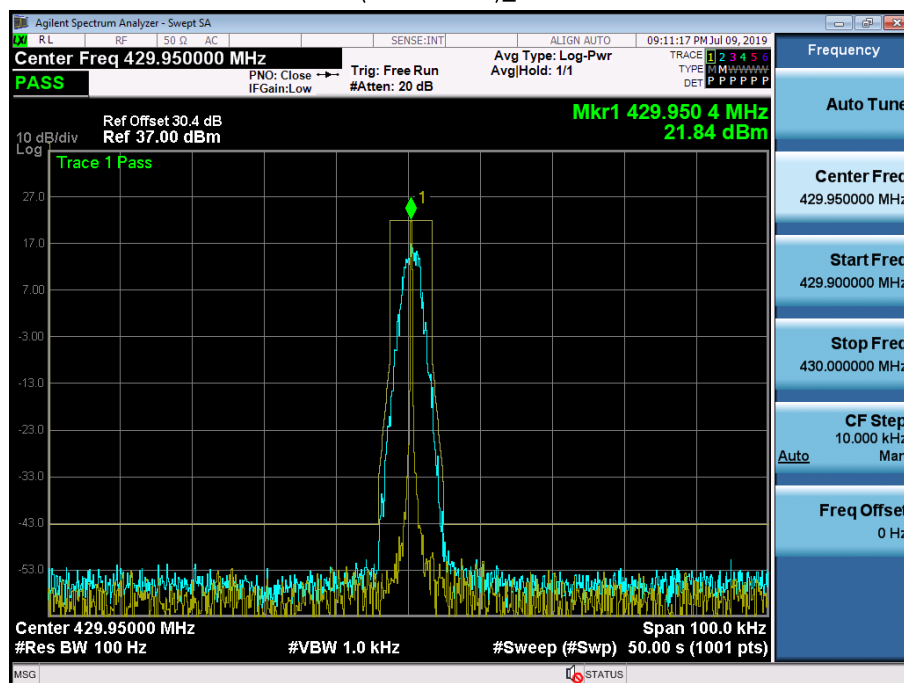

(450.05 MHz)_Low

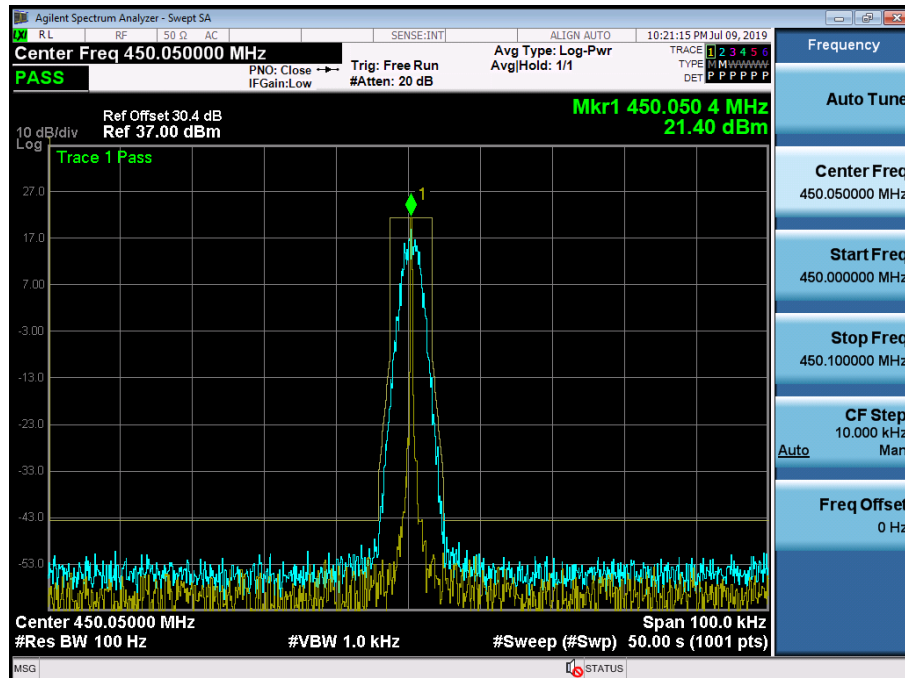


(469.95 MHz)_Low

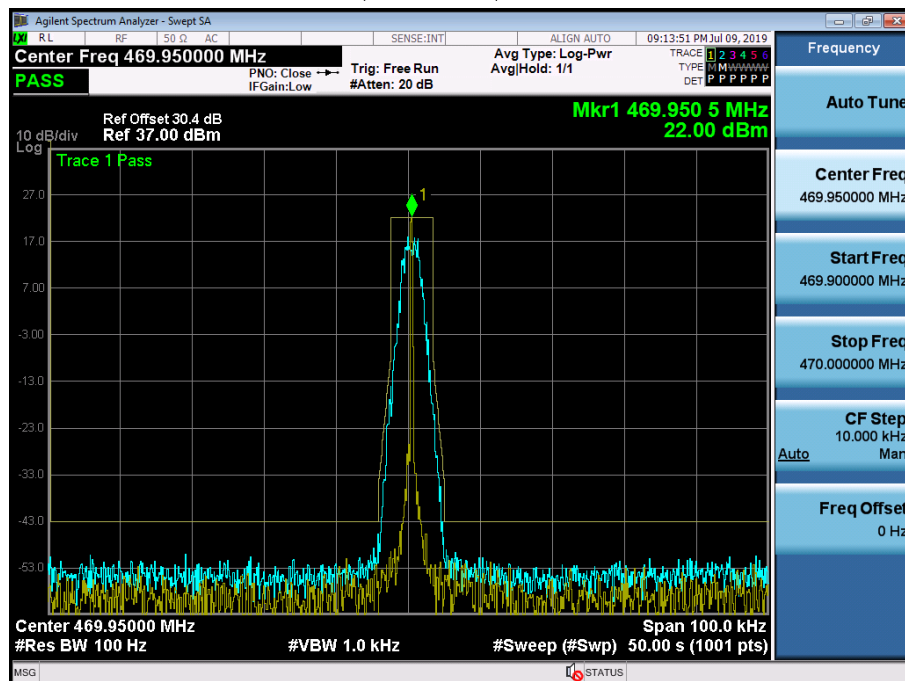


4K00F2D_FCC/IC


(406.15 MHz)_High

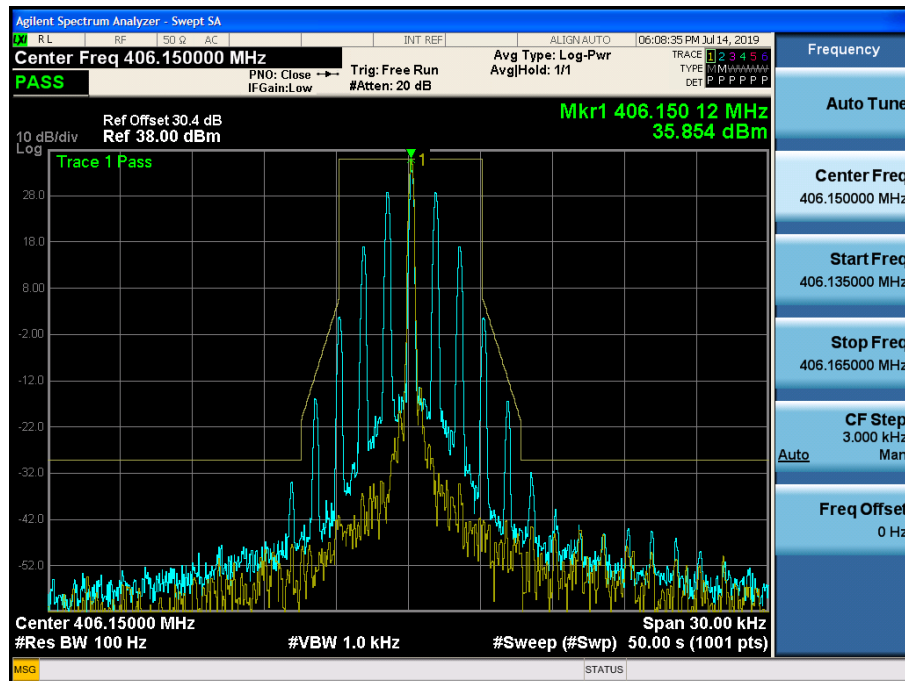


(429.95 MHz)_High

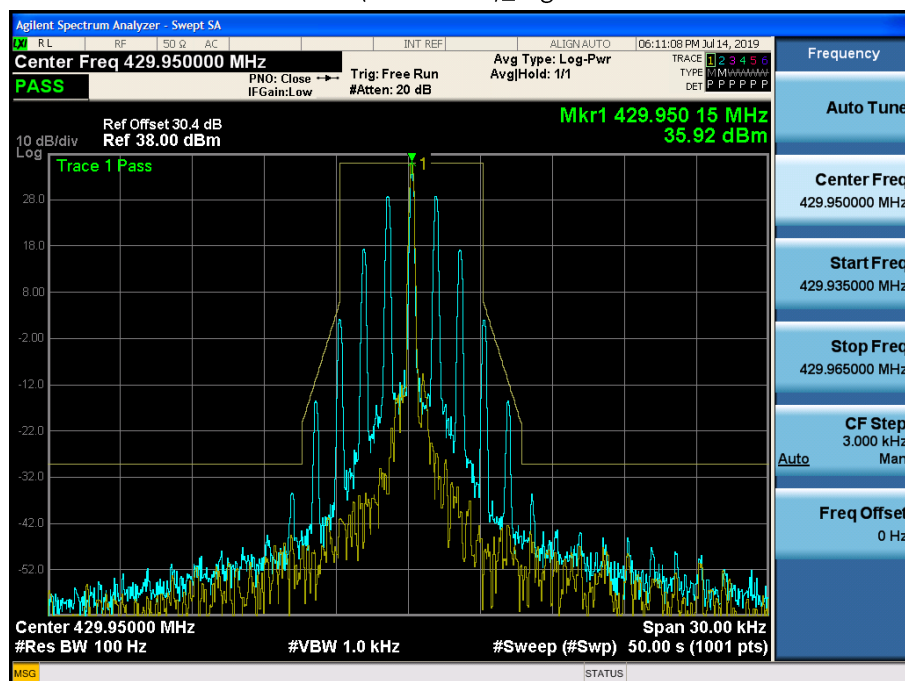


(450.05 MHz)_High

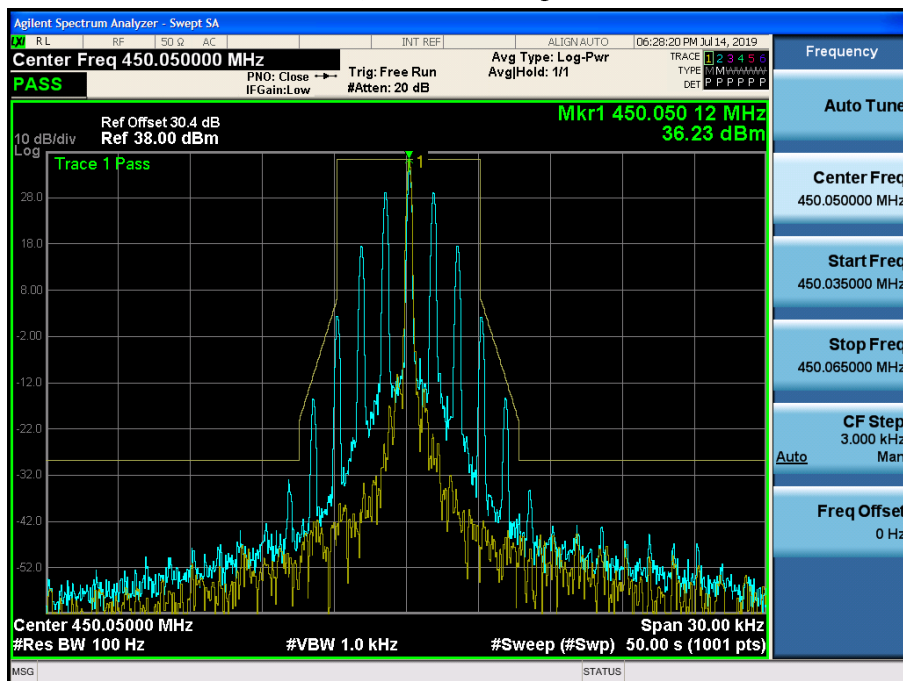


(469.95 MHz)_High

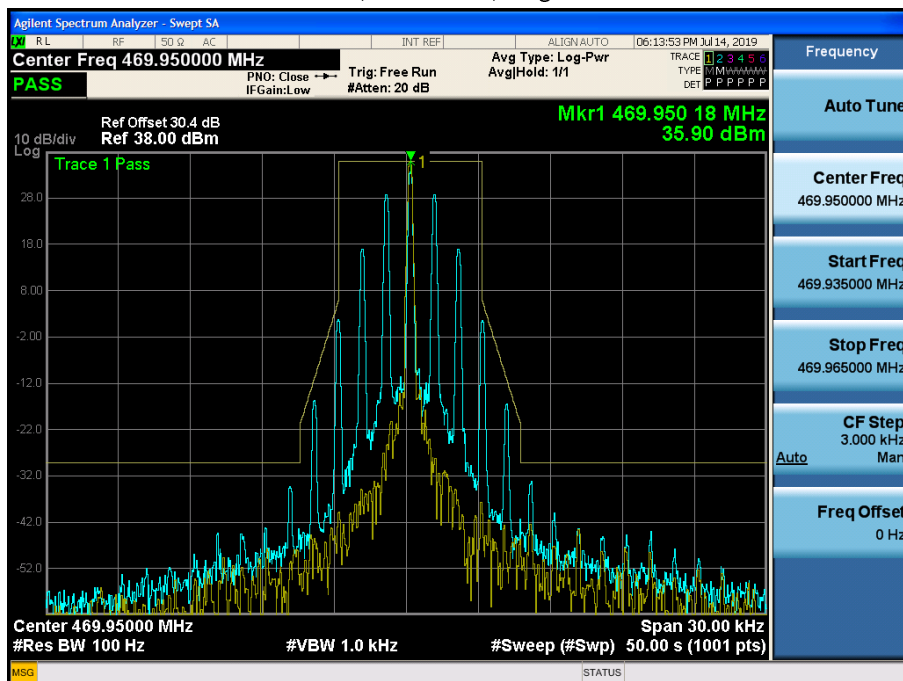


(406.15 MHz)_Low

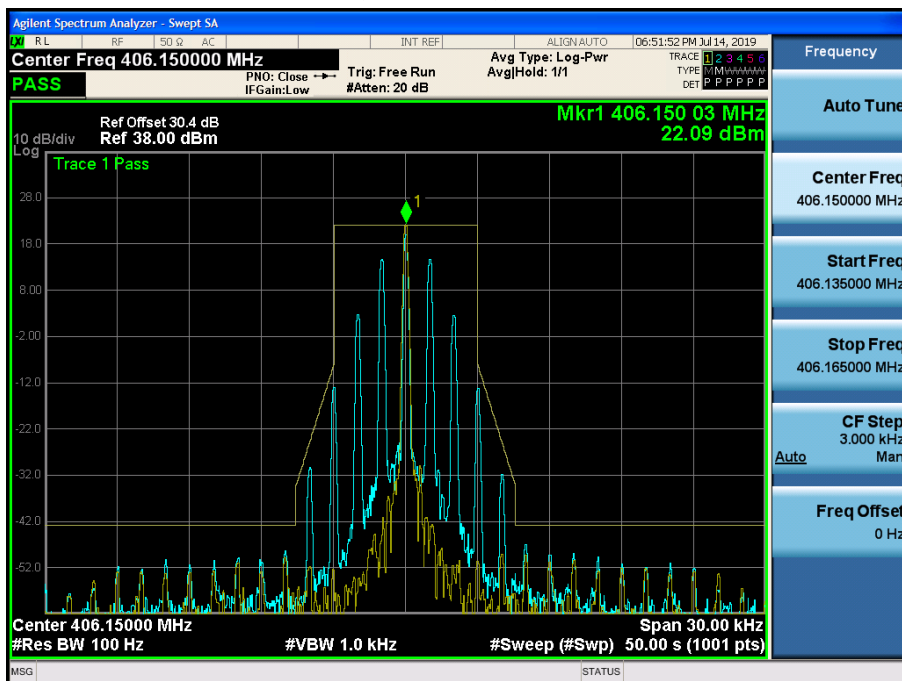


(429.95 MHz)_Low

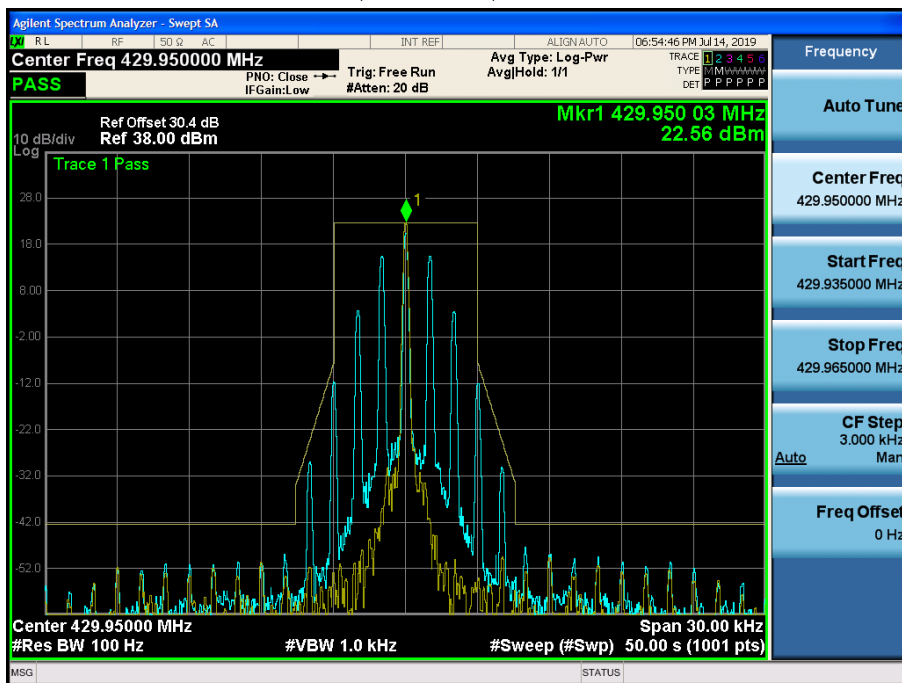

(450.05 MHz)_ Low

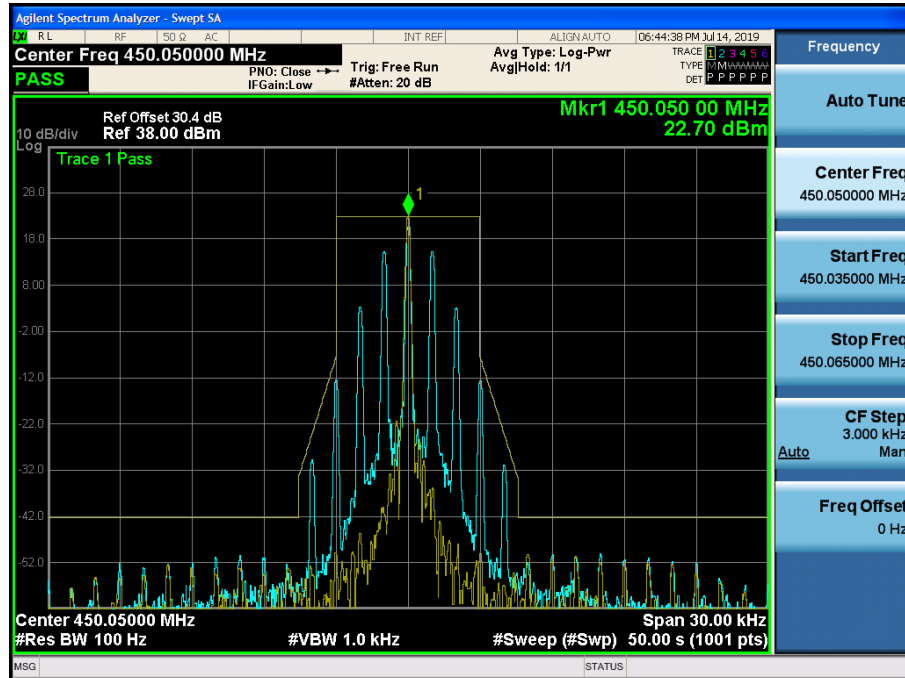

(469.95 MHz)_ Low

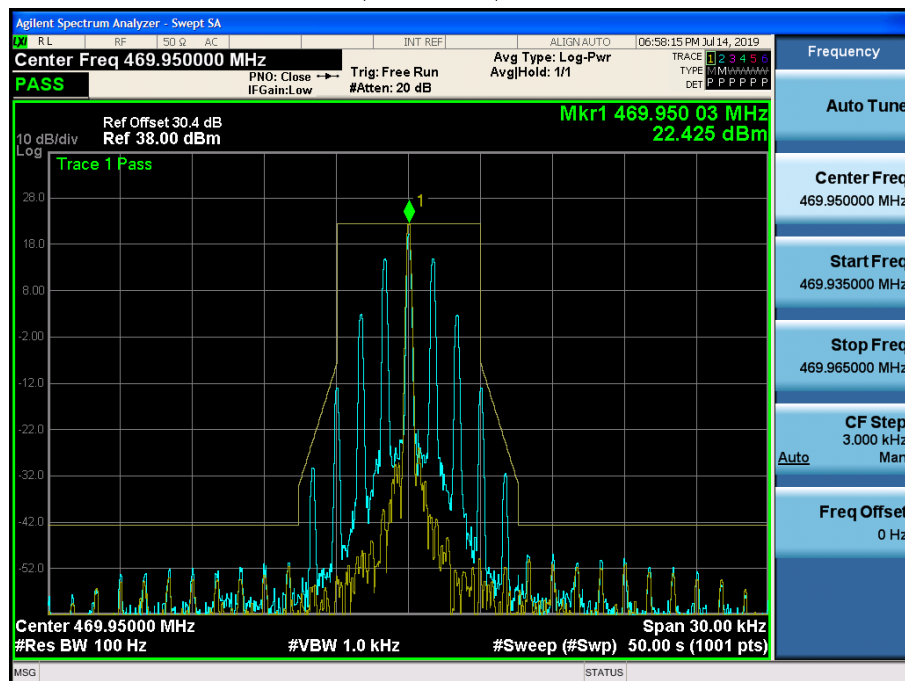


8.7 Transient Frequency Behavior

■ Definition

Transient frequency behavior is a measure of the difference, as a function in time, of the actual transmitter frequency to the assigned transmitter frequency when the transmitted RF output power is switched on or off.

■ TEST CONFIGURATION



■ TEST PROCEDURE

According to 2.2.19 in TIA-603-E Standard.

- a) Connect the equipment as illustrated.
- b) Connect the output of the standard transmitter load to the RF power meter.
Supply sufficient attenuation via the RF attenuator to provide a level that is approximately 40 dB below the maximum allowable input to the modulation domain analyzer.
- c) Unkey the transmitter.
- d) Disconnect the RF power meter and connect the modulation domain analyzer in its place.
Set the envelope trigger of the modulation domain analyzer to the minimum level that will trigger when the transmitter is keyed.
- e) Reduce the attenuation of the RF attenuator so that the input to the modulation domain analyzer is increased by 30 dB when the transmitter is keyed.
- f) Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signal.
- g) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the time base reference to the left for observing the transmitter turn-on transient.
- h) Key the transmitter.
- i) Observe the stored display of the modulation domain analyzer.
The signal trace shall be maintained within the allowable limits during the periods t_1 and t_2 , and shall also remain within limits following t_2 .
- j) Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transient of the transmitter signal.

- k) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the time base reference to the right for observing the transmitter turn-off transient.
- l) Unkey the transmitter.
- m) Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the period t_3 .