



SPECIFICATION:

DC Power: V23A/12V × 1 piece
 Stand-by Current: 15uA
 Transmitting Current: 7mA
 Broadcast Range: 50Meters in open space
 Operating Temperature: -20°J ~ 40°J
 Frequency: 433.92MHz
 Size: 51 × 76 × 30 mm

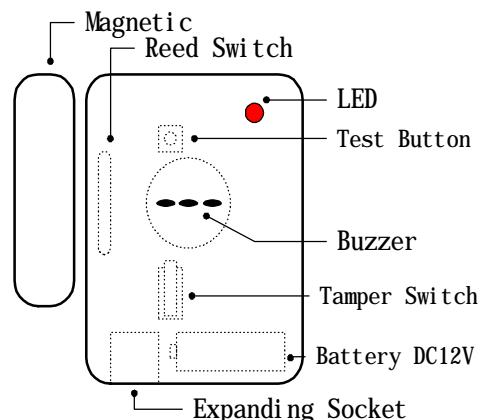


Application:


Case1:
 Standard
 JP1 Open
 JP2 Short
 JP3 Short




Case2:
 Increase One Reed Switch
 JP1 Open
 JP2 Open
 JP3 Short

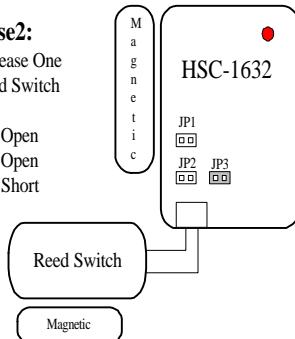


Case3:
 Increase Two Reed Switch
 JP1 Open
 JP2 Open
 JP3 Open

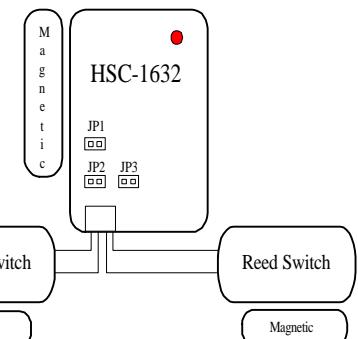

Case4:
 Use One Reed Switch
 JP1 Short
 JP2 Open
 JP3 Short

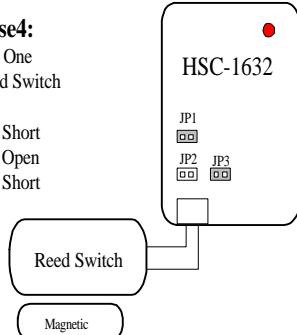

Case5:
 Use Two Reed Switch
 JP1 Short
 JP2 Open
 JP3 Open

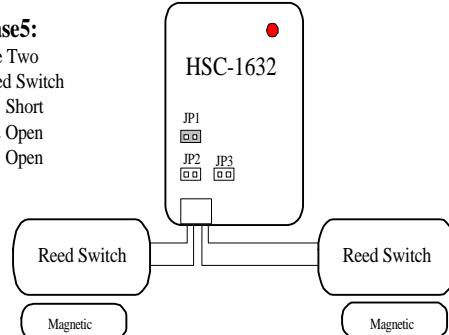

FCC Compliance statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Information to the user

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.