

TEST REPORT

For Bluetooth-LE

Report No. : CHTW24050033 Report Verification: 

Project No..... : SHT2402046704W

FCC ID..... : K6630703X30

Applicant's name : YAESU MUSEN CO., LTD.

Address..... : Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku,
Tokyo 140-0013 Japan

Product Name : Class-H DSC GPS Transceiver

Trade Mark : -

Model No. : HX891BT

Listed Model(s) : -

Standard : FCC CFR Title 47 Part 15 Subpart C § 15.247

Date of receipt of test sample..... : Mar.27, 2024

Date of testing..... : Mar.28, 2024 - May.07, 2024

Date of issue..... : May.16, 2024

Result..... : PASS


Compiled by
(Position+Printed name+Signature): File administrators Caspar Chen



Supervised by
(Position+Printed name+Signature): Project Engineer Caspar Chen



Approved by
(Position+Printed name+Signature): RF Manager Xu yang



Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : Building 7, Baiwang Idea Factory, No.1051, Songbai Road,
Yangguang Community, Xili Subdistrict, Nanshan District,
Shenzhen, Guangdong, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test sample information	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Statement of the measurement uncertainty	8
4.7.	Equipment Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna Requirement	10
5.2.	AC Conducted Emission	11
5.3.	Peak Output Power	12
5.4.	Power Spectral Density	13
5.5.	6dB bandwidth	14
5.6.	99% Occupied Bandwidth	15
5.7.	Duty Cycle	16
5.8.	Conducted Band edge and Spurious Emission	17
5.9.	Radiated Band edge Emission	18
5.10.	Radiated Spurious Emission	21
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>27</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS</u>	<u>28</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>28</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC CFR Title 47 Part 15 Subpart C § 15.247](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2020](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2024-05-16	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Xiangyu Wei
5.2	AC Conducted Emission	15.207	N/A	-
5.3	Peak Output Power	15.247(b)(3)	PASS	Xiangyu Wei
5.4	Power Spectral Density	15.247(e)	PASS	Xiangyu Wei
5.5	6dB Bandwidth	15.247(a)(2)	PASS	Xiangyu Wei
5.6	99% Occupied Bandwidth	-	PASS	Xiangyu Wei
5.7	Duty cycle	-	PASS ^{*1}	Xiangyu Wei
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Xiangyu Wei
5.9	Radiated Band Edge Emission	15.205/15.209	PASS	Yifan Wang
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Yifan Wang

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	YAESU MUSEN CO., LTD.
Address:	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan
Manufacturer:	YAESU MUSEN CO., LTD.
Address:	Omori Bellport D building 3F, 6-26-3 Minamioi, Shinagawa-ku, Tokyo 140-0013 Japan

3.2. Product Description

Main unit information:	
Name of EUT:	Class-H DSC GPS Transceiver
Trade mark:	-
Mode No.:	HX891BT
Listed Model(s):	-
Power supply:	DC 7.4V from battery
Hardware Version:	207980B
Software Version:	V1.00
Accessory unit information:	
Battery information:	7.4Vdc, 1800mAh 14Wh
Adapter information:	Model: SAD-25 Input: AC100-240V, 50/60Hz, 0.4A Output: 10.5Vdc, 1.0A 10.5W
Charger information:	Model: SBH-32 INPUT:10.5~16V,1A OUTPUT: 10.5~16V,1A

3.3. Radio Specification Description

Bluetooth version:	V5.3
Support function:	BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	1/4λ Inverted-L
Antenna gain:	-2.1dBi

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

Channel	Frequency (MHz)
00	2402
01	2404
. . .	. . .
19	2440
. . .	. . .
38	2478
39	2480

4.2. Descriptions of Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For Radiated spurious emissions:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.3. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT24020467001
EMI test items	YPHT24020467002

Note:

RF Conducted test items: Peak Output Power, Power Spectral Density, 6dB Bandwidth, 99% Occupied Bandwidth, Duty cycle, Conducted Band Edge and Spurious Emission

RF Radiated test items: Radiated Band Edge Emission, Radiated Spurious Emission

EMI test items: AC Conducted Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Peak Output Power	1.07
3	Power Spectral Density	1.07
4	6dB Bandwidth	0.002%
5	99% Occupied Bandwidth	0.002%
6	Duty cycle	-
7	Conducted Band Edge and Spurious Emission	1.68dB
8	Radiated Band Edge Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
9	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2023/08/22	2024/08/21
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2023/08/22	2024/08/21
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2023/05/23	2024/05/22
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Radiated Emission – 9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/8/22	2024/8/21
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2024/04/08	2027/04/07
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission - 30MHz~1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/8/22	2024/8/21
●	Ultra-Broadband Antenna	SCHWARZBEC K	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBEC K	HTWE0295	BBV 9742	/	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission-Above 1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2023/8/22	2024/8/21
●	Horn Antenna	SCHWARZBEC K	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Horn Antenna	SCHWARZBEC K	HTWE0103	BBHA9170	BBHA9170472	2023/2/20	2026/2/19
●	Broadband Pre-amplifier	SCHWARZBEC K	HTWE0201	BBV 9718	9718-248	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

REQUIREMENT

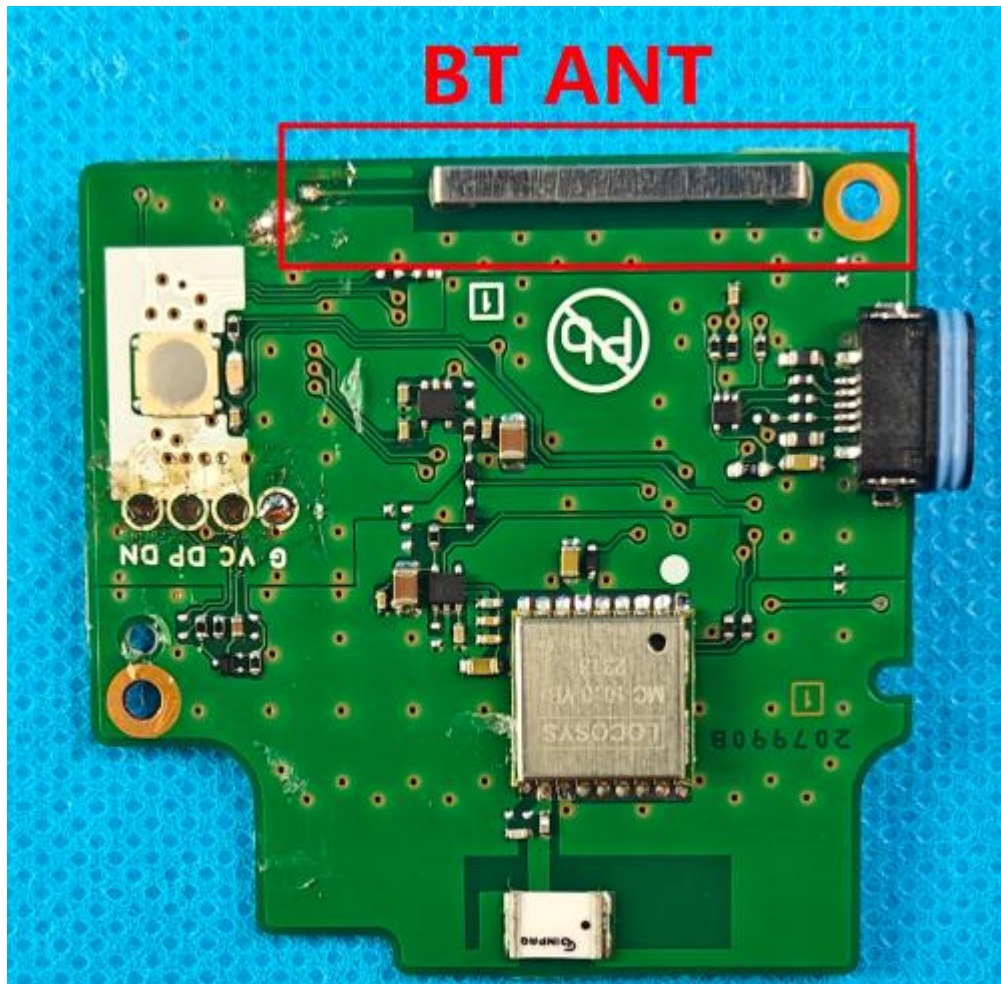
FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

☒ Passed ☐ Not Applicable

The antenna type is a $1/4\lambda$ Inverted-L antenna, please refer to the below antenna photo.



5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

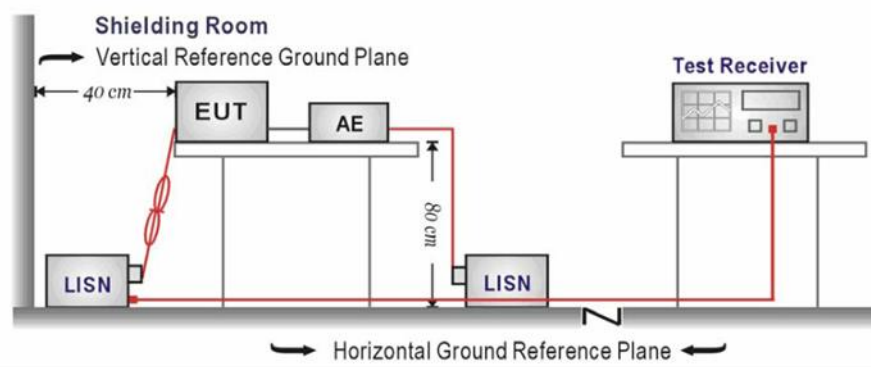TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE

Refer to the clause 4.2

TEST RESULT

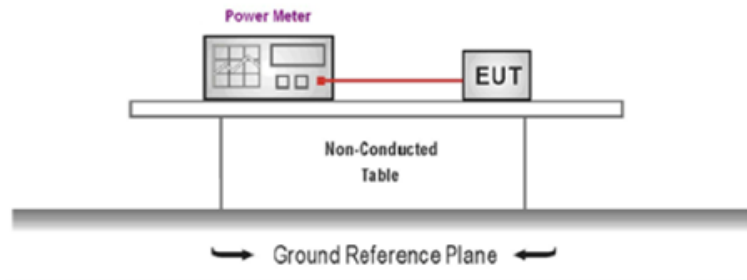
☐ Passed ☒ Not Applicable

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

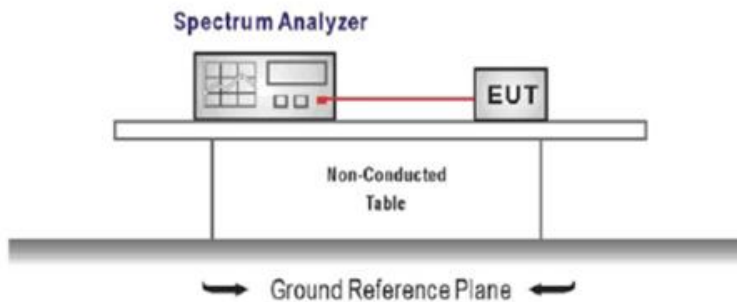
5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

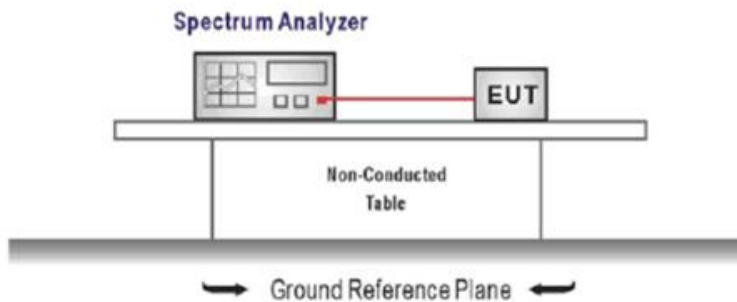
5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

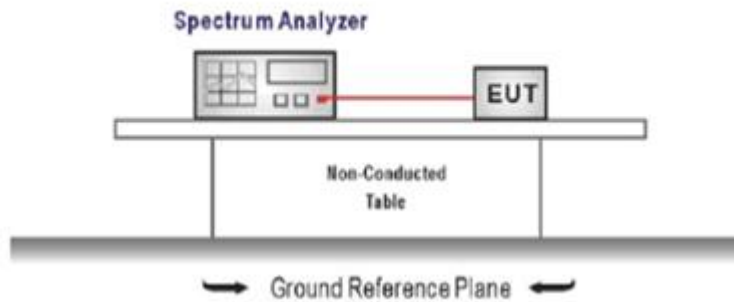
Refer to the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times \text{OBW}$
RBW = 1%~5%OBW
VBW $\geq 3 \times \text{RBW}$
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

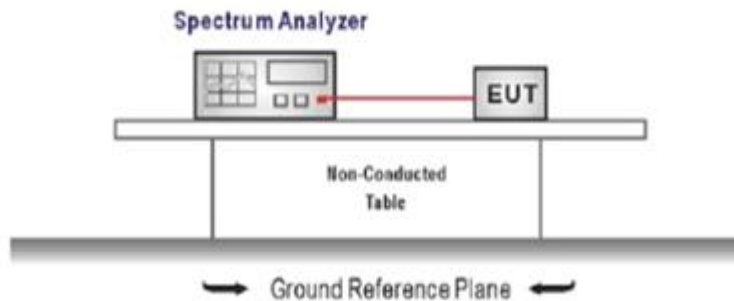
Refer to the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW $\geq$ RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE

Refer to the clause 4.2

TEST DATA

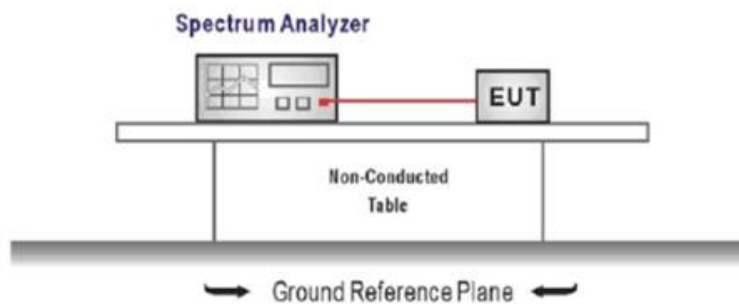
Refer to the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

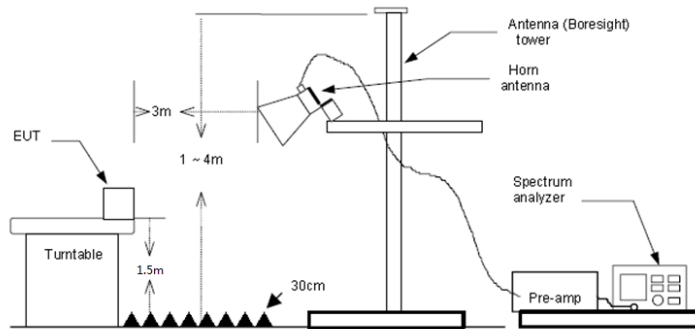
5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

BLE 1M:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	48.38	27.86	4.01	41.80	38.45	74.00	-35.55	Peak
2	2390.03	51.39	27.54	4.31	41.80	41.44	74.00	-32.56	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	37.27	27.86	4.01	41.80	27.34	54.00	-26.66	Average
2	2390.03	40.09	27.54	4.31	41.80	30.14	54.00	-23.86	Average

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	47.74	27.86	4.01	41.80	37.81	74.00	-36.19	Peak
2	2390.03	52.18	27.54	4.31	41.80	42.23	74.00	-31.77	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.97	27.86	4.01	41.80	27.04	54.00	-26.96	Average
2	2390.03	38.35	27.54	4.31	41.80	29.40	54.00	-25.60	Average

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	63.81	27.33	4.18	41.80	53.52	74.00	-20.48	Peak
2	2500.00	50.28	27.30	4.19	41.80	39.97	74.00	-34.03	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	43.87	27.33	4.18	41.80	33.58	54.00	-20.42	Average
2	2500.00	37.53	27.30	4.19	41.80	27.22	54.00	-26.78	Average

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	53.81	27.33	4.18	41.80	43.52	74.00	-30.48	Peak
2	2500.00	48.58	27.30	4.19	41.80	38.27	74.00	-35.73	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	37.78	27.33	4.18	41.80	27.49	54.00	-26.51	Average
2	2500.00	37.20	27.30	4.19	41.80	26.09	54.00	-27.11	Average

BLE 2M:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	49.03	27.86	4.01	41.80	39.10	74.00	-34.90	Peak
2	2390.03	51.10	27.54	4.31	41.80	41.15	74.00	-32.85	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	37.37	27.86	4.01	41.80	27.44	54.00	-26.56	Average
2	2390.03	40.30	27.54	4.31	41.80	30.35	54.00	-23.65	Average

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	48.87	27.86	4.01	41.80	38.94	74.00	-35.06	Peak
2	2390.03	47.88	27.54	4.31	41.80	37.93	74.00	-36.07	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.80	27.86	4.01	41.80	26.87	54.00	-27.13	Average
2	2390.03	37.21	27.54	4.31	41.80	27.26	54.00	-26.74	Average

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	63.66	27.33	4.18	41.80	53.37	74.00	-20.63	Peak
2	2500.00	51.16	27.30	4.19	41.80	40.05	74.00	-33.15	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	50.69	27.33	4.18	41.80	40.40	54.00	-13.60	Average
2	2500.00	37.54	27.30	4.19	41.80	27.23	54.00	-26.77	Average

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	56.15	27.33	4.18	41.80	45.86	74.00	-28.14	Peak
2	2500.00	48.52	27.30	4.19	41.80	38.21	74.00	-35.79	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	42.96	27.33	4.18	41.80	32.67	54.00	-21.33	Average
2	2500.00	37.43	27.30	4.19	41.80	27.12	54.00	-26.88	Average

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

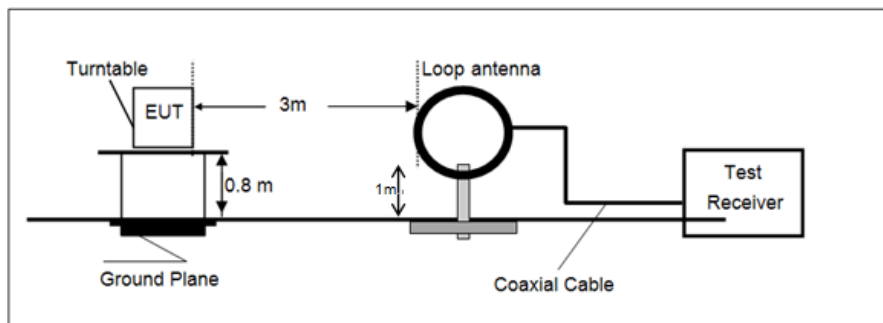
➤ 9 kHz ~ 30 MHz



➤ 30 MHz ~ 1 GHz

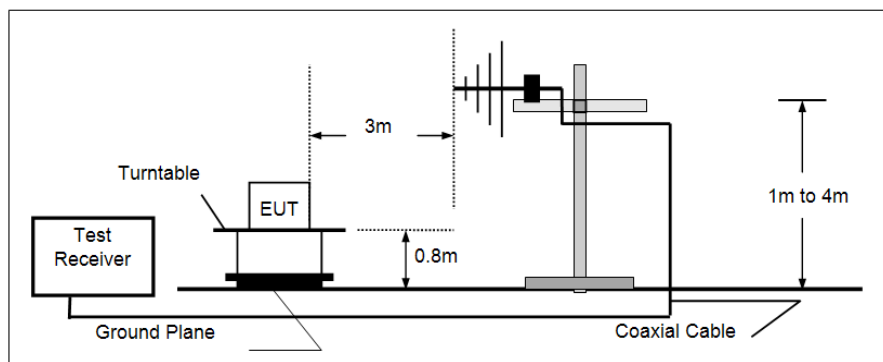

➤ Above 1 GHz

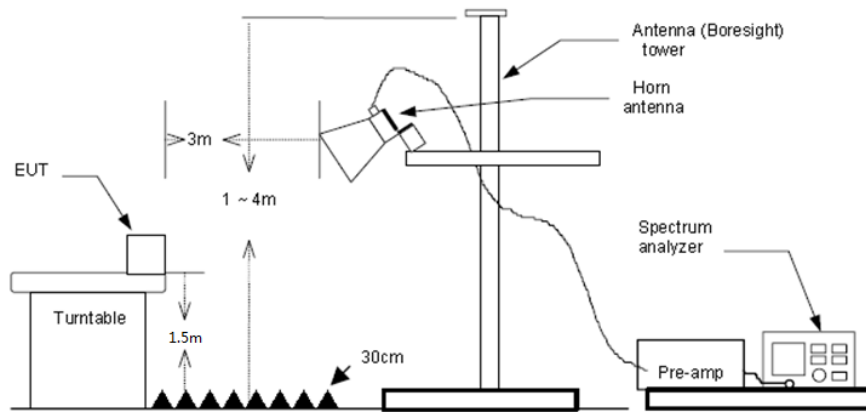

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

For 9 kHz ~ 30 MHz

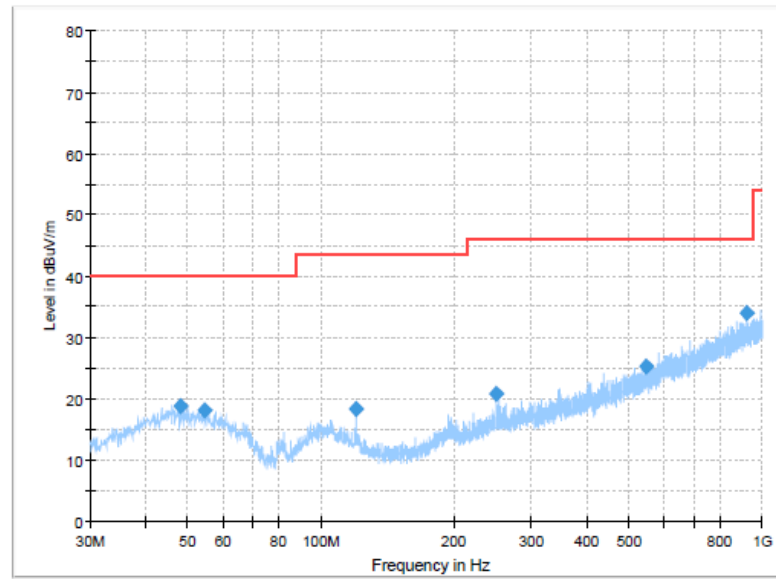
The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found **BLE 2Mbps CH39** which it was worst case, so only show the worst case's data on this report.

Polarization:


Horizontal

**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.1875	18.87	40.00	21.13	100.0	H	139.0	-8.8
54.4925	18.00	40.00	22.00	100.0	H	194.0	-9.1
120.3313	18.23	43.50	25.27	100.0	H	323.0	-12.9
250.1900	20.76	46.00	25.24	300.0	H	194.0	-8.9
545.5550	25.15	46.00	20.85	100.0	H	310.0	-1.1
924.9463	34.02	46.00	11.98	100.0	H	11.0	7.0

Polarization:

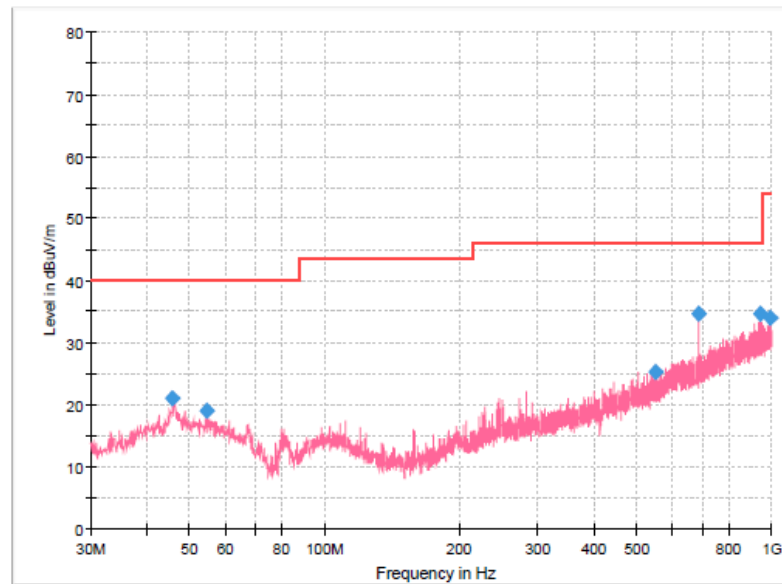Vertical

**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.7625	20.98	40.00	19.02	100.0	V	206.0	-8.8
54.7350	18.97	40.00	21.03	100.0	V	15.0	-9.1
550.2838	25.22	46.00	20.78	100.0	V	0.0	-0.9
687.5388	34.63	46.00	11.37	100.0	V	67.0	2.1
945.1950	34.56	46.00	11.44	100.0	V	0.0	7.1
995.8775	33.95	54.00	20.05	100.0	V	302.0	7.9

BLE 1M:**For 1 GHz ~ 25 GHz**

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3625.67	51.66	29.25	5.07	41.60	44.38	74.00	-29.62	Peak
2	5762.24	44.73	31.92	6.66	40.71	42.60	74.00	-31.40	Peak
3	8002.06	41.33	37.00	8.00	40.81	45.52	74.00	-28.48	Peak
4	10916.26	41.14	40.50	9.96	42.28	49.32	74.00	-24.68	Peak

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3607.26	44.72	29.29	5.07	41.60	37.48	74.00	-36.52	Peak
2	5762.24	50.05	31.92	6.66	40.71	47.92	74.00	-26.08	Peak
3	7209.02	44.79	36.00	7.56	40.95	47.40	74.00	-26.60	Peak
4	10348.05	41.01	39.74	9.68	40.70	49.73	74.00	-24.27	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3662.78	45.33	29.20	5.09	41.60	38.02	74.00	-35.98	Peak
2	6063.19	39.12	32.50	6.05	40.61	37.06	74.00	-36.14	Peak
3	7527.83	39.96	36.14	7.75	41.11	42.74	74.00	-31.26	Peak
4	10374.42	38.12	39.82	9.69	40.65	46.98	74.00	-27.02	Peak

Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3883.62	41.92	29.67	5.30	41.52	35.37	74.00	-38.63	Peak
2	6347.47	41.20	33.10	7.06	40.60	40.04	74.00	-33.16	Peak
3	8002.06	39.52	37.00	8.00	40.81	43.71	74.00	-30.29	Peak
4	10321.74	39.08	39.67	9.67	40.74	47.68	74.00	-26.32	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3463.29	49.18	28.78	4.97	41.60	41.33	74.00	-32.67	Peak
2	3719.15	50.07	29.20	5.20	41.60	42.95	74.00	-31.05	Peak
3	5762.24	44.74	31.92	6.66	40.71	42.61	74.00	-31.39	Peak
4	10217.17	40.78	39.35	9.61	40.93	48.81	74.00	-25.19	Peak

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3410.80	47.77	28.47	5.05	41.60	39.69	74.00	-34.31	Peak
2	4267.18	45.66	30.07	5.77	41.40	40.10	74.00	-33.90	Peak
3	4958.68	44.81	31.23	6.07	41.16	40.95	74.00	-33.05	Peak
4	5762.24	49.49	31.92	6.66	40.71	47.36	74.00	-26.64	Peak

BLE 2M:**For 1 GHz ~ 25 GHz**


Test channel		CH00			Polarity			Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3607.26	50.83	29.29	5.07	41.60	43.59	74.00	-30.41	Peak
2	5762.24	44.34	31.92	6.66	40.71	42.21	74.00	-31.79	Peak
3	7209.02	42.20	36.00	7.56	40.95	44.81	74.00	-29.19	Peak
4	10374.42	39.92	39.82	9.69	40.65	48.78	74.00	-25.22	Peak
Test channel		CH00			Polarity			Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4267.18	48.11	30.07	5.77	41.40	42.55	74.00	-31.45	Peak
2	5762.24	50.59	31.92	6.66	40.71	48.46	74.00	-25.54	Peak
3	7209.02	44.38	36.00	7.56	40.95	46.99	74.00	-27.01	Peak
4	11428.08	40.83	40.43	10.31	42.30	49.27	74.00	-24.73	Peak

Test channel		CH19			Polarity			Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3662.78	50.26	29.20	5.09	41.60	42.95	74.00	-31.05	Peak
2	5762.24	44.05	31.92	6.66	40.71	42.72	74.00	-31.28	Peak
3	8002.06	40.78	37.00	8.00	40.81	44.97	74.00	-29.03	Peak
4	10400.86	39.76	39.90	9.71	40.60	48.77	74.00	-25.23	Peak
Test channel		CH19			Polarity			Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3983.75	44.36	29.77	5.60	41.47	38.26	74.00	-35.74	Peak
2	5762.24	50.34	31.92	6.66	40.71	40.21	74.00	-25.79	Peak
3	8083.96	41.83	37.00	8.13	40.64	46.32	74.00	-27.68	Peak
4	10971.98	40.96	40.50	9.99	42.30	49.15	74.00	-24.85	Peak

Test channel		CH39			Polarity			Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3719.15	50.07	29.28	5.20	41.60	42.95	74.00	-31.05	Peak
2	5762.24	44.01	31.92	6.66	40.71	42.68	74.00	-31.32	Peak
3	7981.72	41.64	36.96	7.99	40.85	45.74	74.00	-28.26	Peak
4	10400.86	39.97	39.90	9.71	40.60	48.98	74.00	-25.02	Peak
Test channel		CH39			Polarity			Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4958.68	45.44	31.23	6.07	41.16	41.58	74.00	-32.42	Peak
2	5762.24	50.17	31.92	6.66	40.71	48.04	74.00	-25.96	Peak
3	8022.46	41.11	37.00	8.07	40.76	45.42	74.00	-28.58	Peak
4	11457.21	40.67	40.46	10.33	42.30	49.16	74.00	-24.84	Peak

6. TEST SETUP PHOTOS

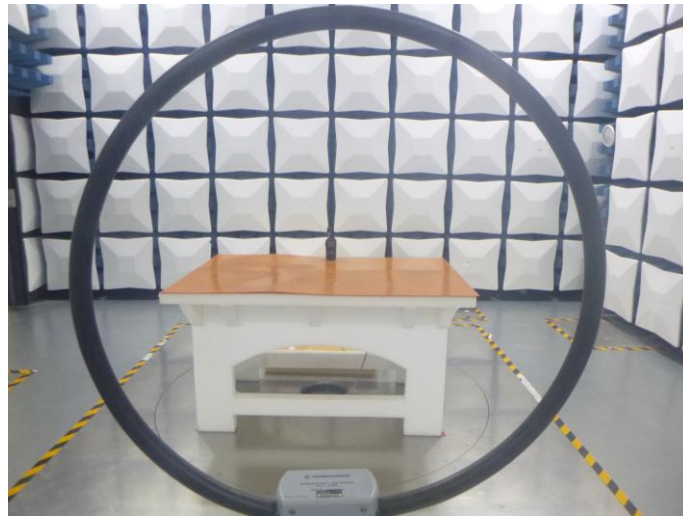Radiated Emission





7. EXTERNAL AND INTERNAL PHOTOS

Reference to the test report No.: CHTW24050028

8. APPENDIX REPORT

APPENDIX REPORT




Project No.	SHT2402046704W	Radio Specification	Bluetooth BLE
Test sample No.	YP HT24020467001	Model No.	HX891BT
Start test date	2024-04-18	Finish date	2024-04-19
Temperature	24℃	Humidity	52%
Test Engineer	Xiangyu Wei	Auditor	Xiaodong Zheo

Appendix clause	Test item	Result
A	Peak Output Power	PASS
B	Power Spectral Density	PASS
C	6 dB Bandwidth	PASS
D	99% Occupied Bandwidth	PASS
E	Duty cycle	PASS
F	Band edge and Spurious Emissions (conducted)	PASS

Appendix A: Peak Output Power




Test rate	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
1Mbps	00	6.55	6.49	≤ 30.00	Pass
	19	6.26	6.21		
	39	5.35	5.31		
2Mbps	00	6.59	6.53	≤ 30.00	Pass
	19	6.30	6.22		
	39	5.38	5.32		




Test rate: 1Mbps	
CH00	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 1 ms RBW 2 MHz VBW 5 MHz Mode Auto Sweep IPk View M1[1] 6.55 dBm 2.40199280 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.402 GHz 691 pts Span 5.0 MHz Date: 18-APR-2024 19:27:02
CH19	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 1 ms RBW 2 MHz VBW 5 MHz Mode Auto Sweep IPk View M1[1] 6.26 dBm 2.43999280 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.44 GHz 691 pts Span 5.0 MHz Date: 18-APR-2024 19:27:06
CH39	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 1 ms RBW 2 MHz VBW 5 MHz Mode Auto Sweep IPk View M1[1] 5.35 dBm 2.48002170 GHz 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm CF 2.48 GHz 691 pts Span 5.0 MHz Date: 18-APR-2024 19:25:43

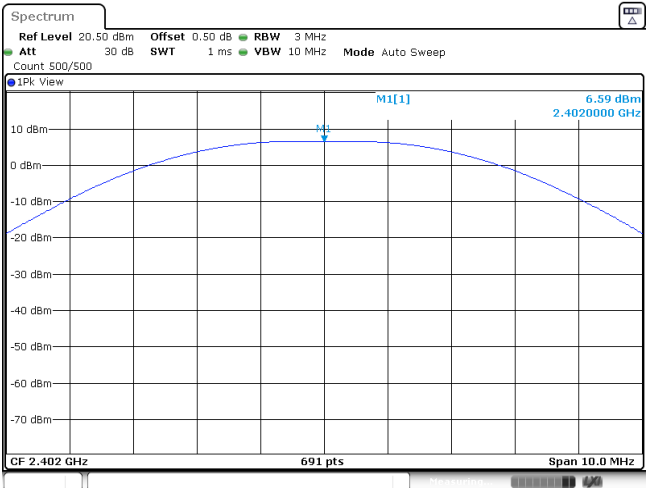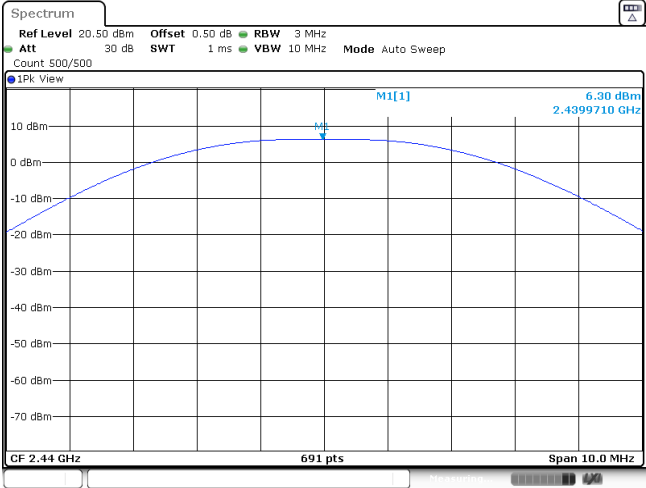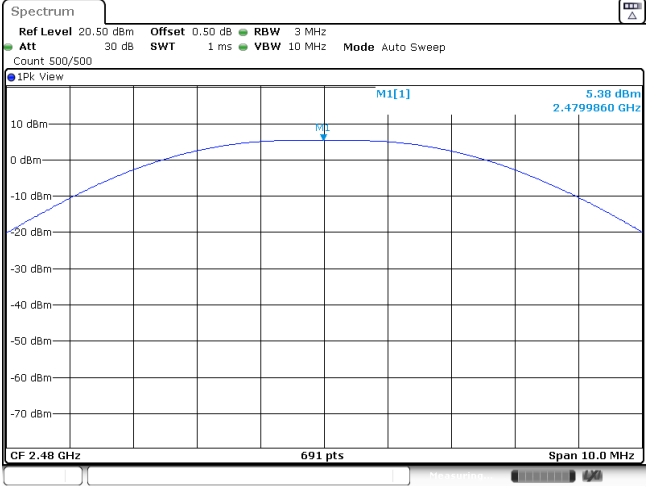Test rate: 2Mbps	
CH00	 Ref Level 20.50 dBm Att 30 dB Offset 0.50 dB RBW 3 MHz SWT 1 ms VBW 10 MHz Mode Auto Sweep Count 500/500 CF 2.402 GHz 691 pts Span 10.0 MHz 6.59 dBm 2.402000 GHz
CH19	 Ref Level 20.50 dBm Att 30 dB Offset 0.50 dB RBW 3 MHz SWT 1 ms VBW 10 MHz Mode Auto Sweep Count 500/500 CF 2.44 GHz 691 pts Span 10.0 MHz 6.30 dBm 2.4399710 GHz
CH39	 Ref Level 20.50 dBm Att 30 dB Offset 0.50 dB RBW 3 MHz SWT 1 ms VBW 10 MHz Mode Auto Sweep Count 500/500 CF 2.48 GHz 691 pts Span 10.0 MHz 5.38 dBm 2.4799860 GHz

Appendix B: Power Spectral Density

Test rate	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
1Mbps	00	-9.78	≤8.00	Pass
	19	-9.88		
	39	-10.84		
2Mbps	00	-13.27	≤8.00	Pass
	19	-13.66		
	39	-14.58		

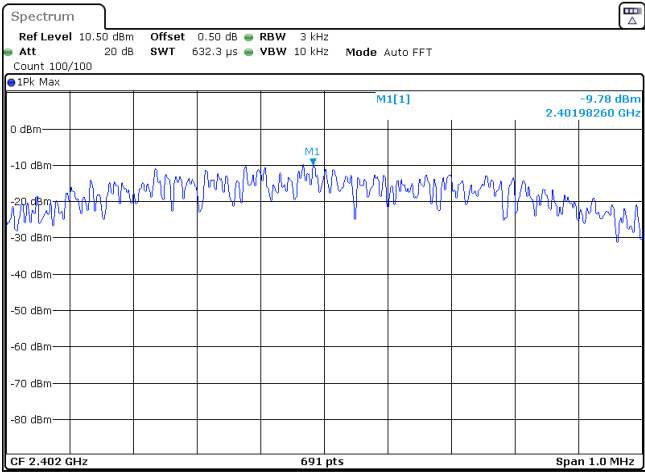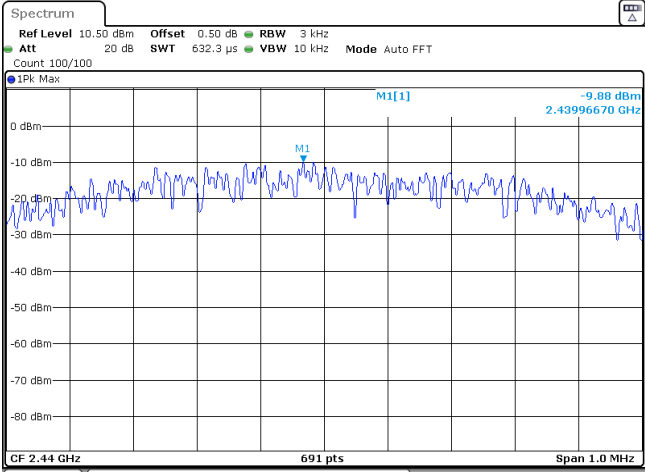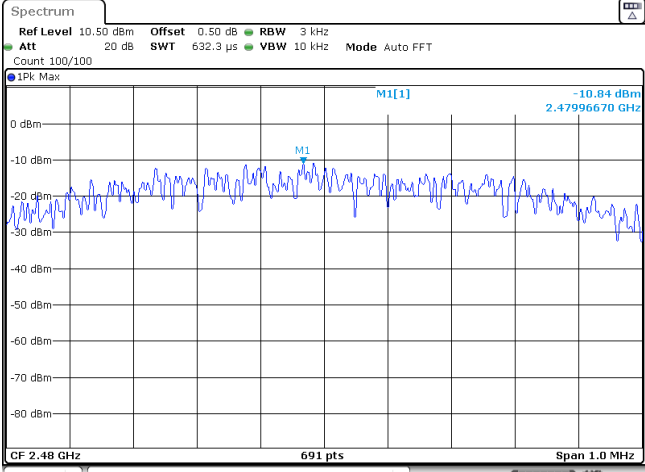
Test rate:		1Mbps
CH00	 Ref Level 10.50 dBm Offset 0.50 dB RBW 3 kHz Att 20 dB SWT 632.3 μs VBW 10 kHz Mode Auto FFT Count 100/100 IPk Max M1[1] -9.78 dBm 2.40198260 GHz CF 2.402 GHz 691 pts Span 1.0 MHz	
CH19	 Ref Level 10.50 dBm Offset 0.50 dB RBW 3 kHz Att 20 dB SWT 632.3 μs VBW 10 kHz Mode Auto FFT Count 100/100 IPk Max M1[1] -9.88 dBm 2.43996670 GHz CF 2.44 GHz 691 pts Span 1.0 MHz	
CH39	 Ref Level 10.50 dBm Offset 0.50 dB RBW 3 kHz Att 20 dB SWT 632.3 μs VBW 10 kHz Mode Auto FFT Count 100/100 IPk Max M1[1] -10.84 dBm 2.47996670 GHz CF 2.48 GHz 691 pts Span 1.0 MHz	

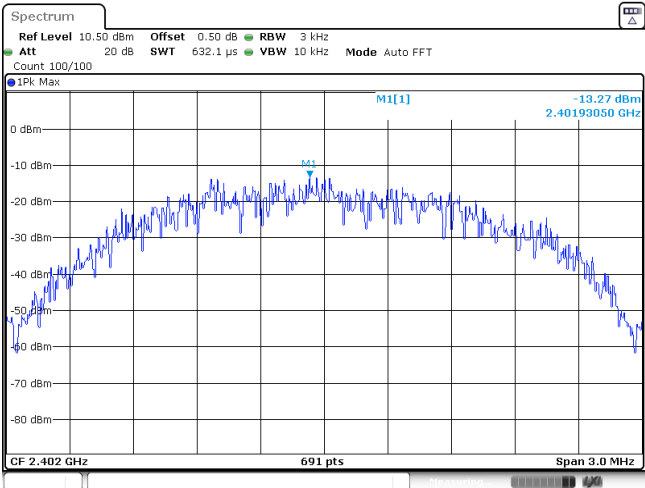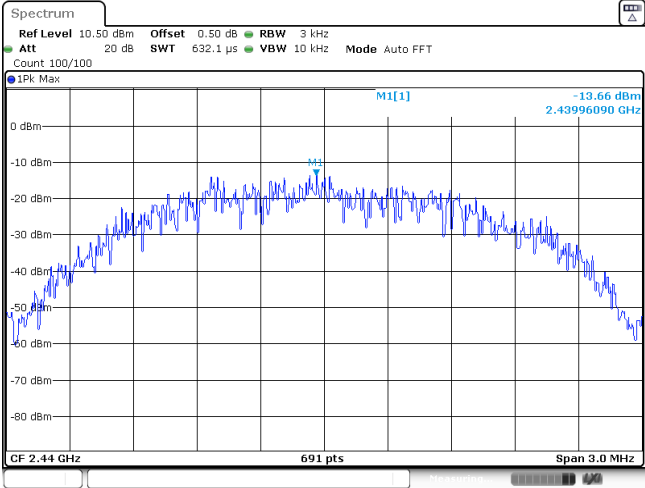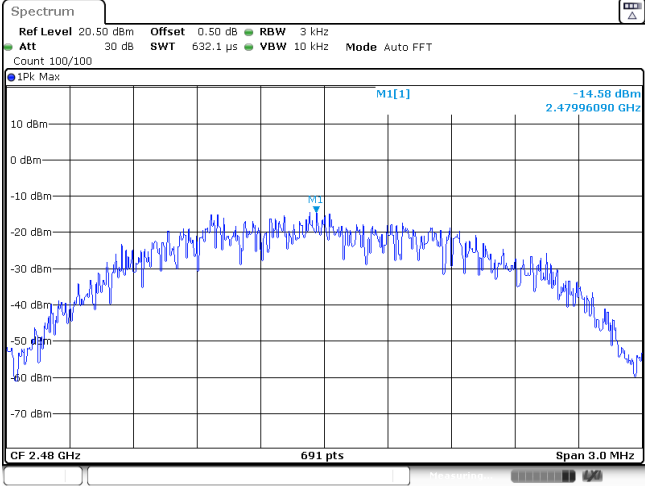Test rate: 2Mbps	
CH00	 18 APR 2024 19:27:48
CH19	 18 APR 2024 19:38:46
CH39	 18 APR 2024 19:41:05

Appendix C: 6dB bandwidth




Type	Channel	6dB Bandwidth(kHz)	Limit (kHz)	Result
1Mbps	00	730.00	≥500	Pass
	19	718.00		
	39	716.00		
2Mbps	00	1205.00	≥500	Pass
	19	1265.00		
	39	1262.00		




Test rate:		1Mbps																																																																																													
CH00	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 0.395 dBm 0.38 dBm 2.40163800 GHz 6.39 dBm 2.40174400 GHz CF 2.402 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.401638 GHz</td><td>0.38 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.401744 GHz</td><td>6.39 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>730.0 kHz</td><td>-0.06 dB</td><td></td><td></td></tr></table> <tr><td>CH19</td><td colspan="3"> Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 0.101 dBm 0.05 dBm 2.43964400 GHz 6.10 dBm 2.43974200 GHz CF 2.44 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.439644 GHz</td><td>0.05 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.439742 GHz</td><td>6.10 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>718.0 kHz</td><td>0.00 dB</td><td></td><td></td></tr></table> <tr><td>CH39</td><td colspan="3"> Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 -0.791 dBm -0.79 dBm 2.47964600 GHz 5.21 dBm 2.47974200 GHz CF 2.48 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.479646 GHz</td><td>-0.79 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.479742 GHz</td><td>5.21 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>716.0 kHz</td><td>-0.05 dB</td><td></td><td></td></tr></table> </td></tr> </td></tr>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.401638 GHz	0.38 dBm			M2		1	2.401744 GHz	6.39 dBm			D3	M1	1	730.0 kHz	-0.06 dB			CH19	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 0.101 dBm 0.05 dBm 2.43964400 GHz 6.10 dBm 2.43974200 GHz CF 2.44 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.439644 GHz</td><td>0.05 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.439742 GHz</td><td>6.10 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>718.0 kHz</td><td>0.00 dB</td><td></td><td></td></tr></table> <tr><td>CH39</td><td colspan="3"> Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 -0.791 dBm -0.79 dBm 2.47964600 GHz 5.21 dBm 2.47974200 GHz CF 2.48 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.479646 GHz</td><td>-0.79 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.479742 GHz</td><td>5.21 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>716.0 kHz</td><td>-0.05 dB</td><td></td><td></td></tr></table> </td></tr>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.439644 GHz	0.05 dBm			M2		1	2.439742 GHz	6.10 dBm			D3	M1	1	718.0 kHz	0.00 dB			CH39	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 -0.791 dBm -0.79 dBm 2.47964600 GHz 5.21 dBm 2.47974200 GHz CF 2.48 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.479646 GHz</td><td>-0.79 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.479742 GHz</td><td>5.21 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>716.0 kHz</td><td>-0.05 dB</td><td></td><td></td></tr></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479646 GHz	-0.79 dBm			M2		1	2.479742 GHz	5.21 dBm			D3	M1	1	716.0 kHz	-0.05 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																																									
M1		1	2.401638 GHz	0.38 dBm																																																																																											
M2		1	2.401744 GHz	6.39 dBm																																																																																											
D3	M1	1	730.0 kHz	-0.06 dB																																																																																											
CH19	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 0.101 dBm 0.05 dBm 2.43964400 GHz 6.10 dBm 2.43974200 GHz CF 2.44 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.439644 GHz</td><td>0.05 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.439742 GHz</td><td>6.10 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>718.0 kHz</td><td>0.00 dB</td><td></td><td></td></tr></table> <tr><td>CH39</td><td colspan="3"> Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 -0.791 dBm -0.79 dBm 2.47964600 GHz 5.21 dBm 2.47974200 GHz CF 2.48 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.479646 GHz</td><td>-0.79 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.479742 GHz</td><td>5.21 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>716.0 kHz</td><td>-0.05 dB</td><td></td><td></td></tr></table> </td></tr>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.439644 GHz	0.05 dBm			M2		1	2.439742 GHz	6.10 dBm			D3	M1	1	718.0 kHz	0.00 dB			CH39	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 -0.791 dBm -0.79 dBm 2.47964600 GHz 5.21 dBm 2.47974200 GHz CF 2.48 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.479646 GHz</td><td>-0.79 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.479742 GHz</td><td>5.21 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>716.0 kHz</td><td>-0.05 dB</td><td></td><td></td></tr></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479646 GHz	-0.79 dBm			M2		1	2.479742 GHz	5.21 dBm			D3	M1	1	716.0 kHz	-0.05 dB																																		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																																									
M1		1	2.439644 GHz	0.05 dBm																																																																																											
M2		1	2.439742 GHz	6.10 dBm																																																																																											
D3	M1	1	718.0 kHz	0.00 dB																																																																																											
CH39	Spectrum Ref Level 20.50 dBm Att 30 dB Count 500/500 Offset 0.50 dB SWT 19.1 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT IPk View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1 M2 M1[1] M2[1] D3 -0.791 dBm -0.79 dBm 2.47964600 GHz 5.21 dBm 2.47974200 GHz CF 2.48 GHz 1001 pts Span 2.0 MHz <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.479646 GHz</td><td>-0.79 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.479742 GHz</td><td>5.21 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>716.0 kHz</td><td>-0.05 dB</td><td></td><td></td></tr></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479646 GHz	-0.79 dBm			M2		1	2.479742 GHz	5.21 dBm			D3	M1	1	716.0 kHz	-0.05 dB																																																																		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																																																									
M1		1	2.479646 GHz	-0.79 dBm																																																																																											
M2		1	2.479742 GHz	5.21 dBm																																																																																											
D3	M1	1	716.0 kHz	-0.05 dB																																																																																											

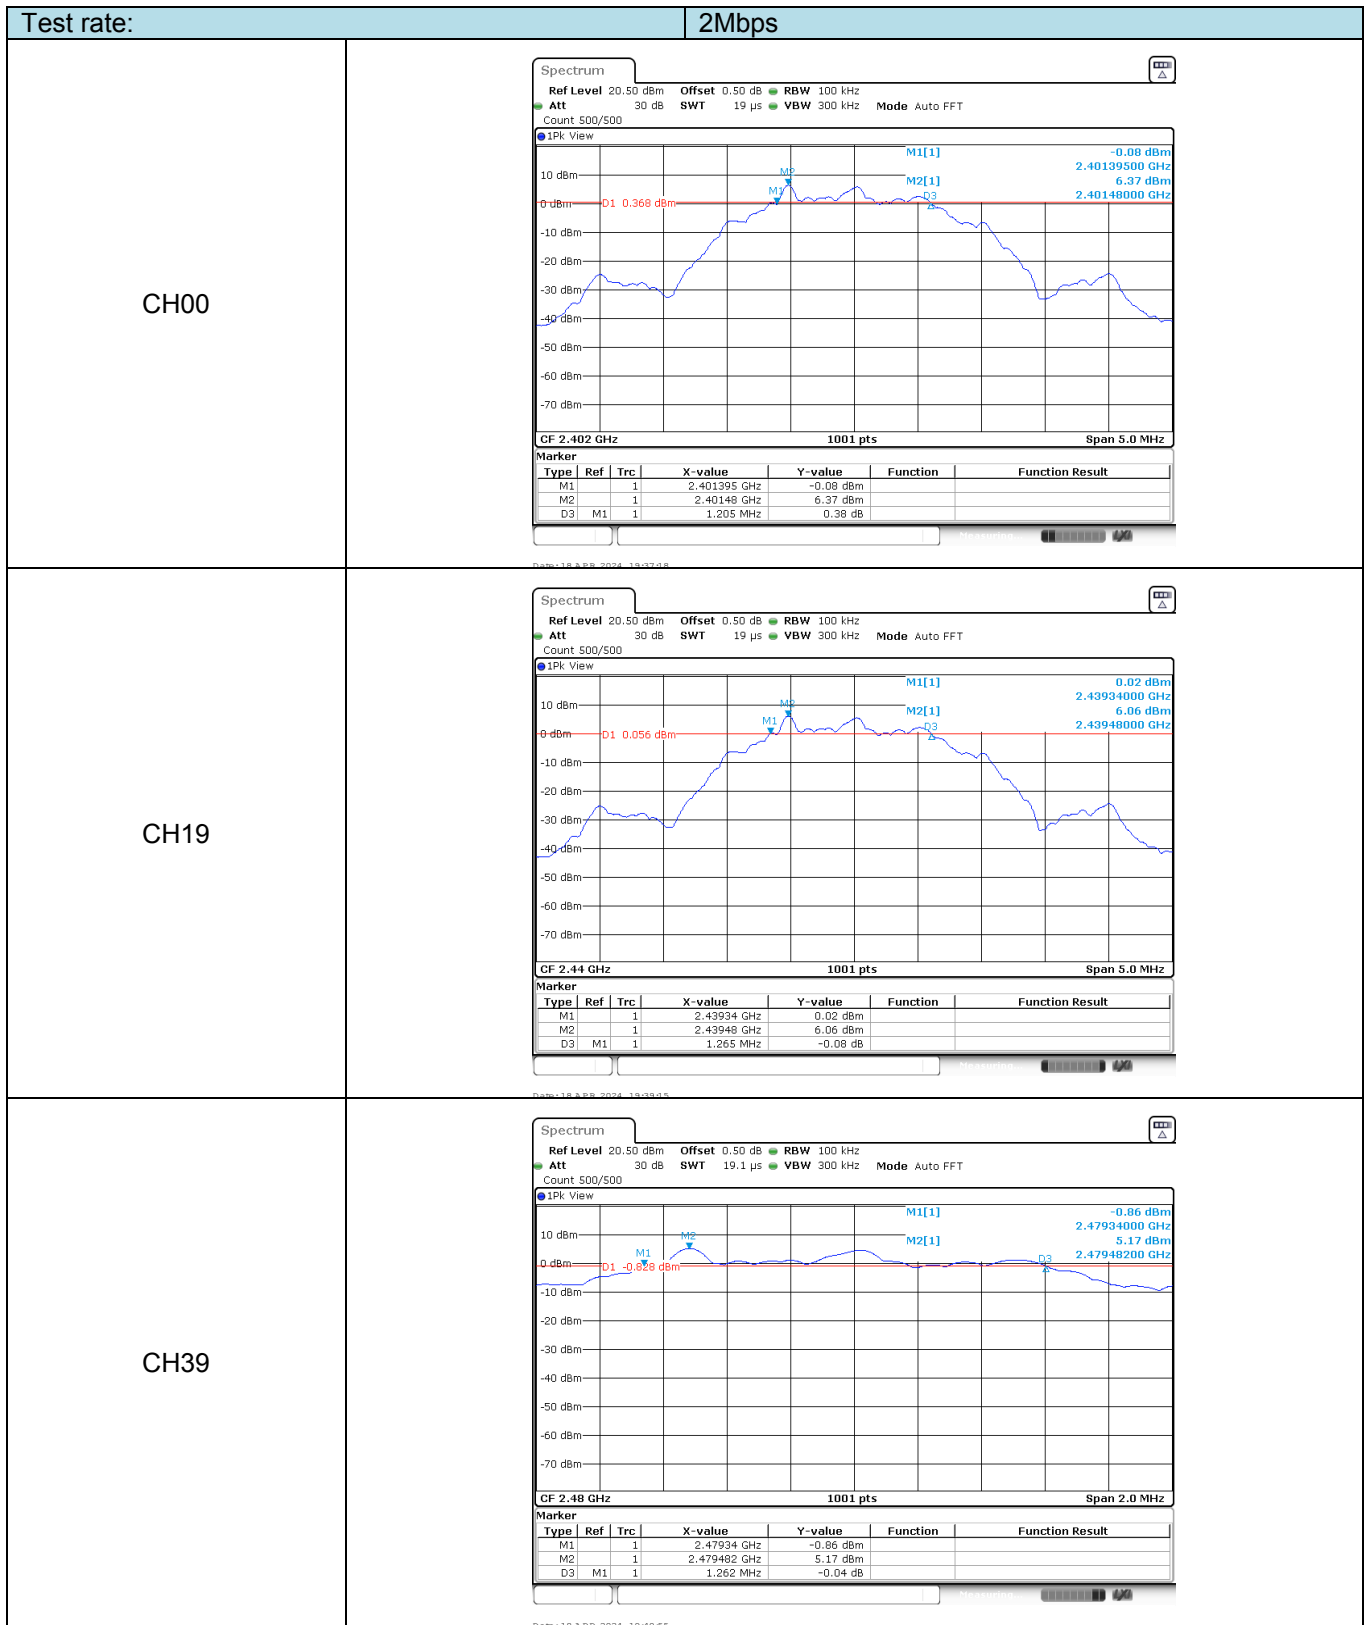



Appendix D: 99% Occupied Bandwidth

Test rate	Channel	99% Occupied Bandwidth(MHz)	Limit (kHz)	Result
1Mbps	00	1.04	-	Pass
	19	1.03		
	39	1.03		
2Mbps	00	2.05	-	Pass
	19	2.05		
	39	2.05		

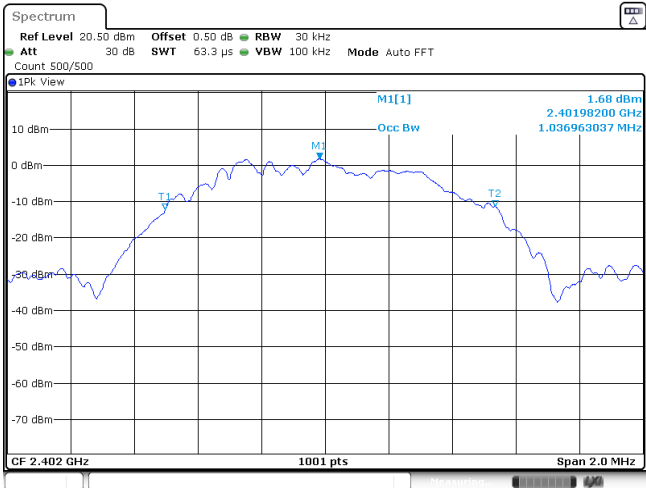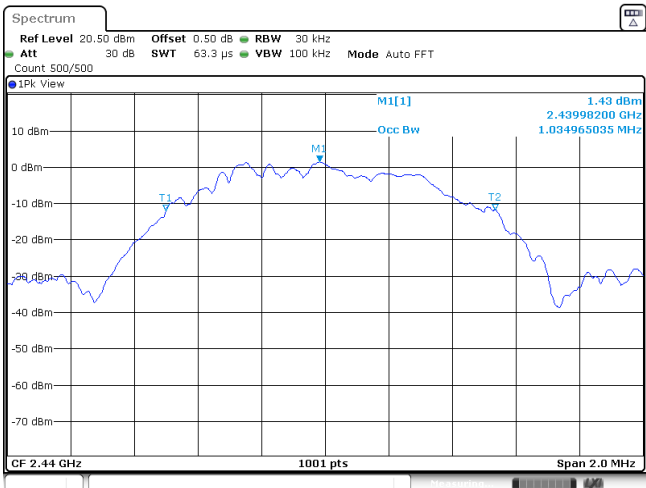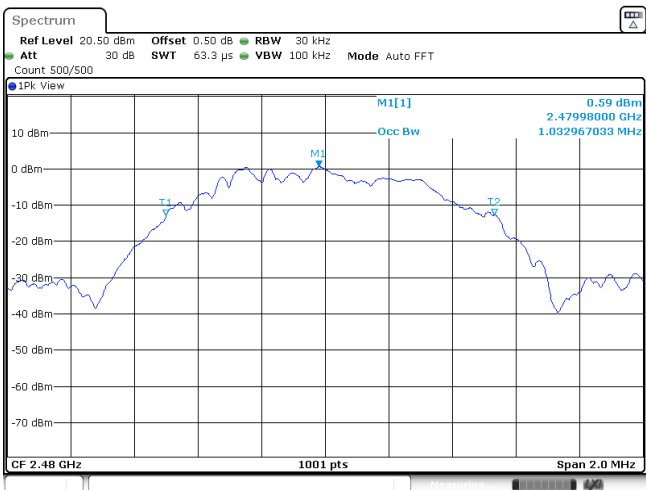Test rate:	1Mbps
CH00	 Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 63.3 μs VBW 100 kHz Mode Auto FFT Count 500/500 1Pk View M1[1] 1.68 dBm 2.40198200 GHz 1.036963037 MHz CF 2.402 GHz 1001 pts Span 2.0 MHz
CH19	 Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 63.3 μs VBW 100 kHz Mode Auto FFT Count 500/500 1Pk View M1[1] 1.43 dBm 2.43998200 GHz 1.034965035 MHz CF 2.44 GHz 1001 pts Span 2.0 MHz
CH39	 Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 63.3 μs VBW 100 kHz Mode Auto FFT Count 500/500 1Pk View M1[1] 0.59 dBm 2.47998000 GHz 1.032957033 MHz CF 2.48 GHz 1001 pts Span 2.0 MHz

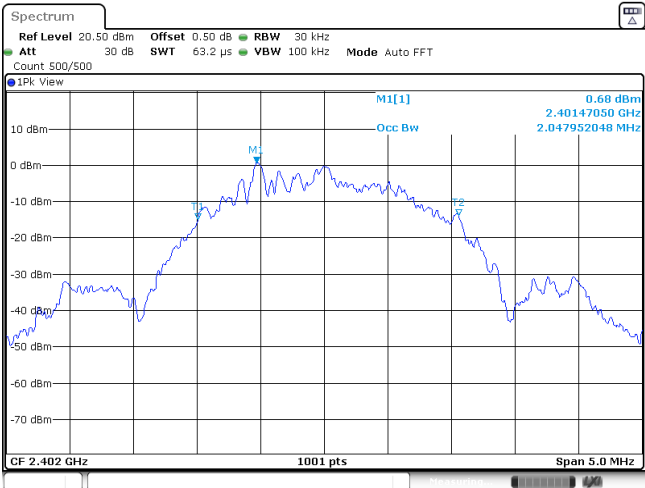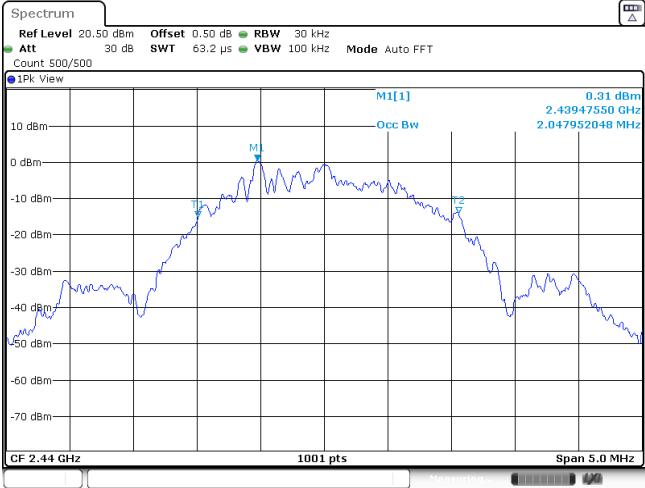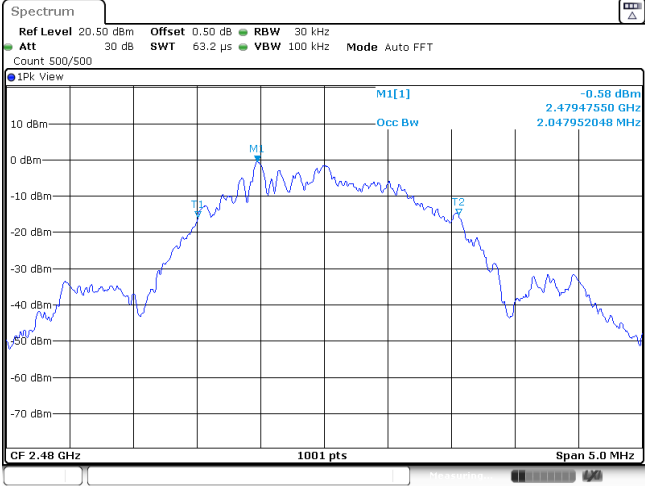
Test rate: 2Mbps	
CH00	 0.68 dBm 2.40147050 GHz 2.047952048 MHz
CH19	 0.31 dBm 2.43947550 GHz 2.047952048 MHz
CH39	 -0.58 dBm 2.47947550 GHz 2.047952048 MHz


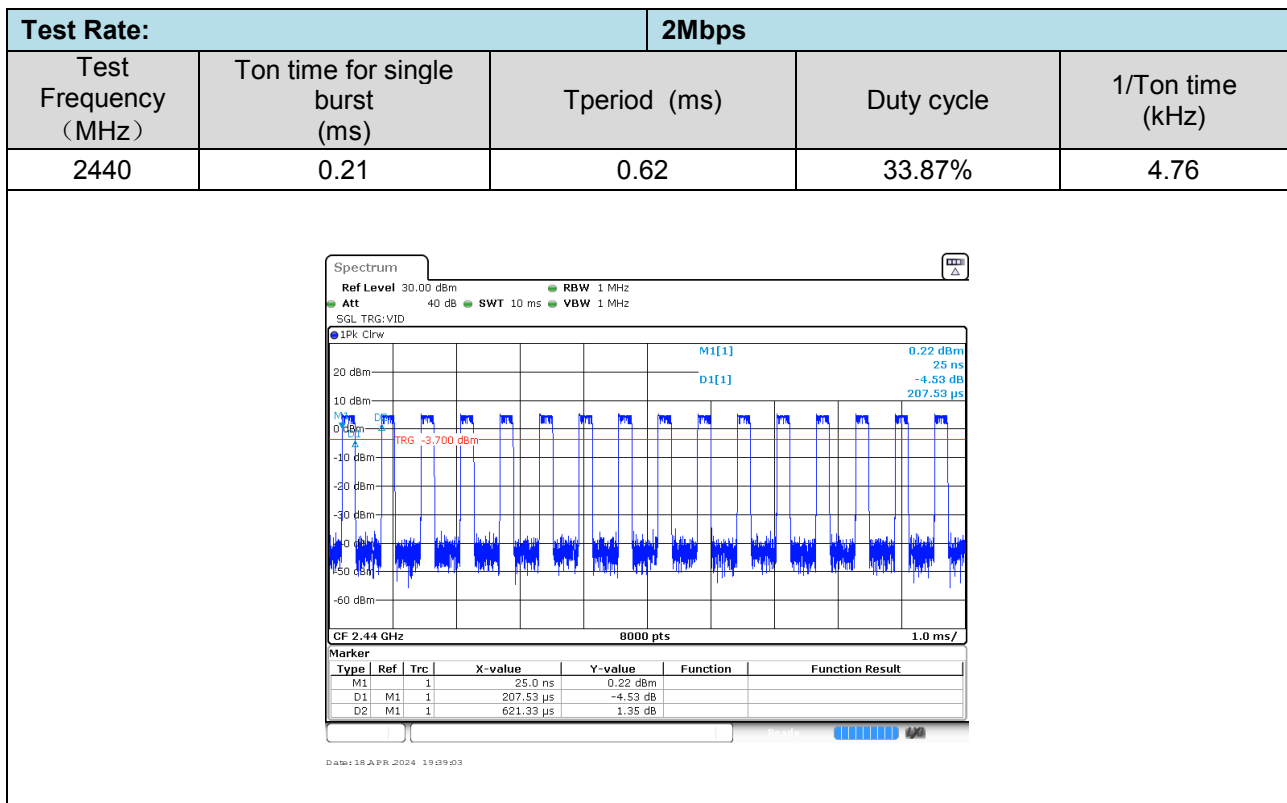
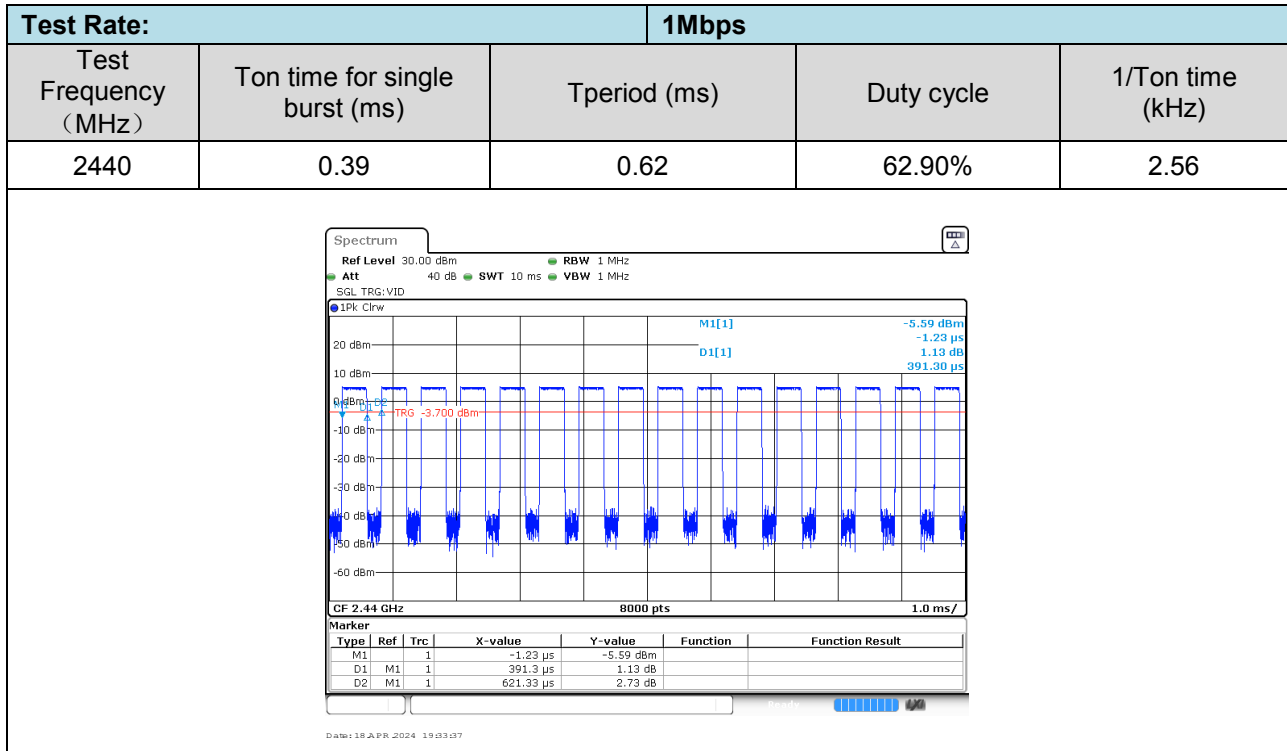
Appendix E: Duty cycle






Appendix F: Band edge and Spurious Emissions (conducted)

Test Item:	Band edge	Test Rate:	1Mbps																																										
CH00	Spectrum Ref Level 10.50 dBm Offset 0.50 dB RBW 100 kHz Att 20 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 300/300 1Pk Max M1[1] 5.74 dBm 2.401770 GHz M2[1] -47.39 dBm 2.400000 GHz M3 -63.15 dBm M4 -65.47 dBm M5 -48.16 dBm D1 -14.290 dBm Start 2.31 GHz 691 pts Stop 2.405 GHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40177 GHz</td><td>5.74 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-47.39 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-63.15 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-65.47 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399906 GHz</td><td>-48.16 dBm</td><td></td><td></td></tr></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40177 GHz	5.74 dBm			M2	1		2.4 GHz	-47.39 dBm			M3	1		2.39 GHz	-63.15 dBm			M4	1		2.31 GHz	-65.47 dBm			M5	1		2.399906 GHz	-48.16 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40177 GHz	5.74 dBm																																									
M2	1		2.4 GHz	-47.39 dBm																																									
M3	1		2.39 GHz	-63.15 dBm																																									
M4	1		2.31 GHz	-65.47 dBm																																									
M5	1		2.399906 GHz	-48.16 dBm																																									
CH39	Spectrum Ref Level 10.50 dBm Offset 0.50 dB RBW 100 kHz Att 20 dB SWT 56.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 1Pk Max M1[1] 5.14 dBm 2.4797350 GHz M2[1] -55.72 dBm 2.4835000 GHz M3 -68.00 dBm M4 -55.70 dBm D1 -14.860 dBm Start 2.478 GHz 691 pts Stop 2.5 GHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.479735 GHz</td><td>5.14 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-55.72 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-68.00 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4835159 GHz</td><td>-55.70 dBm</td><td></td><td></td></tr></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479735 GHz	5.14 dBm			M2	1		2.4835 GHz	-55.72 dBm			M3	1		2.5 GHz	-68.00 dBm			M4	1		2.4835159 GHz	-55.70 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.479735 GHz	5.14 dBm																																									
M2	1		2.4835 GHz	-55.72 dBm																																									
M3	1		2.5 GHz	-68.00 dBm																																									
M4	1		2.4835159 GHz	-55.70 dBm																																									
Test Item:	Band edge	Test Rate:	2Mbps																																										
CH00	Spectrum Ref Level 10.50 dBm Offset 0.50 dB RBW 100 kHz Att 20 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 300/300 1Pk Max M1[1] 5.83 dBm 2.401490 GHz M2[1] -25.50 dBm 2.400000 GHz M3 -63.09 dBm M4 -63.07 dBm M5 -34.94 dBm D1 -14.170 dBm Start 2.31 GHz 691 pts Stop 2.405 GHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40149 GHz</td><td>5.83 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-25.50 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-63.09 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-63.07 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399906 GHz</td><td>-34.94 dBm</td><td></td><td></td></tr></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40149 GHz	5.83 dBm			M2	1		2.4 GHz	-25.50 dBm			M3	1		2.39 GHz	-63.09 dBm			M4	1		2.31 GHz	-63.07 dBm			M5	1		2.399906 GHz	-34.94 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40149 GHz	5.83 dBm																																									
M2	1		2.4 GHz	-25.50 dBm																																									
M3	1		2.39 GHz	-63.09 dBm																																									
M4	1		2.31 GHz	-63.07 dBm																																									
M5	1		2.399906 GHz	-34.94 dBm																																									



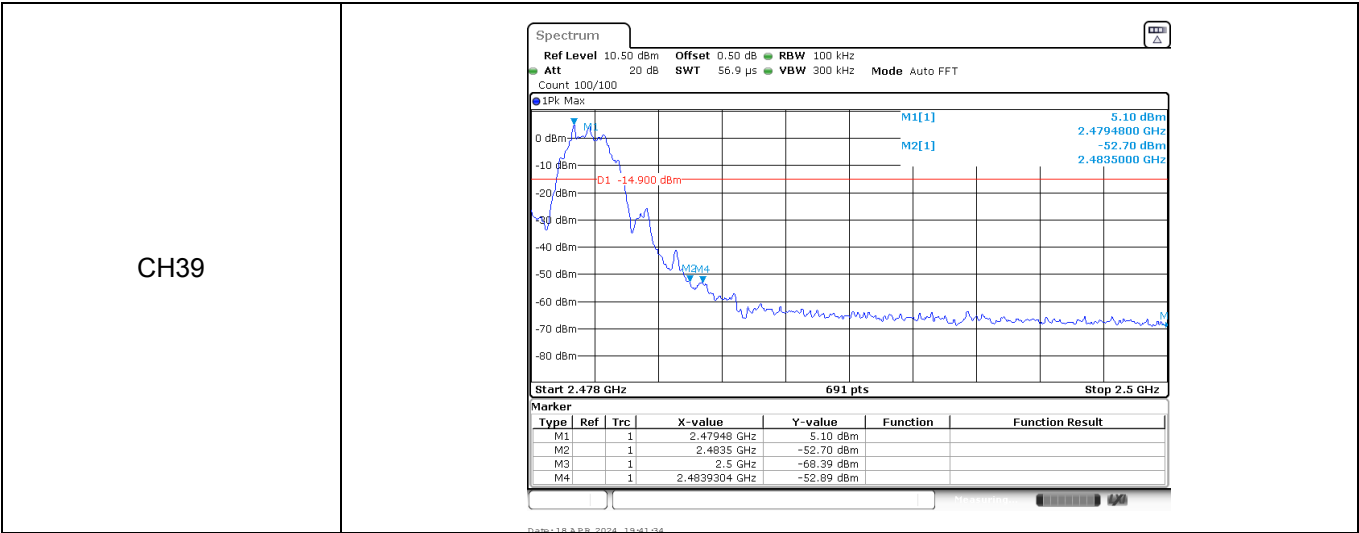


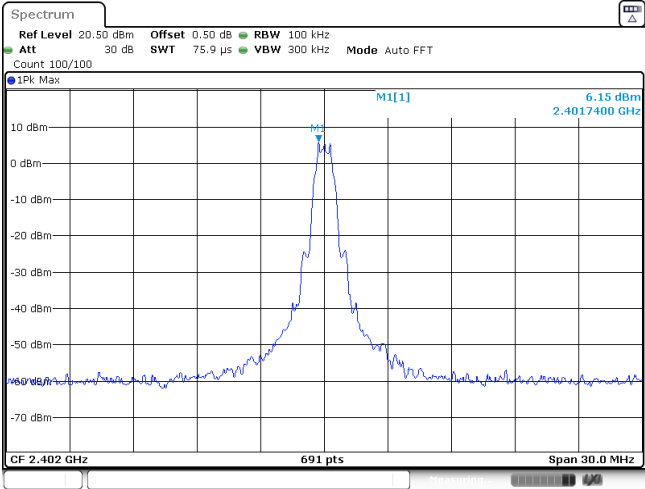
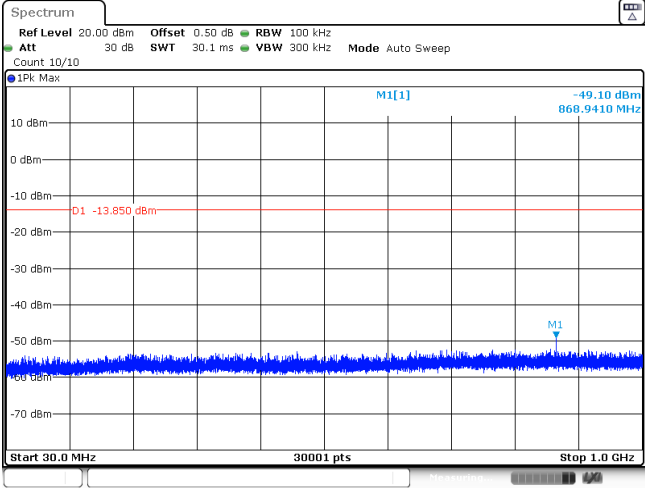
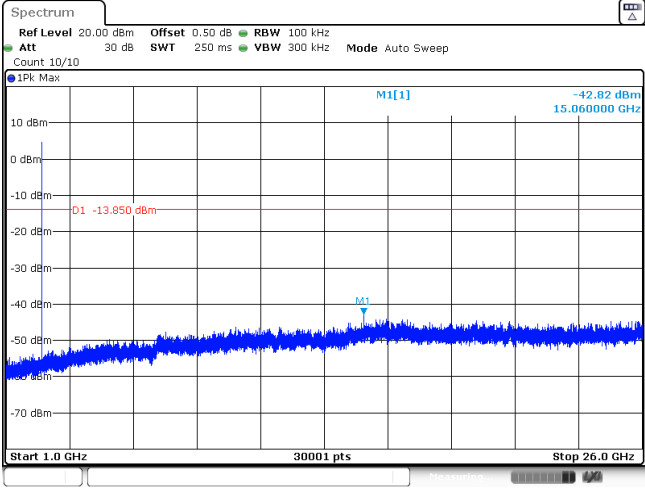
Test Item:	SE	Test Rate:	1Mbps
CH00 Reference level			
CH00 30MHz~1000MHz			
CH00 1GHz~26GHz			

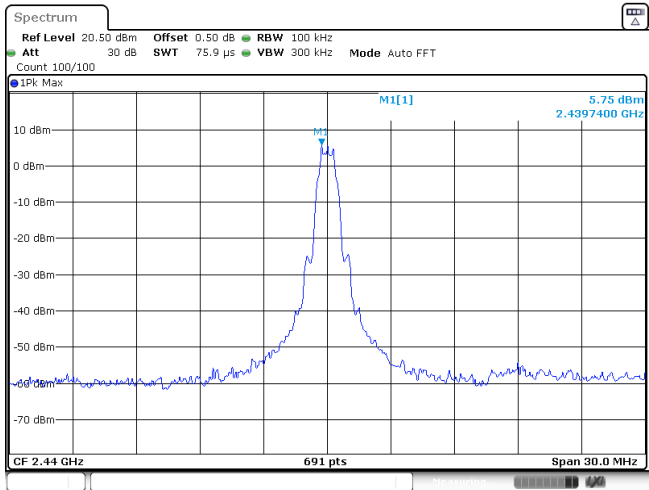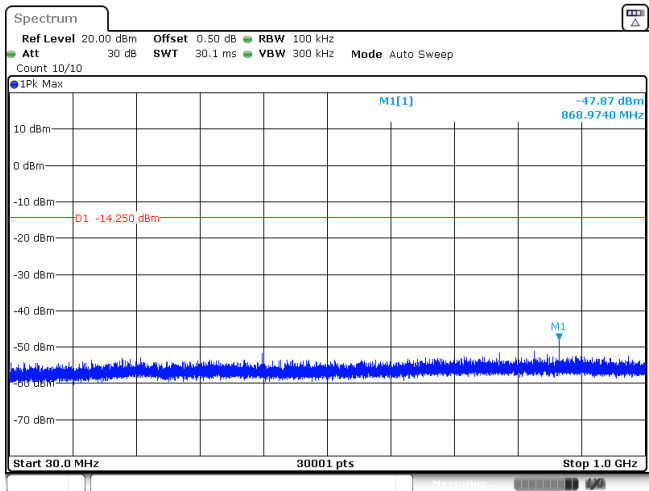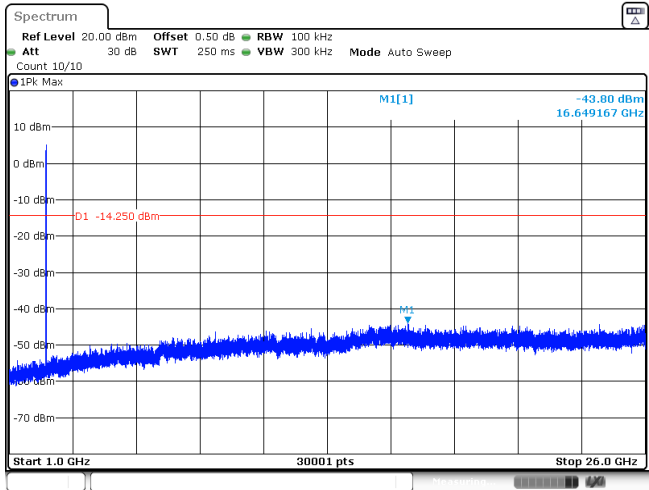CH19 Reference level	 The spectrum plot shows a single sharp peak at 2.4397400 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The peak is labeled M1[1] and has a value of 5.75 dBm. The x-axis is centered at 2.44 GHz with a span of 30.0 MHz. The plot includes parameters: Ref Level 20.50 dBm, Att 30 dB, Offset 0.50 dB, RBW 100 kHz, SWT 75.9 μs, VBW 300 kHz, Mode Auto FFT, Count 100/100, and 691 pts.
CH19 30MHz~1000MHz	 The spectrum plot shows a noise floor across the 30 MHz to 1.0 GHz range. The y-axis ranges from -70 to 10 dBm. A red horizontal line is drawn at -14.250 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 0.50 dB, RBW 100 kHz, SWT 30.1 ms, VBW 300 kHz, Mode Auto Sweep, Count 10/10, and 30001 pts.
CH19 1GHz~26GHz	 The spectrum plot shows a noise floor across the 1.0 GHz to 26.0 GHz range. The y-axis ranges from -70 to 10 dBm. A red horizontal line is drawn at -14.250 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 0.50 dB, RBW 100 kHz, SWT 250 ms, VBW 300 kHz, Mode Auto Sweep, Count 10/10, and 30001 pts.

CH39 Reference level	
CH39 30MHz~1000MHz	
CH39 1GHz~26GHz	

Test Item:	SE	Test Rate:	2Mbps
------------	----	------------	-------

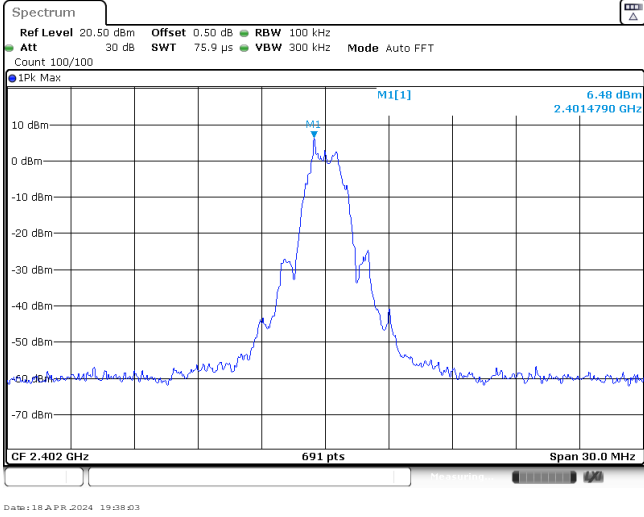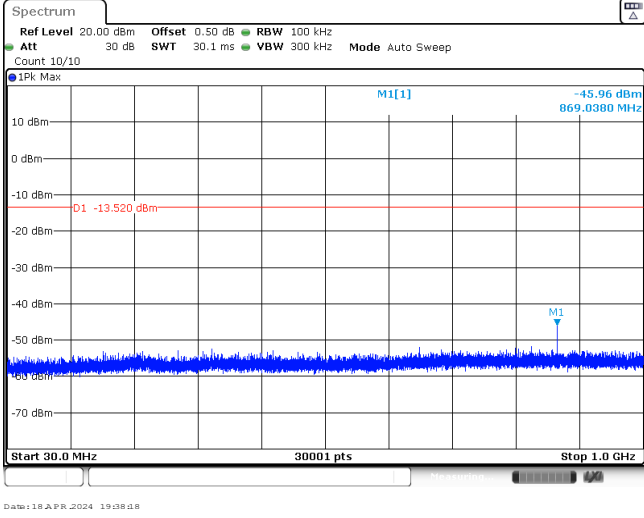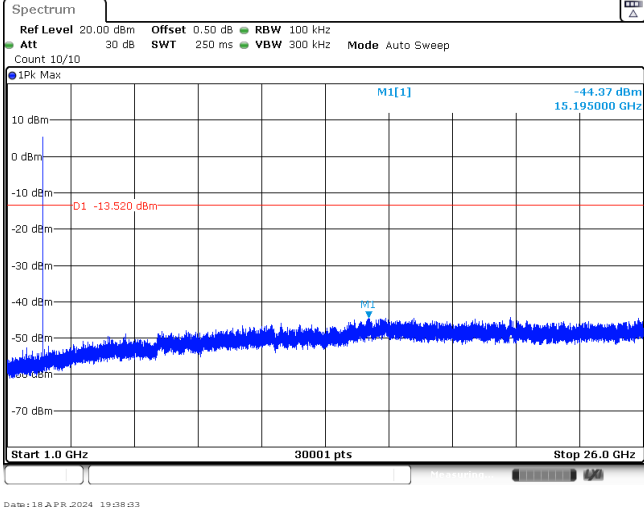CH00 Reference level	
CH00 30MHz~1000MHz	
CH00 1GHz~26GHz	

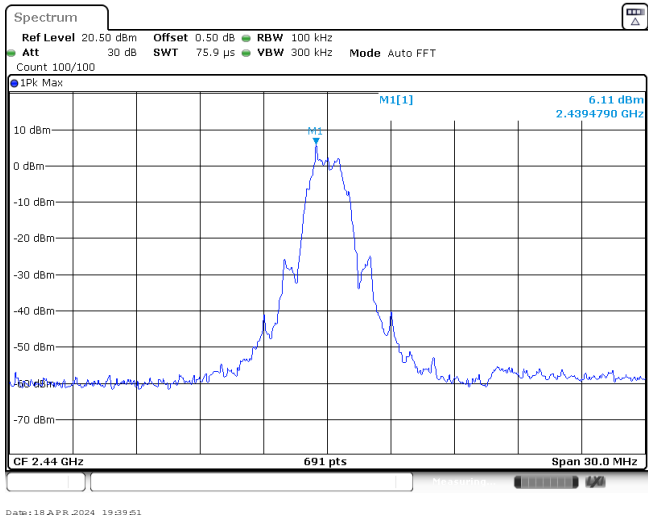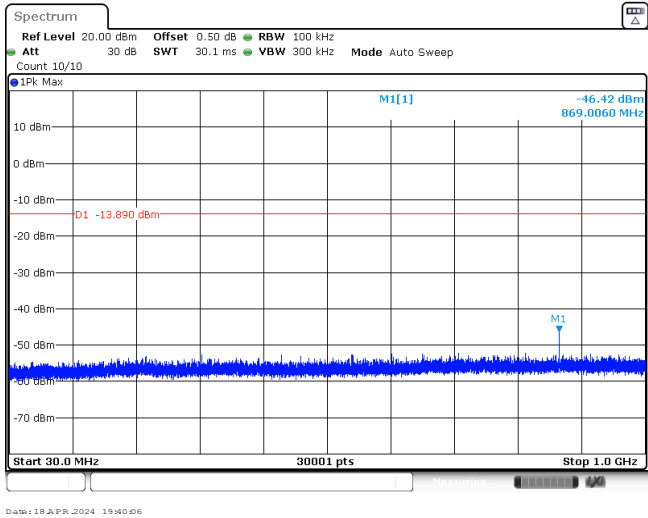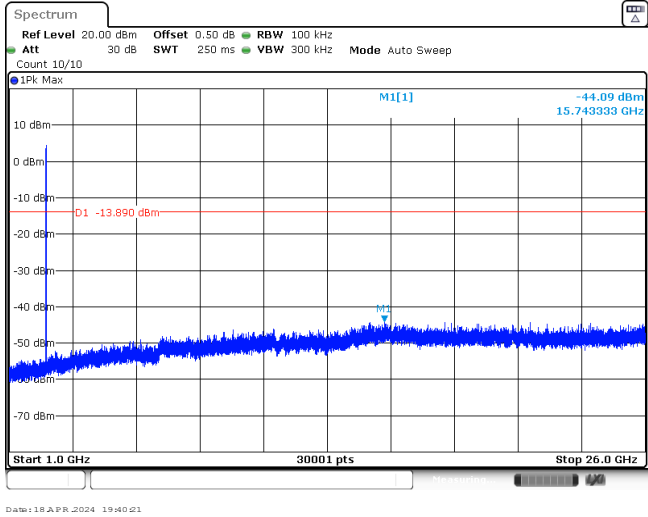CH19 Reference level	
CH19 30MHz~1000MHz	
CH19 1GHz~26GHz	

CH39 Reference level	
CH39 30MHz~1000MHz	
CH39 1GHz~26GHz	

-----End of Report-----