

## TABLE OF CONTENTS LIST

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-800U

### TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.  
PAGE 2.....TECHNICAL DESCRIPTION CONTD. & RF POWER OUTPUT  
PAGE 3.....RF POWER OUTPUT AND MODULATION CHARACTERISTICS  
PAGE 4-5.....OCCUPIED BANDWIDTH  
PAGE 6.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS  
PAGE 7.....FIELD STRENGTH OF SPURIOUS EMISSIONS  
PAGE 8.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 9.....FREQUENCY STABILITY  
PAGE 10-11...TRANSIENT FREQUENCY STABILITY  
PAGE 12.....CERTIFICATION OF TECHNICAL DATA AND  
LIST OF TEST EQUIPMENT

### EXHIBITS CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER  
EXHIBIT 2.....FCC ID LABEL SAMPLE AND SKETCH OF LOCATION  
EXHIBIT 3.....COMPLIANCE STATEMENT FOR EQUIPMENT  
EXHIBIT 4.....LETTER REGARDING FREQUENCY CHANGES  
EXHIBIT 5A-5B....EXTERNAL FRONT VIEW PHOTOGRAPHS  
EXHIBIT 5C-5D....EXTERNAL REAR VIEW PHOTOGRAPHS  
EXHIBIT 5E.....EXTERNAL TOP VIEW PHOTOGRAPH  
EXHIBIT 5F.....INTERNAL COMPONENT SIDE PHOTOGRAPH  
EXHIBIT 5G.....INTERNAL SOLDER SIDE PHOTOGRAPH  
EXHIBIT 6.....BLOCK DIAGRAM  
EXHIBIT 7.....MAIN SCHEMATIC  
EXHIBIT 8.....SW SCHEMATIC  
EXHIBIT 9.....VR SCHEMATIC  
EXHIBIT 10A-10C...PARTS LIST  
EXHIBIT 11A-11D...USER'S MANUAL  
EXHIBIT 12A-12D...CIRCUIT DESCRIPTION  
EXHIBIT 13A-13F...TUNING PROCEDURE  
EXHIBIT 14A.....OCCUPIED BANDWIDTH PLOT - CW - 12.5 kHz CH  
EXHIBIT 14B.....OCCUPIED BANDWIDTH PLOT - 12.5 kHz CH  
EXHIBIT 14C.....OCCUPIED BANDWIDTH PLOT - 25 kHz CH  
EXHIBIT 15A-15B...TRANSIENT FREQUENCY REPOSE - 20dB - 12.5kHz CH  
EXHIBIT 16A-16B...TRANSIENT FREQUENCY REPOSE - 25 kHz CH  
EXHIBIT 17A.....AUDIO FREQUENCY RESPONSE GRAPH - 12.5 kHz CH  
EXHIBIT 17B.....AUDIO FREQUENCY RESPONSE GRAPH - 25 kHz CH  
EXHIBIT 18A.....MODULATION LIMITING - 12.5 kHz CH -300 HZ  
EXHIBIT 18B.....MODULATION LIMITING - 12.5 kHz CH -1000 HZ  
EXHIBIT 18C.....MODULATION LIMITING - 12.5 kHz CH -3000 HZ  
EXHIBIT 18D.....MODULATION LIMITING - 25 kHz CH -300 HZ  
EXHIBIT 18E.....MODULATION LIMITING - 25kHz CH -1000 HZ  
EXHIBIT 18F.....MODULATION LIMITING - 25kHz CH -3000 HZ  
EXHIBIT 19.....AUDIO LOW PASS FILTER GRAPH

DATE: NOVEMBER 5, 1999

REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT

PAGE: TABLE OF CONTENTS

GENERAL INFORMATION REQUIRED  
FOR TYPE ACCEPTANCE

2.983 (a,b,c) YAESU MUSEN CO., LTD. will sell the FCCID: K66VX-800U UHF transceiver in quantity, for use under FCC RULES PART 22, 74, 90, 95, & 90.210.

2.983 (d) TECHNICAL DESCRIPTION

- (1) ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.  
90.209(b)(5)

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 2.5\text{KHz (Peak Deviation)} \\ K &= 1 \\ B_n &= 2(3.0K) + 2(2.5K)(1) = 6.0K + 5.0K = 11.0K \end{aligned}$$

Type of Emission: 11K0F3E

- (2) ALLOWED AUTHORIZED BANDWIDTH = 20.0KHz.  
90.209(b)(5)

$$\begin{aligned} B_n &= 2M + 2DK \\ M &= 3000 \\ D &= 5.0\text{KHz (Peak Deviation)} \\ K &= 1 \\ B_n &= 2(3.0K) + 2(5.0K)(1) = 6.0K + 10.0K = 16.0K \end{aligned}$$

Type of Emission: 16K0F3E

(2) Frequency Range: 450-485 MHz

(3) Power Range and Controls: This UUT has two(2) power ranges, 1.0Watt & 5.0Watt.

(4) Maximum Output Power Rating: 5.0Watts into a 50 ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:

|             |                      |
|-------------|----------------------|
| POWER INPUT | FINAL AMPLIFIER ONLY |
| POWER OUT   | 5.4                  |
| Vce Volts   | 7.2                  |
| Ice Amps    | 1.5                  |
| Pin Watts   | 10.2                 |

(6) Function of each electron tube or semiconductor device or other active circuit device:  
See attached list in Exhibit 10A-10C.

- 2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as PAGES 7-9. The block diagram is included as PAGE 6.
- (8) Instruction book. The instruction manual is included as 11A-11D.
- (9) Tune-up procedure. The tune-up procedure is given in exhibit 13A-13F.
- (10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in 12A-12D.

- 2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.

In addition to the interstage filtering the multi-section low pass filter is described in paragraph 6.3.5 of the instruction manual.

Limiting Modulation:

The transmitter audio limiting circuitry is contained in the loop filter U501, U502, & U503.

Limiting Power: The power is preset at the factory for either high or low. There is no provision for limiting power.

- (12) Digital modulation. This unit does NOT use digital modulation.

- 2.983(e) The data required by 2.985 through 2.997 is submitted below.


- 2.985(a) RF\_power\_output. The test procedure used was TIA/EIA-603 S2.2.1. RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.2V, and the transmitter properly adjusted the RF output measures:

INPUT POWER: (7.2V)(1.5A) = 10.80Watts  
OUTPUT POWER: 5.4 Watts Efficiency: 47%

INPUT POWER(L0): (7.2V)(0.9) = 6.48 Watts  
OUTPUT POWER(L0): 1.3 Watts Efficiency: 20%

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-800U  
DATE: NOVEMBER 5, 1999  
REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT  
PAGE #: 2

2.985(a) RF\_power\_output. The test procedure used was TIA/EIA-603 S2.2.1.

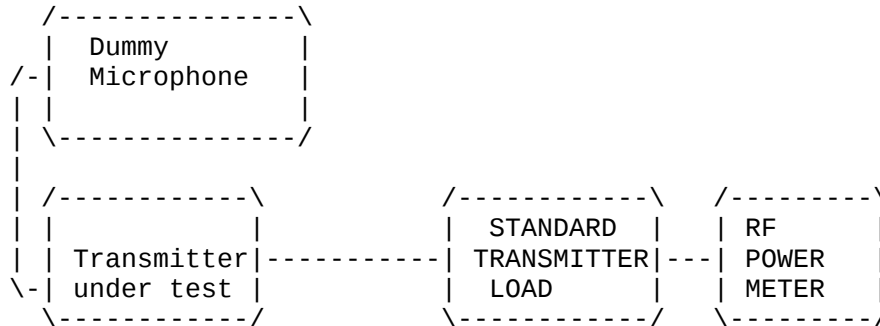


2.987(a) Modulation\_characteristics:

AUDIO\_FREQUENCY\_RESPONSE The audio frequency response was measured in accordance with TIA/EIA Specification TIA/EIA-603 S2.2.6.2.1. The audio frequency response curve is shown in Exhibits 17A-17B.

2.987(b) AUDIO\_LOW\_PASS\_FILTER Transmitters utilizing analog emissions and meets the requirements of paragraph 90.210(b)&(c) therefore no low-pass filter response is included.

2.987(b) AUDIO\_INPUT\_VERSUS\_MODULATION The audio frequency input versus deviation was measured in accordance with TIA/EIA Specification 603 S2.2.6.2.1. with the following exceptions; starting with 1000Hz the input was increased well beyond the deviation changing. This measurement was repeated for the band limits and any frequency deemed appropriate. See Exhibit 18A-18F.

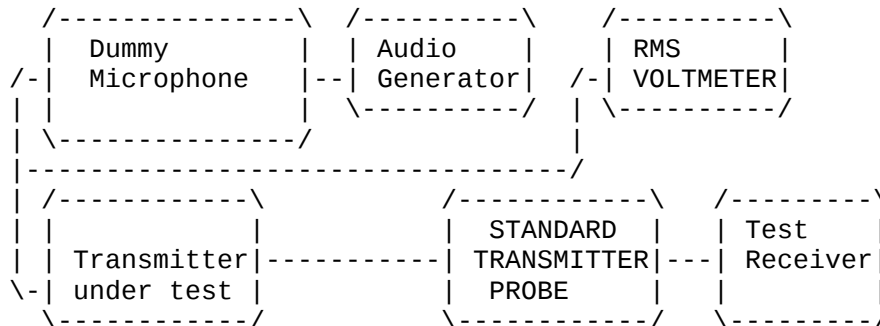

1.The test receiver audio bandwidth was <50Hz to >20,000Hz.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-800U

DATE: NOVEMBER 5, 1999

REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT

PAGE #: 3

2.989(c)            Occupied\_bandwidth:

90.210 (b)

- (1) On any frequency removed from the assigned frequency by more than 50% of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100%, but not more than 250% of the authorized bandwidth: At least 35dB.
- (3) On any frequency removed from the assigned frequency by more than 250% of the authorized bandwidth: At least  $43 + 10 \log(P)$  dB.

90.210 (d) 2


Requirement For 12.5KHz channel bandwidth equipment, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;

- (1) On any frequency from the center of the authorized bandwidth  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 5.625kHz but no more than 12.5kHz: At least  $7.27(f_d - 2.88\text{kHz})\text{dB}$
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdd kHz) of more than 12.5kHz: At least  $50 + 10 \log(P)$  dB or 70dB, whichever is the lesser attenuation.

See Exhibit 14.



2.991 Spurious emissions at antenna terminals(conducted):  
The following data shows the level of conducted spurious responses at the antenna terminal. The test procedure used was TIA/EIA 603 S2.2.13 with the exception that the emissions were recorded in dBc. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental.

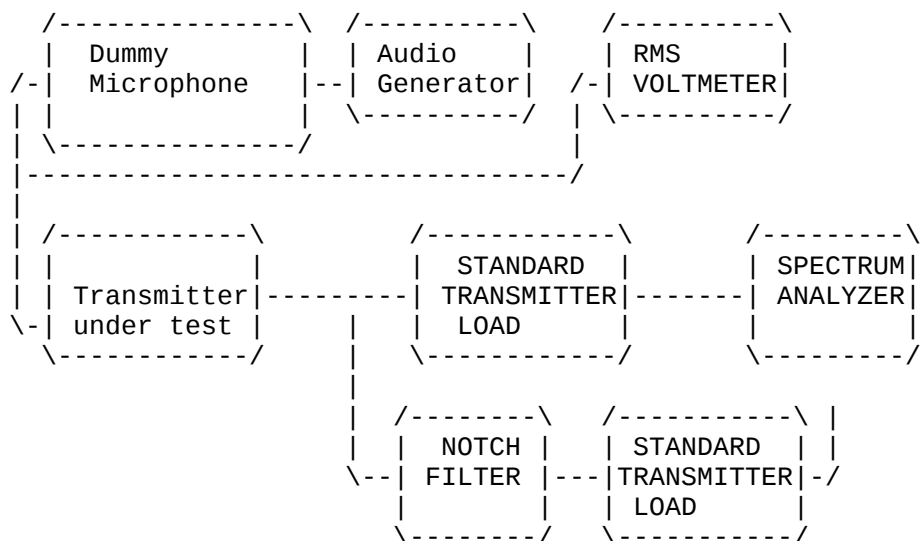

#### Method of Measuring Conducted Spurious Emissions

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.

HIGH POWER  $43 + 10\log(5.4) = 50.3\text{dB}$

LOW POWER At least 70dBc

| EMISSION<br>FREQUENCY<br>MHz | dB BELOW<br>CARRIER |        |
|------------------------------|---------------------|--------|
| 450.00                       | 00.0                | 0.0    |
| 900.00                       | -86.9               | -82.4  |
| 1350.00                      | -97.5               | -89.4  |
| 1800.00                      | -98.2               | -94.5  |
| 2250.00                      | -101.6              | -108.2 |
| 2700.00                      | -102.6              | -104.1 |
| 3150.00                      | -119.5              | -111.5 |
| 3600.00                      | -110.3              | -106.5 |
| 4050.00                      | -115.0              | -104.3 |
| 4500.00                      | -98.9               | -106.5 |

2.993(a)(b) Field strength of spurious emissions:

The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to 4.7 GHz. This test was conducted per ANSI C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference.

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.  
HIGH POWER

$50 + 10\log(5.4) = 57.30$  dB or  
70dBc, whichever is the lessor.

NOTE: FOR THE MARGIN CALCULATION BELOW 70dB WAS USED.

TEST DATA: HIGH POWER

| EMISSION<br>FREQUENCY<br>MHz | METER<br>READING<br>@ 3m dBuV | COAX<br>LOSS<br>dB | ACF<br>dB | FIELD<br>STRENGTH<br>dBuV/m | ATT.<br>LEVEL<br>dB | MARGIN<br>dB | ANT. |
|------------------------------|-------------------------------|--------------------|-----------|-----------------------------|---------------------|--------------|------|
| 484.98                       | 113.50                        | 1.60               | 18.95     | 134.05                      | 0.00                | 0.00         | H    |
| 970.00                       | 34.70                         | 2.90               | 25.10     | 62.70                       | 71.35               | 1.35         | H    |
| 1455.00                      | 19.20                         | 1.00               | 25.82     | 46.02                       | 88.03               | 18.03        | V    |
| 1940.00                      | 19.10                         | 1.02               | 27.76     | 47.88                       | 86.17               | 16.17        | H    |
| 2425.00                      | 5.20                          | 1.09               | 29.06     | 35.36                       | 98.70               | 28.70        | H    |
| 2910.00                      | 23.90                         | 1.17               | 30.27     | 55.34                       | 78.71               | 8.71         | H    |
| 3394.80                      | 8.70                          | 1.24               | 31.49     | 41.43                       | 92.63               | 22.63        | H    |
| 3880.00                      | 0.80                          | 1.31               | 32.70     | 34.81                       | 99.24               | 29.24        | V    |
| 4364.00                      | 1.80                          | 1.38               | 33.41     | 36.59                       | 97.46               | 27.46        | V    |

TEST DATA: LOW POWER

| EMISSION<br>FREQUENCY<br>MHz | METER<br>READING<br>@ 3m dBuV | COAX<br>LOSS<br>dB | ACF<br>dB | FIELD<br>STRENGTH<br>dBuV/m | ATT.<br>LEVEL<br>dB | MARGIN<br>dB | ANT. |
|------------------------------|-------------------------------|--------------------|-----------|-----------------------------|---------------------|--------------|------|
| 484.98                       | 106.70                        | 1.60               | 18.95     | 127.25                      | 0.00                | 0.00         | H    |
| 970.00                       | 25.30                         | 2.90               | 25.10     | 53.30                       | 73.95               | 3.95         | H    |
| 1455.00                      | 28.30                         | 1.00               | 25.82     | 55.12                       | 72.13               | 2.13         | V    |
| 1940.00                      | 14.20                         | 1.02               | 27.76     | 42.98                       | 84.27               | 14.27        | V    |
| 2425.00                      | 5.80                          | 1.09               | 29.06     | 35.96                       | 91.30               | 21.30        | V    |
| 2910.00                      | 22.30                         | 1.17               | 30.27     | 53.74                       | 73.51               | 3.51         | V    |
| 3395.00                      | 8.50                          | 1.24               | 31.49     | 41.23                       | 86.03               | 16.03        | V    |
| 3880.00                      | 0.30                          | 1.31               | 32.70     | 34.31                       | 92.94               | 22.94        | V    |

FCC ID: K66VX-800U

DATE: NOVEMBER 5, 1999


REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT

PAGE #: 7

2.993(a)(b) CONTINUED: Field\_strength\_of\_spurious\_emissions:

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992 with the following exception: the unit was operated into a dipole antenna with the antenna at a height of 1.5 meters in order to establish a reference, then connected to a dummy load. The spectrum was scanned from 30MHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer, an Eaton model 94455-1 Biconical Antenna, a ElectroMetrics antennas models TDA, TDS-25-1, TDS-25-2, RGA-180. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th LANE, GAINESVILLE, FL 32605.

Method of Measuring Radiated Spurious Emissions

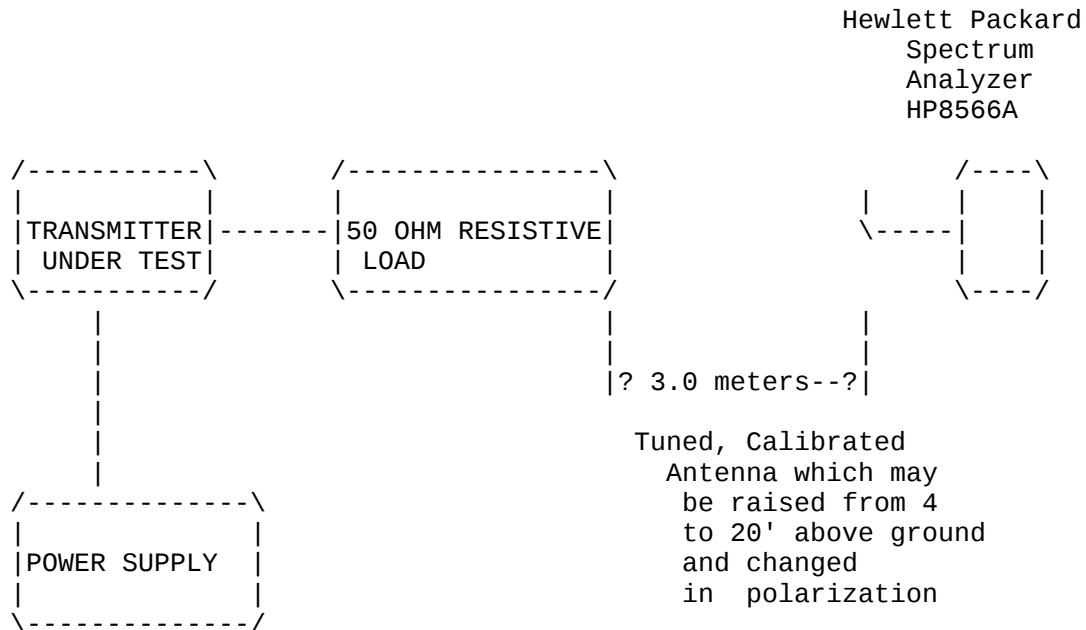

Equipment placed 4' above ground  
on a rotatable platform.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-800U  
DATE: NOVEMBER 5, 1999  
REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT  
PAGE #: 8

2.995(a)(b)(d) Frequency stability:

90.213

Temperature and voltage tests were performed to verify that the frequency remains within the .00025%, 2.5 ppm specification limit. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at plus & minus 15% of the supply voltage of 13.6VDC.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 450.02492 MHz

| TEMPERATURE_C  | FREQUENCY_MHz | PPM   |
|----------------|---------------|-------|
| REFERENCE_____ | 450.024 920   | 00.0  |
| -30_____       | 450.025 100   | +0.04 |
| -20_____       | 450.024 780   | -0.03 |
| -10_____       | 450.024 900   | 00.00 |
| 0_____         | 450.023 950   | -0.22 |
| +10_____       | 450.026 080   | +0.26 |
| +20_____       | 450.025 400   | +0.11 |
| +30_____       | 450.024 560   | -0.08 |
| +40_____       | 450.023 580   | -0.30 |
| +50_____       | 450.024 950   | +0.01 |

-15% Supply Voltage 11.56VDC

+15% Supply Voltage 15.64VDC

+Battery End-point 7.2VDC 450.025 350 +0.10

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was +00.26 to -0.30ppm. The maximum frequency variation over the voltage range was +0.10 ppm.

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-800U

DATE: NOVEMBER 5, 1999

REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT

PAGE #: 9

2.995(a)(b)(d) Frequency stability:

90.214 Transient Frequency Behavior

REQUIREMENTS: In the 450-500MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 25kHz Channels:

| Time Interval | Maximum Frequency | Portable Radios 450-500Mhz |
|---------------|-------------------|----------------------------|
| t1            | +25kHz            | 10.0ms                     |
| t2            | +12.5kHz          | 25.0ms                     |
| t3            | +25.0kHz          | 10.0ms                     |

REQUIREMENTS: In the 450-500MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

| Time Interval | Maximum Frequency | Portable Radios 450-500Mhz |
|---------------|-------------------|----------------------------|
| t1            | +12.5kHz          | 10.0ms                     |
| t2            | +6.25kHz          | 25.0ms                     |
| t3            | +12.5kHz          | 10.0ms                     |

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.


DATE: NOVEMBER 5, 1999

REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT

PAGE #: 10

2.995(a)(b)(d) Frequency\_stability:

90.214 Transient Frequency Behavior  
(Continued)

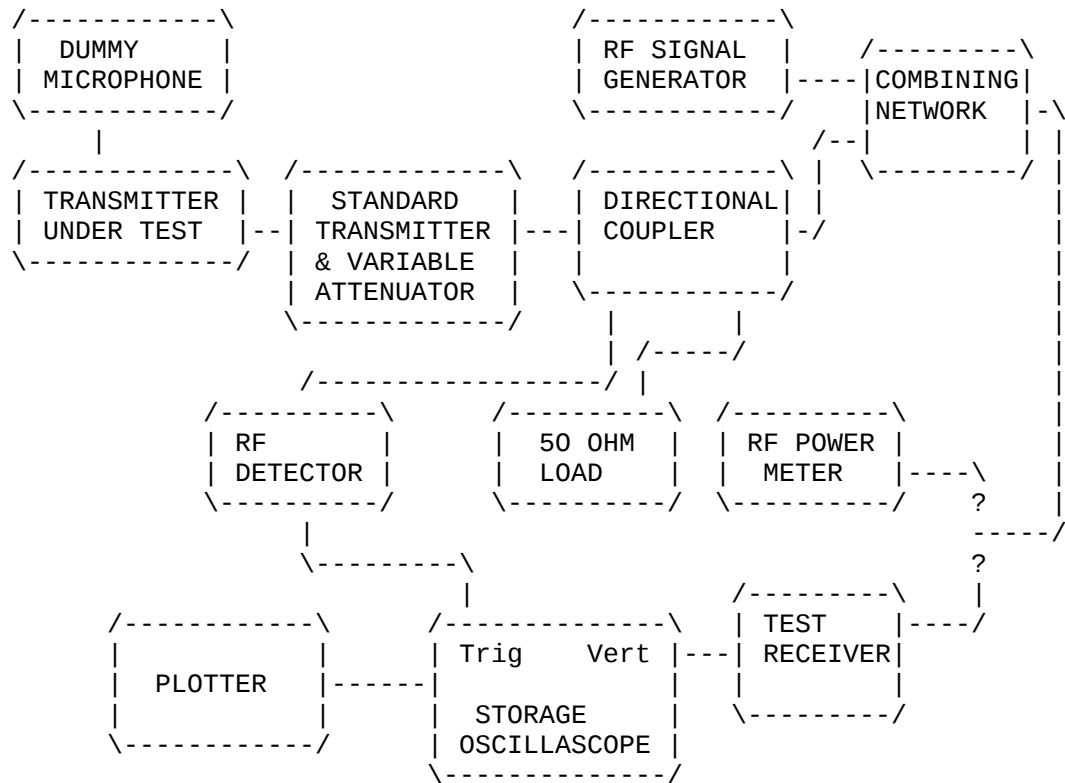

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66VX-800U  
DATE: NOVEMBER 5, 1999  
REPORT #: T:\CUS\Y\YAE\YAE418A9\YAE418A9.RPT  
PAGE #: 11

2.983(f) Photo\_or\_Drawing\_of\_Label:  
See Exhibit 2.

2.983(g) Photos\_of\_Equipment:  
See Exhibits 5A-5G.

2.999 Measurement\_Procedures\_for\_Type\_Acceptance:

Measurement techniques have been in accordance  
with TIA/EIA specifications and the FCC requirements.

2.909 Certification\_of\_Technical\_Data\_by\_Engineers

We, the undersigned, certify that the enclosed  
measurements and enclosed data are true and correct.

S.S. Sanders  
Engineer

#### TEST EQUIPMENT LIST

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/  
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP  
8449B - OPT H02 Cal. 10/17/99
2. Signal Generator, Hewlett Packard 8640B, cal. 9/23/99
3. Signal Generator, HP 8614A Serial No.2015A07428 cal. 5/27/99
3. Eaton Biconnical Antenna Model 94455-1  
20-200 MHz Serial No. 0997 Cal. 9/30/99
4. Electro-Metric Log-Periodic Model No. EM-6950 Ser#632 9/18/99
5. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
6. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 4/27/99
7. Systron Donner Horn 18-26.3GHz Model DBE-520-20 7/14/99
8. Systron Donner Horn 26.5-40.2GHz Model DBD-520-20 7/14/99
9. ATM H0rn 40-60GHz Part #19-443-6R 9/15/99
10. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
11. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal.11/19/98
12. Electro-Metric Line Impedance Stabilization Network Model  
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
13. Special low loss cable was used above 1 GHz
14. Tenney Temperature Chamber
15. AC Voltmeter, HP 400FL, Serial No 2213A14499. Cal. 9/21/99
16. Digital Multimeter, Fluke 8010A/12A, Serial No. 4810047.  
Cal 9/21/99
17. Digital Multimeter, Fluke 77, Serial No. 43850817. Cal 9/21/99
18. Oscilloscope, Tektronix 2230, Serial No. 300572. Cal 9/23/99
19. Frequency Counter, HP 5385A, Serial No. 3242A07460. Cal 10/6/99