

SAR Test Report

Report No.: AGC00793191102FH01

FCC ID : K6MBTMINI

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Bluetooth Headset

BRAND NAME : MIDLAND

MODEL NAME : BTMINI

APPLICANT : CTE International srl

DATE OF ISSUE : Apr. 11,2020


STANDARD(S) : IEEE Std. 1528:2013
FCC 47 CFR Part 2§2.1093:2013
IEEE C95.1TM:2005

REPORT VERSION : V1.1

Attestation of Global Compliance(Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

Report Revise Record

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-----------------|--------------|---------------|--|
| V1.0 | / | Dec. 13,2019 | Invalid | Initial Release |
| V1.1 | 1 st | Apr. 11,2020 | Valid | Added system validation on page 18, The picture on page 46 of 48 of the SAR report have been updated. |




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, ChinaTel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

| Test Report Certification | |
|---------------------------|---|
| Applicant Name | CTE International srl |
| Applicant Address | Via Sevardi 7 – 42124 Reggio Emilia – Italy |
| Manufacturer Name | CTE International srl |
| Manufacturer Address | Via Sevardi 7 – 42124 Reggio Emilia – Italy |
| Factory Name | CTE International srl |
| Factory Address | Via Sevardi 7 – 42124 Reggio Emilia – Italy |
| Product Designation | Bluetooth Headset |
| Brand Name | MIDLAND |
| Model Name | BTMINI |
| Different Description | N/A |
| EUT Voltage | DC3.7V by battery |
| Applicable Standard | IEEE Std. 1528:2013 FCC 47 CFR Part 2§2.1093:2013 IEEE C95.1TM:2005 |
| Test Date | Dec. 05,2019 |
| Report Template | AGCRT-US-Bluetooth/SAR (2018-01-01) |

Note: The results of testing in this report apply to the product/system which was tested only.



Prepared By _____

Thea Huang (Project Engineer) Dec. 05,2019



Reviewed By _____

Angela Li (Reviewer) Oct. 18,2019



Approved By _____

Forrest Lei
(Authorized Officer) Oct. 18,2019



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. SUMMARY OF MAXIMUM SAR VALUE | 5 |
| 2. GENERAL INFORMATION | 6 |
| 2.1. EUT DESCRIPTION | 6 |
| 3. SAR MEASUREMENT SYSTEM | 7 |
| 3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS | 7 |
| 3.2. COMOSAR E-FIELD PROBE | 8 |
| 3.3. ROBOT | 8 |
| 3.4. VIDEO POSITIONING SYSTEM | 9 |
| 3.5. DEVICE HOLDER | 9 |
| 3.6. SAM TWIN PHANTOM | 10 |
| 4. SAR MEASUREMENT PROCEDURE | 11 |
| 4.1. SPECIFIC ABSORPTION RATE (SAR) | 11 |
| 4.2. SAR MEASUREMENT PROCEDURE | 12 |
| 4.3. RF EXPOSURE CONDITIONS | 14 |
| 5. TISSUE SIMULATING LIQUID | 15 |
| 5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID | 15 |
| 5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS | 15 |
| 5.3. TISSUE CALIBRATION RESULT | 16 |
| 6. SAR SYSTEM CHECK PROCEDURE | 17 |
| 6.1. SAR SYSTEM CHECK PROCEDURES | 17 |
| 6.2. SAR SYSTEM CHECK | 18 |
| 7. EUT TEST POSITION | 19 |
| 7.1. BODY WORN POSITION | 19 |
| 8. SAR EXPOSURE LIMITS | 20 |
| 9. TEST FACILITY | 21 |
| 10. TEST EQUIPMENT LIST | 22 |
| 11. MEASUREMENT UNCERTAINTY | 23 |
| 12. CONDUCTED POWER MEASUREMENT | 26 |
| 13. TEST RESULTS | 27 |
| 13.1. SAR TEST RESULTS SUMMARY | 27 |
| APPENDIX A. SAR SYSTEM CHECK DATA | 30 |
| APPENDIX B. SAR MEASUREMENT DATA | 32 |
| APPENDIX C. TEST SETUP PHOTOGRAPHS | 46 |
| APPENDIX D. CALIBRATION DATA | 48 |



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

| Frequency Band | Highest Reported 1g-SAR(W/Kg) | Highest Reported 10g- Extremity SAR(W/Kg) | SAR Test Result |
|------------------------------|-------------------------------|---|-----------------|
| Bluetooth | 1.337 | 0.710 | PASS |
| SAR Test Limit (W/Kg) | 1.6 | 4.0 | |

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/Kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2005 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

2. GENERAL INFORMATION

2.1. EUT Description

| General Information | |
|-------------------------|-----------------------------|
| Product Designation | Bluetooth Headset |
| Test Model | BTMINI |
| Hardware Version | Rev:V2 |
| Software Version | Rev:02 |
| Device Category | Portable |
| RF Exposure Environment | Uncontrolled |
| Antenna Type | Internal |
| Bluetooth | |
| Operation Frequency | 2402~2480MHz |
| Antenna Gain | 0dBi |
| Bluetooth Version | V3.0 |
| Type of modulation | BR :GFSK |
| Peak Output Power | 12.487dBm(Max) |
| Power Supply | DC3.7V, 400mAh (by battery) |

Note:

1. The sample used for testing is end product.
2. The test sample has no any deviation to the test method of standard mentioned in page 1

| Product | Type |
|---------|--|
| | <input checked="" type="checkbox"/> Production unit <input type="checkbox"/> Identical Prototype |




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

3. SAR MEASUREMENT SYSTEM

3.1. The SATIMO system used for performing compliance tests consists of following items

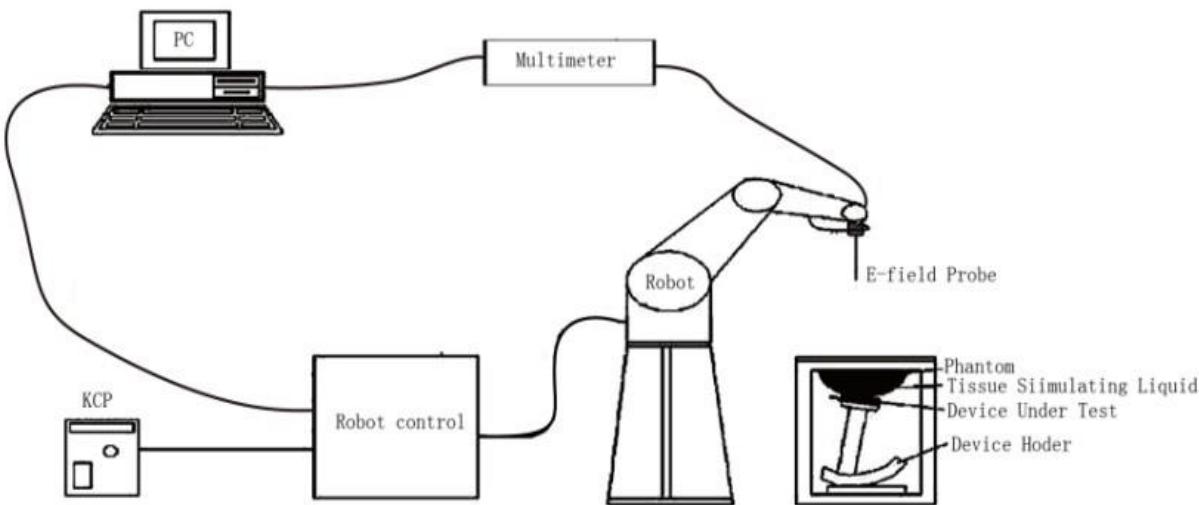

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

| | |
|---------------------------|--|
| Model | SSE5 |
| Manufacture | MVG |
| Identification No. | SN 03/18 EP327 |
| Frequency | 0.15GHz-3GHz Linearity: ± 0.09 dB(150MHz-3GHz) |
| Dynamic Range | 0.01W/Kg-100W/Kg Linearity: ± 0.09 dB |
| Dimensions | Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm |
| Application | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 3 GHz with precision of better 30%. |

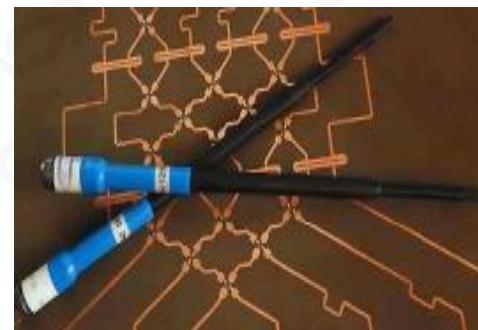

3.3. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller




Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

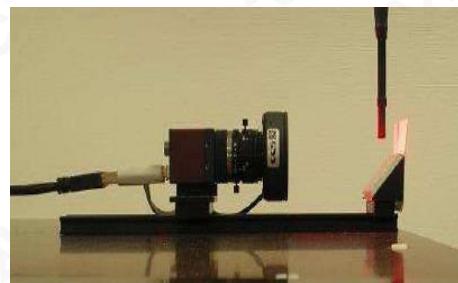


3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity

$\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

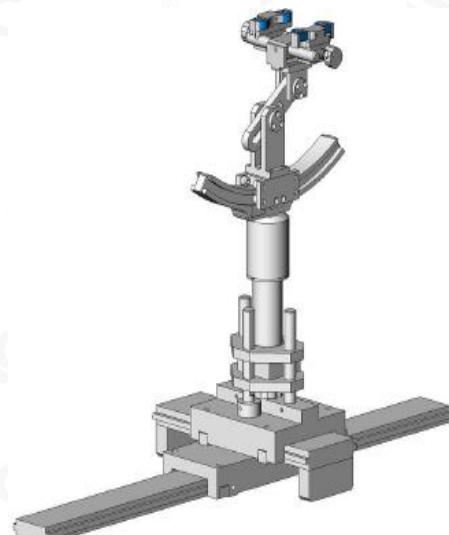

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR is the specific absorption rate in watts per kilogram;
E is the r.m.s. value of the electric field strength in the tissue in volts per meter;
 σ is the conductivity of the tissue in siemens per metre;
 ρ is the density of the tissue in kilograms per cubic metre;
 c_h is the heat capacity of the tissue in joules per kilogram and Kelvin;

$\frac{dT}{dt} \mid t=0$ is the initial time derivative of temperature in the tissue in kelvins per second



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

4.2. SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties,

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in SATIMO software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

| | ≤ 3 GHz | > 3 GHz |
|--|--|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | $30^\circ \pm 1^\circ$ | $20^\circ \pm 1^\circ$ |
| | ≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm | $3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm |
| Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area} | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz

| | | | |
|---|---|--|---|
| Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom} | | ≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm* | $3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm* |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ graded grid | ≤ 5 mm | $3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface $\Delta z_{Zoom}(n>1)$: between subsequent points | ≤ 4 mm $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | $3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. | | | |
| * When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | |

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118


4.3. RF Exposure Conditions

Test Configuration and setting:

The device is a bluetooth headset, and supports Bluetooth wireless technology.

For SAR testing, the device was controlled by software to test at reference fixed frequency points.

12.1.2. Antenna Location: (back view)

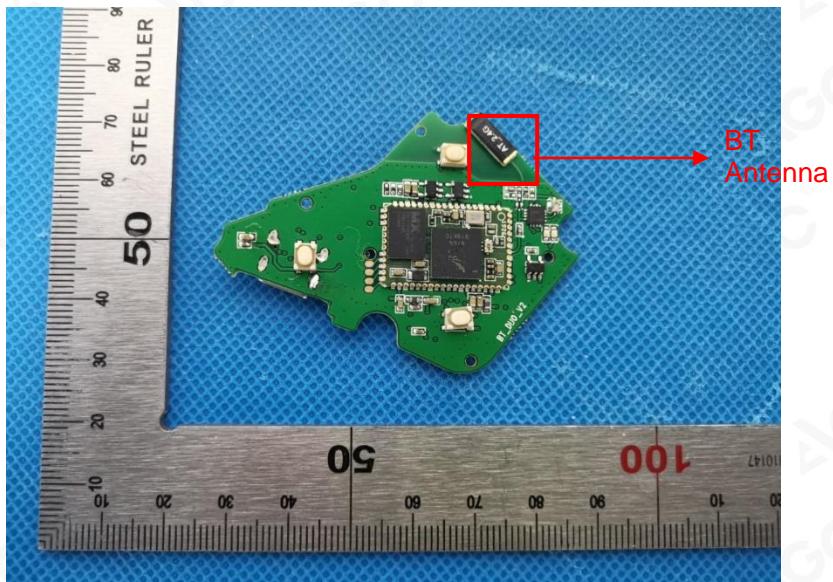

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

5.1. The composition of the tissue simulating liquid

| Ingredient (% Weight) | Water | NaCl | Polysorbate 20 | DGBE | 1,2 Propanediol | Triton X-100 |
|--------------------------|-------|------|----------------|------|--------------------|-----------------|
| Frequency (MHz) | | | | | | |
| 2450 Head | 71.88 | 0.16 | 0.0 | 7.99 | 0.0 | 19.97 |

5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in IEEE 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in IEEE 1528.

| Target Frequency (MHz) | head | | body | |
|---------------------------|--------------|----------------|--------------|----------------|
| | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) |
| 300 | 45.3 | 0.87 | 58.2 | 0.92 |
| 450 | 43.5 | 0.87 | 56.7 | 0.94 |
| 835 | 41.5 | 0.90 | 55.2 | 0.97 |
| 900 | 41.5 | 0.97 | 55.0 | 1.05 |
| 915 | 41.5 | 1.01 | 55.0 | 1.06 |
| 1450 | 40.5 | 1.20 | 54.0 | 1.30 |
| 1610 | 40.3 | 1.29 | 53.8 | 1.40 |
| 1800 – 2000 | 40.0 | 1.40 | 53.3 | 1.52 |
| 2450 | 39.2 | 1.80 | 52.7 | 1.95 |
| 3000 | 38.5 | 2.40 | 52.0 | 2.73 |

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

| Tissue Stimulant Measurement for 2450MHz | | | | | |
|--|--------------|-------------------------------------|-------------------------------|------------------------|--------------|
| Head | Fr. (MHz) | Dielectric Parameters ($\pm 5\%$) | | Tissue Temp [°C] | Test time |
| | | ϵ_r 39.2(37.24-41.16) | δ [s/m]1.80(1.71-1.89) | | |
| | 2402 | 40.95 | 1.75 | 20.3 | Dec. 05,2019 |
| | 2441 | 40.61 | 1.77 | | |
| | 2450 | 40.35 | 1.78 | | |
| | 2480 | 40.06 | 1.78 | | |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118


6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

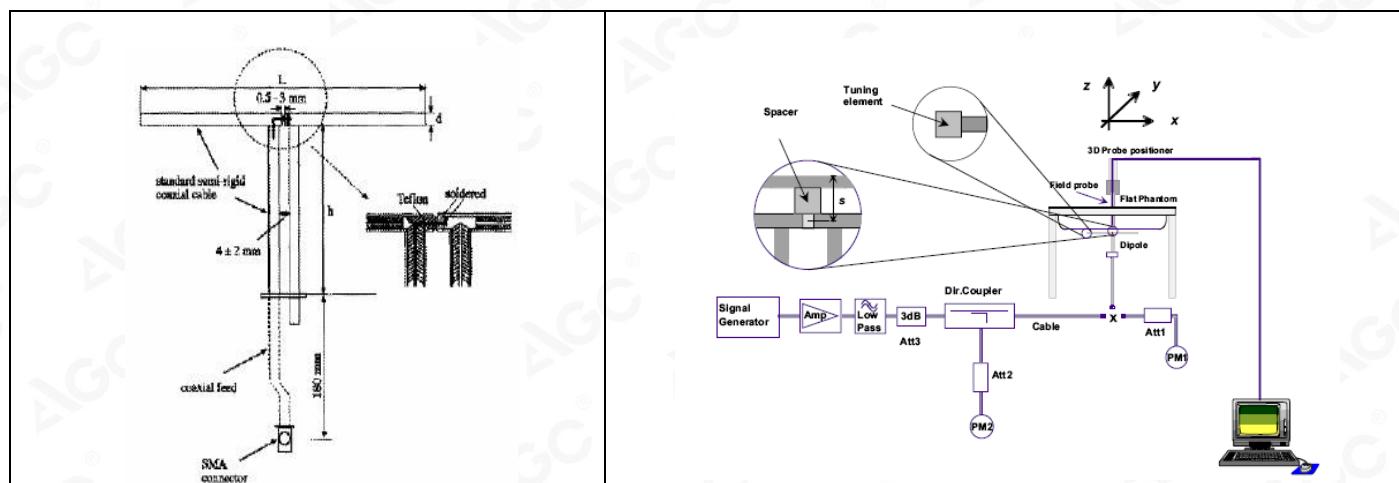


Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

6.2. SAR System Check

6.2.1. Dipoles
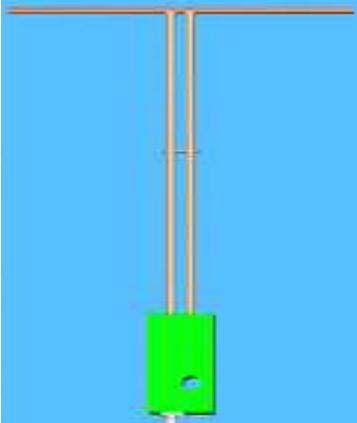
| | |
|---|--|
|  | <p>The dipole used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. the table below provides details for the mechanical and electrical Specifications for the dipoles.</p> |
|---|--|

| Frequency | L (mm) | h (mm) | d (mm) |
|-----------|--------|--------|--------|
| 2450MHz | 51.5 | 30.4 | 3.6 |

6.2.2. System Check Result

| System Performance Check at 2450MHz for Head | | | | | | | | |
|--|--------------------|-------|---------------------------------|---------------|--------------------|-------|-------------------|--------------|
| Validation Kit: SN 46/11 DIP 2G450-189 | | | | | | | | |
| Frequency [MHz] | Target Value(W/Kg) | | Reference Result ($\pm 10\%$) | | Tested Value(W/Kg) | | Tissue Temp. [°C] | Test time |
| | 1g | 10g | 1g | 10g | 1g | 10g | | |
| 2450 | 53.97 | 24.01 | 48.573-59.367 | 21.609-26.411 | 49.44 | 22.96 | 20.3 | Dec. 05,2019 |

Note:

- (1) We use a CW signal of 18dBm for system check, and then all SAR values are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.

6.2.3. System validation

| Test Data | Probe S/N | Tested Freq. (MHz) | Tissue Type | Cond. | Perm | CW validation | | | Mod. validation | | |
|------------|----------------|--------------------|-------------|-------|-------|---------------|-----------------|----------------|-----------------|-------------|-----------------------------|
| | | | | | | Sensitivity | Probe Linearity | Probe Isotropy | Mod. Type | Duty Factor | Peak to average power ratio |
| 03/05/2019 | SN 03/18 EP327 | 2450 | head | 1.77 | 38.70 | PASS | PASS | PASS | OFDM | N/A | PASS |
| 03/01/2019 | SN 03/18 EP327 | 2450 | head | 1.82 | 39.10 | PASS | PASS | PASS | DSSS | PASS | N/A |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

7. EUT TEST POSITION

This EUT was tested in **Head SAR Back, Head SAR Front**.

7.1. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **0mm**.

The SAR test procedure has been defined by FCC via KDB.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

| Type Exposure | Uncontrolled Environment Limit (W/kg) |
|---|---------------------------------------|
| Spatial Peak SAR (1g cube tissue for brain or body) | 1.60 |
| Spatial Average SAR (Whole body) | 0.08 |
| Spatial Peak SAR (Limbs) | 4.0 |



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

9. TEST FACILITY

| | |
|--|--|
| Test Site | Attestation of Global Compliance (Shenzhen) Co., Ltd |
| Location | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Designation Number | CN1259 |
| FCC Test Firm Registration Number | 975832 |
| A2LA Cert. No. | 5054.02 |
| Description | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

10. TEST EQUIPMENT LIST

| Equipment description | Manufacturer/ Model | Identification No. | Current calibration date | Next calibration date |
|-----------------------|-------------------------|------------------------|-----------------------------|-----------------------------|
| SAR Probe | MVG | SN 03/18 EP327 | Dec. 17,2018 | Dec. 16,2019 |
| Phantom | SATIMO | SN_4511_SAM90 | Validated. No cal required. | Validated. No cal required. |
| Liquid | SATIMO | - | Validated. No cal required. | Validated. No cal required. |
| Multimeter | Keithley 2000 | 4114939 | Sep. 09,2019 | Sep. 08,2020 |
| Dipole | SATIMO SID2450 | SN 46/11 DIP 2G450-189 | Apr. 26,2019 | Apr. 25,2022 |
| Signal Generator | Agilent-E4438C | US41461365 | Oct. 08,2019 | Oct. 07,2020 |
| Vector Analyzer | Agilent / E4440A | US41421290 | Feb. 27,2019 | Feb. 26,2020 |
| Network Analyzer | Rhode & Schwarz ZVL6 | SN 101443 | Oct. 08,2019 | Oct. 07,2020 |
| Attenuator | Warison /WATT-6SR1211 | S/N:WRJ34AYM2F 1 | June 11,2019 | June 10, 2020 |
| Attenuator | Mini-circuits / VAT-10+ | 31405 | June 11,2019 | June 10, 2020 |
| Amplifier | EM30180 | SN060552 | Feb. 27,2019 | Feb. 26,2020 |
| Directional Couple | Werlatone/ C5571-10 | SN99463 | Jun. 12,2019 | Jun. 11,2020 |
| Directional Couple | Werlatone/ C6026-10 | SN99482 | Jun. 12,2019 | Jun. 11,2020 |
| Power Sensor | NRP-Z21 | 1137.6000.02 | Sep. 09,2019 | Sep. 08,2020 |
| Power Sensor | NRP-Z23 | US38261498 | Feb. 19,2019 | Feb. 18,2020 |
| Power Viewer | R&S | V2.3.1.0 | N/A | N/A |

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

11. MEASUREMENT UNCERTAINTY

| SATIMO Uncertainty- SN 03/18 EP327 Measurement uncertainty for DUT averaged over 1 gram / 10 gram. | | | | | | | | | |
|---|-------|--------------|----------------|------------|--------------|--------------|----------------|-----------------|----------|
| Uncertainty Component | Sec. | Tol (+-%) | Prob. Dist. | Div. | Ci (1g) | Ci (10g) | 1g Ui (+-%) | 10g Ui (+-%) | vi |
| Measurement System | | | | | | | | | |
| Probe calibration | E.2.1 | 5.831 | N | 1 | 1 | 1 | 5.831 | 5.831 | ∞ |
| Axial Isotropy | E.2.2 | 0.460 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 0.188 | 0.188 | ∞ |
| Hemispherical Isotropy | E.2.2 | 0.915 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 0.374 | 0.374 | ∞ |
| Boundary effect | E.2.3 | 1.000 | R | $\sqrt{3}$ | 1 | 1 | 0.577 | 0.577 | ∞ |
| Linearity | E.2.4 | 0.975 | R | $\sqrt{3}$ | 1 | 1 | 0.563 | 0.563 | ∞ |
| System detection limits | E.2.4 | 1.000 | R | $\sqrt{3}$ | 1 | 1 | 0.577 | 0.577 | ∞ |
| Modulation response | E.2.5 | 3.000 | R | $\sqrt{3}$ | 1 | 1 | 1.732 | 1.732 | ∞ |
| Readout Electronics | E.2.6 | 0.021 | N | 1 | 1 | 1 | 0.021 | 0.021 | ∞ |
| Response Time | E.2.7 | 0.000 | R | $\sqrt{3}$ | 1 | 1 | 0.000 | 0.000 | ∞ |
| Integration Time | E.2.8 | 1.400 | R | $\sqrt{3}$ | 1 | 1 | 0.808 | 0.808 | ∞ |
| RF ambient conditions-Noise | E.6.1 | 3.000 | R | $\sqrt{3}$ | 1 | 1 | 1.732 | 1.732 | ∞ |
| RF ambient conditions-reflections | E.6.1 | 3.000 | R | $\sqrt{3}$ | 1 | 1 | 1.732 | 1.732 | ∞ |
| Probe positioner mechanical tolerance | E.6.2 | 1.400 | R | $\sqrt{3}$ | 1 | 1 | 0.808 | 0.808 | ∞ |
| Probe positioning with respect to phantom shell | E.6.3 | 1.400 | R | $\sqrt{3}$ | 1 | 1 | 0.808 | 0.808 | ∞ |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | E.5 | 2.300 | R | $\sqrt{3}$ | 1 | 1 | 1.328 | 1.328 | ∞ |
| Test sample Related | | | | | | | | | |
| Test sample positioning | E.4.2 | 2.6 | N | 1 | 1 | 1 | 2.600 | 2.600 | ∞ |
| Device holder uncertainty | E.4.1 | 3 | N | 1 | 1 | 1 | 3.000 | 3.000 | ∞ |
| Output power variation—SAR drift measurement | E.2.9 | 5 | R | $\sqrt{3}$ | 1 | 1 | 2.887 | 2.887 | ∞ |
| SAR scaling | E.6.5 | 5 | R | $\sqrt{3}$ | 1 | 1 | 2.887 | 2.887 | ∞ |
| Phantom and tissue parameters | | | | | | | | | |
| Phantom shell uncertainty—shape, thickness, and permittivity | E.3.1 | 4 | R | $\sqrt{3}$ | 1 | 1 | 2.309 | 2.309 | ∞ |
| Uncertainty in SAR correction for deviations in permittivity and conductivity | E.3.2 | 1.9 | N | 1 | 1 | 0.84 | 1.900 | 1.596 | ∞ |
| Liquid conductivity measurement | E.3.3 | 2.5 | R | $\sqrt{3}$ | 0.78 | 0.71 | 1.126 | 1.025 | ∞ |
| Liquid permittivity measurement | E.3.3 | 4 | N | 1 | 0.78 | 0.71 | 3.120 | 2.840 | M |
| Liquid conductivity—temperature uncertainty | E.3.4 | 2.5 | R | $\sqrt{3}$ | 0.23 | 0.26 | 0.332 | 0.375 | ∞ |
| Liquid permittivity—temperature uncertainty | E.3.4 | 5 | N | 1 | 0.23 | 0.26 | 1.150 | 1.300 | M |
| Combined Standard Uncertainty | | | RSS | | | | 9.795 | 9.595 | |
| Expanded Uncertainty (95% Confidence interval) | | | K=2 | | | | 19.589 | 19.191 | |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

| SATIMO Uncertainty- SN 03/18 EP327 System Validation uncertainty for DUT averaged over 1 gram / 10 gram. | | | | | | | | | |
|---|-------------|--------------|----------------|------------|---------|----------|----------------|-----------------|----------|
| Uncertainty Component | Sec. | Tol (+-%) | Prob. Dist. | Div. | Ci (1g) | Ci (10g) | 1g Ui (+-%) | 10g Ui (+-%) | vi |
| Measurement System | | | | | | | | | |
| Probe calibration | E.2.1 | 5.831 | N | 1 | 1 | 1 | 5.831 | 5.831 | ∞ |
| Axial Isotropy | E.2.2 | 0.460 | R | $\sqrt{3}$ | 1 | 1 | 0.266 | 0.266 | ∞ |
| Hemispherical Isotropy | E.2.2 | 0.915 | R | $\sqrt{3}$ | 0 | 0 | 0.000 | 0.000 | ∞ |
| Boundary effect | E.2.3 | 1 | R | $\sqrt{3}$ | 1 | 1 | 0.577 | 0.577 | ∞ |
| Linearity | E.2.4 | 0.975 | R | $\sqrt{3}$ | 1 | 1 | 0.563 | 0.563 | ∞ |
| System detection limits | E.2.4 | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.58 | 0.58 | ∞ |
| Modulation response | E.2.5 | 3.0 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Readout Electronics | E.2.6 | 0.021 | N | 1 | 1 | 1 | 0.021 | 0.021 | ∞ |
| Response Time | E.2.7 | 0.0 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Integration Time | E.2.8 | 1.4 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| RF ambient conditions-Noise | E.6.1 | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.73 | 1.73 | ∞ |
| RF ambient conditions-reflections | E.6.1 | 3.0 | R | $\sqrt{3}$ | 1 | 1 | 1.73 | 1.73 | ∞ |
| Probe positioner mechanical tolerance | E.6.2 | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ |
| Probe positioning with respect to phantom shell | E.6.3 | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | E.5 | 2.3 | R | $\sqrt{3}$ | 1 | 1 | 1.33 | 1.33 | ∞ |
| System validation source | | | | | | | | | |
| Deviation of experimental dipole from numerical dipole | E.6.4 | 5.0 | N | 1 | 1 | 1 | 5.00 | 5.00 | ∞ |
| Input power and SAR drift measurement | 8,6.6. 4 | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.89 | 2.89 | ∞ |
| Dipole axis to liquid distance | 8,E.6. 6 | 2.0 | R | $\sqrt{3}$ | 1 | 1 | 1.15 | 1.15 | ∞ |
| Phantom and set-up | | | | | | | | | |
| Phantom shell uncertainty—shape, thickness, and permittivity | E.3.1 | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.31 | 2.31 | ∞ |
| Uncertainty in SAR correction for deviations in permittivity and conductivity | E.3.2 | 1.9 | N | 1 | 1 | 0.84 | 1.90 | 1.60 | ∞ |
| Liquid conductivity (temperature uncertainty) | E.3.3 | 2.5 | R | $\sqrt{3}$ | 0.78 | 0.71 | 1.13 | 1.02 | ∞ |
| Liquid conductivity (measured) | E.3.3 | 4 | N | 1 | 0.78 | 0.71 | 3.12 | 2.84 | M |
| Liquid permittivity (temperature uncertainty) | E.3.4 | 2.5 | R | $\sqrt{3}$ | 0.23 | 0.26 | 0.33 | 0.38 | ∞ |
| Liquid permittivity (measured) | E.3.4 | 5 | N | 1 | 0.23 | 0.26 | 1.15 | 1.30 | M |
| Combined Standard Uncertainty | | | RSS | | | | 9.721 | 9.521 | |
| Expanded Uncertainty (95% Confidence interval) | | | K=2 | | | | 19.443 | 19.041 | |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

| SATIMO Uncertainty- SN 03/18 EP327 System Check uncertainty for DUT averaged over 1 gram / 10 gram. | | | | | | | | | |
|--|---------|---------------|----------------|------------|---------|----------|----------------|-----------------|----------|
| Uncertainty Component | Sec. | Tol (+- %) | Prob. Dist. | Div. | Ci (1g) | Ci (10g) | 1g Ui (+-%) | 10g Ui (+-%) | vi |
| Measurement System | | | | | | | | | |
| Probe calibration drift | E.2.1.3 | 0.5 | N | 1 | 1 | 1 | 0.50 | 0.50 | ∞ |
| Axial Isotropy | E.2.2 | 0.460 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Hemispherical Isotropy | E.2.2 | 0.915 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Boundary effect | E.2.3 | 1 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Linearity | E.2.4 | 0.975 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| System detection limits | E.2.4 | 1.0 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Modulation response | E.2.5 | 3.0 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Readout Electronics | E.2.6 | 0.021 | N | 1 | 0 | 0 | 0.00 | 0.00 | ∞ |
| Response Time | E.2.7 | 0 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Integration Time | E.2.8 | 1.4 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| RF ambient conditions-Noise | E.6.1 | 3.0 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| RF ambient conditions-reflections | E.6.1 | 3.0 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| Probe positioner mechanical tolerance | E.6.2 | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ |
| Probe positioning with respect to phantom shell | E.6.3 | 1.4 | R | $\sqrt{3}$ | 1 | 1 | 0.81 | 0.81 | ∞ |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | E.5 | 2.3 | R | $\sqrt{3}$ | 0 | 0 | 0.00 | 0.00 | ∞ |
| System check source (dipole) | | | | | | | | | |
| Deviation of experimental dipoles | E.6.4 | 2.0 | N | 1 | 1 | 1 | 2.00 | 2.00 | ∞ |
| Input power and SAR drift measurement | 8,6.6.4 | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.89 | 2.89 | ∞ |
| Dipole axis to liquid distance | 8,E.6.6 | 2.0 | R | $\sqrt{3}$ | 1 | 1 | 1.15 | 1.15 | ∞ |
| Phantom and tissue parameters | | | | | | | | | |
| Phantom shell uncertainty—shape, thickness, and permittivity | E.3.1 | 4 | R | $\sqrt{3}$ | 1 | 1 | 2.31 | 2.31 | ∞ |
| Uncertainty in SAR correction for deviations in permittivity and conductivity | E.3.2 | 1.9 | N | 1 | 1 | 0.84 | 1.90 | 1.60 | ∞ |
| Liquid conductivity measurement | E.3.3 | 2.5 | R | $\sqrt{3}$ | 0.78 | 0.71 | 1.13 | 1.02 | ∞ |
| Liquid permittivity measurement | E.3.3 | 4 | N | 1 | 0.78 | 0.71 | 3.12 | 2.84 | M |
| Liquid conductivity—temperature uncertainty | E.3.4 | 2.5 | R | $\sqrt{3}$ | 0.23 | 0.26 | 0.33 | 0.38 | ∞ |
| Liquid permittivity—temperature uncertainty | E.3.4 | 5 | N | 1 | 0.23 | 0.26 | 1.15 | 1.30 | M |
| Combined Standard Uncertainty | | | RSS | | | | 5.564 | 5.205 | |
| Expanded Uncertainty (95% Confidence interval) | | | K=2 | | | | 11.128 | 10.410 | |



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

12. CONDUCTED POWER MEASUREMENT

Bluetooth_BR

| Modulation | Channel | Frequency(MHz) | Maximum Peak Power (dBm) |
|------------|---------|----------------|--------------------------|
| GFSK | 0 | 2402 | 11.408 |
| | 39 | 2441 | 12.255 |
| | 78 | 2480 | 12.487 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

13. TEST RESULTS

13.1. SAR Test Results Summary

13.1.1. Test position and configuration

1. The EUT is a model of Bluetooth headset. According to user manual, the EUT is installed in the helmet, when remove it out of the helmet, the EUT can also normally work.
2. Based on FCC guidance, use a non-standard setting for SAR testing. The operating instructions contain additional information:

According to KDB 447498 D01 General RF Exposure Guide v06, due to maximum peak power for bluetooth is more than just a test exclusion threshold, which must be tested.

3. Lab. used the head tissue simulating liquid to test 1-g SAR at a test separation distance of 0mm from the flat phantom. At the same time, 10-g extremity SAR value is also considered.
4. For SAR testing, the device was controlled by software to test at reference fixed frequency.

13.1.2. Operation Mode

1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥ 0.8 W/kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
 - (1) When the original highest measured SAR is ≥ 0.8 W/kg, repeat that measurement once.
 - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg.
 - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥ 1.5 W/kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20 .
3. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
Maximum Scaling SAR = tested SAR (Max.) \times [maximum turn-up power (mw) / maximum measurement output power (mw)]



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

13.1.3. Test Result

| SAR MEASUREMENT | | | | | | | | | | | | | | |
|--------------------------------------|------|-----|-----------|--------------------|-----------------------------|--------------------------|--------------------------|-------------------|------------|--|--|--|--|--|
| Depth of Liquid (cm):>15 | | | | | Relative Humidity (%): 41.7 | | | | | | | | | |
| Product: Bluetooth Headset | | | | | | | | | | | | | | |
| Test Mode: Bluetooth for head liquid | | | | | | | | | | | | | | |
| Position | Mode | Ch. | Fr. (MHz) | Power Drift (<±5%) | SAR (1g) (W/kg) | Max. Tune-up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit W/kg | | | | | |
| Head SAR Back | 1DH5 | 0 | 2402 | 1.02 | 0.892 | 12.50 | 11.408 | 1.147 | 1.6 | | | | | |
| Head SAR Back | 1DH5 | 39 | 2441 | -1.15 | 0.918 | 12.50 | 12.255 | 0.971 | 1.6 | | | | | |
| Head SAR Back | 1DH5 | 78 | 2480 | 1.09 | 0.792 | 12.50 | 12.487 | 0.794 | 1.6 | | | | | |
| Head SAR Front | 1DH5 | 0 | 2402 | 1.12 | 1.040 | 12.50 | 11.408 | 1.337 | 1.6 | | | | | |
| Head SAR Front | 1DH5 | 39 | 2441 | -1.16 | 0.967 | 12.50 | 12.255 | 1.023 | 1.6 | | | | | |
| Head SAR Front | 1DH5 | 78 | 2480 | -1.19 | 0.954 | 12.50 | 12.487 | 0.957 | 1.6 | | | | | |

Note:

- When the 1-g SAR is $\leq 0.8\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table is 0mm.

| SAR MEASUREMENT | | | | | | | | | | | | | | |
|--------------------------------------|------|-----|-----------|--------------------|-----------------------------|--------------------------|--------------------------|-------------------|------------|--|--|--|--|--|
| Depth of Liquid (cm):>15 | | | | | Relative Humidity (%): 41.7 | | | | | | | | | |
| Product: Bluetooth Headset | | | | | | | | | | | | | | |
| Test Mode: Bluetooth for head liquid | | | | | | | | | | | | | | |
| Position | Mode | Ch. | Fr. (MHz) | Power Drift (<±5%) | 10g-Extr emity SAR (W/kg) | Max. Tune-up Power (dBm) | Meas. output Power (dBm) | Scaled SAR (W/Kg) | Limit W/kg | | | | | |
| Head SAR Back | 1DH5 | 0 | 2402 | 1.02 | 0.478 | 12.50 | 11.408 | 0.615 | 4.0 | | | | | |
| Head SAR Back | 1DH5 | 39 | 2441 | -1.15 | 0.482 | 12.50 | 12.255 | 0.510 | 4.0 | | | | | |
| Head SAR Back | 1DH5 | 78 | 2480 | 1.09 | 0.433 | 12.50 | 12.487 | 0.434 | 4.0 | | | | | |
| Head SAR Front | 1DH5 | 0 | 2402 | 1.12 | 0.552 | 12.50 | 11.408 | 0.710 | 4.0 | | | | | |
| Head SAR Front | 1DH5 | 39 | 2441 | -1.16 | 0.516 | 12.50 | 12.255 | 0.546 | 4.0 | | | | | |
| Head SAR Front | 1DH5 | 78 | 2480 | -1.19 | 0.494 | 12.50 | 12.487 | 0.495 | 4.0 | | | | | |

Note:

- (1)When the 10-g Reported SAR is $\leq 2.0\text{ W/kg}$, testing for low and high channel is optional..
- (2) The test separation of all above table is 0mm.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1–4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

| Repeated SAR | | | | | | | | | | |
|--------------------------------------|------|-----|-----------|--------------------|----------------------|--------------------|-----------------------|--------------------|-----------------------|--------------|
| Product: Bluetooth Headset | | | | | | | | | | |
| Test Mode: Bluetooth for head liquid | | | | | | | | | | |
| Position | Mode | Ch. | Fr. (MHz) | Power Drift (<±5%) | Once SAR (1g) (W/kg) | Power Drift (<±5%) | Twice SAR (1g) (W/kg) | Power Drift (<±5%) | Third SAR (1g) (W/kg) | Limit (W/kg) |
| Head SAR Front | 1DH5 | 0 | 2402 | 1.03 | 1.184 | -- | -- | -- | -- | 1.6 |



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: Dec. 05,2019

System Check Head 2450 MHz

DUT: Dipole 2450 MHz Type: SID 2450

Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.68

Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):20.6, Liquid temperature (°C): 20.3

SATIMO Configuration

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2450MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 2450MHz Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

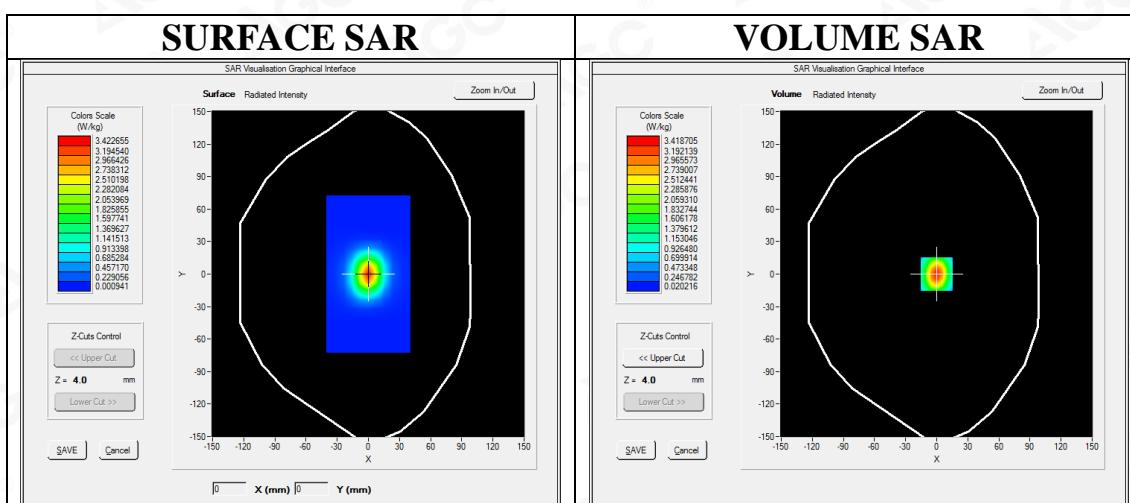

Maximum location: X=0.00, Y=0.00

SAR Peak: 5.74 W/kg



| | |
|----------------|----------|
| SAR 10g (W/Kg) | 1.448745 |
| SAR 1g (W/Kg) | 3.119334 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

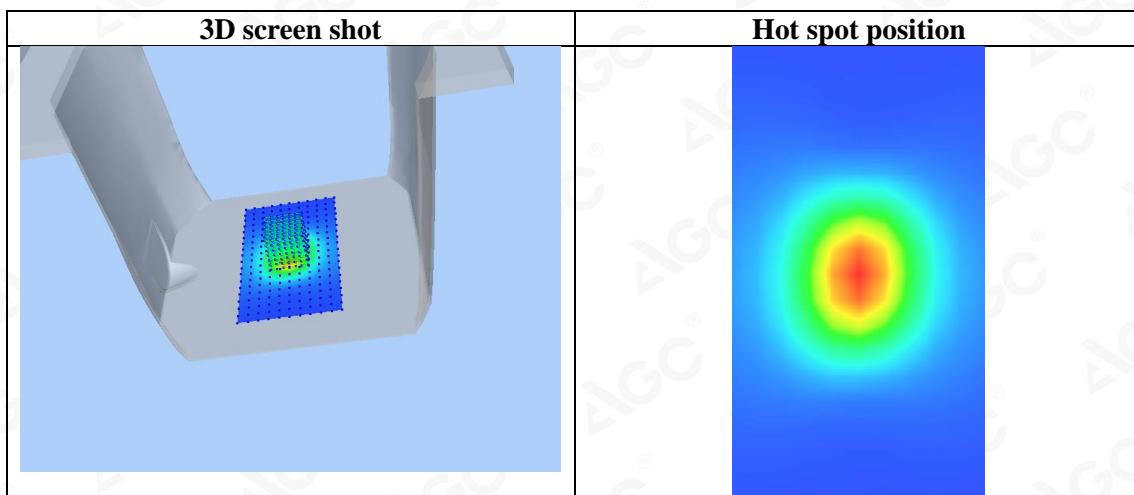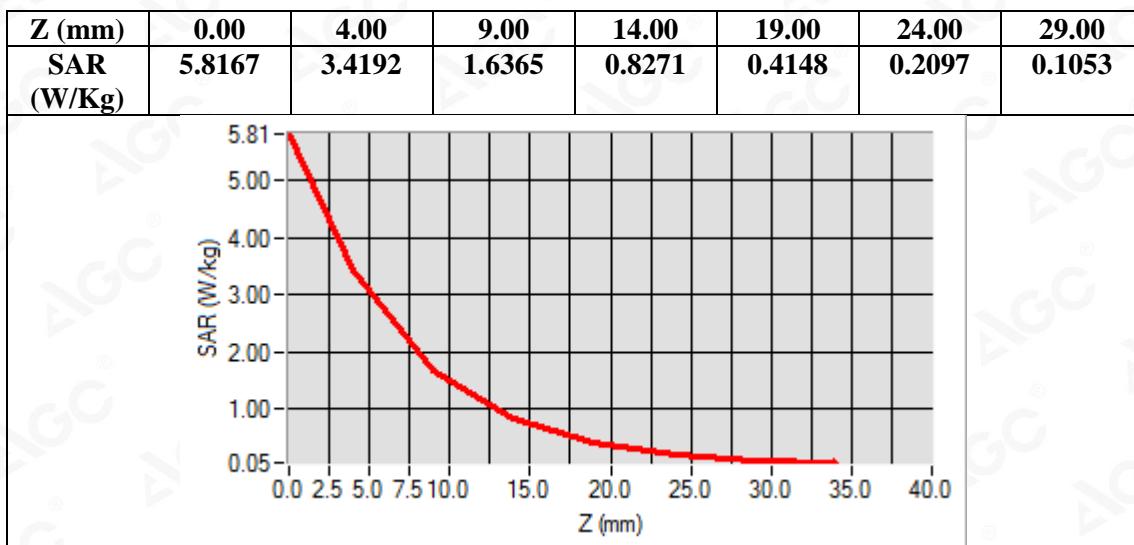

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab

Date: Dec. 05,2019

Bluetooth Low - Head SAR - Back (1DH5)

DUT: Bluetooth Headset; Type: BTMINI

Communication System: BT; Communication System Band: Bluetooth; Duty Cycle: 1:1.28; Conv.F=4.68;
 Frequency: 2402 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.75$ mho/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section
 Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.3


SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/Bluetooth Low- Head SAR - Back /Area Scan: Measurement grid: dx=10mm, dy=10mm

Configuration/Bluetooth Low- Head SAR - Back /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

| | |
|------------------------|--------------------------------|
| Area Scan | sam_direct_droit2_surf10mm.txt |
| ZoomScan | 7x7x7,dx=5mm dy=5mm dz=5mm |
| Phantom | Validation plane |
| Device Position | Head SAR Back |
| Band | Bluetooth |
| Channels | Low |
| Signal | Crest factor: 1.28 |

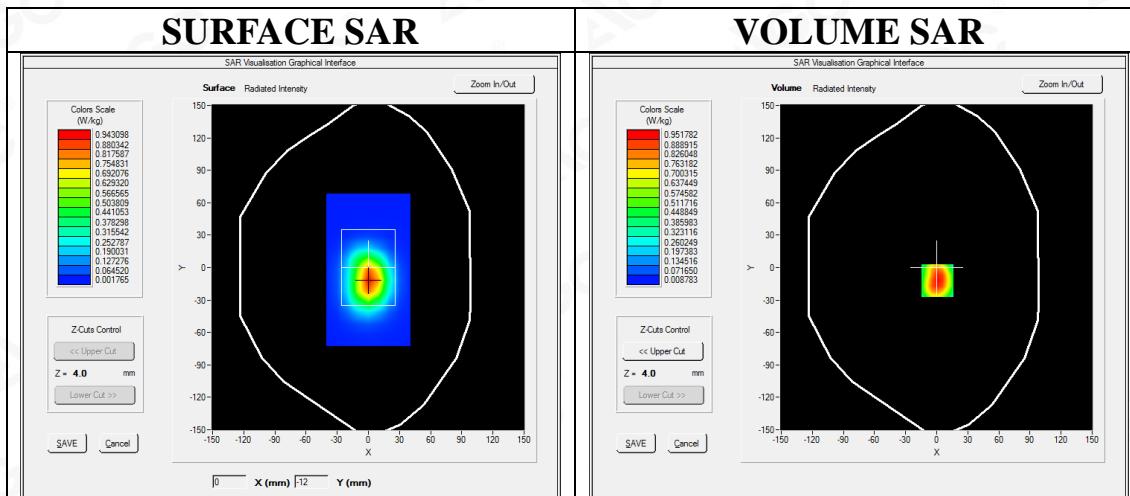

Maximum location: X=1.00, Y=-12.00
SAR Peak: 1.46 W/kg



| | |
|-----------------------|----------|
| SAR 10g (W/Kg) | 0.477750 |
| SAR 1g (W/Kg) | 0.891720 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
 Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

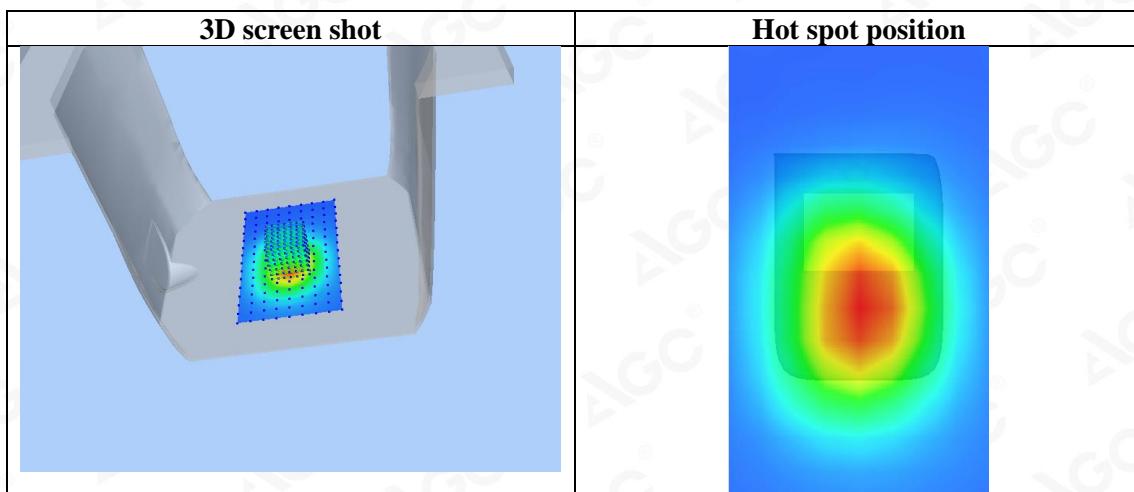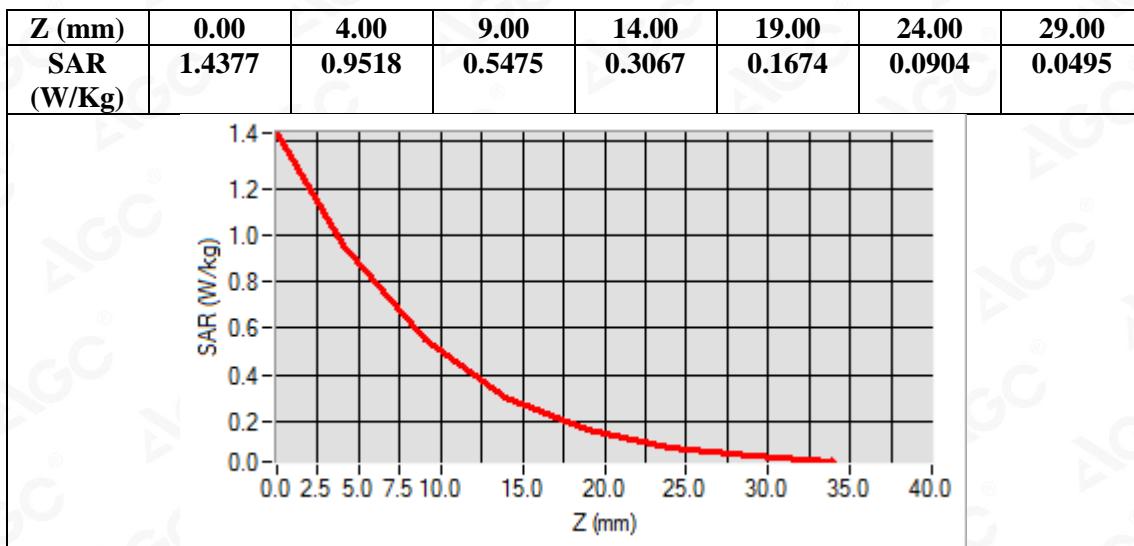

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

Test Laboratory: AGC Lab
Bluetooth Mid - Head SAR - Back (1DH5)
DUT: Bluetooth Headset; Type: BTMINI

Date: Dec. 05,2019

Communication System: BT; Communication System Band: Bluetooth; Duty Cycle: 1:1.28; Conv.F=4.68;
 Frequency: 2441 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 40.61$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section
 Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.3


SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/Bluetooth Mid- Head SAR - Back /Area Scan: Measurement grid: dx=10mm, dy=10mm

Configuration/Bluetooth Mid- Head SAR - Back /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

| | |
|------------------------|--------------------------------|
| Area Scan | sam_direct_droit2_surf10mm.txt |
| ZoomScan | 7x7x7,dx=5mm dy=5mm dz=5mm |
| Phantom | Validation plane |
| Device Position | Head SAR Back |
| Band | Bluetooth |
| Channels | Middle |
| Signal | Crest factor: 1.28 |

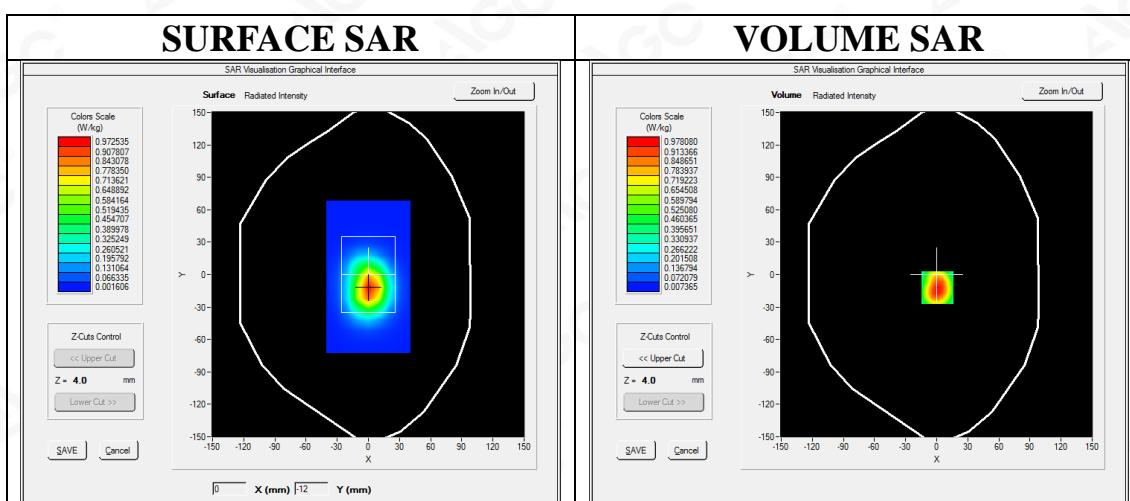

Maximum location: X=1.00, Y=-12.00

SAR Peak: 1.50 W/kg

| | |
|-----------------------|----------|
| SAR 10g (W/Kg) | 0.482182 |
| SAR 1g (W/Kg) | 0.918098 |





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
 Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

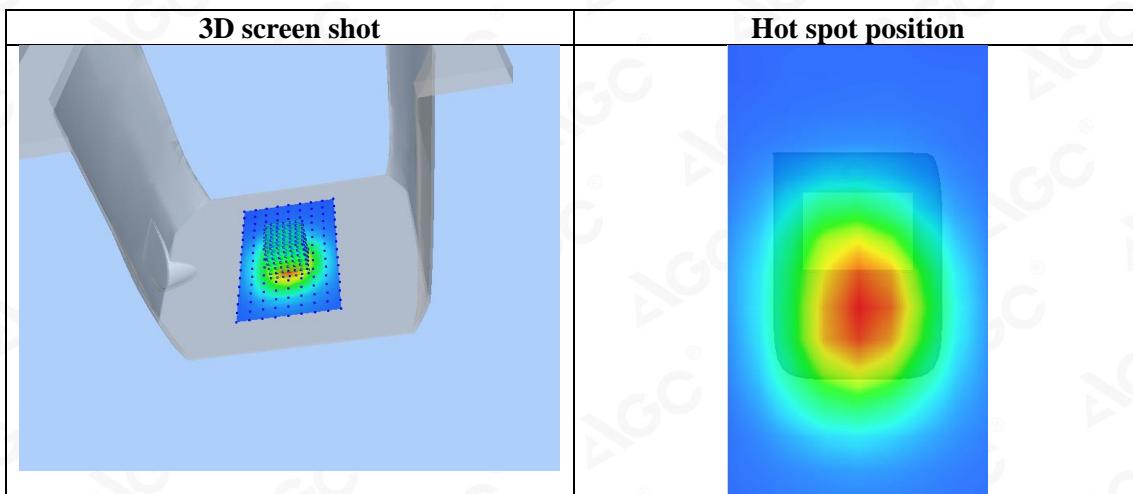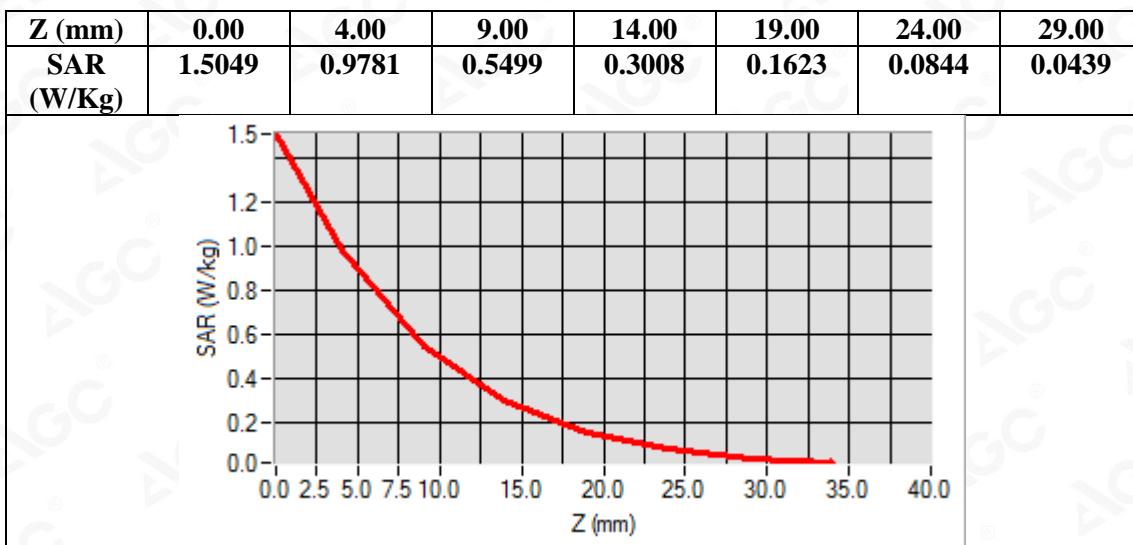

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

Test Laboratory: AGC Lab
Bluetooth High - Head SAR - Back (1DH5)
DUT: Bluetooth Headset; Type: BTMINI

Date: Dec. 05,2019

Communication System: BT; Communication System Band: Bluetooth; Duty Cycle: 1:1.28; Conv.F=4.68;
 Frequency: 2480 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 40.06$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section
 Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.3


SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/Bluetooth High- Head SAR - Back /Area Scan: Measurement grid: dx=10mm, dy=10mm

Configuration/Bluetooth High- Head SAR - Back /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

| | |
|------------------------|--------------------------------|
| Area Scan | sam_direct_droit2_surf10mm.txt |
| ZoomScan | 7x7x7,dx=5mm dy=5mm dz=5mm |
| Phantom | Validation plane |
| Device Position | Head SAR Back |
| Band | Bluetooth |
| Channels | High |
| Signal | Crest factor: 1.28 |

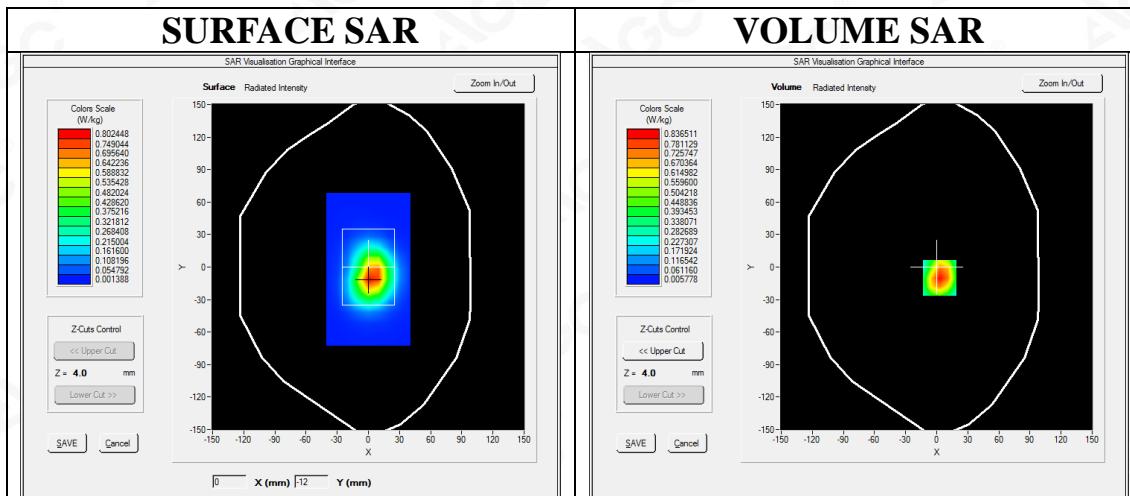

Maximum location: X=3.00, Y=-10.00

SAR Peak: 1.28 W/kg



| | |
|-----------------------|----------|
| SAR 10g (W/Kg) | 0.432512 |
| SAR 1g (W/Kg) | 0.792154 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
 Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

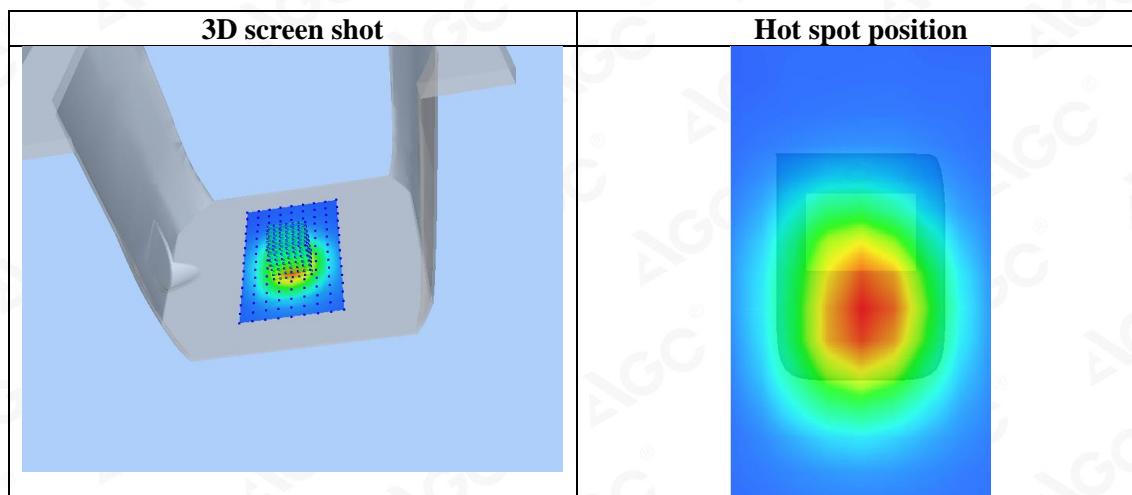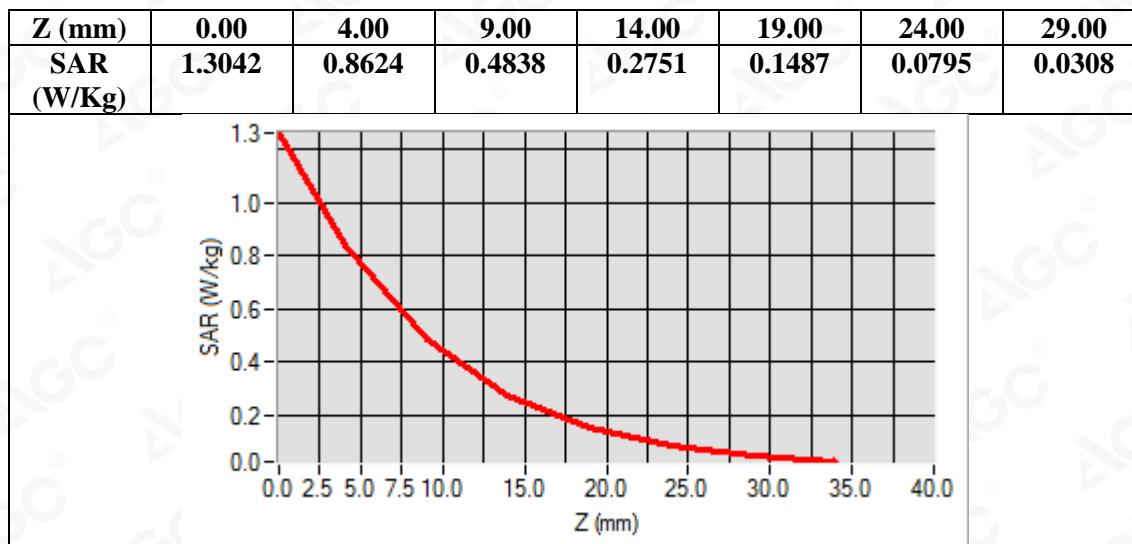

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

Test Laboratory: AGC Lab
Bluetooth Low - Head SAR - Front (DH5)
DUT: Bluetooth Headset; Type: BTMINI

Date: Dec. 05,2019

Communication System: BT; Communication System Band: Bluetooth; Duty Cycle: 1:1.28; Conv.F=4.68; Frequency: 2402 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.75$ mho/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³; Phantom section: Flat Section
 Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.3


SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/Bluetooth Low- Head SAR - Front /Area Scan: Measurement grid: dx=10mm, dy=10mm

Configuration/Bluetooth Low- Head SAR - Front /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

| | |
|------------------------|--------------------------------|
| Area Scan | sam_direct_droit2_surf10mm.txt |
| ZoomScan | 7x7x7,dx=5mm dy=5mm dz=5mm |
| Phantom | Validation plane |
| Device Position | Head SAR Front |
| Band | Bluetooth |
| Channels | Low |
| Signal | Crest factor: 1.28 |

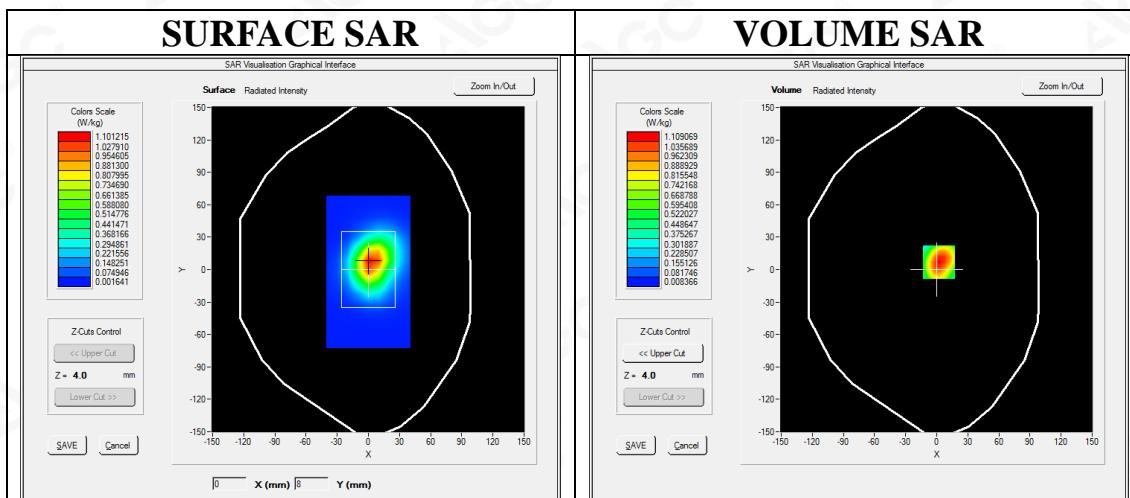

Maximum location: X=2.00, Y=7.00

SAR Peak: 1.72 W/kg



| | |
|-----------------------|----------|
| SAR 10g (W/Kg) | 0.551892 |
| SAR 1g (W/Kg) | 1.040198 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

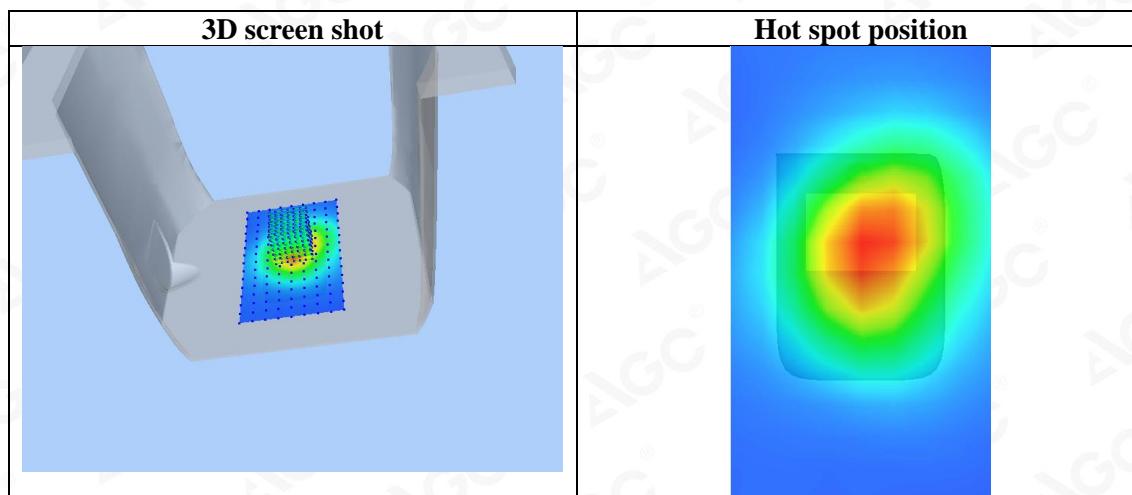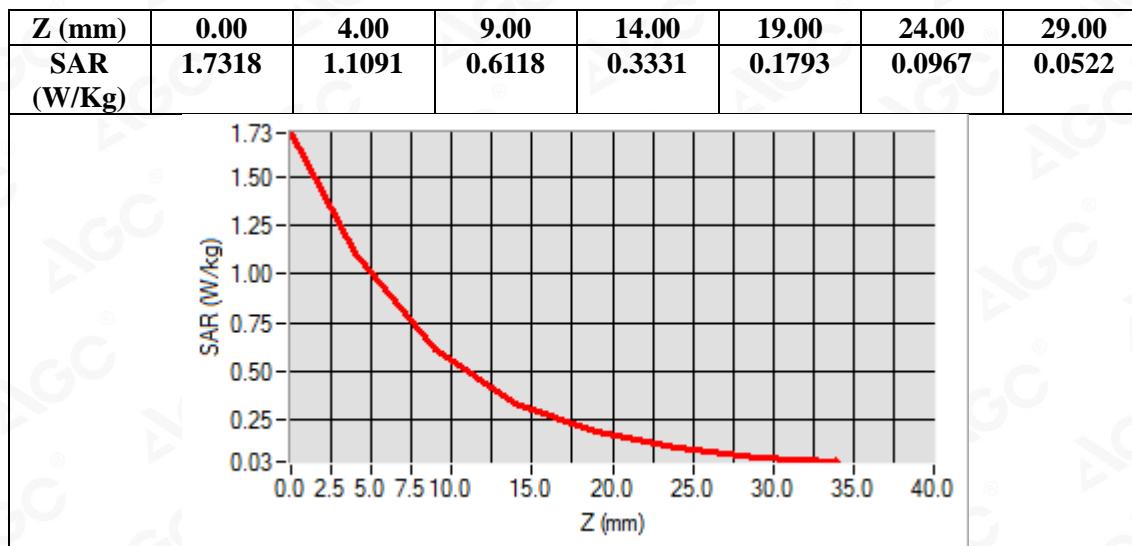

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

Test Laboratory: AGC Lab
Bluetooth Mid - Head SAR - Front (DH5)
DUT: Bluetooth Headset; Type: BTMINI

Date: Dec. 05,2019

Communication System: BT; Communication System Band: Bluetooth; Duty Cycle: 1:1.28; Conv.F=4.68;
 Frequency: 2441 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.77$ mho/m; $\epsilon_r = 40.61$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section
 Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.3


SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/Bluetooth Mid- Head SAR - Front /Area Scan: Measurement grid: dx=10mm, dy=10mm

Configuration/Bluetooth Mid- Head SAR - Front /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

| | |
|------------------------|--------------------------------|
| Area Scan | sam_direct_droit2_surf10mm.txt |
| ZoomScan | 7x7x7,dx=5mm dy=5mm dz=5mm |
| Phantom | Validation plane |
| Device Position | Head SAR Front |
| Band | Bluetooth |
| Channels | Middle |
| Signal | Crest factor: 1.28 |

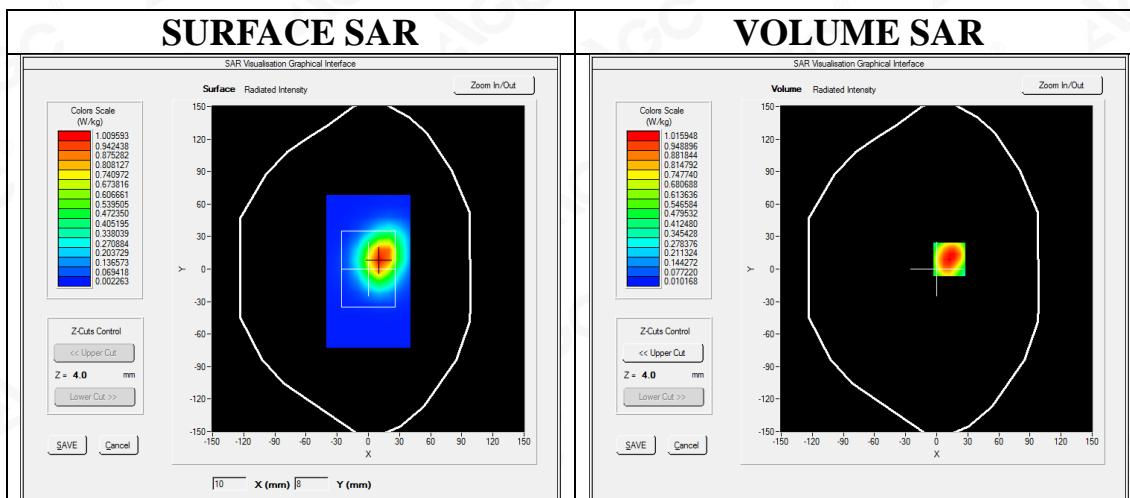

Maximum location: X=12.00, Y=9.00

SAR Peak: 1.57 W/kg

| | |
|-----------------------|----------|
| SAR 10g (W/Kg) | 0.515775 |
| SAR 1g (W/Kg) | 0.966698 |





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
 Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

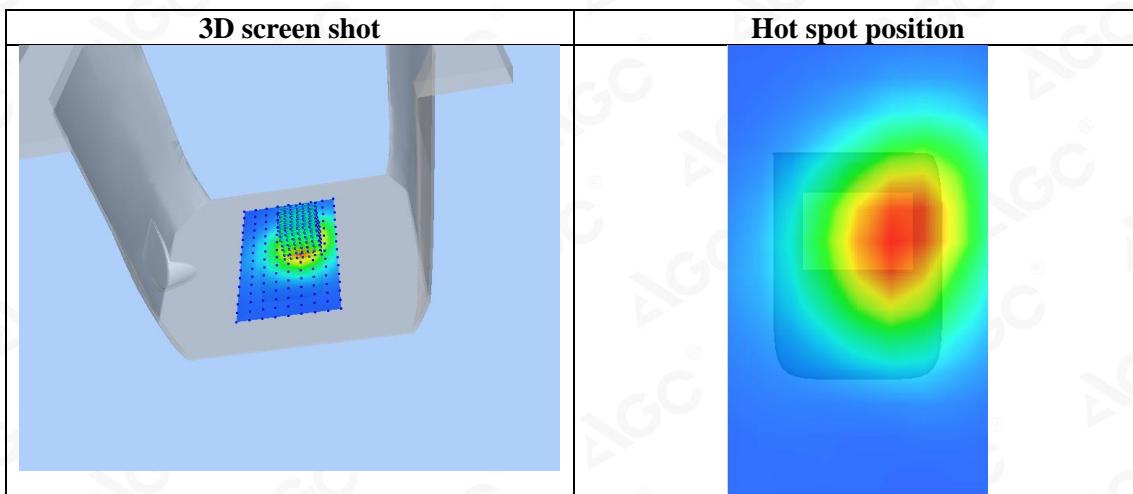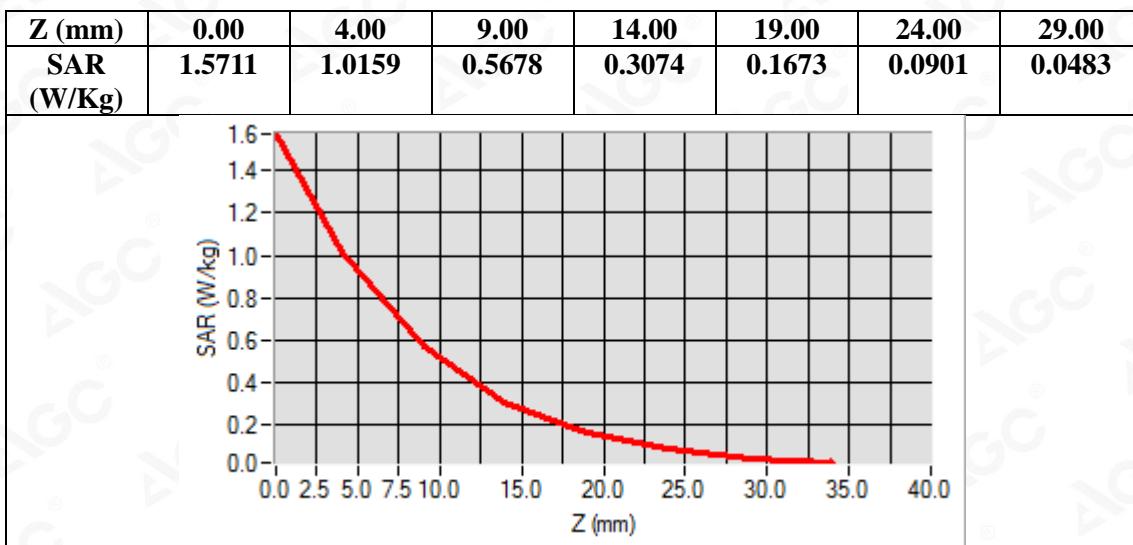

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

Test Laboratory: AGC Lab
Bluetooth High - Head SAR - Front (DH5)
DUT: Bluetooth Headset; Type: BTMINI

Date: Dec. 05,2019

Communication System: BT; Communication System Band: Bluetooth; Duty Cycle: 1:1.28; Conv.F=4.68; Frequency: 2480 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 40.06$; $\rho = 1000$ kg/m³; Phantom section: Flat Section
 Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.3


SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/Bluetooth High- Head SAR - Front /Area Scan: Measurement grid: dx=10mm, dy=10mm

Configuration/Bluetooth High- Head SAR - Front /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

| | |
|------------------------|--------------------------------|
| Area Scan | sam_direct_droit2_surf10mm.txt |
| ZoomScan | 7x7x7,dx=5mm dy=5mm dz=5mm |
| Phantom | Validation plane |
| Device Position | Head SAR Front |
| Band | Bluetooth |
| Channels | High |
| Signal | Crest factor: 1.28 |

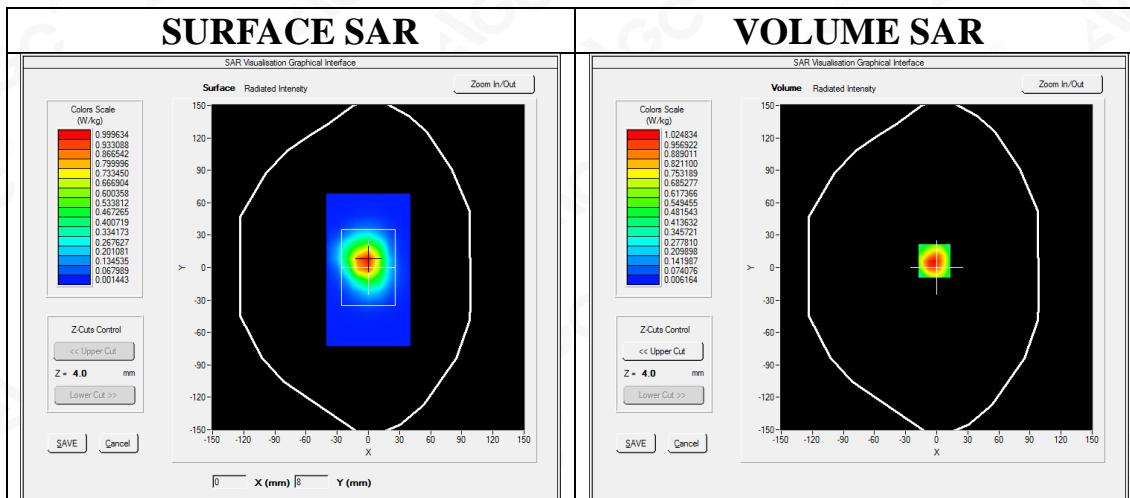

Maximum location: X=-2.00, Y=6.00

SAR Peak: 1.58 W/kg



| | |
|-----------------------|----------|
| SAR 10g (W/Kg) | 0.493596 |
| SAR 1g (W/Kg) | 0.953628 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

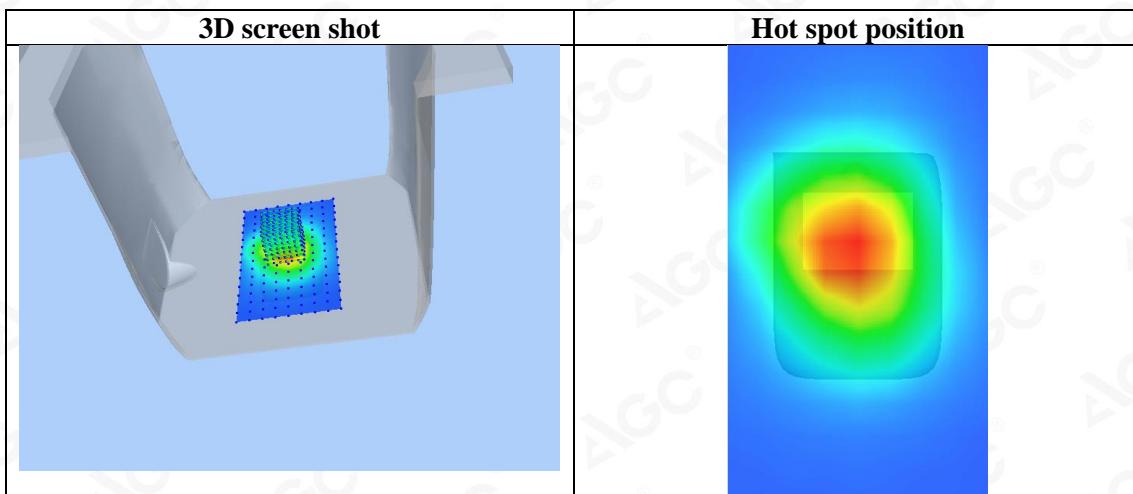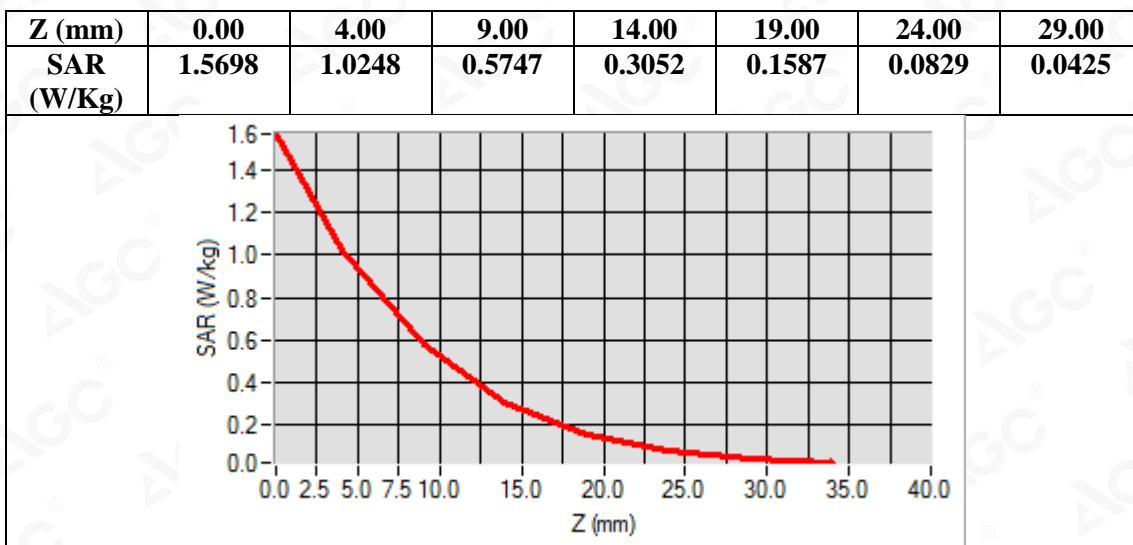

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, ChinaTel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

Repeated SAR
Test Laboratory: AGC Lab
Bluetooth Low - Head SAR - Front (DH5)
DUT: Bluetooth Headset; Type: BTMINI
Date: Dec. 05,2019

Communication System: BT; Communication System Band: Bluetooth; Duty Cycle: 1:1.28; Conv.F=4.68; Frequency: 2402 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.75$ mho/m; $\epsilon_r = 40.95$; $\rho = 1000$ kg/m³; Phantom section: Flat Section
 Ambient temperature (°C): 20.6, Liquid temperature (°C): 20.3


SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2018; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/Bluetooth Low- Head SAR - Front /Area Scan: Measurement grid: dx=10mm, dy=10mm

Configuration/Bluetooth Low- Head SAR - Front /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

| | |
|------------------------|--------------------------------|
| Area Scan | sam_direct_droit2_surf10mm.txt |
| ZoomScan | 7x7x7,dx=5mm dy=5mm dz=5mm |
| Phantom | Validation plane |
| Device Position | Head SAR Front |
| Band | Bluetooth |
| Channels | Low |
| Signal | Crest factor: 1.28 |

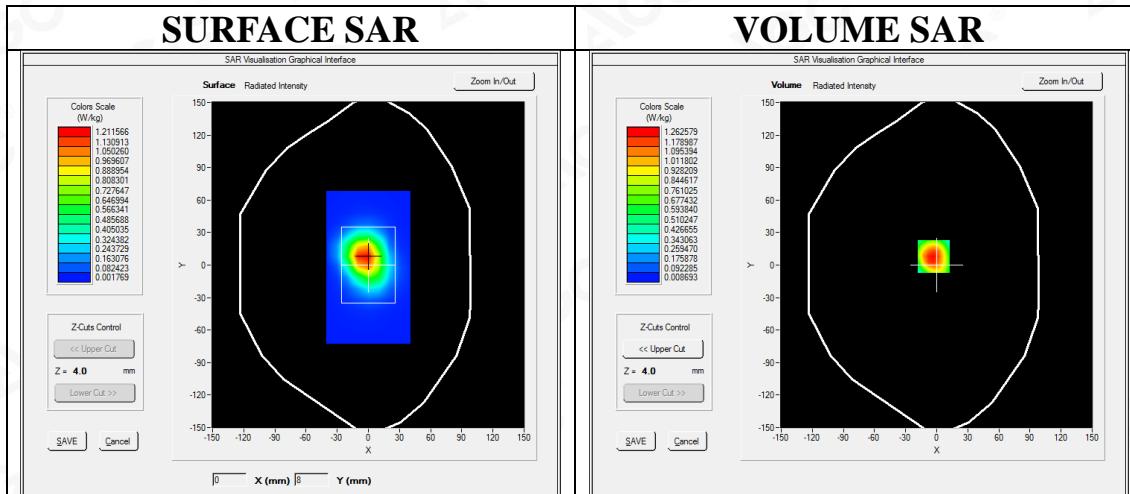

Maximum location: X=-3.00, Y=8.00
SAR Peak: 1.94 W/kg



| | |
|-----------------------|----------|
| SAR 10g (W/Kg) | 0.625298 |
| SAR 1g (W/Kg) | 1.183615 |



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

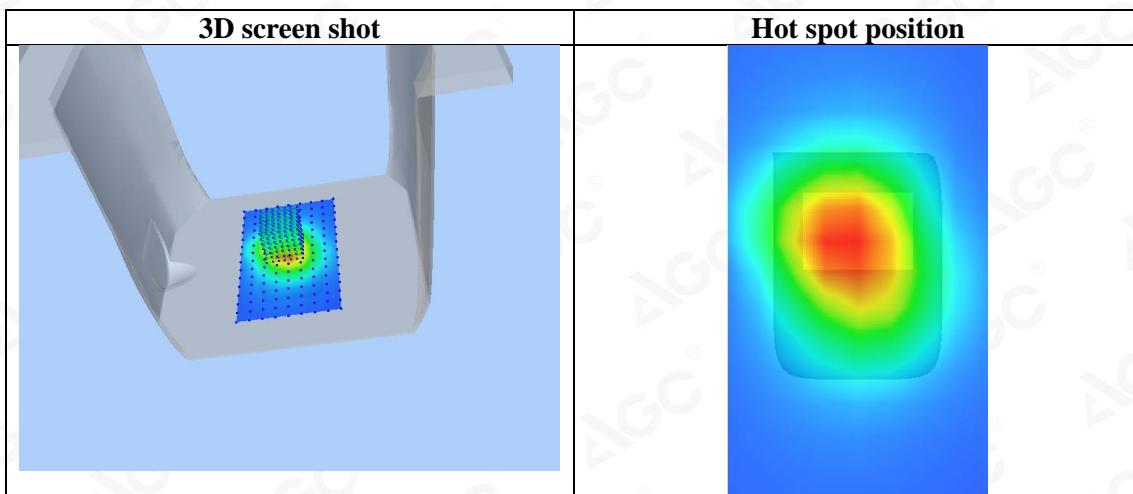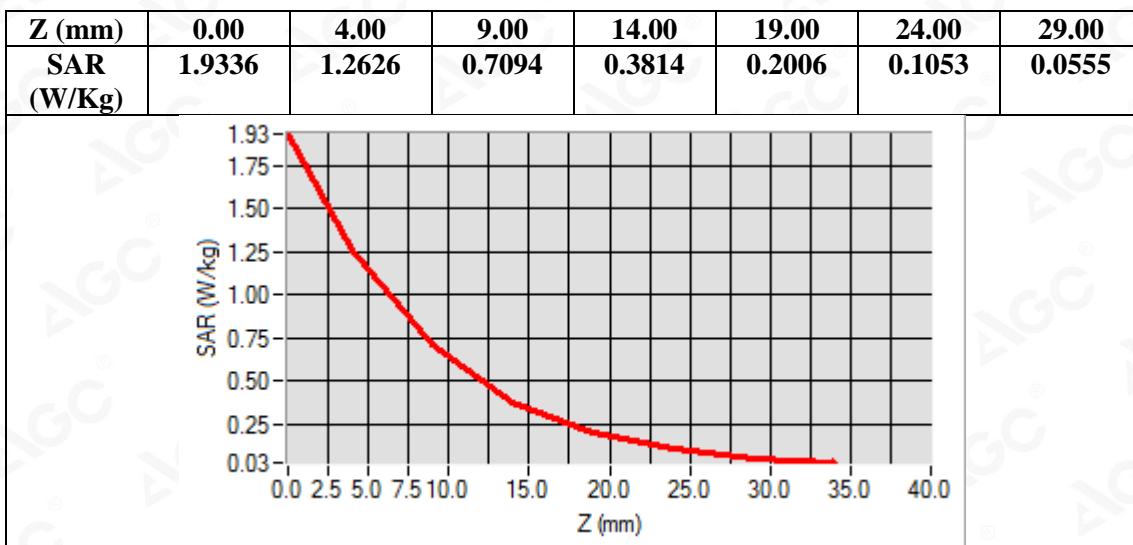


Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

APPENDIX C. TEST SETUP PHOTOGRAPHS

Head SAR front 0mm

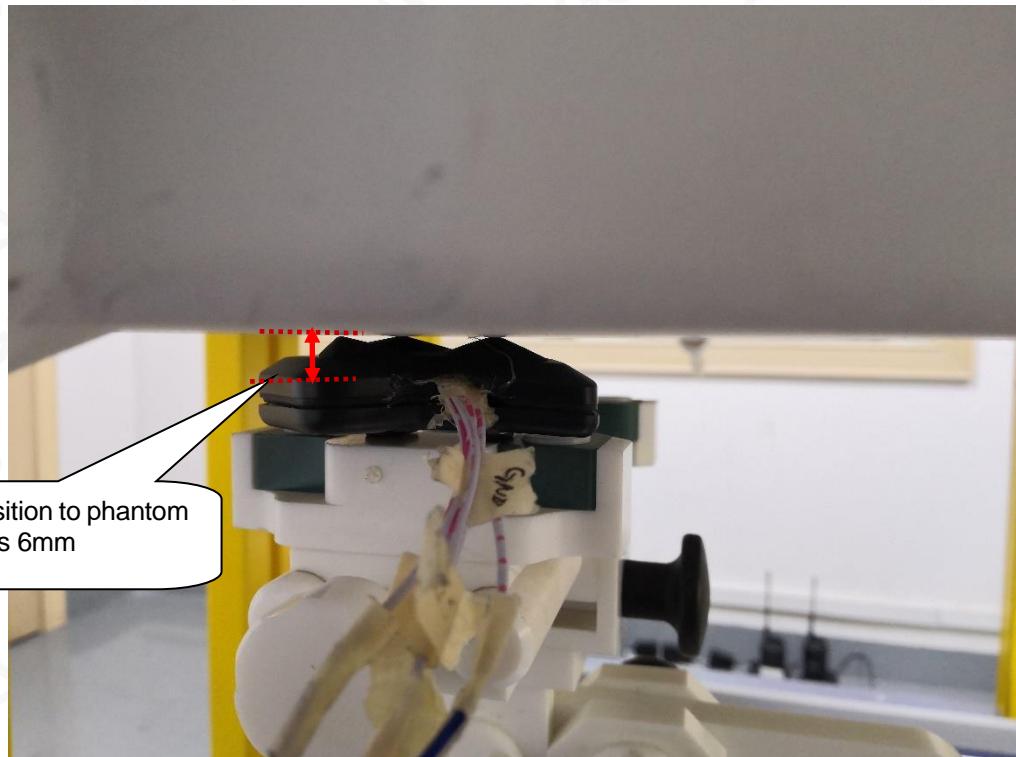

Head SAR Back 0mm

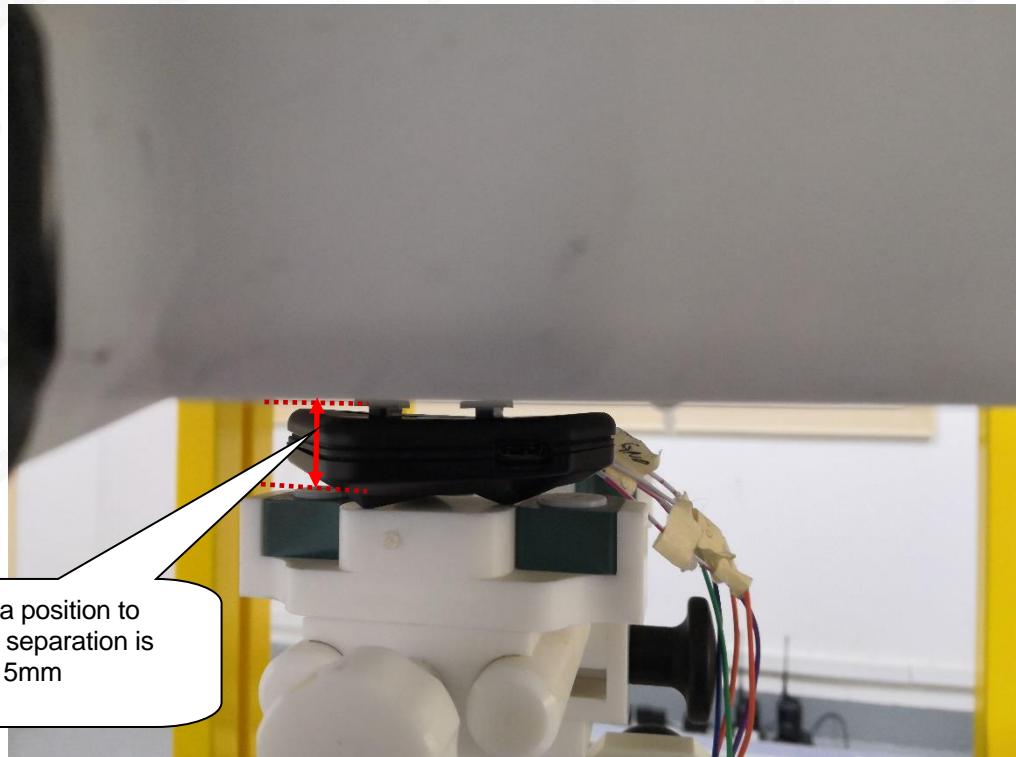


Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, ChinaTel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note : The position used in the measurement were according to IEEE 1528-2013

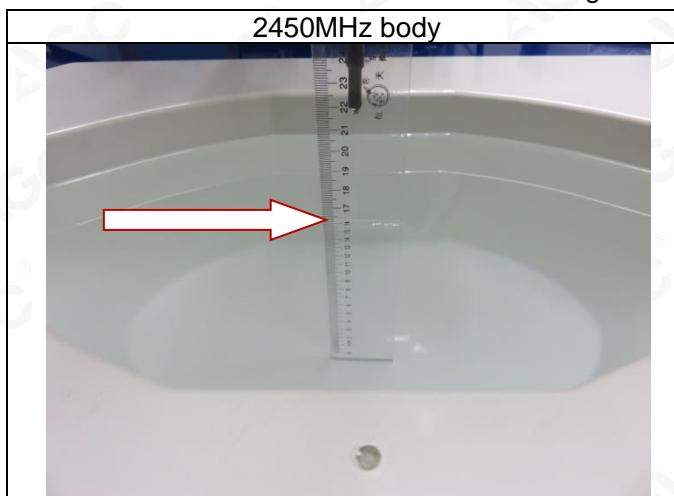

Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118

APPENDIX D. CALIBRATION DATA

Refer to Attached files.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118