



A Test Lab Techno Corp.

Changan Lab : No. 140 -1, Changan Street, Bade City, Taoyuan County, Taiwan R.O.C.
Tel : 886-3-271-0188 / Fax : 886-3-271-0190

SAR EVALUATION REPORT



Test Report No.	:	1105FS13
Applicant	:	Giant Electronics Limited
Trade Mark	:	MOTOROLA
Model Number	:	MR350
Product Name	:	Two Way Radio with GMRS ,FRS and Weather Band Receiver
Date of Test	:	May 10 ~ May 16, 2011
Issued Date	:	May 17, 2011
Test Environment	:	Ambient Temperature : 22 ± 2 °C Relative Humidity : 40 - 70 %
Test Specification	:	Standard C95.1-1992 IEEE Std. 1528-2003 2.1093;FCC/OET Bulletin 65 Supplement C [July 2001]
Max. SAR	:	0.424 W/kg FRS Brain SAR _15mm (50% Duty Cycle) 0.969 W/kg GMRS Brain SAR _15mm (50% Duty Cycle) 0.205 W/kg FRS Muscle SAR With Headset_15mm(50% Duty Cycle) 0.509 W/kg GMRS Muscle SAR With Headset_15mm (50% Duty Cycle) 0.233 W/kg FRS Muscle SAR With Headset_Belt Clip_15mm(50% Duty Cycle) 0.486 W/kg GMRS Muscle SAR With Headset_Belt Clip_15mm (50% Duty Cycle) (Condition: 50% Duty Cycle and positive power drift)
Test Lab	:	Changan Lab.



1. The test operations have to be performed with cautious behavior, the test results are as attached.
2. The test results are under chamber environment of A Test Lab Techno Corp. A Test Lab Techno Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples.
3. The measurement report has to be written approval of A Test Lab Techno Corp. It may only be reproduced or published in full. This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. The test results in the report only apply to the tested sample.

Approved By

Sam Chuang
(Sam Chuang)

Tested By

Alex Wu
(Alex Wu)



Contents


1. Description of Equipment under Test (EUT).....	3
2. Other Accessories.....	5
3. Introduction.....	8
4. SAR Definition	8
5. SAR Measurement Setup.....	9
6. System Components.....	11
6.1 DASY 5 E-Field Probe System.....	11
6.2 Data Acquisition Electronic (DAE) System	14
6.3 Robot	14
6.4 Measurement Server	14
6.5 Device Holder for Transmitters	15
6.6 Phantom - SAM v4.0	16
6.7 Data Storage and Evaluation.....	16
7. Test Equipment List	19
8. Tissue Simulating Liquids.....	20
8.1 Ingredients	21
8.2 Recipes.....	21
8.3 Liquid Confirmation.....	22
9. Measurement Process	24
9.1 Device and Test Conditions	24
9.2 System Performance Check.....	24
9.3 Dosimetric Assessment Setup.....	28
9.4 Spatial Peak SAR Evaluation	30
10. Measurement Uncertainty	31
11. SAR Test Results Summary	34
11.1 FRS Brain SAR (EUT front side distance phantom 15mm).....	34
11.2 GMRS Brain SAR (EUT front side distance phantom 15mm).....	36
11.3 FRS Muscle SAR (EUT link headset distance phantom 15mm).....	38
11.4 GMRS Muscle SAR (EUT link headset distance phantom 15mm).....	40
11.5 FRS Muscle SAR (EUT link headset and Belt clip)	42
11.6 GMRS Muscle SAR (EUT link headset and Belt clip)	44
11.7 Setup Photo	46
11.8 Std. C95.1-1992 RF Exposure Limit.....	55
12. Conclusion	56
13. References	56
Appendix A - System Performance Check	57
Appendix B - SAR Measurement Data	61
Appendix C - Calibration	85



1. Description of Equipment under Test (EUT)

Applicant	: Giant Electronics Limited
Applicant Address	: 33/F. , Two Landmark East, 100 How Ming Road, Kwun Tong, Kowloon, Hong Kong
Manufacturer	: DONGGUAN WISETRONICS TELECOM EQUIPMENT CO. LTD
Manufacturer Address	: Elite Industrial City, Melin District, Dailing Mount Town, Dongguan, Guangdong, PRC
Product Name	: Two Way Radio with GMRS ,FRS and Weather Band Receiver
Trade Mark	: MOTOROLA
Model Number	: MR350
FCC ID	: K7GMRCEJ
Battery Type	: Internal Battery(3.6 V Ni-MH Battery, 650 mAh) ALKALINE Battery(1.5 V AA Battery x 3PCS)
TX Frequency	: 467.5625 - 467.7125 MHz (FRS CH8 - CH 14) 462.5500 - 462.7250 MHz (GMRS CH1 - CH 7, CH15 - CH 22)
Max. RF Output Power	: 0.325 W ERP (25.120 dBm) FRS 1.557 W ERP (31.923 dBm) GMRS
Max. SAR Measurement	: 0.424 W/kg FRS Brain SAR _15mm (50% Duty Cycle) 0.969 W/kg GMRS Brain SAR _15mm (50% Duty Cycle) 0.205 W/kg FRS Muscle SAR With Headset_15mm (50% Duty Cycle) 0.509 W/kg GMRS Muscle SAR With Headset_15mm (50% Duty Cycle) 0.233 W/kg FRS Muscle SAR With Headset_Belt Clip_15mm (50% Duty Cycle) 0.486 W/kg GMRS Muscle SAR With Headset_Belt Clip_15mm (50% Duty Cycle) (Condition: 50% Duty Cycle and positive power drift)
Antenna Type	: Fixed Type
Antenna Gain	: 0dBi
Device Category	: Portable
RF Exposure Environment	: General Population / Uncontrolled
Application Type	: Certification

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment / general population exposure limits specified in Standard C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE Std. 1528-2003.

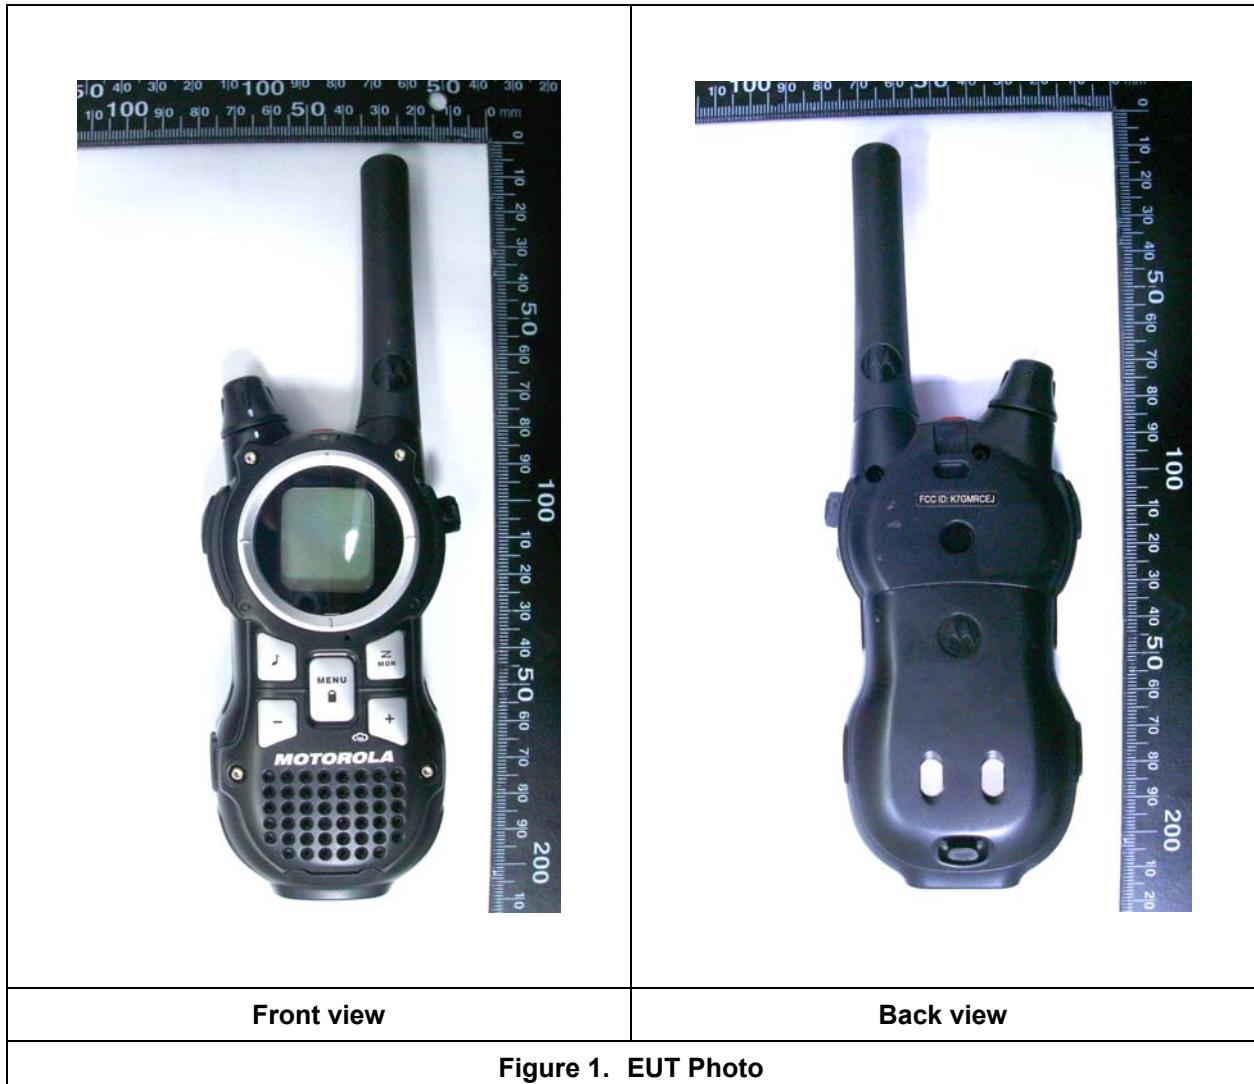

2. Other Accessories

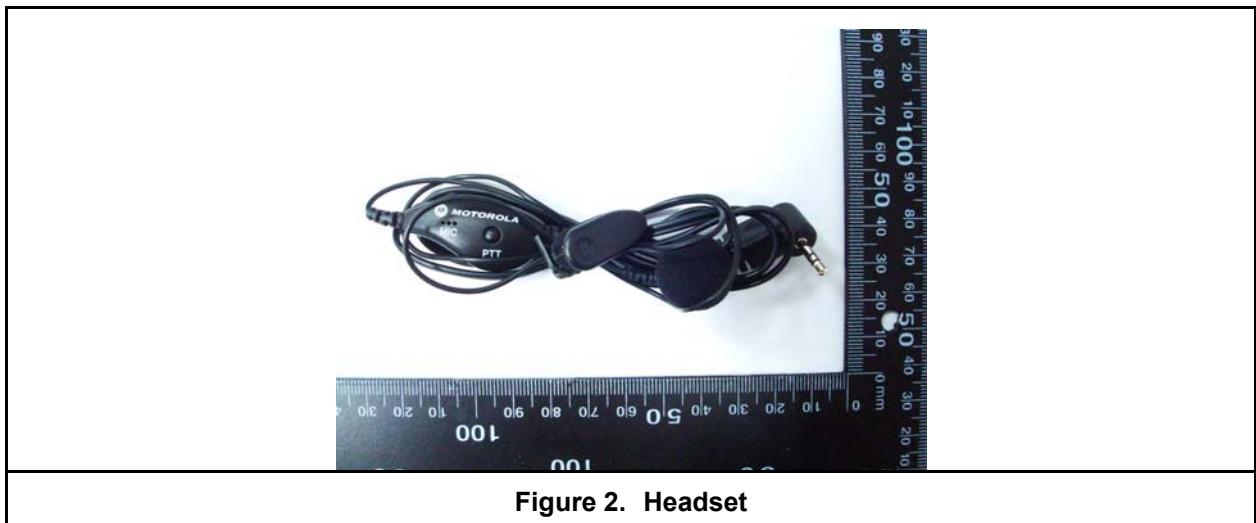


Figure 2. Headset

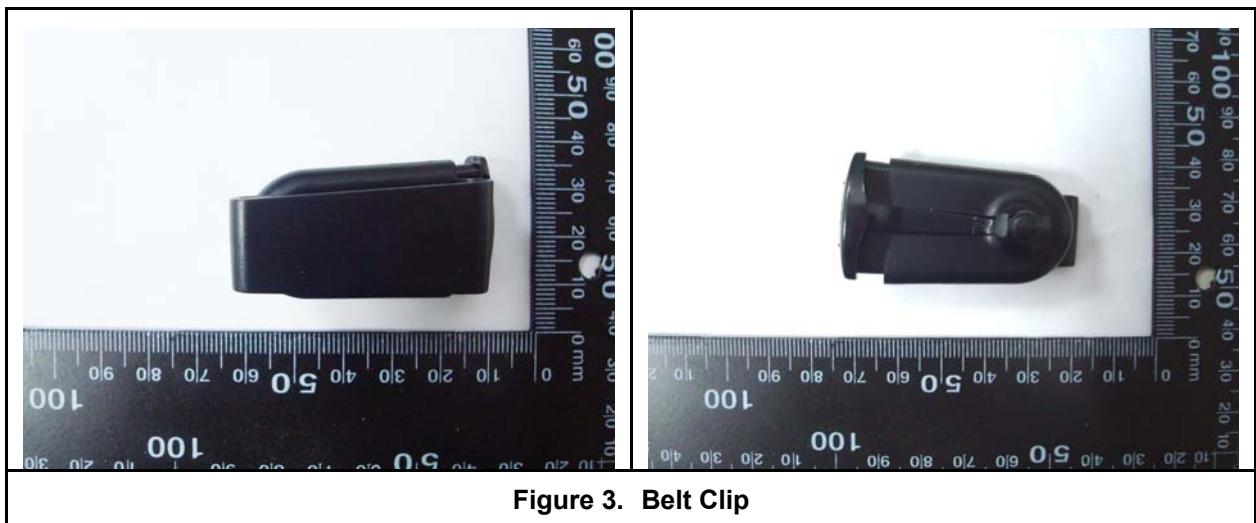


Figure 3. Belt Clip

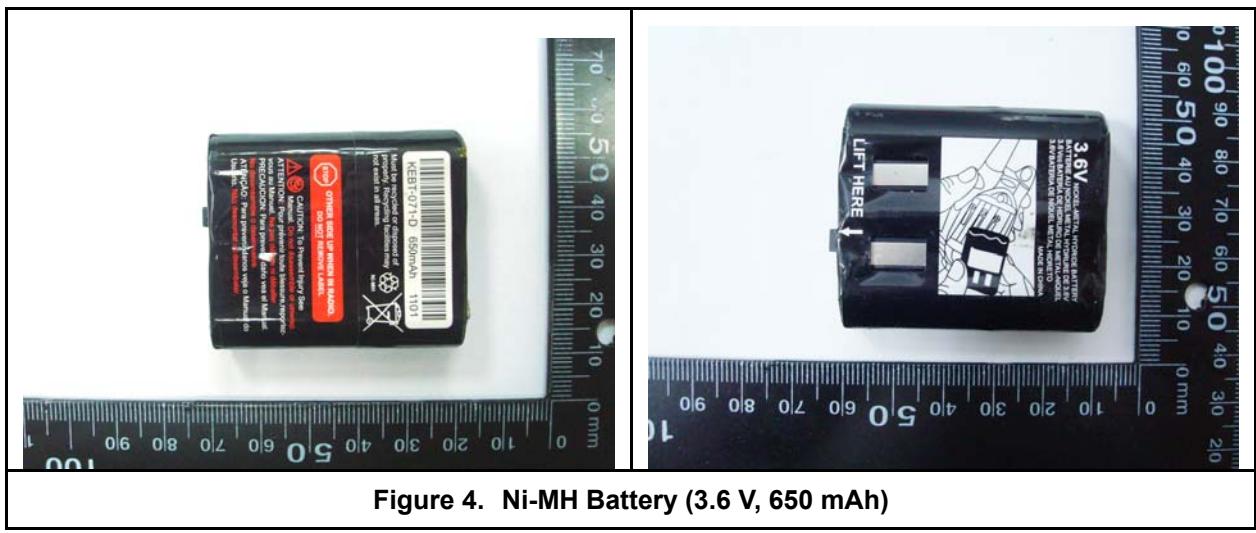
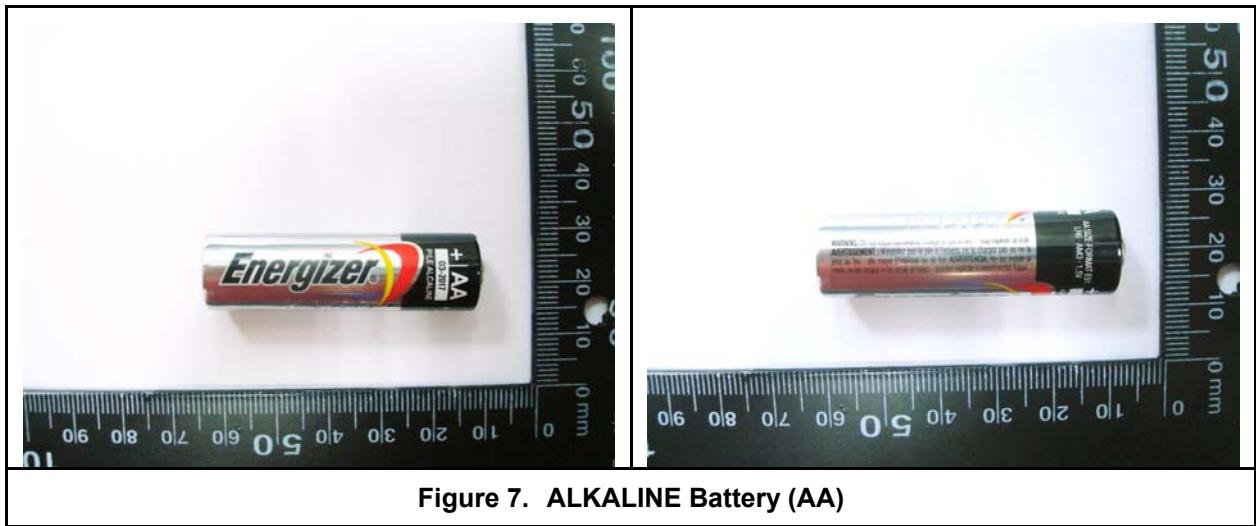
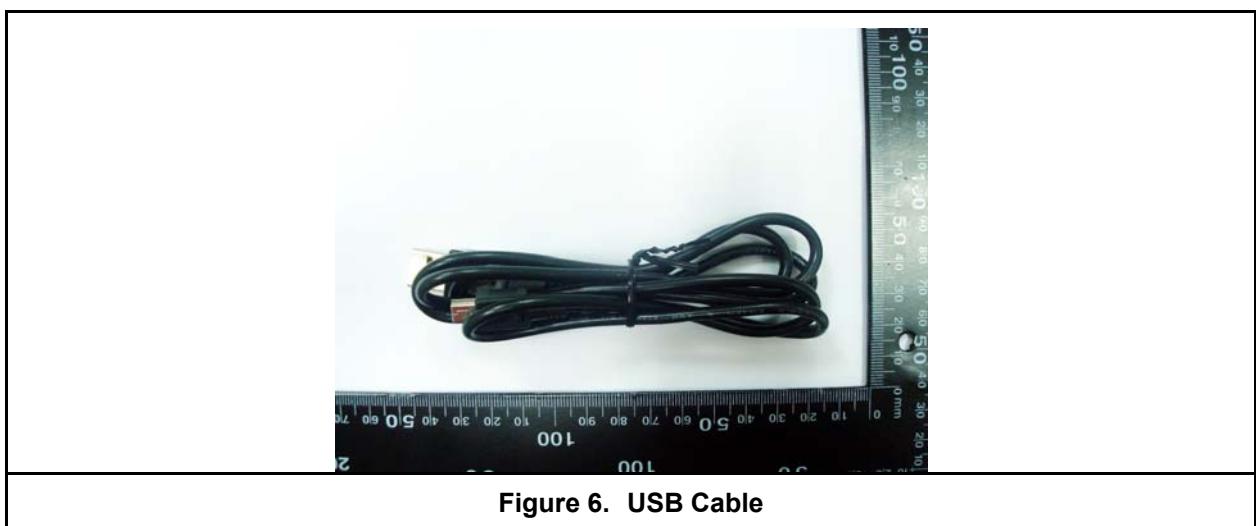
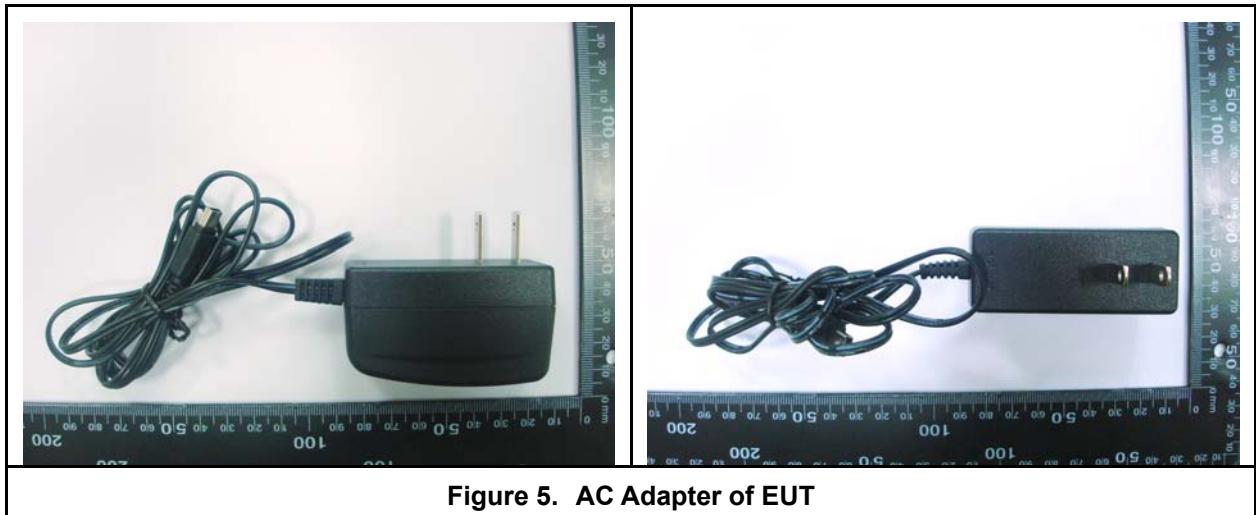


Figure 4. Ni-MH Battery (3.6 V, 650 mAh)



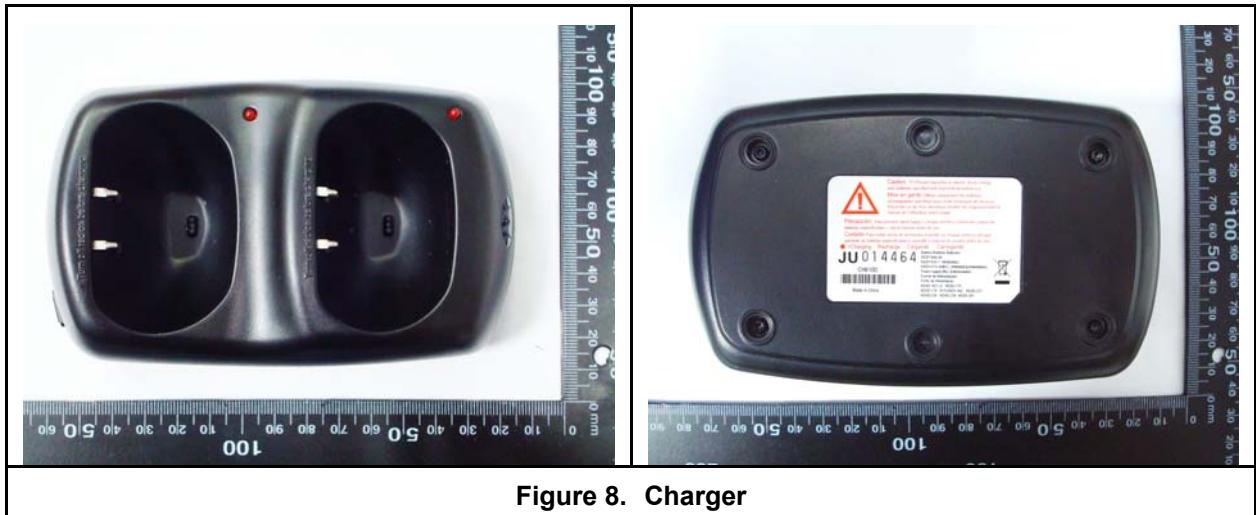


Figure 8. Charger



Figure 9. AC Adapter of Charger

3. **Introduction**

The A Test Lab Techno Corp. RF Testing Laboratory has performed measurements of the maximum potential exposure to the user of **Giant Electronics Limited Trade Mark : MOTOROLA Model(s) : MR350**. The test procedures, as described in American National Standards, Institute C95.1 - 1992 [1] , FCC/OET Bulletin 65 Supplement C [July 2001] were employed and they specify the maximum exposure limit of 1.6mW/g as averaged over any 1 gram of tissue for portable devices being used within 20cm between user and EUT in the uncontrolled environment. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the equipment used are included within this test report.

4. **SAR Definition**

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dw) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Figure 9).

$$\text{SAR} = \frac{d}{dt} \left(\frac{dw}{dm} \right) = \frac{d}{dt} \left(\frac{dw}{\rho dv} \right)$$

Figure 10. SAR Mathematical Equation

SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where :

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electric field strength (V/m)

***Note :**

The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane [2]



5. **SAR Measurement Setup**

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Measurement Server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chipdisk and 128MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The PC consists of the Intel Core(TM)2 CPU @1.86GHz computer with Windows XP system and SAR Measurement Software DASY5, Post Processor SEMCAD, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection...etc. is connected to the Electro-optical converter (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the Measurement Server.

The DAE4 (or DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [3] .

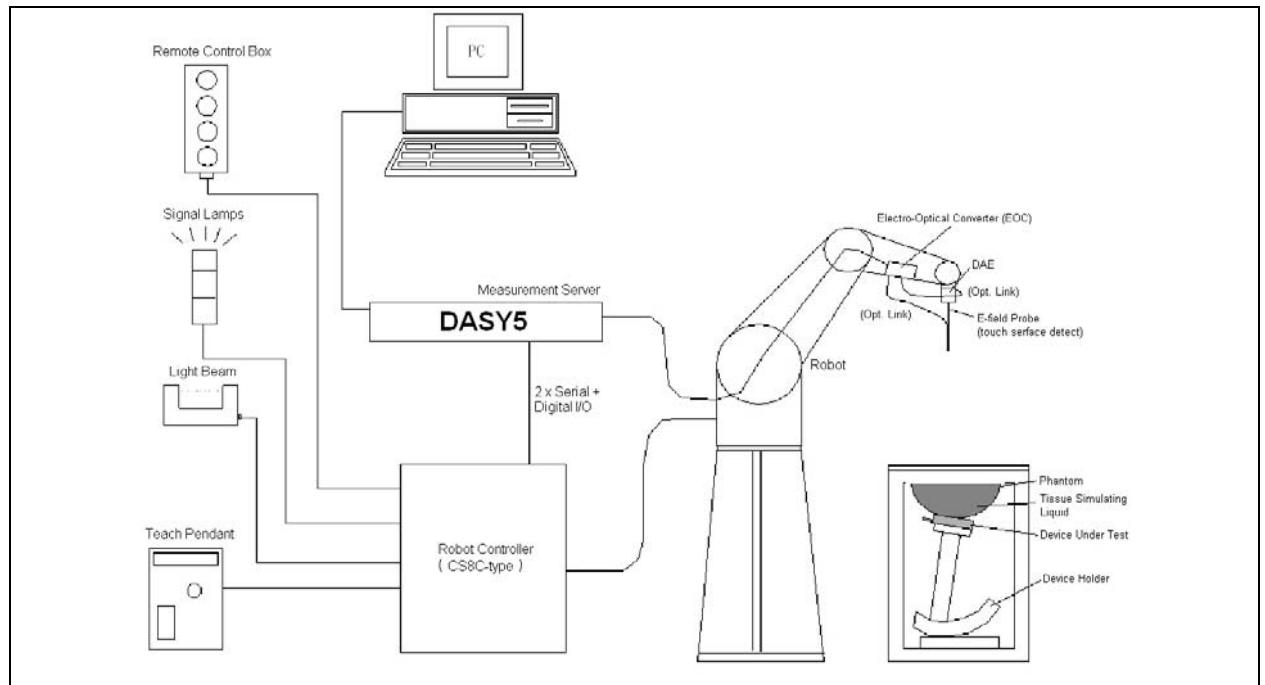


Figure 11. SAR Lab Test Measurement Setup



6. System Components

6.1 DASY 5 E-Field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration [3] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.

6.1.1 E-Field Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 6 GHz In brain and muscle simulating tissue at frequencies of 450MHz Calibration for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.3 dB in brain tissue (rotation around probe axis) ± 0.5 dB in brain tissue (rotation normal probe axis)
Dynamic Range	10 μ W/g to > 100mW/g; Linearity: ± 0.2 dB
Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surface
Dimensions	Overall length: 330mm Tip length: 20mm Body diameter: 12mm Tip diameter: 2.5mm Distance from probe tip to dipole centers: 1.0mm
Application	General dosimetry up to 6GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

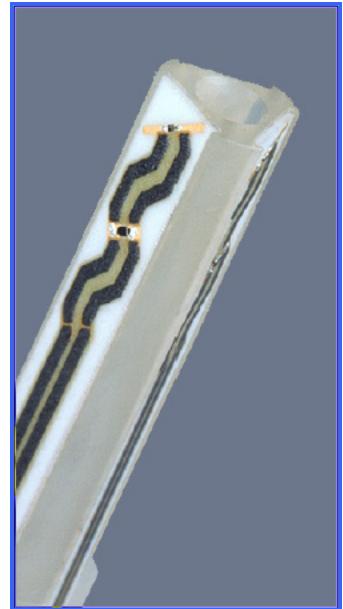


Figure 12.
E-field Probe



Figure 13.
Probe setup on robot



6.1.2 E-Field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in [4] with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in [5] and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1GHz, and in a wave guide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where :

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (head or body),

ΔT = Temperature increase due to RF exposure.

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Or

Where :

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).



6.2 Data Acquisition Electronic (DAE) System

Cell Controller

Processor : Intel Core(TM)2 CPU
Clock Speed : @ 1.86GHz
Operating System : Windows XP Professional

Data Converter

Features : Signal Amplifier, multiplexer, A/D converter, and control logic
Software : DASY5 v5.0 (Build 125) & SEMCAD X Version 13.4 Build 125
Connecting Lines : Optical downlink for data and status info
Optical uplink for commands and clock

6.3 Robot

Positioner : Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability : ± 0.02 mm
No. of Axis : 6

6.4 Measurement Server

Processor : PC/104 with a 400MHz intel ULV Celeron
I/O-board : Link to DAE4(or DAE3)
16-bit A/D converter for surface detection system
Digital I/O interface
Serial link to robot
Direct emergency stop output for robot

6.5 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the IEEE SCC34-SC2 and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

***Note :** A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [6]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Larger DUT cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.

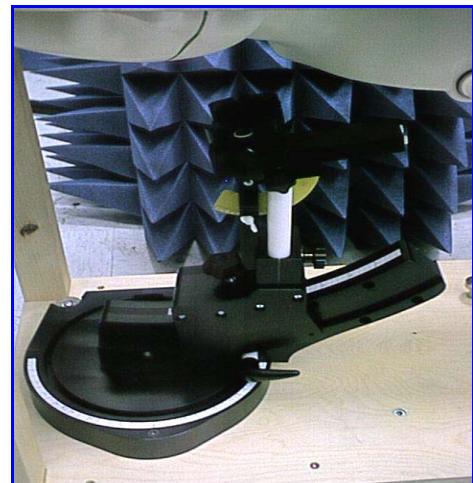


Figure 14. Device Holder

6.6 Phantom - SAM v4.0

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.



Figure 15. SAM Twin Phantom

Shell Thickness	2 ±0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	810×1000×500 mm (H×L×W)

Table 1. Specification of SAM v4.0

6.7 Data Storage and Evaluation

6.7.1 Data Storage

The DASY5 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA5. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

6.7.2 Data Evaluation

The DASY5 post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated :

E-field probes :

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes :

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

$\mu \text{ V}/(\text{V}/\text{m})^2$ for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [$\text{Siemens}/\text{m}$]

ρ = equivalent tissue density in g/cm^3

***Note :** that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = \frac{H_{tot}^2}{37.7}$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm^2

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



7. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	EX3DV4	3632	Jan. 19, 2011	Jan. 19, 2012
SPEAG	450MHz System Validation Kit	D450V2	1021	Feb. 16, 2011	Feb. 16, 2012
SPEAG	Data Acquisition Electronics	DAE4	779	Jan. 31, 2011	Jan. 31, 2012
SPEAG	Measurement Server	SE UMS 011 AA	1025	NCR	
SPEAG	Device Holder	N/A	N/A	NCR	
SPEAG	Phantom	SAM V4.0	TP-1150	NCR	
SPEAG	Robot	Staubli TX90XL	F07/564ZA1/C/01	NCR	
SPEAG	Software	DASY5 V5.0 Build 125	N/A	NCR	
SPEAG	Software	SEMCAD V13.4 Build 125	N/A	NCR	
Agilent	ENA Series Network Analyzer	E5071B	MY42404655	Apr. 14, 2010	Apr. 14, 2012
Agilent	Dielectric Probe Kit	85070C	US99360094	NCR	
R&S	Power Sensor	NRP-Z22	100179	May 20, 2010	May 20, 2011
Agilent	MXG Vector Signal Generator	N5182A	MY47420962	Jun. 25, 2010	Jun. 25, 2011
Agilent	Dual Directional Coupler	778D	50334	NCR	
Mini-Circuits	Power Amplifier	ZHL-42W-SMA	D111103#5	NCR	

Table 2. Test Equipment List

8. Tissue Simulating Liquids

The Head and body mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the tissue.

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an 85070C Dielectric Probe Kit and an E5071B Network Analyzer.

IEEE SCC-34/SC-2 in 1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in human head. Other head and body tissue parameters that have not been specified in 1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equation and extrapolated according to the head parameter specified in 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 - 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00
(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m ³)				

Table 3. Tissue dielectric parameters for head and body phantoms

8.1 Ingredients

The following ingredients are used:

- Water: deionized water (pure H₂O), resistivity $\geq 16 \text{ M } \Omega$ -as basis for the liquid
- Sugar: refined white sugar (typically 99.7 % sucrose, available as crystal sugar in food shops)
-to reduce relative permittivity
- Salt: pure NaCl -to increase conductivity
- Cellulose: Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20°C), CAS # 54290 -to increase viscosity and to keep sugar in solution.
- Preservative: Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 -to prevent the spread of bacteria and molds
- DGBE: Diethylenglycol-monobutyl ether (DGBE), Fluka Chemie GmbH, CAS # 112-34-5 -to reduce relative permittivity

8.2 Recipes

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands.

Note: The goal dielectric parameters (at 22 °C) must be achieved within a tolerance of $\pm 5\%$ for ϵ and $\pm 5\%$ for σ .

Liquid type	HSL 450 - A	
Ingredient	Weight (g)	Weight (%)
Water	522.94	38.91
Sugar	765.09	56.93
Cellulose	3.39	0.25
Salt	50.94	3.79
Preventol	1.63	0.12
Total amount	1'344.00	100.00
Goal dielectric parameters		
Frequency [MHz]	450	
Relative Permittivity	43.5	
Conductivity [S/m]	0.87	

Liquid type		MSL 450 - B		
Ingredient		Weight (g)		Weight (%)
Water		590.62		46.21
Sugar		654.00		51.17
Cellulose		2.36		0.18
Salt		29.96		2.34
Preventol		1.06		0.08
Total amount		1'278.00		100.00
Goal dielectric parameters				
Frequency [MHz]		450		
Relative Permittivity		56.7		
Conductivity [S/m]		0.94		

8.3 Liquid Confirmation

8.3.1 Parameters

Liquid Verify								
Ambient Temperature : 22 ± 2 °C ; Relative Humidity : 40-70 %								
Liquid Type	Freq.	Temp (°C)	Parameters	Target Value	Measured Value	Deviation (%)	Limit (%)	Measured Date
450MHz Head	450MHz	22.0	ϵ_r	43.50	44.40	2.07%	± 5	May 10, 2011
			σ	0.870	0.876	0.69%	± 5	
			ϵ_r	43.50	44.40	2.07%	± 5	May 11, 2011
			σ	0.870	0.876	0.69%	± 5	
450MHz Body	450MHz	22.0	ϵ_r	56.70	55.70	-1.76%	± 5	May 14, 2011
			σ	0.940	0.934	-0.64%	± 5	
			ϵ_r	56.70	55.70	-1.76%	± 5	May 16, 2011
			σ	0.940	0.934	-0.64%	± 5	

Table 4. Measured Tissue dielectric parameters for head and body phantoms

8.3.2 Liquid Depth

The liquid level was during measurement 15cm ± 0.5 cm.

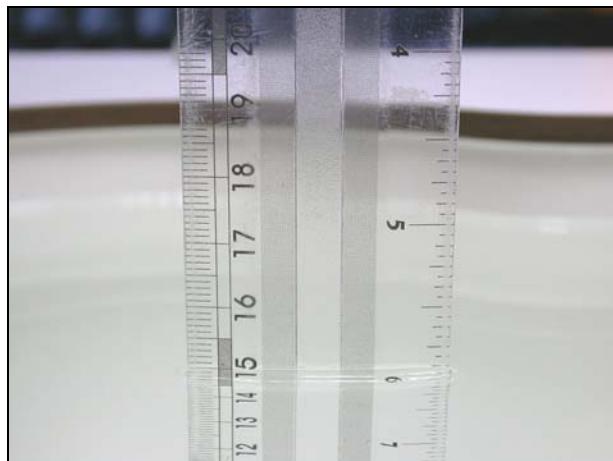


Figure 16. Head-Tissue-Simulating-Liquid

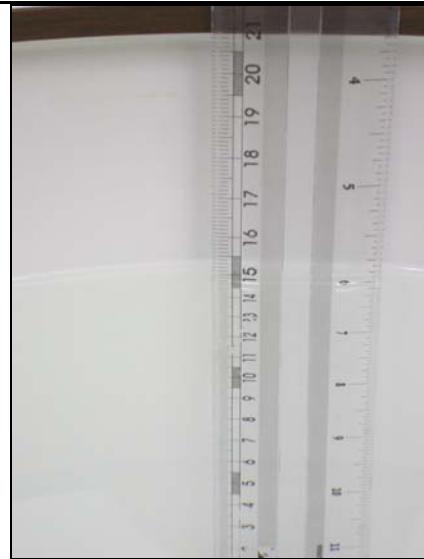


Figure 17. Body-Tissue-Simulating-Liquid

9. Measurement Process

9.1 Device and Test Conditions

The Test Device was provided by Giant Electronics Limited for this evaluation. The spatial peak SAR values were assessed for the middle channel defined by FRS (Ch11 = 467.6375MHz) and GMRS (Ch4 = 462.6375MHz) systems. Battery and accessories shall be those specified by the manufacturer. The battery shall be fully charged before each measurement and there shall be no external connections.

Usage			Operates with a built-in test mode by client		
Distance between antenna axis at the joint and the liquid surface:			For Body, EUT front to phantom, 15mm separation. EUT back to phantom, 15mm separation. EUT back to phantom, to attach belt clip.		
Simulating human Head/Body			Head / Body		
EUT Battery			Fully-charged with Ni-MH Battery and Alkaline Battery.		
Output Power (ERP)	Channel		Frequency MHz	Before	After
	FRS	Middle	- 11	467.6375	25.120
	GMRS	Middle	- 04	462.6375	31.923
					31.880

9.2 System Performance Check

9.2.1 Symmetric Dipoles for System Validation

Construction	Symmetrical dipole with 1/4 balun enables measurement of feed point impedance with NWA matched for use near flat phantoms filled with head simulating solutions. Includes distance holder and tripod adaptor. Calibration. Calibrated SAR value for specified position and input power at the flat phantom in head simulating solutions.
Frequency	450MHz
Return Loss	> 20 dB at specified validation position
Power Capability	> 100 W (f < 1GHz); > 40 W (f > 1GHz)
Options	Dipoles for other frequencies or solutions and other calibration conditions are available upon request
Dimensions	D450V2 : dipole length 270 mm; overall height 330 mm



Figure 18. Validation Kit




9.2.2 Validation


Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation was performed at 450 MHz.

Validation kit		Mixture Type	SAR _{1g} [mW/g]	SAR _{10g} [mW/g]	Cal. Date		Due Date
D450V2-SN1021		Head	4.93	3.27	Feb. 16, 2011		Feb. 16, 2012
		Body	4.68	3.11			
Frequency (MHz)	Power	SAR _{1g} (mW/g)	SAR _{10g} (mW/g)	Drift (dB)	Difference percentage		Date
		398mW	1.94	1.32			
450 (Head)	Normalize to 1 Watt	4.8743719	3.3165829	-0.011	-1.1 %	1.4 %	May 10, 2011
	398mW	1.97	1.36				
450 (Head)	Normalize to 1 Watt	4.9497487	3.4170854	-0.095	0.4 %	4.5 %	May 11, 2011
	398mW	1.86	1.24				
450 (Body)	Normalize to 1 Watt	4.6733668	3.1155779	0.058	-0.1 %	0.2 %	May 14, 2011
	398mW	1.79	1.19				
450 (Body)	Normalize to 1 Watt	4.4974874	2.9899497	-0.030	-3.9 %	-3.9 %	May 16, 2011

Z-axis Plot of System Performance Check

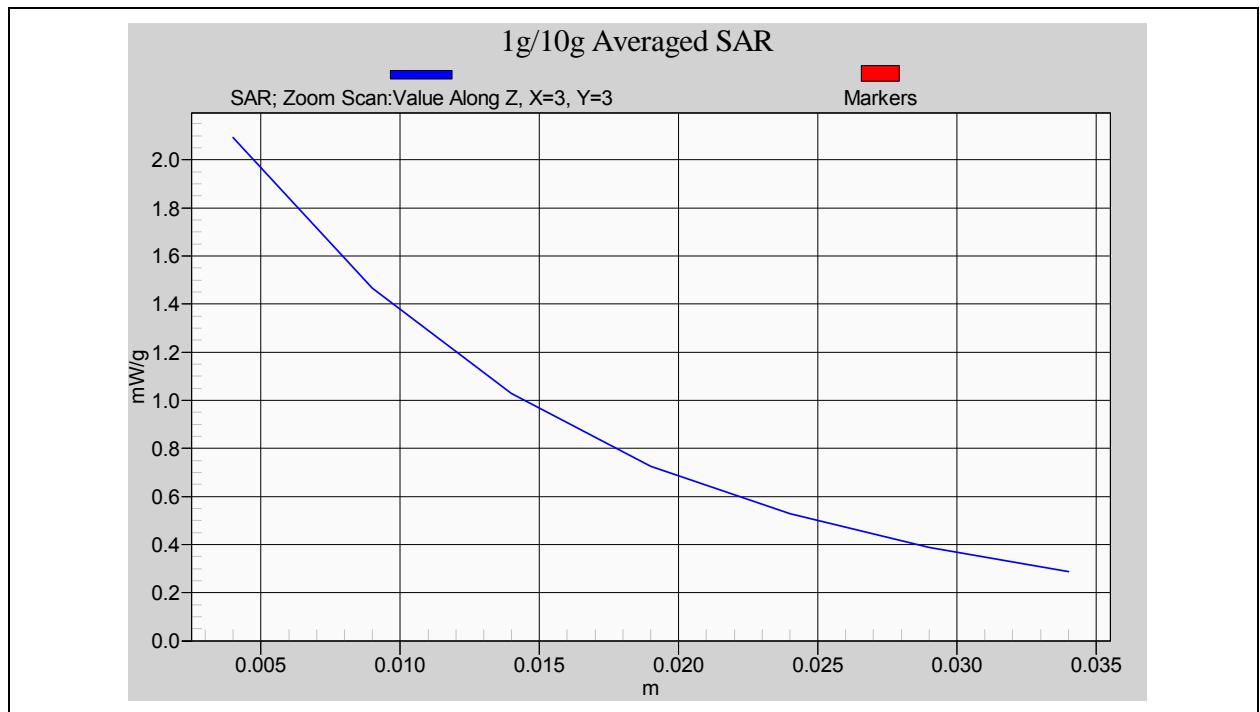


Head-Tissue-Simulating-Liquid 450MHz (05/10/2011)

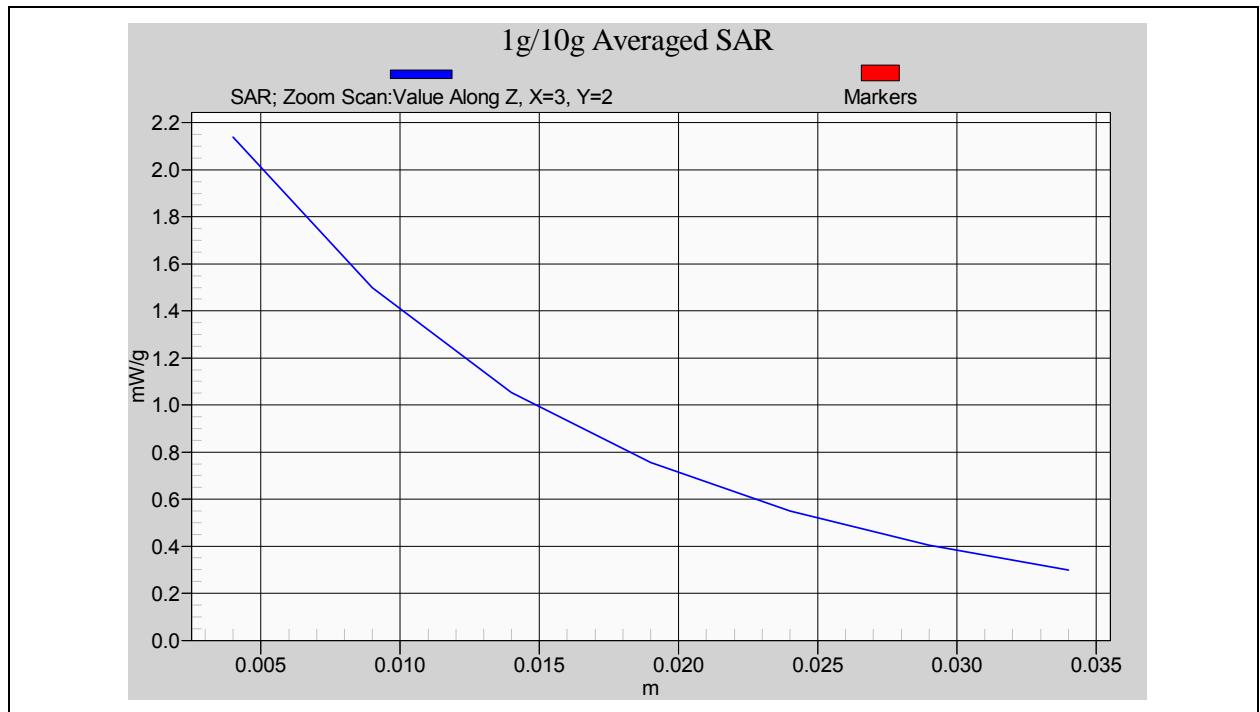


Head-Tissue-Simulating-Liquid 450MHz (05/11/2011)

Z-axis Plot of System Performance Check

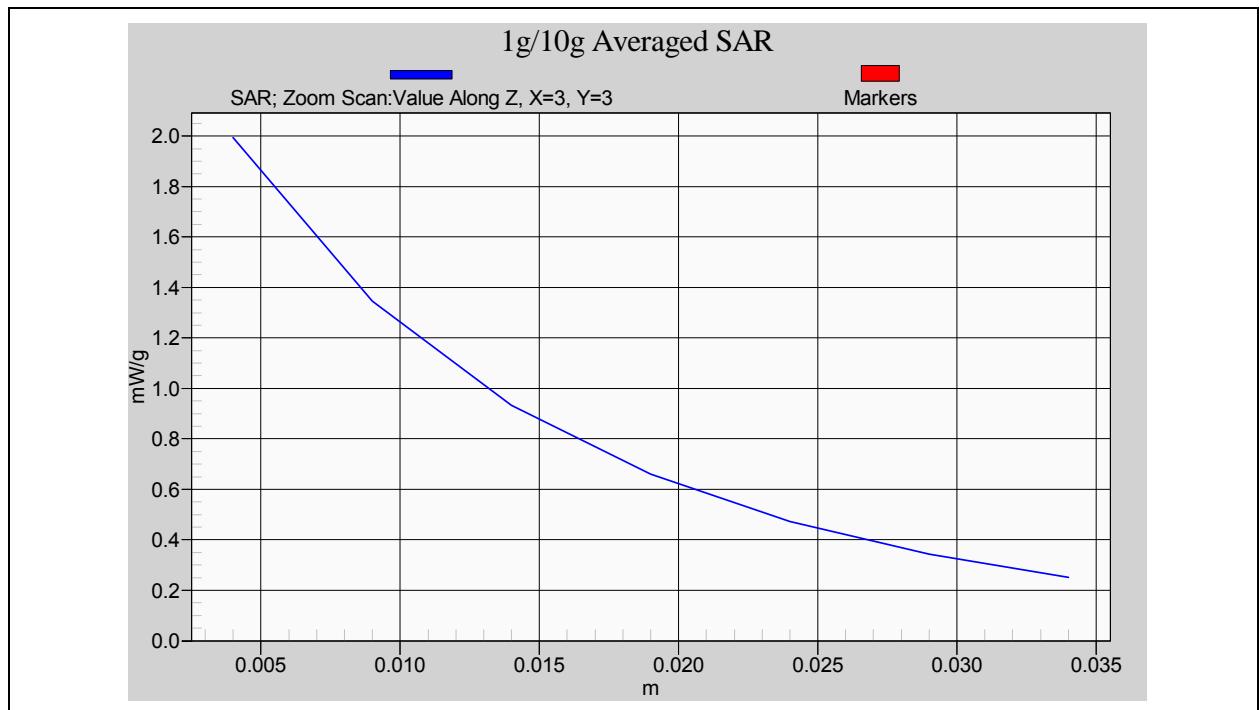

Body -Tissue-Simulating-Liquid 450MHz (05/14/2011)

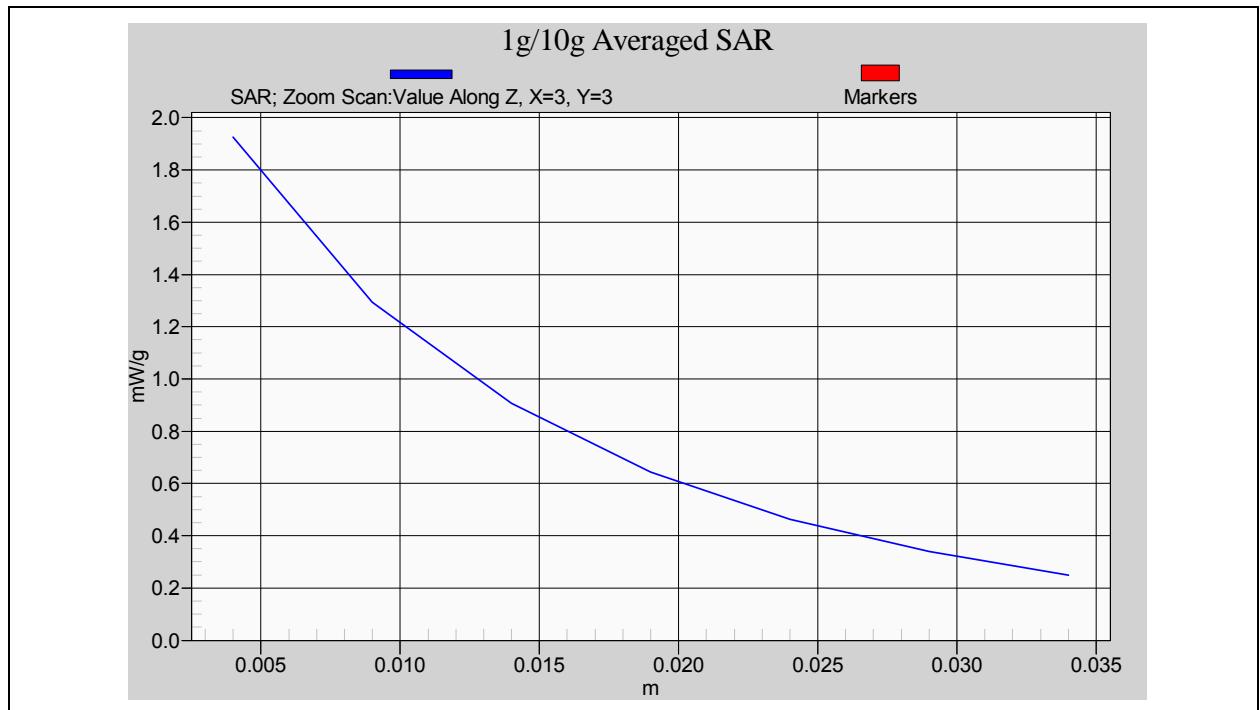

Body -Tissue-Simulating-Liquid 450MHz (05/16/2011)



9.3 Dosimetric Assessment Setup

9.3.1 Body Test Position

Body - Worn Configuration

Body - Worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device.

Body - Worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 15 mm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances.

For this test :

- The EUT is placed into the holster/belt clip and the holster is positioned against the surface of the phantom in a normal operating position.
- Since this EUT doesn't supply any body-worn accessory to the end user, a distance of 15 mm was tested to confirm the necessary "minimum SAR separation distance".
(*Note : This distance includes the 2 mm phantom shell thickness.)



9.3.2 Measurement Procedures

The evaluation was performed with the following procedures :

Surface Check : A surface checks job gathers data used with optical surface detection. It determines the distance from the phantom surface where the reflection from the optical detector has its peak. Any following measurement jobs using optical surface detection will then rely on this value. The surface check performs its search a specified number of times, so that the repeatability can be verified. The probe tip distance is 1.3mm to phantom inner surface during scans.

Reference : The reference job measures the field at a specified reference position, at 4 mm from the selected section's grid reference point.

Area Scan : The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines can find the maximum locations even in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. Any following zoom scan within the same procedure will then perform fine scans around these maxima. The area covered the entire dimension of the EUT and the horizontal grid spacing was 15 mm x 15 mm.

Zoom Scan : Zoom scans are used to assess the highest averaged SAR for cubic averaging volumes with 1 g and 10 g of simulated tissue. The zoom scan measures 7 x 7 x 9 points in a 30 x 30 x 24 mm cube whose base faces are centered around the maxima returned from a preceding area scan within the same procedure.

Drift : The drift job measures the field at the same location as the most recent reference job within the same procedure, with the same settings. The drift measurement gives the field difference in dB from the last reference measurement. Several drift measurements are possible for each reference measurement. This allows monitoring of the power drift of the device in the batch process. If the value changed by more than 5%, the evaluation was repeated.



9.4 Spatial Peak SAR Evaluation

The DASY5 software includes all numerical procedures necessary to evaluate the spatial peak SAR values. Based on the Draft: SCC-34, SC-2, WG-2 - Computational Dosimetry, IEEE P1529/D0.0 (Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) Associated with the Use of Wireless Handsets - Computational Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement in a volume of $(30 \times 30 \times 24) \text{ mm}^3$ (7x7x9 points). The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Postprocessing engine (SEMCAD). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location.

The entire evaluation of the spatial peak values is performed within the Postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into three stages:

Interpolation and Extrapolation

The probe is calibrated at the center of the dipole sensors which is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY5, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and SAR extrapolation routines. The interpolation, Maxima Search and extrapolation routines are all based on the modified Quadratic Shepard's method [7].



10. Measurement Uncertainty

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than $\pm 30.00\%$ [8].

According to Std. C95.3 [9], the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of ± 1 to 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.

According to CENELEC [10], typical worst-case uncertainty of field measurements is ± 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

Source of Uncertainty	Uncertainty Value	Probability Distribution	Divisor	C_i	Standard Uncertainty $\pm 1\% (1-g)$	V_i or V_{eff}
Type-A	$\pm 0.9\%$	Normal	1	1	$\pm 0.90\%$	9
Measurement System						
Probe Calibration	$\pm 7\%$	Normal	1	1	$\pm 7.00\%$	∞
Axial Isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\pm 1.92\%$	∞
Hemispherical Isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\pm 3.92\%$	∞
Spatial Resolution	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	$\pm 0.00\%$	∞
Boundary Effect	$\pm 11.0\%$	Rectangular	$\sqrt{3}$	1	$\pm 6.35\%$	∞
Linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	$\pm 2.71\%$	∞
Detection Limit	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	$\pm 0.58\%$	∞
Readout Electronics	$\pm 1.0\%$	Normal	1	1	$\pm 1.00\%$	∞
RF Ambient Conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	$\pm 1.73\%$	∞
Probe Positioner Mech. Const.	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	$\pm 0.23\%$	∞
Probe Positioning	$\pm 0.35\%$	Rectangular	$\sqrt{3}$	1	$\pm 0.20\%$	∞
Extrapolation and Integration	$\pm 3.9\%$	Rectangular	$\sqrt{3}$	1	$\pm 2.25\%$	∞
Test sample Related						
Test sample Positioning	$\pm 4.7\%$	Normal	1	1	$\pm 4.70\%$	5
Device Holder Uncertainty	$\pm 6.1\%$	Normal	1	1	$\pm 6.10\%$	5
Drift of Output Power	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	$\pm 2.89\%$	∞
Phantom and Setup						
Phantom Uncertainty (Including temperature effects)	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	$\pm 2.31\%$	∞
Liquid Conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.73\%$	∞
Liquid Conductivity (meas.)	$\pm 10.0\%$	Rectangular	$\sqrt{3}$	0.6	$\pm 3.46\%$	∞
Liquid Permittivity (target)	$\pm 5.0\%$	Rectangular	1	0.6	$\pm 3.00\%$	∞
Liquid Permittivity (meas.)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.73\%$	∞
Combined standard uncertainty		RSS			$\pm 15.00\%$	88.7
Expanded uncertainty (Coverage factor = 2)		Normal (k=2)			$\pm 30.00\%$	

Table 5. Uncertainty Budget of DASY

Item	Uncertainty Component	Uncertainty Value	Prob. Dist	Div.	c_i (1g)	c_i (10g)	Std. Unc. (1-g)	Std. Unc. (10-g)	V_i or V_{eff}
Measurement System									
u1	Probe Calibration ($k=1$)	$\pm 5.5\%$	Normal	1	1	1	$\pm 5.5\%$	$\pm 5.5\%$	∞
u2	Probe Isotropy	$\pm 7.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.1\%$	$\pm 3.1\%$	∞
u3	Boundary Effect	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
u4	Linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
u5	System Detection Limit	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.58\%$	$\pm 0.58\%$	∞
u6	Readout Electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
u7	Response Time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
u8	Integration Time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
u9	RF Ambient Conditions	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
u10	RF Ambient Reflections	$\pm 0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0\%$	$\pm 0\%$	∞
u11	Probe Positioner Mechanical Tolerance	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
u12	Probe Positioning with respect to Phantom Shell	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
u13	Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test sample Related									
u14	Test sample Positioning	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	89
u15	Device Holder Uncertainty	$\pm 3.5\%$	Normal	1	1	1	$\pm 3.5\%$	$\pm 3.5\%$	5
u16	Output Power Variation - SAR drift measurement	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Tissue Parameters									
u17	Phantom Uncertainty (shape and thickness tolerances)	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
u18	Liquid Conductivity - deviation from target values	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
u19	Liquid Conductivity - measurement uncertainty	$\pm 1.93\%$	Normal	1	0.64	0.43	$\pm 1.24\%$	$\pm 0.83\%$	69
u20	Liquid Permittivity - deviation from target values	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
u21	Liquid Permittivity - measurement uncertainty	$\pm 1.4\%$	Normal	1	0.6	0.49	$\pm 0.84\%$	$\pm 1.69\%$	69
Combined standard uncertainty				RSS			$\pm 10.05\%$	$\pm 9.98\%$	313
Expanded uncertainty (95% CONFIDENCE LEVEL)				$k=2$			$\pm 20.10\%$	$\pm 19.96\%$	

Table 6. Uncertainty of a system performance check with DASY 5 system



11. SAR Test Results Summary

11.1 FRS Brain SAR (EUT front side distance phantom 15mm)

Ambient :

Temperature (°C) : 22 ± 2 Relative HUMIDITY (%) : 40-70

Liquid :

Mixture Type : HSL450 Liquid Temperature (°C) : 22

Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 3632

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Amb. Temp	Remark	
					Duty Cycle					
MHz	Ch.				100%	50%				
467.6375	11	FM	Ni-MH	N/A	0.789	0.395	-0.025000	22.0	---	
467.6375	11	FM	ALKALINE	N/A	0.841	0.421	-0.031000	22.0	---	
467.6375	11	FM	Ni-MH	N/A	0.795	0.398	-0.023000	22.0	EUT link to USB Cable	
467.6375	11	FM	Ni-MH	N/A	0.758	0.379	-0.006120	22.0	EUT link to AC adaptor	
Std. C95.1-1992 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)		Remark	
			Duty Cycle				Duty Cycle			
MHz	Ch.		100%	50%			100%	50%		
467.6375	11	Ni-MH	0.789	0.395	-0.025000	1.006	0.794	0.397	---	
467.6375	11	ALKALINE	0.841	0.421	-0.031000	1.007	0.847	0.424	---	
467.6375	11	Ni-MH	0.795	0.398	-0.023000	1.005	0.799	0.400	EUT link to USB Cable	
467.6375	11	Ni-MH	0.758	0.379	-0.006120	1.001	0.759	0.380	EUT link to AC adaptor	

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).


SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

Z-axis Plot of SAR Measurement

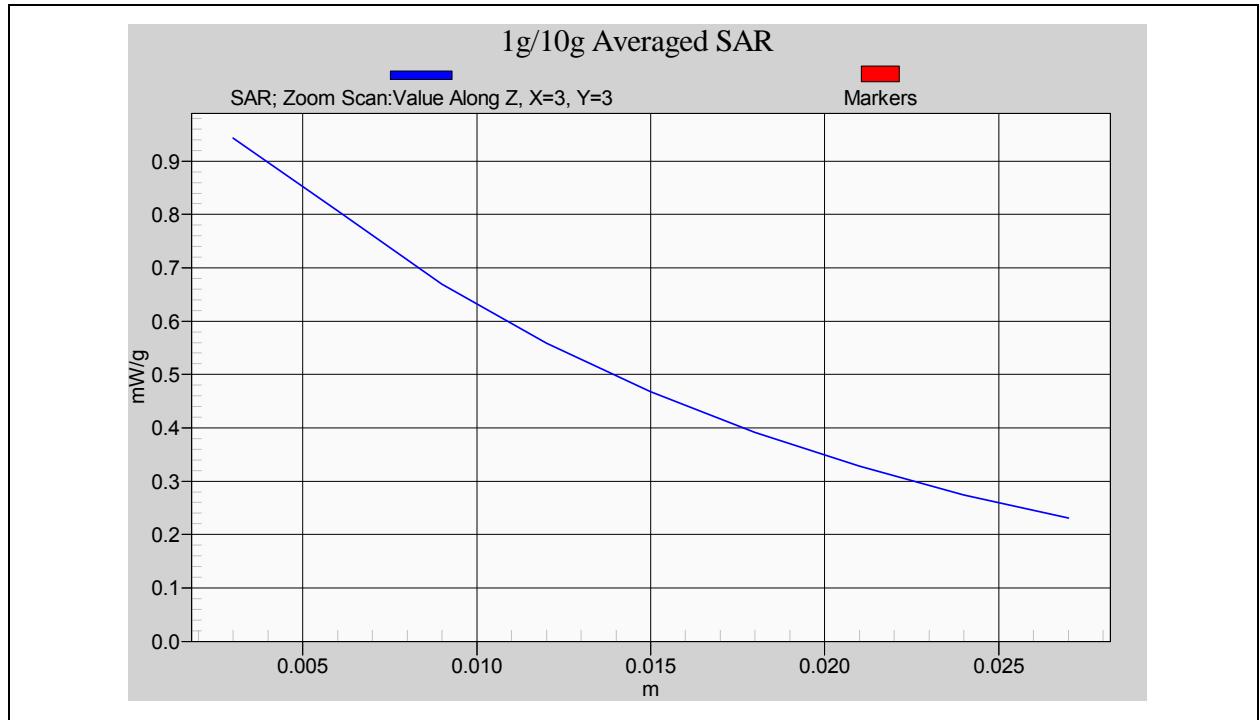

FRS Brain SAR (EUT front side distance phantom 15mm) _ CH11 (ALKALINE Battery)



11.2 GMRS Brain SAR (EUT front side distance phantom 15mm)

Ambient :

Temperature (°C) : 22 ± 2 Relative HUMIDITY (%) : 40-70

Liquid :

Mixture Type : HSL450 Liquid Temperature (°C) : 22
Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 3632

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Amb. Temp	Remark	
					Duty Cycle					
MHz	Ch.				100%	50%				
462.6375	4	FM	Ni-MH	N/A	1.570	0.785	-0.011000	22.0	---	
462.6375	4	FM	ALKALINE	N/A	1.930	0.965	-0.018000	22.0	---	
462.6375	4	FM	Ni-MH	N/A	1.670	0.835	-0.015000	22.0	EUT link to USB Cable	
462.6375	4	FM	Ni-MH	N/A	1.150	0.575	0.012000	22.0	EUT link to AC adaptor	
Std. C95.1-1992 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

- ◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)		Remark
			Duty Cycle				100%	50%	
MHz	Ch.		100%	50%			100%	50%	
462.6375	4	Ni-MH	1.570	0.785	-0.011000	1.003	1.574	0.787	---
462.6375	4	ALKALINE	1.930	0.965	-0.018000	1.004	1.938	0.969	---
462.6375	4	Ni-MH	1.670	0.835	-0.015000	1.003	1.676	0.838	EUT link to USB Cable
462.6375	4	Ni-MH	1.150	0.575	0.012000	1.003	1.153	0.577	EUT link to AC adaptor

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).


SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

Z-axis Plot of SAR Measurement

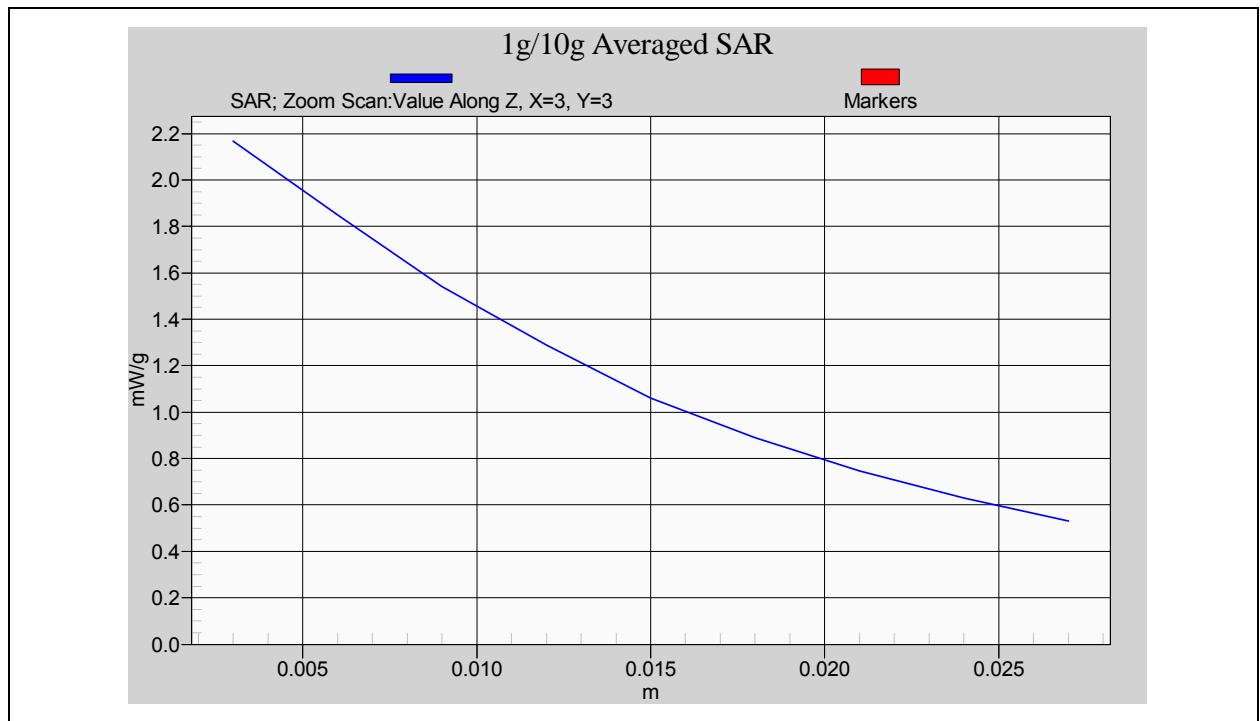

GMRS Brain SAR (EUT front side distance phantom 15mm) _ CH4 (ALKALINE Battery)



11.3 FRS Muscle SAR (EUT link headset distance phantom 15mm)

Ambient :

Temperature (°C) : 22 ± 2 Relative HUMIDITY (%) : 40-70

Liquid :

Mixture Type : MSL450 Liquid Temperature (°C) : 22
Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 3632

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Amb. Temp	Remark	
					Duty Cycle					
MHz	Ch.				100%	50%				
467.6375	11	FM	Ni-MH	Headset	0.379	0.190	-0.015000	22.0	---	
467.6375	11	FM	ALKALINE	Headset	0.405	0.203	-0.046000	22.0	---	
467.6375	11	FM	Ni-MH	Headset	0.296	0.148	0.007880	22.0	EUT link to USB Cable	
467.6375	11	FM	Ni-MH	Headset	0.346	0.173	-0.020000	22.0	EUT link to AC adaptor	
Std. C95.1-1992 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

- ◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)		Remark
			Duty Cycle				100%	50%	
MHz	Ch.		100%	50%			100%	50%	
467.6375	11	Ni-MH	0.379	0.190	-0.015000	1.003	0.380	0.190	---
467.6375	11	ALKALINE	0.405	0.203	-0.046000	1.011	0.409	0.205	---
467.6375	11	Ni-MH	0.296	0.148	0.007880	1.002	0.297	0.148	EUT link to USB Cable
467.6375	11	Ni-MH	0.346	0.173	-0.020000	1.005	0.348	0.174	EUT link to AC adaptor

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).


SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

Z-axis Plot of SAR Measurement

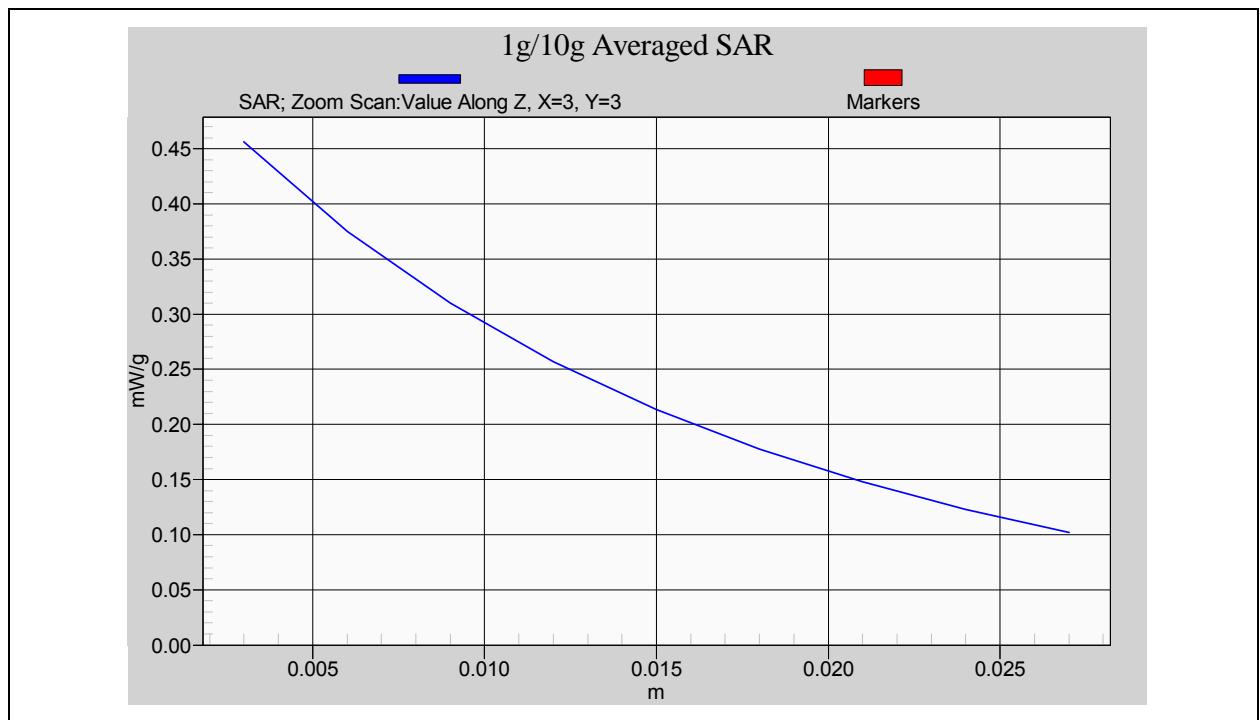

FRS Muscle SAR (EUT link headset distance phantom 15mm) _ CH11 (ALKALINE Battery)



11.4 GMRS Muscle SAR (EUT link headset distance phantom 15mm)

Ambient :

Temperature (°C) : 22 ± 2 Relative HUMIDITY (%) : 40-70

Liquid :

Mixture Type : MSL450 Liquid Temperature (°C) : 22
Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 3632

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Amb. Temp	Remark	
					Duty Cycle					
MHz	Ch.				100%	50%				
462.6375	4	FM	Ni-MH	Headset	0.872	0.436	-0.002400	22.0	---	
462.6375	4	FM	ALKALINE	Headset	1.010	0.505	-0.035000	22.0	---	
462.6375	4	FM	Ni-MH	Headset	0.846	0.423	-0.018000	22.0	EUT link to USB Cable	
462.6375	4	FM	Ni-MH	Headset	0.889	0.445	0.015000	22.0	EUT link to AC adaptor	
Std. C95.1-1992 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

- ◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)		Remark	
			Duty Cycle				Duty Cycle			
MHz	Ch.		100%	50%			100%	50%		
462.6375	4	Ni-MH	0.872	0.436	-0.002400	1.001	0.872	0.436	---	
462.6375	4	ALKALINE	1.010	0.505	-0.035000	1.008	1.018	0.509	---	
462.6375	4	Ni-MH	0.846	0.423	-0.018000	1.004	0.850	0.425	EUT link to USB Cable	
462.6375	4	Ni-MH	0.889	0.445	0.015000	1.003	0.892	0.446	EUT link to AC adaptor	

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).


SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

Z-axis Plot of SAR Measurement

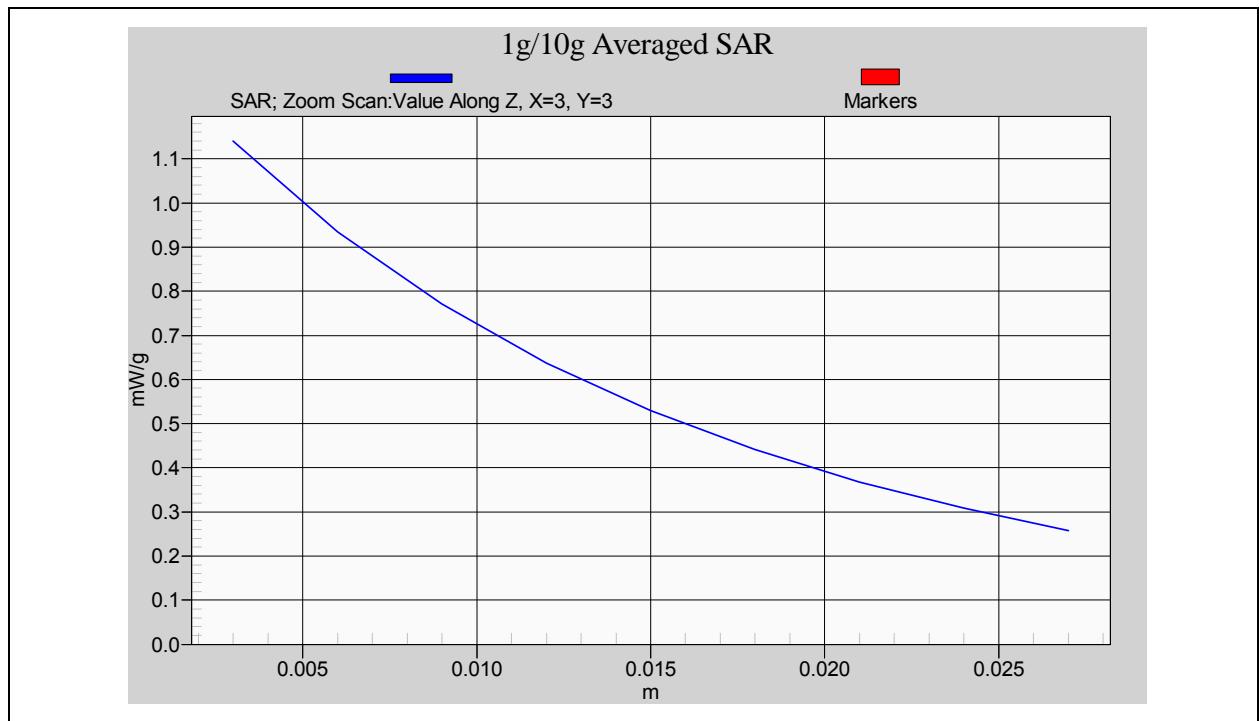

GMRS Muscle SAR (EUT link headset distance phantom 15mm) _ CH4 (ALKALINE Battery)

11.5 FRS Muscle SAR (EUT link headset and Belt clip)

Ambient :

Temperature (°C) :

22 ± 2

Relative HUMIDITY (%) :

40-70

Liquid :

Mixture Type :

MSL450

Liquid Temperature (°C) :

22

Depth of liquid (cm) :

15

Measurement :

Crest Factor :

1

Probe S/N :

3632

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Amb. Temp	Remark	
					Duty Cycle					
MHz	Ch.				100%	50%				
467.6375	11	FM	Ni-MH	Headset & Belt Clip	0.387	0.194	-0.021000	22.0	---	
467.6375	11	FM	ALKALINE	Headset & Belt Clip	0.464	0.232	-0.019000	22.0	---	
467.6375	11	FM	Ni-MH	Headset & Belt Clip	0.287	0.144	-0.031000	22.0	EUT link to USB Cable	
467.6375	11	FM	Ni-MH	Headset & Belt Clip	0.272	0.136	-0.010000	22.0	EUT link to AC adaptor	
Std. C95.1-1992 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram					

- SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)		Remark	
			Duty Cycle				Duty Cycle			
MHz	Ch.		100%	50%			100%	50%		
467.6375	11	Ni-MH	0.387	0.194	-0.021000	1.005	0.389	0.194	---	
467.6375	11	ALKALINE	0.464	0.232	-0.019000	1.004	0.466	0.233	---	
467.6375	11	Ni-MH	0.287	0.144	-0.031000	1.007	0.289	0.145	EUT link to USB Cable	
467.6375	11	Ni-MH	0.272	0.136	-0.010000	1.002	0.273	0.136	EUT link to AC adaptor	

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).


SAR(unknown) = SAR(know) x (PxTx/P(know) T(know))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

Z-axis Plot of SAR Measurement

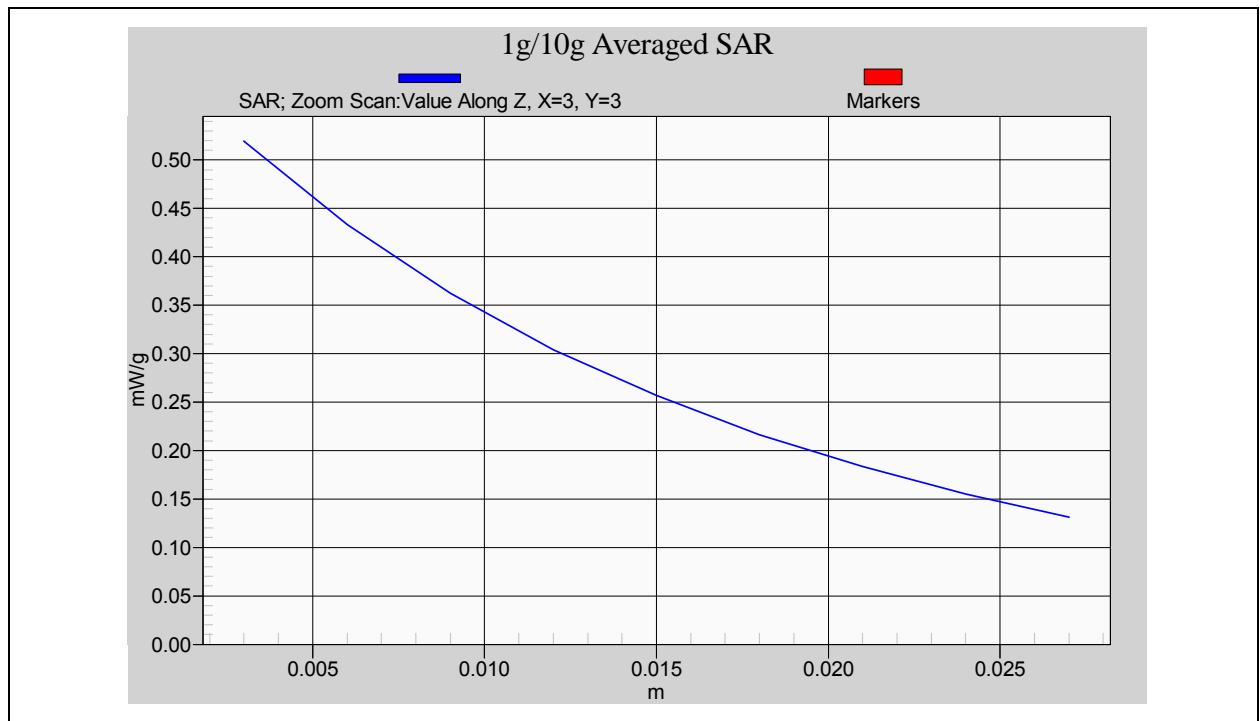

FRS Muscle SAR (EUT link headset and Belt clip) _ CH11 (ALKALINE Battery)



11.6 GMRS Muscle SAR (EUT link headset and Belt clip)

Ambient :

Temperature (°C) : 22 ± 2 Relative HUMIDITY (%) : 40-70

Liquid :

Mixture Type : MSL450 Liquid Temperature (°C) : 22
Depth of liquid (cm) : 15

Measurement :

Crest Factor : 1 Probe S/N : 3632

Frequency		Modulation	Battery	Accessory	SAR _{1g} [mW/g]		Power Drift	Amb. Temp	Remark						
MHz	Ch.				Duty Cycle										
					100%	50%									
462.6375	4	FM	Ni-MH	Headset & Belt Clip	0.971	0.486	-0.000713	22.0	---						
462.6375	4	FM	ALKALINE	Headset & Belt Clip	0.869	0.435	-0.023000	22.0	---						
462.6375	4	FM	Ni-MH	Headset & Belt Clip	0.916	0.458	0.004690	22.0	EUT link to USB Cable						
462.6375	4	FM	Ni-MH	Headset & Belt Clip	0.713	0.357	0.012000	22.0	EUT link to AC adaptor						
Std. C95.1-1992 - Safety Limit Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1 gram										

- ◆ SAR values are scaled for the power drift

Frequency		Battery	SAR _{1g} [mW/g]		power drift (dB)	+ power drift 10^(dB/10)	SAR _{1g} [mW/g] (include +power drift)		Remark				
MHz	Ch.		Duty Cycle				Duty Cycle						
			100%	50%			100%	50%					
462.6375	4	Ni-MH	0.971	0.486	-0.000713	1.000	0.971	0.486	---				
462.6375	4	ALKALINE	0.869	0.435	-0.023000	1.005	0.874	0.437	---				
462.6375	4	Ni-MH	0.916	0.458	0.004690	1.001	0.917	0.458	EUT link to USB Cable				
462.6375	4	Ni-MH	0.713	0.357	0.012000	1.003	0.715	0.357	EUT link to AC adaptor				

SAR is basically proportional to average transmit power and duty cycle

(i.e. SAR = P x T where P is the average transmit power and T is the transmit duty cycle).


SAR(unknown) = SAR(know) x (PxTx/P(known) T(known))

Where Px is the unknown power (i.e. the power at the highest drift)

Tx is the transmit duty cycle used at that unknown power.

If transmitter duty cycle is the same then it should be a relationship of Px/Pknown)

Z-axis Plot of SAR Measurement

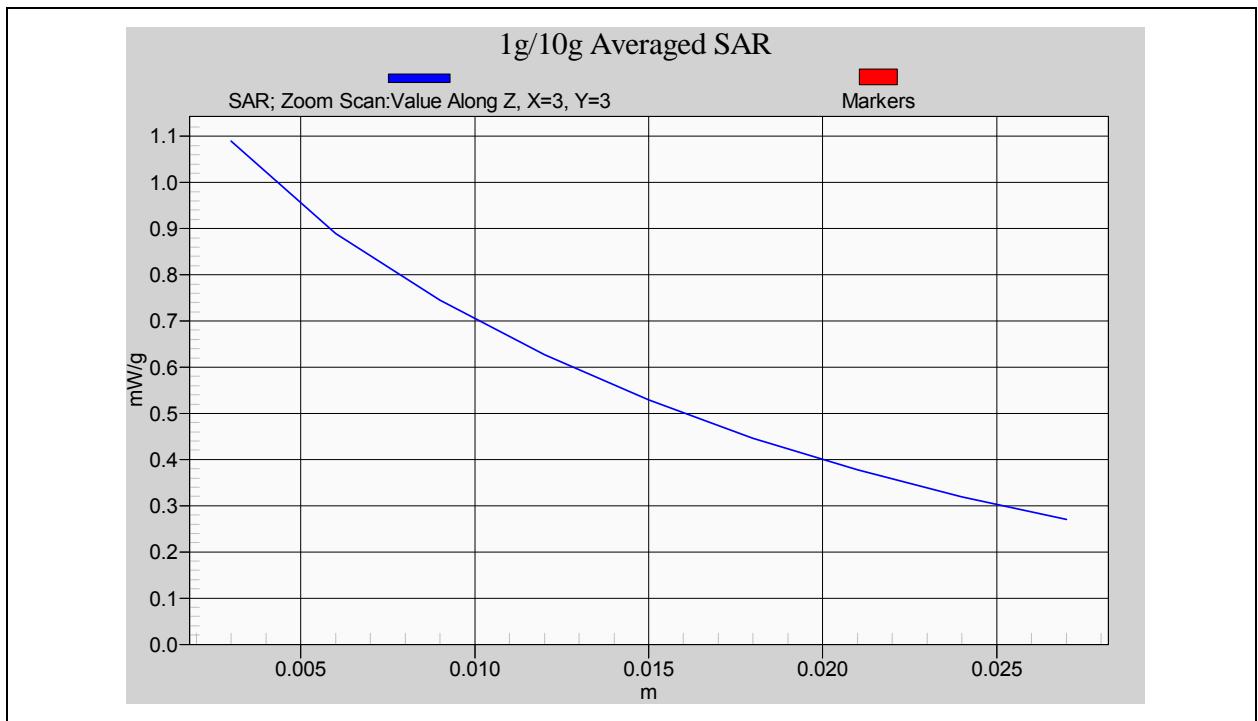



11.7 Setup Photo

Brain Position




Figure 19. EUT front side distance phantom 15mm
(The Spacer was removed during SAR testing)

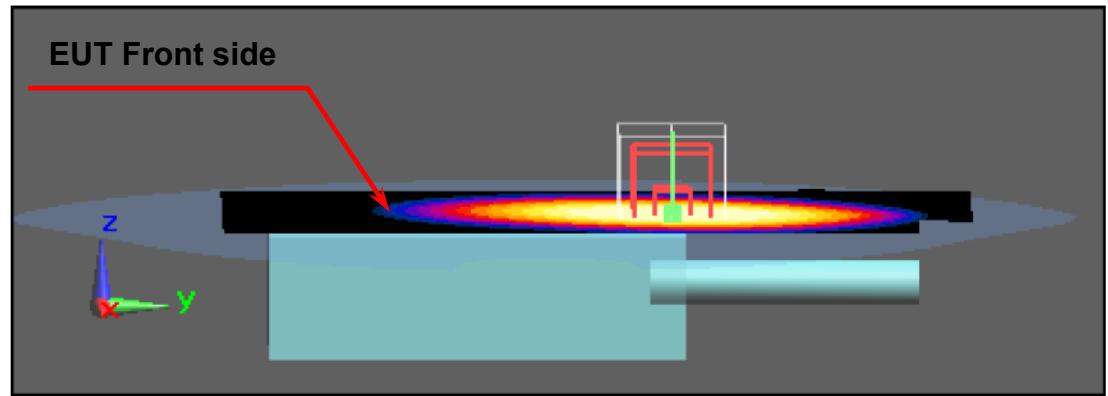

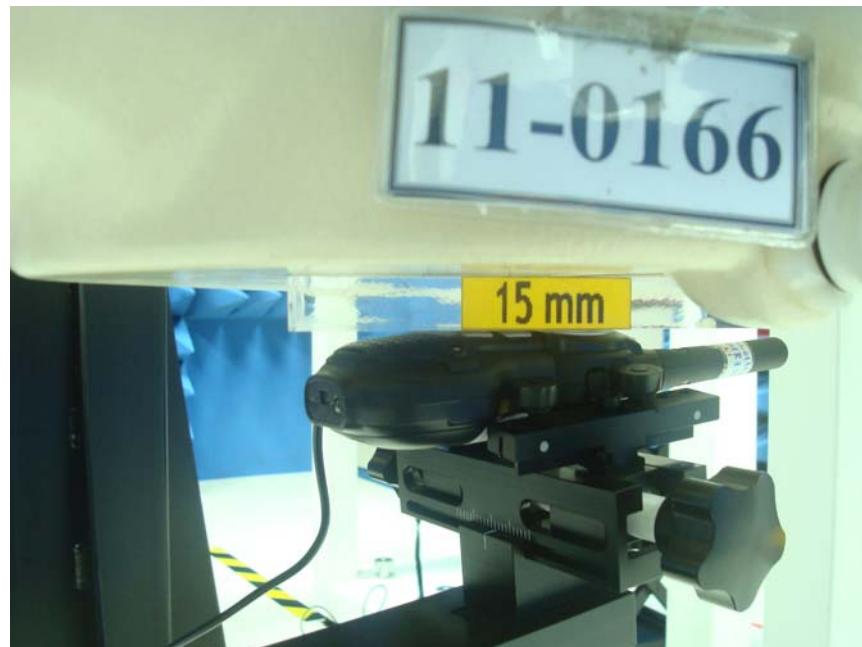Brain Position


**Figure 20. EUT front side (Charging by USB cable via computer) distance phantom 15mm
(The Spacer was removed during SAR testing)**

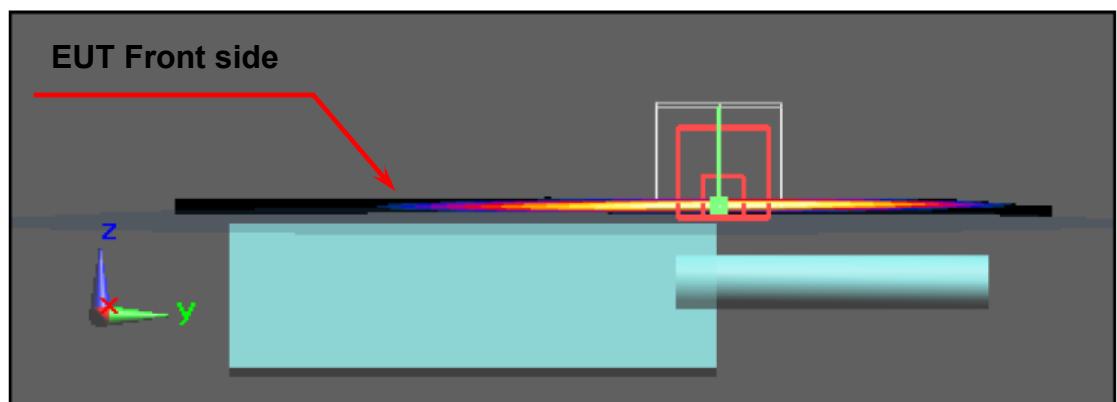

Brain Position




Figure 21. EUT front side (Charging by AC Adapter) distance phantom 15mm
(The Spacer was removed during SAR testing)

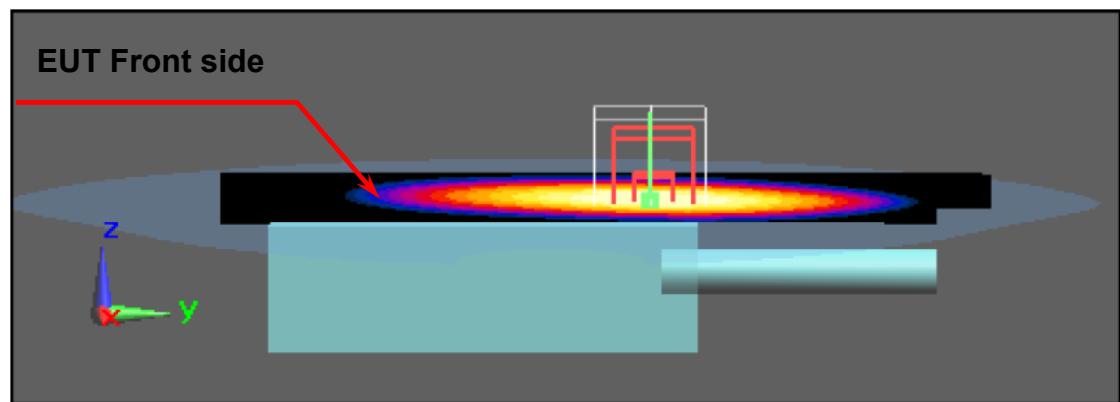

Muscle Position




**Figure 22. EUT link headset distance phantom 15mm
(The Spacer was removed during SAR testing)**

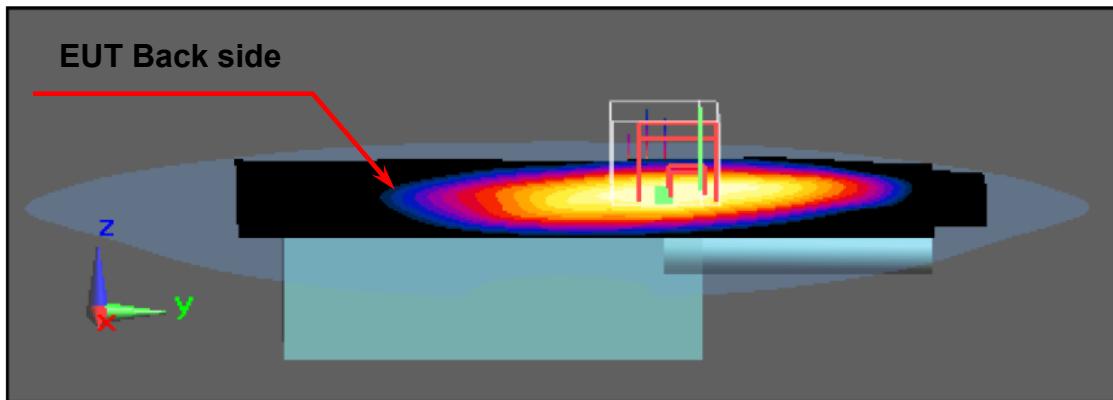

Muscle Position




Figure 23. EUT (Charging by USB cable via computer) link headset distance phantom 15mm
(The Spacer was removed during SAR testing)

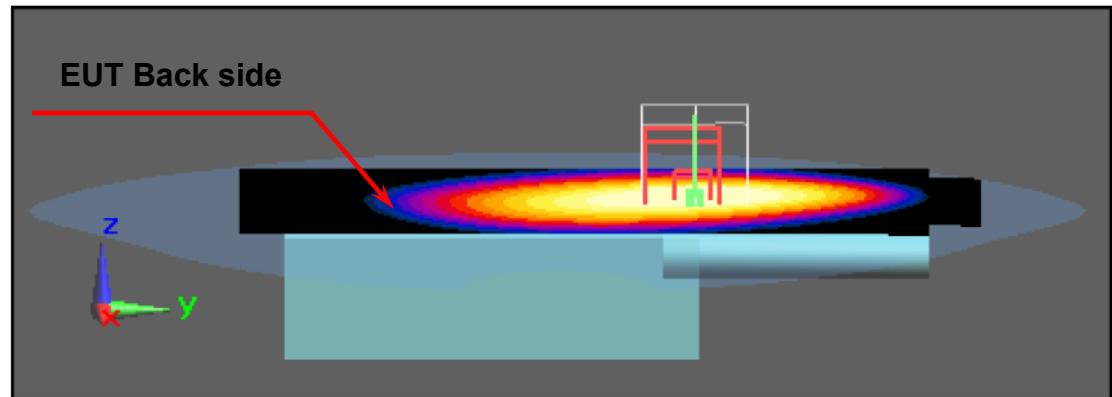

Muscle Position




**Figure 24. EUT (Charging by AC Adapter) link headset distance phantom 15mm
(The Spacer was removed during SAR testing)**

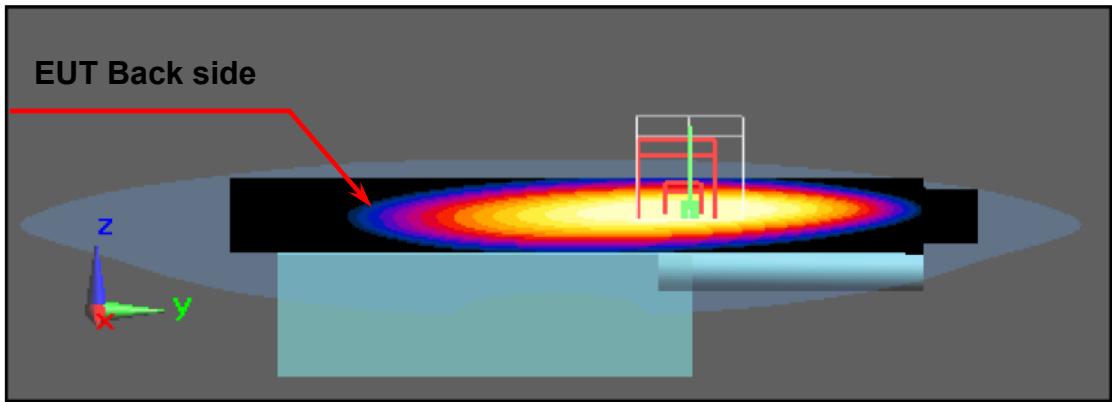


Muscle Position

Figure 25. EUT link headset and Belt clip

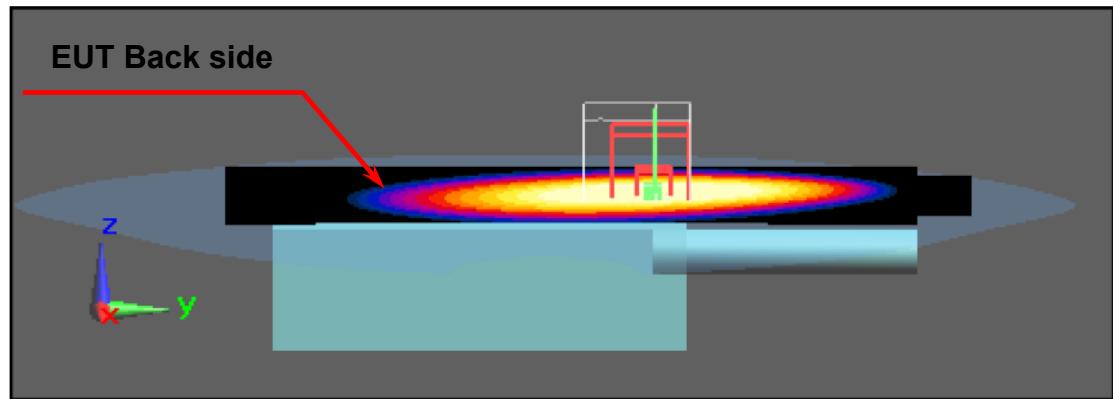


Muscle Position

Figure 26. EUT (Charging by USB cable via computer) link headset and Belt clip

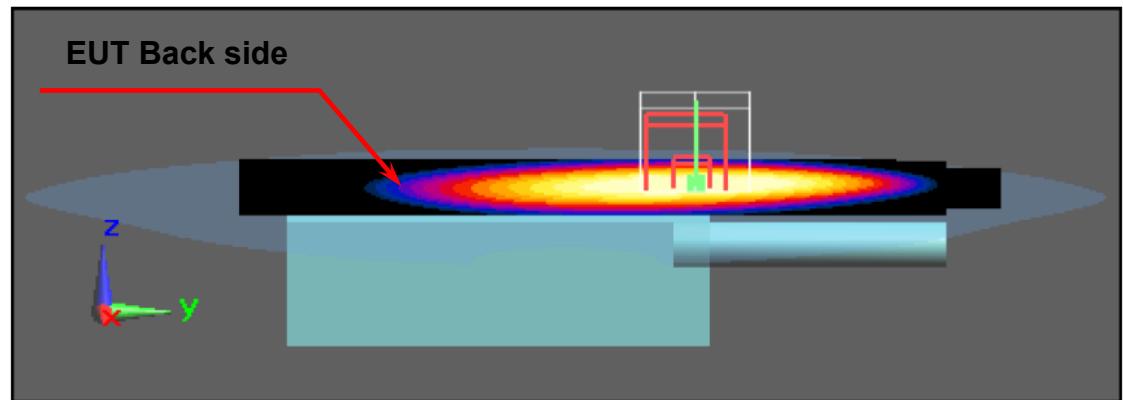

Muscle Position

Figure 27. EUT (Charging by AC Adapter) link headset and Belt clip

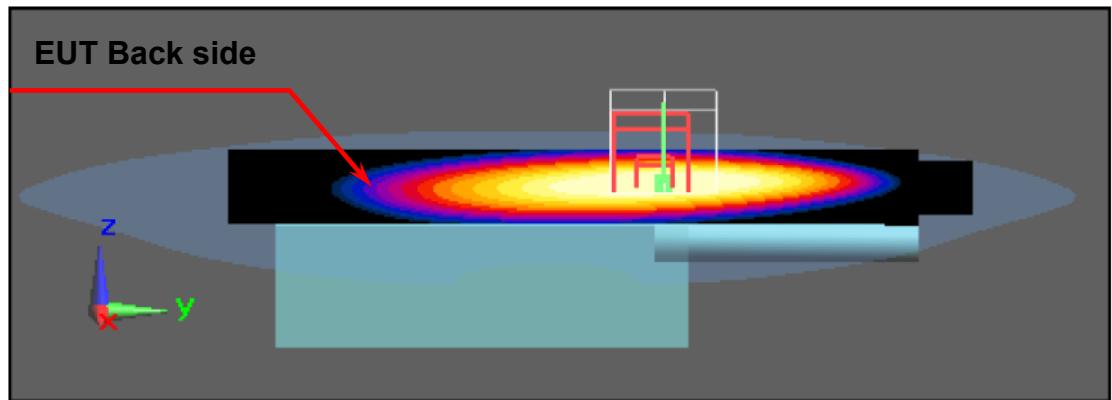

11.8 Std. C95.1-1992 RF Exposure Limit

Human Exposure	Population Uncontrolled Exposure (W/kg) or (mW/g)	Occupational Controlled Exposure (W/kg) or (mW/g)
Spatial Peak SAR* (head)	1.60	8.00
Spatial Peak SAR** (Whole Body)	0.08	0.40
Spatial Peak SAR*** (Partial-Body)	1.60	8.00
Spatial Peak SAR**** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 7. Safety Limits for Partial Body Exposure

Notes :

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole - body.
- *** The Spatial Average value of the SAR averaged over the partial - body.
- **** The Spatial Peak value of the SAR averaged over any 10 grams of tissue.
(defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Population / Uncontrolled Environments : are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational / Controlled Environments : are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

12. Conclusion

The SAR test values found for the portable mobile phone **Giant Electronics Limited Trade Mark : MOTOROLA Model(s) : MR350** are below the maximum recommended level of 1.6 W/kg (mW/g).

13. References

- [1] Std. C95.1-1992, "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300KHz to 100GHz", New York.
- [2] NCRP, National Council on Radiation Protection and Measurements, "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields", NCRP report NO. 86, 1986.
- [3] T. Schmid, O. Egger, and N. Kuster, "Automatic E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp, 105-113, Jan. 1996.
- [4] K. Poković, T. Schmid, and N. Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequency", in ICECOM'97, Dubrovnik, October 15-17, 1997, pp.120-124.
- [5] K. Poković, T. Schmid, and N. Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [6] N. Kuster, and Q. Balzano, "Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz", IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [7] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988 , pp. 139-148.
- [8] N. Kuster, R. Kastle, T. Schmid, *Dosimetric evaluation of mobile communications equipment with known precision*, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [9] Std. C95.3-1991, "IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave", New York: IEEE, Aug. 1992.
- [10] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), *Human Exposure to Electromagnetic Fields High-frequency: 10KHz-300GHz*, Jan. 1995.

Appendix A - System Performance Check

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/10/2011 10:11:34 AM

System Performance Check at 450 MHz_20110510_Head

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 450 MHz/Area Scan (61x191x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.26 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.94 mW/g; SAR(10 g) = 1.32 mW/g

Maximum value of SAR (measured) = 2.09 mW/g

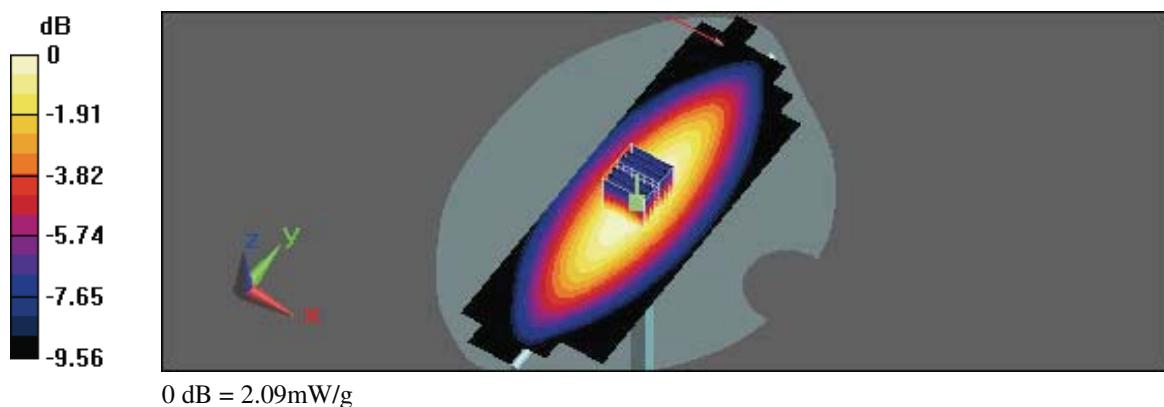

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/11/2011 9:08:19 AM

System Performance Check at 450 MHz_20110511_Head

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 450$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 450 MHz/Area Scan (61x191x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.23 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.2 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 2.76 W/kg

SAR(1 g) = 1.97 mW/g; SAR(10 g) = 1.36 mW/g

Maximum value of SAR (measured) = 2.14 mW/g

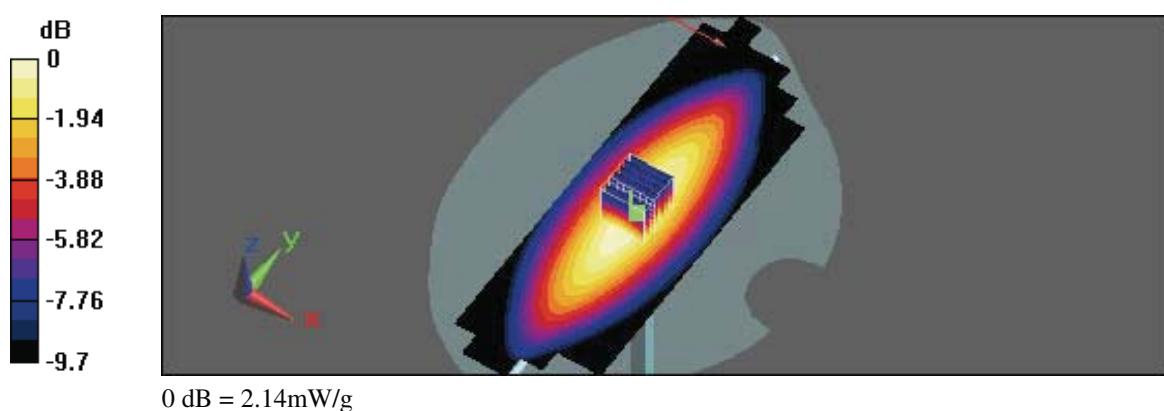

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 9:14:20 AM

System Performance Check at 450 MHz_20110514_Body

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.934$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 450 MHz/Area Scan (61x191x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.95 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 45.3 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.86 mW/g; SAR(10 g) = 1.24 mW/g

Maximum value of SAR (measured) = 1.99 mW/g

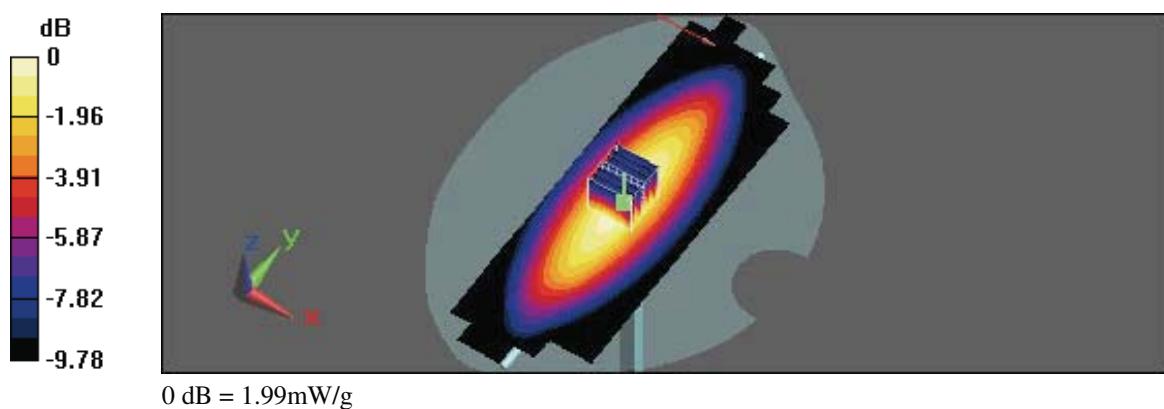

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/16/2011 10:03:06 AM

System Performance Check at 450 MHz_20110516_Body

DUT: Dipole 450MHz; Type: D450V2; Serial: D450V2 SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 450$ MHz; $\sigma = 0.934$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

System Performance Check at 450 MHz/Area Scan (61x191x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.04 mW/g

System Performance Check at 450 MHz/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.6 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 1.79 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 1.93 mW/g

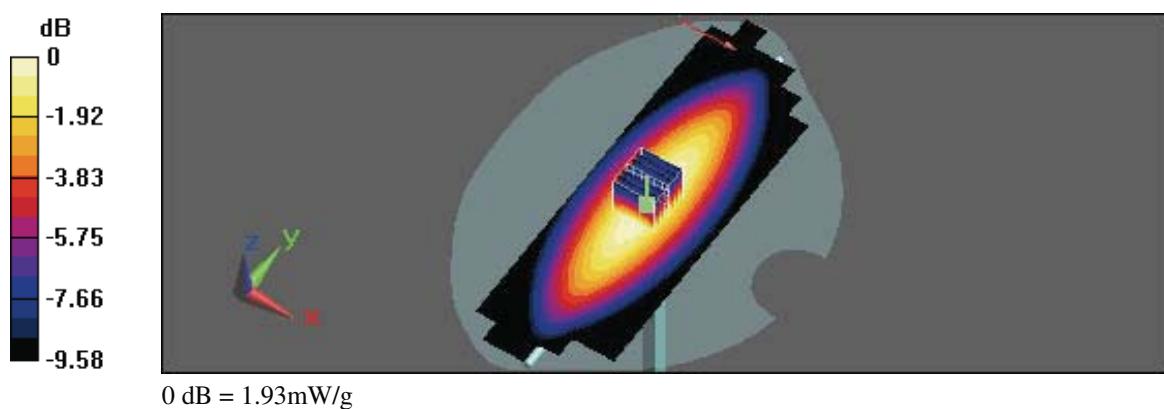

Appendix B - SAR Measurement Data

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/10/2011 12:58:55 PM

Flat_FRS CH11_Brain_Ni-MH (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.982 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 31.9 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.576 mW/g

Maximum value of SAR (measured) = 0.884 mW/g

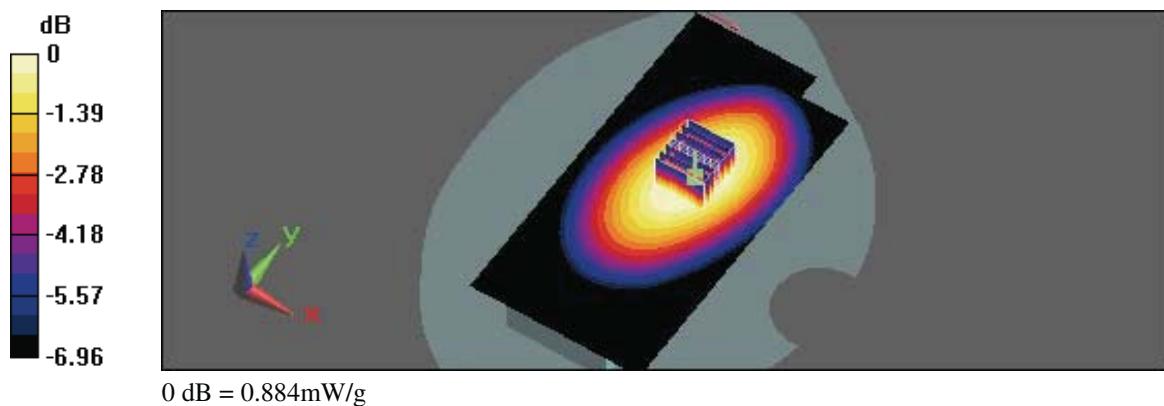

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/11/2011 11:27:22 AM

Flat_FRS CH11_Brain_Alkaline (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 29 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.841 mW/g; SAR(10 g) = 0.612 mW/g

Maximum value of SAR (measured) = 0.943 mW/g

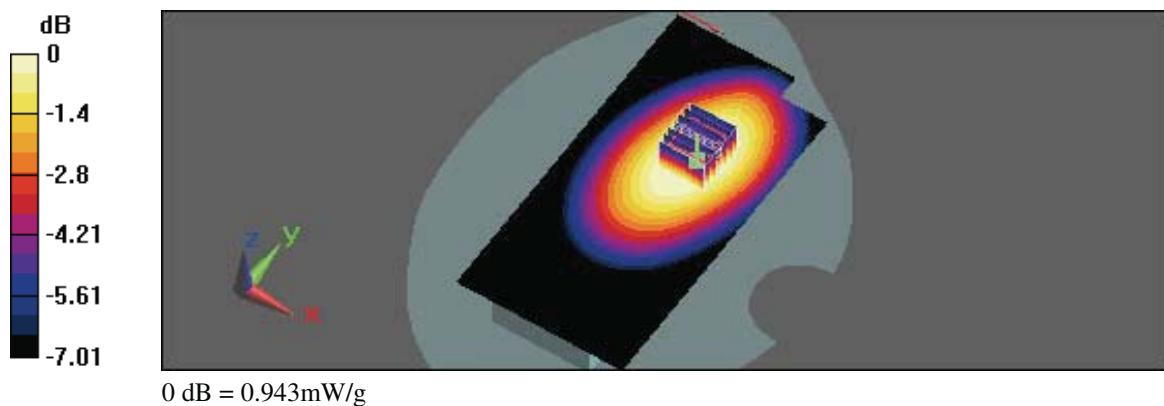

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/11/2011 10:55:59 AM

Flat_FRS CH11_Brain_Ni-MH_USB Cable (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.925 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 28.1 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.998 W/kg

SAR(1 g) = 0.795 mW/g; SAR(10 g) = 0.572 mW/g

Maximum value of SAR (measured) = 0.888 mW/g

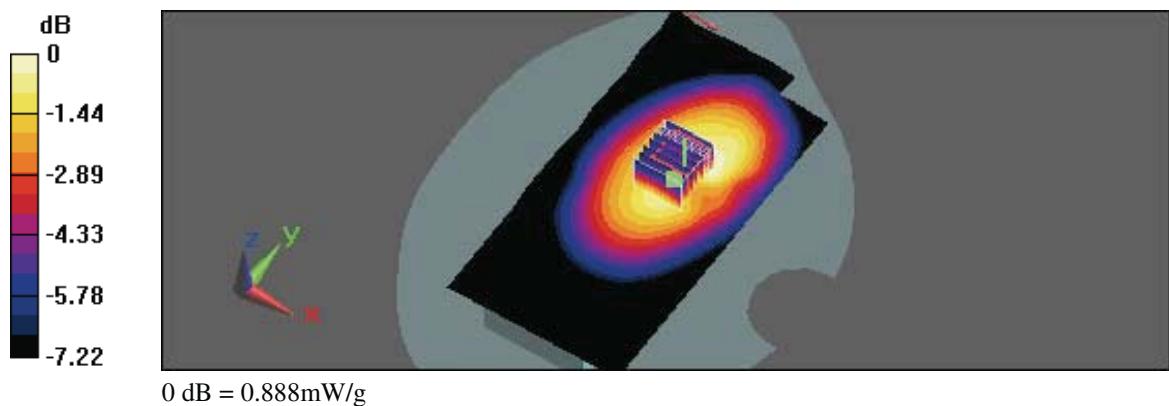

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/11/2011 11:59:39 AM

Flat_FRS CH11_Brain_Ni-MH_USB AC adaptor (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 44$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.949 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 28 V/m; Power Drift = -0.00612 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.550 mW/g

Maximum value of SAR (measured) = 0.850 mW/g

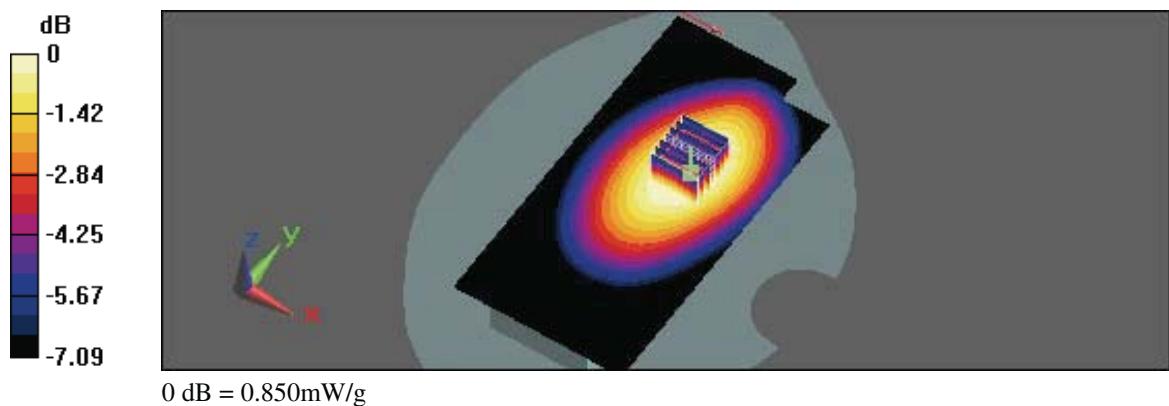

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/10/2011 10:50:16 AM

Flat_GMRS CH4_Brain_Ni-MH (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 44.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.92 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 44.6 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.57 mW/g; SAR(10 g) = 1.14 mW/g

Maximum value of SAR (measured) = 1.76 mW/g

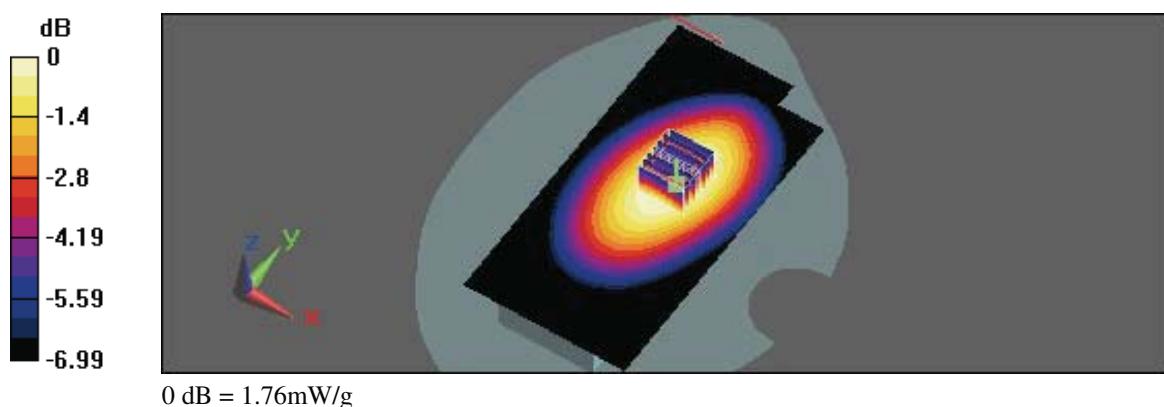

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/10/2011 1:30:10 PM

Flat_GMRS CH4_Brain_Alkaline (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 44.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.5 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 49.3 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.93 mW/g; SAR(10 g) = 1.41 mW/g

Maximum value of SAR (measured) = 2.17 mW/g

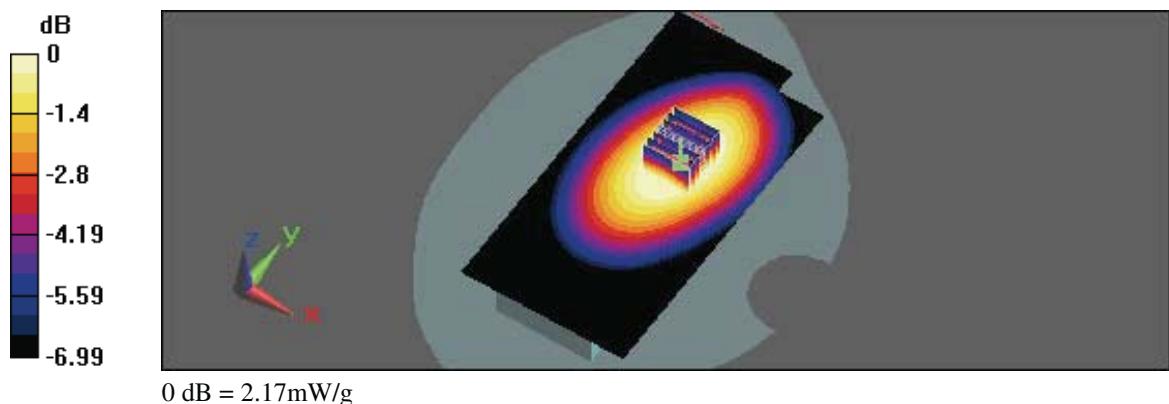

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/11/2011 10:24:44 AM

Flat_GMRS CH4_Brain_Ni-MH_USB Cable (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 44.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.01 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 40 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.67 mW/g; SAR(10 g) = 1.21 mW/g

Maximum value of SAR (measured) = 1.87 mW/g

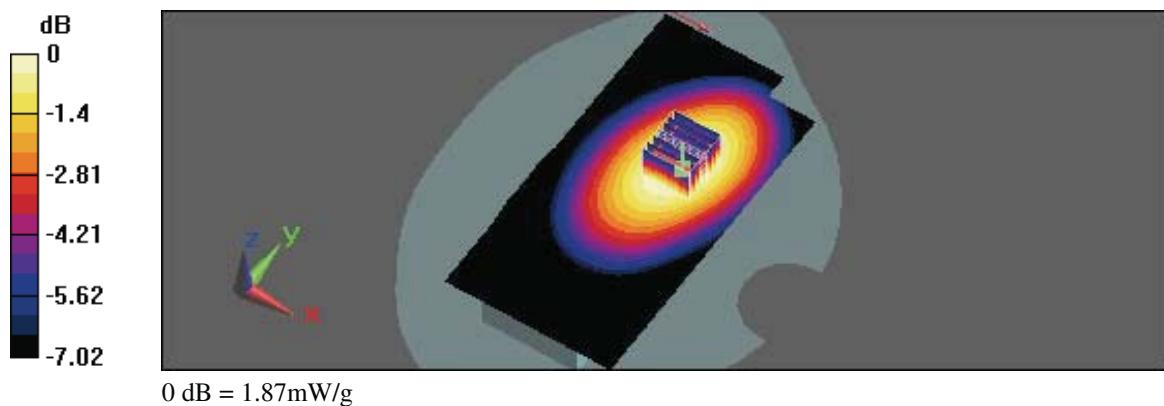

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/10/2011 11:20:36 AM

Flat_GMRS CH4_Brain_Ni-MH_USB AC adaptor (EUT front side distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.884$ mho/m; $\epsilon_r = 44.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(9.4, 9.4, 9.4); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.32 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 35.7 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.835 mW/g

Maximum value of SAR (measured) = 1.29 mW/g

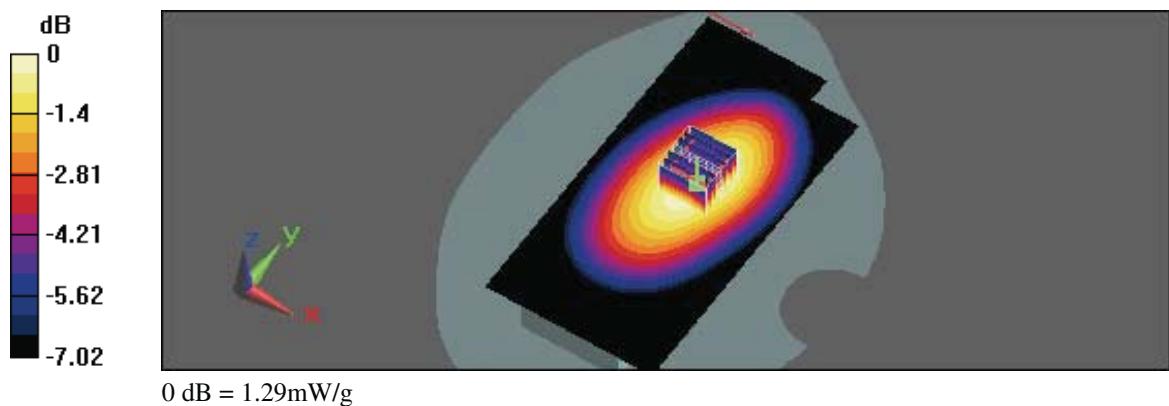

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 2:47:11 PM

Flat_FRS CH11_muscle_Ni-MH (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.485 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 19.3 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.379 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

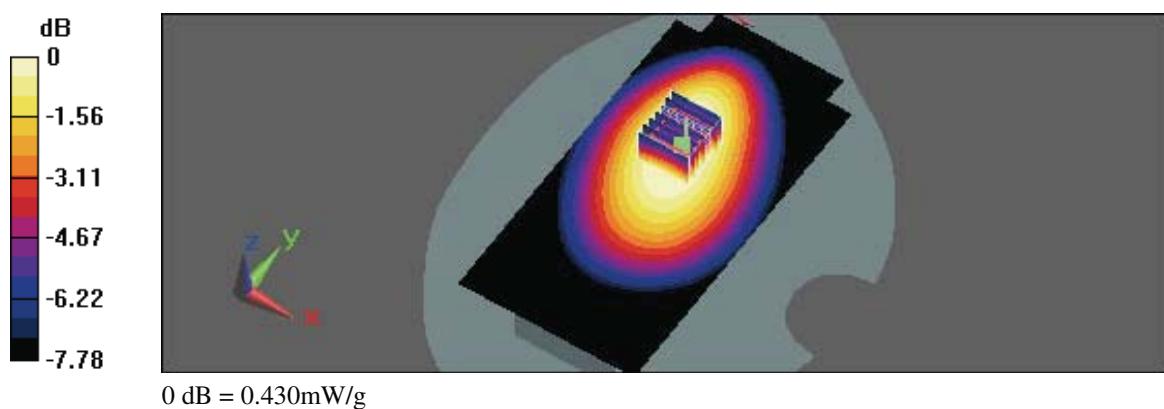

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 12:12:37 PM

Flat_FRS CH11_muscle_Alkaline (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.506 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 20.8 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.456 mW/g

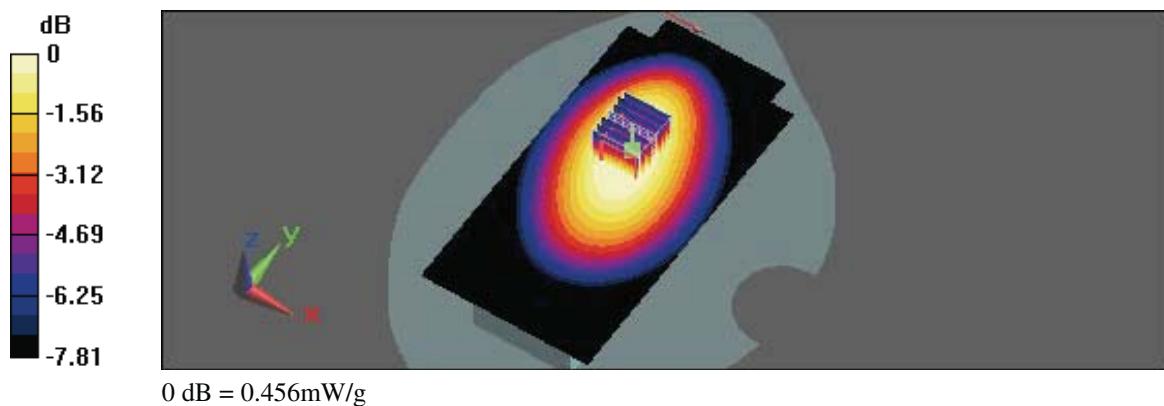

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 1:16:49 PM

Flat_FRS CH11_muscle_Ni-MH_USB Cable (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.363 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.6 V/m; Power Drift = 0.00788 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.336 mW/g

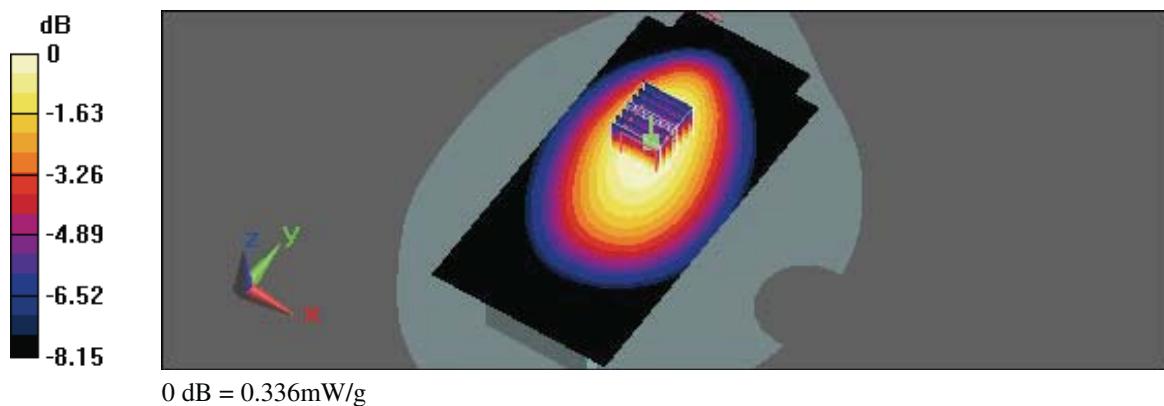

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 3:22:08 PM

Flat_FRS CH11_muscle_Ni-MH_USB AC adaptor (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.424 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.3 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

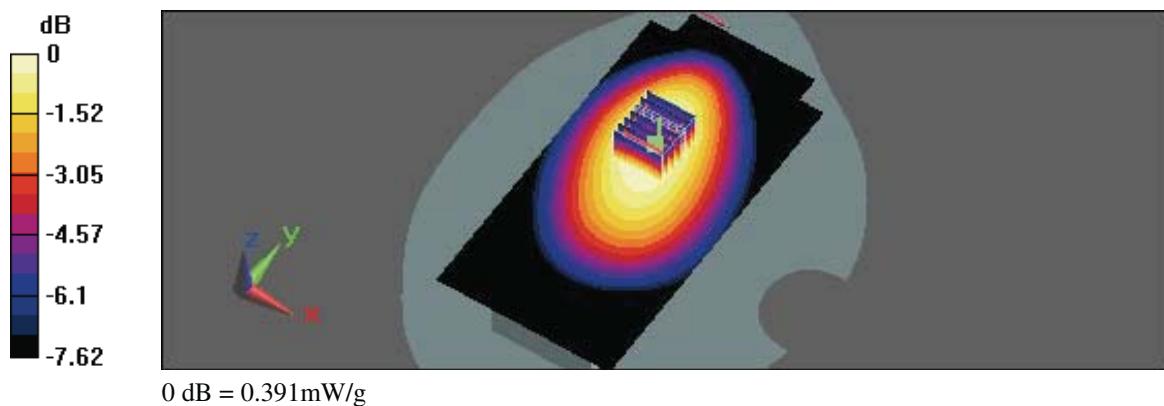

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 9:52:16 AM

Flat_GMRS CH4_muscle_Ni-MH (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.978 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.6 V/m; Power Drift = -0.0024 dB

Peak SAR (extrapolated) = 1.2 W/kg

SAR(1 g) = 0.872 mW/g; SAR(10 g) = 0.624 mW/g

Maximum value of SAR (measured) = 0.979 mW/g

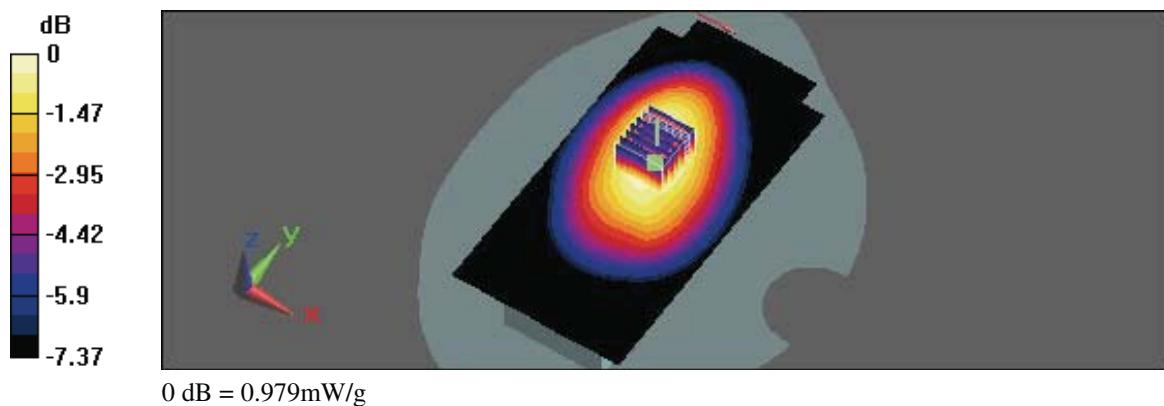

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 10:27:41 AM

Flat_GMRS CH4_muscle_Alkaline (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.3 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 33.6 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.720 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

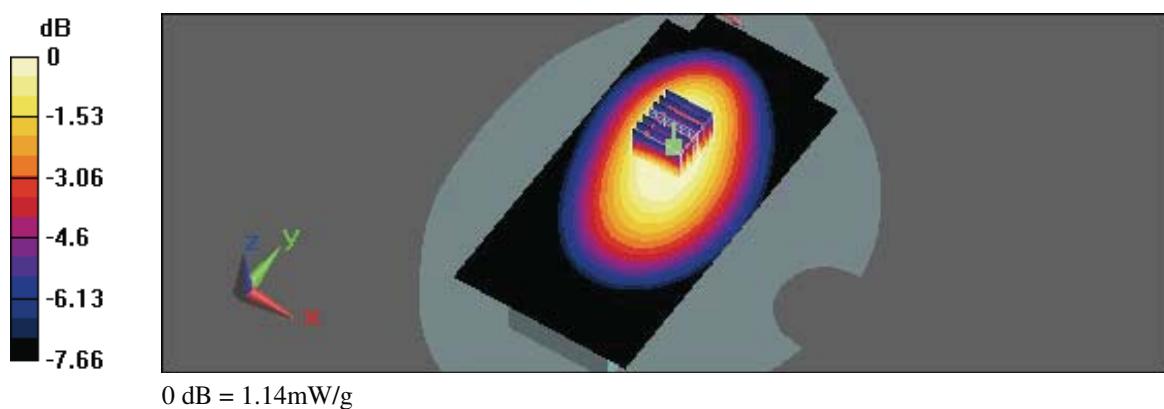

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 11:35:37 AM

Flat_GMRS CH4_muscle_Ni-MH_USB Cable (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.03 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 29.1 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.607 mW/g

Maximum value of SAR (measured) = 0.956 mW/g

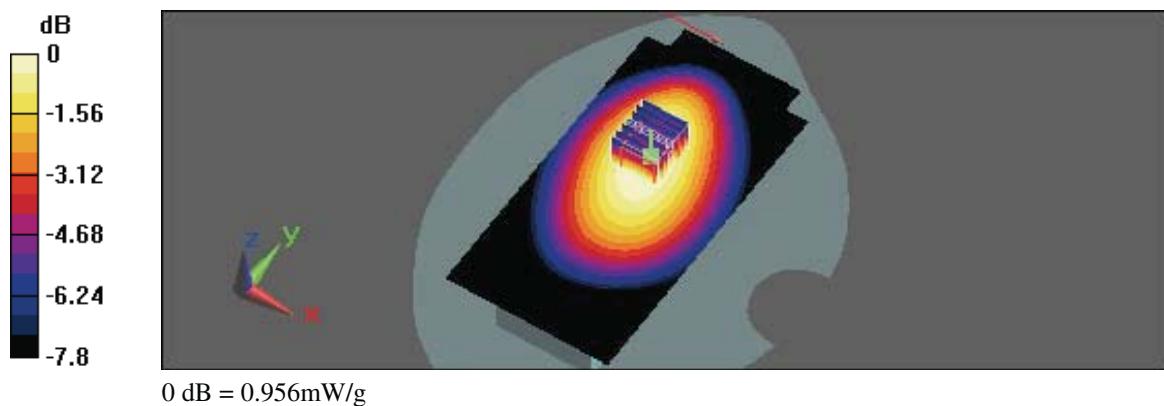

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 10:58:51 AM

Flat_GMRS CH4_muscle_Ni-MH_USB AC adaptor (EUT link headset distance phantom 15mm)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 29.3 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.637 mW/g

Maximum value of SAR (measured) = 1 mW/g

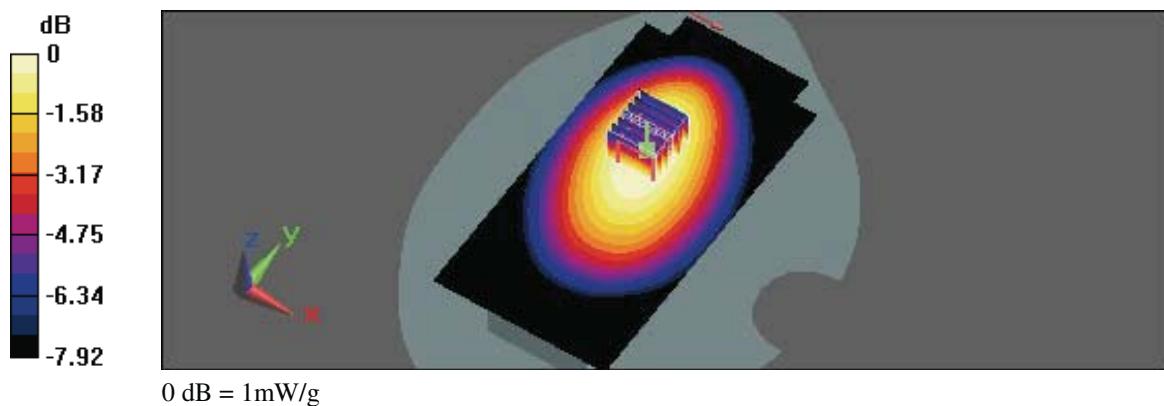

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 3:55:23 PM

Flat_FRS CH11_muscle_Ni-MH (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.486 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 18.2 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.277 mW/g

Maximum value of SAR (measured) = 0.438 mW/g

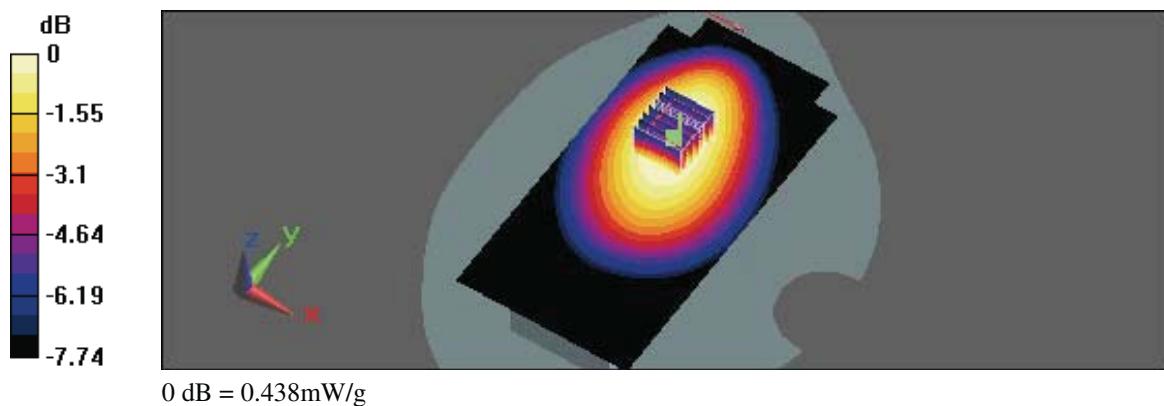

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/16/2011 11:40:43 AM

Flat_FRS CH11_muscle_Alkaline (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.603 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 23.3 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.464 mW/g; SAR(10 g) = 0.340 mW/g

Maximum value of SAR (measured) = 0.519 mW/g

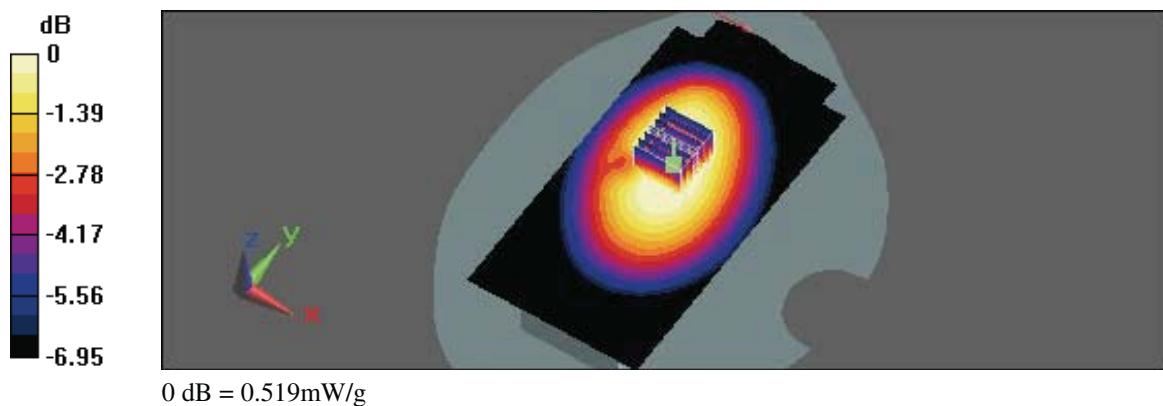

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/14/2011 4:27:12 PM

Flat_FRS CH11_muscle_Ni-MH_USB Cable (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.361 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.8 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.287 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

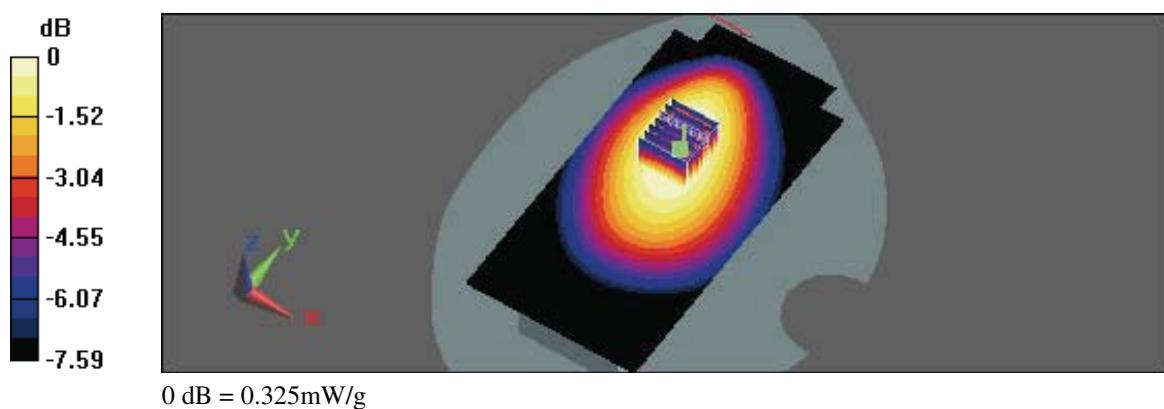

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/16/2011 11:10:39 AM

Flat_FRS CH11_muscle_Ni-MH_USB AC adaptor (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: FRS; Frequency: 467.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 467.6375$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.326 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.9 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.305 mW/g

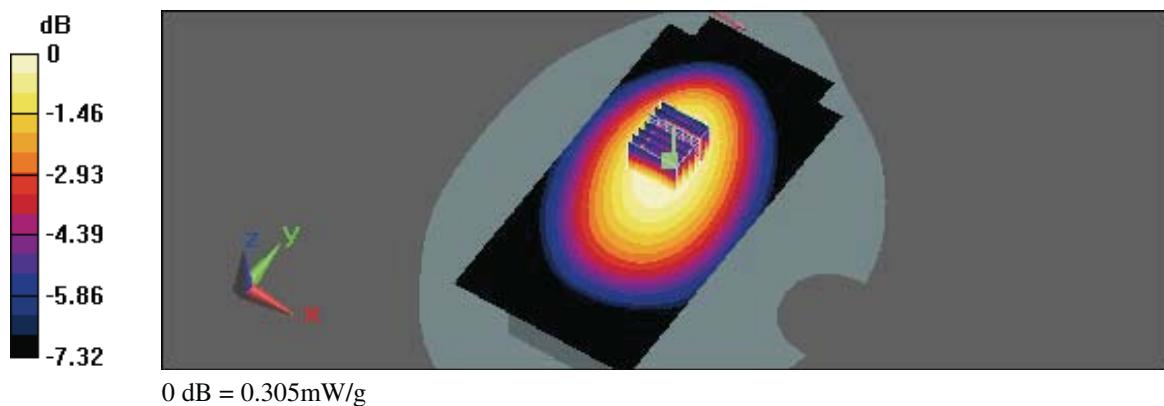

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/16/2011 12:21:40 PM

Flat_GMRS CH4_muscle_Ni-MH (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 31.7 V/m; Power Drift = -0.000713 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.971 mW/g; SAR(10 g) = 0.706 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

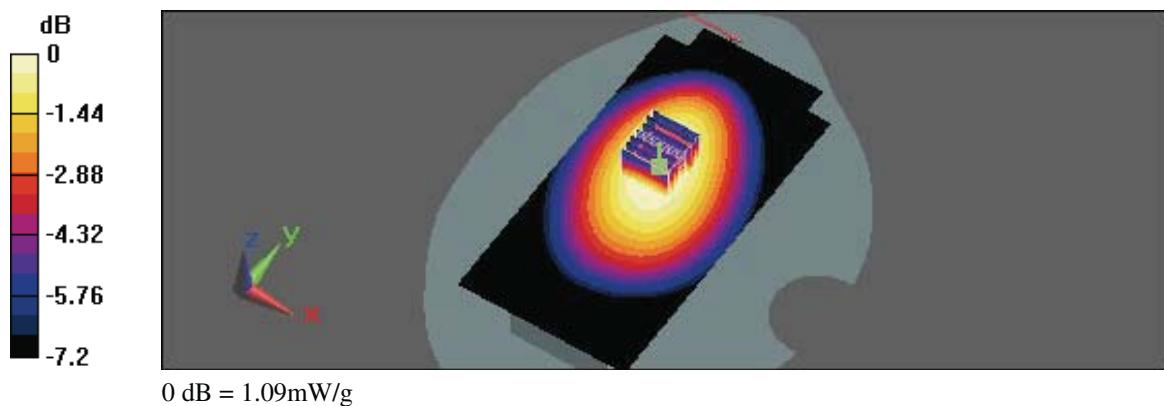

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/16/2011 3:19:19 PM

Flat_GMRS CH4_muscle_Alkaline (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 32.6 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.869 mW/g; SAR(10 g) = 0.634 mW/g

Maximum value of SAR (measured) = 0.971 mW/g

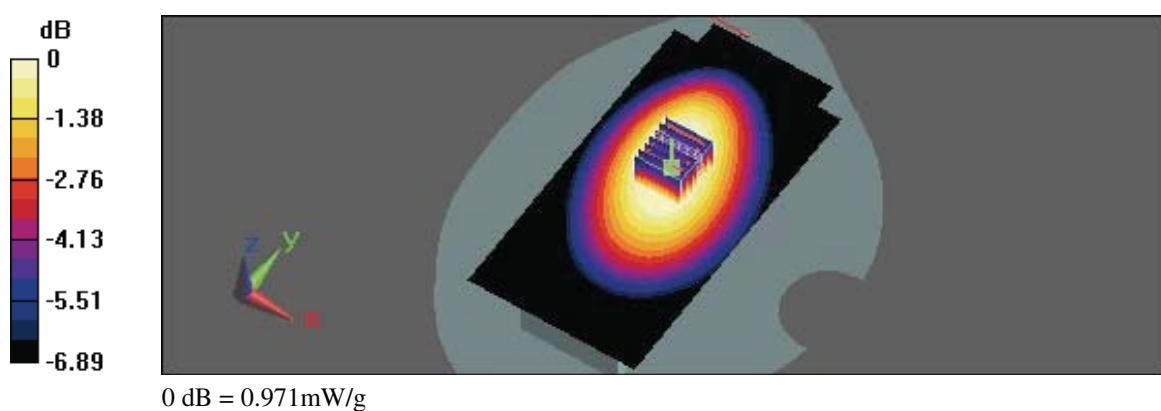

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/16/2011 1:02:37 PM

Flat_GMRS CH4_muscle_Ni-MH_USB Cable (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.15 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 30.9 V/m; Power Drift = 0.00469 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.664 mW/g

Maximum value of SAR (measured) = 1.03 mW/g

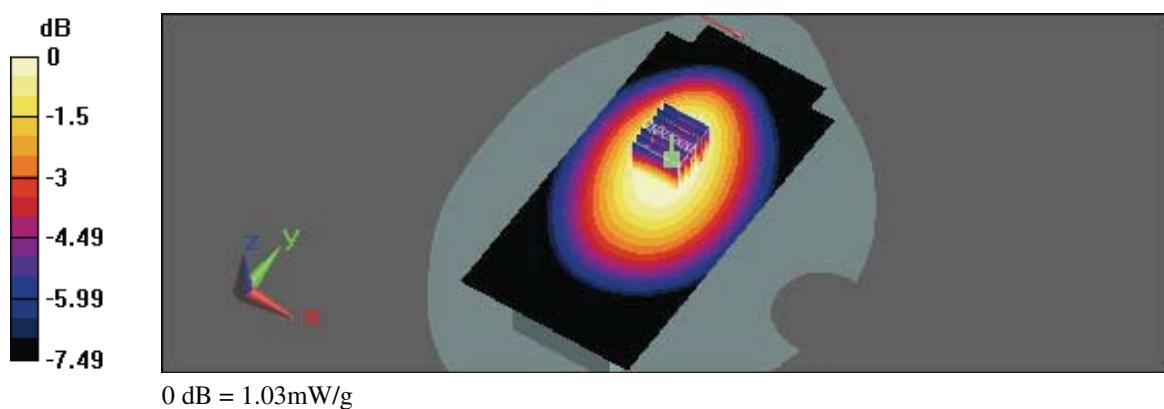

Test Laboratory: A Test Lab Techno Corp.

Date/Time: 5/16/2011 2:07:19 PM

Flat_GMRS CH4_muscle_Ni-MH_USB AC adaptor (EUT link headset and Belt clip)

DUT: MR350; Type: Two Way Radio with GMRS ,FRS and Weather Band Receiver; FCC ID: K7GMRCEJ

Communication System: GMRS; Frequency: 462.6375 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 462.6375$ MHz; $\sigma = 0.946$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3632; ConvF(10.05, 10.05, 10.05); Calibrated: 1/19/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 1/31/2011
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1150 and higher
- Measurement SW: DASY5, V5.0 Build 125;SEMCAD X Version 13.4 Build 125

Flat/Area Scan (71x141x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.875 mW/g

Flat/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 27.2 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.713 mW/g; SAR(10 g) = 0.522 mW/g

Maximum value of SAR (measured) = 0.800 mW/g

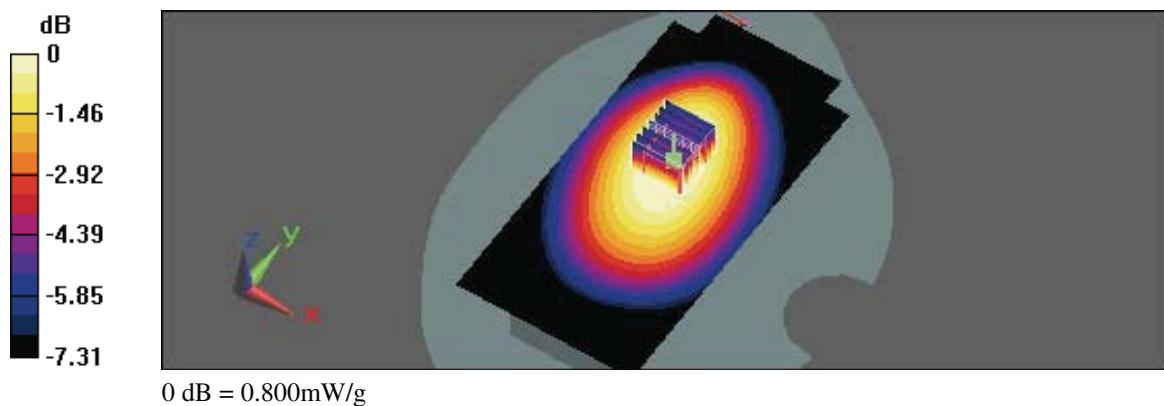



Appendix C - Calibration

All of the instruments Calibration information are listed below.

- Dipole _ D450V2 SN:1021 Calibration No.D450V2-1021_Feb11
- Probe _ EX3DV4 SN:3632 Calibration No.EX3-3632_Jan11
- DAE _ DAE4 SN:779 Calibration No.DAE4-779_Jan11



Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **D450V2-1021_Feb11**

CALIBRATION CERTIFICATE

Object **D450V2 - SN: 1021**

Calibration procedure(s) **QA CAL-15.v5**
Calibration Procedure for dipole validation kits below 800 MHz

Calibration date: **February 16, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Type-N mismatch combination	SN: 5047.3 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ET3DV6	SN: 1507	30-Apr-10 (No. ET3-1507_Apr10)	Apr-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: February 16, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Flat Phantom V4.4	Shell thickness: 6 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	43.6 ± 6 %	0.83 mho/m ± 6 %
Head TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.89 mW / g
SAR normalized	normalized to 1W	4.75 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	4.93 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.26 mW / g
SAR normalized	normalized to 1W	3.17 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	3.27 mW / g ± 17.6 % (k=2)



Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.9 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.82 mW / g
SAR normalized	normalized to 1W	4.57 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	4.68 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.21 mW / g
SAR normalized	normalized to 1W	3.04 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	3.11 mW / g ± 17.6 % (k=2)



Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.6 Ω - 4.5 $j\Omega$
Return Loss	- 21.7 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.6 Ω - 8.5 $j\Omega$
Return Loss	- 20.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.352 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	February 04, 2004

DASY5 Validation Report for Head TSL

Date/Time: 16.02.2011 10:51:29

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.83$ mho/m; $\epsilon_r = 43.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.62, 6.62, 6.62); Calibrated: 30.04.2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 23.04.2010
- Phantom: Flat Phantom 4.4 ; Type: Flat Phantom 4.4; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=398mW /d=15mm, /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.454 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.903 W/kg

SAR(1 g) = 1.89 mW/g; SAR(10 g) = 1.26 mW/g

Maximum value of SAR (measured) = 2.023 mW/g

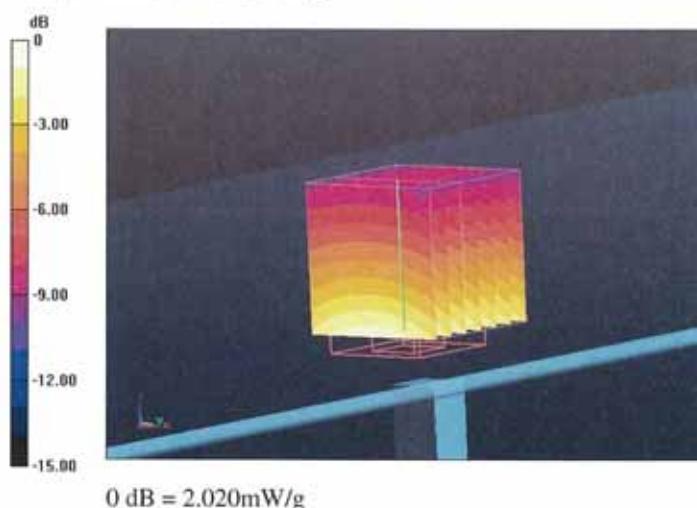

Impedance Measurement Plot for Head TSL

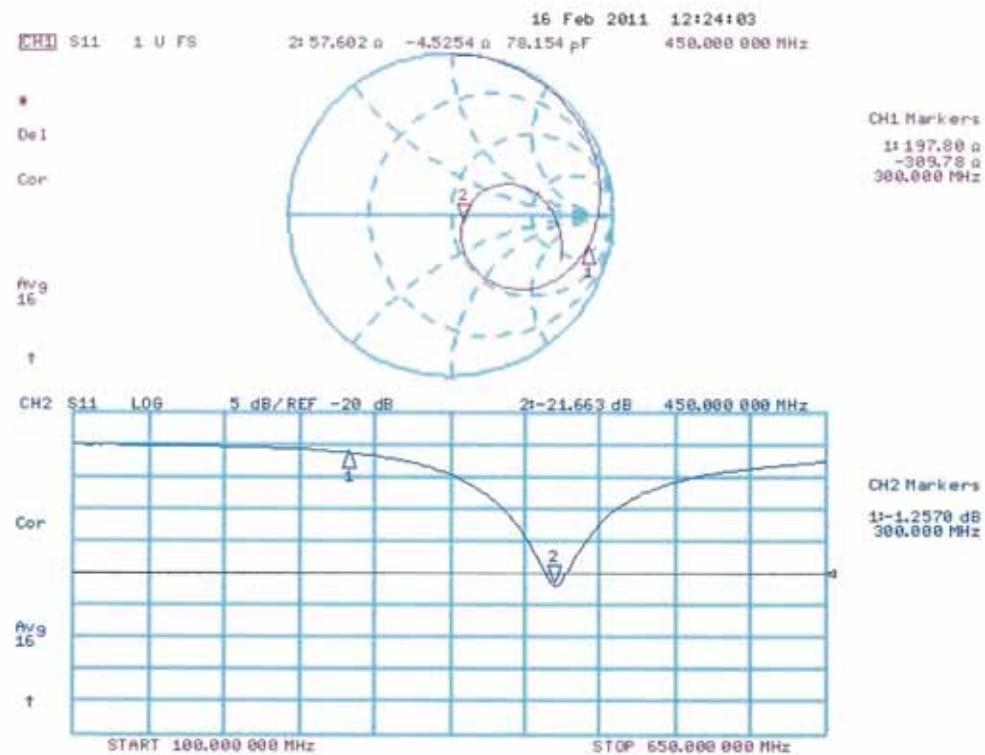

DASY5 Validation Report for Body TSL

Date/Time: 15.02.2011 16:16:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN:1021

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(7.2, 7.2, 7.2); Calibrated: 30.04.2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 23.04.2010
- Phantom: Flat Phantom 4.4 ; Type: Flat Phantom 4.4; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


Pin=398mW /d=15mm /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.922 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.856 W/kg

SAR(1 g) = 1.82 mW/g; SAR(10 g) = 1.21 mW/g

Maximum value of SAR (measured) = 1.939 mW/g

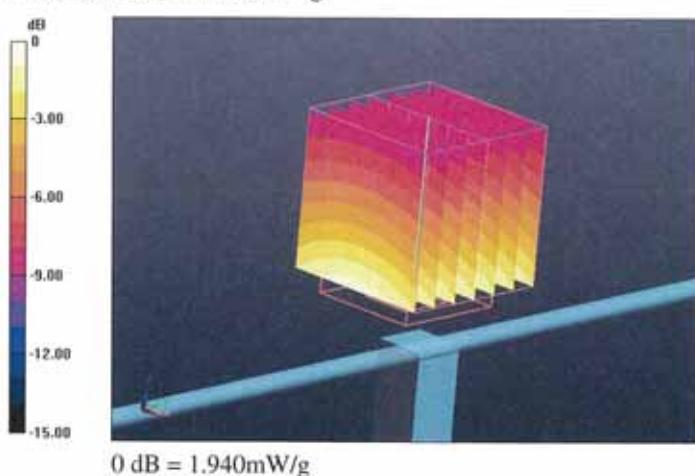

Impedance Measurement Plot for Body TSL

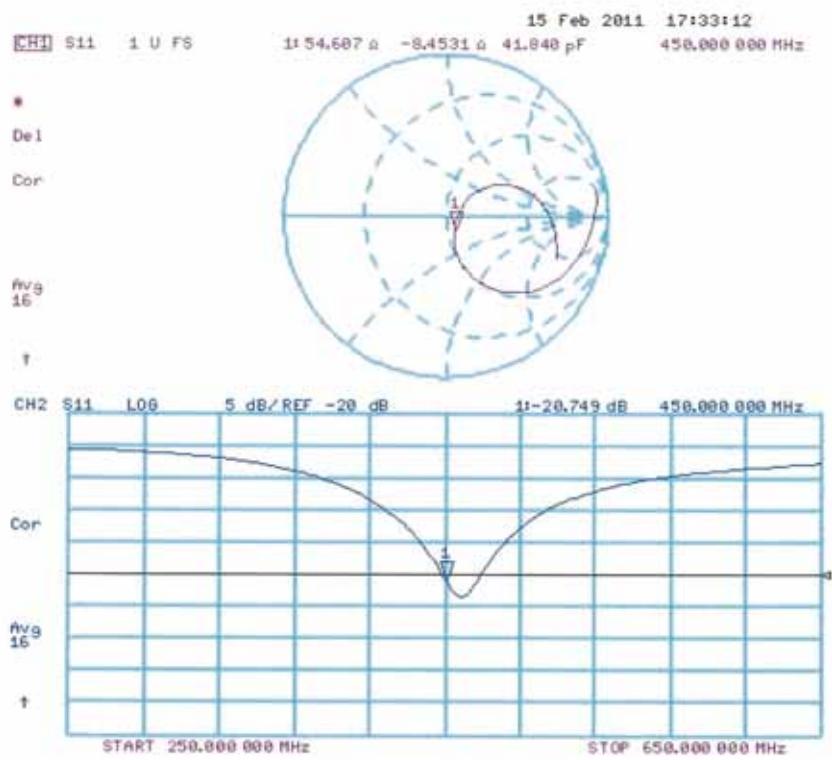



Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **EX3-3632_Jan11**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3632**

Calibration procedure(s) **QA CAL-01.v7, QA CAL-12.v6, QA CAL-23.v4 and QA CAL-25.v3**
Calibration procedure for dosimetric E-field probes

Calibration date: **January 19, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01138)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: January 20, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3632_Jan11

Page 1 of 11

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- Ax,y,z; Bx,y,z; Cx,y,z, VRx,y,z: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



EX3DV4 SN:3632

January 19, 2011

Probe EX3DV4

SN:3632

Manufactured: November 1, 2007
Last calibrated: January 26, 2010
Recalibrated: January 19, 2011

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μ V/(V/m) ²) ^A	0.46	0.44	0.39	\pm 10.1%
DCP (mV) ^B	97.4	94.9	97.4	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X Y Z	0.00 0.00 0.00	0.00 0.00 0.00	1.00 1.00 1.00	133.3 110.0 125.1	\pm 3.4 %

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	9.40	9.40	9.40	0.12	2.85 ± 13.3%
750	± 50 / ± 100	41.9 ± 5%	0.89 ± 5%	9.51	9.51	9.51	0.67	0.64 ± 11.0%
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	9.09	9.09	9.09	0.66	0.64 ± 11.0%
1810	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	8.16	8.16	8.16	0.51	0.74 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	8.02	8.02	8.02	0.58	0.68 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	7.28	7.28	7.28	0.33	0.91 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



EX3DV4 SN:3632

January 19, 2011

DASY/EASY - Parameters of Probe: EX3DV4 SN:3632

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	10.05	10.05	10.05	0.05	1.80 ± 13.3%
750	± 50 / ± 100	55.5 ± 5%	0.96 ± 5%	9.33	9.33	9.33	0.78	0.63 ± 11.0%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	9.28	9.28	9.28	0.73	0.66 ± 11.0%
1810	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.57	7.57	7.57	0.83	0.60 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.39	7.39	7.39	0.67	0.65 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	7.23	7.23	7.23	0.28	1.07 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.




EX3DV4 SN:3632

January 19, 2011



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

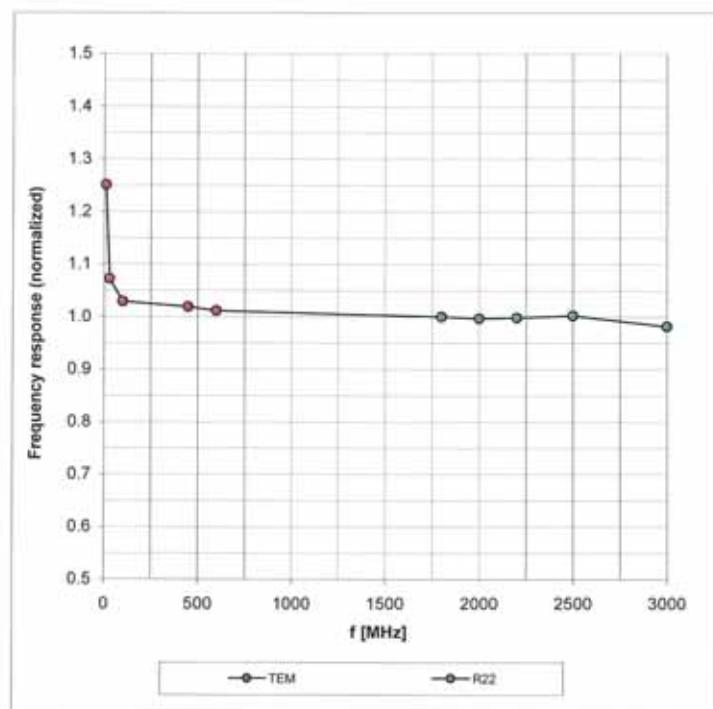


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

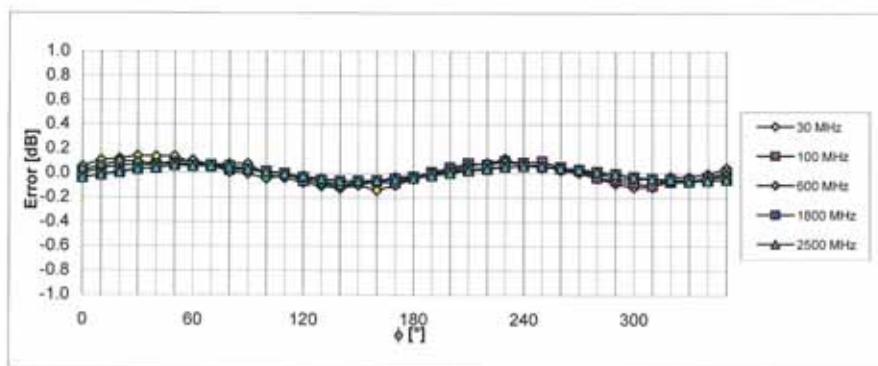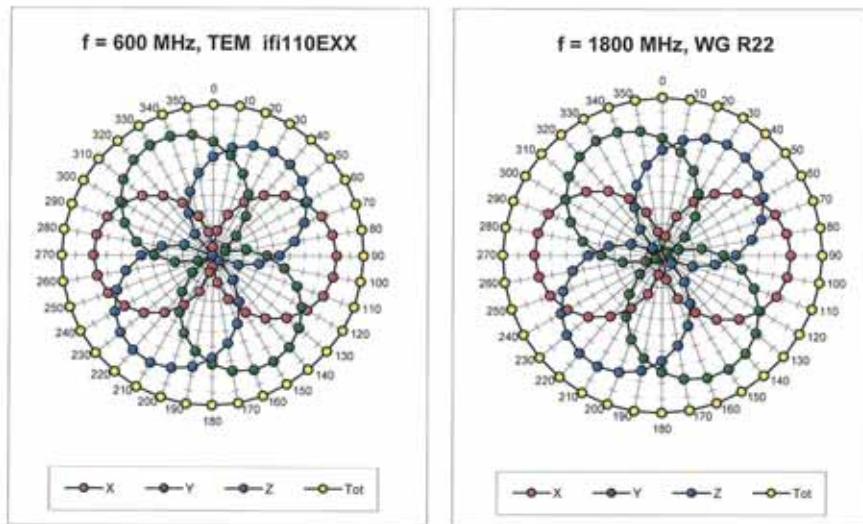


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

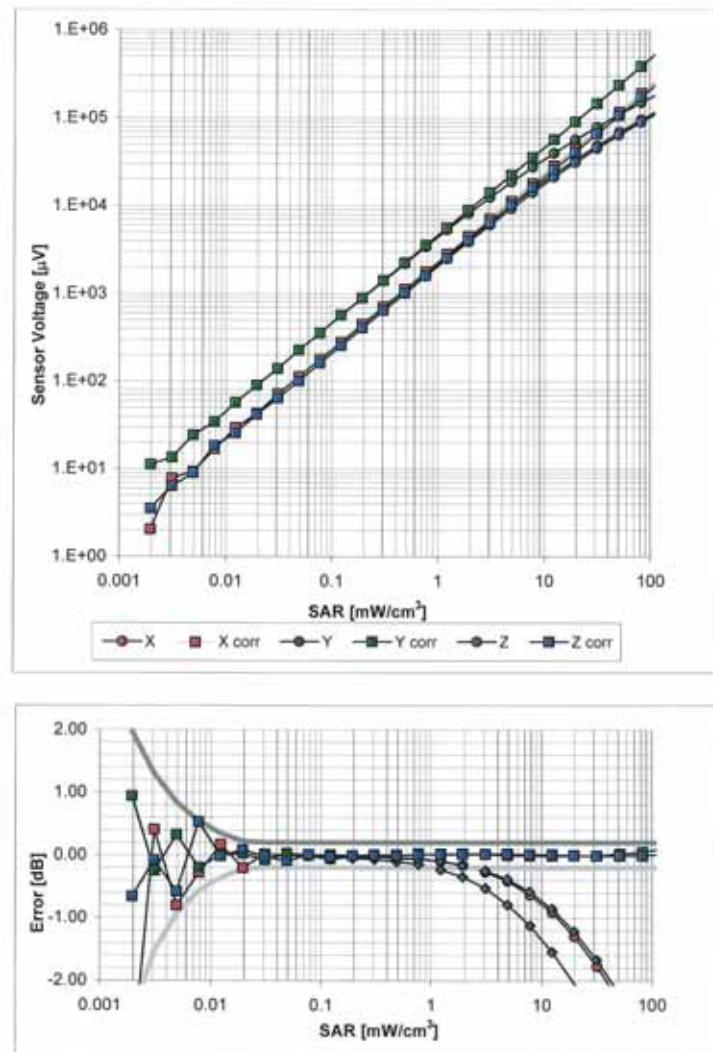


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

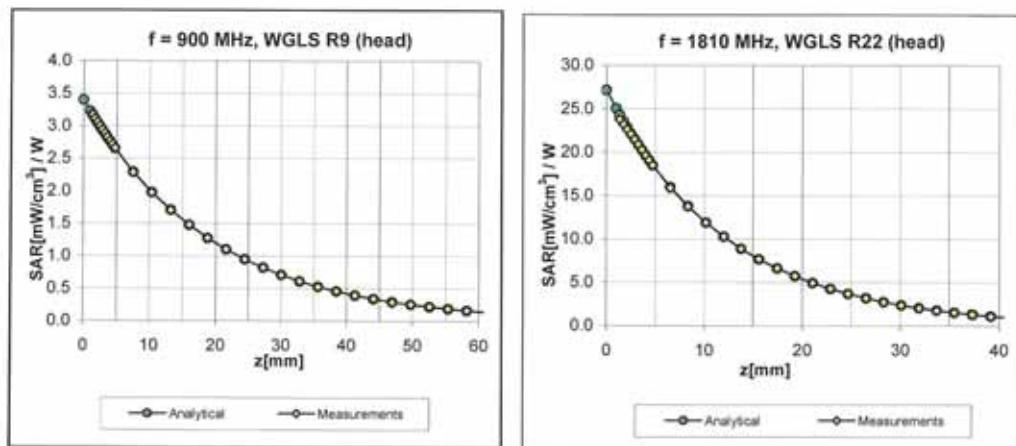

Deviation from Isotropy in HSL

Error (ϕ, θ), $f = 900 \text{ MHz}$

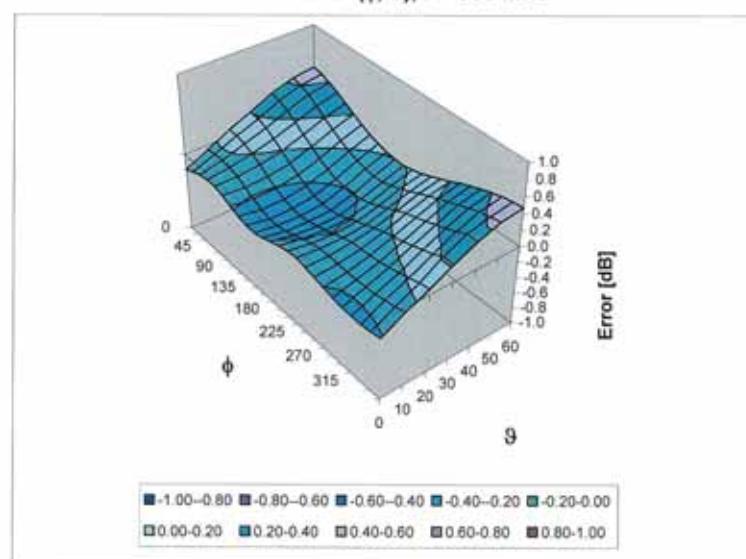

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)



EX3DV4 SN:3632

January 19, 2011

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm



Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **ATL (Auden)**

Certificate No: DAE4-779_Jan11

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000.D04 BJ - SN: 779**

Calibration procedure(s) **QA CAL-08.v22**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **January 31, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-10 (No:10376)	Sep-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-10 (in house check)	In house check: Jun-11

Calibrated by: Name **Andrea Guntli** Function **Technician** Signature

Approved by: Name **Fin Bomholt** Function **R&D Director** Signature

Issued: January 31, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-779_Jan11

Page 1 of 5

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.



DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1\mu\text{V}$, full range = $-100...+300\text{ mV}$

Low Range: 1LSB = 61nV , full range = $-1.....+3\text{mV}$

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$404.517 \pm 0.1\% \text{ (k=2)}$	$403.748 \pm 0.1\% \text{ (k=2)}$	$403.972 \pm 0.1\% \text{ (k=2)}$
Low Range	$3.96927 \pm 0.7\% \text{ (k=2)}$	$3.98585 \pm 0.7\% \text{ (k=2)}$	$3.99915 \pm 0.7\% \text{ (k=2)}$

Connector Angle

Connector Angle to be used in DASY system	$155.5^\circ \pm 1^\circ$
---	---------------------------

Appendix

1. DC Voltage Linearity

High Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	200001.8	6.19	0.00
Channel X	+ Input	20003.75	4.25	0.02
Channel X	- Input	-19996.56	3.04	-0.02
Channel Y	+ Input	200005.0	0.90	0.00
Channel Y	+ Input	20000.78	1.38	0.01
Channel Y	- Input	-19996.43	2.97	-0.01
Channel Z	+ Input	200002.2	-1.15	-0.00
Channel Z	+ Input	19999.59	0.19	0.00
Channel Z	- Input	-19995.05	4.35	-0.02

Low Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	2000.4	0.25	0.01
Channel X	+ Input	200.27	0.37	0.18
Channel X	- Input	-199.08	1.12	-0.56
Channel Y	+ Input	2000.1	0.19	0.01
Channel Y	+ Input	199.01	-0.89	-0.45
Channel Y	- Input	-199.30	0.50	-0.25
Channel Z	+ Input	1999.6	-0.40	-0.02
Channel Z	+ Input	199.22	-0.88	-0.44
Channel Z	- Input	-200.27	-0.37	0.19

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-3.66	-5.39
	-200	5.82	4.90
Channel Y	200	13.39	13.58
	-200	-14.98	-15.16
Channel Z	200	2.20	2.53
	-200	-4.84	-4.61

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	1.33	-0.57
Channel Y	200	1.97	-	3.29
Channel Z	200	1.19	-0.28	-



4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15613	15134
Channel Y	15831	16218
Channel Z	16150	17743

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	-0.26	-1.03	0.79	0.42
Channel Y	0.52	-1.04	2.07	0.58
Channel Z	-2.22	-3.25	-0.85	0.44

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9