

FCC Test Report

Report No.: RF200514E05

FCC ID: K7S-03535

Test Model: E7350

Received Date: May 14, 2020

Test Date: June 01 to 06, 2020

Issued Date: June 18, 2020

Applicant: Belkin International, Inc.

Address: 12045 East Waterfront Dr. Playa Vista California United States 90094

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards and references	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures.....	20
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Conditions.....	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	43
4.2.1 Limits of Conducted Emission Measurement	43
4.2.2 Test Instruments	43
4.2.3 Test Procedures.....	44
4.2.4 Deviation from Test Standard	44
4.2.5 Test Setup.....	44
4.2.6 EUT Operating Conditions.....	44
4.2.7 Test Results	45
4.3 6dB Bandwidth Measurement	47
4.3.1 Limits of 6dB Bandwidth Measurement.....	47
4.3.2 Test Setup.....	47
4.3.3 Test Instruments	47
4.3.4 Test Procedure	47
4.3.5 Deviation from Test Standard	47
4.3.6 EUT Operating Conditions.....	47
4.3.7 Test Result.....	48
4.4 Occupied Bandwidth Measurement	51
4.4.1 Test Setup.....	51
4.4.2 Test Instruments	51
4.4.3 Test Procedure	51
4.4.4 Deviation from Test Standard	51
4.4.5 EUT Operating Conditions.....	51
4.4.6 Test Results	52
4.5 Conducted Output Power Measurement.....	55
4.5.1 Limits of Conducted Output Power Measurement	55
4.5.2 Test Setup.....	55
4.5.3 Test Instruments	55
4.5.4 Test Procedures.....	55
4.5.5 Deviation from Test Standard	55
4.5.6 EUT Operating Conditions.....	55
4.5.7 Test Results	56

4.6	Power Spectral Density Measurement.....	58
4.6.1	Limits of Power Spectral Density Measurement	58
4.6.2	Test Setup.....	58
4.6.3	Test Instruments	58
4.6.4	Test Procedure	58
4.6.5	Deviation from Test Standard	58
4.6.6	EUT Operating Condition	58
4.6.7	Test Results	59
4.7	Conducted Out of Band Emission Measurement.....	63
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	63
4.7.2	Test Setup.....	63
4.7.3	Test Instruments	63
4.7.4	Test Procedure	63
4.7.5	Deviation from Test Standard	63
4.7.6	EUT Operating Condition	63
4.7.7	Test Results	63
5	Pictures of Test Arrangements.....	76
	Annex A - Band-Edge Measurement.....	77
	Appendix – Information of the Testing Laboratories	83

Release Control Record

Issue No.	Description	Date Issued
RF200514E05	Original release.	June 18, 2020

1 Certificate of Conformity

Product: AX1800 Dual-Band WiFi 6 Router

Brand: Linksys

Test Model: E7350

Sample Status: ENGINEERING SAMPLE

Applicant: Belkin International, Inc.

Test Date: June 01 to 06, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Vivian Huang , **Date:** June 18, 2020
Vivian Huang / Specialist

Approved by : Clark Lin , **Date:** June 18, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.17 dB at 16.23047 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.0 dB at 2383.50 MHz
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.
-	Occupied Bandwidth Measurement	-	Reference only

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted Emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AX1800 Dual-Band WiFi 6 Router
Brand	Linksys
Test Model	E7350
Status of EUT	ENGINEERING SAMPLE
Driver version	7.1.0.2
Test Software Version	MT7915 QA 0.0.2.15
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps 802.11ax: up to 1201.0 Mbps
Operating Frequency	2.4GHz: 2.412GHz ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 80211ax (HE20): 11 802.11n (HT40), VHT40, 80211ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 80211ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 80211ax (HE40): 4 802.11ac (VHT80), 80211ax (HE80): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 583.096 mW 5.18 ~ 5.24 GHz: 880.096 mW 5.745 ~ 5.825 GHz: 882.45 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 366.17 mW 5.18 ~ 5.24 GHz: 743.141 mW 5.745 ~ 5.825 GHz: 979.63 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	RJ45 cable x1 (unshielded, 1m)

Note:

1. There are WLAN and Bluetooth technology used for the EUT. The EUT has two radios as following table:

Radio 1	Radio 2
WLAN 2.4GHz	WLAN 5GHz

2. Simultaneously transmission condition.

Condition	Technology
1	WLAN (2.4GHz) WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied power adapter and following different models could be chosen as following table:

No.	Brand	Model No.	Spec.	Plug
1	APD	WB-24J12FU	AC Input: 100-240Vac, 0.7A Max, 50-60Hz DC Output: 12V, 2A DC Output Cable: 1.5m, Unshielded	FCC/IC
2	Ktec	KSA-24W-120200HU	AC Input: 100-240Vac, 0.6A, 50/60Hz DC Output: 12V, 2A DC Output Cable: 1.5m, Unshielded	FCC/IC
3	APD	WB-24J12R	AC Input: 100-240Vac, 0.7A Max, 50-60Hz DC Output: 12V, 2A DC Output Cable: 1.5m, Unshielded	interchangeable plug
4	Ktec	KSA-24W-120200D5	AC Input: 100-240Vac, 0.6A, 50/60Hz DC Output: 12V, 2A DC Output Cable: 1.5m, Unshielded	interchangeable plug

Note:

1. The adapter 1 is as same as adapter 3; except for plug shape is different.
2. The adapter 2 is as same as adapter 4; except for plug shape is different.
3. From the above adapters, the worst conducted emission was found in **Adapter 1** and radiated emission test was found in **Adapter 2**. Therefore only the test data of the modes were recorded in this report.

4. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length (mm)
DB1	Galtronics	3.4	2.4~2.4835GHz	PCB	i-pex(MHF)	58
		3.99	5.15~5.25GHz			
		4.17	5.25~5.35GHz			
		4.74	5.47~5.725GHz			
		5.24	5.725~5.85GHz			
DB2	Galtronics	3.45	2.4~2.4835GHz	PCB	i-pex(MHF)	68
		3.52	5.15~5.25GHz			
		3.00	5.25~5.35GHz			
		3.08	5.47~5.725GHz			
		3.11	5.725~5.85GHz			
DFS Ant (RX only)	Galtronics	2.14	5.15~5.25GHz	metal	none	N/A
		2.86	5.25~5.35GHz			
		3.17	5.47~5.725GHz			
		3.38	5.725~5.85GHz			
BT Ant	Galtronics	4.28	2.4~2.4835GHz	metal	none	N/A

5. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/VHT mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

6. The power setting are list as below:

802.11b		802.11g		VHT20		VHT40		802.11ax (HE20)		802.11ax (HE40)	
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
2412	19.5	2412	15.5	2412	31	2422	30	2412	26	2422	25
2437	22	2437	21	2437	42	2437	37	2437	41	2437	34
2462	19.5	2462	15	2462	29	2452	28	2462	24	2452	27

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	6	DSSS	DBPSK	1Mb/s

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	6	DSSS	DBPSK	1Mb/s

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	24deg. C, 68%RH	120Vac, 60Hz	Tom Yang
RE<1G	18deg. C, 61%RH	120Vac, 60Hz	Sampson Chen
PLC	25deg. C, 75%RH	120Vac, 60Hz	Nick Lo
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.281/12.356 = 0.994$

802.11g: Duty cycle = $2.76/2.827 = 0.976$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.10$

802.11ax (HE20): Duty cycle = $2.574/2.654 = 0.97$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.13$

802.11ax (HE40): Duty cycle = $1.259/1.321 = 0.953$, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.21$

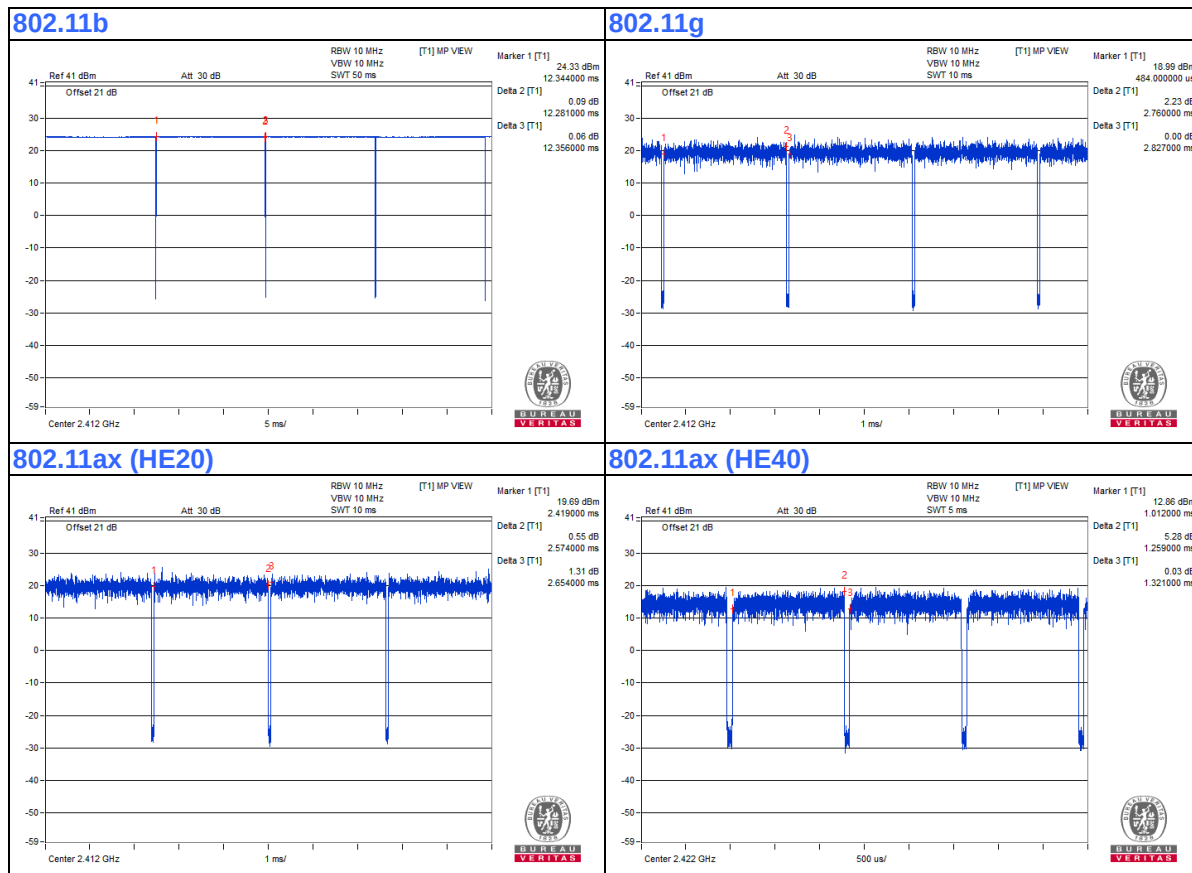

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Lenovo	81A4	YD02YN76	NA	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	HUB	ZyXEL	GS1100-16	S150H44000046	FCC DoC	Provided by Lab
D.	USB 3.0 Disk	SanDisk	Ultra Flair USB 3.0	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	3	10	No	0	Provided by Lab

3.4.1 Configuration of System under Test

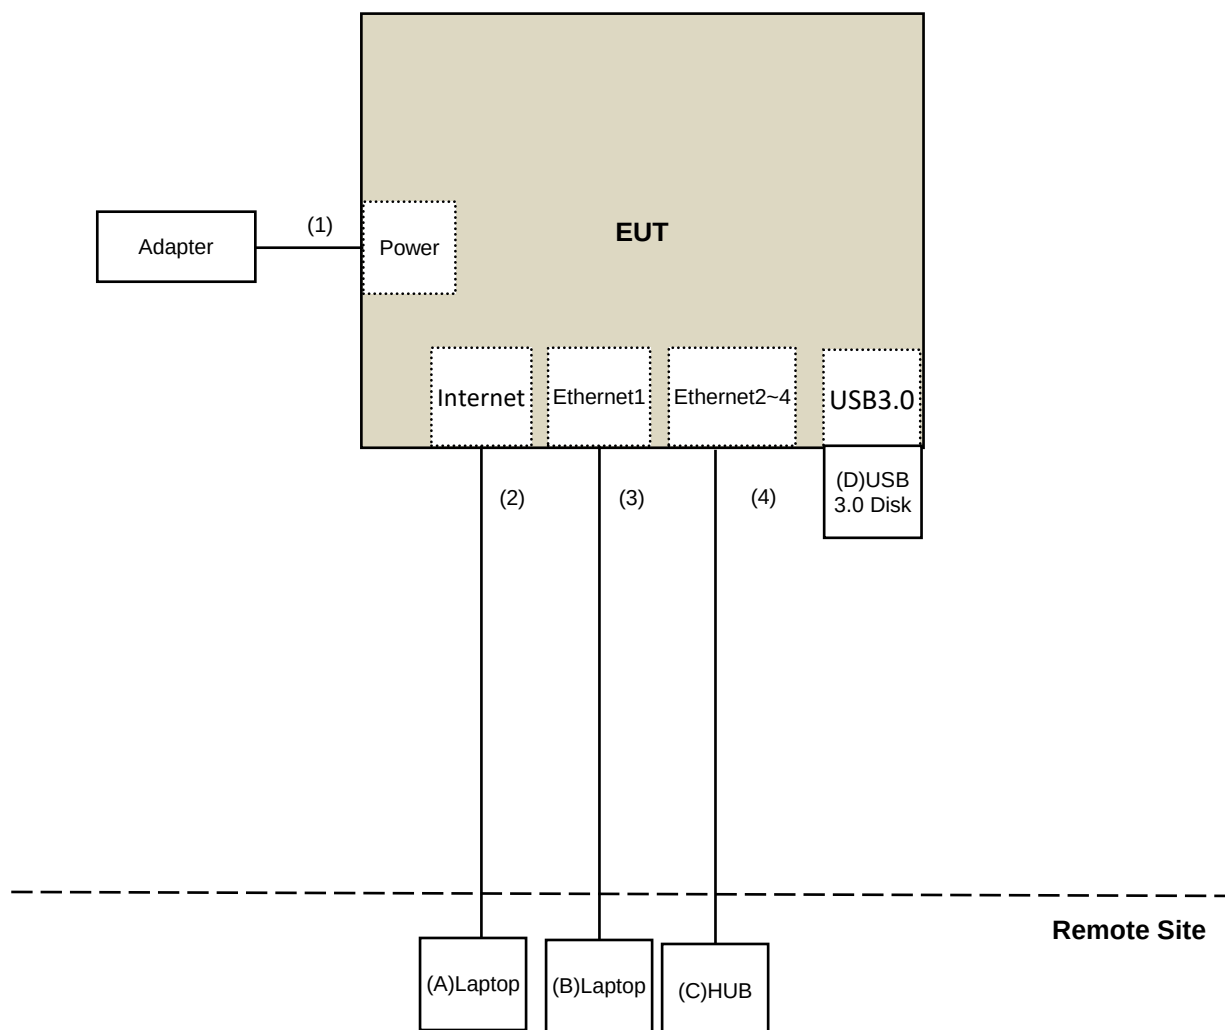

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance :

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated Emission & Bandedge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 13, 2019	Dec. 12, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 23, 2019	Oct. 22, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-4-1	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-2	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-3	Mar. 18, 2020	Mar. 17, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 15, 2019	Aug. 14, 2020
RF Cable	EMC104-SM-SM-1200	160923	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: June 03 to 04, 2020

For other test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 26, 2019	July 25, 2020
Power sensor Anritsu	MA2411B	1339443	July 26, 2019	July 25, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: June 06, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

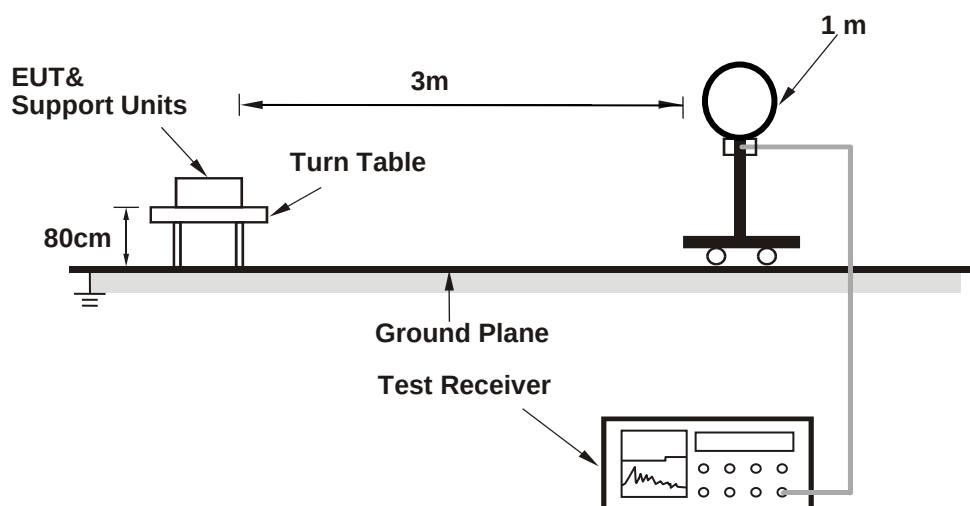

For Radiated emission 30MHz to 1GHz

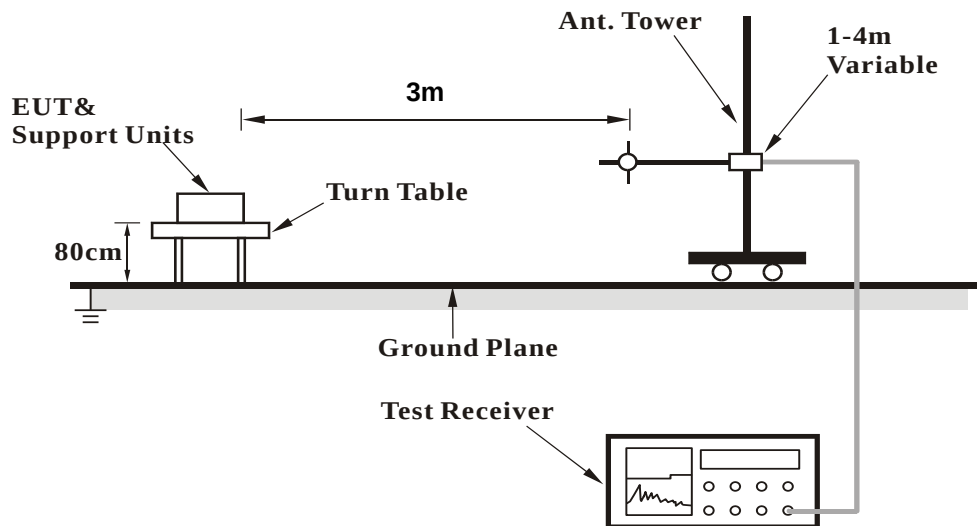

For Radiated emission above 1GHz

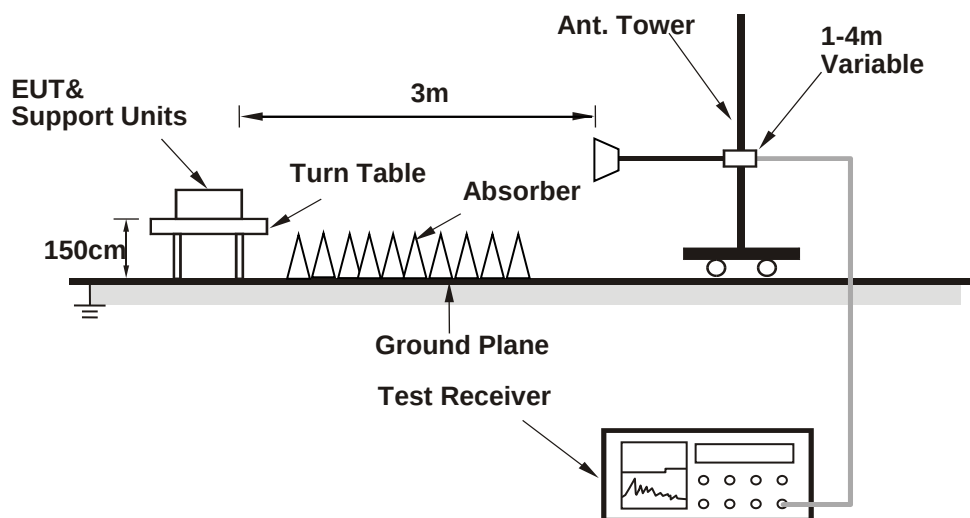

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (MT7915 QA 0.0.2.15) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

CDD Mode

802.11b

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	57.5 PK	74.0	-16.5	2.72 H	262	59.3	-1.8
2	2387.00	44.8 AV	54.0	-9.2	2.72 H	262	46.6	-1.8
3	*2412.00	114.6 PK			2.72 H	262	116.4	-1.8
4	*2412.00	112.7 AV			2.72 H	262	114.5	-1.8
5	4824.00	47.3 PK	74.0	-26.7	1.21 H	8	45.1	2.2
6	4824.00	45.8 AV	54.0	-8.2	1.21 H	8	43.6	2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.30	59.2 PK	74.0	-14.8	1.09 V	122	61.1	-1.9
2	2374.30	50.8 AV	54.0	-3.2	1.09 V	122	52.7	-1.9
3	*2412.00	118.5 PK			1.09 V	122	120.3	-1.8
4	*2412.00	116.3 AV			1.09 V	122	118.1	-1.8
5	4824.00	51.3 PK	74.0	-22.7	3.15 V	8	49.1	2.2
6	4824.00	49.5 AV	54.0	-4.5	3.15 V	8	47.3	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	2.73 H	261	68.5	-1.8
2	2390.00	46.8 AV	54.0	-7.2	2.73 H	261	48.6	-1.8
3	*2437.00	117.8 PK			2.73 H	261	119.6	-1.8
4	*2437.00	115.7 AV			2.73 H	261	117.5	-1.8
5	2483.50	66.5 PK	74.0	-7.5	2.73 H	261	68.4	-1.9
6	2483.50	47.1 AV	54.0	-6.9	2.73 H	261	49.0	-1.9
7	4874.00	52.0 PK	74.0	-22.0	1.66 H	17	49.9	2.1
8	4874.00	50.4 AV	54.0	-3.6	1.66 H	17	48.3	2.1
9	7311.00	54.2 PK	74.0	-19.8	1.15 H	140	45.1	9.1
10	7311.00	50.6 AV	54.0	-3.4	1.15 H	140	41.5	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	1.12 V	120	73.7	-1.8
2	2390.00	52.6 AV	54.0	-1.4	1.12 V	120	54.4	-1.8
3	*2437.00	120.5 PK			1.12 V	120	122.3	-1.8
4	*2437.00	118.6 AV			1.12 V	120	120.4	-1.8
5	2483.50	72.7 PK	74.0	-1.3	1.12 V	120	74.6	-1.9
6	2483.50	52.9 AV	54.0	-1.1	1.12 V	120	54.8	-1.9
7	4874.00	47.3 PK	74.0	-26.7	1.89 V	55	45.2	2.1
8	4874.00	44.5 AV	54.0	-9.5	1.89 V	55	42.4	2.1
9	7311.00	51.4 PK	74.0	-22.6	2.31 V	120	42.3	9.1
10	7311.00	46.8 AV	54.0	-7.2	2.31 V	120	37.7	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.2 PK			1.80 H	309	116.0	-1.8
2	*2462.00	112.8 AV			1.80 H	309	114.6	-1.8
3	2483.50	59.2 PK	74.0	-14.8	1.80 H	309	61.1	-1.9
4	2483.50	49.6 AV	54.0	-4.4	1.80 H	309	51.5	-1.9
5	4924.00	50.9 PK	74.0	-23.1	1.63 H	18	48.6	2.3
6	4924.00	49.3 AV	54.0	-4.7	1.63 H	18	47.0	2.3
7	7386.00	51.7 PK	74.0	-22.3	1.06 H	137	42.3	9.4
8	7386.00	47.2 AV	54.0	-6.8	1.06 H	137	37.8	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.4 PK			1.10 V	86	119.2	-1.8
2	*2462.00	115.3 AV			1.10 V	86	117.1	-1.8
3	2483.50	58.7 PK	74.0	-15.3	1.10 V	86	60.6	-1.9
4	2483.50	52.9 AV	54.0	-1.1	1.10 V	86	54.8	-1.9
5	4924.00	45.9 PK	74.0	-28.1	1.71 V	104	43.6	2.3
6	4924.00	43.2 AV	54.0	-10.8	1.71 V	104	40.9	2.3
7	7386.00	49.1 PK	74.0	-24.9	1.70 V	78	39.7	9.4
8	7386.00	42.9 AV	54.0	-11.1	1.70 V	78	33.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.6 PK	74.0	-12.4	1.53 H	314	63.4	-1.8
2	2390.00	48.3 AV	54.0	-5.7	1.53 H	314	50.1	-1.8
3	*2412.00	113.5 PK			1.53 H	314	115.3	-1.8
4	*2412.00	103.4 AV			1.53 H	314	105.2	-1.8
5	4824.00	47.0 PK	74.0	-27.0	1.21 H	17	44.8	2.2
6	4824.00	45.6 AV	54.0	-8.4	1.21 H	17	43.4	2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.44 V	298	70.9	-1.8
2	2390.00	52.4 AV	54.0	-1.6	1.44 V	298	54.2	-1.8
3	*2412.00	115.3 PK			1.44 V	298	117.1	-1.8
4	*2412.00	105.2 AV			1.44 V	298	107.0	-1.8
5	4824.00	51.3 PK	74.0	-22.7	3.15 V	15	49.1	2.2
6	4824.00	49.2 AV	54.0	-4.8	3.15 V	15	47.0	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.25 H	86	68.4	-1.8
2	2390.00	48.5 AV	54.0	-5.5	1.25 H	86	50.3	-1.8
3	*2437.00	118.3 PK			1.25 H	86	120.1	-1.8
4	*2437.00	108.5 AV			1.25 H	86	110.3	-1.8
5	2483.50	66.0 PK	74.0	-8.0	1.25 H	86	67.9	-1.9
6	2483.50	48.9 AV	54.0	-5.1	1.25 H	86	50.8	-1.9
7	4874.00	52.0 PK	74.0	-22.0	1.69 H	7	49.9	2.1
8	4874.00	50.6 AV	54.0	-3.4	1.69 H	7	48.5	2.1
9	7311.00	53.9 PK	74.0	-20.1	1.10 H	147	44.8	9.1
10	7311.00	50.2 AV	54.0	-3.8	1.10 H	147	41.1	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.26 V	298	73.2	-1.8
2	2390.00	52.1 AV	54.0	-1.9	1.26 V	298	53.9	-1.8
3	*2437.00	120.3 PK			1.26 V	298	122.1	-1.8
4	*2437.00	110.2 AV			1.26 V	298	112.0	-1.8
5	2483.50	72.1 PK	74.0	-1.9	1.26 V	298	74.0	-1.9
6	2483.50	52.5 AV	54.0	-1.5	1.26 V	298	54.4	-1.9
7	4874.00	47.3 PK	74.0	-26.7	1.84 V	39	45.2	2.1
8	4874.00	44.6 AV	54.0	-9.4	1.84 V	39	42.5	2.1
9	7311.00	51.5 PK	74.0	-22.5	2.30 V	119	42.4	9.1
10	7311.00	46.9 AV	54.0	-7.1	2.30 V	119	37.8	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.0 PK			1.77 H	310	112.8	-1.8
2	*2462.00	101.3 AV			1.77 H	310	103.1	-1.8
3	2483.50	62.3 PK	74.0	-11.7	1.77 H	310	64.2	-1.9
4	2483.50	48.8 AV	54.0	-5.2	1.77 H	310	50.7	-1.9
5	4924.00	51.3 PK	74.0	-22.7	1.62 H	21	49.0	2.3
6	4924.00	49.7 AV	54.0	-4.3	1.62 H	21	47.4	2.3
7	7386.00	52.2 PK	74.0	-21.8	1.05 H	122	42.8	9.4
8	7386.00	47.7 AV	54.0	-6.3	1.05 H	122	38.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.2 PK			1.00 V	117	115.0	-1.8
2	*2462.00	104.2 AV			1.00 V	117	106.0	-1.8
3	2483.50	65.5 PK	74.0	-8.5	1.00 V	117	67.4	-1.9
4	2483.50	53.0 AV	54.0	-1.0	1.00 V	117	54.9	-1.9
5	4924.00	47.4 PK	74.0	-26.6	1.87 V	49	45.1	2.3
6	4924.00	44.7 AV	54.0	-9.3	1.87 V	49	42.4	2.3
7	7386.00	50.9 PK	74.0	-23.1	2.29 V	118	41.5	9.4
8	7386.00	46.5 AV	54.0	-7.5	2.29 V	118	37.1	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Beamforming Mode

VHT20

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.0 PK	74.0	-15.0	1.52 H	315	60.8	-1.8
2	2390.00	47.6 AV	54.0	-6.4	1.52 H	315	49.4	-1.8
3	*2412.00	107.4 PK			1.52 H	315	109.2	-1.8
4	*2412.00	98.2 AV			1.52 H	315	100.0	-1.8
5	4824.00	47.3 PK	74.0	-26.7	1.18 H	24	45.1	2.2
6	4824.00	45.7 AV	54.0	-8.3	1.18 H	24	43.5	2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.57 V	119	70.0	-1.8
2	2390.00	52.8 AV	54.0	-1.2	1.57 V	119	54.6	-1.8
3	*2412.00	113.7 PK			1.57 V	119	115.5	-1.8
4	*2412.00	104.1 AV			1.57 V	119	105.9	-1.8
5	4824.00	51.7 PK	74.0	-22.3	3.15 V	17	49.5	2.2
6	4824.00	49.5 AV	54.0	-4.5	3.15 V	17	47.3	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.49 H	313	60.2	-1.8
2	2390.00	46.0 AV	54.0	-8.0	1.49 H	313	47.8	-1.8
3	*2437.00	112.9 PK			1.49 H	313	114.7	-1.8
4	*2437.00	103.1 AV			1.49 H	313	104.9	-1.8
5	2483.50	59.3 PK	74.0	-14.7	1.49 H	313	61.2	-1.9
6	2483.50	47.0 AV	54.0	-7.0	1.49 H	313	48.9	-1.9
7	4874.00	51.8 PK	74.0	-22.2	1.67 H	23	49.7	2.1
8	4874.00	50.4 AV	54.0	-3.6	1.67 H	23	48.3	2.1
9	7311.00	54.6 PK	74.0	-19.4	1.11 H	143	45.5	9.1
10	7311.00	50.9 AV	54.0	-3.1	1.11 H	143	41.8	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	1.19 V	119	67.6	-1.8
2	2390.00	51.3 AV	54.0	-2.7	1.19 V	119	53.1	-1.8
3	*2437.00	118.4 PK			1.19 V	119	120.2	-1.8
4	*2437.00	108.5 AV			1.19 V	119	110.3	-1.8
5	2483.50	67.3 PK	74.0	-6.7	1.19 V	119	69.2	-1.9
6	2483.50	52.6 AV	54.0	-1.4	1.19 V	119	54.5	-1.9
7	4874.00	47.7 PK	74.0	-26.3	1.94 V	63	45.6	2.1
8	4874.00	44.7 AV	54.0	-9.3	1.94 V	63	42.6	2.1
9	7311.00	51.0 PK	74.0	-23.0	2.26 V	108	41.9	9.1
10	7311.00	46.6 AV	54.0	-7.4	2.26 V	108	37.5	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.8 PK			1.48 H	310	107.6	-1.8
2	*2462.00	97.3 AV			1.48 H	310	99.1	-1.8
3	2483.50	61.1 PK	74.0	-12.9	1.48 H	310	63.0	-1.9
4	2483.50	48.7 AV	54.0	-5.3	1.48 H	310	50.6	-1.9
5	4924.00	51.1 PK	74.0	-22.9	1.68 H	5	48.8	2.3
6	4924.00	49.6 AV	54.0	-4.4	1.68 H	5	47.3	2.3
7	7386.00	51.7 PK	74.0	-22.3	1.02 H	125	42.3	9.4
8	7386.00	47.0 AV	54.0	-7.0	1.02 H	125	37.6	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.7 PK			1.55 V	116	114.5	-1.8
2	*2462.00	103.8 AV			1.55 V	116	105.6	-1.8
3	2483.50	66.5 PK	74.0	-7.5	1.55 V	116	68.4	-1.9
4	2483.50	52.9 AV	54.0	-1.1	1.55 V	116	54.8	-1.9
5	4924.00	47.8 PK	74.0	-26.2	1.99 V	77	45.5	2.3
6	4924.00	44.9 AV	54.0	-9.1	1.99 V	77	42.6	2.3
7	7386.00	51.4 PK	74.0	-22.6	2.35 V	108	42.0	9.4
8	7386.00	46.8 AV	54.0	-7.2	2.35 V	108	37.4	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

VHT40

Channel	TX Channel 3	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	1.51 H	314	63.7	-1.8
2	2390.00	48.6 AV	54.0	-5.4	1.51 H	314	50.4	-1.8
3	*2422.00	103.4 PK			1.51 H	314	105.2	-1.8
4	*2422.00	93.1 AV			1.51 H	314	94.9	-1.8
5	4844.00	47.8 PK	74.0	-26.2	1.16 H	27	45.6	2.2
6	4844.00	46.1 AV	54.0	-7.9	1.16 H	27	43.9	2.2
7	7266.00	54.4 PK	74.0	-19.6	1.19 H	150	45.4	9.0
8	7266.00	50.9 AV	54.0	-3.1	1.19 H	150	41.9	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.7 PK	74.0	-12.3	1.43 V	117	63.5	-1.8
2	2390.00	52.8 AV	54.0	-1.2	1.43 V	117	54.6	-1.8
3	*2422.00	108.8 PK			1.43 V	117	110.6	-1.8
4	*2422.00	99.6 AV			1.43 V	117	101.4	-1.8
5	4844.00	51.2 PK	74.0	-22.8	3.20 V	9	49.0	2.2
6	4844.00	49.0 AV	54.0	-5.0	3.20 V	9	46.8	2.2
7	7266.00	50.8 PK	74.0	-23.2	2.30 V	125	41.8	9.0
8	7266.00	46.4 AV	54.0	-7.6	2.30 V	125	37.4	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.8 PK	74.0	-14.2	1.45 H	314	61.6	-1.8
2	2390.00	47.7 AV	54.0	-6.3	1.45 H	314	49.5	-1.8
3	*2437.00	105.6 PK			1.45 H	314	107.4	-1.8
4	*2437.00	95.4 AV			1.45 H	314	97.2	-1.8
5	2483.50	60.7 PK	74.0	-13.3	1.45 H	314	62.6	-1.9
6	2483.50	47.1 AV	54.0	-6.9	1.45 H	314	49.0	-1.9
7	4874.00	51.4 PK	74.0	-22.6	1.66 H	25	49.3	2.1
8	4874.00	49.9 AV	54.0	-4.1	1.66 H	25	47.8	2.1
9	7311.00	54.3 PK	74.0	-19.7	1.13 H	130	45.2	9.1
10	7311.00	50.6 AV	54.0	-3.4	1.13 H	130	41.5	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	1.51 V	212	69.5	-1.8
2	2390.00	52.6 AV	54.0	-1.4	1.51 V	212	54.4	-1.8
3	*2437.00	112.4 PK			1.51 V	212	114.2	-1.8
4	*2437.00	103.1 AV			1.51 V	212	104.9	-1.8
5	2483.50	66.2 PK	74.0	-7.8	1.51 V	212	68.1	-1.9
6	2483.50	52.3 AV	54.0	-1.7	1.51 V	212	54.2	-1.9
7	4874.00	47.4 PK	74.0	-26.6	1.89 V	49	45.3	2.1
8	4874.00	44.6 AV	54.0	-9.4	1.89 V	49	42.5	2.1
9	7311.00	51.8 PK	74.0	-22.2	2.25 V	105	42.7	9.1
10	7311.00	46.9 AV	54.0	-7.1	2.25 V	105	37.8	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 9	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	102.2 PK			1.52 H	310	104.0	-1.8
2	*2452.00	92.5 AV			1.52 H	310	94.3	-1.8
3	2483.50	56.7 PK	74.0	-17.3	1.52 H	310	58.6	-1.9
4	2483.50	45.2 AV	54.0	-8.8	1.52 H	310	47.1	-1.9
5	4904.00	51.1 PK	74.0	-22.9	1.59 H	16	49.0	2.1
6	4904.00	49.7 AV	54.0	-4.3	1.59 H	16	47.6	2.1
7	7356.00	52.0 PK	74.0	-22.0	1.09 H	126	42.8	9.2
8	7356.00	47.3 AV	54.0	-6.7	1.09 H	126	38.1	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.1 PK			1.49 V	112	108.9	-1.8
2	*2452.00	97.7 AV			1.49 V	112	99.5	-1.8
3	2483.50	63.5 PK	74.0	-10.5	1.49 V	112	65.4	-1.9
4	2483.50	52.8 AV	54.0	-1.2	1.49 V	112	54.7	-1.9
5	4904.00	47.7 PK	74.0	-26.3	1.85 V	62	45.6	2.1
6	4904.00	44.6 AV	54.0	-9.4	1.85 V	62	42.5	2.1
7	7356.00	51.0 PK	74.0	-23.0	2.25 V	108	41.8	9.2
8	7356.00	46.5 AV	54.0	-7.5	2.25 V	108	37.3	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE20)

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.98	57.1 PK	74.0	-16.9	1.52 H	117	58.9	-1.8
2	2386.98	46.9 AV	54.0	-7.1	1.52 H	117	48.7	-1.8
3	*2412.00	105.4 PK			1.52 H	117	107.2	-1.8
4	*2412.00	94.4 AV			1.52 H	117	96.2	-1.8
5	4824.00	47.3 PK	74.0	-26.7	1.24 H	28	45.1	2.2
6	4824.00	45.6 AV	54.0	-8.4	1.24 H	28	43.4	2.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	1.19 V	92	67.6	-1.8
2	2390.00	52.6 AV	54.0	-1.4	1.19 V	92	54.4	-1.8
3	*2412.00	113.4 PK			1.19 V	92	115.2	-1.8
4	*2412.00	102.6 AV			1.19 V	92	104.4	-1.8
5	4824.00	51.7 PK	74.0	-22.3	3.11 V	19	49.5	2.2
6	4824.00	49.3 AV	54.0	-4.7	3.11 V	19	47.1	2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.6 PK	74.0	-11.4	1.50 H	115	64.4	-1.8
2	2390.00	48.1 AV	54.0	-5.9	1.50 H	115	49.9	-1.8
3	*2437.00	113.6 PK			1.50 H	115	115.4	-1.8
4	*2437.00	101.4 AV			1.50 H	115	103.2	-1.8
5	2483.50	61.2 PK	74.0	-12.8	1.50 H	115	63.1	-1.9
6	2483.50	47.6 AV	54.0	-6.4	1.50 H	115	49.5	-1.9
7	4874.00	52.3 PK	74.0	-21.7	1.66 H	5	50.2	2.1
8	4874.00	50.5 AV	54.0	-3.5	1.66 H	5	48.4	2.1
9	7311.00	54.0 PK	74.0	-20.0	1.12 H	133	44.9	9.1
10	7311.00	50.5 AV	54.0	-3.5	1.12 H	133	41.4	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.7 PK	74.0	-3.3	1.20 V	115	72.5	-1.8
2	2390.00	52.5 AV	54.0	-1.5	1.20 V	115	54.3	-1.8
3	*2437.00	121.7 PK			1.20 V	115	123.5	-1.8
4	*2437.00	109.8 AV			1.20 V	115	111.6	-1.8
5	2483.50	69.8 PK	74.0	-4.2	1.20 V	115	71.7	-1.9
6	2483.50	52.7 AV	54.0	-1.3	1.20 V	115	54.6	-1.9
7	4874.00	47.2 PK	74.0	-26.8	1.86 V	45	45.1	2.1
8	4874.00	44.5 AV	54.0	-9.5	1.86 V	45	42.4	2.1
9	7311.00	51.9 PK	74.0	-22.1	2.33 V	126	42.8	9.1
10	7311.00	47.1 AV	54.0	-6.9	2.33 V	126	38.0	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.5 PK			1.52 H	72	106.3	-1.8
2	*2462.00	93.1 AV			1.52 H	72	94.9	-1.8
3	2483.50	57.2 PK	74.0	-16.8	1.52 H	72	59.1	-1.9
4	2483.50	46.1 AV	54.0	-7.9	1.52 H	72	48.0	-1.9
5	4924.00	50.6 PK	74.0	-23.4	1.59 H	17	48.3	2.3
6	4924.00	48.9 AV	54.0	-5.1	1.59 H	17	46.6	2.3
7	7386.00	51.6 PK	74.0	-22.4	1.09 H	126	42.2	9.4
8	7386.00	47.2 AV	54.0	-6.8	1.09 H	126	37.8	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.9 PK			1.04 V	124	115.7	-1.8
2	*2462.00	101.6 AV			1.04 V	124	103.4	-1.8
3	2483.50	65.4 PK	74.0	-8.6	1.04 V	124	67.3	-1.9
4	2483.50	52.9 AV	54.0	-1.1	1.04 V	124	54.8	-1.9
5	4924.00	46.8 PK	74.0	-27.2	1.86 V	41	44.5	2.3
6	4924.00	44.2 AV	54.0	-9.8	1.86 V	41	41.9	2.3
7	7386.00	51.3 PK	74.0	-22.7	2.26 V	133	41.9	9.4
8	7386.00	46.9 AV	54.0	-7.1	2.26 V	133	37.5	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE40)

Channel	TX Channel 3	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.08	56.3 PK	74.0	-17.7	1.25 H	54	58.1	-1.8
2	2386.08	46.3 AV	54.0	-7.7	1.25 H	54	48.1	-1.8
3	*2422.00	100.4 PK			1.25 H	54	102.2	-1.8
4	*2422.00	90.2 AV			1.25 H	54	92.0	-1.8
5	4844.00	46.8 PK	74.0	-27.2	1.23 H	26	44.6	2.2
6	4844.00	45.6 AV	54.0	-8.4	1.23 H	26	43.4	2.2
7	7266.00	54.0 PK	74.0	-20.0	1.21 H	140	45.0	9.0
8	7266.00	50.4 AV	54.0	-3.6	1.21 H	140	41.4	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	1.65 V	287	66.9	-1.8
2	2390.00	52.4 AV	54.0	-1.6	1.65 V	287	54.2	-1.8
3	*2422.00	109.7 PK			1.65 V	287	111.5	-1.8
4	*2422.00	99.1 AV			1.65 V	287	100.9	-1.8
5	4844.00	51.7 PK	74.0	-22.3	3.13 V	16	49.5	2.2
6	4844.00	49.5 AV	54.0	-4.5	3.13 V	16	47.3	2.2
7	7266.00	51.2 PK	74.0	-22.8	2.28 V	116	42.2	9.0
8	7266.00	46.6 AV	54.0	-7.4	2.28 V	116	37.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.27 H	55	59.2	-1.8
2	2390.00	47.4 AV	54.0	-6.6	1.27 H	55	49.2	-1.8
3	*2437.00	103.1 PK			1.27 H	55	104.9	-1.8
4	*2437.00	92.5 AV			1.27 H	55	94.3	-1.8
5	2483.50	55.8 PK	74.0	-18.2	1.27 H	55	57.7	-1.9
6	2483.50	44.5 AV	54.0	-9.5	1.27 H	55	46.4	-1.9
7	4874.00	52.0 PK	74.0	-22.0	1.69 H	15	49.9	2.1
8	4874.00	50.1 AV	54.0	-3.9	1.69 H	15	48.0	2.1
9	7311.00	54.9 PK	74.0	-19.1	1.13 H	125	45.8	9.1
10	7311.00	50.5 AV	54.0	-3.5	1.13 H	125	41.4	9.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.3 PK	74.0	-6.7	1.80 V	300	69.1	-1.8
2	2390.00	52.3 AV	54.0	-1.7	1.80 V	300	54.1	-1.8
3	*2437.00	114.4 PK			1.80 V	300	116.2	-1.8
4	*2437.00	101.9 AV			1.80 V	300	103.7	-1.8
5	2483.50	65.9 PK	74.0	-8.1	1.80 V	300	67.8	-1.9
6	2483.50	49.4 AV	54.0	-4.6	1.80 V	300	51.3	-1.9
7	4874.00	46.7 PK	74.0	-27.3	1.88 V	48	44.6	2.1
8	4874.00	44.2 AV	54.0	-9.8	1.88 V	48	42.1	2.1
9	7311.00	51.5 PK	74.0	-22.5	2.25 V	113	42.4	9.1
10	7311.00	46.8 AV	54.0	-7.2	2.25 V	113	37.7	9.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 9	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	100.9 PK			1.26 H	55	102.7	-1.8
2	*2452.00	91.4 AV			1.26 H	55	93.2	-1.8
3	2488.79	56.9 PK	74.0	-17.1	1.26 H	55	58.8	-1.9
4	2488.79	47.1 AV	54.0	-6.9	1.26 H	55	49.0	-1.9
5	4904.00	51.0 PK	74.0	-23.0	1.60 H	27	48.9	2.1
6	4904.00	49.6 AV	54.0	-4.4	1.60 H	27	47.5	2.1
7	7356.00	51.8 PK	74.0	-22.2	1.11 H	137	42.6	9.2
8	7356.00	47.3 AV	54.0	-6.7	1.11 H	137	38.1	9.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.5 PK			1.91 V	77	111.3	-1.8
2	*2452.00	98.6 AV			1.91 V	77	100.4	-1.8
3	2483.50	64.7 PK	74.0	-9.3	1.91 V	77	66.6	-1.9
4	2483.50	52.5 AV	54.0	-1.5	1.91 V	77	54.4	-1.9
5	4904.00	47.0 PK	74.0	-27.0	1.91 V	66	44.9	2.1
6	4904.00	44.3 AV	54.0	-9.7	1.91 V	66	42.2	2.1
7	7356.00	51.2 PK	74.0	-22.8	2.26 V	112	42.0	9.2
8	7356.00	46.7 AV	54.0	-7.3	2.26 V	112	37.5	9.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CDD Mode

Below 1GHz Data:


802.11b

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.02	36.8 QP	40.0	-3.2	1.20 H	5	46.1	-9.3
2	66.62	35.5 QP	40.0	-4.5	1.70 H	340	44.7	-9.2
3	107.87	36.1 QP	43.5	-7.4	2.20 H	280	46.8	-10.7
4	218.47	39.0 QP	46.0	-7.0	1.20 H	281	49.7	-10.7
5	366.30	35.8 QP	46.0	-10.2	1.10 H	43	40.6	-4.8
6	725.25	35.7 QP	46.0	-10.3	1.30 H	119	32.5	3.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

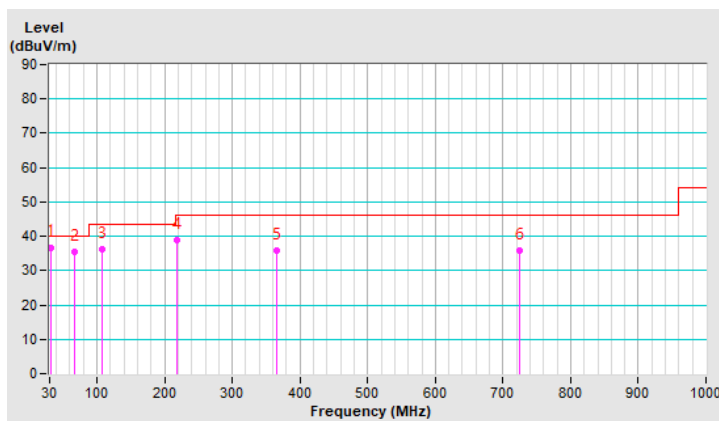


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.02	30.0 QP	40.0	-10.0	3.10 V	250	38.3	-8.3
2	106.82	36.7 QP	43.5	-6.8	3.20 V	264	47.6	-10.9
3	157.92	35.5 QP	43.5	-8.0	2.20 V	109	42.8	-7.3
4	206.03	38.8 QP	43.5	-4.7	1.10 V	120	49.5	-10.7
5	311.83	36.4 QP	46.0	-9.6	1.30 V	312	42.5	-6.1
6	368.53	36.2 QP	46.0	-9.8	1.40 V	53	40.9	-4.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

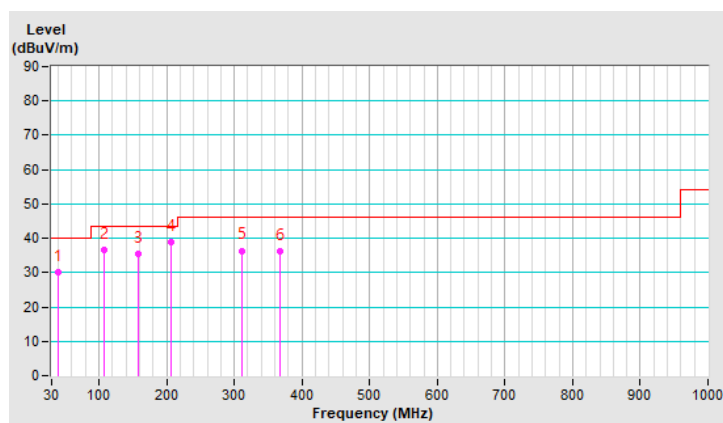

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: June 01, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

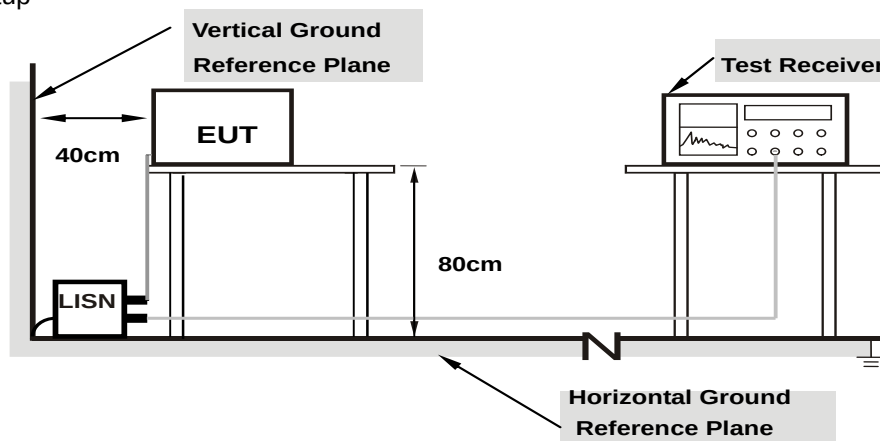

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.03	39.68	25.90	49.71	35.93	65.79	55.79	-16.08	-19.86
2	0.18125	10.04	34.73	21.84	44.77	31.88	64.43	54.43	-19.66	-22.55
3	0.21250	10.04	28.72	19.68	38.76	29.72	63.11	53.11	-24.35	-23.39
4	0.31797	10.05	21.94	10.07	31.99	20.12	59.76	49.76	-27.77	-29.64
5	14.21094	11.06	23.78	20.86	34.84	31.92	60.00	50.00	-25.16	-18.08
6	16.23047	11.20	29.87	27.93	41.07	39.13	60.00	50.00	-18.93	-10.87

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

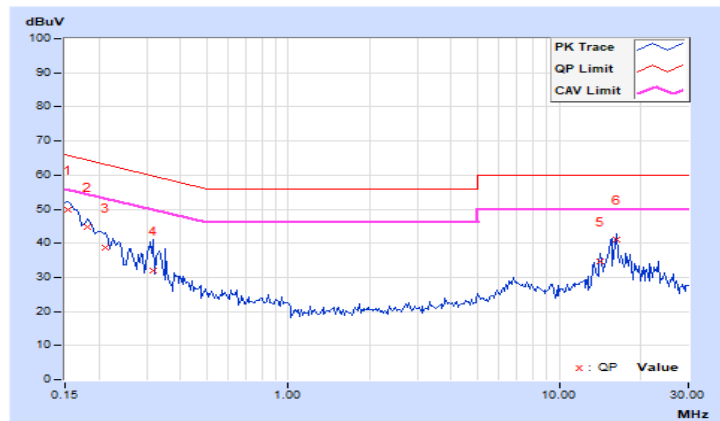


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.02	41.34	27.30	51.36	37.32	65.79	55.79	-14.43	-18.47
2	0.18125	10.03	36.42	22.70	46.45	32.73	64.43	54.43	-17.98	-21.70
3	0.22031	10.03	26.36	8.97	36.39	19.00	62.81	52.81	-26.42	-33.81
4	0.28281	10.03	25.69	16.34	35.72	26.37	60.73	50.73	-25.01	-24.36
5	15.61719	10.97	29.91	27.67	40.88	38.64	60.00	50.00	-19.12	-11.36
6	16.23047	11.00	31.81	29.83	42.81	40.83	60.00	50.00	-17.19	-9.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

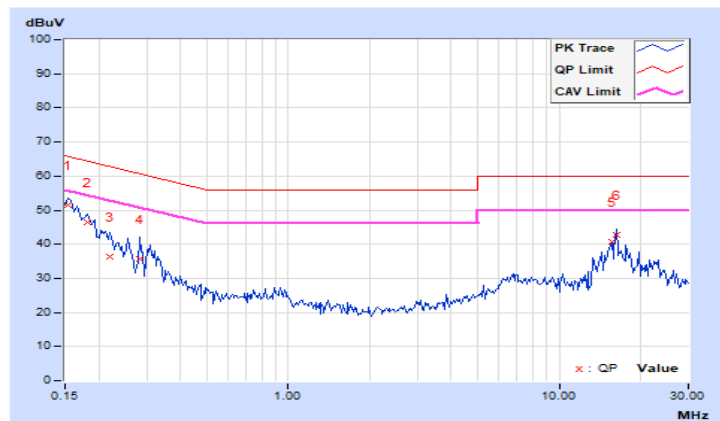


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.08	8.1	0.5	Pass
6	2437	9.12	9.14	0.5	Pass
11	2462	8.09	8.07	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.19	15.2	0.5	Pass
6	2437	15.14	15.14	0.5	Pass
11	2462	15.37	15.19	0.5	Pass

Beamforming Mode

VHT20

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.19	16.34	0.5	Pass
6	2437	15.19	15.7	0.5	Pass
11	2462	15.19	16.34	0.5	Pass

VHT40

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.2	35.28	0.5	Pass
6	2437	35.26	35.27	0.5	Pass
9	2452	35.3	35.27	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	18.61	18.58	0.5	Pass
6	2437	18.21	18.4	0.5	Pass
11	2462	18.8	18.65	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	37.29	36.03	0.5	Pass
6	2437	37.42	36.88	0.5	Pass
9	2452	37.25	35.69	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH11

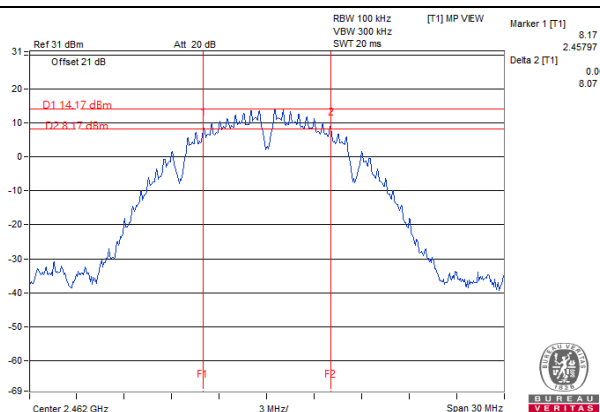


802.11g / Chain 0 : CH6

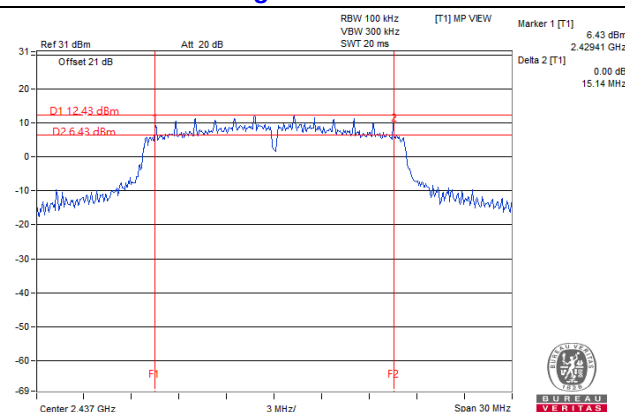


VHT20 / Chain 0 : CH1

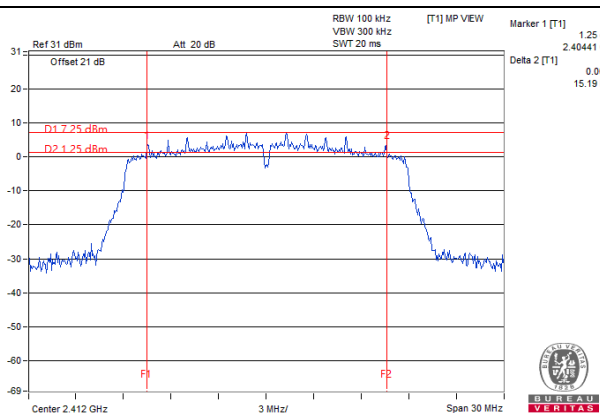


VHT40 / Chain 0 : CH3

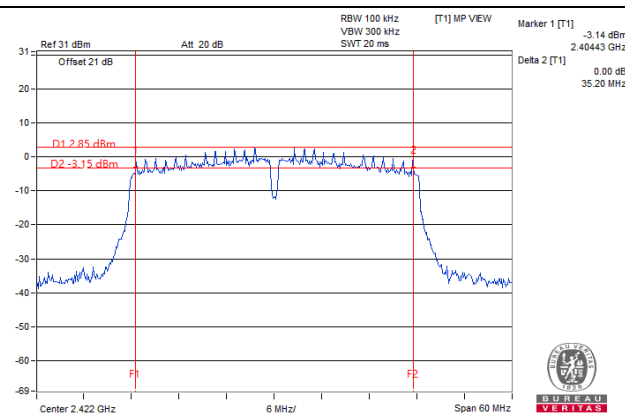

802.11ax (HE20) / Chain 0 : CH6

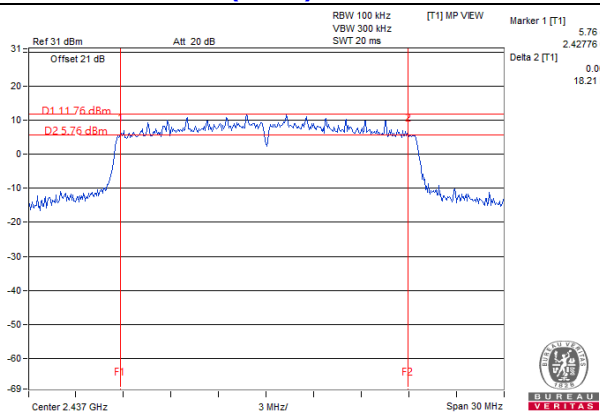


802.11ax (HE40) / Chain 1 : CH9

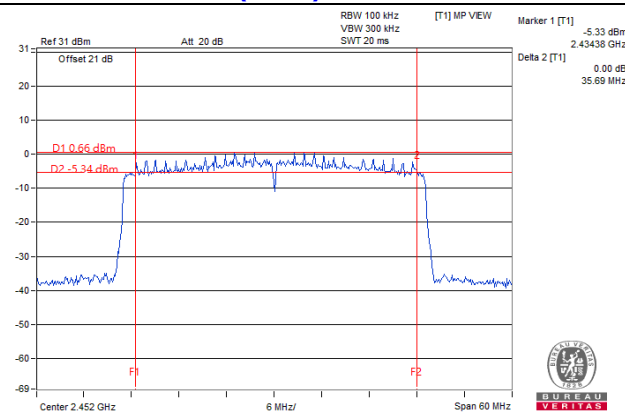

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

Same as Item 4.3.6.

4.4.6 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	12.72	12.72
6	2437	14.4	14.64
11	2462	12.84	12.84

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	16.8	16.56
6	2437	17.4	17.64
11	2462	16.56	16.56

Beamforming Mode

VHT20

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	17.76	17.76
6	2437	18.48	18.72
11	2462	17.76	17.64

VHT40

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
3	2422	36.24	36.48
6	2437	36.24	36.24
9	2452	36.48	36.24

802.11ax (HE20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
1	2412	18.96	19.08
6	2437	19.2	19.56
11	2462	19.08	18.96

802.11ax (HE40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
3	2422	37.92	37.92
6	2437	37.92	37.92
9	2452	37.92	37.92

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH6

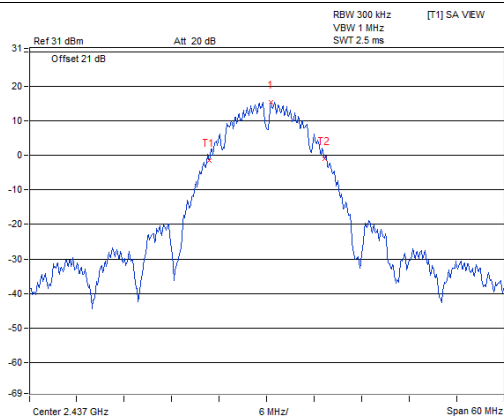


802.11g / Chain 1 : CH6

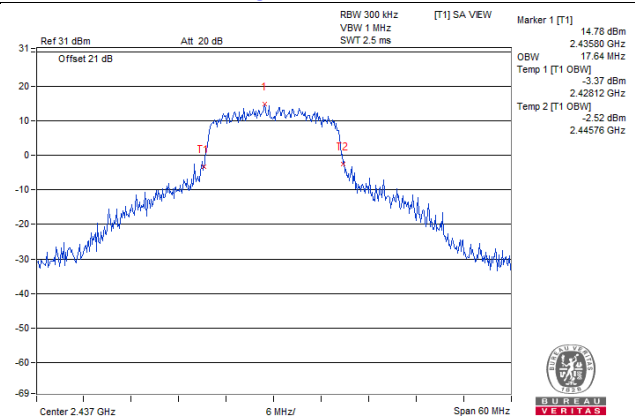


VHT20 / Chain 1 : CH6

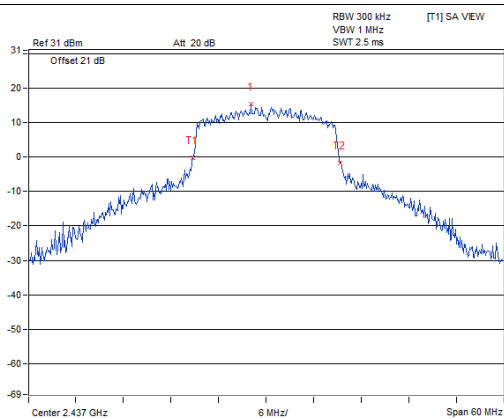


VHT40 / Chain 0 : CH9

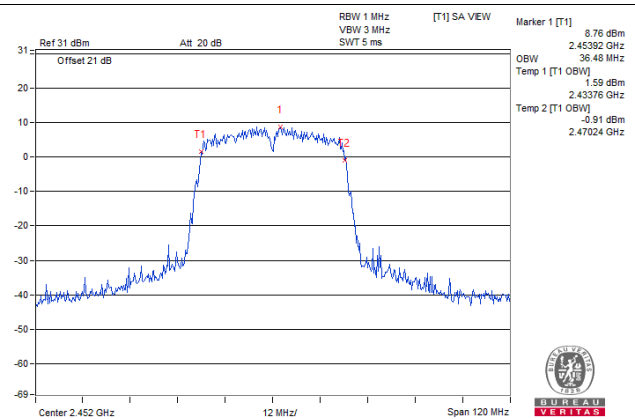

802.11ax (HE20) / Chain 1 : CH6

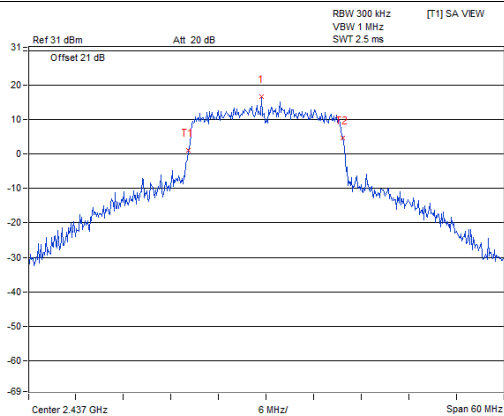

802.11ax (HE40) / Chain 0 : CH3

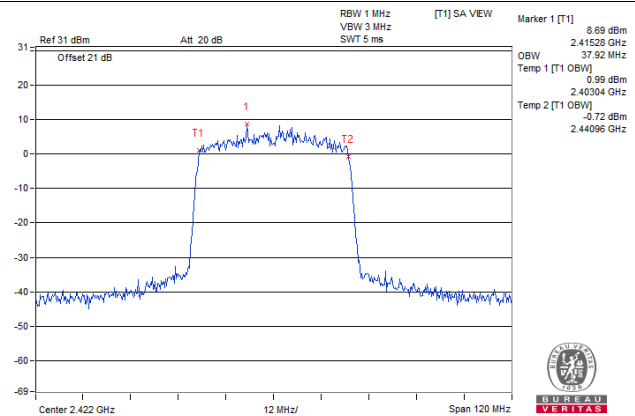

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.03	22.77	348.822	25.43	30.00	Pass
6	2437	24.78	24.51	583.096	27.66	30.00	Pass
11	2462	23.01	22.24	367.48	25.65	30.00	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	17.24	17.98	115.772	20.64	30.00	Pass
6	2437	23.26	23.14	417.899	26.21	30.00	Pass
11	2462	17.62	17.01	108.044	20.34	30.00	Pass

Beamformig Mode

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	17.66	16.01	98.247	19.92	30.00	Pass
6	2437	22.51	22.74	366.17	25.64	30.00	Pass
11	2462	17.06	15.88	89.542	19.52	30.00	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	15.45	15.44	70.07	18.46	30.00	Pass
6	2437	19.08	19.14	162.945	22.12	30.00	Pass
9	2452	14.92	14.73	60.762	17.84	30.00	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.27	15.25	67.148	18.27	30.00	Pass
6	2437	22.45	22.67	360.719	25.57	30.00	Pass
11	2462	14.22	14.32	53.464	17.28	30.00	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	12.71	13.33	40.192	16.04	30.00	Pass
6	2437	17.56	18.01	120.258	20.80	30.00	Pass
9	2452	14.12	14.11	51.586	17.13	30.00	Pass


Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced.

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

For 802.11b

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For other modulation mode:

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1			
1	2412	-7.99	-8.64	-5.29	8.00	Pass
6	2437	-6.73	-6.07	-3.38	8.00	Pass
11	2462	-8.40	-7.61	-4.98	8.00	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85 \text{ dBi} < 6 \text{ dBi}$, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
1	2412	-15.06	-14.18	0.10	-11.49	8.00	Pass
6	2437	-8.88	-8.20	0.10	-5.42	8.00	Pass
11	2462	-16.02	-14.95	0.10	-12.34	8.00	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85 \text{ dBi} < 6 \text{ dBi}$, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

Beamforming Mode

VHT20

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
1	2412	-15.01	-15.75	0.13	-12.22	8.00	Pass
6	2437	-9.86	-9.17	0.13	-6.36	8.00	Pass
11	2462	-13.97	-16.06	0.13	-11.75	8.00	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85 \text{ dBi} < 6 \text{ dBi}$, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

VHT40

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
3	2422	-19.17	-18.81	0.21	-15.77	8.00	Pass
6	2437	-14.64	-16.02	0.21	-12.06	8.00	Pass
9	2452	-19.22	-18.04	0.21	-15.37	8.00	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85 \text{ dBi} < 6 \text{ dBi}$, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
1	2412	-17.39	-17.35	0.13	-14.23	8.00	Pass
6	2437	-11.81	-10.98	0.13	-8.23	8.00	Pass
11	2462	-18.58	-18.19	0.13	-15.24	8.00	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85 \text{ dBi} < 6 \text{ dBi}$, so the power density limit shall not be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.


802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1				
3	2422	-22.24	-22.25	0.21	-19.02	8.00	Pass
6	2437	-18.06	-17.64	0.21	-14.62	8.00	Pass
9	2452	-20.95	-21.81	0.21	-18.14	8.00	Pass


- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20})^2 / 2] = 5.85 \text{ dBi} < 6 \text{ dBi}$, so the power density limit shall not be reduced.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH6

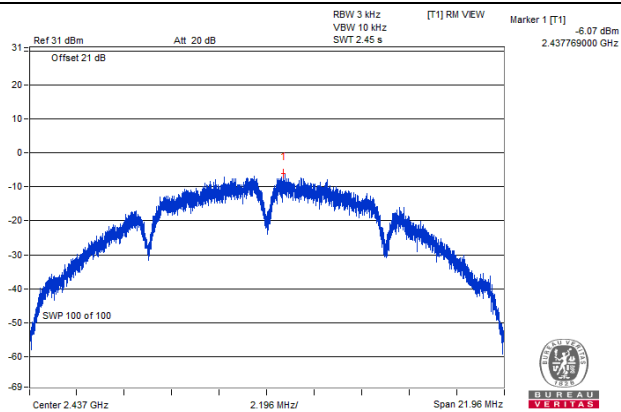


802.11g / Chain 1 : CH6

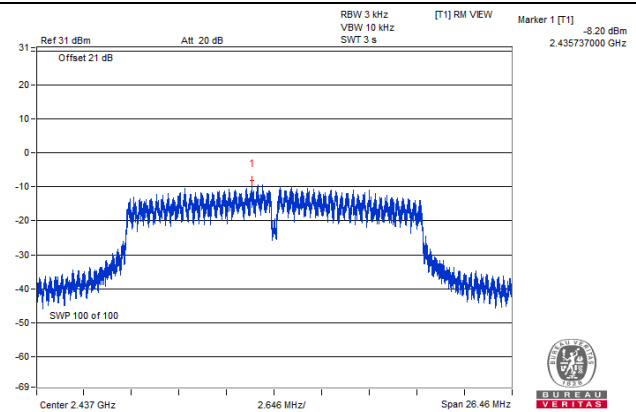


VHT20 / Chain 1 : CH6

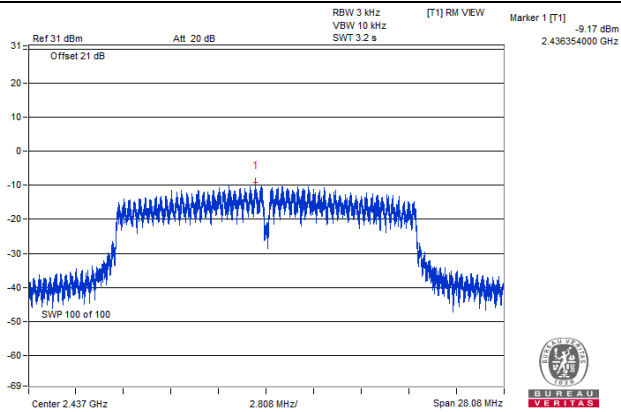


VHT40 / Chain 0 : CH6

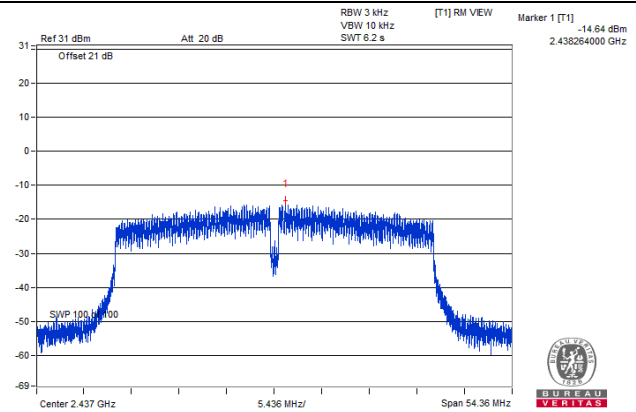

802.11ax (HE20) / Chain 1 : CH6

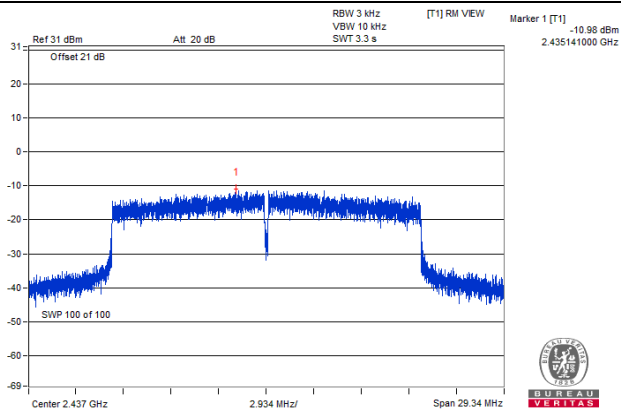

802.11ax (HE40) / Chain 1 : CH6

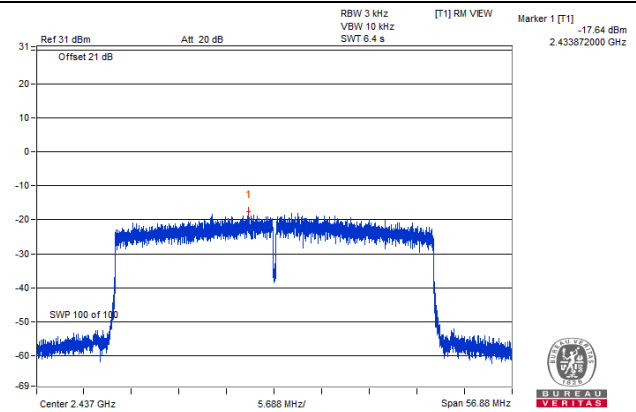


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition


Same as Item 4.3.6

4.7.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

Maximum REF

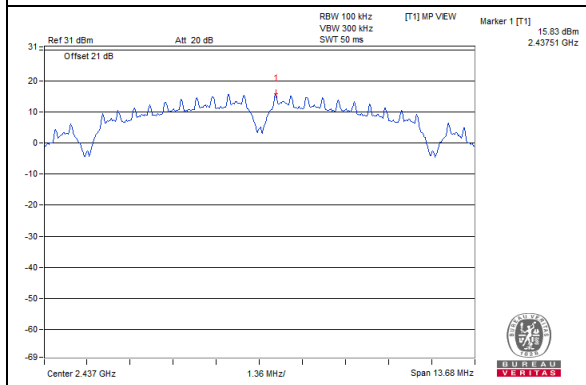


Chain 0


CH 1

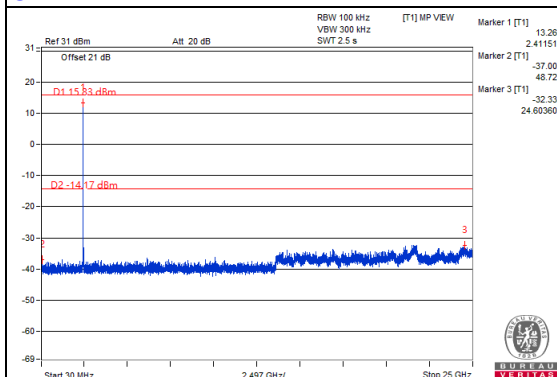


CH 6

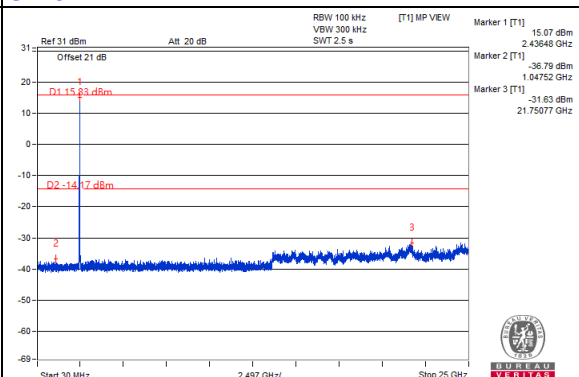


CH 11

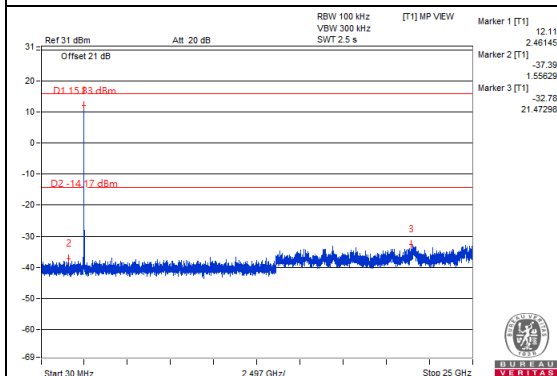

CH 1 Band edge

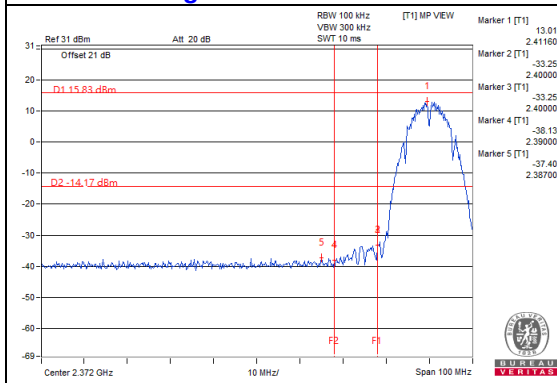


CH 11 Band edge

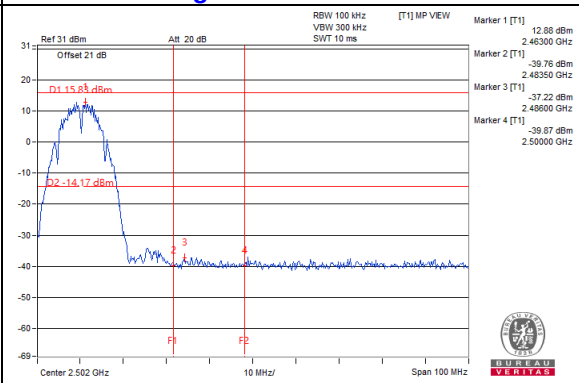


Chain 1


CH 1

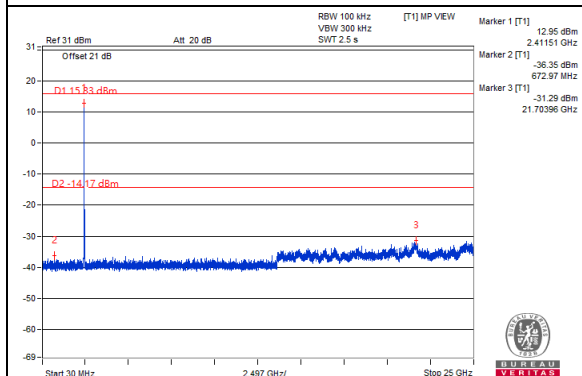


CH 6

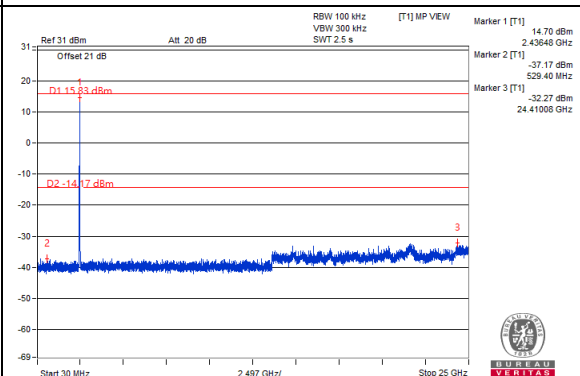


CH 11

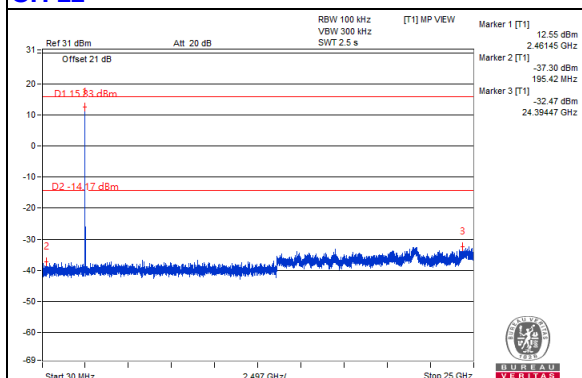

CH 1 Band edge

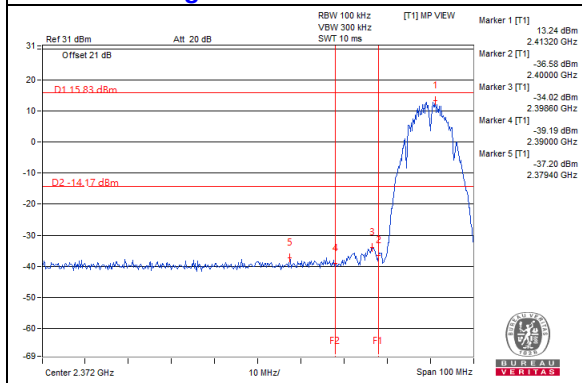


CH 11 Band edge

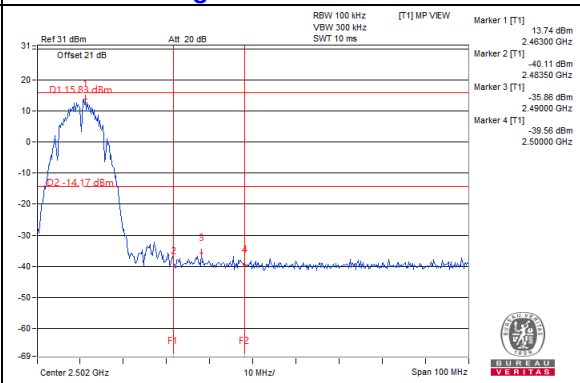


802.11g

Maximum REF

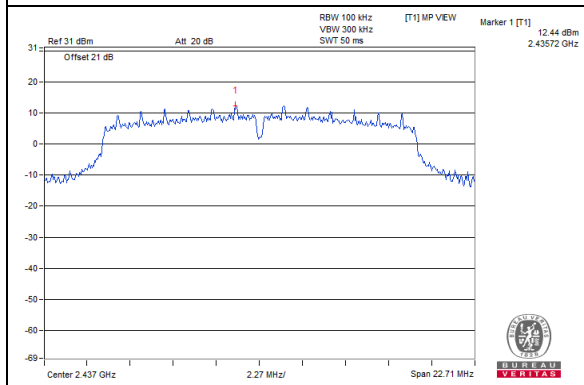


Chain 0


CH 1

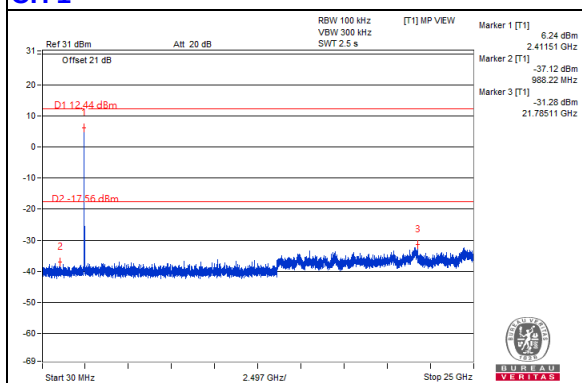


CH 6

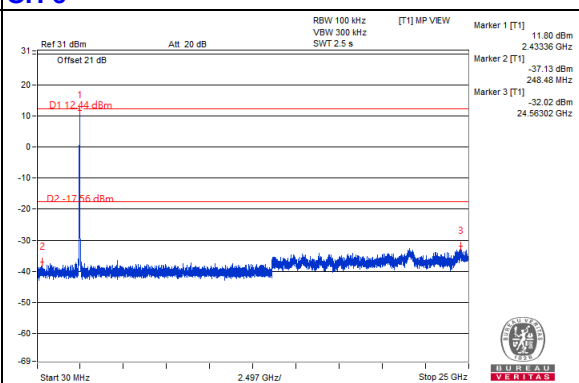


CH 11

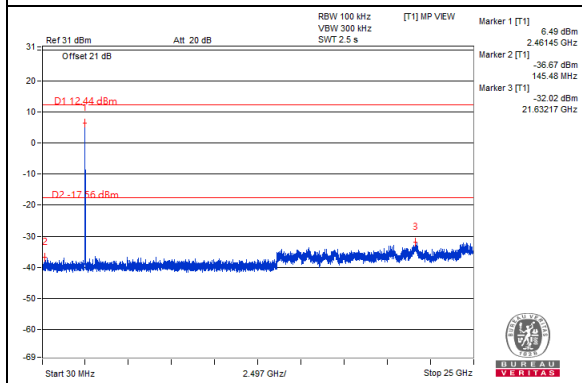

CH 1 Band edge

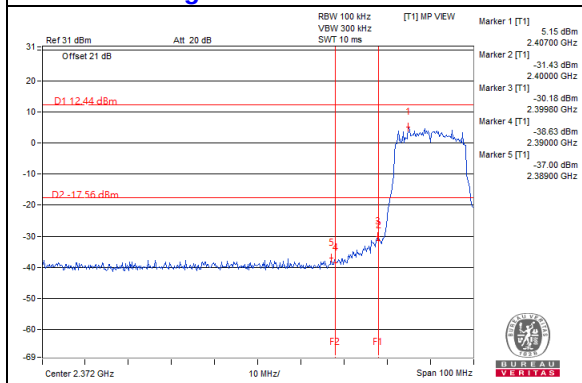


CH 11 Band edge

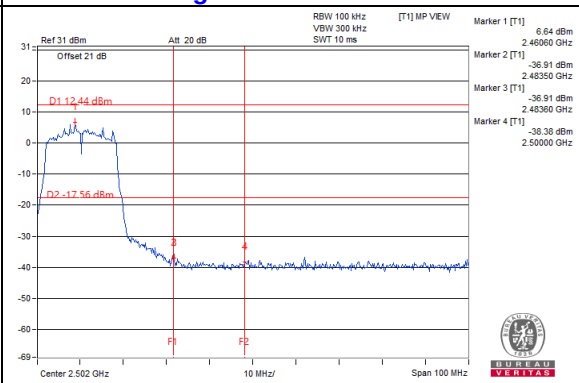


Chain 1


CH 1

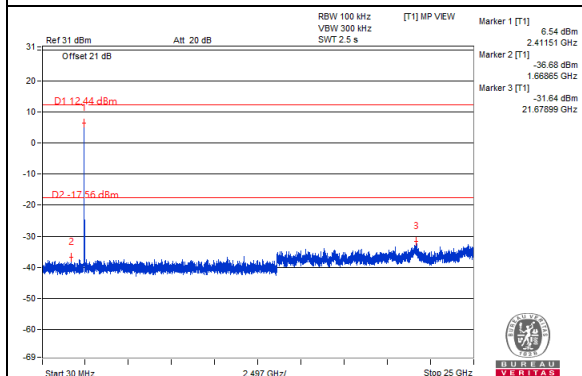


CH 6

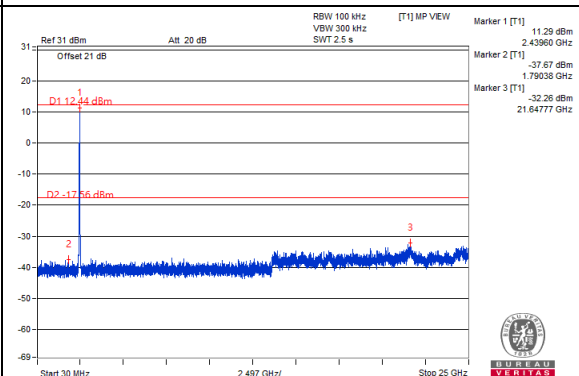


CH 11

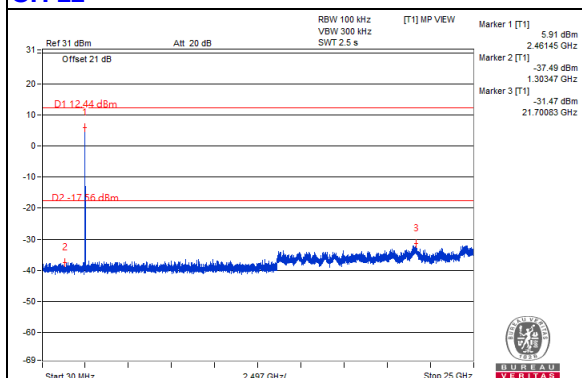

CH 1 Band edge

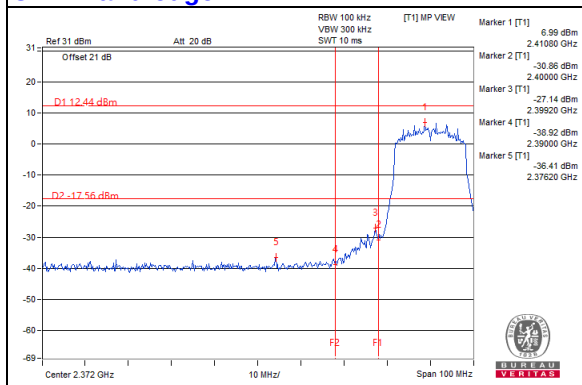


CH 11 Band edge

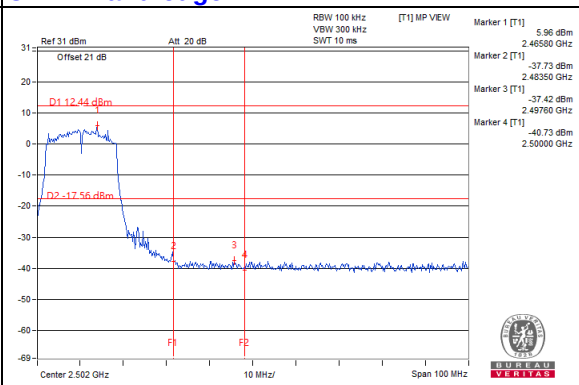


VHT20

Maximum REF

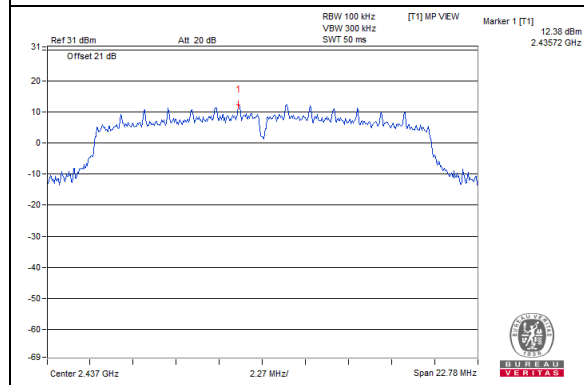


Chain 0


CH 1

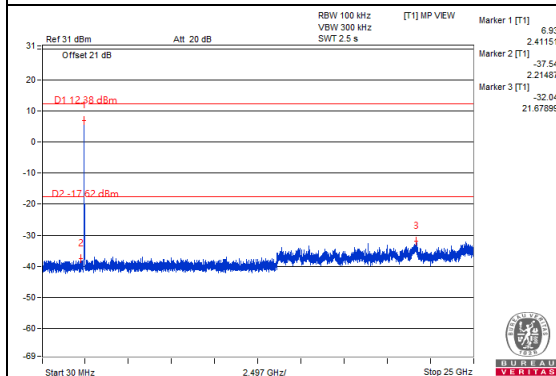


CH 6

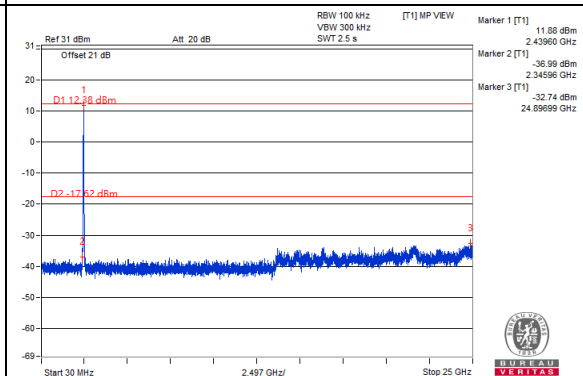


CH 11

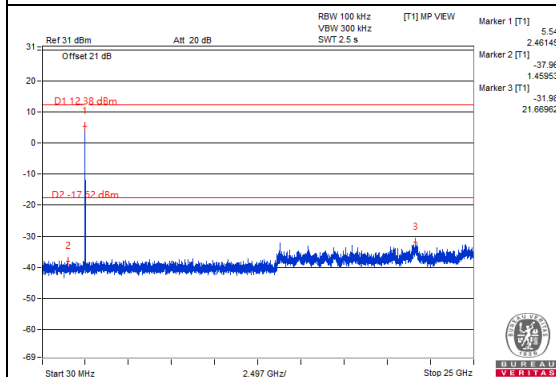

CH 1 Band edge

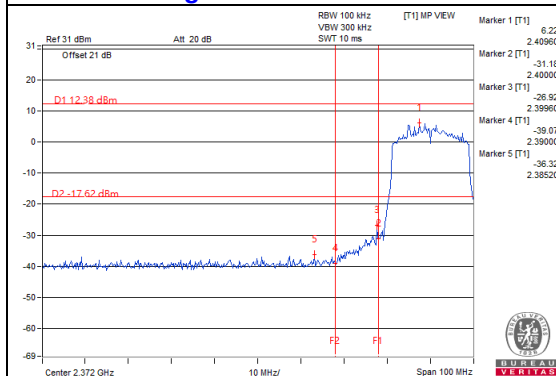


CH 11 Band edge

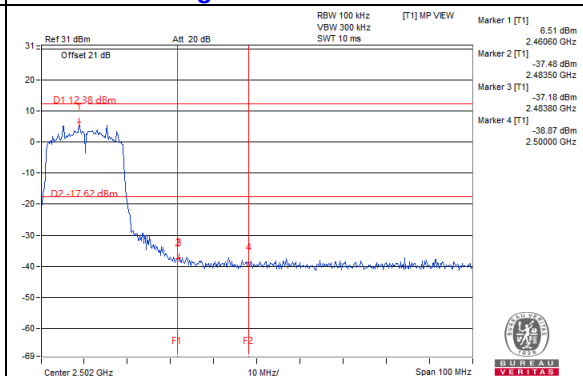


Chain 1


CH 1

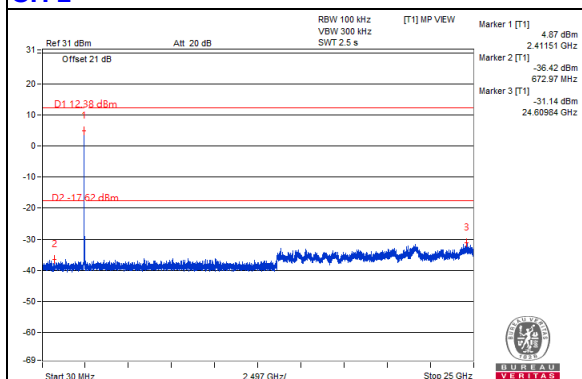


CH 6

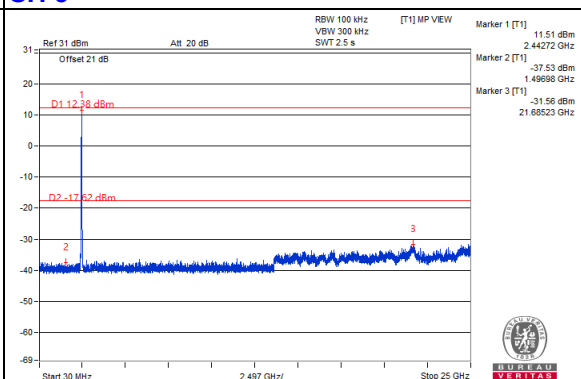


CH 11

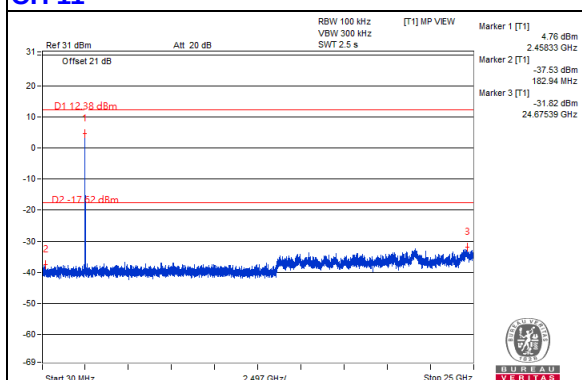

CH 1 Band edge

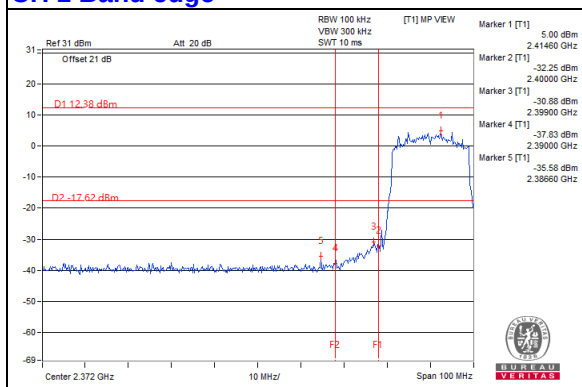


CH 11 Band edge

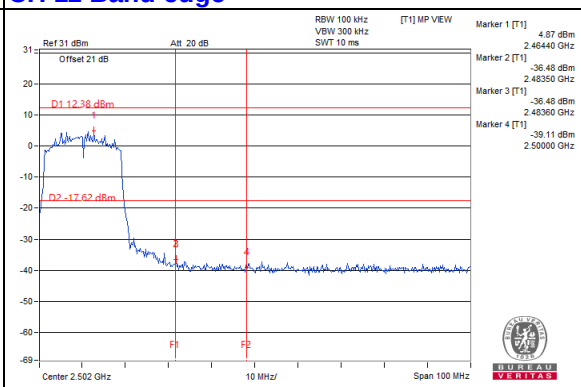


VHT40

Maximum REF

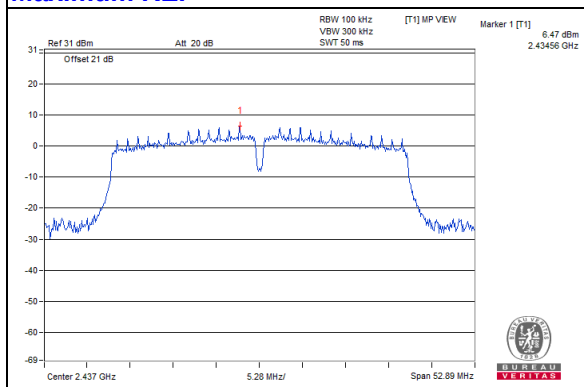


Chain 0


CH 3

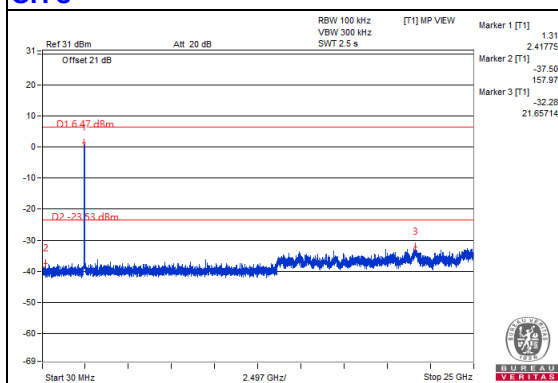


CH 6

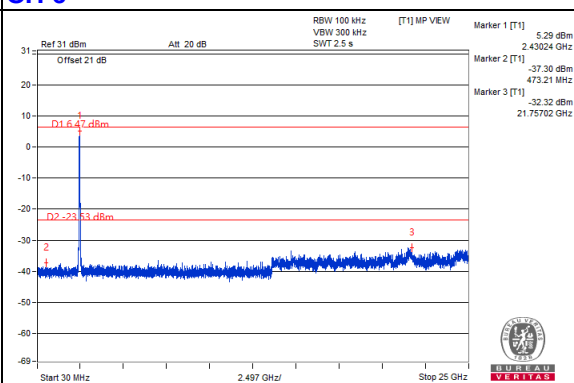


CH 9

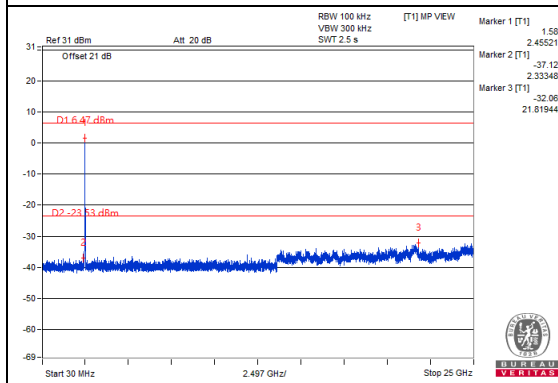

CH 3 Band edge

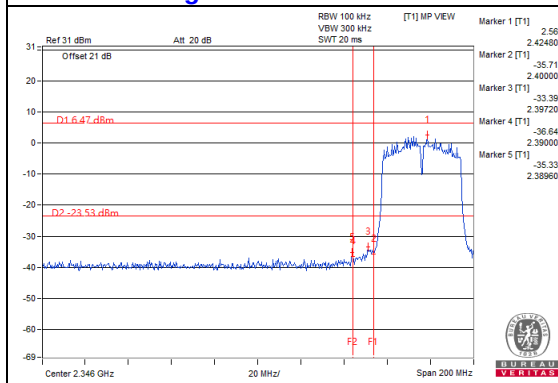


CH 9 Band edge

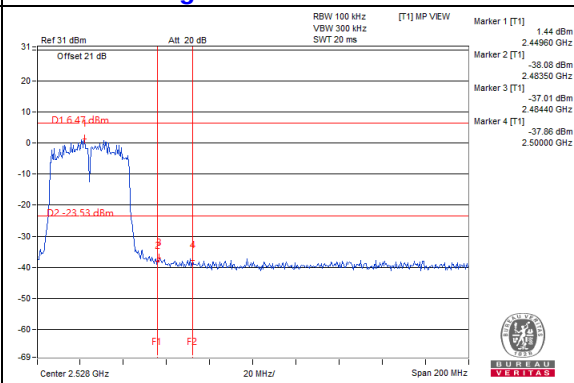


Chain 1


CH 3

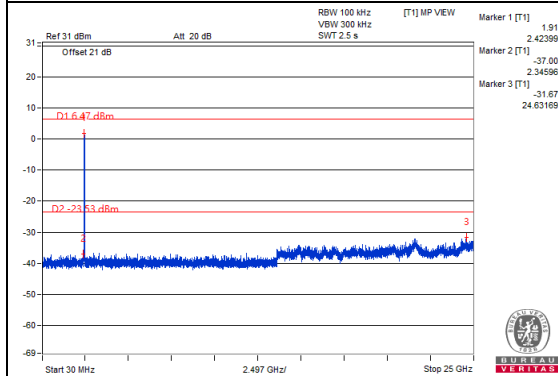


CH 6

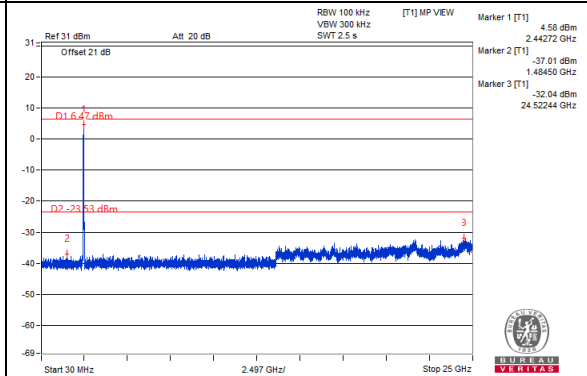


CH 9

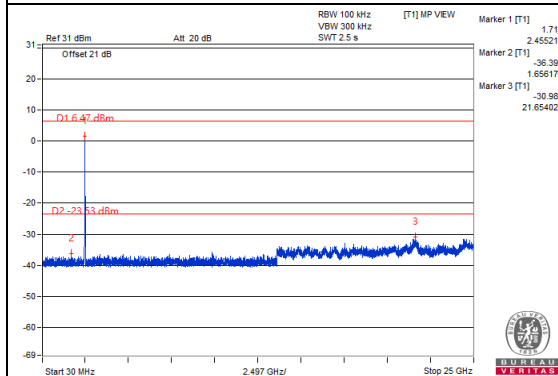

CH 3 Band edge

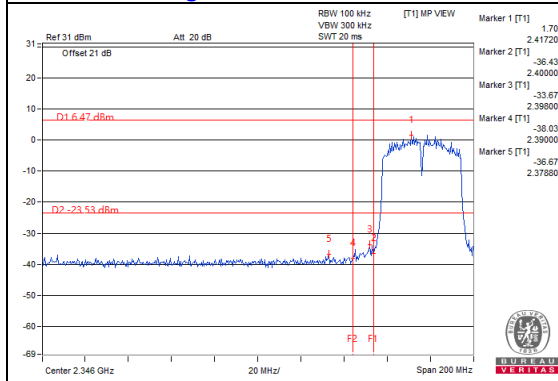


CH 9 Band edge

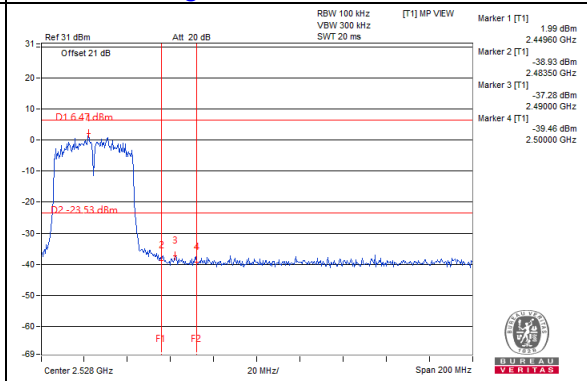


802.11ax (HE20)

Maximum REF

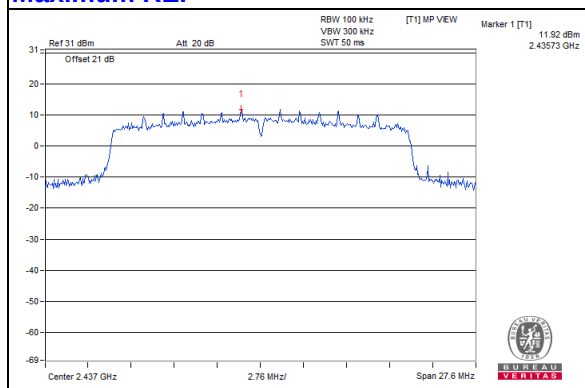


Chain 0


CH 1

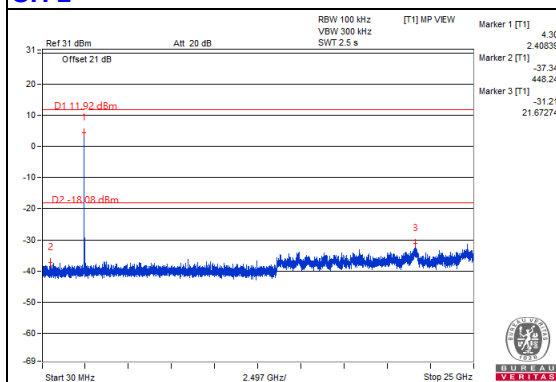


CH 6

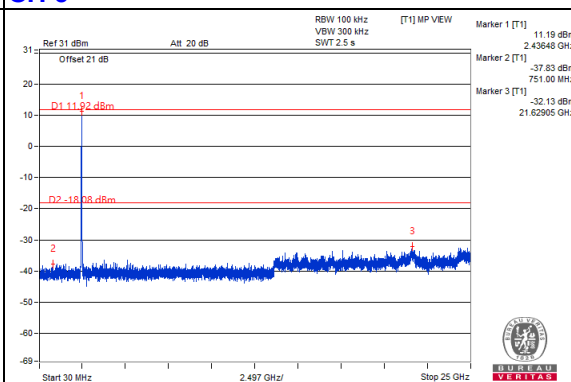


CH 11

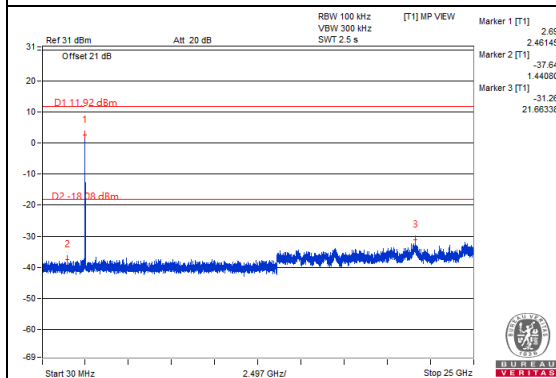

CH 1 Band edge

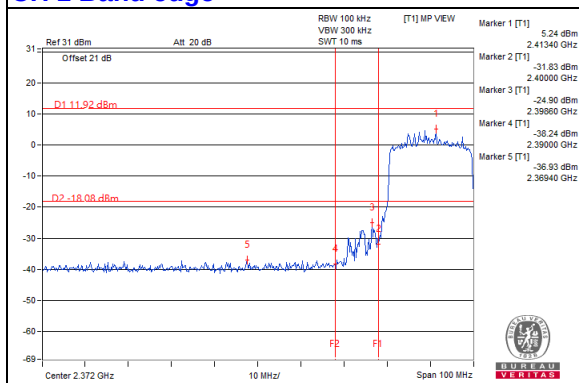


CH 11 Band edge

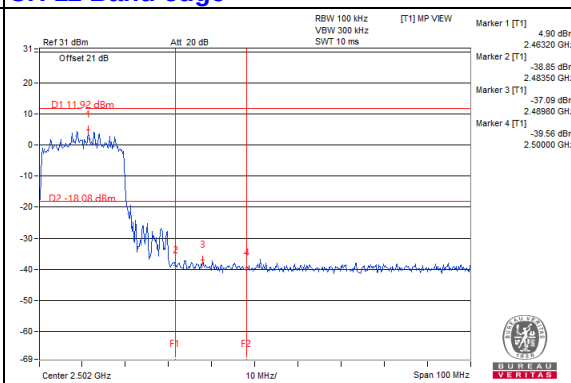


Chain 1


CH 1

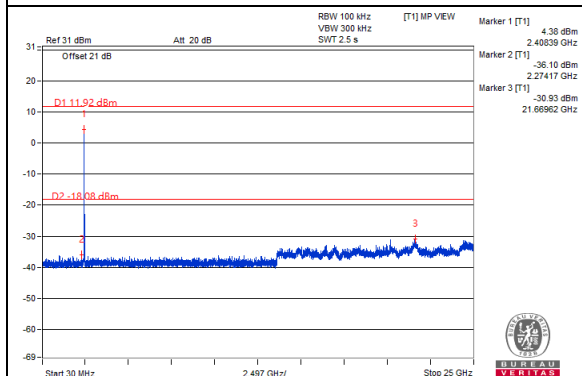


CH 6

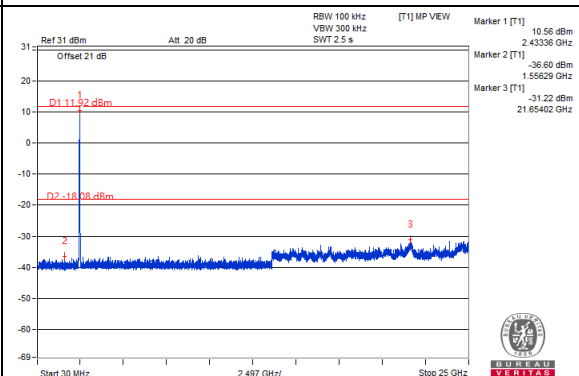


CH 11

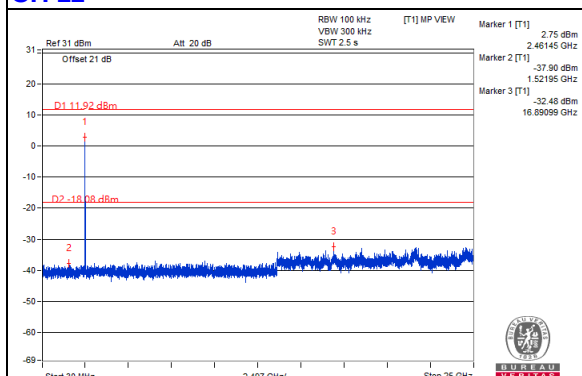

CH 1 Band edge

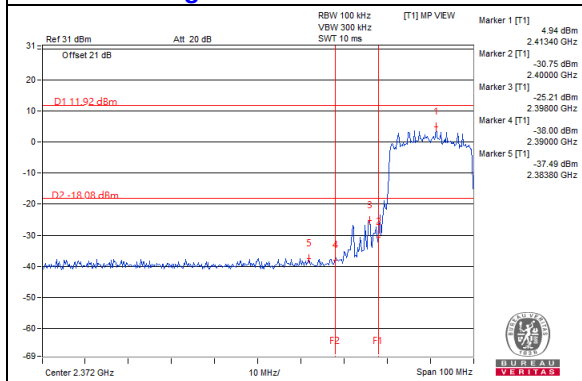


CH 11 Band edge

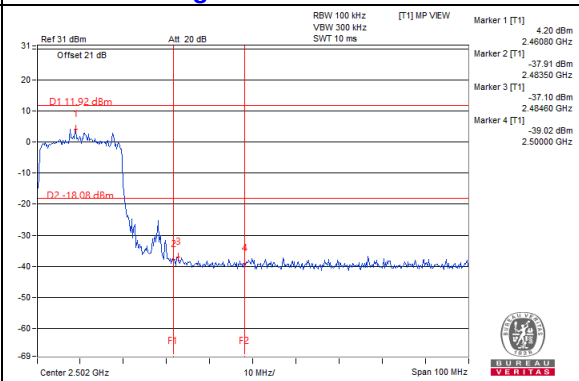


802.11ax (HE40)

Maximum REF

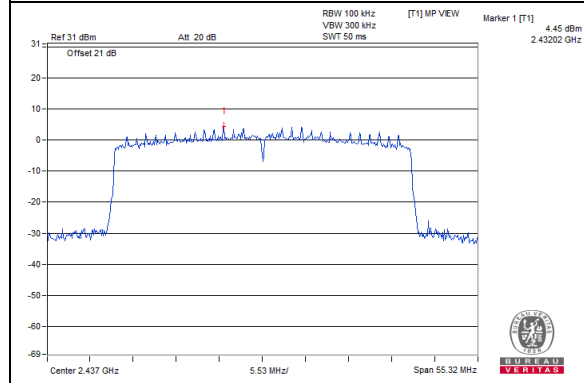


Chain 0


CH 3

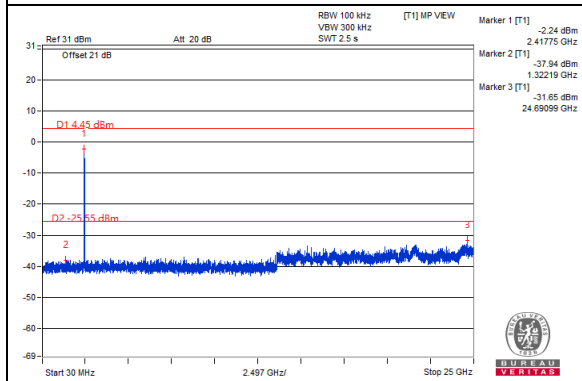


CH 6

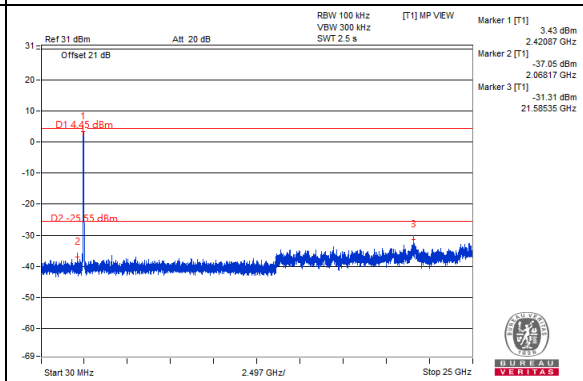


CH 9

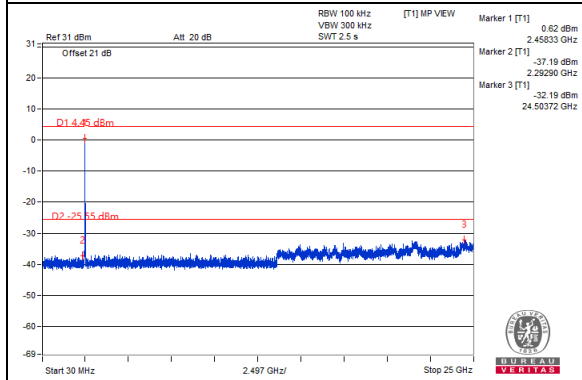

CH 3 Band edge

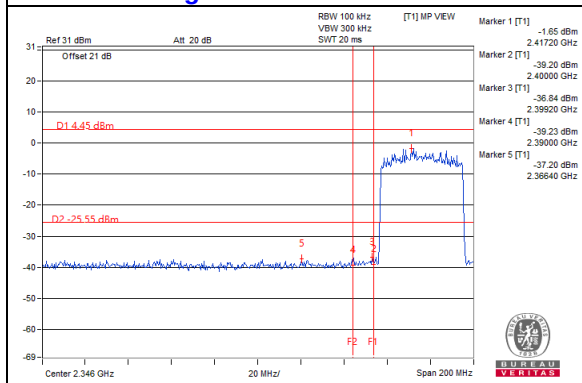


CH 9 Band edge

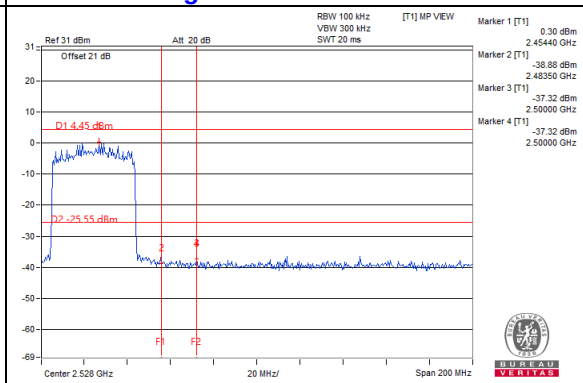


Chain 1


CH 3

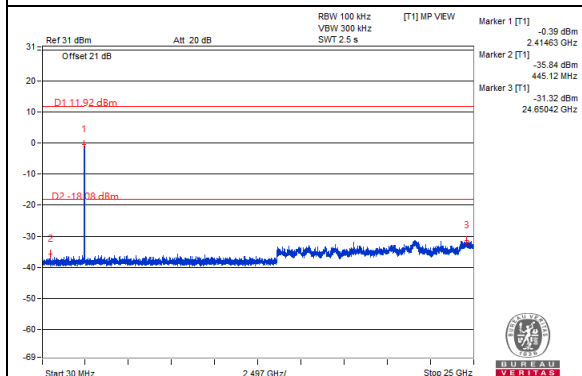


CH 6

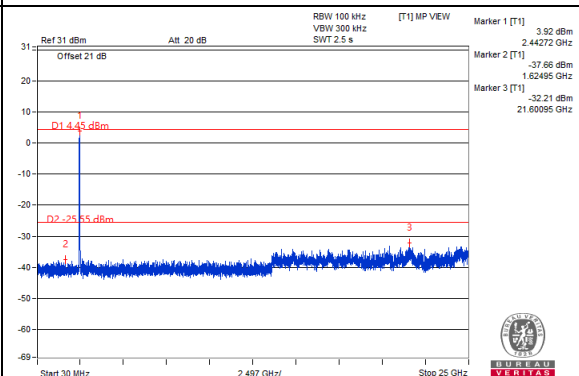


CH 9

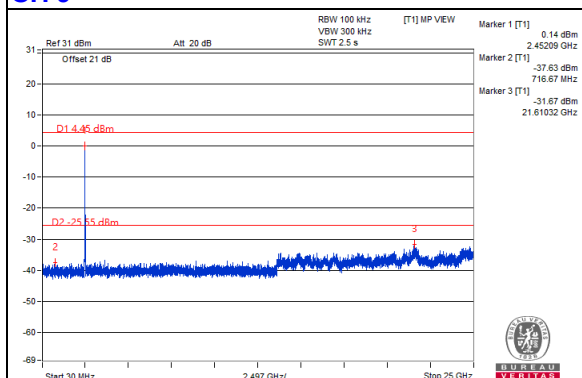

CH 3 Band edge

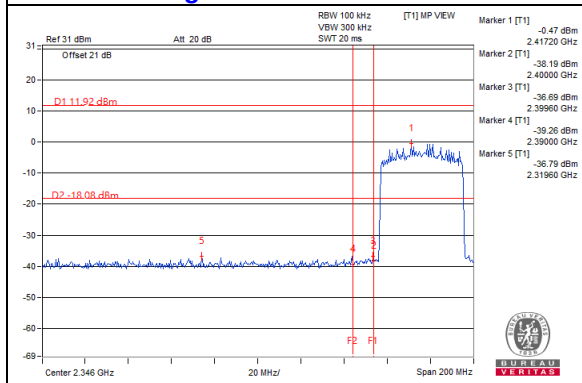

CH 9 Band edge

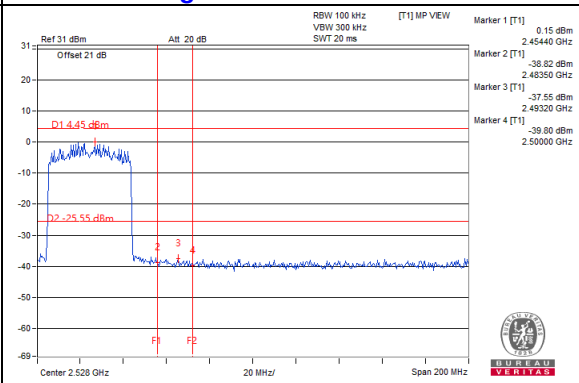


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement


802.11b

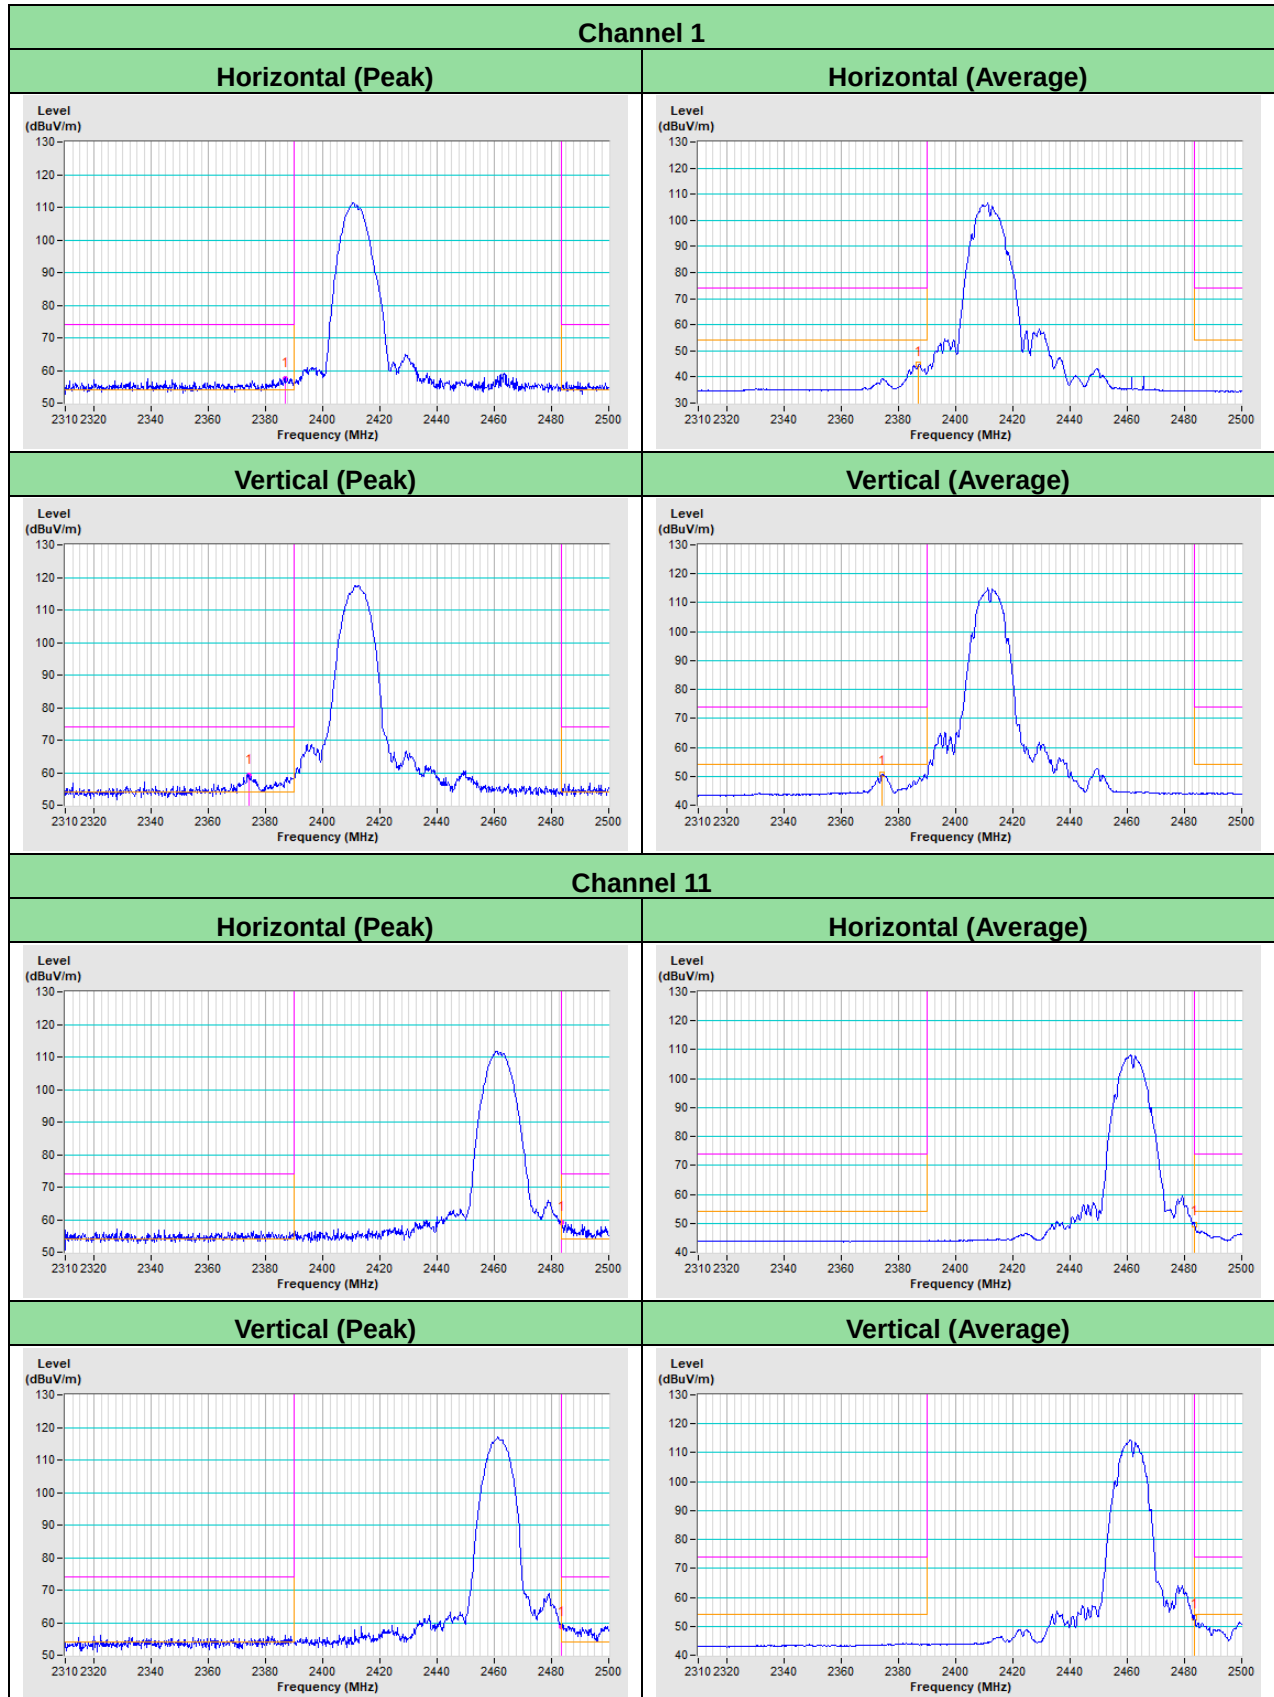


802.11g

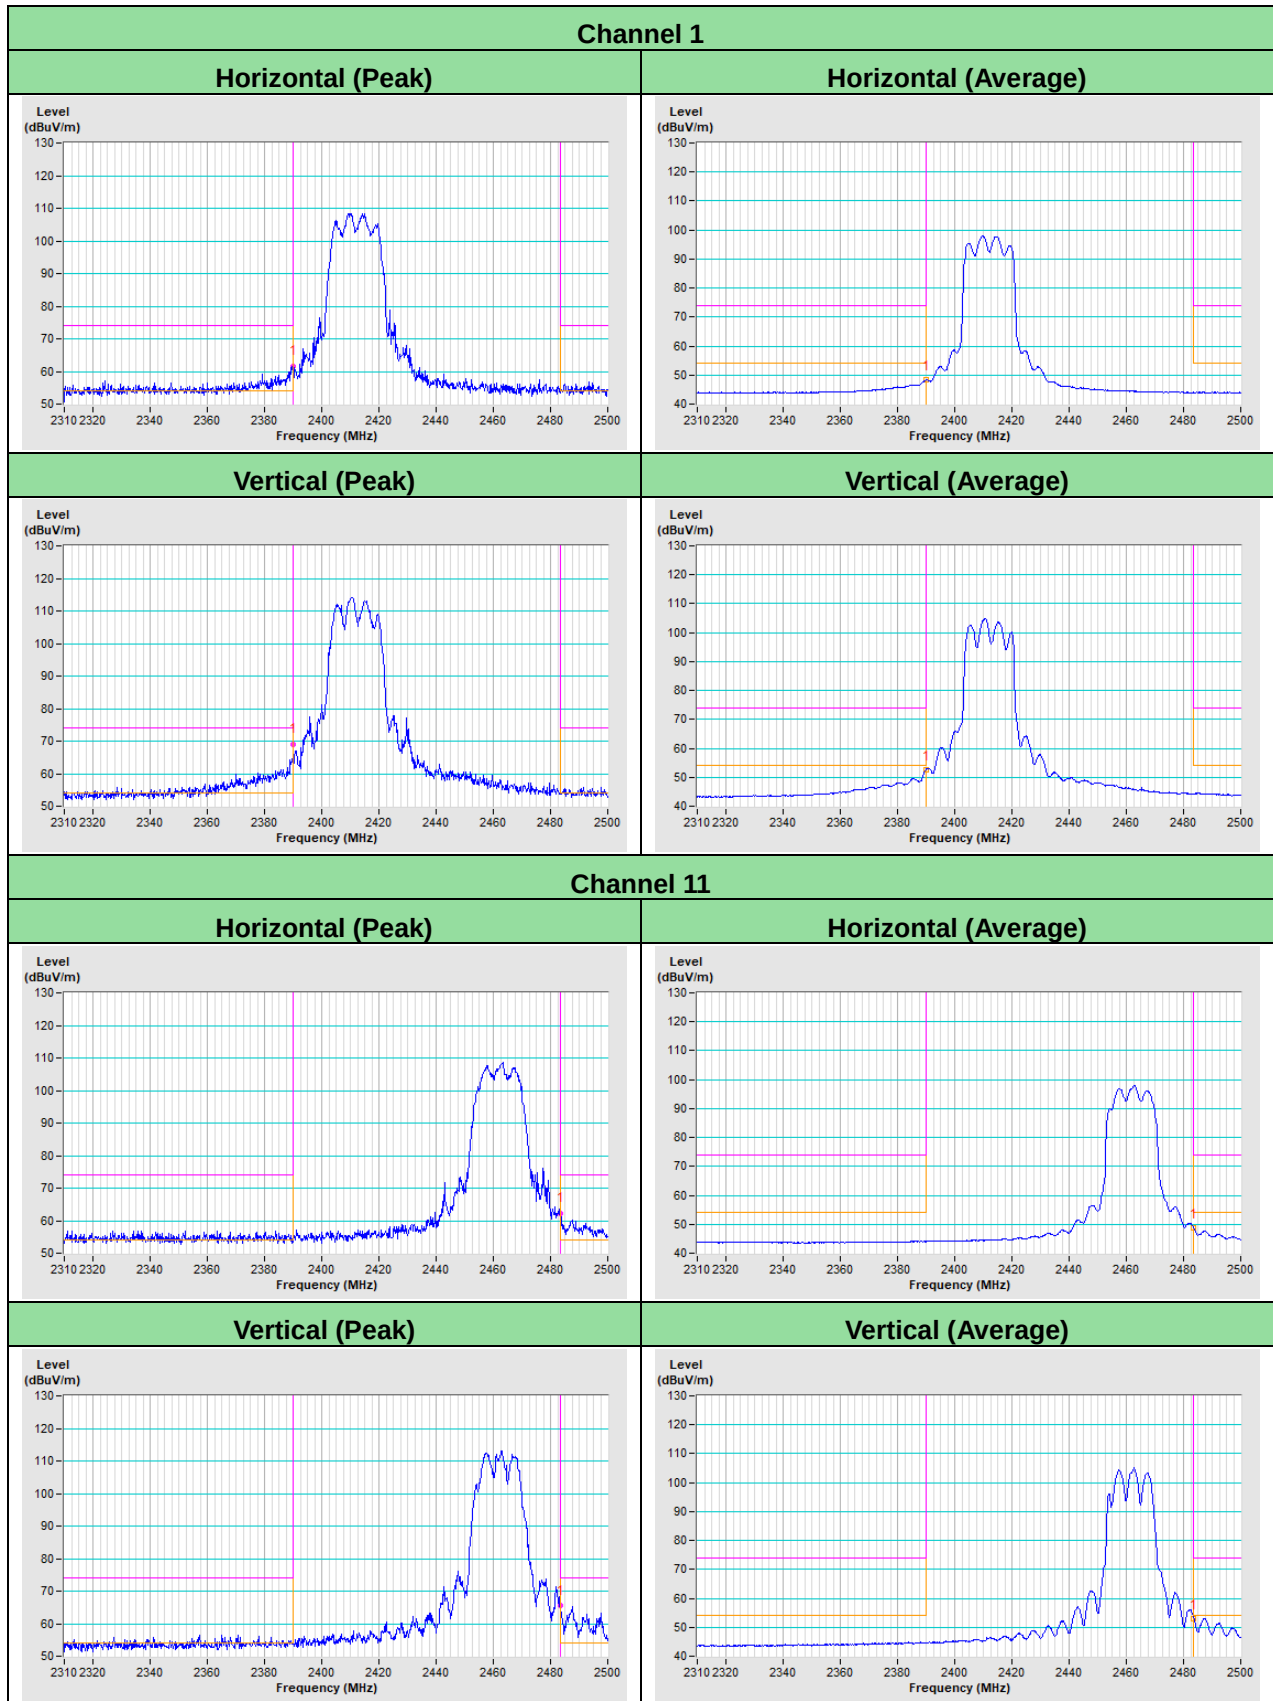


VHT20

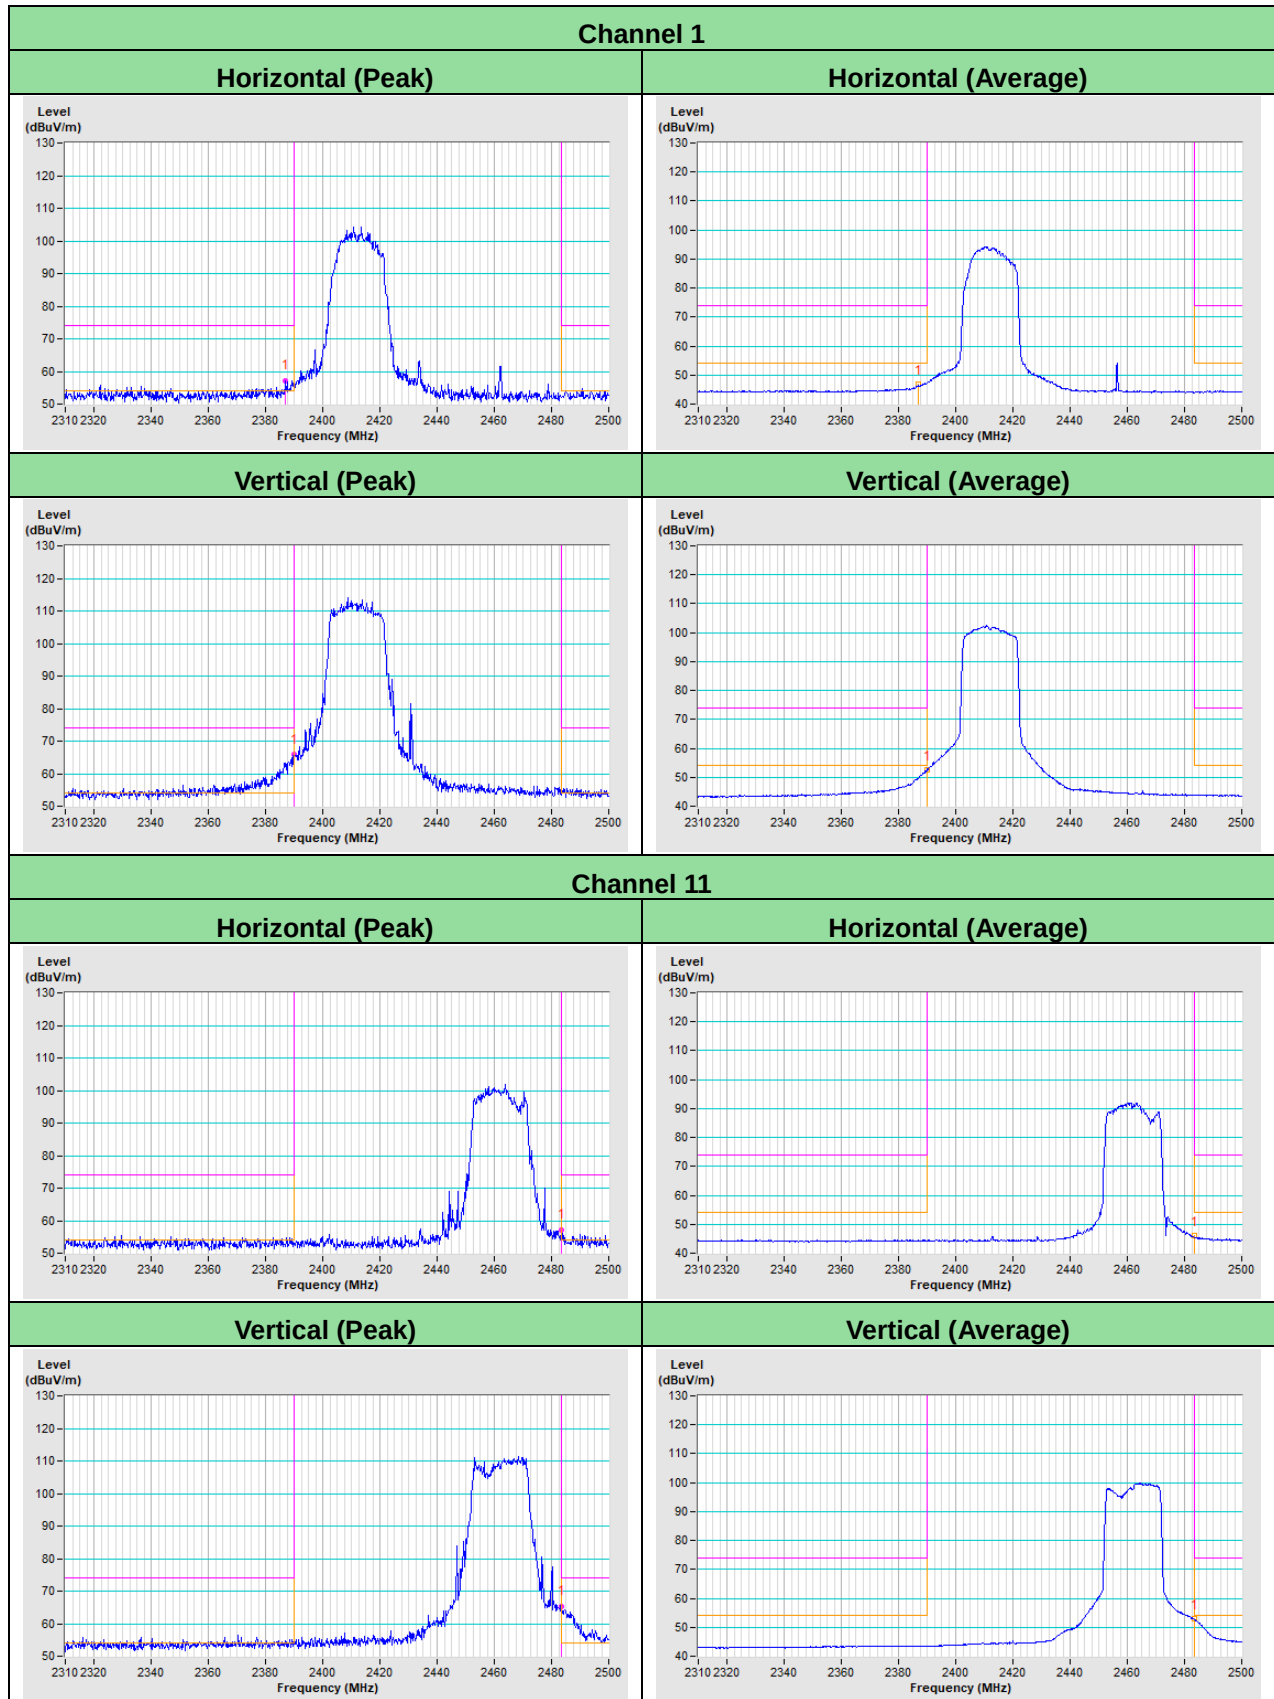


VHT40

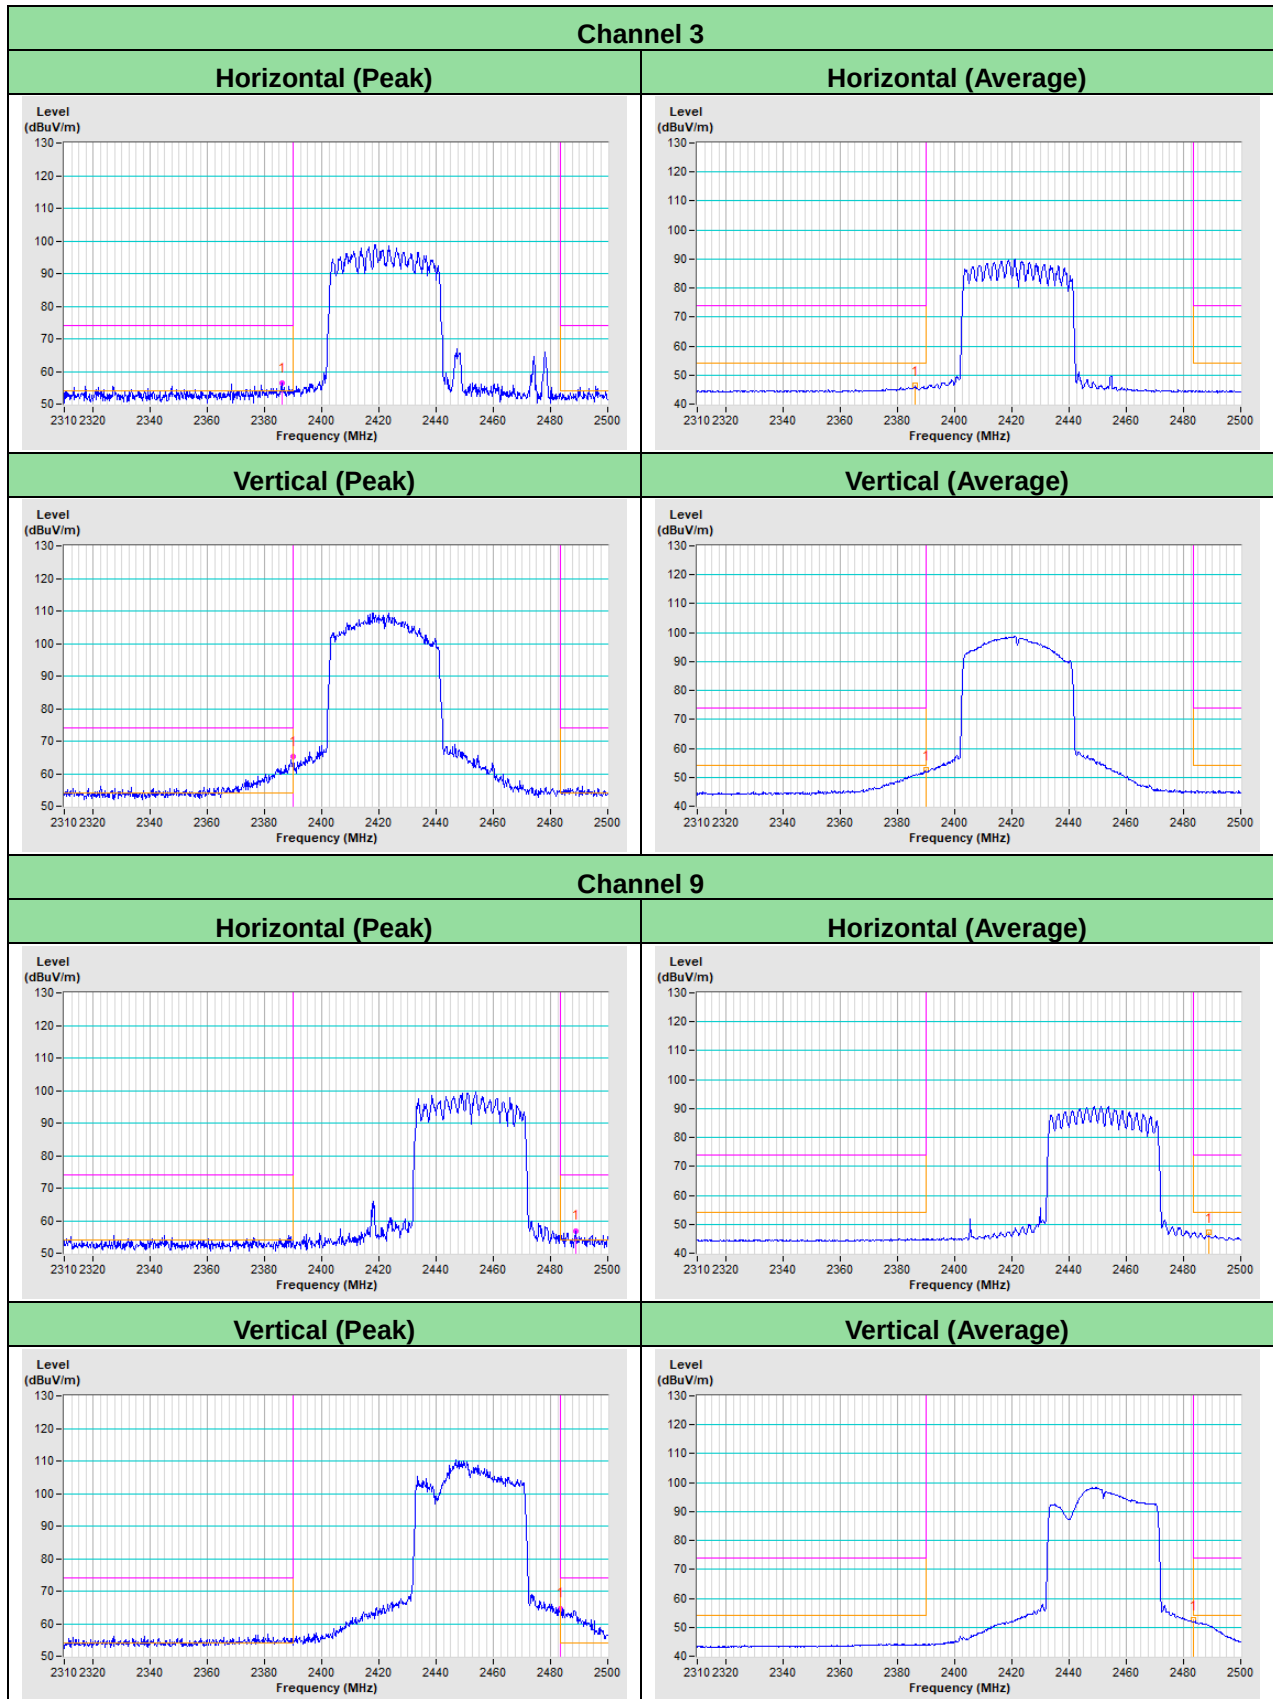

802.11ax (HE20)

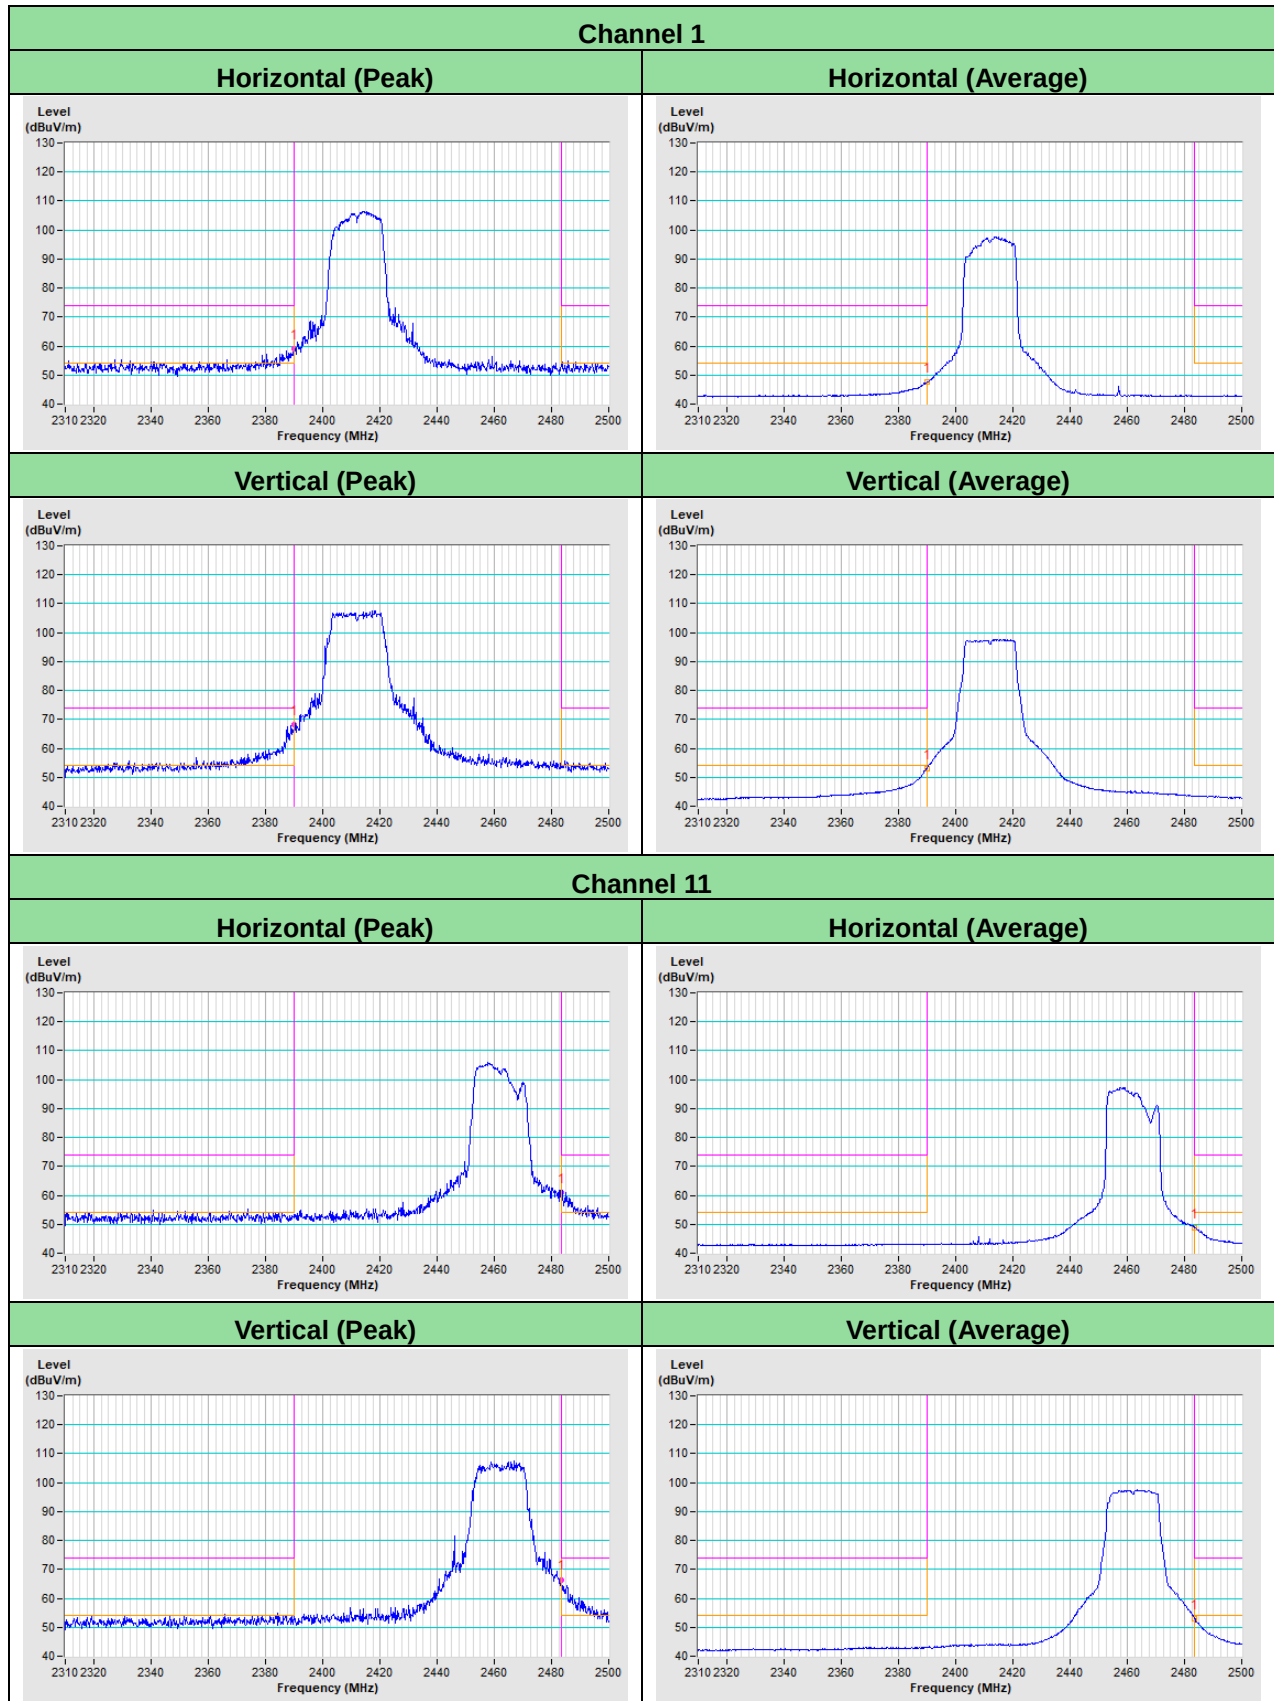

802.11ax (HE40)

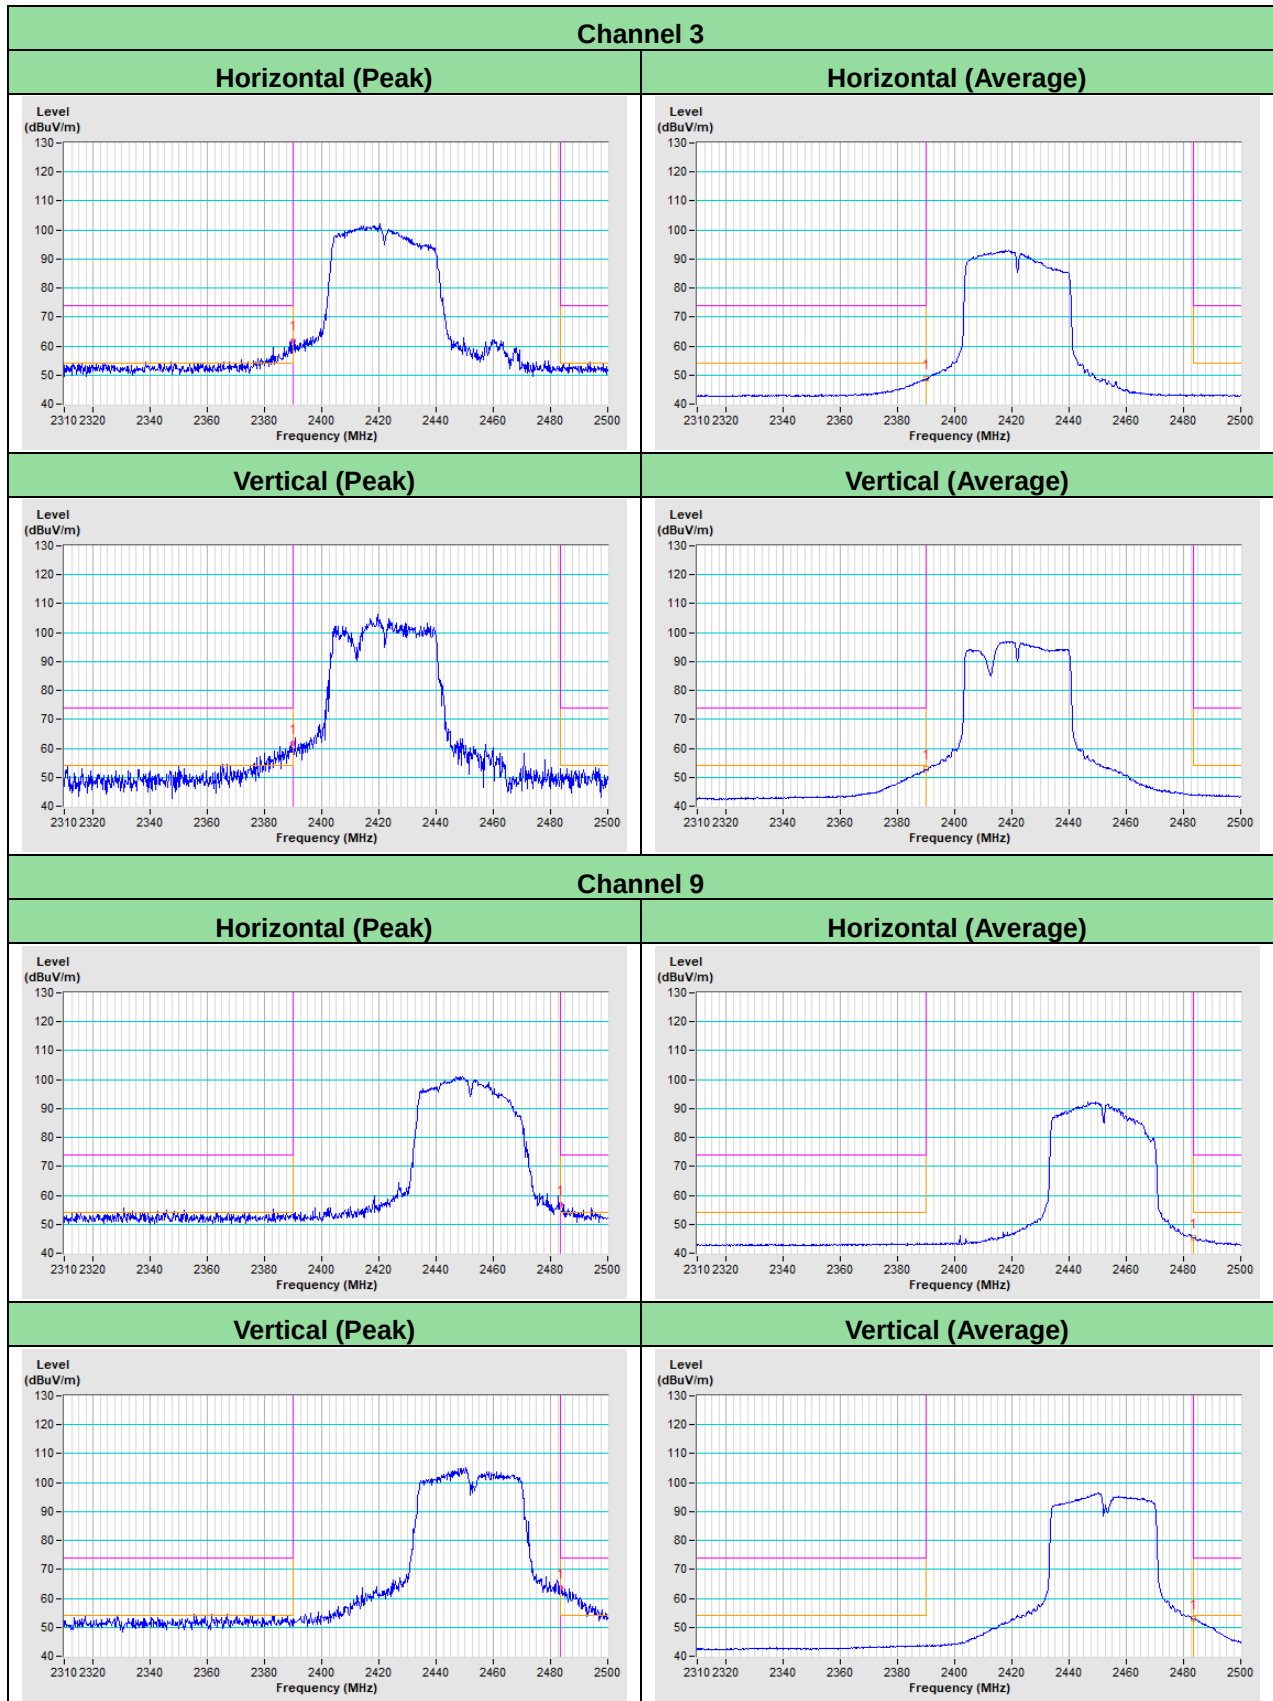

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---