

FCC Test Report

Report No.: RF200504D01

FCC ID: K7SAUF001

Test Model: AUF001

Received Date: May 4, 2020

Test Date: May 7 to 8, 2020

Issued Date: May 20, 2020

Applicant: Belkin International, Inc.

Address: 12045 East Waterfront Drive, Playa Vista, CA. 90094, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Report Issue History Record	3
Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	6
3.2.1 Test Mode Applicability and Tested Channel Detail	7
3.3 Description of Support Units	8
3.3.1 Configuration of System under Test	9
3.4 General Description of Applied Standards	10
4 Test Types and Results	11
4.1 Radiated Emission and Bandedge Measurement	11
4.1.1 Limits of Radiated Emission and Bandedge Measurement	11
4.1.2 Test Instruments	12
4.1.3 Test Procedures	13
4.1.4 Deviation from Test Standard	13
4.1.5 Test Set Up	14
4.1.6 EUT Operating Conditions	14
4.1.7 Test Results	15
4.2 Conducted Emission Measurement	25
4.2.1 Limits of Conducted Emission Measurement	25
4.2.2 Test Instruments	25
4.2.3 Test Procedures	26
4.2.4 Deviation from Test Standard	26
4.2.5 Test Setup	26
4.2.6 EUT Operating Conditions	26
4.2.7 Test Results	27
5 Pictures of Test Arrangements	31
Appendix – Information of the Testing Laboratories	32

Report Issue History Record

Issue No.	Description	Date Issued
RF200504D01	Original release.	May 20, 2020

Release Control Record

Issue No.	Description	Date Issued
RF200504D01	Original release.	May 20, 2020

1 Certificate of Conformity

Product: BOOST↑CHARGE™ Wireless Charging Stand 10W + Speaker

Brand: belkin

Test Model: AUF001

Sample Status: Engineering sample

Applicant: Belkin International, Inc.

Test Date: May 7 to 8, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.209)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date: May 20, 2020

Celia Chen / Supervisor

Approved by :



Date: May 20, 2020

Rex Lai / Associate Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.209)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -11.52dB at 0.81932MHz
15.209	Radiated Emission Test	Pass	Meet the requirement of limit. Minimum passing margin is -6.97dB at 68.9455MHz

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.00 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.61 dB
	30MHz ~ 1000MHz	5.43 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	BOOST↑CHARGE™ Wireless Charging Stand 10W + Speaker
Brand	belkin
Test Model	AUF001
Sample Status	Engineering sample
Power Supply Rating	I/P rating: 12Vdc, 1.5A O/P rating: 10W
Modulation Type	FSK
Operating Frequency	127.8 kHz
Antenna Type	Coil antenna
Field Strength	90.31dBuV/m
Dimensions	18.76cm ² (Length = 47.5mm, Width = 39.5mm)
Accessory Device	Wall charger
Data Cable Supplied	N/A
Maximum Power Output from the Charging Coil	10W

Note:

1. The EUT is a BOOST↑CHARGE™ Wireless Charging Stand + BT Speaker with Qi charging function.

2. The EUT uses following Wall charger.

Wall charger	1	2
Brand	belkin	belkin
Model	DSA-18PFR-12 FEU	DSA-18PFR-12 FUS
Plug Type	EU	US
Input Power	100-240Vac, 50/60Hz, 0.6A	100-240Vac, 50/60Hz, 0.6A
Output Power	+12.0Vdc, 1.5A, 18W	+12.0Vdc, 1.5A, 18W
Power Line	AC 2 Pin, Non-shielded DC (1.5m) attached on Wall charger	AC 2 Pin, Non-shielded DC (1.5m) attached on Wall charger
The two wall chargers are identical with each other except for their plug type difference.		

During the test, **Wall charger 2** was selected as the representative one for the test.

3. The emission of the simultaneous operation (BT and Qi) has been evaluated and no non-compliance was found.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

The following test frequency is provided to this EUT:

Operating Frequency (kHz)	Test Mode
127.8	Charging Mode with max Load
127.8	Standby Mode

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To		Description
	RE<1G	PLC	
A	√	√	Charging Mode with max Load
B	√	√	Standby Mode

Where **RE<1G**: Radiated Emission below 1GHz **PLC**: Power Line Conducted Emission

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Operating Frequency (kHz)	Tested Frequency (kHz)
A	127.8	127.8
B	127.8	127.8

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Operating Frequency (kHz)	Tested Frequency (kHz)
A	127.8	127.8
B	127.8	127.8

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE<1G	23 deg. C, 66% RH	120Vac, 60Hz	Ian Chang
PLC	22 deg. C, 80% RH	120Vac, 60Hz	Kobe Lu

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Mechanical tool	N/A	N/A	N/A	N/A	Supplied by client
B.	Load	N/A	N/A	N/A	N/A	Supplied by client (10W max load)


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC cable	1	0.2	N	1	Supplied by client
2.	DC cable	1	1.5	N	0	Supplied by client
3.	DC cable	1	0.1	N	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).


3.3.1 Configuration of System under Test

Charging Mode:

Test Mode A for Conducted emission test

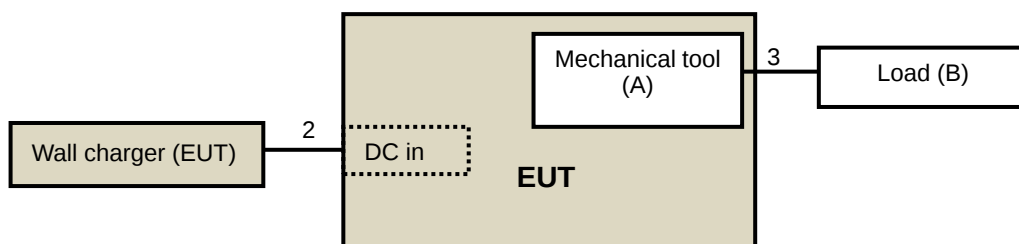


Test Mode A for Radiated emission test

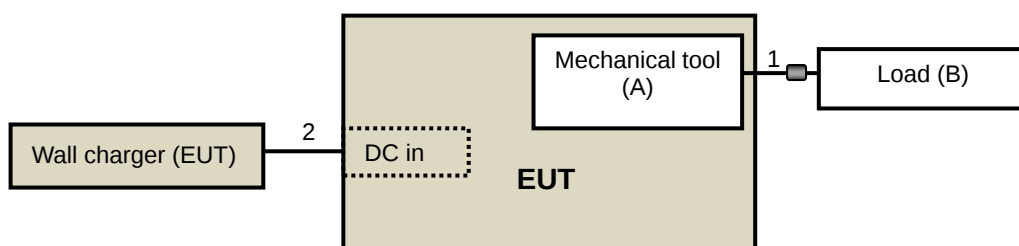

Standby Mode:

Test Mode B

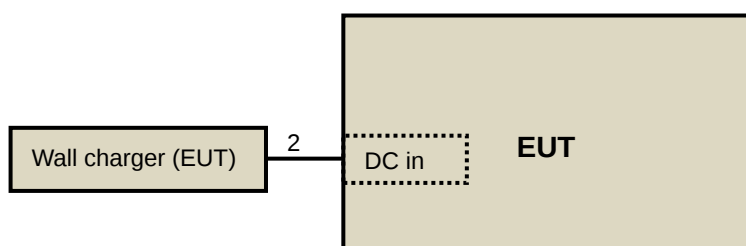

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR FCC Part 15, Subpart C (Section 15.209)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

For Frequency Below 30MHz

Frequency (MHz)	Field Strength (dBuV/m)		Measurement Distance (meters)
	uV/m	dBuV/m	
0.009 – 0.490	2400 / F (kHz)	48.52-13.80	300
0.490 – 1.705	24000 / F (kHz)	33.80-22.97	30
1.705 – 30.0	30	29.54	30

For Frequency Between 30-1000MHz

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
30-88	90	39.1	100	40.0
88-216	150	43.5	150	43.5
216-960	210	46.4	200	46.0
Above 960	300	49.5	500	54.0

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 19, 2020	Feb. 18, 2021
HP Preamplifier	8449B	3008A01201	Feb. 20, 2020	Feb. 19, 2021
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 19, 2020	Feb. 18, 2021
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 18, 2020	Mar. 17, 2021
Schwarzbeck Antenna	VULB 9168	139	Nov. 7, 2019	Nov. 6, 2020
Schwarzbeck Antenna	VHBA 9123	480	Jun. 3, 2019	Jun. 2, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 24, 2019	Nov. 23, 2020
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	Nov. 24, 2019	Nov. 23, 2020
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Jul. 10, 2019	Jul. 9, 2020
SUHNER RF cable With 3/4dB PAD	SF102	Cable-CH8-3.6m	Jul. 10, 2019	Jul. 9, 2020
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 11, 2019	Jun. 10, 2020
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 30, 2019	Jul. 29, 2020
Loop Antenna EMCI	LPA600	270	Aug. 23, 2019	Aug. 22, 2021
EMCO Horn Antenna	3115	00028257	Nov. 24, 2019	Nov. 23, 2020
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 23, 2019	Sep. 22, 2020
Anritsu Power Sensor	MA2411B	0738404	Apr. 13, 2020	Apr. 12, 2021
Anritsu Power Meter	ML2495A	0842014	Apr. 13, 2020	Apr. 12, 2021

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200Hz at frequency range 9kHz to 150kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency range 150kHz to 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

For Radiated emission below 30MHz

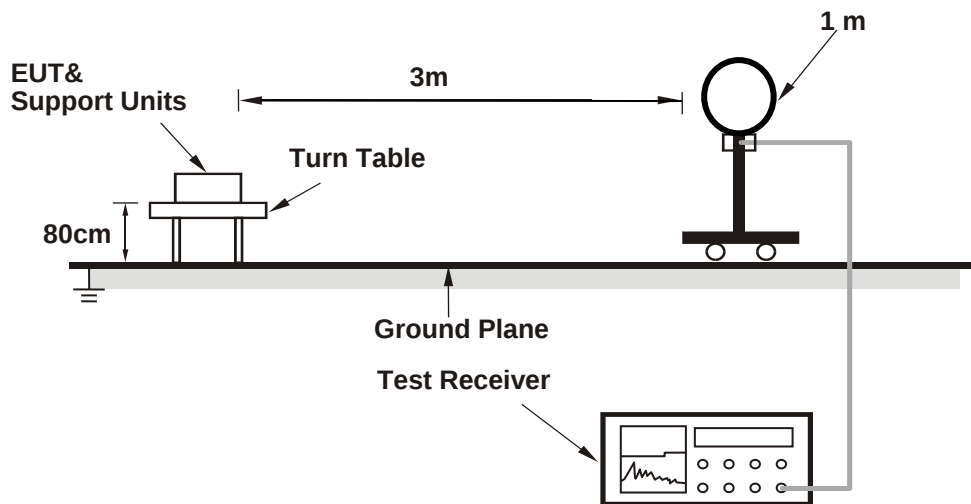

For Radiated emission 30MHz to 1GHz

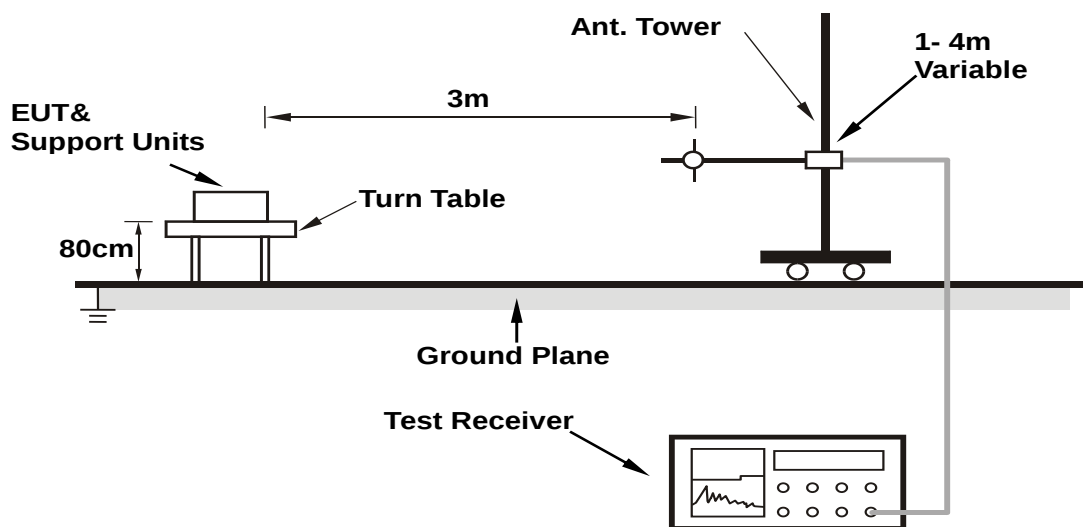

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Test Mode A:

Connect the Load with the EUT via mechanical tool (wireless charging) during the test.

Test Mode B:

Set the EUT under standby condition.

4.1.7 Test Results

Below 30MHz Data:


Charging Mode

Test Frequency	127.8kHz	Detector Function	Peak (PK)
Frequency Range	9kHz ~ 30MHz		Average (AV) Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	90.31 PK	125.48	-35.17	1.00	176	71.07	19.24
2	*0.1278	88.59 AV	105.47	-16.88	1.00	176	69.35	19.24
3	0.6416	56.91 QP	71.46	-14.55	1.00	250	49.27	7.64
4	0.8912	51.66 QP	68.60	-16.94	1.00	281	45.99	5.67
5	1.1504	47.16 QP	66.39	-19.23	1.00	297	42.62	4.54
6	1.4000	44.09 QP	64.68	-20.59	1.00	309	39.98	4.11
7	1.6592	41.58 QP	63.21	-21.63	1.00	321	37.92	3.66
8	1.9184	39.15 QP	69.54	-30.39	1.00	332	35.94	3.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

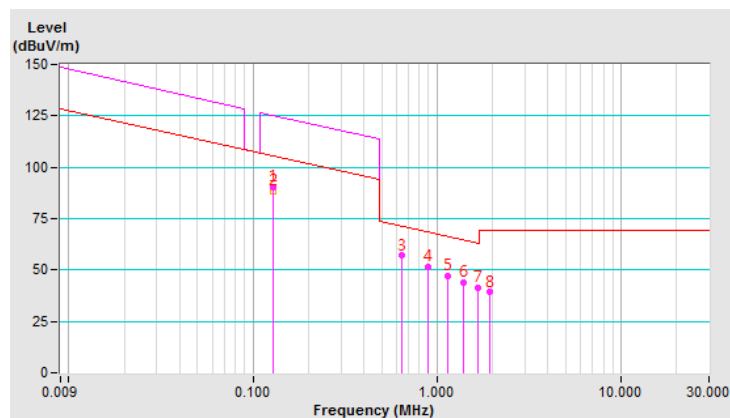


Test Frequency	127.8kHz	Detector Function	Peak (PK)
Frequency Range	9kHz ~ 30MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	82.08 PK	125.48	-43.40	1.00	290	62.84	19.24
2	*0.1278	80.14 AV	105.47	-25.33	1.00	290	60.90	19.24
3	0.6368	51.60 QP	71.52	-19.92	1.00	170	43.92	7.68
4	0.8944	45.89 QP	68.57	-22.68	1.00	142	40.24	5.65
5	1.1520	42.62 QP	66.38	-23.76	1.00	112	38.08	4.54
6	1.4040	39.90 QP	64.66	-24.76	1.00	100	35.80	4.10
7	1.6616	37.92 QP	63.19	-25.27	1.00	90	34.26	3.66
8	1.9192	35.00 QP	69.54	-34.54	1.00	82	31.79	3.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

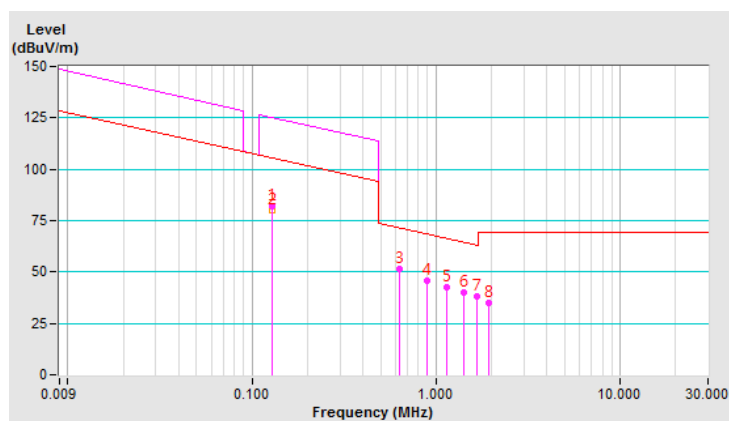


Test Frequency	127.8kHz	Detector Function	Peak (PK)
Frequency Range	9kHz ~ 30MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	86.43 PK	125.48	-39.05	1.00	0	67.19	19.24
2	*0.1278	84.69 AV	105.47	-20.78	1.00	0	65.45	19.24
3	0.6416	55.25 QP	71.46	-16.21	1.00	305	47.61	7.64
4	0.8912	49.47 QP	68.60	-19.13	1.00	285	43.80	5.67
5	1.1504	45.68 QP	66.39	-20.71	1.00	268	41.14	4.54
6	1.4000	43.14 QP	64.68	-21.54	1.00	252	39.03	4.11
7	1.6592	39.80 QP	63.21	-23.41	1.00	238	36.14	3.66
8	1.9184	37.34 QP	69.54	-32.20	1.00	225	34.13	3.21
9	2.1680	35.43 QP	69.54	-34.11	1.00	212	32.65	2.78

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

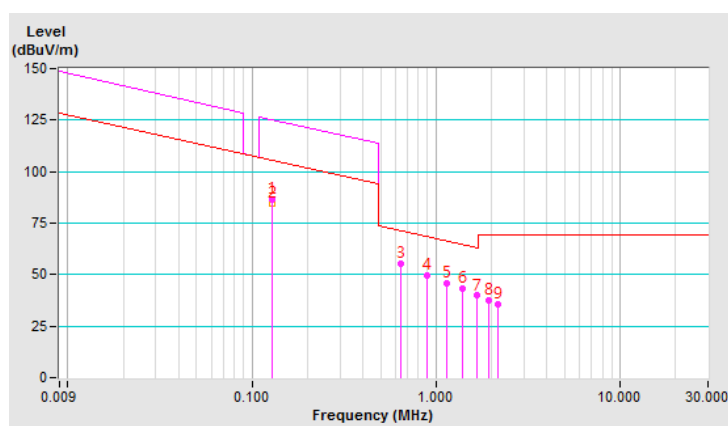


Standby Mode

Test Frequency	127.8kHz	Detector Function	Peak (PK)
Frequency Range	9kHz ~ 30MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	88.09 PK	125.48	-37.39	1.00	54	68.85	19.24
2	*0.1278	80.66 AV	105.47	-24.81	1.00	54	61.42	19.24
3	0.6368	54.58 QP	71.52	-16.94	1.00	322	46.90	7.68
4	0.8944	48.36 QP	68.57	-20.21	1.00	341	42.71	5.65
5	1.1520	44.95 QP	66.38	-21.43	1.00	265	40.41	4.54
6	1.4040	42.69 QP	64.66	-21.97	1.00	248	38.59	4.10
7	1.6616	40.57 QP	63.19	-22.62	1.00	229	36.91	3.66
8	1.9136	37.20 QP	69.54	-32.34	1.00	201	33.98	3.22

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

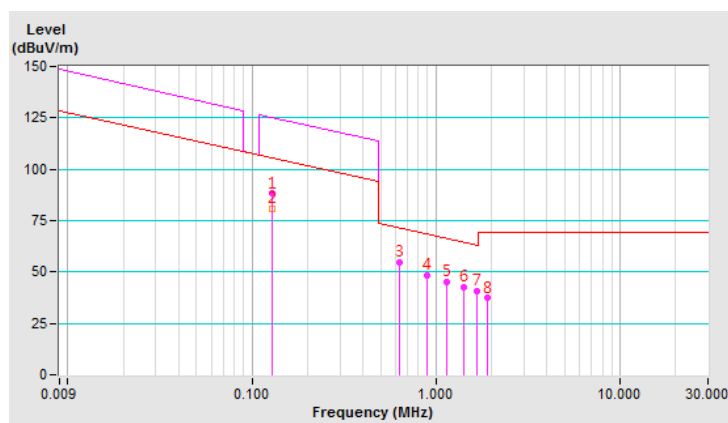


Test Frequency	127.8kHz	Detector Function	Peak (PK)
Frequency Range	9kHz ~ 30MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Perpendicular At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	79.96 PK	125.48	-45.52	1.00	343	60.72	19.24
2	*0.1278	71.57 AV	105.47	-33.90	1.00	343	52.33	19.24
3	0.6368	47.00 QP	71.52	-24.52	1.00	232	39.32	7.68
4	0.8944	41.19 QP	68.57	-27.38	1.00	216	35.54	5.65
5	1.1464	37.80 QP	66.42	-28.62	1.00	205	33.25	4.55
6	1.4040	34.58 QP	64.66	-30.08	1.00	195	30.48	4.10
7	1.6616	33.56 QP	63.19	-29.63	1.00	184	29.90	3.66
8	1.9192	31.80 QP	69.54	-37.74	1.00	69	28.59	3.21

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

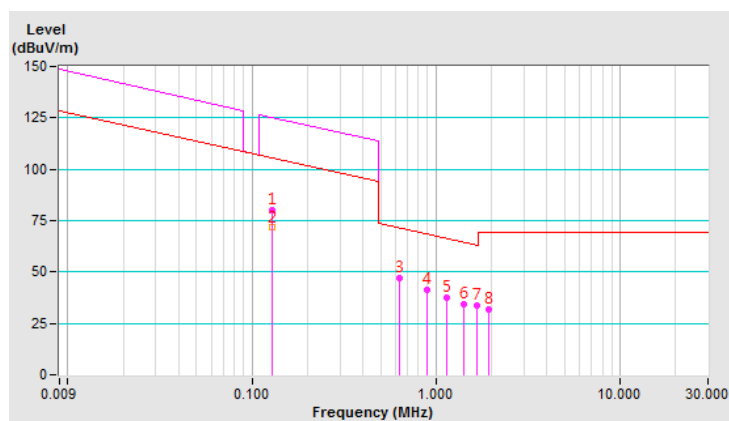


Test Frequency	127.8kHz	Detector Function	Peak (PK)
Frequency Range	9kHz ~ 30MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*0.1278	86.49 PK	125.48	-38.99	1.00	138	67.25	19.24
2	*0.1278	78.95 AV	105.47	-26.52	1.00	138	59.71	19.24
3	0.6368	52.27 QP	71.52	-19.25	1.00	94	44.59	7.68
4	0.8944	46.70 QP	68.57	-21.87	1.00	108	41.05	5.65
5	1.1520	42.81 QP	66.38	-23.57	1.00	120	38.27	4.54
6	1.4040	40.96 QP	64.66	-23.70	1.00	128	36.86	4.10
7	1.6616	38.69 QP	63.19	-24.50	1.00	137	35.03	3.66
8	1.9136	36.61 QP	69.54	-32.93	1.00	149	33.39	3.22

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

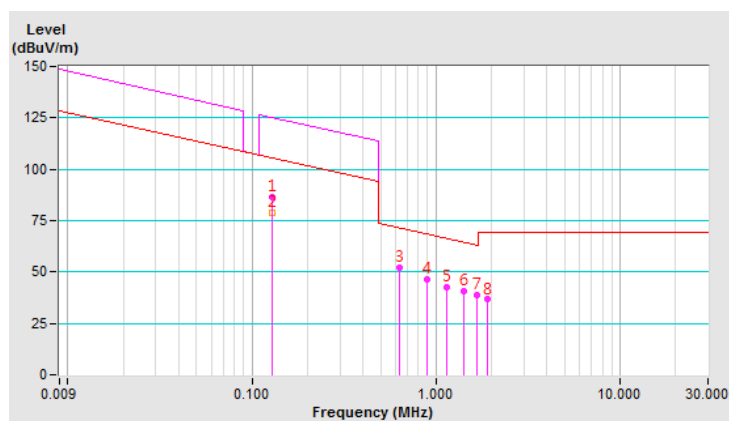

Above 30MHz Data:


Charging Mode

Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	69.7215	28.03 QP	40.00	-11.97	1.27 H	209	36.92	-8.89
2	160.0285	25.63 QP	43.50	-17.87	1.88 H	297	32.04	-6.41
3	248.7350	33.42 QP	46.00	-12.58	1.67 H	216	40.32	-6.90
4	360.7700	29.36 QP	46.00	-16.64	1.50 H	239	33.03	-3.67
5	422.2195	31.57 QP	46.00	-14.43	1.28 H	125	33.81	-2.24
6	526.3490	30.13 QP	46.00	-15.87	2.26 H	230	30.10	0.03

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

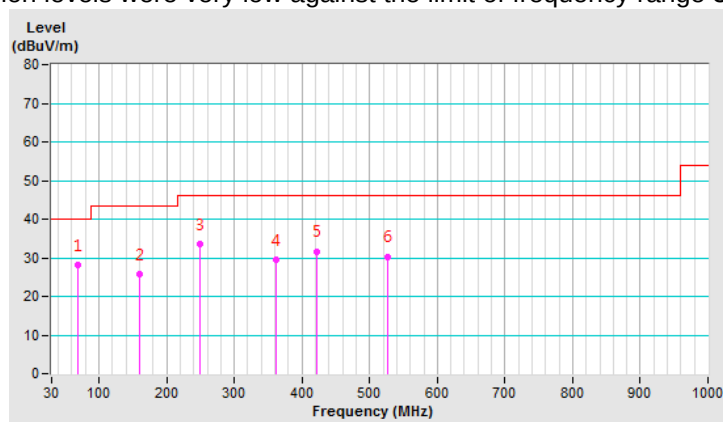


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	A		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.5130	32.04 QP	40.00	-7.96	1.34 V	325	39.43	-7.39
2	68.9455	33.03 QP	40.00	-6.97	1.08 V	3	41.98	-8.95
3	159.9315	24.77 QP	43.50	-18.73	1.00 V	37	31.18	-6.41
4	250.0445	27.25 QP	46.00	-18.75	1.16 V	360	34.10	-6.85
5	422.8985	30.65 QP	46.00	-15.35	1.27 V	201	32.86	-2.21
6	535.9035	33.29 QP	46.00	-12.71	1.52 V	274	33.16	0.13
7	642.9915	32.62 QP	46.00	-13.38	1.82 V	218	29.76	2.86

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

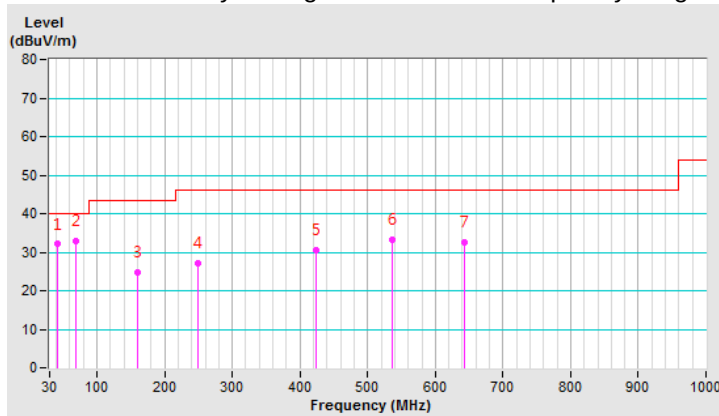


Standby Mode

Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.0695	23.23 QP	40.00	-16.77	1.32 H	244	31.25	-8.02
2	159.3495	22.87 QP	43.50	-20.63	1.55 H	274	29.34	-6.47
3	249.7535	32.81 QP	46.00	-13.19	2.52 H	235	39.67	-6.86
4	363.5830	29.71 QP	46.00	-16.29	1.65 H	228	33.30	-3.59
5	430.9980	31.68 QP	46.00	-14.32	1.74 H	118	33.49	-1.81
6	476.7335	32.18 QP	46.00	-13.82	1.20 H	139	33.02	-0.84

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

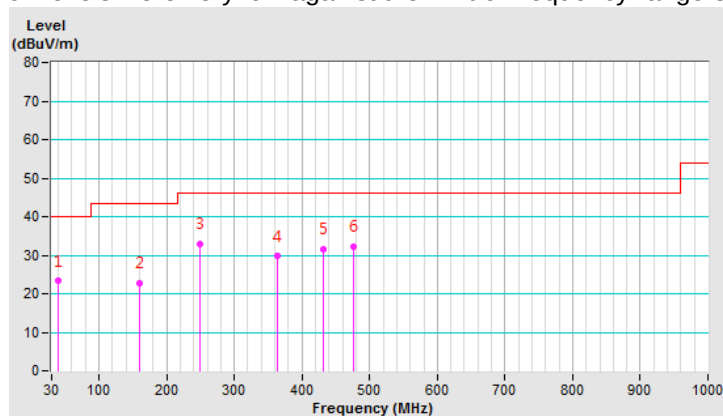


Test Frequency	127.8kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	B		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	44.6470	27.57 QP	40.00	-12.43	1.66 V	66	34.79	-7.22
2	69.3335	25.03 QP	40.00	-14.97	1.92 V	112	33.96	-8.93
3	169.3890	22.03 QP	43.50	-21.47	1.80 V	59	28.90	-6.87
4	247.9590	26.85 QP	46.00	-19.15	2.01 V	38	33.80	-6.95
5	425.8085	32.02 QP	46.00	-13.98	1.74 V	191	34.06	-2.04
6	530.5685	33.62 QP	46.00	-12.38	1.57 V	272	33.53	0.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.

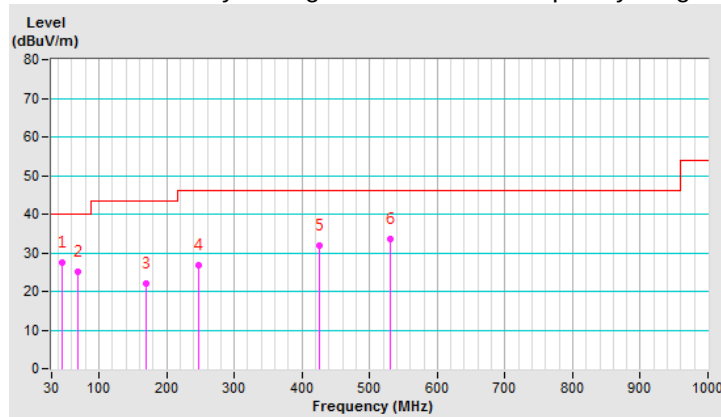

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESCS30	100276	Apr. 16, 2020	Apr. 15, 2021
SCHWARZBECK Artificial Mains Network (for EUT)	NSLK 8128	8128-244	Nov. 11, 2019	Nov. 10, 2020
LISN With Adapter (for EUT)	AD10	C05Ada-001	Nov. 11, 2019	Nov. 10, 2020
ROHDE & SCHWARZ Artificial Mains Network (for peripheral)	ESH3-Z5	100220	Nov. 18, 2019	Nov. 17, 2020
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C05.01	Jan. 30, 2020	Jan. 29, 2021
LYNICS Terminator (For R&S LISN)	0900510	E1-01-305	Feb. 17, 2020	Feb. 16, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 5.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

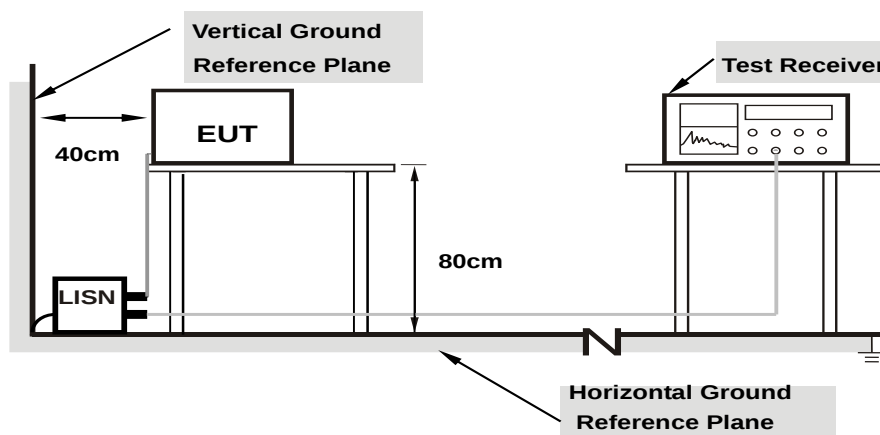

Note: Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as item 4.1.6.

4.2.7 Test Results


Charging Mode

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	A		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.90	40.85	10.35	50.75	20.25	65.38	55.38	-14.63	-35.13
2	0.20078	9.90	41.54	25.22	51.44	35.12	63.58	53.58	-12.14	-18.46
3	0.26447	9.90	36.72	25.50	46.62	35.40	61.29	51.29	-14.67	-15.89
4	0.32188	9.91	29.28	13.88	39.19	23.79	59.66	49.66	-20.47	-25.87
5	0.40000	9.91	28.83	18.35	38.74	28.26	57.85	47.85	-19.11	-19.59
6	0.44688	9.91	26.75	15.02	36.66	24.93	56.93	46.93	-20.27	-22.00
7	0.63828	9.93	23.93	14.06	33.86	23.99	56.00	46.00	-22.14	-22.01
8	0.81932	9.95	28.11	24.53	38.06	34.48	56.00	46.00	-17.94	-11.52
9	2.45703	10.05	27.06	23.85	37.11	33.90	56.00	46.00	-18.89	-12.10
10	4.09766	10.17	27.32	23.47	37.49	33.64	56.00	46.00	-18.51	-12.36

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

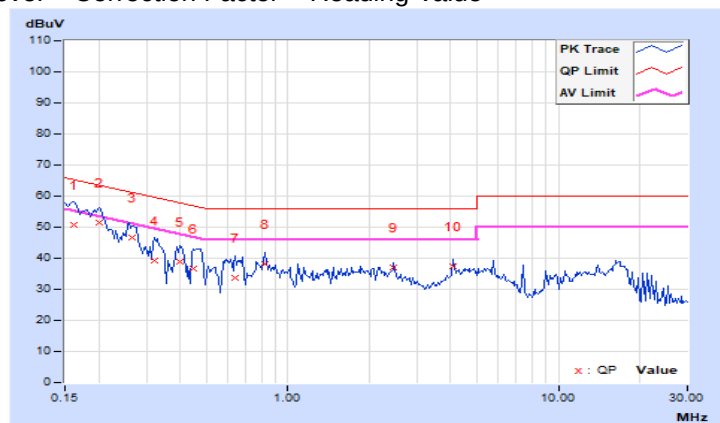


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	A		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.92	35.24	11.22	45.16	21.14	65.58	55.58	-20.42	-34.44
2	0.19542	9.92	40.27	25.20	50.19	35.12	63.80	53.80	-13.61	-18.68
3	0.25938	9.93	36.13	23.97	46.06	33.90	61.45	51.45	-15.39	-17.55
4	0.31797	9.93	26.41	10.63	36.34	20.56	59.76	49.76	-23.42	-29.20
5	0.39219	9.94	28.22	18.17	38.16	28.11	58.02	48.02	-19.86	-19.91
6	0.44688	9.94	26.59	15.02	36.53	24.96	56.93	46.93	-20.40	-21.97
7	0.60313	9.96	24.99	16.35	34.95	26.31	56.00	46.00	-21.05	-19.69
8	0.82188	9.98	26.62	22.75	36.60	32.73	56.00	46.00	-19.40	-13.27
9	2.45822	10.08	26.82	23.95	36.90	34.03	56.00	46.00	-19.10	-11.97
10	4.09766	10.18	26.06	24.10	36.24	34.28	56.00	46.00	-19.76	-11.72
11	5.73446	10.27	28.11	24.63	38.38	34.90	60.00	50.00	-21.62	-15.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

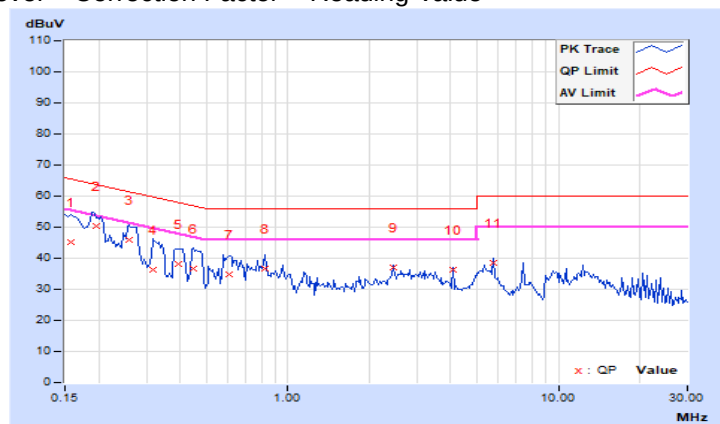


Standby Mode

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	B		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.90	34.76	18.16	44.66	28.06	66.00	56.00	-21.34	-27.94
2	0.17344	9.90	31.94	16.94	41.84	26.84	64.79	54.79	-22.95	-27.95
3	0.40000	9.91	33.24	24.16	43.15	34.07	57.85	47.85	-14.70	-13.78
4	0.80234	9.95	19.03	10.18	28.98	20.13	56.00	46.00	-27.02	-25.87
5	1.23828	9.98	15.95	7.96	25.93	17.94	56.00	46.00	-30.07	-28.06
6	2.78906	10.08	12.64	4.66	22.72	14.74	56.00	46.00	-33.28	-31.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

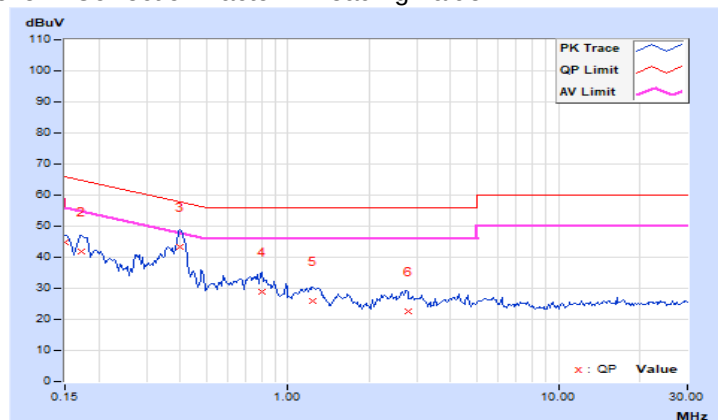


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Test Mode	B		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.92	35.12	19.54	45.04	29.46	66.00	56.00	-20.96	-26.54
2	0.17344	9.92	31.90	18.04	41.82	27.96	64.79	54.79	-22.97	-26.83
3	0.23203	9.92	23.73	10.77	33.65	20.69	62.38	52.38	-28.73	-31.69
4	0.40000	9.94	32.92	23.55	42.86	33.49	57.85	47.85	-14.99	-14.36
5	0.76719	9.97	18.59	10.26	28.56	20.23	56.00	46.00	-27.44	-25.77
6	1.61719	10.03	13.65	5.28	23.68	15.31	56.00	46.00	-32.32	-30.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

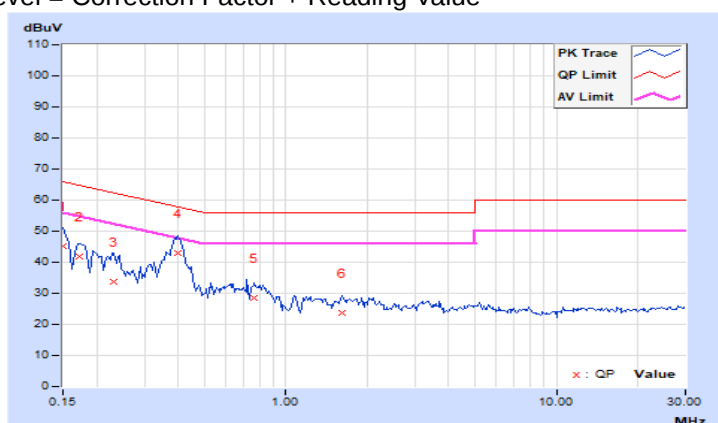

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---