



FCC TEST REPORT

REPORT NO.: RF971124L11
MODEL NO.: F5D8235-4 v2
RECEIVED: Nov. 24, 2008
TESTED: Jan. 13 ~ Feb. 13, 2009
ISSUED: Feb. 19, 2009

APPLICANT: Belkin International, Inc.
ADDRESS: 501 West Walnut Street, Compton,
CA 90220-5221

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 101 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	RADIATED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	CONDUCTED EMISSION MEASUREMENT	41
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	41
4.2.2	TEST INSTRUMENTS	41
4.2.3	TEST PROCEDURES	42
4.2.4	DEVIATION FROM TEST STANDARD	42
4.2.5	TEST SETUP	43
4.2.6	EUT OPERATING CONDITIONS	43
4.2.7	TEST RESULTS	44
4.3	6dB BANDWIDTH MEASUREMENT	46
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	46
4.3.2	TEST INSTRUMENTS	46
4.3.3	TEST PROCEDURE	46
4.3.4	DEVIATION FROM TEST STANDARD	46
4.3.5	TEST SETUP	47
4.3.6	EUT OPERATING CONDITIONS	47
4.3.7	TEST RESULTS	48
4.4	MAXIMUM PEAK OUTPUT POWER	62
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	62
4.4.2	INSTRUMENTS	62
4.4.3	TEST PROCEDURES	62
4.4.4	DEVIATION FROM TEST STANDARD	62
4.4.5	TEST SETUP	63
4.4.6	EUT OPERATING CONDITIONS	63
4.4.7	TEST RESULTS	64
4.5	POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	66
4.5.2	TEST INSTRUMENTS	66
4.5.3	TEST PROCEDURE	66
4.5.4	DEVIATION FROM TEST STANDARD	66
4.5.5	TEST SETUP	67



A D T

4.5.6	EUT OPERATING CONDITION	67
4.5.7	TEST RESULTS	68
4.6	BAND EDGES MEASUREMENT	80
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	80
4.6.2	TEST INSTRUMENTS	80
4.6.3	TEST PROCEDURE	81
4.6.4	DEVIATION FROM TEST STANDARD	81
4.6.5	EUT OPERATING CONDITION	82
4.6.6	TEST RESULTS	82
4.7	ANTENNA REQUIREMENT	98
4.7.1	STANDARD APPLICABLE	98
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	98
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	99
6.	INFORMATION ON THE TESTING LABORATORIES.....	100
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	101



A D T

1. CERTIFICATION

PRODUCT: N+ Wireless Router

MODEL: F5D8235-4 v2

BRAND: Belkin

APPLICANT: Belkin International, Inc.

TESTED: Jan. 13 ~ Feb. 13, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (model: F5D8235-4 v2) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch,** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Polly Chien* , **DATE** : Feb. 19, 2009
Polly Chien / Specialist

TECHNICAL ACCEPTANCE : *Long Chen* , **DATE** : Feb. 19, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : *Gary Chang* , **DATE** : Feb. 19, 2009
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.99dB at 0.315MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.02dB at 2375.00 MHz, 2390.00 MHz, 2499.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	N+ Wireless Router
MODEL NO.	F5D8235-4 v2
FCC ID	K7SF5D8235-4B
POWER SUPPLY	12Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 300.0Mbps
FREQUENCY RANGE	2400.0 ~ 2483.5MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, Draft 802.11n (20MHz) 7 for Draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	318.809mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
DATA CABLE	NA
I/O PORTS	RJ45, USB
ACCESSORY DEVICES	Adapter

NOTE:

- 1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
Draft 802.11n (20MHz)	2TX
Draft 802.11n (40MHz)	2TX

- 2. The EUT was operated with following power adapter:

BRAND:	DVE
MODEL:	DSA-20P-10 US 120180
INPUT:	100-240Vac, 50/60Hz, 0.7A
OUTPUT:	12Vdc, 1.5A
POWER LINE:	1.8m non-shielded cable without core

- 3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

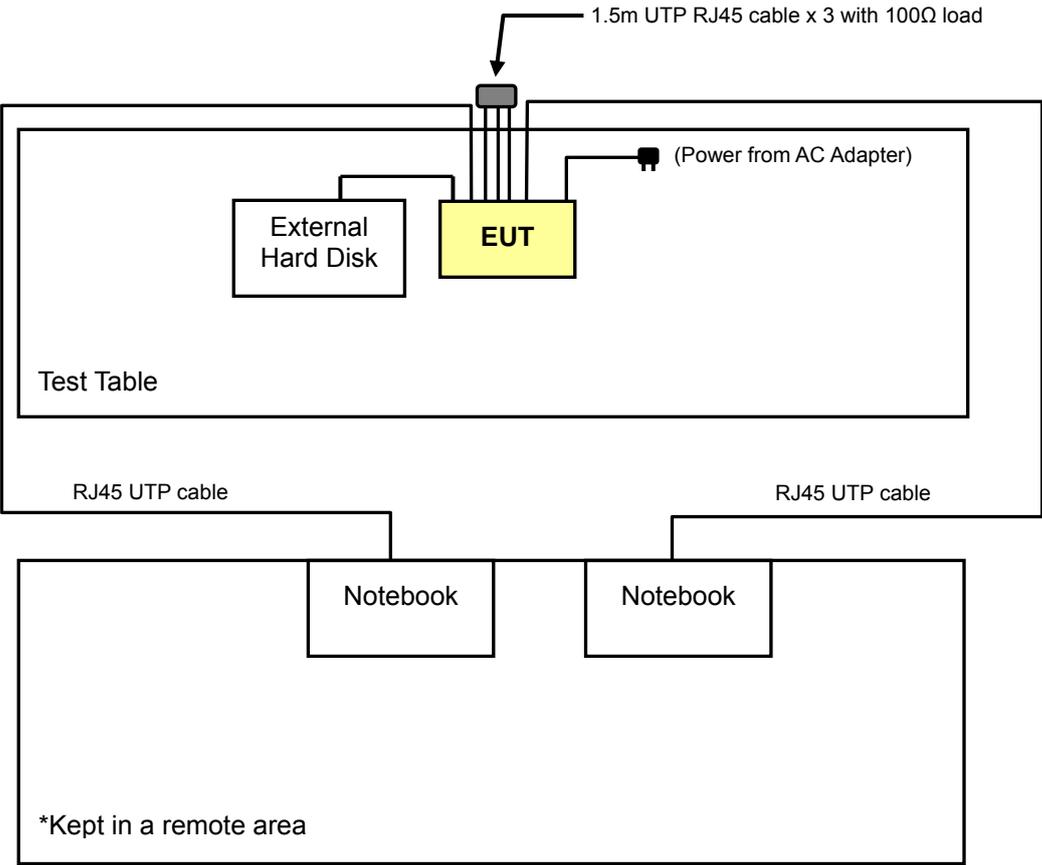

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE \geq 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	Z
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Z
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Z
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Z

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
Draft 802.11n (40MHz)	1 to 7	4	OFDM	BPSK	15.0	Z

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
Draft 802.11n (40MHz)	1 to 7	4	OFDM	BPSK	15.0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	D531	CN-0XM006-48643 -81U-2973	QDS-BRCM1020
2	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
3	EXTERNAL HARD DISK	Terasys	F12-UF	A0100222- 4860009	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable
2	10m RJ45 UTP cable
3	1.5 m shielded cable, terminated with USB connector, w/o core.

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Items 1, 2 acted as communication partners to transfer data.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 29, 2008	Dec. 28, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 08, 2008	Dec. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 30, 2008	Apr. 29, 2009
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Dec. 29, 2008	Dec. 28, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01960	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8447D	2944A10631	Nov. 03, 2008	Nov. 02, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 21, 2008	Aug. 20, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Aug. 21, 2008	Aug. 20, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

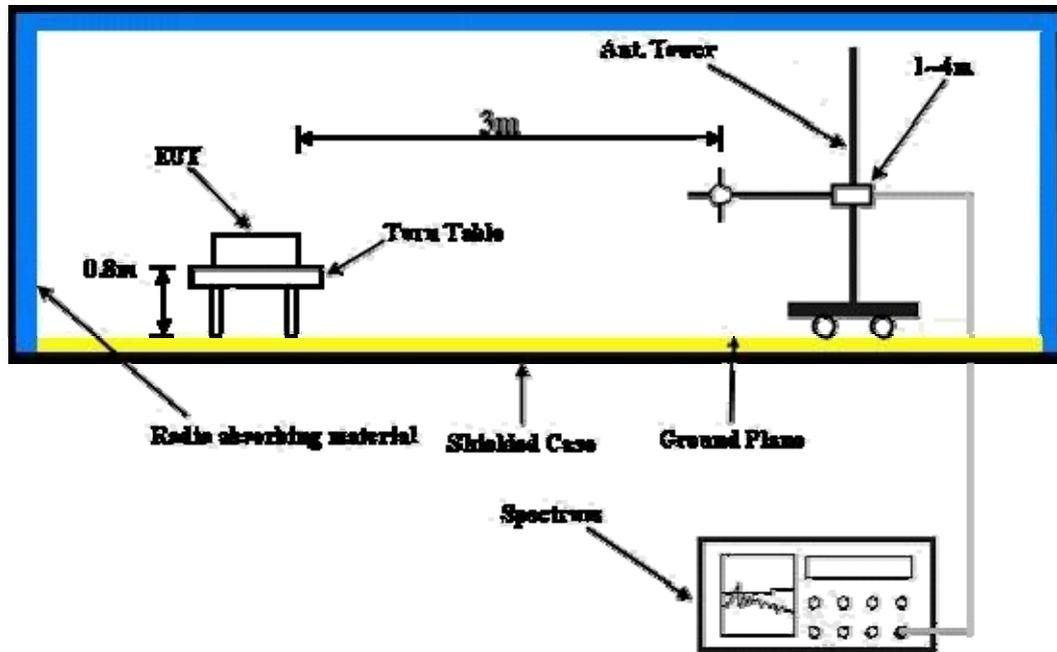

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared notebook system outside of testing area to act as a communication partners.
- The communication partner connected with EUT via a RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.02 PK	83.80	-34.78	1.77 H	221	18.33	30.69
2	#2000.00	45.85 AV	79.15	-33.30	1.77 H	221	15.16	30.69
3	2375.00	59.72 PK	74.00	-14.28	1.16 H	313	27.49	32.23
4	2375.00	49.21 AV	54.00	-4.79	1.16 H	313	16.98	32.23
5	*2412.00	103.80 PK			1.14 H	313	71.42	32.38
6	*2412.00	99.15 AV			1.14 H	313	66.77	32.38
7	2499.50	61.43 PK	74.00	-12.57	1.34 H	317	28.70	32.73
8	2499.50	50.15 AV	54.00	-3.85	1.34 H	317	17.42	32.73
9	4824.00	52.94 PK	74.00	-21.06	1.30 H	73	14.37	38.56
10	4824.00	45.98 AV	54.00	-8.02	1.30 H	73	7.41	38.56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.86 PK	88.34	-38.48	1.65 V	267	19.17	30.69
2	#2000.00	46.79 AV	83.65	-36.86	1.65 V	267	16.10	30.69
3	2375.00	62.38 PK	74.00	-11.62	1.35 V	72	30.15	32.23
4	2375.00	52.95 AV	54.00	-1.05	1.35 V	72	20.72	32.23
5	*2412.00	108.34 PK			1.61 V	321	75.96	32.38
6	*2412.00	103.65 AV			1.61 V	321	71.27	32.38
7	2499.50	65.12 PK	74.00	-8.88	1.51 V	196	32.39	32.73
8	2499.50	52.92 AV	54.00	-1.08	1.51 V	196	20.19	32.73
9	4824.00	50.74 PK	74.00	-23.26	1.63 V	41	12.17	38.56
10	4824.00	40.37 AV	54.00	-13.63	1.63 V	41	1.80	38.56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	48.97 PK	84.11	-35.14	1.69 H	210	18.28	30.69
2	#2000.00	45.79 AV	79.58	-33.79	1.69 H	210	15.10	30.69
3	2375.00	59.83 PK	74.00	-14.17	1.18 H	320	27.60	32.23
4	2375.00	49.28 AV	54.00	-4.72	1.18 H	320	17.05	32.23
5	*2437.00	104.11 PK			1.18 H	319	71.63	32.48
6	*2437.00	99.58 AV			1.18 H	319	67.10	32.48
7	2499.50	61.52 PK	74.00	-12.48	1.39 H	302	28.79	32.73
8	2499.50	50.26 AV	54.00	-3.74	1.39 H	302	17.53	32.73
9	4874.00	52.48 PK	74.00	-21.52	1.34 H	128	13.80	38.67
10	4874.00	44.71 AV	54.00	-9.29	1.34 H	128	6.03	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.81 PK	88.67	-38.86	1.63 V	260	19.12	30.69
2	#2000.00	46.71 AV	84.18	-37.47	1.63 V	260	16.02	30.69
3	2375.00	62.89 PK	74.00	-11.11	1.34 V	75	30.66	32.23
4	2375.00	52.94 AV	54.00	-1.06	1.34 V	75	20.71	32.23
5	*2437.00	108.67 PK			1.10 V	289	76.19	32.48
6	*2437.00	104.18 AV			1.10 V	289	71.70	32.48
7	2499.50	63.80 PK	74.00	-10.20	1.12 V	324	31.07	32.73
8	2499.50	52.87 AV	54.00	-1.13	1.12 V	324	20.14	32.73
9	4874.00	50.78 PK	74.00	-23.22	1.07 V	136	12.10	38.67
10	4874.00	39.30 AV	54.00	-14.70	1.07 V	136	0.62	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	48.99 PK	86.03	-37.04	1.66 H	208	18.30	30.69
2	#2000.00	45.86 AV	80.67	-34.81	1.66 H	208	15.17	30.69
3	2375.00	59.87 PK	74.00	-14.13	1.21 H	323	27.64	32.23
4	2375.00	49.34 AV	54.00	-4.66	1.21 H	323	17.11	32.23
5	*2462.00	106.03 PK			1.23 H	310	73.45	32.58
6	*2462.00	100.67 AV			1.23 H	310	68.09	32.58
7	2499.50	28.83 PK	74.00	-45.17	1.35 H	298	-3.90	32.73
8	2499.50	17.59 AV	54.00	-36.41	1.35 H	298	-15.14	32.73
9	4924.00	52.21 PK	74.00	-21.79	1.13 H	43	13.42	38.79
10	4924.00	43.79 AV	54.00	-10.21	1.13 H	43	5.00	38.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.82 PK	90.15	-40.33	1.63 V	266	19.13	30.69
2	#2000.00	46.73 AV	85.44	-38.71	1.63 V	266	16.04	30.69
3	2375.00	62.00 PK	74.00	-12.00	1.31 V	67	29.77	32.23
4	2375.00	52.93 AV	54.00	-1.07	1.31 V	67	20.70	32.23
5	*2462.00	110.15 PK			1.29 V	71	77.57	32.58
6	*2462.00	105.44 AV			1.29 V	71	72.86	32.58
7	2499.50	65.03 PK	74.00	-8.97	1.48 V	188	32.30	32.73
8	2499.50	52.88 AV	54.00	-1.12	1.48 V	188	20.15	32.73
9	4924.00	50.63 PK	74.00	-23.37	1.13 V	284	11.84	38.79
10	4924.00	39.04 AV	54.00	-14.96	1.13 V	284	0.25	38.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.12 PK	82.34	-33.22	1.71 H	218	18.43	30.69
2	#2000.00	45.88 AV	71.89	-26.01	1.71 H	218	15.19	30.69
3	2375.00	59.86 PK	74.00	-14.14	1.12 H	310	27.63	32.23
4	2375.00	49.33 AV	54.00	-4.67	1.12 H	310	17.10	32.23
5	*2412.00	102.34 PK			1.41 H	313	69.96	32.38
6	*2412.00	91.89 AV			1.41 H	313	59.51	32.38
7	2499.50	61.57 PK	74.00	-12.43	1.27 H	299	28.84	32.73
8	2499.50	50.26 AV	54.00	-3.74	1.27 H	299	17.53	32.73
9	4824.00	50.20 PK	74.00	-23.80	1.46 H	252	11.63	38.56
10	4824.00	37.12 AV	54.00	-16.88	1.46 H	252	-1.45	38.56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.75 PK	88.31	-38.56	1.59 V	258	19.06	30.69
2	#2000.00	46.68 AV	77.89	-31.21	1.59 V	258	15.99	30.69
3	2375.00	62.58 PK	74.00	-11.42	1.15 V	56	30.35	32.23
4	2375.00	52.98 AV	54.00	-1.02	1.15 V	56	20.75	32.23
5	*2412.00	108.31 PK			1.14 V	308	75.93	32.38
6	*2412.00	97.89 AV			1.14 V	308	65.51	32.38
7	2499.50	65.25 PK	74.00	-8.75	1.47 V	188	32.52	32.73
8	2499.50	52.94 AV	54.00	-1.06	1.47 V	188	20.21	32.73
9	4824.00	49.21 PK	74.00	-24.79	1.06 V	198	10.64	38.56
10	4824.00	35.82 AV	54.00	-18.18	1.06 V	198	-2.75	38.56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.19 PK	82.42	-33.23	1.68 H	223	18.50	30.69
2	#2000.00	45.96 AV	71.98	-26.02	1.68 H	223	15.27	30.69
3	2375.00	59.91 PK	74.00	-14.09	1.16 H	312	27.68	32.23
4	2375.00	49.41 AV	54.00	-4.59	1.16 H	312	17.18	32.23
5	*2437.00	102.42 PK			1.45 H	322	69.94	32.48
6	*2437.00	91.98 AV			1.45 H	322	59.50	32.48
7	2499.50	61.62 PK	74.00	-12.38	1.29 H	302	28.89	32.73
8	2499.50	50.33 AV	54.00	-3.67	1.29 H	302	17.60	32.73
9	4874.00	49.63 PK	74.00	-24.37	1.16 H	185	10.95	38.67
10	4874.00	36.66 AV	54.00	-17.34	1.16 H	185	-2.02	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.88 PK	88.40	-38.52	1.60 V	261	19.19	30.69
2	#2000.00	46.84 AV	78.01	-31.17	1.60 V	261	16.15	30.69
3	2375.00	62.44 PK	74.00	-11.56	1.40 V	83	30.21	32.23
4	2375.00	52.97 AV	54.00	-1.03	1.40 V	83	20.74	32.23
5	*2437.00	108.40 PK			1.36 V	314	75.92	32.48
6	*2437.00	98.01 AV			1.36 V	314	65.53	32.48
7	2499.50	65.21 PK	74.00	-8.79	1.53 V	201	32.48	32.73
8	2499.50	52.88 AV	54.00	-1.12	1.53 V	201	20.15	32.73
9	4874.00	49.27 PK	74.00	-24.73	1.17 V	283	10.59	38.67
10	4874.00	36.18 AV	54.00	-17.82	1.17 V	283	-2.50	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.22 PK	83.63	-34.41	1.73 H	221	18.53	30.69
2	#2000.00	45.96 AV	73.12	-27.16	1.73 H	221	15.27	30.69
3	2375.00	59.93 PK	74.00	-14.07	1.15 H	315	27.70	32.23
4	2375.00	49.42 AV	54.00	-4.58	1.15 H	315	17.19	32.23
5	*2462.00	103.63 PK			1.42 H	310	71.05	32.58
6	*2462.00	93.12 AV			1.42 H	310	60.54	32.58
7	2499.50	61.62 PK	74.00	-12.38	1.24 H	291	28.89	32.73
8	2499.50	50.31 AV	54.00	-3.69	1.24 H	291	17.58	32.73
9	4924.00	48.96 PK	74.00	-25.04	1.52 H	13	10.17	38.79
10	4924.00	35.59 AV	54.00	-18.41	1.52 H	13	-3.20	38.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.79 PK	89.72	-39.93	1.57 V	266	19.10	30.69
2	#2000.00	46.72 AV	79.36	-32.64	1.57 V	266	16.03	30.69
3	2375.00	62.63 PK	74.00	-11.37	1.18 V	60	30.40	32.23
4	2375.00	52.92 AV	54.00	-1.08	1.18 V	60	20.69	32.23
5	*2462.00	109.72 PK			1.30 V	72	77.14	32.58
6	*2462.00	99.36 AV			1.30 V	72	66.78	32.58
7	2499.50	65.33 PK	74.00	-8.67	1.45 V	193	32.60	32.73
8	2499.50	52.98 AV	54.00	-1.02	1.45 V	193	20.25	32.73
9	4924.00	48.83 PK	74.00	-25.17	1.20 V	155	10.04	38.79
10	4924.00	34.98 AV	54.00	-19.02	1.20 V	155	-3.81	38.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.11 PK	86.49	-37.38	1.66 H	210	18.42	30.69
2	#2000.00	45.93 AV	76.06	-30.13	1.66 H	210	15.24	30.69
3	2375.00	59.82 PK	74.00	-14.18	1.02 H	297	27.59	32.23
4	2375.00	49.33 AV	54.00	-4.67	1.02 H	297	17.10	32.23
5	*2412.00	106.49 PK			1.14 H	313	74.11	32.38
6	*2412.00	96.06 AV			1.14 H	313	63.68	32.38
7	2499.50	61.52 PK	74.00	-12.48	1.36 H	320	28.79	32.73
8	2499.50	50.21 AV	54.00	-3.79	1.36 H	320	17.48	32.73
9	4824.00	49.96 PK	74.00	-24.04	1.11 H	99	11.39	38.56
10	4824.00	37.77 AV	54.00	-16.23	1.11 H	99	-0.80	38.56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.93 PK	92.20	-42.27	1.61 V	273	19.24	30.69
2	#2000.00	46.87 AV	81.80	-34.93	1.61 V	273	16.18	30.69
3	2375.00	62.41 PK	74.00	-11.59	1.21 V	7	30.18	32.23
4	2375.00	52.97 AV	54.00	-1.03	1.21 V	7	20.74	32.23
5	*2412.00	112.20 PK			1.16 V	11	79.82	32.38
6	*2412.00	101.80 AV			1.16 V	11	69.42	32.38
7	2499.50	65.22 PK	74.00	-8.78	1.44 V	175	32.49	32.73
8	2499.50	52.91 AV	54.00	-1.09	1.44 V	175	20.18	32.73
9	4824.00	50.60 PK	74.00	-23.40	1.13 V	221	12.03	38.56
10	4824.00	36.57 AV	54.00	-17.43	1.13 V	221	-2.00	38.56

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.21 PK	86.97	-37.76	1.69 H	211	18.52	30.69
2	#2000.00	45.89 AV	76.59	-30.70	1.69 H	211	15.20	30.69
3	2375.00	59.85 PK	74.00	-14.15	1.04 H	289	27.62	32.23
4	2375.00	49.43 AV	54.00	-4.57	1.04 H	289	17.20	32.23
5	*2437.00	106.97 PK			1.16 H	320	74.49	32.48
6	*2437.00	96.59 AV			1.16 H	320	64.11	32.48
7	2499.50	61.47 PK	74.00	-12.53	1.40 H	311	28.74	32.73
8	2499.50	50.16 AV	54.00	-3.84	1.40 H	311	17.43	32.73
9	4874.00	50.08 PK	74.00	-23.92	1.13 H	148	11.40	38.67
10	4874.00	37.41 AV	54.00	-16.59	1.13 H	148	-1.27	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.98 PK	92.71	-42.73	1.64 V	281	19.29	30.69
2	#2000.00	46.91 AV	82.36	-35.45	1.64 V	281	16.22	30.69
3	2375.00	62.52 PK	74.00	-11.48	1.24 V	12	30.29	32.23
4	2375.00	52.91 AV	54.00	-1.09	1.24 V	12	20.68	32.23
5	*2437.00	112.71 PK			1.14 V	18	80.23	32.48
6	*2437.00	102.36 AV			1.14 V	18	69.88	32.48
7	2499.50	65.31 PK	74.00	-8.69	1.48 V	181	32.58	32.73
8	2499.50	52.93 AV	54.00	-1.07	1.48 V	181	20.20	32.73
9	4874.00	49.75 PK	74.00	-24.25	1.02 V	96	11.07	38.67
10	4874.00	36.75 AV	54.00	-17.25	1.02 V	96	-1.93	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	49.22 PK	86.98	-37.76	1.56 H	203	18.53	30.69
2	#2000.00	46.02 AV	76.79	-30.77	1.56 H	203	15.33	30.69
3	2375.00	59.93 PK	74.00	-14.07	1.06 H	288	27.70	32.23
4	2375.00	49.41 AV	54.00	-4.59	1.06 H	288	17.18	32.23
5	*2462.00	106.98 PK			1.11 H	320	74.40	32.58
6	*2462.00	96.79 AV			1.11 H	320	64.21	32.58
7	2499.50	61.63 PK	74.00	-12.37	1.38 H	311	28.90	32.73
8	2499.50	50.35 AV	54.00	-3.65	1.38 H	311	17.62	32.73
9	4924.00	49.15 PK	74.00	-24.85	1.09 H	86	10.36	38.79
10	4924.00	36.54 AV	54.00	-17.46	1.09 H	86	-2.25	38.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	26deg. C, 68%RH 1000hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	50.02 PK	92.95	-42.93	1.58 V	269	19.33	30.69
2	#2000.00	46.93 AV	82.51	-35.58	1.58 V	269	16.24	30.69
3	2375.00	62.49 PK	74.00	-11.51	1.19 V	2	30.26	32.23
4	2375.00	52.94 AV	54.00	-1.06	1.19 V	2	20.71	32.23
5	*2462.00	112.95 PK			1.29 V	112	80.37	32.58
6	*2462.00	102.51 AV			1.29 V	112	69.93	32.58
7	2499.50	65.29 PK	74.00	-8.71	1.42 V	169	32.56	32.73
8	2499.50	52.96 AV	54.00	-1.04	1.42 V	169	20.23	32.73
9	4924.00	50.07 PK	74.00	-23.93	1.33 V	122	11.28	38.79
10	4924.00	36.20 AV	54.00	-17.80	1.33 V	122	-2.59	38.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	50.36 PK	78.46	-28.10	1.42 H	36	19.67	30.69
2	#2000.00	45.80 AV	67.91	-22.11	1.42 H	36	15.11	30.69
3	2375.00	59.68 PK	74.00	-14.32	1.05 H	86	27.45	32.23
4	2375.00	49.83 AV	54.00	-4.17	1.05 H	86	17.60	32.23
5	2390.00	65.96 PK	74.00	-8.04	1.01 H	239	33.67	32.29
6	2390.00	50.10 AV	54.00	-3.90	1.01 H	239	17.81	32.29
7	*2422.00	98.46 PK			1.16 H	72	66.04	32.42
8	*2422.00	87.91 AV			1.16 H	72	55.49	32.42
9	2499.50	61.50 PK	74.00	-12.50	1.31 H	263	28.77	32.73
10	2499.50	50.36 AV	54.00	-3.64	1.31 H	263	17.63	32.73
11	4844.00	53.90 PK	74.00	-20.10	1.25 H	213	15.29	38.61
12	4844.00	45.12 AV	54.00	-8.88	1.25 H	213	6.51	38.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	50.36 PK	86.11	-35.75	1.36 V	58	19.67	30.69
2	#2000.00	46.21 AV	75.89	-29.68	1.36 V	58	15.52	30.69
3	2375.00	62.01 PK	74.00	-11.99	1.00 V	338	29.78	32.23
4	2375.00	52.90 AV	54.00	-1.10	1.00 V	338	20.67	32.23
5	2390.00	67.71 PK	74.00	-6.29	1.00 V	272	35.42	32.29
6	2390.00	52.95 AV	54.00	-1.05	1.00 V	272	20.66	32.29
7	*2422.00	106.11 PK			1.00 V	338	73.69	32.42
8	*2422.00	95.89 AV			1.00 V	338	63.47	32.42
9	2499.50	64.39 PK	74.00	-9.61	1.17 V	86	31.66	32.73
10	2499.50	52.63 AV	54.00	-1.37	1.17 V	86	19.90	32.73
11	4844.00	50.69 PK	74.00	-23.31	1.06 V	89	12.08	38.61
12	4844.00	40.99 AV	54.00	-13.01	1.06 V	89	2.38	38.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2375.00	67.03 PK	74.00	-6.97	1.31 H	320	34.80	32.23
2	2375.00	51.03 AV	54.00	-2.97	1.31 H	320	18.80	32.23
3	2390.00	58.89 PK	74.00	-15.11	1.17 H	316	26.60	32.29
4	2390.00	48.41 AV	54.00	-5.59	1.17 H	316	16.12	32.29
5	*2437.00	104.60 PK			1.41 H	313	72.12	32.48
6	*2437.00	94.60 AV			1.41 H	313	62.12	32.48
7	2483.50	60.56 PK	74.00	-13.44	1.13 H	83	27.90	32.66
8	2483.50	48.26 AV	54.00	-5.74	1.13 H	83	15.60	32.66
9	2499.50	62.14 PK	74.00	-11.86	1.06 H	286	29.41	32.73
10	2499.50	50.79 AV	54.00	-3.21	1.06 H	286	18.06	32.73
11	4874.00	51.97 PK	74.00	-22.03	1.40 H	12	13.29	38.67
12	4874.00	39.25 AV	54.00	-14.75	1.40 H	12	0.57	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2375.00	69.03 PK	74.00	-4.97	1.06 V	69	36.80	32.23
2	2375.00	52.93 AV	54.00	-1.07	1.06 V	69	20.70	32.23
3	2390.00	69.23 PK	74.00	-4.77	1.38 V	119	36.94	32.29
4	2390.00	52.98 AV	54.00	-1.02	1.38 V	119	20.69	32.29
5	*2437.00	112.87 PK			1.20 V	351	80.39	32.48
6	*2437.00	101.60 AV			1.20 V	351	69.12	32.48
7	2483.50	66.91 PK	74.00	-7.09	1.00 V	288	34.25	32.66
8	2483.50	52.96 AV	54.00	-1.04	1.00 V	288	20.30	32.66
9	2499.50	64.25 PK	74.00	-9.75	1.02 V	65	31.52	32.73
10	2499.50	52.96 AV	54.00	-1.04	1.02 V	65	20.23	32.73
11	4874.00	50.68 PK	74.00	-23.32	1.03 V	320	12.00	38.67
12	4874.00	37.58 AV	54.00	-16.42	1.03 V	320	-1.10	38.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	50.39 PK	82.81	-32.42	1.16 H	330	19.70	30.69
2	#2000.00	46.10 AV	72.60	-26.50	1.16 H	330	15.41	30.69
3	2390.00	65.93 PK	74.00	-8.07	1.06 H	122	33.64	32.29
4	2390.00	50.10 AV	54.00	-3.90	1.06 H	122	17.81	32.29
5	*2452.00	102.81 PK			1.11 H	72	70.27	32.54
6	*2452.00	92.60 AV			1.11 H	72	60.06	32.54
7	2483.50	60.46 PK	74.00	-13.54	1.12 H	338	27.80	32.66
8	2483.50	49.90 AV	54.00	-4.10	1.12 H	338	17.24	32.66
9	2499.50	61.36 PK	74.00	-12.64	1.07 H	317	28.63	32.73
10	2499.50	50.17 AV	54.00	-3.83	1.07 H	317	17.44	32.73
11	4904.00	50.34 PK	74.00	-23.66	1.03 H	289	11.60	38.74
12	4904.00	36.97 AV	54.00	-17.03	1.03 H	289	-1.77	38.74

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. "#":The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1000hPa	TESTED BY	Sun Lin

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2000.00	50.39 PK	89.58	-39.19	1.20 V	313	19.70	30.69
2	#2000.00	47.85 AV	78.44	-30.59	1.20 V	313	17.16	30.69
3	2390.00	67.01 PK	74.00	-6.99	1.23 V	63	34.72	32.29
4	2390.00	52.93 AV	54.00	-1.07	1.23 V	63	20.64	32.29
5	*2452.00	109.58 PK			1.34 V	115	77.04	32.54
6	*2452.00	98.44 AV			1.34 V	115	65.90	32.54
7	2483.50	65.88 PK	74.00	-8.12	1.86 V	286	33.22	32.66
8	2483.50	52.96 AV	54.00	-1.04	1.86 V	286	20.30	32.66
9	2499.50	64.36 PK	74.00	-9.64	1.11 V	236	31.63	32.73
10	2499.50	52.98 AV	54.00	-1.02	1.11 V	236	20.25	32.73
11	4904.00	49.79 PK	74.00	-24.21	1.17 V	103	11.05	38.74
12	4904.00	37.22 AV	54.00	-16.78	1.17 V	103	-1.52	38.74

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.

BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 999hPa	TESTED BY	Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	127.11	39.47 QP	43.50	-4.03	2.00 H	301	26.95	12.52
2	255.44	40.44 QP	46.00	-5.56	1.00 H	301	26.63	13.81
3	374.04	37.33 QP	46.00	-8.67	1.00 H	310	20.67	16.65
4	625.04	44.94 QP	46.00	-1.06	1.20 H	113	21.29	23.65
5	751.23	40.32 QP	46.00	-5.68	1.00 H	235	14.45	25.87
6	875.67	42.08 QP	46.00	-3.92	1.00 H	10	14.38	27.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	56.12	38.75 QP	40.00	-1.25	1.25 V	142	24.83	13.92
2	127.11	39.56 QP	43.50	-3.94	1.25 V	145	27.04	12.52
3	374.04	41.15 QP	46.00	-4.85	1.50 V	277	24.50	16.65
4	500.00	44.81 QP	46.00	-1.19	1.00 V	219	24.32	20.49
5	624.85	44.44 QP	46.00	-1.56	1.00 V	79	20.80	23.64
6	875.05	44.92 QP	46.00	-1.08	1.12 V	72	17.22	27.70
7	897.05	42.67 QP	46.00	-3.33	2.00 V	244	14.63	28.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Cond_ V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

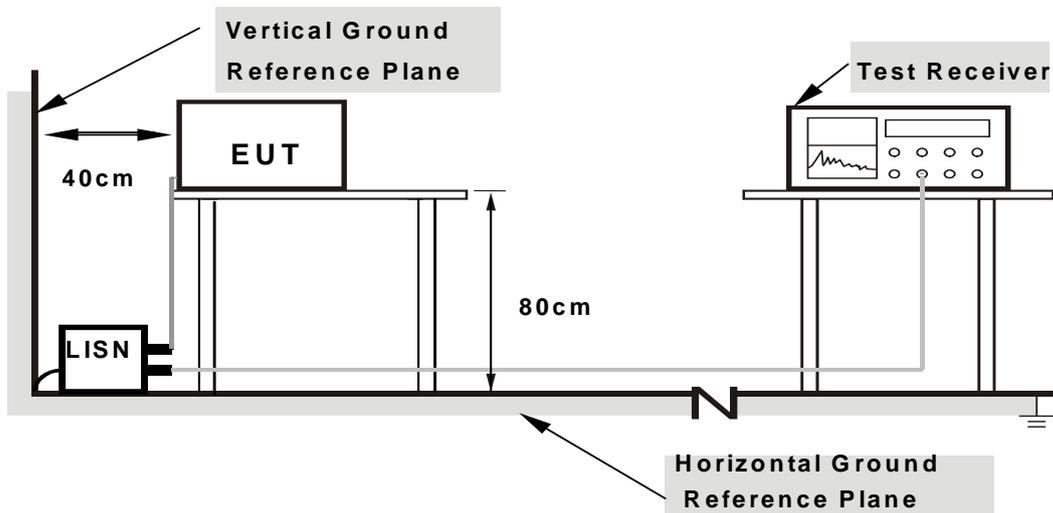

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa	TESTED BY	Sun Lin

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.13	38.76	-	38.89	-	65.38	55.38	-26.49	-
2	0.252	0.13	33.33	-	33.46	-	61.71	51.71	-28.24	-
3	0.314	0.14	40.24	-	40.38	-	59.86	49.86	-19.49	-
4	0.552	0.15	25.14	-	25.29	-	56.00	46.00	-30.71	-
5	0.849	0.17	29.59	-	29.76	-	56.00	46.00	-26.24	-
6	1.191	0.19	27.63	-	27.82	-	56.00	46.00	-28.18	-
7	17.082	0.60	32.50	-	33.10	-	60.00	50.00	-26.90	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

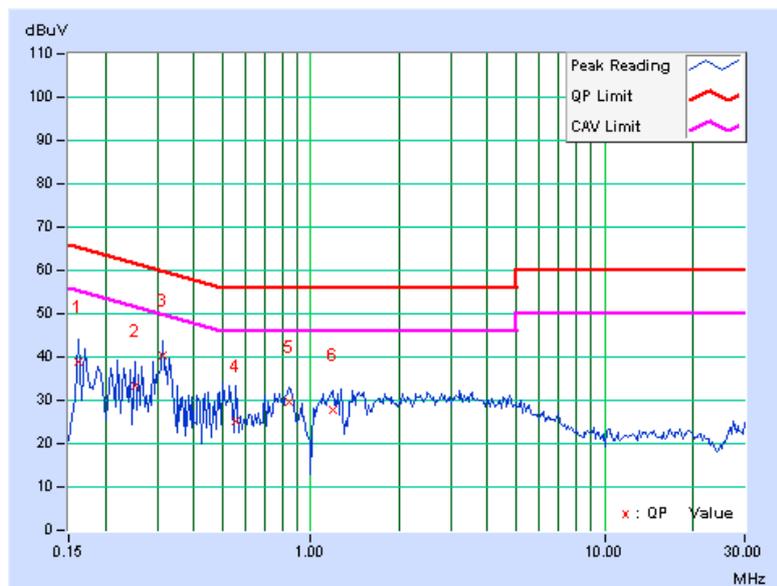




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa	TESTED BY	Sun Lin

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.14	38.27	-	38.41	-	65.79	55.79	-27.38	-
2	0.173	0.14	37.68	-	37.82	-	64.79	54.79	-26.97	-
3	0.228	0.15	34.47	-	34.62	-	62.52	52.52	-27.90	-
4	0.315	0.16	44.69	-	44.85	-	59.83	49.83	-14.99	-
5	0.513	0.17	35.74	-	35.91	-	56.00	46.00	-20.09	-
6	0.857	0.19	34.46	-	34.65	-	56.00	46.00	-21.35	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

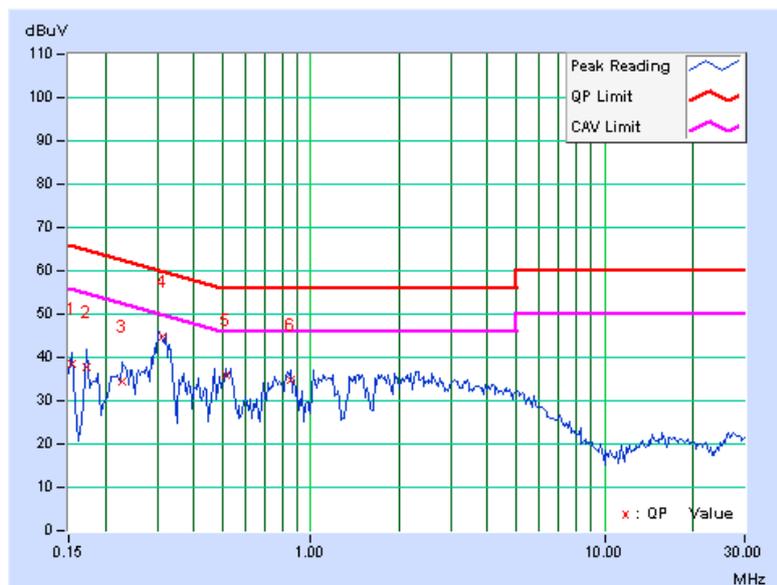

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

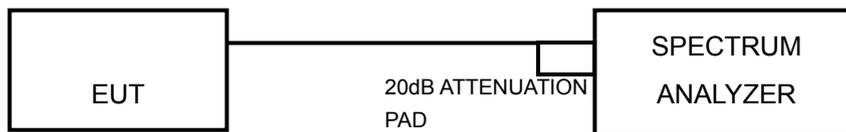

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b DSSS MODULATION


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.11	0.5	PASS
6	2437	12.13	0.5	PASS
11	2462	12.09	0.5	PASS




A D T

CH 1

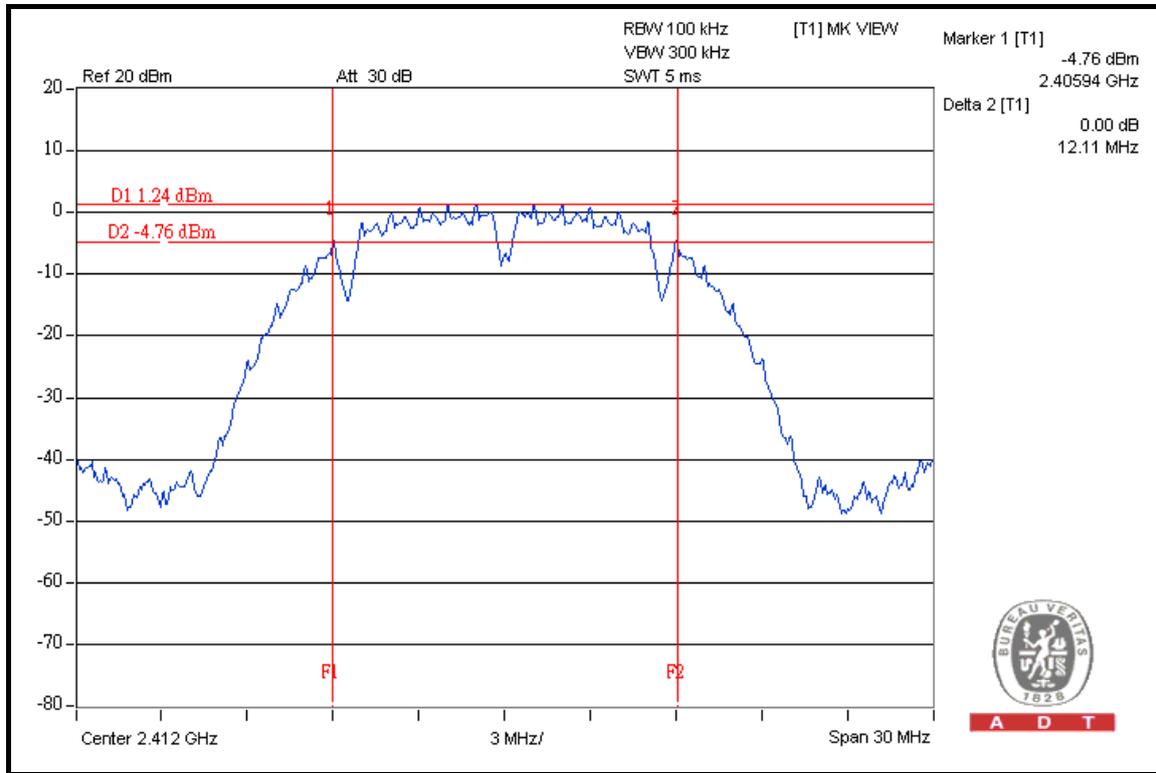


CH 6

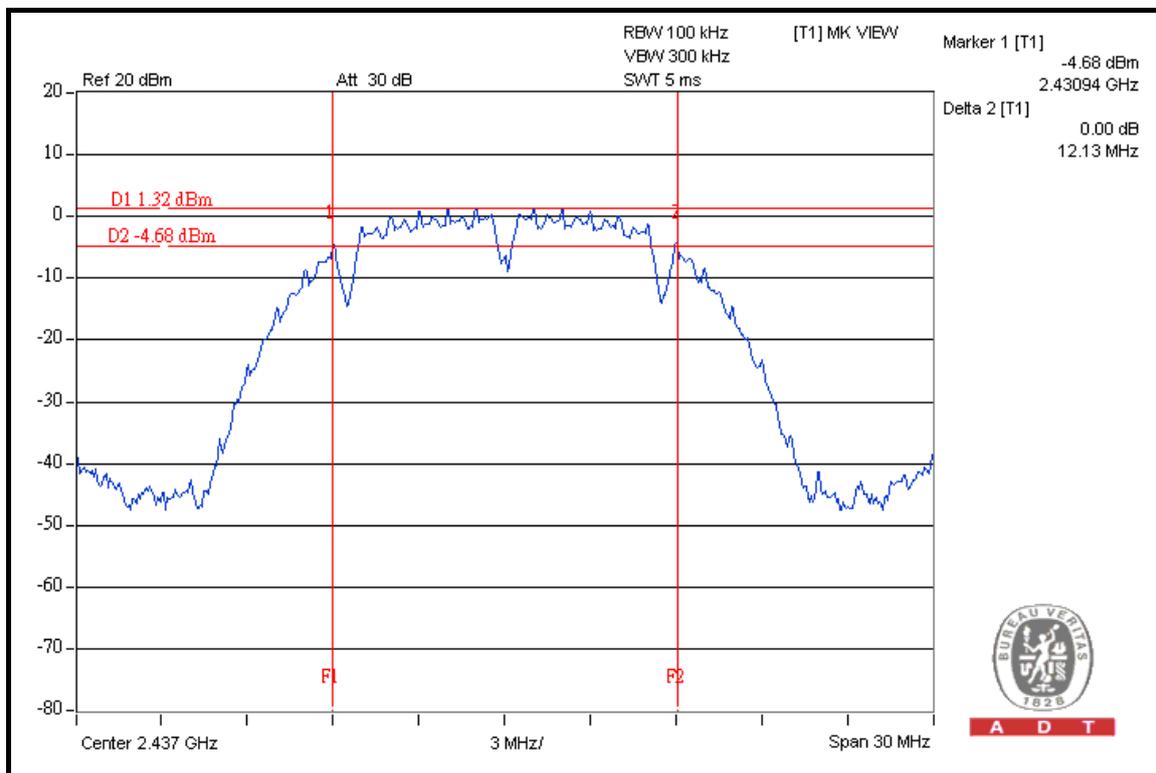



A D T

CH 11

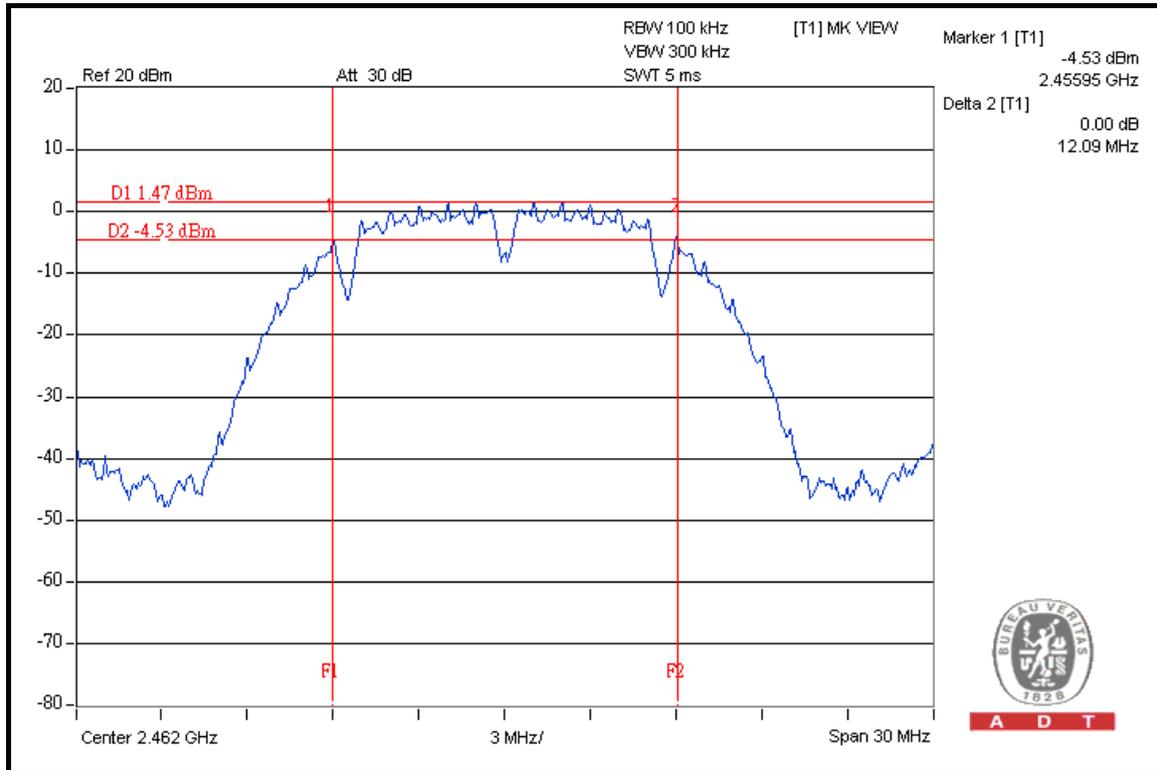



A D T

802.11g OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.52	0.5	PASS
6	2437	16.47	0.5	PASS
11	2462	16.48	0.5	PASS




A D T

CH 1

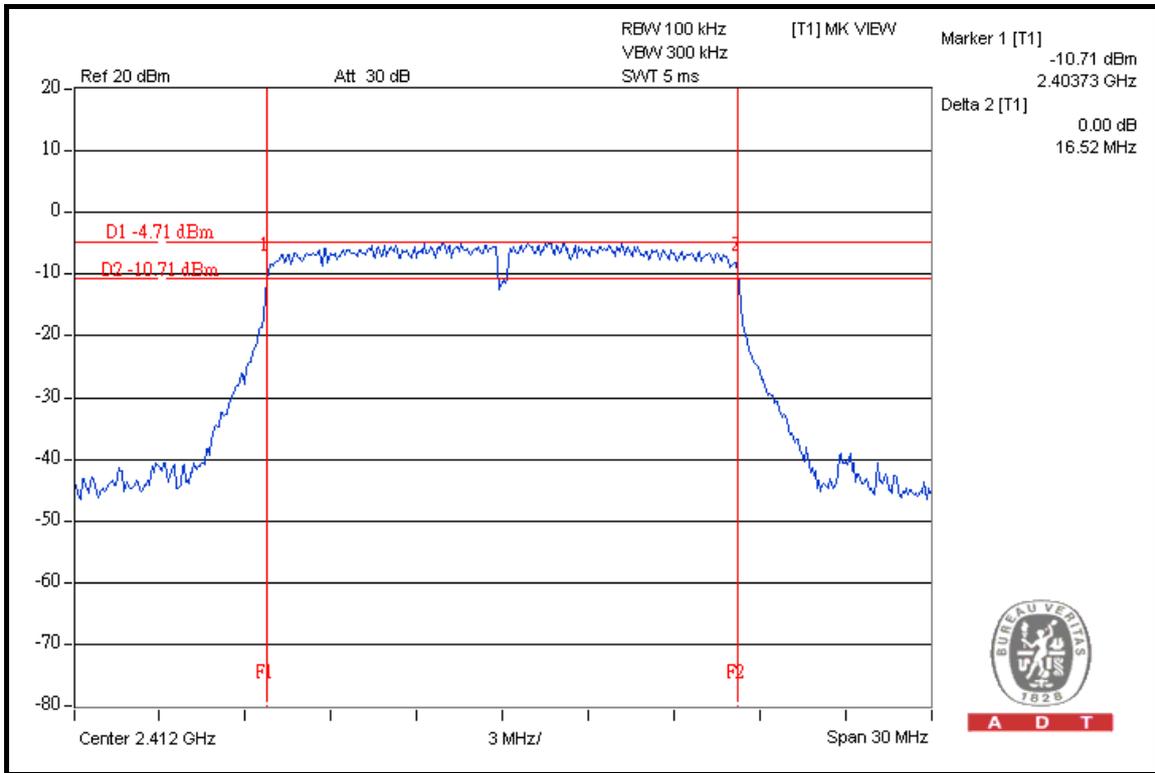


CH 6

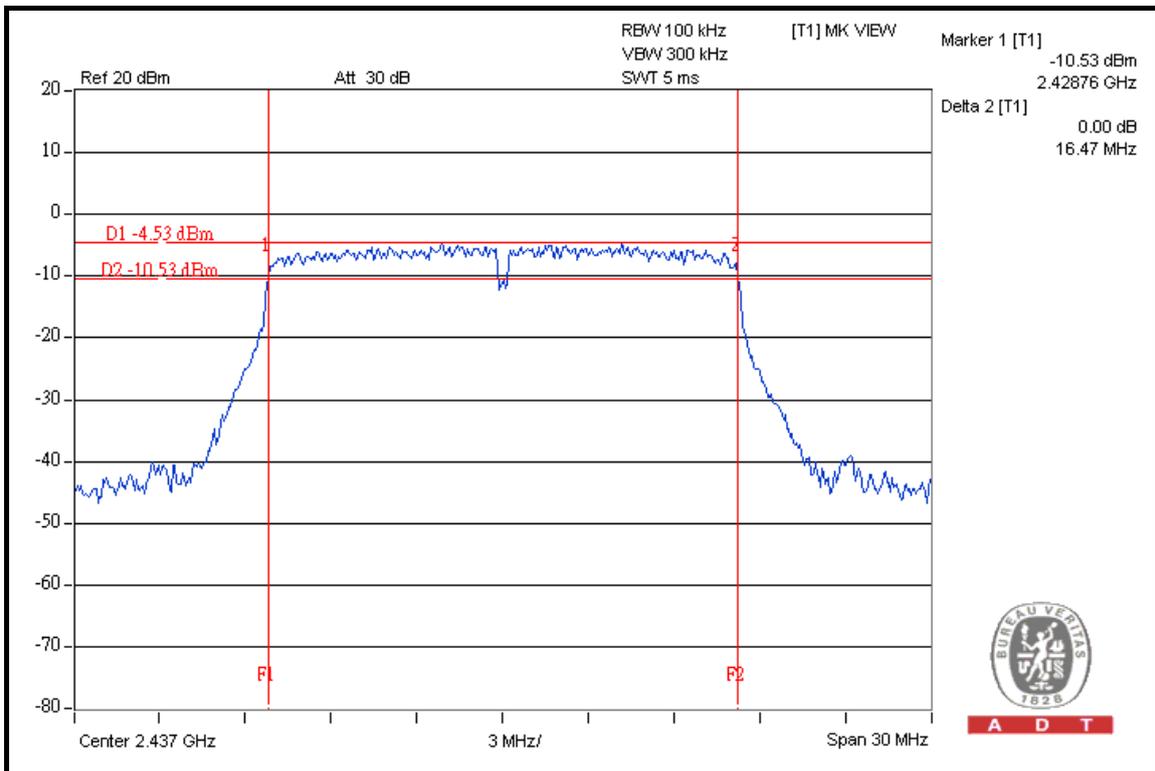



A D T

CH 11

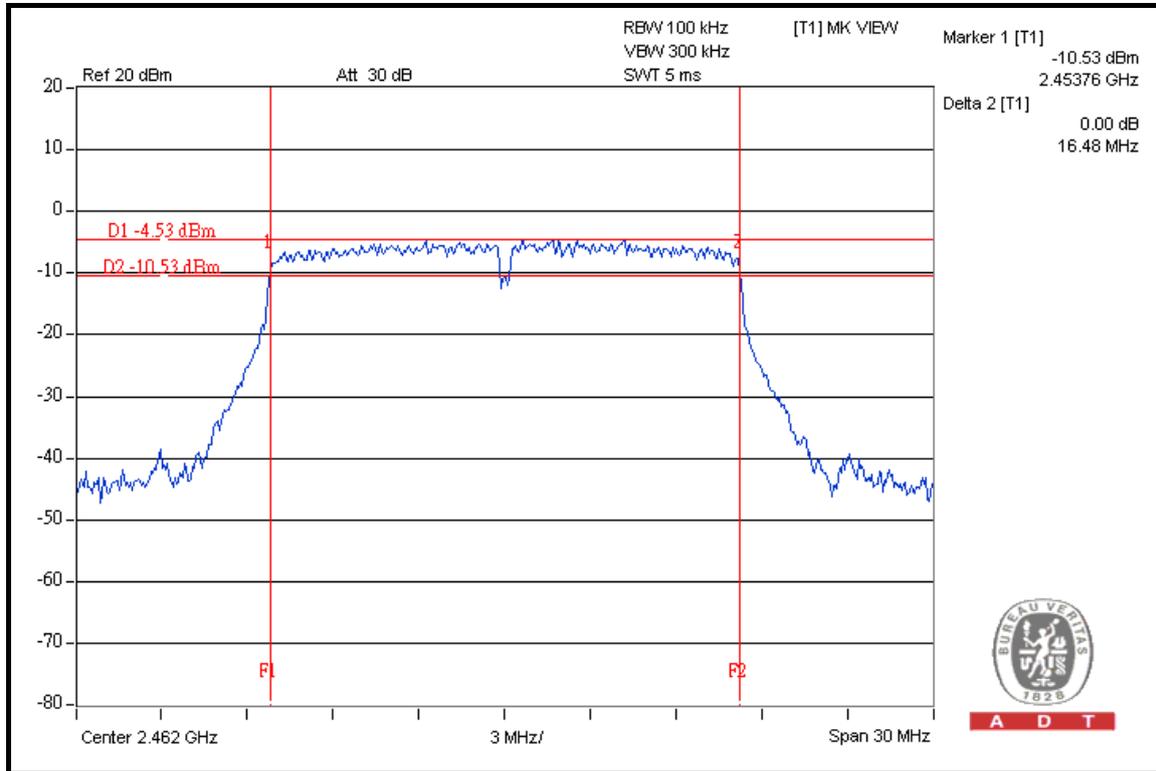

A D T



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.40	17.46	0.5	PASS
6	2437	16.59	17.63	0.5	PASS
11	2462	17.70	17.64	0.5	PASS




A D T

CH 11

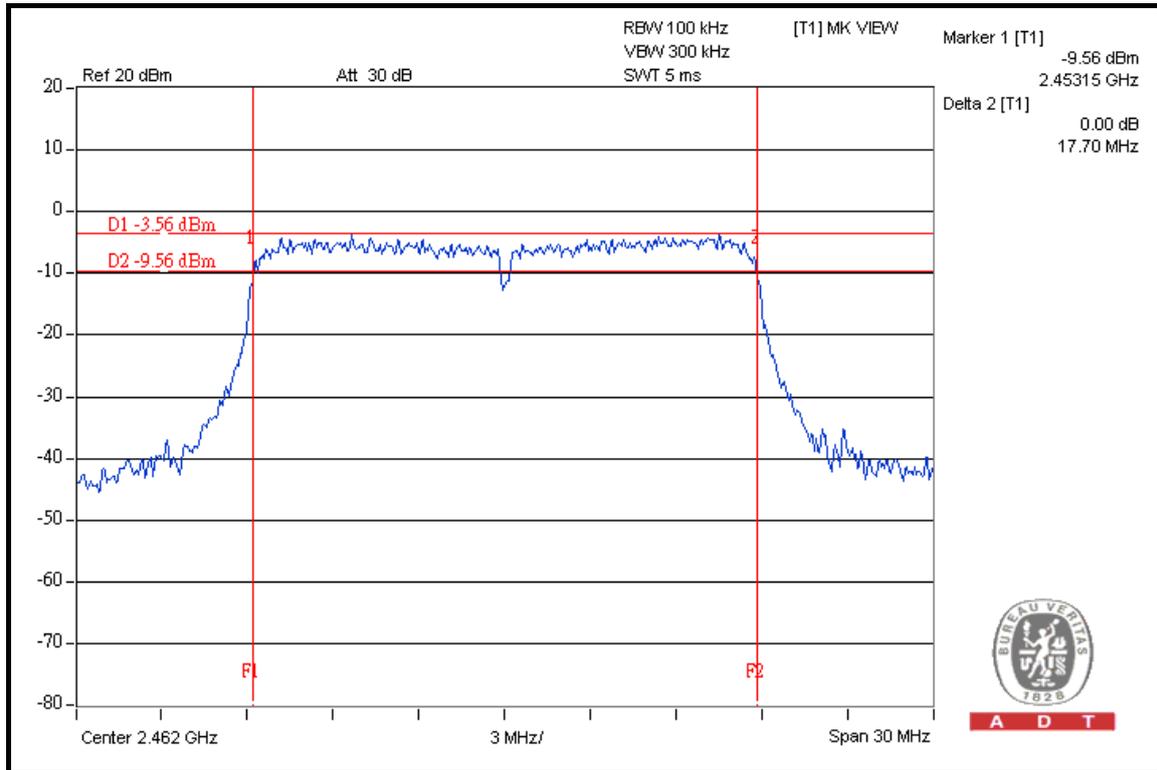

A D T

FOR CHAIN 1: CH 1

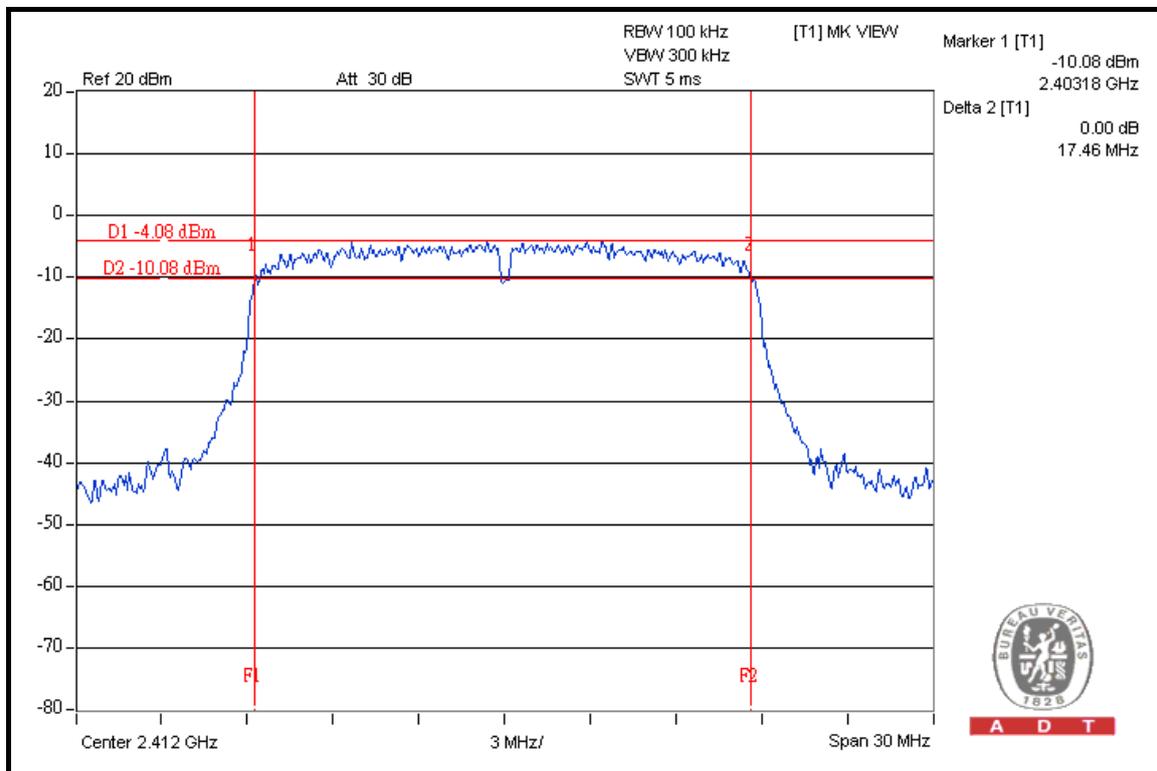


A D T




A D T

CH 6

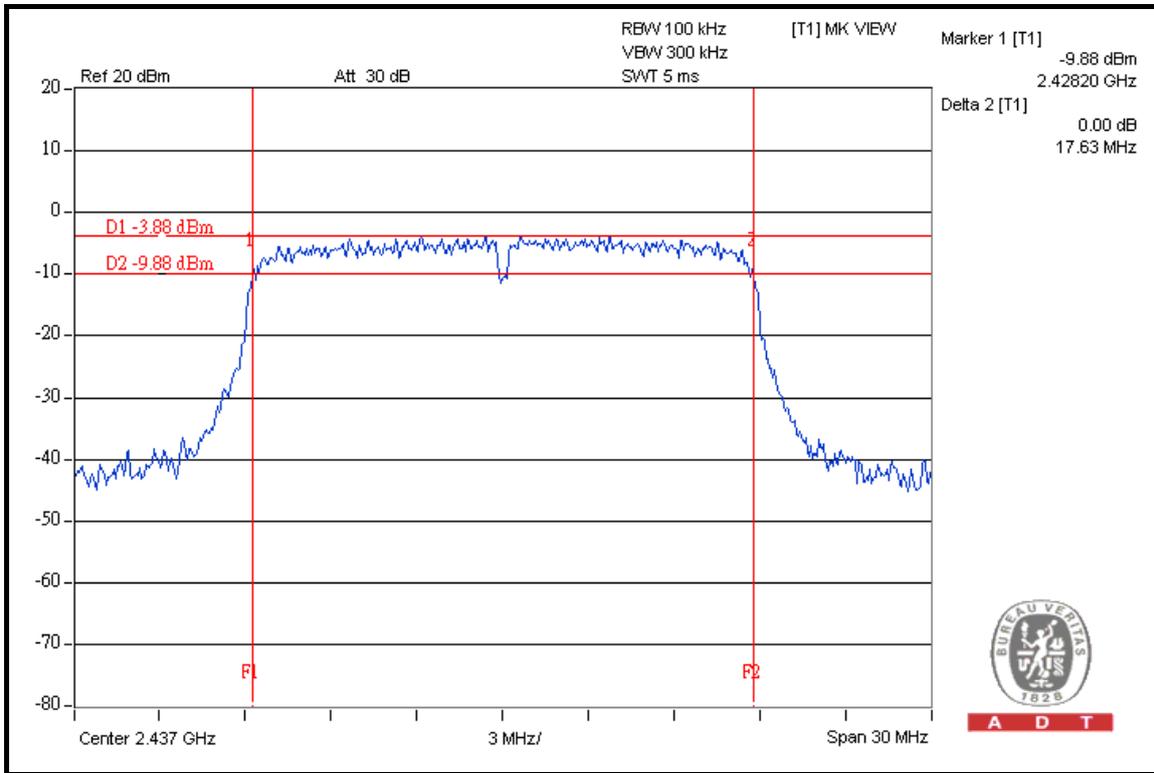

CH 11

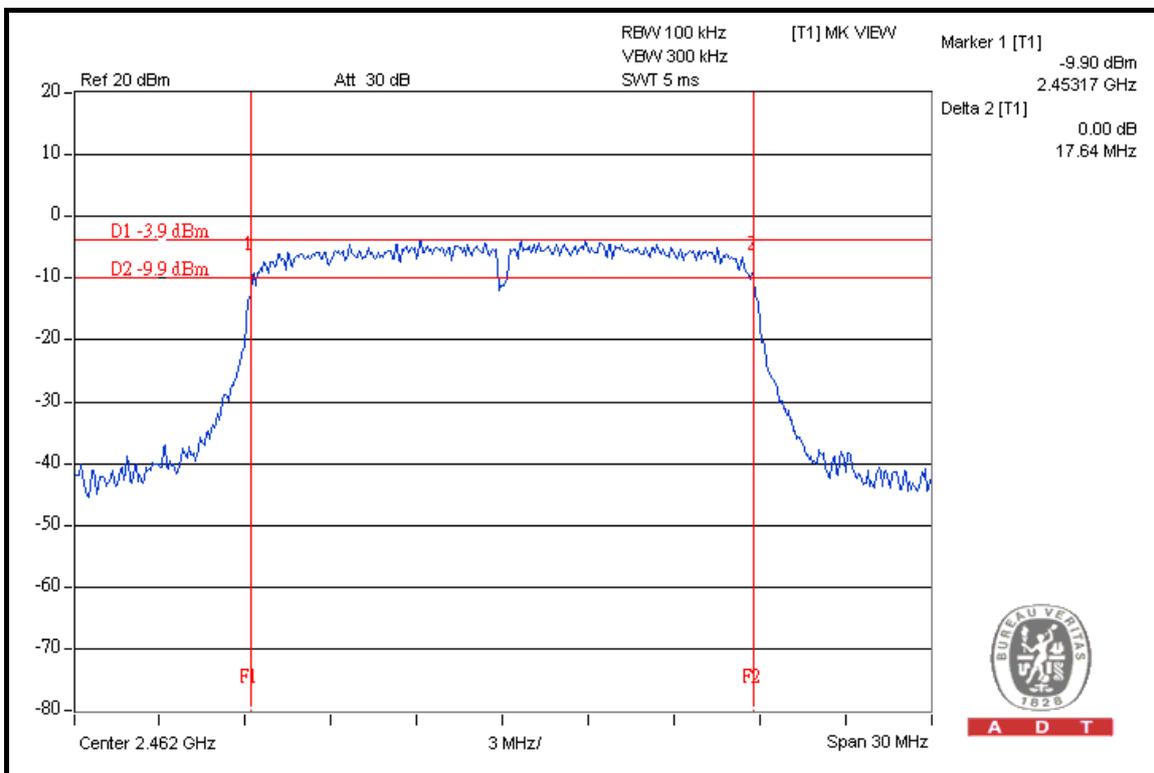



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2422	35.82	35.73	0.5	PASS
4	2437	35.84	36.43	0.5	PASS
7	2452	35.44	35.72	0.5	PASS




A D T

FOR CHAIN 0: CH 1

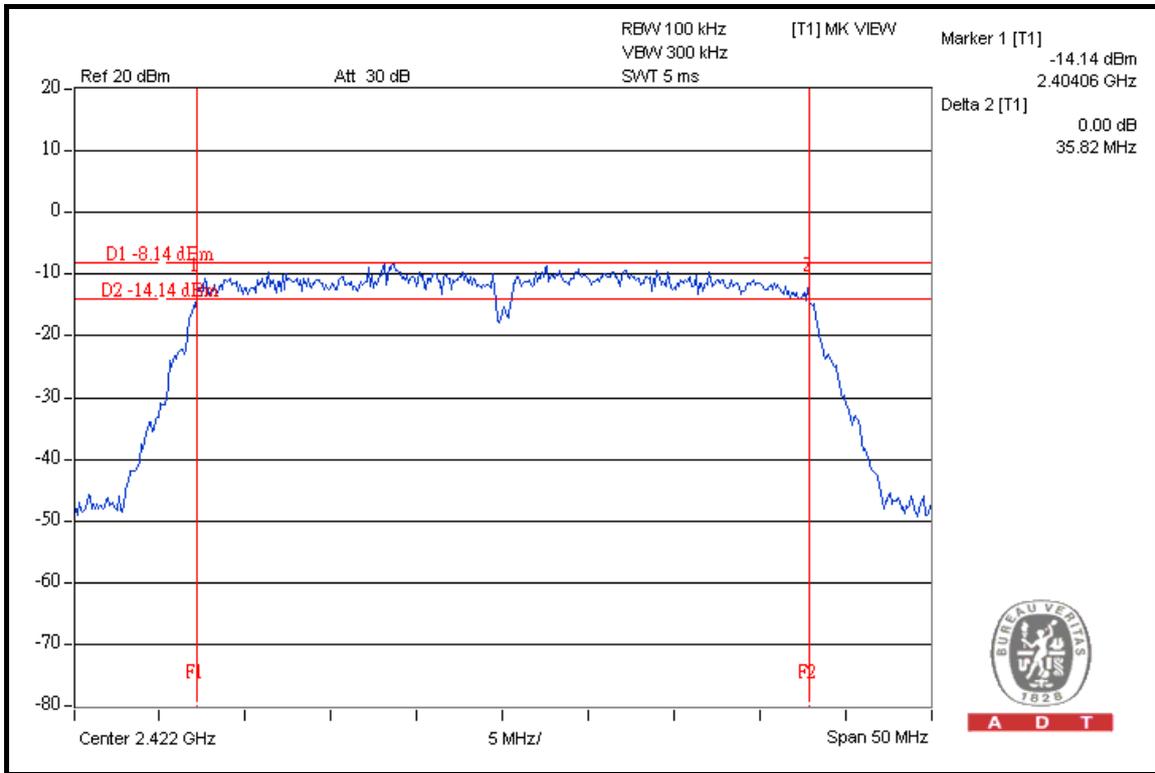


CH 4

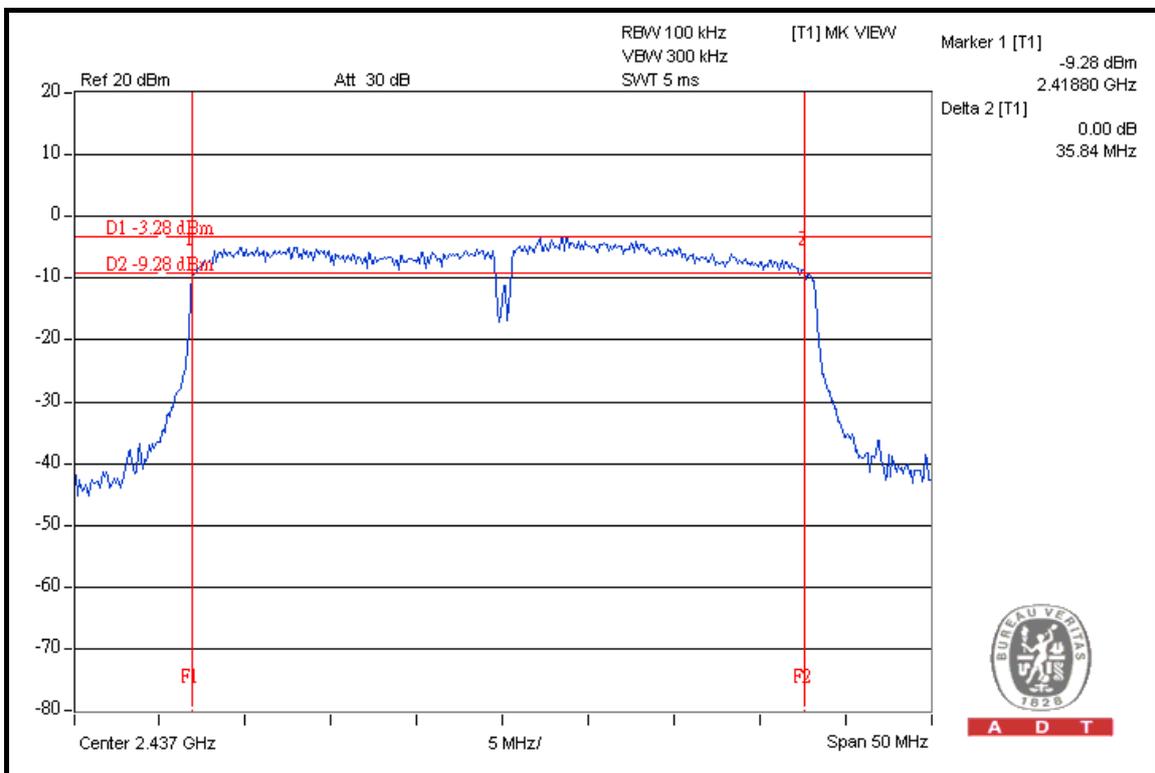




A D T

CH 7

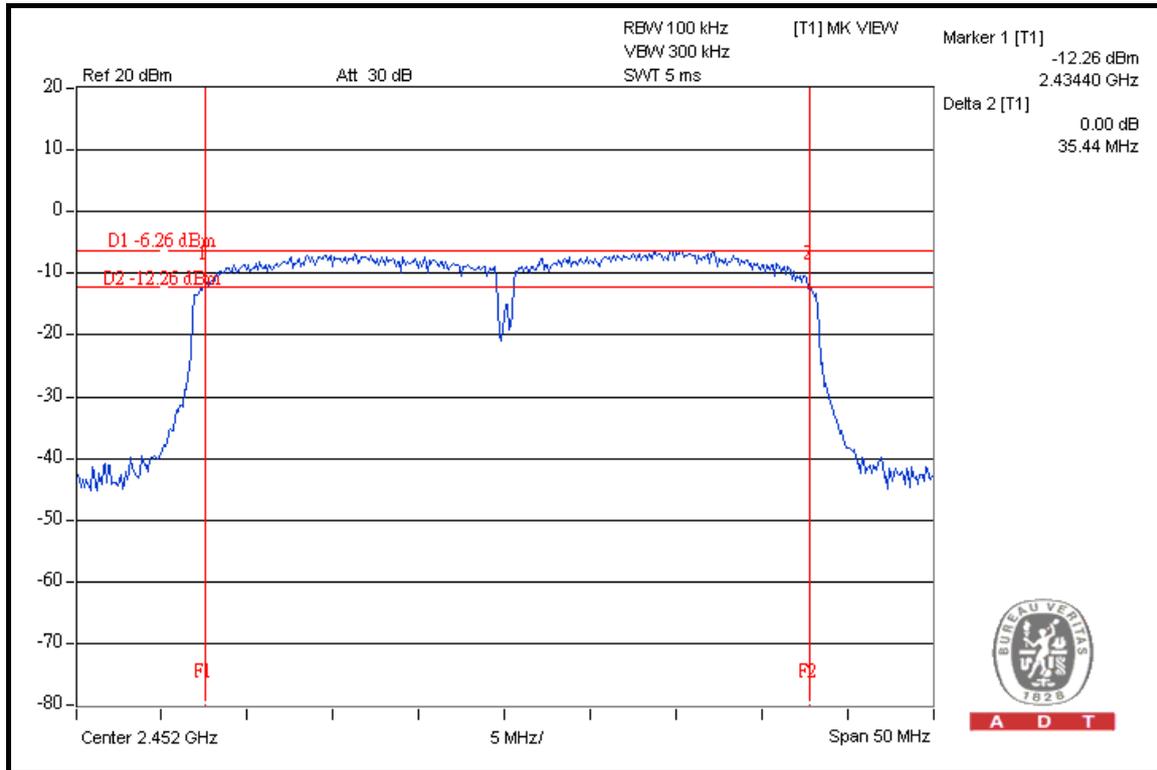


FOR CHAIN 1: CH 1

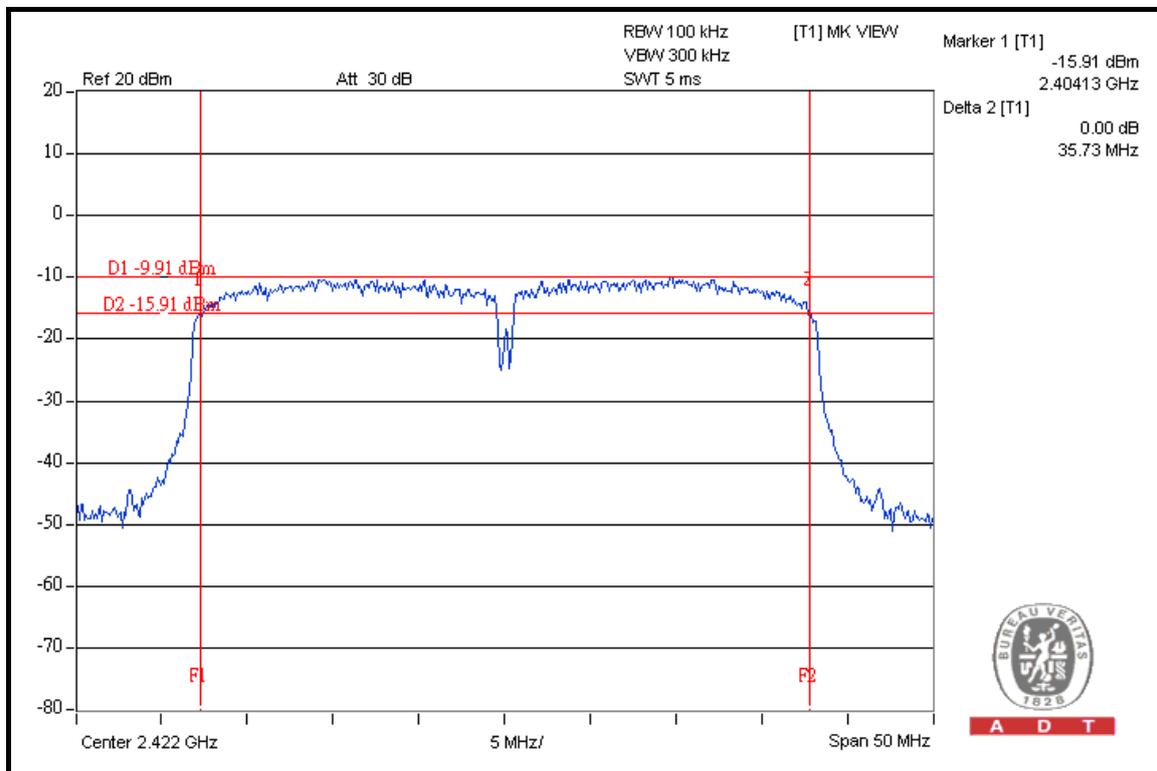




A D T

CH 4

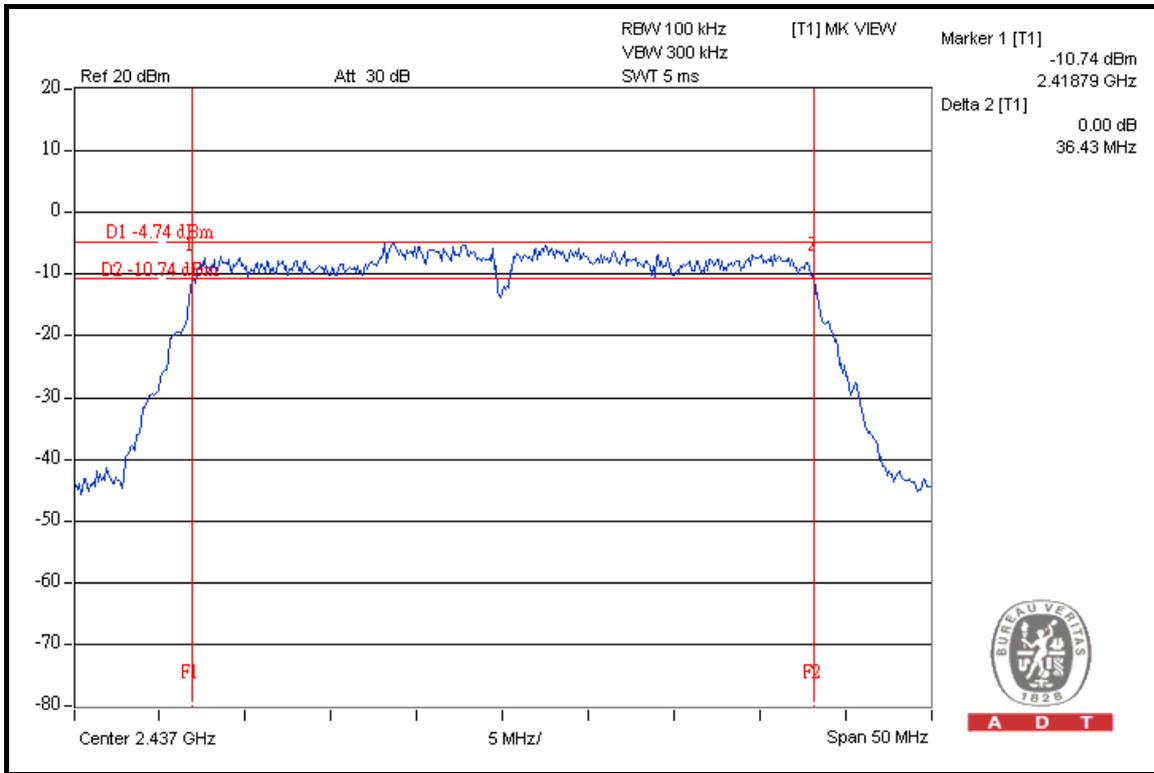

CH 7

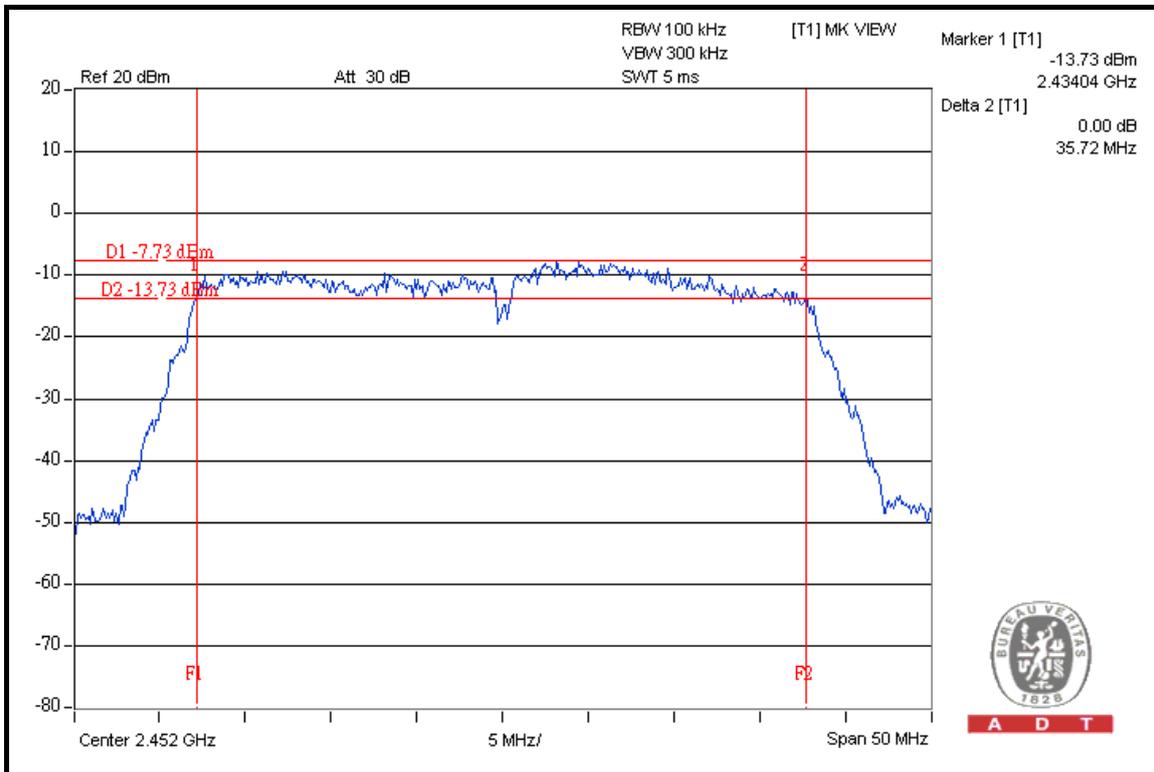

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
HIGH SPEED PEAK POWER METER	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
POWER SENSOR	MA2444B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

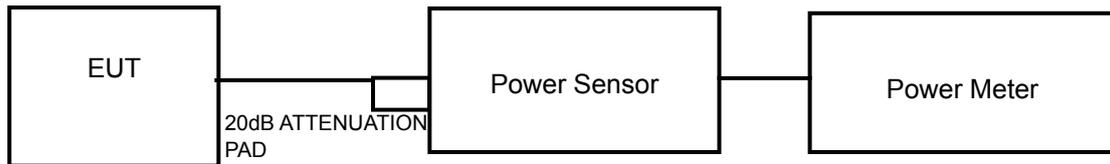

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.350	17.02	30	PASS
6	2437	50.816	17.06	30	PASS
11	2462	50.582	17.04	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	141.906	21.52	30	PASS
6	2437	142.233	21.53	30	PASS
11	2462	142.889	21.55	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	19.04	19.02	159.967	22.04	30	PASS
6	2437	19.02	19.01	159.415	22.03	30	PASS
11	2462	19.03	19.02	159.783	22.04	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	17.02	17.03	100.816	20.04	30	PASS
4	2437	22.03	22.02	318.809	25.04	30	PASS
7	2452	19.05	19.01	159.969	22.04	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

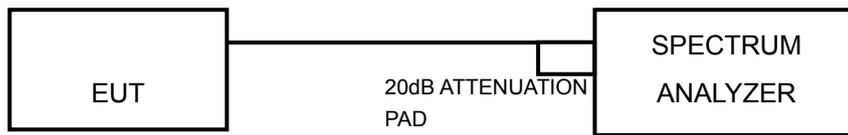

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T


4.5.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-16.85	8	PASS
6	2437	-16.77	8	PASS
11	2462	-16.64	8	PASS

CH 1

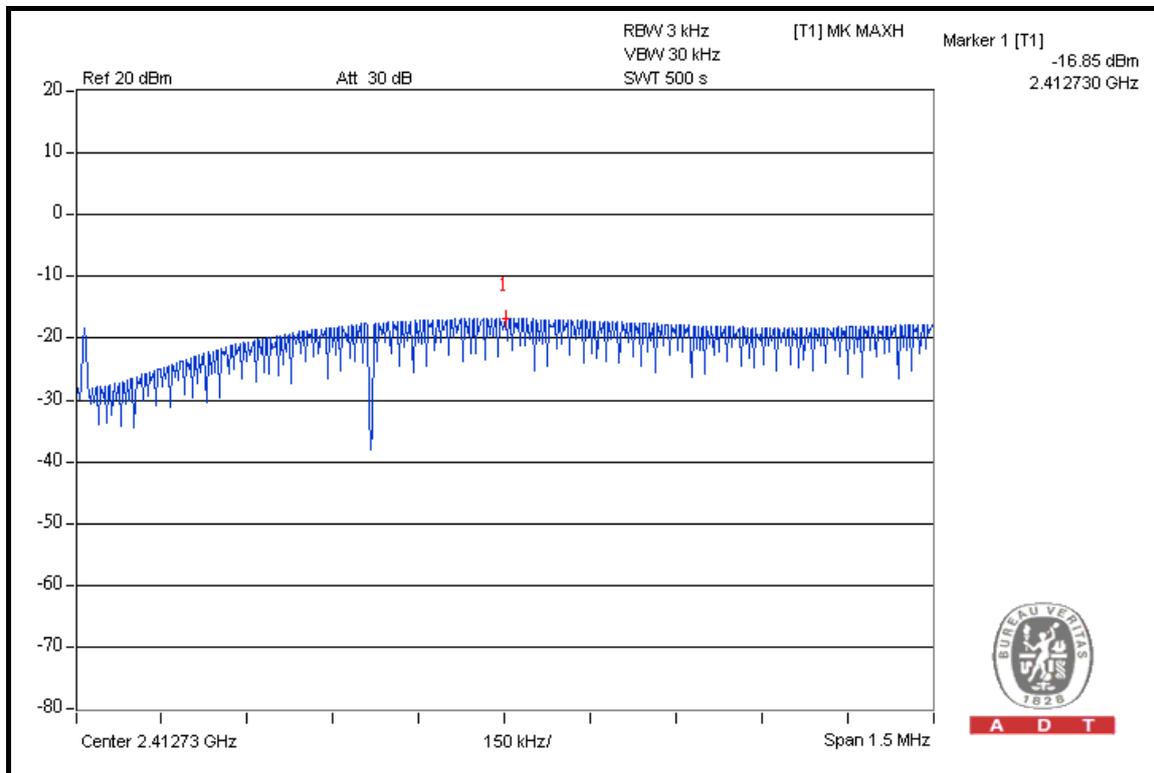


A D T




A D T

CH 6

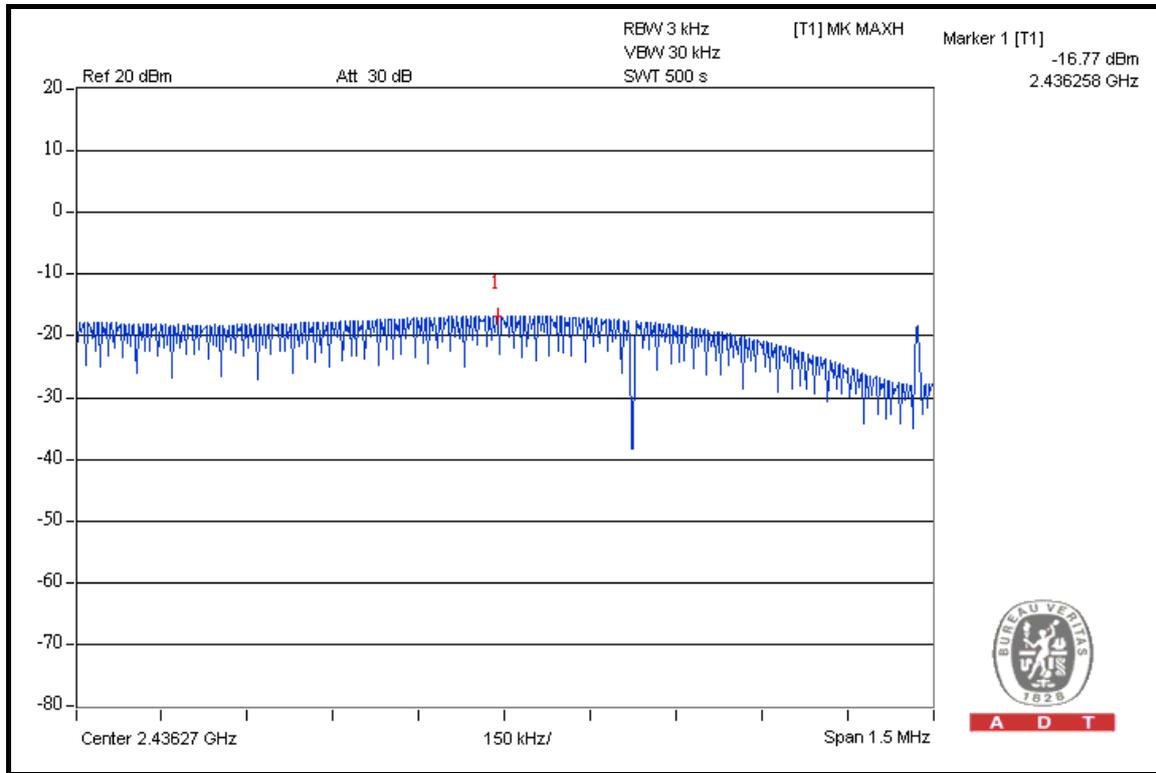

A D T

CH 11

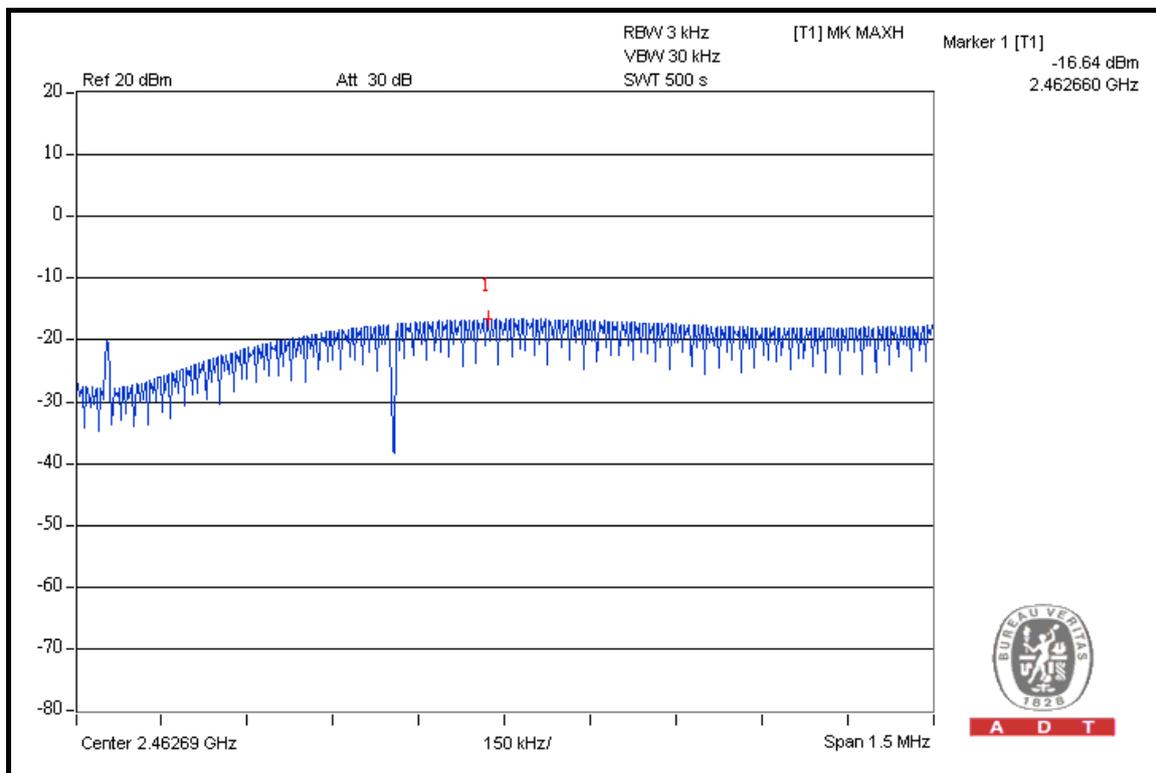

A D T




A D T

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-18.00	8	PASS
6	2437	-17.86	8	PASS
11	2462	-17.83	8	PASS

CH 1

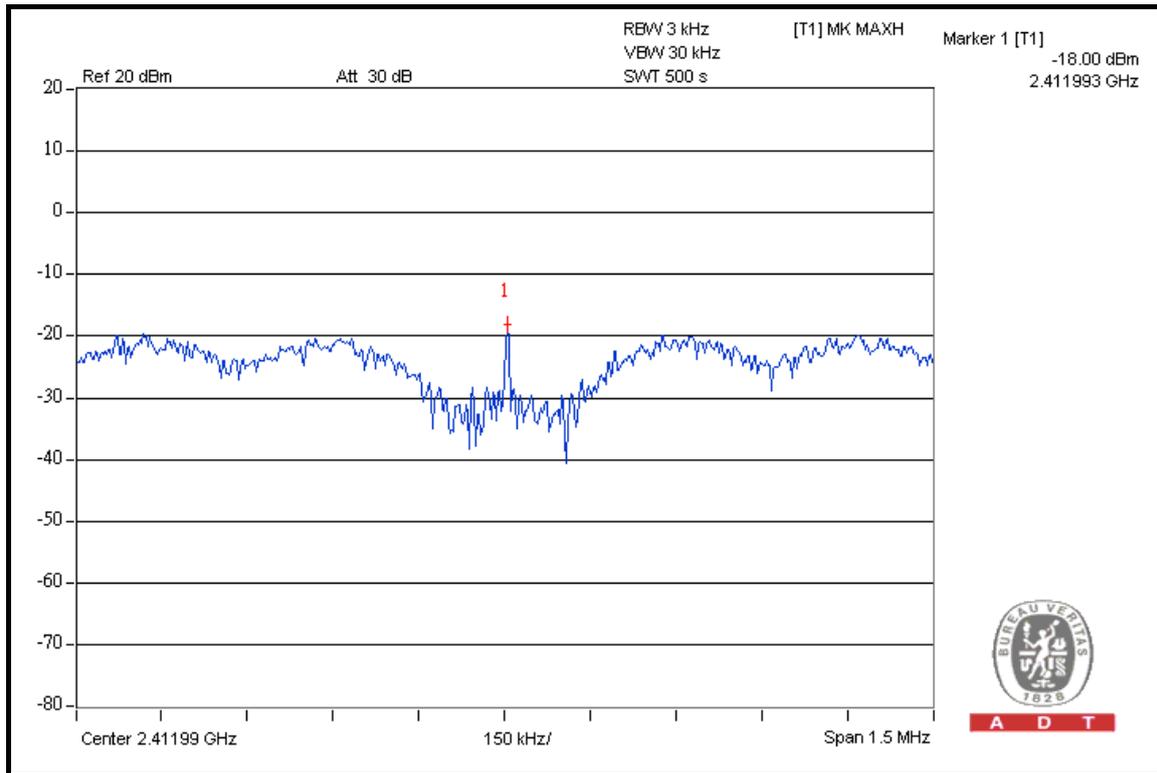


A D T




A D T

CH 6

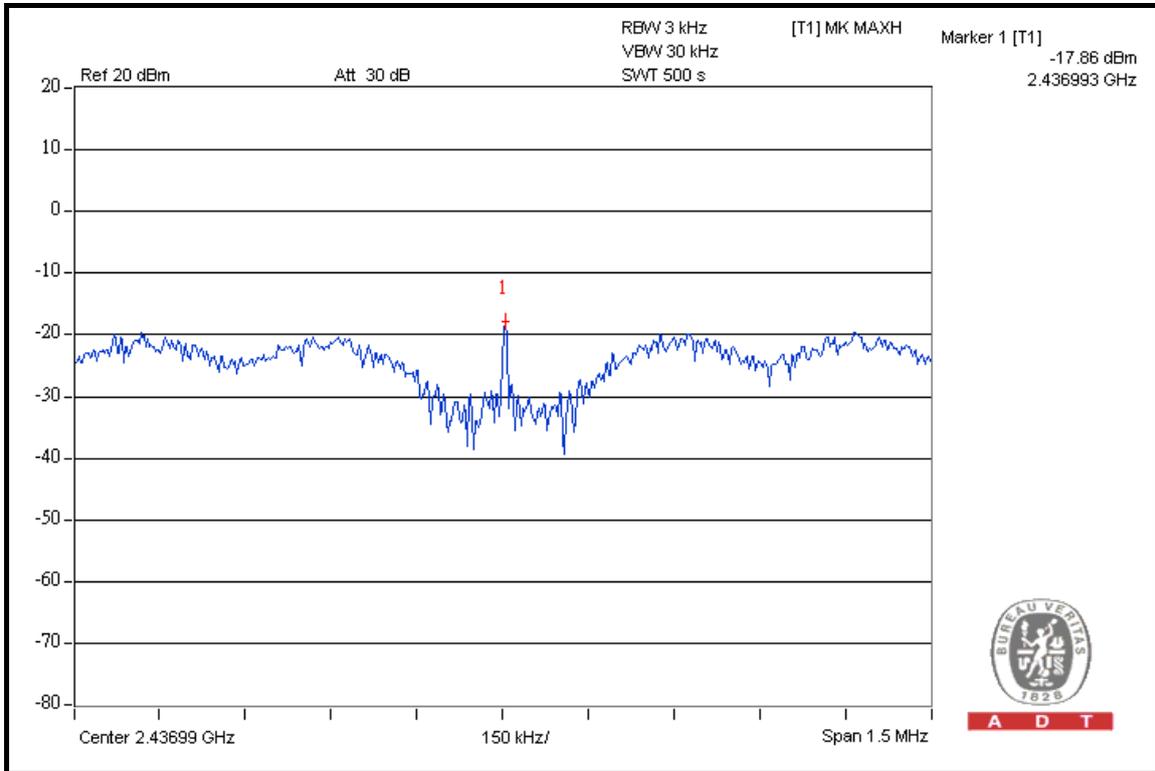

CH 11

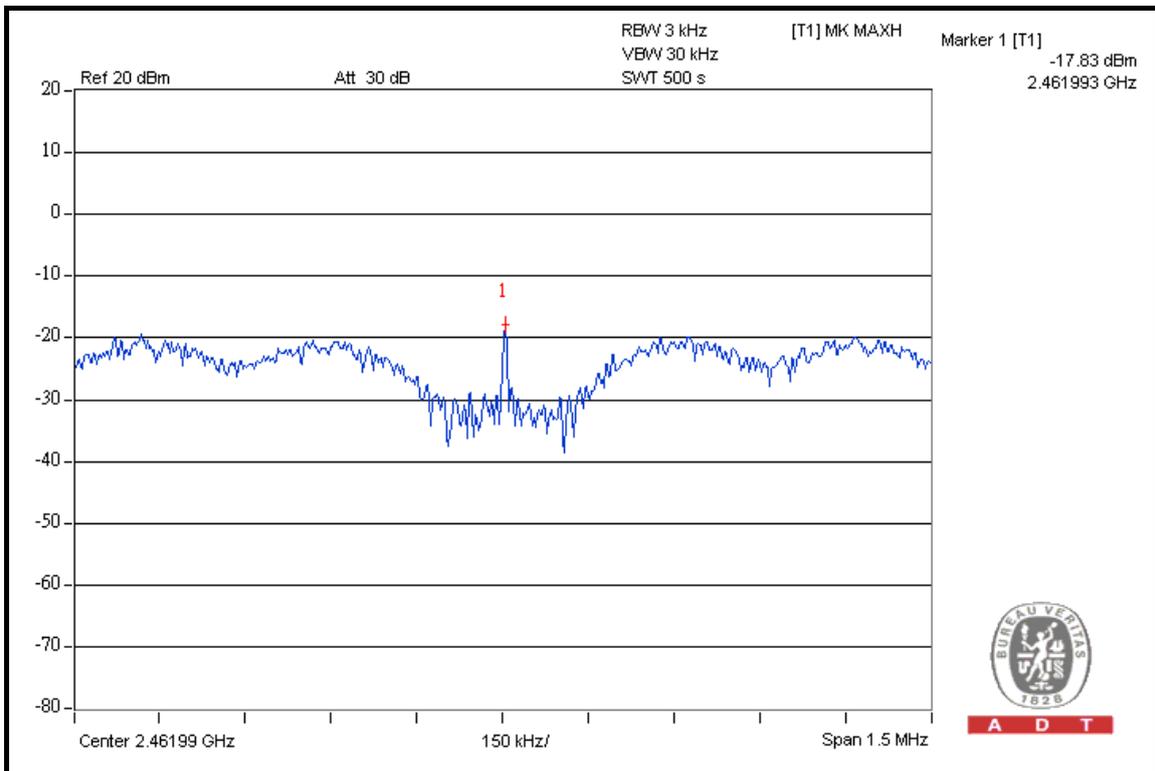



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-18.13	-16.46	0.038	-14.20	8	PASS
6	2437	-17.96	-16.61	0.038	-14.22	8	PASS
11	2462	-18.13	-16.65	0.037	-14.32	8	PASS




A D T

FOR CHAIN 0: CH 1

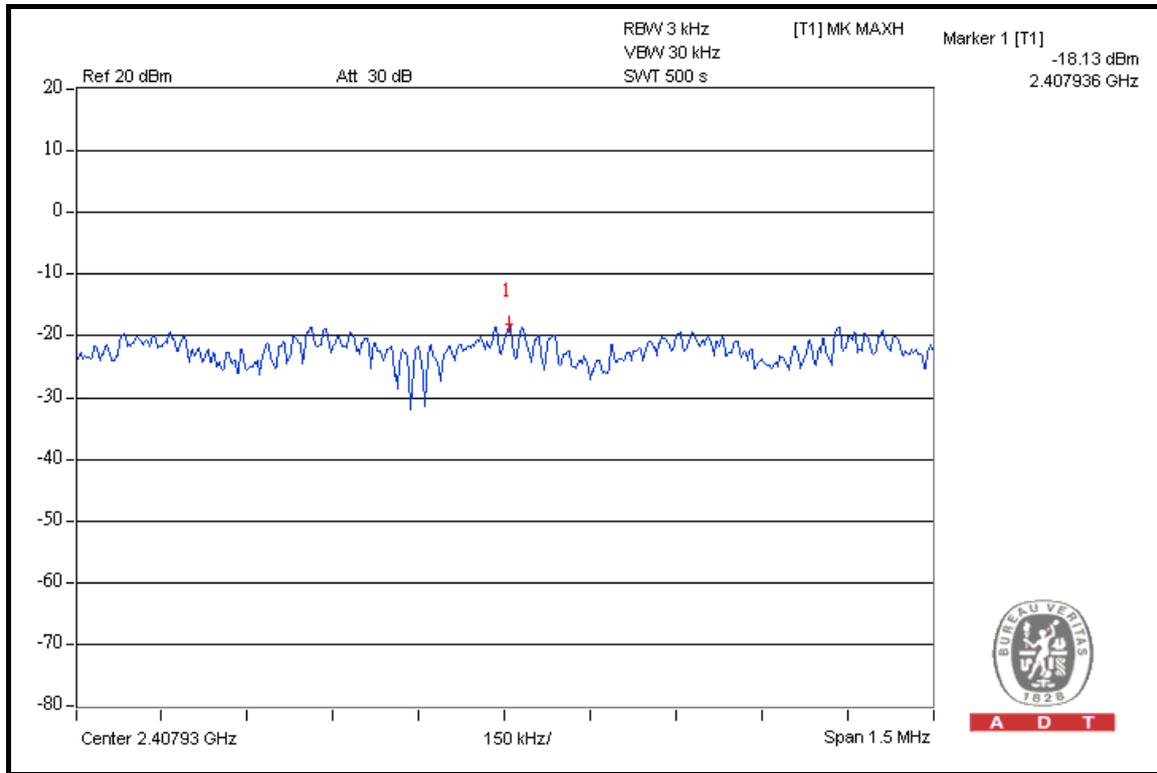


CH 6

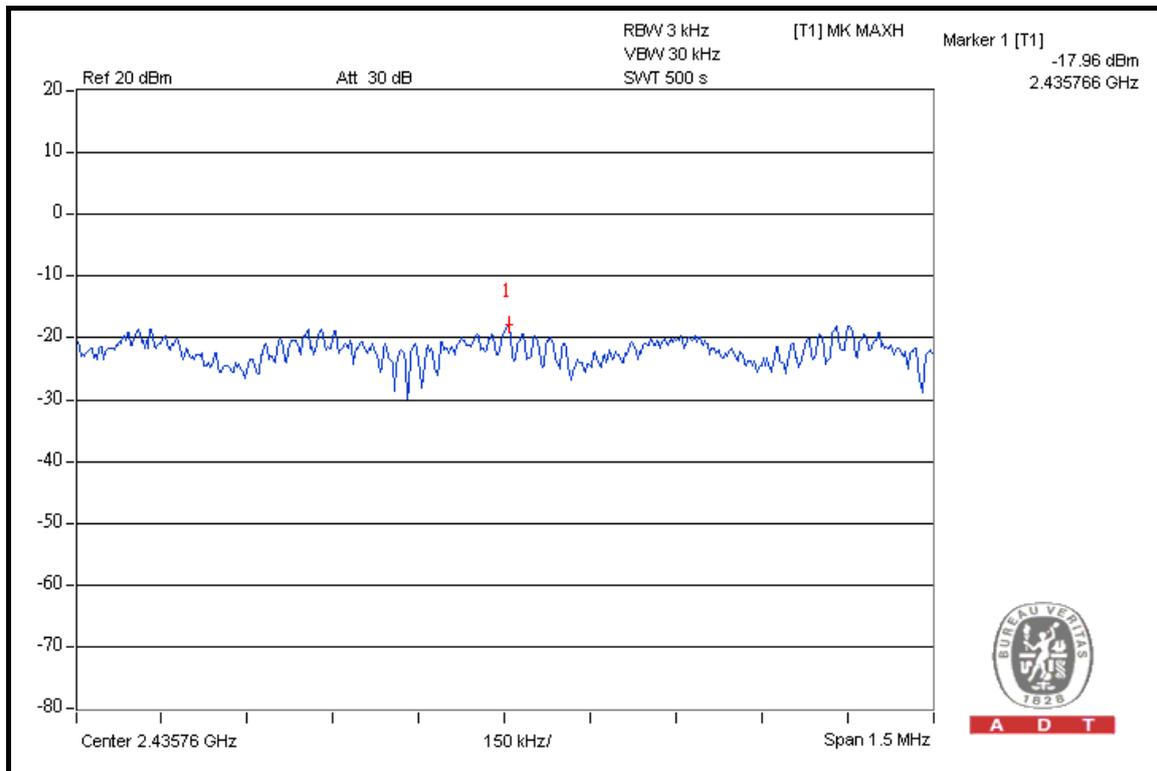




A D T

CH 11

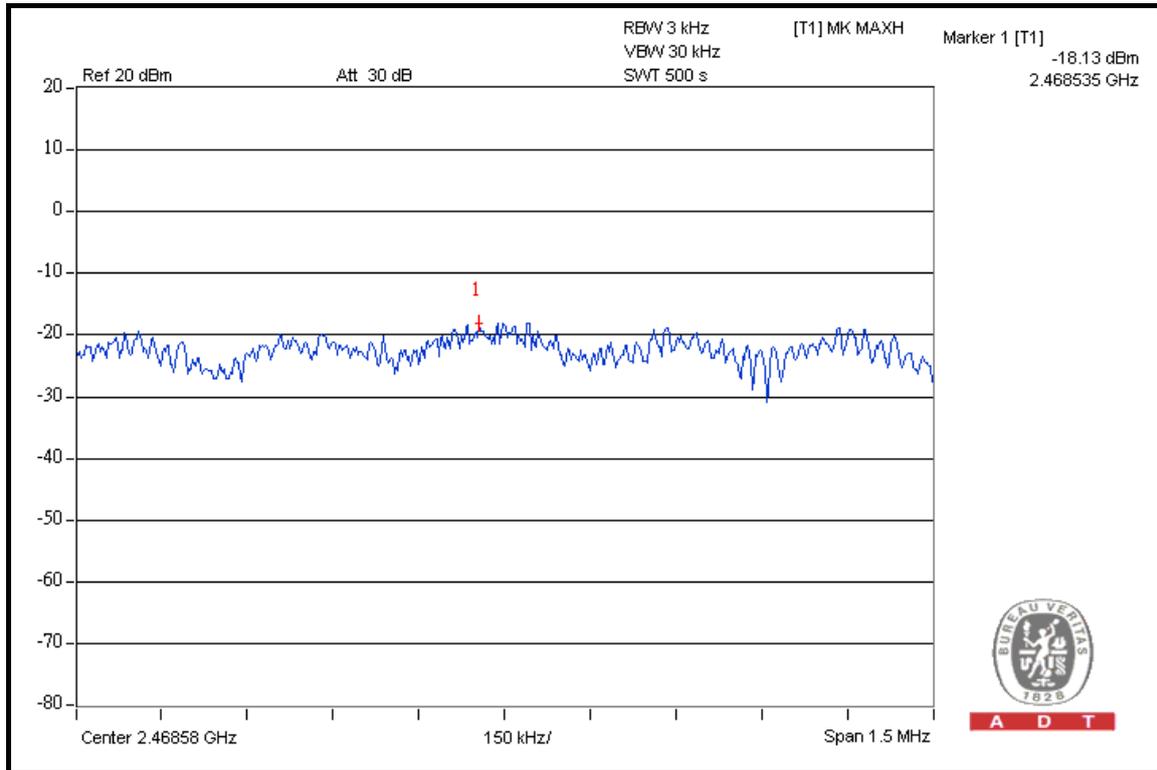

A D T

FOR CHAIN 1: CH 1

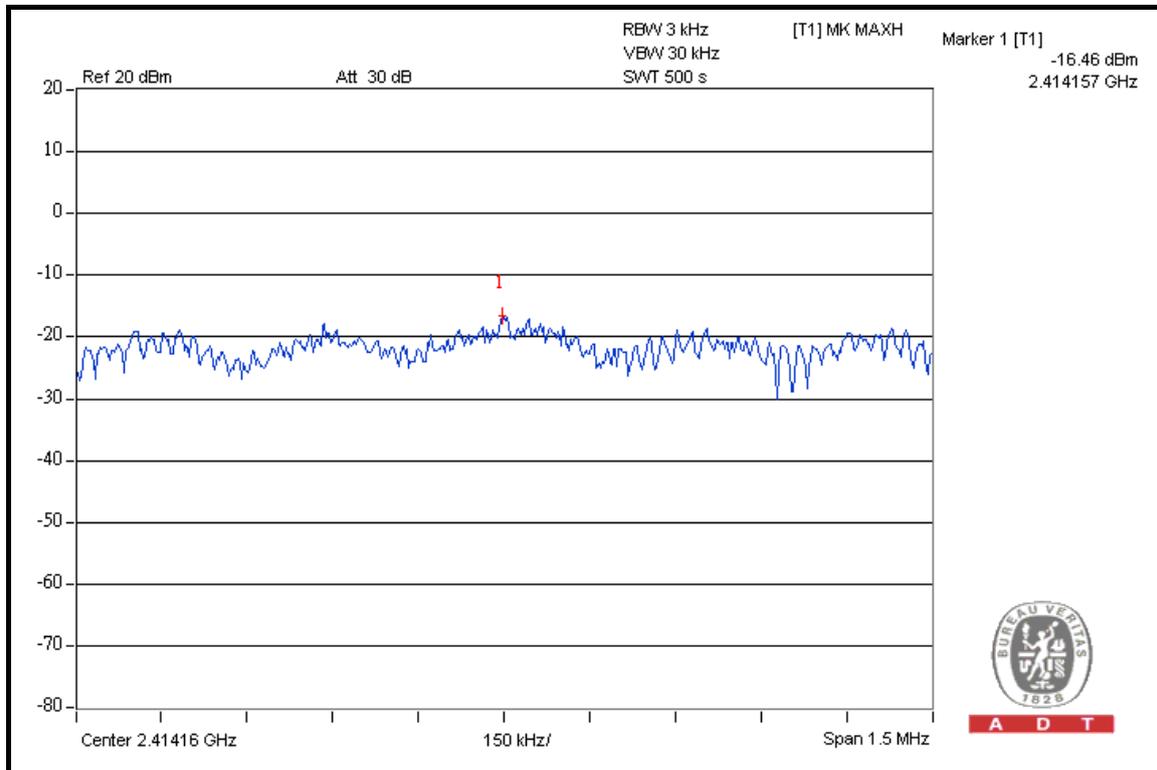


A D T




A D T

CH 6

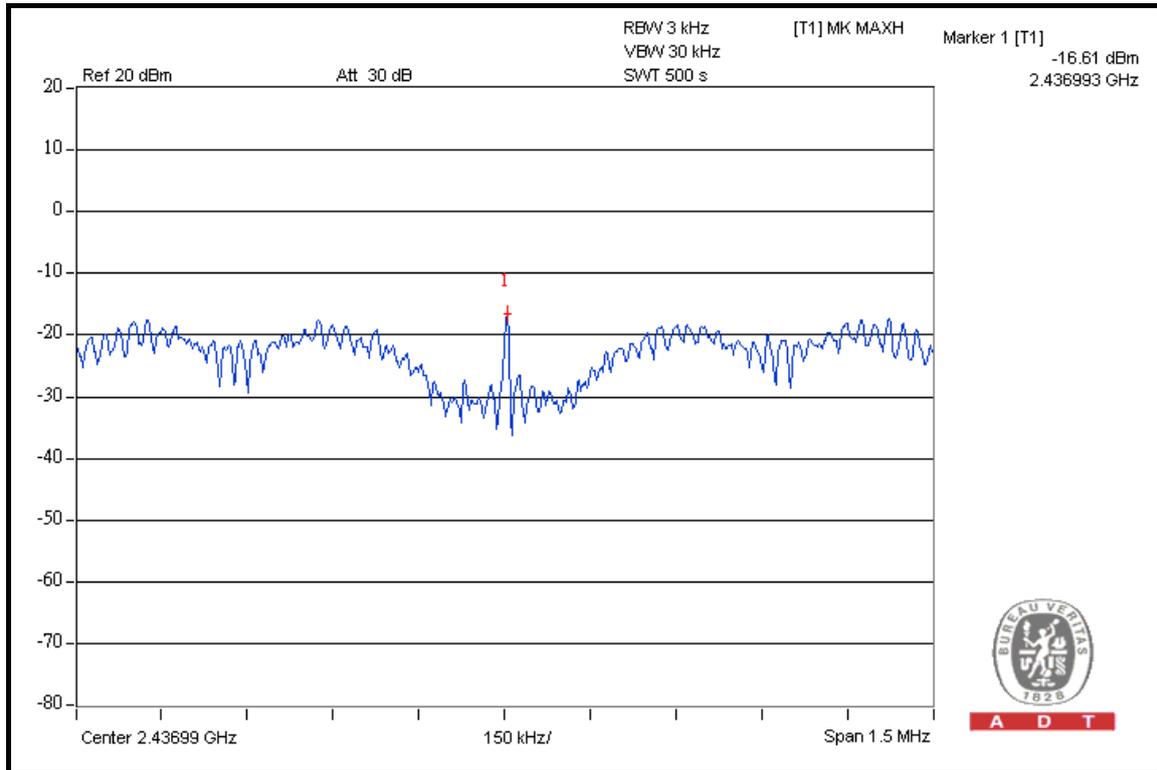

CH 11

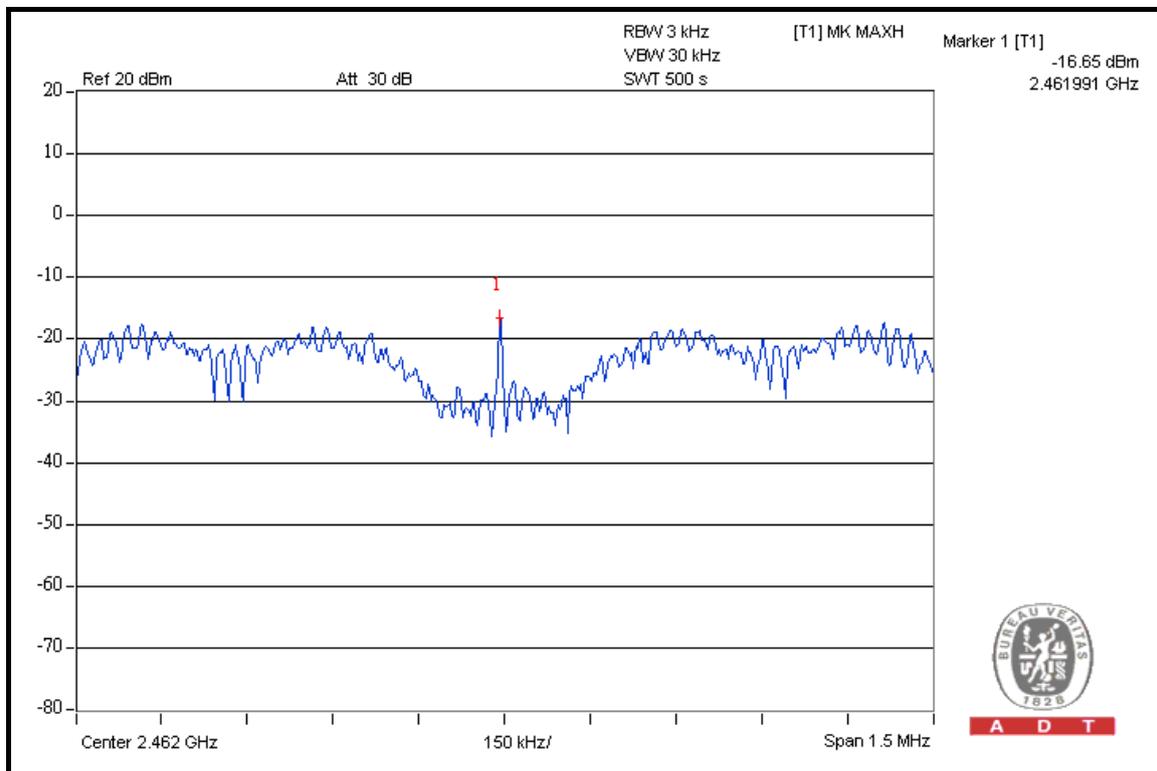



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	-22.08	-21.71	0.014	-18.59	8	PASS
4	2437	-17.00	-16.60	0.042	-13.79	8	PASS
7	2452	-19.94	-19.68	0.021	-16.80	8	PASS




A D T

FOR CHAIN 0: CH 1

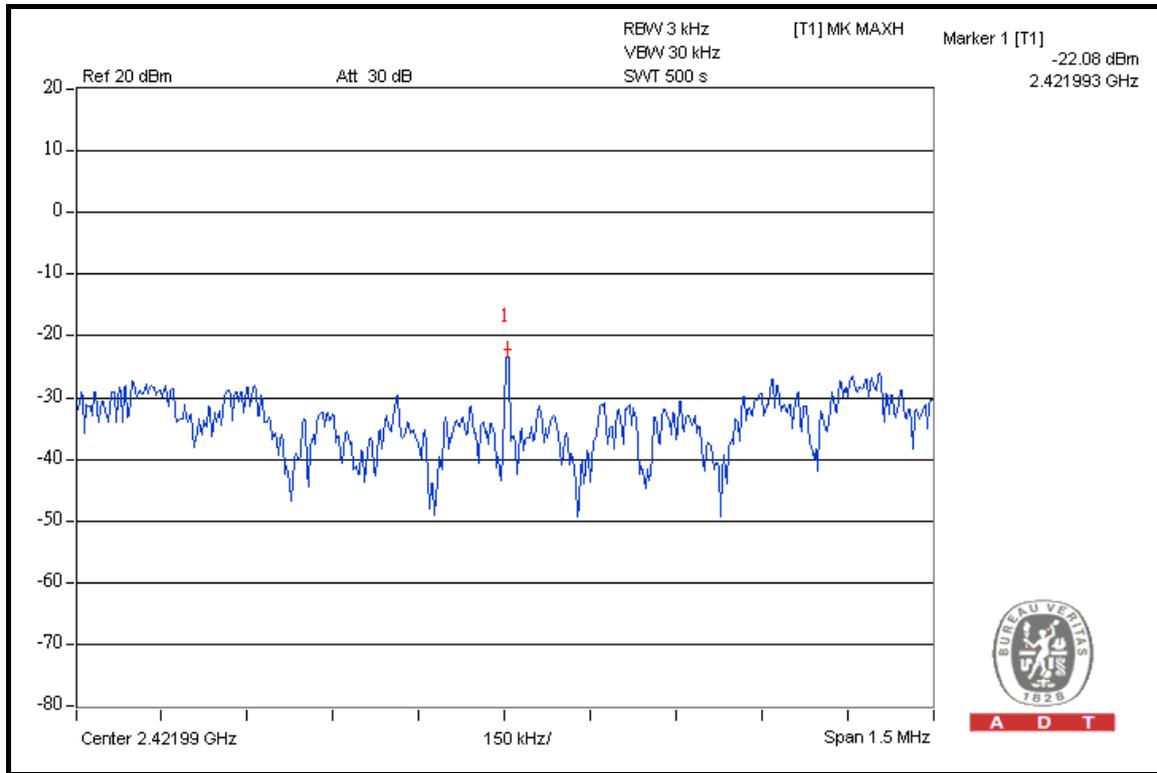


CH 4

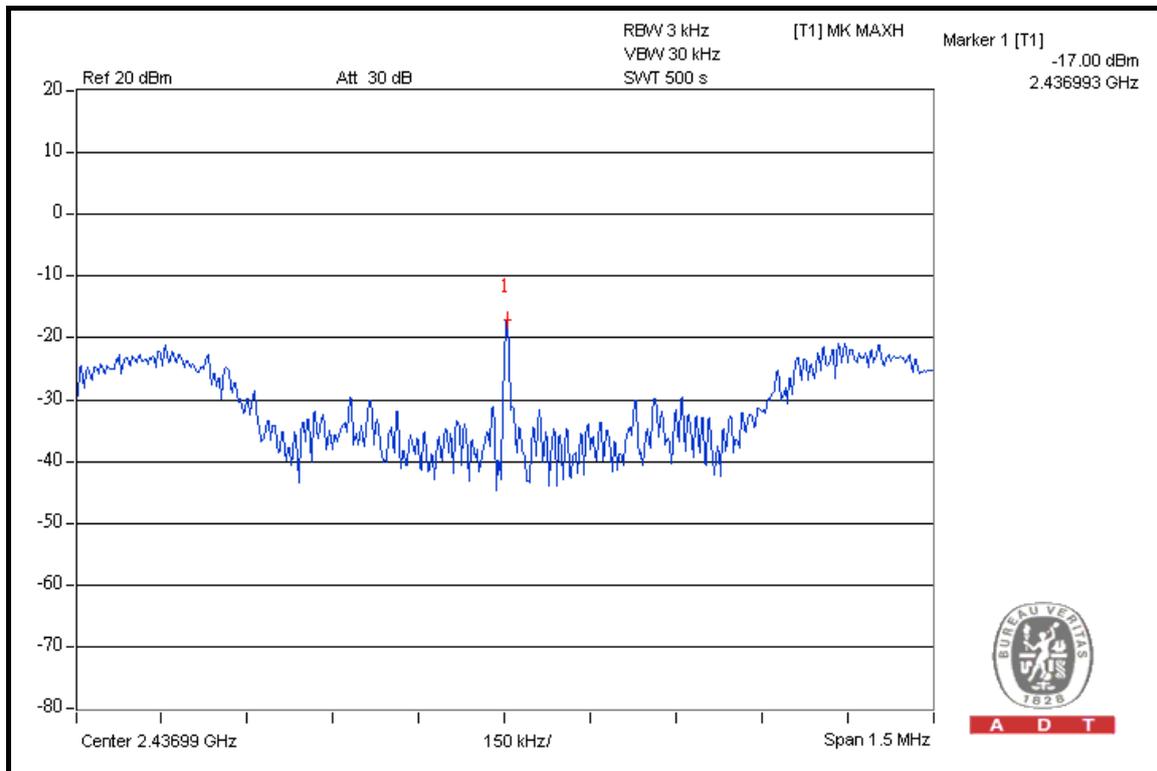




A D T

CH 7

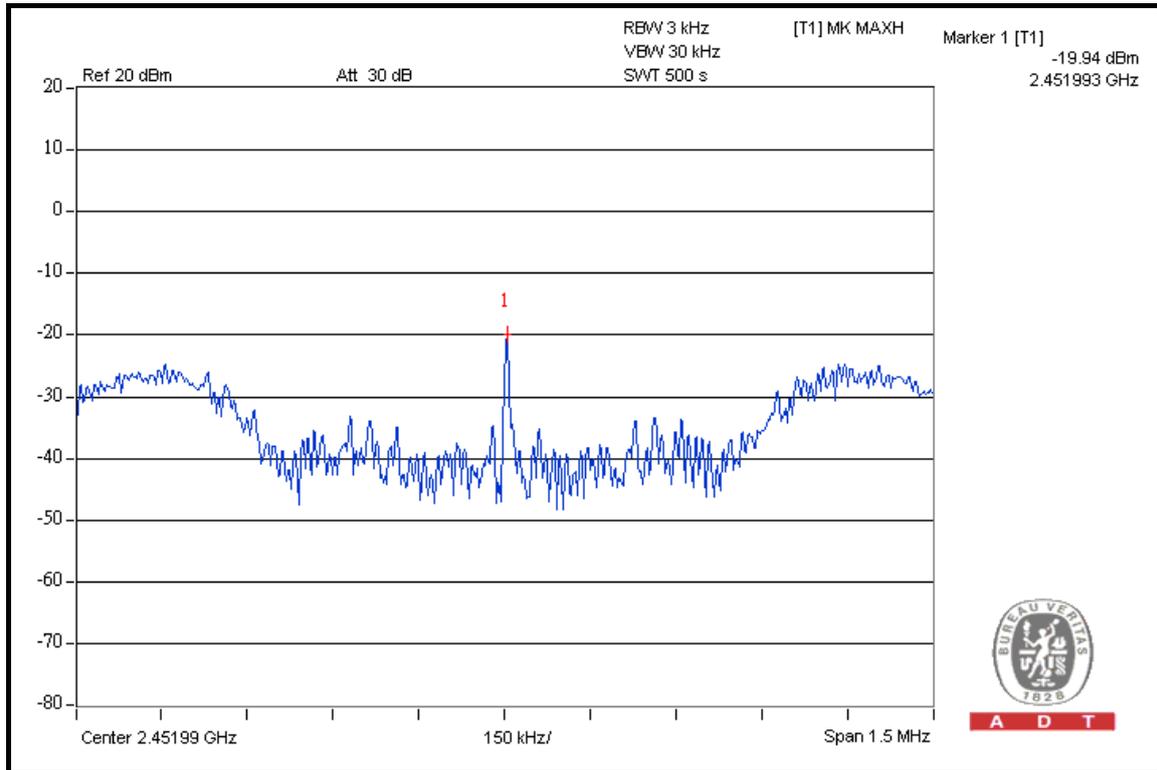


FOR CHAIN 1: CH 1

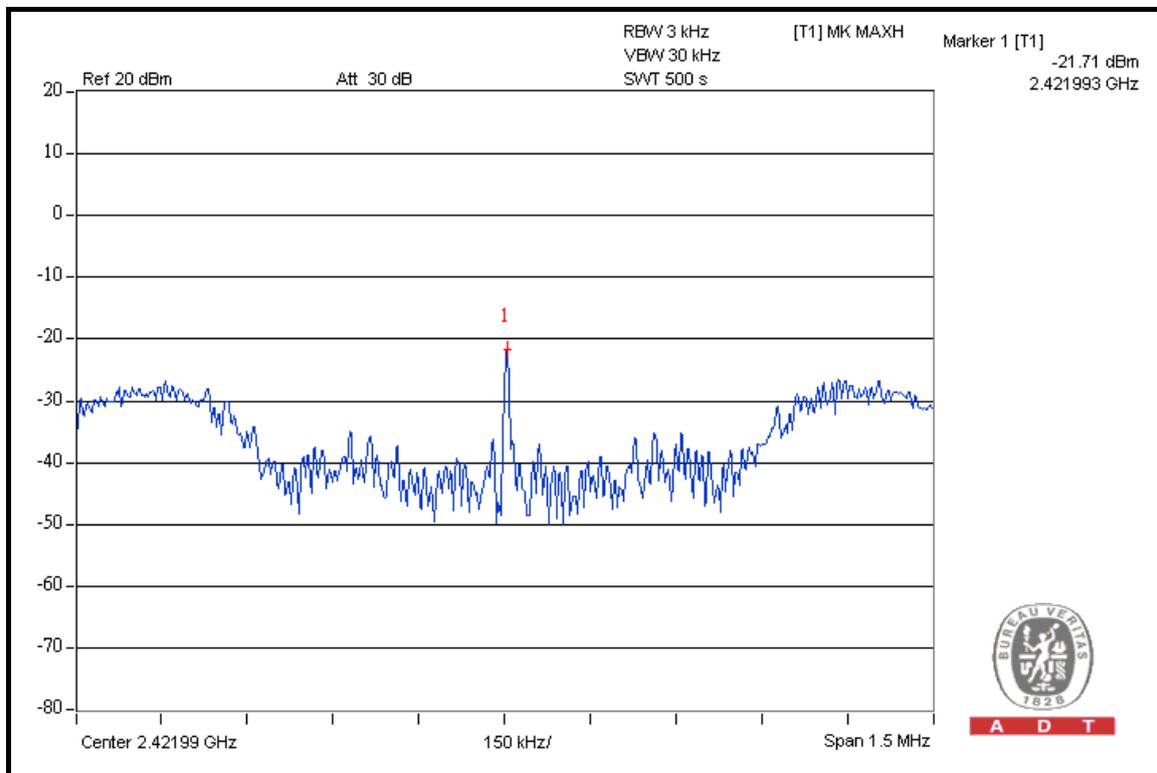




A D T

CH 4

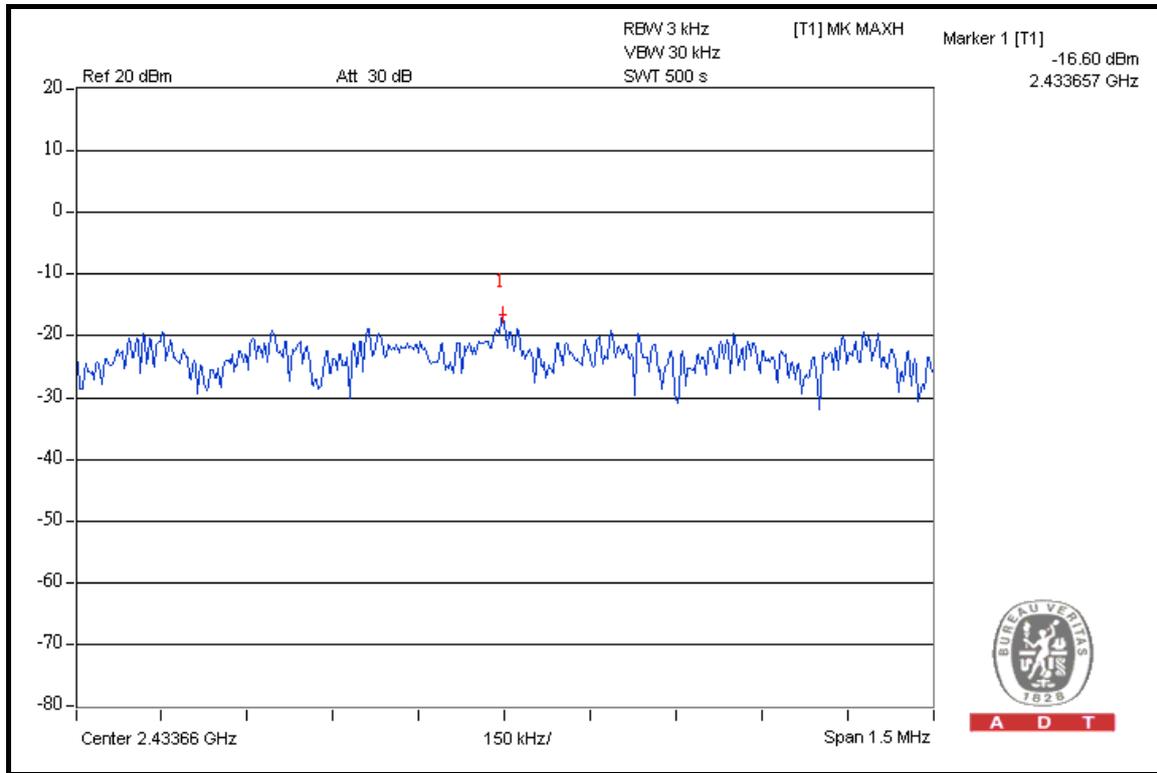

A D T

CH 7

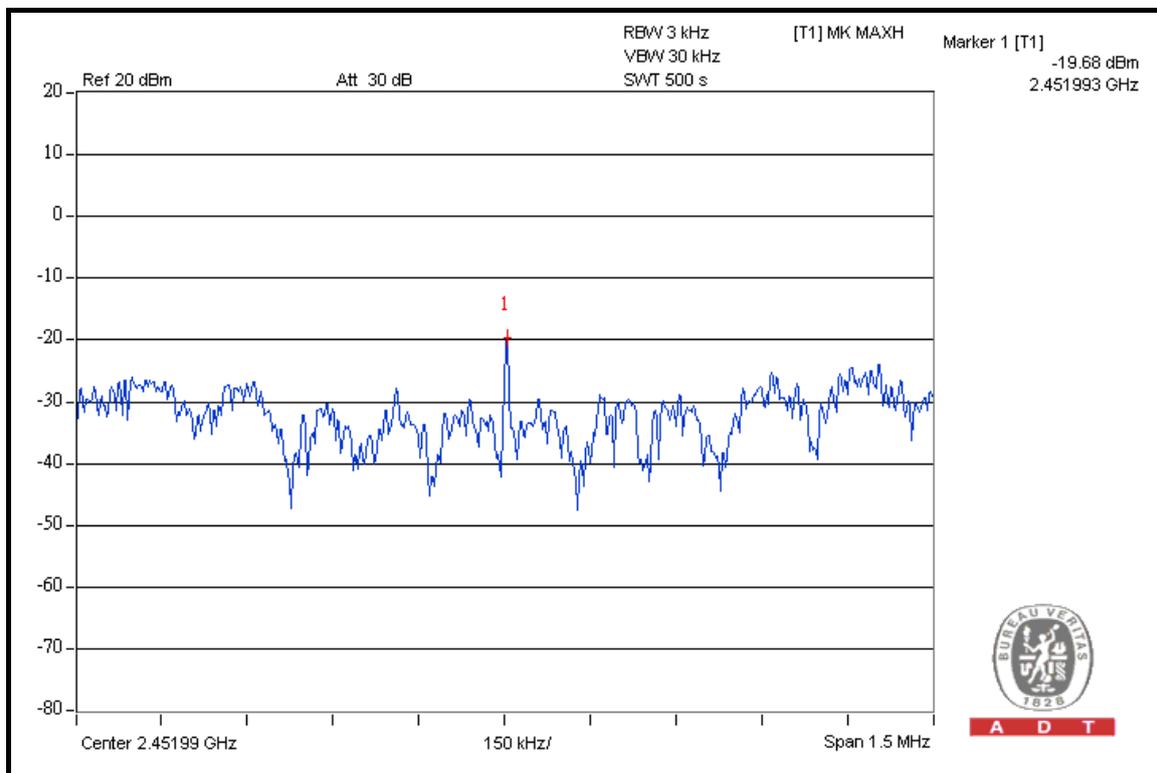

A D T

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
FOR CONDUCTED MEASUREMENT				
SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009
FOR RADIATED MEASUREMENT				
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 29, 2008	Dec. 28, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 08, 2008	Dec. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 30, 2008	Apr. 29, 2009
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Dec. 29, 2008	Dec. 28, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01960	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8447D	2944A10631	Nov. 03, 2008	Nov. 02, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 21, 2008	Aug. 20, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Aug. 21, 2008	Aug. 20, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

FOR CONDUCTED MEASUREMENT

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

FOR RADIATED MEASUREMENT

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz)

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1: The band edge emission plot on the next page shows 48.34dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 108.34dBuV/m (Peak), so the maximum field strength in restrict band is $108.34 - 48.34 = 60.00$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 55.95dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 103.65dBuV/m (Average), so the maximum field strength in restrict band is $103.65 - 55.95 = 47.70$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 49.53dBc between carrier maximum power and local maximum emission in restrict band (2.50000GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 110.15dBuV/m (Peak), so the maximum field strength in restrict band is $110.53 - 49.53 = 60.62$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 52.88dBc between carrier maximum power and local maximum emission in restrict band (2.50000GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 105.44dBuV/m (Average), so the maximum field strength in restrict band is $105.44 - 52.88 = 52.56$ dBuV/m which is under 54dBuV/m limit.




A D T

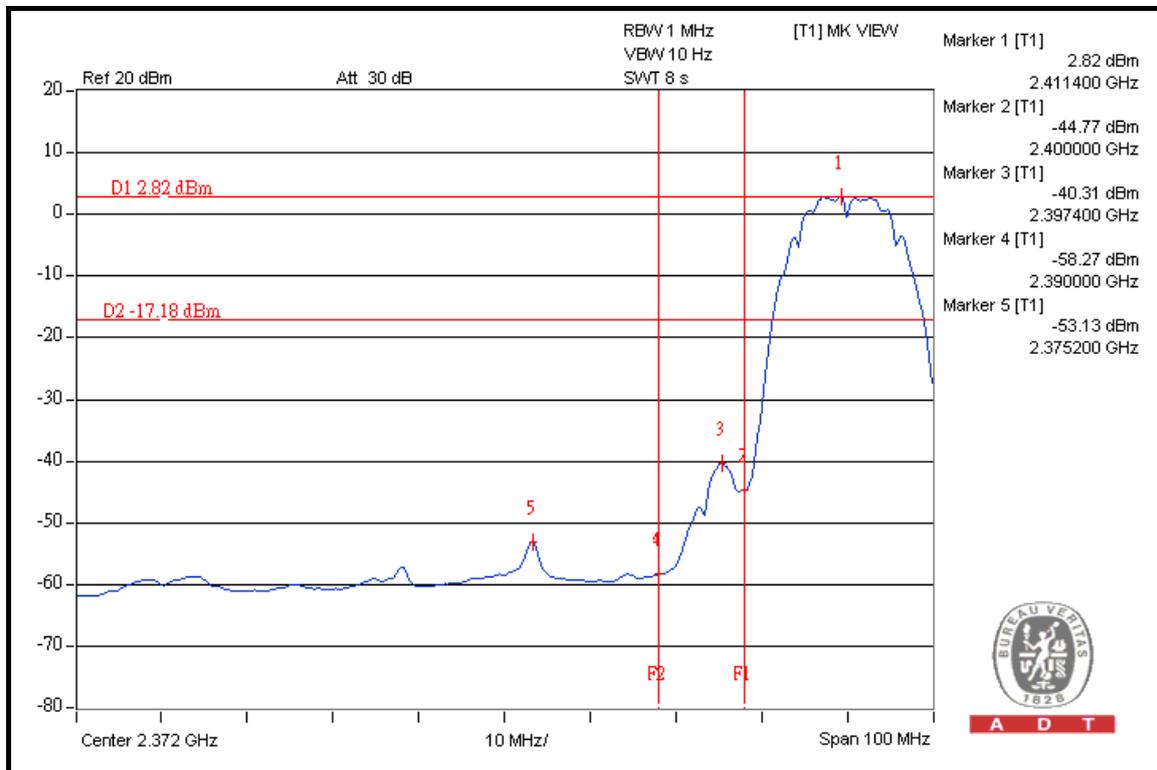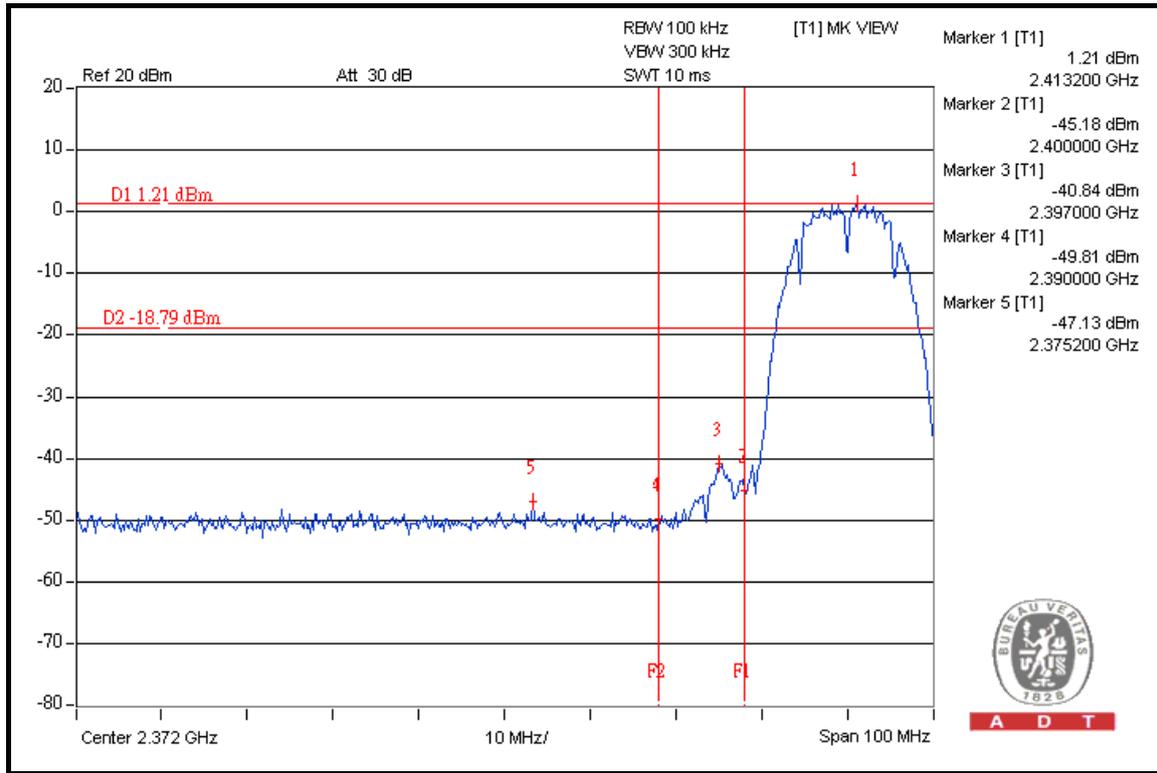




A D T

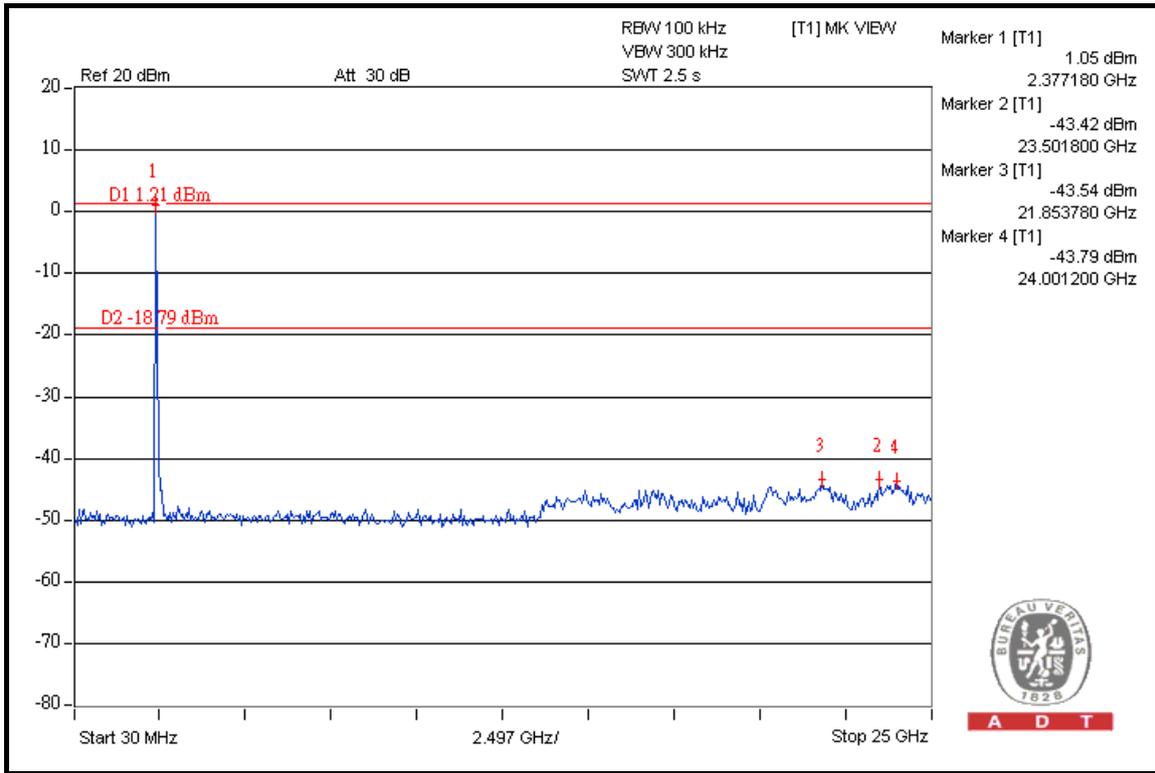



A D T

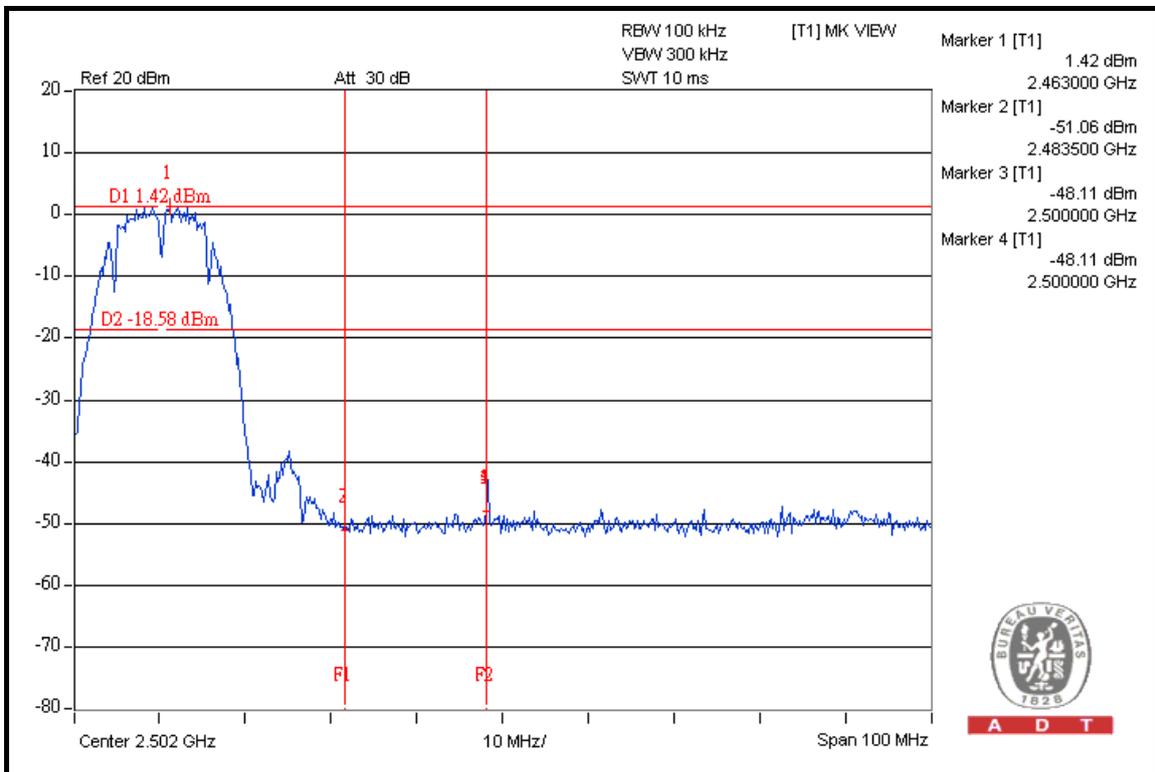

A D T



A D T

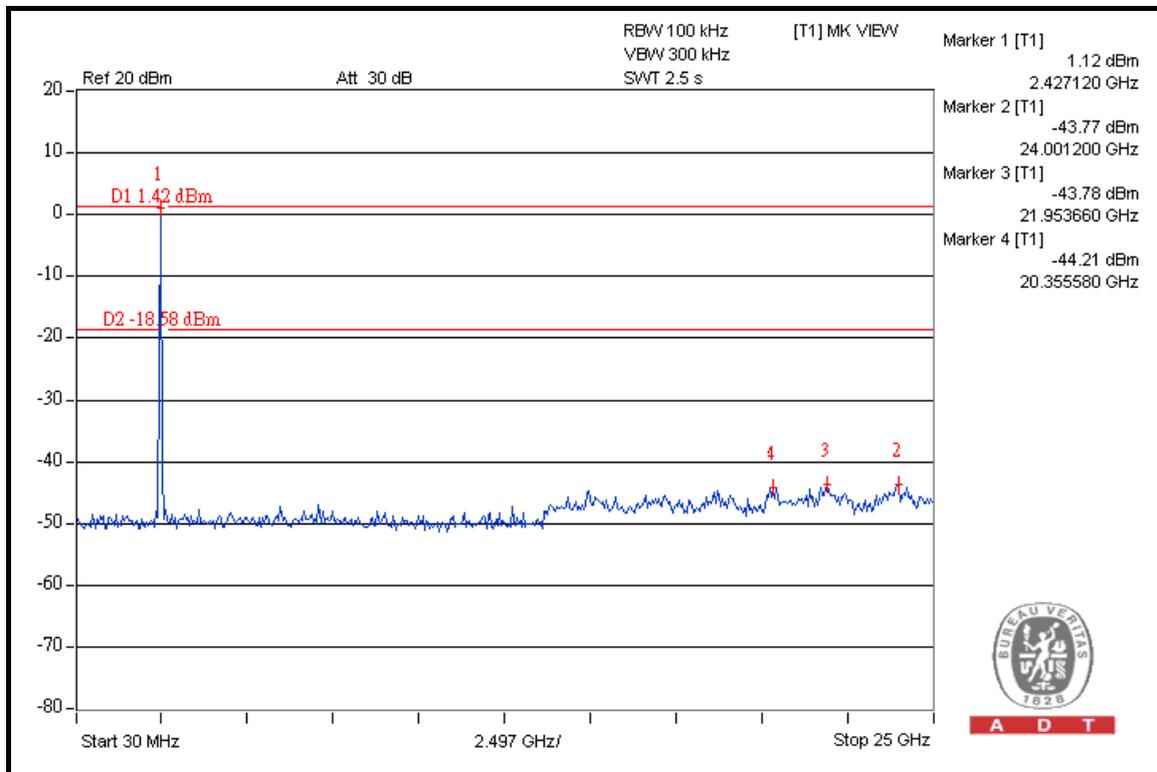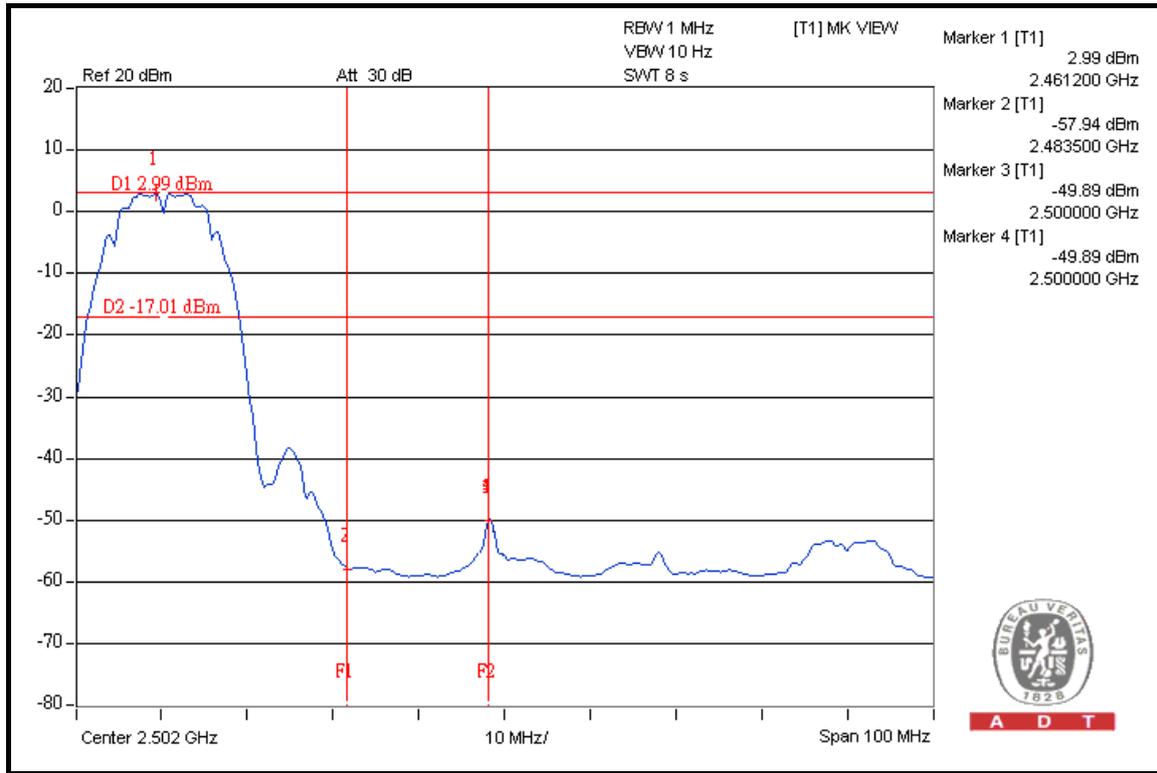

802.11g OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 42.98dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 108.31dBuV/m (Peak), so the maximum field strength in restrict band is $108.31 - 42.98 = 65.33$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 49.85dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 97.89dBuV/m (Average), so the maximum field strength in restrict band is $97.89 - 49.85 = 48.04$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 42.41dBc between carrier maximum power and local maximum emission in restrict band (2.50000GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 109.72dBuV/m (Peak), so the maximum field strength in restrict band is $109.72 - 42.41 = 67.31$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 46.46dBc between carrier maximum power and local maximum emission in restrict band (2.50000GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 99.36dBuV/m (Average), so the maximum field strength in restrict band is $99.36 - 46.46 = 52.90$ dBuV/m which is under 54dBuV/m limit.





A D T

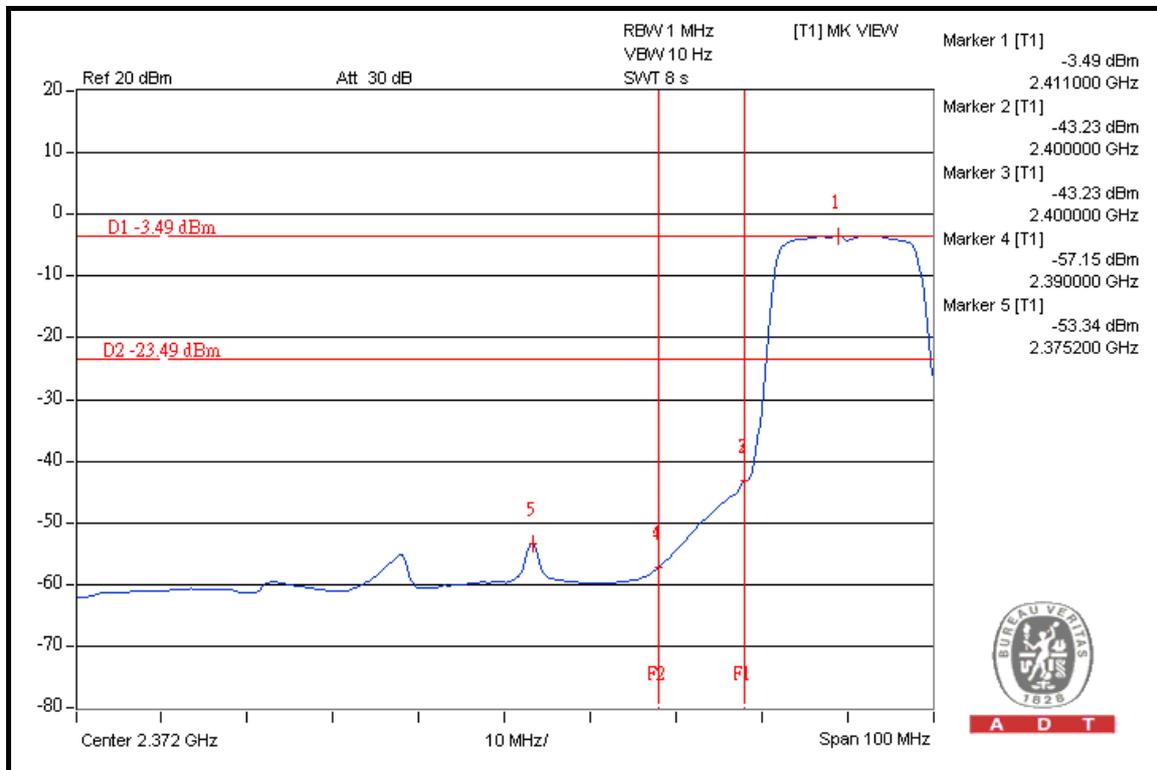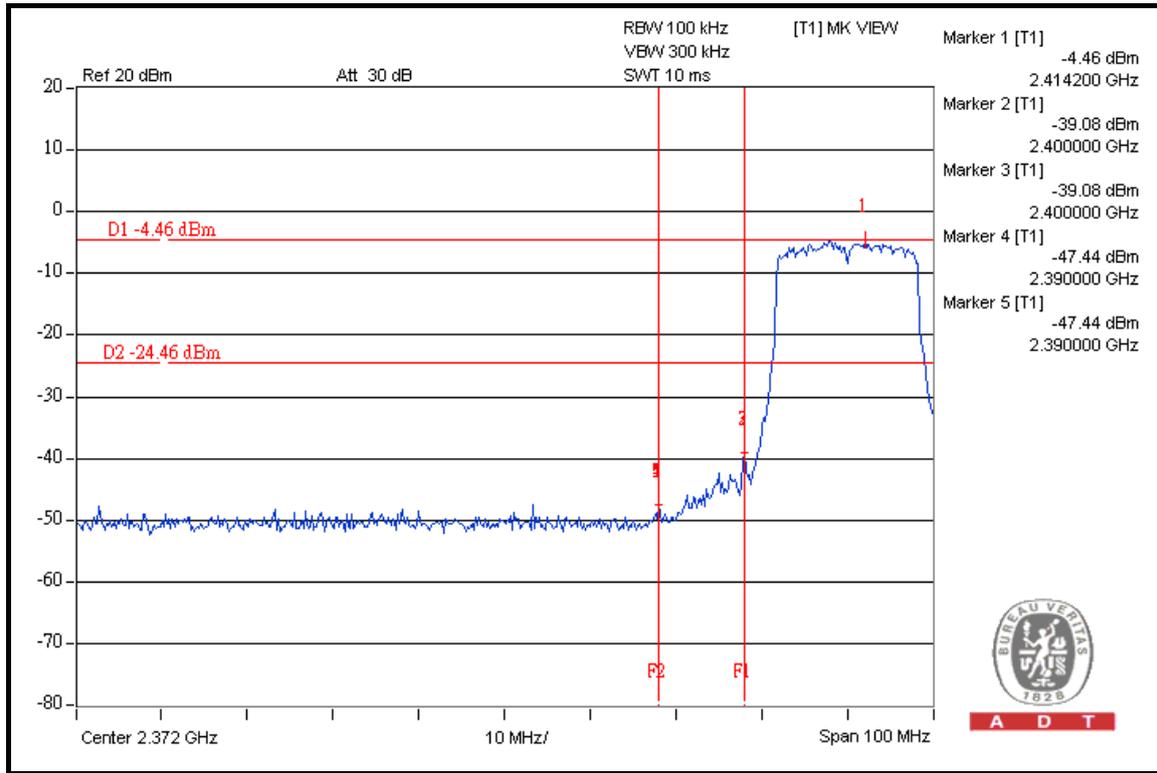




A D T

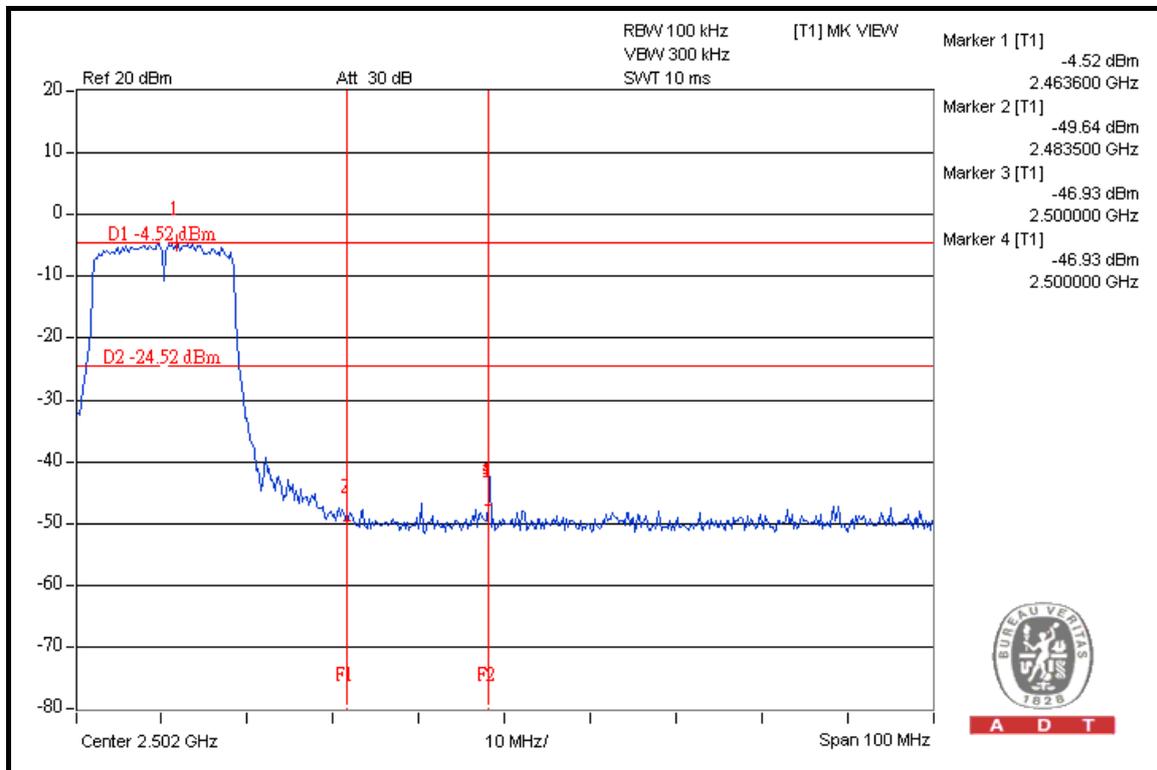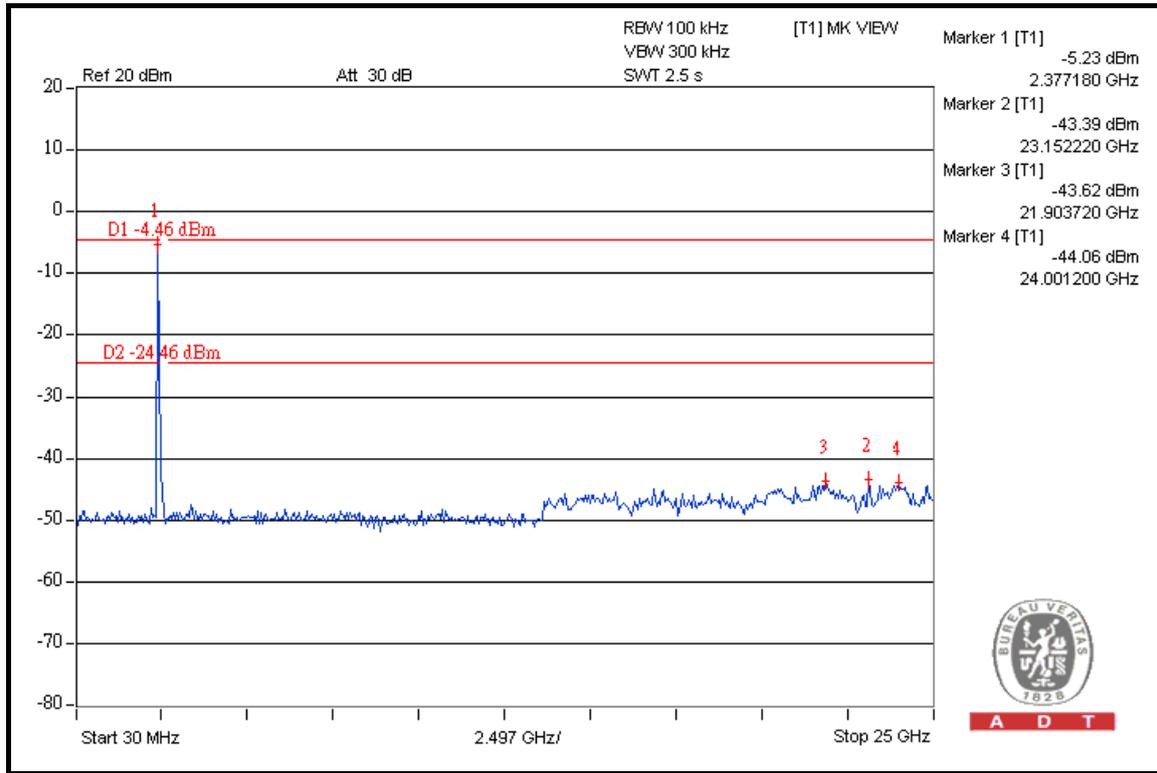




A D T

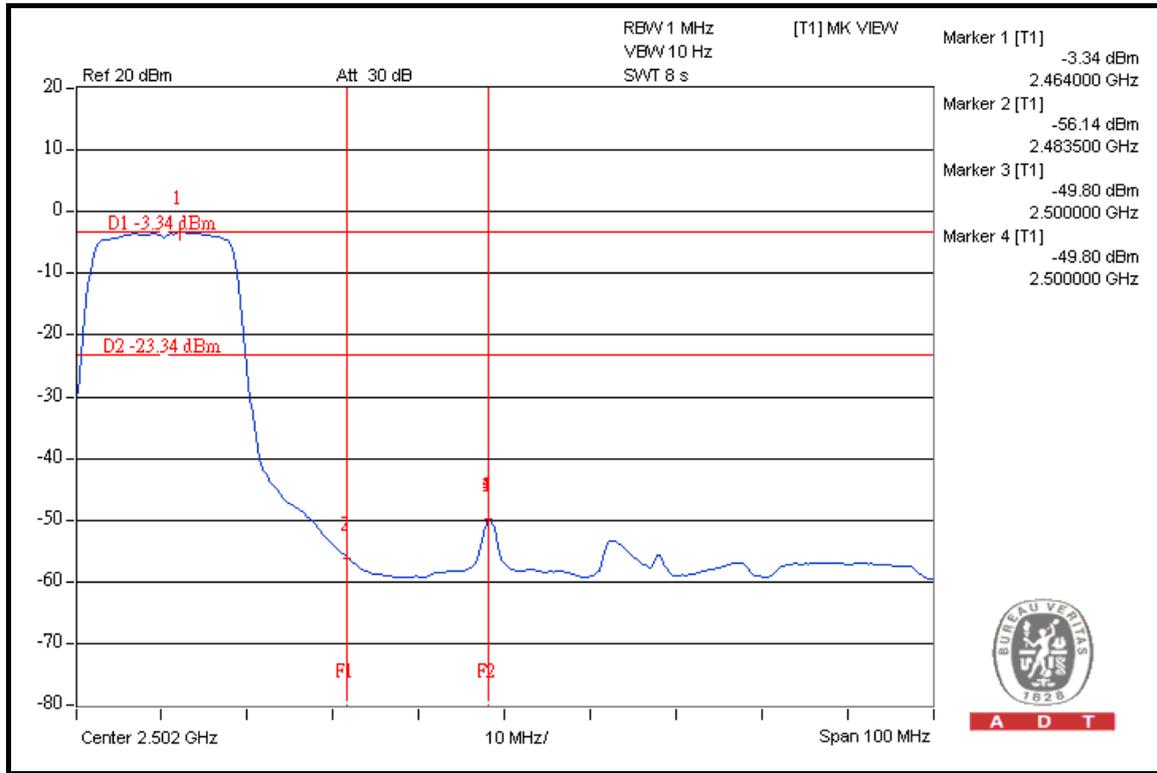

A D T

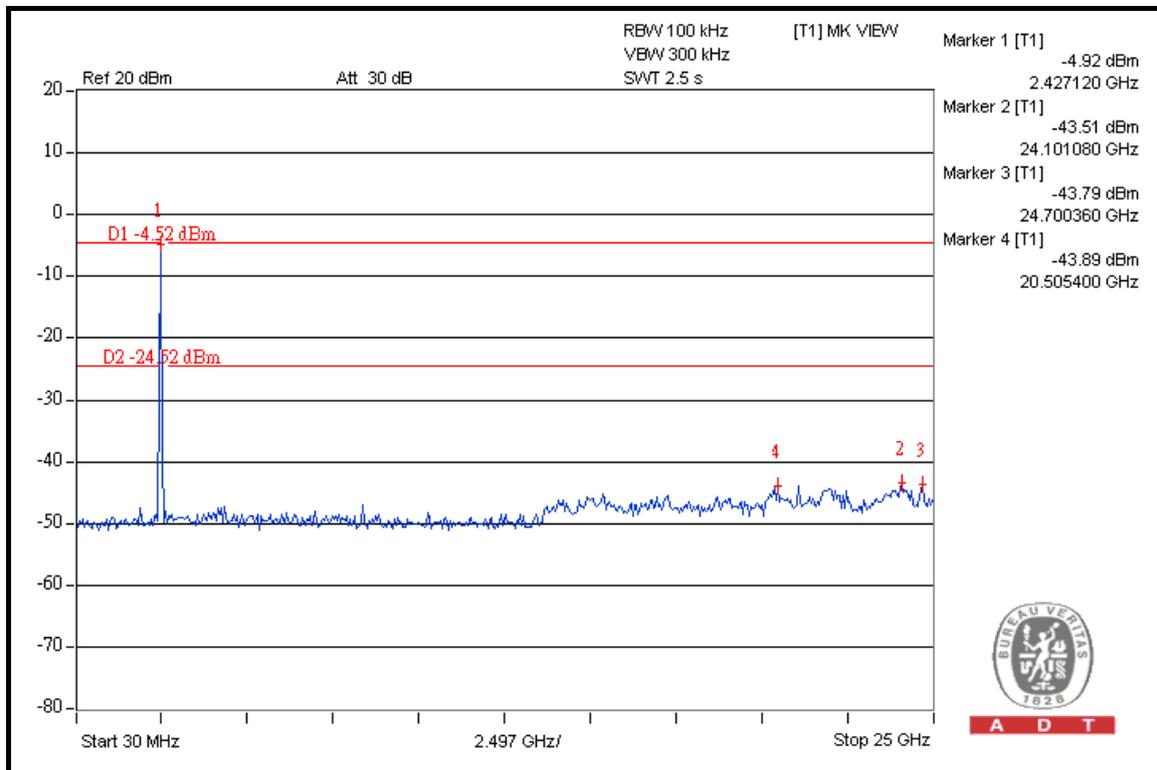

A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 44.76dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 112.20dBuV/m (Peak), so the maximum field strength in restrict band is $112.20 - 44.76 = 67.44$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 49.25dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 101.80dBuV/m (Average), so the maximum field strength in restrict band is $101.80 - 49.25 = 52.55$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 46.95dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 112.95dBuV/m (Peak), so the maximum field strength in restrict band is $112.95 - 46.95 = 66.00$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 51.59dBc between carrier maximum power and local maximum emission in restrict band (2.50000GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 102.51dBuV/m (Average), so the maximum field strength in restrict band is $102.51 - 51.59 = 50.92$ dBuV/m which is under 54dBuV/m limit.



A D T

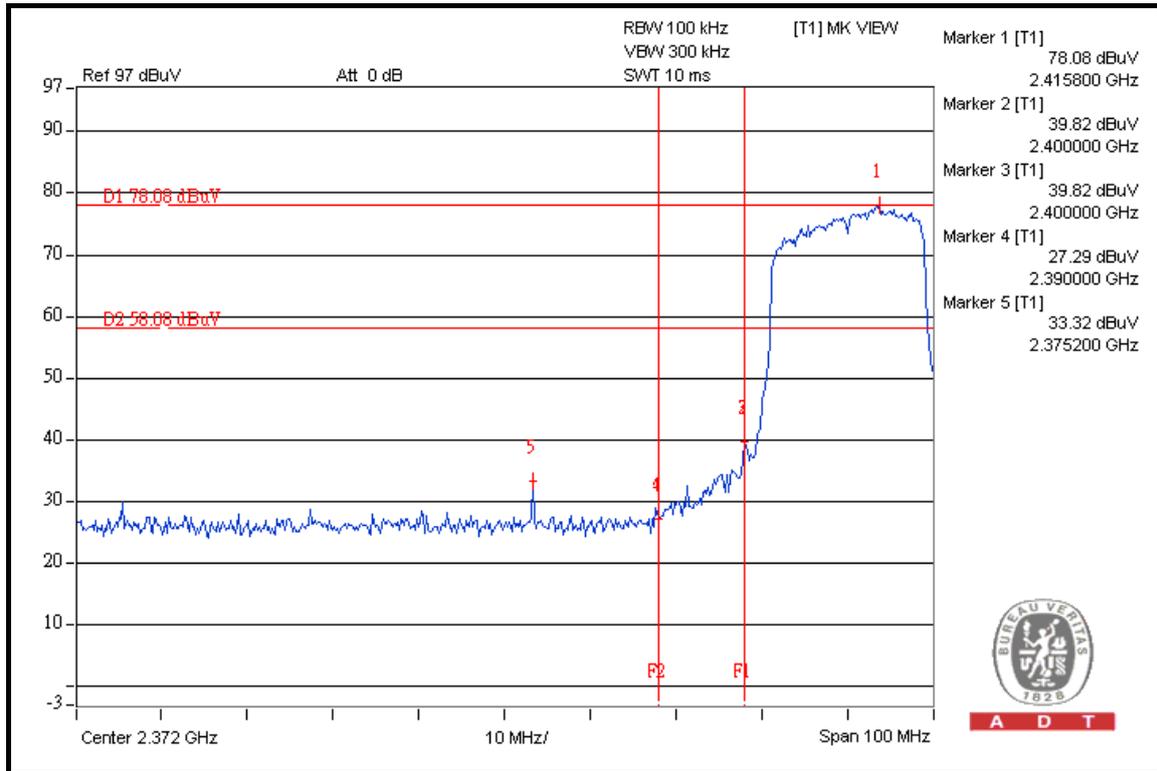



A D T

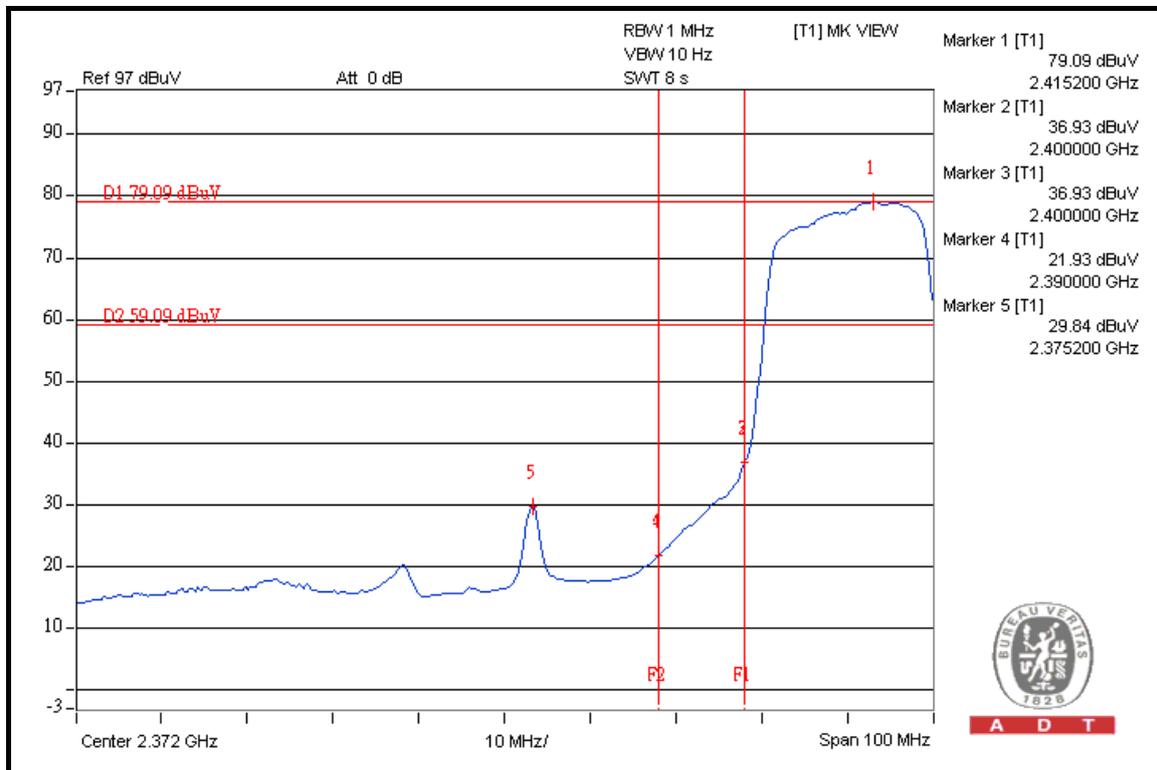

A D T




A D T

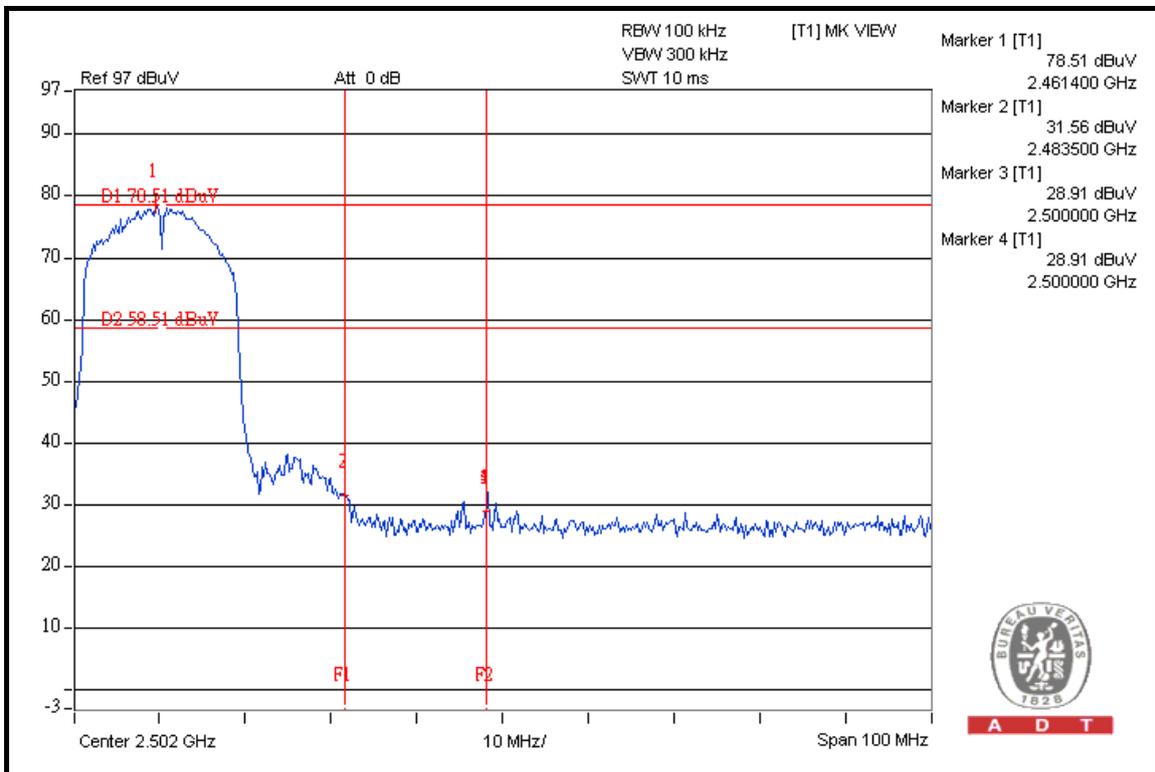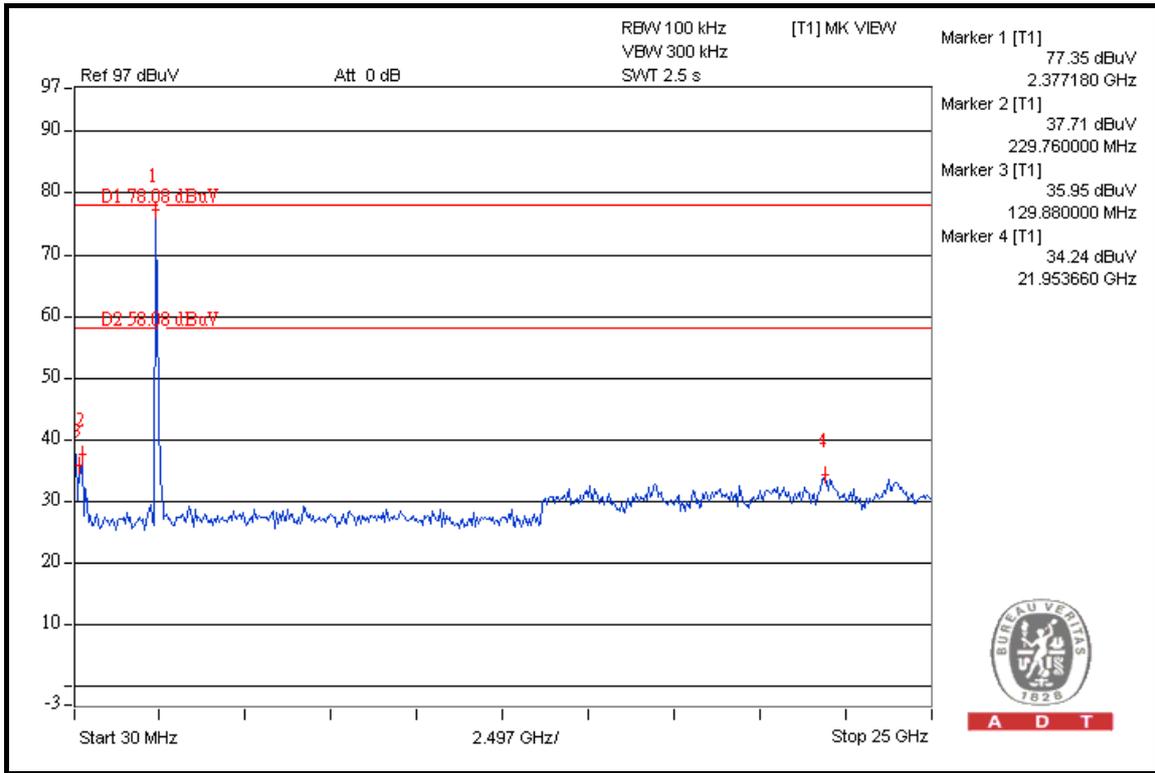




A D T

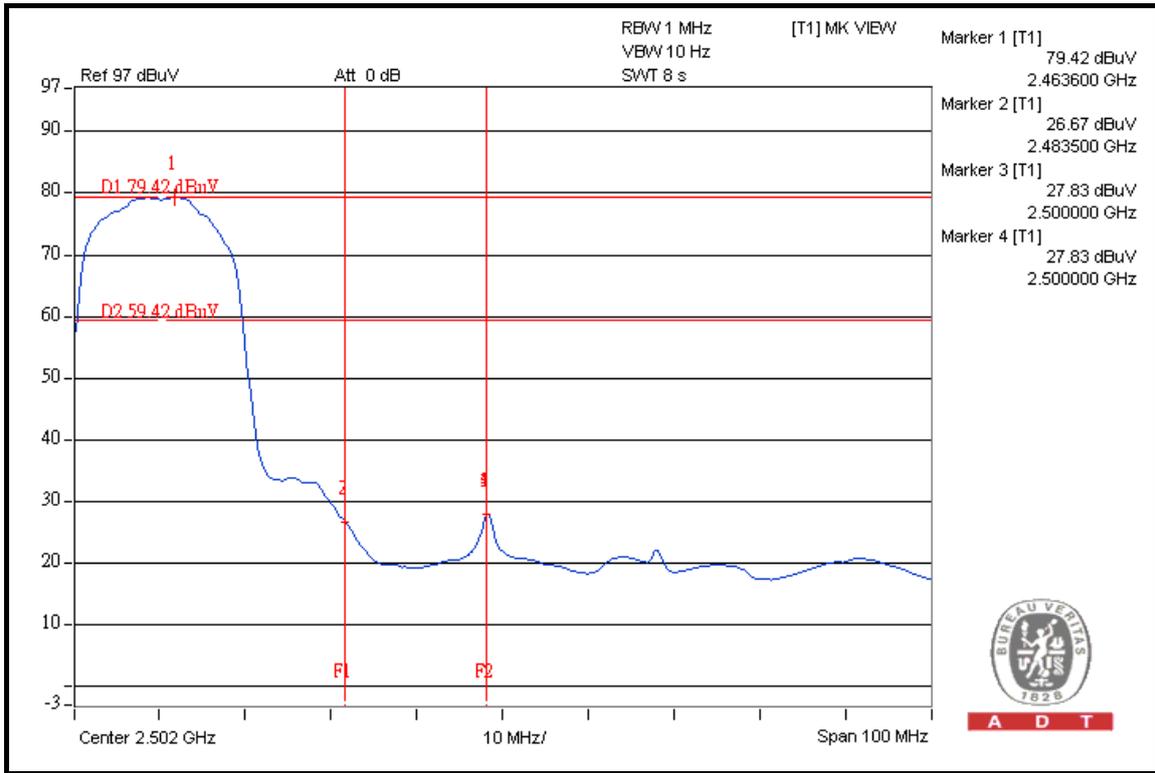

A D T

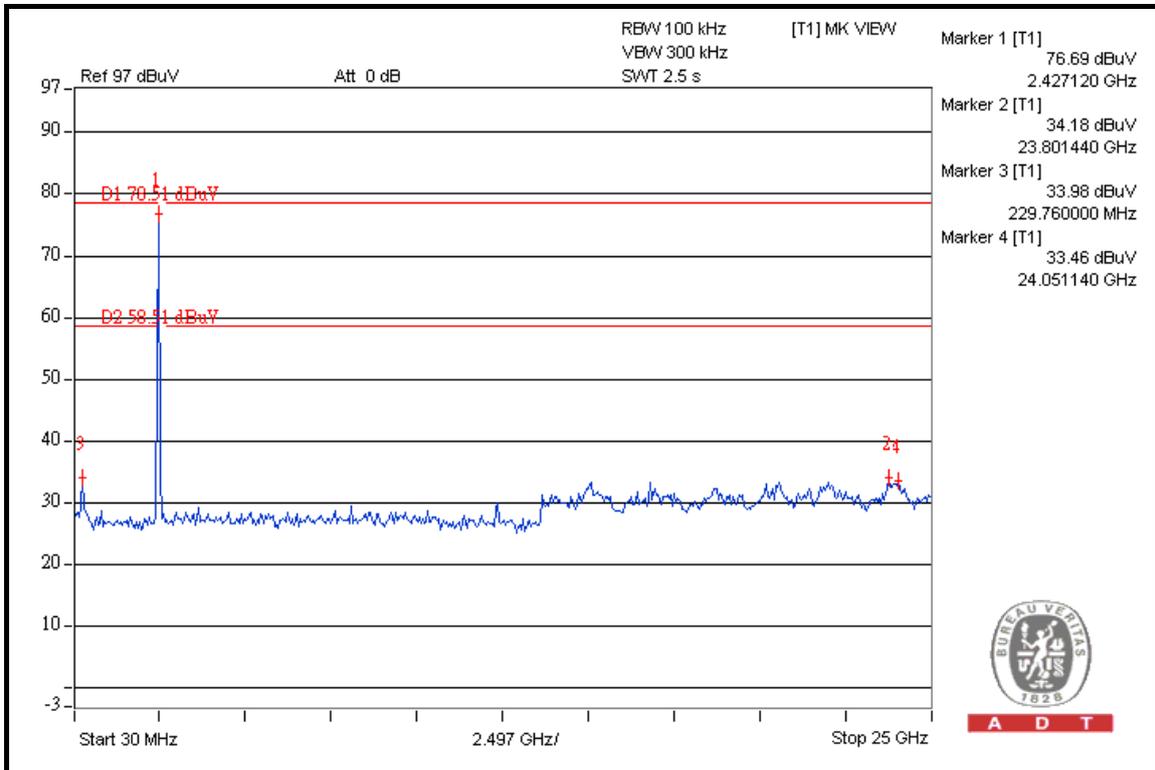

A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 38.34dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 106.11dBuV/m (Peak), so the maximum field strength in restrict band is $106.11 - 38.34 = 67.77$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 44.00dBc between carrier maximum power and local maximum emission in restrict band (2.37520GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 95.89dBuV/m (Average), so the maximum field strength in restrict band is $95.89 - 44.00 = 51.89$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 42.01dBc between carrier maximum power and local maximum emission in restrict band (2.50000GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 109.58dBuV/m (Peak), so the maximum field strength in restrict band is $109.58 - 42.01 = 67.57$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 47.77dBc between carrier maximum power and local maximum emission in restrict band (2.50000GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 98.44dBuV/m (Average), so the maximum field strength in restrict band is $98.44 - 47.77 = 50.67$ dBuV/m which is under 54dBuV/m limit.





A D T

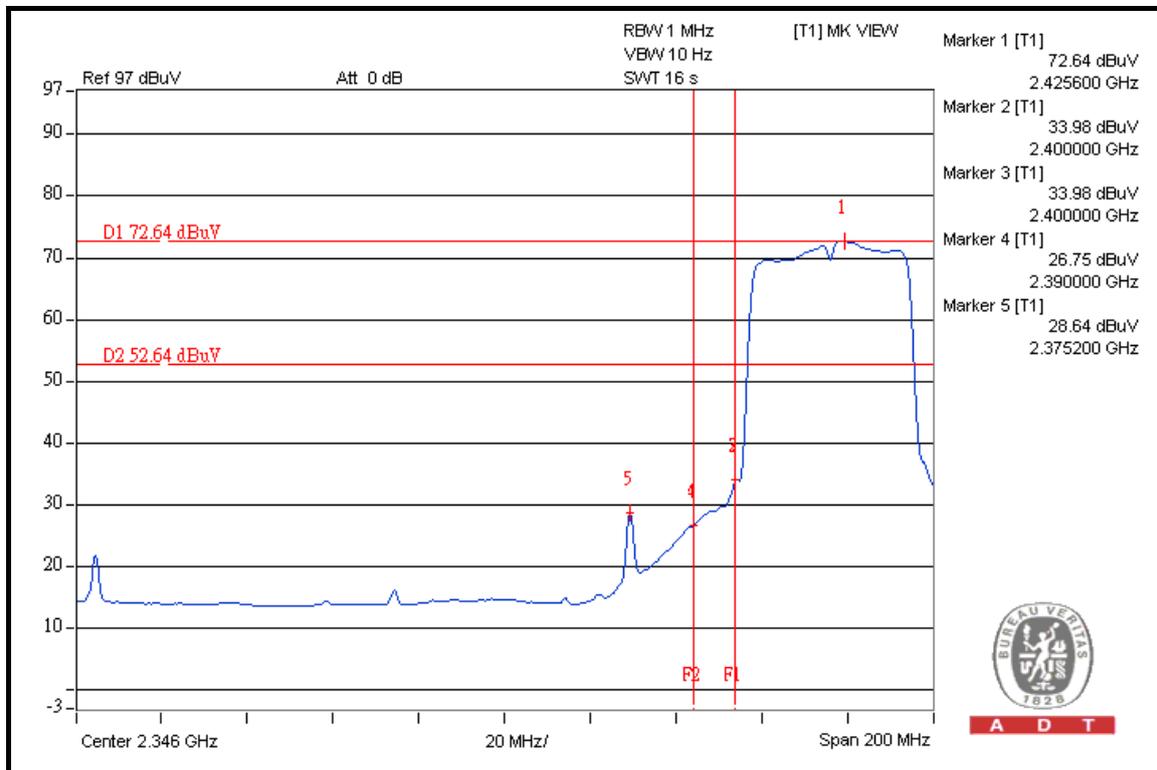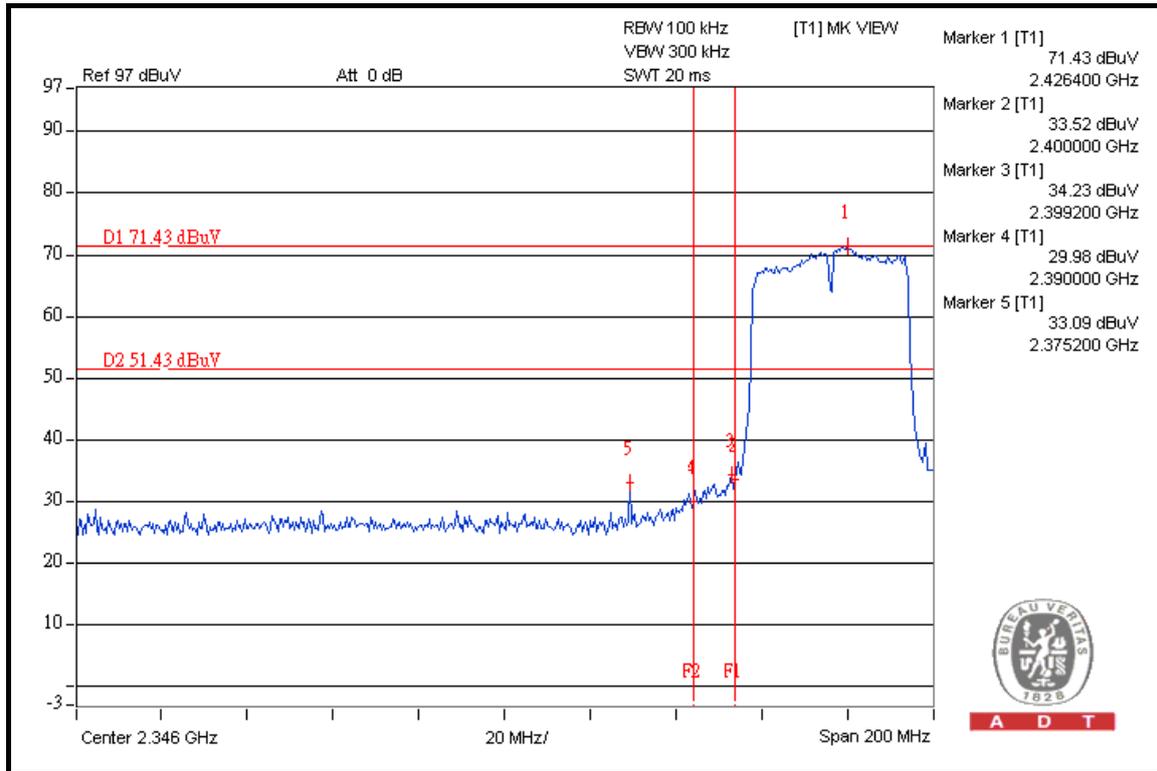





A D T

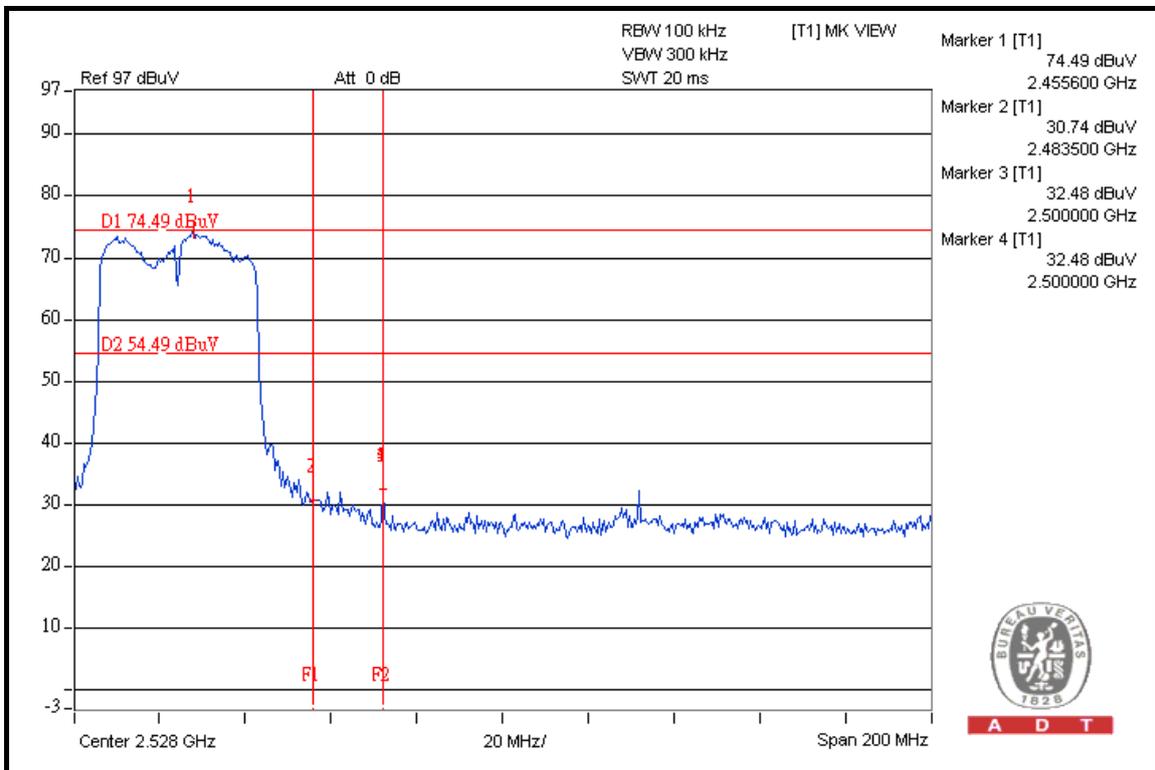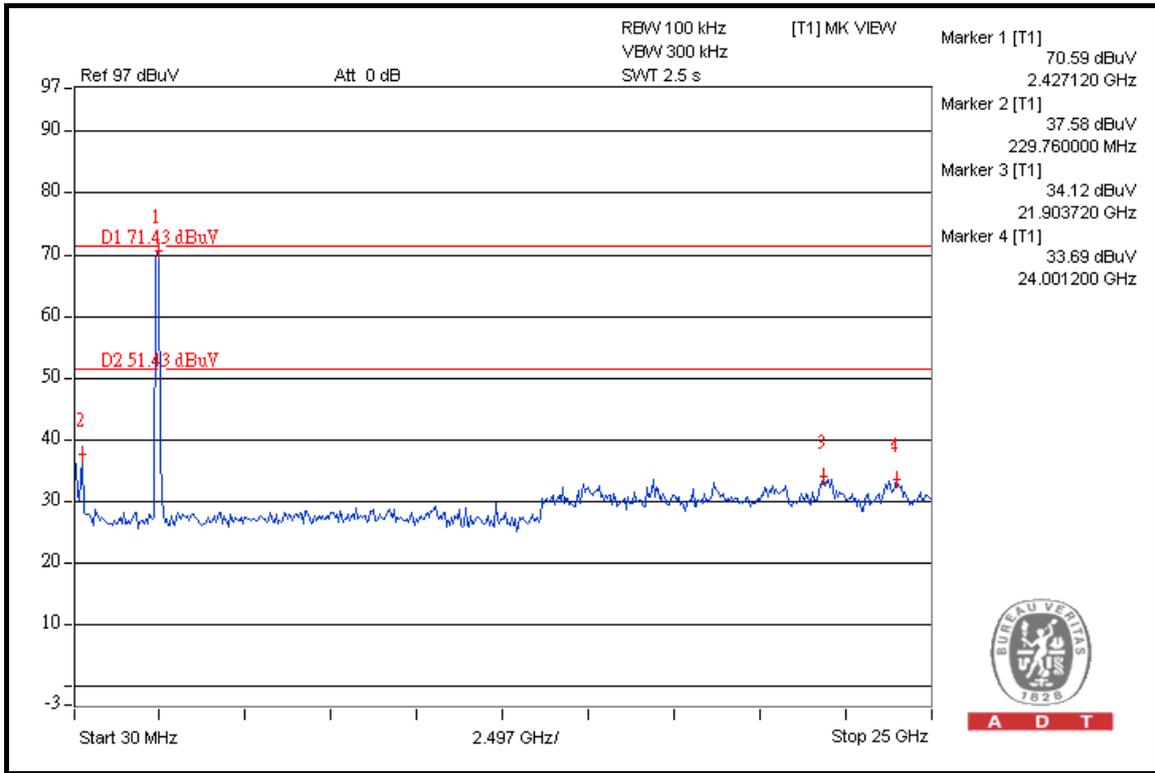



A D T

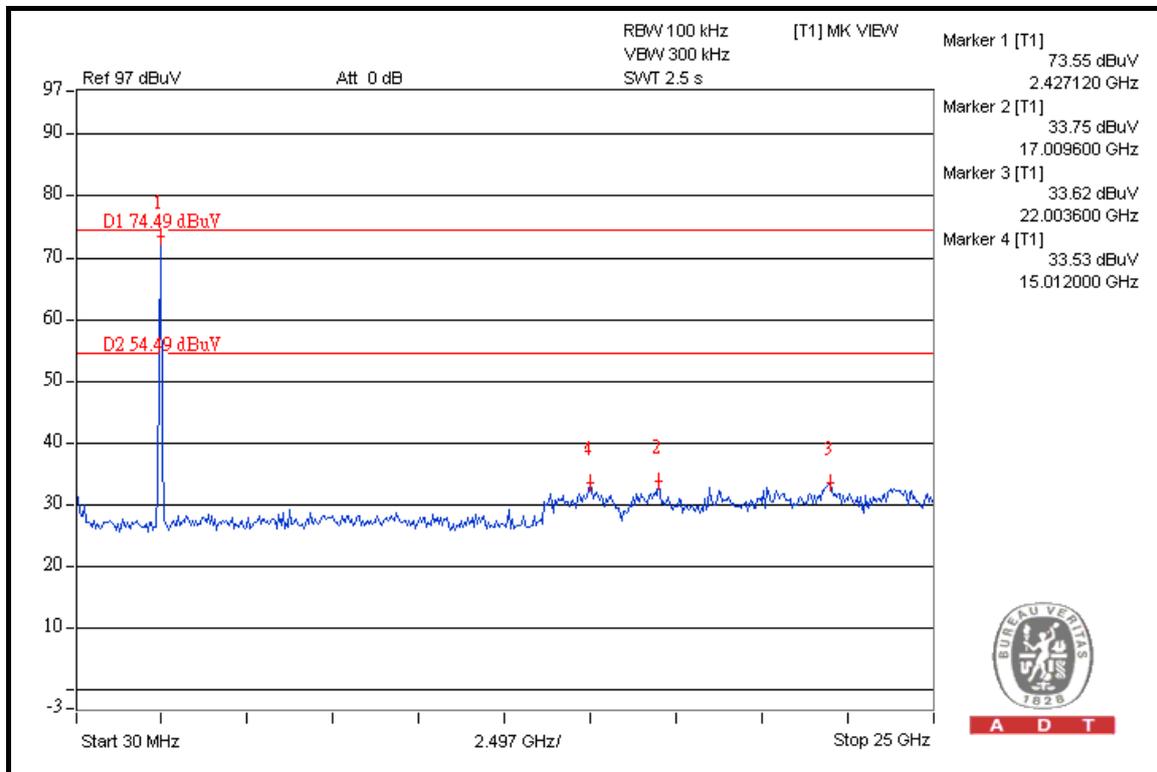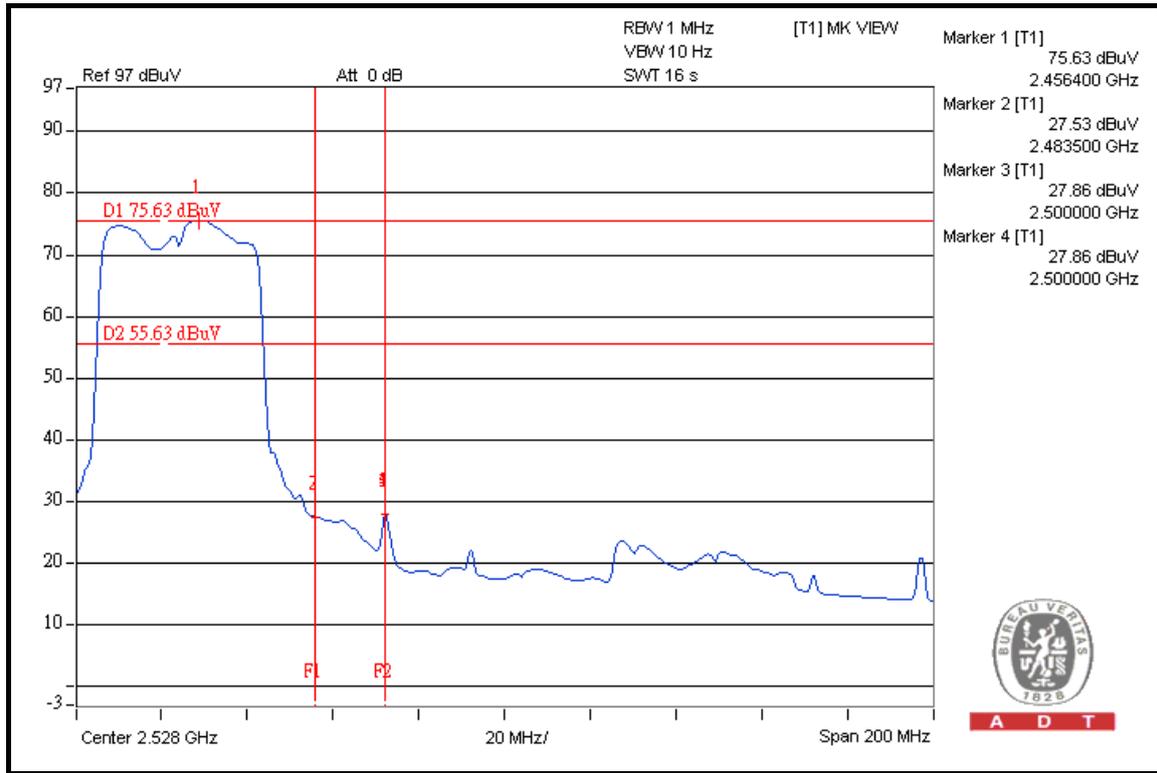

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna without antenna connector. The maximum Gain of the antenna is 2.0dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---