

FCC TEST REPORT

REPORT NO.: RF980525H02

MODEL NO.: F5D8635-4 V2

RECEIVED: May 25, 2009

TESTED: June 01 to 23, 2009

ISSUED: June 25, 2009

APPLICANT: Belkin International, Inc.

ADDRESS: 501 West Walnut Street, Compton, CA 90220-5221,
USA

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 102 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS	13
3.5	CONFIGURATION OF SYSTEM UNDER TEST	14
4.	TEST TYPES AND RESULTS.....	16
4.1	CONDUCTED EMISSION MEASUREMENT.....	16
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
4.1.2	TEST INSTRUMENTS.....	17
4.1.3	TEST PROCEDURES	17
4.1.4	DEVIATION FROM TEST STANDARD	17
4.1.5	TEST SETUP	18
4.1.6	EUT OPERATING CONDITIONS	18
4.1.7	TEST RESULTS.....	19
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	21
4.2.2	TEST INSTRUMENTS.....	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	24
4.2.6	EUT OPERATING CONDITIONS	24
4.2.7	TEST RESULTS – Below 1GHz.....	25
4.2.8	TEST RESULTS – Above 1GHz	26
4.3	6dB BANDWIDTH MEASUREMENT.....	54
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	54
4.3.2	TEST INSTRUMENTS.....	54
4.3.3	TEST PROCEDURE.....	54
4.3.4	DEVIATION FROM TEST STANDARD	54
4.3.5	TEST SETUP	55
4.3.6	EUT OPERATING CONDITIONS	55
4.3.7	TEST RESULTS.....	56
4.4	MAXIMUM PEAK OUTPUT POWER	68



A D T

4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	68
4.4.2	INSTRUMENTS	68
4.4.3	TEST PROCEDURES	68
4.4.4	DEVIATION FROM TEST STANDARD	68
4.4.5	TEST SETUP	69
4.4.6	EUT OPERATING CONDITIONS	69
4.4.7	TEST RESULTS.....	70
4.5	POWER SPECTRAL DENSITY MEASUREMENT	72
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	72
4.5.2	TEST INSTRUMENTS.....	72
4.5.3	TEST PROCEDURE.....	72
4.5.4	DEVIATION FROM TEST STANDARD	72
4.5.5	TEST SETUP	73
4.5.6	EUT OPERATING CONDITION	73
4.5.7	TEST RESULTS.....	74
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	86
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT ..	86
4.6.2	TEST INSTRUMENTS.....	86
4.6.3	TEST PROCEDURE.....	86
4.6.4	DEVIATION FROM TEST STANDARD	87
4.6.5	EUT OPERATING CONDITION	87
4.6.6	TEST RESULTS.....	87
4.7	ANTENNA REQUIREMENT	100
4.7.1	STANDARD APPLICABLE	100
4.7.2	ANTENNA CONNECTED CONSTRUCTION	100
5.	INFORMATION ON THE TESTING LABORATORIES	101
6.	APPENDIX - A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	102



A D T

1. CERTIFICATION

PRODUCT : N+ Wireless Modem Router
BRAND : Belkin
MODEL NO.: F5D8635-4 V2
APPLICANT : Belkin International, Inc.
TESTED : June 01 to 23, 2009
TEST SAMPLE : R&D SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: F5D8635-4 V2) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao, **DATE:** June 25, 2009
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung, **DATE:** June 25, 2009
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen, **DATE:** June 25, 2009
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.09dB at 0.193MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 4824.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	N+ Wireless Modem Router
MODEL NO.	F5D8635-4 V2
FCC ID	K7SF5D8635V2
POWER SUPPLY	DC 15V from adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6Mbps Draft 802.11n (20MHz, 400ns GI): 144.444 / 130 / 115.556 / 86.667 / 72.2 / 65 / 57.8 / 57.778 / 43.333 / 43.3 / 28.9 / 28.889 / 21.7 / 14.444 / 14.4 / 7.2Mbps Draft 802.11n (40MHz, 400ns GI): 300 / 270 / 240 / 180 / 150 / 135 / 120 / 90 / 60 / 45 / 30 / 15Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 171.002mW 802.11g: 363.915mW draft 802.11n (20MHz): 472.665mW draft 802.11n (40MHz): 414.951mW
ANTENNA TYPE	Please see note 1
DATA CABLE	NA
I/O PORT	RJ-45(Ethernet) port x 4 RJ-11(DSL) port x 1 USB port x 1
ASSOCIATED DEVICES	Antenna x 2 Adapter x 1

NOTE:

- There are two antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Antenna Connector
1	Dipole	2	NA
2	Dipole	2	NA

2. The EUT must be supplied with a power adapter as following:

Brand:	Foxlink
Model No.:	FA-1501250SUA
Input power :	AC100-240V, 0.5A, 50-60Hz
Output power :	DC 15V, 1.25A DC output cable (Unshielded, 2m)

3. The EUT incorporates a MIMO function with draft 802.11n. Physically, the EUT provides two completed transmit and two completed receivers.

4. The EUT is 2 * 2 spatial MIMO without beam forming function. The antenna configurations are two transmitter antennas and two receiver antennas, as there are 2 Dipole antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas.

5. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.

6. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC:** Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	TX CHAIN(0)	TX CHAIN(1)
A	802.11b	√	
B	802.11g	√	
C	DRAFT 802.11n(20MHz) for MCS 0~7	√	√
D	DRAFT 802.11n(20MHz) for MCS 8~15	√	√
E	DRAFT 802.11n(40MHz) for MCS 0~7	√	√
F	DRAFT 802.11n(40MHz) for MCS 8~15	√	√

Note:

- The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
- Antenna 1 and Antenna 2 are Dipole antennas.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1	DSSS	DBPSK	1	A

RADIATED EMISSION TEST (BELOW 1 GHZ):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1	DSSS	DBPSK	1	A

RADIATED EMISSION TEST (ABOVE 1 GHZ):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	C
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15	E

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 11	OFDM	BPSK	6	B
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2	C
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15	E

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	A
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	B
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	C
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15	E

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	CN-04Y212-48643-38E-0145	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166-5CA-0448	PIW632500516610
3	NOTEBOOK COMPUTER (For conducted test only)	DELL	PP18L	6976685584	FCC DoC
4	CO-ROUTER	ZyXEL	IES-1000	S4Z3112558	FCC DoC
5	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
6	IPOD	Apple	A1137	6U6078FMUPR	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (Unshielded, 1.3m)
2	UTP cable (Unshielded, 10m)
3	Wireless
4	RJ-11 Cable (Unshielded, 10m)
5	UTP cable (Unshielded, 10m)
6	1 m shielded cable, terminated with USB connector, w/o core.


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted Emission test:

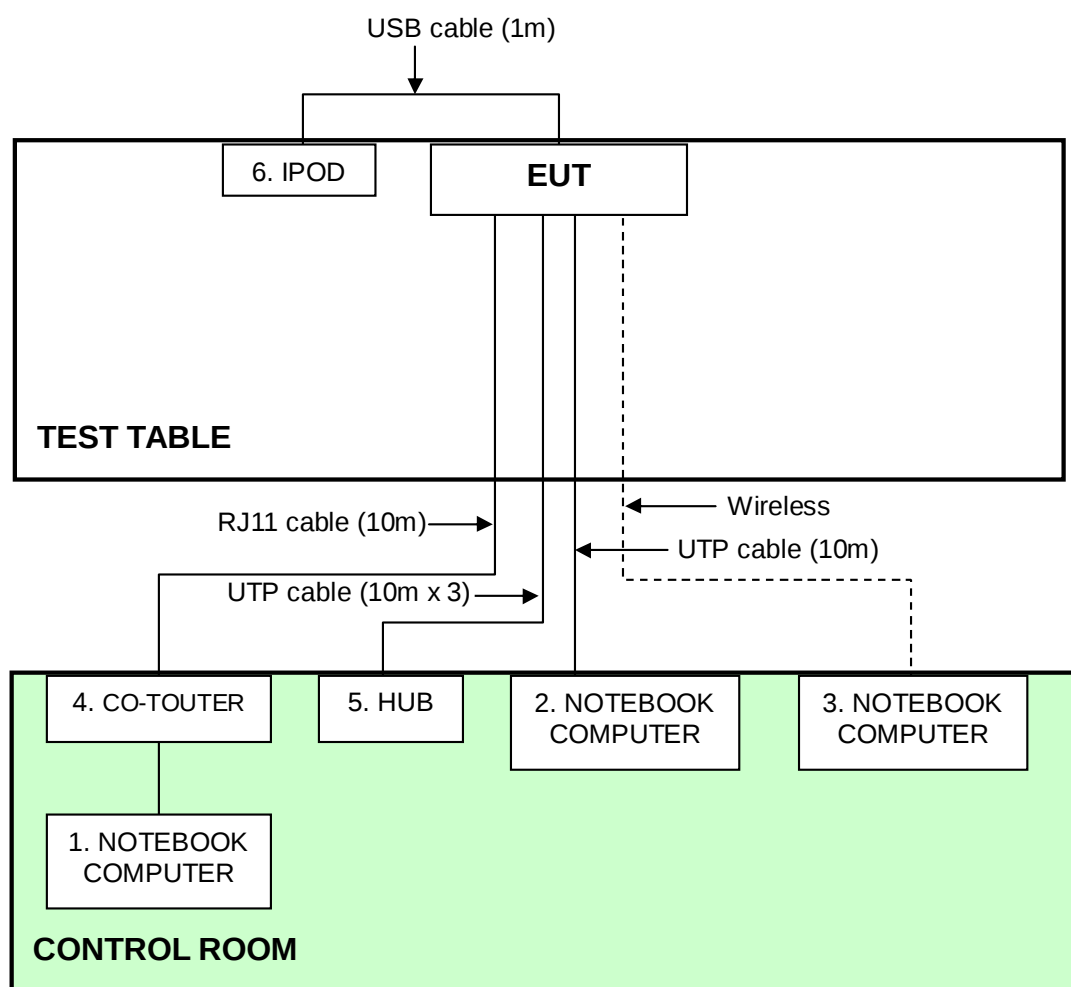

For other test:

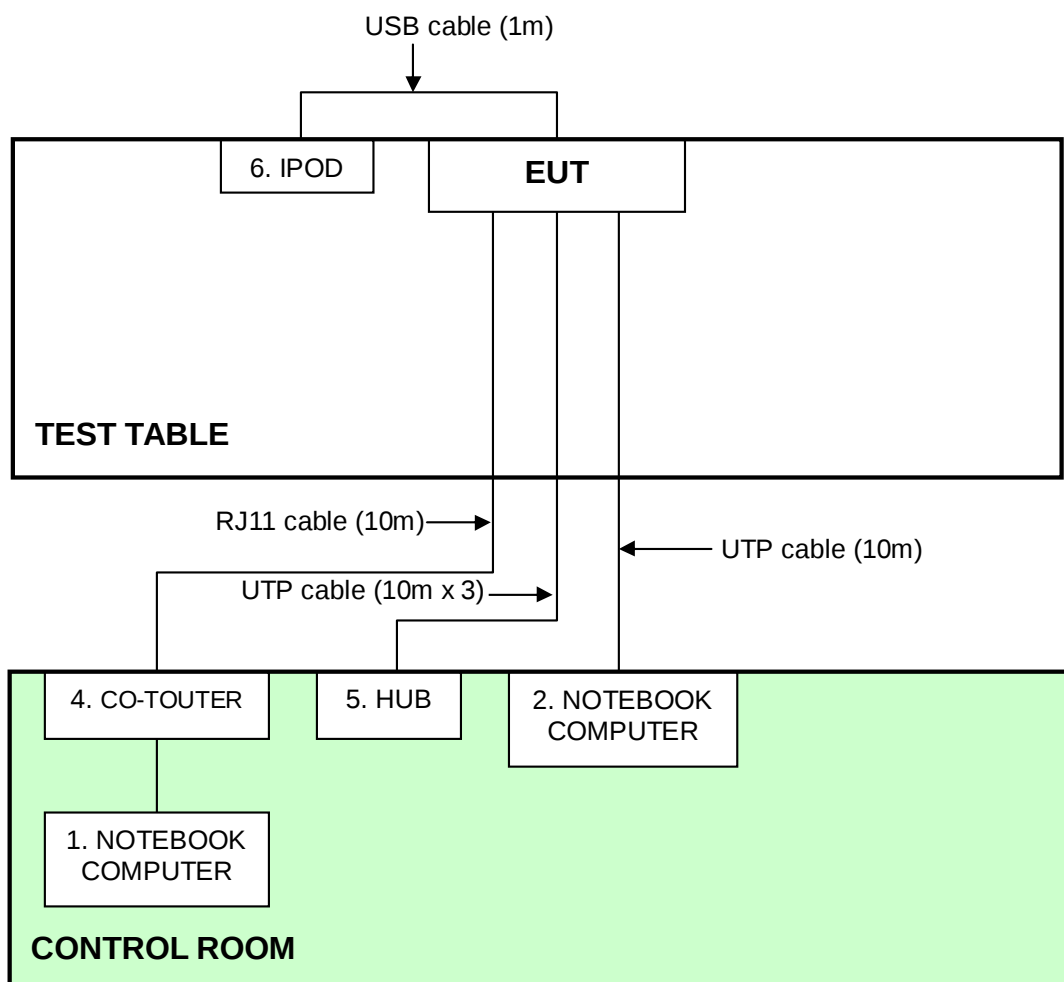

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 23, 2009	Mar. 22, 2010
Line-Impedance Stabilization Network (for EUT)	ENV-216	100071	Nov. 26, 2008	Nov. 25, 2009
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 05, 2008	Nov. 04, 2009
RF Cable (JYEBAO)	5DFB	COBCAB-001	Aug. 15, 2008	Aug. 14, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

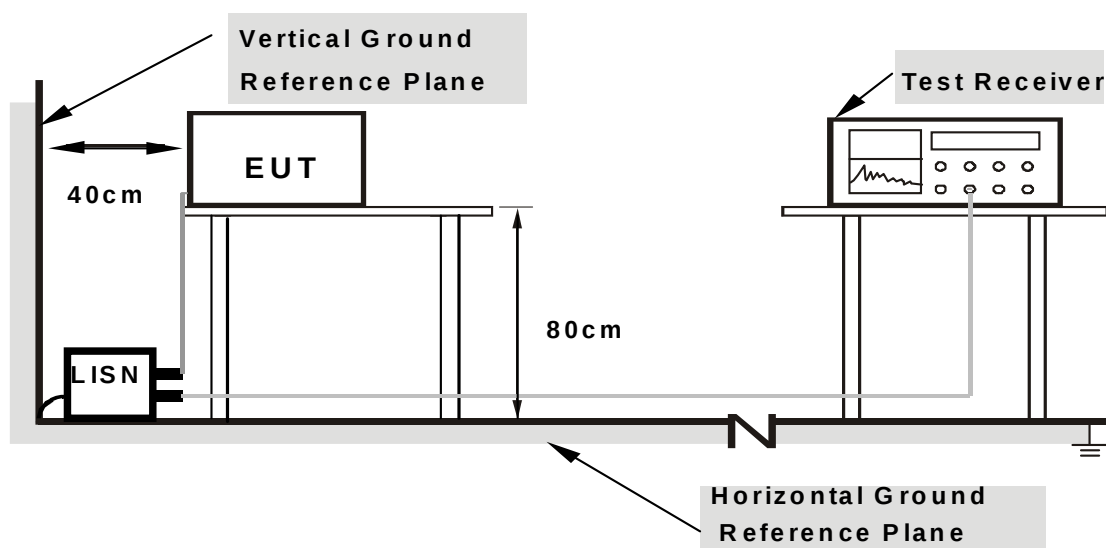

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 5) to act as communication partners and placed them outside of testing area.
3. The communication partners run test program “Ping.exe” to enable EUT under transmission/receiving condition continuously via UTP cables, one RJ-11 cable and wireless transmission.


4.1.7 TEST RESULTS

802.11B OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 965hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.22	50.12	-	50.34	-	63.91	53.91	-13.57	-
2	0.259	0.29	41.69	-	41.98	-	61.45	51.45	-19.47	-
3	0.318	0.36	35.55	-	35.91	-	59.76	49.76	-23.85	-
4	0.474	0.44	33.89	-	34.33	-	56.44	46.44	-22.11	-
5	11.677	0.84	30.42	-	31.26	-	60.00	50.00	-28.74	-
6	23.129	1.63	32.31	-	33.94	-	60.00	50.00	-26.06	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

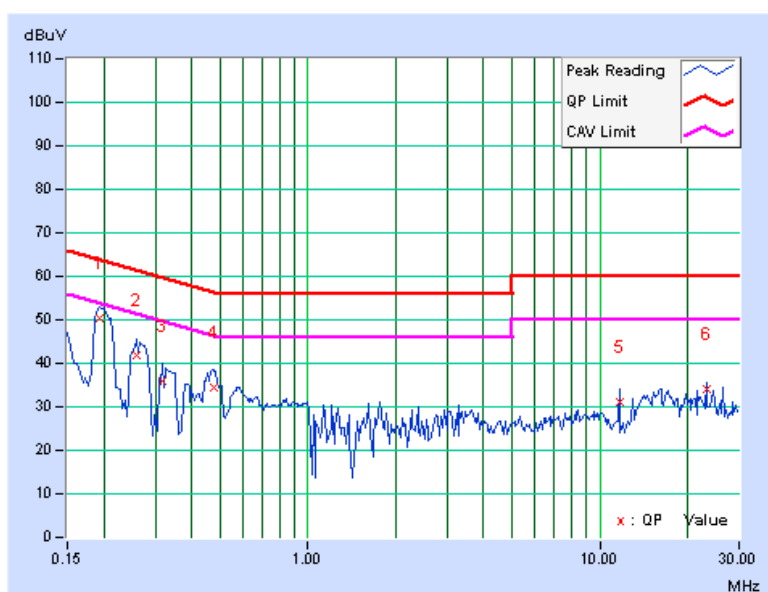

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line (L)
MODULATION TYPE	DBPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 965hPa	TESTED BY	Eric Lee

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.15	50.67	-	50.82	-	63.91	53.91	-13.09	-
2	0.255	0.22	42.18	-	42.40	-	61.58	51.58	-19.18	-
3	0.318	0.30	36.17	-	36.47	-	59.76	49.76	-23.29	-
4	0.490	0.37	33.61	-	33.98	-	56.18	46.18	-22.20	-
5	11.682	0.68	32.45	-	33.13	-	60.00	50.00	-26.87	-
6	15.031	0.89	28.16	-	29.05	-	60.00	50.00	-30.95	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

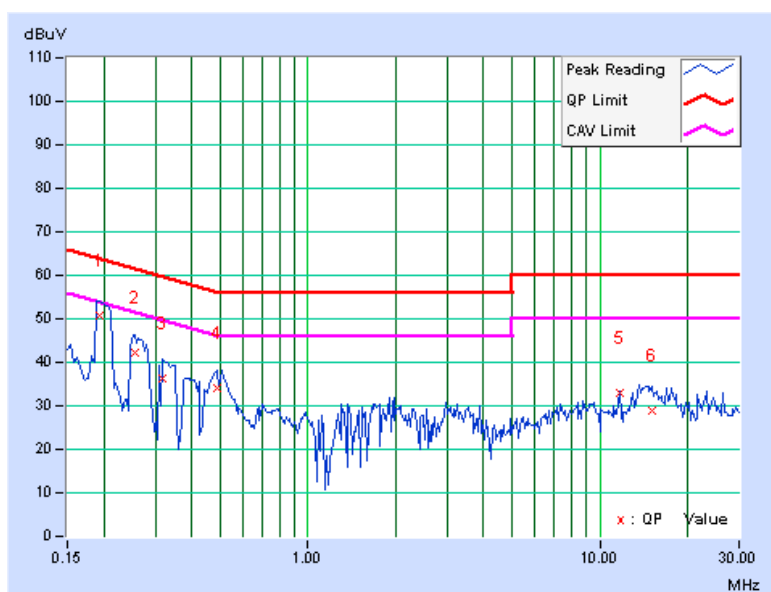

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 9, 2008	Dec. 8, 2009
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 9, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 9, 2008	Sep. 8, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
R&S Loop Antenna	HFH2-Z2	100070	Jan. 14, 2008	Jan. 13, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 15, 2008	Aug. 14, 2009
RF Cable	8DFB	STCCAB-30M-1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

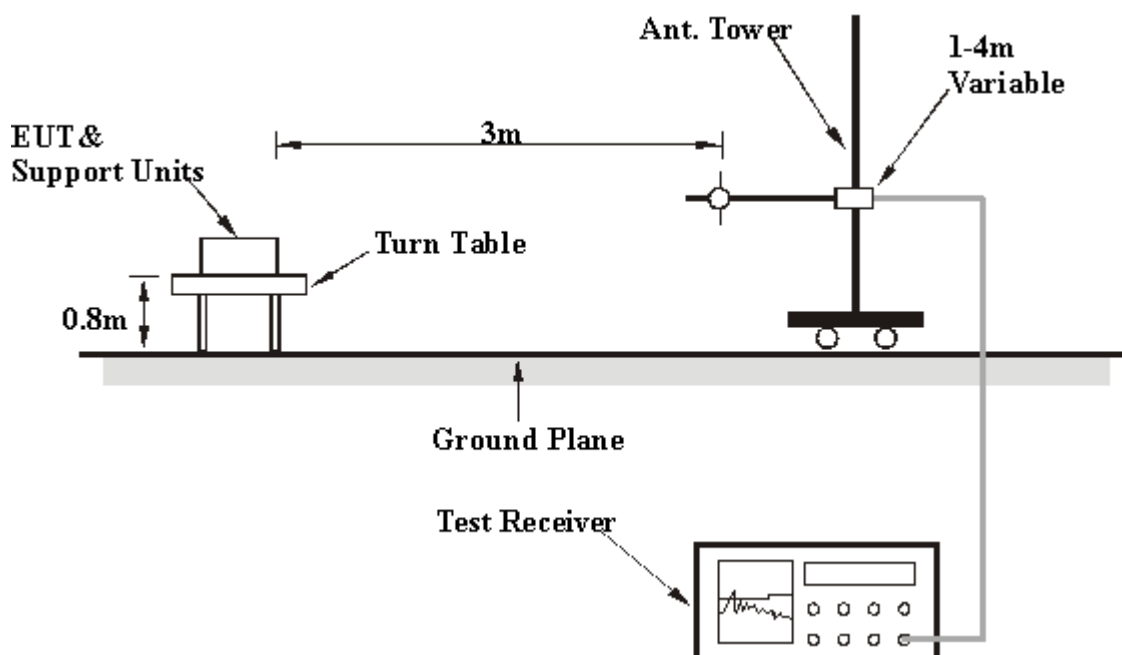

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared other computer systems (support units 1 ~ 5) to act as communication partners and placed them outside of testing area.
3. The communication partner runs test program" ARC MEG TOOL 2.0.0.9.exe" to enable EUT under transmission condition continuously at specific channel frequency via UTP cables and one RJ-11 cable.



A D T

4.2.7 TEST RESULTS – Below 1GHz

BELOW 1GHz WORST-CASE DATA : 802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25.0deg. C, 72.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.99	41.60 QP	46.00	-4.40	1.11 H	95	27.35	14.25
2	399.99	33.23 QP	46.00	-12.77	1.98 H	58	13.73	19.50
3	499.99	34.95 QP	46.00	-11.05	1.59 H	259	12.46	22.49
4	625.00	35.72 QP	46.00	-10.28	1.00 H	122	10.43	25.29
5	750.01	36.06 QP	46.00	-9.94	1.35 H	108	9.15	26.91
6	875.01	31.93 QP	46.00	-14.07	1.16 H	238	2.64	29.29
7	1000.01	35.33 QP	54.00	-18.67	1.12 H	124	4.59	30.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	75.00	38.70 QP	40.00	-1.30	1.00 V	118	26.59	12.11
2	125.00	29.60 QP	43.50	-13.90	1.00 V	242	16.54	13.06
3	249.99	40.60 QP	46.00	-5.40	1.00 V	277	26.35	14.25
4	375.00	35.07 QP	46.00	-10.93	1.05 V	152	16.26	18.81
5	399.99	40.97 QP	46.00	-5.03	1.00 V	180	21.47	19.50
6	500.00	43.02 QP	46.00	-2.98	1.00 V	118	20.53	22.49
7	625.01	34.73 QP	46.00	-11.27	1.66 V	89	9.44	25.29
8	750.01	37.79 QP	46.00	-8.21	1.48 V	51	10.88	26.91
9	875.01	33.78 QP	46.00	-12.22	1.00 V	278	4.49	29.29
10	1000.01	37.51 QP	54.00	-16.49	1.00 V	172	6.77	30.74

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS – Above 1GHz

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.28	56.64 PK	74.00	-17.36	1.41 H	81	26.37	30.27
2	2387.28	45.98 AV	54.00	-8.02	1.41 H	81	15.71	30.27
3	*2412.00	102.75 PK			1.42 H	75	72.39	30.36
4	*2412.00	98.92 AV			1.42 H	75	68.56	30.36
5	4824.00	55.49 PK	74.00	-18.51	1.19 H	30	18.70	36.79
6	4824.00	52.08 AV	54.00	-1.92	1.19 H	30	15.29	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.28	62.29 PK	74.00	-11.71	1.20 V	293	32.02	30.27
2	2387.28	53.07 AV	54.00	-0.93	1.20 V	293	22.80	30.27
3	*2412.00	111.90 PK			1.19 V	72	81.54	30.36
4	*2412.00	108.40 AV			1.19 V	72	78.04	30.36
5	4824.00	56.36 PK	74.00	-17.64	1.06 V	104	19.57	36.79
6	4824.00	53.50 AV	54.00	-0.50	1.06 V	104	16.71	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.25 PK			1.42 H	73	69.79	30.46
2	*2437.00	96.68 AV			1.42 H	73	66.22	30.46
3	4874.00	54.27 PK	74.00	-19.73	1.07 H	33	17.35	36.92
4	4874.00	50.43 AV	54.00	-3.57	1.07 H	33	13.51	36.92
5	7311.00	56.03 PK	74.00	-17.97	1.45 H	46	12.89	43.14
6	7311.00	44.42 AV	54.00	-9.58	1.45 H	46	1.28	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2381.52	58.50 PK	74.00	-15.50	1.12 V	275	28.25	30.25
2	2381.52	47.75 AV	54.00	-6.25	1.12 V	275	17.50	30.25
3	*2437.00	112.00 PK			1.12 V	97	81.54	30.46
4	*2437.00	108.59 AV			1.12 V	97	78.13	30.46
5	2492.41	60.64 PK	74.00	-13.36	1.11 V	284	29.98	30.66
6	2492.41	49.24 AV	54.00	-4.76	1.11 V	284	18.58	30.66
7	4874.00	56.25 PK	74.00	-17.75	1.03 V	91	19.33	36.92
8	4874.00	53.00 AV	54.00	-1.00	1.03 V	91	16.08	36.92
9	7311.00	54.44 PK	74.00	-19.56	1.26 V	255	11.30	43.14
10	7311.00	40.30 AV	54.00	-13.70	1.26 V	255	-2.84	43.14

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.53 PK			1.10 H	95	70.98	30.55
2	*2462.00	97.88 AV			1.10 H	95	67.33	30.55
3	2483.53	57.17 PK	74.00	-16.83	1.60 H	80	26.54	30.63
4	2483.53	45.18 AV	54.00	-8.82	1.60 H	80	14.55	30.63
5	4924.00	55.94 PK	74.00	-18.06	1.06 H	35	18.88	37.06
6	4924.00	45.18 AV	54.00	-8.82	1.06 H	35	8.12	37.06
7	7386.00	55.07 PK	74.00	-18.93	1.46 H	45	11.94	43.13
8	7386.00	42.57 AV	54.00	-11.43	1.46 H	45	-0.56	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.69 PK			1.09 V	284	81.14	30.55
2	*2462.00	108.09 AV			1.09 V	284	77.54	30.55
3	2483.59	62.29 PK	74.00	-11.71	1.09 V	285	31.66	30.63
4	2483.59	51.39 AV	54.00	-2.61	1.09 V	285	20.76	30.63
5	4924.00	56.20 PK	74.00	-17.80	1.03 V	90	19.14	37.06
6	4924.00	52.90 AV	54.00	-1.10	1.03 V	90	15.84	37.06
7	7386.00	53.79 PK	74.00	-20.21	1.27 V	252	10.66	43.13
8	7386.00	39.43 AV	54.00	-14.57	1.27 V	252	-3.70	43.13

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

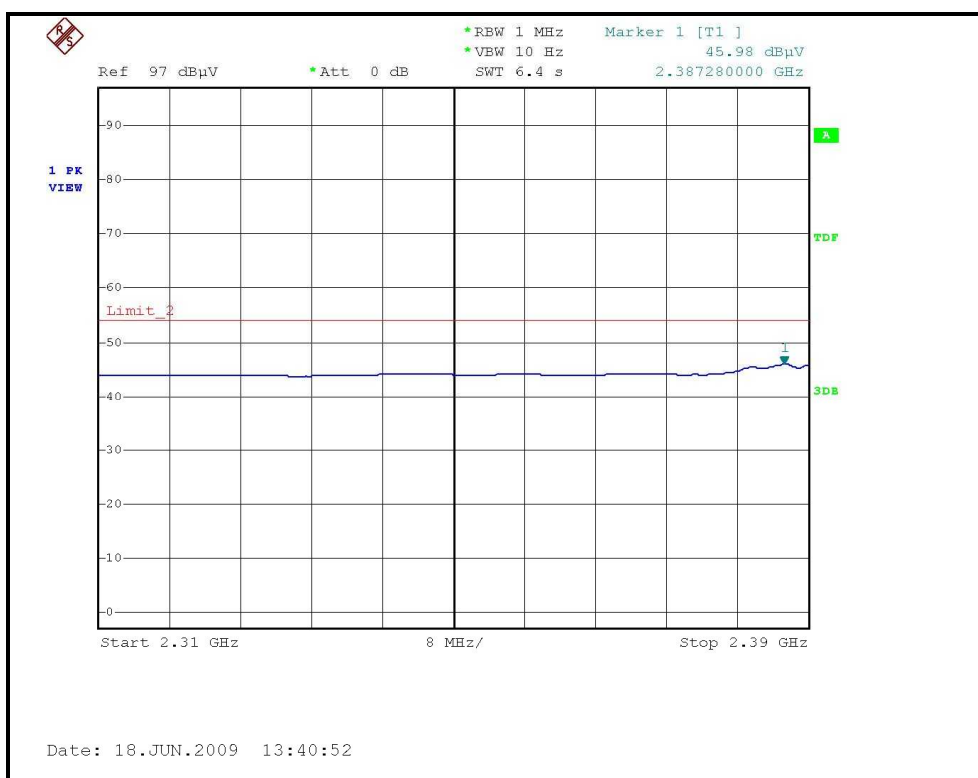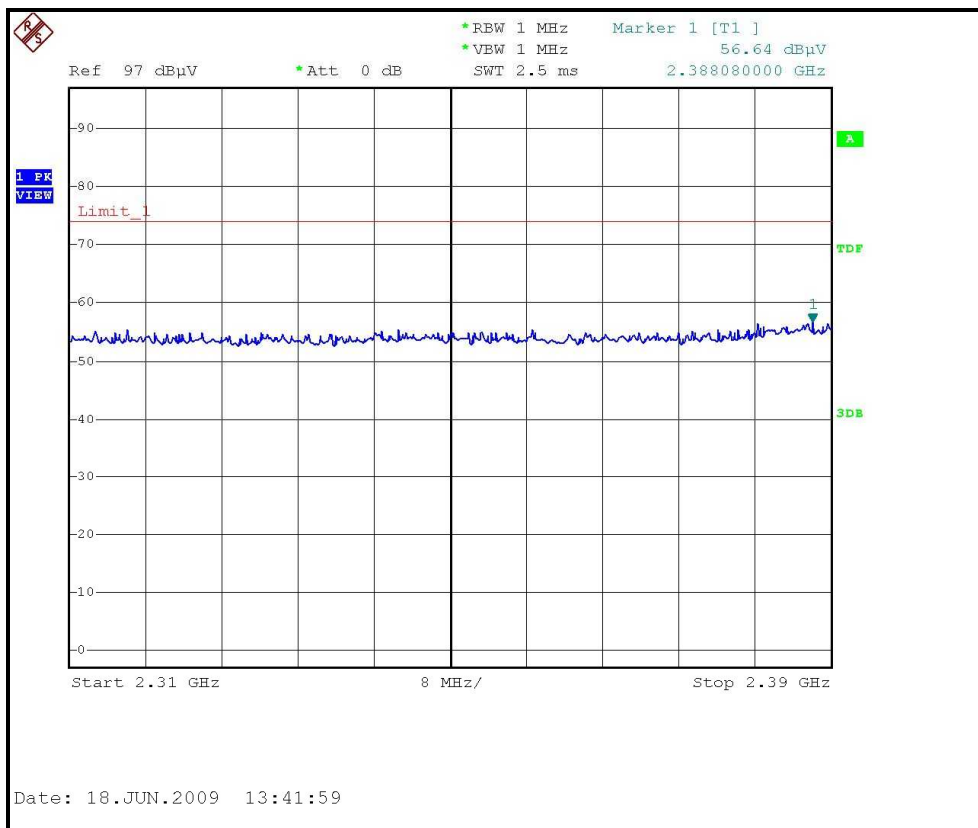





A D T



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

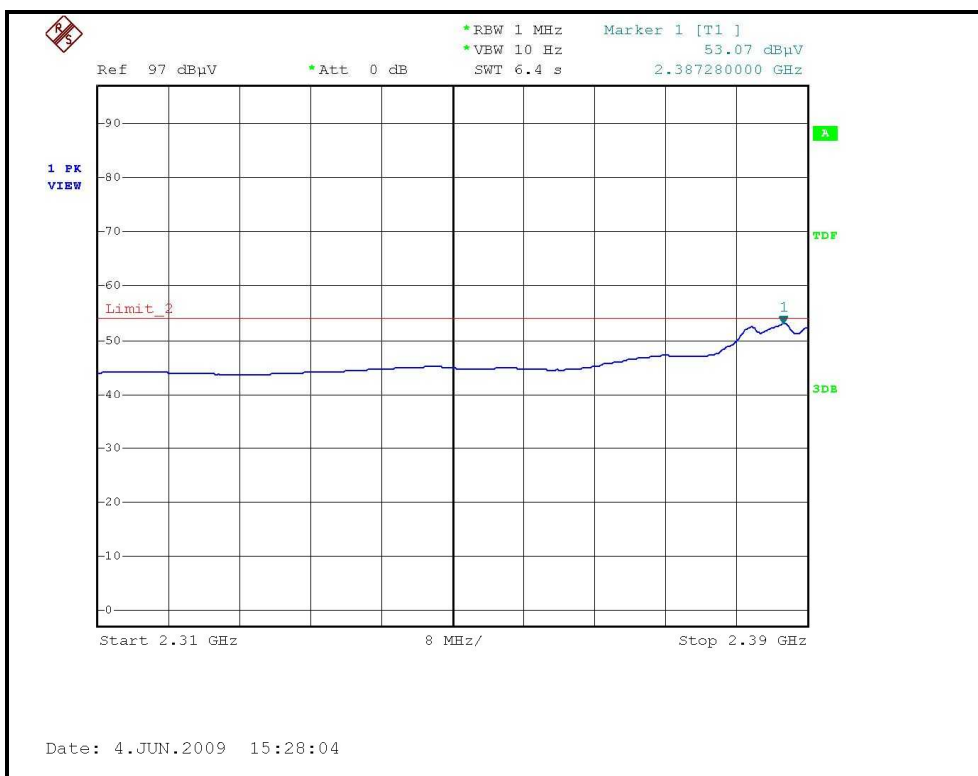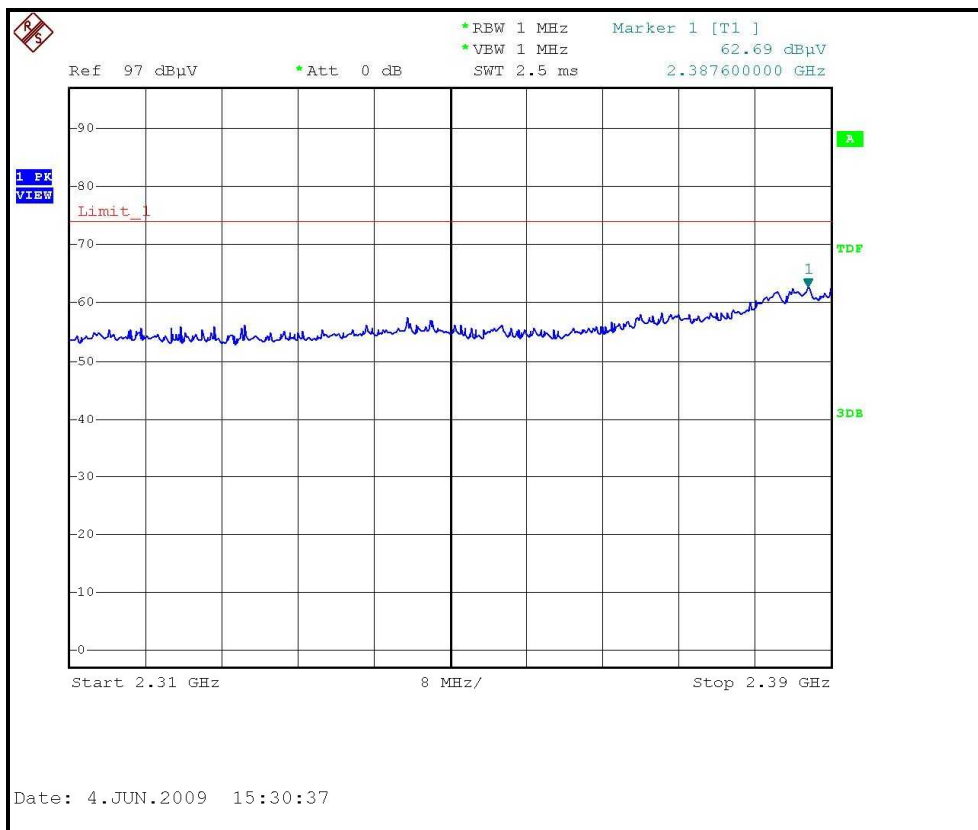

RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

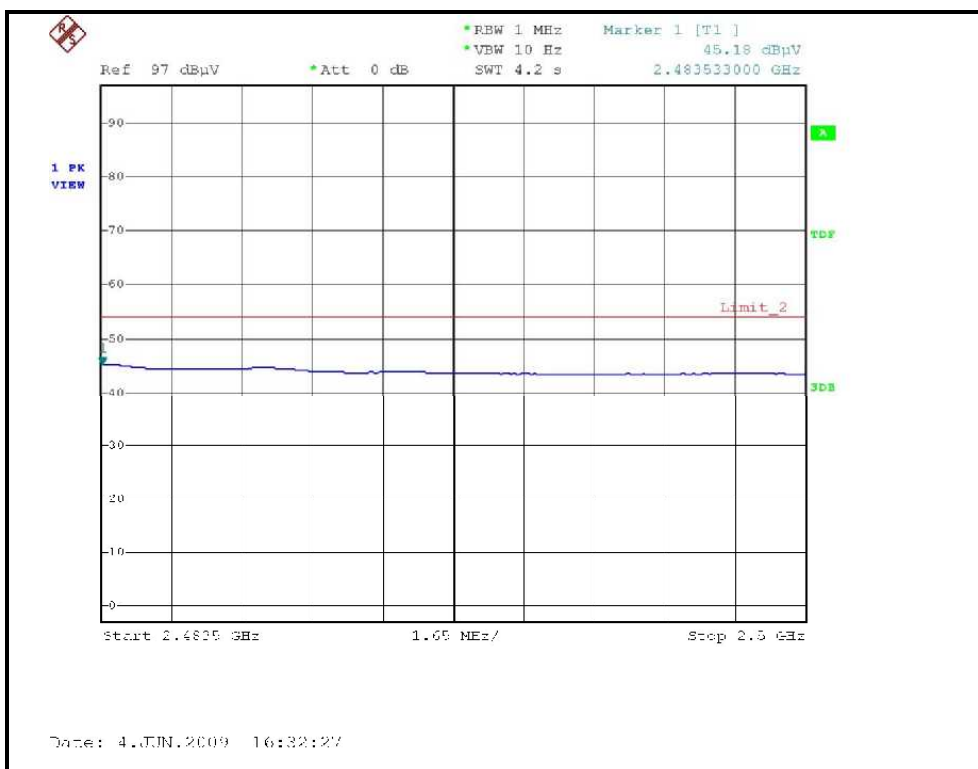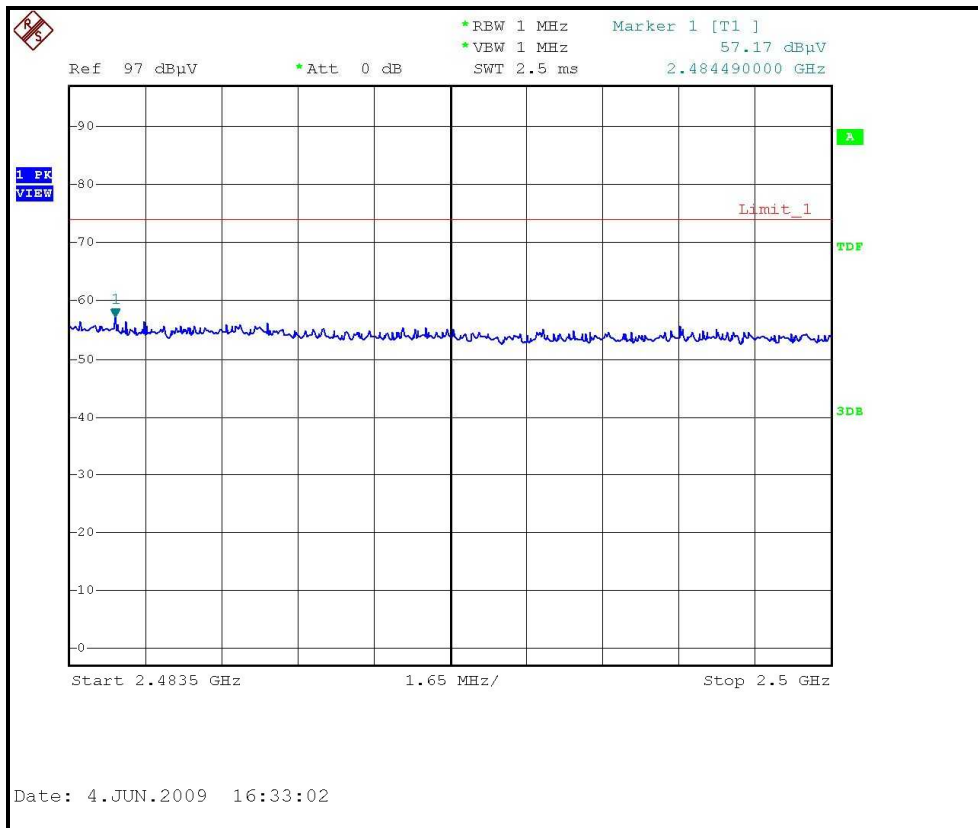

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

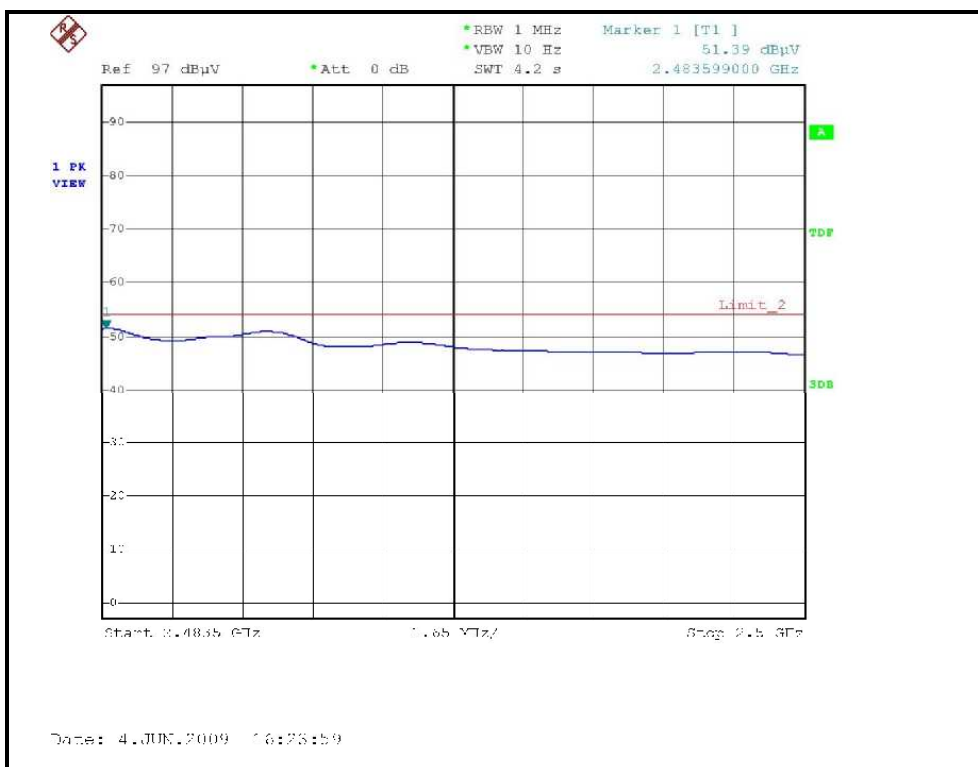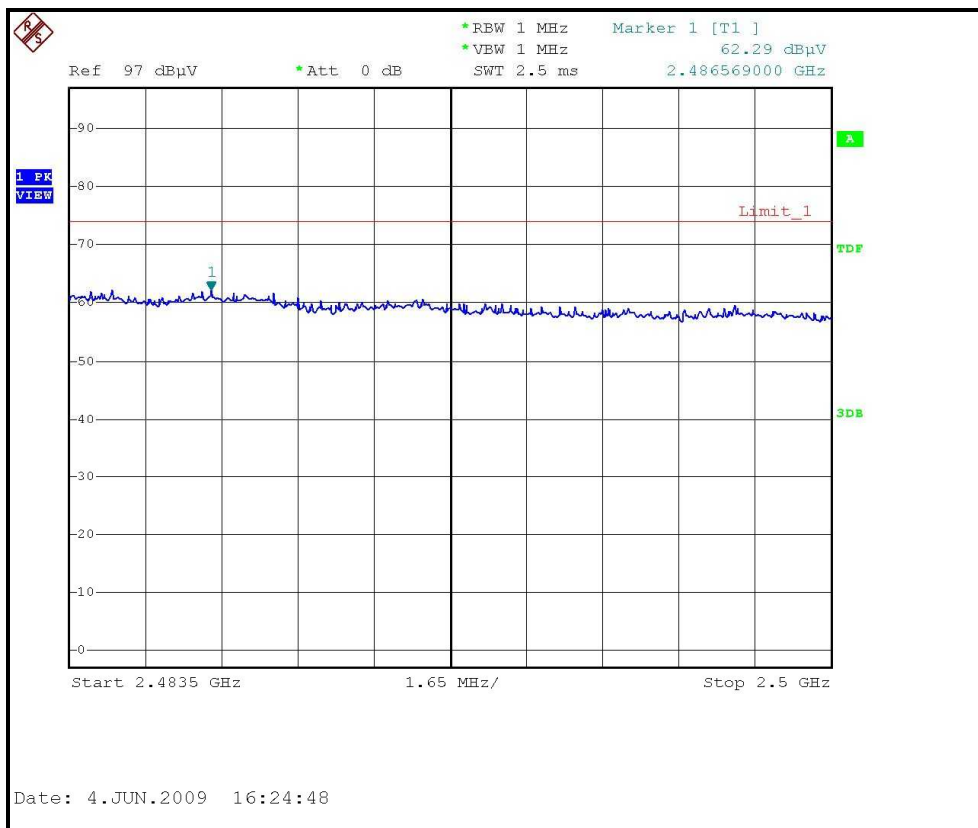



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.78 PK	74.00	-12.22	1.48 H	77	31.50	30.28
2	2390.00	46.93 AV	54.00	-7.07	1.48 H	77	16.65	30.28
3	*2412.00	102.66 PK			1.42 H	74	72.30	30.36
4	*2412.00	93.47 AV			1.42 H	74	63.11	30.36
5	4824.00	52.43 PK	74.00	-21.57	1.30 H	32	15.64	36.79
6	4824.00	37.57 AV	54.00	-16.43	1.30 H	32	0.78	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.42 PK	74.00	-4.58	1.23 V	293	39.14	30.28
2	2390.00	52.67 AV	54.00	-1.33	1.23 V	293	22.39	30.28
3	*2412.00	112.21 PK			1.19 V	72	81.85	30.36
4	*2412.00	102.82 AV			1.19 V	72	72.46	30.36
5	4824.00	52.84 PK	74.00	-21.16	1.17 V	99	16.05	36.79
6	4824.00	38.61 AV	54.00	-15.39	1.17 V	99	1.82	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.00 PK			1.42 H	72	71.54	30.46
2	*2437.00	92.80 AV			1.42 H	72	62.34	30.46
3	4874.00	53.10 PK	74.00	-20.90	1.05 H	33	16.18	36.92
4	4874.00	39.03 AV	54.00	-14.97	1.05 H	33	2.11	36.92
5	7311.00	57.23 PK	74.00	-16.77	1.45 H	32	14.09	43.14
6	7311.00	42.57 AV	54.00	-11.43	1.45 H	32	-0.57	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2384.72	60.07 PK	74.00	-13.93	1.10 V	301	29.81	30.26
2	2384.72	49.34 AV	54.00	-4.66	1.10 V	301	19.08	30.26
3	*2437.00	113.50 PK			1.10 V	88	83.04	30.46
4	*2437.00	104.33 AV			1.10 V	88	73.87	30.46
5	2489.34	63.22 PK	74.00	-10.78	1.09 V	284	32.57	30.65
6	2489.34	51.68 AV	54.00	-2.32	1.09 V	284	21.03	30.65
7	4874.00	53.77 PK	74.00	-20.23	1.00 V	76	16.85	36.92
8	4874.00	40.07 AV	54.00	-13.93	1.00 V	76	3.15	36.92
9	7311.00	53.76 PK	74.00	-20.24	1.24 V	265	10.62	43.14
10	7311.00	40.00 AV	54.00	-14.00	1.24 V	265	-3.14	43.14

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.69 PK			1.41 H	72	68.14	30.55
2	*2462.00	89.45 AV			1.41 H	72	58.90	30.55
3	2483.50	59.33 PK	74.00	-14.67	1.42 H	72	28.70	30.63
4	2483.50	45.24 AV	54.00	-8.76	1.42 H	72	14.61	30.63
5	4924.00	49.82 PK	74.00	-24.18	1.35 H	295	12.76	37.06
6	4924.00	36.27 AV	54.00	-17.73	1.35 H	295	-0.79	37.06
7	7386.00	54.38 PK	74.00	-19.62	1.42 H	62	11.25	43.13
8	7386.00	40.81 AV	54.00	-13.19	1.42 H	62	-2.32	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.16 PK			1.09 V	279	81.61	30.55
2	*2462.00	102.73 AV			1.09 V	279	72.18	30.55
3	2483.50	69.34 PK	74.00	-4.66	1.11 V	285	38.71	30.63
4	2483.50	52.80 AV	54.00	-1.20	1.11 V	285	22.17	30.63
5	4924.00	52.91 PK	74.00	-21.09	1.19 V	104	15.85	37.06
6	4924.00	37.58 AV	54.00	-16.42	1.19 V	104	0.52	37.06
7	7386.00	51.46 PK	74.00	-22.54	1.28 V	67	8.33	43.13
8	7386.00	39.24 AV	54.00	-14.76	1.28 V	67	-3.89	43.13

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.


RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

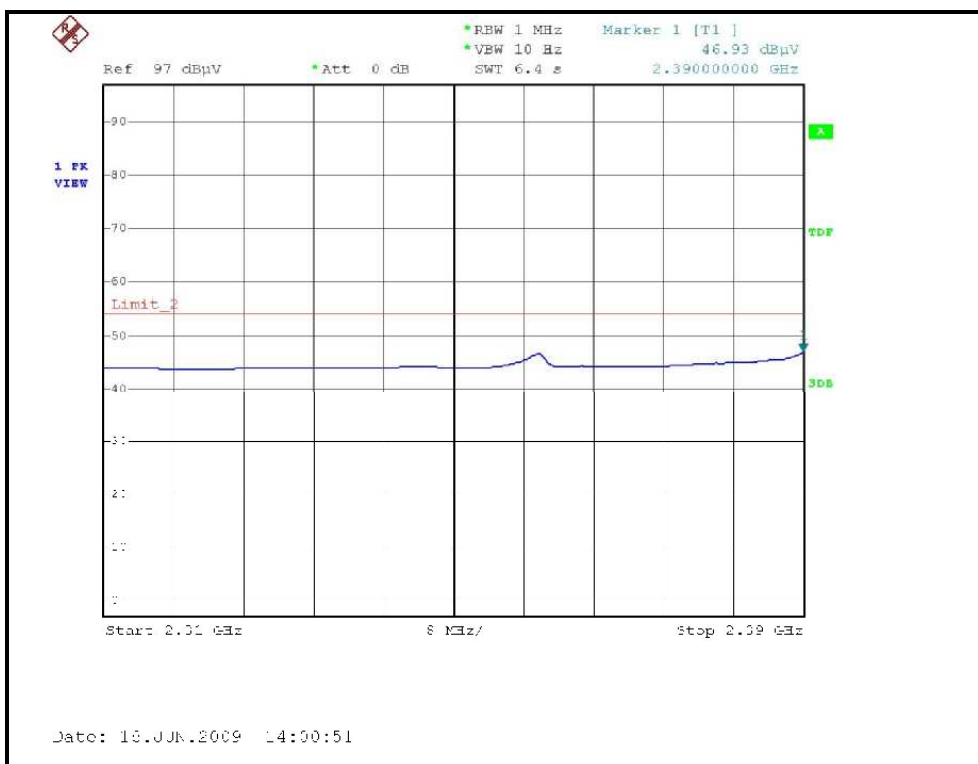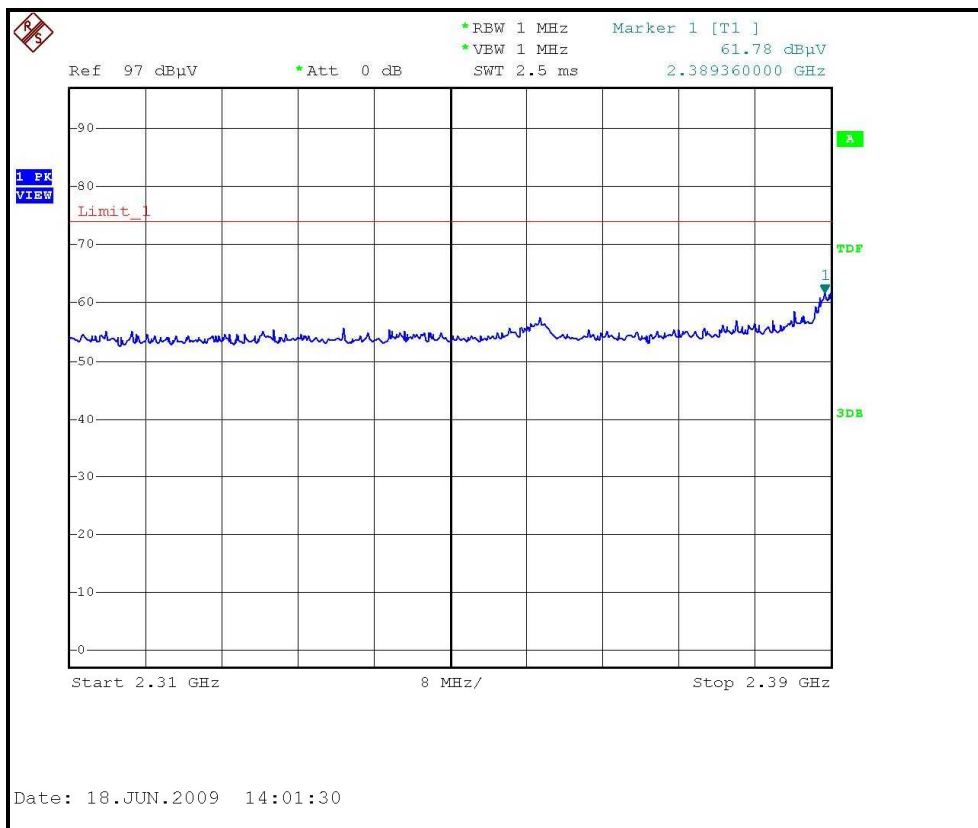


RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

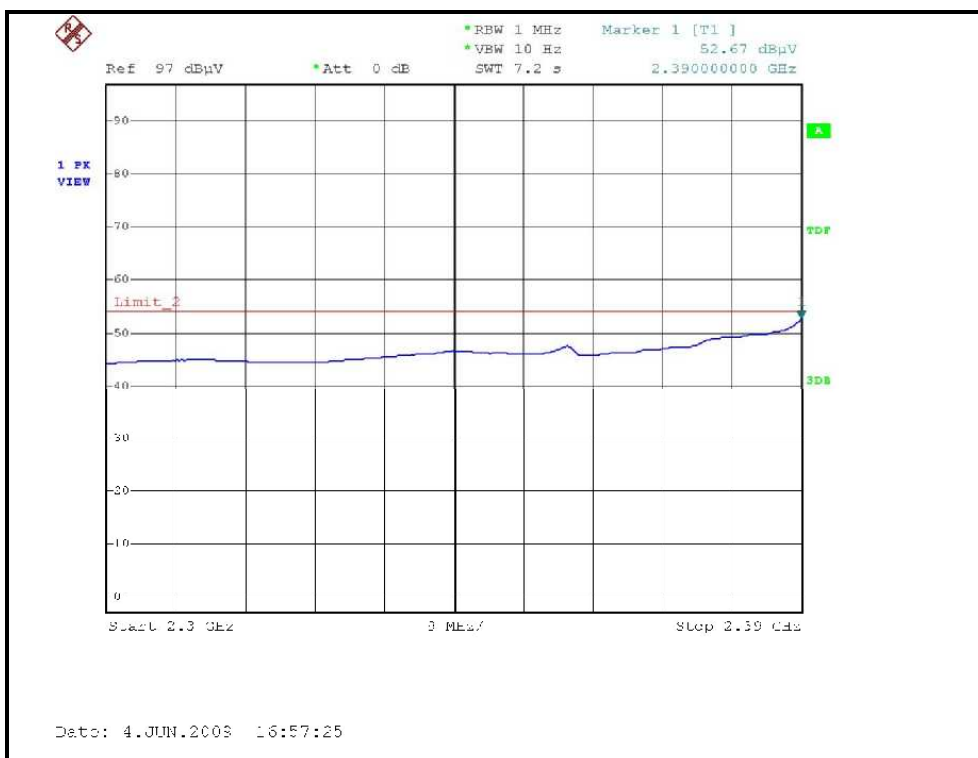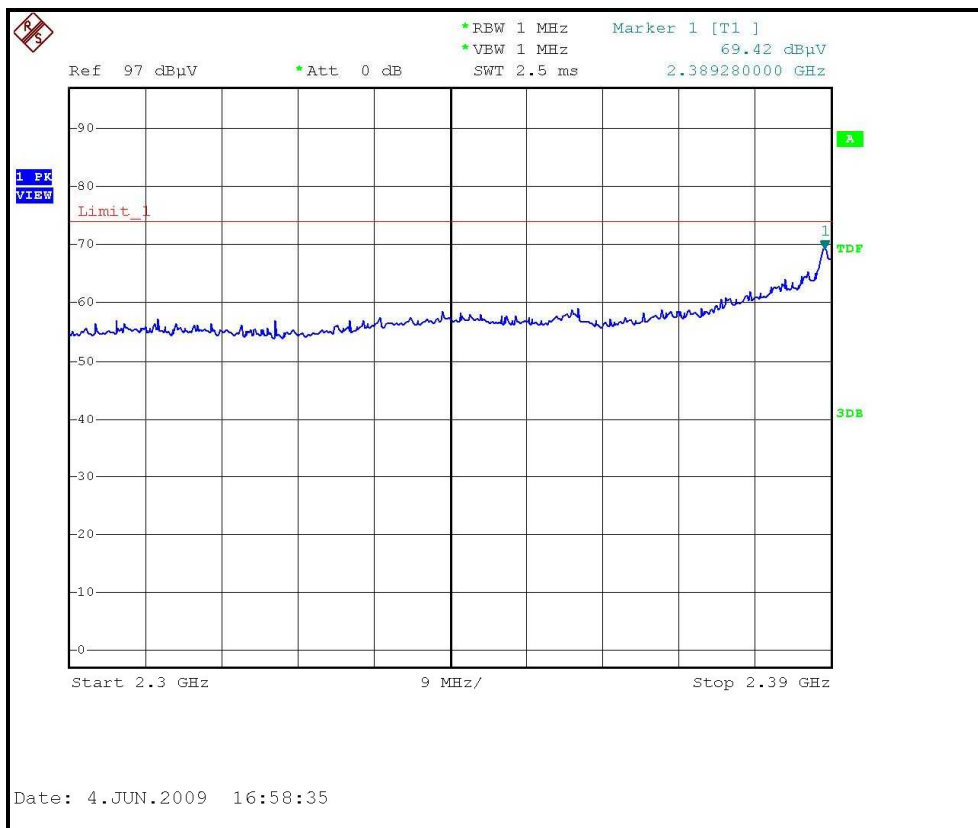

RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

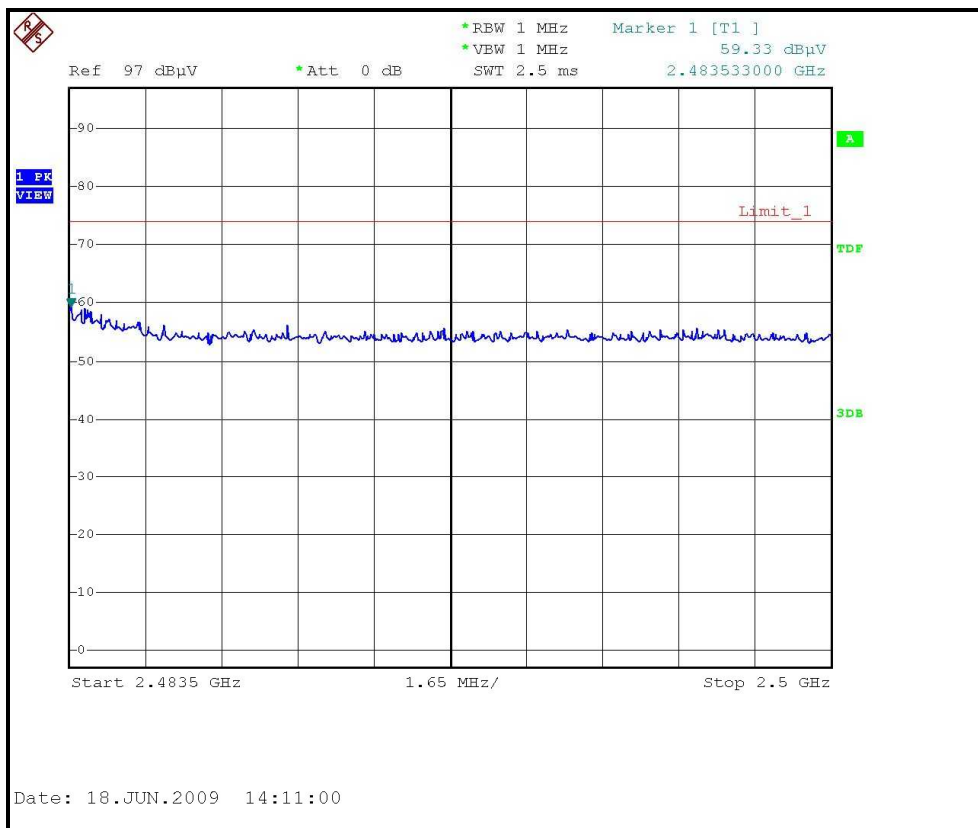

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

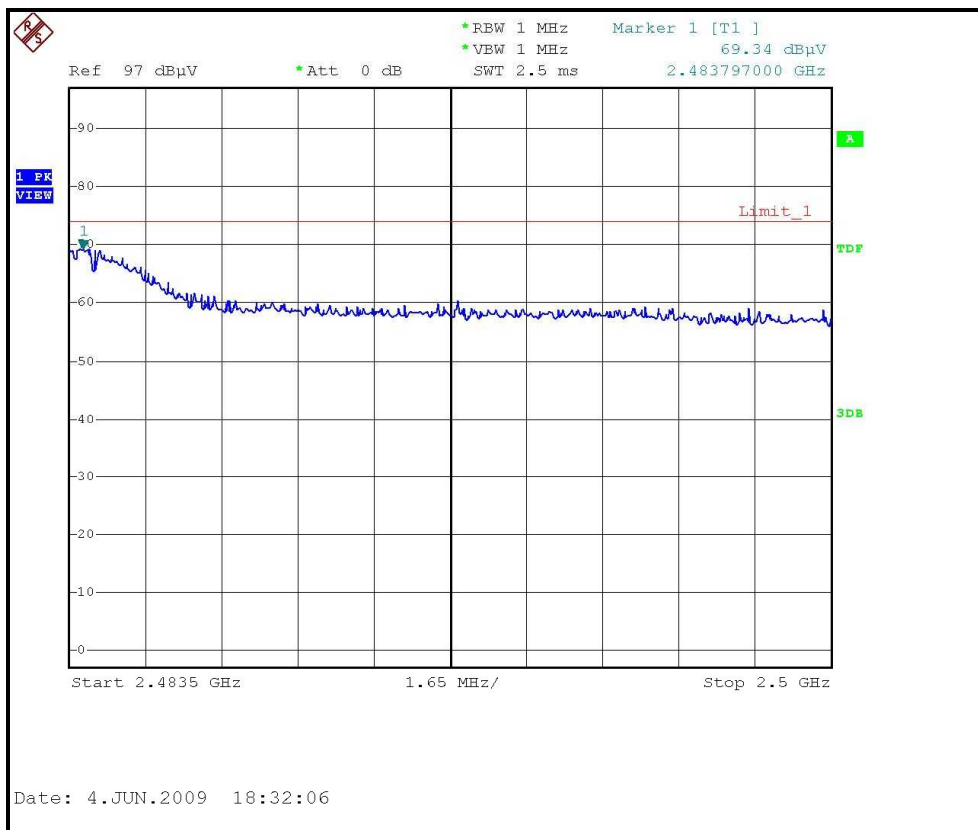

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.98 PK	74.00	-14.02	1.41 H	59	29.70	30.28
2	2390.00	45.51 AV	54.00	-8.49	1.41 H	59	15.23	30.28
3	*2412.00	102.53 PK			1.39 H	61	72.17	30.36
4	*2412.00	92.77 AV			1.39 H	61	62.41	30.36
5	4824.00	49.24 PK	74.00	-24.76	1.58 H	20	12.45	36.79
6	4824.00	35.59 AV	54.00	-18.41	1.58 H	20	-1.20	36.79
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.21 PK	74.00	-7.79	1.22 V	249	35.93	30.28
2	2390.00	52.60 AV	54.00	-1.40	1.22 V	249	22.32	30.28
3	*2412.00	114.82 PK			1.18 V	276	84.46	30.36
4	*2412.00	105.11 AV			1.18 V	276	74.75	30.36
5	4824.00	49.72 PK	74.00	-24.28	1.42 V	84	12.93	36.79
6	4824.00	36.58 AV	54.00	-17.42	1.42 V	84	-0.21	36.79

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.81 PK			1.40 H	48	72.35	30.46
2	*2437.00	92.80 AV			1.40 H	48	62.34	30.46
3	4874.00	55.08 PK	74.00	-18.92	1.00 H	130	18.16	36.92
4	4874.00	39.05 AV	54.00	-14.95	1.00 H	130	2.13	36.92
5	7311.00	57.10 PK	74.00	-16.90	1.00 H	107	13.96	43.14
6	7311.00	42.13 AV	54.00	-11.87	1.00 H	107	-1.01	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.20	63.91 PK	74.00	-10.09	1.20 V	252	33.64	30.27
2	2385.20	52.40 AV	54.00	-1.60	1.20 V	252	22.13	30.27
3	*2437.00	115.33 PK			1.11 V	264	84.87	30.46
4	*2437.00	105.66 AV			1.11 V	264	75.20	30.46
5	2488.90	63.68 PK	74.00	-10.32	1.35 V	278	33.03	30.65
6	2488.90	52.35 AV	54.00	-1.65	1.35 V	278	21.70	30.65
7	4874.00	51.69 PK	74.00	-22.31	1.20 V	107	14.77	36.92
8	4874.00	38.47 AV	54.00	-15.53	1.20 V	107	1.55	36.92
9	7311.00	53.72 PK	74.00	-20.28	1.46 V	276	10.58	43.14
10	7311.00	39.40 AV	54.00	-14.60	1.46 V	276	-3.74	43.14

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.06 PK			1.41 H	71	68.51	30.55
2	*2462.00	89.40 AV			1.41 H	71	58.85	30.55
3	2483.50	58.58 PK	74.00	-15.42	1.40 H	74	27.95	30.63
4	2483.50	44.92 AV	54.00	-9.08	1.40 H	74	14.29	30.63
5	4924.00	55.47 PK	74.00	-18.53	1.10 H	124	18.41	37.06
6	4924.00	39.52 AV	54.00	-14.48	1.10 H	124	2.46	37.06
7	7386.00	55.00 PK	74.00	-19.00	1.00 H	111	11.87	43.13
8	7386.00	40.98 AV	54.00	-13.02	1.00 H	111	-2.15	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.30 PK			1.37 V	202	83.75	30.55
2	*2462.00	104.52 AV			1.37 V	202	73.97	30.55
3	2483.50	71.37 PK	74.00	-2.63	1.23 V	281	40.74	30.63
4	2483.50	53.46 AV	54.00	-0.54	1.23 V	281	22.83	30.63
5	4924.00	51.40 PK	74.00	-22.60	1.18 V	258	14.34	37.06
6	4924.00	37.84 AV	54.00	-16.16	1.18 V	258	0.78	37.06
7	7386.00	53.68 PK	74.00	-20.32	1.54 V	303	10.55	43.13
8	7386.00	40.01 AV	54.00	-13.99	1.54 V	303	-3.12	43.13

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.





A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, HORIZONTAL)

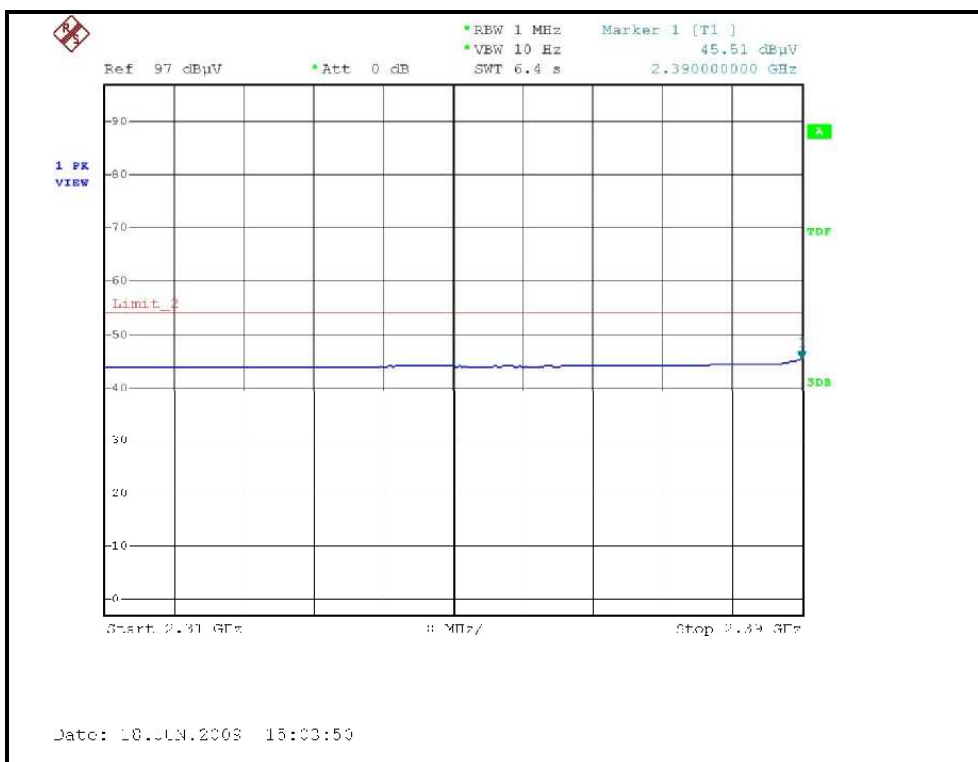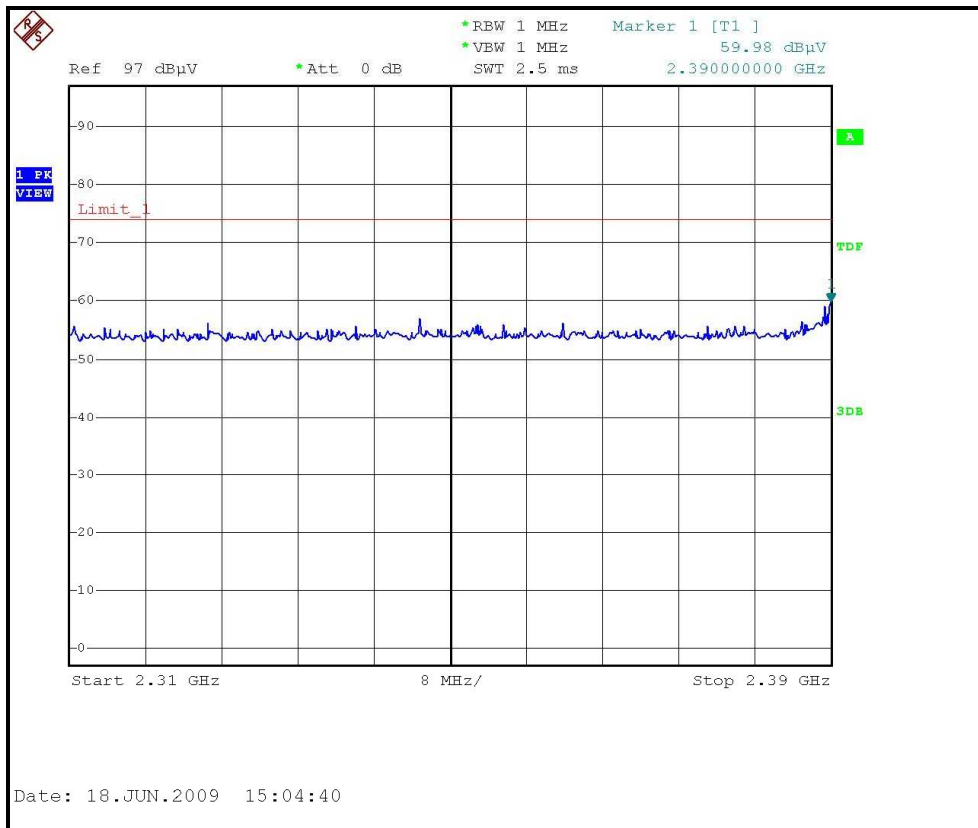


RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH1, VERTICAL)

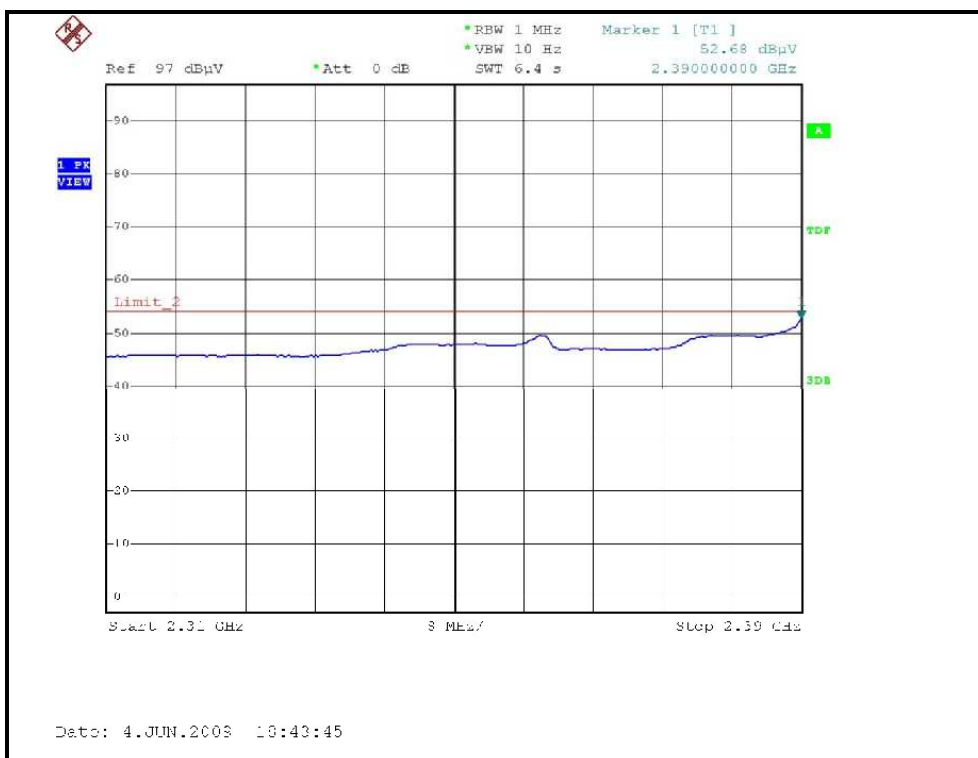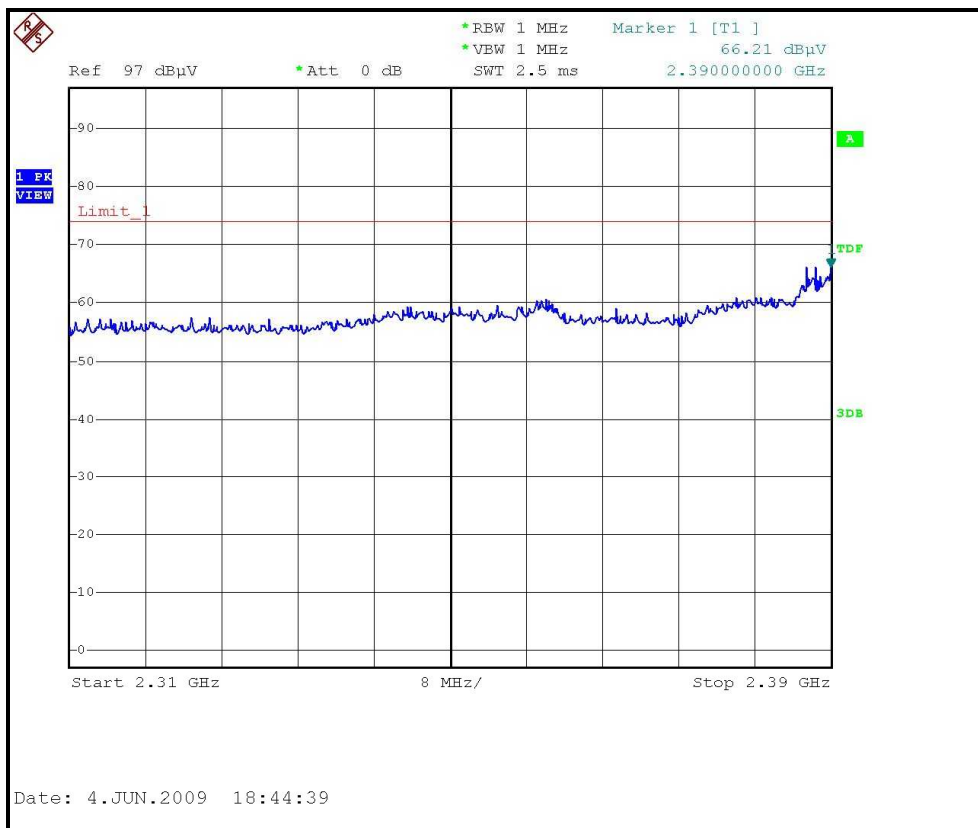





A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, HORIZONTAL)

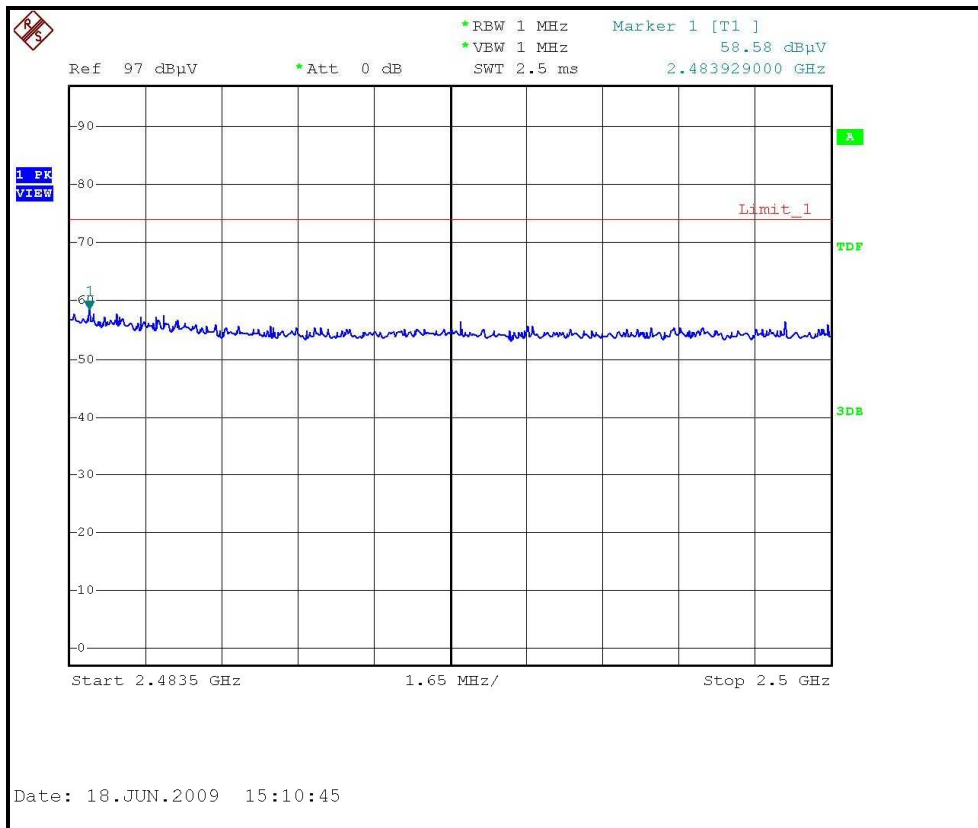

RESTRICTED BANDEDGE (DRAFT 802.11n (20MHz) MODE,CH11, VERTICAL)

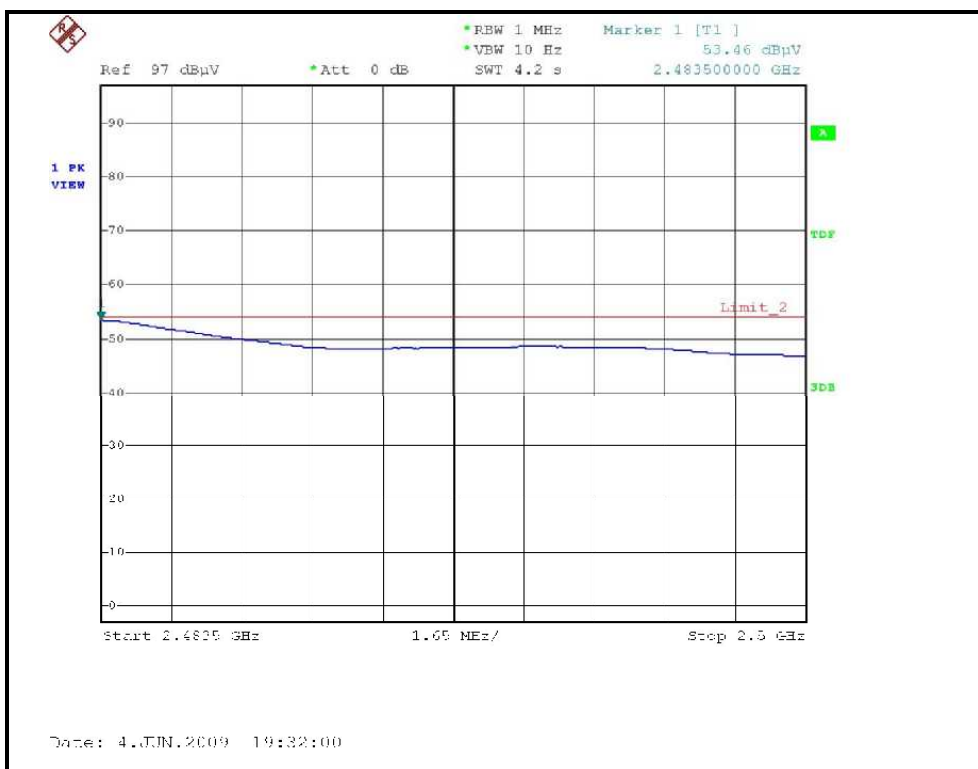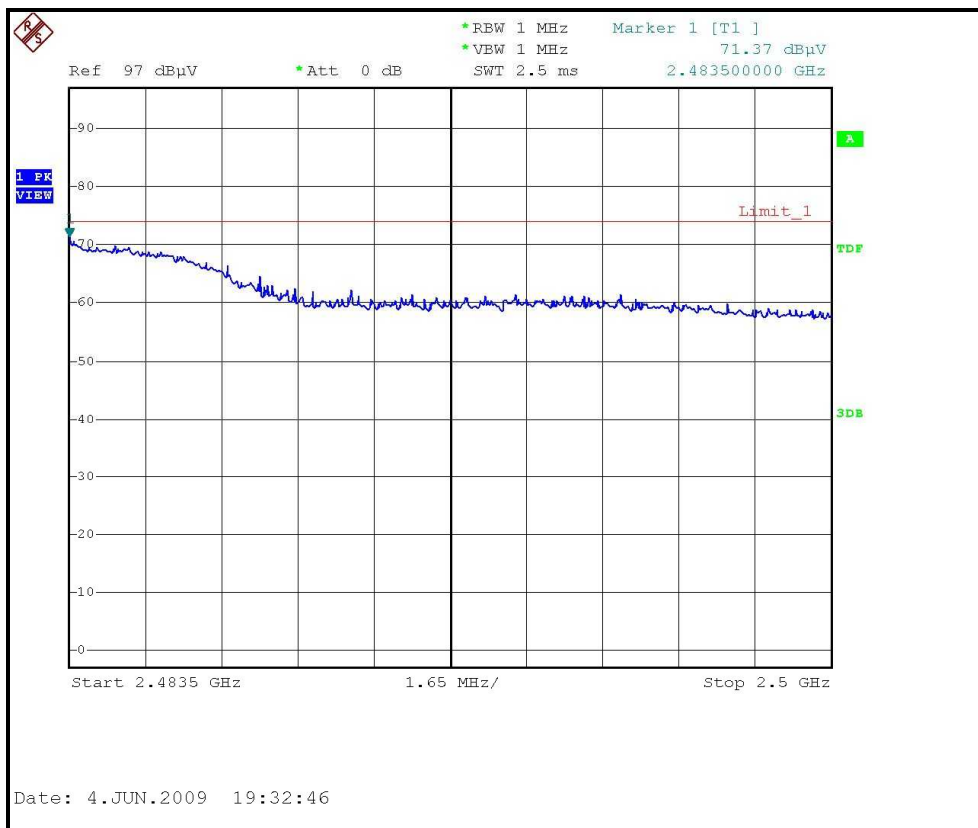



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.38 PK	74.00	-18.62	1.22 H	262	25.10	30.28
2	2390.00	44.88 AV	54.00	-9.12	1.22 H	262	14.60	30.28
3	*2422.00	95.18 PK			1.10 H	47	64.78	30.40
4	*2422.00	86.13 AV			1.10 H	47	55.73	30.40
5	4844.00	48.00 PK	74.00	-26.00	1.00 H	137	11.16	36.84
6	4844.00	34.63 AV	54.00	-19.37	1.00 H	137	-2.21	36.84
7	7266.00	54.31 PK	74.00	-19.69	1.01 H	100	11.17	43.14
8	7266.00	40.46 AV	54.00	-13.54	1.01 H	100	-2.68	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.72 PK	74.00	-8.28	1.22 V	251	35.44	30.28
2	2390.00	53.21 AV	54.00	-0.79	1.22 V	251	22.93	30.28
3	*2422.00	108.98 PK			1.15 V	278	78.58	30.40
4	*2422.00	99.72 AV			1.15 V	278	69.32	30.40
5	4844.00	50.11 PK	74.00	-23.89	1.23 V	69	13.27	36.84
6	4844.00	36.57 AV	54.00	-17.43	1.23 V	69	-0.27	36.84
7	7266.00	53.24 PK	74.00	-20.76	1.40 V	148	10.10	43.14
8	7266.00	39.74 AV	54.00	-14.26	1.40 V	148	-3.40	43.14

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.34 PK			1.22 H	263	67.88	30.46
2	*2437.00	89.09 AV			1.22 H	263	58.63	30.46
3	4874.00	50.08 PK	74.00	-23.92	1.00 H	123	13.16	36.92
4	4874.00	36.92 AV	54.00	-17.08	1.00 H	123	0.00	36.92
5	7311.00	54.50 PK	74.00	-19.50	1.00 H	112	11.36	43.14
6	7311.00	40.75 AV	54.00	-13.25	1.00 H	112	-2.39	43.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.45 PK	74.00	-11.55	1.20 V	251	32.17	30.28
2	2390.00	51.14 AV	54.00	-2.86	1.20 V	251	20.86	30.28
3	*2437.00	112.11 PK			1.11 V	264	81.65	30.46
4	*2437.00	102.40 AV			1.11 V	264	71.94	30.46
5	2483.50	67.12 PK	74.00	-6.88	1.11 V	285	36.49	30.63
6	2483.50	52.01 AV	54.00	-1.99	1.11 V	285	21.38	30.63
7	4874.00	51.25 PK	74.00	-22.75	1.38 V	58	14.33	36.92
8	4874.00	37.58 AV	54.00	-16.42	1.38 V	58	0.66	36.92
9	7311.00	52.48 PK	74.00	-21.52	1.26 V	74	9.34	43.14
10	7311.00	40.48 AV	54.00	-13.52	1.26 V	74	-2.66	43.14

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	29.0deg. C, 58.0%RH 965hPa	TESTED BY	Duke Tseng



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	94.74 PK			1.42 H	265	64.23	30.51
2	*2452.00	84.87 AV			1.42 H	265	54.36	30.51
3	2483.86	57.65 PK	74.00	-16.35	1.43 H	72	27.02	30.63
4	2483.86	45.21 AV	54.00	-8.79	1.43 H	72	14.58	30.63
5	4904.00	49.80 PK	74.00	-24.20	1.00 H	122	12.80	37.00
6	4904.00	35.24 AV	54.00	-18.76	1.00 H	122	-1.76	37.00
7	7356.00	54.23 PK	74.00	-19.77	1.00 H	105	11.10	43.13
8	7356.00	41.46 AV	54.00	-12.54	1.00 H	105	-1.67	43.13
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.07 PK			1.23 V	265	77.56	30.51
2	*2452.00	98.07 AV			1.23 V	265	67.56	30.51
3	2483.80	65.51 PK	74.00	-8.49	1.27 V	273	34.88	30.63
4	2483.80	52.76 AV	54.00	-1.24	1.27 V	273	22.13	30.63
5	4904.00	51.87 PK	74.00	-22.13	1.63 V	248	14.87	37.00
6	4904.00	37.48 AV	54.00	-16.52	1.63 V	248	0.48	37.00
7	7356.00	52.56 PK	74.00	-21.44	1.58 V	7	9.43	43.13
8	7356.00	40.86 AV	54.00	-13.14	1.58 V	7	-2.27	43.13

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, HORIZONTAL)

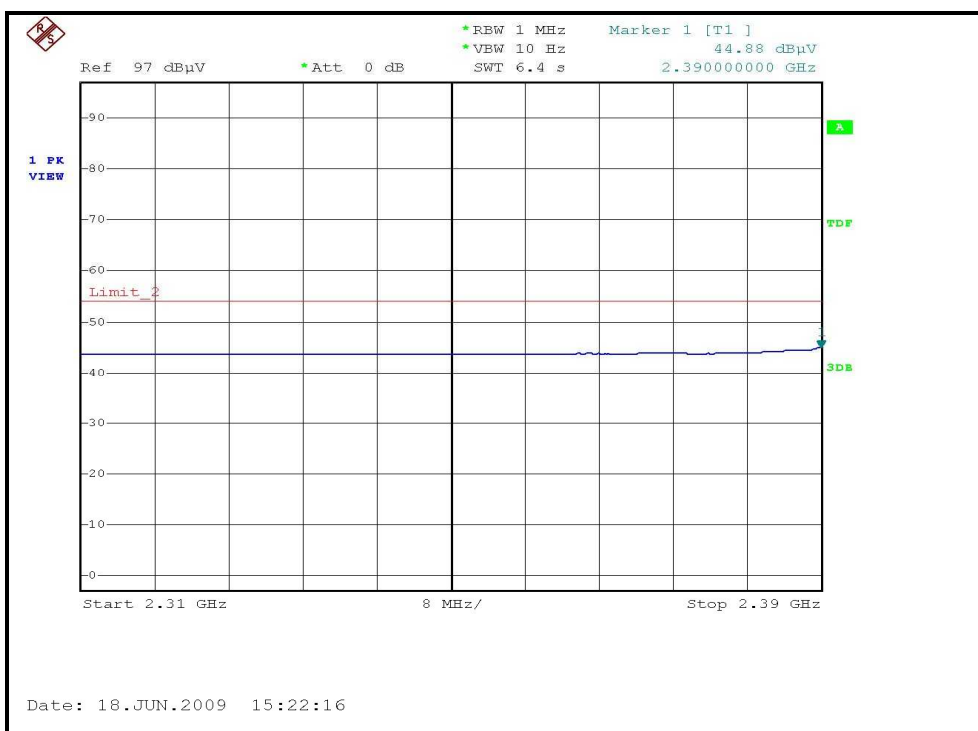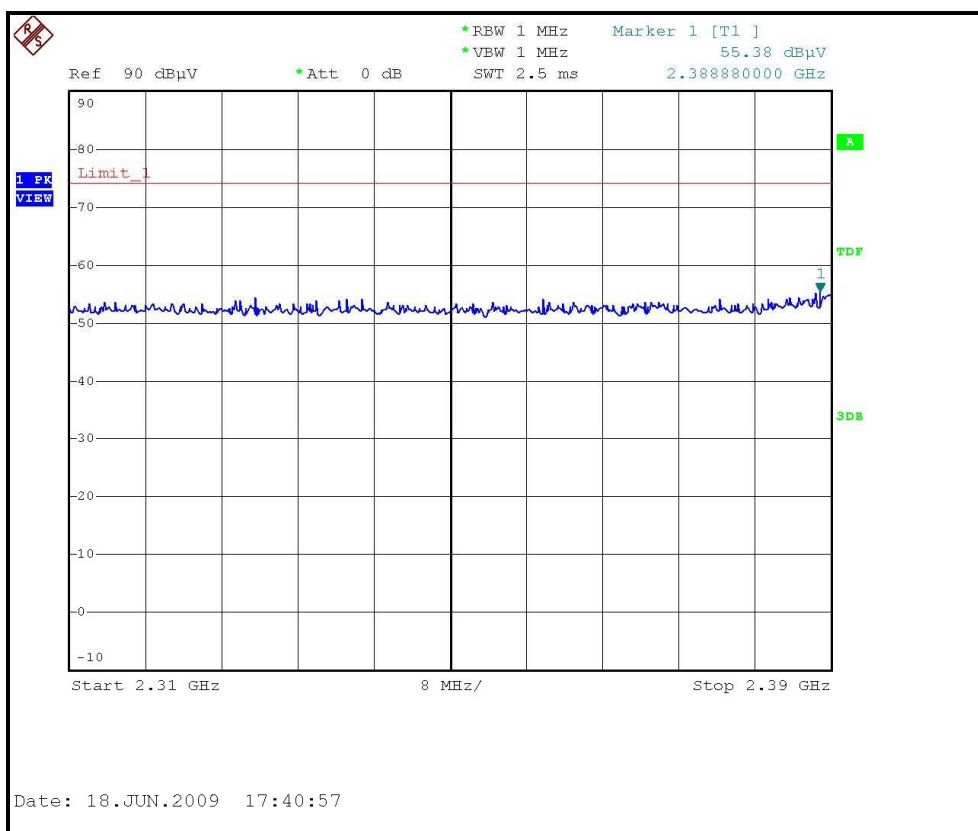



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH1, VERTICAL)

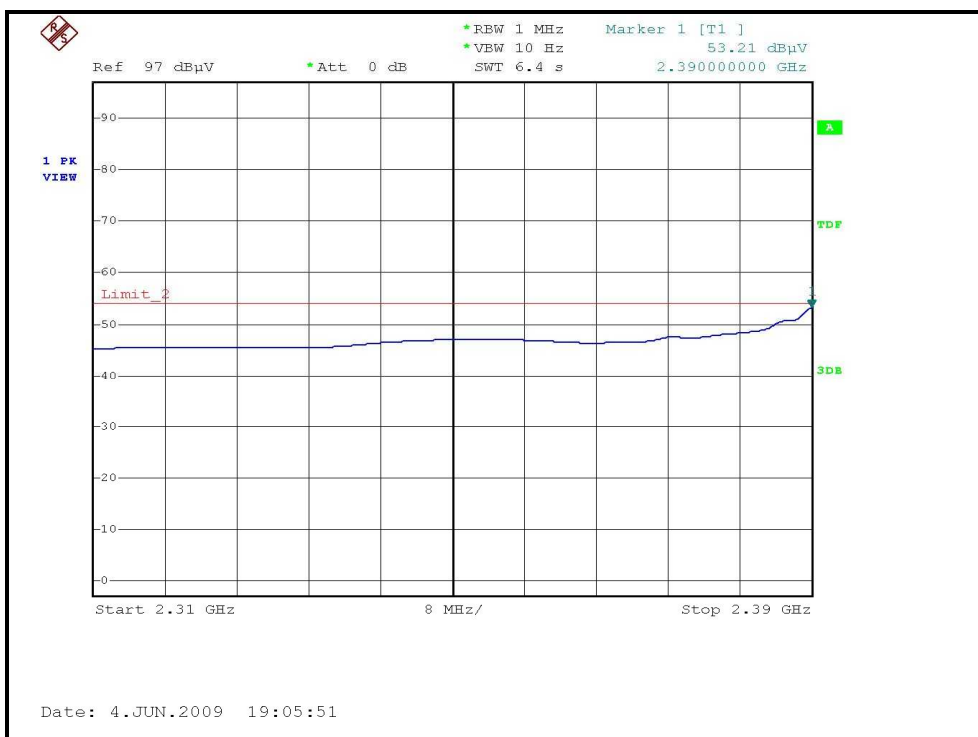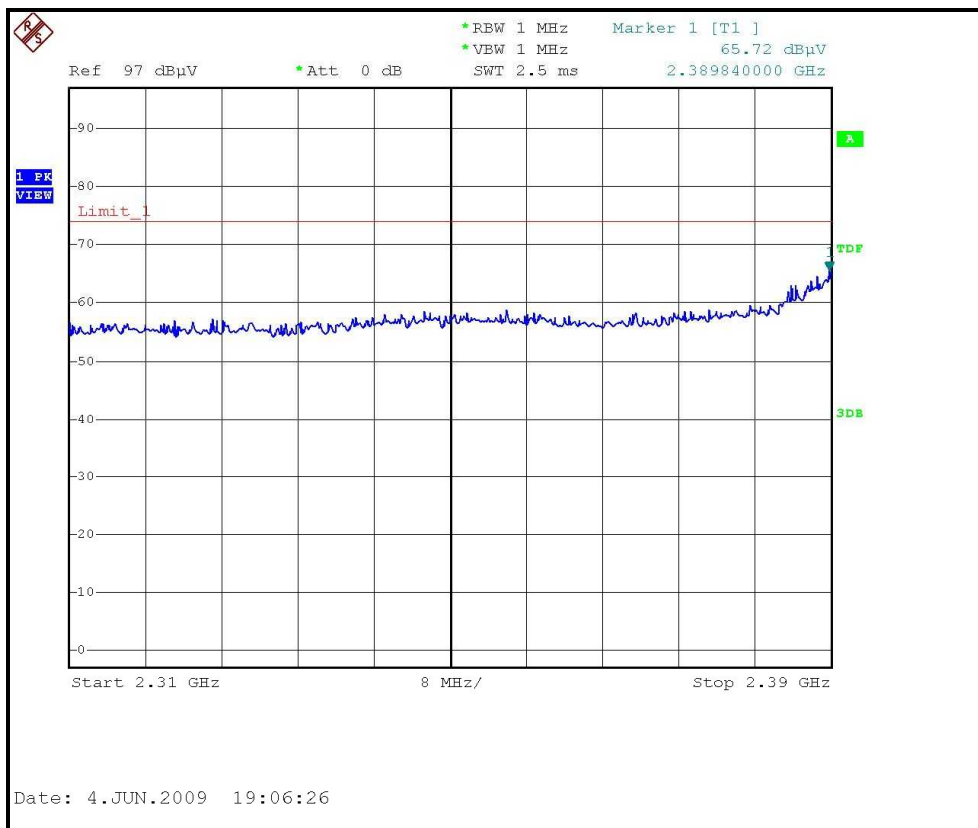



A D T



RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, HORIZONTAL)

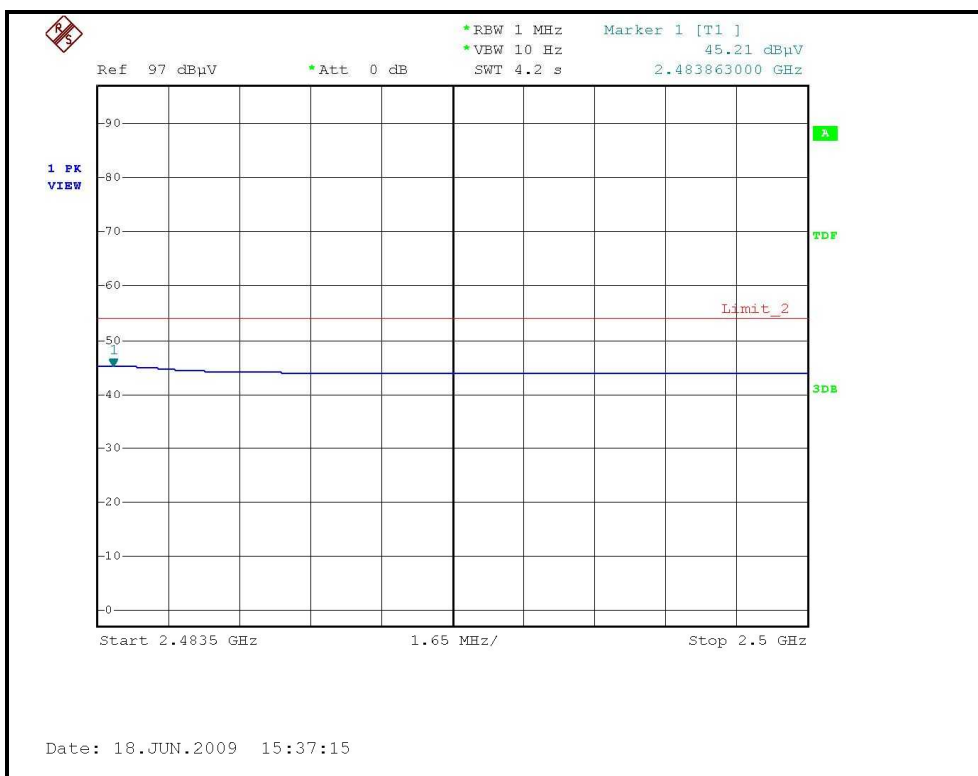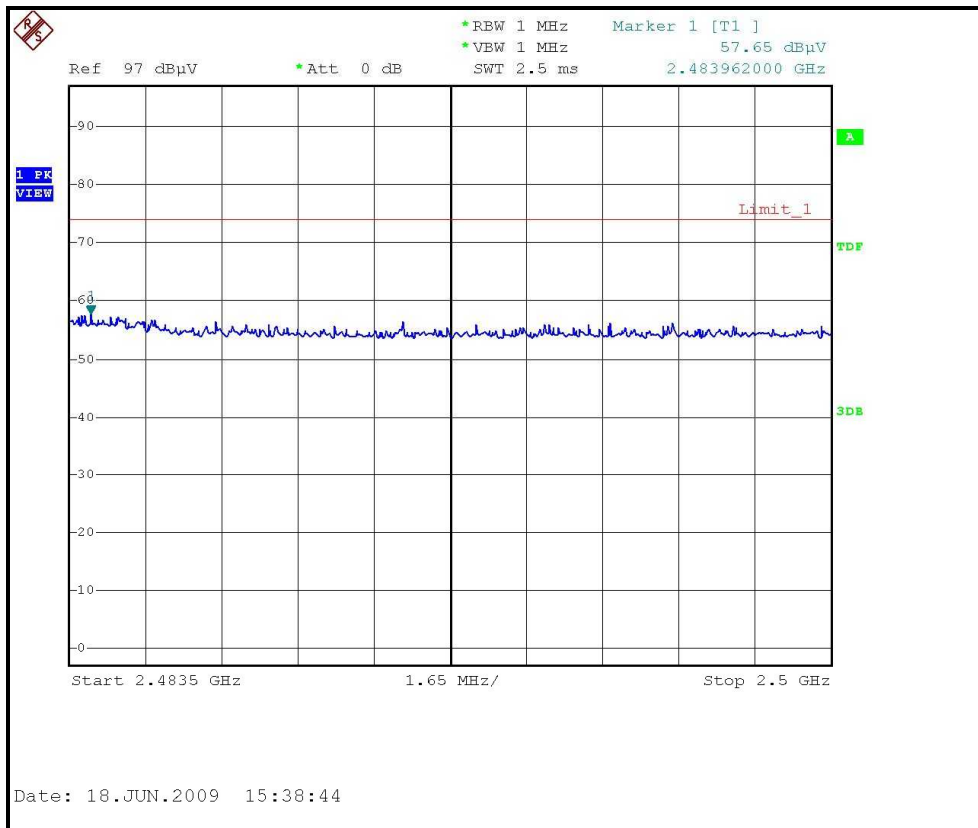



A D T

RESTRICTED BANDEDGE (DRAFT 802.11n (40MHz) MODE,CH7, VERTICAL)

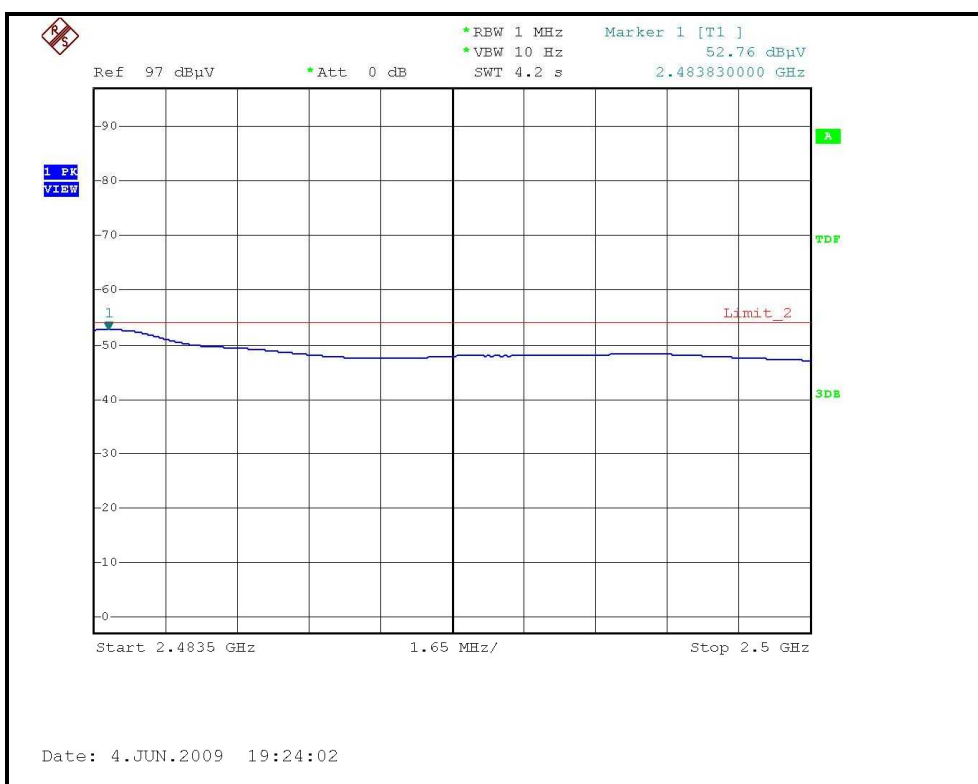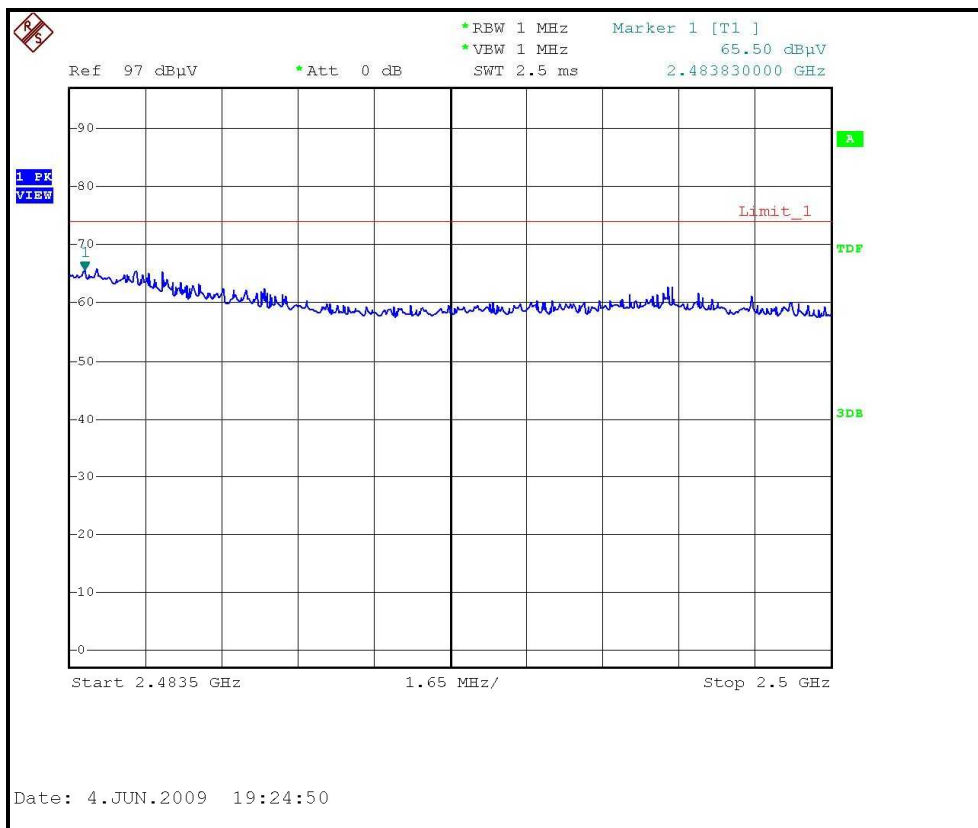

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

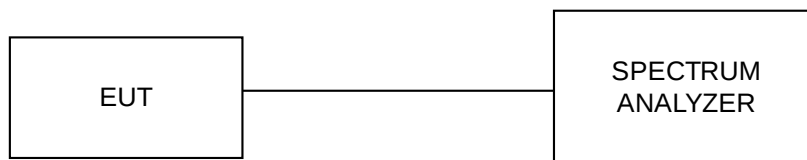

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION:


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.12	0.5	PASS
6	2437	12.20	0.5	PASS
11	2462	12.18	0.5	PASS


CH1

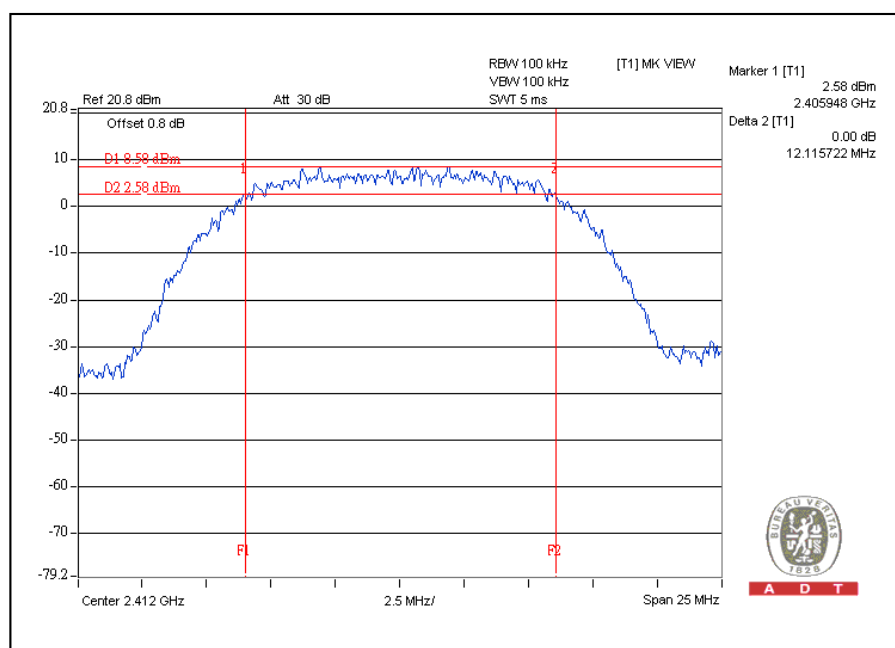

CH6

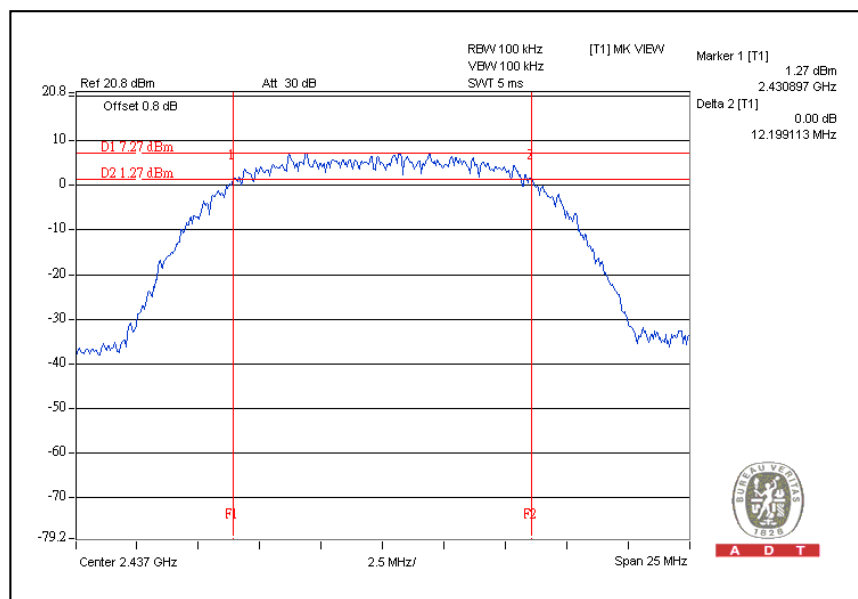

CH11

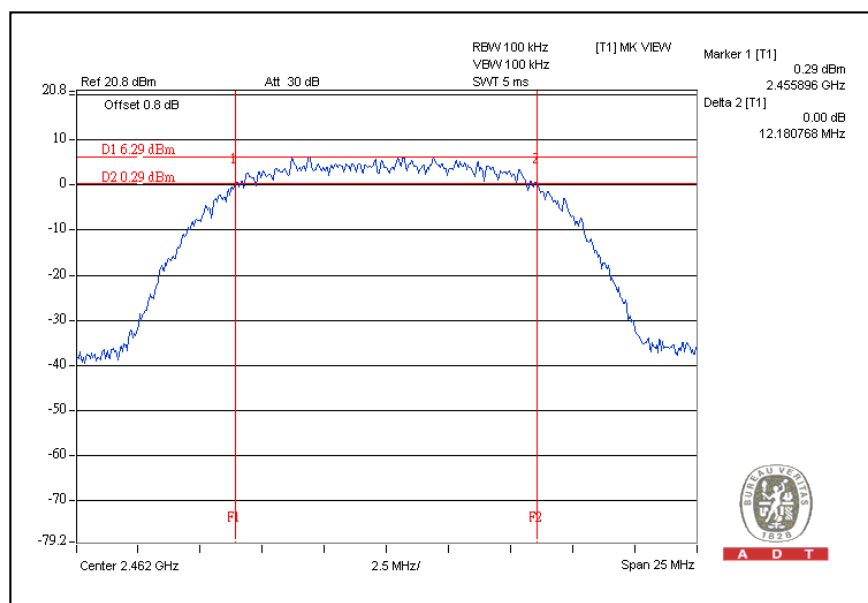


802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.61	0.5	PASS
6	2437	16.62	0.5	PASS
11	2462	16.62	0.5	PASS


CH1

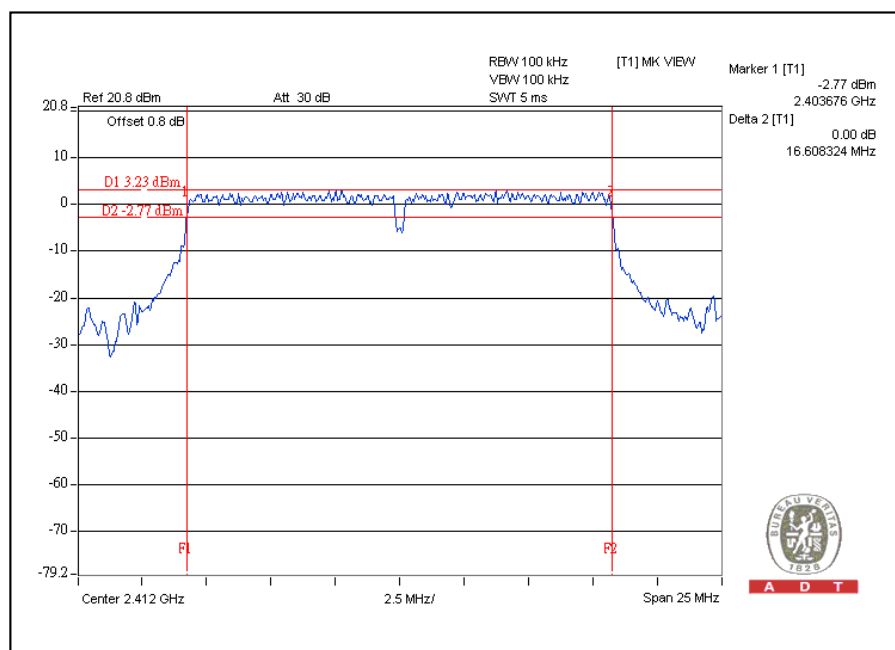

CH6

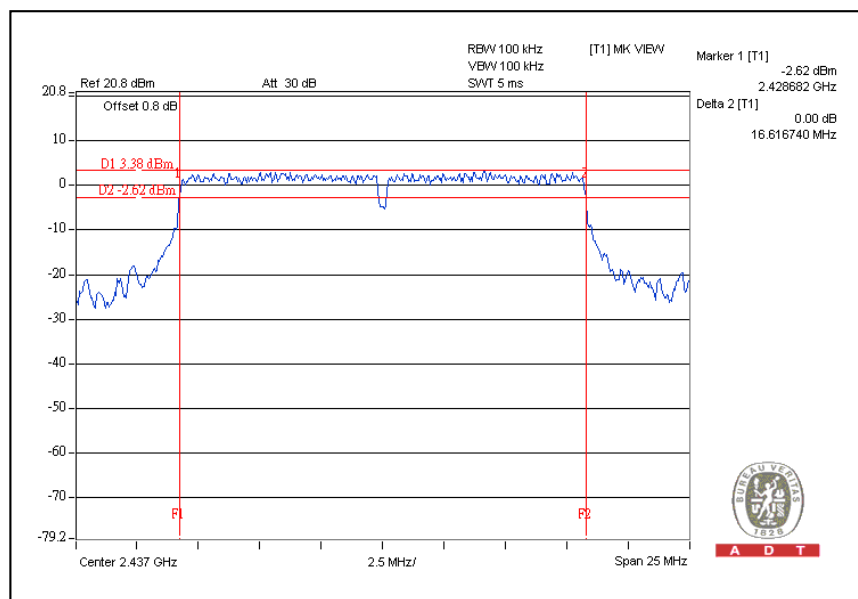

CH11

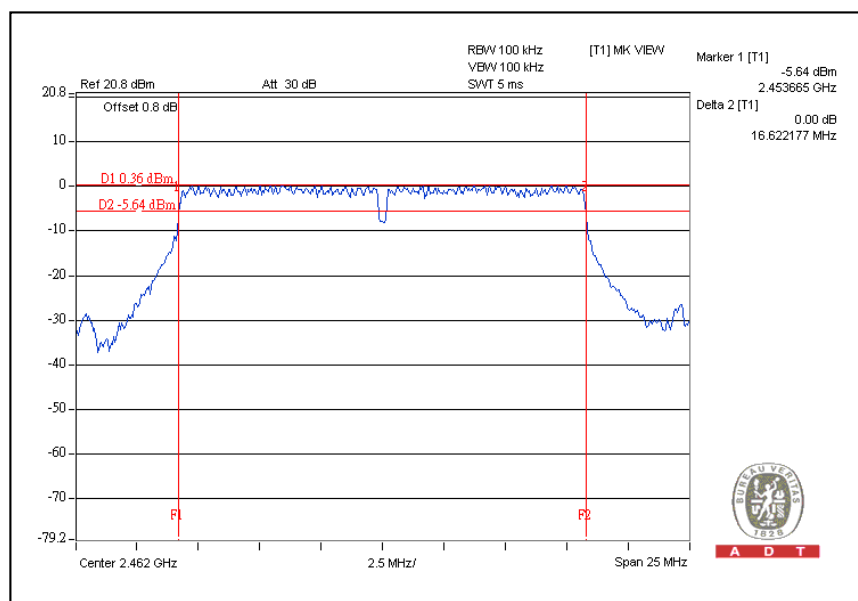


DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2412	17.76	17.76	0.5	PASS
6	2437	17.74	17.73	0.5	PASS
11	2462	17.75	17.76	0.5	PASS


For Chain(0): CH1

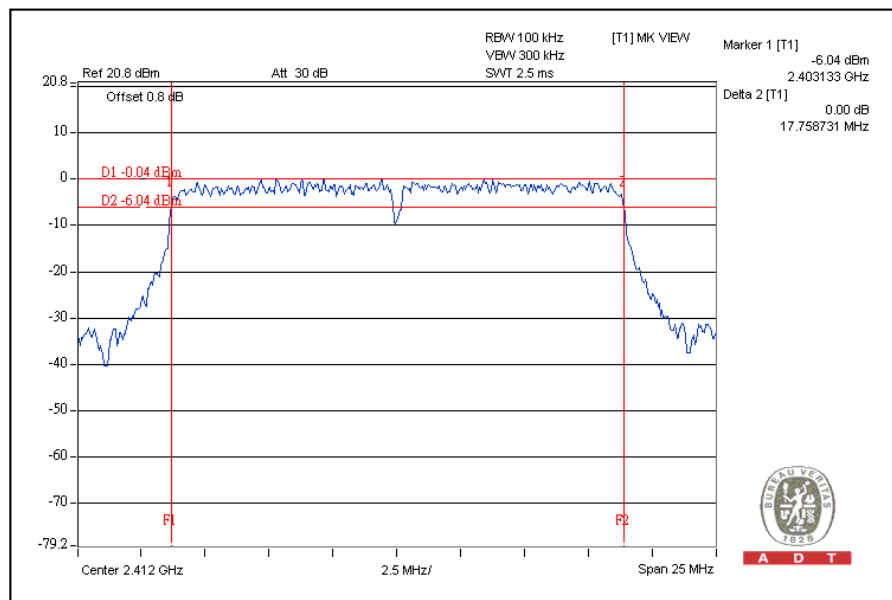


CH6

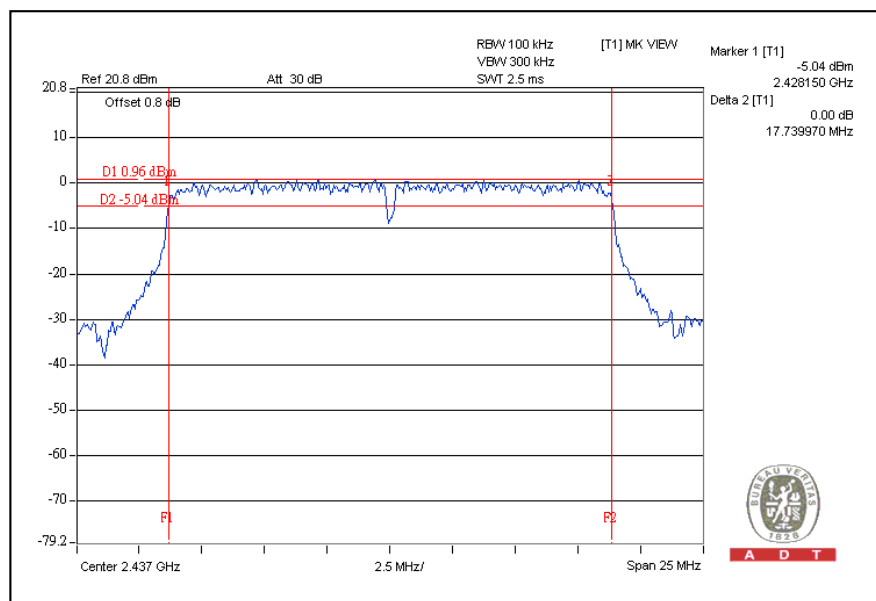


CH11

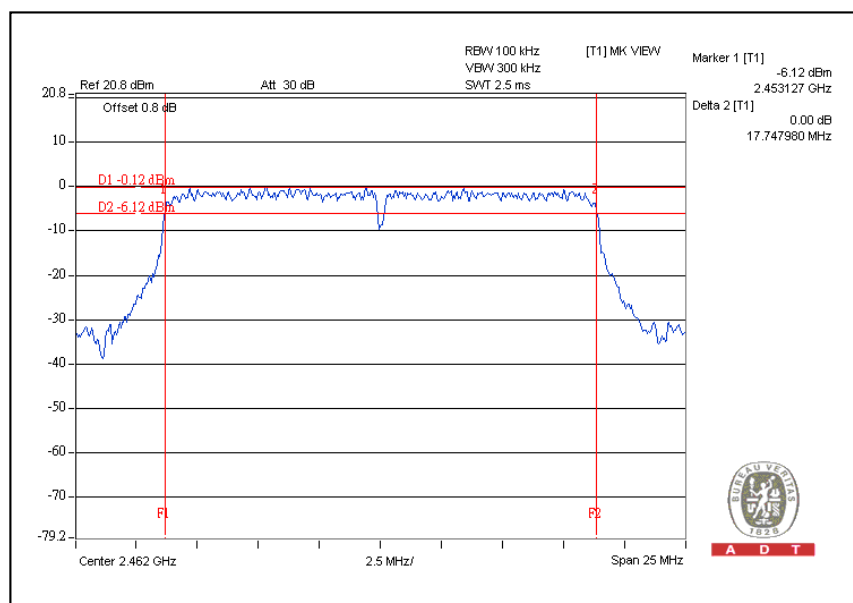

For CHAIN(1): CH1

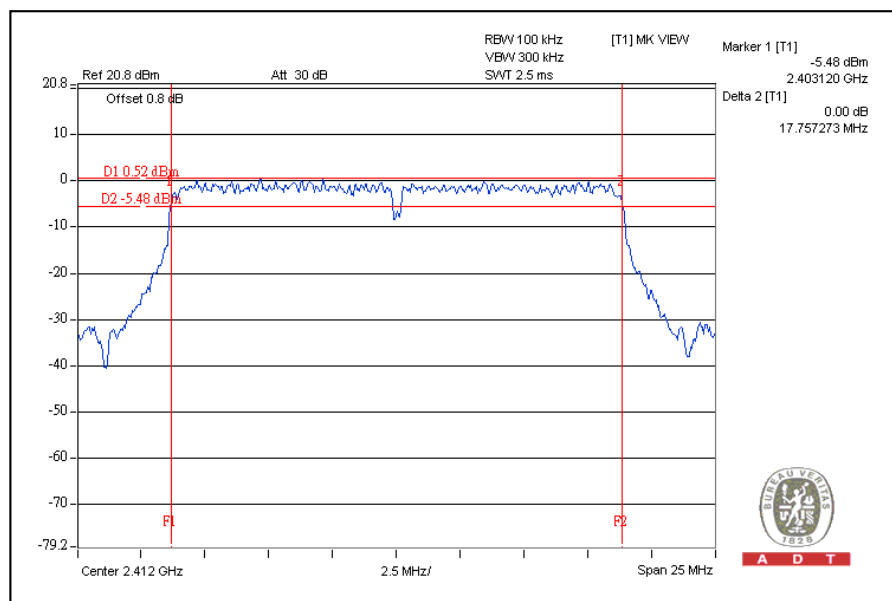


CH6

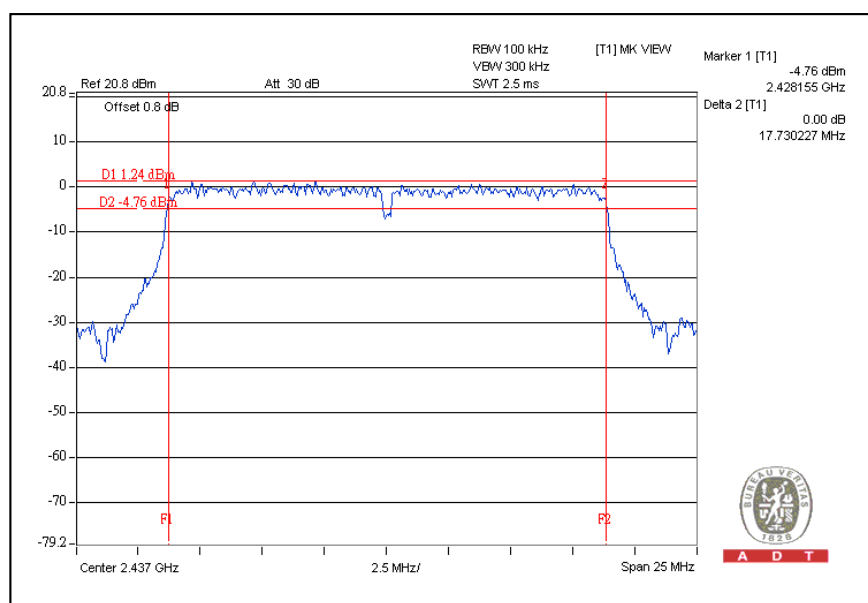



A D T

CH11

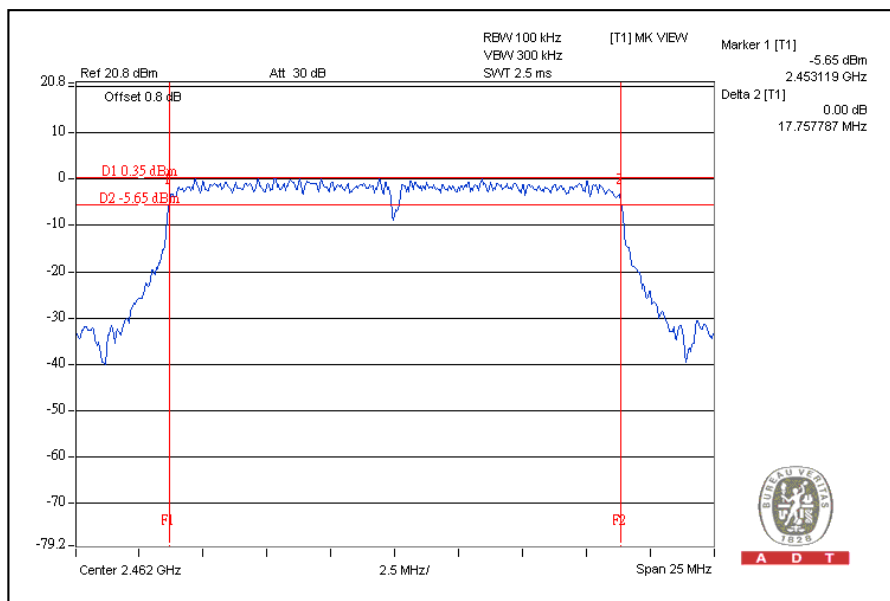


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	15Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN(0)	CHAIN(1)		
1	2422	36.56	36.56	0.5	PASS
4	2437	36.54	36.53	0.5	PASS
7	2452	36.53	36.56	0.5	PASS


For Chain (0): CH1

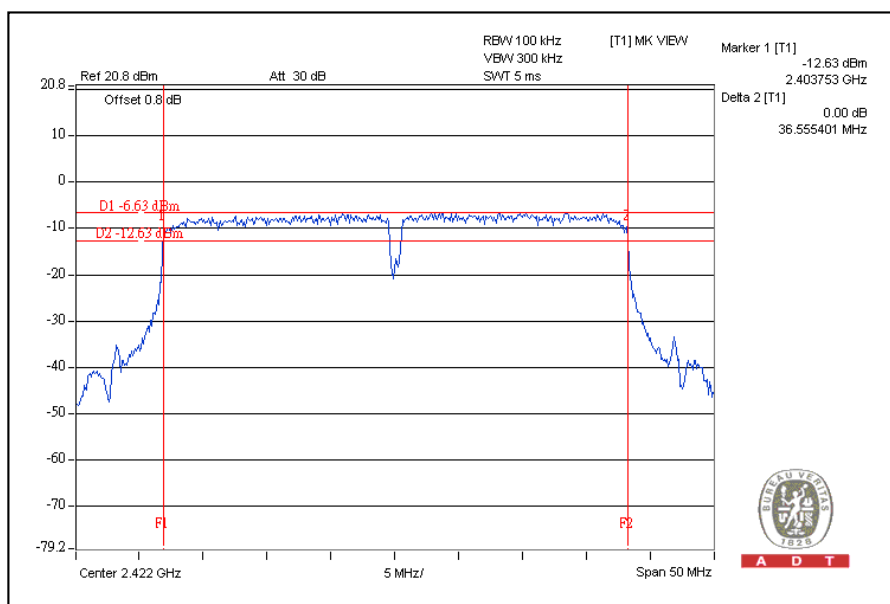


CH4

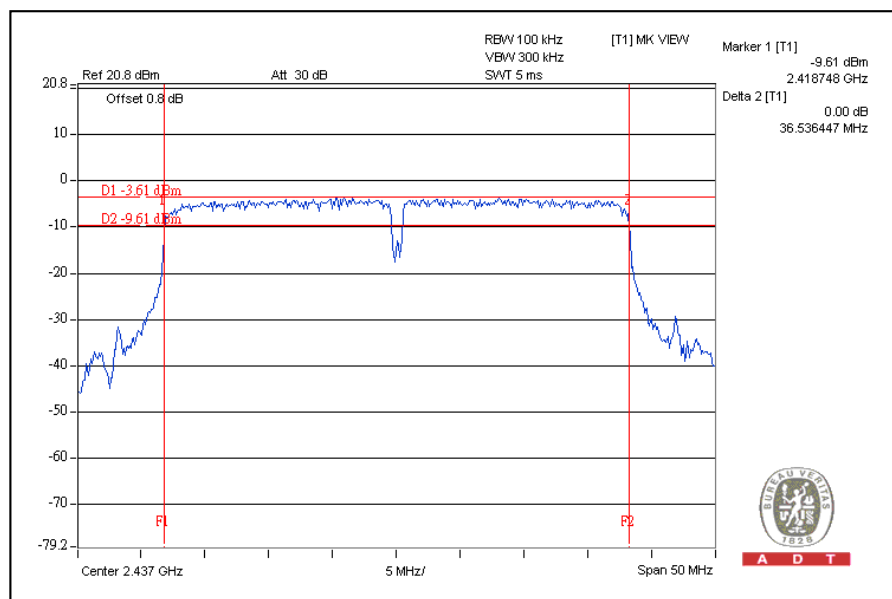


CH7

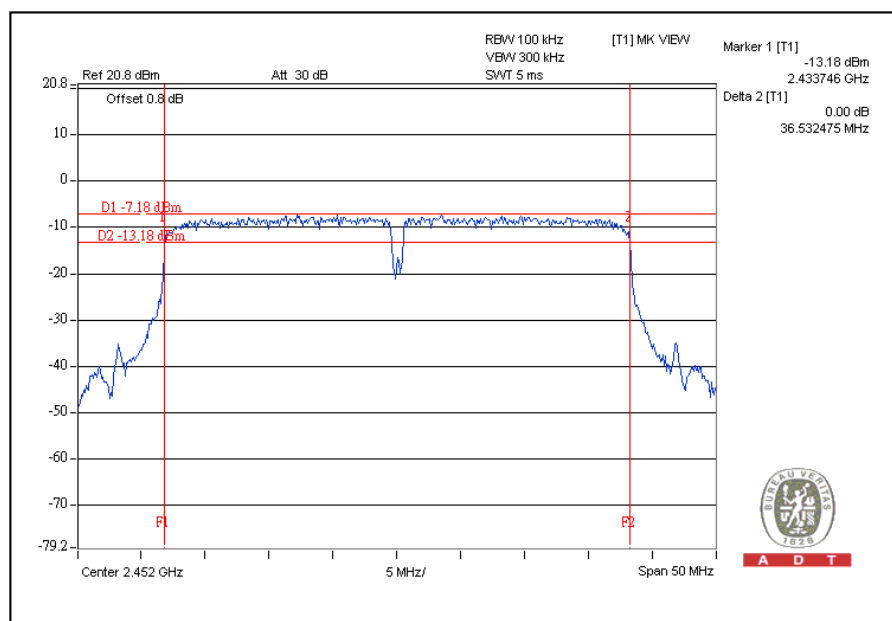

For Chain (1): CH1

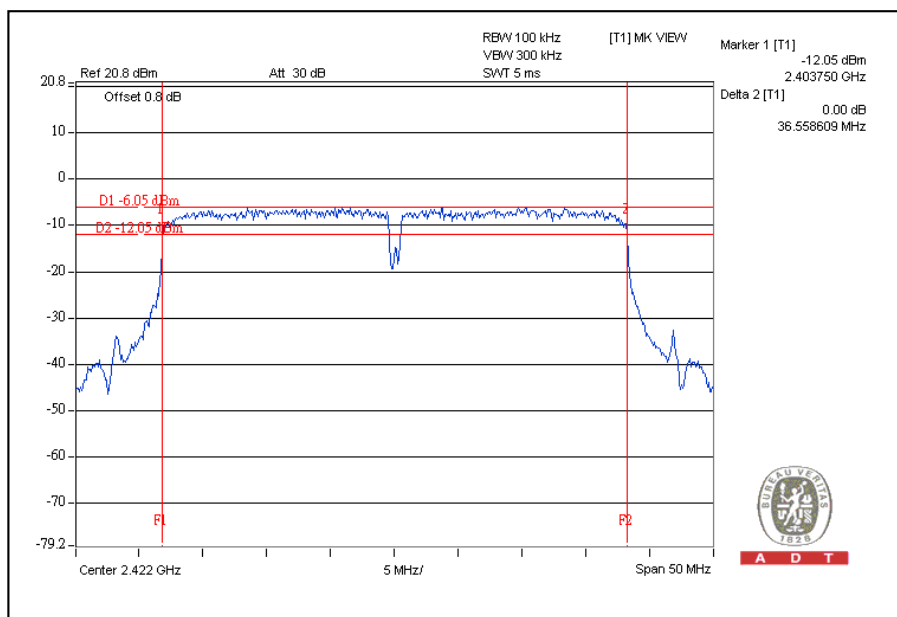


CH4

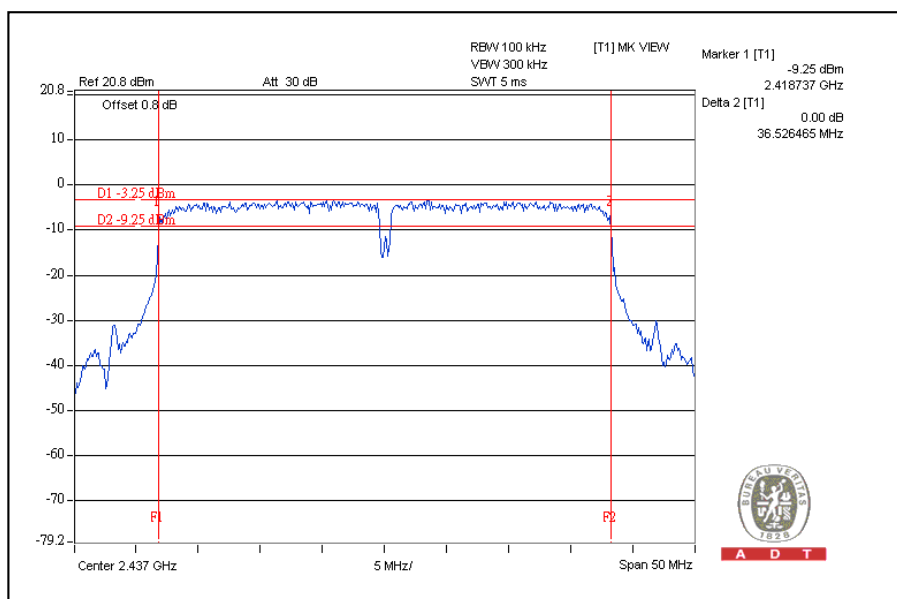



A D T

CH7

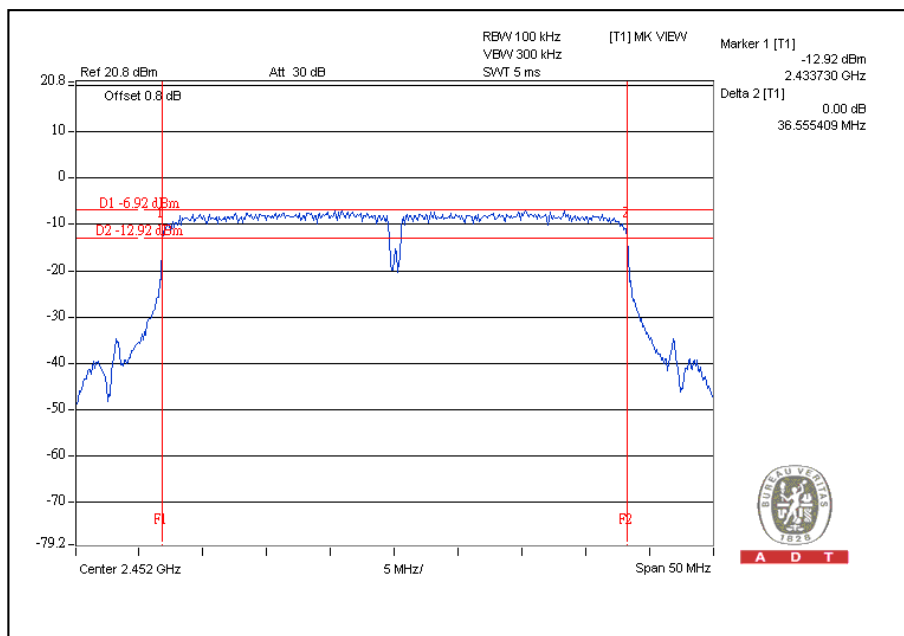

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model no.	Serial No.	Calibrated date	Calibrated Until
Anritsu Power Meter	ML2495A	0824006	April 25, 2009	April 24, 2010
Pulse Power Sensor	MA2411B	0738172	April 25, 2009	April 24, 2010

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

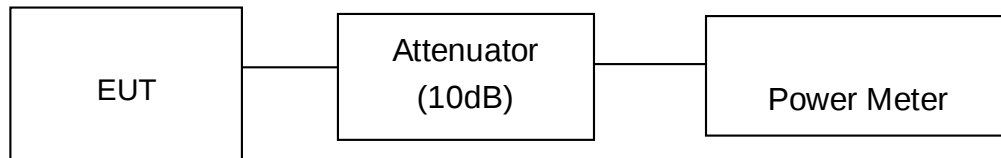

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.2.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	22.33	171.002	30	PASS
6	2437	21.11	129.122	30	PASS
11	2462	20.29	106.905	30	PASS

802.11g OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	25.50	354.813	30	PASS
6	2437	25.61	363.915	30	PASS
11	2462	23.78	238.781	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	186.209	225.424	22.70	23.53	411.633	26.15	30	PASS
6	2437	233.884	238.781	23.69	23.78	472.665	26.75	30	PASS
11	2462	187.932	199.986	22.74	23.01	387.918	25.89	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION:

MODULATION TYPE	BPSK	TRANSFER RATE	15Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2422	104.472	114.551	20.19	20.59	219.023	23.40	30	PASS
4	2437	193.642	221.309	22.87	23.45	414.951	26.18	30	PASS
7	2452	82.604	97.499	19.17	19.89	180.103	22.56	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.2.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION:


MODULATION TYPE	DBPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-4.34	8	PASS
6	2437	-5.67	8	PASS
11	2462	-6.60	8	PASS


CH1

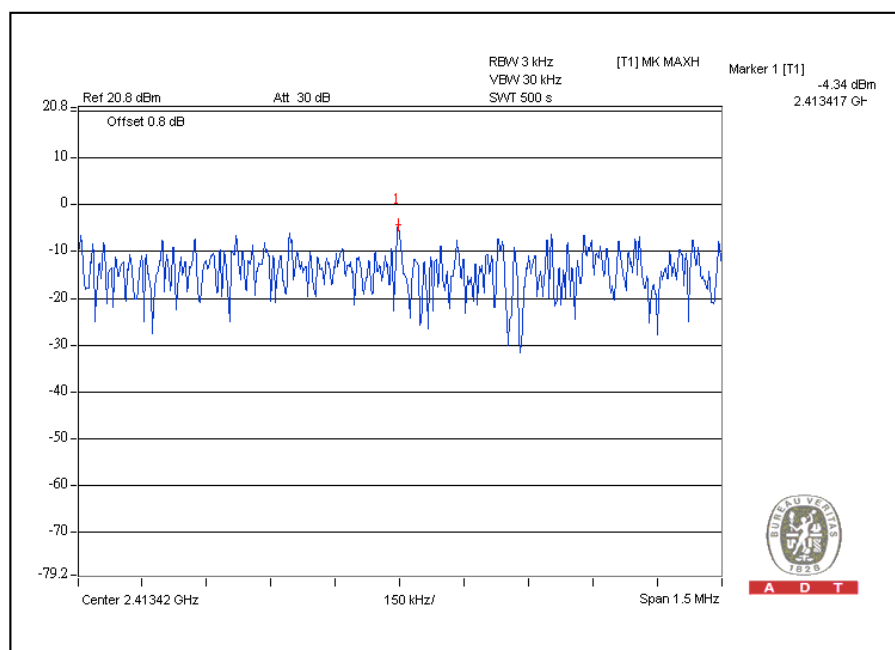

CH6

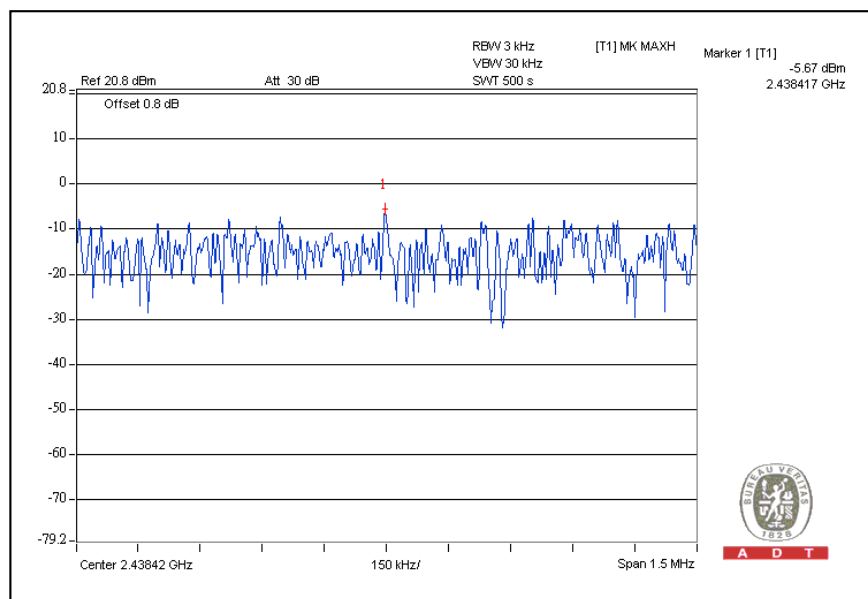

CH11

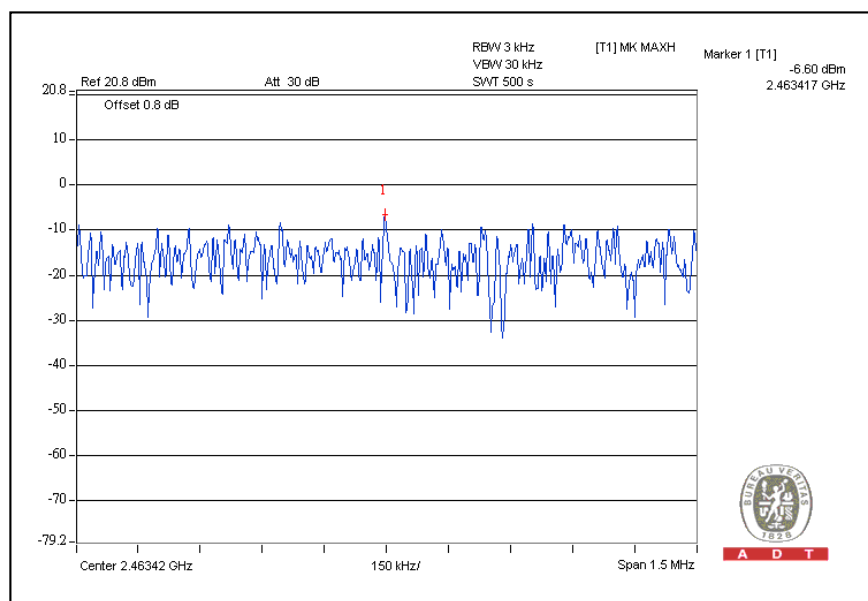


802.11g OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-11.18	8	PASS
6	2437	-10.99	8	PASS
11	2462	-13.40	8	PASS


CH1

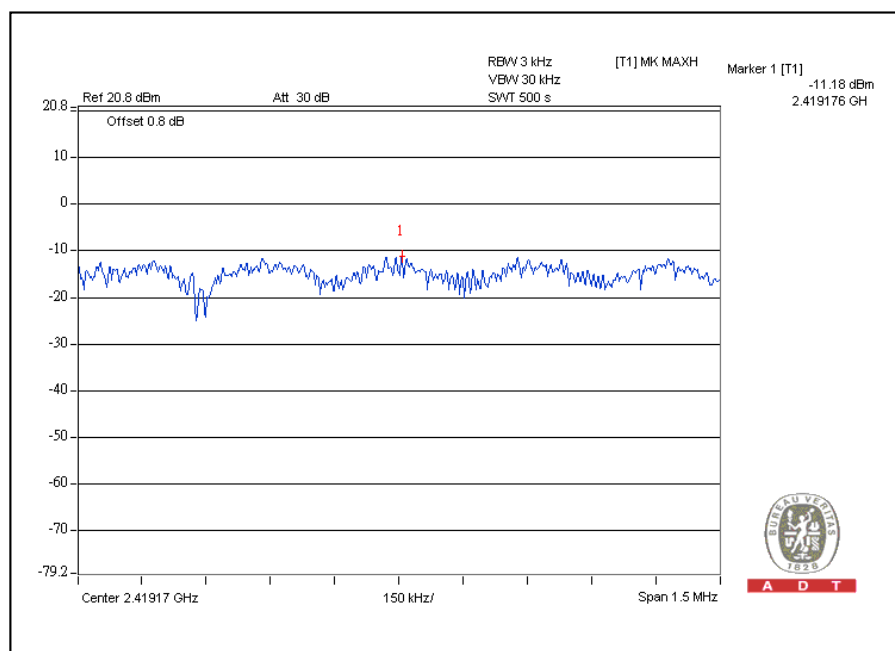

CH6

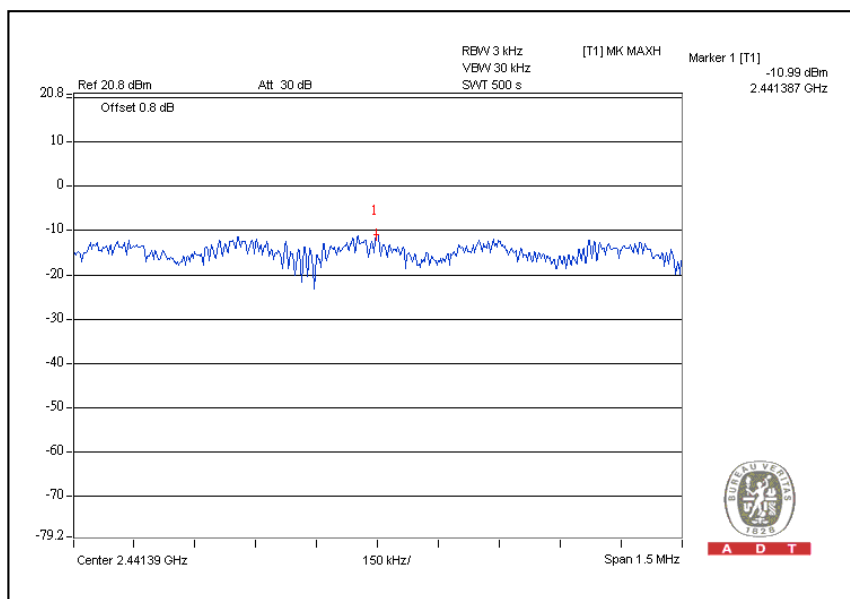

CH11

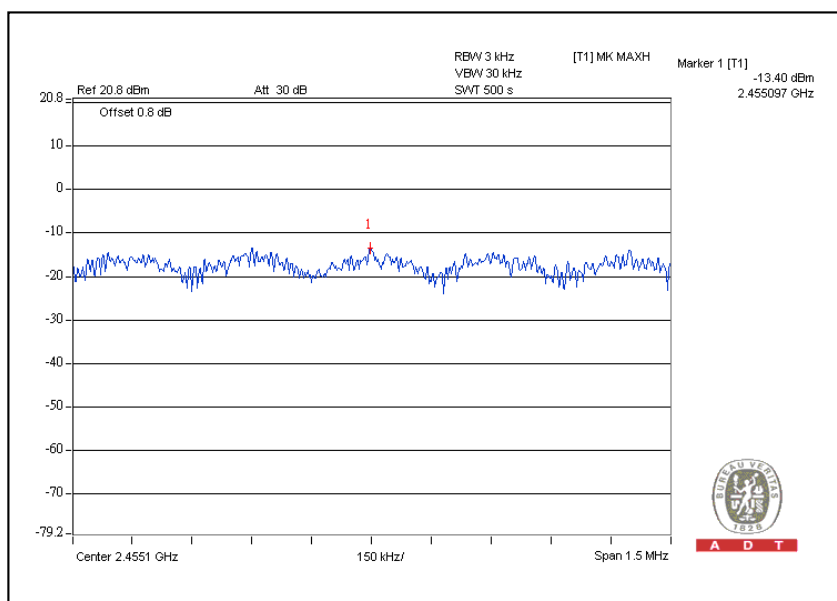




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2412	0.040	0.047	-13.99	-13.31	0.087	-10.60	8	PASS
6	2437	0.049	0.065	-13.06	-11.90	0.114	-9.43	8	PASS
11	2462	0.048	0.047	-13.16	-13.29	0.095	-10.22	8	PASS


For Chain(0): CH1

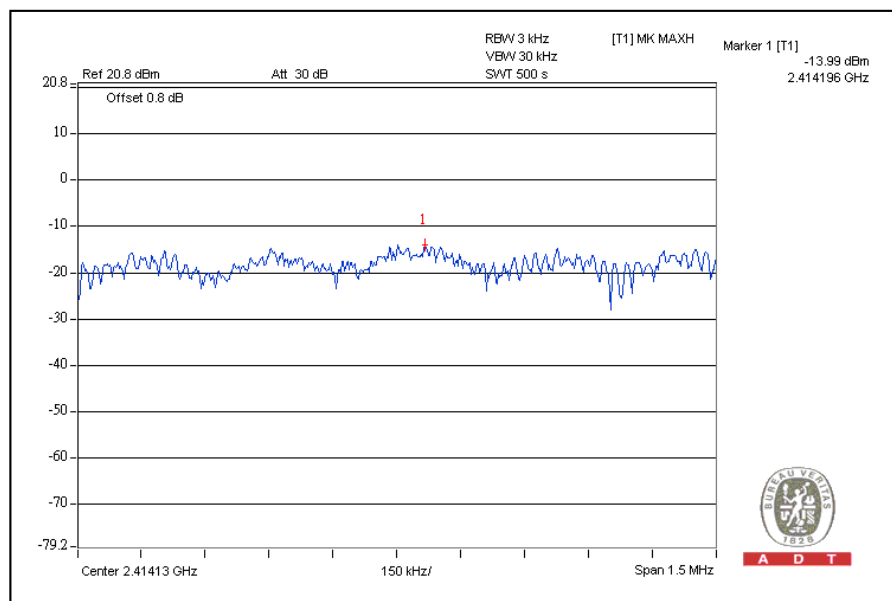


CH6

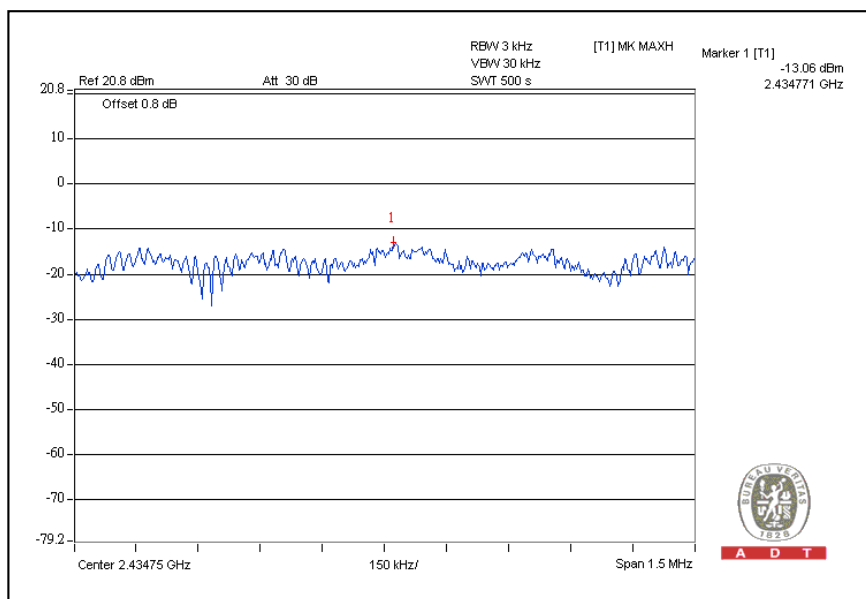


CH11

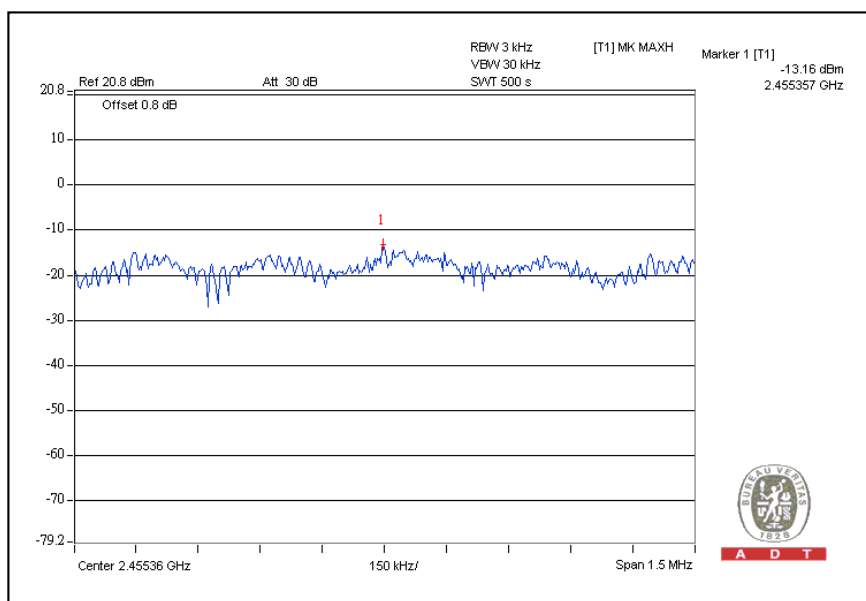

For Chain (1): CH1

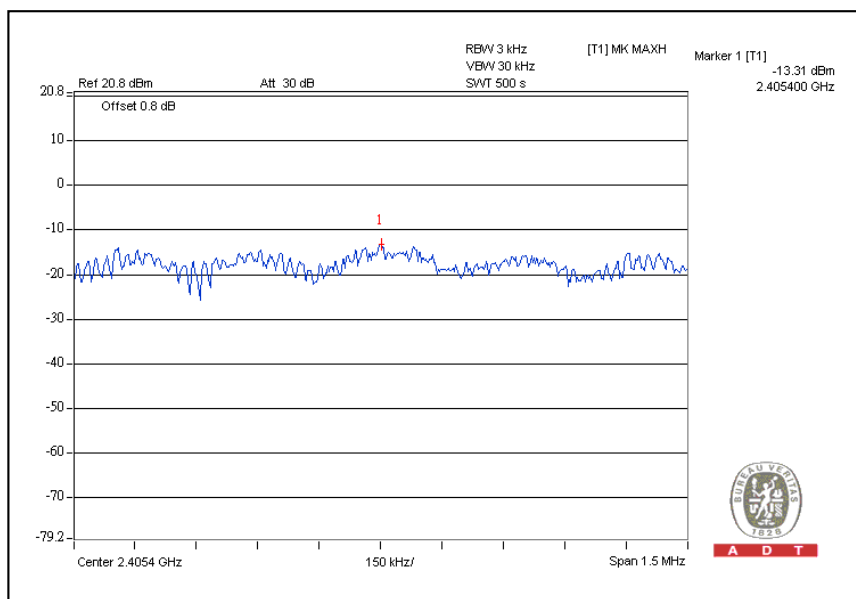


CH6

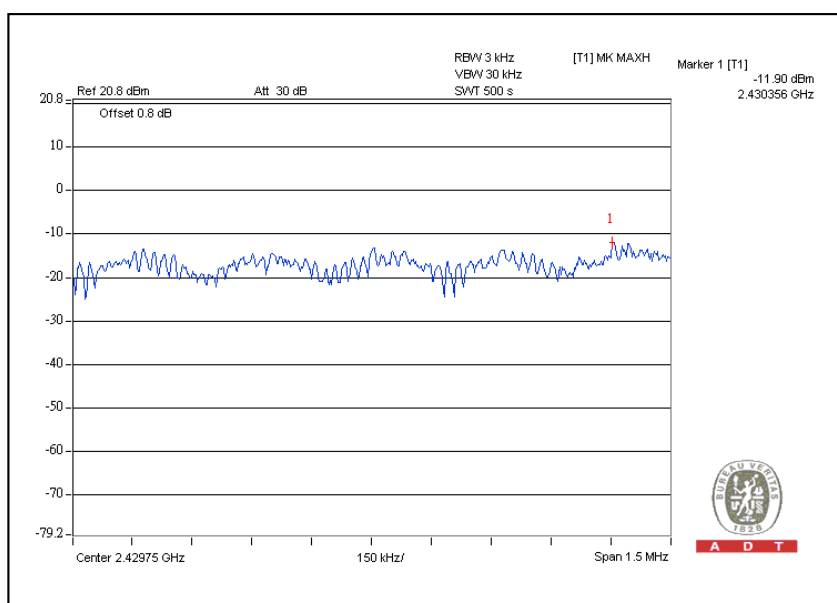



A D T

CH11

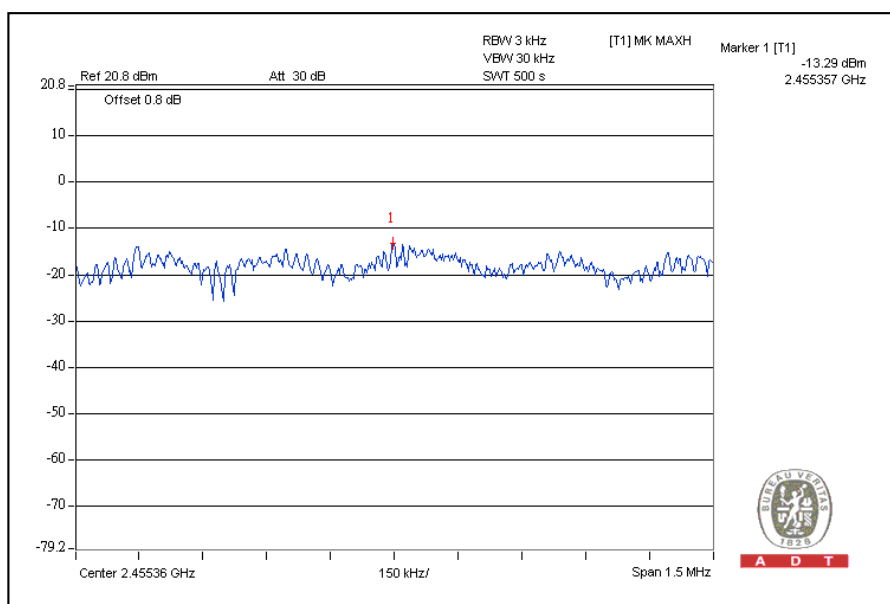


DRAFT 802.11n (40MHz) OFDM MODULATION:


MODULATION TYPE	BPSK	TRANSFER RATE	15Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 60%RH, 965hPa
TESTED BY	Rex Huang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
		CHAIN(0)	CHAIN(1)	CHAIN(0)	CHAIN(1)				
1	2422	0.012	0.019	-19.18	-17.14	0.031	-15.09	8	PASS
4	2437	0.040	0.025	-13.98	-16.08	0.065	-11.87	8	PASS
7	2452	0.009	0.008	-20.32	-20.81	0.017	-17.70	8	PASS


For Chain (0): CH1

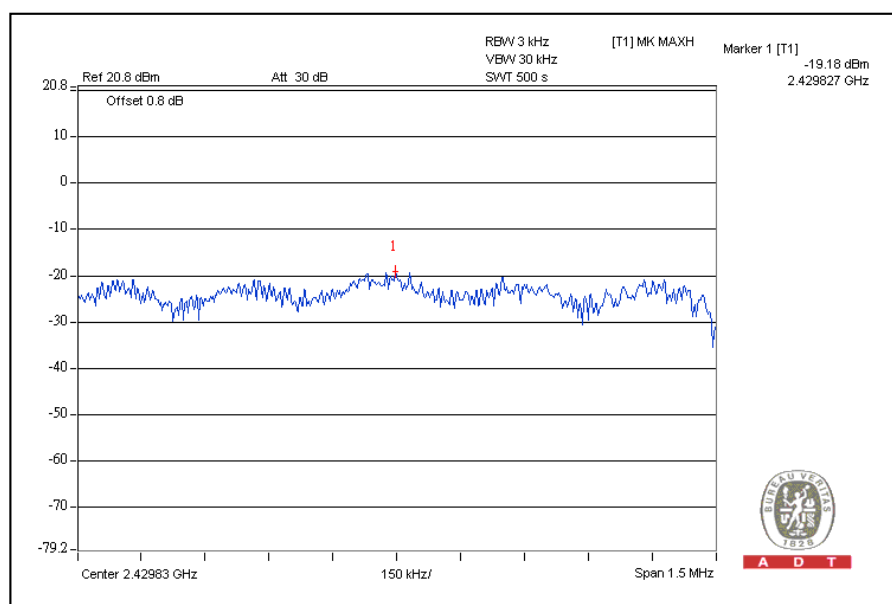


CH4

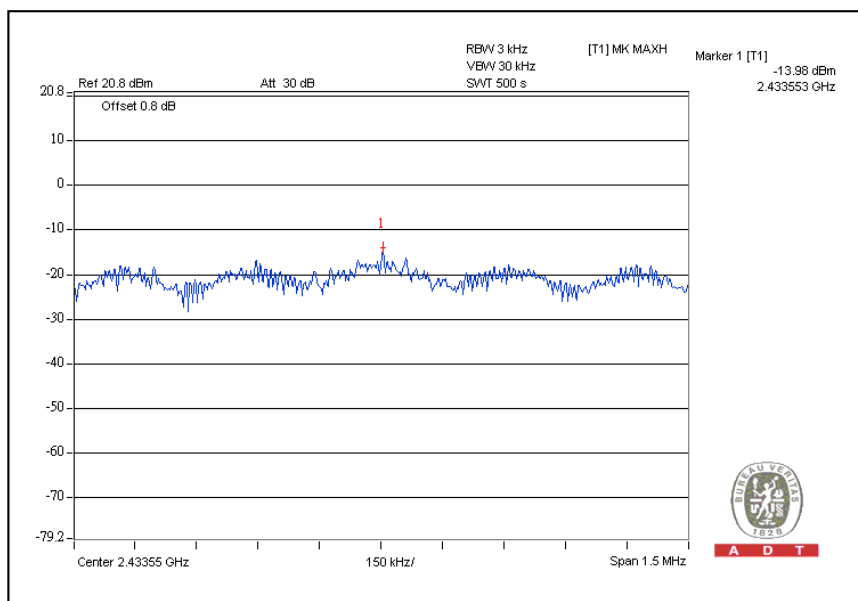


CH7

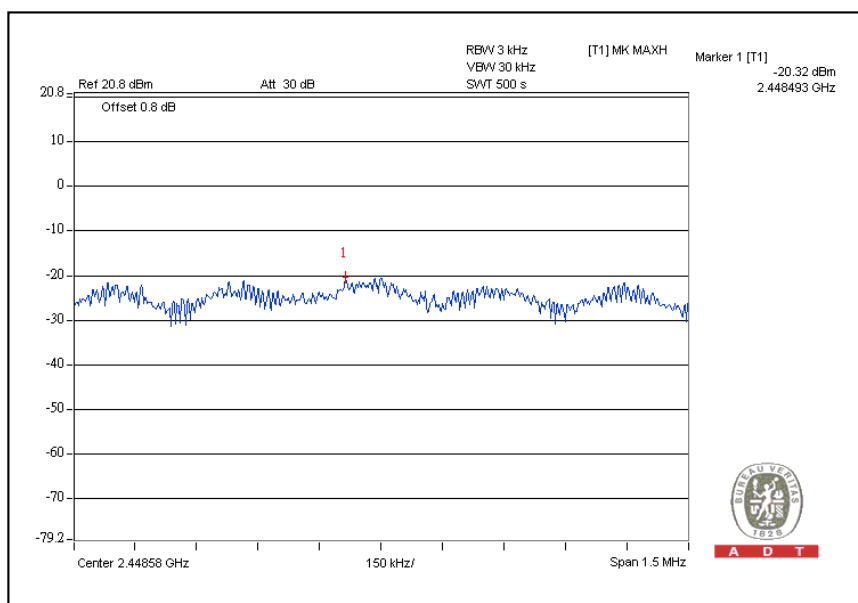

For Chain (1): CH1

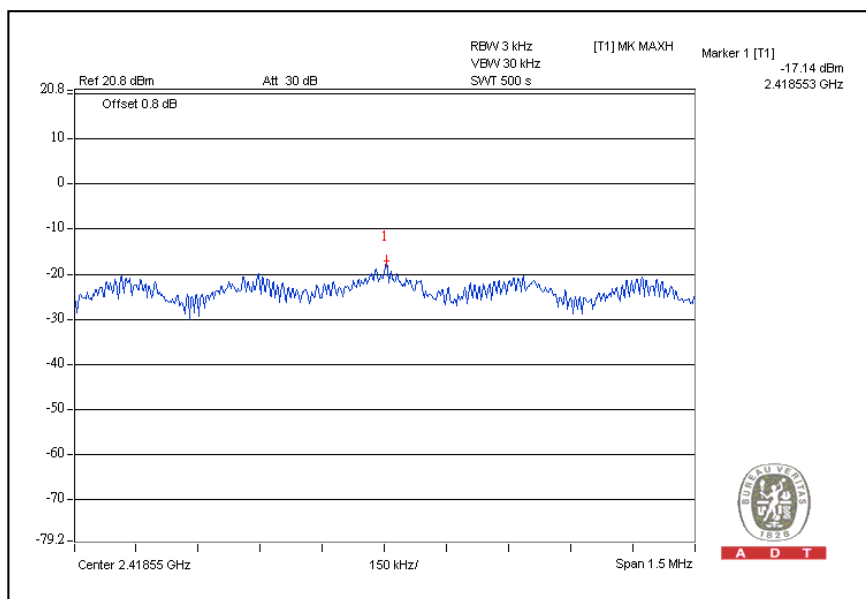


CH4

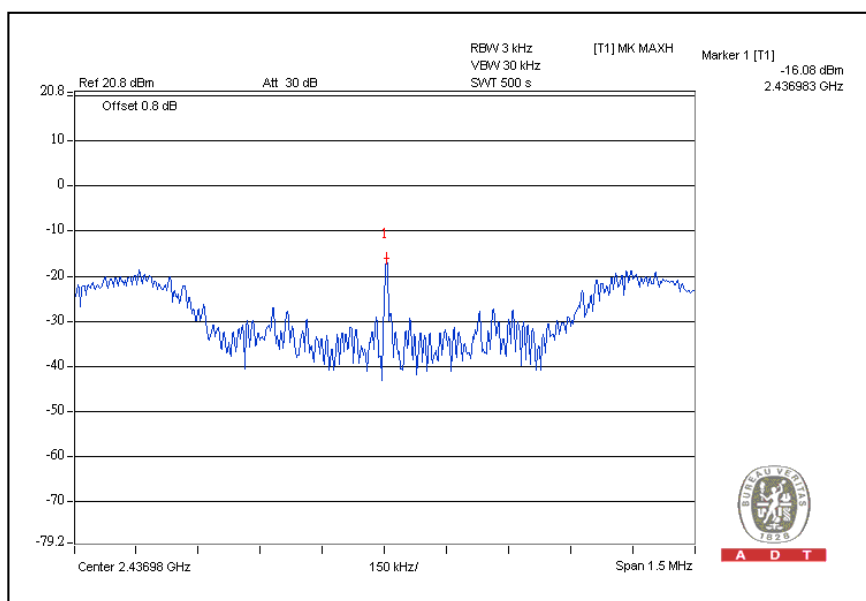



A D T

CH7

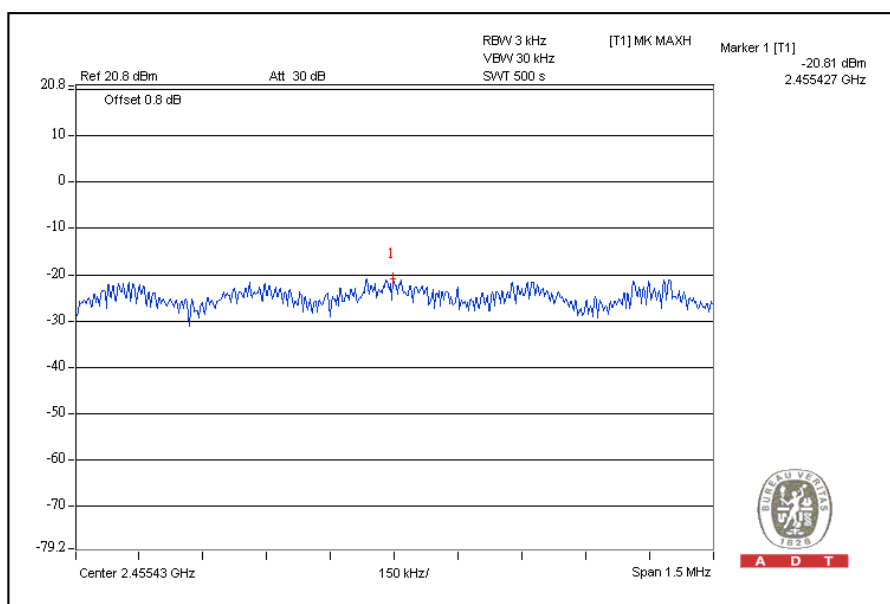

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2008	Dec. 08, 2009

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz and VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.2.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


CH1

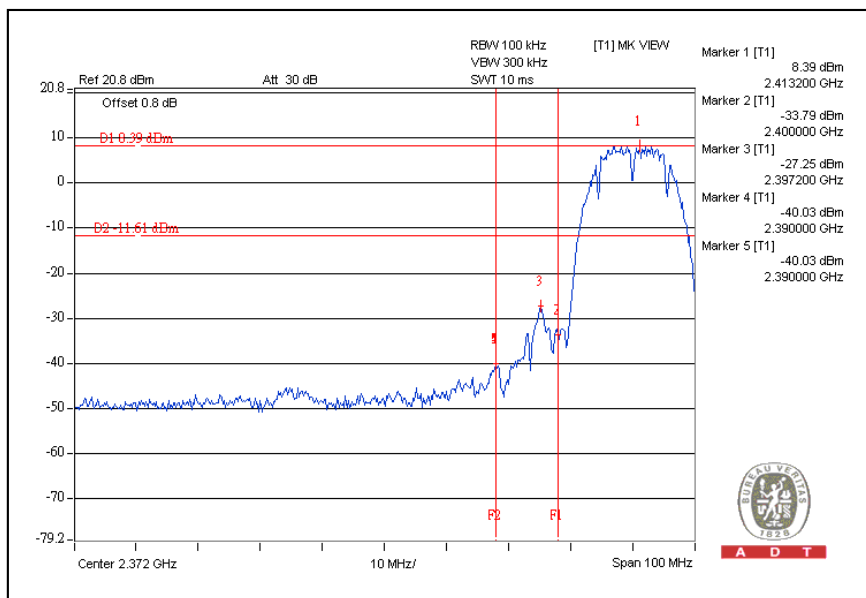


CH11

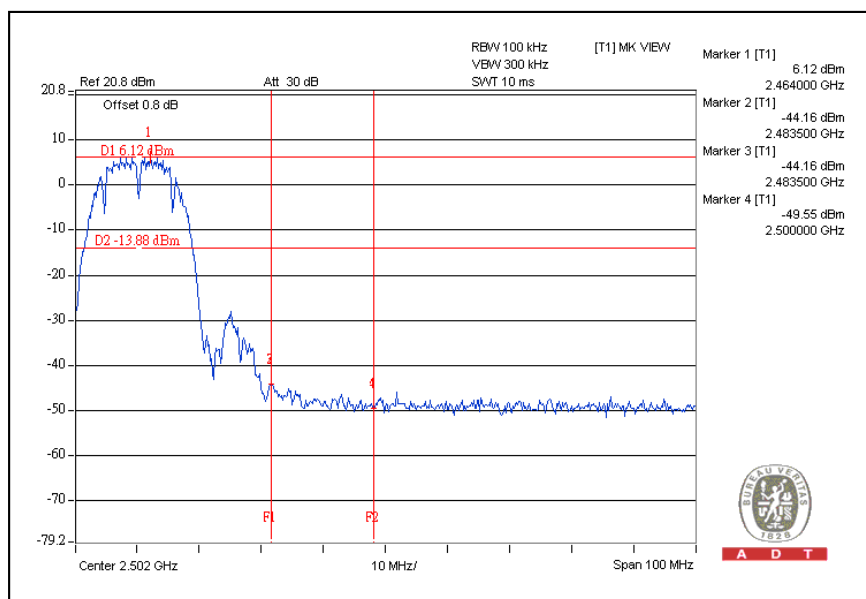

CH1

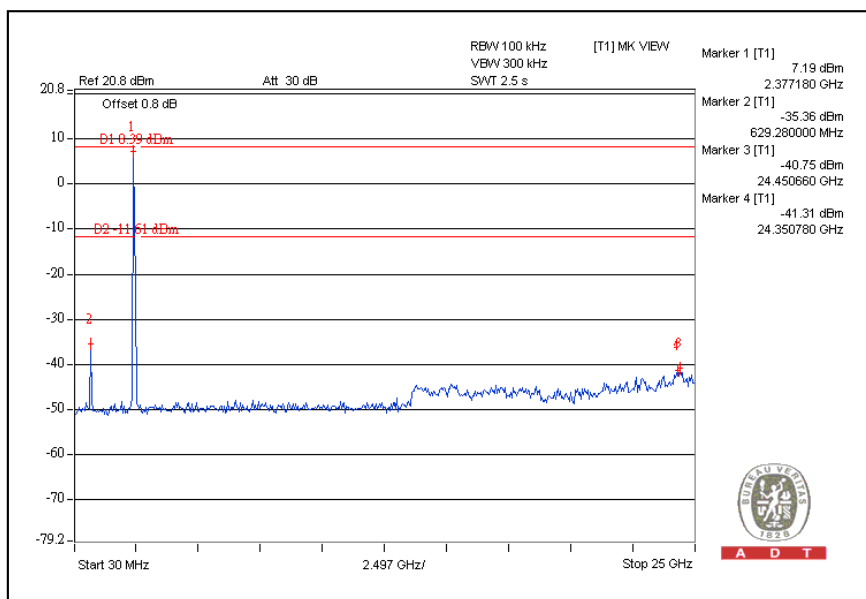


CH11

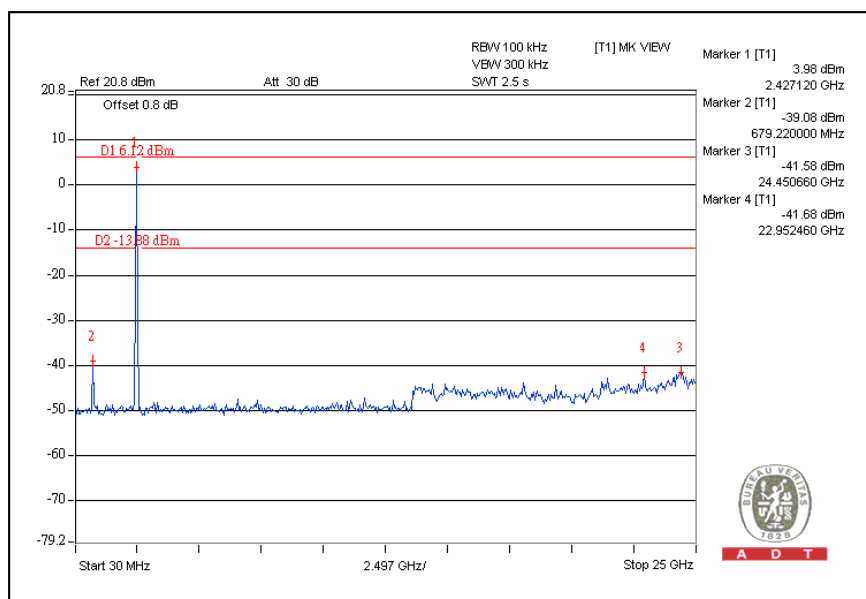


802.11g OFDM MODULATION:


CH 1

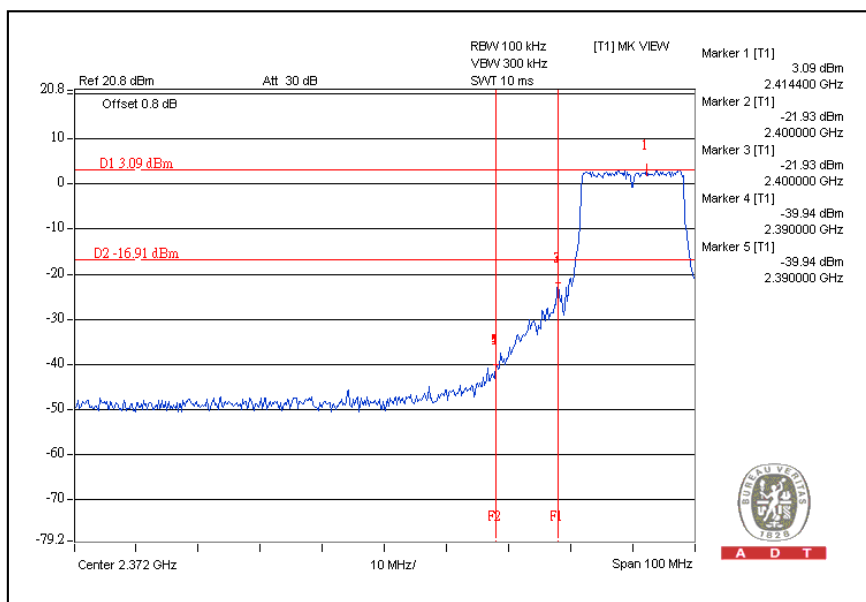


CH11

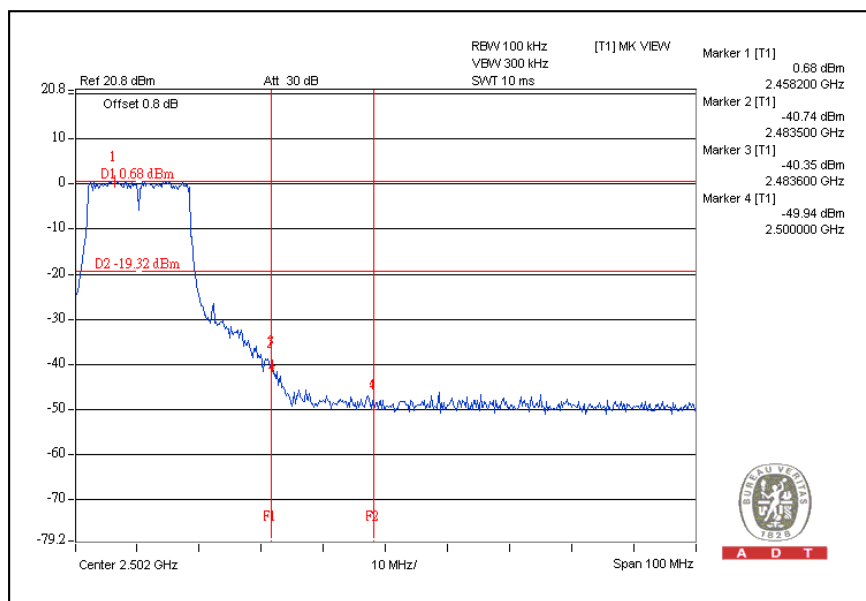


CH1

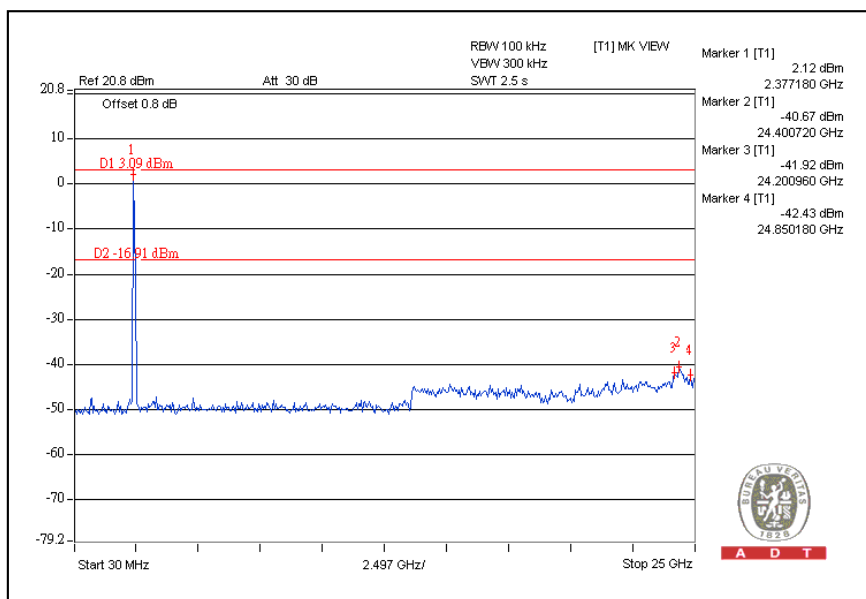


CH11

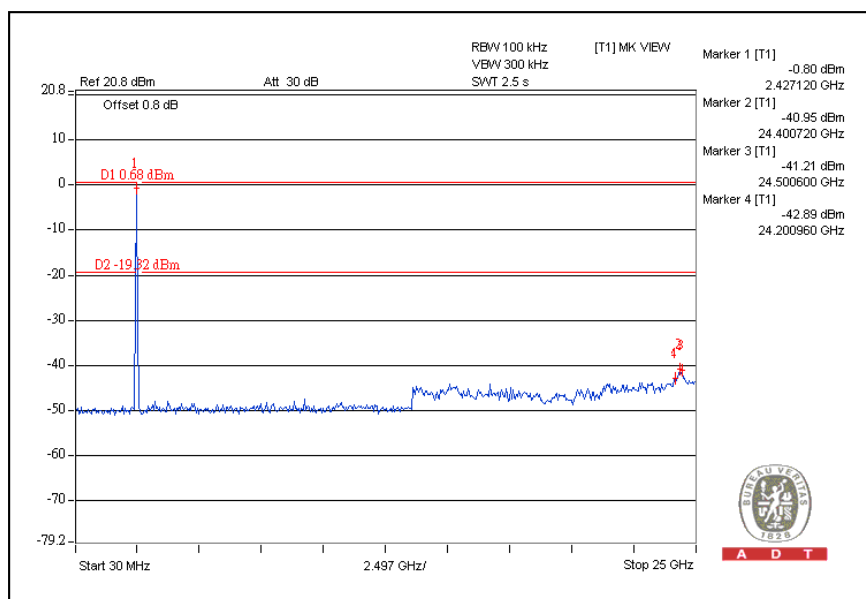


DRAFT 802.11n (20MHz) OFDM MODULATION: For Chain (0):CH1

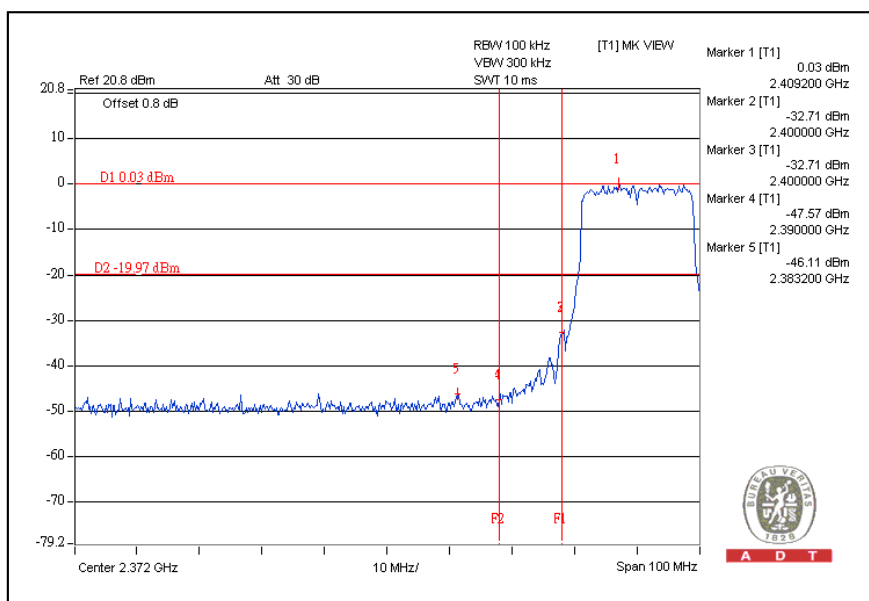


CH11

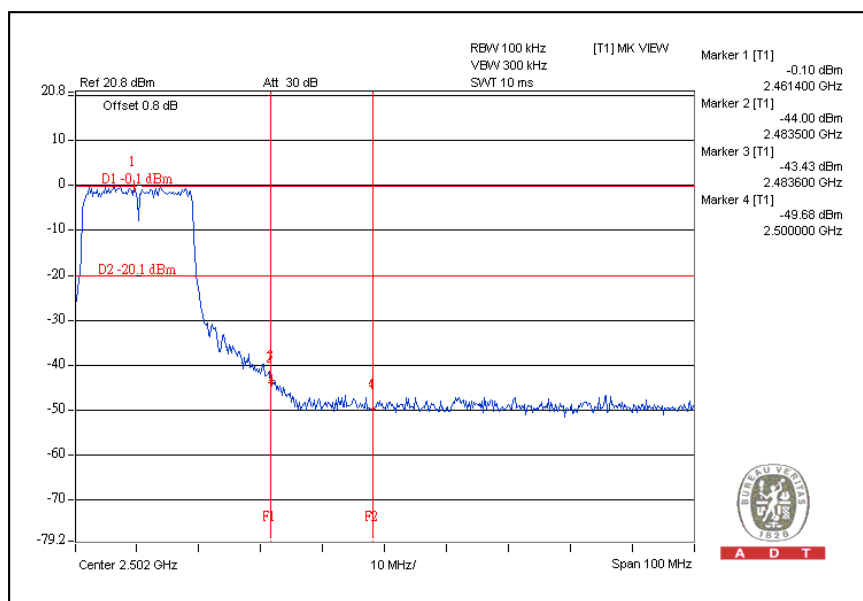


CH1

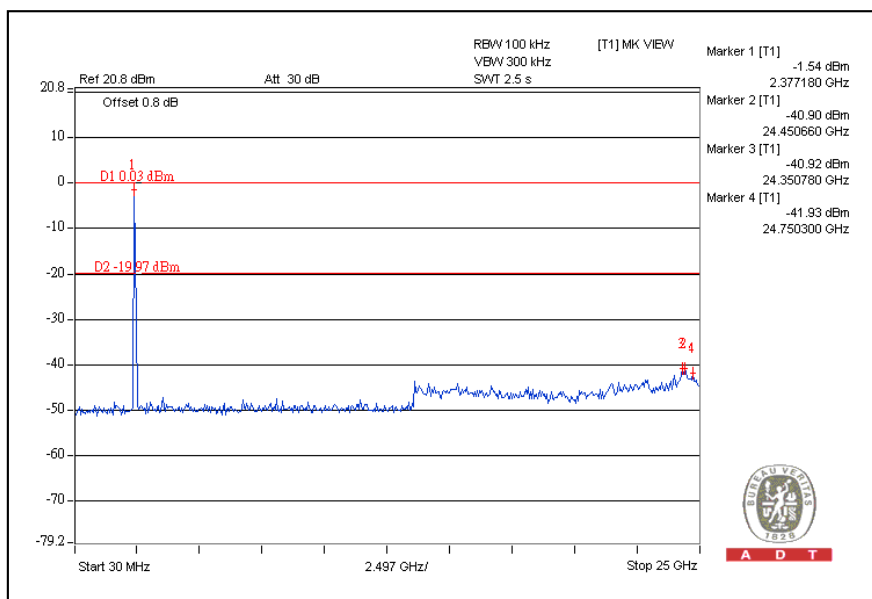


CH11

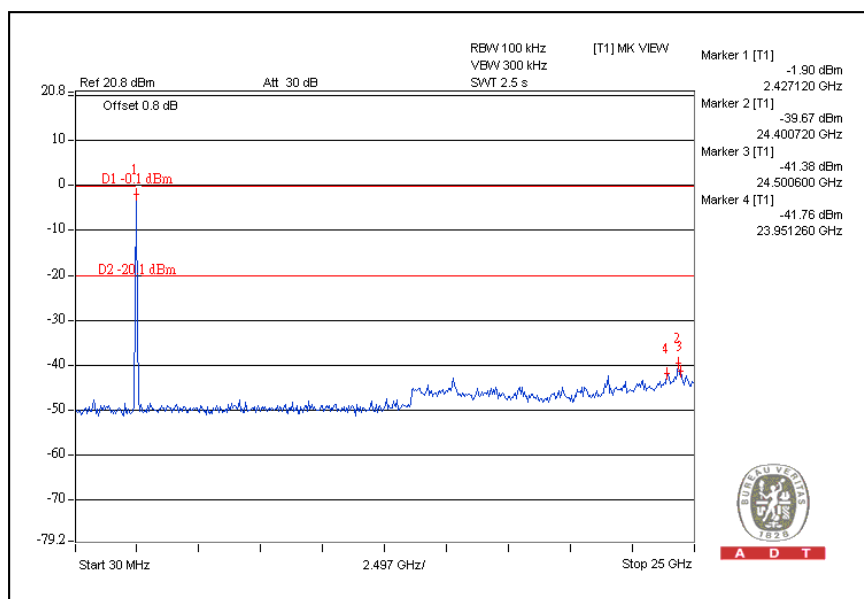


For Chain (1):CH1

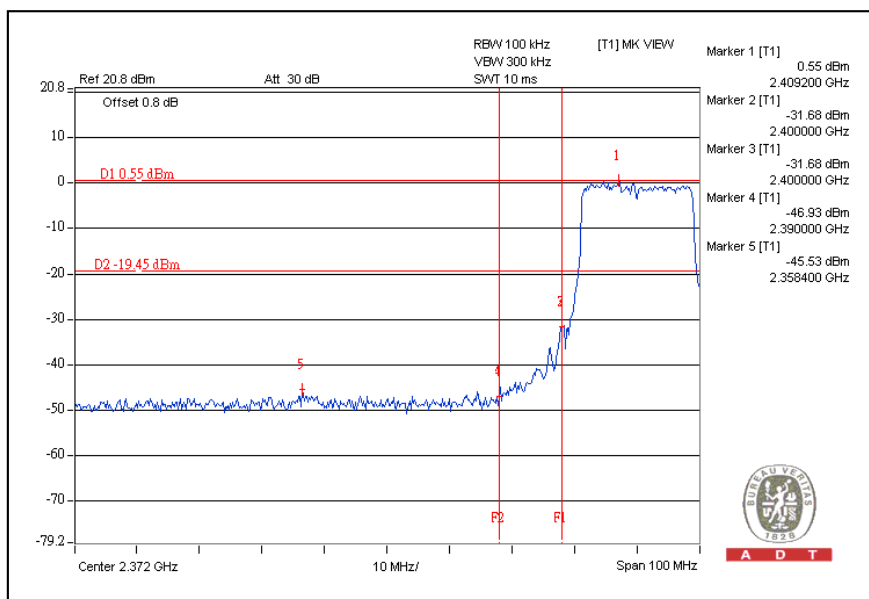


CH11

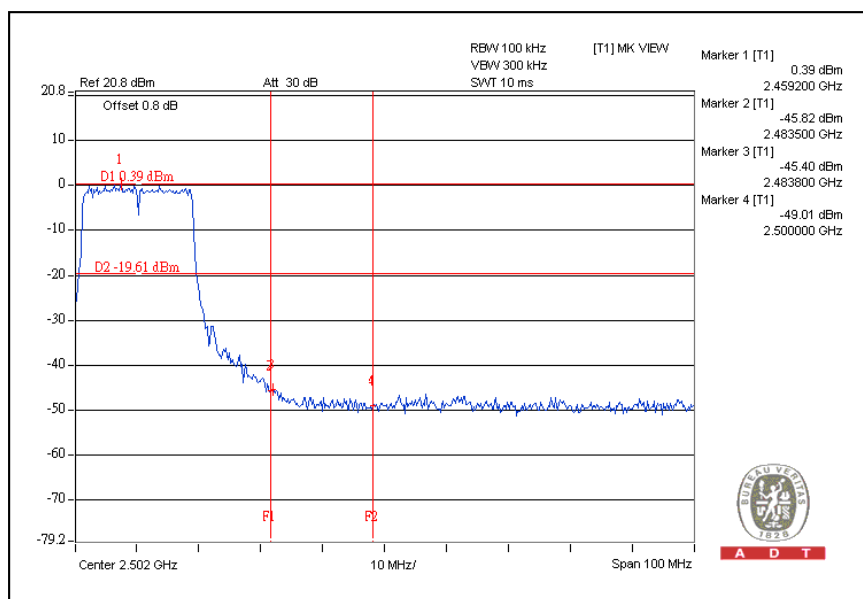


CH1

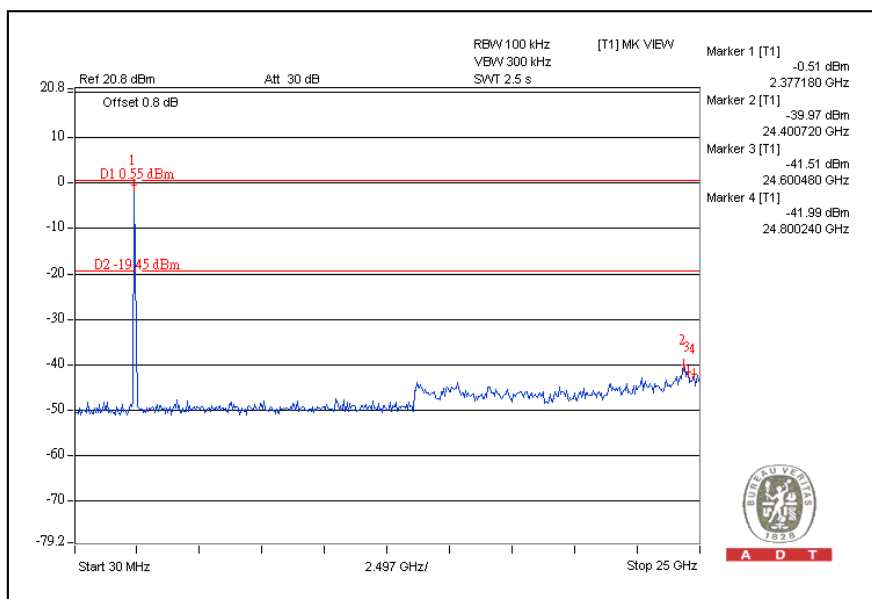


CH11

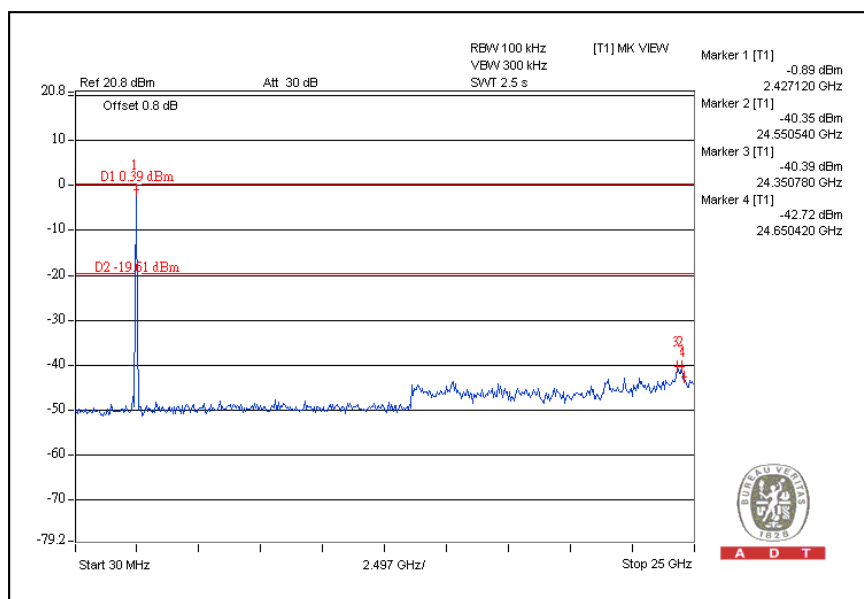


DRAFT 802.11n (40MHz) OFDM MODULATION: For Chain (0):CH1

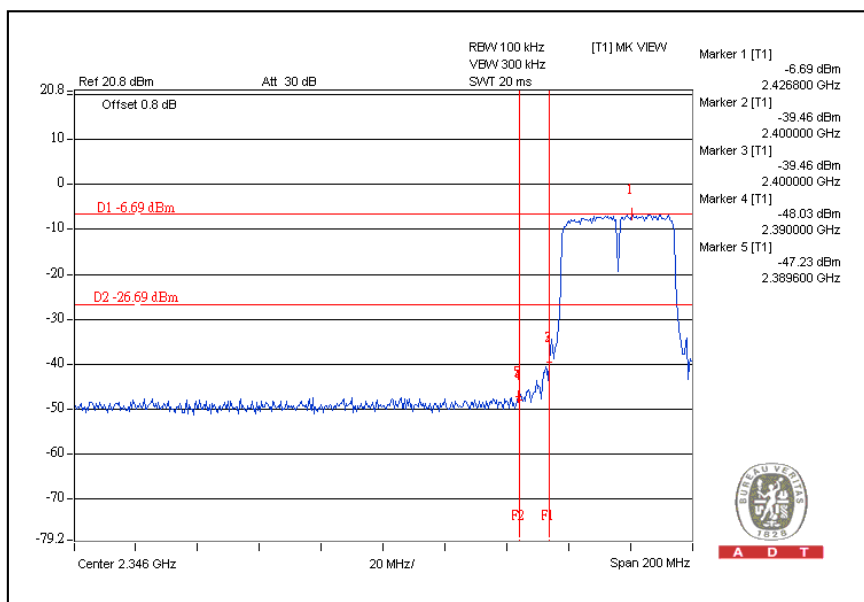


CH7

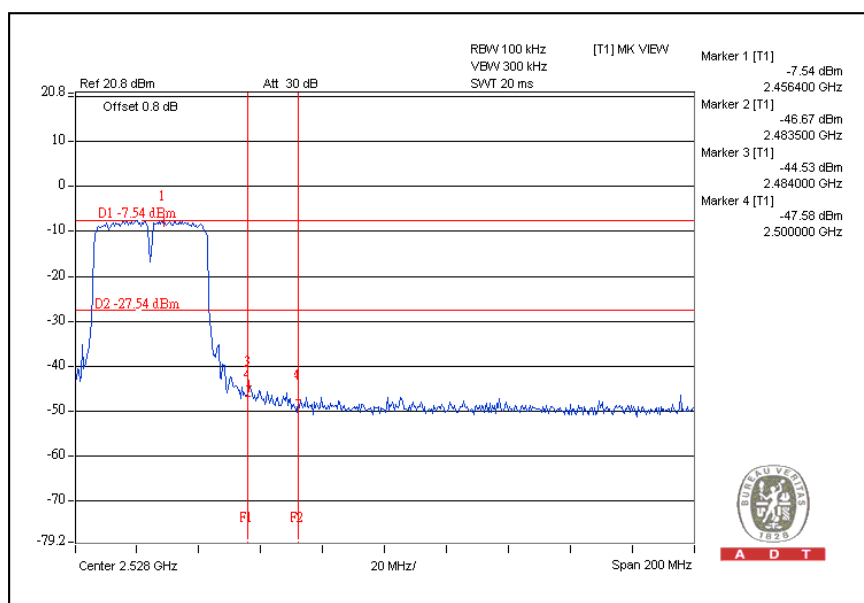


CH1

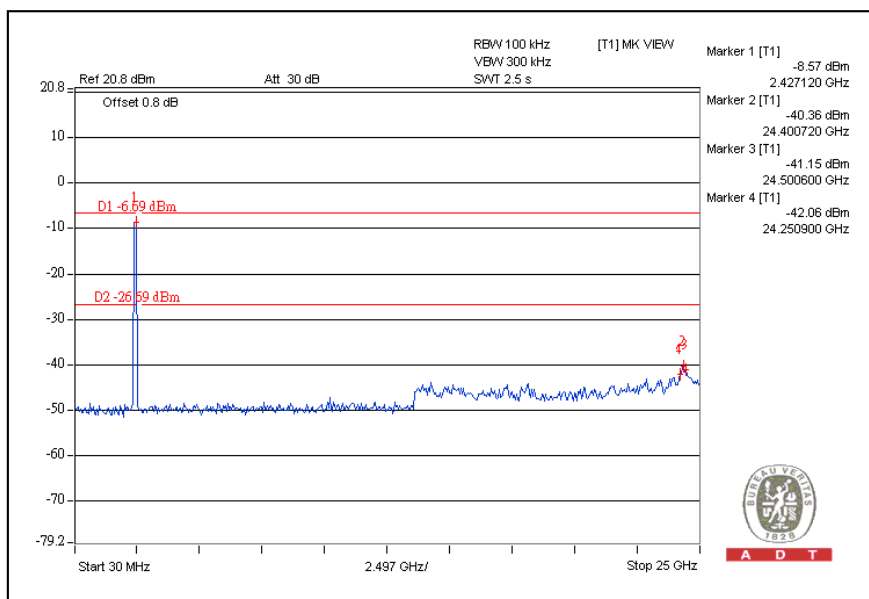


CH7

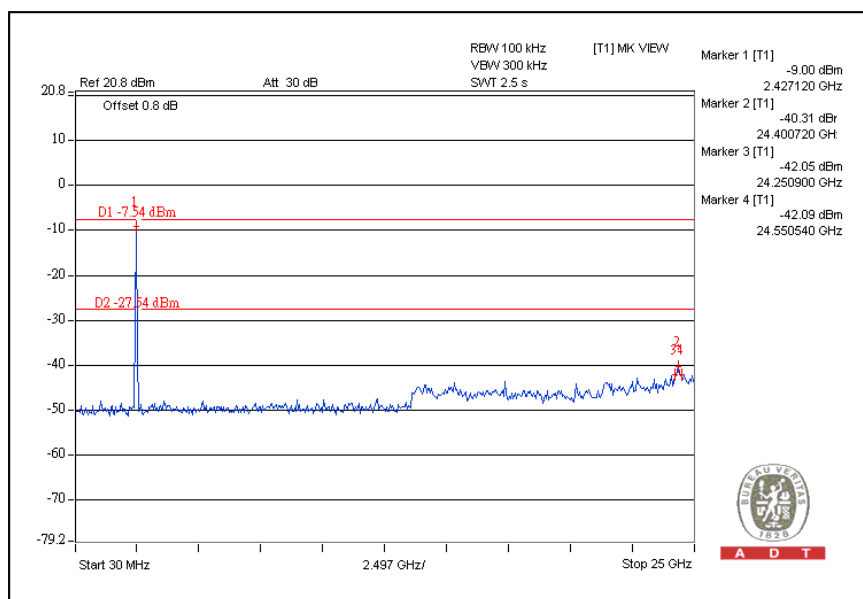


For Chain (1):CH1

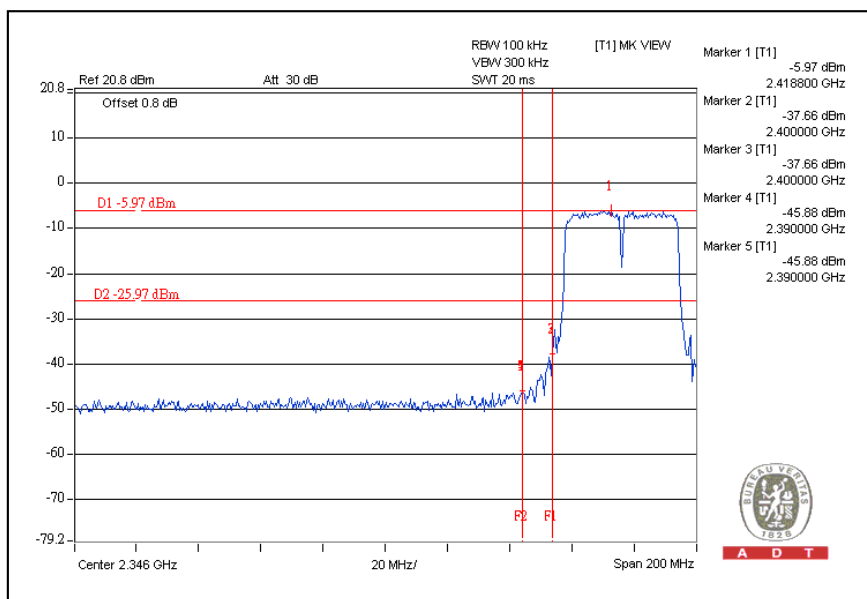


CH7

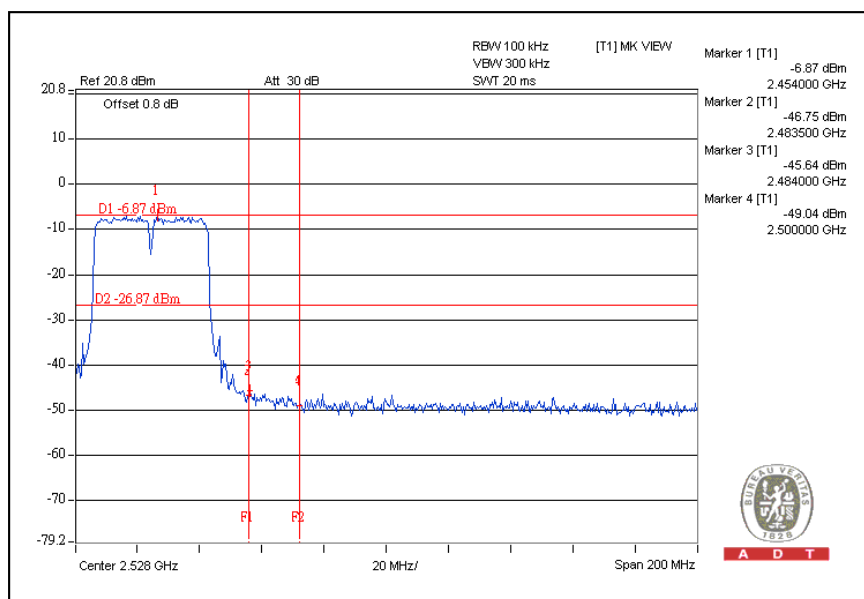

CH1

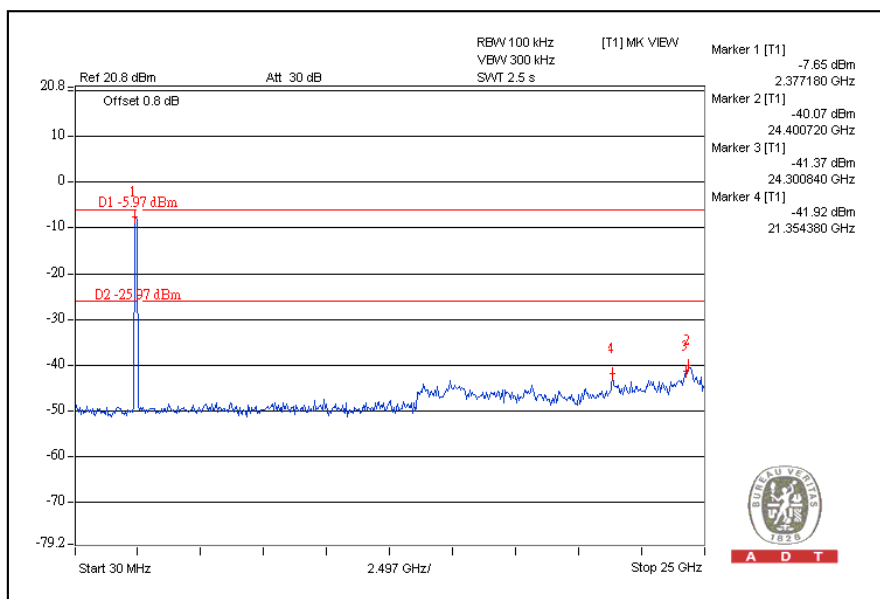

CH7

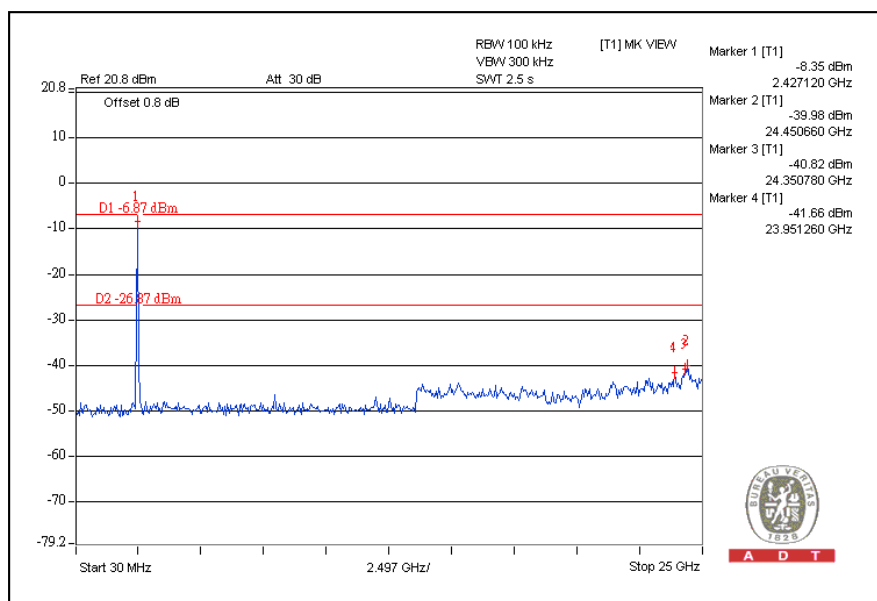

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

There are two antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Antenna Connector
1	Dipole	2	NA
2	Dipole	2	NA

**A D T**

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6. APPENDIX - A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---