

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Universal Wireless HDTV Adapter Travel Router DB
Brand Name : BELKIN
Model No. : F7D4555v1, F7D4555xx
Filing Type : New Application
Applicant : Belkin International inc.
Manufacturer : 12045 East Waterfront Drive, Playa Vista, CA 90094, USA
FCC ID : K7SF7D4555V1
Received Date : Aug. 18, 2011
Final Test Date : Sep. 28, 2011

Statement

Test result included is only for the PIFA Antenna 802.11a/n (5725~5850 MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT 2

2 GENERAL INFORMATION..... 3

2.1 Product Details..... 3

2.2 Accessories..... 3

2.3 Table for Filed Antenna..... 4

2.4 Table for Carrier Frequencies 5

2.5 Test Manner 5

2.6 Table for Test Modes 6

2.7 Table for Testing Locations..... 6

2.8 Table for Supporting Units 7

2.9 Table for Parameters of Test Software Setting..... 7

2.10 EUT Operation during Test 8

2.11 Test Configuration..... 9

3 TEST RESULT 11

3.1 AC Power Line Conducted Emissions Measurement 11

3.2 Maximum Peak Output Power Measurement 29

3.3 Power Spectral Density Measurement..... 32

3.4 6dB Spectrum Bandwidth Measurement 46

3.5 Radiated Emissions Measurement 60

3.6 Band Edge and Fundamental Emissions Measurement..... 98

3.7 Antenna Requirements 111

4 LIST OF MEASURING EQUIPMENTS 112

5 TEST LOCATION..... 114

6 TAF CERTIFICATE OF ACCREDITATION 115

APPENDIX A. TEST PHOTOS A1 ~ A15

APPENDIX B. PHOTOGRAPHS OF EUT B1 ~ B30

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Universal Wireless HDTV Adapter Travel Router DB


Brand Name : BELKIN

Model No. : F7D4555v1, F7D4555xx

Applicant : Belkin International inc.

12045 East Waterfront Drive, Playa Vista, CA 90094, USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 18, 2011 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Wayne Hsu / Vice Manager

SPORTON International Inc.

No. 52 Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C | | | | |
|---|---------------------|-------------------------------------|---------------|--------------------|
| Part | Rule Section | Description of Test | Result | Under Limit |
| 3.1 | 15.207 | AC Power Line Conducted Emissions | Complies | 4.15 dB |
| 3.2 | 15.247(b)(3) | Maximum Peak Output Power | Complies | 9.40 dB |
| 3.3 | 15.247(e) | Power Spectral Density | Complies | 24.31dB |
| 3.4 | 15.247(a)(2) | 6dB Spectrum Bandwidth | Complies | - |
| 3.5 | 15.247(d) | Radiated Emissions | Complies | 1.40 dB |
| 3.6 | 15.247(d) | Band Edge and Fundamental Emissions | Complies | - |
| 3.7 | 15.203 | Antenna Requirements | Complies | - |

| Test Items | Uncertainty | Remark |
|---|-----------------------|--------------------------|
| AC Power Line Conducted Emissions | ±2.3dB | Confidence levels of 95% |
| Maximum Peak Output Power | ±0.8dB | Confidence levels of 95% |
| Power Spectral Density | ±0.5dB | Confidence levels of 95% |
| 6dB Spectrum Bandwidth | ±8.5×10 ⁻⁸ | Confidence levels of 95% |
| Radiated Emissions (9kHz~30MHz) | ±0.8dB | Confidence levels of 95% |
| Radiated Emissions (30MHz~1000MHz) | ±1.9dB | Confidence levels of 95% |
| Radiated / Band Edge Emissions (1GHz~18GHz) | ±1.9dB | Confidence levels of 95% |
| Radiated Emissions (18GHz~40GHz) | ±1.9dB | Confidence levels of 95% |
| Temperature | ±0.7°C | Confidence levels of 95% |
| Humidity | ±3.2% | Confidence levels of 95% |
| DC / AC Power Source | ±1.4% | Confidence levels of 95% |

2 GENERAL INFORMATION

2.1 Product Details

The EUT may match the different type of antennas used for random. Only the radio detail of IEEE 802.11b/g/n is shown in this report. Only the radio detail of IEEE 802.11a/n is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

| Items | Description |
|-------------------------------------|---|
| Power Type | Power from adapter |
| Data Modulation Data Rate (Mbps) | OFDM for IEEE 802.11a (BPSK / QPSK / 16QAM / 64QAM) (6/9/12/18/24/36/48/54) See the below table for IEEE 802.11n |
| Frequency Range | 5725 ~ 5850MHz |
| Channel Number | 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth |
| Channel Band Width (99%) | 802.11a : 16.48 MHz 802.11n : MCS 0 (20MHz) : 17.68 MHz ; MCS 0 (40MHz) : 36.00 MHz MCS 8 (20MHz) : 17.68 MHz ; MCS 8 (40MHz) : 36.00 MHz |
| Conducted Output Power | 802.11a : 17.55 dBm 802.11n : MCS 0 (20MHz) : 17.56dBm ; MCS 0 (40MHz) : 17.64 dBm MCS 8 (20MHz) : 20.60dBm ; MCS 8 (40MHz) : 20.53 dBm |

2.2 Accessories

| Power | Brand | Model | Rating |
|-------------------|-----------|----------------------|--|
| AC Adapter | ShunShing | SDCII10B | INPUT : 100-240V~50/60Hz 0.3A OUTPUT : +5V 2.1A |
| Switching Adapter | DVE | DSC-5CU-05 050100 | INPUT : 100-240V~50/60Hz 0.2A OUTPUT : +5V 1A |
| Switching Adapter | Sunny | SYS1421-0505-W2 | INPUT : 100-240V~0.5A MAX 50-60Hz OUTPUT : +5V 1A |

Other:

The following items should be included:

- The Universal Wireless HDTV Adapter
- USB 2.0 cable *1
- RJ45 cable * 1
- Quick Installation Guide

2.3 Table for Filed Antenna

Antenna & Bandwidth

| Antenna Mode | Single Chain | | Two Chain | |
|--------------|--------------|--------|-----------|--------|
| | 20 MHz | 40 MHz | 20 MHz | 40 MHz |
| 802.11a | V | X | X | X |
| 802.11n | V | V | V | V |

| Antenna | | | |
|---------|------|-----------|------------|
| No. | Type | Connector | Gain (dBi) |
| 1 | PIFA | U.FL | 3.60 |
| 2 | PCB | U.FL | 4.06 |

| 5GHz Directional Gain | | | | | |
|-----------------------|-----------|--|-------------------------|---------------------|------------------------|
| Set | Modulaton | Transmitter Outputs Signals Correlated | Transmitter Outputs (N) | Elements Gain (dBi) | Directional Gain (dBi) |
| 1 | 802.11a | N/A | 1 | N/A | N/A |
| 2 | 802.11n | uncorrelated | 2 | 3.6, 3.6 | 3.6 |
| 3 | 802.11a | N/A | 1 | N/A | N/A |
| 4 | 802.11n | uncorrelated | 2 | 4.27, 4.27 | 4.27 |

For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:

- Any transmit signals are correlated, Directional Gain = $G_{ANT} + 10 \log(N)$ dBi
- All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:

- Any transmit signals are correlated, Directional Gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi
- All transmit signals are completely uncorrelated, Directional Gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N]$ dBi

IEEE 802.11n Modulation Scheme

| MCS | Spatial | Modulation | Coding Rate | Data rate(Mbps) | |
|-------|---------|------------|-------------|-----------------|----------------|
| | | | | 20 MHz channel | 40 MHz channel |
| Index | Streams | Type | Type | 800nsGI | 800nsGI |
| 0 | 1 | BPSK | 1/2 | 6.5 | 13.5 |
| 1 | 1 | QPSK | 1/2 | 13 | 27 |
| 2 | 1 | QPSK | 3/4 | 19.5 | 40.5 |
| 3 | 1 | 16-QAM | 1/2 | 26 | 54 |
| 4 | 1 | 16-QAM | 3/4 | 39 | 81 |
| 5 | 1 | 64-QAM | 2/3 | 52 | 108 |
| 6 | 1 | 64-QAM | 3/4 | 58.5 | 121.5 |
| 7 | 1 | 64-QAM | 5/6 | 65 | 135 |
| 8 | 2 | BPSK | 1/2 | 13 | 27 |
| 9 | 2 | QPSK | 1/2 | 26 | 54 |
| 10 | 2 | QPSK | 3/4 | 39 | 81 |
| 11 | 2 | 16-QAM | 1/2 | 52 | 108 |
| 12 | 2 | 16-QAM | 3/4 | 78 | 162 |
| 13 | 2 | 64-QAM | 2/3 | 104 | 216 |
| 14 | 2 | 64-QAM | 3/4 | 117 | 243 |
| 15 | 2 | 64-QAM | 5/6 | 130 | 270 |

2.4 Table for Carrier Frequencies

| Frequency Band | Channel No. | Frequency (20MHz) | Channel No. | Frequency (40MHz) |
|----------------|-------------|-------------------|-------------|-------------------|
| 5725~5850 MHz | 149 | 5745 MHz | 151 | 5755 MHz |
| | 153 | 5765 MHz | 159 | 5795 MHz |
| | 157 | 5785 MHz | - | - |
| | 161 | 5805 MHz | - | - |
| | 165 | 5825 MHz | - | - |

2.5 Test Manner

- a. The following test modes were for conducted final test:
 - Mode 1. EUT with BI-TEK PIFA Ant.+ ShunShing Adapter (SDCII10B)
 - Mode 2. EUT with Mingtek PIFA Ant.+ ShunShing Adapter (SDCII10B)
 - Mode 3. EUT with BI-TEK PIFA Ant.+ DVE Adapter (DSC-5CU-05)
 - Mode 4. EUT with Mingtek PIFA Ant.+ DVE Adapter (DSC-5CU-05)
 - Mode 5. EUT with BI-TEK PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)
 - Mode 6. EUT with Mingtek PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)
 - Mode 7. EUT with BI-TEK PIFA Ant.(From system)
 - Mode 8. EUT with Mingtek PIFA Ant.G (From system)

- b. The following test modes were for radiated emissions (Below 1GHz) final test:
 - Mode 1. EUT with PIFA Ant.+ ShunShing Adapter (SDCII10B)
 - Mode 2. EUT with PIFA Ant.+ DVE Adapter (DSC-5CU-05)
 - Mode 3. EUT with PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)
 - Mode 4. EUT with PIFA Ant. (From system)

- c. The following test modes were for radiated emissions (Above 1GHz) final test:
 - Mode 1. EUT with PIFA Ant.+ Sunny Adapter (SYS1421-0505-W2)

**Performed the worst configuration for higher gain was test in final test report.
 (Only for conducted and radiated emissions test)

2.6 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items | Mode | Data Rate | Channel | Antenna port |
|--|----------------------|-----------|-------------|--------------|
| AC Power Line Conducted Emissions Radiated Emissions Below 1GHz | Refer to section 2.5 | Auto | - | - |
| Maximum Peak Output Power Power Spectral Density | 11a/BPSK | 6 Mbps | 149/157/165 | A |
| | MCS 0 (20MHz) | 6.5 Mbps | 149/157/165 | A/B; A+B |
| | MCS 0 (40MHz) | 13.5 Mbps | 151/159 | |
| | MCS 8 (20MHz) | 13 Mbps | 149/157/165 | |
| 6dB Spectrum Bandwidth | MCS 8 (40MHz) | 27 Mbps | 151/159 | A |
| | 11a/BPSK | 6 Mbps | 149/157/165 | |
| | MCS 0 (20MHz) | 6.5 Mbps | 149/157/165 | |
| | MCS 0 (40MHz) | 13.5 Mbps | 151/159 | |
| Radiated Emissions Above 1GHz Fundamental Emissions | MCS 8 (20MHz) | 13 Mbps | 149/157/165 | A/B |
| | MCS 8 (40MHz) | 27 Mbps | 151/159 | |
| | 11a/BPSK | 6 Mbps | 149/157/165 | A |
| | MCS 0 (20MHz) | 6.5 Mbps | 149/157/165 | |
| Band Edge Emissions | MCS 0 (40MHz) | 13.5 Mbps | 151/159 | A |
| | MCS 8 (20MHz) | 13 Mbps | 149/165 | |
| | MCS 8 (40MHz) | 27 Mbps | 151/159 | |
| | 11a/BPSK | 6 Mbps | 149/165 | A+B |
| | MCS 0 (20MHz) | 6.5 Mbps | 149/157/165 | |

2.7 Table for Testing Locations

| Test Site No. | Site Category | Location |
|---------------|---------------|----------|
| CO01-NH | Conduction | Dung Hu |
| TH01-HY | OVEN Room | Hwa Ya |
| 03CH03-HY | SAC | Hwa Ya |

Semi Anechoic Chamber (SAC).

2.8 Table for Supporting Units

| Support Unit | Brand | Model | FCC ID | Remark |
|-------------------------------|-----------|----------|--------|---------------------|
| Personal Computer | DELL | DCTA | DoC | Conducted Emissions |
| LCD Monitor | DELL | E198WFPF | DoC | |
| USB Keyboard | DELL | Sk-8175 | DoC | |
| USB Mouse | DELL | MOC5UO | DoC | |
| Printer | HP | C2642A | DoC | |
| Modem | ACEEX | DM1414 | DoC | |
| USB2.0 iPod | APPLE | A1137 | DoC | |
| Notebook (Remote Workstation) | HP | 541 | N/A | Radiated Emissions |
| Notebook | DELL | E5500 | DoC | |
| Modem | ACEEX | DM1414 | DoC | |
| Mouse | Microsoft | 1004 | DoC | |

Note: For the radiated emissions (Above 1GHz) only tested by using notebook.

2.9 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11a

| Test Software Version | MP Test | | |
|-----------------------|----------|----------|----------|
| Frequency | 5745 MHz | 5785 MHz | 5825 MHz |
| IEEE 802.11a | 41 | 41 | 42 |

Power Parameters of IEEE 802.11n

| Test Software Version | MP Test | | |
|-----------------------|----------|----------|----------|
| Frequency | 5745 MHz | 5785 MHz | 5825 MHz |
| IEEE 802.11n(20MHz) | 43 | 43 | 44 |
| Frequency | 5755 MHz | 5795 MHz | - |
| IEEE 802.11n(40MHz) | 43 | 43 | - |

For Two Chain:

Power Parameters of IEEE 802.11n Ant. A+B

| Test Software Version | MP Test | | |
|-----------------------|----------|----------|----------|
| Frequency | 5745 MHz | 5785 MHz | 5825 MHz |
| IEEE 802.11n(20MHz) | 43&46 | 43&46 | 44&47 |
| Frequency | 5755 MHz | 5795 MHz | - |
| IEEE 802.11n(40MHz) | 44&46 | 45&47 | - |

2.10 EUT Operation during Test

For Conducted Emissions :

An executive program, "EMITEST.EXE" under Win XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

- a. The program was executed as follows:
- b. Turn on the power of all equipment.
- c. The EUT reads the test program from the hard disk drive and runs it.
- d. The EUT sends "H" messages to the monitor, and the monitor displays "H" patterns on the screen.
- e. The EUT sends " H " messages to the printer, then the printer prints them on the paper.
- f. The EUT sends messages to the modem.
- g. Repeat the steps from c to e.

At the same time, the following programs were executed:

- Executed "Ping.exe" to link with the remote workstation to receive and transmit data via RJ45 cable.


For Radiated Emissions :

- Executed "MP Test" to keep transmitting signals at fixed frequency.


2.11 Test Configuration

2.11.1 Radiation Emissions Test Configuration


For radiated emissions 9kHz~1GHz
Mode 1~Mode 3

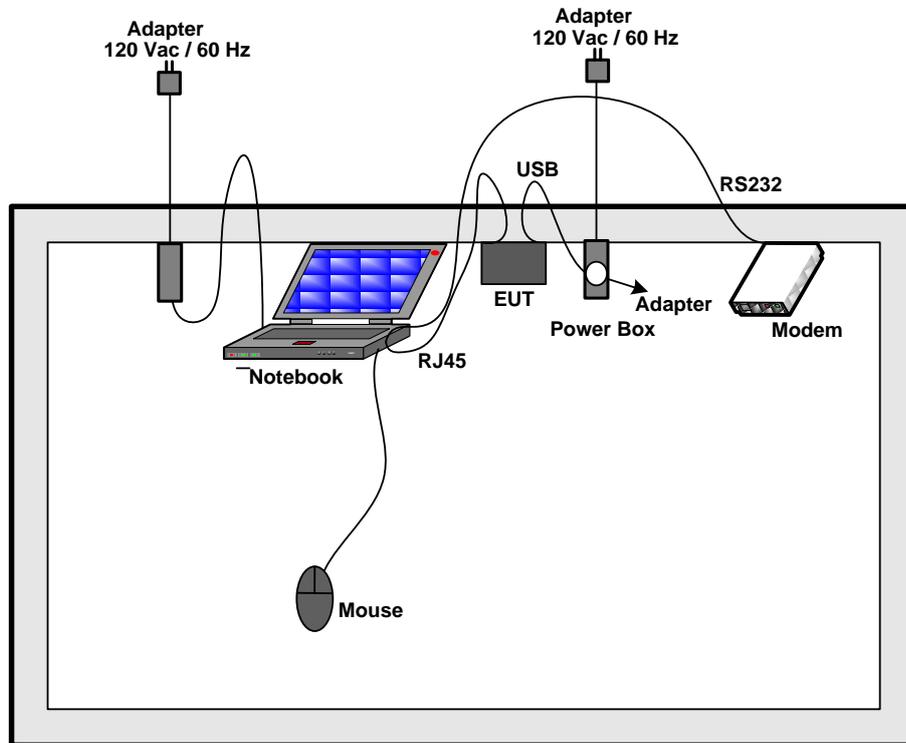

Mode 4

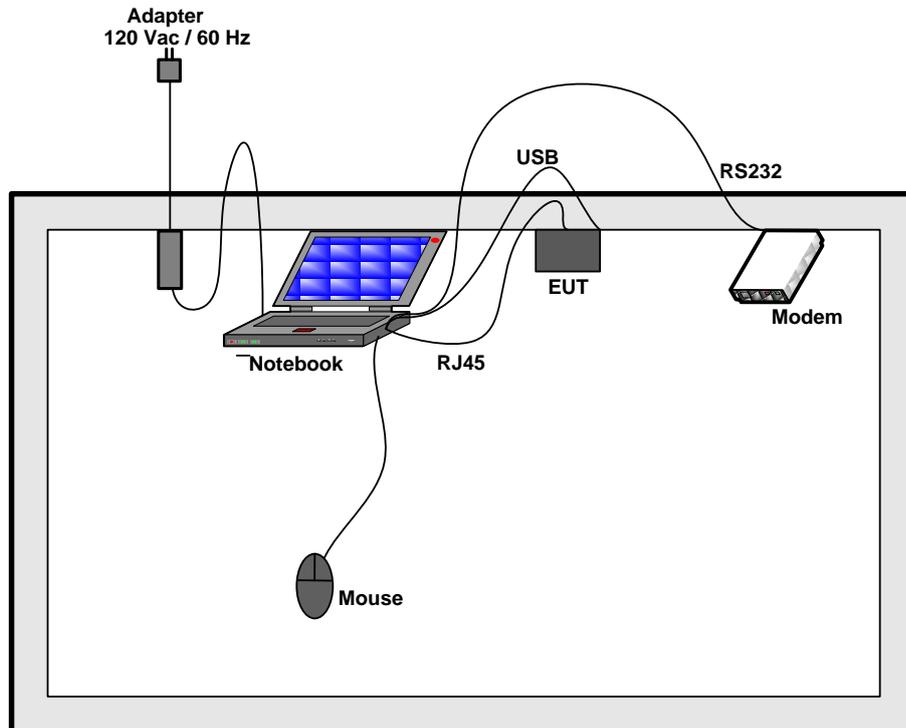

**For radiated emissions above 1GHz
Mode 1**

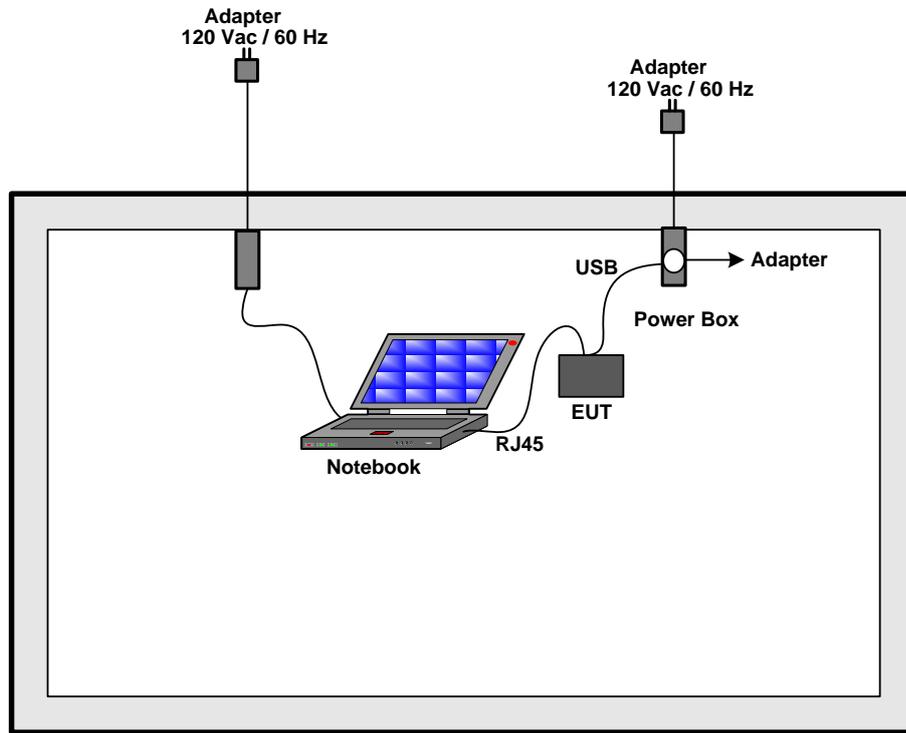

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5 | 66~56 | 56~46 |
| 0.5~5 | 56 | 46 |
| 5~30 | 60 | 50 |

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 KHz |

3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

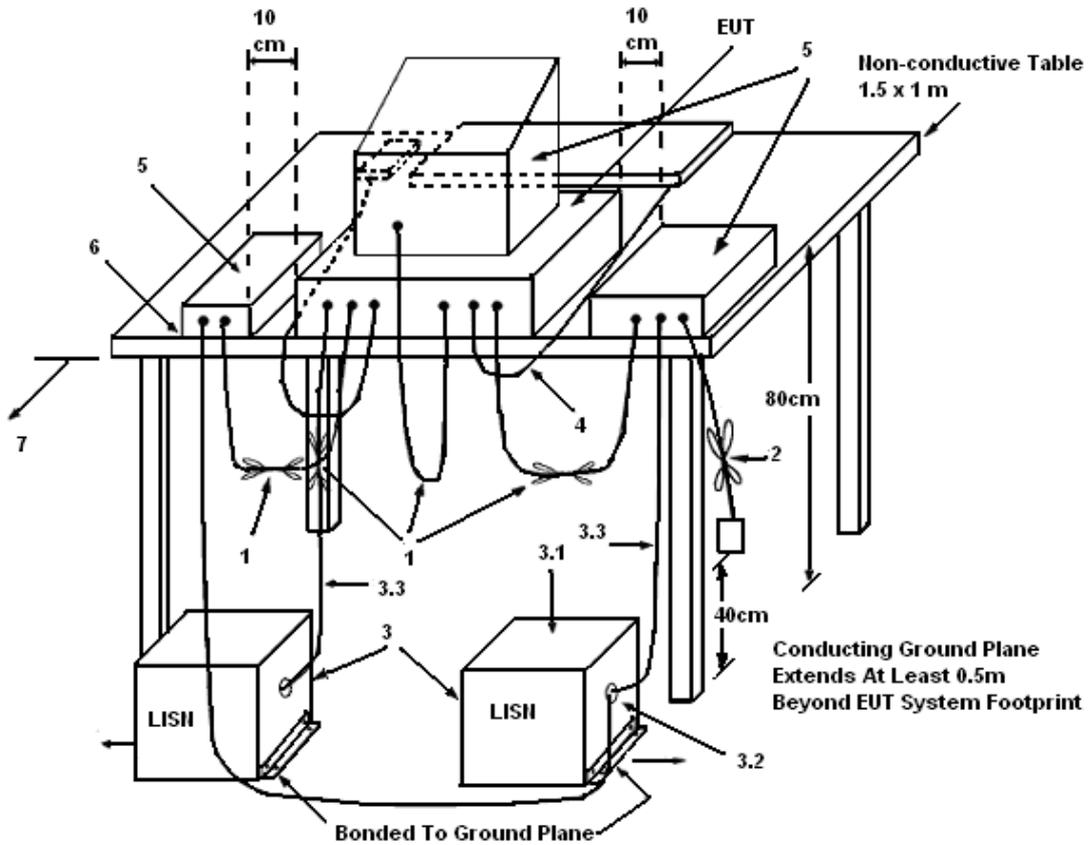

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


| | | | |
|-----------------|---------------|---------------|---------|
| Final Test Date | Aug. 19, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 1 |

Line

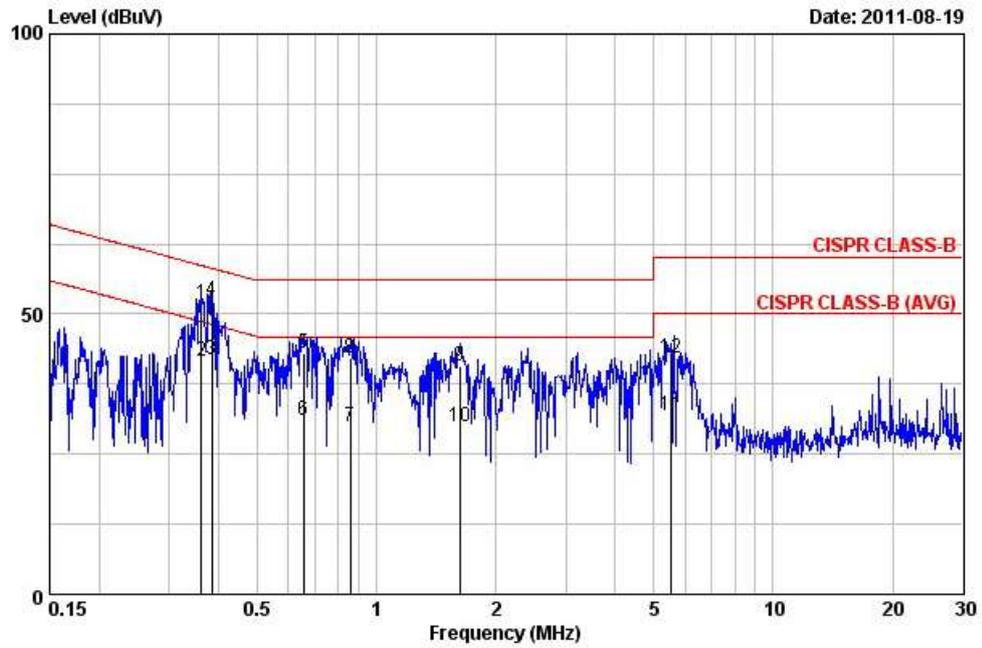

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.361 | 51.73 | -6.97 | 58.69 | 41.59 | 10.04 | 0.10 | QP |
| 2 | 0.361 | 41.61 | -7.09 | 48.69 | 31.47 | 10.04 | 0.10 | AVERAGE |
| 3 | 0.385 | 41.88 | -6.29 | 48.17 | 31.74 | 10.04 | 0.10 | AVERAGE |
| 4 | 0.385 | 52.44 | -5.73 | 58.17 | 42.30 | 10.04 | 0.10 | QP |
| 5 | 0.654 | 43.03 | -12.97 | 56.00 | 32.88 | 10.05 | 0.10 | QP |
| 6 | 0.654 | 30.95 | -15.05 | 46.00 | 20.80 | 10.05 | 0.10 | AVERAGE |
| 7 | 0.857 | 30.05 | -15.95 | 46.00 | 19.90 | 10.05 | 0.10 | AVERAGE |
| 8 | 0.857 | 42.27 | -13.73 | 56.00 | 32.12 | 10.05 | 0.10 | QP |
| 9 | 1.619 | 40.76 | -15.24 | 56.00 | 30.53 | 10.06 | 0.17 | QP |
| 10 | 1.619 | 29.96 | -16.04 | 46.00 | 19.73 | 10.06 | 0.17 | AVERAGE |
| 11 | 5.505 | 31.78 | -18.22 | 50.00 | 21.45 | 10.12 | 0.20 | AVERAGE |
| 12 | 5.505 | 42.11 | -17.89 | 60.00 | 31.78 | 10.12 | 0.20 | QP |

Neutral

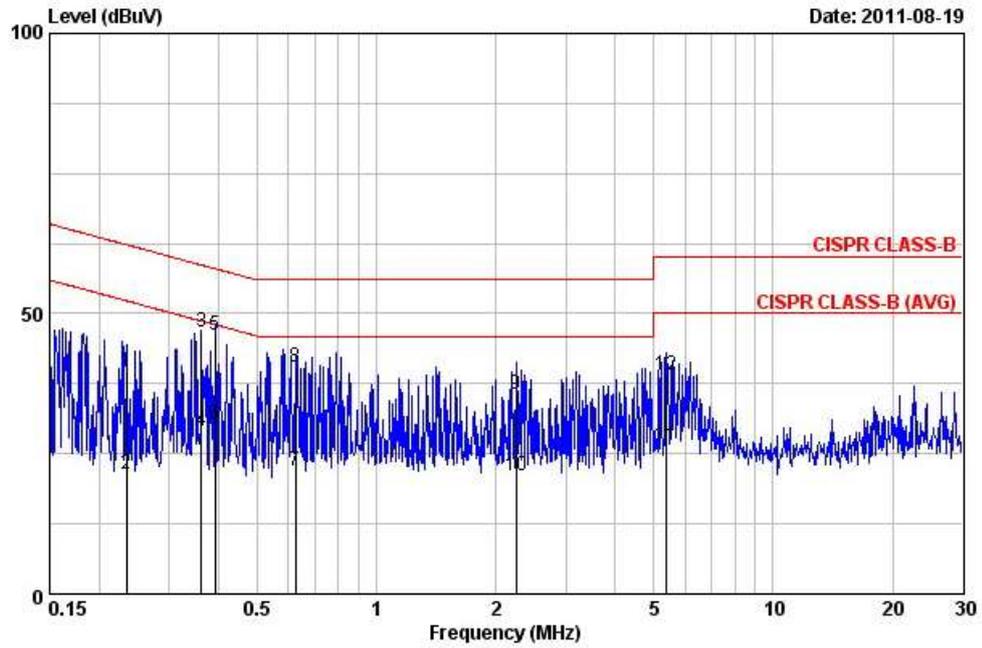


| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.234 | 39.57 | -22.74 | 62.30 | 29.48 | 9.98 | 0.10 | QP |
| 2 | 0.234 | 21.25 | -31.06 | 52.30 | 11.16 | 9.98 | 0.10 | AVERAGE |
| 3 | 0.361 | 46.72 | -11.98 | 58.69 | 36.63 | 9.99 | 0.10 | QP |
| 4 | 0.361 | 29.01 | -19.69 | 48.69 | 18.92 | 9.99 | 0.10 | AVERAGE |
| 5 | 0.391 | 46.30 | -11.74 | 58.03 | 36.21 | 9.99 | 0.10 | QP |
| 6 | 0.391 | 30.32 | -17.72 | 48.03 | 20.23 | 9.99 | 0.10 | AVERAGE |
| 7 | 0.624 | 22.00 | -24.00 | 46.00 | 11.91 | 9.99 | 0.10 | AVERAGE |
| 8 | 0.624 | 40.41 | -15.59 | 56.00 | 30.32 | 9.99 | 0.10 | QP |
| 9 | 2.249 | 35.72 | -20.28 | 56.00 | 25.50 | 10.01 | 0.20 | QP |
| 10 | 2.249 | 21.15 | -24.85 | 46.00 | 10.93 | 10.01 | 0.20 | AVERAGE |
| 11 | 5.362 | 26.54 | -23.46 | 50.00 | 16.28 | 10.06 | 0.20 | AVERAGE |
| 12 | 5.362 | 38.94 | -21.06 | 60.00 | 28.68 | 10.06 | 0.20 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.


| | | | |
|------------------------|---------------|----------------------|---------|
| Final Test Date | Aug. 29, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 2 |

Line

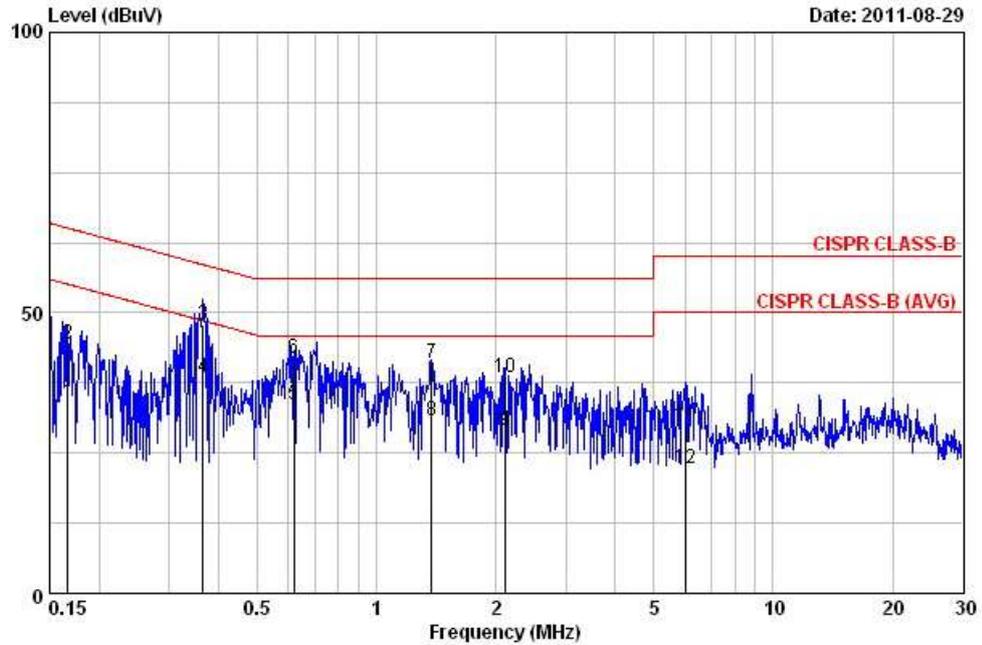

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.167 | 33.88 | -21.24 | 55.12 | 23.75 | 10.04 | 0.10 | AVERAGE |
| 2 | 0.167 | 44.34 | -20.78 | 65.12 | 34.21 | 10.04 | 0.10 | QP |
| 3 | 0.365 | 47.99 | -10.61 | 58.61 | 37.86 | 10.04 | 0.10 | QP |
| 4 | 0.365 | 38.57 | -10.03 | 48.61 | 28.44 | 10.04 | 0.10 | AVERAGE |
| 5 | 0.621 | 33.69 | -12.31 | 46.00 | 23.55 | 10.04 | 0.10 | AVERAGE |
| 6 | 0.621 | 41.92 | -14.08 | 56.00 | 31.78 | 10.04 | 0.10 | QP |
| 7 | 1.374 | 41.15 | -14.85 | 56.00 | 30.95 | 10.06 | 0.15 | QP |
| 8 | 1.374 | 30.67 | -15.33 | 46.00 | 20.47 | 10.06 | 0.15 | AVERAGE |
| 9 | 2.110 | 29.06 | -16.94 | 46.00 | 18.79 | 10.07 | 0.20 | AVERAGE |
| 10 | 2.110 | 38.43 | -17.57 | 56.00 | 28.16 | 10.07 | 0.20 | QP |
| 11 | 5.993 | 29.91 | -30.09 | 60.00 | 19.58 | 10.13 | 0.20 | QP |
| 12 | 5.993 | 22.11 | -27.89 | 50.00 | 11.78 | 10.13 | 0.20 | AVERAGE |

Neutral

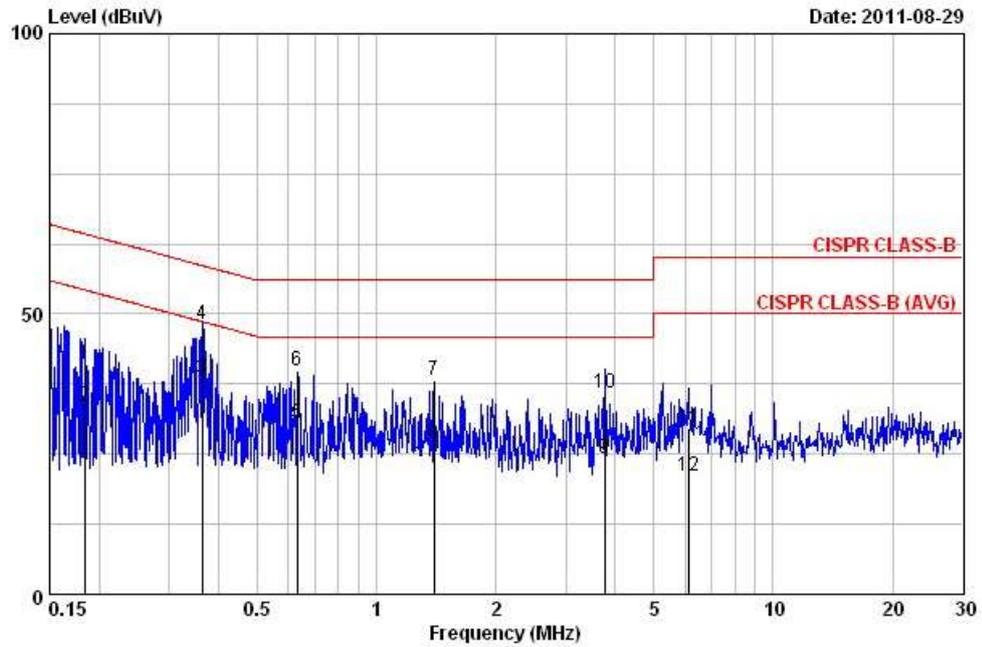


| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.183 | 41.06 | -23.27 | 64.33 | 30.98 | 9.98 | 0.10 | QP |
| 2 | 0.183 | 33.69 | -20.64 | 54.33 | 23.61 | 9.98 | 0.10 | AVERAGE |
| 3 | 0.363 | 38.58 | -10.07 | 48.65 | 28.49 | 9.99 | 0.10 | AVERAGE |
| 4 | 0.363 | 48.09 | -10.56 | 58.65 | 38.00 | 9.99 | 0.10 | QP |
| 5 | 0.630 | 30.51 | -15.49 | 46.00 | 20.42 | 9.99 | 0.10 | AVERAGE |
| 6 | 0.630 | 39.87 | -16.13 | 56.00 | 29.78 | 9.99 | 0.10 | QP |
| 7 | 1.396 | 38.10 | -17.90 | 56.00 | 27.95 | 10.00 | 0.15 | QP |
| 8 | 1.396 | 26.66 | -19.34 | 46.00 | 16.51 | 10.00 | 0.15 | AVERAGE |
| 9 | 3.759 | 24.30 | -21.70 | 46.00 | 14.07 | 10.03 | 0.20 | AVERAGE |
| 10 | 3.759 | 35.85 | -20.15 | 56.00 | 25.62 | 10.03 | 0.20 | QP |
| 11 | 6.121 | 29.72 | -30.28 | 60.00 | 19.45 | 10.07 | 0.20 | QP |
| 12 | 6.121 | 21.21 | -28.79 | 50.00 | 10.94 | 10.07 | 0.20 | AVERAGE |

Note:
Level = Read Level + LISN Factor + Cable Loss.


| | | | |
|-----------------|---------------|---------------|---------|
| Final Test Date | Aug. 19, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 3 |

Line

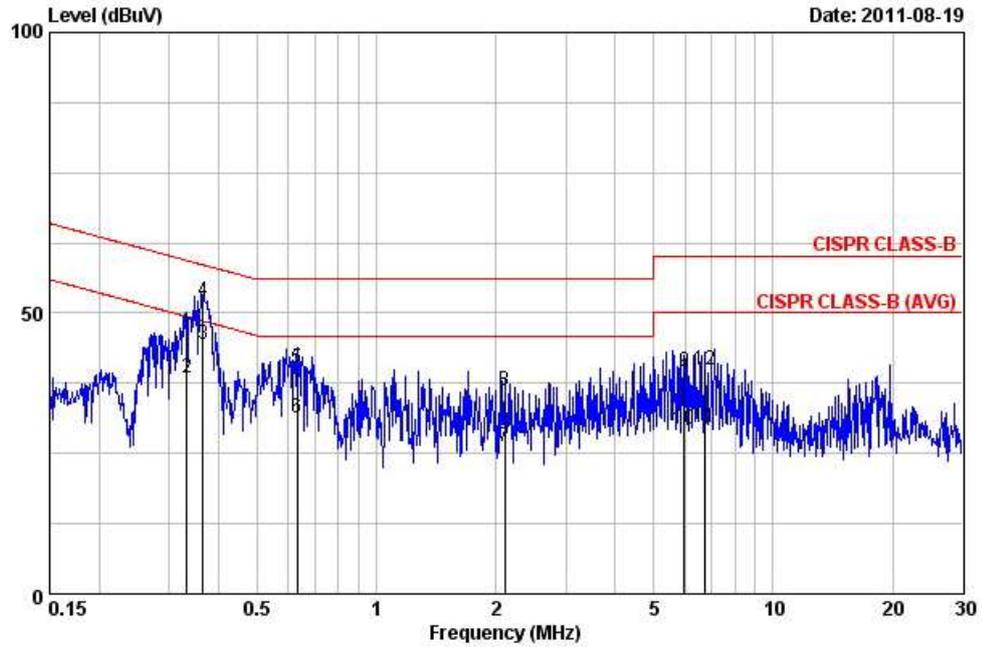

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.332 | 46.56 | -12.84 | 59.40 | 36.42 | 10.04 | 0.10 | QP |
| 2 | 0.332 | 38.60 | -10.80 | 49.40 | 28.46 | 10.04 | 0.10 | AVERAGE |
| 3 | 0.366 | 44.44 | -4.15 | 48.59 | 34.31 | 10.04 | 0.10 | AVERAGE |
| 4 | 0.366 | 52.26 | -6.33 | 58.59 | 42.13 | 10.04 | 0.10 | QP |
| 5 | 0.630 | 40.26 | -15.74 | 56.00 | 30.12 | 10.04 | 0.10 | QP |
| 6 | 0.630 | 31.31 | -14.69 | 46.00 | 21.17 | 10.04 | 0.10 | AVERAGE |
| 7 | 2.110 | 26.22 | -19.78 | 46.00 | 15.95 | 10.07 | 0.20 | AVERAGE |
| 8 | 2.110 | 36.04 | -19.96 | 56.00 | 25.77 | 10.07 | 0.20 | QP |
| 9 | 5.961 | 39.52 | -20.48 | 60.00 | 29.19 | 10.13 | 0.20 | QP |
| 10 | 5.961 | 29.26 | -20.74 | 50.00 | 18.93 | 10.13 | 0.20 | AVERAGE |
| 11 | 6.733 | 29.51 | -20.49 | 50.00 | 19.17 | 10.14 | 0.20 | AVERAGE |
| 12 | 6.733 | 40.00 | -20.00 | 60.00 | 29.66 | 10.14 | 0.20 | QP |

Neutral

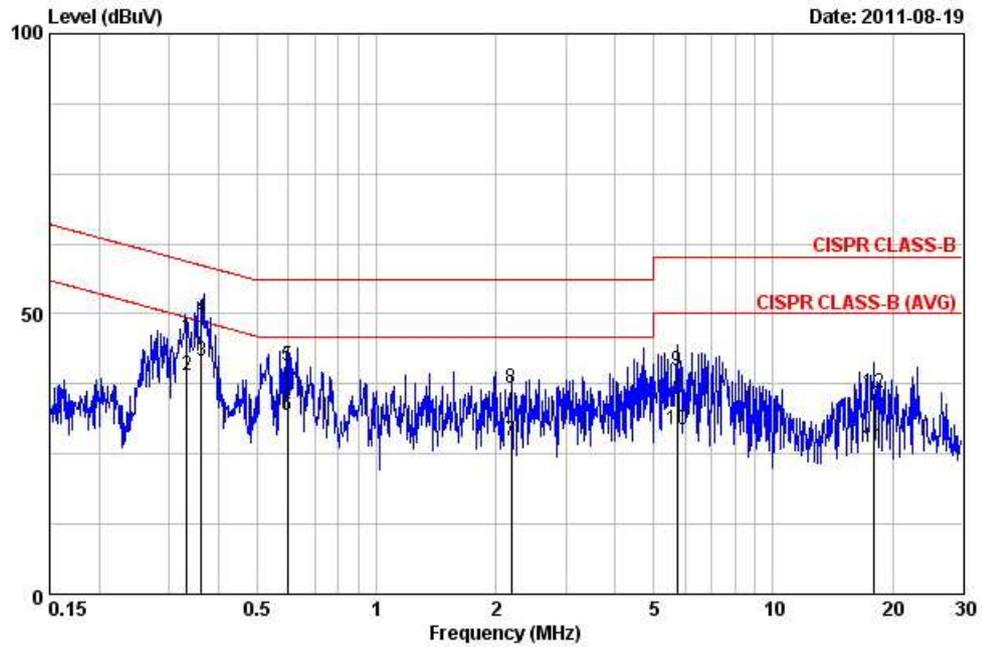


| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|--------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.333 | 45.90 | -13.48 | 59.38 | 35.81 | 9.99 | 0.10 | QP |
| 2 | 0.333 | 38.89 | -10.49 | 49.38 | 28.80 | 9.99 | 0.10 | AVERAGE |
| 3 | 0.362 | 41.62 | -7.06 | 48.68 | 31.53 | 9.99 | 0.10 | AVERAGE |
| 4 | 0.362 | 49.22 | -9.46 | 58.68 | 39.13 | 9.99 | 0.10 | QP |
| 5 | 0.598 | 40.81 | -15.19 | 56.00 | 30.72 | 9.99 | 0.10 | QP |
| 6 | 0.598 | 31.83 | -14.17 | 46.00 | 21.74 | 9.99 | 0.10 | AVERAGE |
| 7 | 2.190 | 27.41 | -18.59 | 46.00 | 17.20 | 10.01 | 0.20 | AVERAGE |
| 8 | 2.190 | 36.65 | -19.35 | 56.00 | 26.44 | 10.01 | 0.20 | QP |
| 9 | 5.713 | 39.80 | -20.20 | 60.00 | 29.54 | 10.06 | 0.20 | QP |
| 10 | 5.713 | 29.23 | -20.77 | 50.00 | 18.97 | 10.06 | 0.20 | AVERAGE |
| 11 | 17.944 | 26.19 | -23.81 | 50.00 | 15.67 | 10.26 | 0.26 | AVERAGE |
| 12 | 17.944 | 35.92 | -24.08 | 60.00 | 25.40 | 10.26 | 0.26 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.


| | | | |
|------------------------|---------------|----------------------|---------|
| Final Test Date | Aug. 29, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 4 |

Line

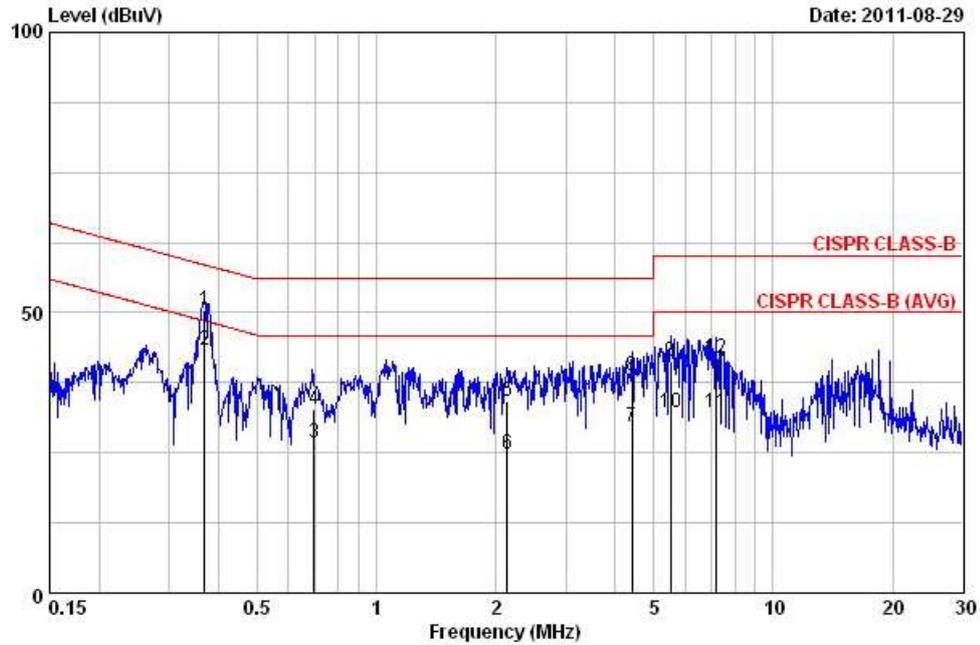

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|-------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.369 | 50.49 | -8.03 | 58.52 | 40.35 | 10.04 | 0.10 | QP |
| 2 | 0.369 | 43.33 | -5.20 | 48.52 | 33.19 | 10.04 | 0.10 | AVERAGE |
| 3 | 0.695 | 26.69 | -19.31 | 46.00 | 16.55 | 10.05 | 0.10 | AVERAGE |
| 4 | 0.695 | 32.80 | -23.20 | 56.00 | 22.66 | 10.05 | 0.10 | QP |
| 5 | 2.133 | 34.23 | -21.77 | 56.00 | 23.96 | 10.07 | 0.20 | QP |
| 6 | 2.133 | 24.88 | -21.12 | 46.00 | 14.61 | 10.07 | 0.20 | AVERAGE |
| 7 | 4.410 | 29.77 | -16.23 | 46.00 | 19.47 | 10.10 | 0.20 | AVERAGE |
| 8 | 4.410 | 38.78 | -17.22 | 56.00 | 28.48 | 10.10 | 0.20 | QP |
| 9 | 5.505 | 41.27 | -18.73 | 60.00 | 30.94 | 10.12 | 0.20 | QP |
| 10 | 5.505 | 32.10 | -17.90 | 50.00 | 21.77 | 10.12 | 0.20 | AVERAGE |
| 11 | 7.213 | 32.28 | -17.72 | 50.00 | 21.93 | 10.15 | 0.20 | AVERAGE |
| 12 | 7.213 | 41.78 | -18.22 | 60.00 | 31.43 | 10.15 | 0.20 | QP |

Neutral

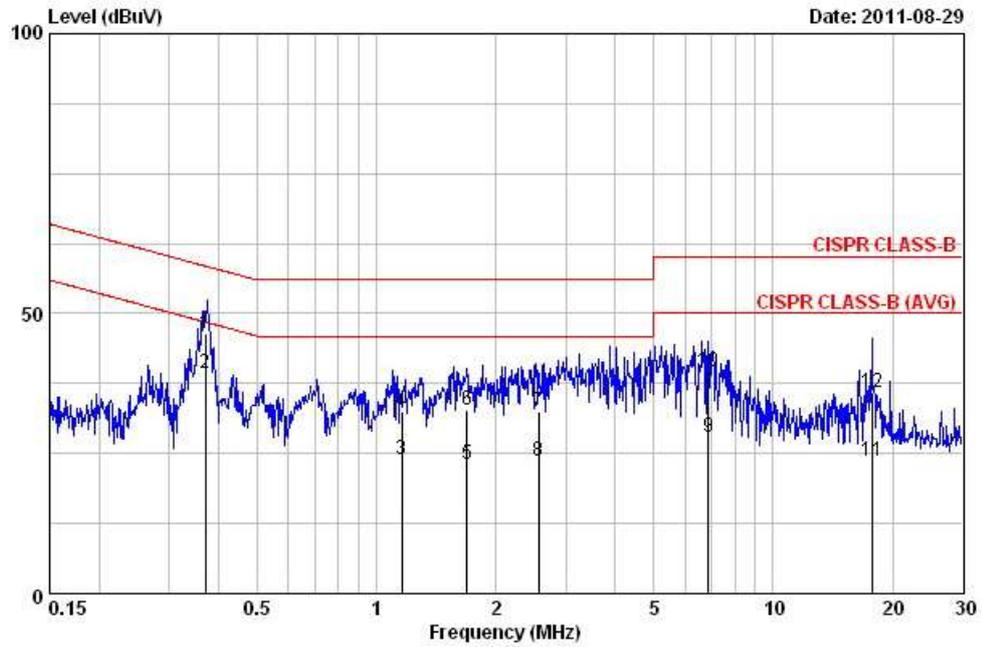


| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.371 | 46.56 | -11.91 | 58.47 | 36.47 | 9.99 | 0.10 | QP |
| 2 | 0.371 | 39.45 | -9.03 | 48.47 | 29.36 | 9.99 | 0.10 | AVERAGE |
| 3 | 1.156 | 23.86 | -22.14 | 46.00 | 13.76 | 9.99 | 0.11 | AVERAGE |
| 4 | 1.156 | 32.47 | -23.53 | 56.00 | 22.36 | 9.99 | 0.11 | QP |
| 5 | 1.689 | 23.20 | -22.80 | 46.00 | 13.02 | 10.01 | 0.18 | AVERAGE |
| 6 | 1.689 | 32.81 | -23.19 | 56.00 | 22.63 | 10.01 | 0.18 | QP |
| 7 | 2.567 | 32.47 | -23.53 | 56.00 | 22.26 | 10.02 | 0.20 | QP |
| 8 | 2.567 | 23.57 | -22.43 | 46.00 | 13.36 | 10.02 | 0.20 | AVERAGE |
| 9 | 6.878 | 27.81 | -22.19 | 50.00 | 17.52 | 10.08 | 0.20 | AVERAGE |
| 10 | 6.878 | 39.47 | -20.53 | 60.00 | 29.19 | 10.08 | 0.20 | QP |
| 11 | 17.755 | 23.77 | -26.23 | 50.00 | 13.26 | 10.25 | 0.26 | AVERAGE |
| 12 | 17.755 | 35.79 | -24.21 | 60.00 | 25.28 | 10.25 | 0.26 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.


| | | | |
|-----------------|---------------|---------------|---------|
| Final Test Date | Aug. 19, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 5 |

Line

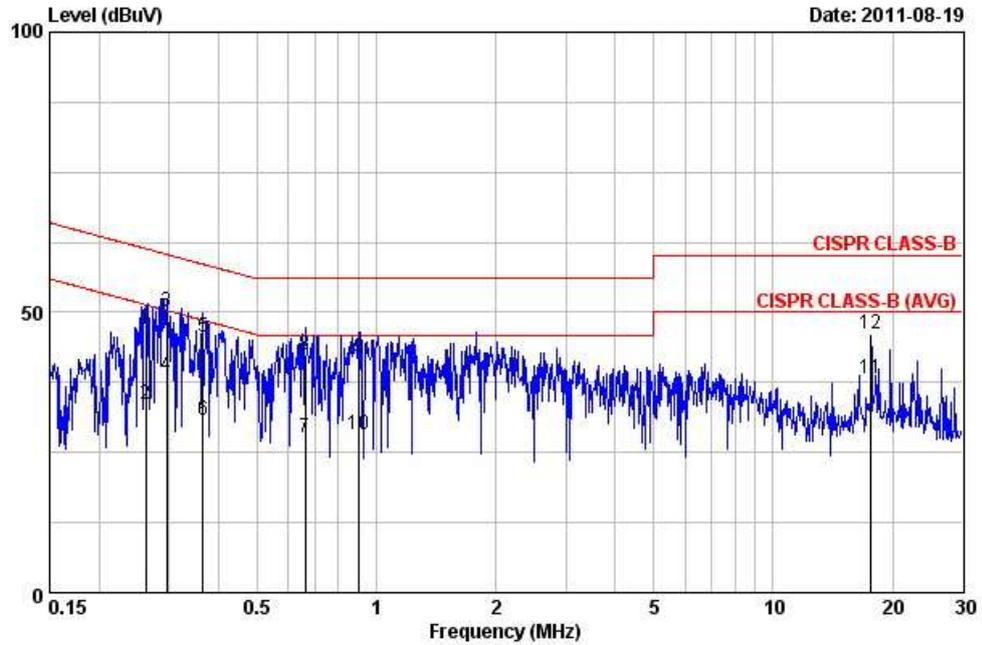

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|------|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 @ | 0.262 | 47.03 | -14.35 | 61.38 | 36.89 | 10.03 | 0.10 | QP |
| 2 | 0.262 | 33.51 | -17.87 | 51.38 | 23.37 | 10.03 | 0.10 | AVERAGE |
| 3 @ | 0.296 | 50.18 | -10.18 | 60.37 | 40.05 | 10.04 | 0.10 | QP |
| 4 @ | 0.296 | 38.69 | -11.67 | 50.37 | 28.56 | 10.04 | 0.10 | AVERAGE |
| 5 @ | 0.365 | 45.50 | -13.10 | 58.61 | 35.37 | 10.04 | 0.10 | QP |
| 6 | 0.365 | 30.77 | -17.83 | 48.61 | 20.64 | 10.04 | 0.10 | AVERAGE |
| 7 | 0.661 | 27.56 | -18.44 | 46.00 | 17.41 | 10.05 | 0.10 | AVERAGE |
| 8 @ | 0.661 | 42.44 | -13.56 | 56.00 | 32.29 | 10.05 | 0.10 | QP |
| 9 @ | 0.904 | 42.01 | -13.99 | 56.00 | 31.86 | 10.05 | 0.10 | QP |
| 10 | 0.904 | 28.14 | -17.86 | 46.00 | 17.99 | 10.05 | 0.10 | AVERAGE |
| 11 @ | 17.693 | 38.06 | -11.94 | 50.00 | 27.51 | 10.29 | 0.26 | AVERAGE |
| 12 @ | 17.693 | 46.16 | -13.84 | 60.00 | 35.61 | 10.29 | 0.26 | QP |

Neutral

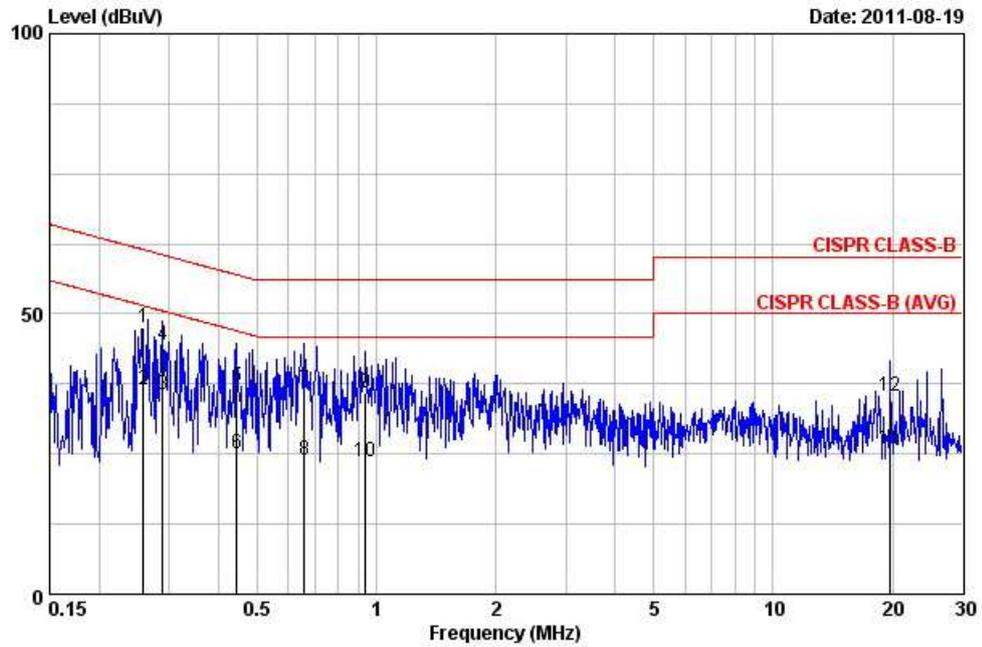


| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.259 | 47.59 | -13.88 | 61.47 | 37.51 | 9.98 | 0.10 | QP |
| 2 | 0.259 | 36.38 | -15.09 | 51.47 | 26.30 | 9.98 | 0.10 | AVERAGE |
| 3 | 0.289 | 35.75 | -14.79 | 50.54 | 25.66 | 9.99 | 0.10 | AVERAGE |
| 4 | 0.289 | 44.58 | -15.96 | 60.54 | 34.49 | 9.99 | 0.10 | QP |
| 5 | 0.444 | 37.03 | -19.95 | 56.98 | 26.94 | 9.99 | 0.10 | QP |
| 6 | 0.444 | 25.21 | -21.77 | 46.98 | 15.12 | 9.99 | 0.10 | AVERAGE |
| 7 | 0.658 | 36.59 | -19.41 | 56.00 | 26.50 | 9.99 | 0.10 | QP |
| 8 | 0.658 | 23.96 | -22.04 | 46.00 | 13.87 | 9.99 | 0.10 | AVERAGE |
| 9 | 0.938 | 35.76 | -20.24 | 56.00 | 25.67 | 9.99 | 0.10 | QP |
| 10 | 0.938 | 23.57 | -22.43 | 46.00 | 13.48 | 9.99 | 0.10 | AVERAGE |
| 11 | 19.713 | 26.05 | -23.95 | 50.00 | 15.48 | 10.28 | 0.29 | AVERAGE |
| 12 | 19.713 | 35.29 | -24.71 | 60.00 | 24.72 | 10.28 | 0.29 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.


| | | | |
|------------------------|---------------|----------------------|---------|
| Final Test Date | Aug. 29, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 6 |

Line

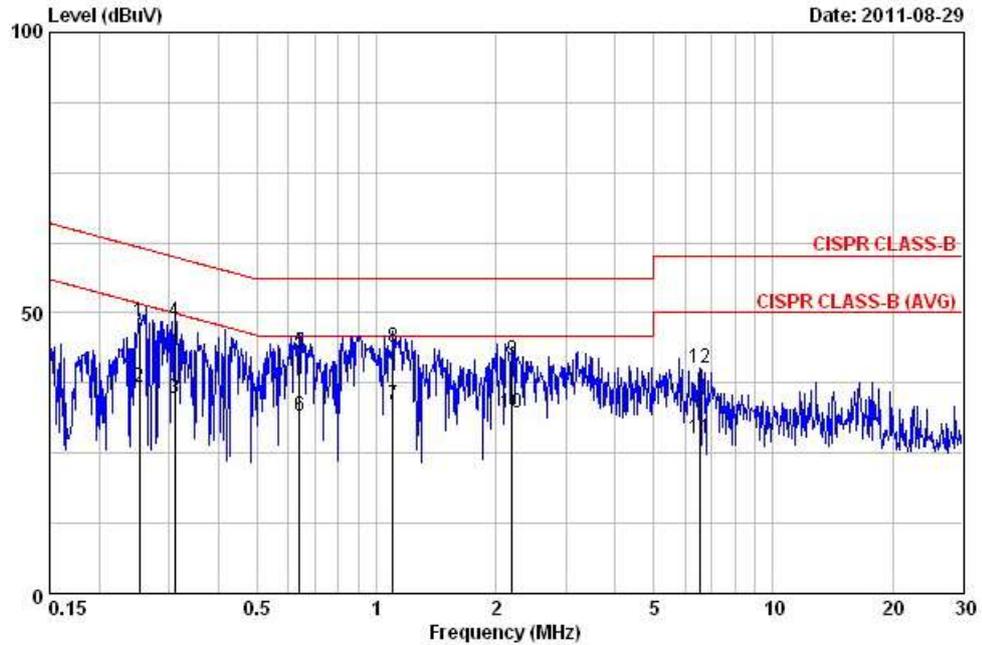

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.252 | 48.35 | -13.34 | 61.69 | 38.21 | 10.03 | 0.10 | QP |
| 2 | 0.252 | 36.70 | -14.99 | 51.69 | 26.56 | 10.03 | 0.10 | AVERAGE |
| 3 | 0.310 | 34.67 | -15.30 | 49.97 | 24.53 | 10.04 | 0.10 | AVERAGE |
| 4 | 0.310 | 48.40 | -11.57 | 59.97 | 38.26 | 10.04 | 0.10 | QP |
| 5 | 0.641 | 43.07 | -12.93 | 56.00 | 32.92 | 10.05 | 0.10 | QP |
| 6 | 0.641 | 31.62 | -14.38 | 46.00 | 21.47 | 10.05 | 0.10 | AVERAGE |
| 7 | 1.100 | 33.68 | -12.32 | 46.00 | 23.51 | 10.05 | 0.11 | AVERAGE |
| 8 | 1.100 | 44.00 | -12.00 | 56.00 | 33.83 | 10.05 | 0.11 | QP |
| 9 | 2.201 | 41.47 | -14.53 | 56.00 | 31.20 | 10.07 | 0.20 | QP |
| 10 | 2.201 | 32.08 | -13.92 | 46.00 | 21.81 | 10.07 | 0.20 | AVERAGE |
| 11 | 6.523 | 27.59 | -22.41 | 50.00 | 17.25 | 10.14 | 0.20 | AVERAGE |
| 12 | 6.523 | 40.30 | -19.70 | 60.00 | 29.96 | 10.14 | 0.20 | QP |

Neutral

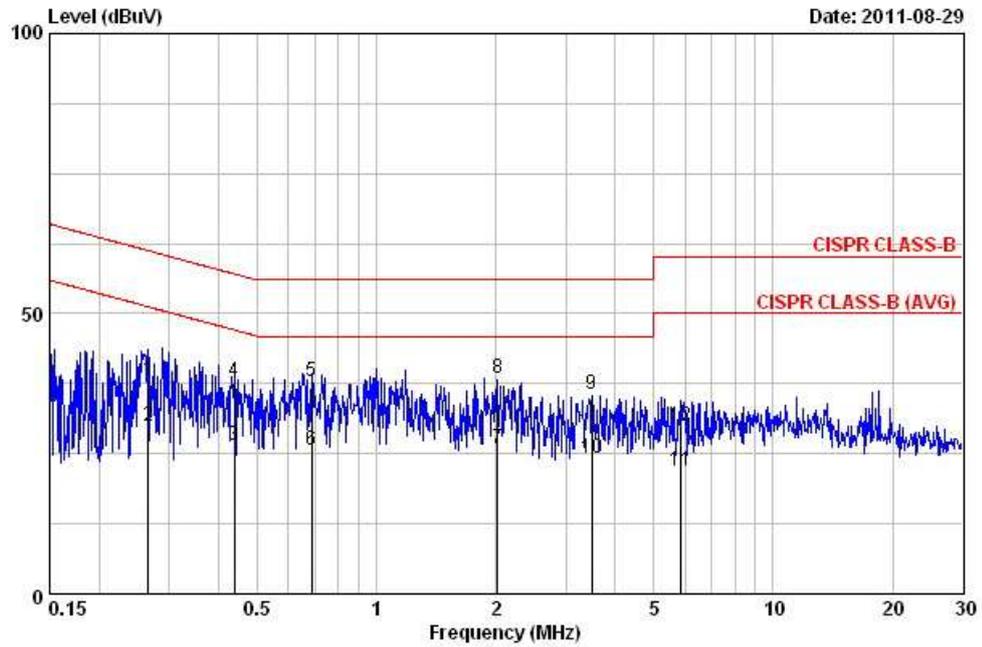


| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.266 | 38.06 | -23.19 | 61.25 | 27.98 | 9.98 | 0.10 | QP |
| 2 | 0.266 | 29.80 | -21.45 | 51.25 | 19.72 | 9.98 | 0.10 | AVERAGE |
| 3 | 0.437 | 26.55 | -20.56 | 47.11 | 16.46 | 9.99 | 0.10 | AVERAGE |
| 4 | 0.437 | 37.96 | -19.15 | 57.11 | 27.87 | 9.99 | 0.10 | QP |
| 5 | 0.686 | 37.94 | -18.06 | 56.00 | 27.85 | 9.99 | 0.10 | QP |
| 6 | 0.686 | 25.61 | -20.39 | 46.00 | 15.52 | 9.99 | 0.10 | AVERAGE |
| 7 | 2.023 | 25.80 | -20.20 | 46.00 | 15.59 | 10.01 | 0.20 | AVERAGE |
| 8 | 2.023 | 38.43 | -17.57 | 56.00 | 28.22 | 10.01 | 0.20 | QP |
| 9 | 3.491 | 35.69 | -20.31 | 56.00 | 25.46 | 10.03 | 0.20 | QP |
| 10 | 3.491 | 24.14 | -21.86 | 46.00 | 13.91 | 10.03 | 0.20 | AVERAGE |
| 11 | 5.836 | 22.01 | -27.99 | 50.00 | 11.74 | 10.07 | 0.20 | AVERAGE |
| 12 | 5.836 | 29.85 | -30.15 | 60.00 | 19.58 | 10.07 | 0.20 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.


| | | | |
|------------------------|---------------|----------------------|---------|
| Final Test Date | Aug. 18, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 7 |

Line

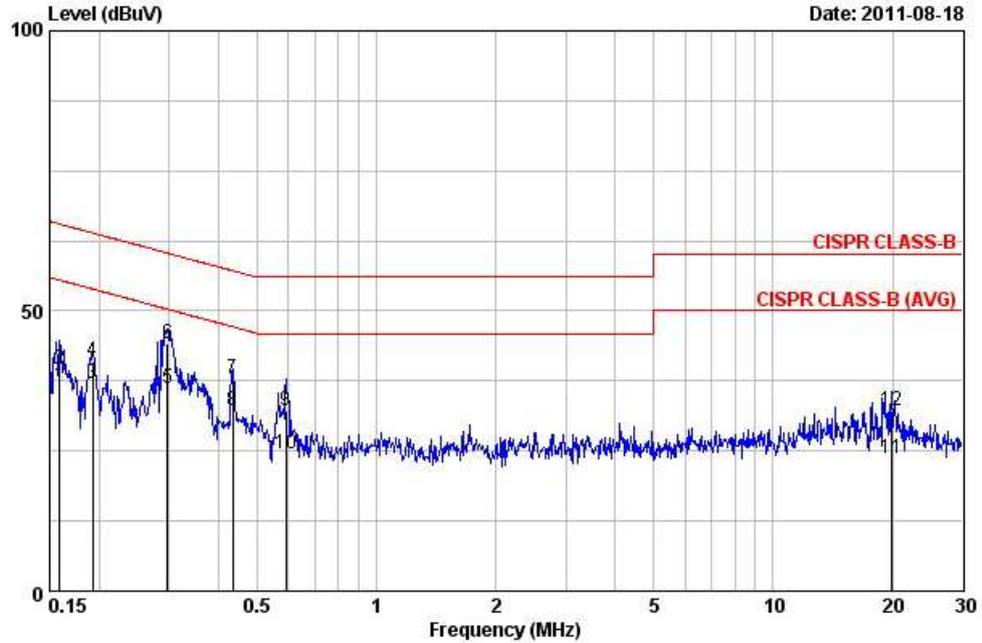

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|--------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.159 | 36.75 | -18.77 | 55.52 | 26.61 | 10.04 | 0.10 | AVERAGE |
| 2 | 0.159 | 39.68 | -25.84 | 65.52 | 29.54 | 10.04 | 0.10 | QP |
| 3 | 0.192 | 36.91 | -17.02 | 53.93 | 26.78 | 10.03 | 0.10 | AVERAGE |
| 4 | 0.192 | 40.97 | -22.96 | 63.93 | 30.84 | 10.03 | 0.10 | QP |
| 5 | 0.297 | 36.13 | -14.19 | 50.32 | 26.00 | 10.04 | 0.10 | AVERAGE |
| 6 | 0.297 | 44.13 | -16.19 | 60.32 | 34.00 | 10.04 | 0.10 | QP |
| 7 | 0.434 | 38.01 | -19.17 | 57.18 | 27.87 | 10.04 | 0.10 | QP |
| 8 | 0.434 | 32.28 | -14.90 | 47.18 | 22.14 | 10.04 | 0.10 | AVERAGE |
| 9 | 0.592 | 32.24 | -23.76 | 56.00 | 22.09 | 10.04 | 0.10 | QP |
| 10 | 0.592 | 24.38 | -21.62 | 46.00 | 14.23 | 10.04 | 0.10 | AVERAGE |
| 11 | 19.950 | 23.54 | -26.46 | 50.00 | 12.92 | 10.32 | 0.30 | AVERAGE |
| 12 | 19.950 | 32.23 | -27.77 | 60.00 | 21.61 | 10.32 | 0.30 | QP |

Neutral

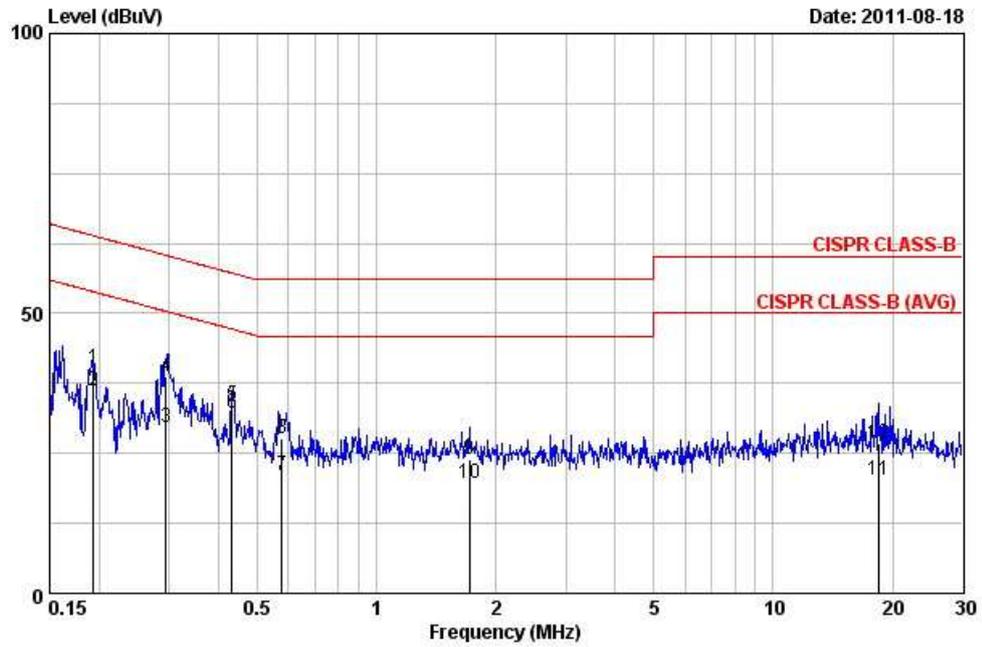


| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.193 | 40.25 | -23.64 | 63.89 | 30.17 | 9.98 | 0.10 | QP |
| 2 | 0.193 | 36.30 | -17.59 | 53.89 | 26.22 | 9.98 | 0.10 | AVERAGE |
| 3 | 0.294 | 29.70 | -20.71 | 50.41 | 19.62 | 9.99 | 0.10 | AVERAGE |
| 4 | 0.294 | 38.74 | -21.67 | 60.41 | 28.66 | 9.99 | 0.10 | QP |
| 5 | 0.432 | 33.58 | -23.63 | 57.21 | 23.49 | 9.99 | 0.10 | QP |
| 6 | 0.432 | 32.28 | -14.93 | 47.21 | 22.19 | 9.99 | 0.10 | AVERAGE |
| 7 | 0.576 | 21.14 | -24.86 | 46.00 | 11.05 | 9.99 | 0.10 | AVERAGE |
| 8 | 0.576 | 27.61 | -28.39 | 56.00 | 17.52 | 9.99 | 0.10 | QP |
| 9 | 1.716 | 24.06 | -31.94 | 56.00 | 13.88 | 10.01 | 0.18 | QP |
| 10 | 1.716 | 19.64 | -26.36 | 46.00 | 9.46 | 10.01 | 0.18 | AVERAGE |
| 11 | 18.426 | 20.16 | -29.84 | 50.00 | 9.63 | 10.26 | 0.27 | AVERAGE |
| 12 | 18.426 | 26.80 | -33.20 | 60.00 | 16.27 | 10.26 | 0.27 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.


| | | | |
|-----------------|---------------|---------------|---------|
| Final Test Date | Aug. 29, 2011 | Test Site No. | CO01-NH |
| Temperature | 24°C | Humidity | 54% |
| Test Engineer | Eddie | Configuration | Mode 8 |

Line

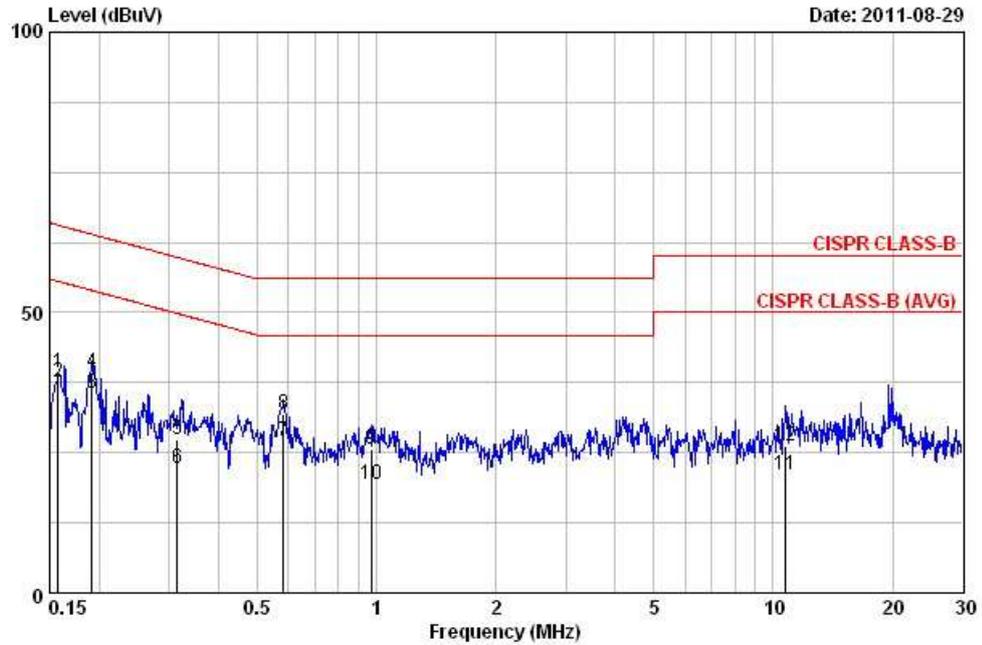

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.157 | 39.37 | -26.24 | 65.60 | 29.23 | 10.04 | 0.10 | QP |
| 2 | 0.157 | 37.73 | -17.88 | 55.60 | 27.59 | 10.04 | 0.10 | AVERAGE |
| 3 | 0.191 | 35.57 | -18.41 | 53.98 | 25.44 | 10.03 | 0.10 | AVERAGE |
| 4 | 0.191 | 39.41 | -24.57 | 63.98 | 29.28 | 10.03 | 0.10 | QP |
| 5 | 0.315 | 27.47 | -32.37 | 59.84 | 17.33 | 10.04 | 0.10 | QP |
| 6 | 0.315 | 22.22 | -27.62 | 49.84 | 12.08 | 10.04 | 0.10 | AVERAGE |
| 7 | 0.582 | 26.98 | -19.02 | 46.00 | 16.83 | 10.04 | 0.10 | AVERAGE |
| 8 | 0.582 | 31.86 | -24.14 | 56.00 | 21.71 | 10.04 | 0.10 | QP |
| 9 | 0.968 | 25.51 | -30.49 | 56.00 | 15.36 | 10.05 | 0.10 | QP |
| 10 | 0.968 | 19.50 | -26.50 | 46.00 | 9.35 | 10.05 | 0.10 | AVERAGE |
| 11 | 10.733 | 21.04 | -28.96 | 50.00 | 10.64 | 10.19 | 0.20 | AVERAGE |
| 12 | 10.733 | 26.30 | -33.70 | 60.00 | 15.90 | 10.19 | 0.20 | QP |

Neutral

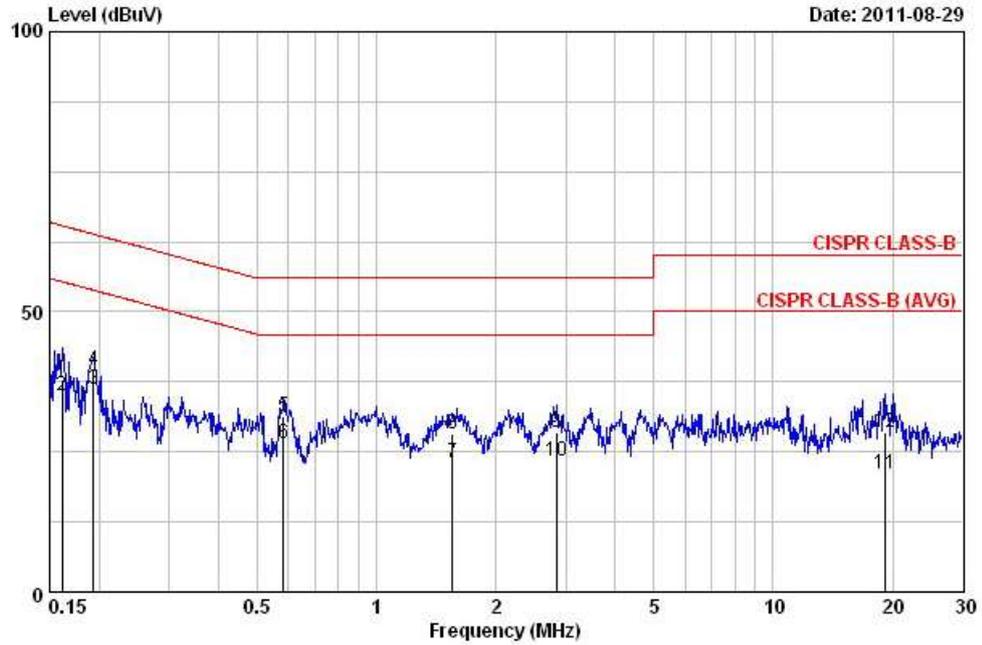

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.162 | 38.00 | -27.39 | 65.38 | 27.92 | 9.98 | 0.10 | QP |
| 2 | 0.162 | 34.95 | -20.44 | 55.38 | 24.87 | 9.98 | 0.10 | AVERAGE |
| 3 | 0.193 | 36.07 | -17.82 | 53.89 | 25.99 | 9.98 | 0.10 | AVERAGE |
| 4 | 0.193 | 39.48 | -24.41 | 63.89 | 29.40 | 9.98 | 0.10 | QP |
| 5 | 0.582 | 31.39 | -24.61 | 56.00 | 21.30 | 9.99 | 0.10 | QP |
| 6 | 0.582 | 26.59 | -19.41 | 46.00 | 16.50 | 9.99 | 0.10 | AVERAGE |
| 7 | 1.552 | 23.12 | -22.88 | 46.00 | 12.95 | 10.00 | 0.16 | AVERAGE |
| 8 | 1.552 | 28.29 | -27.71 | 56.00 | 18.12 | 10.00 | 0.16 | QP |
| 9 | 2.839 | 28.38 | -27.62 | 56.00 | 18.16 | 10.02 | 0.20 | QP |
| 10 | 2.839 | 23.37 | -22.63 | 46.00 | 13.15 | 10.02 | 0.20 | AVERAGE |
| 11 | 19.122 | 21.18 | -28.82 | 50.00 | 10.63 | 10.27 | 0.28 | AVERAGE |
| 12 | 19.122 | 28.47 | -31.53 | 60.00 | 17.92 | 10.27 | 0.28 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Peak Output Power Measurement

3.2.1 Limit

For systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|------------------------------|----------------|
| Filter No. | Auto |
| Measurement time | 0.135 s ~ 26 s |
| Used Peak Sensor | MA2411B |

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.
4. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

3.2.4 Test Setup Layout

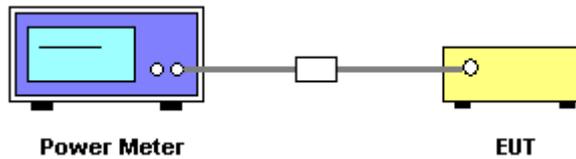

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Peak Output Power

| | | | |
|------------------------|---------------|-----------------------|-----------|
| Final Test Date | Sep. 17, 2011 | Test Site No. | TH01-HY |
| Temperature | 23.2°C | Humidity | 68% |
| Test Engineer | Cain | Configurations | 802.11a/n |

For Single Chain:

Configuration of IEEE 802.11a

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 149 | 5745 MHz | 17.55 | 30 | Complies |
| 157 | 5785 MHz | 17.39 | 30 | Complies |
| 165 | 5825 MHz | 17.22 | 30 | Complies |

Configuration of IEEE 802.11n Ant. A (20MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 149 | 5745 MHz | 17.56 | 30 | Complies |
| 157 | 5785 MHz | 17.32 | 30 | Complies |
| 165 | 5825 MHz | 17.23 | 30 | Complies |

Configuration of IEEE 802.11n Ant. A (40MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 151 | 5755 MHz | 17.64 | 30 | Complies |
| 159 | 5795 MHz | 17.43 | 30 | Complies |

For Two Chain:

Configuration of IEEE 802.11n Ant. A (20MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 149 | 5745 MHz | 17.75 | 30 | Complies |
| 157 | 5785 MHz | 17.58 | 30 | Complies |
| 165 | 5825 MHz | 17.52 | 30 | Complies |

Configuration of IEEE 802.11n Ant. B (20MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 149 | 5745 MHz | 17.43 | 30 | Complies |
| 157 | 5785 MHz | 17.37 | 30 | Complies |
| 165 | 5825 MHz | 17.09 | 30 | Complies |

Configuration of IEEE 802.11n Ant. A+B (20MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 149 | 5745 MHz | 20.60 | 30 | Complies |
| 157 | 5785 MHz | 20.49 | 30 | Complies |
| 165 | 5825 MHz | 20.32 | 30 | Complies |

Configuration of IEEE 802.11n Ant. A (40MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 151 | 5755 MHz | 17.46 | 30 | Complies |
| 159 | 5795 MHz | 17.63 | 30 | Complies |

Configuration of IEEE 802.11n Ant. B (40MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 151 | 5755 MHz | 17.35 | 30 | Complies |
| 159 | 5795 MHz | 17.41 | 30 | Complies |

Configuration of IEEE 802.11n Ant. A+B (40MHz)

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 151 | 5755 MHz | 20.42 | 30 | Complies |
| 159 | 5795 MHz | 20.53 | 30 | Complies |

3.3 Power Spectral Density Measurement

3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| Span Frequency | 1.5MHz |
| RB | 3 kHz |
| VB | 30 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | 500s |

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

3.3.4 Test Setup Layout

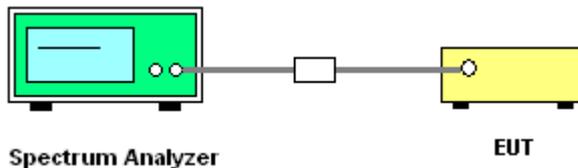

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

| | | | |
|------------------------|---------------|-----------------------|-----------|
| Final Test Date | Sep. 17, 2011 | Test Site No. | TH01-HY |
| Temperature | 23.2°C | Humidity | 68% |
| Test Engineer | Cain | Configurations | 802.11a/n |

For Single Chain:

Configuration of IEEE 802.11a

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 149 | 5745 MHz | -22.23 | 8 | Complies |
| 157 | 5785 MHz | -20.92 | 8 | Complies |
| 165 | 5825 MHz | -20.74 | 8 | Complies |

Configuration of IEEE 802.11n (20MHz)

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 149 | 5745 MHz | -21.19 | 8 | Complies |
| 157 | 5785 MHz | -19.84 | 8 | Complies |
| 165 | 5825 MHz | -18.79 | 8 | Complies |

Configuration of IEEE 802.11n (40MHz)

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 151 | 5755 MHz | -23.88 | 8 | Complies |
| 159 | 5795 MHz | -22.20 | 8 | Complies |

For Two Chain:

Configuration of IEEE 802.11n Ant. A (20MHz)

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 149 | 5745 MHz | -19.46 | 8 | Complies |
| 157 | 5785 MHz | -19.35 | 8 | Complies |
| 165 | 5825 MHz | -18.77 | 8 | Complies |

Configuration of IEEE 802.11n Ant. B (20MHz)

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 149 | 5745 MHz | -21.29 | 8 | Complies |
| 157 | 5785 MHz | -20.14 | 8 | Complies |
| 165 | 5825 MHz | -19.94 | 8 | Complies |

Configuration of IEEE 802.11n Ant. A+B (20MHz)

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 149 | 5745 MHz | -17.27 | 8 | Complies |
| 157 | 5785 MHz | -16.72 | 8 | Complies |
| 165 | 5825 MHz | -16.31 | 8 | Complies |

Configuration of IEEE 802.11n Ant. A (40MHz)

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 151 | 5755 MHz | -21.20 | 8 | Complies |
| 159 | 5795 MHz | -19.49 | 8 | Complies |

Configuration of IEEE 802.11n Ant. B (40MHz)

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 151 | 5755 MHz | -25.11 | 8 | Complies |
| 159 | 5795 MHz | -22.96 | 8 | Complies |

Configuration of IEEE 802.11n Ant. A+B (40MHz)


| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 151 | 5755 MHz | -19.72 | 8 | Complies |
| 159 | 5795 MHz | -17.88 | 8 | Complies |

For Single Chain:
Power Density Plot on Configuration IEEE 802.11a / 5745 MHz



MARKER 1
5.744041 GHz
Ref 20 dBm
+RBW 3 kHz
+VBW 30 kHz
+SWT 500 s
Marker 1 [T1]
-22.23 dBm
5.744041000 GHz

1 PK
VIEW

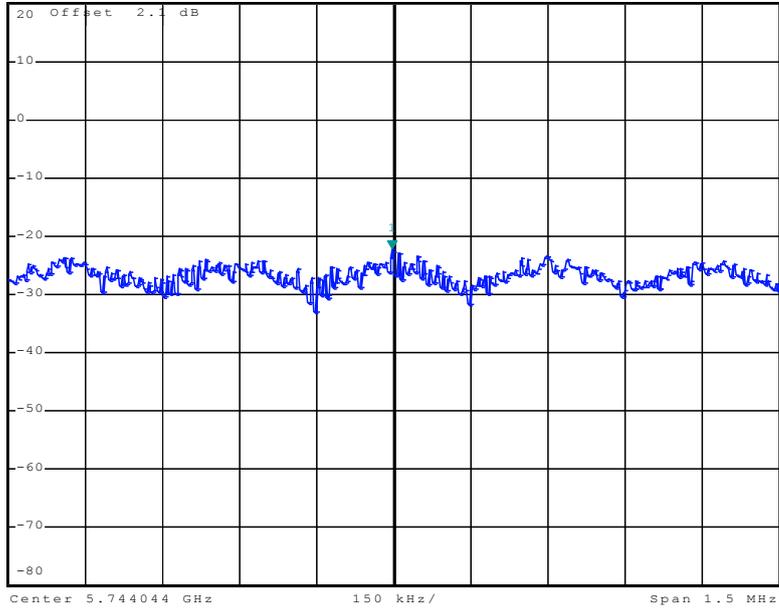


Date: 15.SEP.2011 23:03:38

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz




MARKER 1
5.790293 GHz
Ref 20 dBm
+RBW 3 kHz
+VBW 30 kHz
+SWT 500 s
Marker 1 [T1]
-20.92 dBm
5.790293000 GHz

1 PK
VIEW

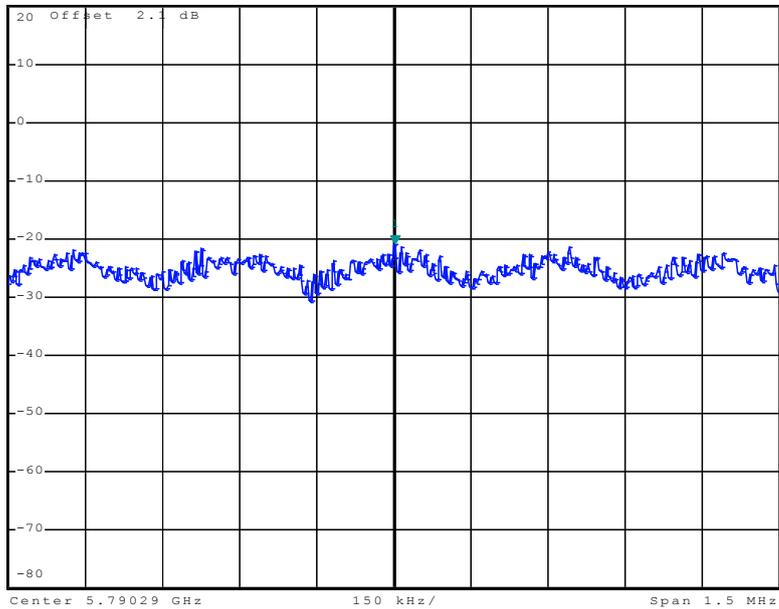


Date: 15.SEP.2011 23:09:37

Power Density Plot on Configuration IEEE 802.11a / 5825 MHz

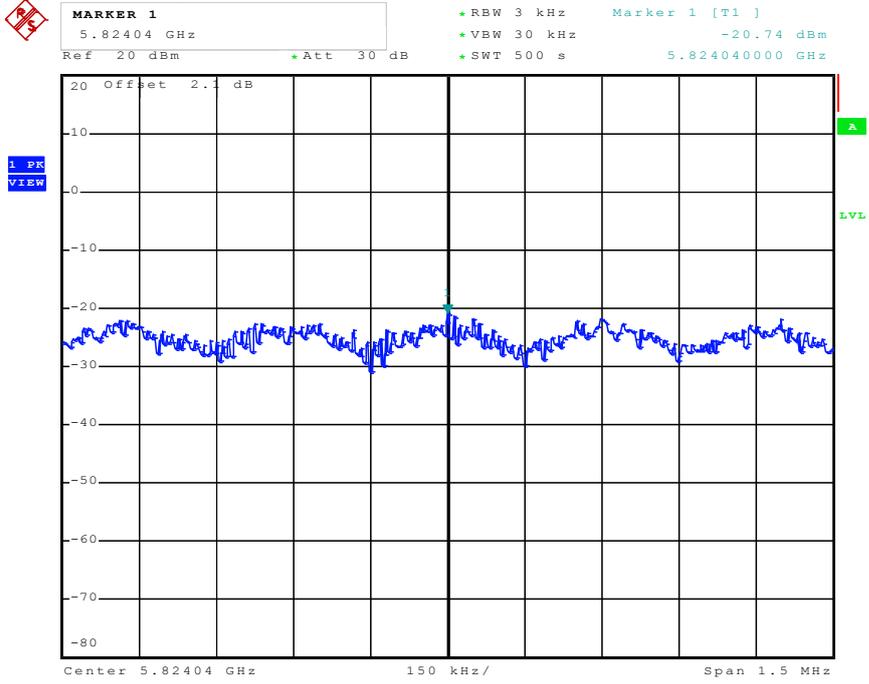


Date: 15.SEP.2011 23:20:18

Power Density Plot on Configuration of IEEE 802.11n (20MHz) / 5745 MHz

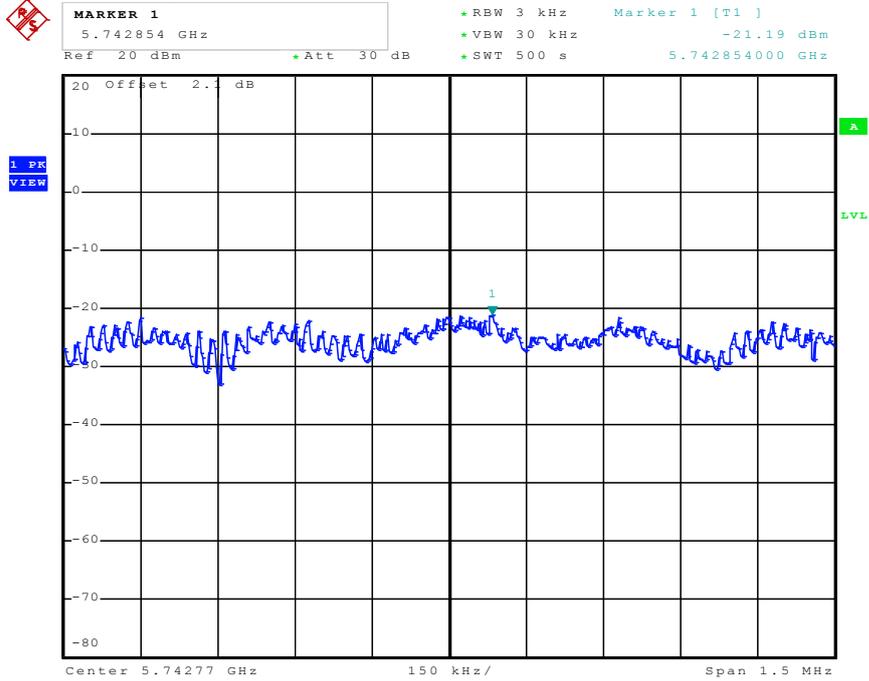


Date: 16.SEP.2011 00:08:27

Power Density Plot on Configuration of IEEE 802.11n (20MHz) / 5785 MHz

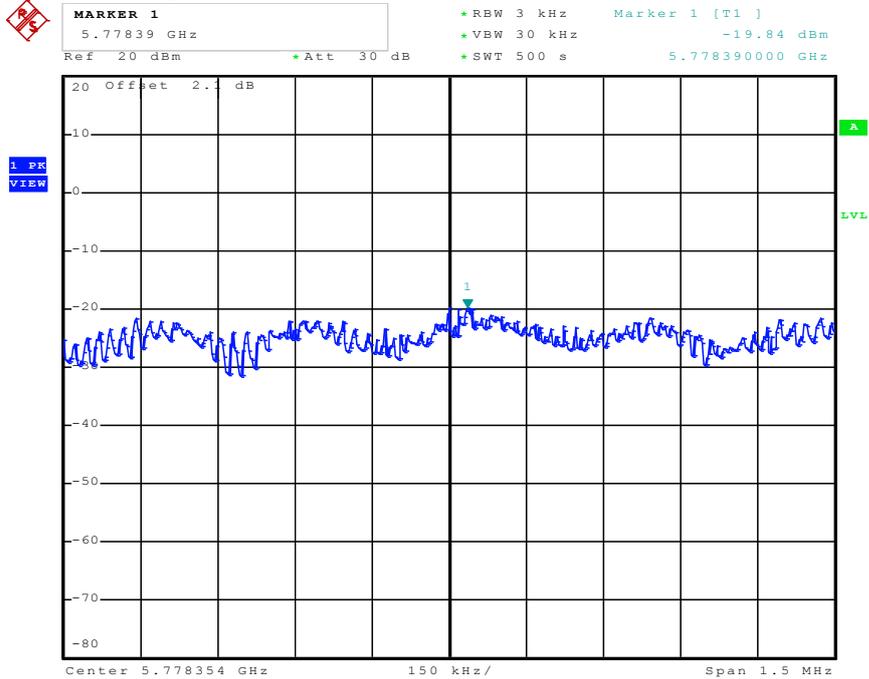


Date: 16.SEP.2011 00:09:20

Power Density Plot on Configuration of IEEE 802.11n (20MHz) / 5825 MHz

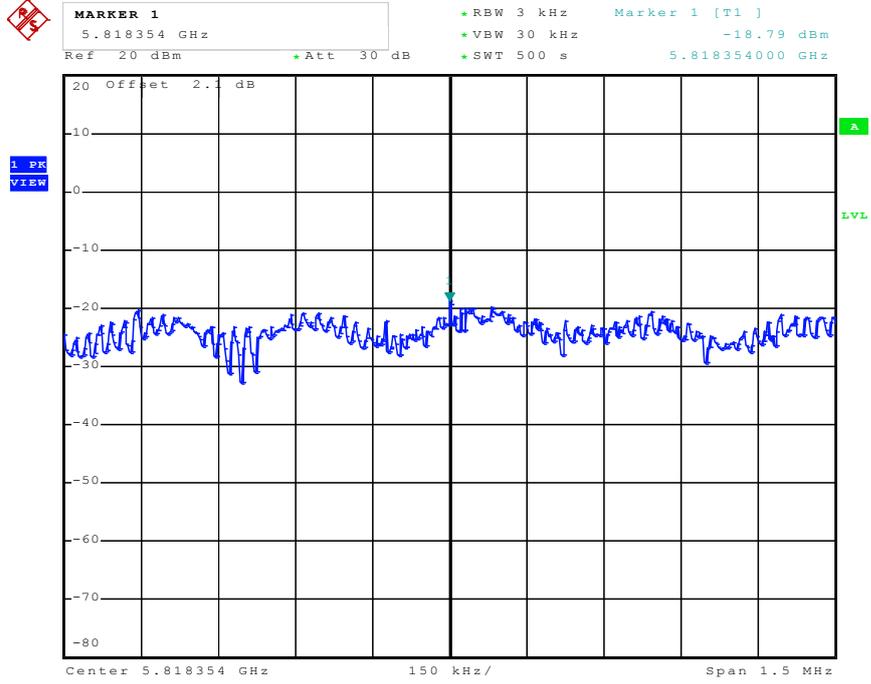


Date: 16.SEP.2011 00:26:09

Power Density Plot on Configuration of IEEE 802.11n (40MHz) / 5755 MHz

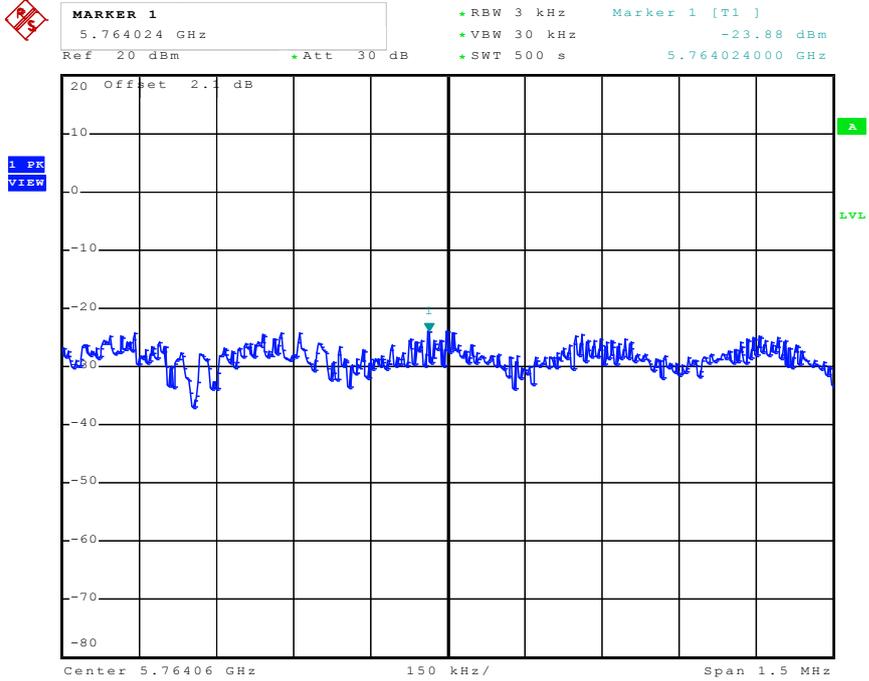


Date: 16.SEP.2011 02:16:14

Power Density Plot on Configuration of IEEE 802.11n (40MHz) / 5795 MHz

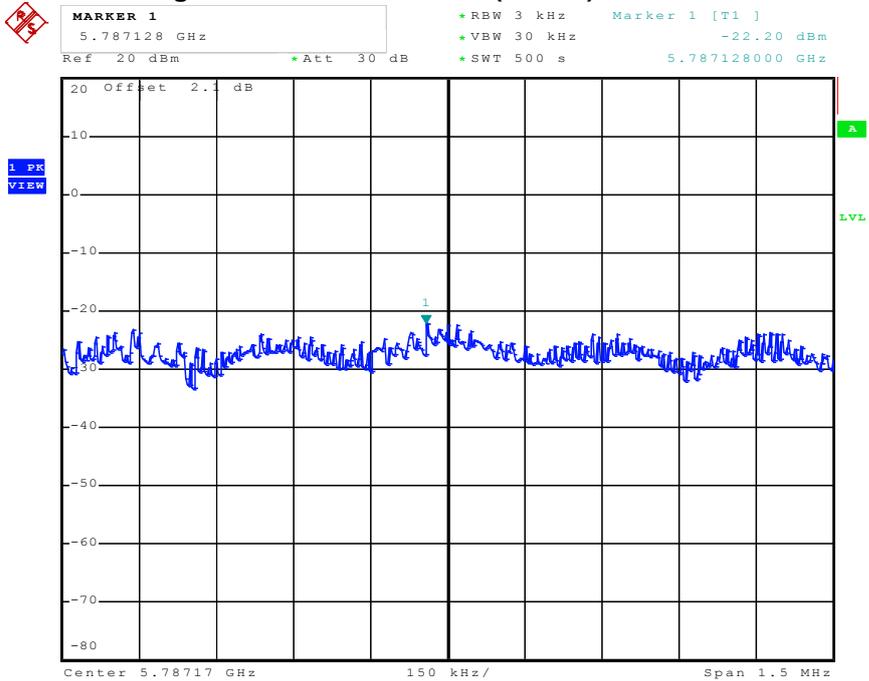


Date: 16.SEP.2011 02:26:26

For Two Chain:
Power Density Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5745 MHz

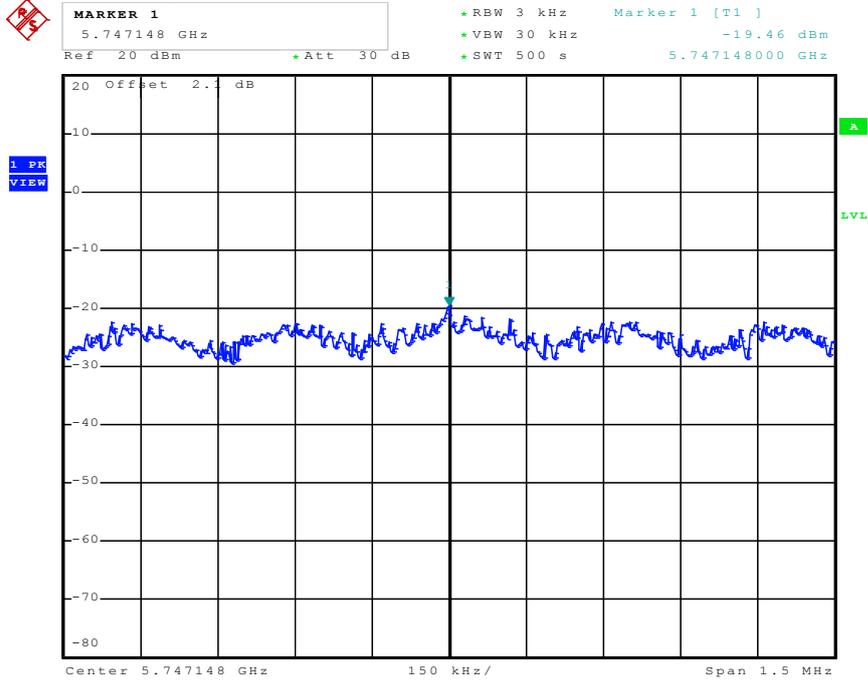


Date: 16.SEP.2011 22:15:51

Power Density Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5785 MHz

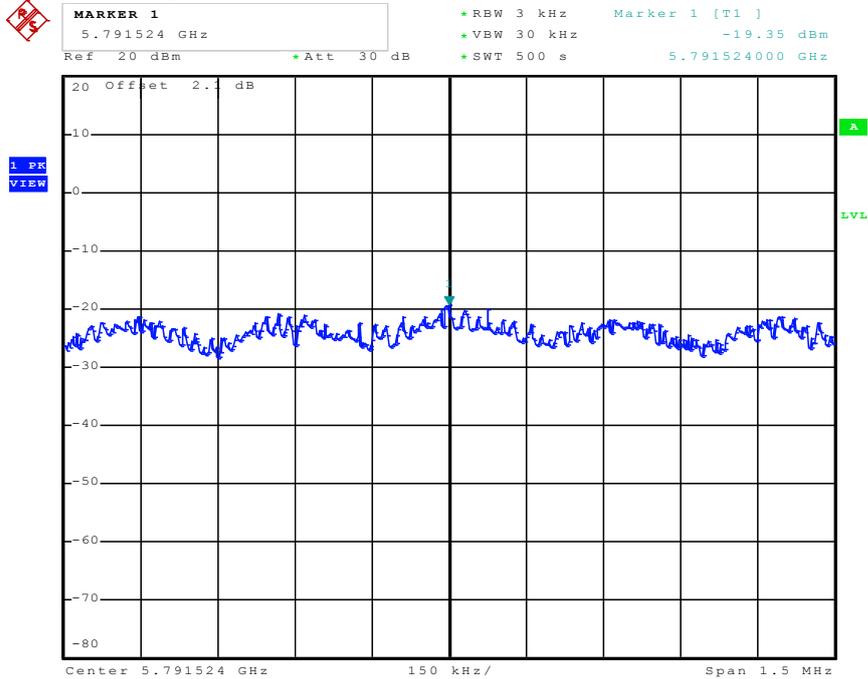


Date: 16.SEP.2011 22:28:48

Power Density Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5825 MHz

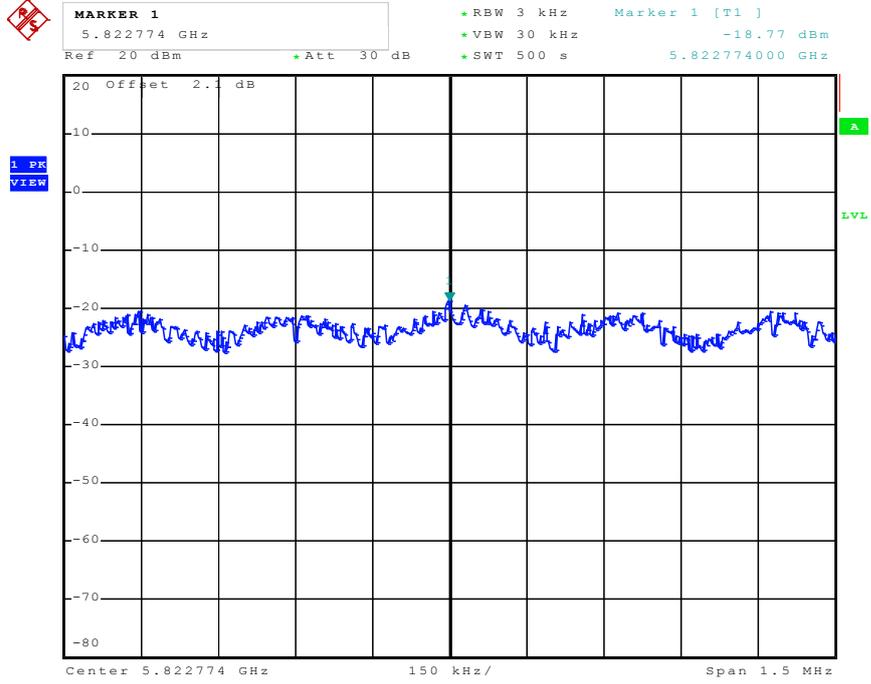


Date: 16.SEP.2011 22:38:12

Power Density Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5745 MHz

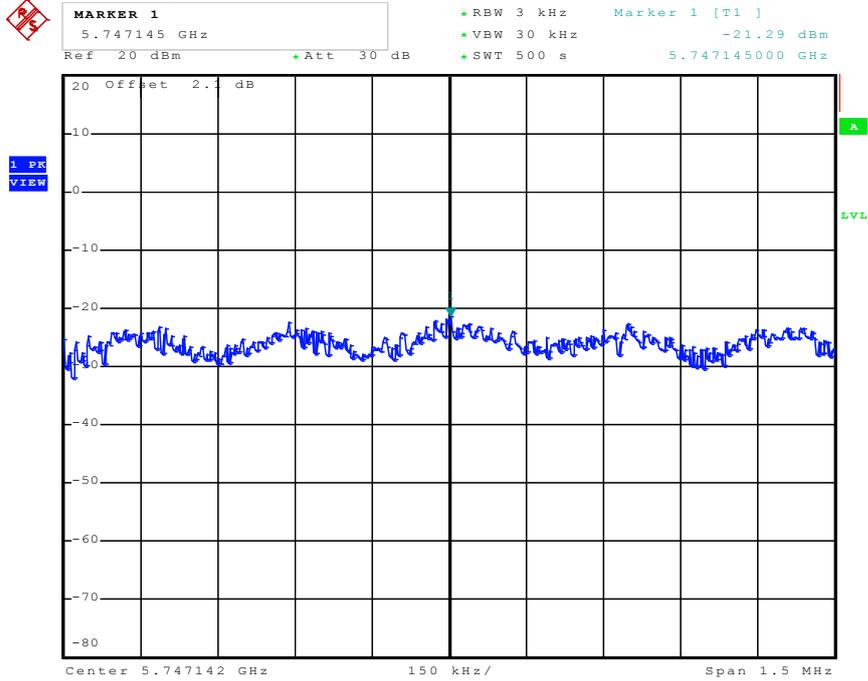


Date: 16.SEP.2011 23:41:33

Power Density Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5785 MHz

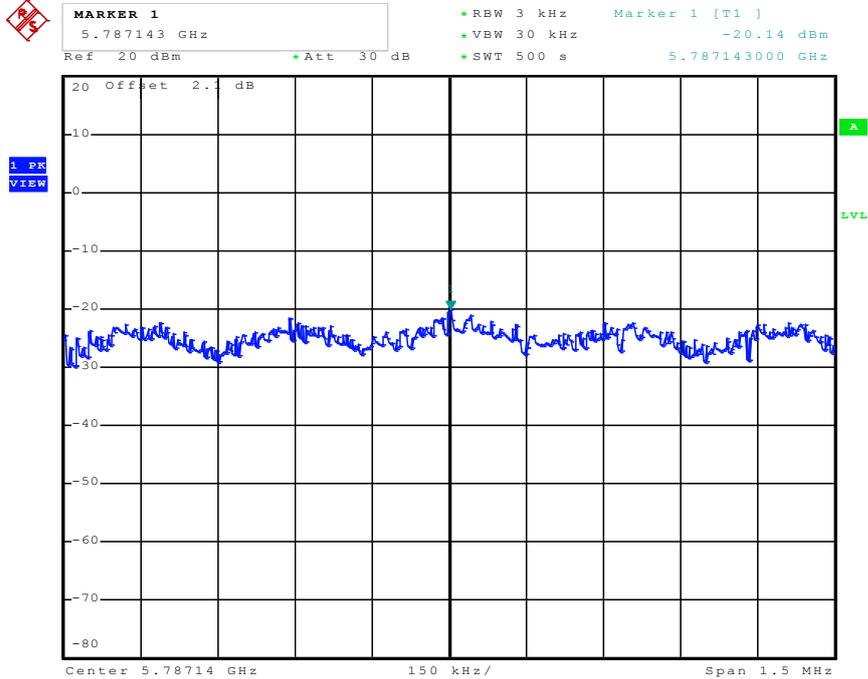


Date: 16.SEP.2011 23:42:24

Power Density Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5825 MHz

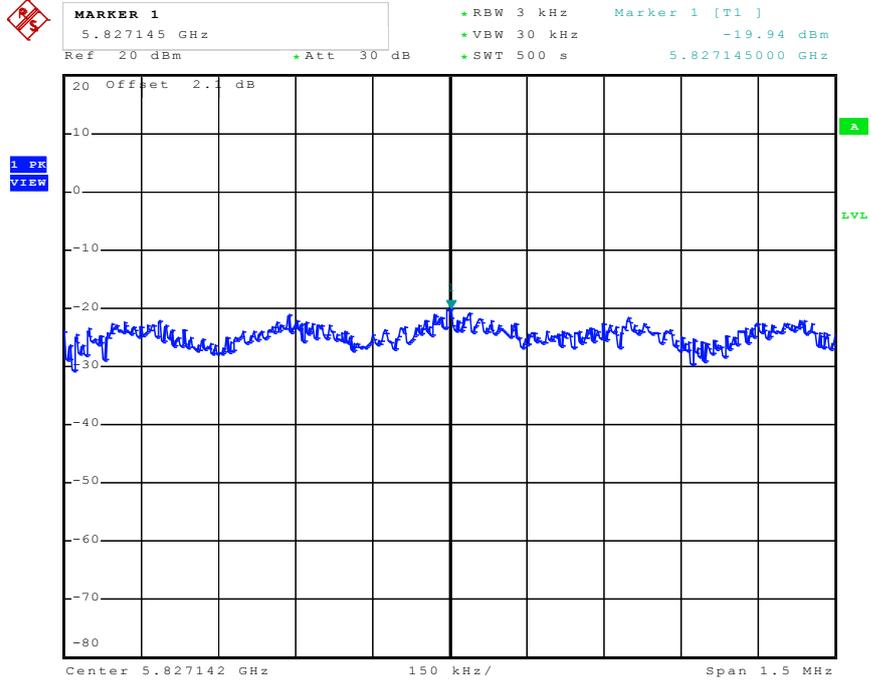


Date: 16.SEP.2011 23:55:25

Power Density Plot on Configuration of IEEE 802.11n Ant. A (40MHz) / 5755 MHz

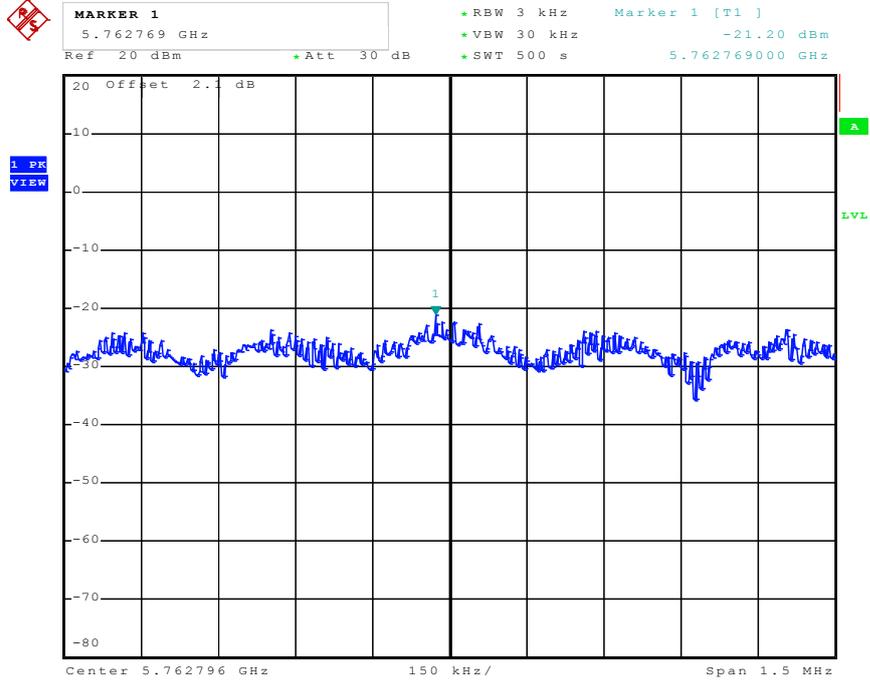


Date: 16.SEP.2011 22:39:46

Power Density Plot on Configuration of IEEE 802.11n Ant. A (40MHz) / 5795 MHz

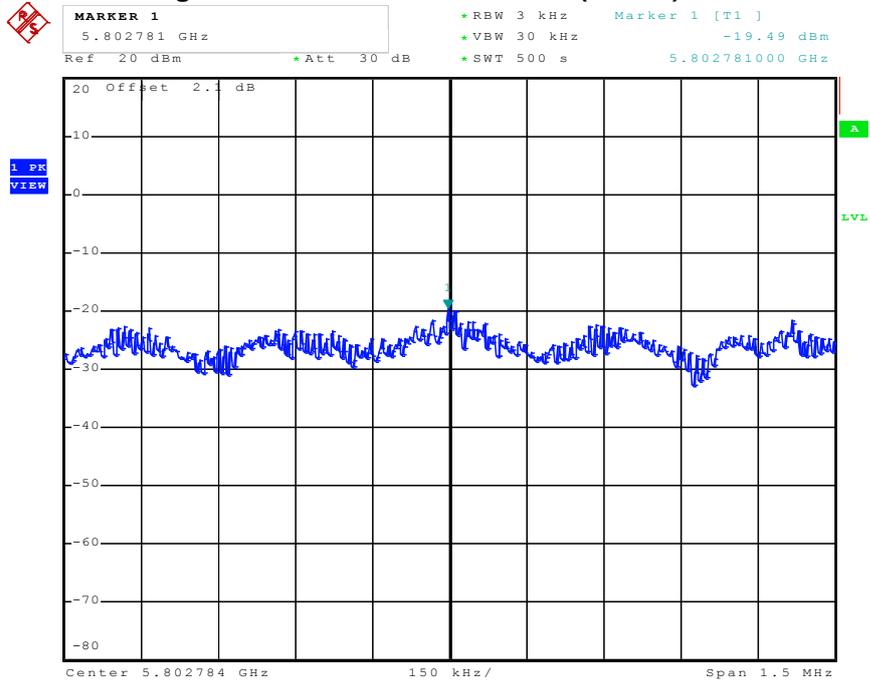


Date: 16.SEP.2011 22:51:15

Power Density Plot on Configuration of IEEE 802.11n Ant. B (40MHz) / 5755 MHz

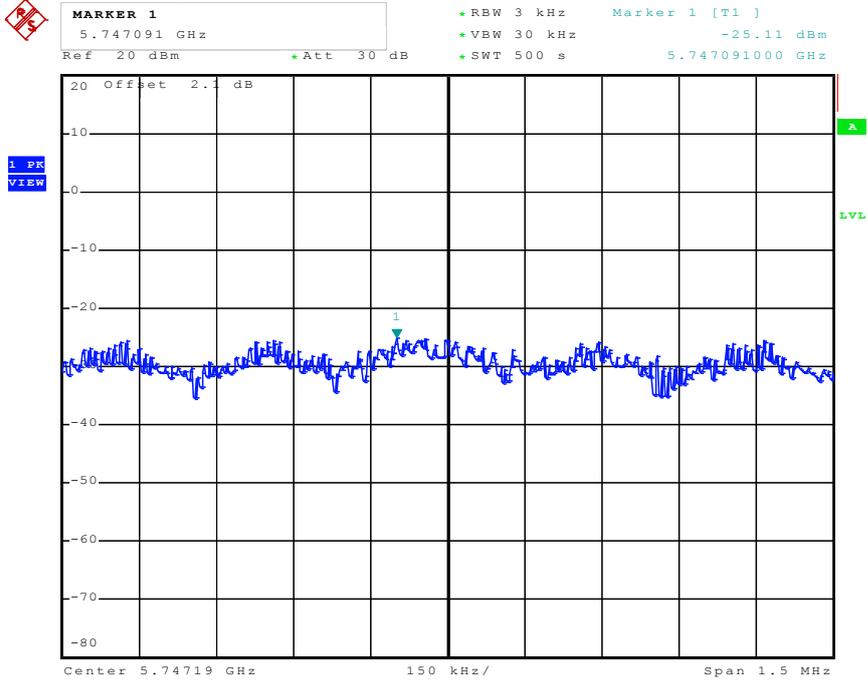

Date: 16.SEP.2011 23:56:53

Power Density Plot on Configuration of IEEE 802.11n Ant. B (40MHz) / 5795 MHz

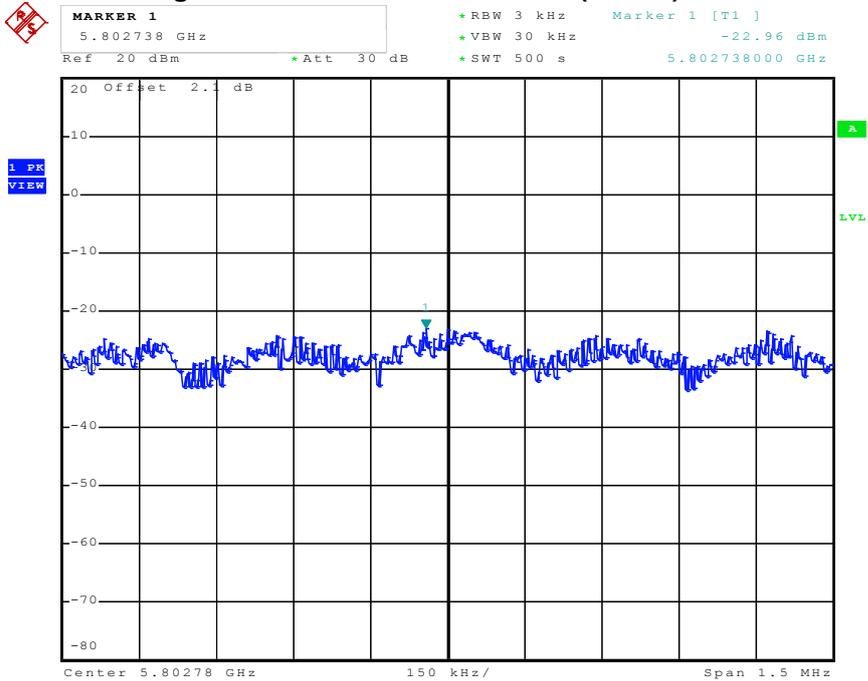

Date: 17.SEP.2011 00:04:20

3.4 6dB Spectrum Bandwidth Measurement

3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameters | Setting |
|----------------------------|-----------------|
| Attenuation | Auto |
| Span Frequency | > 6dB Bandwidth |
| RB | 100 kHz |
| VB | 300 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

3.4.4 Test Setup Layout

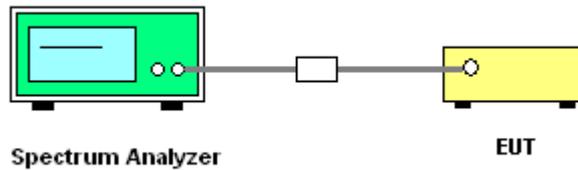

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

| | | | |
|------------------------|---------------|-----------------------|-----------|
| Final Test Date | Sep. 17, 2011 | Test Site No. | TH01-HY |
| Temperature | 23.2°C | Humidity | 68% |
| Test Engineer | Cain | Configurations | 802.11a/n |

For Single Chain:

Configuration of IEEE 802.11a

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 16.60 | 16.48 | 500 | Complies |
| 157 | 5785 MHz | 16.60 | 16.48 | 500 | Complies |
| 165 | 5825 MHz | 16.56 | 16.44 | 500 | Complies |

Configuration of IEEE 802.11n Ant. A (20MHz)

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 17.76 | 17.64 | 500 | Complies |
| 157 | 5785 MHz | 17.76 | 17.64 | 500 | Complies |
| 165 | 5825 MHz | 17.72 | 17.68 | 500 | Complies |

Configuration of IEEE 802.11n Ant. A (40MHz)

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 151 | 5755 MHz | 36.48 | 36.08 | 500 | Complies |
| 159 | 5795 MHz | 36.48 | 36.00 | 500 | Complies |

For Two Chain:

Configuration of IEEE 802.11n Ant. A (20MHz)

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 17.80 | 17.64 | 500 | Complies |
| 157 | 5785 MHz | 17.80 | 17.68 | 500 | Complies |
| 165 | 5825 MHz | 17.80 | 17.64 | 500 | Complies |

Configuration of IEEE 802.11n Ant. B (20MHz)

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149 | 5745 MHz | 17.72 | 17.64 | 500 | Complies |
| 157 | 5785 MHz | 17.72 | 17.64 | 500 | Complies |
| 165 | 5825 MHz | 17.68 | 17.60 | 500 | Complies |


Configuration of IEEE 802.11n Ant. A (40MHz)

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151 | 5755 MHz | 36.48 | 36.00 | 500 | Complies |
| 159 | 5795 MHz | 36.48 | 36.00 | 500 | Complies |

Configuration of IEEE 802.11n Ant. B (40MHz)


| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151 | 5755 MHz | 36.40 | 36.00 | 500 | Complies |
| 159 | 5795 MHz | 36.40 | 36.00 | 500 | Complies |

For Single Chain:
6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5745 MHz

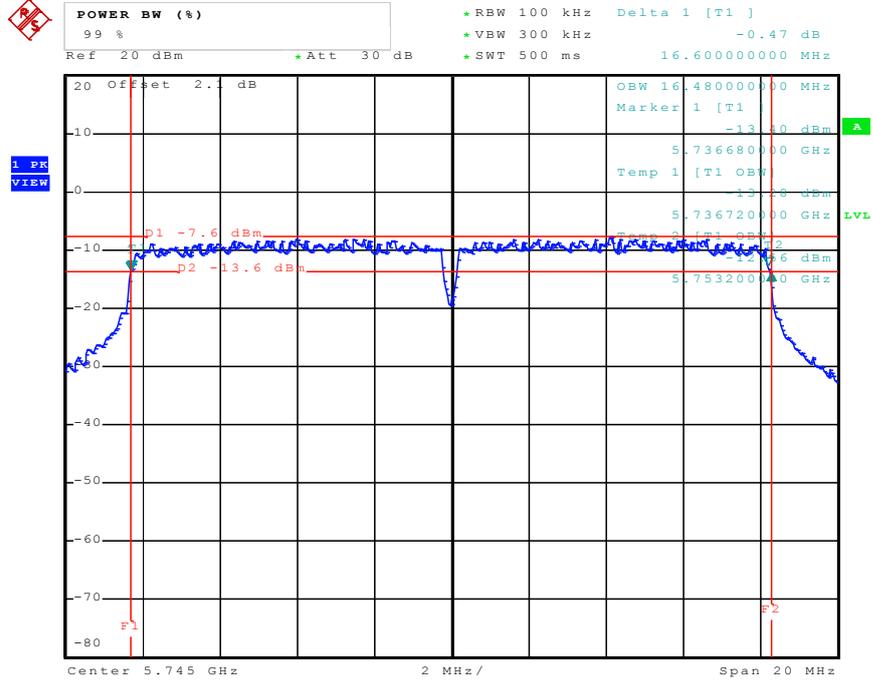


Date: 15.SEP.2011 22:57:56

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz

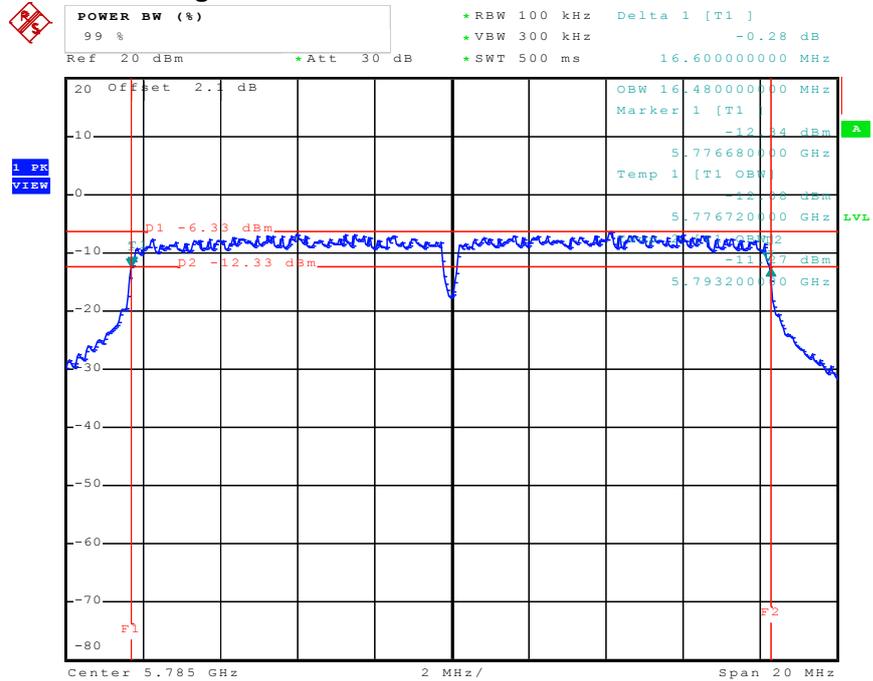


Date: 15.SEP.2011 23:10:40

6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz

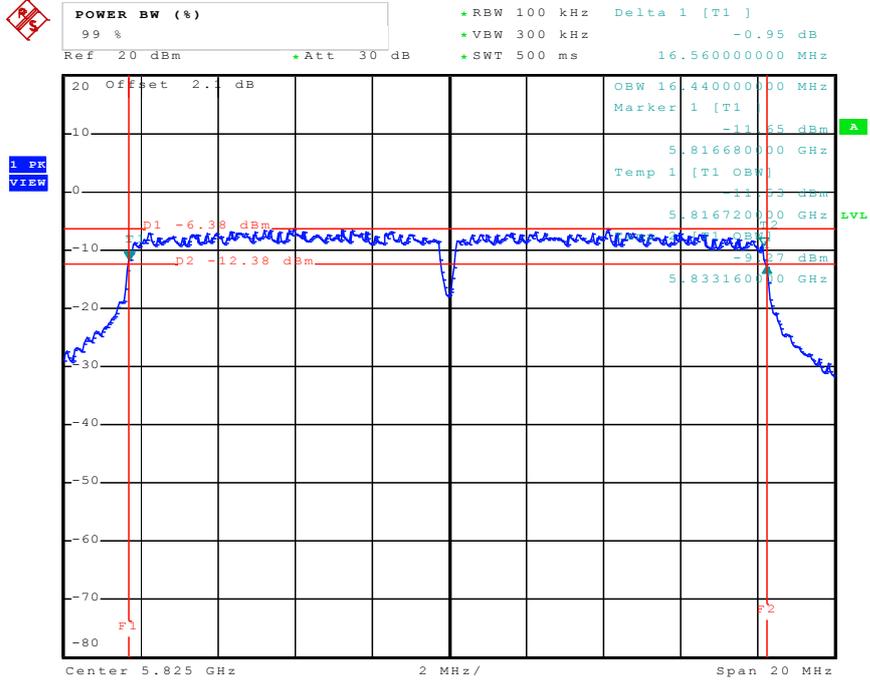


Date: 15.SEP.2011 23:21:16

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) / 5745 MHz

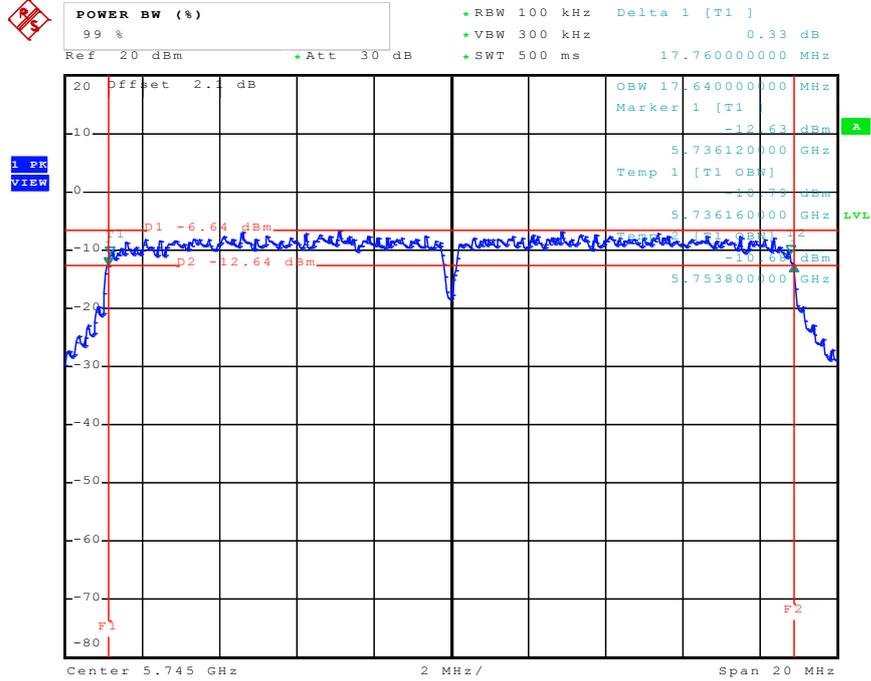


Date: 16.SEP.2011 00:00:10

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) / 5785 MHz

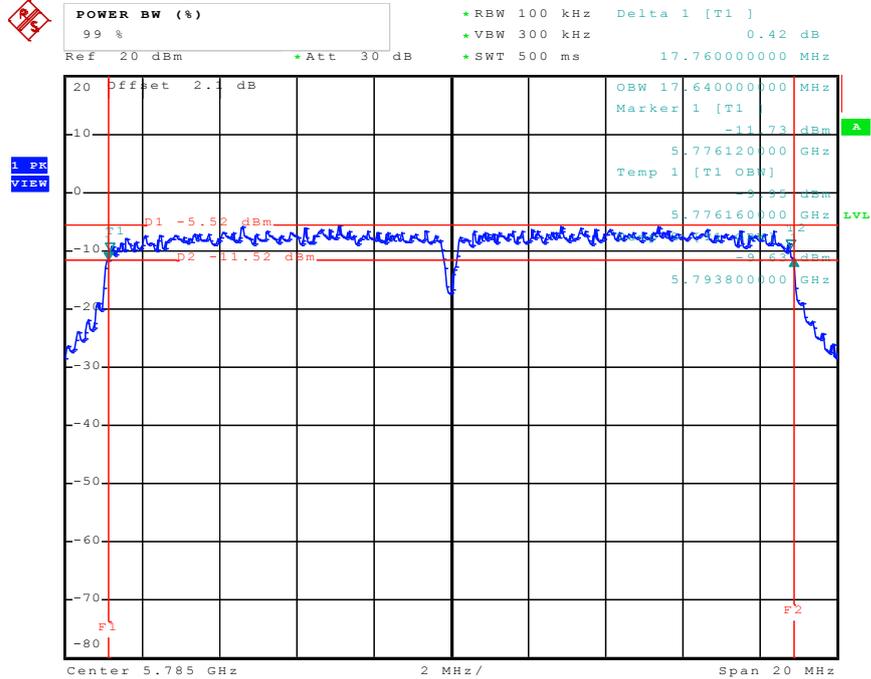


Date: 16.SEP.2011 00:11:14

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (20MHz) / 5825 MHz

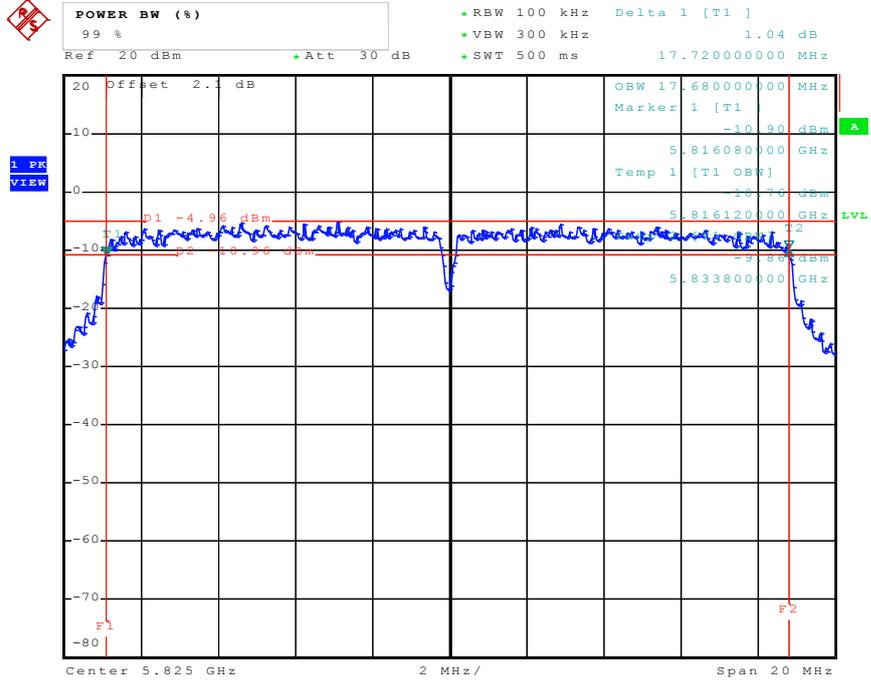


Date: 16.SEP.2011 00:24:57

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (40MHz) / 5755 MHz

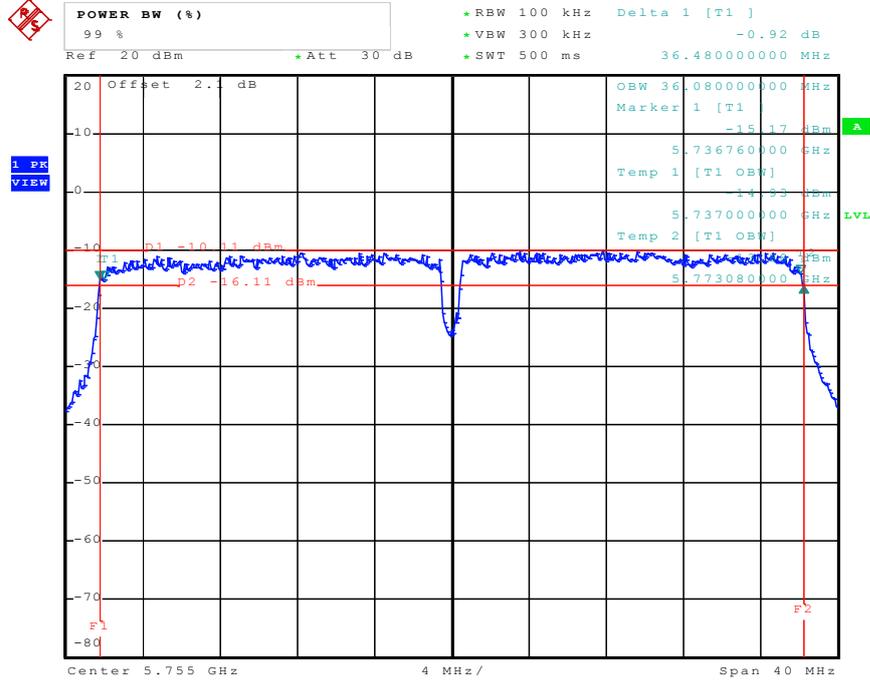


Date: 16.SEP.2011 02:17:01

6 dB Bandwidth Plot on Configuration of IEEE 802.11n (40MHz) / 5795 MHz

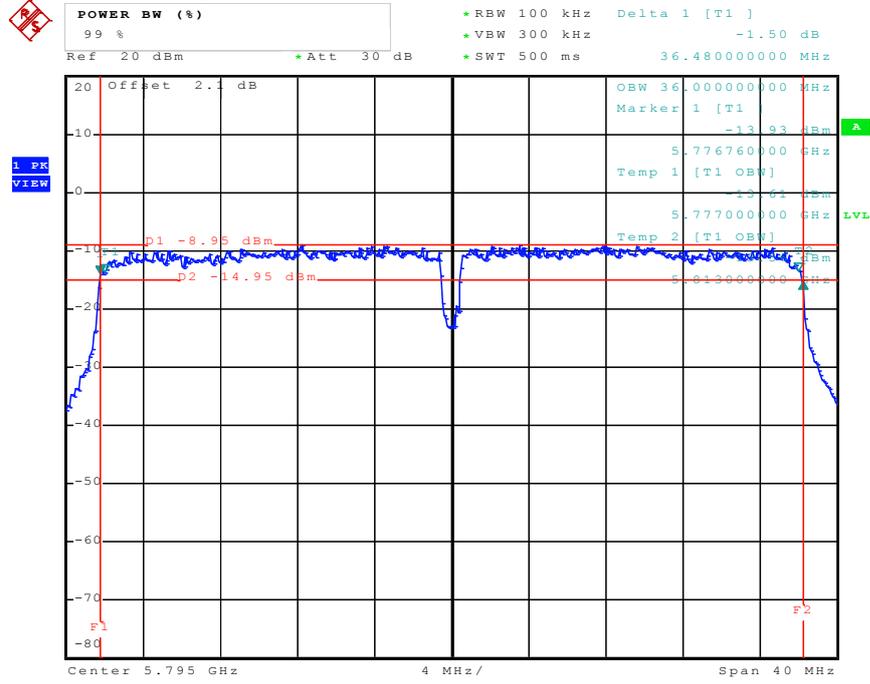


Date: 16.SEP.2011 02:20:17

For Two Chain:
6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5745 MHz

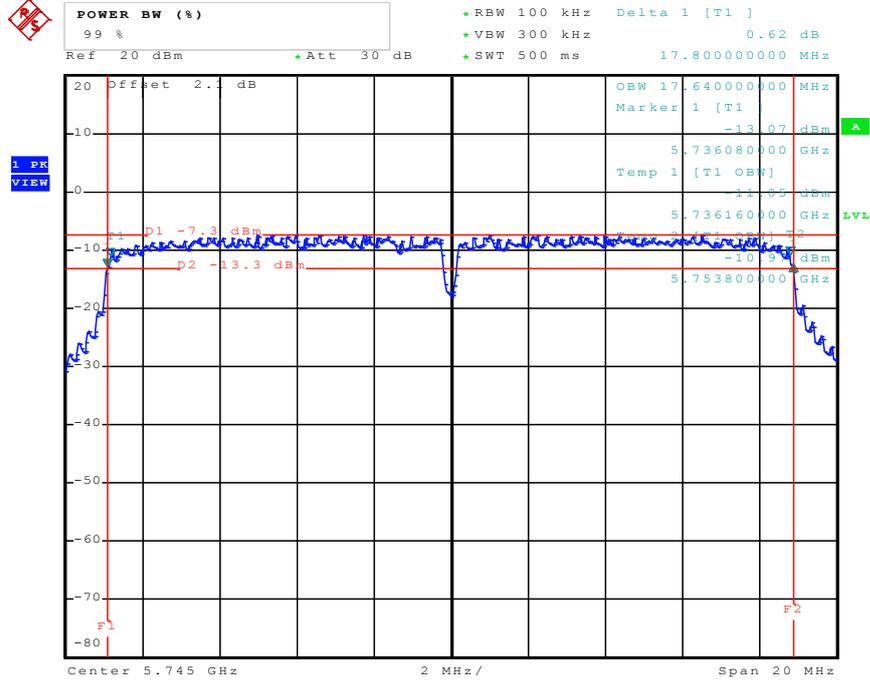


Date: 16.SEP.2011 22:14:35

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5785 MHz

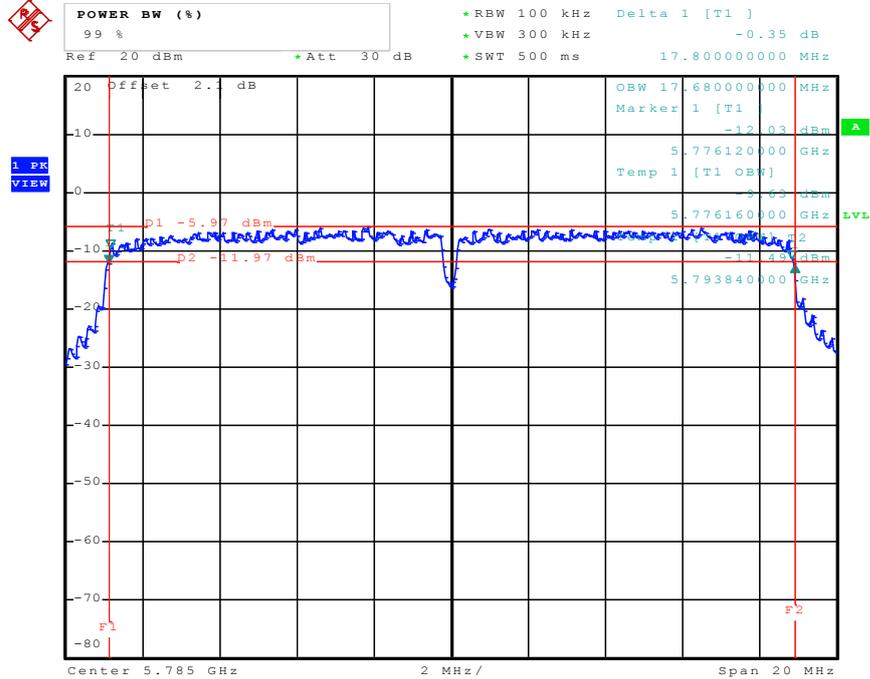


Date: 16.SEP.2011 22:29:53

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5825 MHz

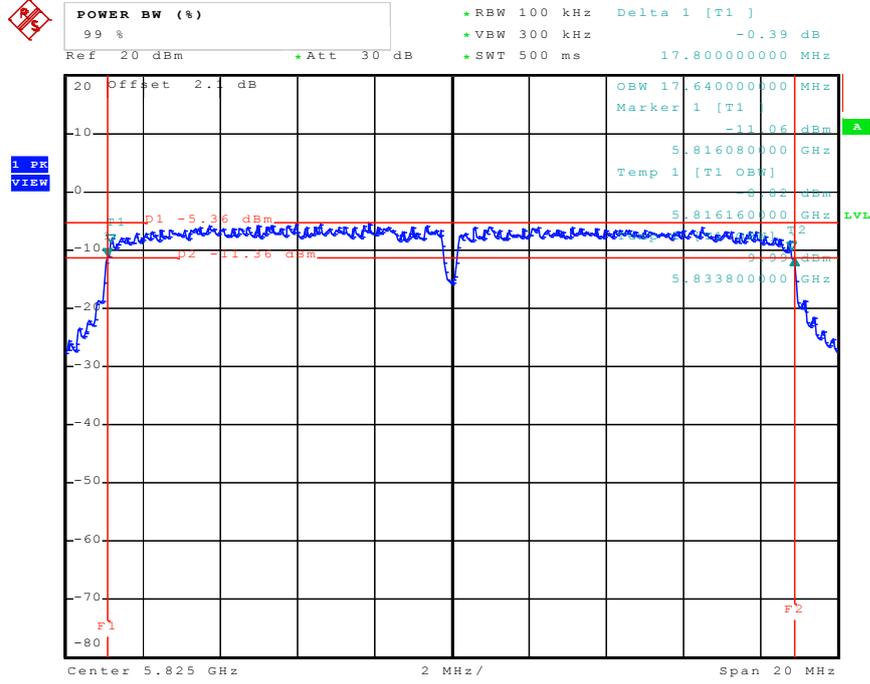


Date: 16.SEP.2011 22:32:18

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5745 MHz

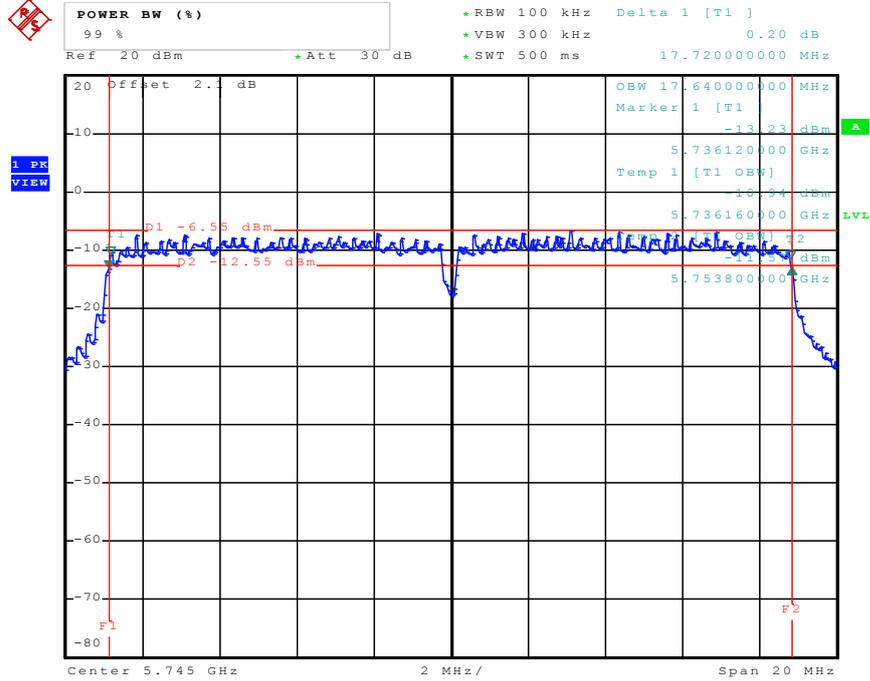


Date: 16.SEP.2011 23:38:21

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5785 MHz

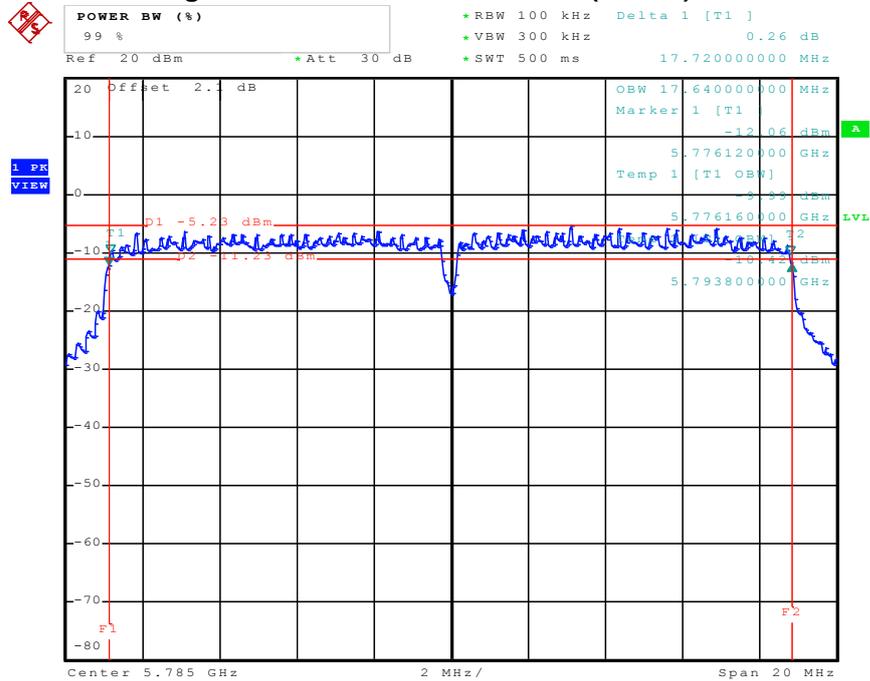


Date: 16.SEP.2011 23:49:01

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5825 MHz

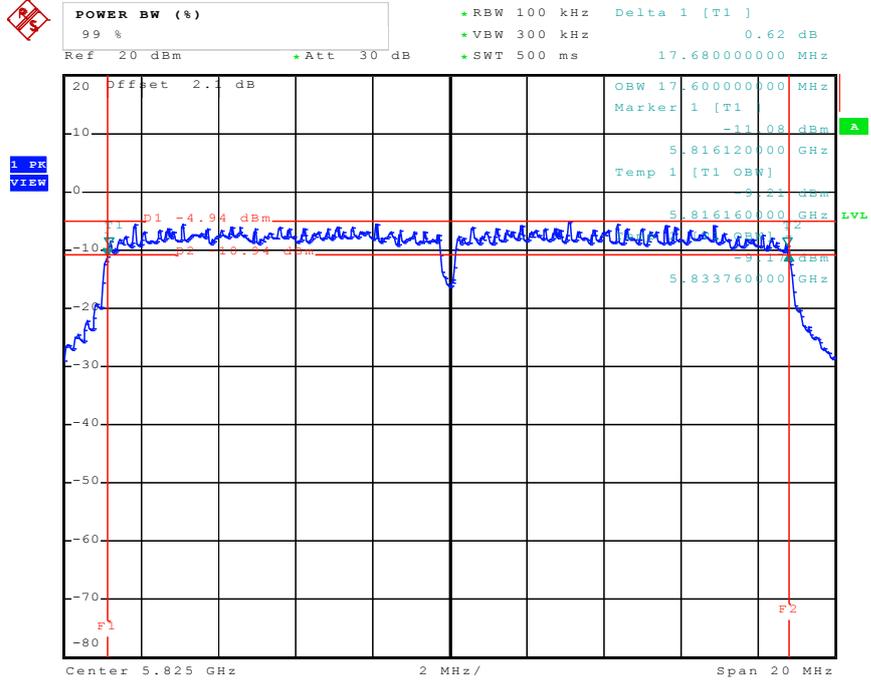


Date: 16.SEP.2011 23:49:53

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. A (40MHz) / 5755 MHz

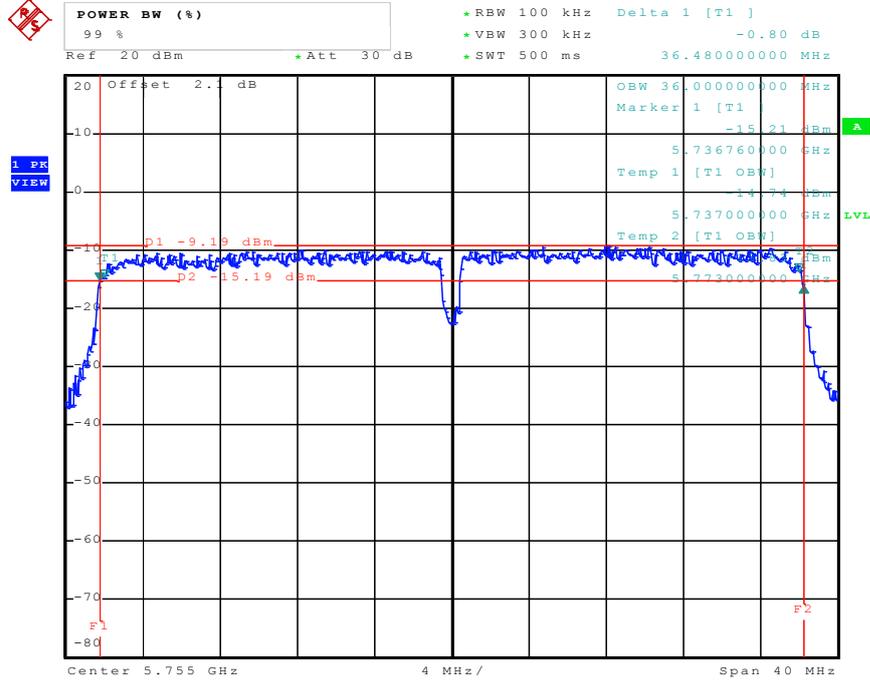


Date: 16.SEP.2011 22:42:46

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. A (40MHz) / 5795 MHz

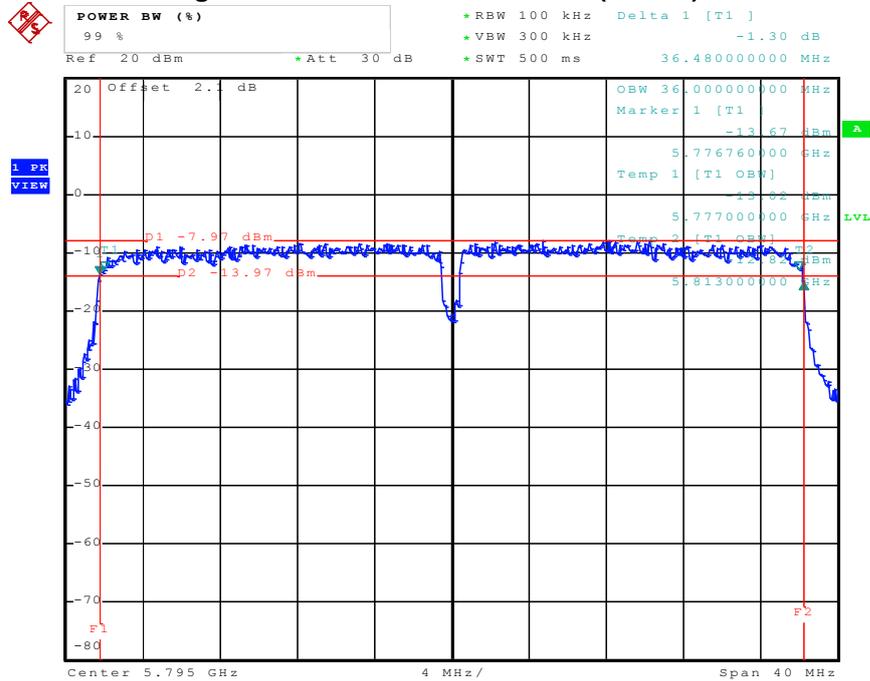


Date: 16.SEP.2011 22:46:03

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. B (40MHz) / 5755 MHz

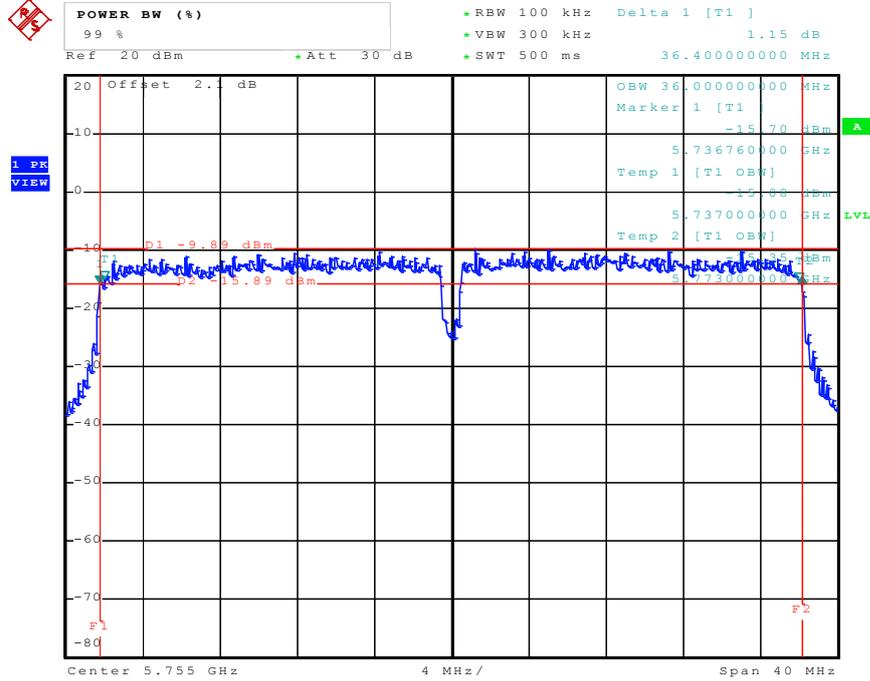

Date: 16.SEP.2011 23:59:20

6 dB Bandwidth Plot on Configuration of IEEE 802.11n Ant. B (40MHz) / 5795 MHz

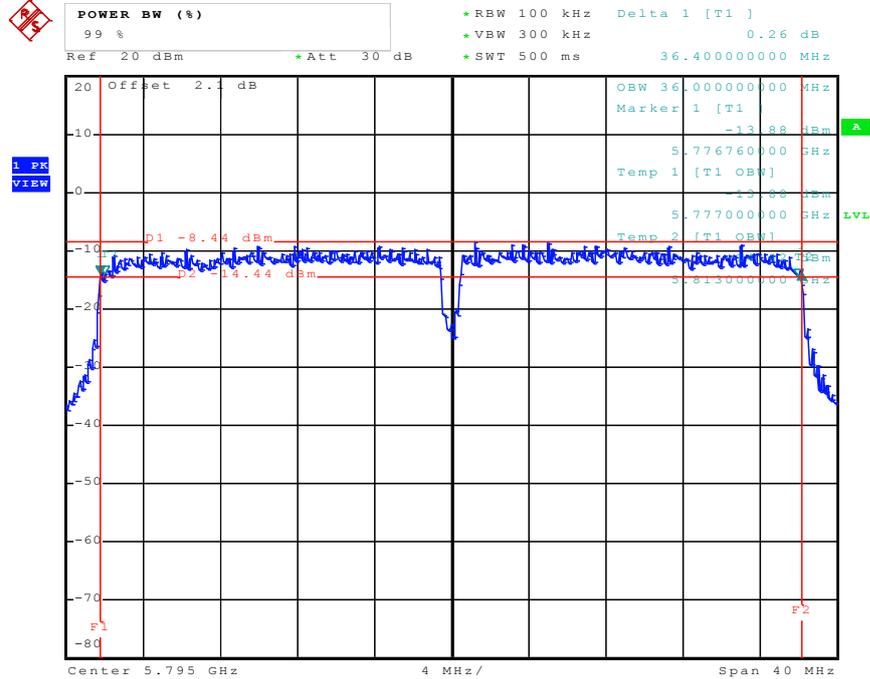

Date: 17.SEP.2011 00:01:49

3.5 Radiated Emissions Measurement

3.5.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| Frequencies (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|--------------------------|---|--------------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for peak |


| Receiver Parameter | Setting |
|---------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

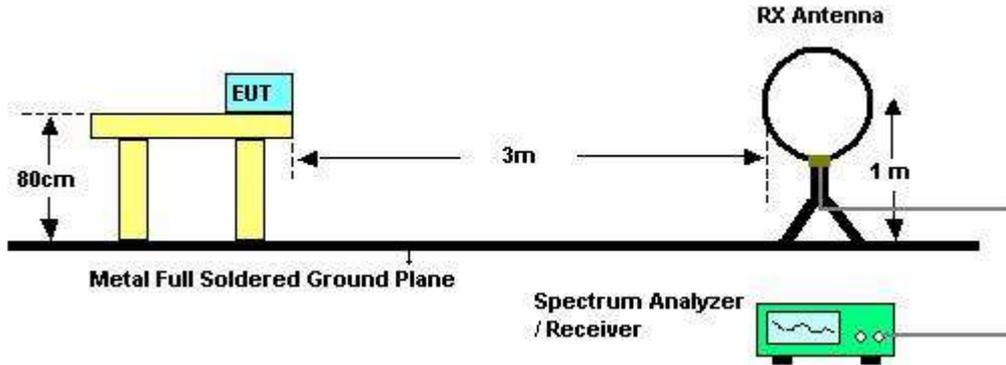

For radiated emissions above 30MHz

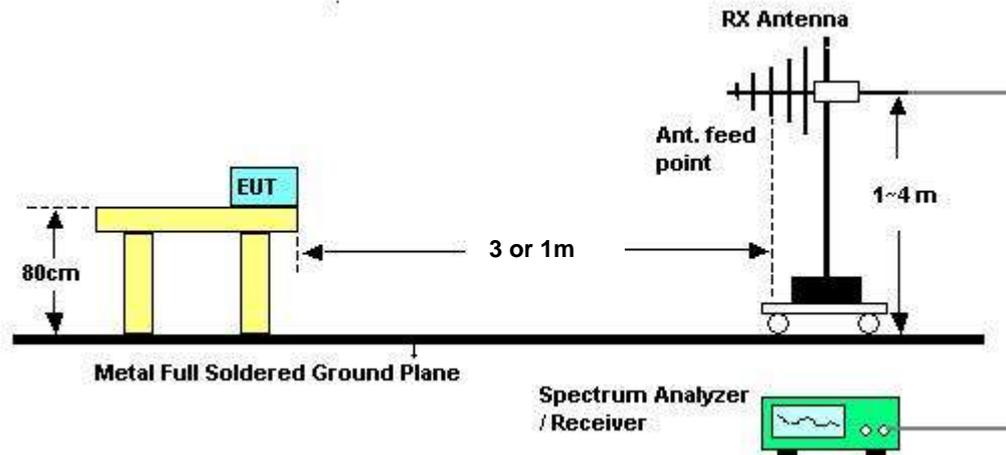

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

| | | | |
|------------------------|---------------|----------------------|-----------|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | | |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark |
|------------------------|-------------------------|----------------------------|------------------------------|---------------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


| | | | |
|-----------------|---------------|---------------|-----------|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | Mode 1 |

Horizontal

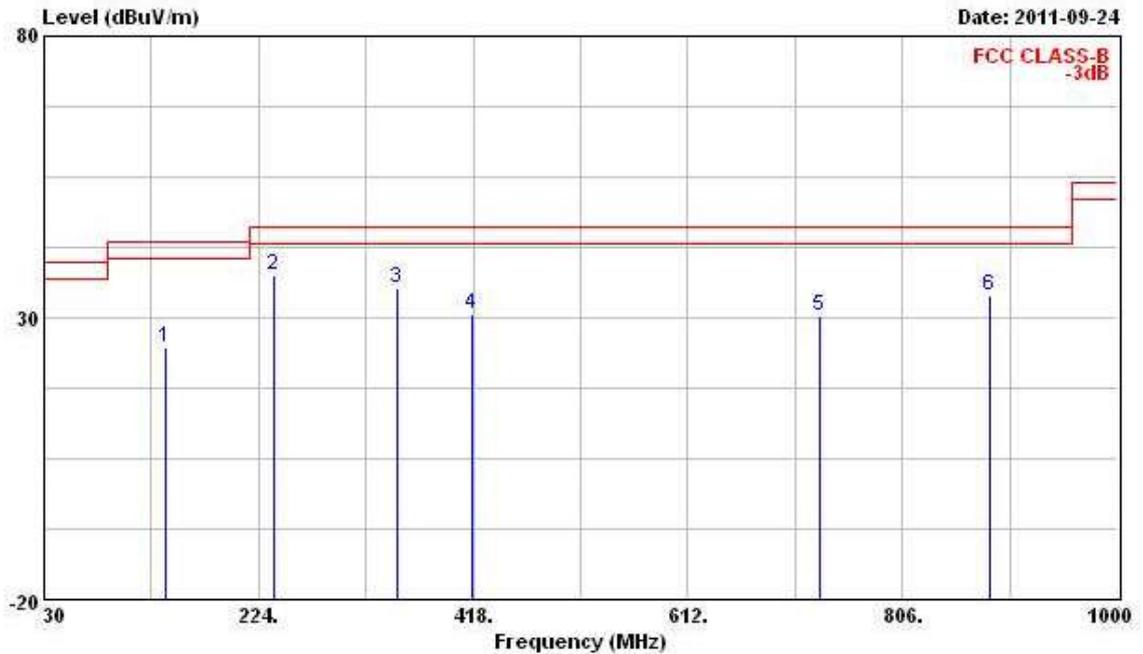

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 140.580 | 24.74 | -18.76 | 43.50 | 40.04 | 11.36 | 1.05 | 27.70 | Peak | --- | --- |
| 2 | 238.550 | 37.72 | -8.28 | 46.00 | 52.76 | 11.44 | 1.52 | 28.00 | Peak | --- | --- |
| 3 | 350.100 | 35.29 | -10.71 | 46.00 | 46.52 | 14.99 | 2.23 | 28.46 | Peak | --- | --- |
| 4 | 417.030 | 30.64 | -15.36 | 46.00 | 39.67 | 17.16 | 2.56 | 28.75 | Peak | --- | --- |
| 5 | 731.310 | 30.23 | -15.77 | 46.00 | 35.23 | 20.43 | 3.95 | 29.38 | Peak | --- | --- |
| 6 | 885.540 | 34.10 | -11.90 | 46.00 | 37.69 | 20.98 | 4.81 | 29.38 | Peak | --- | --- |

Vertical

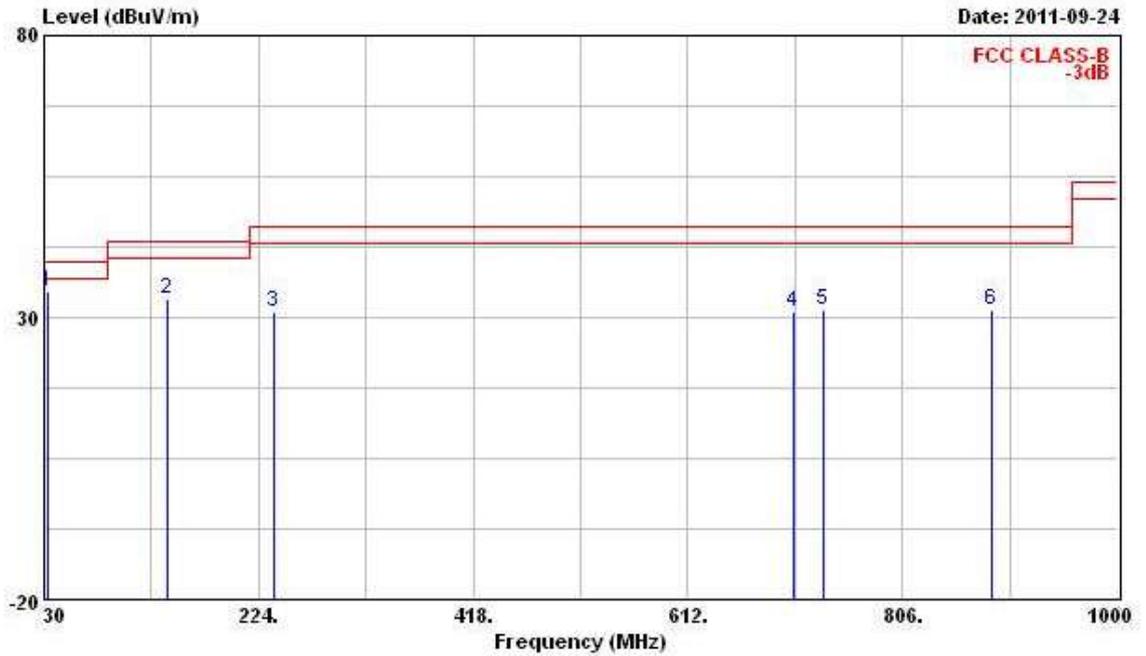

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 32.910 | 34.72 | -5.28 | 40.00 | 46.27 | 16.71 | -0.82 | 27.44 | Peak | --- | --- |
| 2 | 141.550 | 33.35 | -10.15 | 43.50 | 48.75 | 11.26 | 1.05 | 27.71 | Peak | --- | --- |
| 3 | 238.550 | 31.07 | -14.93 | 46.00 | 46.11 | 11.44 | 1.52 | 28.00 | Peak | --- | --- |
| 4 | 708.030 | 30.95 | -15.05 | 46.00 | 36.30 | 20.09 | 3.87 | 29.31 | Peak | --- | --- |
| 5 | 734.220 | 31.38 | -14.62 | 46.00 | 36.33 | 20.47 | 3.96 | 29.39 | Peak | --- | --- |
| 6 | 886.510 | 31.39 | -14.61 | 46.00 | 34.98 | 20.98 | 4.81 | 29.38 | Peak | --- | --- |

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


| | | | |
|-----------------|---------------|---------------|-----------|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | Mode 2 |

Horizontal

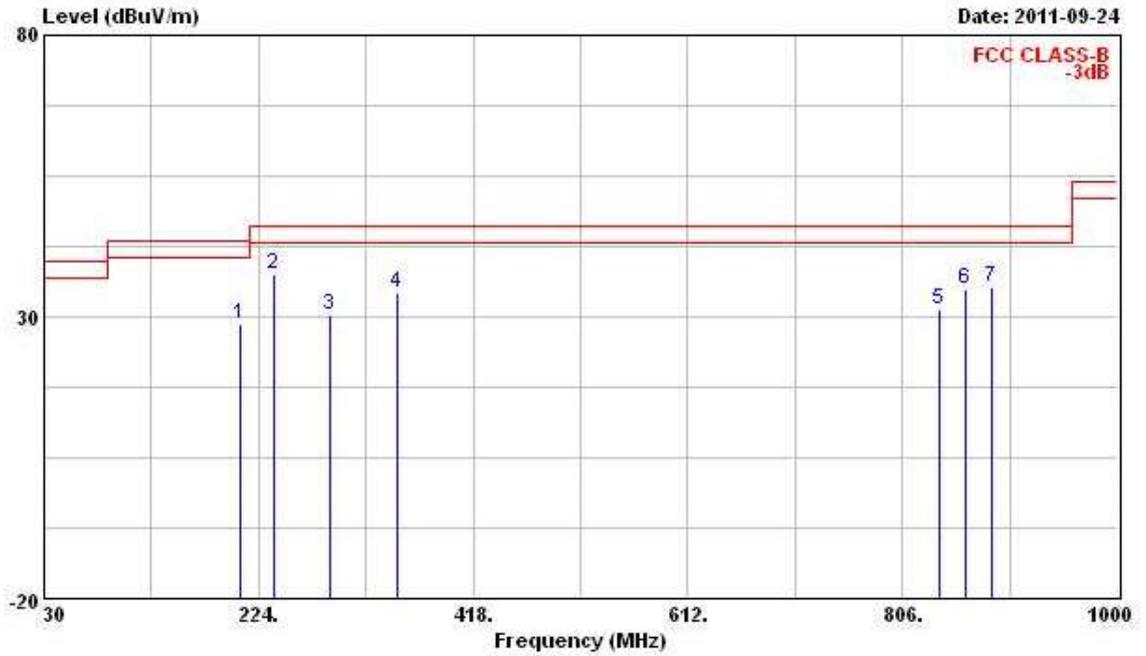

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 207.510 | 28.83 | -14.67 | 43.50 | 46.05 | 9.46 | 1.31 | 27.99 | Peak | --- | --- |
| 2 | 238.550 | 37.51 | -8.49 | 46.00 | 52.55 | 11.44 | 1.52 | 28.00 | Peak | --- | --- |
| 3 | 288.020 | 30.39 | -15.61 | 46.00 | 43.42 | 13.37 | 1.82 | 28.22 | Peak | --- | --- |
| 4 | 350.100 | 34.30 | -11.70 | 46.00 | 45.53 | 14.99 | 2.23 | 28.46 | Peak | --- | --- |
| 5 | 839.950 | 31.28 | -14.72 | 46.00 | 35.33 | 20.82 | 4.58 | 29.45 | Peak | --- | --- |
| 6 | 863.230 | 34.86 | -11.14 | 46.00 | 38.70 | 20.89 | 4.69 | 29.42 | Peak | --- | --- |
| 7 | 886.510 | 35.18 | -10.82 | 46.00 | 38.77 | 20.98 | 4.81 | 29.38 | Peak | --- | --- |

Vertical

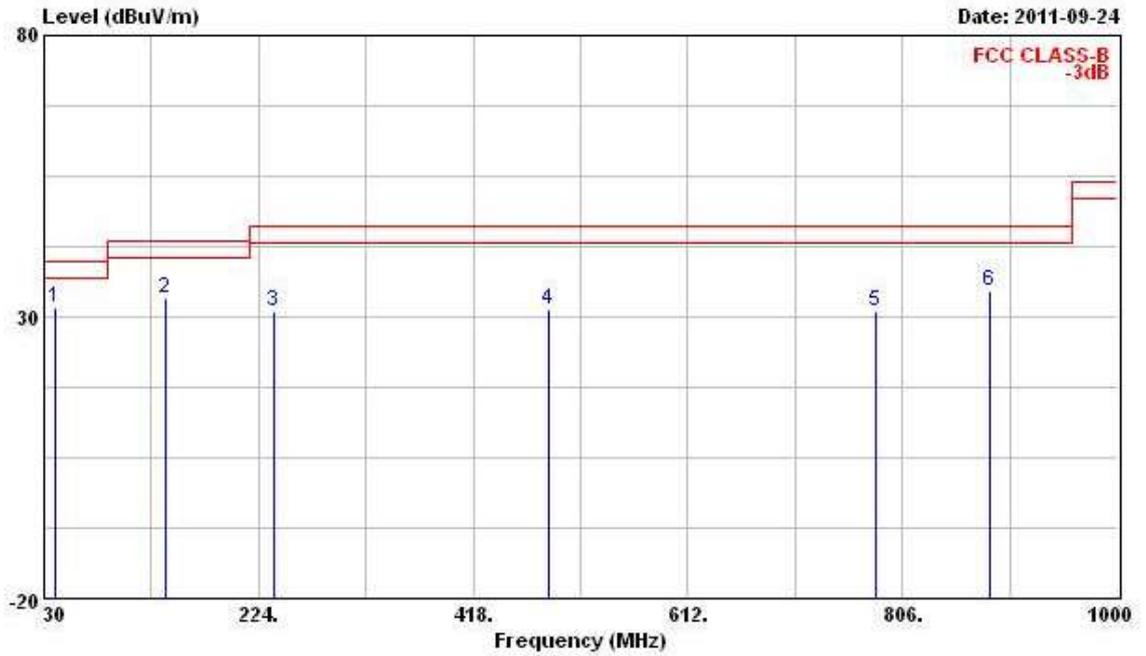

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 40.670 | 31.75 | -8.25 | 40.00 | 47.75 | 12.17 | -0.69 | 27.47 | Peak | --- | --- |
| 2 | 140.580 | 33.32 | -10.18 | 43.50 | 48.62 | 11.36 | 1.05 | 27.70 | Peak | --- | --- |
| 3 | 238.550 | 31.07 | -14.93 | 46.00 | 46.11 | 11.44 | 1.52 | 28.00 | Peak | --- | --- |
| 4 | 486.870 | 31.29 | -14.71 | 46.00 | 39.55 | 17.99 | 2.68 | 28.93 | Peak | --- | --- |
| 5 | 781.750 | 31.05 | -14.95 | 46.00 | 35.50 | 20.74 | 4.27 | 29.45 | Peak | --- | --- |
| 6 | 885.540 | 34.46 | -11.54 | 46.00 | 38.05 | 20.98 | 4.81 | 29.38 | Peak | --- | --- |

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


| | | | |
|------------------------|---------------|----------------------|-----------|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | Mode 3 |

Horizontal

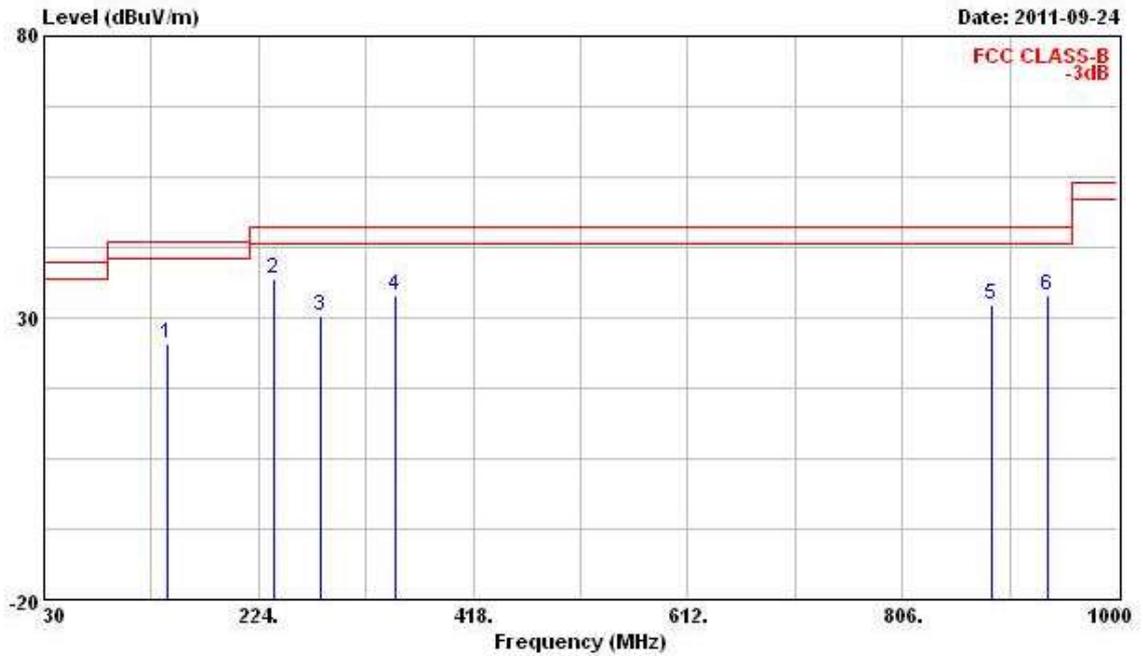

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 141.550 | 25.30 | -18.20 | 43.50 | 40.70 | 11.26 | 1.05 | 27.71 | Peak | --- | --- |
| 2 | 238.550 | 36.90 | -9.10 | 46.00 | 51.94 | 11.44 | 1.52 | 28.00 | Peak | --- | --- |
| 3 | 280.260 | 30.47 | -15.53 | 46.00 | 43.64 | 13.23 | 1.77 | 28.17 | Peak | --- | --- |
| 4 | 347.190 | 33.81 | -12.19 | 46.00 | 45.13 | 14.92 | 2.21 | 28.45 | Peak | --- | --- |
| 5 | 886.510 | 32.42 | -13.58 | 46.00 | 36.01 | 20.98 | 4.81 | 29.38 | Peak | --- | --- |
| 6 | 936.950 | 34.10 | -11.90 | 46.00 | 36.84 | 21.25 | 5.23 | 29.23 | Peak | --- | --- |

Vertical

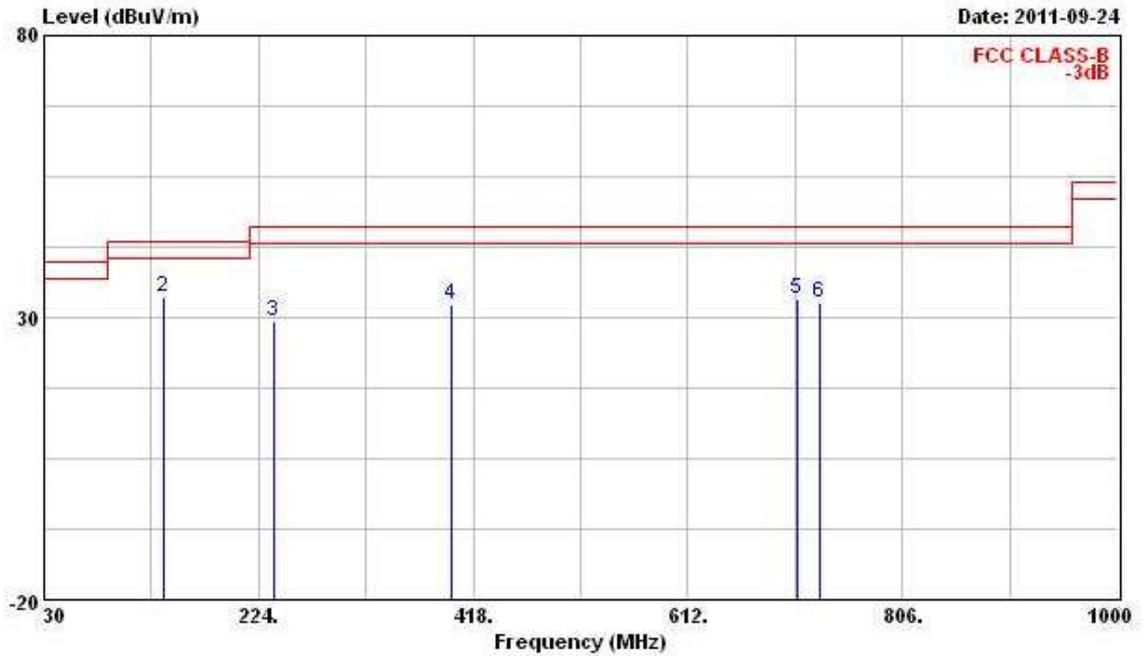

| | Freq | Level | Over Limit | Limit Line | ReadAntenna | Cable | Preamp | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------|-------|--------|------------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | | cm | deg |
| 1 | 30.000 | 36.24 | -3.76 | 40.00 | 46.13 | 18.48 | -0.91 | 27.46 Peak | --- | --- |
| 2 | 137.670 | 33.65 | -9.85 | 43.50 | 48.65 | 11.64 | 1.04 | 27.68 Peak | --- | --- |
| 3 | 238.550 | 29.20 | -16.80 | 46.00 | 44.24 | 11.44 | 1.52 | 28.00 Peak | --- | --- |
| 4 | 397.630 | 32.17 | -13.83 | 46.00 | 41.93 | 16.38 | 2.47 | 28.61 Peak | --- | --- |
| 5 | 710.940 | 33.36 | -12.64 | 46.00 | 38.66 | 20.14 | 3.89 | 29.32 Peak | --- | --- |
| 6 | 731.310 | 32.76 | -13.24 | 46.00 | 37.76 | 20.43 | 3.95 | 29.38 Peak | --- | --- |

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


| | | | |
|------------------------|---------------|----------------------|-----------|
| Final Test Date | Sep. 28, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | Mode 4 |

Horizontal

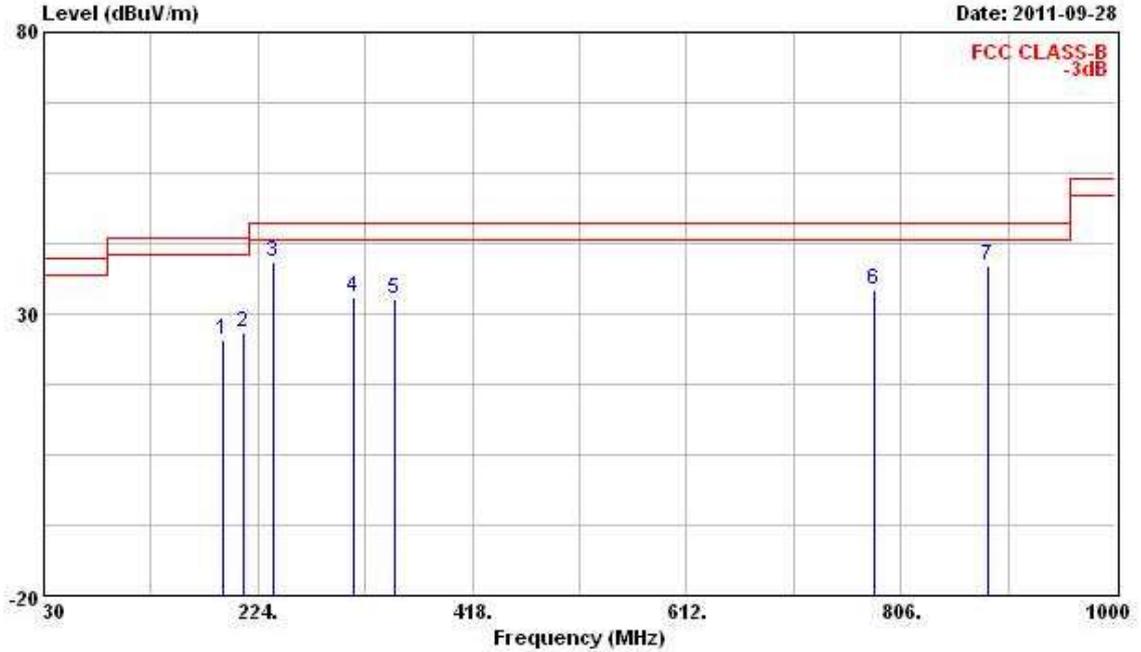

| | Freq | Level | Over Limit | Limit Line | Read Antenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|--------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 191.990 | 25.43 | -18.07 | 43.50 | 42.89 | 9.29 | 1.20 | 27.95 | Peak | --- | --- |
| 2 | 210.420 | 26.83 | -16.67 | 43.50 | 44.11 | 9.39 | 1.33 | 27.99 | Peak | --- | --- |
| 3 | 238.550 | 39.28 | -6.72 | 46.00 | 54.32 | 11.44 | 1.52 | 28.00 | Peak | --- | --- |
| 4 | 311.300 | 33.02 | -12.98 | 46.00 | 45.36 | 14.02 | 1.96 | 28.32 | Peak | --- | --- |
| 5 | 347.190 | 32.55 | -13.45 | 46.00 | 43.87 | 14.92 | 2.21 | 28.45 | Peak | --- | --- |
| 6 | 781.750 | 34.26 | -11.74 | 46.00 | 38.71 | 20.74 | 4.27 | 29.45 | Peak | --- | --- |
| 7 | 885.540 | 38.42 | -7.58 | 46.00 | 42.01 | 20.98 | 4.81 | 29.38 | Peak | --- | --- |

Vertical

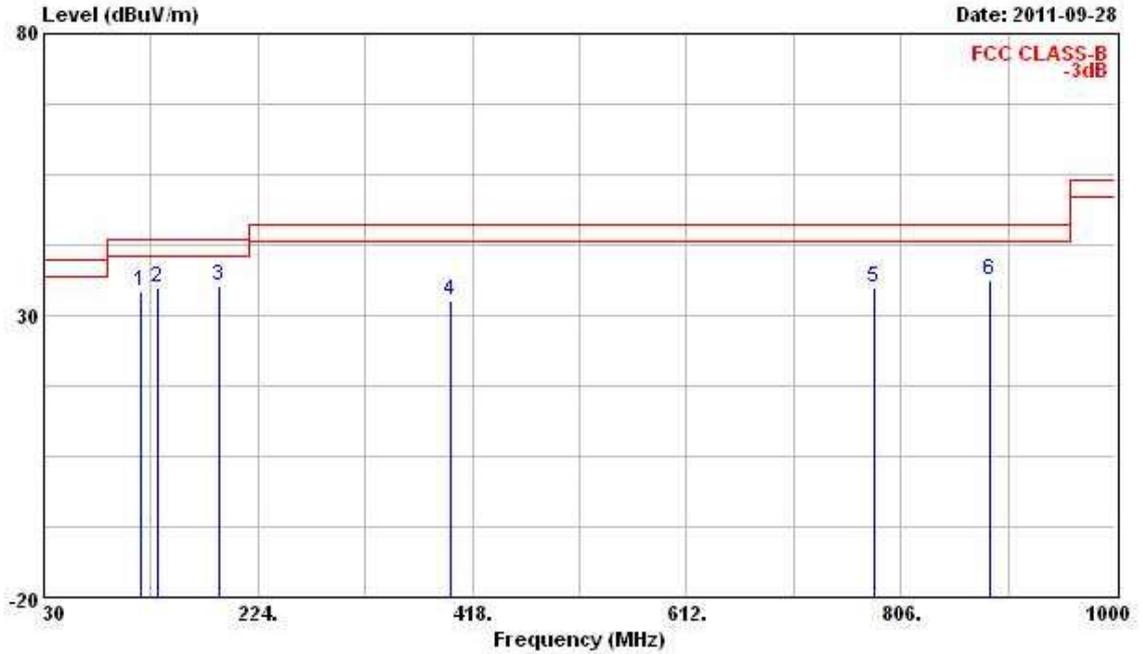

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 118.270 | 34.21 | -9.29 | 43.50 | 48.19 | 12.61 | 0.94 | 27.53 | Peak | --- | --- |
| 2 | 133.790 | 34.89 | -8.61 | 43.50 | 49.49 | 12.01 | 1.03 | 27.65 | Peak | --- | --- |
| 3 | 188.110 | 35.35 | -8.15 | 43.50 | 52.89 | 9.17 | 1.22 | 27.93 | Peak | --- | --- |
| 4 | 397.630 | 32.61 | -13.39 | 46.00 | 42.37 | 16.38 | 2.47 | 28.61 | Peak | --- | --- |
| 5 | 781.750 | 34.97 | -11.03 | 46.00 | 39.42 | 20.74 | 4.27 | 29.45 | Peak | --- | --- |
| 6 | 886.510 | 36.11 | -9.89 | 46.00 | 39.70 | 20.98 | 4.81 | 29.38 | Peak | --- | --- |

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10th Harmonic)

For Single Chain:

| | | | |
|-----------------|---------------|---------------|-----------------|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11a Ch. 149 |


Horizontal

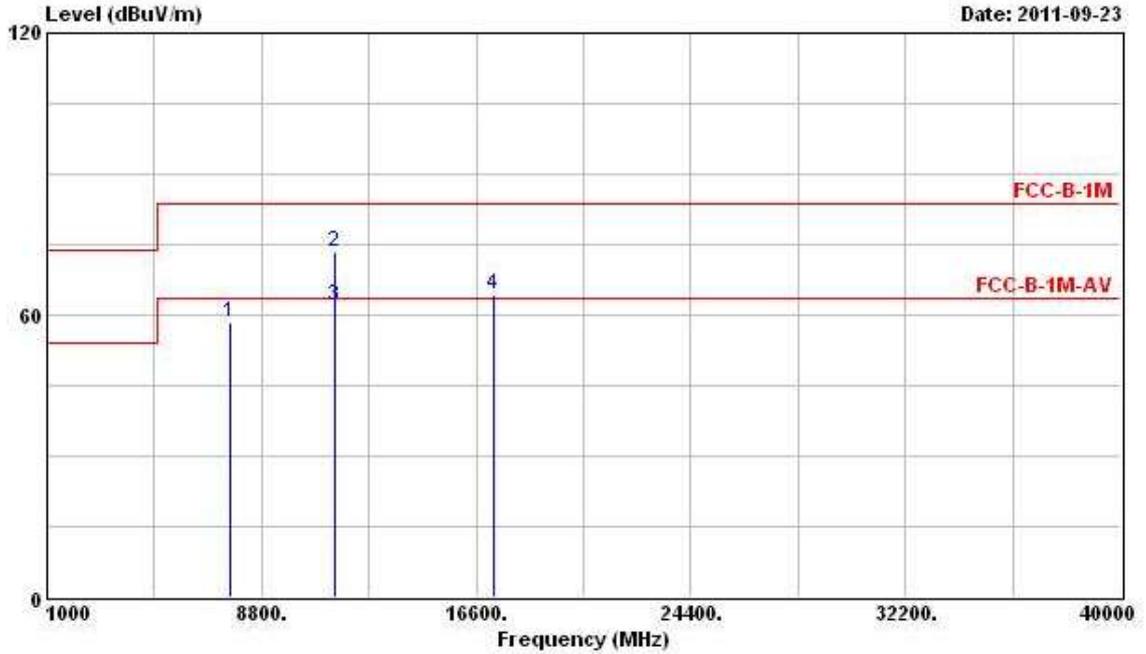

| | Freq | Level | Over Limit | Limit Line | ReadAntenna | Cable | Preamp | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------|-------|--------|---------------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB | dB | | cm | deg |
| 1 | 7649.000 | 58.54 | -5.00 | 63.54 | 47.72 | 37.80 | 6.00 | 32.98 PK | --- | --- |
| 2 | 11490.000 | 73.51 | -10.03 | 83.54 | 58.98 | 39.77 | 7.33 | 32.57 Peak | --- | --- |
| 3 | 11490.000 | 61.85 | -1.69 | 63.54 | 47.33 | 39.77 | 7.33 | 32.57 Average | --- | --- |
| 4 | 17235.000 | 64.29 | | | 43.77 | 43.71 | 8.48 | 31.67 Peak | --- | --- |

Note: The item 4 is on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

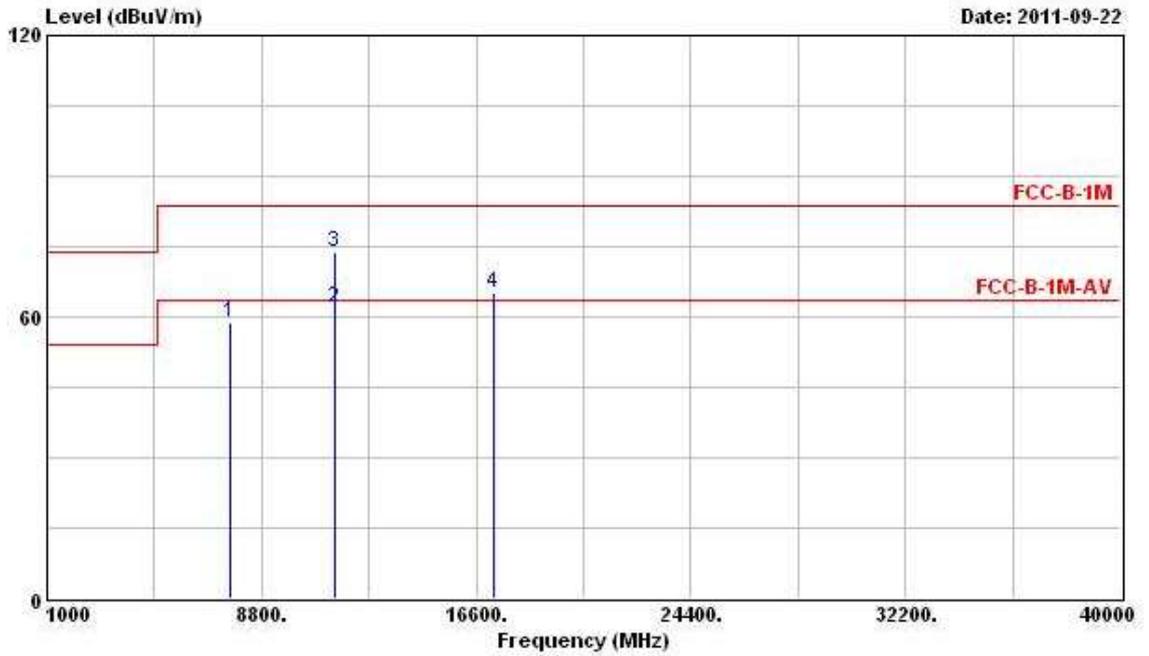


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7660.000 | 58.81 | -4.73 | 63.54 | 47.95 | 37.80 | 6.04 | 32.98 | PK | --- | --- |
| 2 | 11490.000 | 61.81 | -1.73 | 63.54 | 47.28 | 39.77 | 7.33 | 32.57 | Average | --- | --- |
| 3 | 11490.000 | 73.65 | -9.89 | 83.54 | 59.13 | 39.77 | 7.33 | 32.57 | Peak | --- | --- |
| 4 | 17235.000 | 65.22 | | | 44.70 | 43.71 | 8.48 | 31.67 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|------------------------|---------------|----------------------|-----------------|
| Final Test Date | Sep. 22, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11a Ch. 157 |


Horizontal

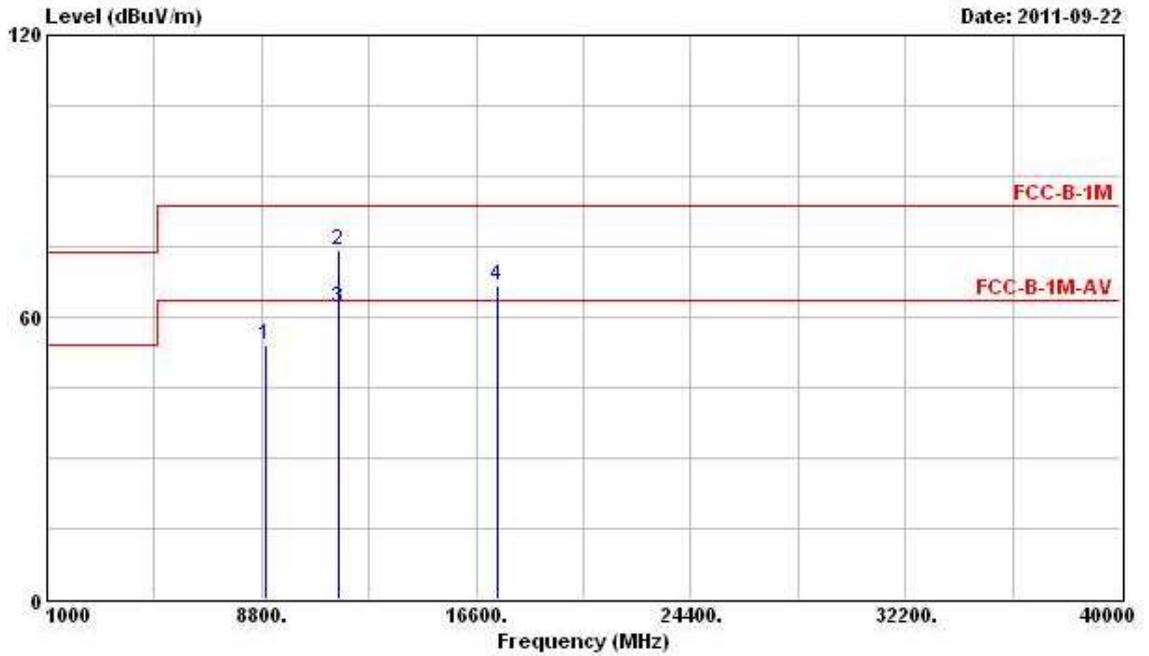

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 8925.000 | 53.94 | | | 41.84 | 38.88 | 6.41 | 33.18 | Peak | --- | --- |
| 2 | 11570.000 | 74.21 | -9.33 | 83.54 | 59.72 | 39.72 | 7.36 | 32.58 | Peak | --- | --- |
| 3 | 11570.400 | 61.93 | -1.61 | 63.54 | 47.43 | 39.72 | 7.36 | 32.58 | Average | --- | --- |
| 4 | 17355.000 | 66.57 | | | 45.04 | 44.71 | 8.52 | 31.70 | Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

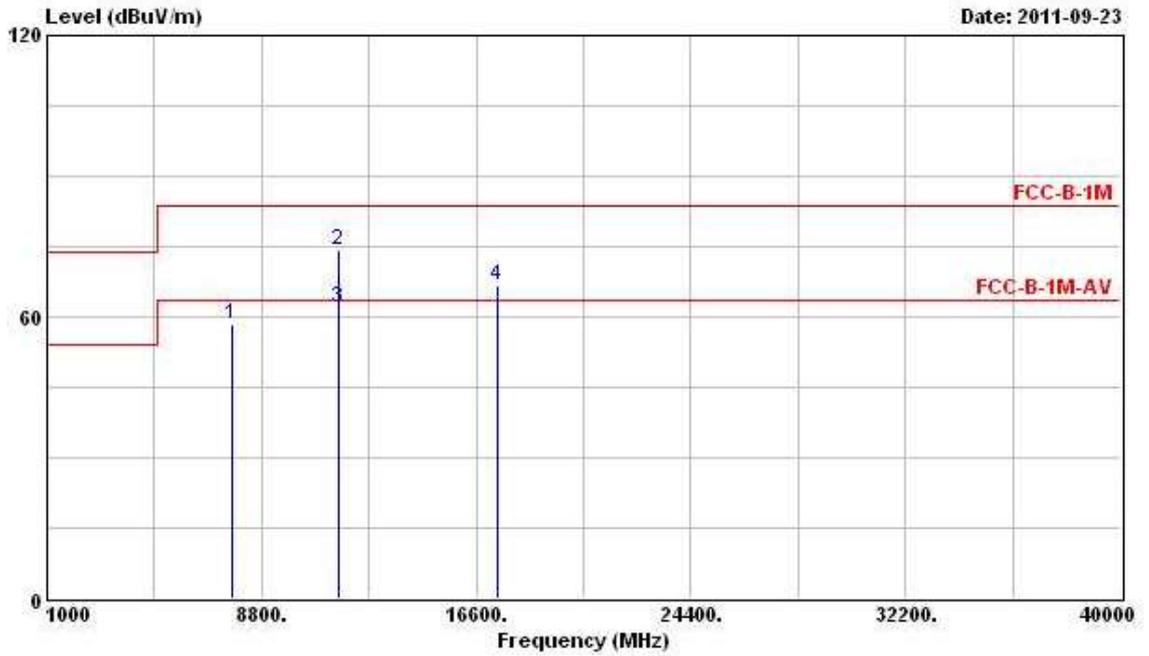


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7693.000 | 58.27 | -5.27 | 63.54 | 47.38 | 37.80 | 6.07 | 32.98 | PK | --- | --- |
| 2 | 11570.000 | 74.05 | -9.49 | 83.54 | 59.56 | 39.72 | 7.36 | 32.58 | Peak | --- | --- |
| 3 | 11570.500 | 61.95 | -21.59 | 83.54 | 47.46 | 39.72 | 7.36 | 32.58 | Peak | --- | --- |
| 4 | 17355.000 | 66.60 | | | 45.07 | 44.71 | 8.52 | 31.70 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|---------------|---------------|-----------------|
| Final Test Date | Sep. 22, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11a Ch. 165 |


Horizontal

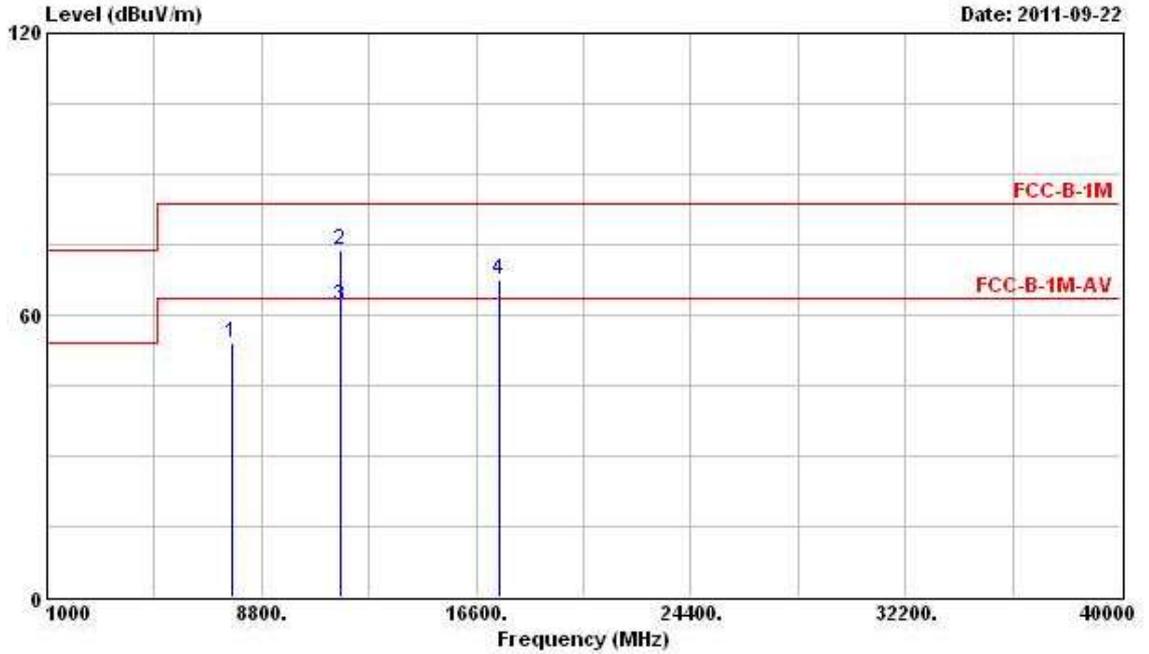

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7737.000 | 54.02 | -9.52 | 63.54 | 43.10 | 37.80 | 6.11 | 32.99 | PK | --- | --- |
| 2 | 11650.000 | 73.72 | -9.82 | 83.54 | 59.29 | 39.63 | 7.39 | 32.59 | Peak | --- | --- |
| 3 | 11650.000 | 61.99 | -1.55 | 63.54 | 47.56 | 39.63 | 7.39 | 32.59 | Average | --- | --- |
| 4 | 17475.000 | 67.51 | | | 44.98 | 45.71 | 8.55 | 31.73 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

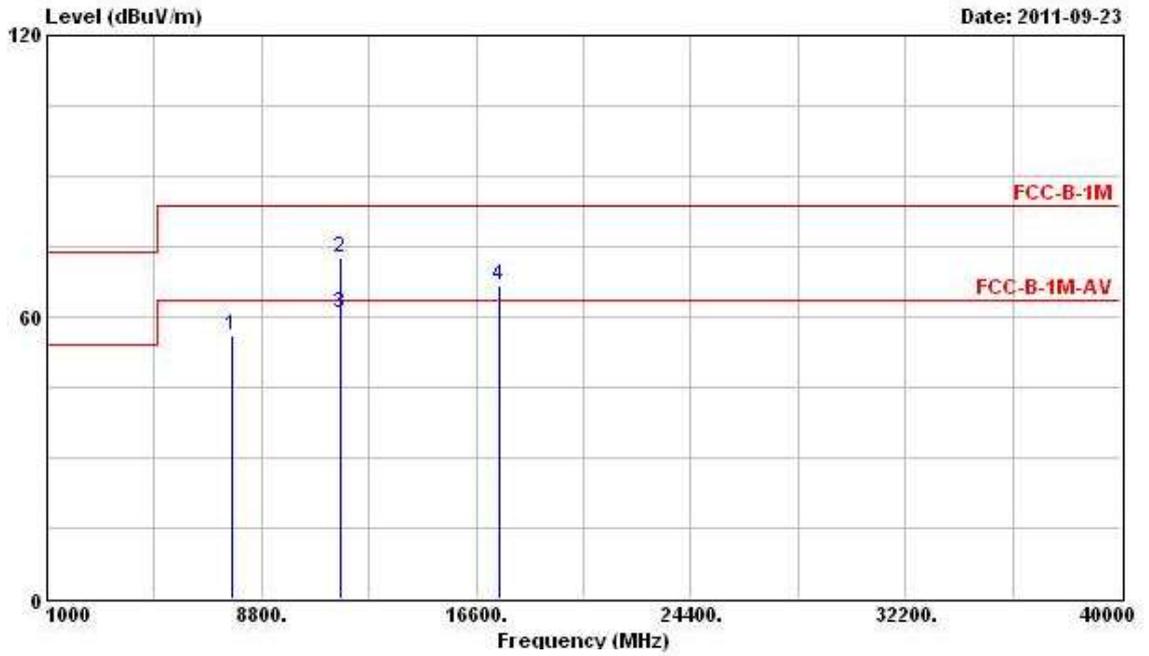


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7737.000 | 56.02 | -7.52 | 63.54 | 45.10 | 37.80 | 6.11 | 32.99 | PK | --- | --- |
| 2 | 11650.000 | 72.53 | -11.01 | 83.54 | 58.10 | 39.63 | 7.39 | 32.59 | Peak | --- | --- |
| 3 @ | 11650.000 | 60.77 | -2.77 | 63.54 | 46.34 | 39.63 | 7.39 | 32.59 | Average | --- | --- |
| 4 | 17475.000 | 66.83 | | | 44.30 | 45.71 | 8.55 | 31.73 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|---------------|---------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 149 (20MHz) MCS0 (Ant. A) |


Horizontal

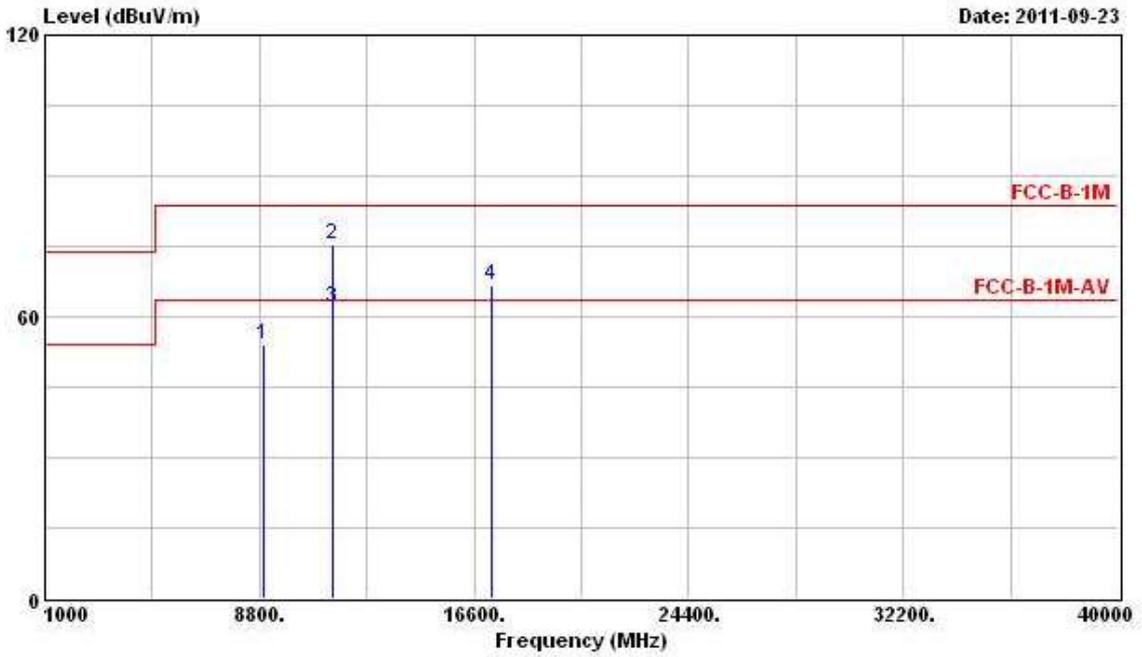

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 8969.000 | 53.94 | | | 41.78 | 38.95 | 6.40 | 33.20 | Peak | --- | --- |
| 2 | 11490.000 | 75.20 | -8.34 | 83.54 | 60.67 | 39.77 | 7.33 | 32.57 | Peak | --- | --- |
| 3 | 11490.000 | 61.96 | -1.58 | 63.54 | 47.43 | 39.77 | 7.33 | 32.57 | Average | --- | --- |
| 4 | 17235.000 | 66.68 | | | 46.16 | 43.71 | 8.48 | 31.67 | Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

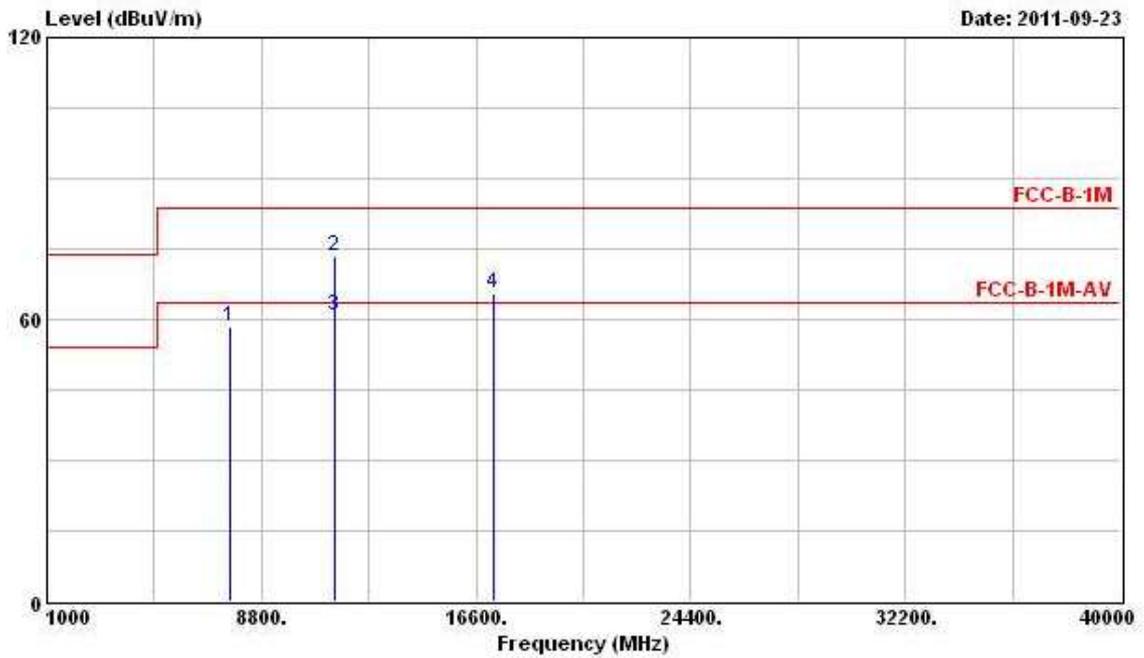


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7649.000 | 58.42 | -5.12 | 63.54 | 47.60 | 37.80 | 6.00 | 32.98 | PK | --- | --- |
| 2 | 11477.000 | 73.56 | -9.98 | 83.54 | 59.06 | 39.75 | 7.33 | 32.57 | Peak | --- | --- |
| 3 | 11490.000 | 60.98 | -22.56 | 83.54 | 46.45 | 39.77 | 7.33 | 32.57 | Peak | --- | --- |
| 4 | 17235.000 | 65.35 | | | 44.83 | 43.71 | 8.48 | 31.67 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|---------------|---------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 157 (20MHz) MCS0 (Ant. A) |


Horizontal

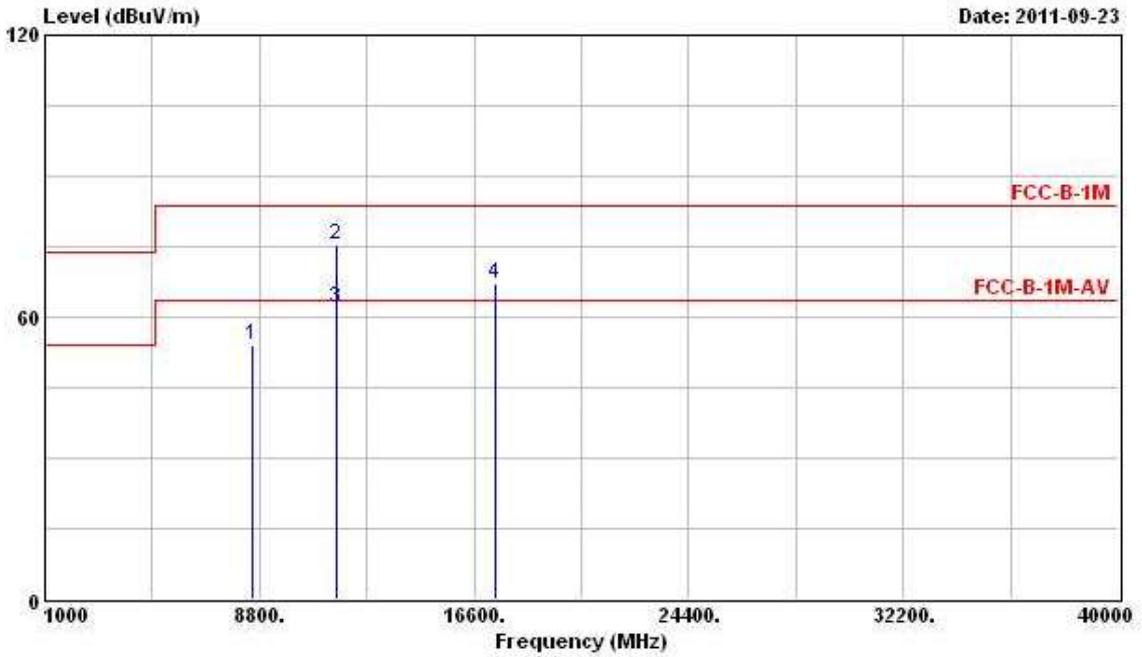

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 8518.000 | 54.16 | | | 42.46 | 38.32 | 6.42 | 33.05 | Peak | --- | --- |
| 2 | 11570.000 | 75.33 | -8.21 | 83.54 | 60.84 | 39.72 | 7.36 | 32.58 | Peak | --- | --- |
| 3 | 11570.000 | 61.88 | -1.66 | 63.54 | 47.39 | 39.72 | 7.36 | 32.58 | Average | --- | --- |
| 4 | 17355.000 | 67.14 | | | 45.61 | 44.71 | 8.52 | 31.70 | Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

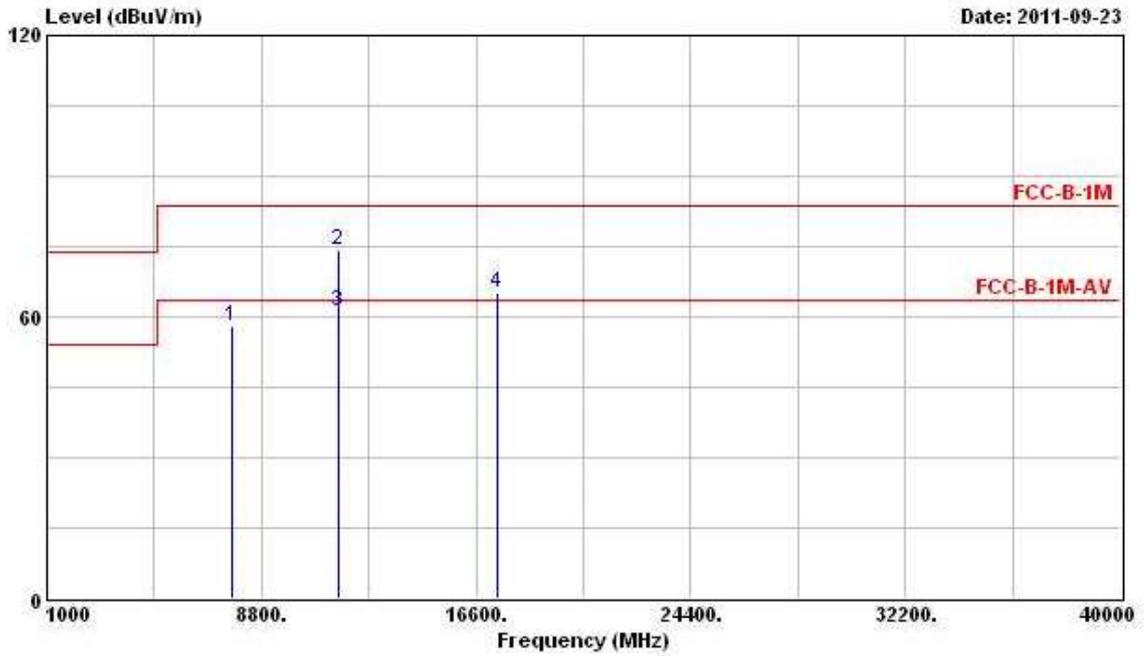


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7693.000 | 57.98 | -5.56 | 63.54 | 47.09 | 37.80 | 6.07 | 32.98 | PK | --- | --- |
| 2 | 11570.000 | 74.03 | -9.51 | 83.54 | 59.54 | 39.72 | 7.36 | 32.58 | Peak | --- | --- |
| 3 @ | 11570.000 | 61.06 | -2.48 | 63.54 | 46.57 | 39.72 | 7.36 | 32.58 | Average | --- | --- |
| 4 | 17355.000 | 65.22 | | | 43.69 | 44.71 | 8.52 | 31.70 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|---------------|---------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 165 (20MHz) MCS0 (Ant. A) |


Horizontal

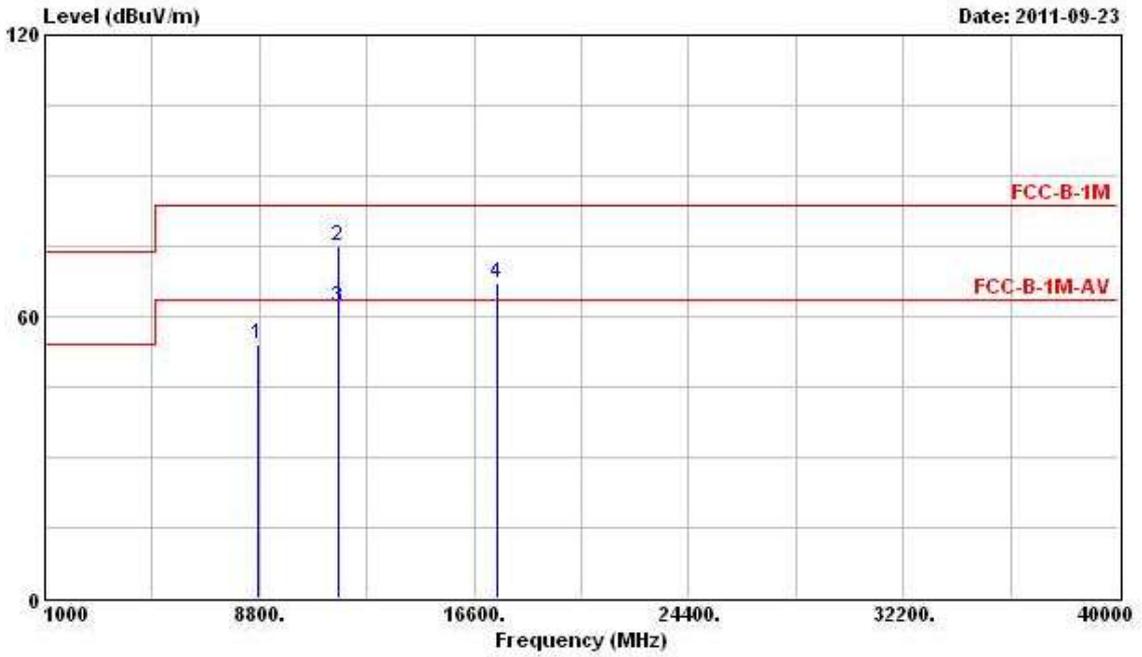

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | Remark | Ant | Table |
|---|-----------|--------|-------|--------|-------------|-------|--------|---------------|-----|-------|
| | MHz | dBuV/m | Limit | Line | Level | Loss | Factor | | Pos | Pos |
| | | | dB | dBuV/m | dBuV | dB | dB | | cm | deg |
| 1 | 8749.000 | 54.05 | | | 42.11 | 38.65 | 6.41 | 33.13 Peak | --- | --- |
| 2 | 11650.000 | 75.18 | -8.36 | 83.54 | 60.75 | 39.63 | 7.39 | 32.59 Peak | --- | --- |
| 3 | 11650.000 | 61.92 | -1.62 | 63.54 | 47.49 | 39.63 | 7.39 | 32.59 Average | --- | --- |
| 4 | 17475.000 | 66.99 | | | 44.46 | 45.71 | 8.55 | 31.73 Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

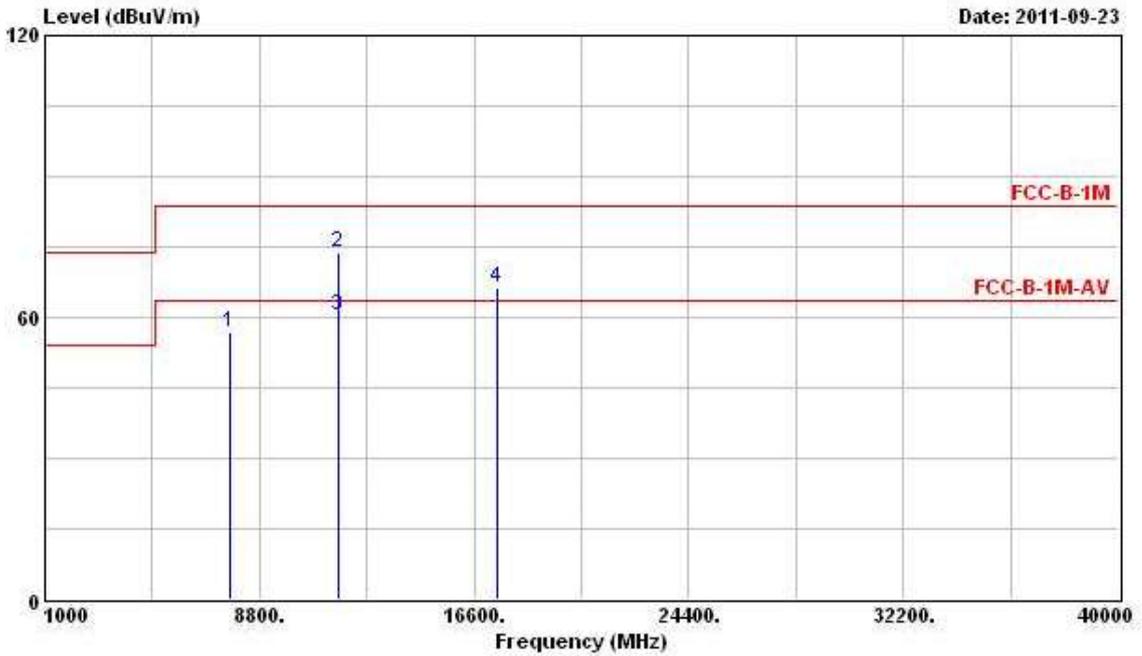


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7737.000 | 56.96 | -6.58 | 63.54 | 46.04 | 37.80 | 6.11 | 32.99 | PK | --- | --- |
| 2 | 11650.000 | 73.87 | -9.67 | 83.54 | 59.44 | 39.63 | 7.39 | 32.59 | Peak | --- | --- |
| 3 | 11650.000 | 60.45 | -3.09 | 63.54 | 46.02 | 39.63 | 7.39 | 32.59 | Average | --- | --- |
| 4 | 17475.000 | 66.43 | | | 43.90 | 45.71 | 8.55 | 31.73 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|------------------------|---------------|----------------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 151 (40MHz) MCS0 (Ant. A) |


Horizontal

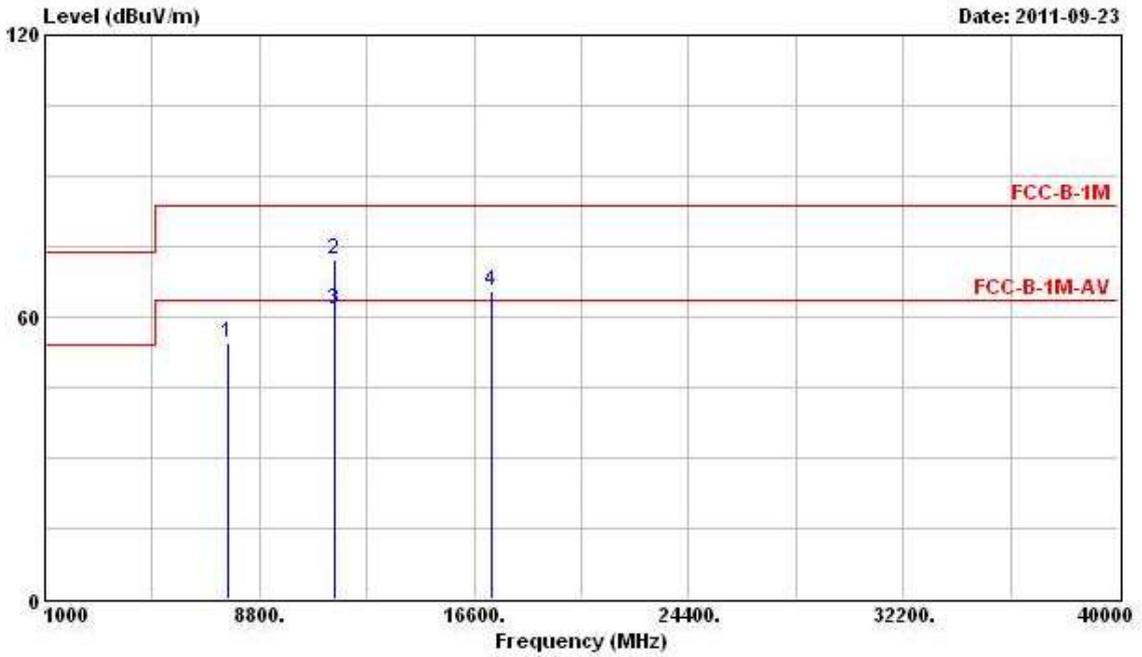

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7649.000 | 54.35 | -9.19 | 63.54 | 43.53 | 37.80 | 6.00 | 32.98 | PK | --- | --- |
| 2 | 11510.000 | 72.26 | -11.28 | 83.54 | 57.70 | 39.80 | 7.33 | 32.57 | Peak | --- | --- |
| 3 | 11510.000 | 61.66 | -1.88 | 63.54 | 47.10 | 39.80 | 7.33 | 32.57 | Average | --- | --- |
| 4 | 17265.000 | 65.50 | | | 44.69 | 43.99 | 8.49 | 31.67 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

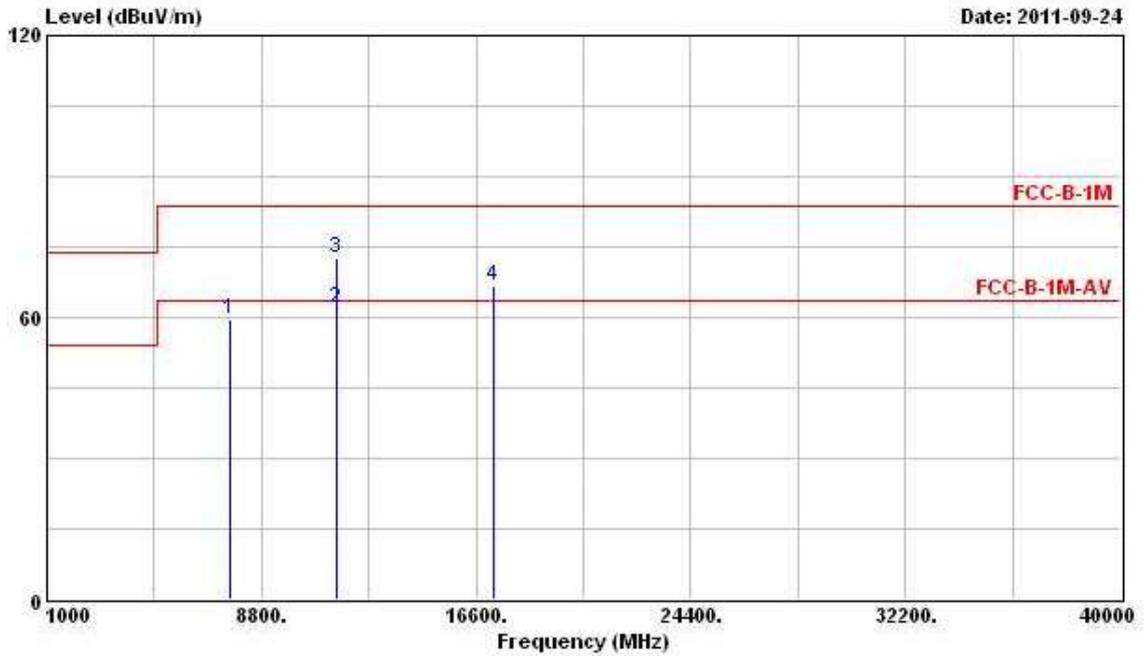


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7649.000 | 59.46 | -4.08 | 63.54 | 48.64 | 37.80 | 6.00 | 32.98 | PK | --- | --- |
| 2 | 11510.000 | 62.14 | -1.40 | 63.54 | 47.58 | 39.80 | 7.33 | 32.57 | Average | --- | --- |
| 3 | 11510.000 | 72.78 | -10.76 | 83.54 | 58.22 | 39.80 | 7.33 | 32.57 | Peak | --- | --- |
| 4 | 17265.000 | 66.64 | | | 45.83 | 43.99 | 8.49 | 31.67 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|------------------------|---------------|----------------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 159 (40MHz) MCS0 (Ant. A) |


Horizontal

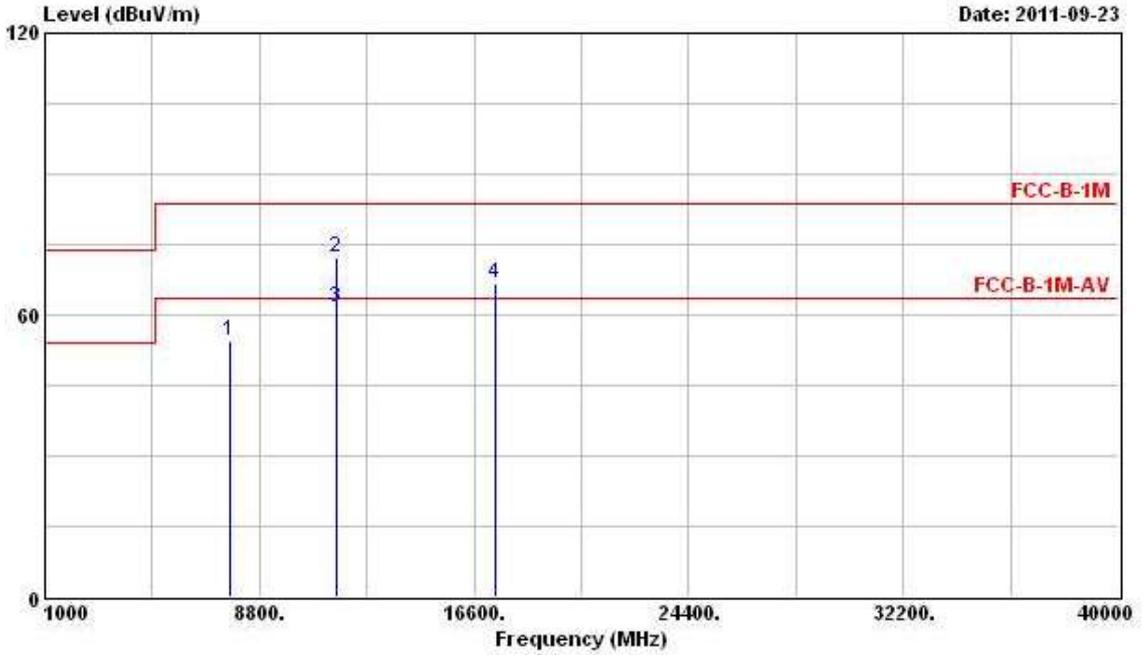

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7726.000 | 54.64 | -8.90 | 63.54 | 43.76 | 37.80 | 6.07 | 32.99 | PK | --- | --- |
| 2 | 11590.000 | 72.21 | -11.33 | 83.54 | 57.72 | 39.70 | 7.37 | 32.58 | Peak | --- | --- |
| 3 | 11590.400 | 61.64 | -1.90 | 63.54 | 47.15 | 39.70 | 7.37 | 32.58 | Average | --- | --- |
| 4 | 17385.000 | 66.55 | | | 44.74 | 45.00 | 8.53 | 31.71 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

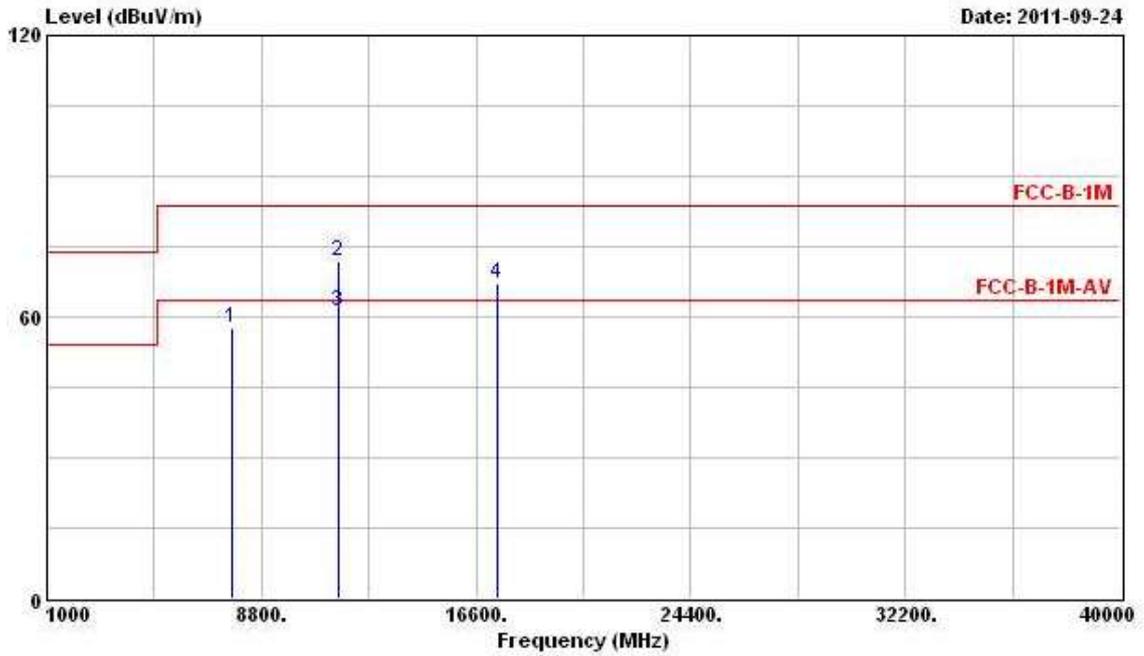


| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | Remark | Ant | Table |
|-----|-----------|--------|--------|--------|-------------|-------|--------|---------------|-----|-------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg |
| 1 | 7726.000 | 57.70 | -5.84 | 63.54 | 46.82 | 37.80 | 6.07 | 32.99 PK | --- | --- |
| 2 | 11590.000 | 71.71 | -11.83 | 83.54 | 57.22 | 39.70 | 7.37 | 32.58 Peak | --- | --- |
| 3 @ | 11590.000 | 61.27 | -2.27 | 63.54 | 46.78 | 39.70 | 7.37 | 32.58 Average | --- | --- |
| 4 | 17385.000 | 67.05 | | | 45.24 | 45.00 | 8.53 | 31.71 Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

For Two Chain:

| | | | |
|-----------------|---------------|---------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 149 (20MHz) MCS8 (Ant. A+B) |


Horizontal

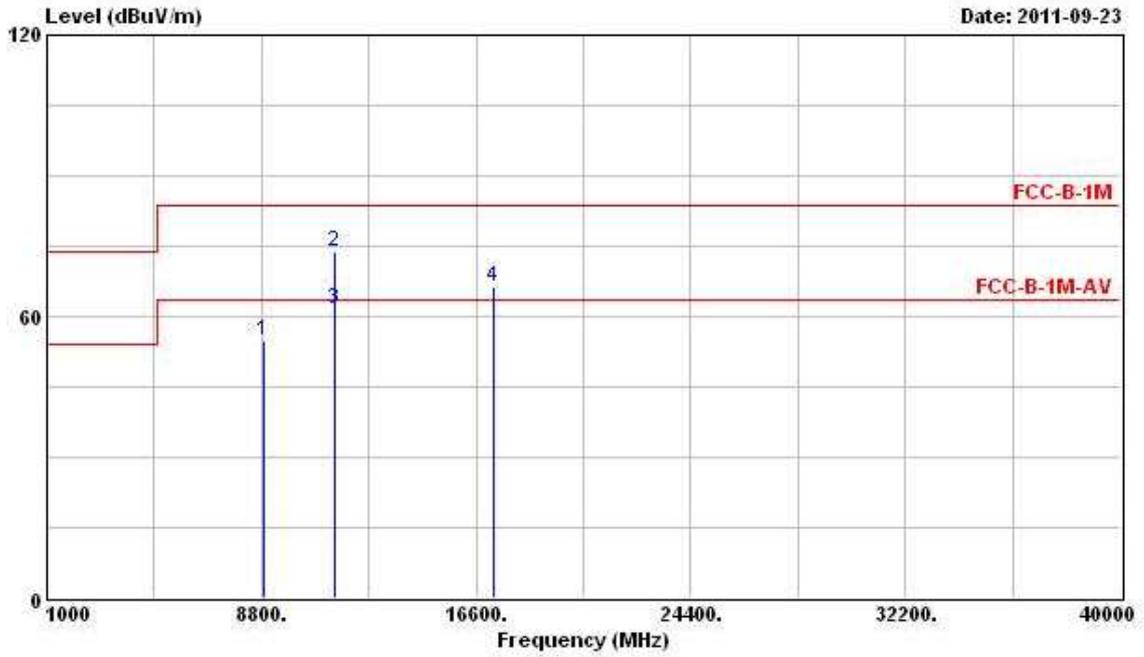

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 8914.000 | 54.69 | | | 42.58 | 38.88 | 6.41 | 33.18 | Peak | --- | --- |
| 2 | 11490.000 | 73.75 | -9.79 | 83.54 | 59.22 | 39.77 | 7.33 | 32.57 | Peak | --- | --- |
| 3 | 11490.000 | 61.66 | -1.88 | 63.54 | 47.13 | 39.77 | 7.33 | 32.57 | Average | --- | --- |
| 4 | 17235.000 | 66.14 | | | 45.62 | 43.71 | 8.48 | 31.67 | Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

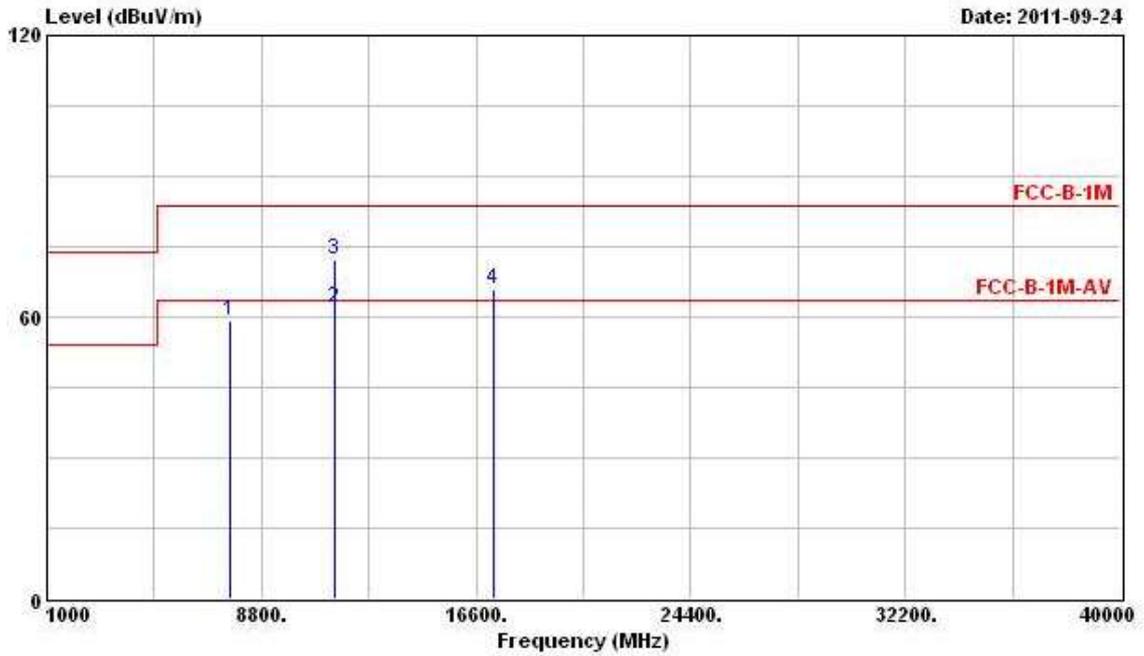


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7649.000 | 59.11 | -4.43 | 63.54 | 48.29 | 37.80 | 6.00 | 32.98 | PK | --- | --- |
| 2 | 11490.000 | 61.80 | -1.74 | 63.54 | 47.28 | 39.77 | 7.33 | 32.57 | Average | --- | --- |
| 3 | 11490.000 | 72.24 | -11.30 | 83.54 | 57.71 | 39.77 | 7.33 | 32.57 | Peak | --- | --- |
| 4 | 17235.000 | 65.95 | | | 45.43 | 43.71 | 8.48 | 31.67 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|---------------|---------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 157 (20MHz) MCS8 (Ant. A+B) |


Horizontal

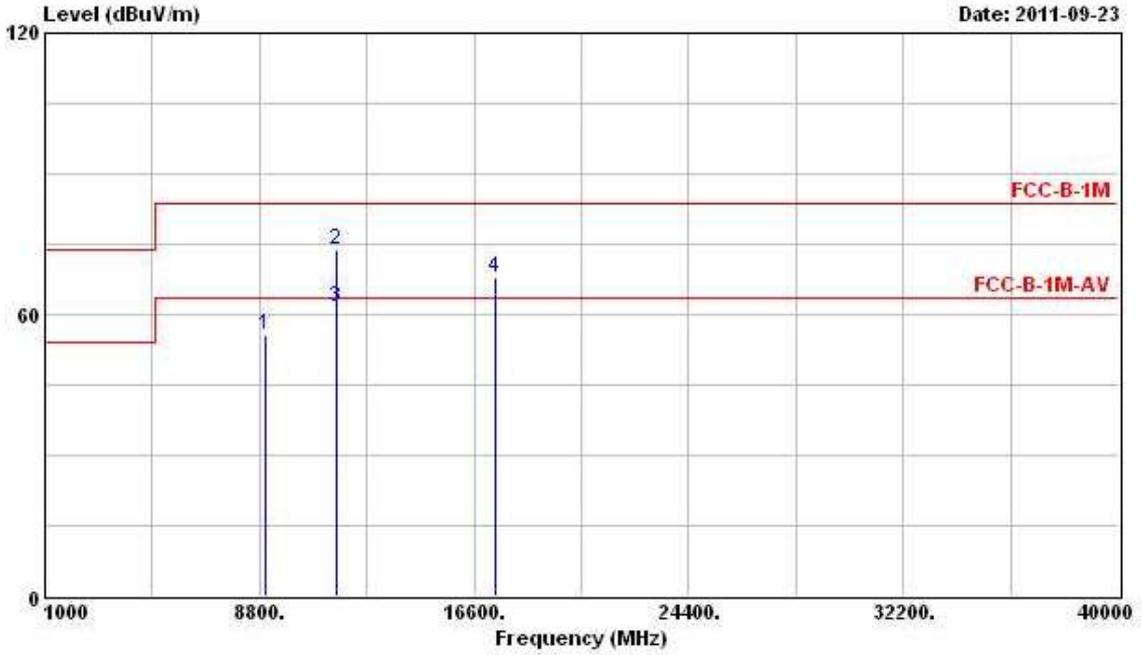

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 8991.000 | 55.50 | | | 43.32 | 38.98 | 6.40 | 33.20 | Peak | --- | --- |
| 2 | 11570.000 | 73.92 | -9.62 | 83.54 | 59.43 | 39.72 | 7.36 | 32.58 | Peak | --- | --- |
| 3 | 11570.000 | 61.75 | -1.79 | 63.54 | 47.26 | 39.72 | 7.36 | 32.58 | Average | --- | --- |
| 4 | 17355.000 | 67.90 | | | 46.37 | 44.71 | 8.52 | 31.70 | Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

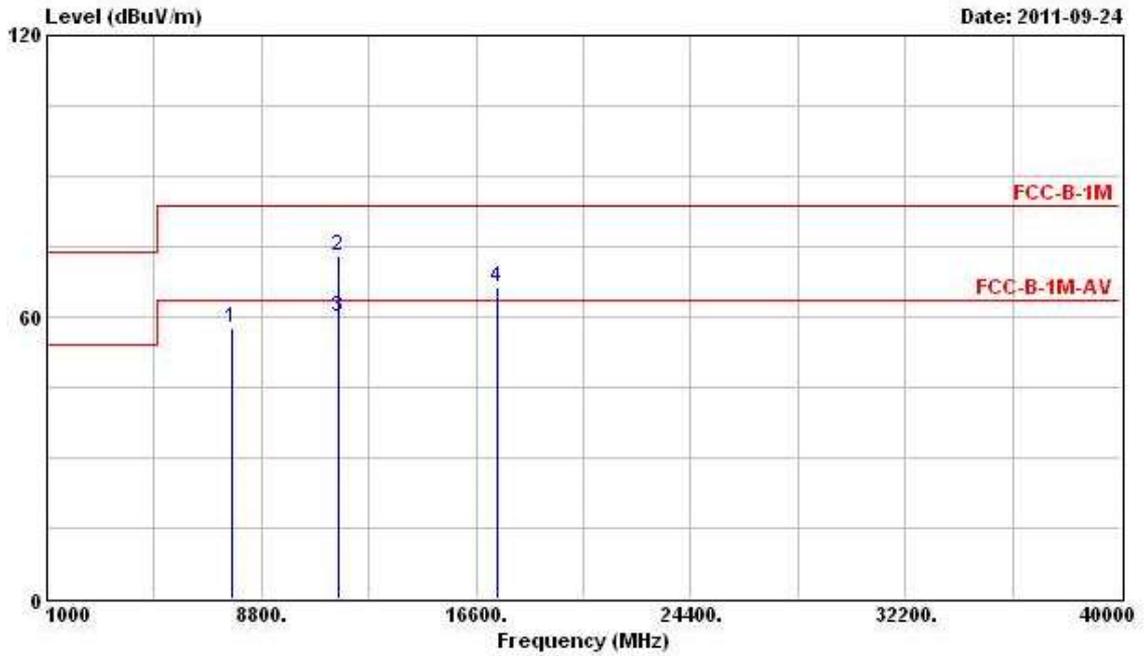


| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | | Ant | Table |
|-----|-----------|--------|--------|--------|-------------|-------|--------|---------------|-----|-------|
| | MHz | dBuV/m | Limit | Line | Level | Loss | Factor | Remark | Pos | Pos |
| | | | dB | dBuV/m | dBuV | dB | dB | | cm | deg |
| 1 | 7693.000 | 57.61 | -5.93 | 63.54 | 46.72 | 37.80 | 6.07 | 32.98 PK | --- | --- |
| 2 | 11570.000 | 73.22 | -10.32 | 83.54 | 58.73 | 39.72 | 7.36 | 32.58 Peak | --- | --- |
| 3 @ | 11570.000 | 60.10 | -3.44 | 63.54 | 45.61 | 39.72 | 7.36 | 32.58 Average | --- | --- |
| 4 | 17355.000 | 66.27 | | | 44.74 | 44.71 | 8.52 | 31.70 Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|---------------|---------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 165 (20MHz) MCS8 (Ant. A+B) |


Horizontal

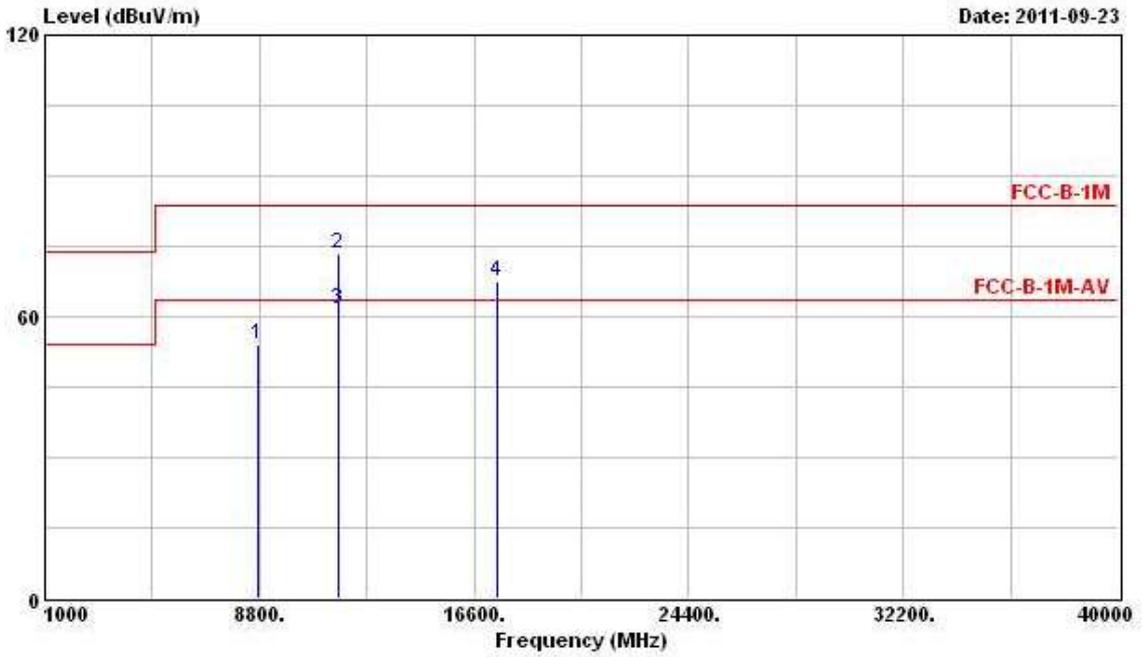

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 8738.000 | 54.10 | | | 42.18 | 38.63 | 6.41 | 33.12 | Peak | --- | --- |
| 2 | 11650.000 | 73.42 | -10.12 | 83.54 | 58.99 | 39.63 | 7.39 | 32.59 | Peak | --- | --- |
| 3 | 11650.000 | 61.67 | -1.87 | 63.54 | 47.24 | 39.63 | 7.39 | 32.59 | Average | --- | --- |
| 4 | 17475.000 | 67.60 | | | 45.07 | 45.71 | 8.55 | 31.73 | Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

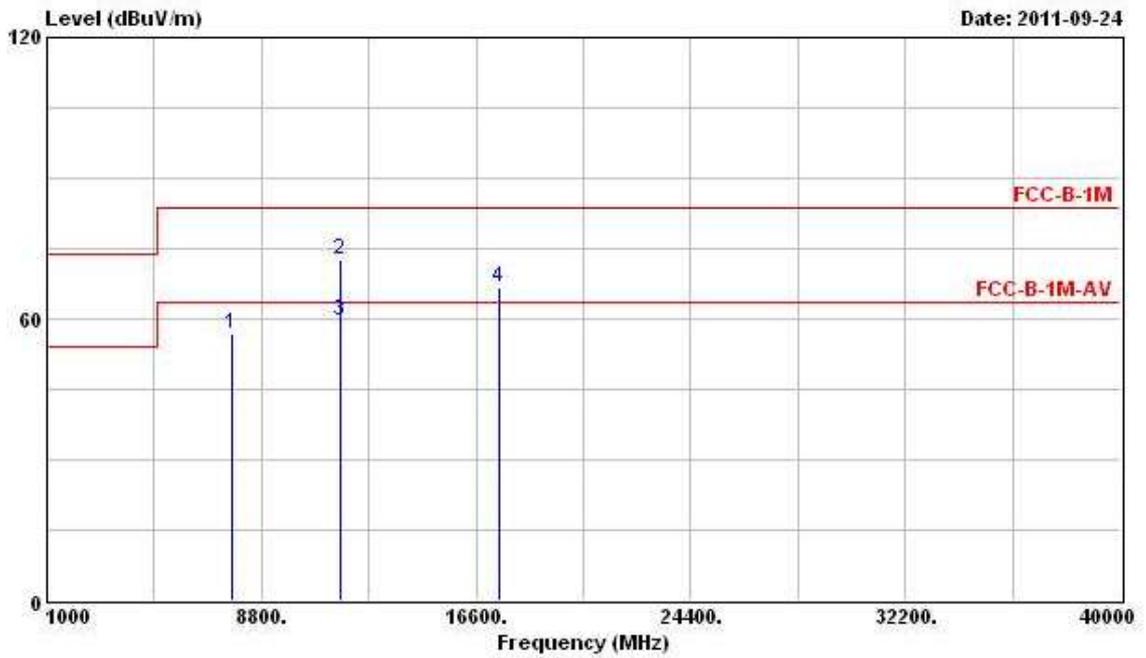


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7737.000 | 56.79 | -6.75 | 63.54 | 45.87 | 37.80 | 6.11 | 32.99 | PK | --- | --- |
| 2 | 11650.000 | 72.63 | -10.91 | 83.54 | 58.20 | 39.63 | 7.39 | 32.59 | Peak | --- | --- |
| 3 @ | 11650.000 | 59.80 | -3.74 | 63.54 | 45.37 | 39.63 | 7.39 | 32.59 | Average | --- | --- |
| 4 | 17475.000 | 66.77 | | | 44.24 | 45.71 | 8.55 | 31.73 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|------------------------|---------------|----------------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 151 (40MHz) MCS8 (Ant. A+B) |


Horizontal

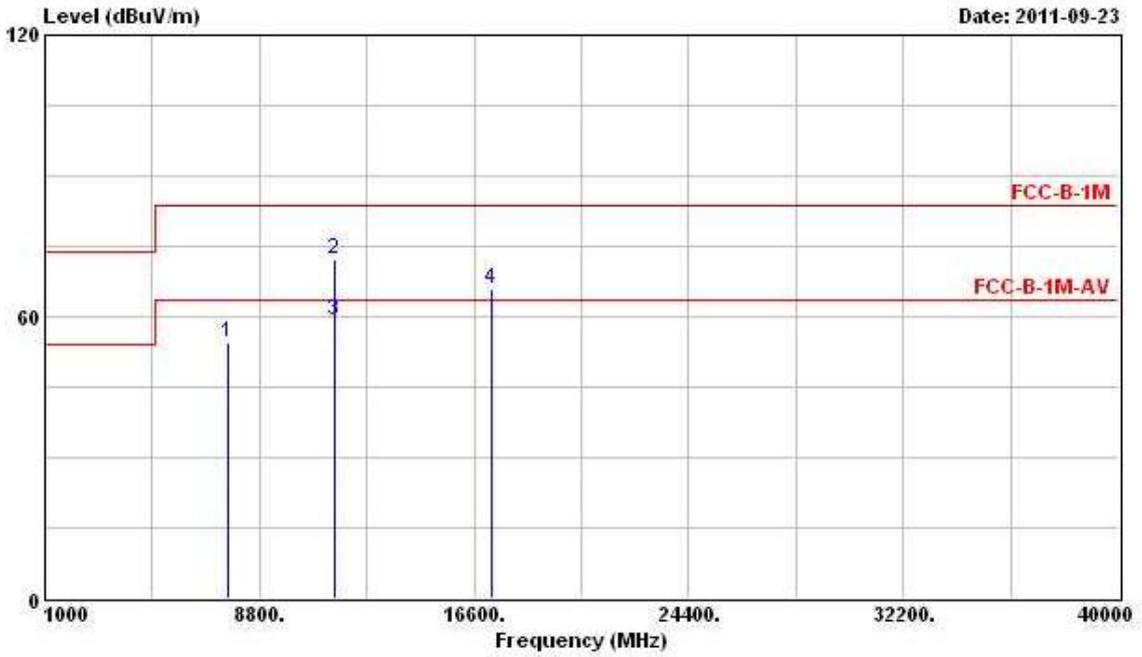

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7649.000 | 54.55 | -8.99 | 63.54 | 43.73 | 37.80 | 6.00 | 32.98 | PK | --- | --- |
| 2 | 11510.000 | 72.34 | -11.20 | 83.54 | 57.78 | 39.80 | 7.33 | 32.57 | Peak | --- | --- |
| 3 | 11510.000 | 59.30 | -4.24 | 63.54 | 44.74 | 39.80 | 7.33 | 32.57 | Average | --- | --- |
| 4 | 17265.000 | 65.73 | | | 44.92 | 43.99 | 8.49 | 31.67 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

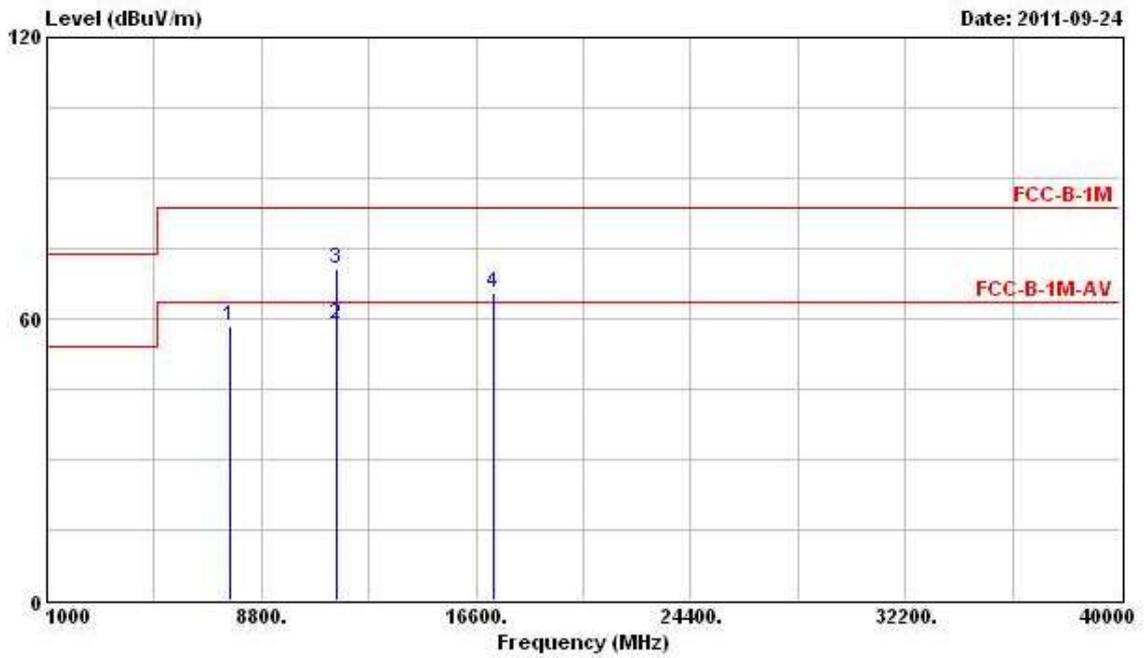


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7649.000 | 58.59 | -4.95 | 63.54 | 47.77 | 37.80 | 6.00 | 32.98 | PK | --- | --- |
| 2 | 11510.000 | 58.97 | -4.57 | 63.54 | 44.41 | 39.80 | 7.33 | 32.57 | Average | --- | --- |
| 3 | 11510.000 | 70.62 | -12.92 | 83.54 | 56.06 | 39.80 | 7.33 | 32.57 | Peak | --- | --- |
| 4 | 17265.000 | 65.66 | | | 44.85 | 43.99 | 8.49 | 31.67 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|------------------------|---------------|----------------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n Ch. 159 (40MHz) MCS8 (Ant. A+B) |


Horizontal

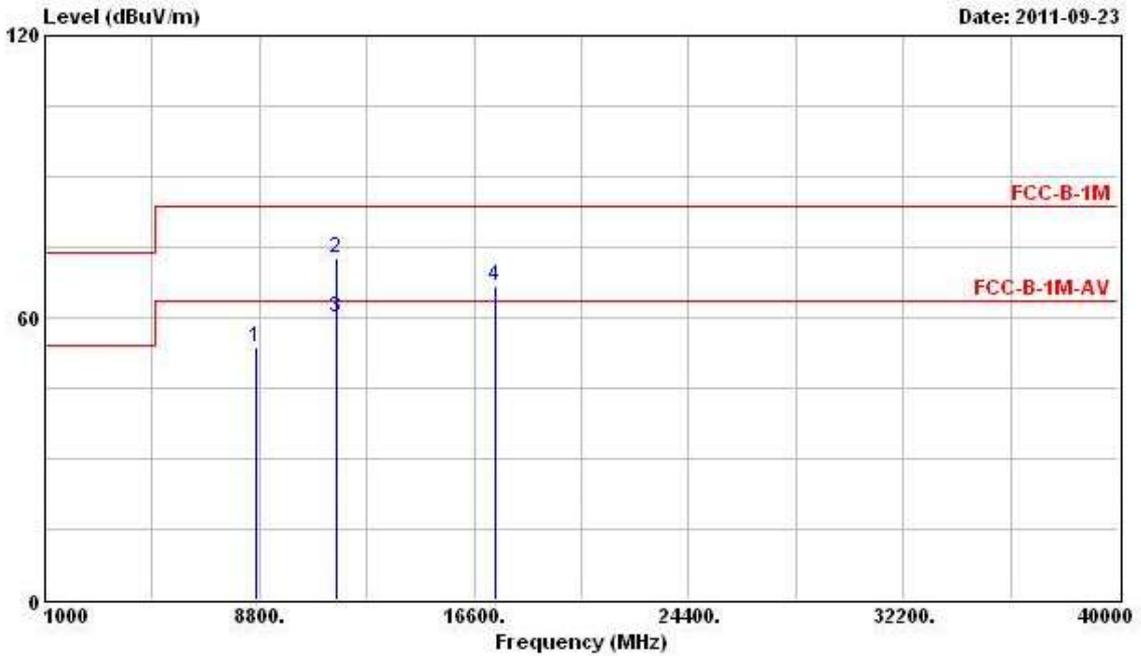

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 8705.000 | 53.87 | | | 41.99 | 38.58 | 6.41 | 33.11 | Peak | --- | --- |
| 2 | 11590.000 | 72.44 | -11.10 | 83.54 | 57.95 | 39.70 | 7.37 | 32.58 | Peak | --- | --- |
| 3 | 11590.000 | 60.01 | -3.53 | 63.54 | 45.53 | 39.70 | 7.37 | 32.58 | Average | --- | --- |
| 4 | 17385.000 | 66.70 | | | 44.89 | 45.00 | 8.53 | 31.71 | Peak | --- | --- |

Note: The items 1 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

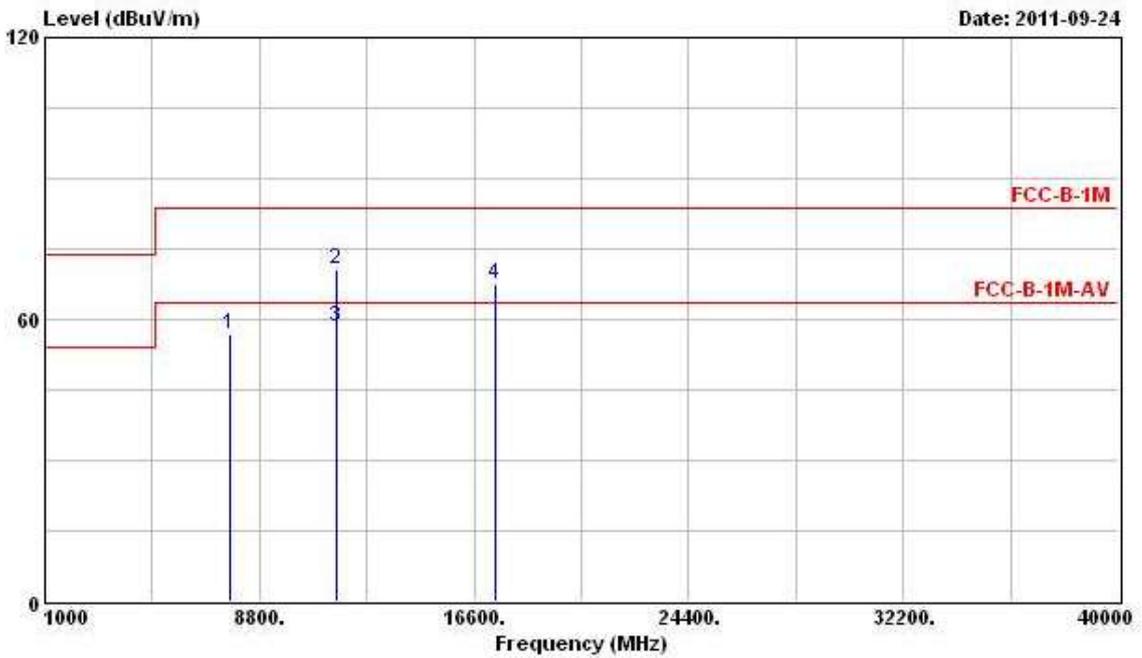

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|-----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 7726.000 | 56.78 | -6.76 | 63.54 | 45.90 | 37.80 | 6.07 | 32.99 | PK | --- | --- |
| 2 | 11590.000 | 70.60 | -12.94 | 83.54 | 56.11 | 39.70 | 7.37 | 32.58 | Peak | --- | --- |
| 3 | 11590.000 | 58.53 | -5.01 | 63.54 | 44.04 | 39.70 | 7.37 | 32.58 | Average | --- | --- |
| 4 | 17385.000 | 67.42 | | | 45.61 | 45.00 | 8.53 | 31.71 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6 Band Edge and Fundamental Emissions Measurement

3.6.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|--------------------------|--|--------------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Span Frequency | 100 MHz |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak |

3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Test Result of Band Edge and Fundamental Emissions

For Single Chain:

| | | | |
|-----------------|---------------|---------------|---------------------------|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11a Ch. 149, 157, 165 |

Channel 149

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 2 | 5742.820 | 109.01 | | | 68.85 | 34.95 | 5.21 | 0.00 | Average | --- | --- |
| 2 | 5741.700 | 119.66 | | | 79.50 | 34.95 | 5.21 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 157

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 5723.630 | 56.76 | | | 16.58 | 34.96 | 5.23 | 0.00 | Average | --- | --- |
| 2 | 5790.100 | 107.86 | | | 67.73 | 34.94 | 5.19 | 0.00 | Average | --- | --- |
| 3 | 5858.100 | 56.23 | | | 16.16 | 34.93 | 5.14 | 0.00 | Average | --- | --- |
| 1 | 5711.220 | 70.16 | | | 29.97 | 34.96 | 5.23 | 0.00 | Peak | --- | --- |
| 2 | 5791.460 | 118.40 | | | 78.27 | 34.94 | 5.19 | 0.00 | Peak | --- | --- |
| 3 | 5851.300 | 71.25 | | | 31.16 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |

The item 2 is fundamental emissions and the items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 165

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 5822.650 | 108.03 | | | 67.93 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 2 | 5850.000 | 60.98 | | | 20.89 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 1 | 5826.770 | 118.59 | | | 78.49 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |
| 2 | 5850.970 | 80.22 | | | 40.13 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|------------------------|---------------|----------------------|---|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n (20MHz) Ch. 149, 157, 165 MCS0 (Ant. A) |

Channel 149

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 2 @ | 5750.730 | 108.61 | | | 68.45 | 34.95 | 5.21 | 0.00 | Average | --- | --- |
| 2 @ | 5751.500 | 120.47 | | | 80.31 | 34.95 | 5.21 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 157

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 5724.820 | 56.74 | | | 16.56 | 34.96 | 5.23 | 0.00 | Average | --- | --- |
| 2 @ | 5790.270 | 107.98 | | | 67.85 | 34.94 | 5.19 | 0.00 | Average | --- | --- |
| 3 | 5861.670 | 56.24 | | | 16.17 | 34.93 | 5.14 | 0.00 | Average | --- | --- |
| 1 | 5709.350 | 70.37 | | | 30.18 | 34.96 | 5.23 | 0.00 | Peak | --- | --- |
| 2 @ | 5791.460 | 119.79 | | | 79.66 | 34.94 | 5.19 | 0.00 | Peak | --- | --- |
| 3 | 5854.190 | 69.95 | | | 29.86 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |

The item 2 is fundamental emissions and the items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 165

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 5828.150 | 108.48 | | | 68.38 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 2 @ | 5850.000 | 62.81 | | | 22.72 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 1 @ | 5831.390 | 120.22 | | | 80.12 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |
| 2 @ | 5852.070 | 81.14 | | | 41.05 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

| | | | |
|------------------------|---------------|----------------------|--|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n (40MHz) Ch. 151, 159 MCS0 (Ant. A) |

Channel 151

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|--------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 5725.000 | 71.03 | | | 30.85 | 34.96 | 5.23 | 0.00 | Average | --- | --- |
| 2 @ | 5758.600 | 106.17 | | | 66.01 | 34.95 | 5.21 | 0.00 | Average | --- | --- |
| 1 @ | 5725.000 | 87.58 | | | 47.40 | 34.96 | 5.23 | 0.00 | Peak | --- | --- |
| 2 @ | 5759.800 | 117.43 | | | 77.27 | 34.95 | 5.21 | 0.00 | Peak | --- | --- |

The item 2 is fundamental emissions and the item 1 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 159

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|--------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 5803.800 | 106.98 | | | 66.86 | 34.94 | 5.19 | 0.00 | Average | --- | --- |
| 2 @ | 5850.000 | 62.76 | | | 22.67 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 1 @ | 5799.800 | 118.01 | | | 77.88 | 34.94 | 5.19 | 0.00 | Peak | --- | --- |
| 2 @ | 5853.800 | 81.94 | | | 41.85 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Two Chain:

| | | | |
|------------------------|---------------|----------------------|---|
| Final Test Date | Sep. 24, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n (20MHz) Ch. 149, 157, 165 MCS8 (Ant. A+B) |

Channel 149

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 2 ☺ | 5749.610 | 109.08 | | | 68.92 | 34.95 | 5.21 | 0.00 | Average | --- | --- |
| 2 ☺ | 5751.010 | 120.92 | | | 80.76 | 34.95 | 5.21 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 157

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 5717.340 | 56.77 | | | 16.58 | 34.96 | 5.23 | 0.00 | Average | --- | --- |
| 2 ☺ | 5781.430 | 107.50 | | | 67.37 | 34.94 | 5.19 | 0.00 | Average | --- | --- |
| 3 | 5857.420 | 56.33 | | | 16.26 | 34.93 | 5.14 | 0.00 | Average | --- | --- |
| 1 | 5713.430 | 70.46 | | | 30.27 | 34.96 | 5.23 | 0.00 | Peak | --- | --- |
| 2 ☺ | 5789.590 | 119.23 | | | 79.10 | 34.94 | 5.19 | 0.00 | Peak | --- | --- |
| 3 | 5859.460 | 69.68 | | | 29.61 | 34.93 | 5.14 | 0.00 | Peak | --- | --- |

The item 2 is fundamental emissions and the items 1 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 165

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 ☺ | 5828.310 | 108.07 | | | 67.97 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 2 ☺ | 5850.000 | 59.98 | | | 19.89 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 1 ☺ | 5826.770 | 119.75 | | | 79.65 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |
| 2 | 5850.310 | 77.51 | | | 37.42 | 34.93 | 5.16 | 0.00 | Peak | --- | --- |

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

| | | | |
|------------------------|---------------|----------------------|--|
| Final Test Date | Sep. 23, 2011 | Test Site No. | 03CH03-HY |
| Temperature | 25°C | Humidity | 56% |
| Test Engineer | Daniel | Configuration | 802.11n (40MHz) Ch. 151, 159 MCS8 (Ant. A+B) |

Channel 151

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 ☺ | 5725.000 | 69.33 | | | 29.15 | 34.96 | 5.23 | 0.00 | Average | --- | --- |
| 2 ☺ | 5752.200 | 106.40 | | | 66.24 | 34.95 | 5.21 | 0.00 | Average | --- | --- |
| 1 ☺ | 5723.000 | 84.59 | | | 44.41 | 34.96 | 5.23 | 0.00 | Peak | --- | --- |
| 2 ☺ | 5765.100 | 118.25 | | | 78.09 | 34.95 | 5.21 | 0.00 | Peak | --- | --- |

The item 2 is fundamental emissions and the item 1 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Channel 159

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 ☺ | 5804.200 | 106.44 | | | 66.32 | 34.94 | 5.19 | 0.00 | Average | --- | --- |
| 2 | 5850.300 | 59.40 | | | 19.31 | 34.93 | 5.16 | 0.00 | Average | --- | --- |
| 1 ☺ | 5799.400 | 118.46 | | | 78.33 | 34.94 | 5.19 | 0.00 | Peak | --- | --- |
| 2 | 5855.900 | 76.33 | | | 36.26 | 34.93 | 5.14 | 0.00 | Peak | --- | --- |

The item 1 is fundamental emissions and the item 2 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band

| | | | |
|-----------------|---------------|----------------|-----------|
| Final Test Date | Sep. 17, 2011 | Test Site No. | TH01-HY |
| Temperature | 23.2°C | Humidity | 68% |
| Test Engineer | Cain | Configurations | 802.11a/n |


For Single Chain:

Low Band Edge Plot on Configuration of IEEE 802.11a / 5745 MHz

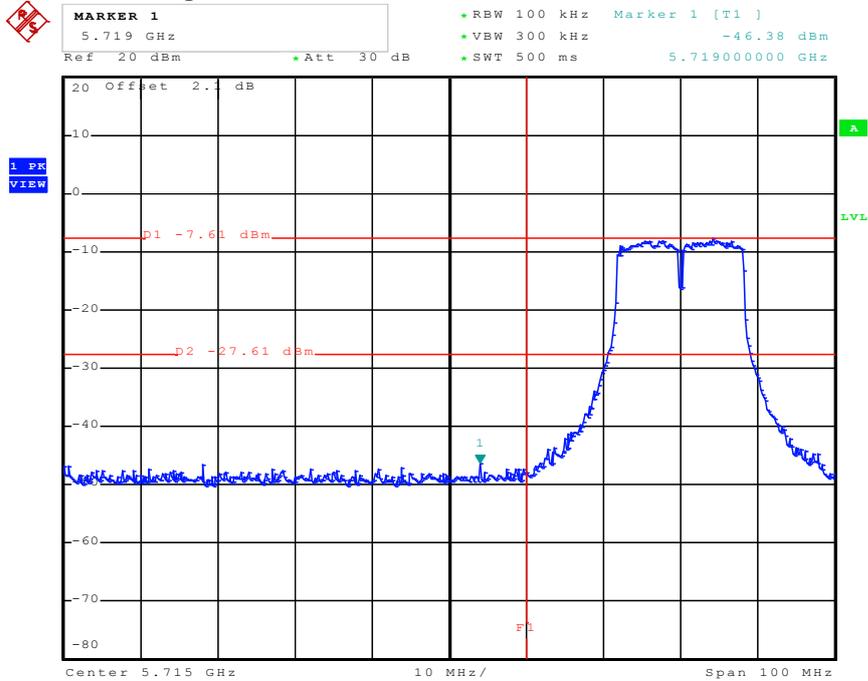


Date: 15.SEP.2011 22:58:42

High Band Edge Plot on Configuration of IEEE 802.11a / 5825 MHz

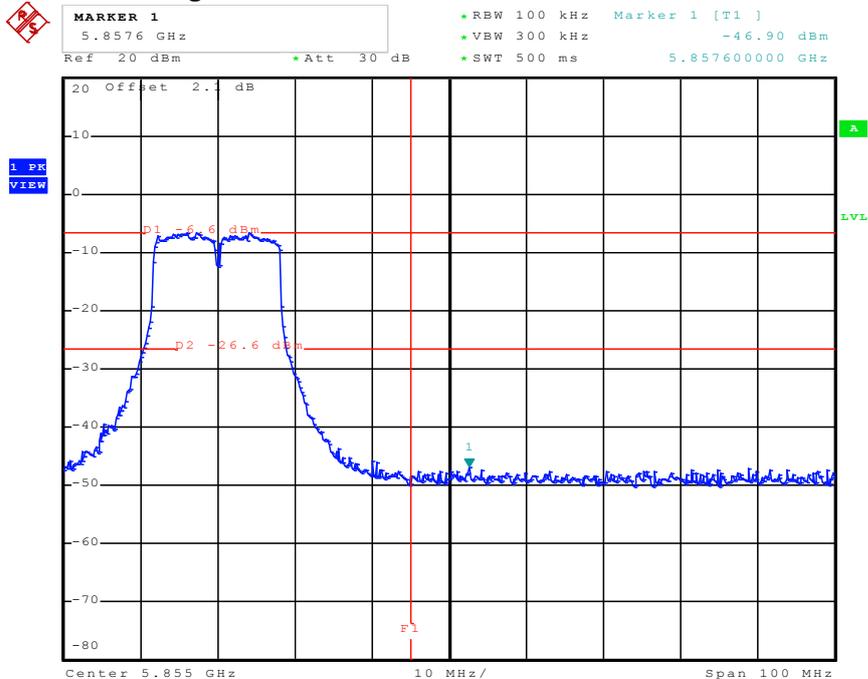


Date: 15.SEP.2011 23:21:49

Low Band Edge Plot on Configuration of IEEE 802.11n (20MHz) / 5745 MHz

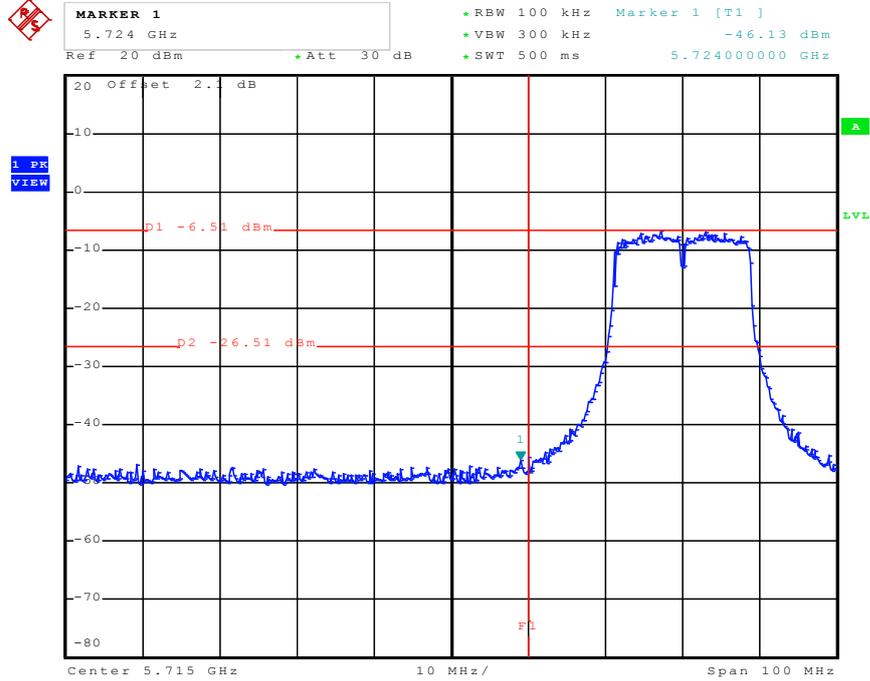


Date: 16.SEP.2011 00:00:53

High Band Edge Plot on Configuration of IEEE 802.11n (20MHz) / 5825 MHz

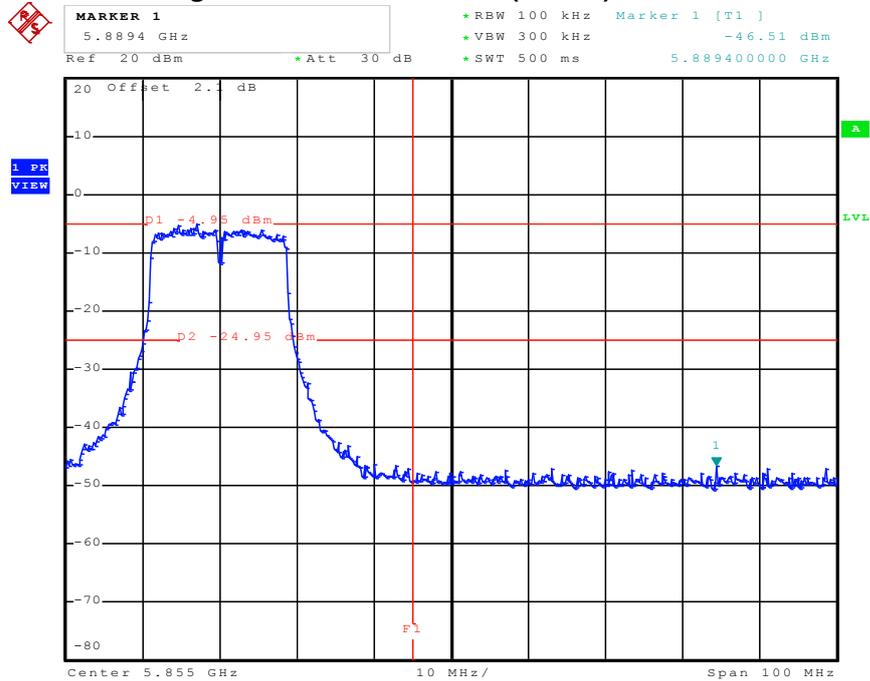


Date: 16.SEP.2011 00:25:30

Low Band Edge Plot on Configuration of IEEE 802.11n (40MHz) / 5755 MHz

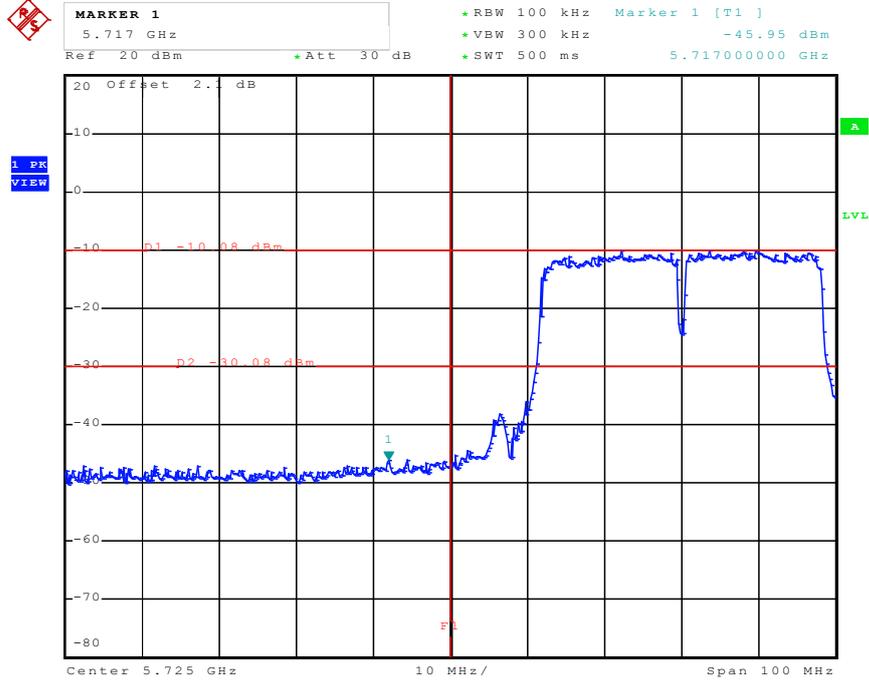


Date: 16.SEP.2011 02:18:41

High Band Edge Plot on Configuration of IEEE 802.11n (40MHz) / 5795 MHz

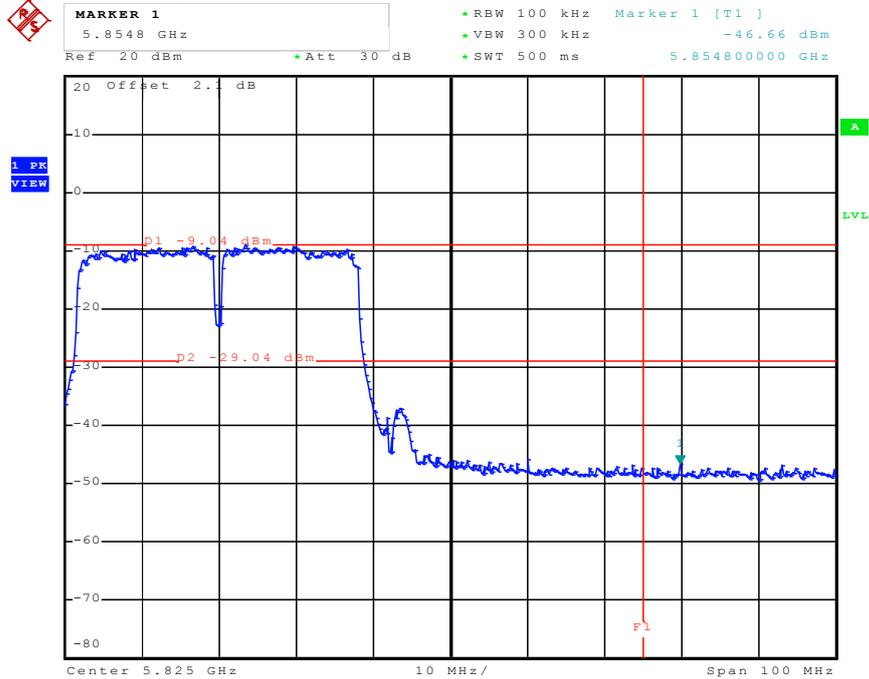


Date: 16.SEP.2011 02:22:25

For Two Chain:
Low Band Edge Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5745 MHz

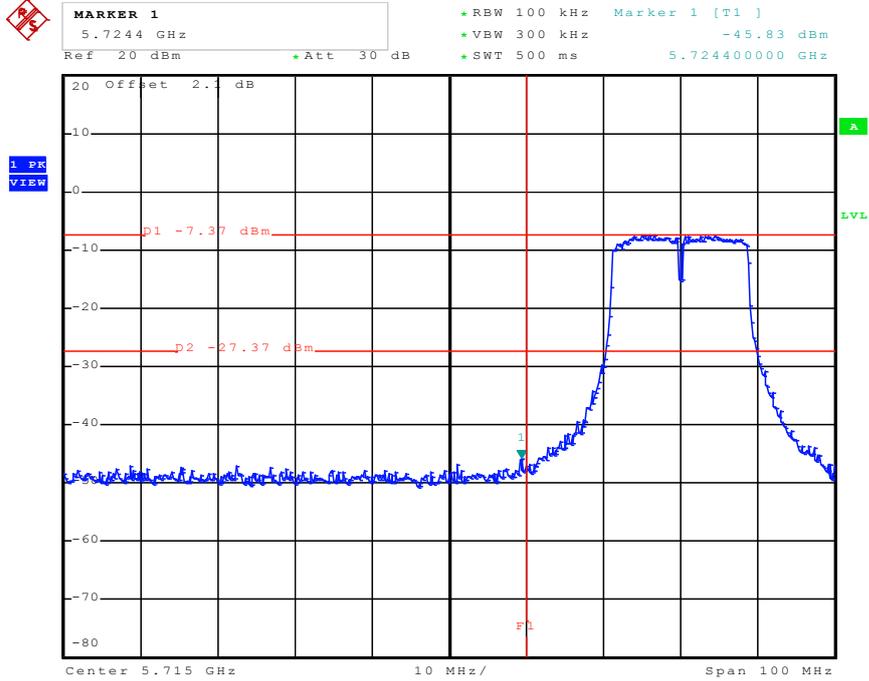


Date: 16.SEP.2011 22:15:09

High Band Edge Plot on Configuration of IEEE 802.11n Ant. A (20MHz) / 5825 MHz

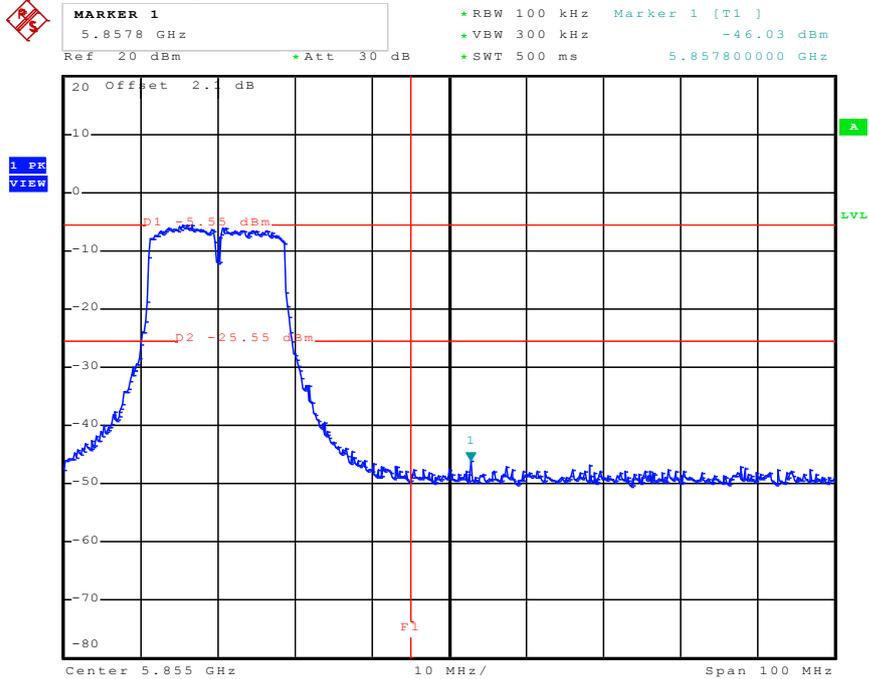


Date: 16.SEP.2011 22:32:59

Low Band Edge Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5745 MHz

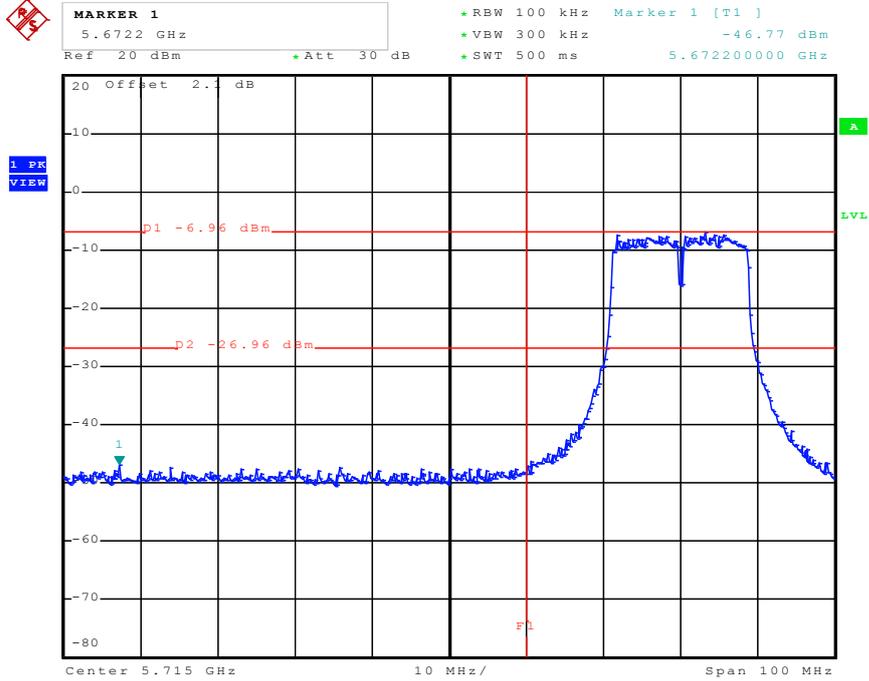


Date: 16.SEP.2011 23:39:01

High Band Edge Plot on Configuration of IEEE 802.11n Ant. B (20MHz) / 5825 MHz

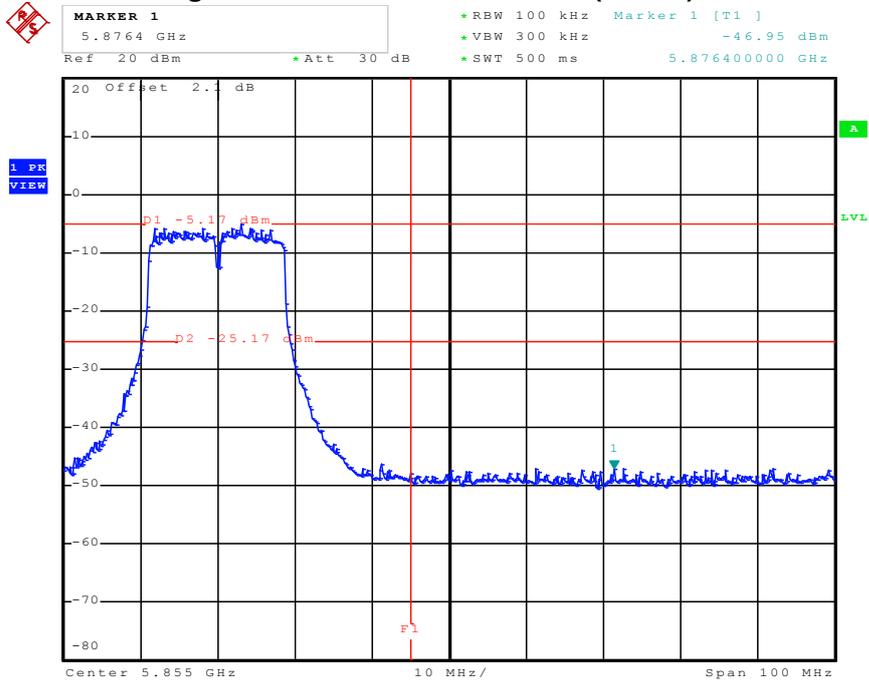


Date: 16.SEP.2011 23:50:27

Low Band Edge Plot on Configuration of IEEE 802.11n Ant. A (40MHz) / 5755 MHz

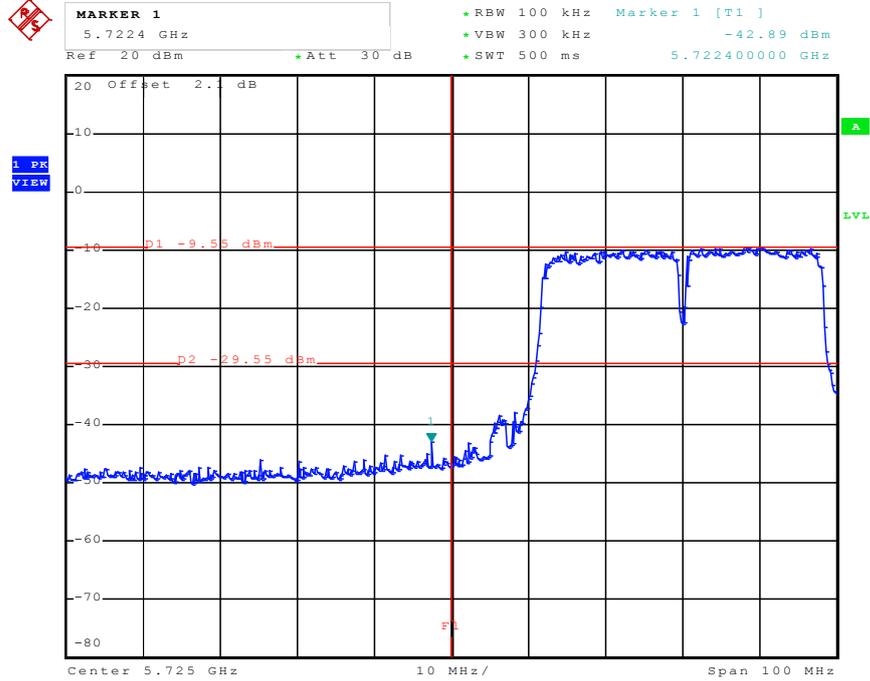


Date: 16.SEP.2011 22:43:33

High Band Edge Plot on Configuration of IEEE 802.11n Ant. A (40MHz) / 5795 MHz

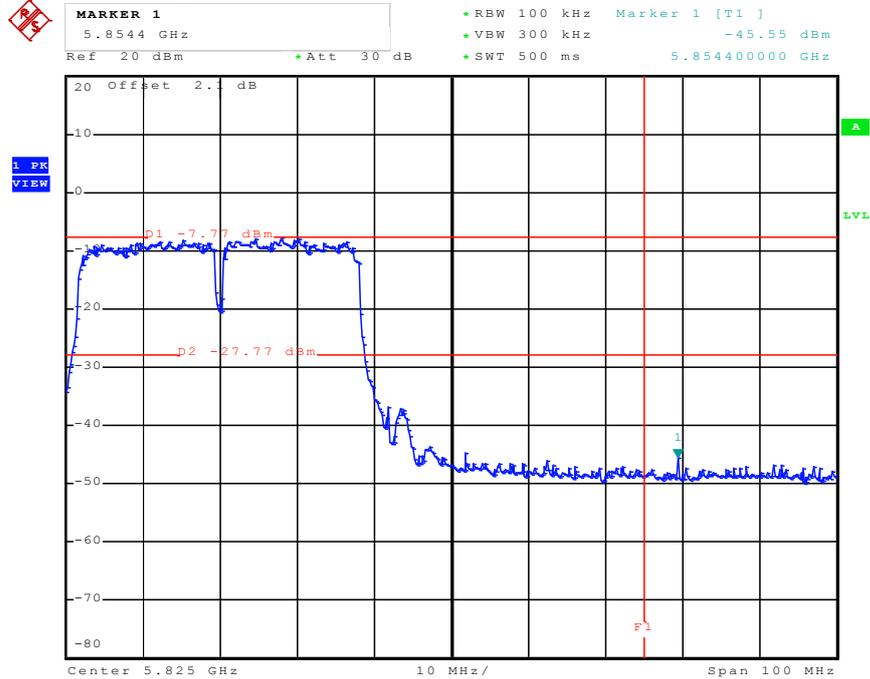


Date: 16.SEP.2011 22:45:09

Low Band Edge Plot on Configuration of IEEE 802.11n Ant. B (40MHz) / 5755 MHz

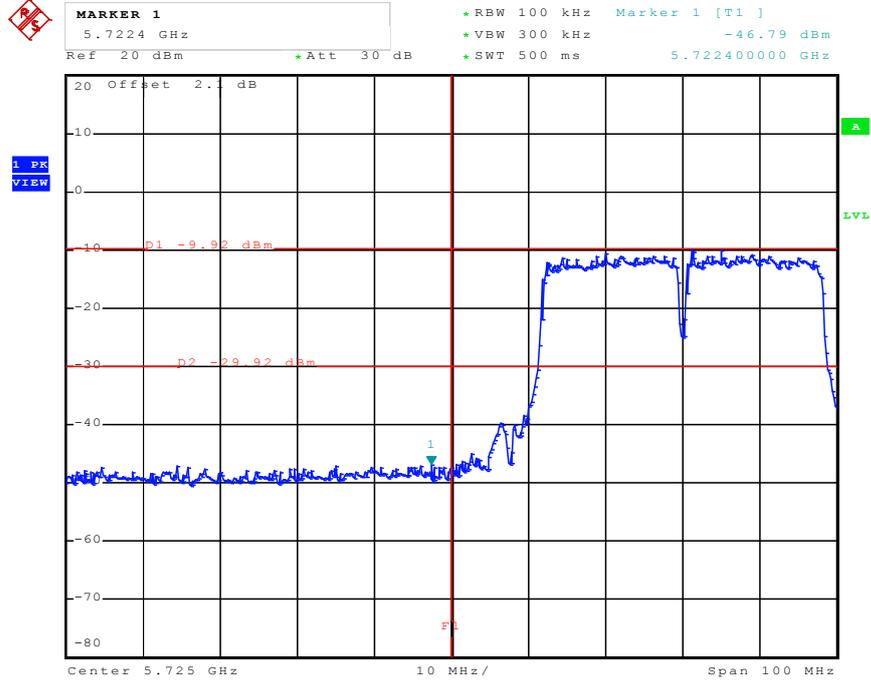

Date: 17.SEP.2011 00:00:01

High Band Edge Plot on Configuration of IEEE 802.11n Ant. B (40MHz) / 5795 MHz

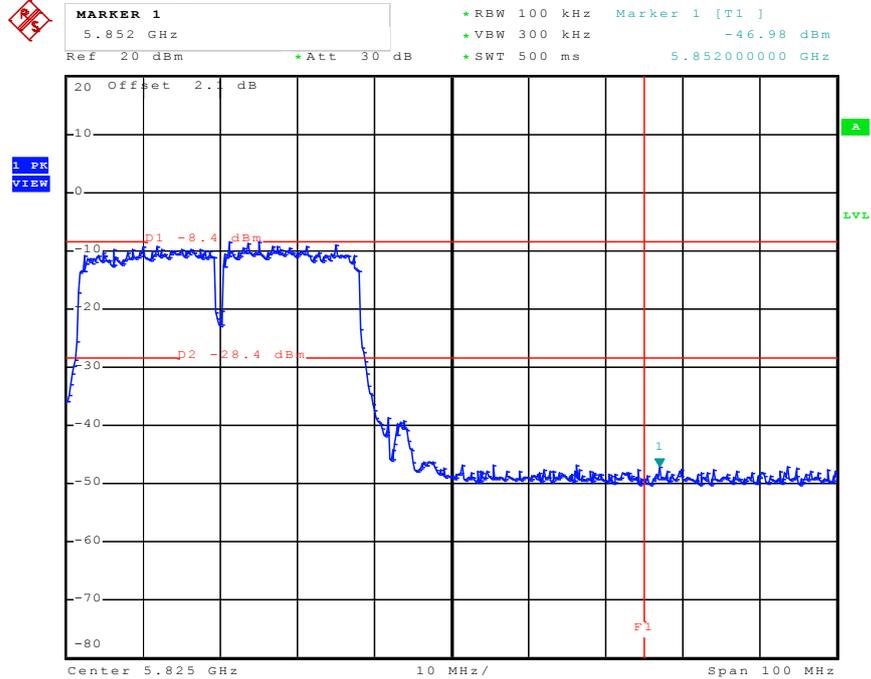

Date: 17.SEP.2011 00:01:02

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.7.2 Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|--------------|-----------------------|-----------|------------|------------------|------------------|----------------------|
| Receiver | R&S | ESCS 30 | 100357 | 9 kHz - 2.75 GHz | Nov. 16, 2010 | Conduction (CO01-NH) |
| LISN | SCHAFFNER | NNB41 | 04/10153 | 9kHz - 30MHz | Nov. 16, 2010 | Conduction (CO01-NH) |
| Power Filter | CORCOM | MR12030 | N/A | 30A*2 | N/A | Conduction (CO01-NH) |
| RF Cable-CON | Suhner Switzerland | RG223/U | CB004 | 9kHz - 30MHz | Dec. 14, 2010 | Conduction (CO01-NH) |

Note: Calibration Interval of instruments listed above is one year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|----------------------------|--------------|--------------|-------------|-----------------|------------------|---------------------|
| Spectrum Analyzer | R&S | FSP 30 | 100023 | 9KHz ~ 30GHz | Mar. 15, 2011 | Conducted (TH01-HY) |
| DC Power Source | G.W. | GPC-6030D | C671845 | DC 1V ~ 60V | Jun. 03, 2011 | Conducted (TH01-HY) |
| Temp. and Humidity Chamber | Giant Force | GTH-225-20-S | MAB0103-001 | N/A | Oct. 22, 2010 | Conducted (TH01-HY) |
| RF CABLE-1m | Jye Bao | RG142 | CB034-1m | 20MHz ~ 7GHz | Dec. 02, 2010 | Conducted (TH01-HY) |
| RF CABLE-2m | Jye Bao | RG142 | CB035-2m | 20MHz ~ 1GHz | Dec. 02, 2010 | Conducted (TH01-HY) |
| Signal Generator | R&S | SMR40 | 100116 | 10MHz ~ 40GHz | Jun. 07, 2011 | Conducted (TH01-HY) |
| Power Sensor | Anritsu | MA2411B | 0917017 | 300MHz~40GHz | Jan. 06, 2011 | Conducted (TH01-HY) |
| Power Meter | Anritsu | ML2495A | 0949003 | 300MHz~40GHz | Jan. 06, 2011 | Conducted (TH01-HY) |

Note: Calibration Interval of instruments listed above is one year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-----------------|--------------|-----------|-------------|-----------------|------------------|---------------------|
| AC Power Source | HPC | HPA-500W | HPA-9100024 | AC 0 ~ 300V | Jun. 09, 2011* | Conducted (TH01-HY) |

Note: Calibration Interval of instruments listed above is two year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|--------------------------|----------------|--------------|-------------|----------------------|------------------|--------------------------|
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30 MHz ~ 1 GHz 3m | Jun. 17, 2011 | Radiation (03CH03-HY) |
| Amplifier | SCHAFFNER | COA9231A | 18667 | 9 kHz ~ 2 GHz | Jan. 25, 2011 | Radiation (03CH03-HY) |
| Amplifier | Agilent | 8449B | 3008A02120 | 1 GHz ~ 26.5 GHz | Aug. 04, 2011 | Radiation (03CH03-HY) |
| Spectrum Analyzer | R&S | FSP40 | 100004 | 9 kHz ~ 40 GHz | Nov. 17, 2010 | Radiation (03CH03-HY) |
| Bilog Antenna | SCHAFFNER | CBL 6112D | 22237 | 30 MHz ~ 1 GHz | Oct. 16, 2010 | Radiation (03CH03-HY) |
| Horn Antenna | EMCO | 3115 | 6741 | 1 GHz ~ 18 GHz | May 30, 2011 | Radiation (03CH03-HY) |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 15 GHz ~ 40 GHz | Jan.13, 2011 | Radiation (03CH03-HY) |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30 MHz ~ 1 GHz | Jan. 18, 2011 | Radiation (03CH03-HY) |
| RF Cable-high | SUHNER | SUCOFLEX 106 | 03CH03-HY | 1 GHz ~ 40 GHz | Jan. 18, 2011 | Radiation (03CH03-HY) |
| Turn Table | HD | DS 420 | 420/650/00 | 0 – 360 degree | N/A | Radiation (03CH03-HY) |

Note: Calibration Interval of instruments listed above is one year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|--------------|--------------|-----------|------------|-----------------|------------------|--------------------------|
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 9 kHz - 30 MHz | Jul. 29, 2010* | Radiation (03CH03-HY) |

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

| | |
|--------|--|
| SHIJR | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055 |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695 |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740 |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626 |
| NEIHU | ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777 |
| JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

6 TAF CERTIFICATE OF ACCREDITATION


Certificate No. : L1190-110111

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

| | |
|---------------------------------------|---|
| Accreditation Criteria | : ISO/IEC 17025:2005 |
| Accreditation Number | : 1190 |
| Originally Accredited | : December 15, 2003 |
| Effective Period | : January 10, 2010 to January 09, 2013 |
| Accredited Scope | : Testing Field, see described in the Appendix |
| Specific Accreditation Program | : Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities |


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 11, 2011

Pl, total 24 pages