

## RF Exposure Test Report

**Report No.:** SA190107D06

**FCC ID:** K7SF7U082

**Test Model:** F7U082

**Series Model:** F7U088

**Received Date:** Jan. 7, 2019

**Test Date:** Jan. 25, 2019

**Issued Date:** Feb. 11, 2019

**Applicant:** Belkin International., Inc

**Address:** 12045 East Waterfront Drive, Playa Vista, CA. 90094, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

**FCC Registration /  
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

## Table of Contents

<b>Report Issue History Record .....</b>	<b>3</b>
<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 General Information .....</b>	<b>5</b>
2.1 General Description of EUT .....	5
<b>3 RF Exposure .....</b>	<b>6</b>
3.1 Description of Support Units .....	6
3.1.1 Configuration of System Under Test .....	6
3.2 Test Setup .....	7
3.3 Test Instruments .....	7
3.4 Limits for Maximum Permissible Exposure (MPE) .....	8
3.5 Test Point Description .....	8
<b>4 Calculation Result of Maximum Conducted Power .....</b>	<b>9</b>
<b>5 Photographs of the Test Configuration .....</b>	<b>13</b>



**Report Issue History Record**

Issue No.	Description	Date Issued
SA190107D06	Original release.	Feb. 11, 2019

**Release Control Record**

Issue No.	Description	Date Issued
SA190107D06	Original release	Feb. 11, 2019

## 1 Certificate of Conformity

**Product:** BOOST↑UP™ Wireless Charging Pad 10W

**Brand:** belkin

**Test Model:** F7U082

**Series Model:** F7U088

**Sample Status:** Engineering sample

**Applicant:** Belkin International., Inc

**Test Date:** Jan. 25, 2019

**Standards:** FCC Part 1 (Section 1.1307(b), 1.1310)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**



**Date:** Feb. 11, 2019

Celia Chen / Supervisor

**Approved by :**



**Date:** Feb. 11, 2019

Rex Lai / Associate Technical Manager

## 2 General Information

### 2.1 General Description of EUT

Product	BOOST↑UP™ Wireless Charging Pad 10W
Brand	belkin
Test Model	F7U082
Series Model	F7U088
Model Difference	Refer to table as below
Sample Status	Engineering sample
Rating	Input: 5Vdc, 2A, Output: 5W Input: 9Vdc, 2A / 12Vdc, 1.5A Output: 10W From adapter
Modulation Type	FSK
Operating Frequency	111-148kHz
Antenna Type	Coil antenna
Field Strength	79.76dBuV/m
Dimensions	17.35cm <sup>2</sup> (diameter = 47mm)
Accessory Device	Adapter
Data Cable Supplied	1.3m shielded USB cable
Maximum Power Output from the Charging Coil	10W

Note:

1. The EUT is a wireless inductive charging coil.
2. The EUT has two configuration could be chosen as the following.

Model	Configuration	Difference
F7U082	Wireless charging pad + USB cable + AC power supply	Marketing purpose
F7U088	Wireless charging pad + USB cable	

3. The EUT consumes power from a switching power adapter, as the following:

Brand	Model	Specification
belkin	DSA-18QFB FUS A	Input: 100-240Vac, 50/60Hz, 0.8A (AC 2 Pin) Output: +3.6-6Vdc, 2A +6-9Vdc, 2A +9-12Vdc, 1.5A

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3 RF Exposure

#### 3.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Load	N/A	N/A	N/A	N/A	Supplied by client (10W max load)


Note: All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable	1	1.3	Y	0	Supplied by client


Note: The core(s) is(are) originally attached to the cable(s).

#### 3.1.1 Configuration of System Under Test


For Charging Mode:

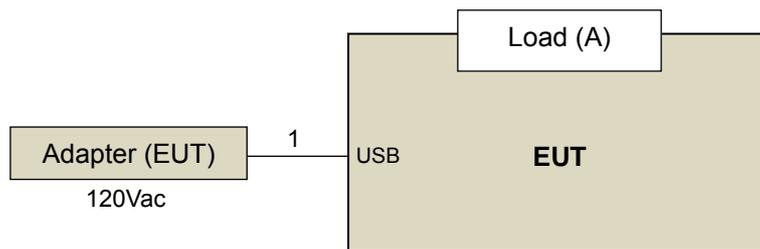

For Standby Mode:

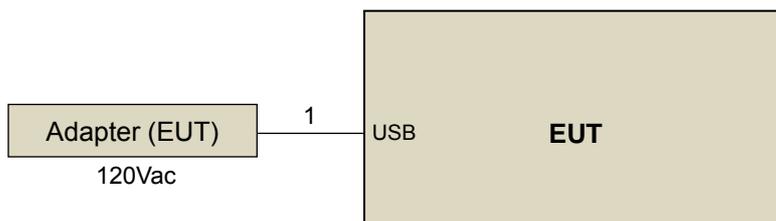

### 3.2 Test Setup

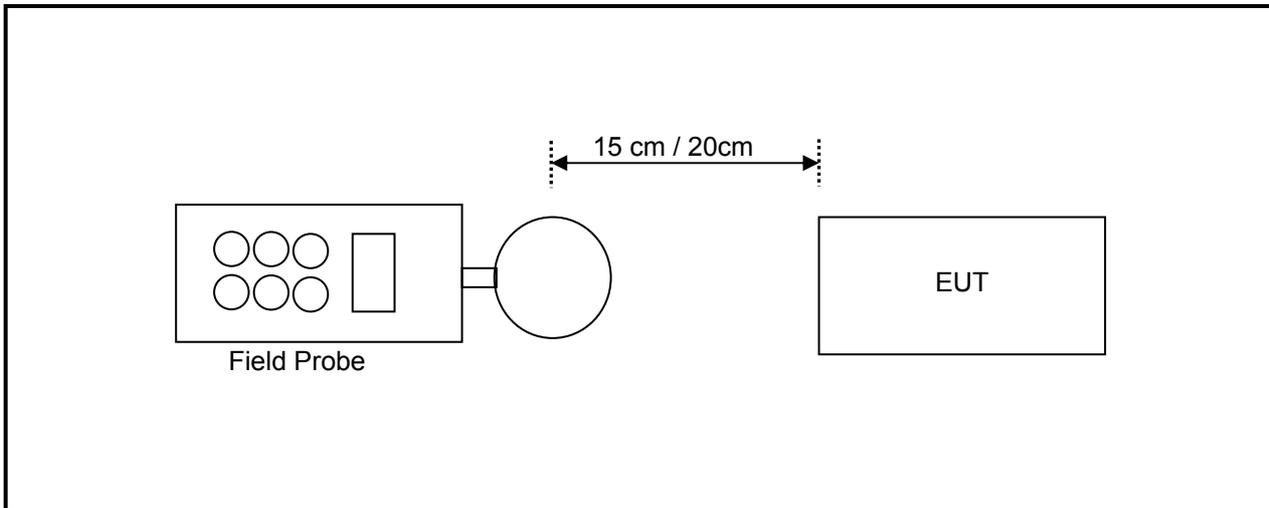

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device.

### 3.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Broadband Field Meter	NARDA	NBM-550	-	Mar. 28, 2018	Mar. 27, 2020
Magnetic Field Meter	NARDA	ELT-400	1 – 400kHz	Apr. 12, 2018	Apr. 11, 2020
Magnetic Probe	NARDA	HF-3061	300kHz – 30MHz	Apr. 16, 2018	Apr. 15, 2020
Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Apr. 17, 2018	Apr. 16, 2020
Broadband Field Meter	NARDA	NBM-550	-	Mar. 28, 2018	Mar. 27, 2020
Electric Field Meter	COMBINOVA	EFM 200	5Hz – 400kHz	Dec. 6, 2017	Dec. 5, 2019
E-Field Probe	NARDA	EF-0391	100kHz – 3GHz	Mar. 28, 2018	Mar. 27, 2020
E-Field Probe	NARDA	EF-6091	100MHz – 60GHz	Mar. 29, 2018	Mar. 28, 2020

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in Chia Pau RF Chamber

### 3.4 Limits for Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density


NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

### 680106 D01 RF Exposure Wireless Charging App v03

The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

### 3.5 Test Point Description

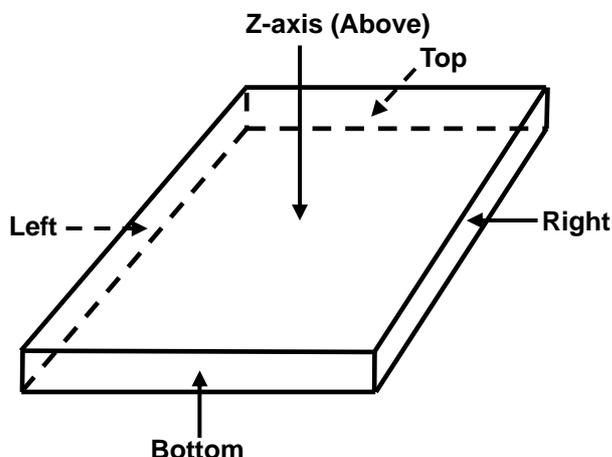

#### 4 Calculation Result of Maximum Conducted Power

Charging Mode with 10% Load

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	1.0200	0.7600	1.2100	0.7700	0.8100
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-612.9800	-613.2400	-612.7900	-613.2300	-613.1900
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-305.9800	-306.2400	-305.7900	-306.2300	-306.1900

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1780	0.1910	0.1240	0.1120	0.1700
Max H-field (A/m)	0.1424	0.1528	0.0992	0.0896	0.1360
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.4876	-1.4772	-1.5308	-1.5404	-1.4940
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.6726	-0.6622	-0.7158	-0.7254	-0.6790

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with 50% Load

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	1.1200	0.8500	1.2800	0.8800	0.9200
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-612.8800	-613.1500	-612.7200	-613.1200	-613.0800
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-305.8800	-306.1500	-305.7200	-306.1200	-306.0800

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1840	0.1960	0.1310	0.1160	0.1730
Max H-field (A/m)	0.1472	0.1568	0.1048	0.0928	0.1384
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.4828	-1.4732	-1.5252	-1.5372	-1.4916
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.6678	-0.6582	-0.7102	-0.7222	-0.6766

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with Full Load

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	2.1200	1.8500	2.2900	1.8700	1.9200
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-611.8800	-612.1500	-611.7100	-612.1300	-612.0800
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-304.8800	-305.1500	-304.7100	-305.1300	-305.0800

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1860	0.1990	0.1330	0.1190	0.1760
Max H-field (A/m)	0.1488	0.1592	0.1064	0.0952	0.1408
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.4812	-1.4708	-1.5236	-1.5348	-1.4892
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.6662	-0.6558	-0.7086	-0.7198	-0.6742

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with 10% Load (With 3mm airgap)

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	1.3200	1.2500	1.1900	1.6300	1.2600
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-612.6800	-612.7500	-612.8100	-612.3700	-612.7400
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-305.6800	-305.7500	-305.8100	-305.3700	-305.7400

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1780	0.1720	0.1590	0.1390	0.1460
Max H-field (A/m)	0.1424	0.1376	0.1272	0.1112	0.1168
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.4876	-1.4924	-1.5028	-1.5188	-1.5132
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.6726	-0.6774	-0.6878	-0.7038	-0.6982

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with 50% Load (With 3mm airgap)

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	1.3600	1.2900	1.2300	1.6700	1.3100
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-612.6400	-612.7100	-612.7700	-612.3300	-612.6900
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-305.6400	-305.7100	-305.7700	-305.3300	-305.6900

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1810	0.1750	0.1620	0.1620	0.1620
Max H-field (A/m)	0.1448	0.1400	0.1296	0.1296	0.1296
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.4852	-1.4900	-1.5004	-1.5004	-1.5004
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.6702	-0.6750	-0.6854	-0.6854	-0.6854

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Charging Mode with Full Load (With 3mm airgap)

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	1.7800	1.7100	1.6500	2.0900	1.7200
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-612.2200	-612.2900	-612.3500	-611.9100	-612.2800
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-305.2200	-305.2900	-305.3500	-304.9100	-305.2800

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.2050	0.1990	0.1860	0.1660	0.1730
Max H-field (A/m)	0.1640	0.1592	0.1488	0.1328	0.1384
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.4660	-1.4708	-1.4812	-1.4972	-1.4916
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.6510	-0.6558	-0.6662	-0.6822	-0.6766

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Standby Mode

E-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max E-field (V/m)	0.1700	0.1600	0.2300	0.2500	0.1800
Limit (V/m)	614	614	614	614	614
Margin (V/m)	-613.8300	-613.8400	-613.7700	-613.7500	-613.8200
50 % Limit (V/m)	307	307	307	307	307
50 % Margin (V/m)	-306.8300	-306.8400	-306.7700	-306.7500	-306.8200

H-Field Measurement					
Distance	15cm				20cm
EUT Side	Left	Right	Top	Bottom	Z-axis
Max H-field (uT)	0.1210	0.1140	0.1250	0.1360	0.1420
Max H-field (A/m)	0.0968	0.0912	0.1000	0.1088	0.1136
Limit (A/m)	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5332	-1.5388	-1.5300	-1.5212	-1.5164
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7182	-0.7238	-0.7150	-0.7062	-0.7014

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

## 5 Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---