

EMC TEST REPORT

For

Tunecast Auto for iPod

Model Number: F8V7101, F8M025

FCC ID: K7SF8V7101-1

Report Number : WT068001702

Test Laboratory	:	Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory Guangdong EMC Compliance Test Center
Site Location	:	Bldg. of Metrology & Quality Inspection, Longzhu Road, Shenzhen, Guangdong, China
Tel	:	0086-755-26941637, 26941529, 26941531
Fax	:	0086-755-26941545
Email	:	emclab@sohu.com

TABLE OF CONTENTS

TEST REPORT DECLARATION	4
1. TEST RESULTS SUMMARY	5
2. GENERAL INFORMATION	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty	7
3. PRODUCT DESCRIPTION	7
3.1. EUT Description	7
3.2. Related Submittal(s) / Grant (s)	8
3.3. Block Diagram of EUT Configuration.....	8
3.4. Operating Condition of EUT	8
3.5. Special Accessories.....	8
3.6. Equipment Modifications.....	8
3.7. Support Equipment List	8
3.8. Test Conditions	8
4. TEST EQUIPMENT USED	9
4.1. Test Equipment Used to Measure Conducted Disturbance	9
4.2. Test Equipment Used to Measure Radiated Disturbance and bandwidth.....	9
5. CONDUCTED DISTURBANCE TEST	10
5.1. Test Standard and Limit.....	10
5.2. Test Procedure	10
5.3. Test Arrangement.....	10
5.4. Test Data	11
6. RADIATED DISTURBANCE TEST	12
6.1. Test Standard and Limit.....	12
6.2. Test Procedure	12
6.3. Test Arrangement.....	12
6.4. Test Data	12
7. OCCUPIED BANDWIDTH.....	19
7.1. Test Standard and Limit.....	19
7.2. Test Procedure	19
7.3. Test Arrangement.....	19
7.4. Test Data	19
8. BAND EDGE	23
8.1. Test Standard and Limit.....	23
8.2. Band Edge FCC 15.239(d) Limit.....	23
8.3. Test Procedure	23
8.4. Test Arrangement.....	23
8.5. Test Data	23
9. ANTENNA REQUIREMENT	26
10. TURNING RANG	27
10.1. Test Standard and Limit.....	27

10.2.	Band Edge FCC 15.239(d) Limit.....	27
10.3.	Test Procedure	27
10.4.	Test Data	28
APPENDIX I TEST PHOTO.....		30
APPENDIX II EUT PHOTO		32

TEST REPORT DECLARATION

Applicant : Belkin Corporation
Address : 501 West Walnut Street, Compton, CA90220, U.S.A.
Manufacturer : Belkin Corporation
Address : 501 West Walnut Street, Compton, CA90220, U.S.A.
EUT Description : Tunecast Auto for iPod
Model Number : F8V7101, F8M025
Model Difference : F8M025 and F8V7101 are identical in schematic, structure and critical components except for screen and connector, which vary with different customer
FCC ID Number : K7SF8V7101-1

Test Standards:

FCC Part 15 15.239 :2006

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.239.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.


Tested by:


(Dewelly Yang)

Date:

Sep. 13,2006

Checked by:


(Louis Lin)

Date:

Sep. 13,2006

Approved by:


(Peter Lin)

Date:

Sep. 13,2006

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Disturbance	15.207	N/A
Radiated disturbance	15.239	Pass
Occupied Bandwidth	15.239	Pass
Band Edges	15.239	Pass
Antenna Requirement	15.203	Pass
Turning rang	15.239	Pass

2. GENERAL INFORMATION

2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Committee for Laboratories (**CNAL**) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (**FCC**), and the registration number are **97379**(open area test site) and **274801**(semi anechoic chamber).

The Laboratory is listed in Voluntary Control Council for Interference by Information Technology Equipment (**VCCI**), and the registration number are **R-1974**(open area test site) , **R-1966**(semi anechoic chamber), **C-2117**(mains ports conducted interference measurement) and **T-180**(telecommunication ports conducted interference measurement).

The Laboratory is registered to perform emission tests with Industry Canada (**IC**), and the registration number is **IC4174**.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is **E2024086Z02**.

Measurement Uncertainty

2.3. Measurement Uncertainty

Conducted Disturbance : 9kHz~30MHz 3.5dB

Radiated Disturbance: 30MHz~1000MHz 4.5dB
1GHz~18GHz 4.6dB

3. PRODUCT DESCRIPTION

3.1. EUT Description

Description	: Tunecast Auto for iPod
Manufacturer	: Belkin Corporation
Model Number	: F8V7101, F8M025
Input Power	: DC 12V
Operate Frequency	: 88.1 ~107.9MHz
Channel Spacing	: 100kHz
Modulation	: Frequency Modulation
Antenna Designation	: integrate

F8V7101-1 is a digital tuning FM transmitter with CLA and 30 PIN CONNECTOR , this system consists of a FM transmitter, a car adapter and a 30 PIN connector, a MCU controller, a LCD display, an EEPROM programmer, two Velcro strips, as well as an audio detector, in addition to two press keys which are used to turn the proper FM frequency and two memory keys for turning to the stored channel.

The FM transmitter is a FM stereo transmitting configuration, which radiates FM wave on the air by modulating the any required signal to the carrier signal. The transmission frequency is set from 88.1 to 107.9MHz.

Auto Power on & Auto Power off When the power on, the unit will turn on within 0.5 seconds. But If there is no audio being detected for 30 seconds, it will turn off automatically to conserve the power while the unit detects the input audio signal again or pressing the M1 or MII button, it will turn on again automatically.


This product can be powered by an DC to DC regulator within the cigarette lighter adapter. The DC regulator transforms input DC into 5V DC as the whole system's power.

F8M025 and F8V7101 are identical in schematic, structure and critical components except for screen and connector, which vary with different customer. Pretest were performed for two model. Test result of F8V7101-1 is the worse. The test report was shown the Test result of F8V7101 only.

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: K7SF8V7101-1 filing to comply with Section 15.239 of the FCC Part 15, Subpart C Rules.

3.3. Block Diagram of EUT Configuration



3.4. Operating Condition of EUT

Mode 1: FM88.1MHz (play 1kHz Signal.)

Mode 2: FM98.0MHz (play 1kHz Signal)

Mode 3: FM107.9MHz (play 1kHz Signal)

3.5. Special Accessories

Not available for this EUT intended for grant.

3.6. Equipment Modifications

Not available for this EUT intended for grant.

3.7. Support Equipment List

Ipod

M/N: A1137

S/N: YM60207GTJT

Input:DC5-30V 1A

Manufacturer: Apple

3.8. Test Conditions

Date of test: Aug.28-Sep.1,2006

Date of EUT Receive: Aug.25,2006

Temperature: 24 °C

Relative Humidity: 68%

4. TEST EQUIPMENT USED

4.1. Test Equipment Used to Measure Conducted Disturbance

Table 2 Conducted Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB2603	EMI Test Receiver	Rohde & Schwarz	ESCS30	Jan.28, 2006	1 Year
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.28, 2006	1 Year
SB2585	AM/FM generator	Jung Jin	JSG-1101B	Jun.20, 2006	1 Year
SB3612	Audio generator	KENWOOD	AD-203D	Jun.20, 2006	1 Year

4.2. Test Equipment Used to Measure Radiated Disturbance and bandwidth

Table 3 Radiated Disturbance Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB3436	EMI Test Receiver	Rohde & Schwarz	ESI26	Jan.28, 2006	1 Year
SB3440	Bilog Antenna	Chase	CBL6112B	Jan.28, 2006	1 Year
SB2585	AM/FM generator	Jung Jin	JSG-1101B	Jun.20, 2006	1 Year
SB3612	Audio generator	KENWOOD	AD-203D	Jun.20, 2006	1 Year

5. CONDUCTED DISTURBANCE TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15:2006

5.1.2. Test Limit

Table 4 Conducted Disturbance Test Limit (Class B)

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

- Decreasing linearly with logarithm of the frequency
- The lower limit shall apply at the transition frequency.

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data

N/A

This EUT is connected to car power outlet..

6. RADIATED DISTURBANCE TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15:2006

6.1.2. Test Limit

Table 5 Radiated Disturbance Test Limit (Class B)

FREQUENCY MHz	FIELD STRENGTHS LIMITS ($\mu\text{V/m}$)	FIELD STRENGTHS LIMITS dB ($\mu\text{V/m}$)
30 ~ 88	100	40.0
88 ~ 216	150	43.5
216 ~ 960	200	46.0
960 ~	500	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

6.4. Test Data

Emissions don't show below are too low against the limits, the test curves are shown in the APPENDIX I

Table 6 Radiated Disturbance Test Data (FCC Part15)

Model No.: F8V7101								
Test Mode: 1								
Frequency(MHz)	Polarization	Reading (dB μ V)	Cable Loss R1 (dB)	Cable Loss R2 (dB)	Antenna Factor (dB/m)	Level dB (μ V/m)	Limits dB (μ V/m)	Detector
88.098	H	31.4	0.7	0.9	10.69	43.7	48.0	AV
88.098	H	31.9	0.7	0.9	10.69	44.2	68.0	Peak
138.140	H	20.8	0.9	1.2	12.06	35.0	43.5	QP
288.170	H	15.2	1.1	1.8	13.51	31.6	46.0	QP
312.100	H	13.2	1.2	1.7	14.04	30.1	46.0	QP
352.010	H	12.9	1.3	1.9	15.93	32.0	46.0	QP
59.966	V	17.6	0.5	0.7	5.33	24.1	40.0	QP
88.098	V	31.5	0.7	0.9	10.69	43.8	68.0	PK
88.098	V	30.9	0.7	0.9	10.69	43.2	48.0	AV
138.140	V	31.4	0.9	1.2	12.06	30.6	43.5	QP

Table 7 Radiated Disturbance Test Data (FCC Part15)


Model No.: F8V7101								
Test Mode: 2								
Frequency(MHz)	Polarization	Reading (dB μ V)	Cable Loss R1 (dB)	Cable Loss R2 (dB)	Antenna Factor (dB/m)	Level dB (μ V/m)	Limits dB (μ V/m)	Detector
97.998	H	33.1	0.7	0.9	11.73	46.4	68	PK
97.998	H	32.7	0.7	0.9	11.73	46.0	48	AV
137.660	H	20.4	0.9	1.2	12.06	34.6	43.5	QP
195.980	H	24.5	1	1.4	10.26	37.2	43.5	QP
335.998	H	13.4	1.3	1.9	14.69	31.3	46.0	QP
59.980	V	26.0	0.5	0.7	5.33	32.5	40.0	PK
97.998	V	31.3	0.7	0.9	11.73	44.6	68.0	AV
97.998	V	30.8	0.7	0.9	11.73	44.1	48.0	QP
137.660	V	15.7	0.9	1.2	12.06	29.9	43.5	QP

Table 8 Radiated Disturbance Test Data (FCC Part15)

Model No.: F8V7101								
Test Mode: 3								
Frequency(MHz)	Polarization	Reading (dB μ V)	Cable Loss R1 (dB)	Cable Loss R2 (dB)	Antenna Factor (dB/m)	Level dB (μ V/m)	Limits dB (μ V/m)	Detector
107.908	H	32.2	0.7	0.9	12.71	46.5	68.0	PK
107.908	H	31.8	0.7	0.9	12.71	46.1	48.0	AV
137.660	H	16.9	0.9	1.2	12.06	31.1	43.5	QP
59.991	V	25.1	0.5	0.7	5.33	31.6	40.0	AP
107.908	V	29.7	0.7	0.9	12.71	44.0	68.0	PK
107.908	V	29.3	0.7	0.9	12.71	43.6	48.0	AV
137.160	V	15.5	0.9	1.2	12.06	29.7	43.5	QP


Radiated Emission

EUT: M/N:F8V7101
Operating Condition: 88.1 MHz TX
Test Site: SMQ EMC Lab.SAC
Test Specification: Horizontal & Vertical
Comment: DC12V

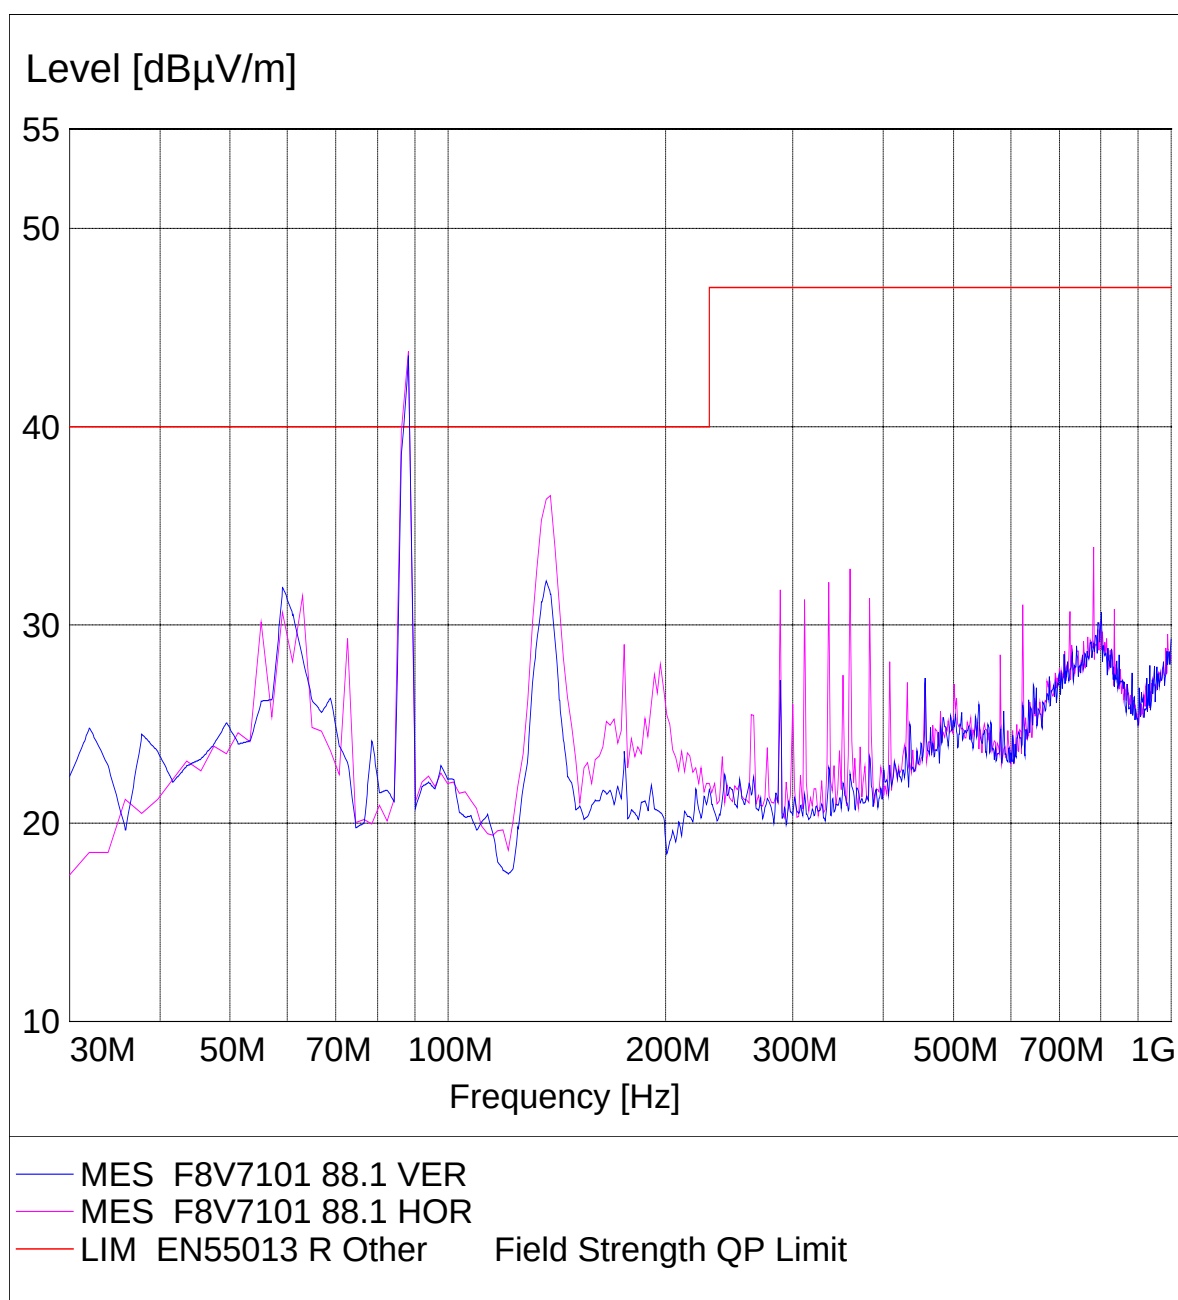


Radiated Emission

EUT: M/N:F8V7101
Operating Condition: 98 MHz TX
Test Site: SMQ EMC Lab.SAC
Test Specification: Horizontal & Vertical
Comment: DC12V

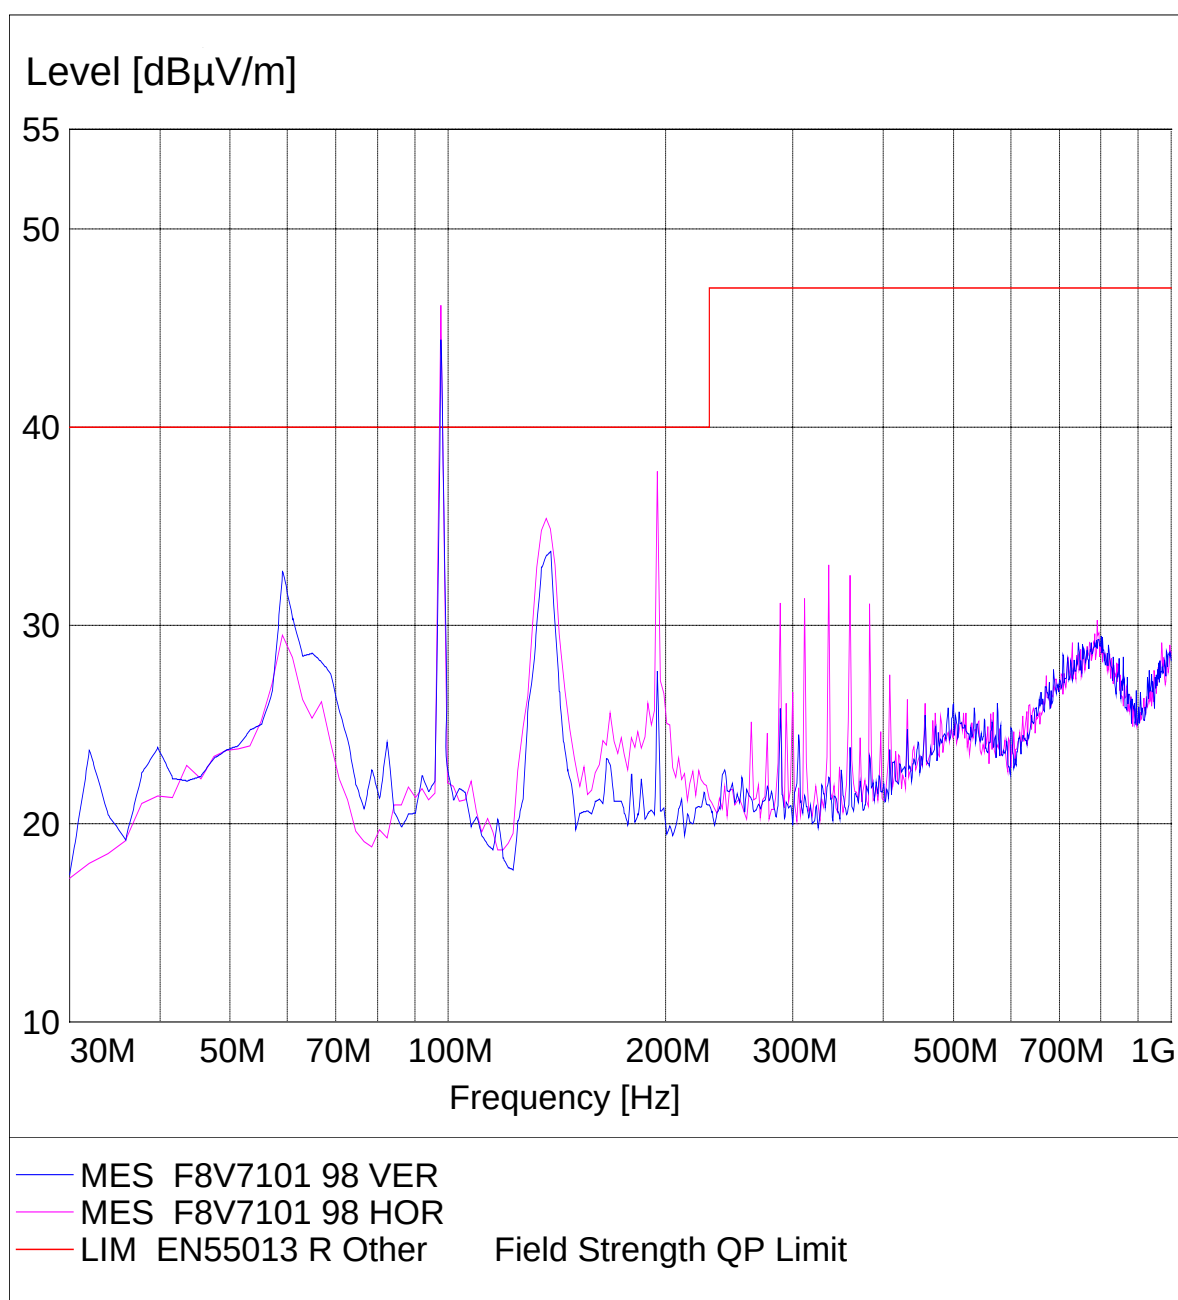

Radiated Emission

EUT: M/N:F8V7101
Operating Condition: 107.9 MHz TX
Test Site: SMQ EMC Lab.SAC
Test Specification: Horizontal & Vertical
Comment: DC12V

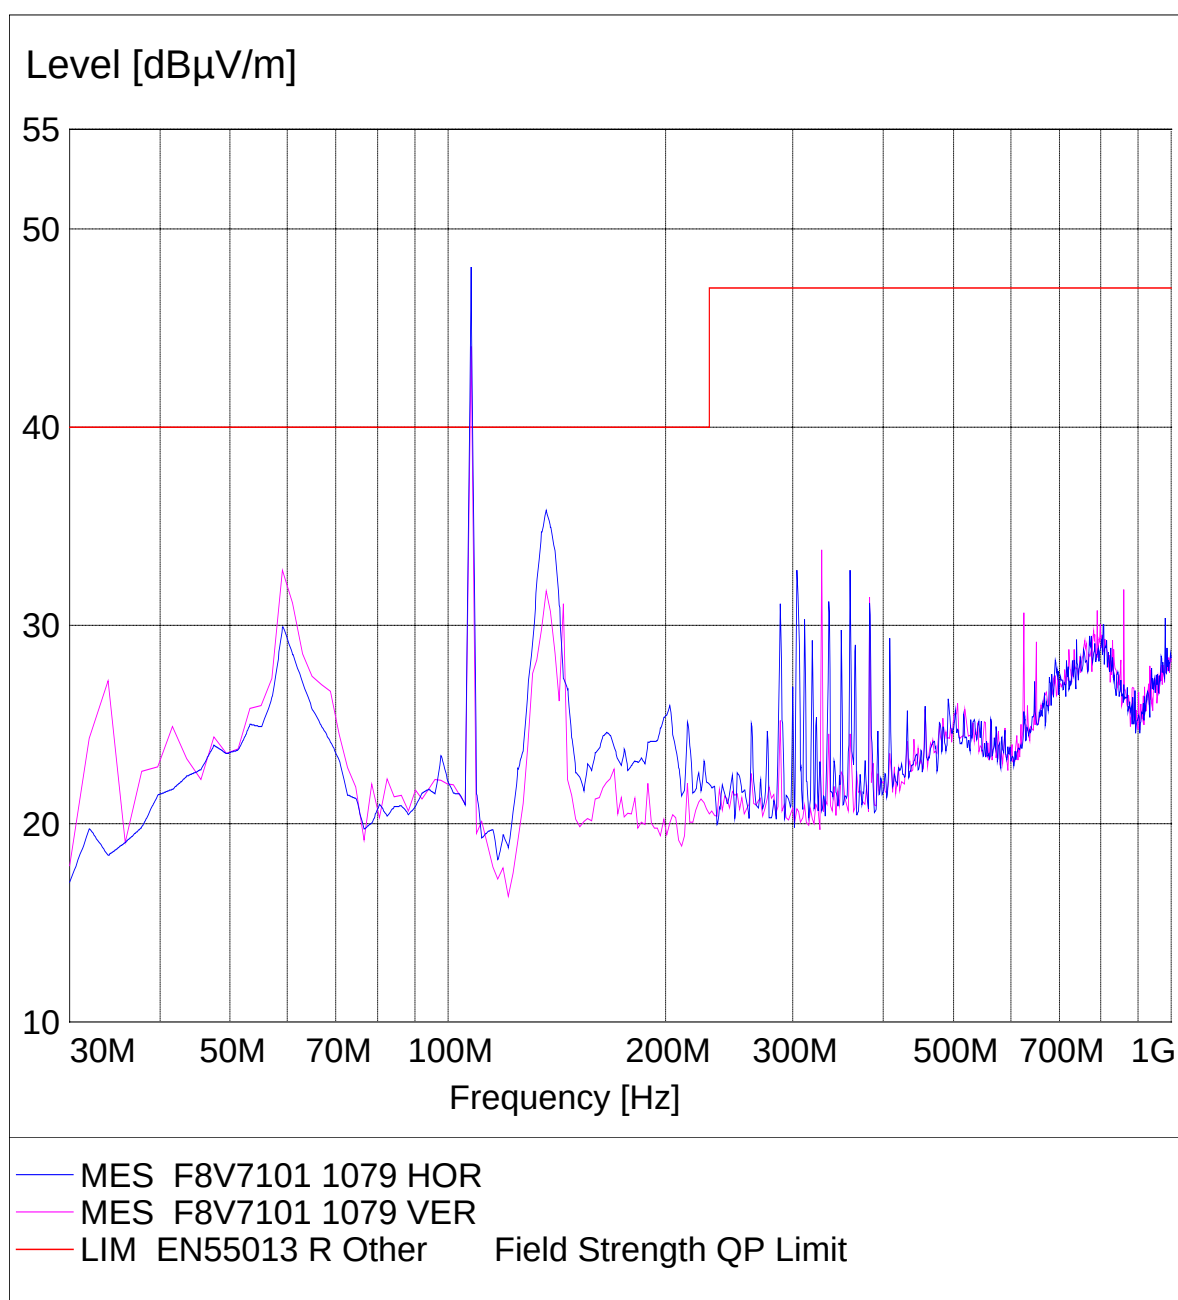

7. OCCUPIED BANDWIDTH

7.1. Test Standard and Limit

7.1.1. Test Standard

FCC Part 15:2005

7.1.2. Test Limit

Table 9 Bandwidth Limit

	Limit (kHz)
Bandwidth	200

7.2. Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation. Playing MP3.(the volume control of ipod was set to maximum.)
3. Set EMI test receiver(ESIB26) Center Frequency = fundamental frequency, RBW, VBW= 5KHz, Span=300KHz.
4. Set EMI test receiver(ESIB26) Max hold. Mark peak, -26dB.

Note: The EUT can be connected to Ipod only. And it can't be connected to other equipment. It is connected to ipod by the base interface of ipod. The input signal of EUT is controlled by ipod. so the the volume control of ipod was set to maximum during the test. It means that the test was performed with the maximum audio input.

7.3. Test Arrangement


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.


7.4. Test Data


Input signal : play MP3
FM 88.1MHz
26dB bandwidth = 126.2kHz

FM 98.0MHz
26dB bandwidth = 156.8kHz

FM 107.9MHz
26dB bandwidth = 156.3kHz

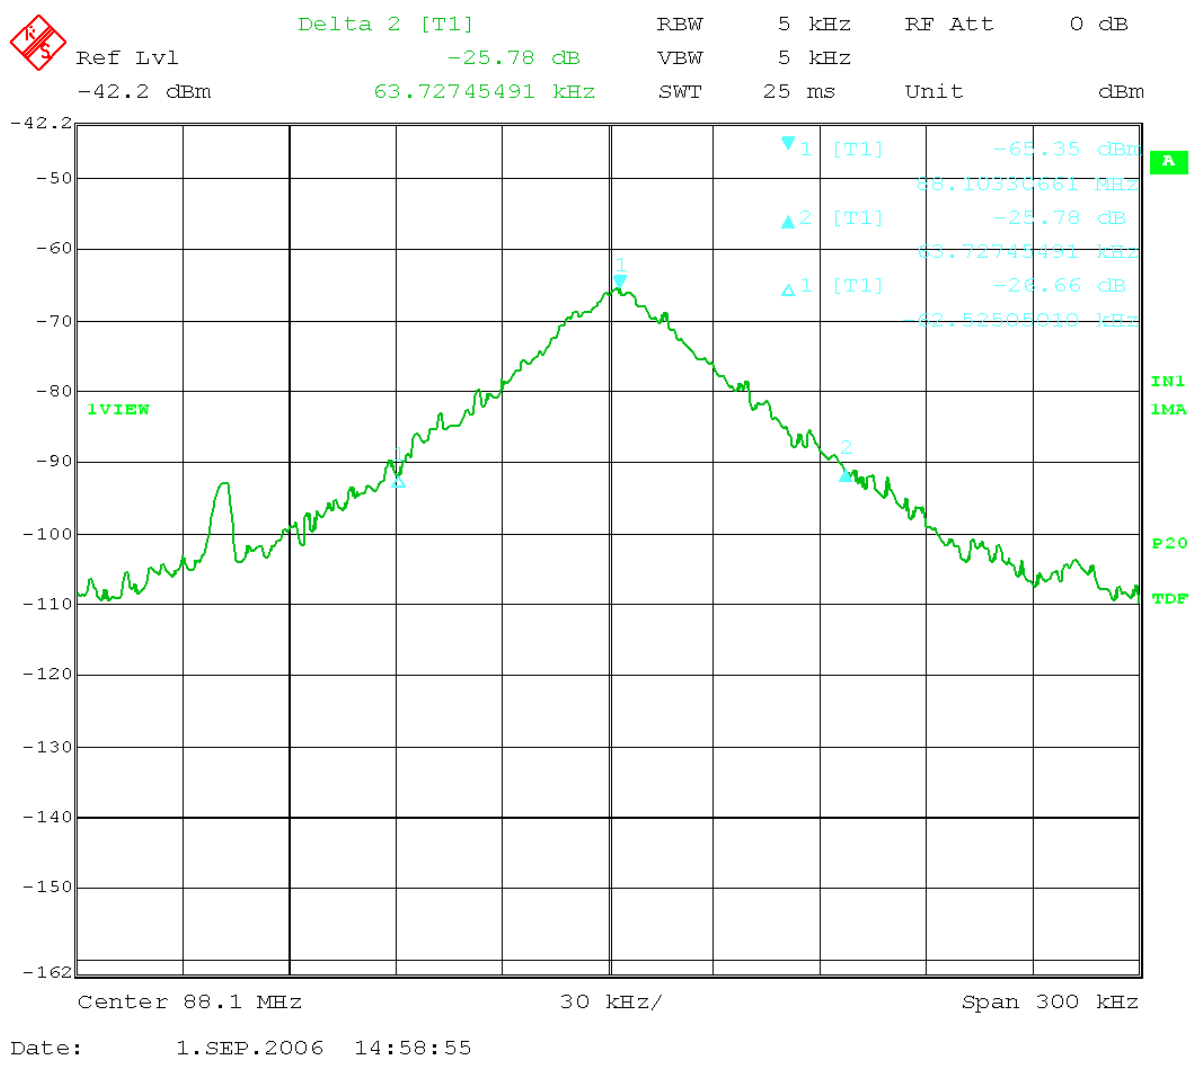

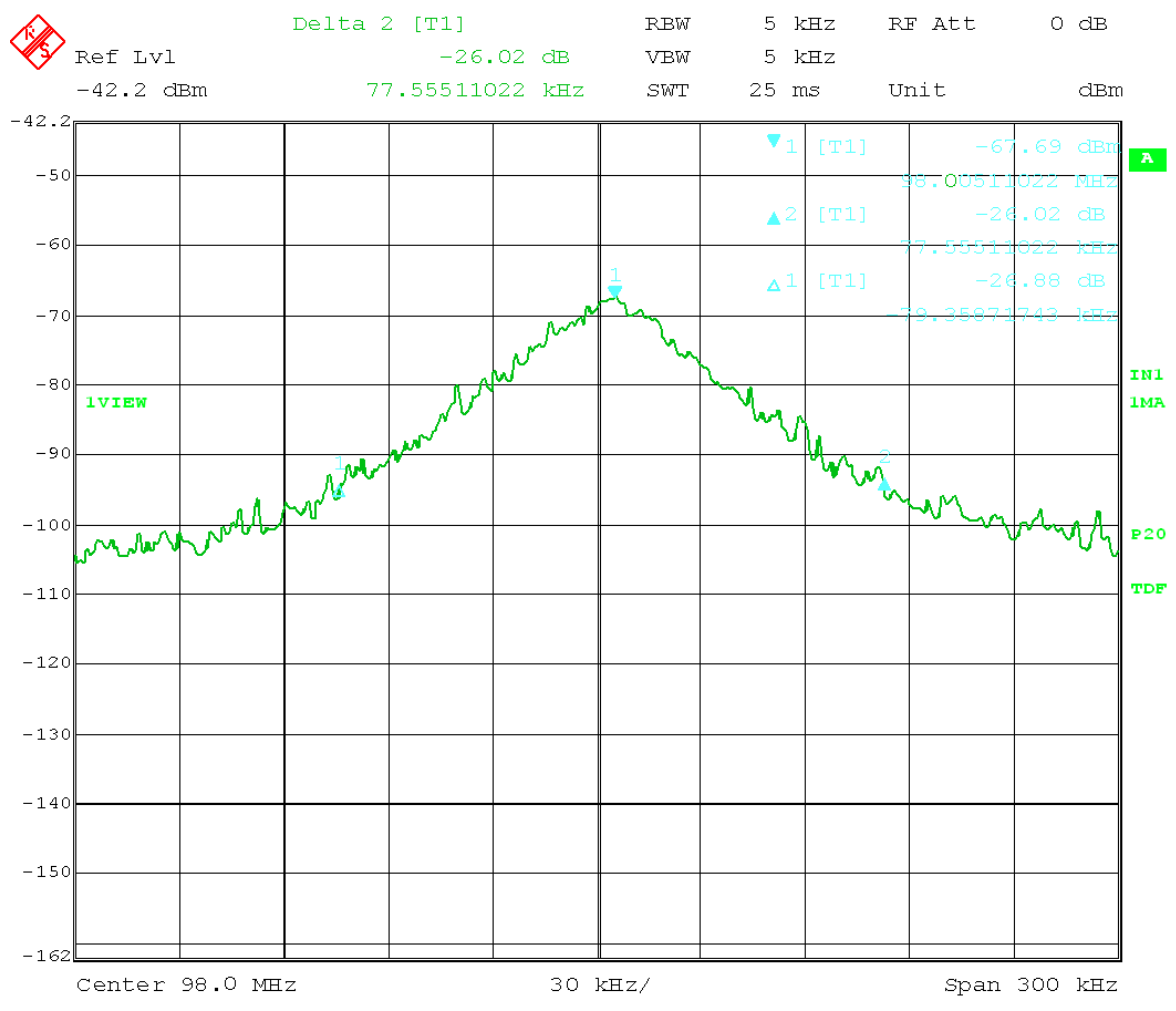

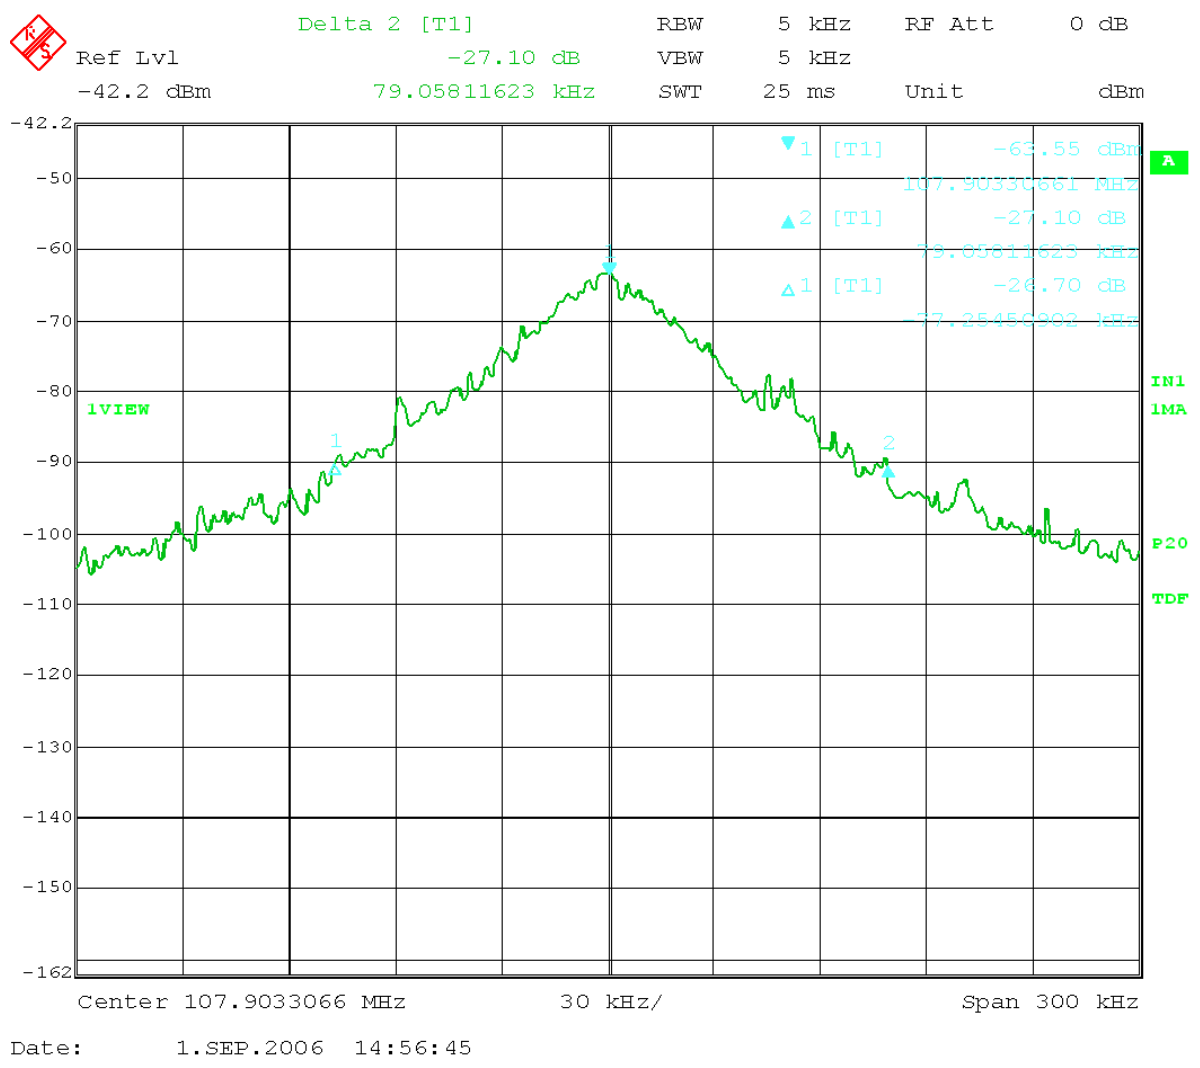

8. BAND EDGE

8.1. Test Standard and Limit

8.1.1. Test Standard

FCC Part 15 15.239 :2005

8.2. Band Edge FCC 15.239(d) Limit

The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in Section 15.209.


8.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instruments. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

8.4. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

8.5. Test Data

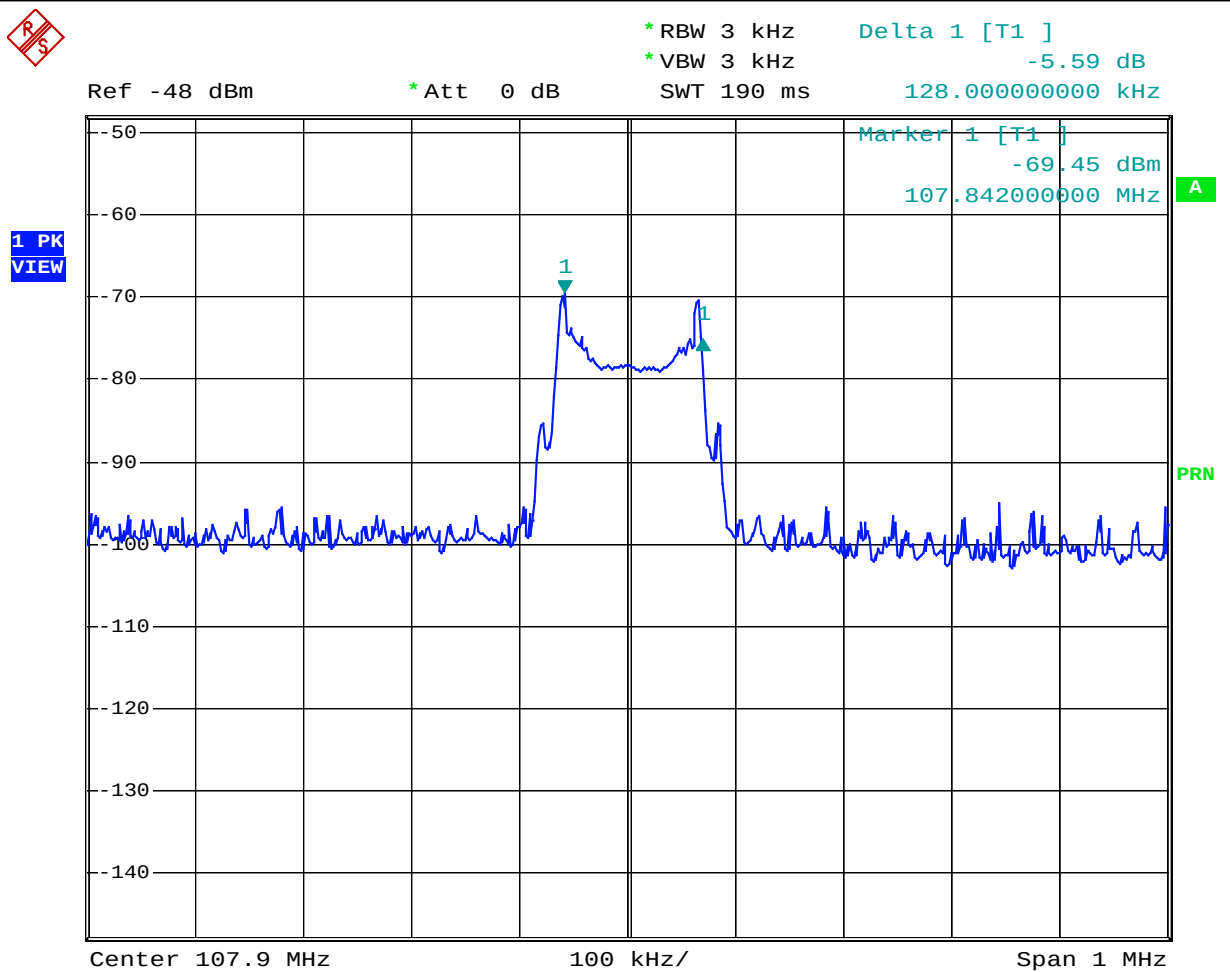

Comment: Conducted Disturbance
Date: 30.SEP.2006 16:22:52




*RBW 3 kHz Marker 2 [T1]
*VBW 3 kHz -72.18 dBm
SWT 190 ms 88.040000000 MHz

Ref -48 dBm

*Att 0 dB

1 PK
VIEW

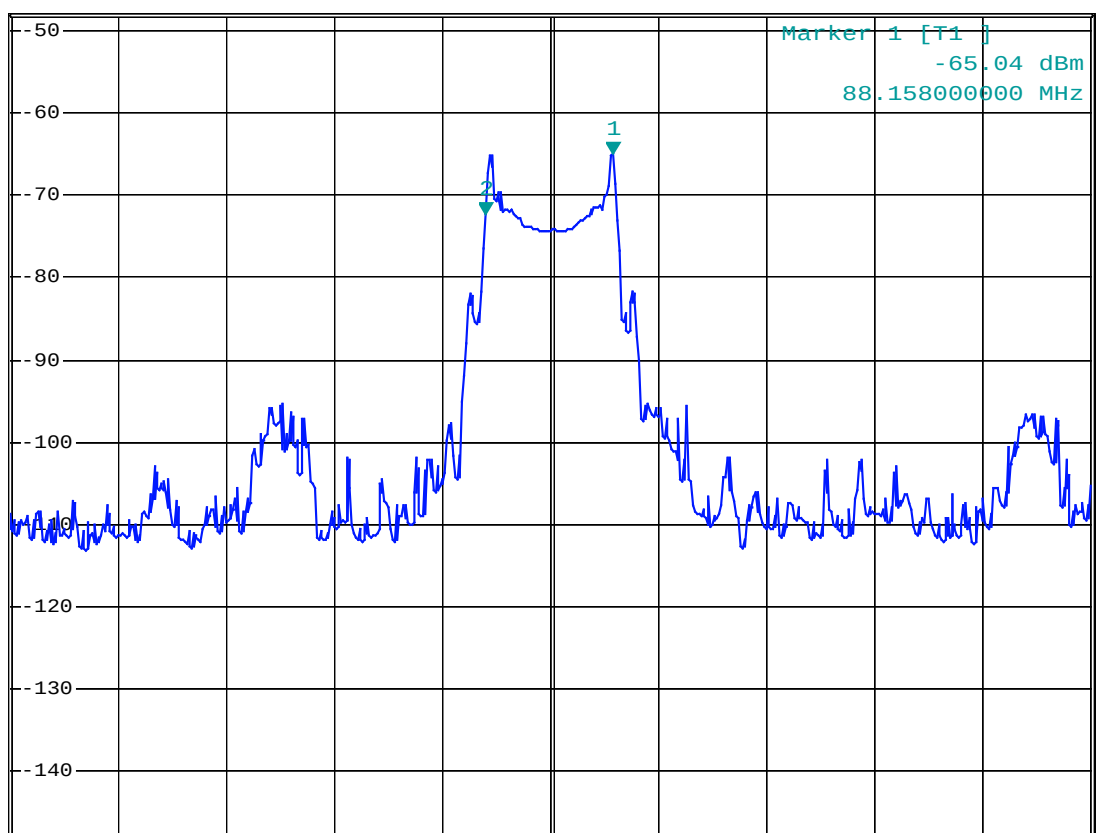

*
A

PRN

Center 88.1 MHz 100 kHz/ Span 1 MHz


Comment: Conducted Disturbance
Date: 30.SEP.2006 16:25:32

9. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is wire soldered on the PCB, this is permanently attached antenna and meets the requirements of this section.

Antenna

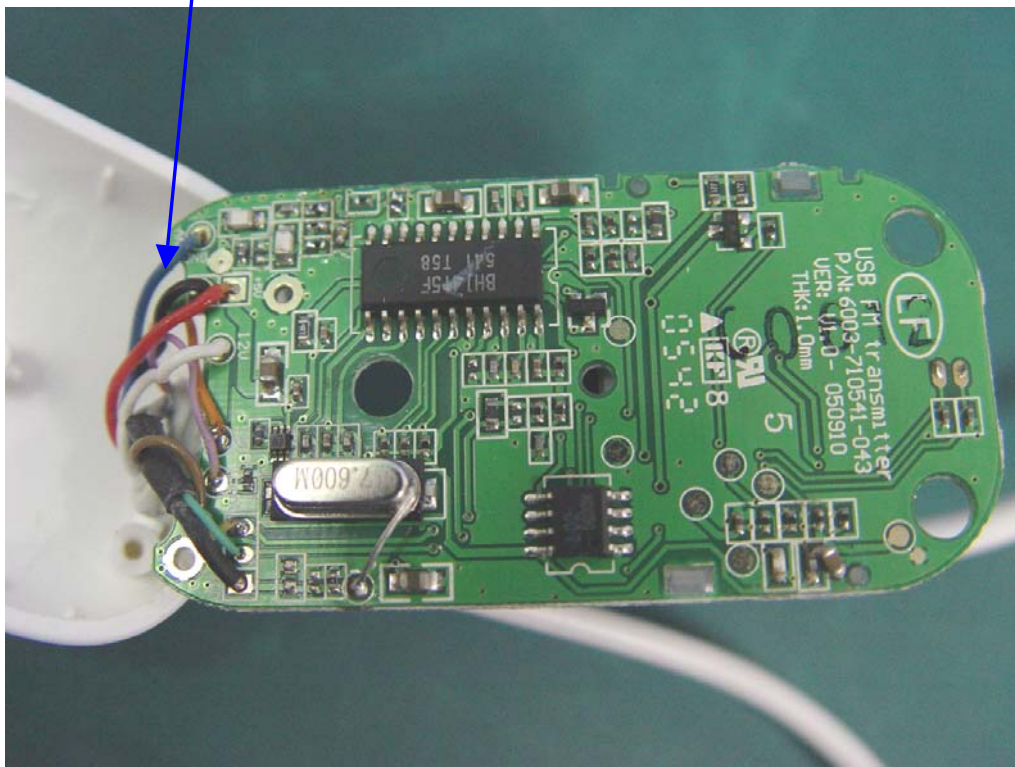

10. TURNING RANG

10.1.Test Standard and Limit

10.1.1.Test Standard


FCC Part 15 15.239 :2005

10.2.Limit

88-108MHz

10.3.Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set the EUT working on the lowest frequency.
3. Set EMI test receiver(ESIB26) Center Frequency = working frequency, RBW, VBW= 1KHz, Span=300KHz.
4. Measuring the working frequency. And check the measuring result with the EUT display.
5. Set the EUT working on the mid frequency. Repeat step 3 and 4.
6. Set the EUT working on the high frequency. Repeat step 3 and 4.
7. Press the $\uparrow$ or $\downarrow$ button on the TuneCast Auto to select the transmission frequency, from the low to high frequency. And check the working frequency display on the screen. The working frequency should be inside 88-108MHz.

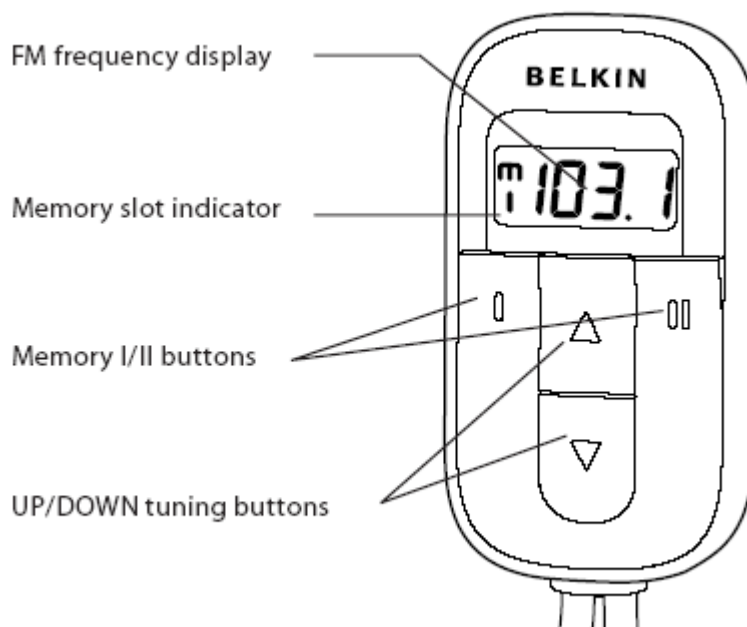

10.4. Test Data

Low Frequency= 88.103MHz	EUT screen display 88.1MHz
Mid Frequency= 98.005MHz	EUT screen display 98.0MHz
High Frequency=107.903MHz	EUT screen display 107.9MHz


The working frequency rang is from 88.1 to 107.9MHz.





APPENDIX I TEST PHOTO

Photo 1 Radaited Emission Test

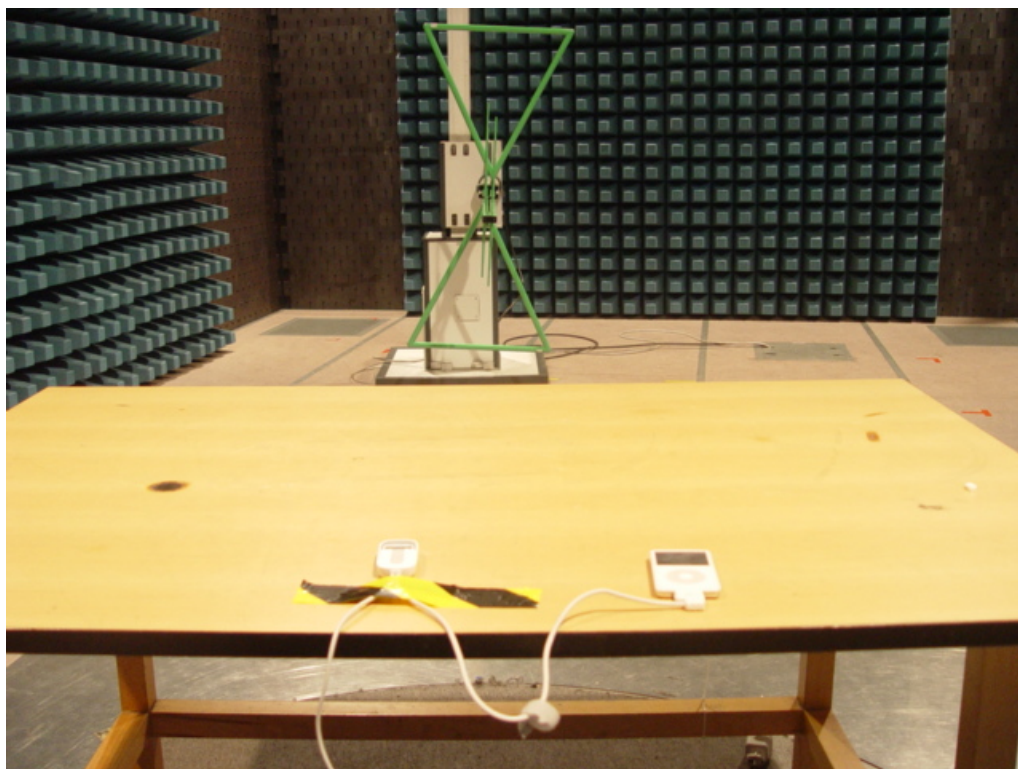

APPENDIX II EUT PHOTO

Photo 1 Appearance of EUT



Photo 2 Appearance of EUT



Photo 3 Inside of EUT



Photo 4 Inside of EUT

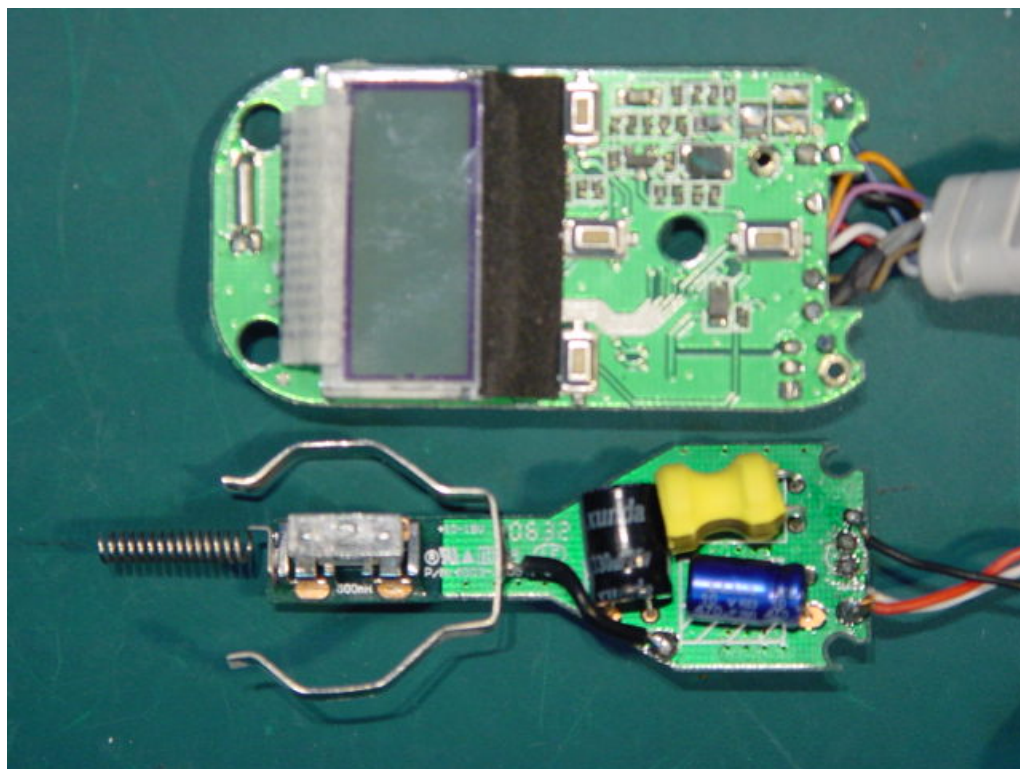


Photo 5 Inside of EUT

