

**FCC PART 15, SUBPART C
TEST REPORT***for***TUNECAST AUTO****MODEL: F8Z439**

Prepared for

**BELKIN INTERNATIONAL, INC.
501 W. WALNUT STREET
COMPTON, CA 90220-5221**

Prepared by: _____

JOSH HANSEN

Approved by: _____

JEFF KLINGER**COMPATIBLE ELECTRONICS INC.
20621 Pascal Way
LAKE FOREST, CA 92630
(949) 587-0400**DATE: May 20th 2009

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	17	2	2	2	6	13	42

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	4
1. PURPOSE	5
2. ADMINISTRATIVE DATA	6
2.1 Location of Testing	6
2.2 Traceability Statement	6
2.3 Cognizant Personnel	6
2.4 Date Test Sample was Received	6
2.5 Disposition of the Test Sample	6
2.6 Abbreviations and Acronyms	6
3. APPLICABLE DOCUMENTS	7
4. Description of Test Configuration	8
4.1 Description Of Test Configuration - EMI	8
4.1.1 Cable Construction and Termination	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
5.2 EMI Test Equipment	11
6. TEST SITE DESCRIPTION	12
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
7. Test Procedures	13
7.1 RF Emissions	13
7.1.1 Conducted Emissions Test	13
7.1.2 Radiated Emissions (Spurious and Harmonics) Test	14
7.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)	15
7.1.4 Peak radiated EMI	15
7.2 Bandwidth of the Fundamental	16
8. CONCLUSIONS	17

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Radiated Emissions Photos • Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of 3 Meter Radiated Site

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: TUNECAST AUTO
Model: F8Z439
S/N: 2

Product Description: See Expository Statement

Modifications: The EUT was not modified.

Manufacturer: Belkin International, inc.
501 W. Walnut Street
Compton, CA 90220-5221

Test Date: May 7th, 2009

Test Specifications: CFR Title 47, Part 15 Subpart C, Sections 15.205, 15.209 and 15.239

Test Procedure: ANSI C63.4: 2003

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Radiated RF Emissions, 9 kHz – 1080 MHz	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209, 15.239 (b), and 15.239 (c).
2	-20 dB Bandwidth of the Fundamental	Complies with the limits of CFR Title 47, Part 15, Subpart C, section 15.239 (a).

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the TUNECAST AUTO Model: F8Z439. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.239.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way, Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Belkin International, inc.

Daniel Wesey Compliance Engineer

Compatible Electronics, Inc.

Josh Hansen	Test Engineer
Jeff Klinger	Director of Engineering

2.4 Date Test Sample was Received

The test sample was received on May 7th 2009.

2.5 Disposition of the Test Sample

The sample has not yet been returned to Belkin International, inc. as of May 7th 2009.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
CLA	Cigar Lighter Adaptor
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description Of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

The TUNECAST AUTO Model: F8Z439 (EUT) was investigated for worst case configuration. An Apple iPod was connected to the EUT via the EUT 3.5mm Audio jack. 12v DC was supplied via integral CLA (Cigar Lighter Adaptor), which was connected to a CLA socket receptacle, which in turn was connected to a 12v battery. The EUT was receiving audio from the iPod and transmitting the audio in the FM band, the iPod and the music being played was provided by the customer, the song was Linkin Park "Don't Stay" 0dB encode rate at max amplitude. The EUT's transmit antenna was soldered to the Radio PCB of the EUT, which is contained in the face of the EUT. Another iPod was being charged by the USB port on the EUT CLA.

The low, middle, and high channels were investigated.

The final data was taken in the modes above. Please see Appendix E for the data sheets.

(Setup Photo)



4.1.1 Cable Construction and Termination

- Cable 1 USB cable 1 meter long with a USB connector at one end and a 30pin iPod dock connector at the other end.
- Cable 2 Audio cable .5 meter long with a 3.5mm Audio jack at one end and hardwired to the EUT at the other.
- Cable 3 Power cable .5 meter long hard wired at the EUT and CLA ends.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIALNUMBER	FCC ID
TUNECAST AUTO (EUT)	BELKIN INTERNATIONAL, INC.	F8Z439	N/A	K7SF8Z439
iPod	Apple	A1136	JQ542XTQSZ9	N/A
iPod	Apple	A1236	7N742NBPYOP	N/A
Speakers	N/A	N/A	N/A	N/A
12v Battery	N/A	N/A	N/A	N/A

5.2 EMI Test Equipment

EQUIPMENT TYPE	MANU-FACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS					
Computer	Compatible Electronics	N/A	N/A	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100172	Jan. 7, 2009	Jan. 7, 2011
Monitor	ICS Advent	N/A	N/A	N/A	N/A
RF RADIATED EMISSIONS TEST EQUIPMENT					
CombyLog Antenna	Com-Power	AC-220	001	Sept. 3, 2008	Sept. 3, 2009
Loop Antenna	Com-Power	AL-130	17085	Aug. 1, 2008	Aug. 1, 2010
Antenna Mast	Sunol Sciences Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Sciences Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Sciences Corporation	SC104V	020808-1	N/A	N/A

6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT, iPod, and Cigar Lighter receptacle were mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was placed in the center, and on the back edge of the table, in accordance with ANSI C63.4:2003. The test site receive antenna distance was measured from the closest periphery of the EUT setup. Each accessory was placed 10 cm to either side of the EUT. The battery was placed on the ground, using an 80 cm length of wire to connect to a cigar lighter receptacle, which was mounted on the table.

The EUT and accessories were investigated for worst case placement; the above yielded the worst case configuration.

The EUT was not grounded.

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.


7.1 RF Emissions

7.1.1 Conducted Emissions Test

EUT is DC powered, this test was not performed.

Test Results:

Test not performed.

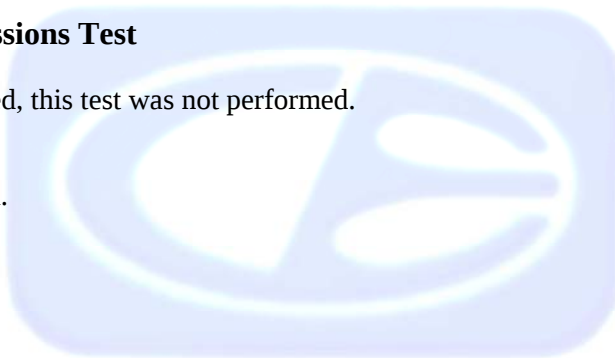

7.1.2 Radiated Emissions (Spurious and Harmonics) Test

The receiver was used as a measuring meter along with the quasi-peak adapter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps.

The frequencies above 1 GHz and the fundamental for the low, middle, and high channels were investigated with the built in average detector.

The measurement bandwidths and transducers used for the radiated emissions (Spurious) tests were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 1 GHz	100 kHz	CombiLog Antenna
1 GHz to 1.08 GHz	1 MHz	CombiLog Antenna

The Semi-Anechoic test site of Compatible Electronics, Inc, Lab P, was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Final data was collected in the worst case (highest emission) configuration of the EUT (Channel 88.1MHz). At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gun sight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

7.1.3 Radiated Emissions (Spurious and Harmonics) Test (Continued)

The emissions from the EUT were investigated with the EUT while operated on each of three channels, 88.1MHz, 98.1MHz and 107.9MHz. The EUT was receiving a 0 dB encoded file from the audio source at max amplitude. This file represents maximum audio input level. The EUT was tested at a 3-meter test distance to obtain the final test data. The worst case scanned and presented was channel 88.1MHz. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.239.

7.1.4 Peak radiated EMI

The EUT was tested at a 3-meter test distance to obtain the final test data. The EUT was maximized for position. The EUT was receiving a 0 dB encoded file from the audio source at max amplitude. This file represents maximum audio input level. The resolution bandwidth was 100 KHz and video bandwidth 300 KHz. The final qualification data sheets are located in Appendix E. This data also shows compliance at the band edges.

Test Results:


The EUT complies with Part 15, Subpart C, section 15.239.

7.2 Bandwidth of the Fundamental

The -20 dB bandwidth was checked using the EMI Receiver to see that it was wholly within the 200 kHz band centered on the operating frequency. The RBW was set to 10 kHz and the VBW was set to 30 kHz, but no less than 3kHz RBW and 10kHz VBW. The low, middle, and high channels were investigated. Plots of the -20 dB bandwidth are located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.239 (a) for the -20 dB bandwidth of the fundamental. The EUT has a -20 dB bandwidth that is wholly within the 200 kHz band centered on the operating frequency.

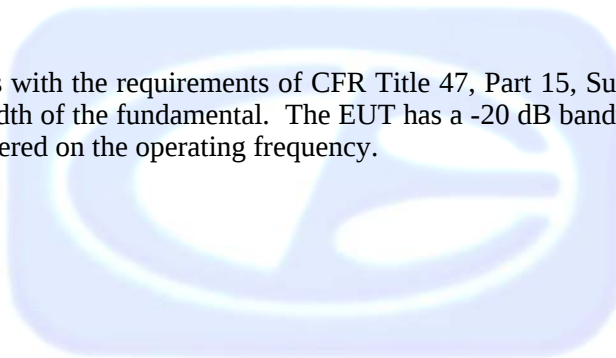

8. CONCLUSIONS

The TUNECAST AUTO Model: F8Z439 meets all of the specification limits defined in CFR Title 47, Part 15, Subpart B for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.239 for the transmitter portion.





APPENDIX A

LABORATORY RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY RECOGNITIONS

Compatible Electronics has the following agency accreditations:

National Voluntary Laboratory Accreditation Program - Lab Code: 200527-0

Voluntary Control Council for Interference - Registration Numbers: R-2848, C-3142, T-1450

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

Compatible Electronics is recognized or on file with the following agencies:

Industry Canada
Site Number: 2154C-1

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.239 or FCC Class B specifications.

No modifications were made to the EUT.





APPENDIX C

ADDITIONAL MODELS COVERED UNDER THIS REPORT

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

TUNECAST AUTO
Model: F8Z439
S/N: 2

Additional Model Numbers:

NO ADDITIONAL MODELS



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS

FIGURE 1: PLOT MAP AND LAYOUT OF RADIATED TEST SITE

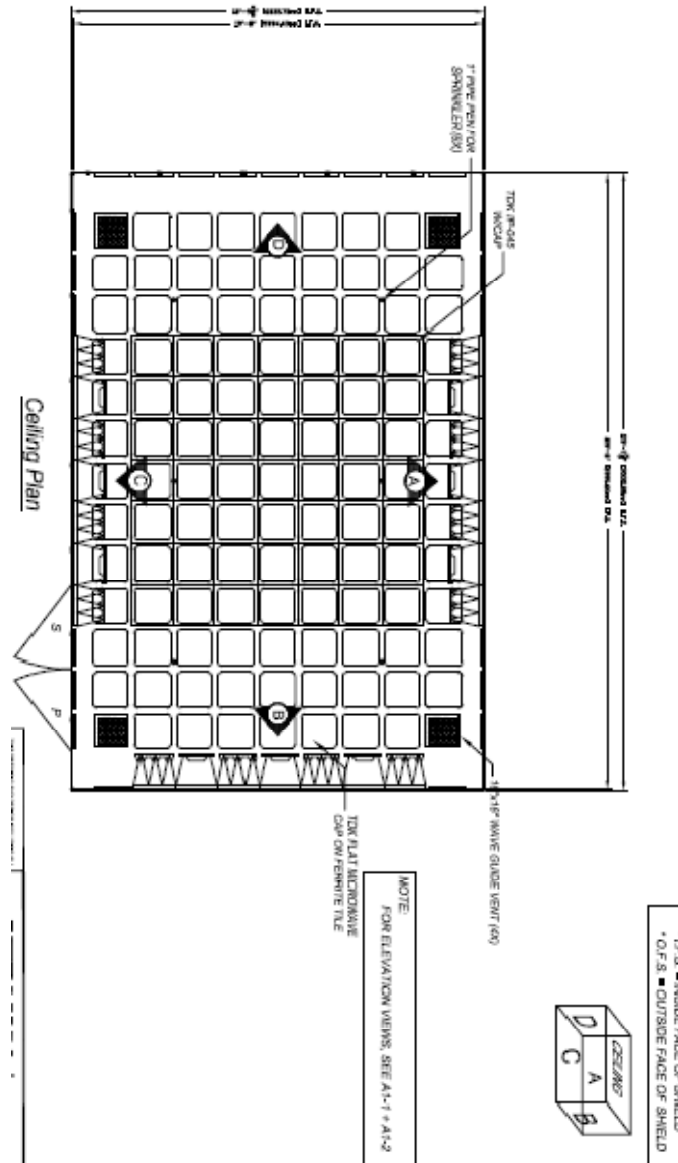


Figure 1TDK FAC-3 test chamber

COM-POWER AC-220**COMBYLOG ANTENNA****S/N: 001****CALIBRATION DATE: 9/3/08**


FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
20.0	22.1	300.0	14.9
25.0	21.1	400.0	16.5
30.0	20.6	500.0	18.5
40.0	19.8	700.0	21.1
50.0	19.0	900.0	23.2
60.0	13.8	1000.0	24.6
70.0	9.6	1100.0	24.8
80.0	8.7	1300.0	24.9
100.0	11.6	1500.0	27.2
150.0	9.4	1700.0	27.2
200.0	10.8	2000.0	29.0
250.0	14.9	2100.0	29.0

COM-POWER AL-130**LOOP ANTENNA**

S/N: 17085

CALIBRATION DATE: 8/1/08


FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-43	8.5	0.8	-41.53	9.97
0.01	-41.93	9.57	0.9	-41.46	10.04
0.02	-41.29	10.21	1	-41.29	10.21
0.03	-40.73	10.77	2	-40.97	10.53
0.04	-41.03	10.47	3	-41.1	10.4
0.05	-42.37	9.13	4	-41.36	10.14
0.06	-41.6	9.9	5	-40.93	10.57
0.07	-41.96	9.54	6	-40.67	10.83
0.08	-42.1	9.4	7	-41.07	10.43
0.09	-41.83	9.67	8	-40.9	10.6
0.1	-41.83	9.67	9	-40.1	11.4
0.2	-44.46	7.04	10	-41.16	10.34
0.3	-41.73	9.77	15	-47.97	3.53
0.4	-41.8	9.7	20	-40.77	10.73
0.5	-41.8	9.7	25	-44.37	7.13
0.6	-41.33	10.17	30	-43.1	8.4
0.7	-41.36	10.14			

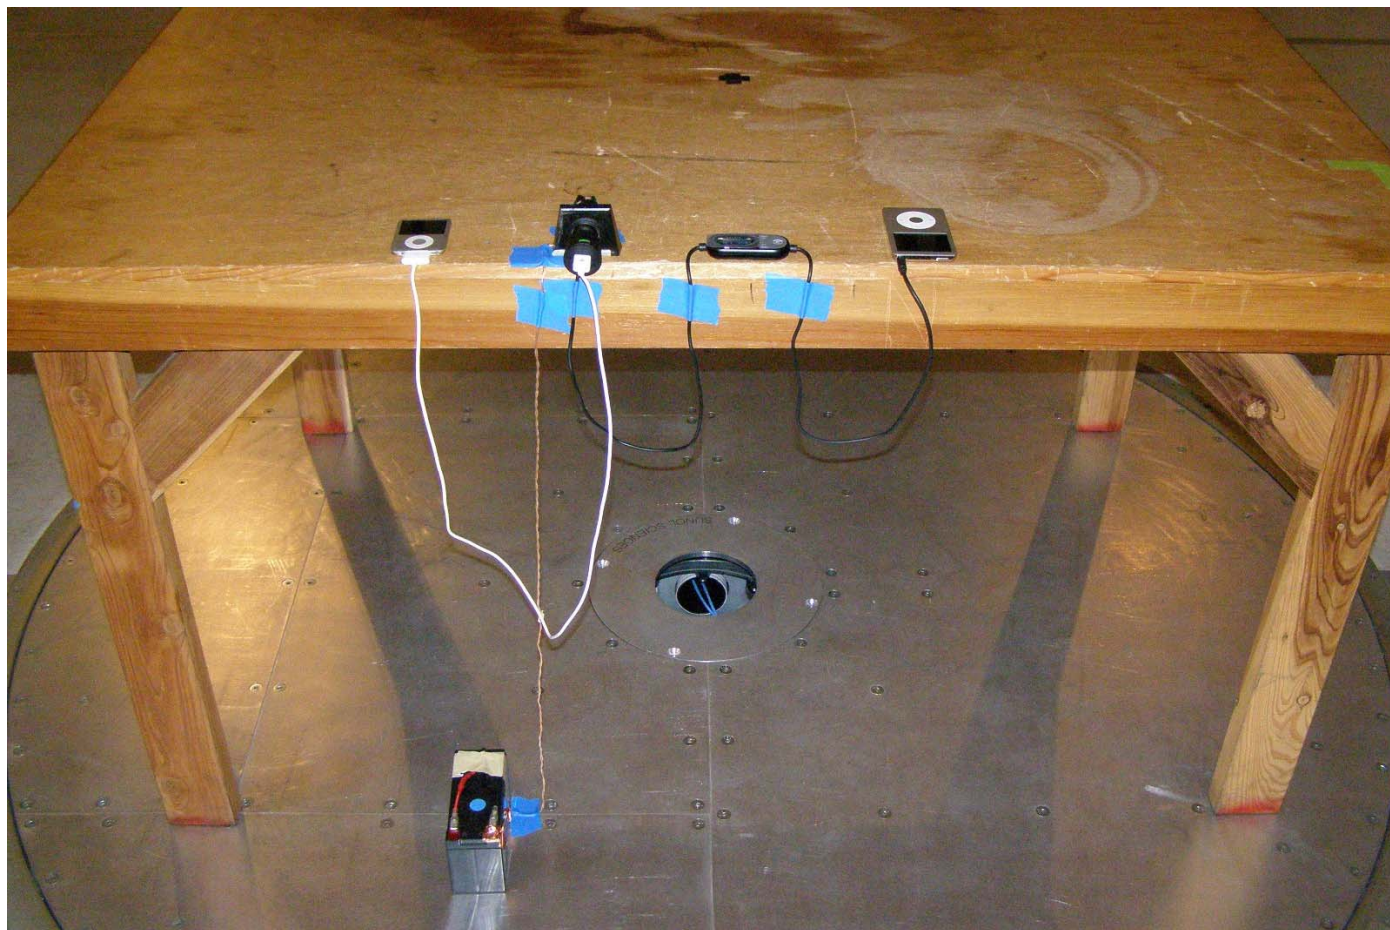

BACK VIEW

BELKIN INTERNATIONAL, INC.
TUNECAST AUTO
MODEL: F8Z439
FCC SUBPART B AND C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

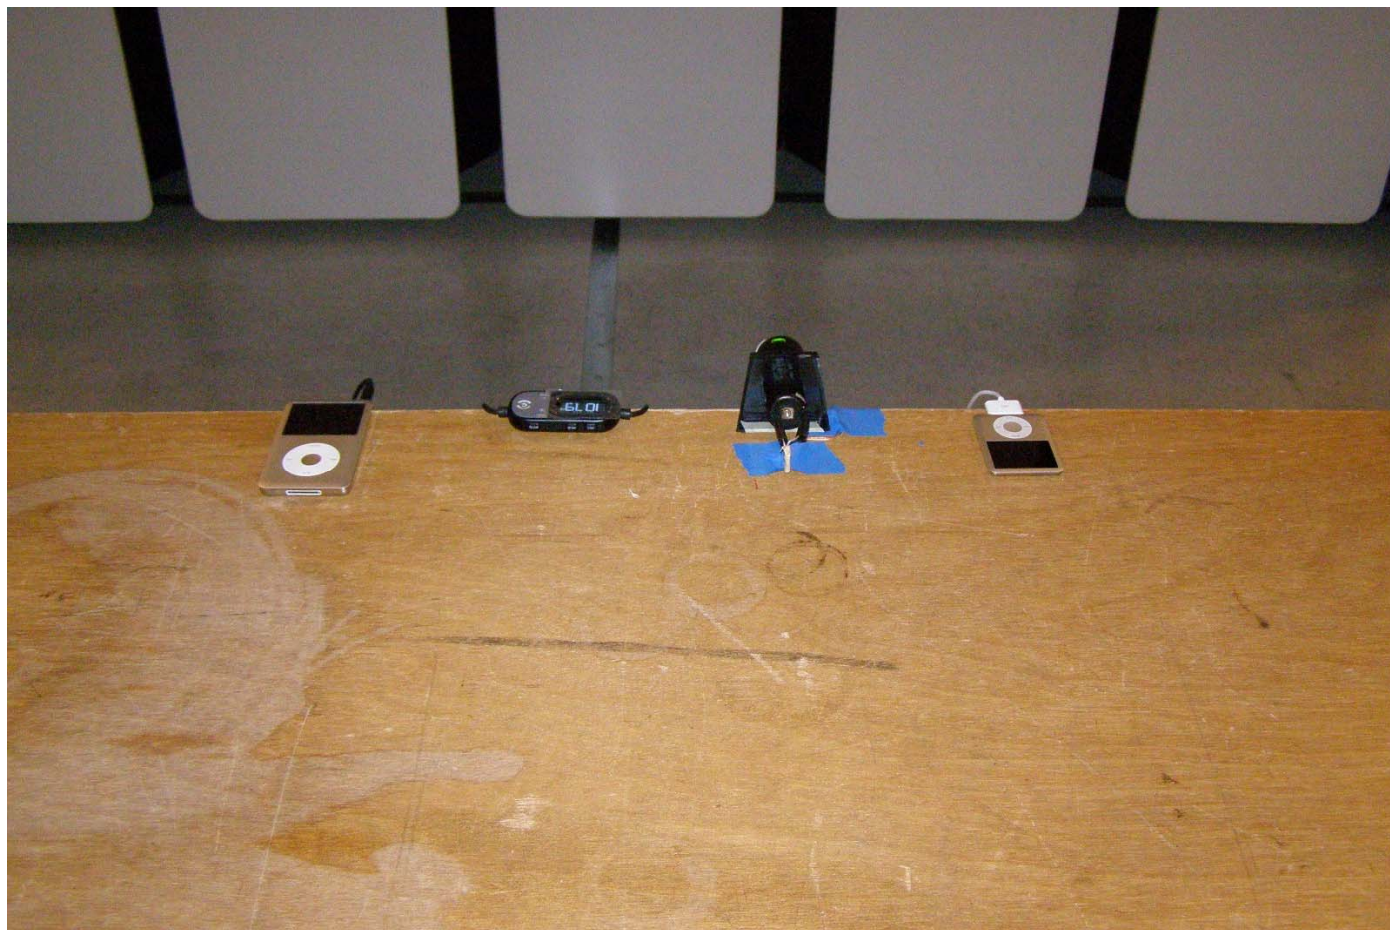

FRONT VIEW (Y-Axis)

BELKIN INTERNATIONAL, INC.
TUNECAST AUTO
MODEL: F8Z439
FCC SUBPART B AND C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E

DATA SHEETS



RADIATED EMISSIONS

SPURIOUS AND HARMONICS

DATA SHEETS

RADIATED EMISSIONS

9kHz – 30MHz

9 kHz - 150 kHz:

No Emissions Found

150 kHz - 30 MHz:

No Emissions Found

Title: FCC 15.239

5/7/2009 9:17:16 AM

File: Radiated Pre-scan 30-1000Mhz 88-1.set

Sequence: Preliminary Scan

Operator: Josh Hansen

EUT Type: TuneCast Auto (F8Z439)


EUT Condition: Song played: Linkin Park "Don't Stay" 0dB encode

Comments: Ipod connected to USB to charger

Temp: 68F

Hum: 56%

Compatible Electronics, Inc. FAC-3

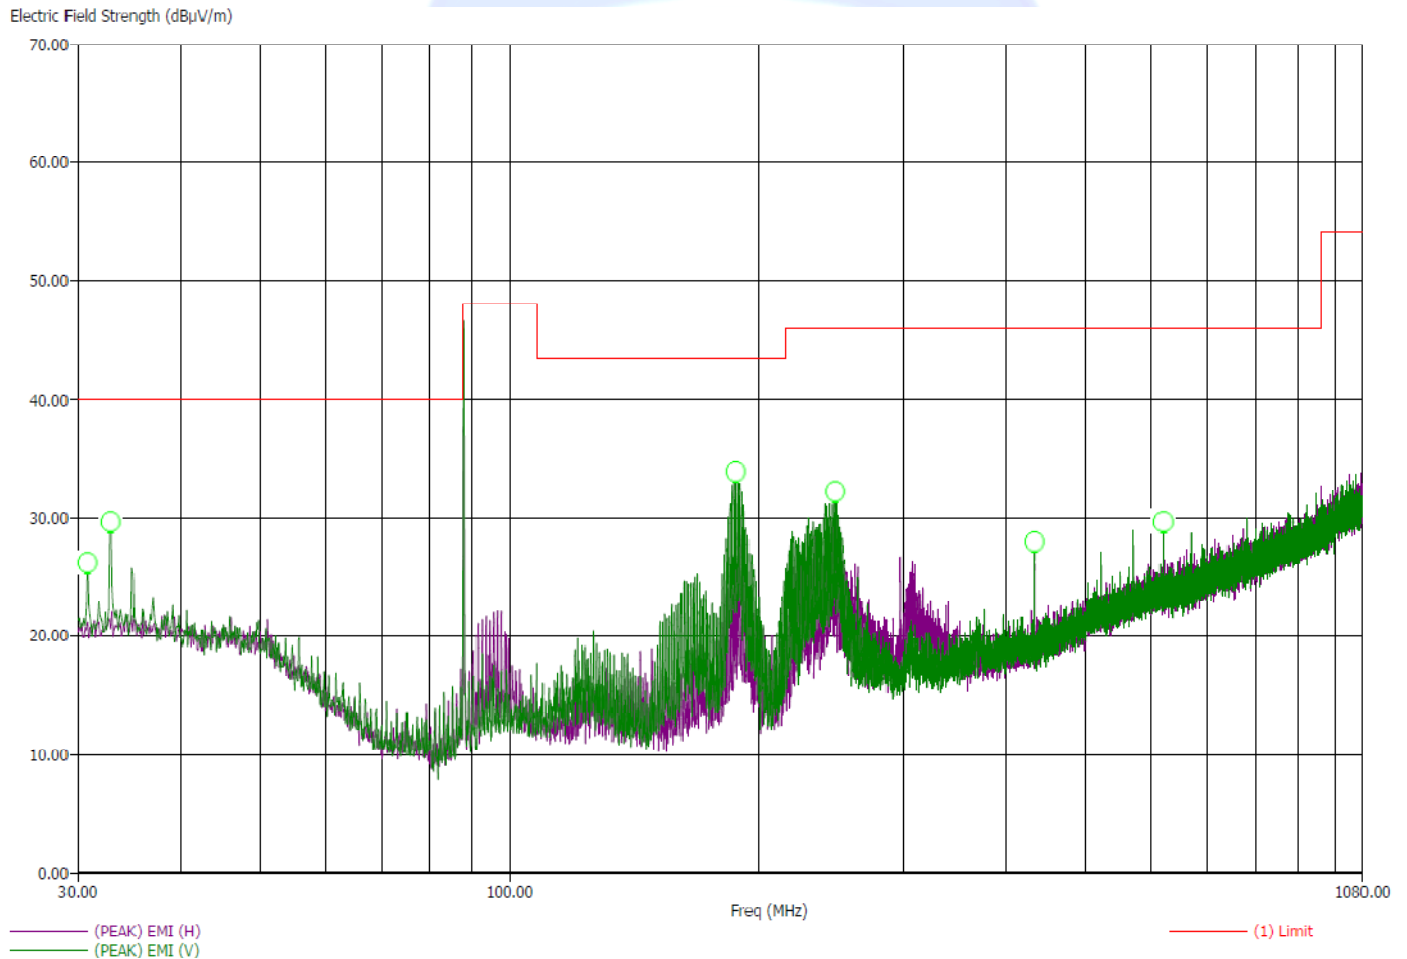

Title: FCC 15.239

5/7/2009 9:43:22 AM

File: Radiated Final 30-1000Mhz 88-1.set

Sequence: Final Measurements

Operator: Josh Hansen

EUT Type: TuneCast Auto (F8Z439)

EUT Condition: Song played: Linkin Park "Don't Stay" 0dB encode

Comments: Ipod connected to USB to charger

Temp: 68F

Hum: 56%

Compatible Electronics, Inc. FAC-3

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBμV/m)	(PEAK) EMI (dBμV/m)	Limit (dBμV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)
30.80	-15.92	24.08	27.08	40.00	V	154.75	164.88
32.90	-13.35	26.65	29.70	40.00	V	-0.25	164.52
188.20	-9.54	33.96	35.95	43.50	V	221.25	156.88
247.90	-16.37	29.63	31.81	46.00	V	76.50	333.82
432.10	-20.10	25.90	27.17	46.00	V	77.00	368.52
619.50	-21.16	24.84	28.84	46.00	V	202.25	260.47



-20 dB BANDWIDTH


DATA SHEETS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700


Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

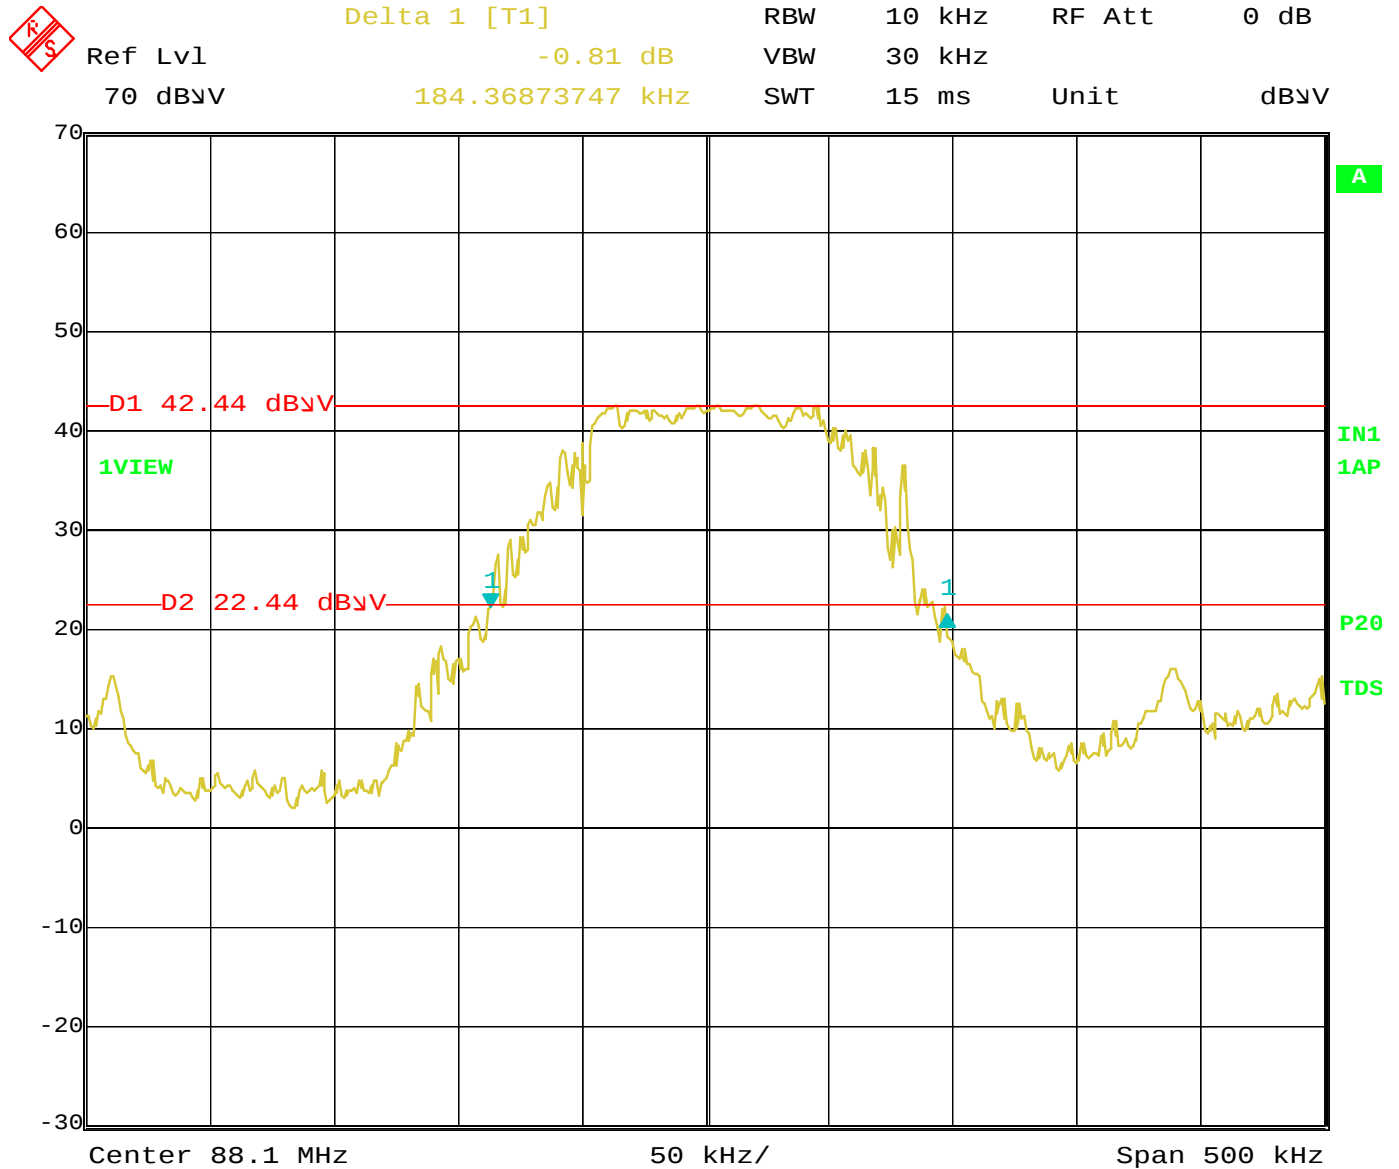

Date: 7.MAY.2009 12:55:13

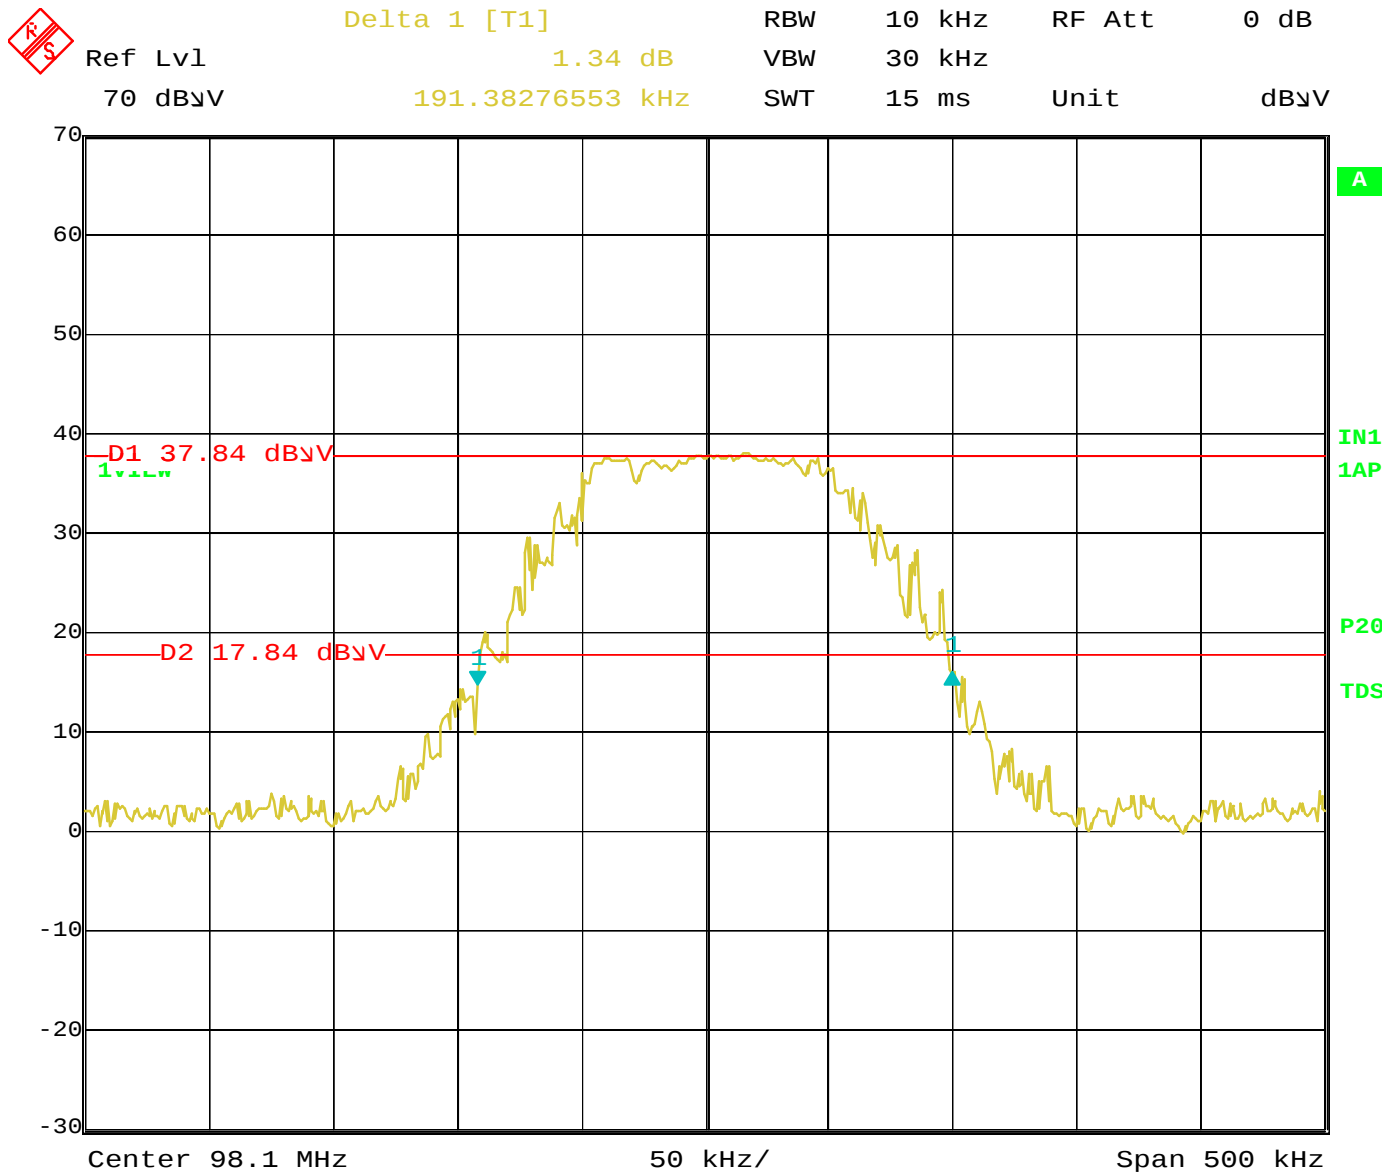

Date: 7.MAY.2009 12:57:37

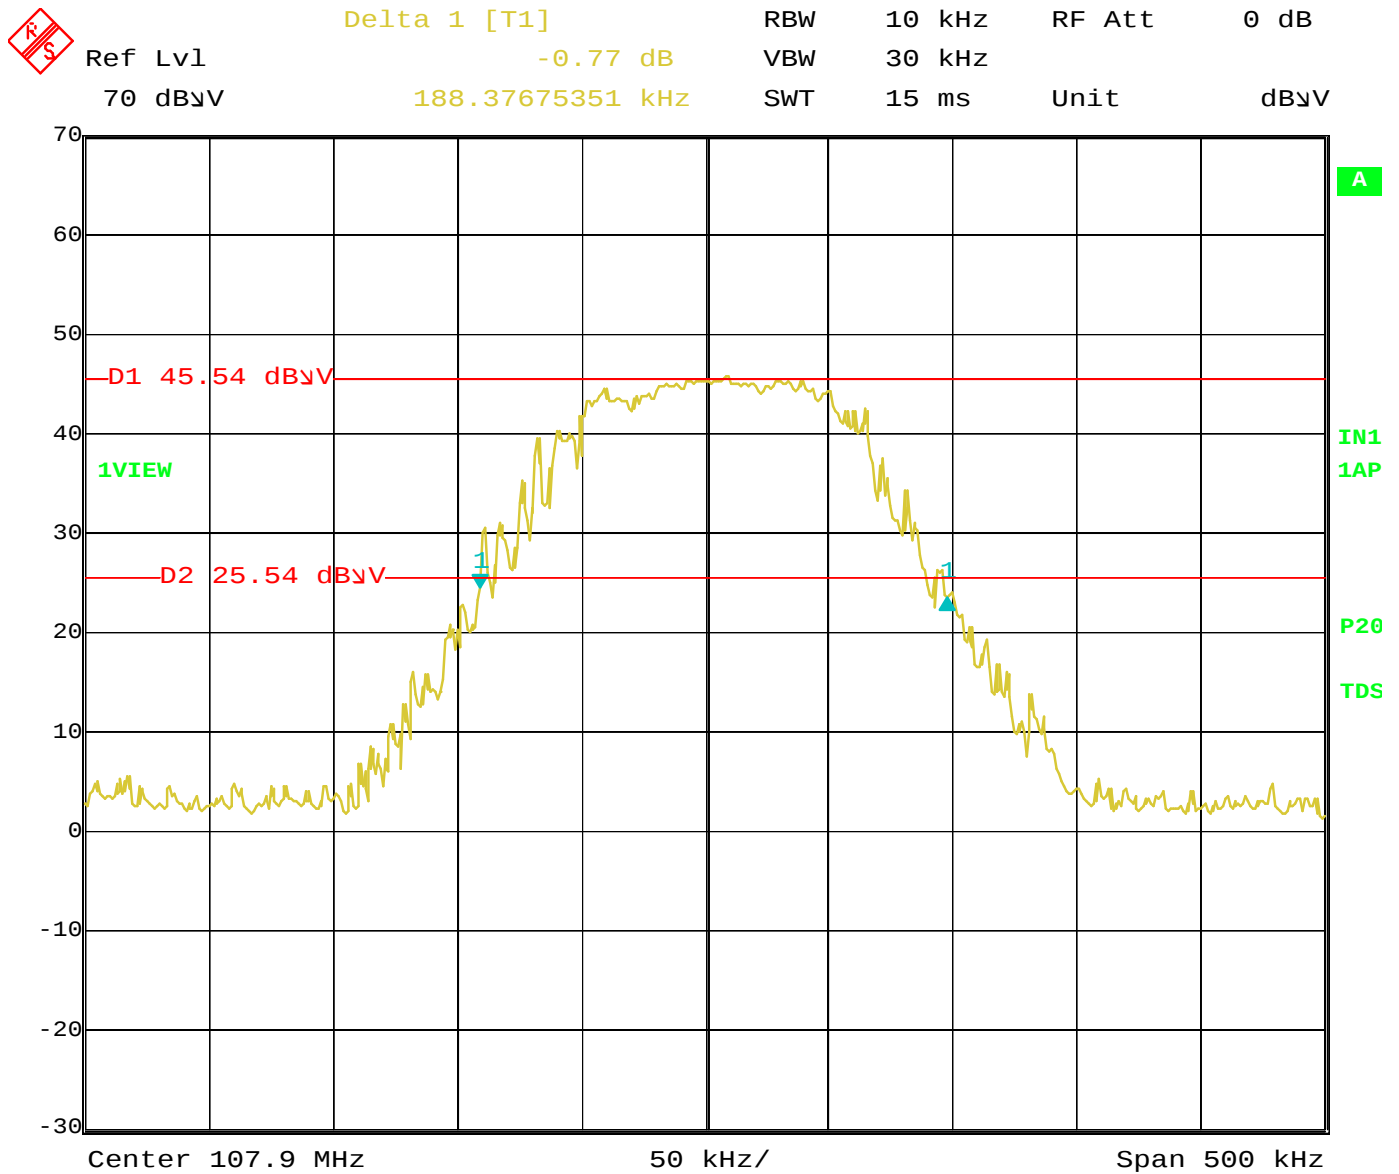

Date: 7.MAY.2009 12:59:30

PEAK TRANSMIT EMI and BAND EDGE

DATA SHEETS

Title: FCC 15.239

File: Final ETSI 15.239-2.set

Operator: Josh Hansen

EUT Type: TuneCast Auto (F8Z439)

EUT Condition: Song played: Linkin Park "Don't Stay" 0dB encode

Comments: Another iPod connected to USB to charger

Temp: 68F

Hum: 56%

5/7/2009 11:22:31 AM

Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3

Freq (MHz)	(AVG) Margin (dB)	(AVG) EMI (dBμV/m)	(PEAK) EMI (dBμV/m)	Limit (dBμV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)
88.10	-6.04	41.91	43.62	47.95	H	194.50	340.76
88.10	-3.55	44.40	46.52	47.95	V	212.25	151.52
98.10	-14.72	33.23	38.89	47.95	H	360.00	352.94
98.10	-6.86	41.09	42.49	47.95	V	53.75	151.70
107.90	-3.68	44.27	45.36	47.95	H	222.50	380.94
107.90	-7.73	40.22	46.20	47.95	V	360.00	151.29




Att 10 dB AUTO
 Preamp INPUT 1

Det	MA/QP	Trd	FAC
ResBW	120 kHz		
Meas T	100 ms	Unit	dBμV

FREQUENCY **88.00000000** **MHz**

LEVEL	PK+	43.51	dBμV
	QPK	38.56	dBμV

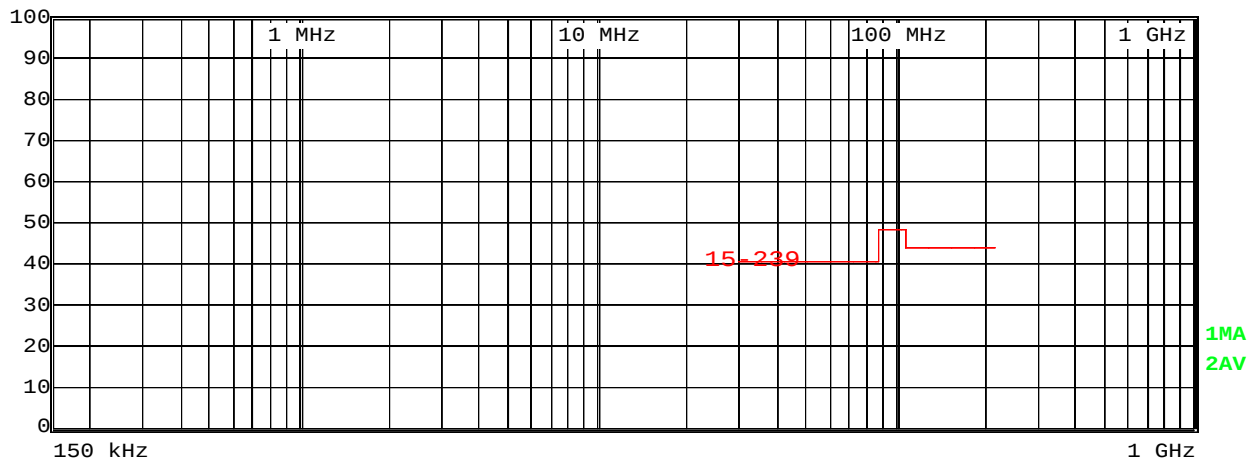

Date: 7.MAY.2009 12:51:17




Att 10 dB AUTO
 Preamp INPUT 1

Det	MA/QP	Trd	FAC
ResBW	120 kHz		
Meas T	100 ms	Unit	dBμV

FREQUENCY 108.00000000 MHz

LEVEL	PK+	46.24	dBμV
	QPK	42.44	dBμV

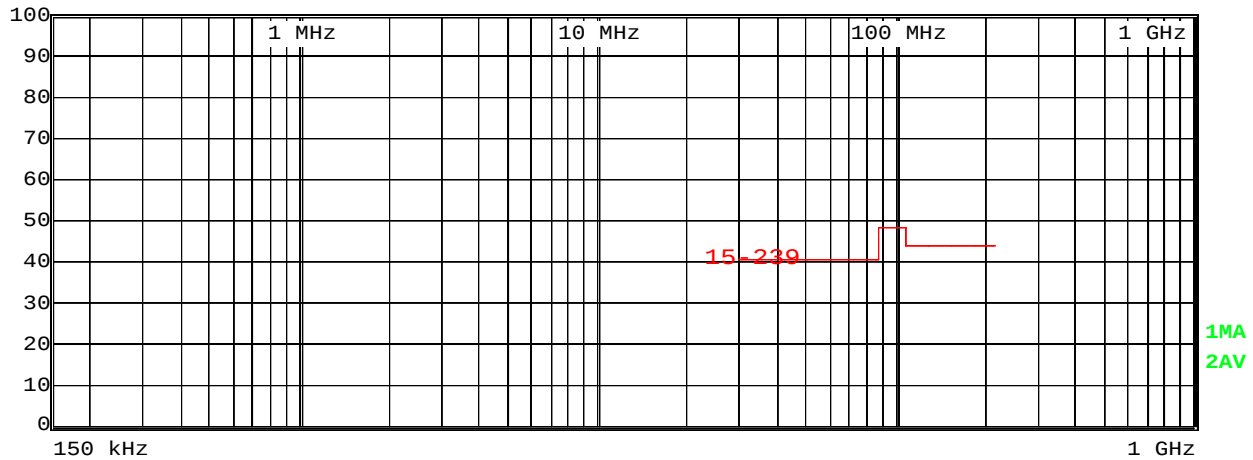

Date: 7.MAY.2009 12:49:26