

FCC RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : N300 Wireless N Router
Brand Name : Belkin
Model No. : F9K1002v3
Filing Type : New Application
Applicant : Belkin International Inc.
12045 E. Waterfront Drive Playa Viste,
CA 90094, USA
FCC ID : K7SF9K1002V3
Manufacturer : Belkin International Inc.
12045 E. Waterfront Drive Playa Viste,
CA 90094, USA
Received Date : Apr. 17, 2012
Final Test Date : May 18, 2012

Statement

Test result included is only for the 802.11b/g/n part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT2

2 GENERAL INFORMATION.....3

2.1 Product Details.....3

2.2 Accessories.....4

2.3 Table for Filed Antenna.....4

2.4 Table for Carrier Frequencies5

2.5 Test Manner5

2.6 Table for Test Modes6

2.7 Table for Testing Locations.....6

2.8 Table for Supporting Units6

2.9 Table for Parameters of Test Software Setting.....7

2.10 EUT Operation during Test8

2.11 Test Configuration.....8

3 TEST RESULT10

3.1 AC Power Line Conducted Emissions Measurement10

3.2 Maximum Peak Output Power Measurement14

3.3 Power Spectral Density Measurement.....17

3.4 6dB Spectrum Bandwidth Measurement36

3.5 Radiated Emissions Measurement71

3.6 Band Edge and Fundamental Emissions Measurement.....121

3.7 Antenna Requirements136

4 LIST OF MEASURING EQUIPMENTS137

5 TEST LOCATION.....139

6 TAF CERTIFICATE OF ACCREDITATION140

APPENDIX A. RF EXPOSURE EVALUATION A1 ~ A3

APPENDIX B. TEST PHOTOS B1 ~ B6

APPENDIX C. PHOTOGRAPHS OF EUT C1 ~ C15


CERTIFICATE OF COMPLIANCE

According to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : N300 Wireless N Router
Brand Name : Belkin
Model No. : F9K1002v3
Applicant : Belkin International Inc.
12045 E. Waterfront Drive Playa Viste,
CA 90094, USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 17, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

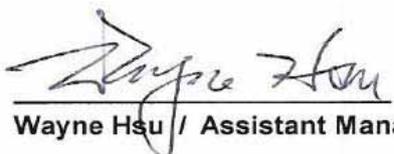

Wayne Hsu / Assistant Manager

SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C | | | | |
|--|--------------|------------------------------------|----------|-------------|
| Part | Rule Section | Description of Test | Result | Under Limit |
| 3.1 | 15.207 | AC Power Line Conducted Emissions | Complies | 11.42 dB |
| 3.2 | 15.247(b)(3) | Maximum Peak Output Power | Complies | 2.61 dB |
| 3.3 | 15.247(e) | Power Spectral Density | Complies | 16.36 dB |
| 3.4 | 15.247(a)(2) | 6dB Spectrum Bandwidth Measurement | Complies | - |
| 3.5 | 15.247(d) | Radiated Emissions | Complies | 1.01 dB |
| 3.6 | 15.247(d) | Band Edge Emissions | Complies | 1.06 dB |
| 3.7 | 15.203 | Antenna Requirements | Complies | - |

| Test Items | Uncertainty | Remark |
|---|-----------------------|--------------------------|
| AC Power Line Conducted Emissions | ±2.3dB | Confidence levels of 95% |
| Maximum Peak Output Power | ±0.8dB | Confidence levels of 95% |
| Power Spectral Density | ±0.5dB | Confidence levels of 95% |
| 6dB Spectrum Bandwidth Measurement | ±8.5×10 ⁻⁸ | Confidence levels of 95% |
| Radiated Emissions (9kHz~30MHz) | ±0.8dB | Confidence levels of 95% |
| Radiated Emissions (30MHz~1000MHz) | ±1.9dB | Confidence levels of 95% |
| Radiated / Band Edge Emissions (1GHz~18GHz) | ±1.9dB | Confidence levels of 95% |
| Radiated Emissions (18GHz~40GHz) | ±1.9dB | Confidence levels of 95% |
| Temperature | ±0.7°C | Confidence levels of 95% |
| Humidity | ±3.2% | Confidence levels of 95% |
| DC / AC Power Source | ±1.4% | Confidence levels of 95% |

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11b/g/n is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

| Items | Description |
|-------------------------------------|--|
| Power Type | From 9V adapter |
| Data Modulation Data Rate (Mbps) | DSSS for IEEE 802.11b (DBPSK / DQPSK / CCK) (1/2/ 5.5/11) OFDM for IEEE 802.11g (BPSK / QPSK / 16QAM / 64QAM) (6/9/12/18/24/36/48/54) See the below table for IEEE 802.11n |
| Frequency Range | 2400 ~ 2483.5MHz |
| Channel Number | 11b/g/n (20MHz): 11 ; 11/n (40MHz): 7 |
| Channel Band Width (99%) | 802.11b/g : 11b: 14.52 MHz ; 11g: 16.40 MHz 802.11n : MCS 0 (20MHz) : 17.56 MHz ; MCS 0 (40MHz) : 35.60 MHz MCS 8 (20MHz) : 17.56 MHz ; MCS 8 (40MHz) : 35.60 MHz |
| Conducted Output Power | 802.11b/g : 11b: 14.87 dBm ; 11g: 24.15 dBm 802.11n : MCS 0 (20MHz) : 23.79 dBm ; MCS 0 (40MHz) : 23.76 dBm MCS 8 (20MHz) : 27.39 dBm ; MCS 8 (40MHz) : 26.92 dBm |

IEEE 802.11n Modulation Scheme

| MCS | Spatial | Modulation | Coding Rate | Data rate(Mbps) | |
|-------|---------|------------|-------------|---------------------------|---------------------------|
| | | | | 20 MHz channel 800nsGI | 40 MHz channel 800nsGI |
| Index | Streams | Type | Type | | |
| 0 | 1 | BPSK | 1/2 | 6.5 | 13.5 |
| 1 | 1 | QPSK | 1/2 | 13 | 27 |
| 2 | 1 | QPSK | 3/4 | 19.5 | 40.5 |
| 3 | 1 | 16-QAM | 1/2 | 26 | 54 |
| 4 | 1 | 16-QAM | 3/4 | 39 | 81 |
| 5 | 1 | 64-QAM | 2/3 | 52 | 108 |
| 6 | 1 | 64-QAM | 3/4 | 58.5 | 121.5 |
| 7 | 1 | 64-QAM | 5/6 | 65 | 135 |
| 8 | 2 | BPSK | 1/2 | 13 | 27 |
| 9 | 2 | QPSK | 1/2 | 26 | 54 |
| 10 | 2 | QPSK | 3/4 | 39 | 81 |
| 11 | 2 | 16-QAM | 1/2 | 52 | 108 |
| 12 | 2 | 16-QAM | 3/4 | 78 | 162 |
| 13 | 2 | 64-QAM | 2/3 | 104 | 216 |
| 14 | 2 | 64-QAM | 3/4 | 117 | 243 |
| 15 | 2 | 64-QAM | 5/6 | 130 | 270 |

| Symbol | Explanation |
|--------|---|
| NSS | Number of spatial streams |
| R | Code rate |
| NBPS | Number of coded bits per single carrier |
| NCBPS | Number of coded bits per symbol |
| NDBPS | Number of data bits per symbol |
| GI | guard interval |

2.2 Accessories

| Accessories Information | | | | |
|-------------------------|--------------|--|------------|-----------------|
| AC Adapter 1 | Brand Name | DVE | Model Name | DSA-9PFB-09 FUS |
| | Power Rating | I/P: 100-240Vac ~50/60Hz 0.3A; O/P: +9Vdc 1A | | |
| AC Adapter 2 | Brand Name | Sunny | Model Name | SYS1381-0909-W2 |
| | Power Rating | I/P: 100-240Vac ~0.5A MAX, 50-60Hz; O/P: 9Vdc 1.0A | | |

Note: Regarding to more detail and other information, please refer to user manual.

2.3 Table for Filed Antenna

| Antenna Category (Ant. Cat.) | |
|-------------------------------------|---|
| <input checked="" type="checkbox"/> | Integral antenna (antenna permanently attached) |
| <input checked="" type="checkbox"/> | Temporary RF connector provided ; <input type="checkbox"/> No temporary RF connector provided |

| Transmitter Outputs & Receiver Inputs Information | | | |
|---|---------------------|-----------------|----------------------------|
| Modulation | Transmitter Outputs | Receiver Inputs | Transmitter Output Signals |
| 802.11b/g | 1 | 1 | - |
| 802.11n HT20 / HT40 | 1 | 1 | - |
| 802.11n HT20 / HT40 | 2 | 2 | - |

| Antenna General Information | | | | | | | | | |
|--|----|---|-----------|--------------|---|-------|---------------------------|---|---|
| Antenna Port (Total 2 Port) | | | | | 1(TX/RX), 2(TX/RX) | | | | |
| Maximum RF Output Power Level (PL) | | | | | 1 | | | | |
| Transmit Chains Power Distribution | | | | | <input checked="" type="checkbox"/> symmetrical distribution <input type="checkbox"/> asymmetrical distribution | | | | |
| Ant. No. | PL | Ant. Port [Ant No. X connect to Ant. Port Y] | Ant. Cat. | Ant. Type | Brand | Model | G _{ANT} (dBi) | DG (dBi) [correlated] N _{TX} = 1 | DG (dBi) [uncorrelated] N _{TX} = 2 |
| 1 | 1 | 1 | Integral | PCB | -- | -- | 4.8 | N/A | 4 |
| 2 | 1 | 2 | Integral | Parse Dipole | -- | -- | 3.1 | | |
| <input checked="" type="checkbox"/> The equipment is normally installed and point-to-point or point-to-multipoint systems: Ant. No. 1, 2 | | | | | | | | | |
| Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain (DG) = G _{ANT} + 10 log(N) dBi All transmit signals are completely uncorrelated, Directional Gain (DG) = G _{ANT} Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain (DG) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi All transmit signals are completely uncorrelated, Directional Gain (DG) = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / N]$ dBi | | | | | | | | | |

**The EUT was pre-tested antenna port 1 and antenna port 2 for single chain, the worst case was antenna port 1. therefore only the test data recorded in this report.

2.4 Table for Carrier Frequencies

There are two bandwidth systems for IEEE 802.11b/g/n.

For IEEE 802.11 b/g/n (20MHz) bandwidth systems use channel 1 ~ 11.

For IEEE 802.11 n (40MHz) bandwidth systems use channel 3 ~ 9.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1 | 2412 MHz | 7 | 2442 MHz |
| | 2 | 2417 MHz | 8 | 2447 MHz |
| | 3 | 2422 MHz | 9 | 2452 MHz |
| | 4 | 2427 MHz | 10 | 2457 MHz |
| | 5 | 2432 MHz | 11 | 2462 MHz |
| | 6 | 2437 MHz | - | - |

2.5 Test Manner

The following test modes were pretested for conducted and radiated test:

(During the test, the status of WLAN was open)

Mode 1. Adapter: DVE (DSA-9PFB-09 FUS)

Mode 2. Adapter: Sunny (SYS1381-0909-W2)

For conducted emissions test, cause "Mode 1" generated the worst test result; it was reported as final data.

For radiated emissions test, cause "Mode 1" generated the worst test result; it was reported as final data.

2.6 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items | Mode | Data Rate | Channel |
|--|-------------------|-----------|---------|
| AC Power Line Conducted Emissions | Transmitting mode | 13.5 Mbps | 6 |
| Maximum Peak Output Power Power Spectral Density | 11b/CCK | 1 Mbps | 1/6/11 |
| | 11g/BPSK | 6 Mbps | 1/6/11 |
| | MCS 0 (20MHz) | 6.5 Mbps | 1/6/11 |
| | MCS 0 (40MHz) | 13.5 Mbps | 3/6/9 |
| | MCS 8 (20MHz) | 13 Mbps | 1/6/11 |
| 6dB Spectrum Bandwidth Measurement | MCS 8 (40MHz) | 27 Mbps | 3/6/9 |
| | 11b/CCK | 1 Mbps | 1/6/11 |
| | 11g/BPSK | 6 Mbps | 1/6/11 |
| | MCS 0 (20MHz) | 6.5 Mbps | 1/6/11 |
| | MCS 0 (40MHz) | 13.5 Mbps | 3/6/9 |
| Radiated Emissions Below 1GHz | MCS 8 (20MHz) | 13 Mbps | 1/6/11 |
| | MCS 8 (40MHz) | 27 Mbps | 3/6/9 |
| | 11g/BPSK | 6 Mbps | 6 |
| | MCS 0 (20MHz) | 6.5 Mbps | 6 |
| | MCS 0 (40MHz) | 13.5 Mbps | 6 |
| Radiated Emissions Above 1GHz Fundamental Emissions | MCS 8 (20MHz) | 13 Mbps | 6 |
| | MCS 8 (40MHz) | 27 Mbps | 6 |
| | 11b/CCK | 1 Mbps | 1/6/11 |
| | 11g/BPSK | 6 Mbps | 1/6/11 |
| | MCS 0 (20MHz) | 6.5 Mbps | 1/6/11 |
| | MCS 0 (40MHz) | 13.5 Mbps | 3/6/9 |
| Band Edge Emissions | MCS 8 (20MHz) | 13 Mbps | 1/6/11 |
| | MCS 8 (40MHz) | 27 Mbps | 3/6/9 |
| | 11b/CCK | 1 Mbps | 1/11 |
| | 11g/BPSK | 6 Mbps | 1/11 |
| | MCS 0 (20MHz) | 6.5 Mbps | 1/11 |
| | MCS 0 (40MHz) | 13.5 Mbps | 3/9 |

2.7 Table for Testing Locations

| Test Site No. | Site Category | Location |
|---------------|---------------|----------|
| CO04-HY | Conduction | Hwa Ya |
| TH01-HY | OVEN Room | Hwa Ya |
| 03CH02-HY | SAC | Hwa Ya |

Semi Anechoic Chamber (SAC).

2.8 Table for Supporting Units

| Support Unit | Brand | Model | FCC ID |
|--------------|-------|-------|--------|
| Notebook | DELL | E5520 | DoC |

2.9 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11b/g Port 1

| Test Software Version | MP B/G Test | | |
|------------------------------|--------------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| IEEE 802.11b | 31 | 32 | 28 |
| IEEE 802.11g | 43 | 44 | 43 |

Power Parameters of IEEE 802.11n Pot 1

| Test Software Version | MP B/G Test | | |
|------------------------------|--------------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| IEEE 802.11n (20MHz) | 44 | 44 | 43 |
| Frequency | 2422 MHz | 2437 MHz | 2452 MHz |
| IEEE 802.11n (40MHz) | 46 | 44 | 42 |

For Two Chains:

Power Parameters of IEEE 802.11n Port 1+ Port 2

| Test Software Version | MP B/G Test | | |
|------------------------------|--------------------|----------|----------|
| Frequency | 2412 MHz | 2437 MHz | 2462 MHz |
| IEEE 802.11n (20MHz) | 52:52 | 50:50 | 50:50 |
| Frequency | 2422 MHz | 2437 MHz | 2452 MHz |
| IEEE 802.11n (40MHz) | 49:49 | 52:52 | 45:45 |

2.10 EUT Operation during Test

An executive program, "EMCTEST.EXE" under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows:


- a. Turn on the power of all equipment.
- b. The NB reads the test program from the hard disk drive and runs it.
- c. The NB sends "H" messages to the panel and displays "H" patterns on the screen.

At the same time, the following program was executed:


- Executed "MP B/G Test" to keep transmitting signals at fixed frequency.

2.11 Test Configuration


For conducted emissions

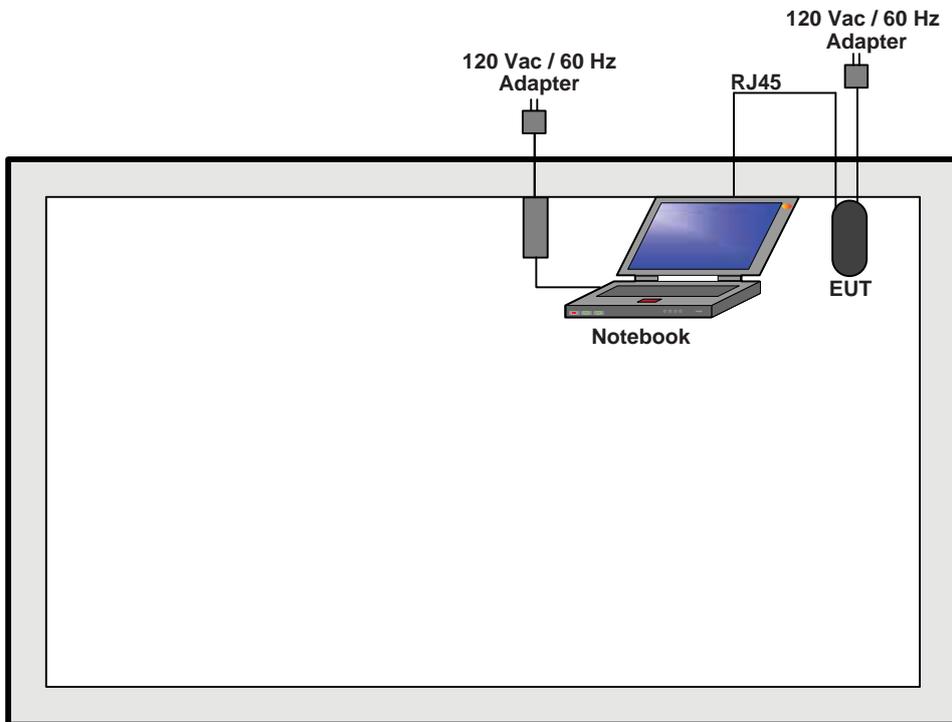

For radiated emissions 9kHz~1GHz

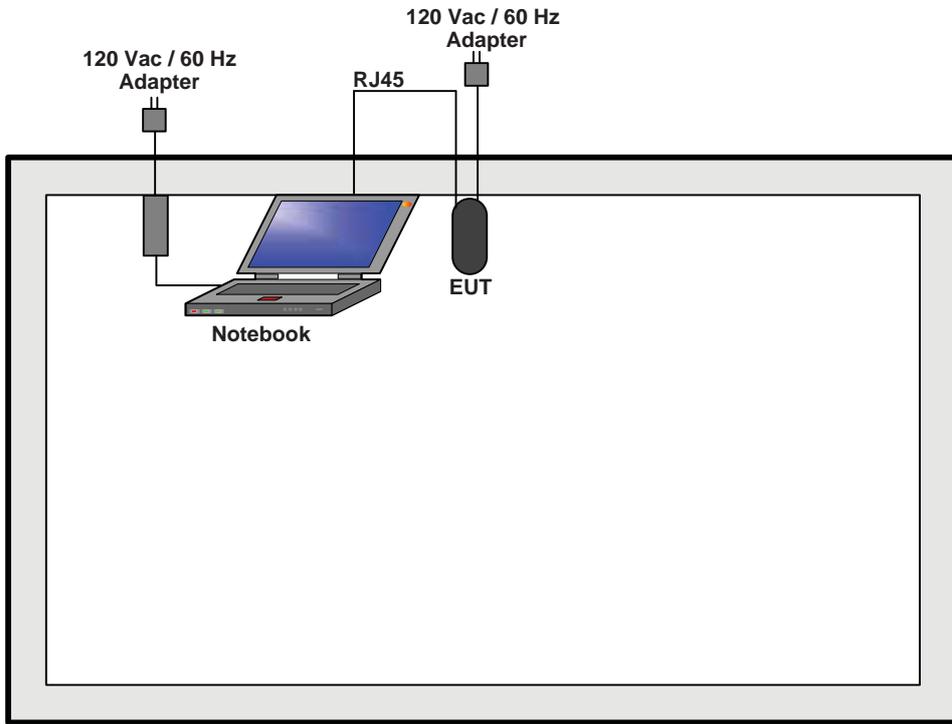

For radiated emissions above 1GHz

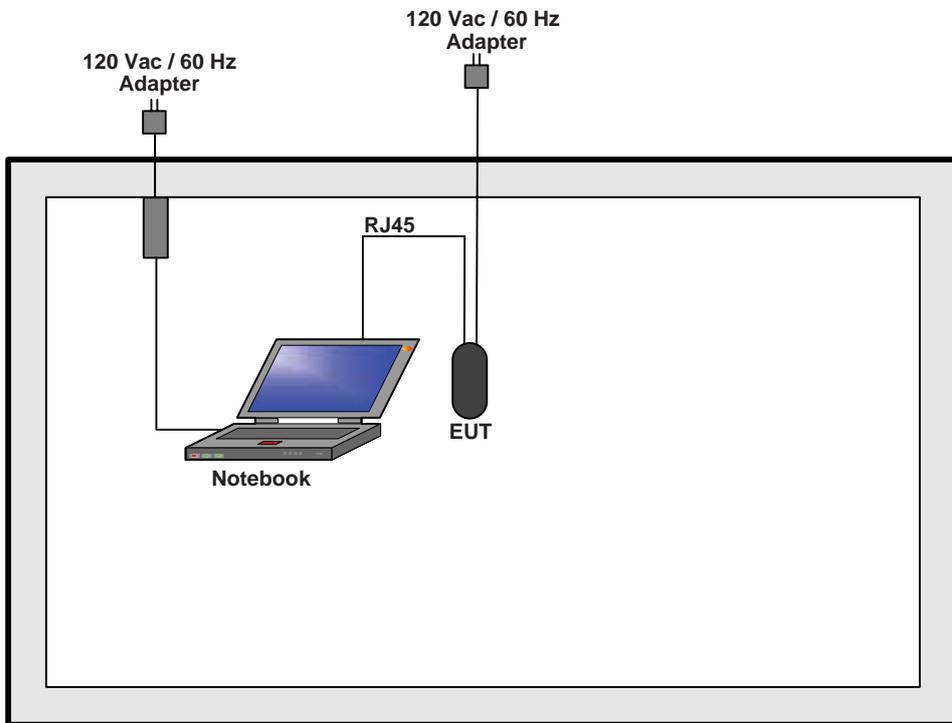

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5 | 66~56 | 56~46 |
| 0.5~5 | 56 | 46 |
| 5~30 | 60 | 50 |

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

3.1.3 Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 kHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

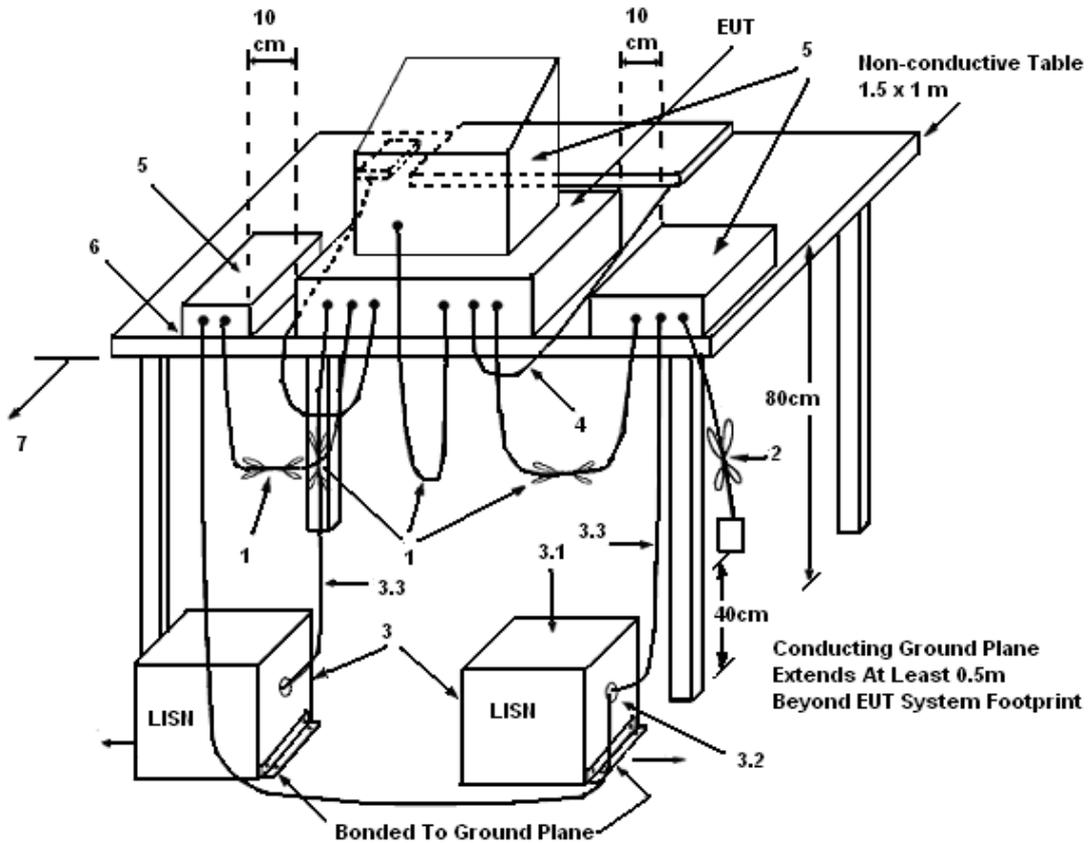

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in transmitting function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


| | | | |
|-----------------|--------------|---------------|---------|
| Final Test Date | May 17, 2012 | Test Site No. | CO04-HY |
| Temperature | 23°C | Humidity | 46% |
| Test Engineer | Alan | Configuration | Mode 1 |

Line

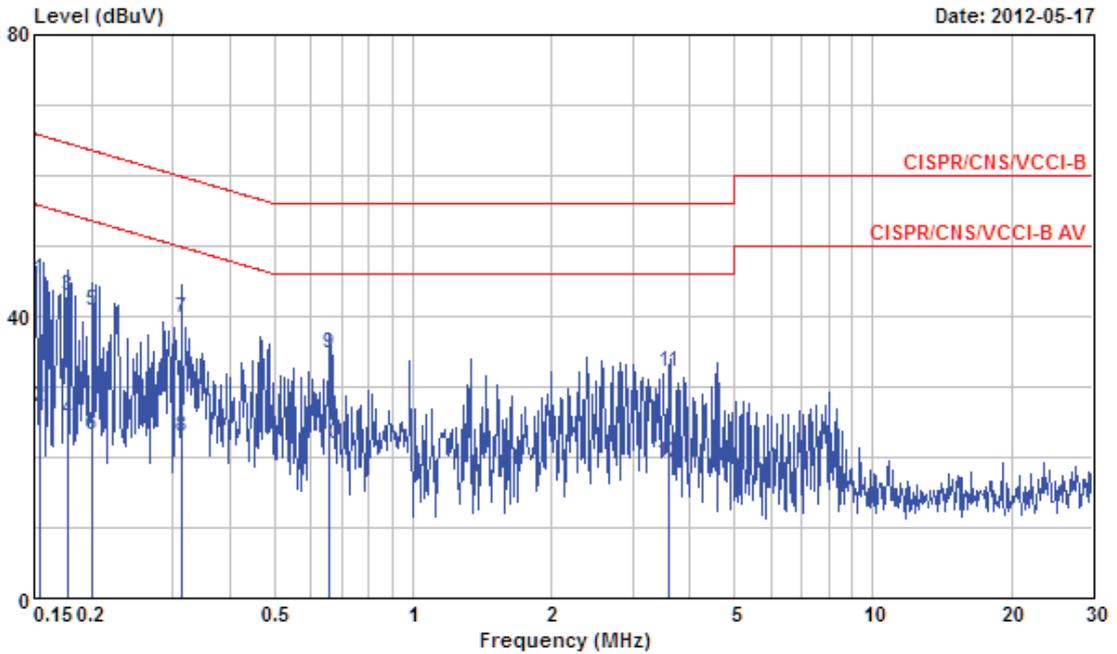

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|-----------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.1548450 | 45.14 | -20.60 | 65.74 | 44.74 | 0.30 | 0.10 | QP |
| 2 | 0.1548450 | 27.19 | -28.55 | 55.74 | 26.79 | 0.30 | 0.10 | Average |
| 3 | 0.1777150 | 42.97 | -21.62 | 64.59 | 42.57 | 0.30 | 0.10 | QP |
| 4 | 0.1777150 | 25.25 | -29.34 | 54.59 | 24.85 | 0.30 | 0.10 | Average |
| 5 | 0.2007470 | 40.86 | -22.72 | 63.58 | 40.46 | 0.30 | 0.10 | QP |
| 6 | 0.2007470 | 23.10 | -30.48 | 53.58 | 22.70 | 0.30 | 0.10 | Average |
| 7 | 0.3132810 | 39.76 | -20.12 | 59.88 | 39.36 | 0.30 | 0.10 | QP |
| 8 | 0.3132810 | 22.80 | -27.08 | 49.88 | 22.40 | 0.30 | 0.10 | Average |
| 9 | 0.6577770 | 34.67 | -21.33 | 56.00 | 34.28 | 0.29 | 0.10 | QP |
| 10 | 0.6577770 | 21.88 | -24.12 | 46.00 | 21.49 | 0.29 | 0.10 | Average |
| 11 | 3.613 | 32.23 | -23.77 | 56.00 | 31.89 | 0.34 | 0.00 | QP |
| 12 | 3.613 | 19.20 | -26.80 | 46.00 | 18.86 | 0.34 | 0.00 | Average |

Neutral

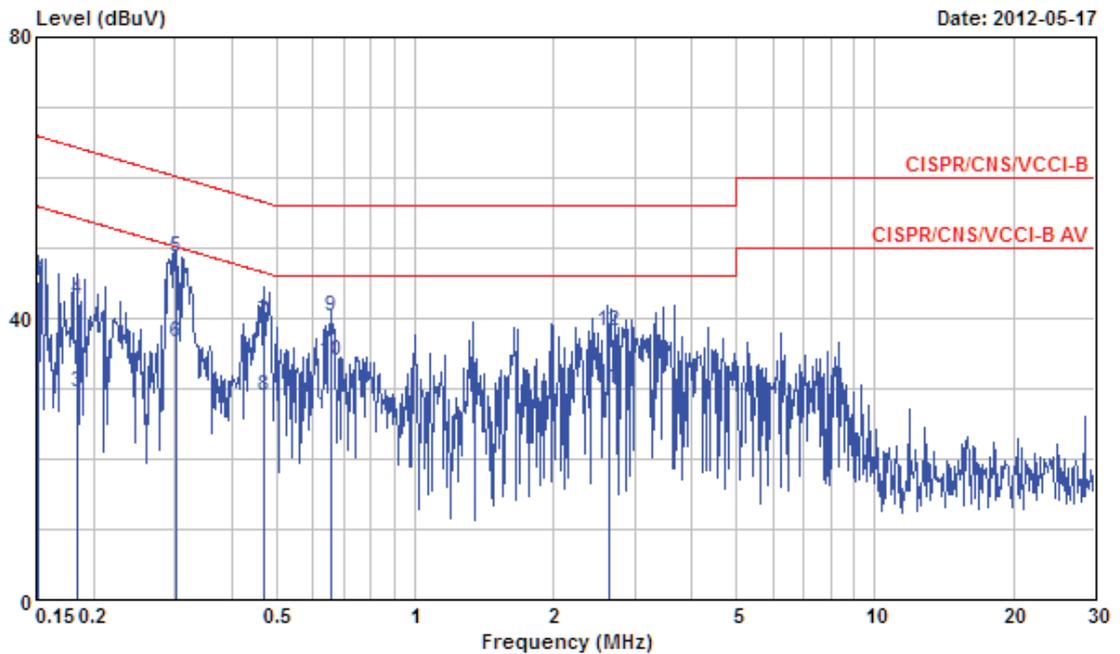

| | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark |
|----|-----------|-------|------------|------------|------------|-------------|------------|---------|
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.1515980 | 31.75 | -24.16 | 55.91 | 31.38 | 0.27 | 0.10 | Average |
| 2 | 0.1515980 | 45.38 | -20.53 | 65.91 | 45.01 | 0.27 | 0.10 | QP |
| 3 | 0.1844300 | 29.46 | -24.82 | 54.28 | 29.10 | 0.26 | 0.10 | Average |
| 4 | 0.1844300 | 42.65 | -21.63 | 64.28 | 42.29 | 0.26 | 0.10 | QP |
| 5 | 0.3034790 | 48.73 | -11.42 | 60.15 | 48.39 | 0.24 | 0.10 | QP |
| 6 | 0.3034790 | 36.62 | -13.53 | 50.15 | 36.28 | 0.24 | 0.10 | Average |
| 7 | 0.4711010 | 39.59 | -16.90 | 56.49 | 39.25 | 0.24 | 0.10 | QP |
| 8 | 0.4711010 | 28.94 | -17.55 | 46.49 | 28.60 | 0.24 | 0.10 | Average |
| 9 | 0.6564260 | 40.25 | -15.75 | 56.00 | 39.90 | 0.25 | 0.10 | QP |
| 10 | 0.6564260 | 34.01 | -11.99 | 46.00 | 33.66 | 0.25 | 0.10 | Average |
| 11 | 2.630 | 30.01 | -15.99 | 46.00 | 29.73 | 0.28 | 0.00 | Average |
| 12 | 2.630 | 38.26 | -17.74 | 56.00 | 37.98 | 0.28 | 0.00 | QP |

Note:
Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Peak Output Power Measurement

3.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-multipoint antenna reduction operation, the limit has to be reduced by 1dB for every dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting |
|------------------------------|----------------|
| Filter No. | Auto |
| Measurement time | 0.135 s ~ 26 s |
| Used Peak Sensor | MA2411B |

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.
4. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula. (Only for IEEE 802.11n test)

3.2.4 Test Setup Layout

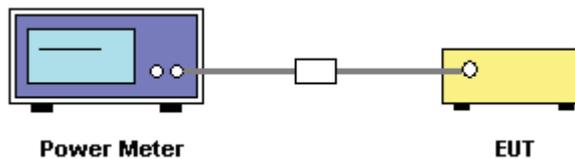

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Peak Output Power

| | | | |
|------------------------|--------------|-----------------------|-------------|
| Final Test Date | May 18, 2012 | Test Site No. | TH01-HY |
| Temperature | 26.3°C | Humidity | 28% |
| Test Engineer | Ian | Configurations | 802.11b/g/n |

For Single Chain:

Configuration IEEE 802.11b Port 1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 1 | 2412 MHz | 14.87 | 30.00 | Complies |
| 6 | 2437 MHz | 14.85 | 30.00 | Complies |
| 11 | 2462 MHz | 13.13 | 30.00 | Complies |

Configuration IEEE 802.11g Port 1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 1 | 2412 MHz | 23.81 | 30.00 | Complies |
| 6 | 2437 MHz | 24.15 | 30.00 | Complies |
| 11 | 2462 MHz | 24.06 | 30.00 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 1 | 2412 MHz | 23.63 | 30.00 | Complies |
| 6 | 2437 MHz | 23.79 | 30.00 | Complies |
| 11 | 2462 MHz | 23.71 | 30.00 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|-----------------|
| 3 | 2422 MHz | 23.76 | 30.00 | Complies |
| 6 | 2437 MHz | 23.41 | 30.00 | Complies |
| 9 | 2452 MHz | 22.49 | 30.00 | Complies |

For Two Chains:

Configuration of IEEE 802.11n (20MHz) Port 1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|----------|
| 1 | 2412 MHz | 24.87 | 30.00 | Complies |
| 6 | 2437 MHz | 24.76 | 30.00 | Complies |
| 11 | 2462 MHz | 24.85 | 30.00 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 2

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|----------|
| 1 | 2412 MHz | 23.41 | 30.00 | Complies |
| 6 | 2437 MHz | 23.97 | 30.00 | Complies |
| 11 | 2462 MHz | 23.84 | 30.00 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 1+ Port 2

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|----------|
| 1 | 2412 MHz | 27.21 | 30.00 | Complies |
| 6 | 2437 MHz | 27.39 | 30.00 | Complies |
| 11 | 2462 MHz | 27.38 | 30.00 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|----------|
| 3 | 2422 MHz | 23.78 | 30.00 | Complies |
| 6 | 2437 MHz | 24.56 | 30.00 | Complies |
| 9 | 2452 MHz | 22.63 | 30.00 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 2

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|----------|
| 3 | 2422 MHz | 21.49 | 30.00 | Complies |
| 6 | 2437 MHz | 23.15 | 30.00 | Complies |
| 9 | 2452 MHz | 19.48 | 30.00 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 1+ Port 2

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|-----------------------|------------------|----------|
| 3 | 2422 MHz | 25.79 | 30.00 | Complies |
| 6 | 2437 MHz | 26.92 | 30.00 | Complies |
| 9 | 2452 MHz | 24.34 | 30.00 | Complies |

3.3.7 Test Result of Power Spectral Density

| | | | |
|------------------------|--------------|-----------------------|-------------|
| Final Test Date | May 18, 2012 | Test Site No. | TH01-HY |
| Temperature | 26.3°C | Humidity | 28% |
| Test Engineer | Ian | Configurations | 802.11b/g/n |

For Single Chain:

Configuration IEEE 802.11b Port 1

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 1 | 2412 MHz | -18.17 | 8.00 | Complies |
| 6 | 2437 MHz | -17.63 | 8.00 | Complies |
| 11 | 2462 MHz | -20.57 | 8.00 | Complies |

Configuration IEEE 802.11g Port 1

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 1 | 2412 MHz | -14.22 | 8.00 | Complies |
| 6 | 2437 MHz | -14.30 | 8.00 | Complies |
| 11 | 2462 MHz | -13.79 | 8.00 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 1

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 1 | 2412 MHz | -13.49 | 8.00 | Complies |
| 6 | 2437 MHz | -14.07 | 8.00 | Complies |
| 11 | 2462 MHz | -14.36 | 8.00 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 1

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 3 | 2422 MHz | -14.93 | 8.00 | Complies |
| 6 | 2437 MHz | -15.17 | 8.00 | Complies |
| 9 | 2452 MHz | -16.53 | 8.00 | Complies |

For Two Chains:

Configuration of IEEE 802.11n (20MHz) Port 1

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 1 | 2412 MHz | -9.82 | 8.00 | Complies |
| 6 | 2437 MHz | -10.44 | 8.00 | Complies |
| 11 | 2462 MHz | -12.37 | 8.00 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 2

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 1 | 2412 MHz | -13.80 | 8.00 | Complies |
| 6 | 2437 MHz | -13.81 | 8.00 | Complies |
| 11 | 2462 MHz | -14.82 | 8.00 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 1+ Port 2

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 1 | 2412 MHz | -8.36 | 8.00 | Complies |
| 6 | 2437 MHz | -8.80 | 8.00 | Complies |
| 11 | 2462 MHz | -10.41 | 8.00 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 1

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 3 | 2422 MHz | -15.42 | 8.00 | Complies |
| 6 | 2437 MHz | -14.59 | 8.00 | Complies |
| 9 | 2452 MHz | -15.40 | 8.00 | Complies |


Configuration of IEEE 802.11n (40MHz) Port 2

| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 3 | 2422 MHz | -18.76 | 8.00 | Complies |
| 6 | 2437 MHz | -16.40 | 8.00 | Complies |
| 9 | 2452 MHz | -19.77 | 8.00 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 1+ Port 2


| Channel | Frequency | Power Density (dBm) | Max. Limit (dBm) | Result |
|---------|-----------|---------------------|------------------|-----------------|
| 3 | 2422 MHz | -13.77 | 8.00 | Complies |
| 6 | 2437 MHz | -12.39 | 8.00 | Complies |
| 9 | 2452 MHz | -14.05 | 8.00 | Complies |

For Single Chain:
Power Density Plot on Configuration IEEE 802.11b 2412 MHz Port 1

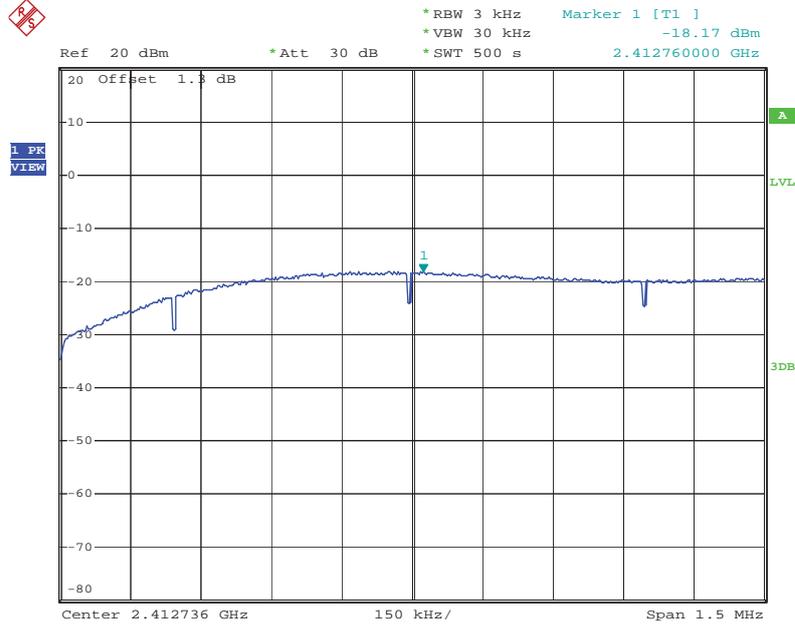


Date: 15.MAY.2012 13:42:39

Power Density Plot on Configuration IEEE 802.11b 2437 MHz Port 1

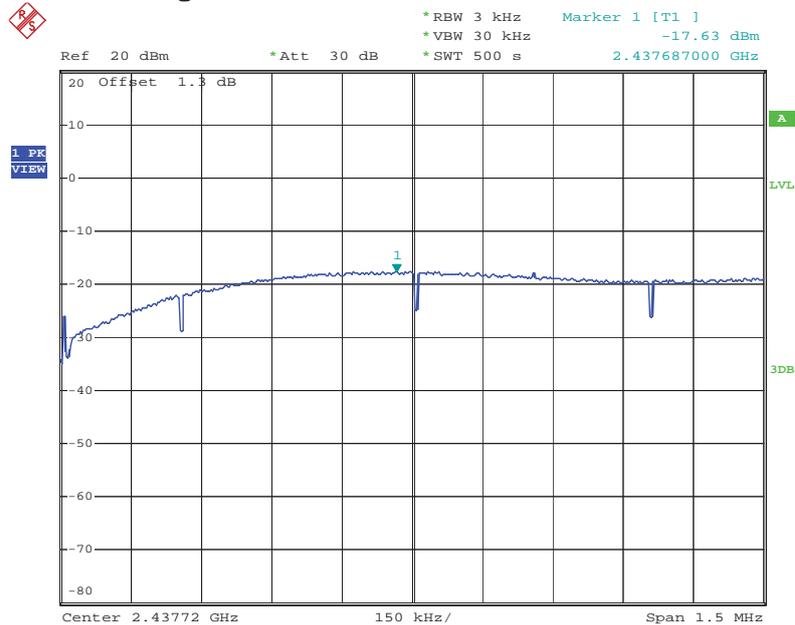


Date: 15.MAY.2012 13:48:15

Power Density Plot on Configuration IEEE 802.11b 2462 MHz Port 1

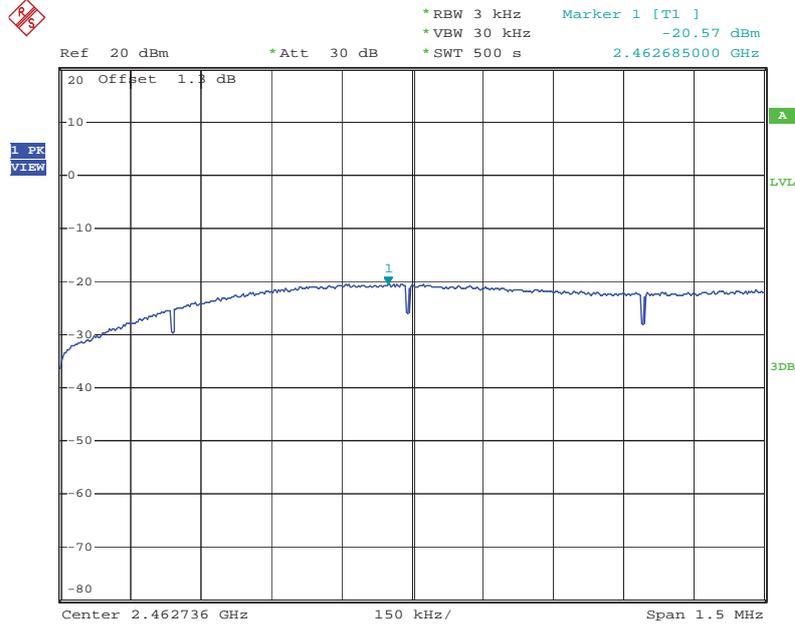


Date: 15.MAY.2012 13:55:44

Power Density Plot on Configuration IEEE 802.11g 2412 MHz Port 1

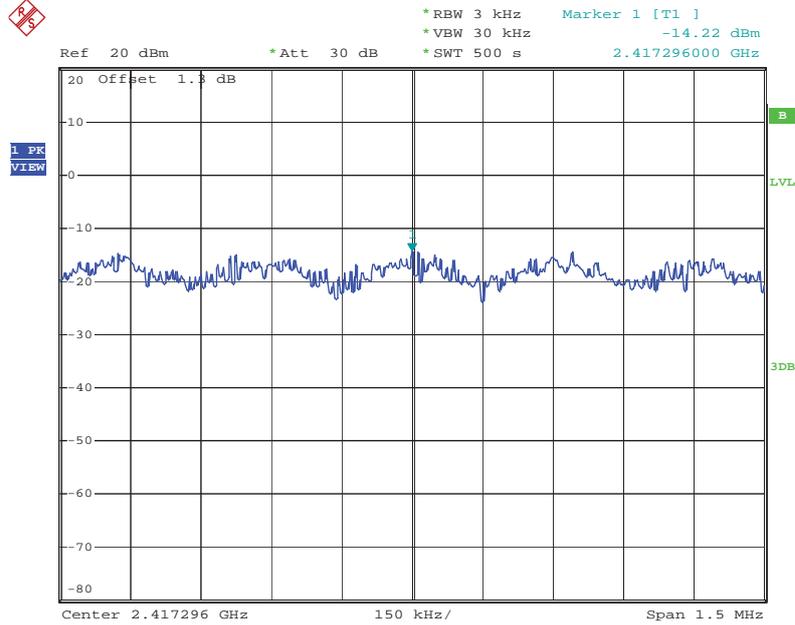


Date: 18.MAY.2012 11:08:04

Power Density Plot on Configuration IEEE 802.11g 2437 MHz Port 1

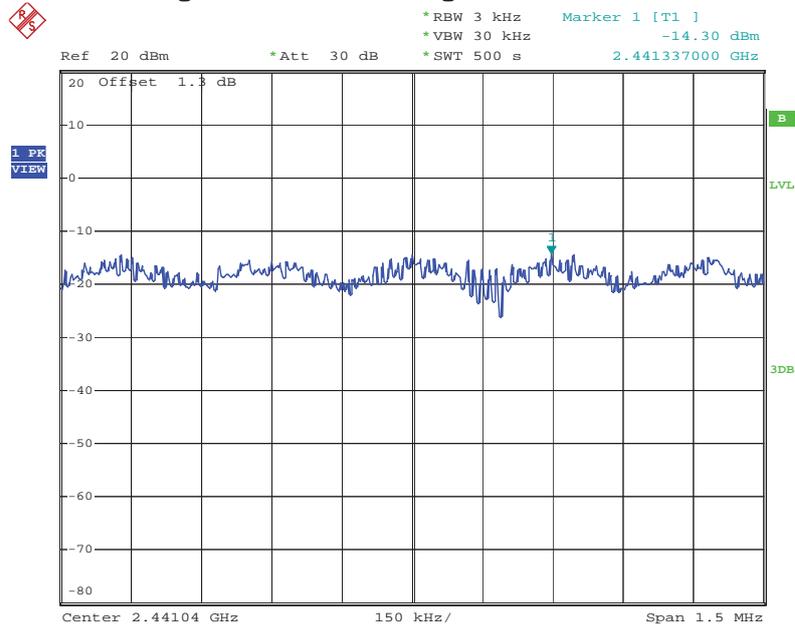


Date: 18.MAY.2012 11:14:45

Power Density Plot on Configuration IEEE 802.11g 2462 MHz Port 1

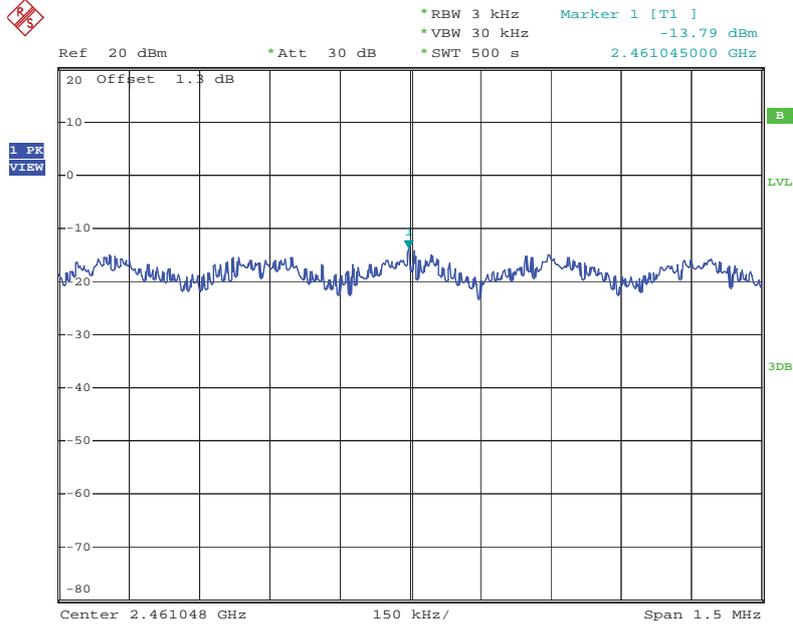


Date: 18.MAY.2012 11:17:03

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

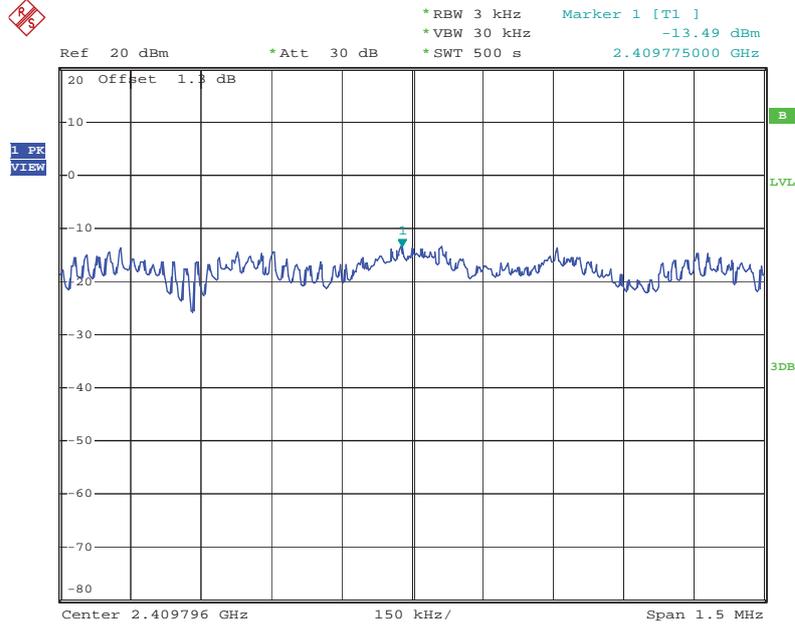


Date: 18.MAY.2012 11:24:14

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 1

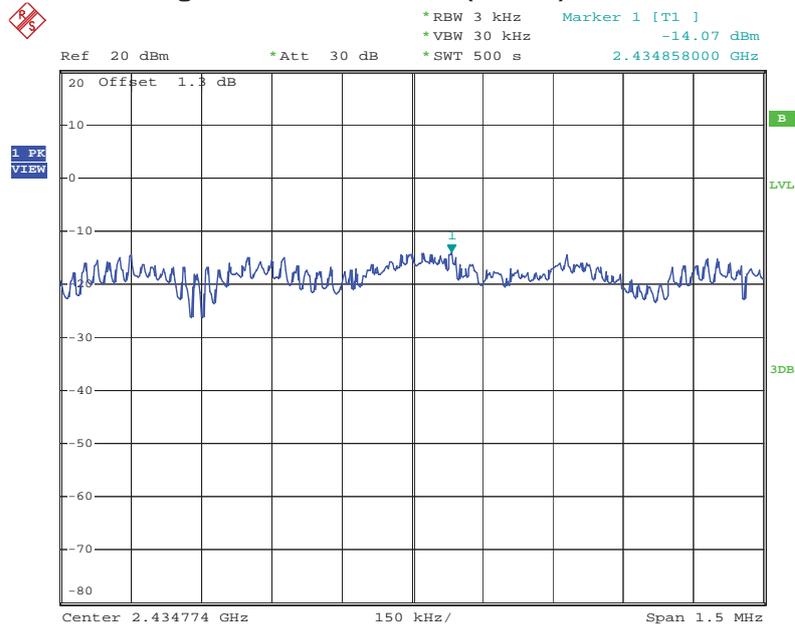


Date: 18.MAY.2012 11:26:21

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

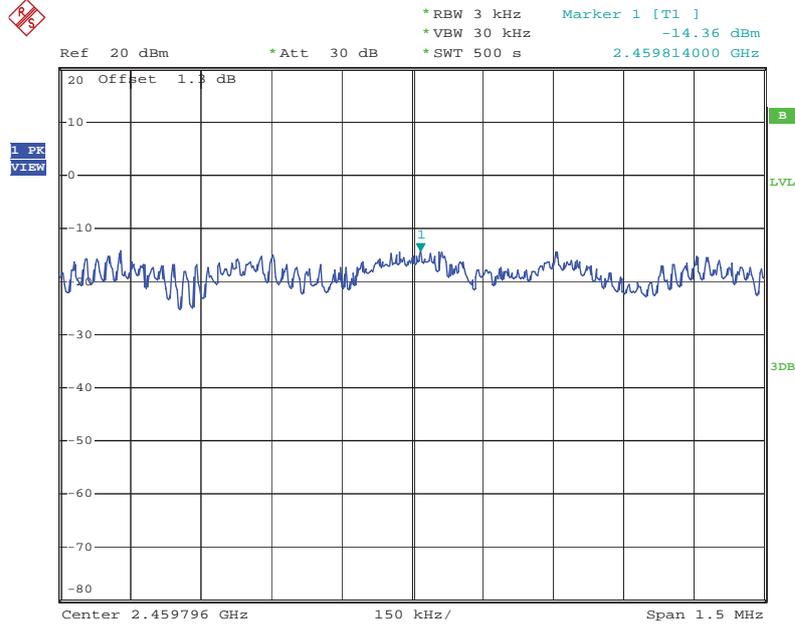


Date: 18.MAY.2012 11:28:24

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

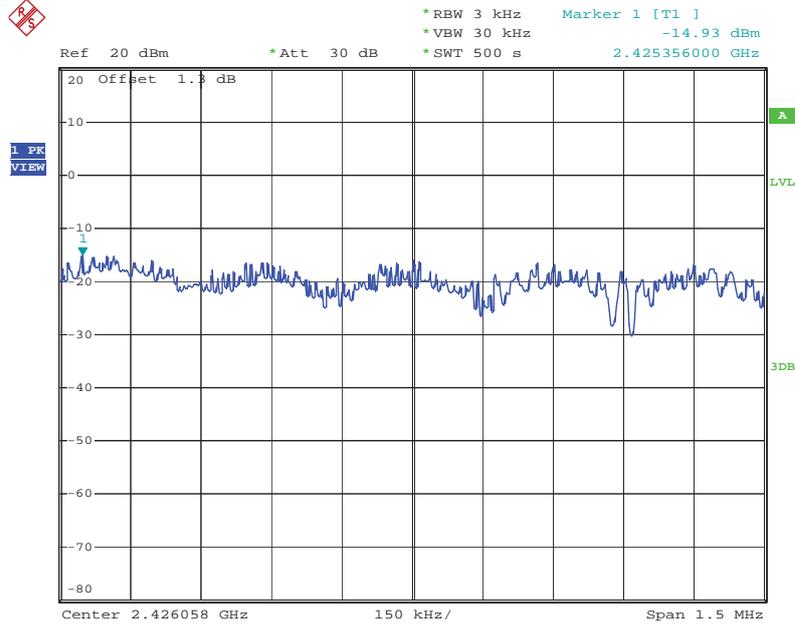


Date: 15.MAY.2012 16:24:32

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 1

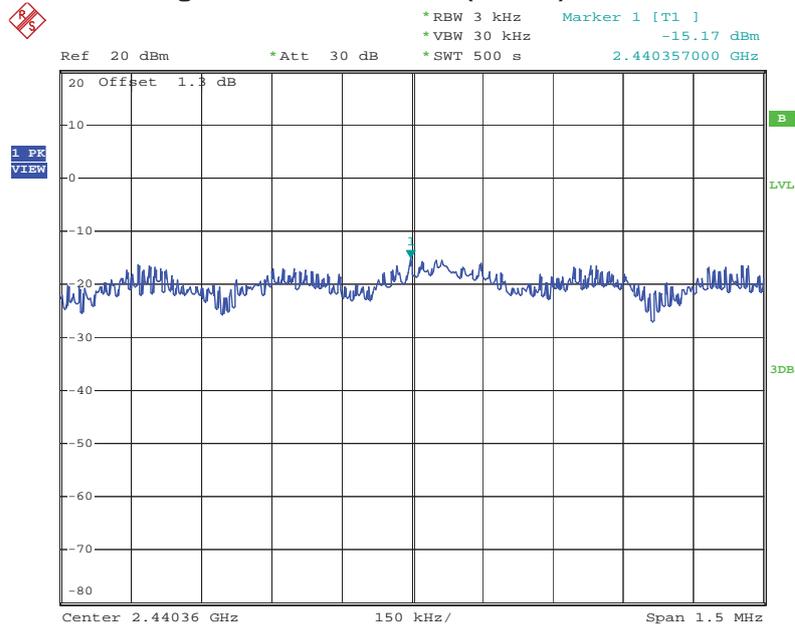


Date: 18.MAY.2012 11:30:48

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

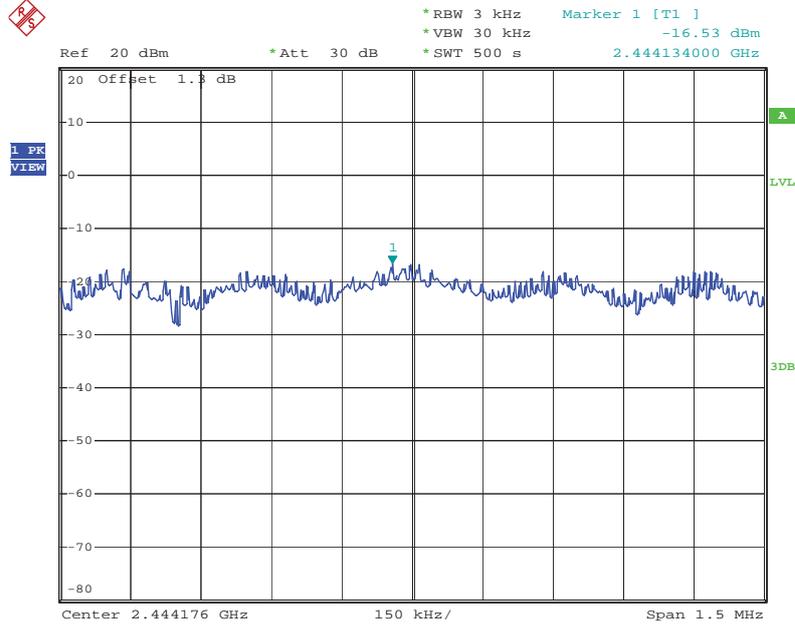


Date: 15.MAY.2012 16:29:52

For Two Chains:
Power Density Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

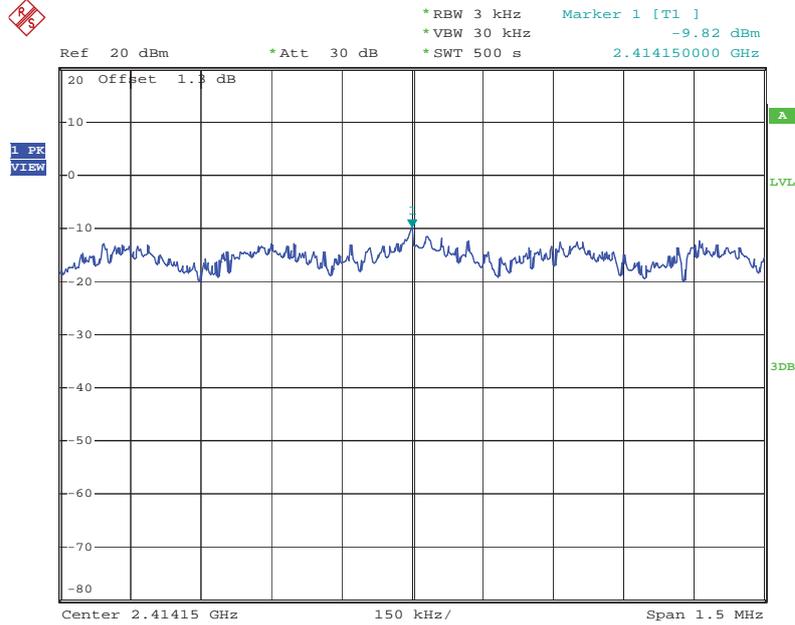


Date: 15.MAY.2012 17:52:10

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 1

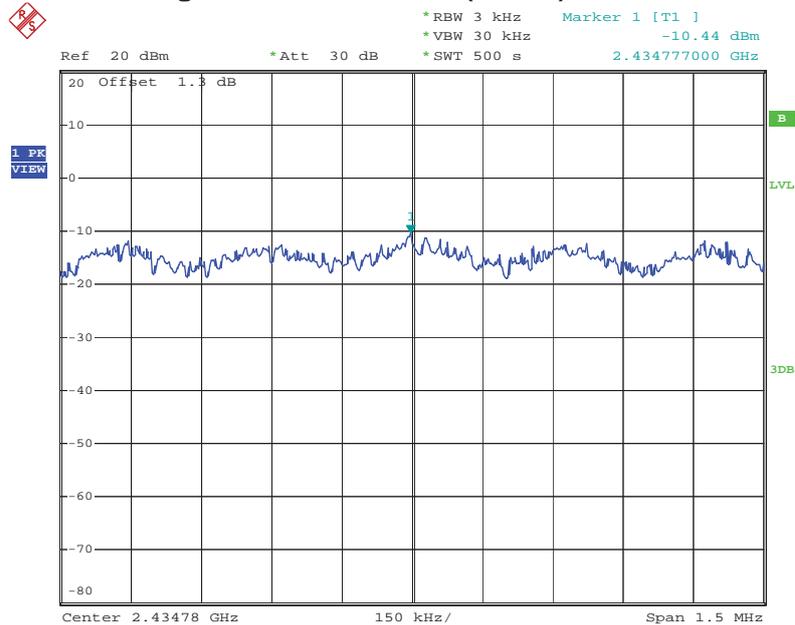


Date: 18.MAY.2012 11:44:20

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

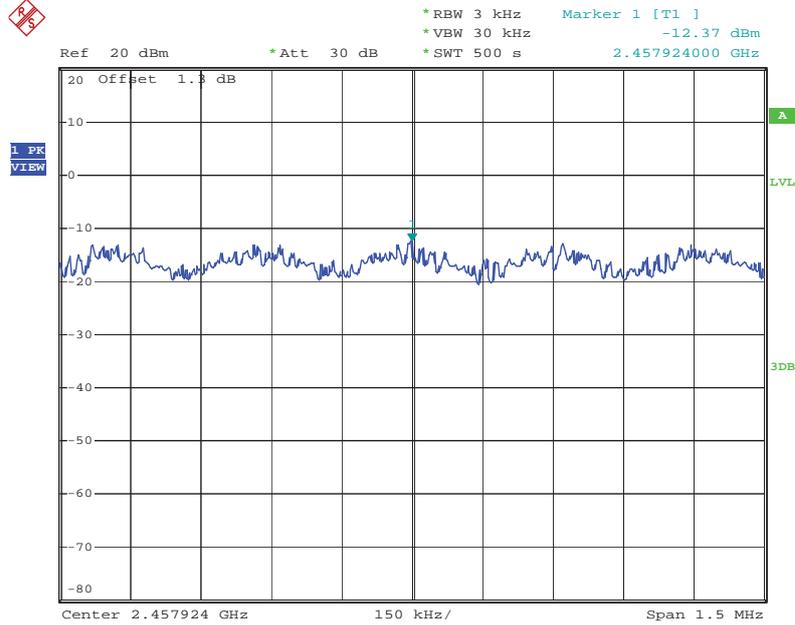


Date: 15.MAY.2012 17:56:55

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 2

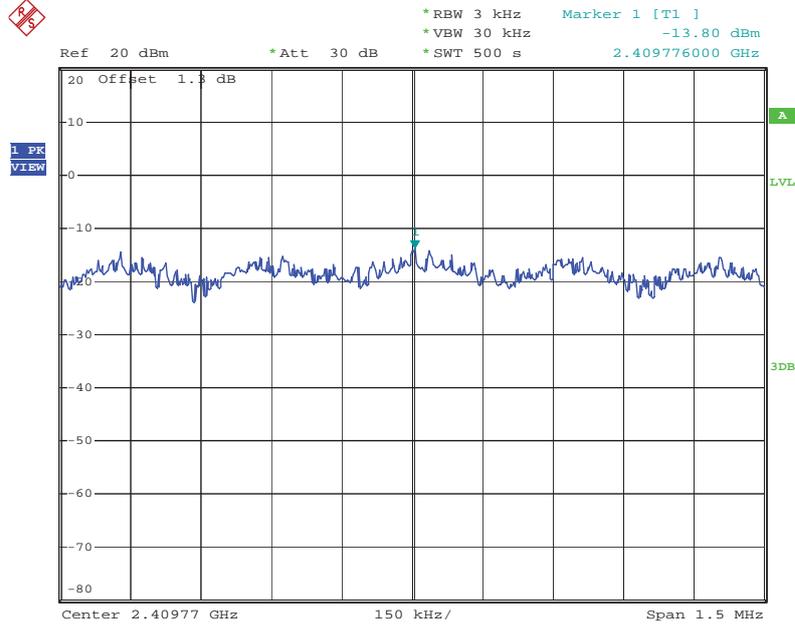


Date: 15.MAY.2012 18:55:34

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 2

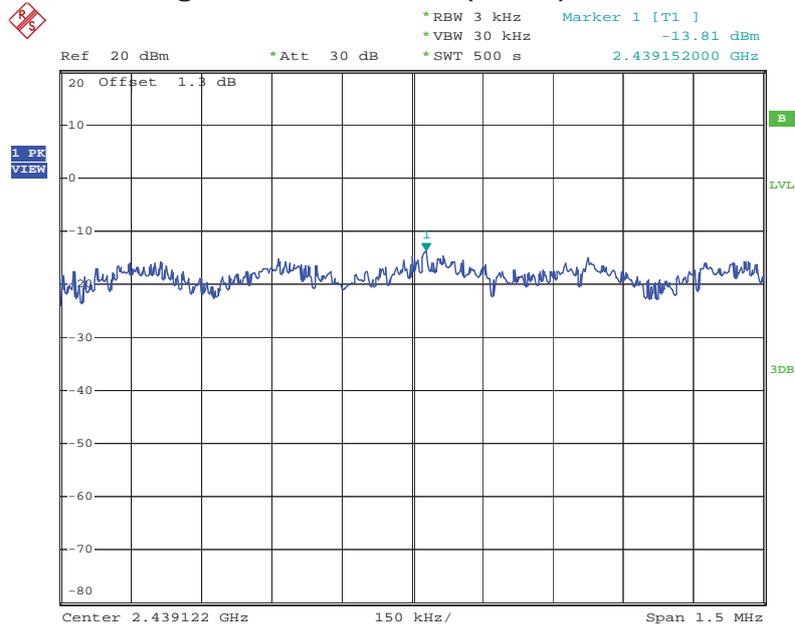


Date: 18.MAY.2012 11:45:49

Power Density Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 2

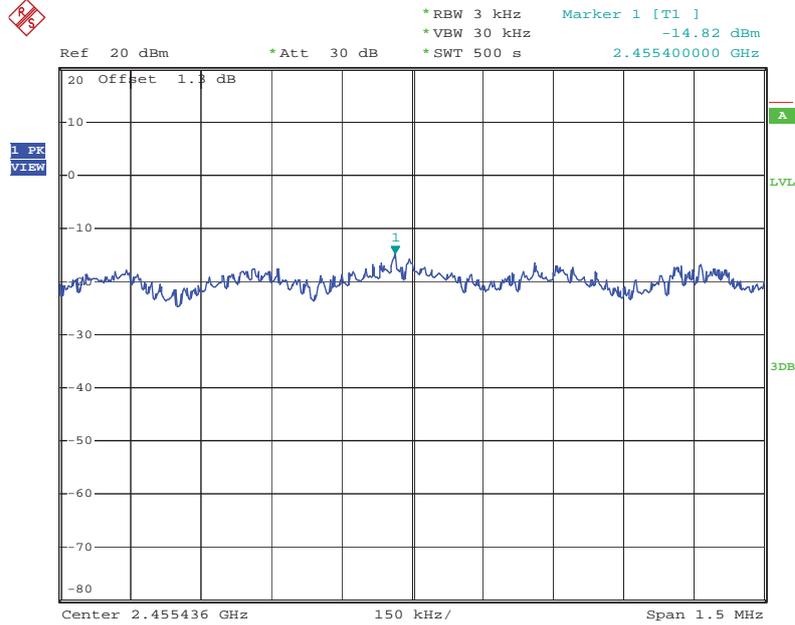


Date: 15.MAY.2012 18:03:09

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

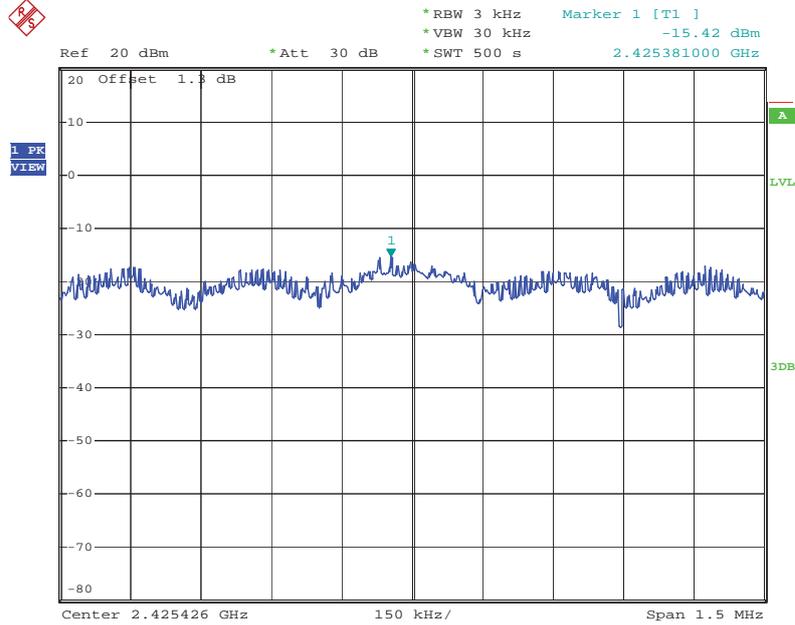


Date: 15.MAY.2012 19:06:10

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 1

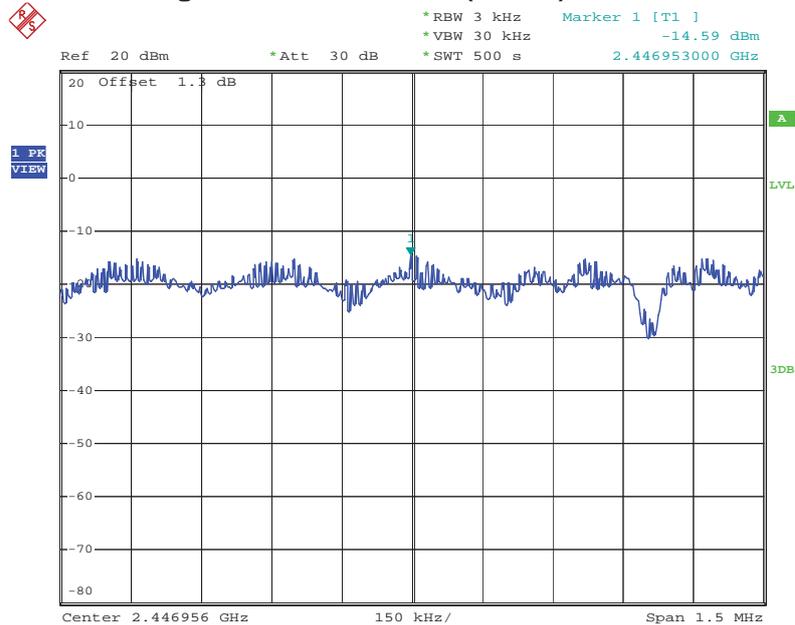


Date: 15.MAY.2012 19:14:14

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

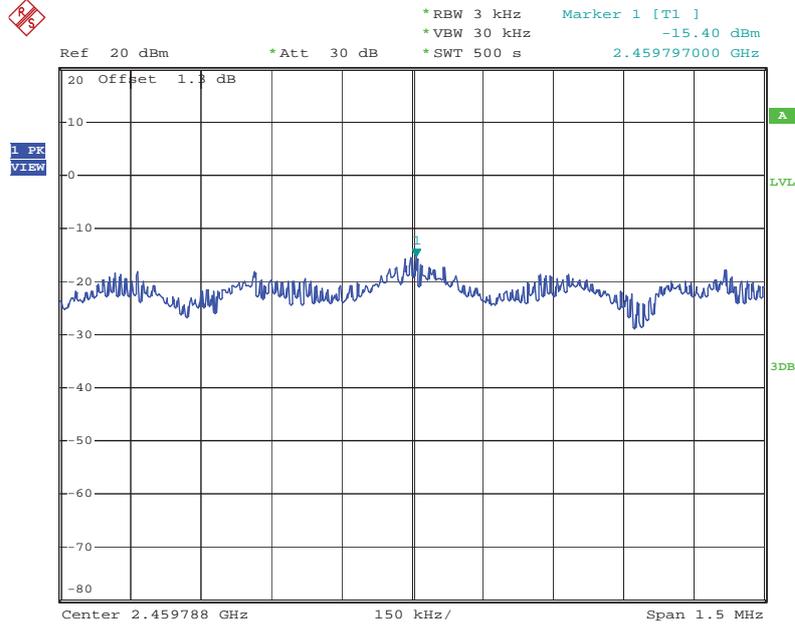


Date: 15.MAY.2012 19:18:31

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 2

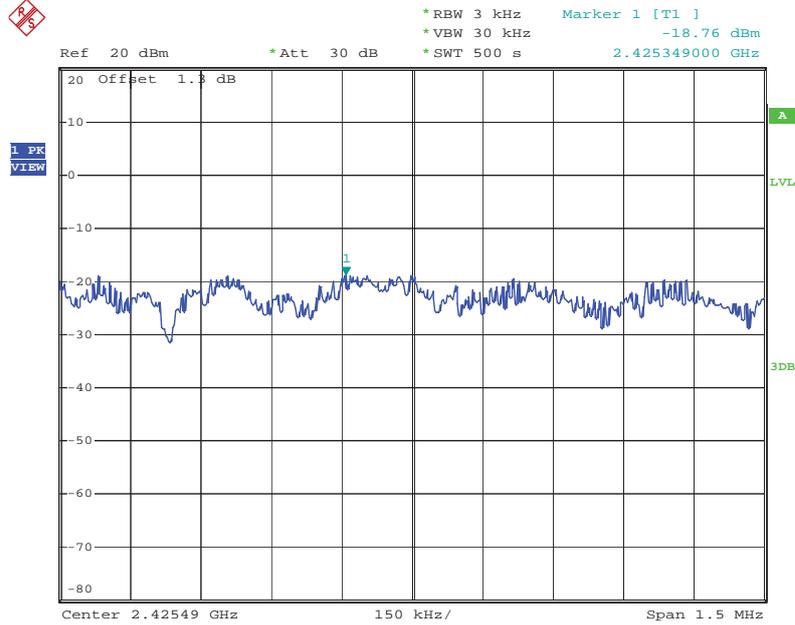


Date: 15.MAY.2012 20:05:48

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 2

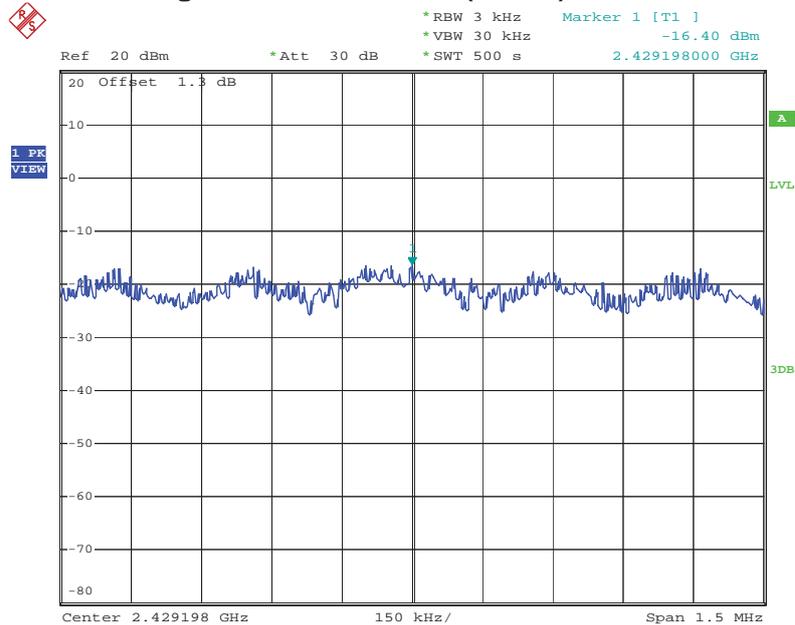

Date: 15.MAY.2012 20:02:43

Power Density Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 2

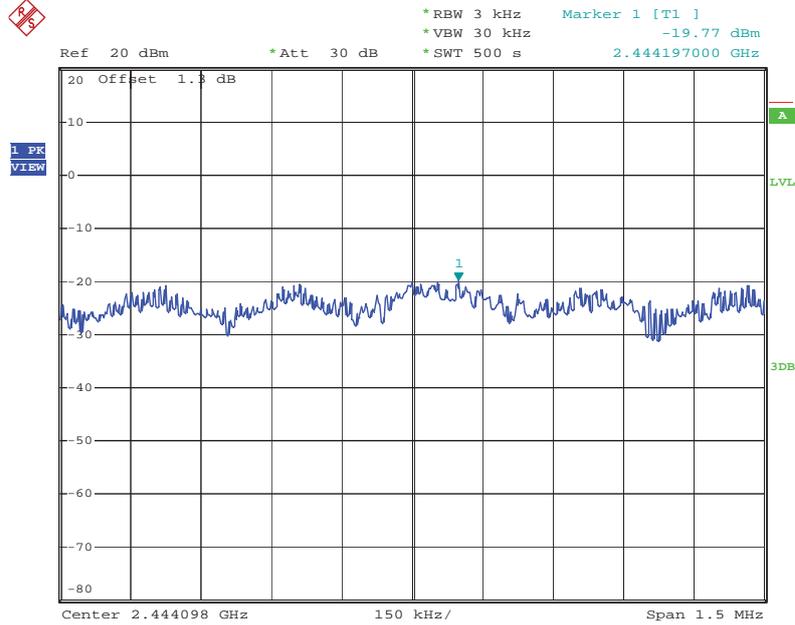

Date: 15.MAY.2012 19:22:40

3.4 6dB Spectrum Bandwidth Measurement

3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameters | Setting |
|----------------------------|-----------------|
| Attenuation | Auto |
| Span Frequency | > 6dB Bandwidth |
| RB | 100 kHz |
| VB | 300 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. For 6dB Bandwidth the resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. For 99% Occupied Bandwidth the resolution Bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.

3.4.4 Test Setup Layout

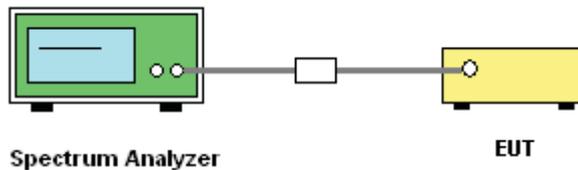

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

| | | | |
|------------------------|--------------|-----------------------|-------------|
| Final Test Date | May 15, 2012 | Test Site No. | TH01-HY |
| Temperature | 26.3°C | Humidity | 28% |
| Test Engineer | Ian | Configurations | 802.11b/g/n |

For Single Chain:

Configuration IEEE 802.11b Port 1

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 1 | 2412 MHz | 10.04 | 14.36 | 500 | Complies |
| 6 | 2437 MHz | 10.12 | 14.52 | 500 | Complies |
| 11 | 2462 MHz | 10.12 | 14.40 | 500 | Complies |

Configuration IEEE 802.11g Port 1

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 1 | 2412 MHz | 16.44 | 16.36 | 500 | Complies |
| 6 | 2437 MHz | 16.44 | 16.40 | 500 | Complies |
| 11 | 2462 MHz | 16.40 | 16.36 | 500 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 1

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 1 | 2412 MHz | 17.56 | 17.56 | 500 | Complies |
| 6 | 2437 MHz | 17.60 | 17.56 | 500 | Complies |
| 11 | 2462 MHz | 17.56 | 17.56 | 500 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 1

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 3 | 2422 MHz | 35.76 | 35.60 | 500 | Complies |
| 6 | 2437 MHz | 35.36 | 35.52 | 500 | Complies |
| 9 | 2452 MHz | 35.36 | 35.60 | 500 | Complies |

For Two Chains:

Configuration of IEEE 802.11n (20MHz) Port 1

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 1 | 2412 MHz | 17.64 | 17.52 | 500 | Complies |
| 6 | 2437 MHz | 17.60 | 17.56 | 500 | Complies |
| 11 | 2462 MHz | 17.64 | 17.56 | 500 | Complies |

Configuration of IEEE 802.11n (20MHz) Port 2

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 1 | 2412 MHz | 17.64 | 17.56 | 500 | Complies |
| 6 | 2437 MHz | 17.56 | 17.56 | 500 | Complies |
| 11 | 2462 MHz | 17.56 | 17.56 | 500 | Complies |


Configuration of IEEE 802.11n (40MHz) Port 1

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 3 | 2422 MHz | 35.36 | 35.52 | 500 | Complies |
| 6 | 2437 MHz | 35.44 | 35.60 | 500 | Complies |
| 9 | 2452 MHz | 35.36 | 35.52 | 500 | Complies |

Configuration of IEEE 802.11n (40MHz) Port 2


| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-----------------|
| 3 | 2422 MHz | 35.12 | 35.52 | 500 | Complies |
| 6 | 2437 MHz | 35.12 | 35.52 | 500 | Complies |
| 9 | 2452 MHz | 35.12 | 35.52 | 500 | Complies |

For Single Chain:
6 dB Bandwidth Plot on Configuration IEEE 802.11b 2412 MHz Port 1

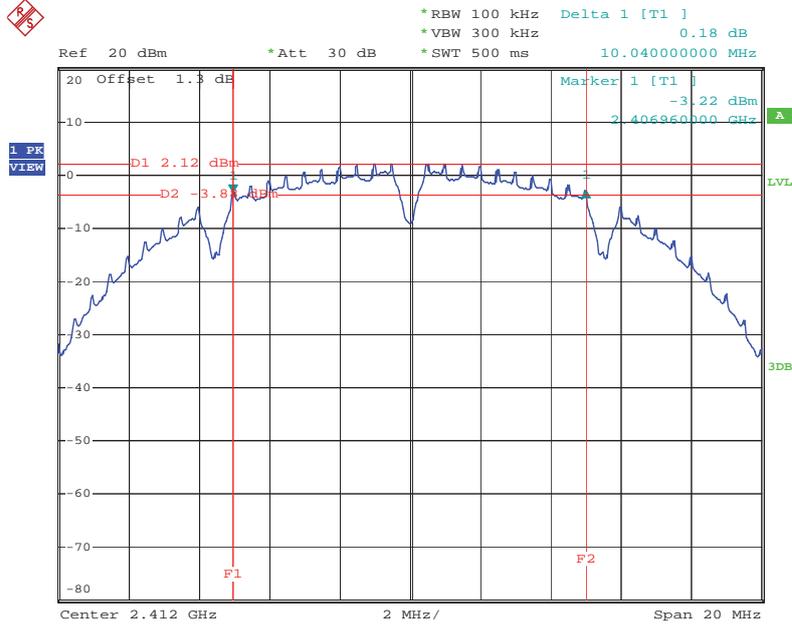


Date: 15.MAY.2012 13:38:06

6 dB Bandwidth Plot on Configuration IEEE 802.11b 2437 MHz Port 1

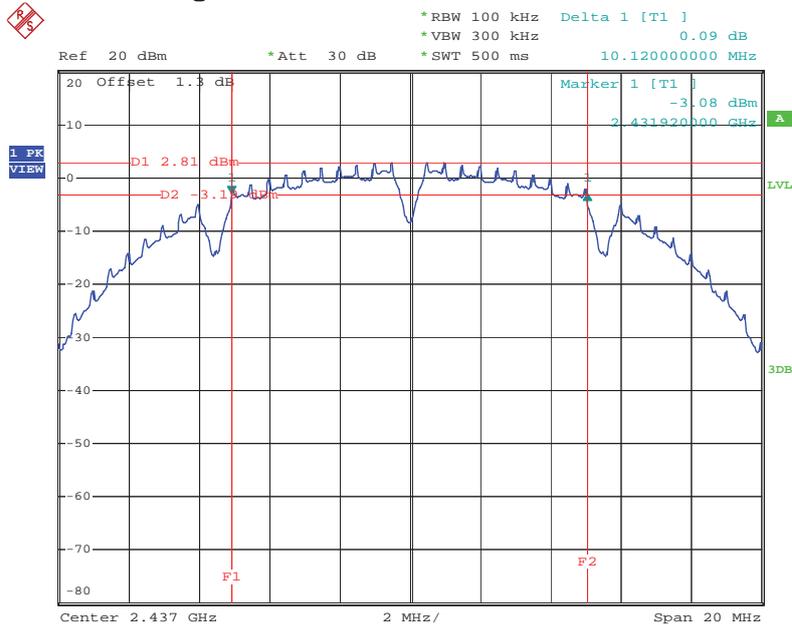


Date: 15.MAY.2012 13:45:53

6 dB Bandwidth Plot on Configuration IEEE 802.11b 2462 MHz Port 1

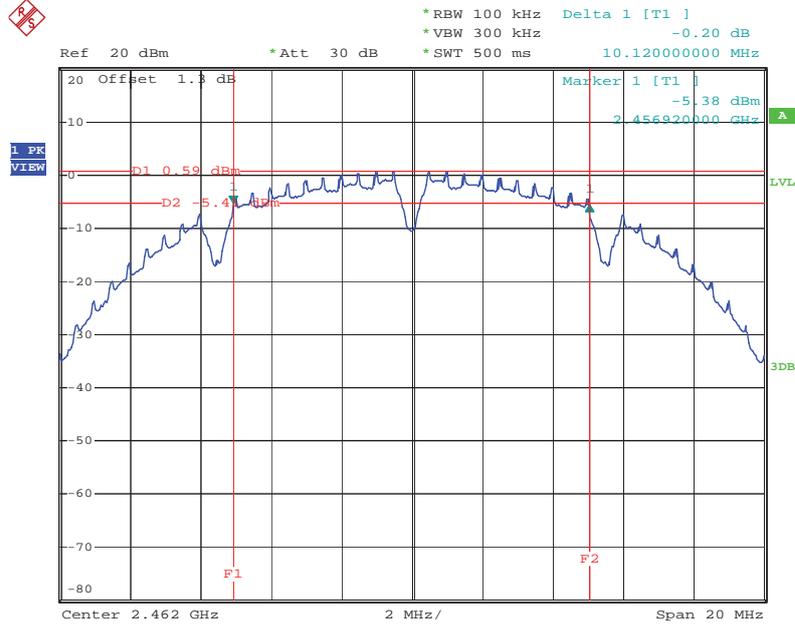


Date: 15.MAY.2012 13:53:23

6 dB Bandwidth Plot on Configuration IEEE 802.11g 2412 MHz Port 1

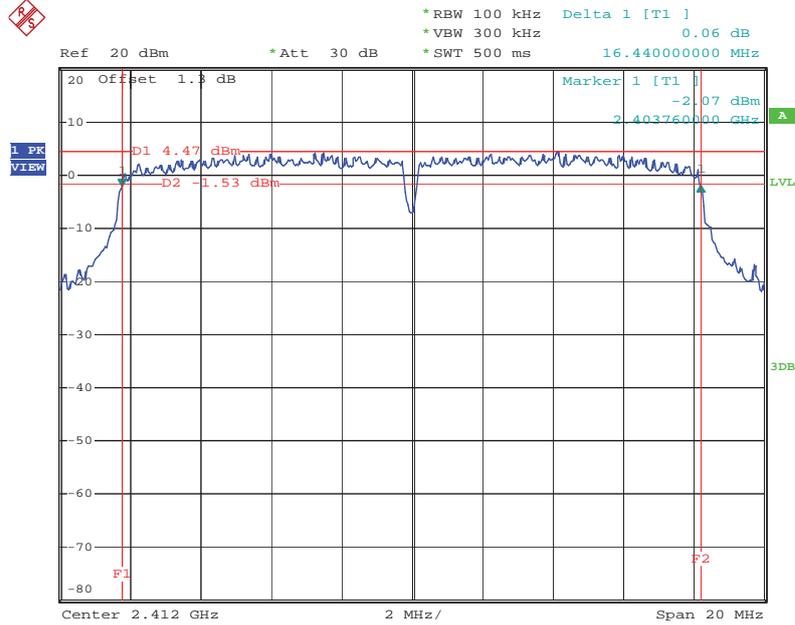


Date: 15.MAY.2012 14:27:58

6 dB Bandwidth Plot on Configuration IEEE 802.11g 2437 MHz Port 1

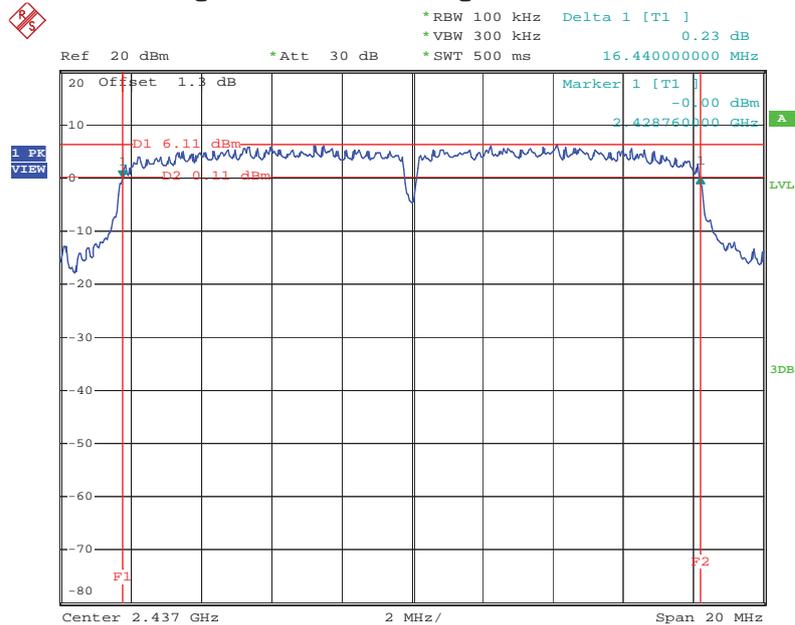


Date: 15.MAY.2012 14:46:38

6 dB Bandwidth Plot on Configuration IEEE 802.11g 2462 MHz Port 1

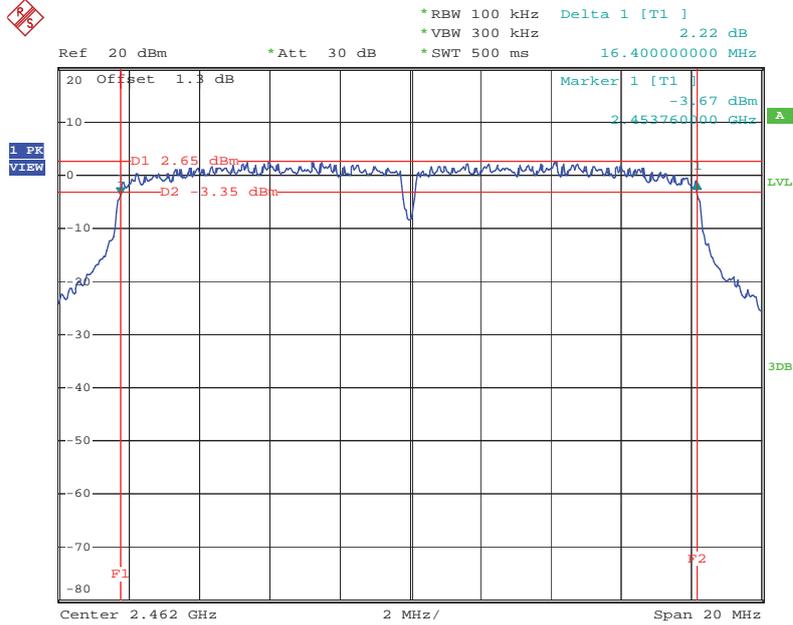


Date: 15.MAY.2012 15:49:17

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

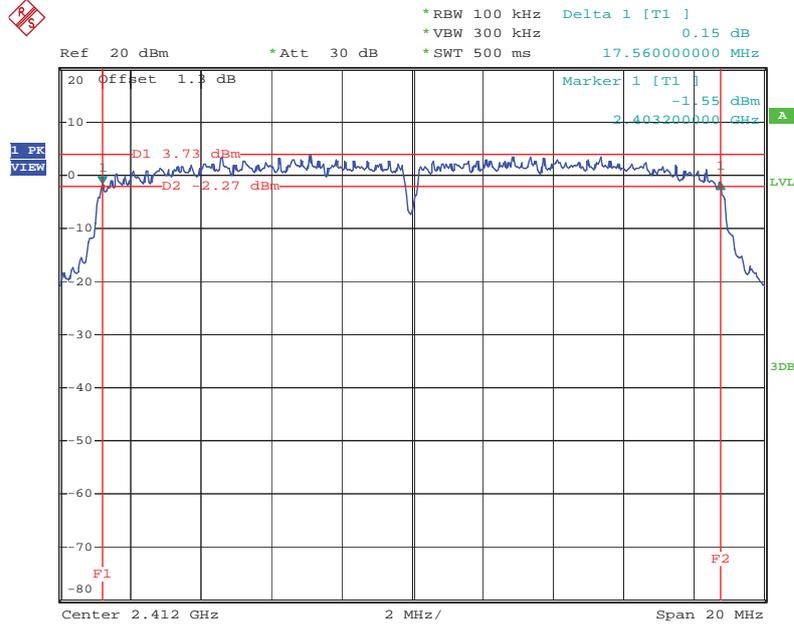


Date: 15.MAY.2012 16:00:29

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 1

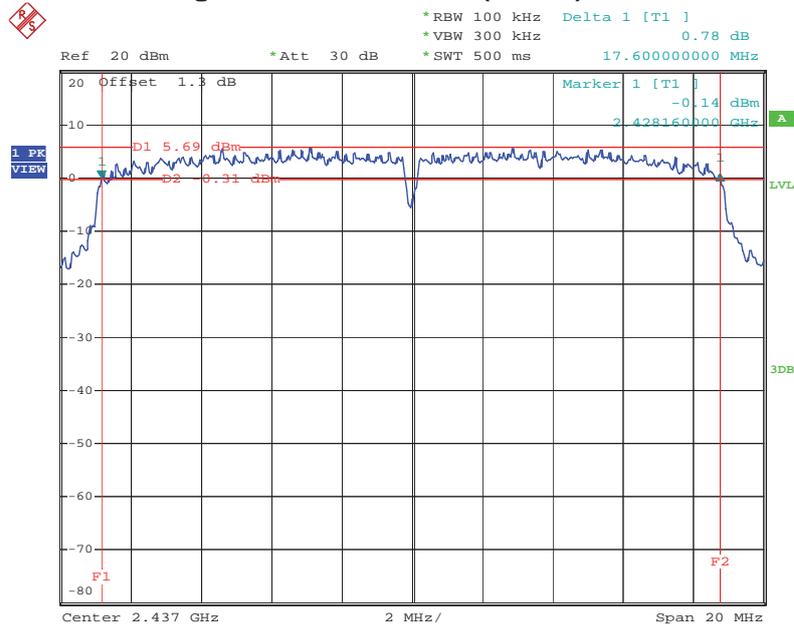


Date: 15.MAY.2012 16:05:27

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

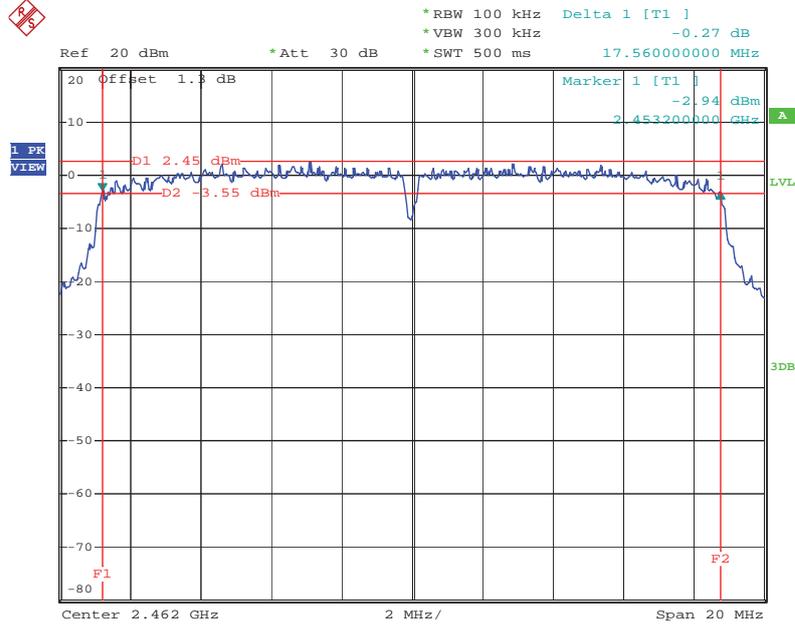


Date: 15.MAY.2012 16:07:24

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

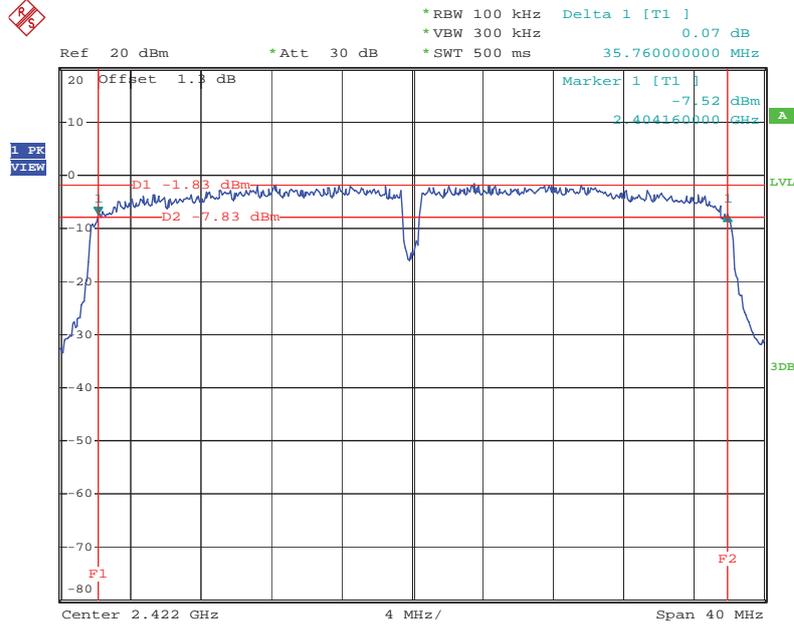


Date: 15.MAY.2012 16:22:52

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 1

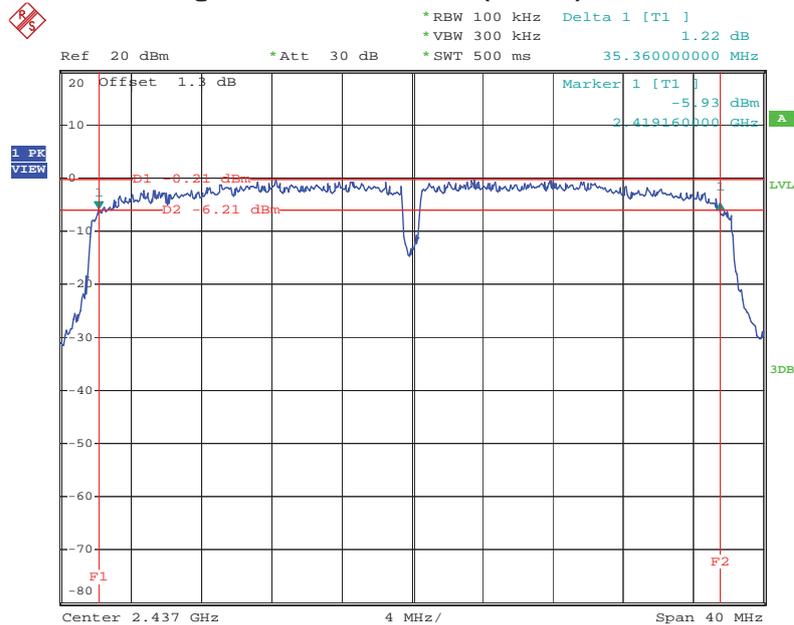


Date: 15.MAY.2012 16:25:38

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

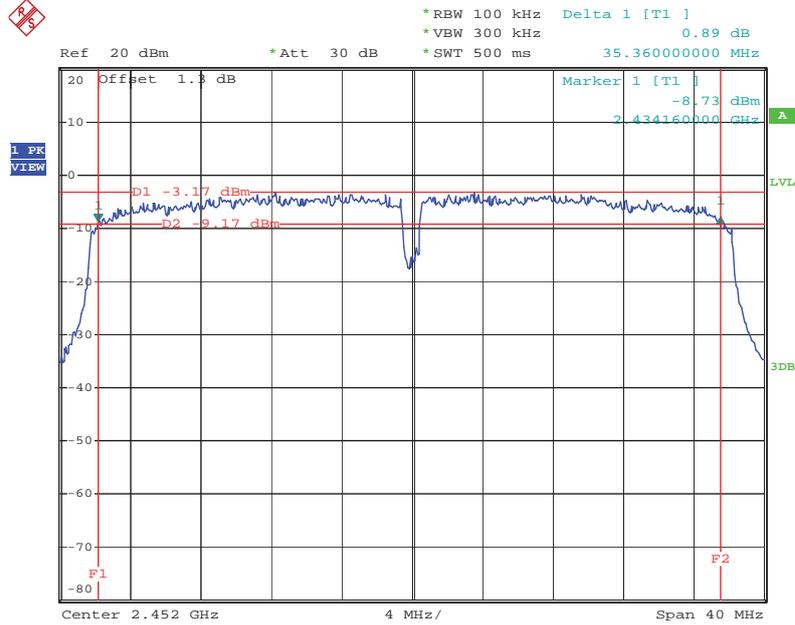


Date: 15.MAY.2012 16:27:57

For Two Chains:
6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

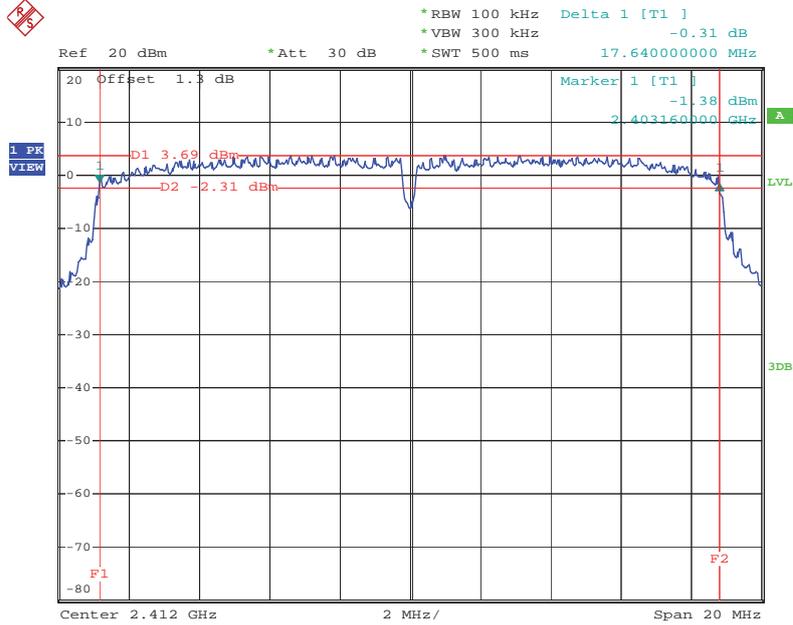


Date: 15.MAY.2012 17:50:35

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 1

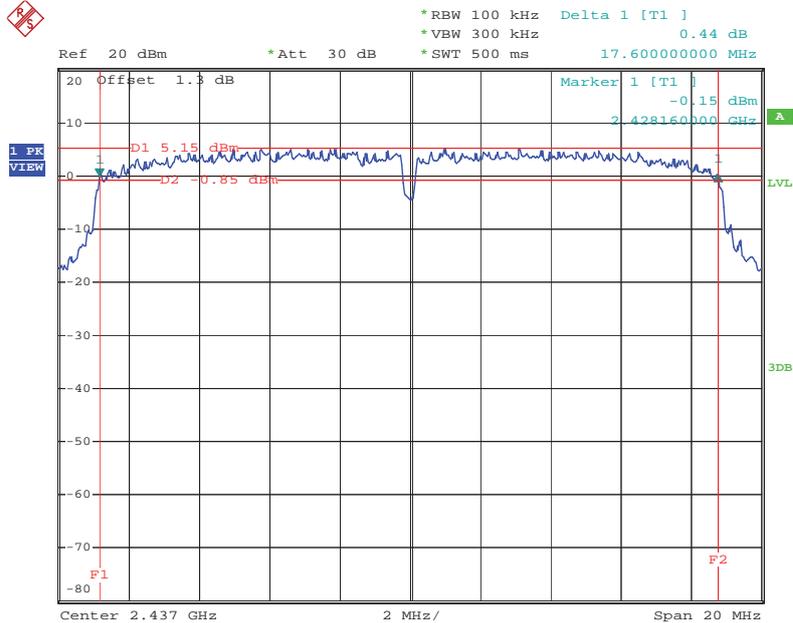


Date: 15.MAY.2012 17:53:20

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

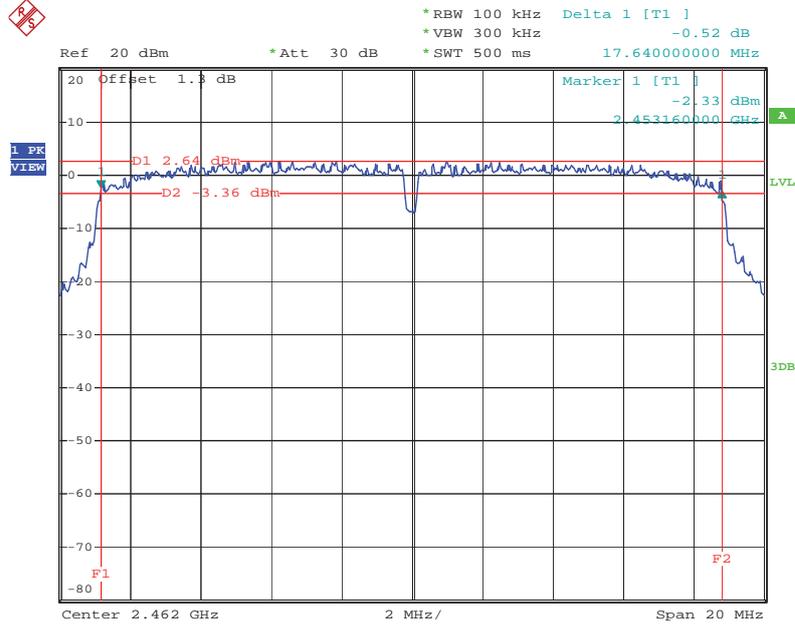


Date: 15.MAY.2012 17:55:28

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 2

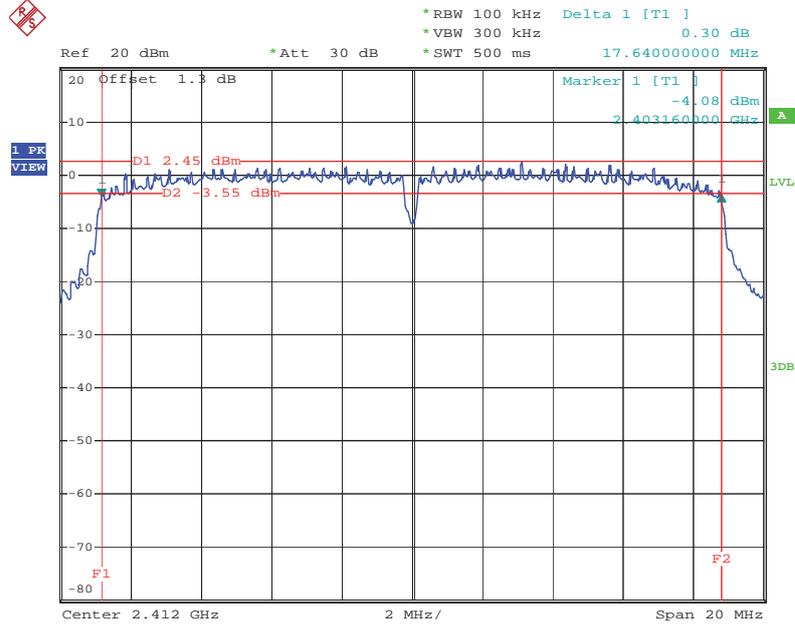


Date: 15.MAY.2012 18:53:43

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 2

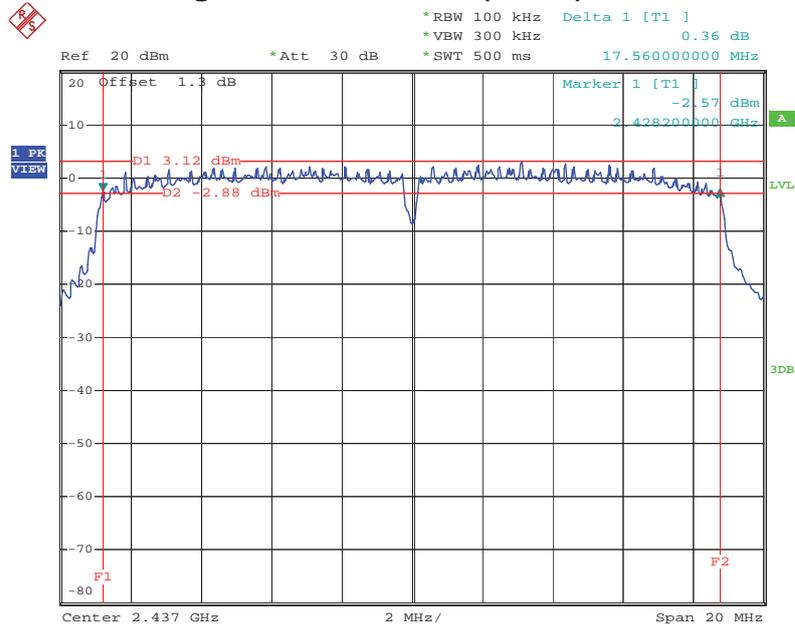


Date: 15.MAY.2012 18:05:04

6 dB Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 2

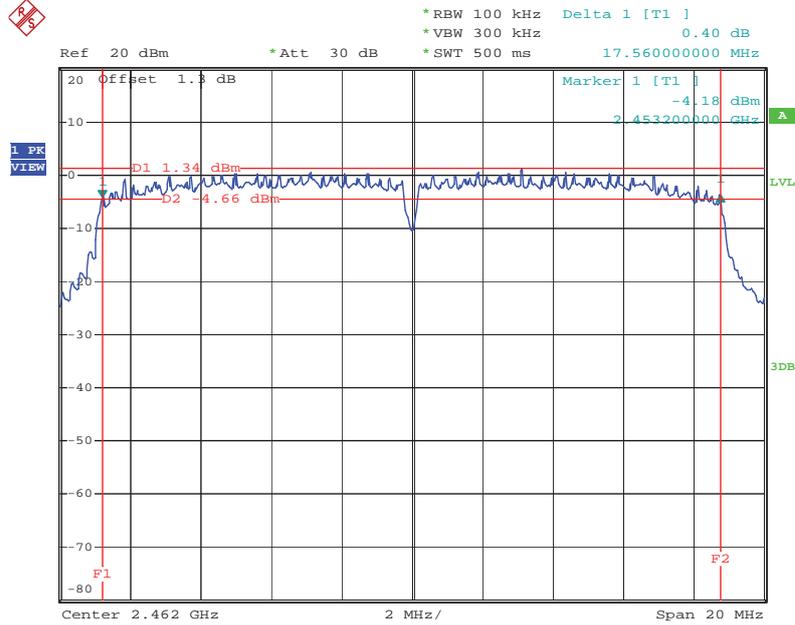


Date: 15.MAY.2012 18:00:55

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

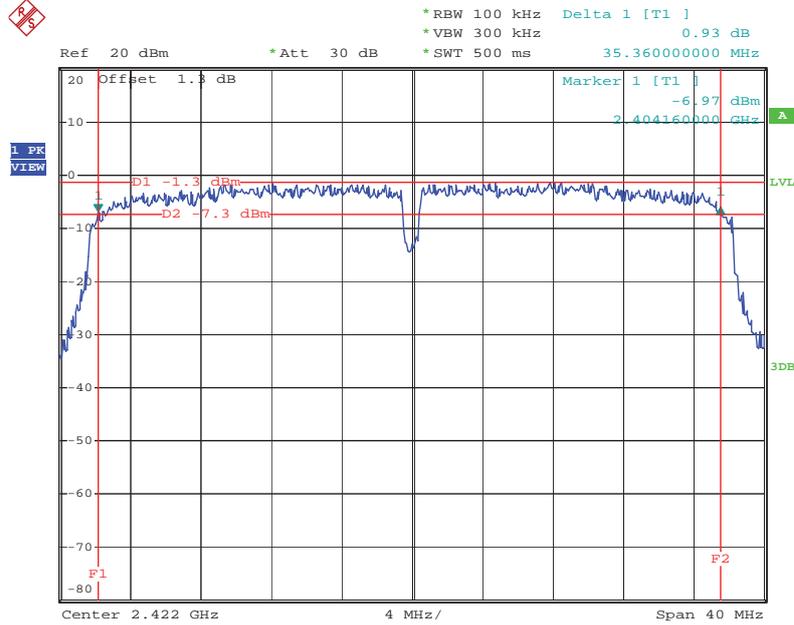


Date: 15.MAY.2012 19:04:11

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 1

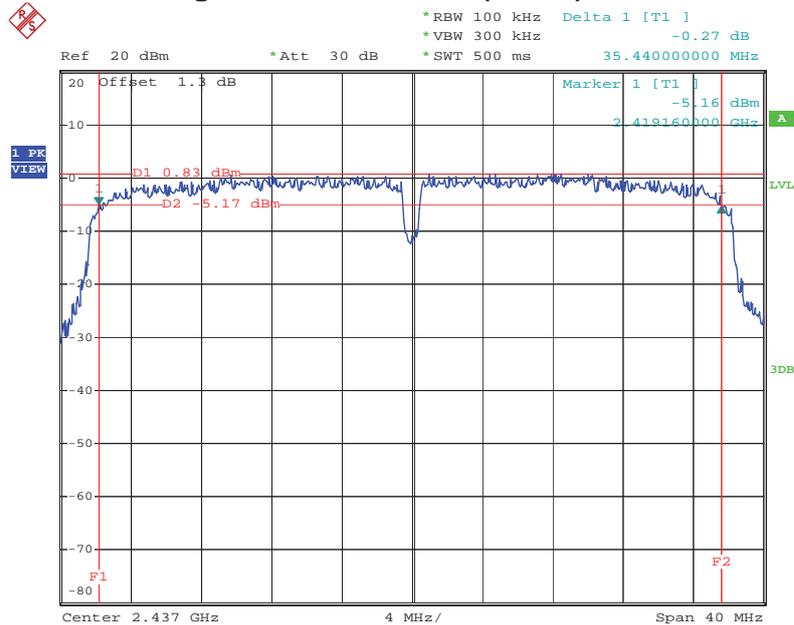


Date: 15.MAY.2012 19:12:59

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

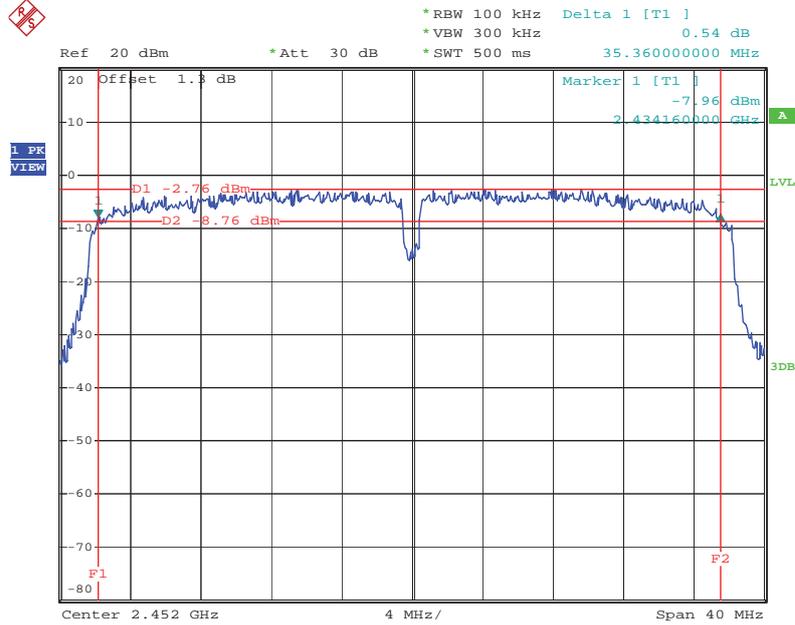


Date: 15.MAY.2012 19:16:33

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 2

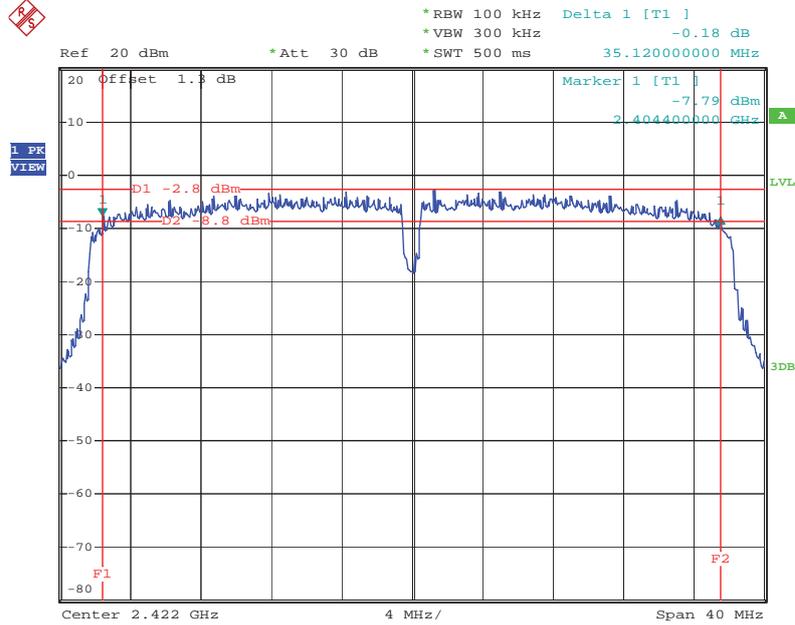


Date: 15.MAY.2012 20:03:46

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 2

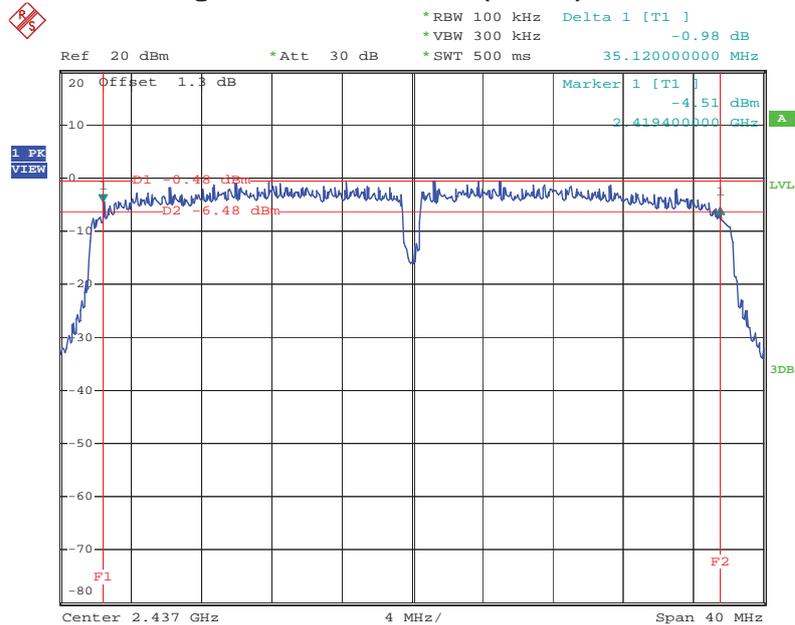


Date: 15.MAY.2012 20:01:38

6 dB Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 2

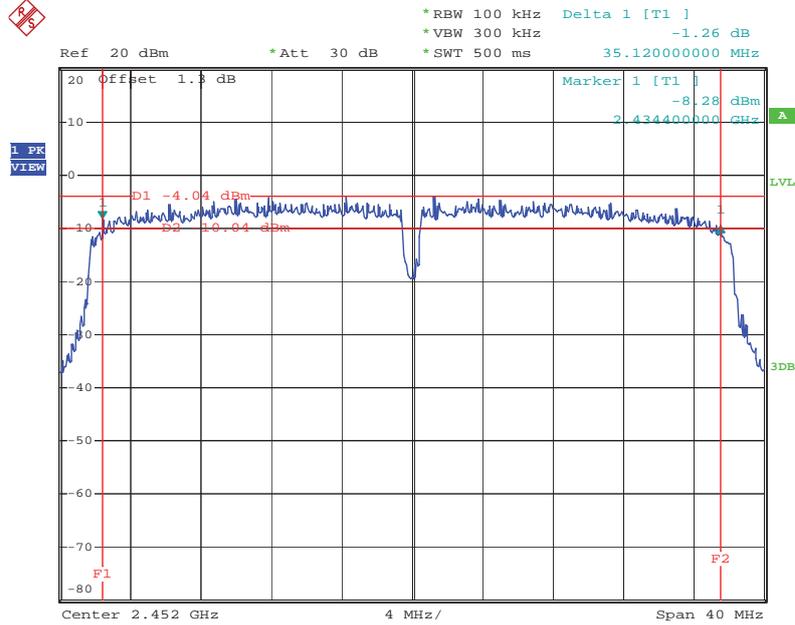


Date: 15.MAY.2012 19:20:45

For Single Chain:
 99% Occupied Bandwidth Plot on Configuration IEEE 802.11b 2412 MHz Port 1

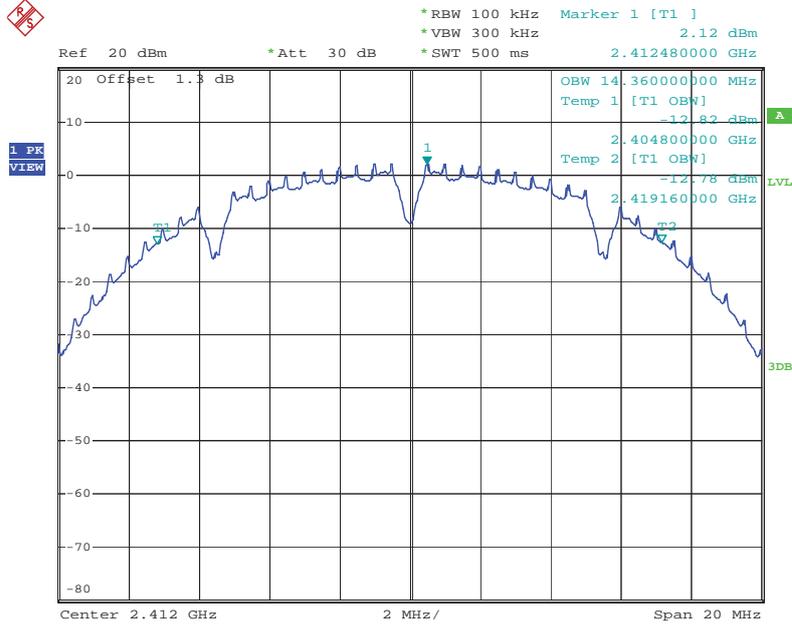


Date: 15.MAY.2012 13:38:30

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b 2437 MHz Port 1

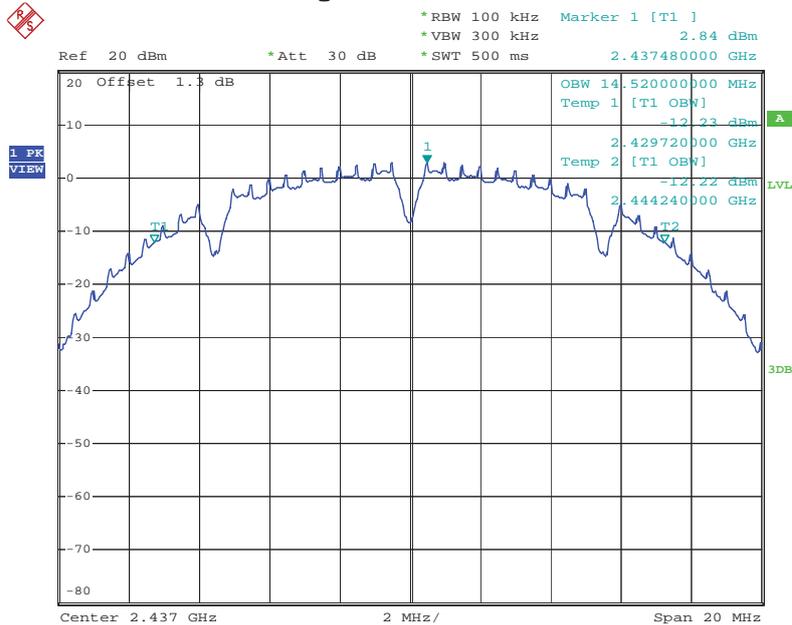


Date: 15.MAY.2012 13:47:30

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b 2462 MHz Port 1

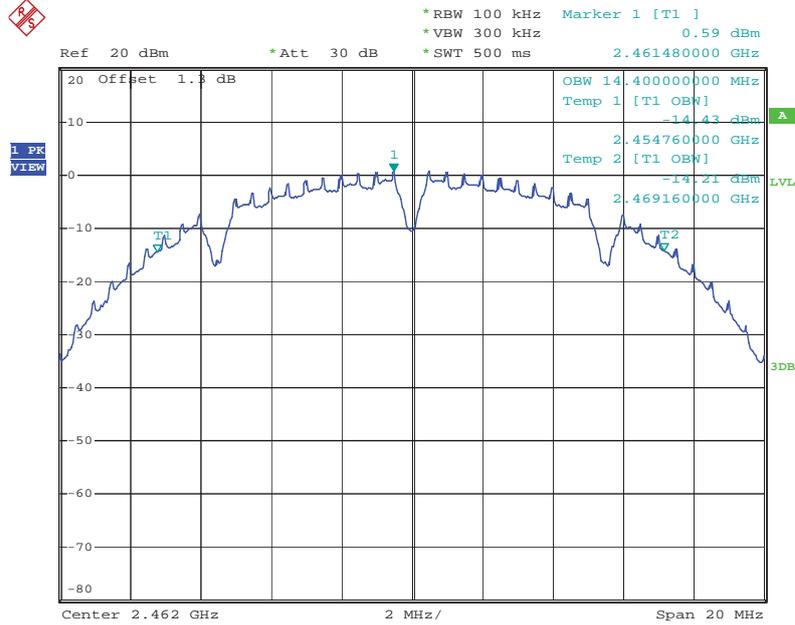


Date: 15.MAY.2012 13:53:36

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g 2412 MHz Port 1

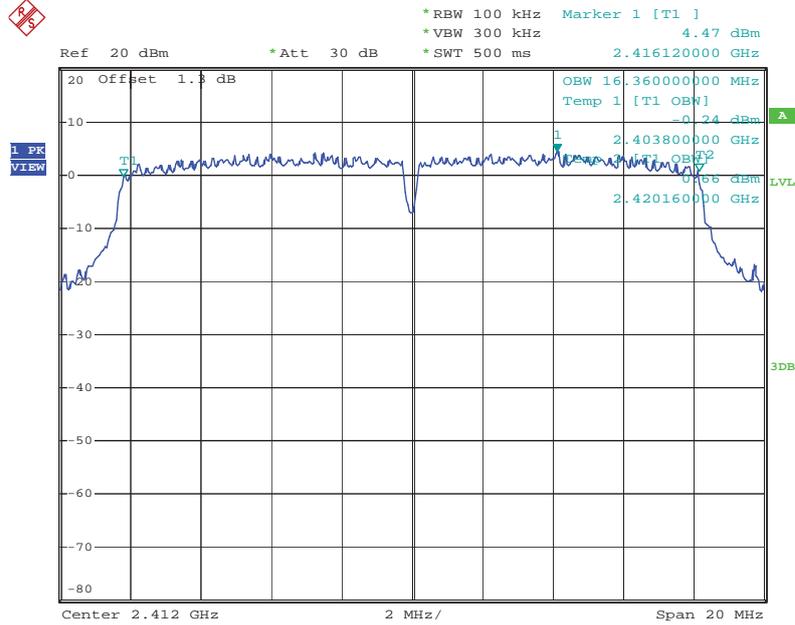


Date: 15.MAY.2012 14:28:11

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g 2437 MHz Port 1

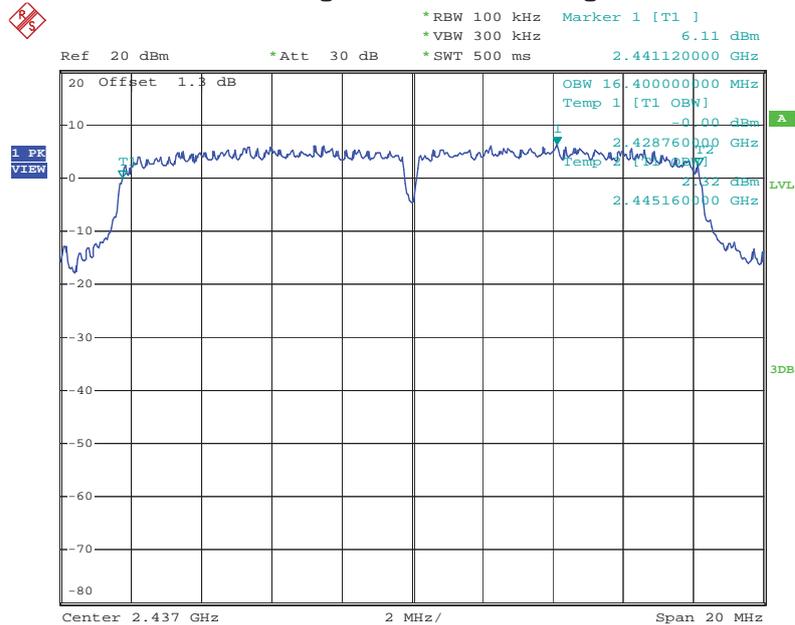


Date: 15.MAY.2012 14:46:49

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g 2462 MHz Port 1

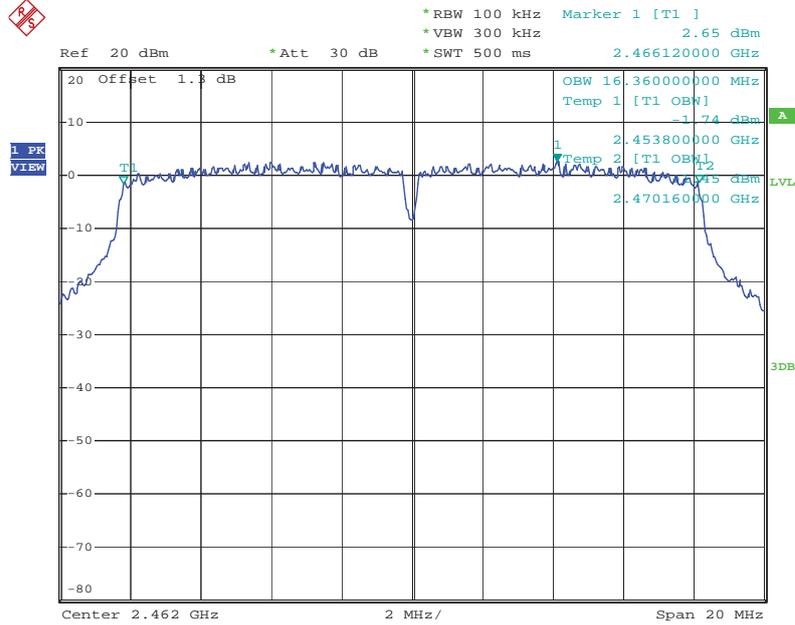


Date: 15.MAY.2012 15:49:33

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

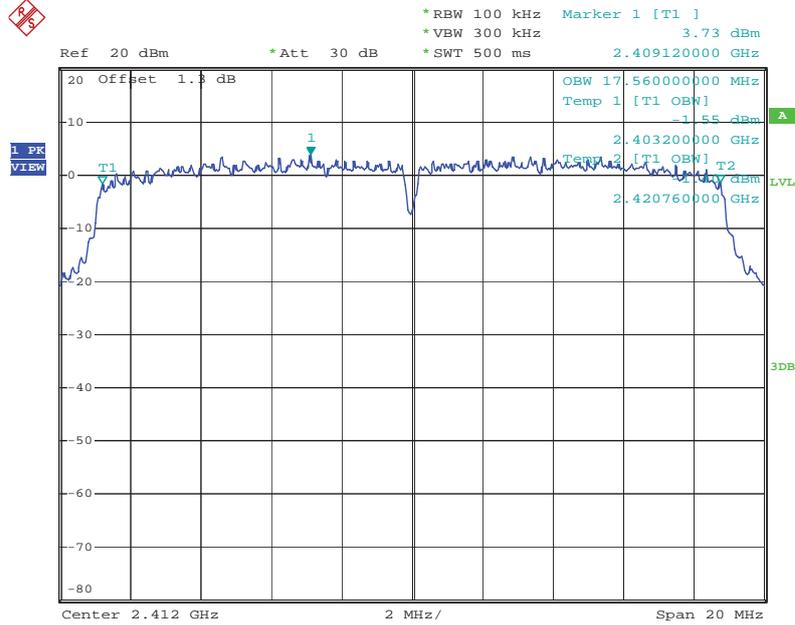


Date: 15.MAY.2012 16:00:41

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 1

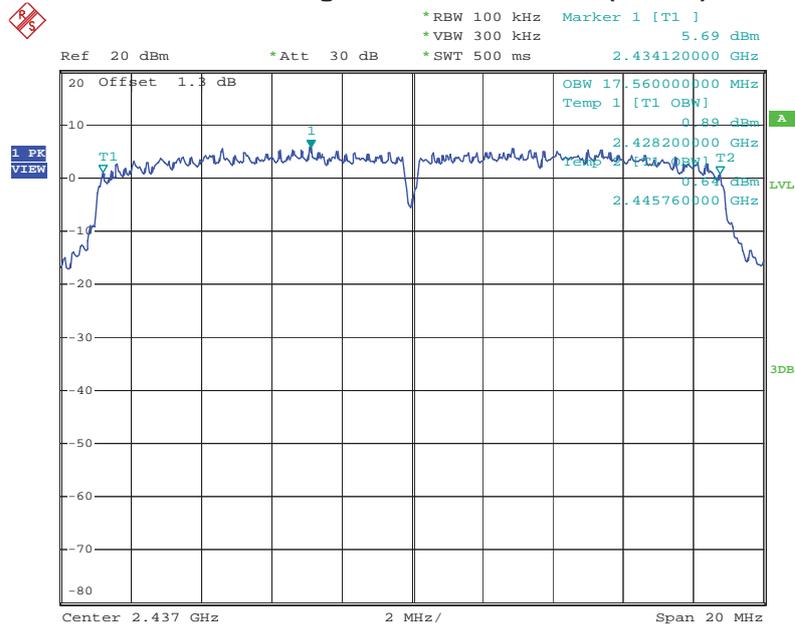


Date: 15.MAY.2012 16:05:39

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

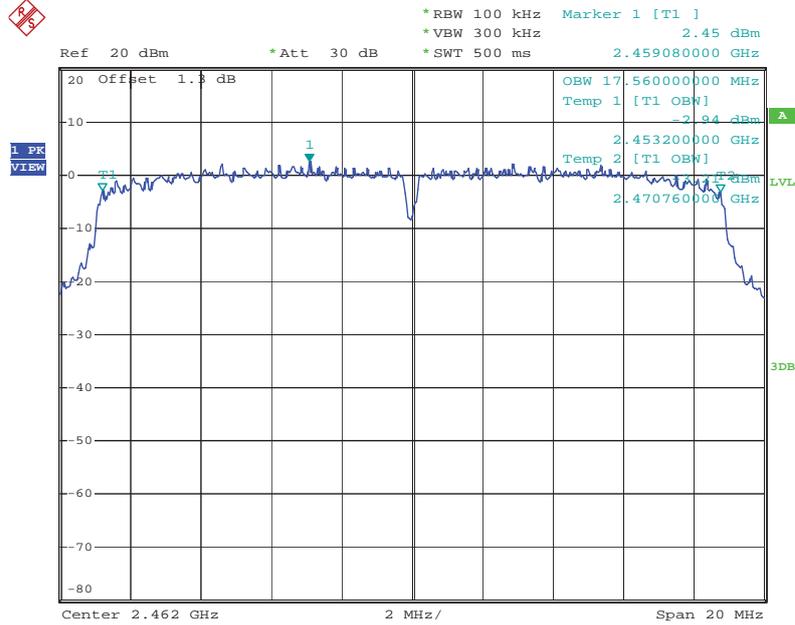


Date: 15.MAY.2012 16:07:37

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

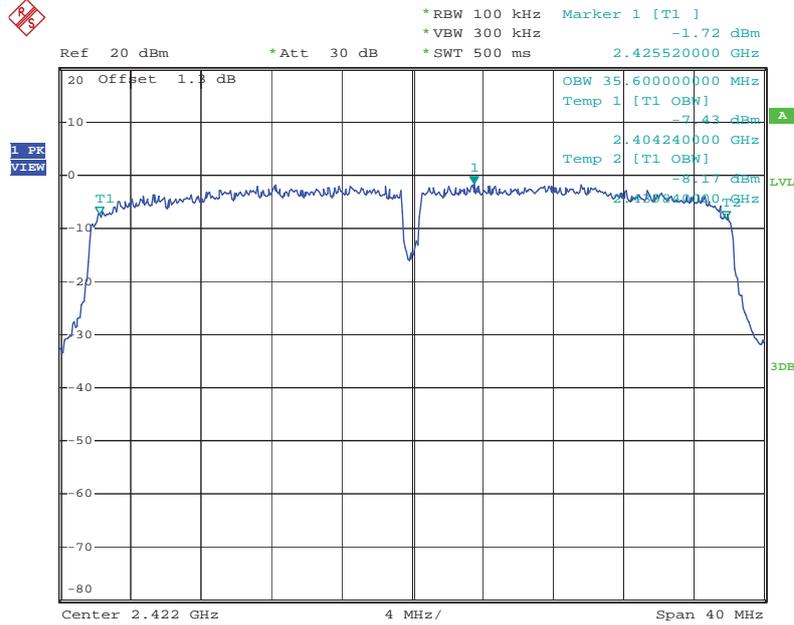


Date: 15.MAY.2012 16:23:03

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 1

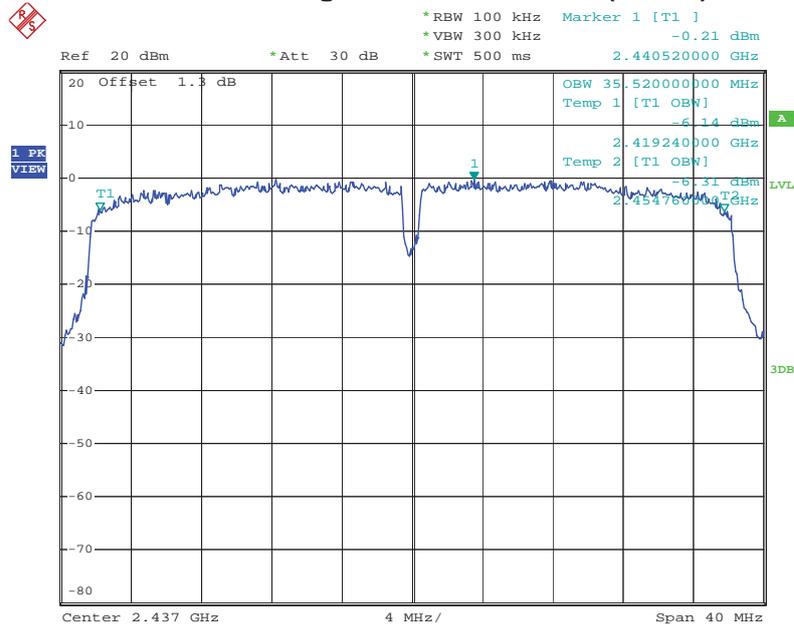


Date: 15.MAY.2012 16:25:49

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

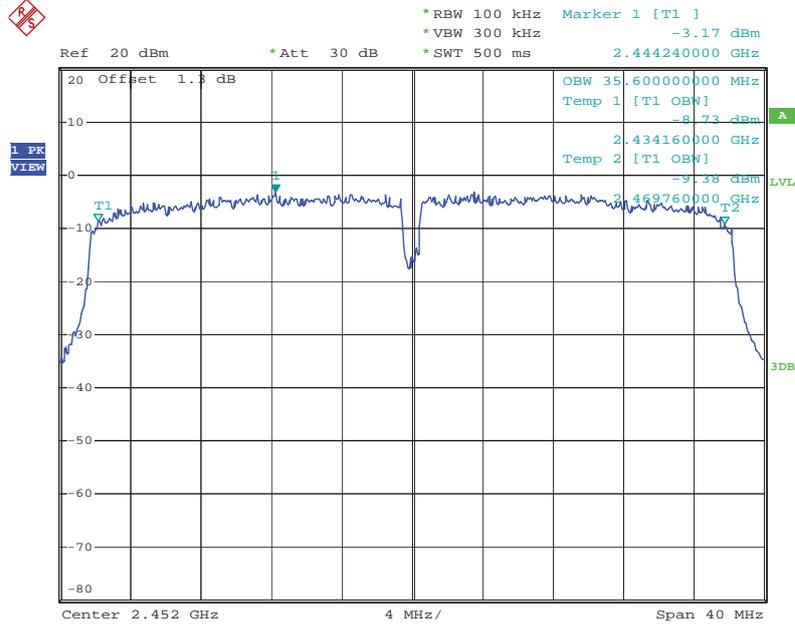


Date: 15.MAY.2012 16:28:10

For Two Chains:
 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

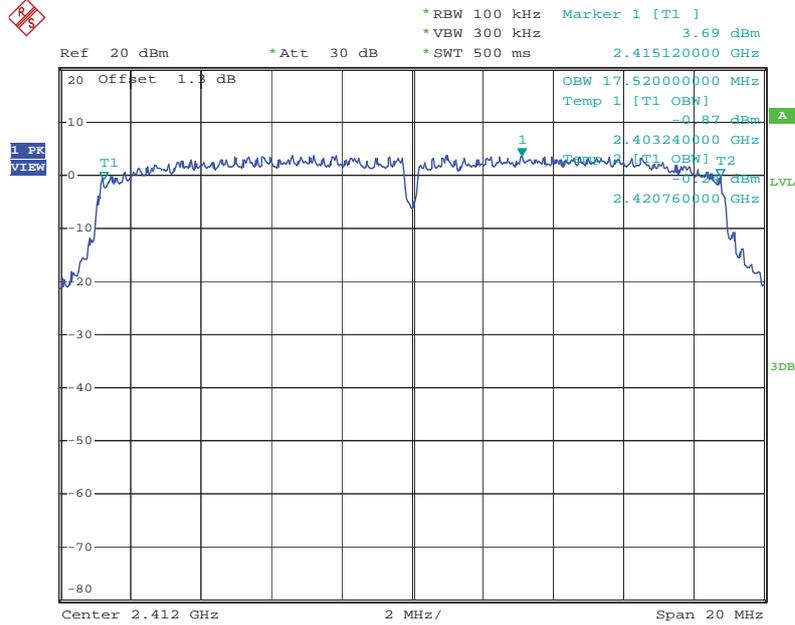


Date: 15.MAY.2012 17:50:47

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 1

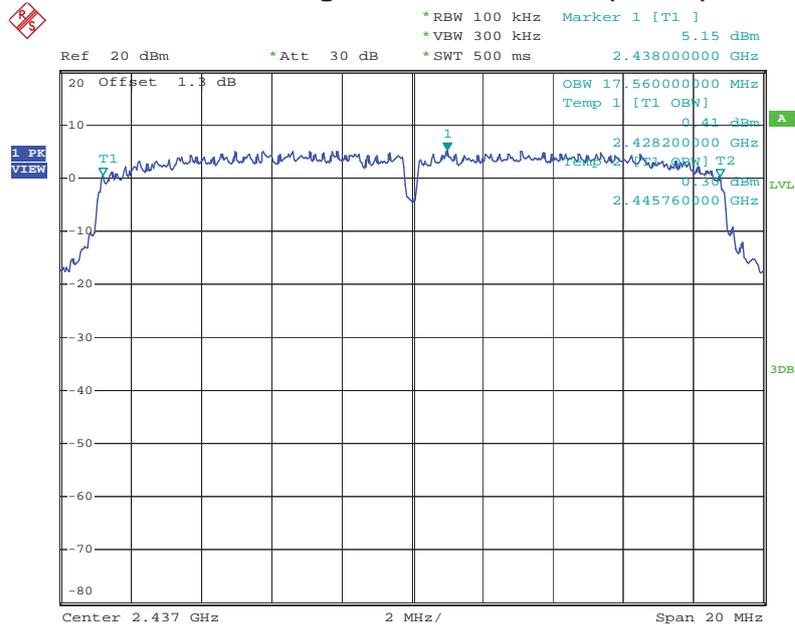


Date: 15.MAY.2012 17:53:31

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

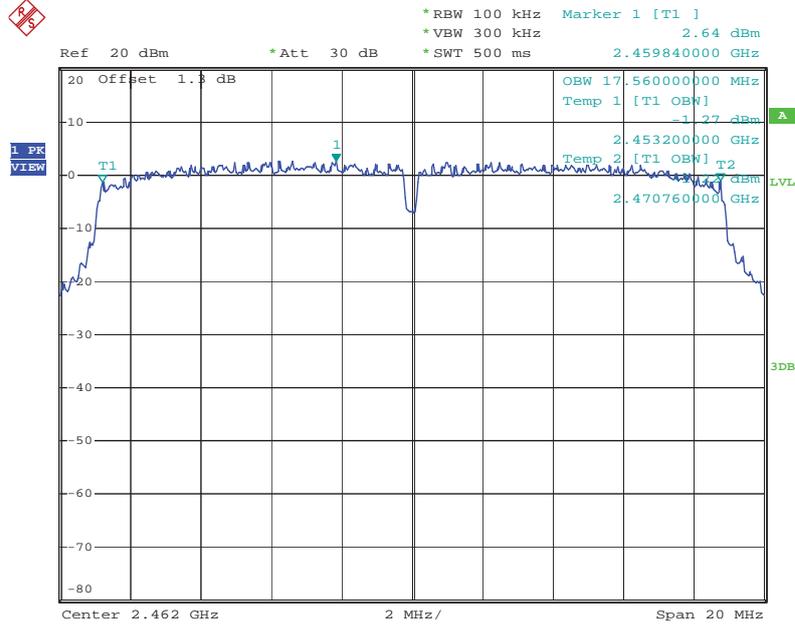


Date: 15.MAY.2012 17:55:40

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 2

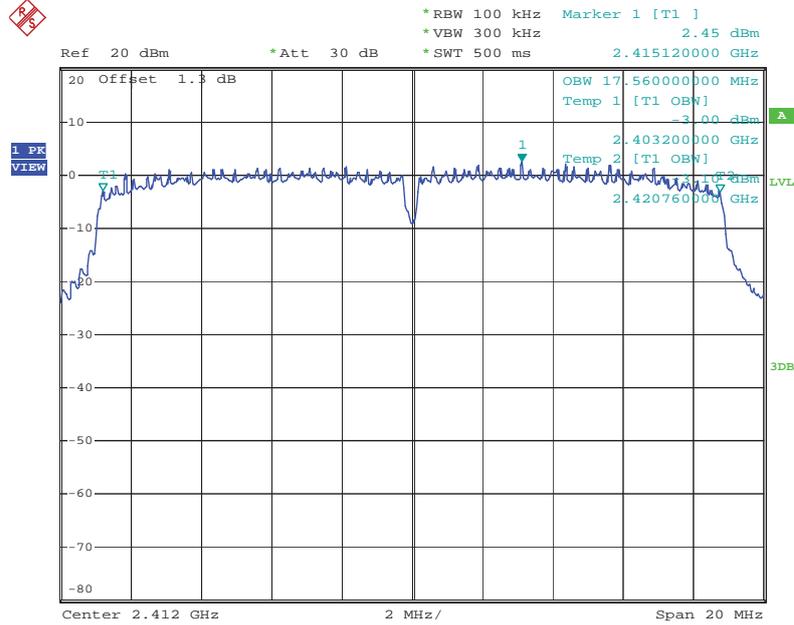


Date: 15.MAY.2012 18:53:54

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2437 MHz Port 2

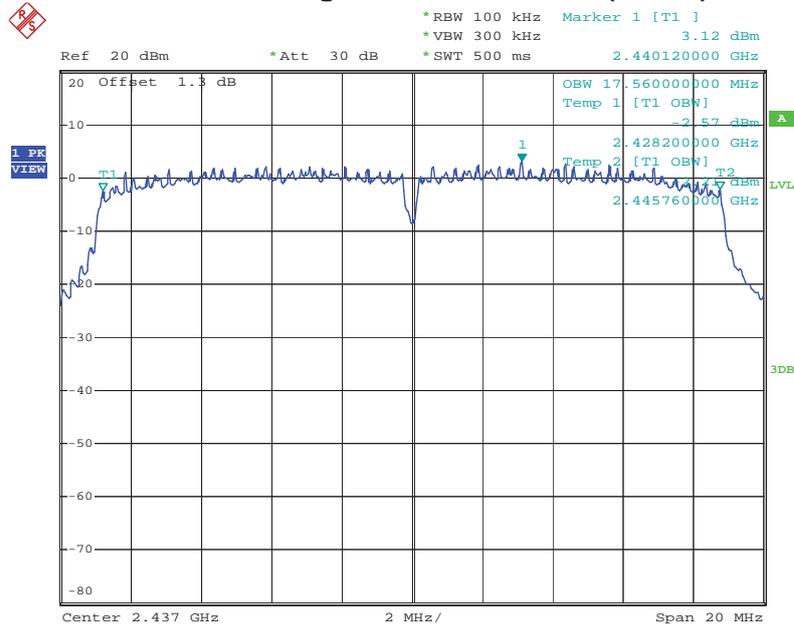


Date: 15.MAY.2012 18:05:15

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 2

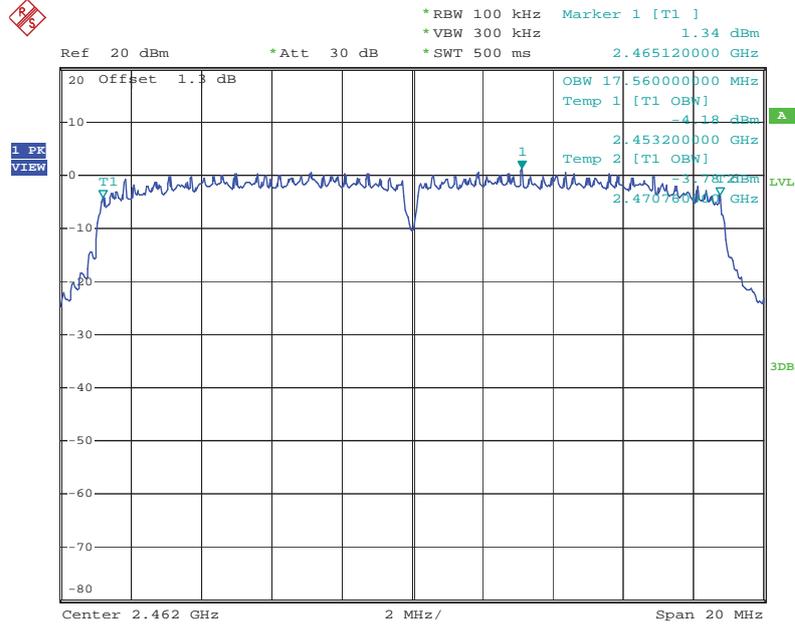


Date: 15.MAY.2012 18:01:08

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

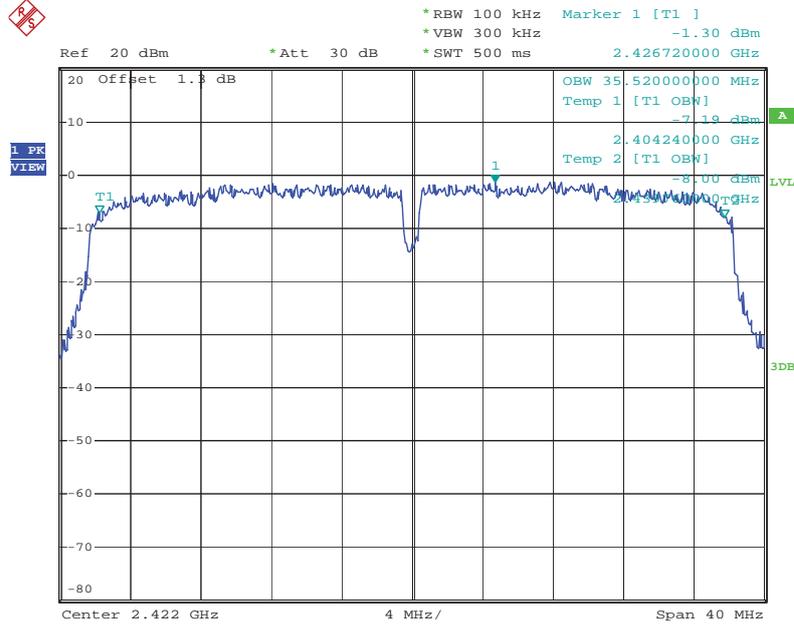


Date: 15.MAY.2012 19:04:27

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 1

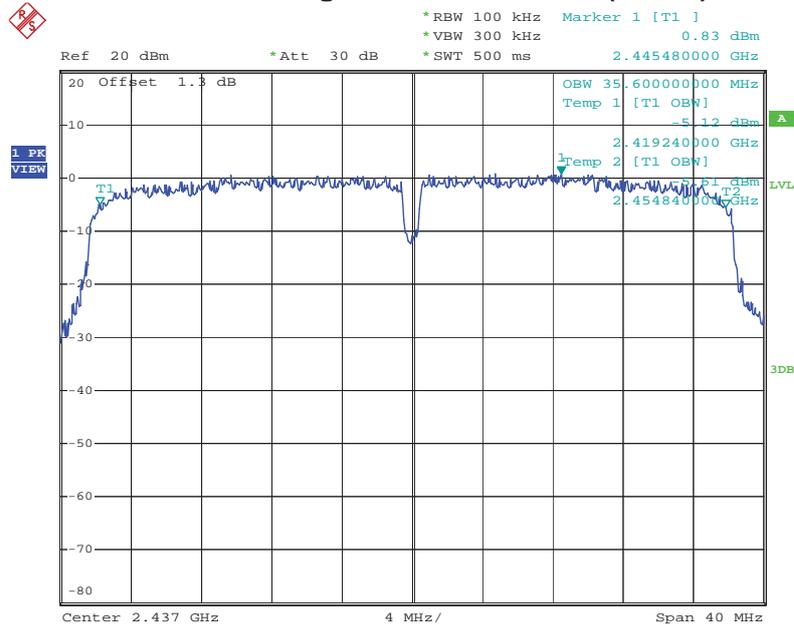


Date: 15.MAY.2012 19:13:19

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

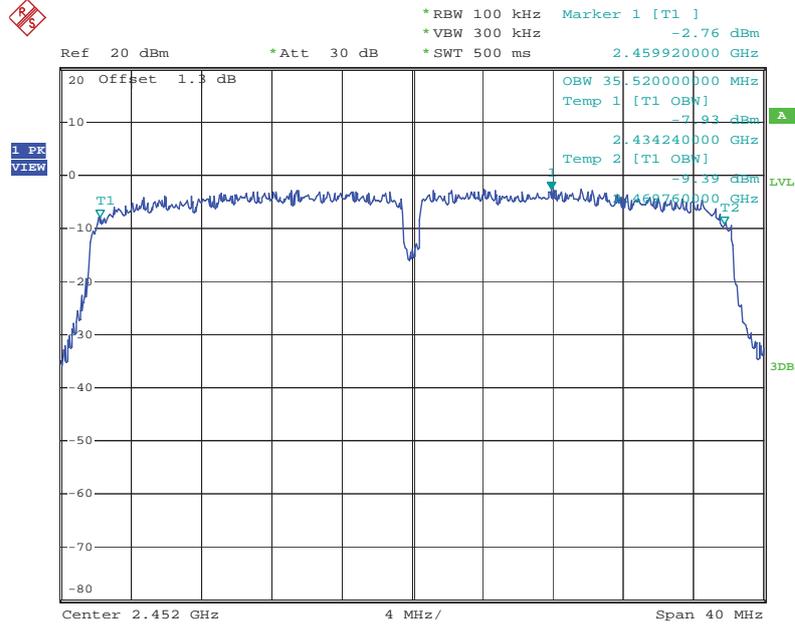


Date: 15.MAY.2012 19:16:45

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 2

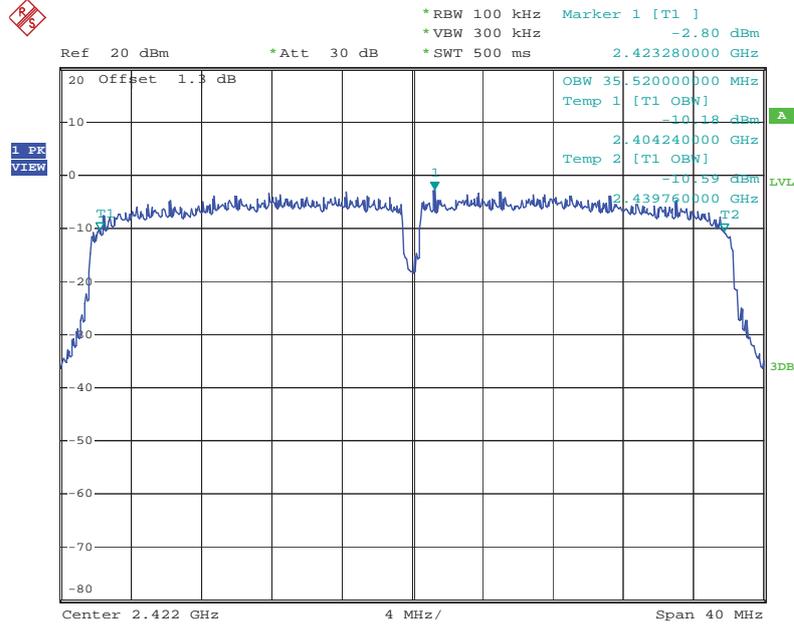


Date: 15.MAY.2012 20:03:57

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2437 MHz Port 2

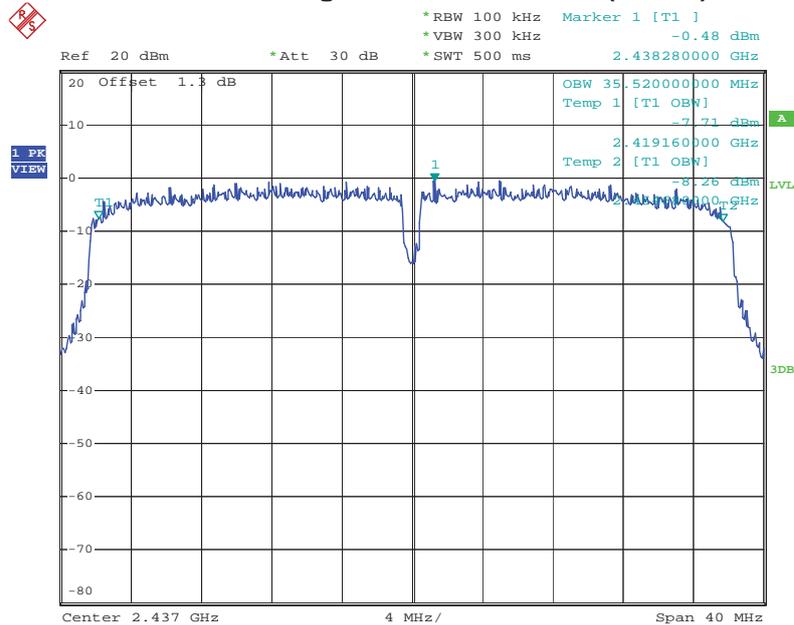

Date: 15.MAY.2012 20:01:49

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 2

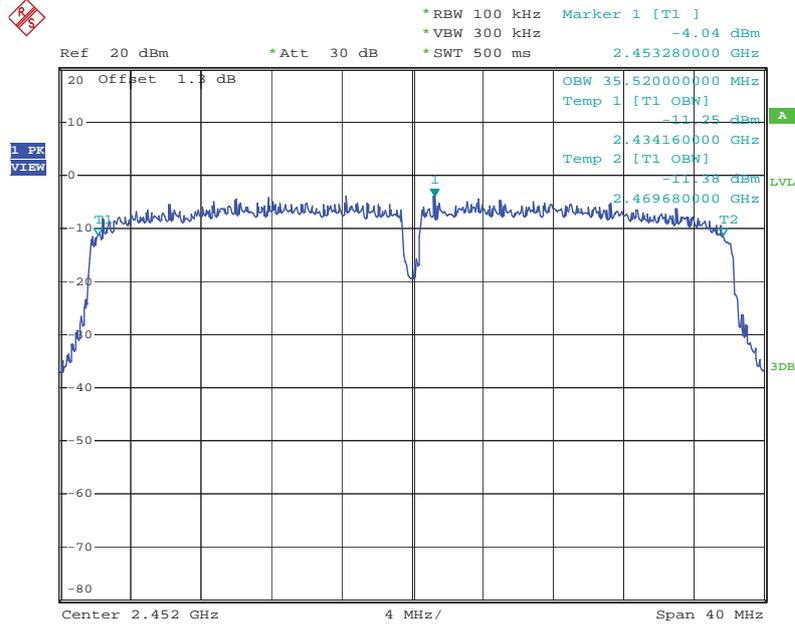

Date: 15.MAY.2012 19:20:57

3.5 Radiated Emissions Measurement

3.5.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| Frequencies (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|--------------------------|---|--------------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for peak |


| Receiver Parameter | Setting |
|---------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

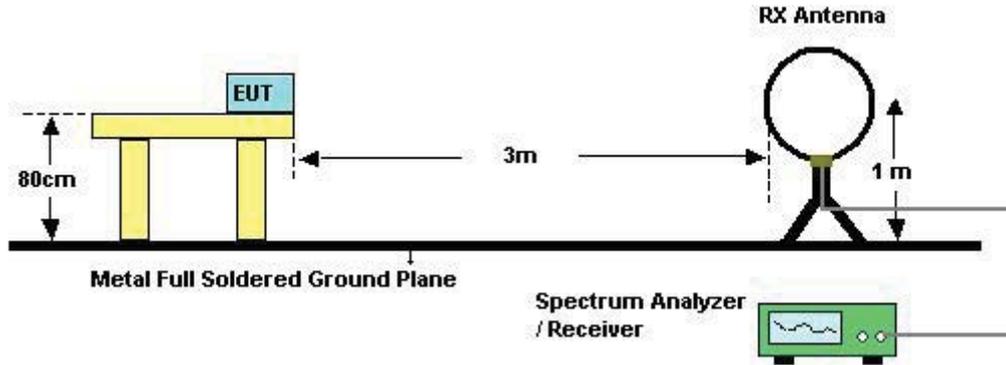

For radiated emissions above 30MHz

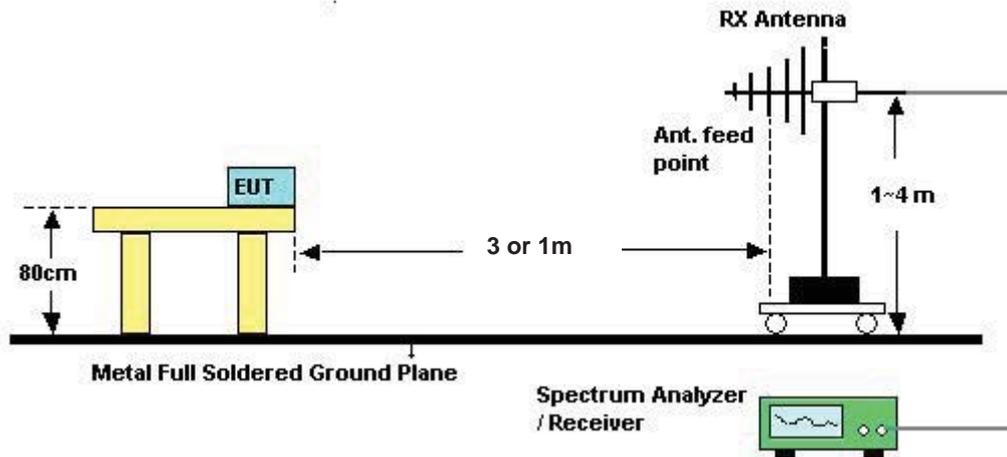

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

| | | | |
|------------------------|--------------|----------------------|-----------|
| Final Test Date | May 09, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | | |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark |
|--------------------|---------------------|------------------------|--------------------------|---------------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)

For Single Chain:


| | | | |
|-----------------|--------------|---------------|---------------|
| Final Test Date | May 09, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11g Ch. 6 |

Horizontal

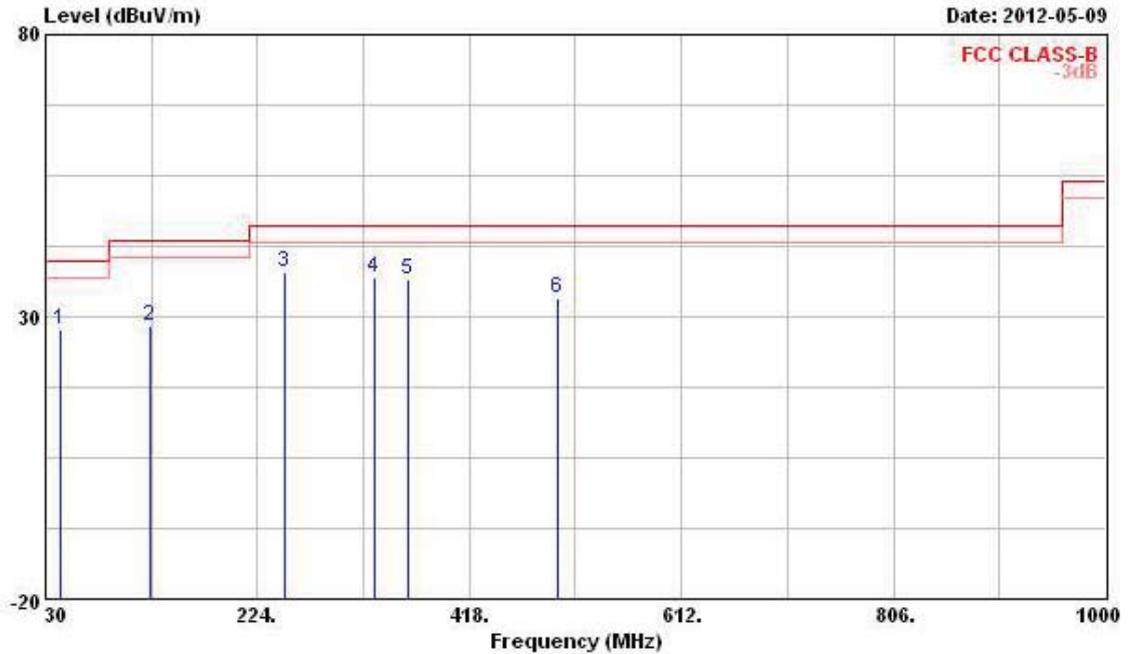

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 43.580 | 27.56 | -12.44 | 40.00 | 42.08 | 12.27 | 1.09 | 27.88 | Peak | --- | --- |
| 2 | 125.060 | 28.43 | -15.07 | 43.50 | 41.13 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 38.02 | -7.98 | 46.00 | 49.57 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 331.670 | 37.01 | -8.99 | 46.00 | 47.09 | 14.20 | 3.10 | 27.38 | Peak | --- | --- |
| 5 | 361.740 | 36.71 | -9.29 | 46.00 | 46.42 | 14.66 | 3.23 | 27.60 | Peak | --- | --- |
| 6 | 498.510 | 33.28 | -12.72 | 46.00 | 40.56 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |

Vertical

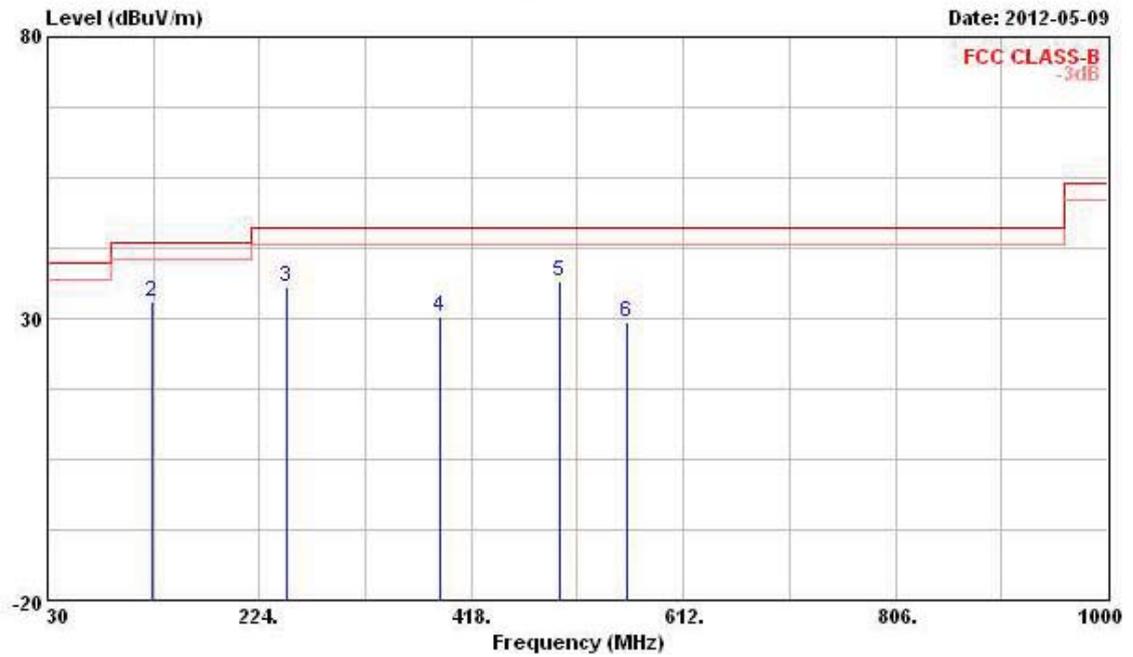

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 30.000 | 32.24 | -7.76 | 40.00 | 43.08 | 16.22 | 0.89 | 27.95 | Peak | --- | --- |
| 2 | 125.060 | 32.87 | -10.63 | 43.50 | 45.57 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 35.66 | -10.34 | 46.00 | 47.21 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 388.900 | 30.29 | -15.71 | 46.00 | 39.65 | 15.09 | 3.35 | 27.80 | Peak | --- | --- |
| 5 | 498.510 | 36.44 | -9.56 | 46.00 | 43.72 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 6 | 559.620 | 29.31 | -16.69 | 46.00 | 34.65 | 19.00 | 4.08 | 28.42 | Peak | --- | --- |

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 09, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 6 |

Horizontal

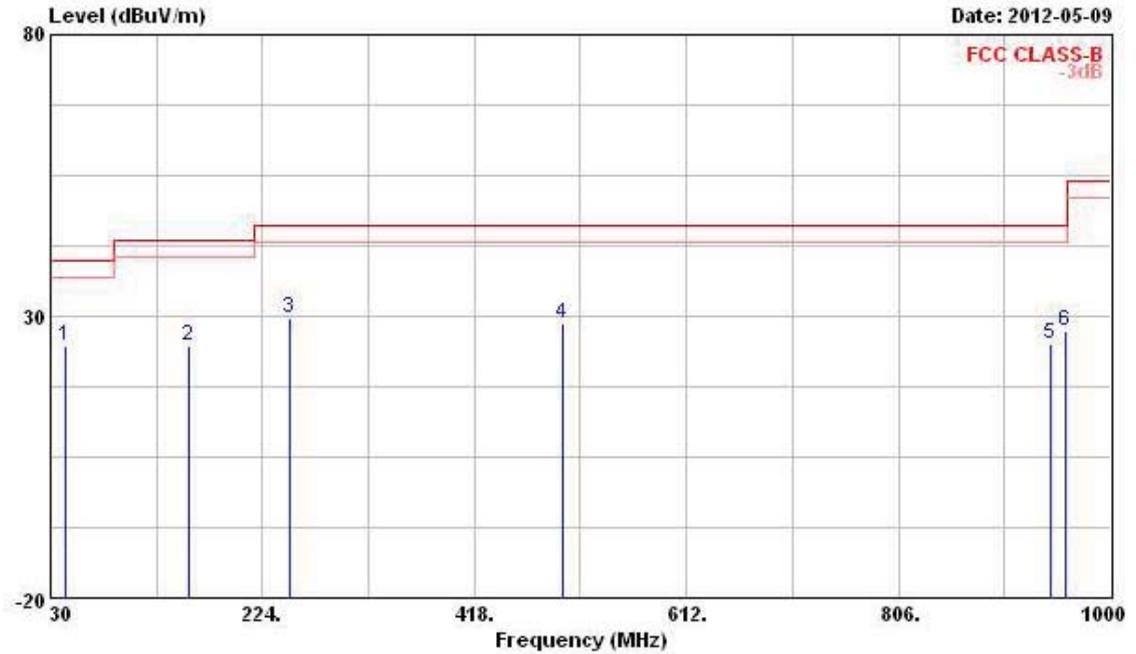

| | Freq | Level | Over Limit | Limit Line | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 43.580 | 24.75 | -15.25 | 40.00 | 39.27 | 12.27 | 1.09 | 27.88 | Peak | --- | --- |
| 2 | 156.100 | 24.83 | -18.67 | 43.50 | 39.73 | 10.64 | 2.06 | 27.60 | Peak | --- | --- |
| 3 | 249.220 | 29.77 | -16.23 | 46.00 | 41.32 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 498.510 | 28.73 | -17.27 | 46.00 | 36.01 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 5 | 944.710 | 25.17 | -20.83 | 46.00 | 25.97 | 21.13 | 5.50 | 27.43 | Peak | --- | --- |
| 6 | 959.260 | 27.37 | -18.63 | 46.00 | 27.70 | 21.49 | 5.56 | 27.38 | Peak | --- | --- |

Vertical

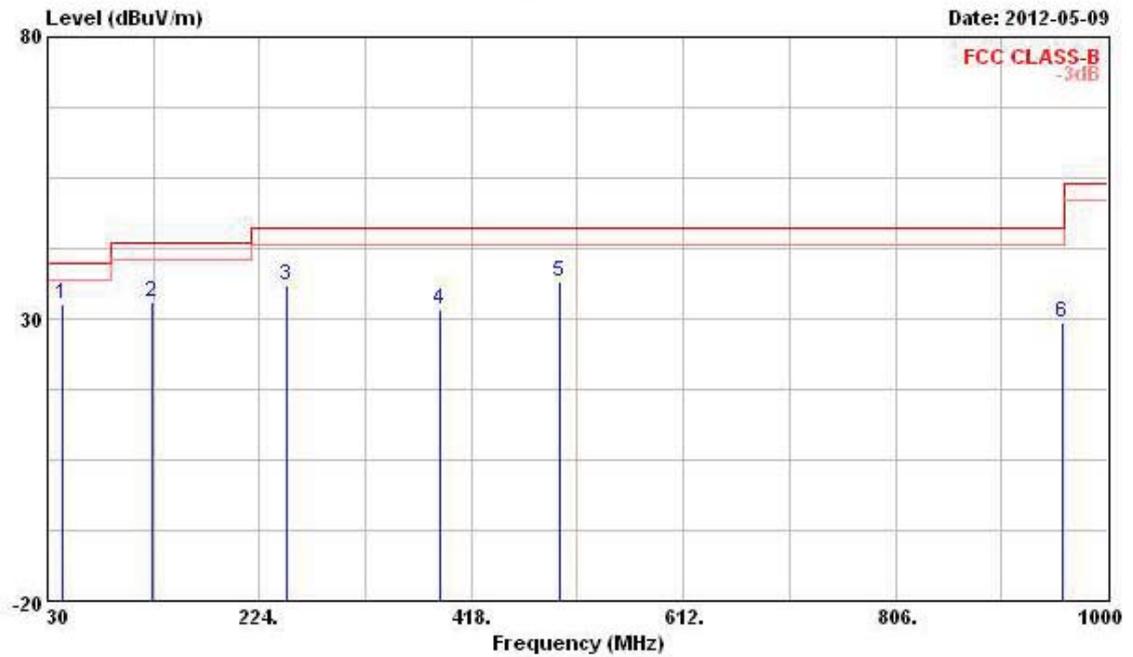


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 43.580 | 32.75 | -7.25 | 40.00 | 47.27 | 12.27 | 1.09 | 27.88 | Peak | --- | --- |
| 2 | 125.060 | 32.94 | -10.56 | 43.50 | 45.64 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 36.03 | -9.97 | 46.00 | 47.58 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 388.900 | 31.62 | -14.38 | 46.00 | 40.98 | 15.09 | 3.35 | 27.80 | Peak | --- | --- |
| 5 | 498.510 | 36.47 | -9.53 | 46.00 | 43.75 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 6 | 959.260 | 29.47 | -16.53 | 46.00 | 29.80 | 21.49 | 5.56 | 27.38 | Peak | --- | --- |

Note:
 The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


| | | | |
|------------------------|--------------|----------------------|-----------------------|
| Final Test Date | May 09, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 6 |

Horizontal

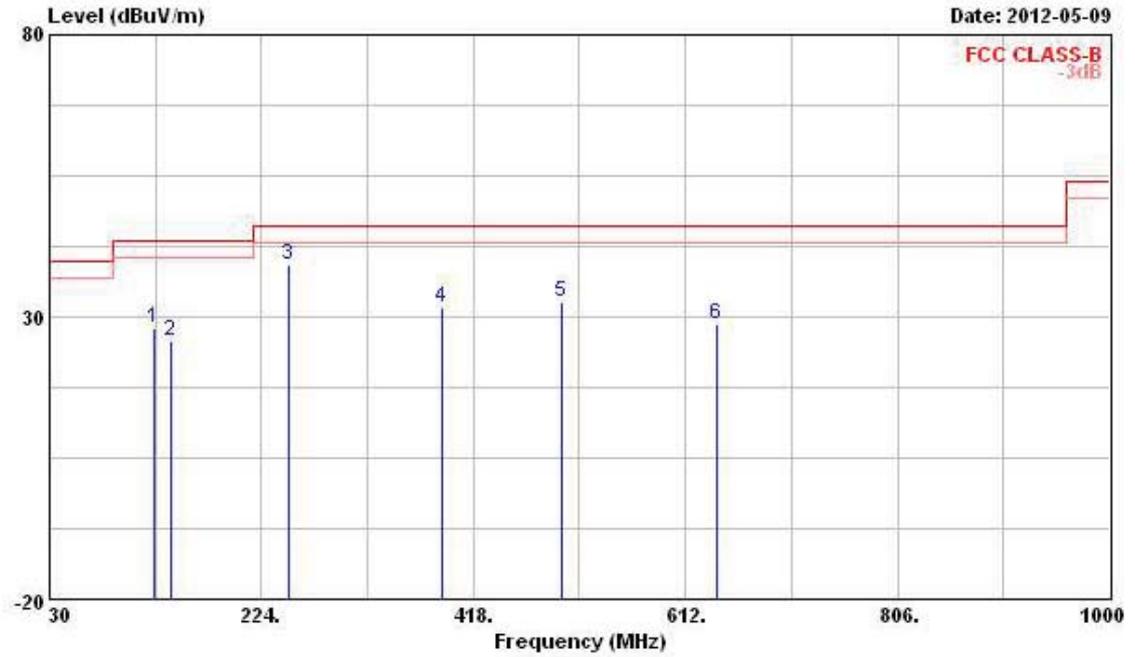

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 125.060 | 27.88 | -15.62 | 43.50 | 40.58 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 2 | 141.550 | 25.62 | -17.88 | 43.50 | 39.51 | 11.78 | 2.00 | 27.67 | Peak | --- | --- |
| 3 @ | 249.220 | 39.12 | -6.88 | 46.00 | 50.67 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 388.900 | 31.60 | -14.40 | 46.00 | 40.96 | 15.09 | 3.35 | 27.80 | Peak | --- | --- |
| 5 | 498.510 | 32.51 | -13.49 | 46.00 | 39.79 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 6 | 641.100 | 28.57 | -17.43 | 46.00 | 32.97 | 19.63 | 4.36 | 28.39 | Peak | --- | --- |

Vertical

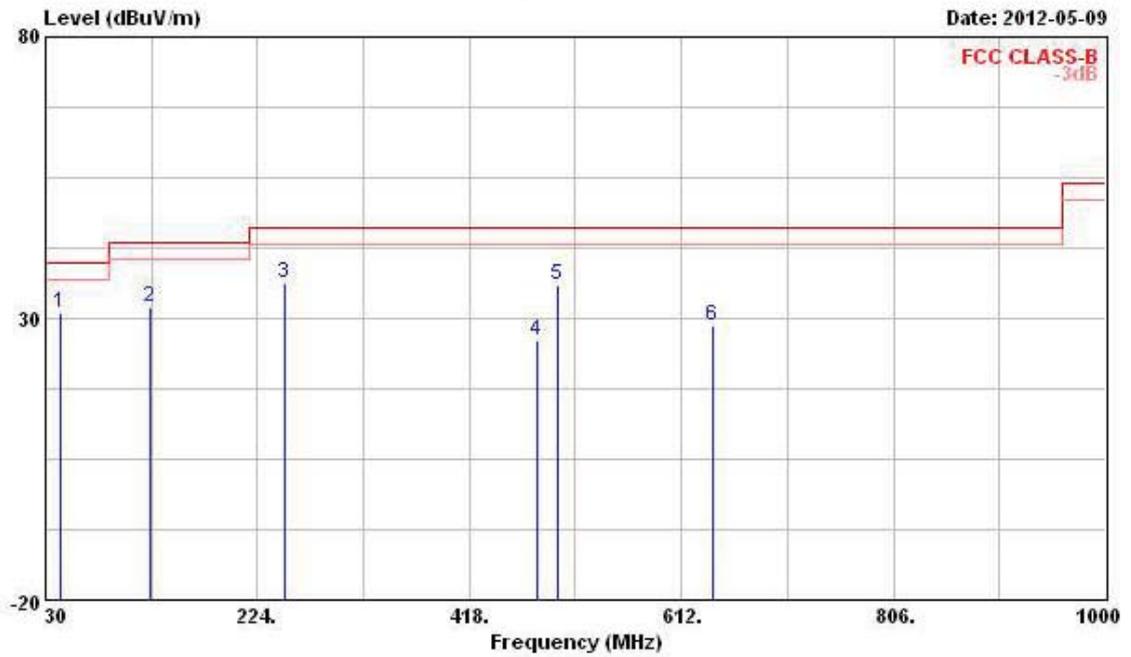

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 43.580 | 30.84 | -9.16 | 40.00 | 45.36 | 12.27 | 1.09 | 27.88 | Peak | --- | --- |
| 2 | 125.060 | 31.82 | -11.68 | 43.50 | 44.52 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 36.16 | -9.84 | 46.00 | 47.71 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 479.110 | 25.96 | -20.04 | 46.00 | 33.64 | 16.87 | 3.72 | 28.27 | Peak | --- | --- |
| 5 | 498.510 | 35.77 | -10.23 | 46.00 | 43.05 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 6 | 641.100 | 28.83 | -17.17 | 46.00 | 33.23 | 19.63 | 4.36 | 28.39 | Peak | --- | --- |

Note:
 The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Two Chains:


| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 09, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 6 |

Horizontal

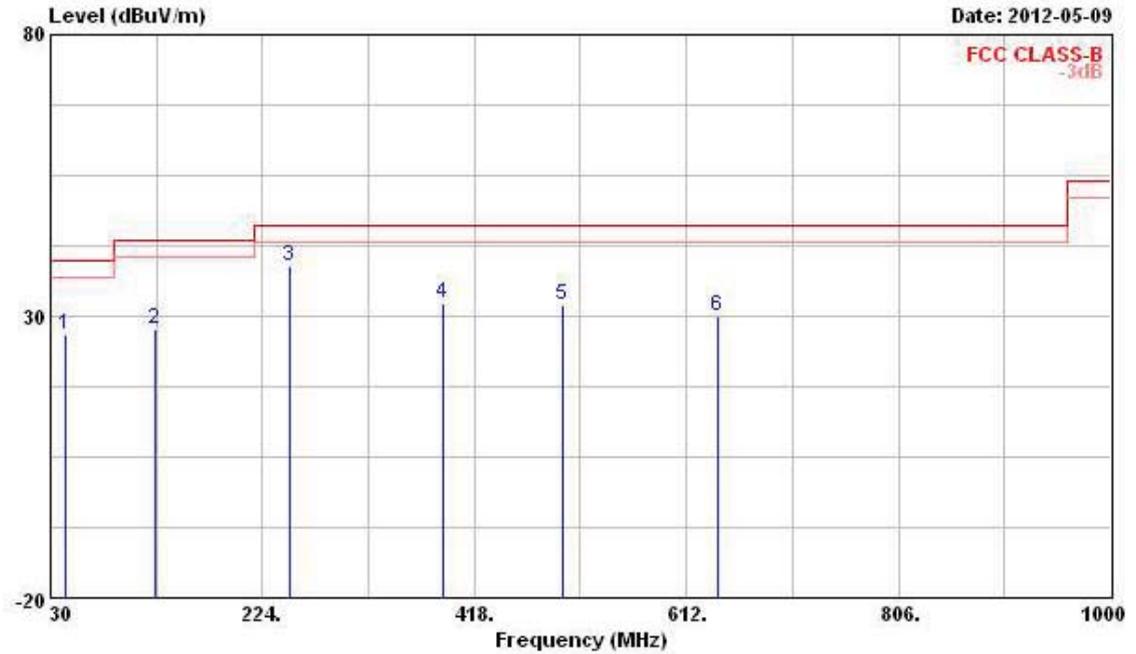

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 43.580 | 26.73 | -13.27 | 40.00 | 41.25 | 12.27 | 1.09 | 27.88 | Peak | --- | --- |
| 2 | 125.060 | 27.82 | -15.68 | 43.50 | 40.52 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 38.78 | -7.22 | 46.00 | 50.33 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 388.900 | 32.20 | -13.80 | 46.00 | 41.56 | 15.09 | 3.35 | 27.80 | Peak | --- | --- |
| 5 | 498.510 | 31.95 | -14.05 | 46.00 | 39.23 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 6 | 641.100 | 29.97 | -16.03 | 46.00 | 34.37 | 19.63 | 4.36 | 28.39 | Peak | --- | --- |

Vertical

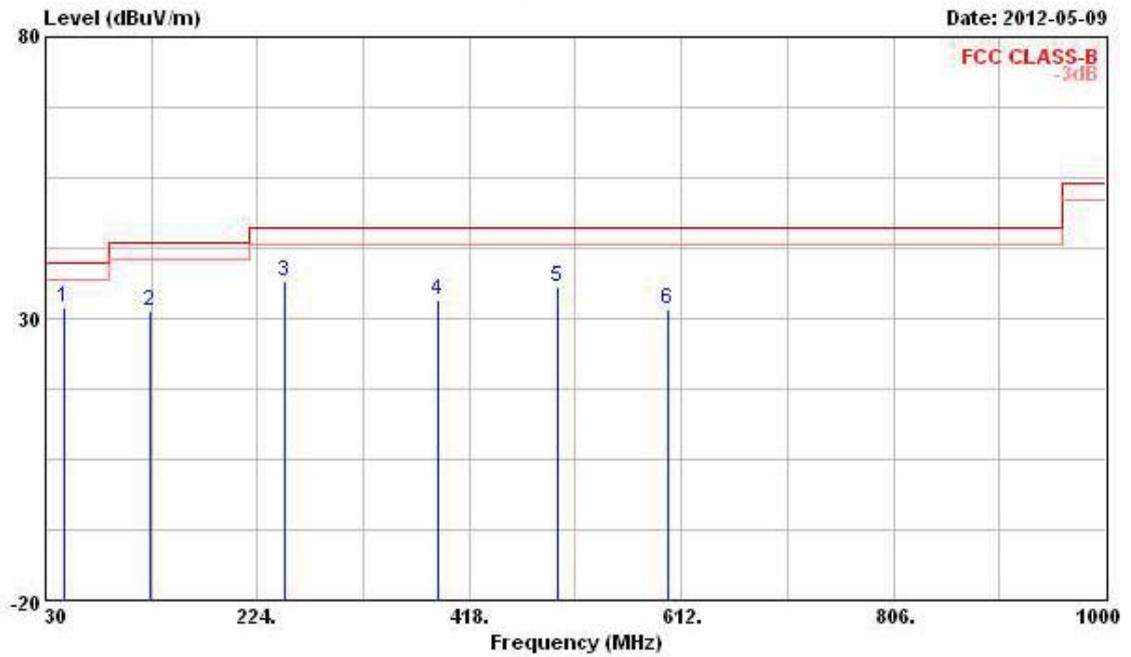

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 47.460 | 32.05 | -7.95 | 40.00 | 47.94 | 10.82 | 1.15 | 27.86 | Peak | --- | --- |
| 2 | 125.060 | 31.48 | -12.02 | 43.50 | 44.18 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 36.44 | -9.56 | 46.00 | 47.99 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 388.900 | 33.20 | -12.80 | 46.00 | 42.56 | 15.09 | 3.35 | 27.80 | Peak | --- | --- |
| 5 | 498.510 | 35.53 | -10.47 | 46.00 | 42.81 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 6 | 599.390 | 31.53 | -14.47 | 46.00 | 35.60 | 20.15 | 4.24 | 28.46 | Peak | --- | --- |

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 09, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 6 |

Horizontal

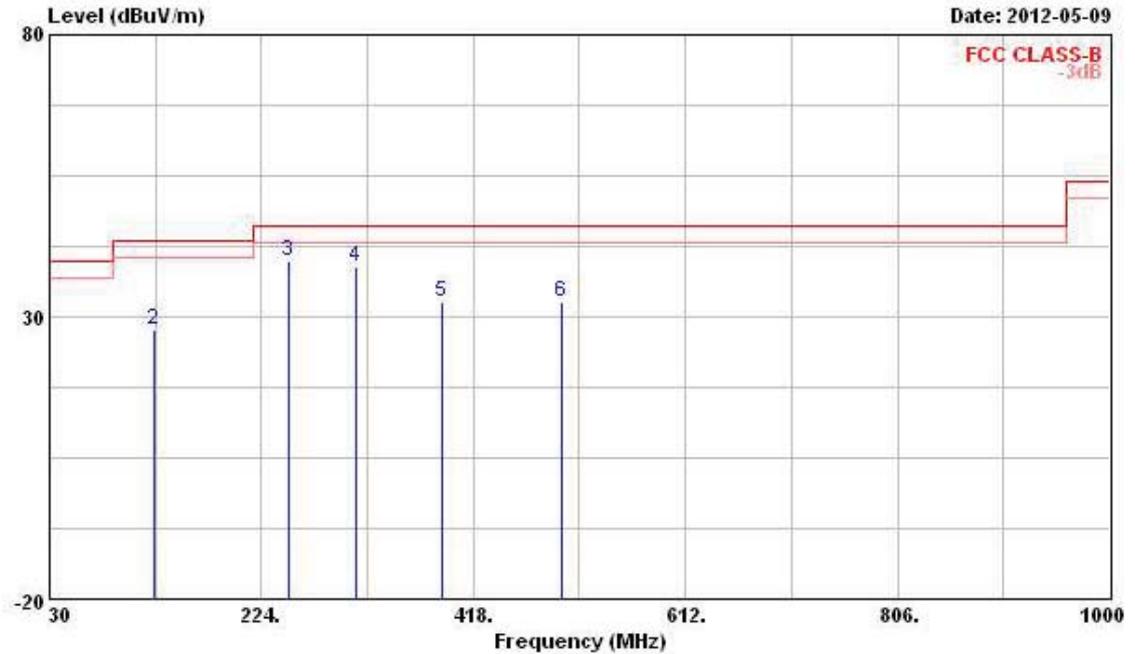

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 30.000 | 29.54 | -10.46 | 40.00 | 40.38 | 16.22 | 0.89 | 27.95 | Peak | --- | --- |
| 2 | 125.060 | 27.64 | -15.86 | 43.50 | 40.34 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 39.85 | -6.15 | 46.00 | 51.40 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 311.300 | 38.90 | -7.10 | 46.00 | 49.25 | 13.88 | 3.01 | 27.24 | Peak | --- | --- |
| 5 | 388.900 | 32.72 | -13.28 | 46.00 | 42.08 | 15.09 | 3.35 | 27.80 | Peak | --- | --- |
| 6 | 498.510 | 32.68 | -13.32 | 46.00 | 39.96 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |

Vertical

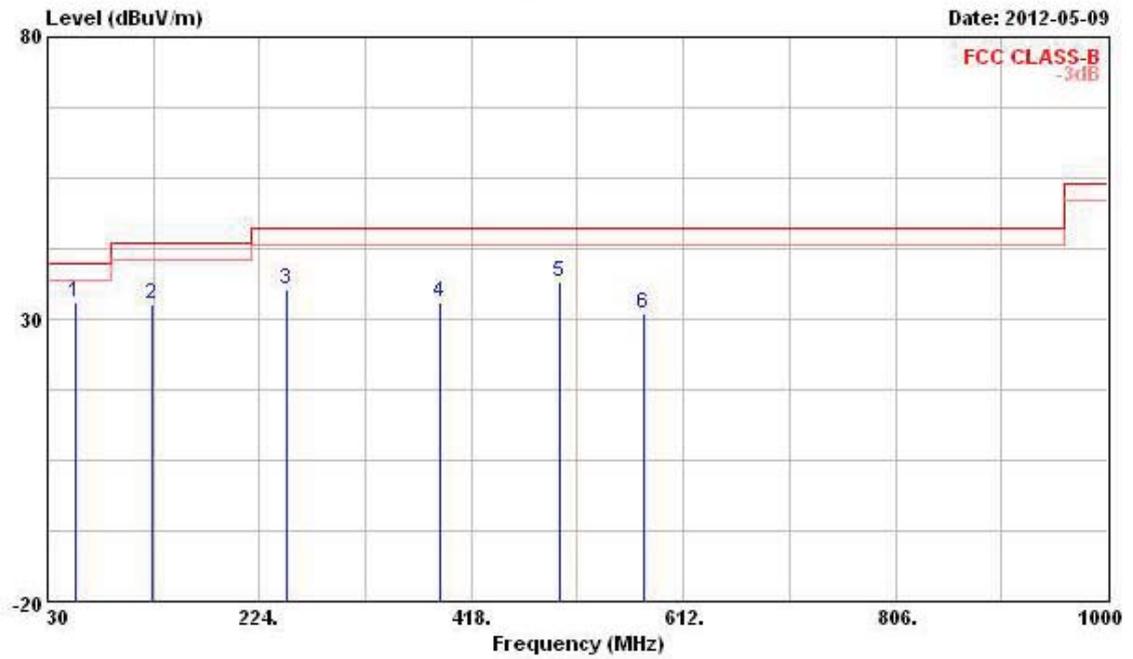

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 55.220 | 32.85 | -7.15 | 40.00 | 51.18 | 8.27 | 1.25 | 27.85 | Peak | --- | --- |
| 2 | 125.060 | 32.60 | -10.90 | 43.50 | 45.30 | 13.18 | 1.86 | 27.74 | Peak | --- | --- |
| 3 | 249.220 | 35.17 | -10.83 | 46.00 | 46.72 | 12.97 | 2.77 | 27.29 | Peak | --- | --- |
| 4 | 388.900 | 33.11 | -12.89 | 46.00 | 42.47 | 15.09 | 3.35 | 27.80 | Peak | --- | --- |
| 5 | 498.510 | 36.54 | -9.46 | 46.00 | 43.82 | 17.26 | 3.82 | 28.36 | Peak | --- | --- |
| 6 | 576.110 | 31.09 | -14.91 | 46.00 | 35.90 | 19.48 | 4.15 | 28.44 | Peak | --- | --- |


Note:
 The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10th Harmonic)

For Single Chain:

| | | | |
|-----------------|--------------|---------------|---------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11b Ch. 1 |


Horizontal

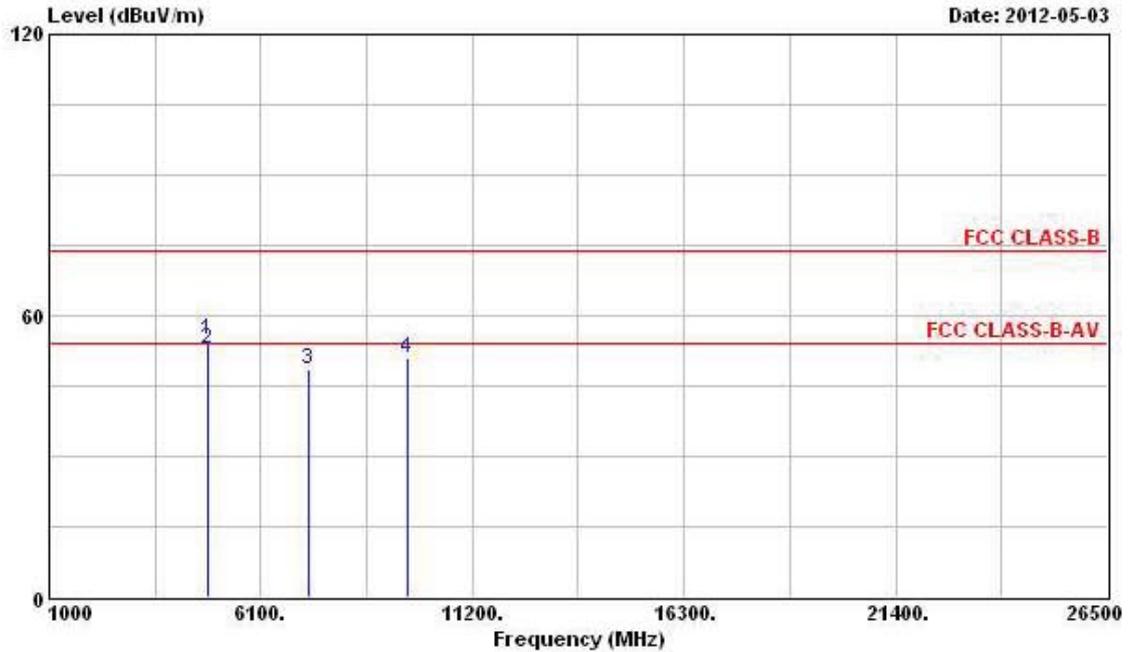

| | Freq | Level | Over | Limit | ReadAntenna | | Cable Preamp | | Remark | Ant | Table |
|---|----------|--------|--------|--------|-------------|-------|--------------|--------|---------|-----|-------|
| | | | | | Limit | Line | Level | Factor | | | |
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 54.75 | -19.25 | 74.00 | 49.21 | 35.76 | 4.58 | 34.80 | Peak | --- | --- |
| 2 | 4824.000 | 52.98 | -1.02 | 54.00 | 47.44 | 35.76 | 4.58 | 34.80 | Average | --- | --- |
| 3 | 7236.000 | 48.44 | | | 40.04 | 37.85 | 5.63 | 35.08 | Peak | --- | --- |
| 4 | 9648.000 | 50.76 | | | 40.50 | 39.39 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 3 and 4 are on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

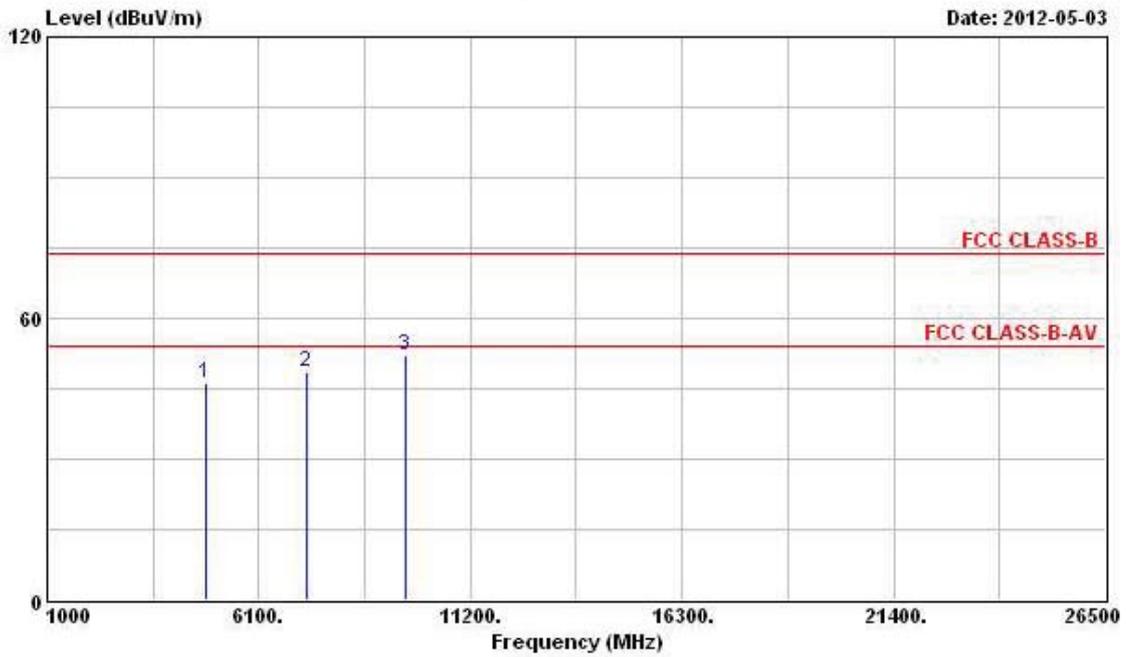


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 46.11 | -7.89 | 54.00 | 41.20 | 35.13 | 4.58 | 34.80 | PK | --- | --- |
| 2 | 7236.000 | 48.47 | | | 41.02 | 36.90 | 5.63 | 35.08 | Peak | --- | --- |
| 3 | 9648.000 | 52.10 | | | 42.64 | 38.59 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|---------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11b Ch. 6 |


Horizontal

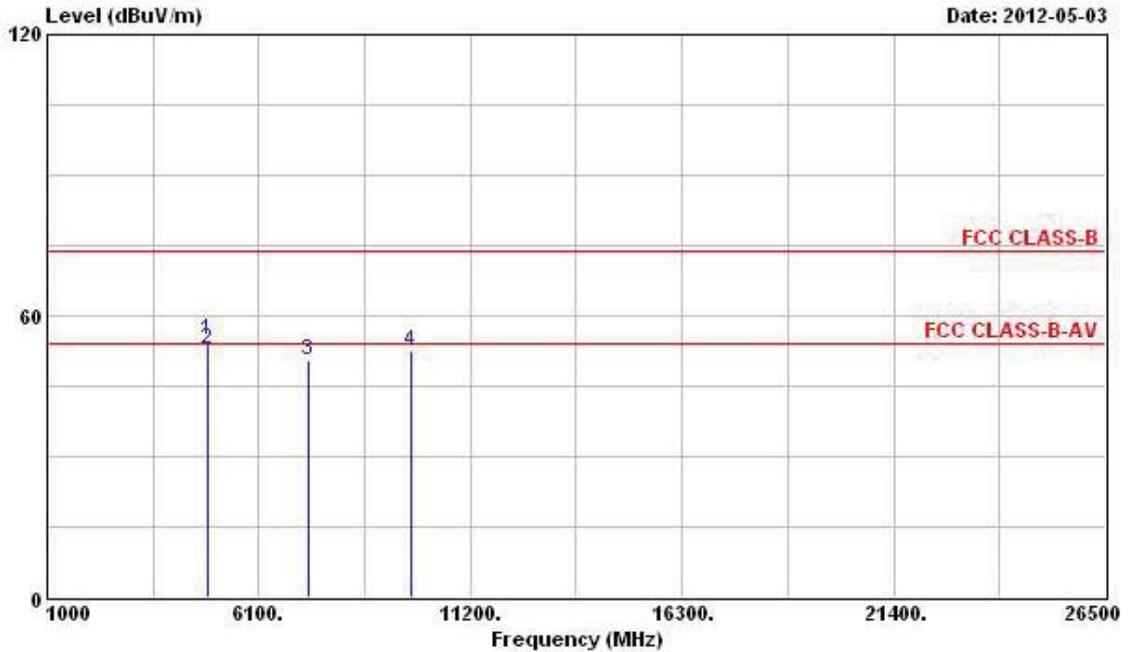

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 54.84 | -19.16 | 74.00 | 49.18 | 35.83 | 4.61 | 34.78 | Peak | --- | --- |
| 2 @ | 4874.000 | 52.70 | -1.30 | 54.00 | 47.04 | 35.83 | 4.61 | 34.78 | Average | --- | --- |
| 3 @ | 7311.000 | 50.52 | -3.48 | 54.00 | 42.12 | 37.86 | 5.64 | 35.10 | PK | --- | --- |
| 4 | 9748.000 | 52.67 | | | 42.28 | 39.51 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

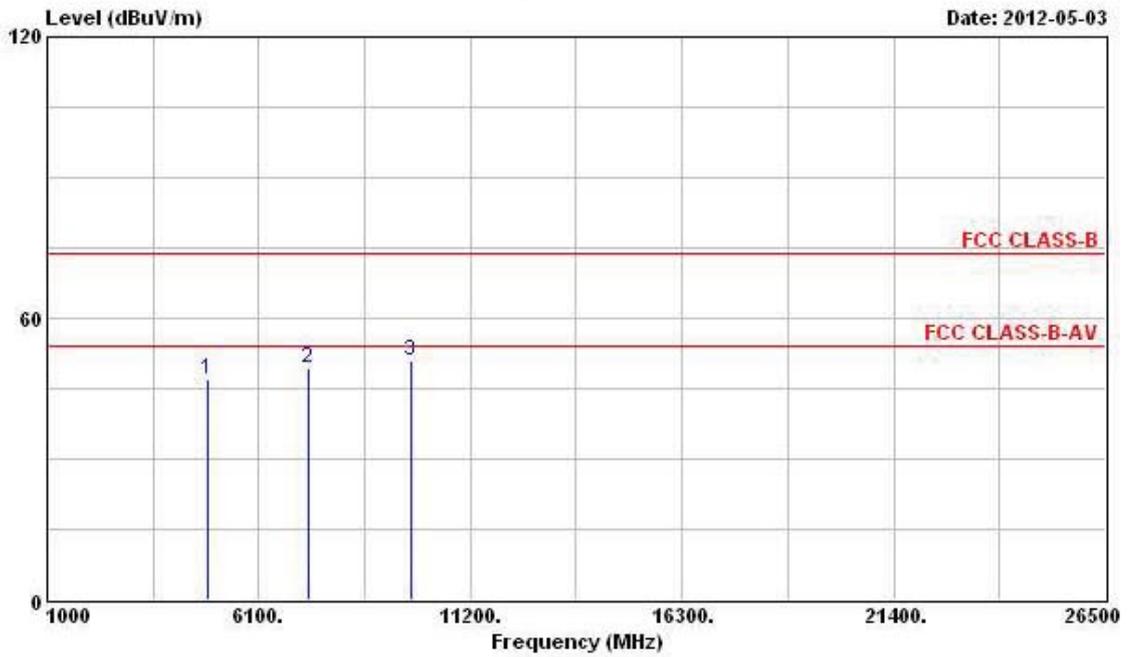


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|------------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | @ 4874.000 | 47.12 | -6.88 | 54.00 | 42.11 | 35.18 | 4.61 | 34.78 | PK | --- | --- |
| 2 | @ 7311.000 | 49.43 | -4.57 | 54.00 | 41.97 | 36.92 | 5.64 | 35.10 | PK | --- | --- |
| 3 | @ 9748.000 | 51.08 | | | 41.49 | 38.71 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|----------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11b Ch. 11 |


Horizontal

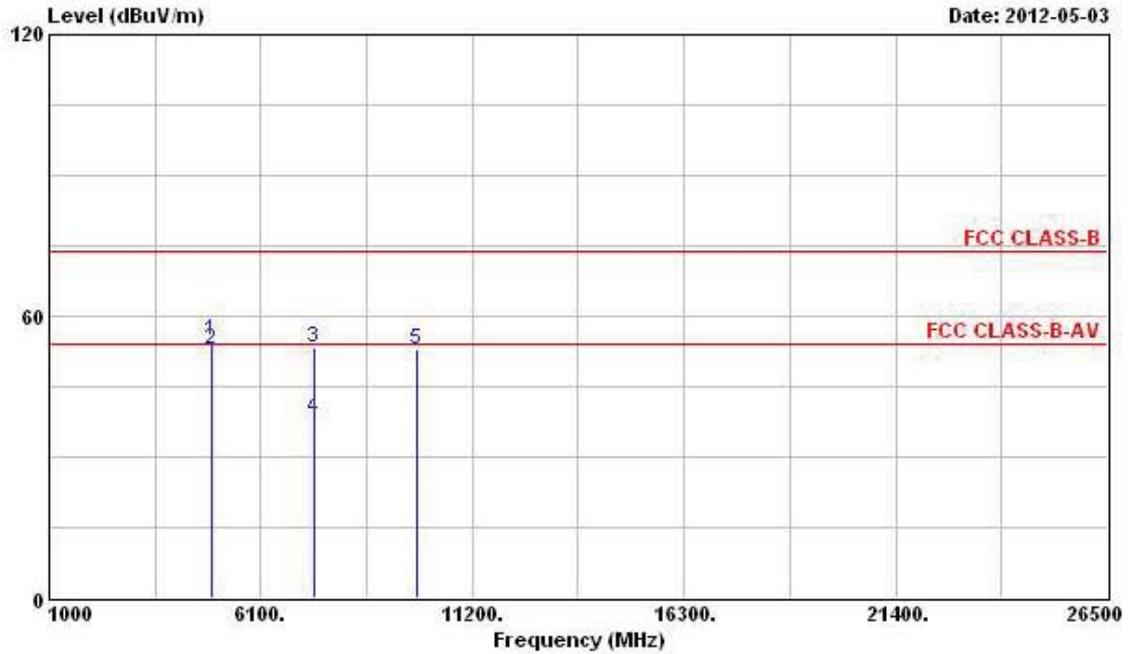

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 54.78 | -19.22 | 74.00 | 48.97 | 35.90 | 4.68 | 34.77 | Peak | --- | --- |
| 2 | 4924.000 | 52.99 | -1.01 | 54.00 | 47.18 | 35.90 | 4.68 | 34.77 | Average | --- | --- |
| 3 | 7386.000 | 53.46 | -20.54 | 74.00 | 45.05 | 37.88 | 5.65 | 35.12 | Peak | --- | --- |
| 4 | 7386.000 | 38.23 | -15.77 | 54.00 | 29.82 | 37.88 | 5.65 | 35.12 | Average | --- | --- |
| 5 | 9848.000 | 53.04 | | | 42.54 | 39.61 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

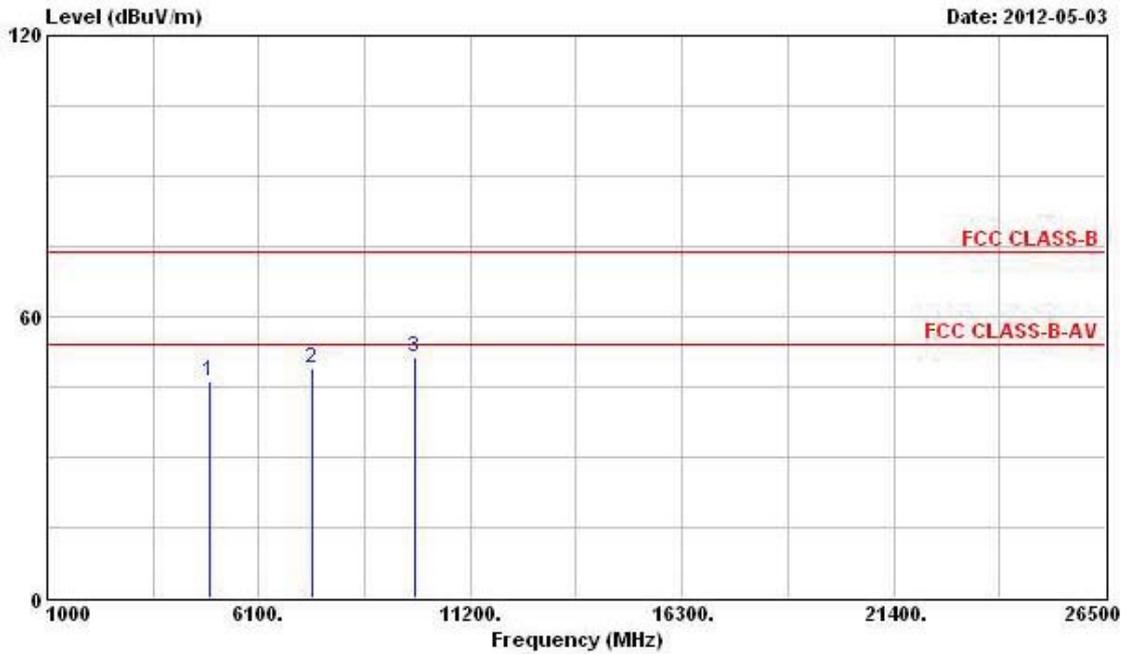


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 46.24 | -7.76 | 54.00 | 41.10 | 35.23 | 4.68 | 34.77 | PK | --- | --- |
| 2 | 7386.000 | 48.86 | -5.14 | 54.00 | 41.37 | 36.96 | 5.65 | 35.12 | PK | --- | --- |
| 3 | 9848.000 | 51.43 | | | 41.73 | 38.81 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|---------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11g Ch. 1 |


Horizontal

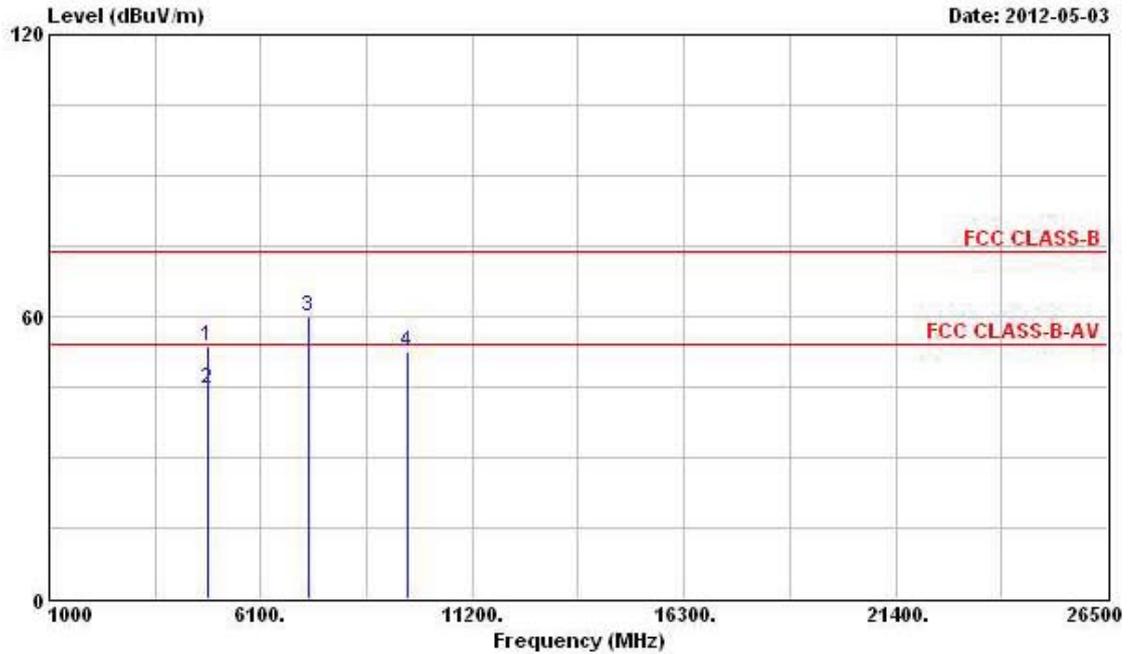

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 53.88 | -20.12 | 74.00 | 48.34 | 35.76 | 4.58 | 34.80 | Peak | --- | --- |
| 2 | 4824.000 | 44.62 | -9.38 | 54.00 | 39.08 | 35.76 | 4.58 | 34.80 | Average | --- | --- |
| 3 | 7236.000 | 60.03 | | | 51.63 | 37.85 | 5.63 | 35.08 | Peak | --- | --- |
| 4 | 9648.000 | 52.61 | | | 42.35 | 39.39 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 3 and 4 are on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

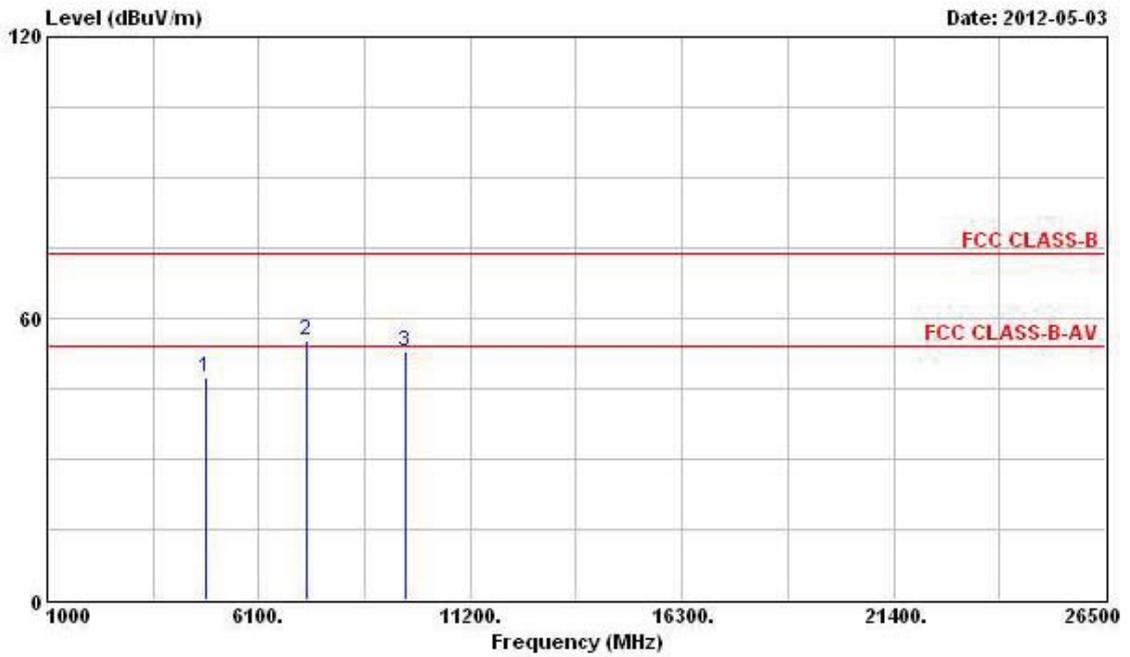


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 47.26 | -6.74 | 54.00 | 42.35 | 35.13 | 4.58 | 34.80 | PK | --- | --- |
| 2 | 7236.000 | 55.42 | | | 47.97 | 36.90 | 5.63 | 35.08 | Peak | --- | --- |
| 3 | 9648.000 | 52.94 | | | 43.48 | 38.59 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 2 and 3 are on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|---------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11g Ch. 6 |


Horizontal

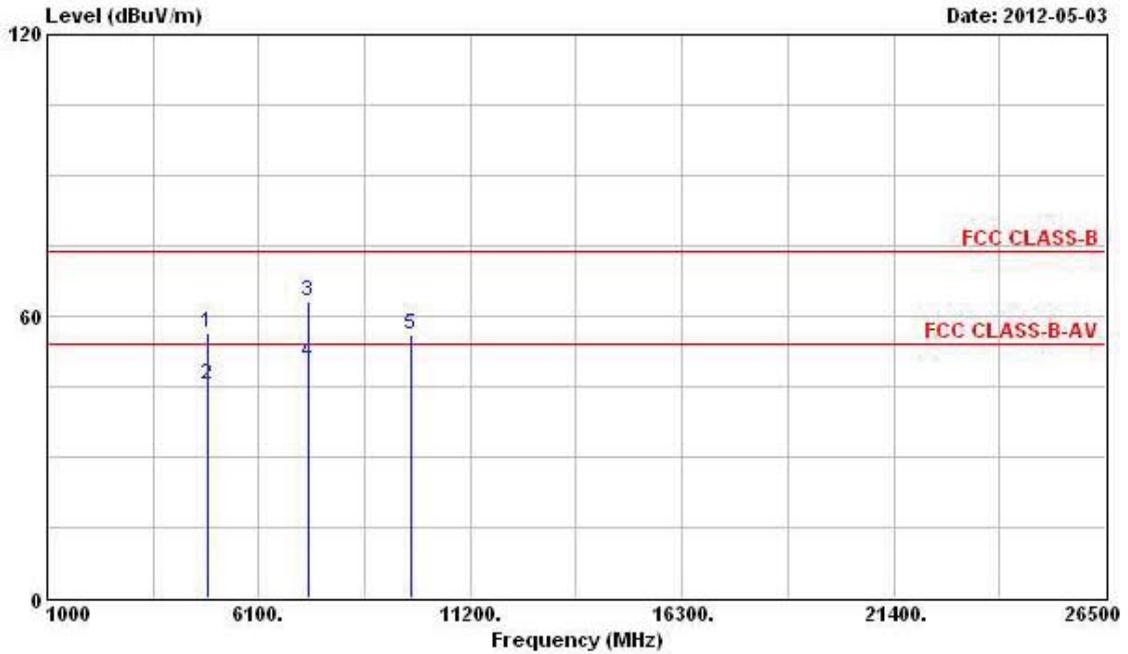

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 56.51 | -17.49 | 74.00 | 50.85 | 35.83 | 4.61 | 34.78 | Peak | --- | --- |
| 2 @ | 4874.000 | 45.28 | -8.72 | 54.00 | 39.62 | 35.83 | 4.61 | 34.78 | Average | --- | --- |
| 3 @ | 7311.000 | 63.03 | -10.97 | 74.00 | 54.63 | 37.86 | 5.64 | 35.10 | Peak | --- | --- |
| 4 @ | 7311.000 | 50.03 | -3.97 | 54.00 | 41.63 | 37.86 | 5.64 | 35.10 | Average | --- | --- |
| 5 | 9748.000 | 56.06 | | | 45.67 | 39.51 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

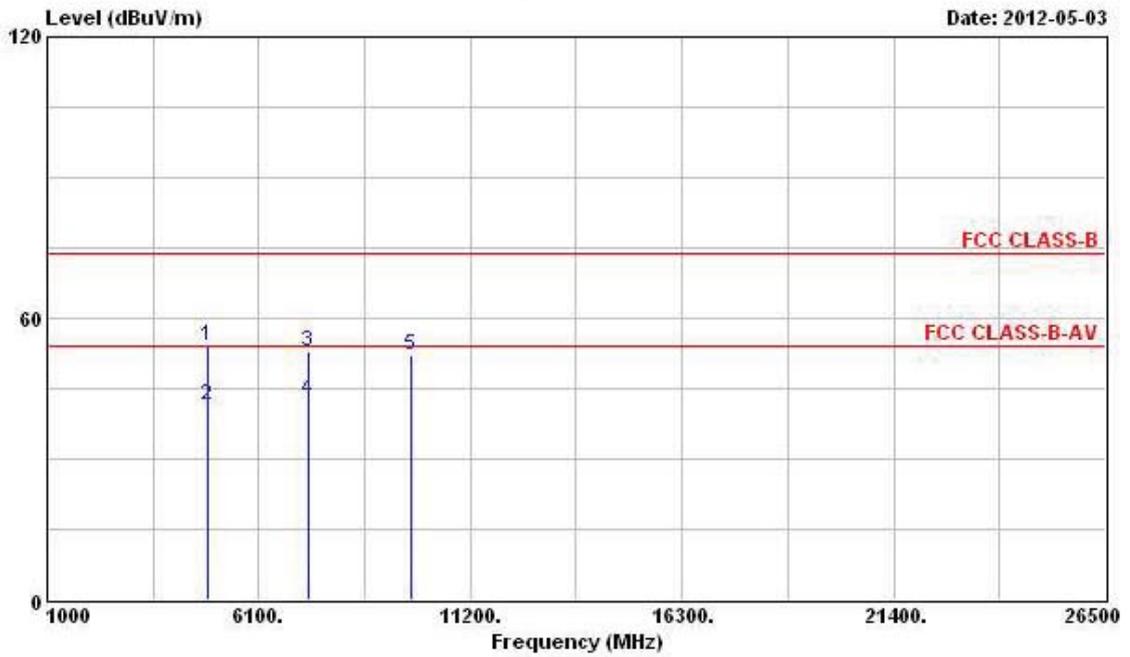


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBUV/m | dB | dBUV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 54.06 | -19.94 | 74.00 | 49.05 | 35.18 | 4.61 | 34.78 | Peak | --- | --- |
| 2 @ | 4874.000 | 41.49 | -12.51 | 54.00 | 36.48 | 35.18 | 4.61 | 34.78 | Average | --- | --- |
| 3 | 7311.000 | 52.94 | -21.06 | 74.00 | 45.48 | 36.92 | 5.64 | 35.10 | Peak | --- | --- |
| 4 @ | 7311.000 | 42.76 | -11.24 | 54.00 | 35.30 | 36.92 | 5.64 | 35.10 | Average | --- | --- |
| 5 | 9748.000 | 51.95 | | | 42.36 | 38.71 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|----------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11g Ch. 11 |


Horizontal

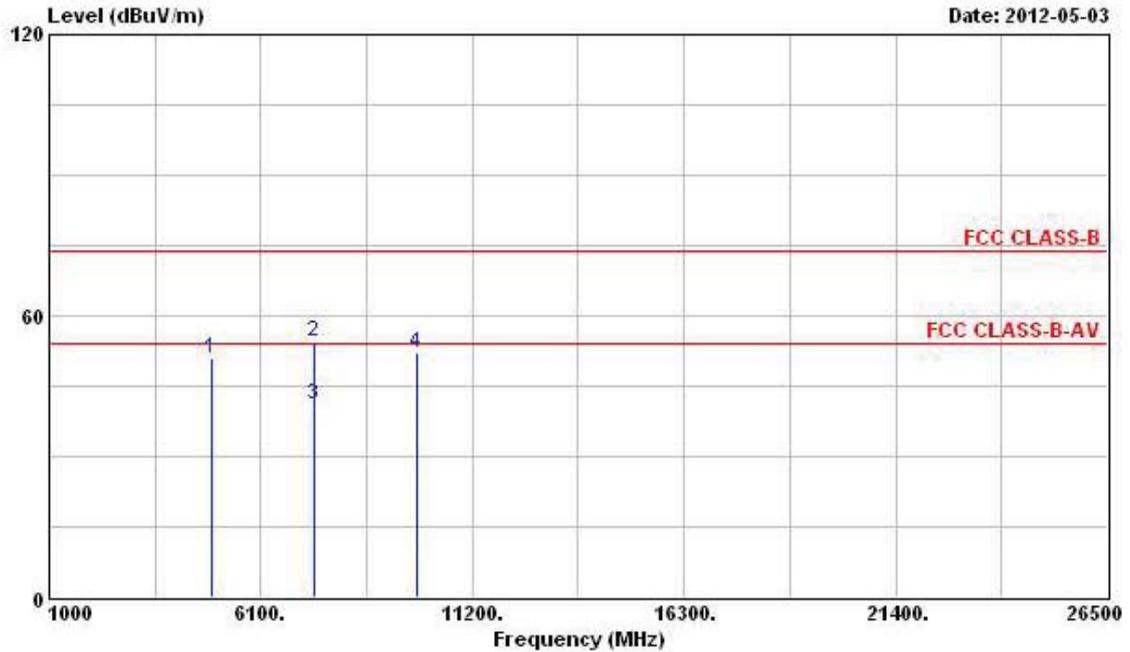

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 50.91 | -3.09 | 54.00 | 45.10 | 35.90 | 4.68 | 34.77 | PK | --- | --- |
| 2 | 7386.000 | 54.44 | -19.56 | 74.00 | 46.03 | 37.88 | 5.65 | 35.12 | Peak | --- | --- |
| 3 | 7386.000 | 40.88 | -13.12 | 54.00 | 32.47 | 37.88 | 5.65 | 35.12 | Average | --- | --- |
| 4 | 9848.000 | 52.10 | | | 41.60 | 39.61 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

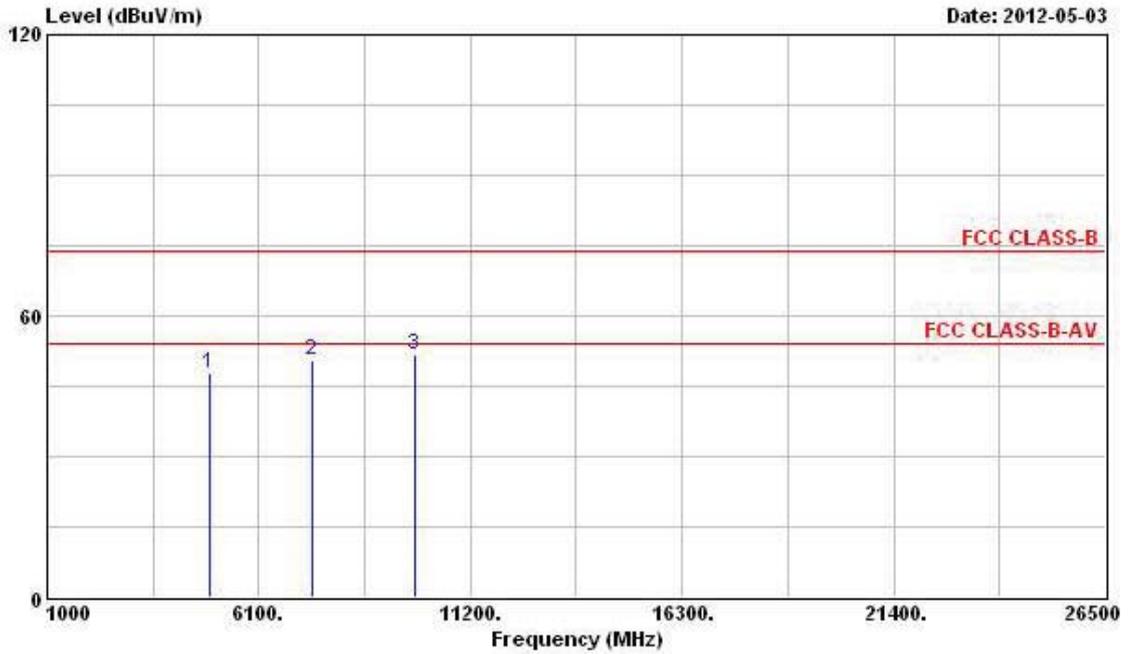


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBUV/m | dB | dBUV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 47.59 | -6.41 | 54.00 | 42.45 | 35.23 | 4.68 | 34.77 | PK | --- | --- |
| 2 | 7386.000 | 50.34 | -3.66 | 54.00 | 42.85 | 36.96 | 5.65 | 35.12 | PK | --- | --- |
| 3 | 9848.000 | 51.56 | | | 41.86 | 38.81 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 1 |


Horizontal

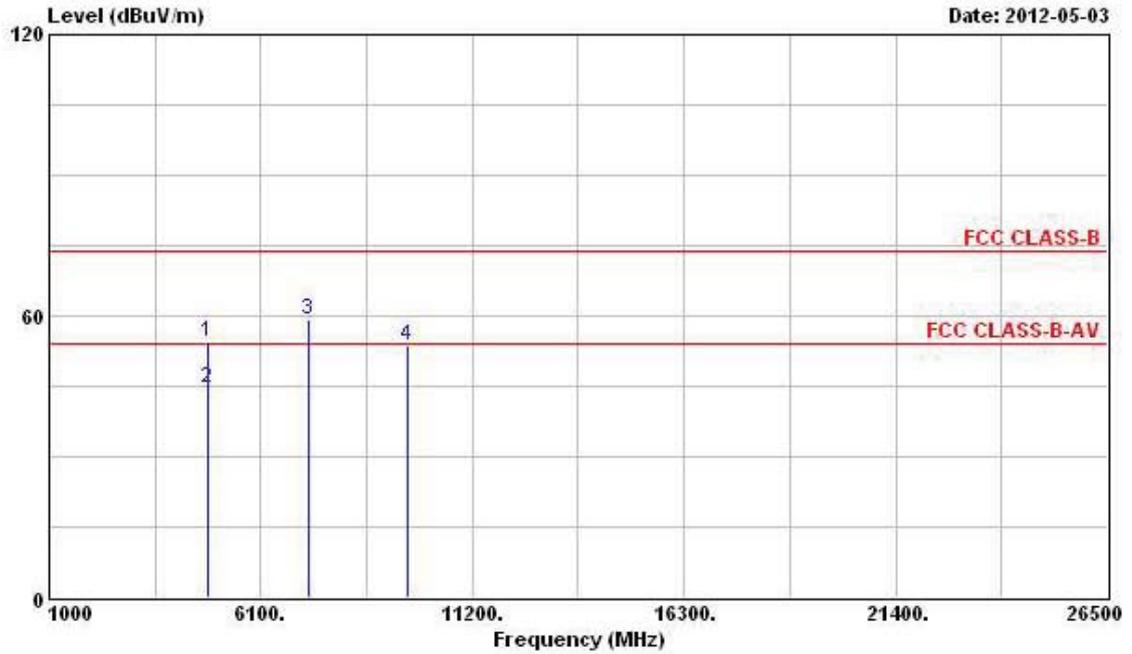

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|------------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 54.65 | -19.35 | 74.00 | 49.11 | 35.76 | 4.58 | 34.80 | Peak | --- | --- |
| 2 | @ 4824.000 | 44.72 | -9.28 | 54.00 | 39.18 | 35.76 | 4.58 | 34.80 | Average | --- | --- |
| 3 | 7236.000 | 59.28 | | | 50.88 | 37.85 | 5.63 | 35.08 | Peak | --- | --- |
| 4 | 9648.000 | 53.55 | | | 43.29 | 39.39 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

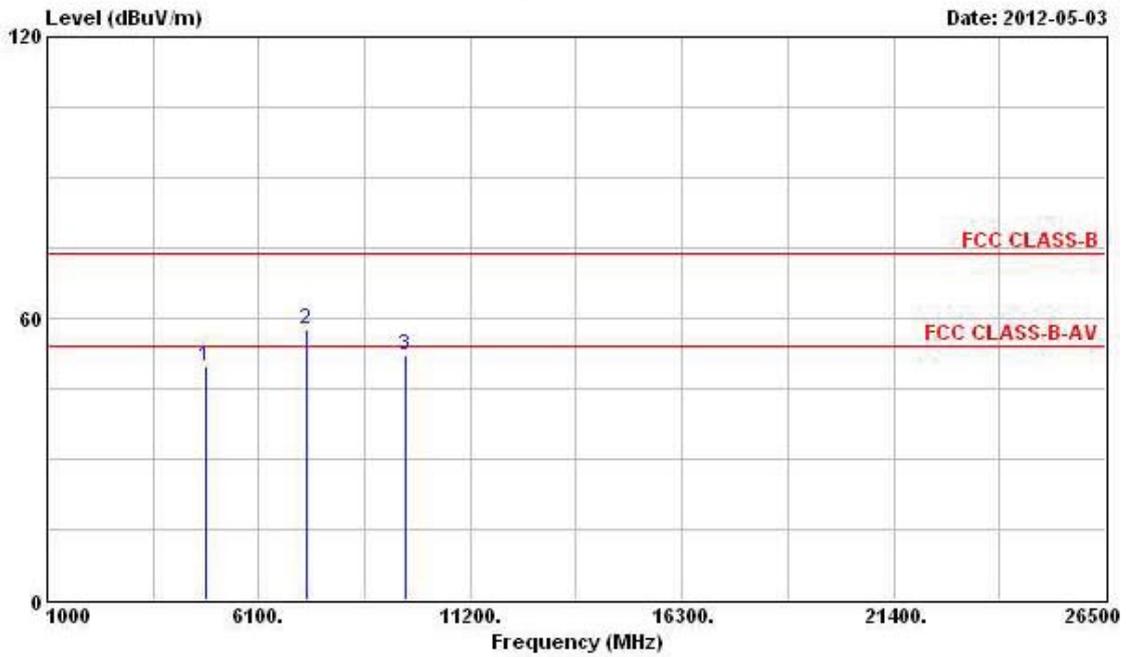


| | Freq | Level | Over Limit | Limit Line | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 49.84 | -4.16 | 54.00 | 44.93 | 35.13 | 4.58 | 34.80 | PK | --- | --- |
| 2 | 7236.000 | 57.79 | | | 50.34 | 36.90 | 5.63 | 35.08 | Peak | --- | --- |
| 3 | 9648.000 | 52.18 | | | 42.72 | 38.59 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 6 |


Horizontal

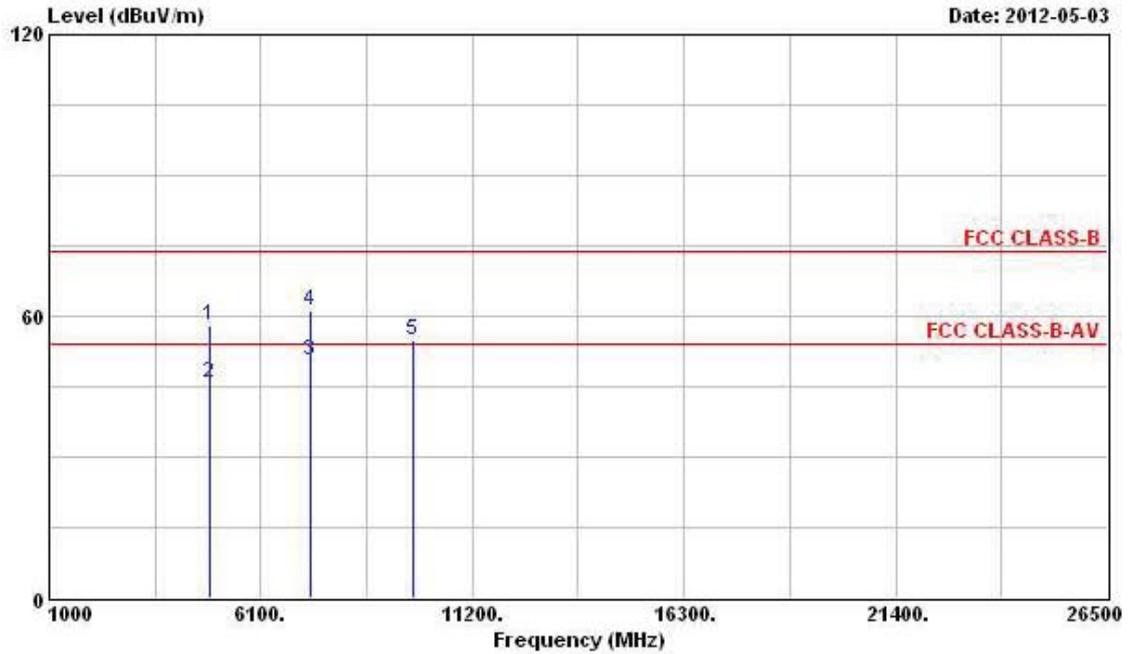

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|------------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 58.22 | -15.78 | 74.00 | 52.56 | 35.83 | 4.61 | 34.78 | Peak | --- | --- |
| 2 | @ 4874.000 | 45.63 | -8.37 | 54.00 | 39.97 | 35.83 | 4.61 | 34.78 | Average | --- | --- |
| 3 | @ 7311.000 | 50.34 | -3.66 | 54.00 | 41.94 | 37.86 | 5.64 | 35.10 | Average | --- | --- |
| 4 | @ 7311.000 | 61.22 | -12.78 | 74.00 | 52.82 | 37.86 | 5.64 | 35.10 | Peak | --- | --- |
| 5 | 9748.000 | 54.94 | | | 44.55 | 39.51 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

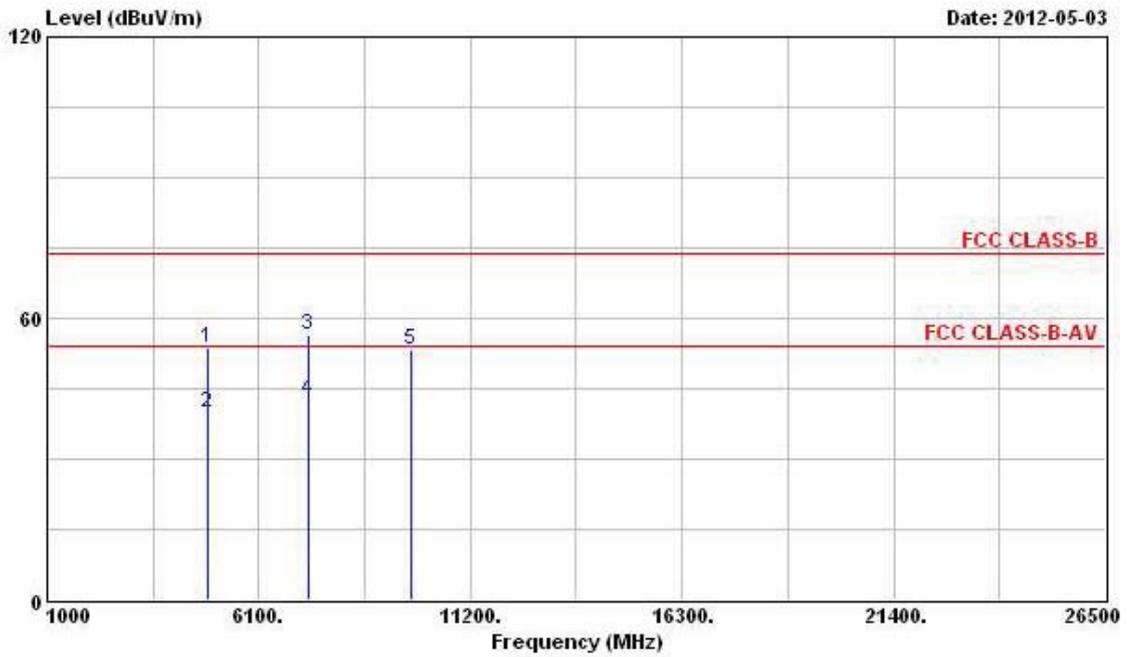


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 53.80 | -20.20 | 74.00 | 48.79 | 35.18 | 4.61 | 34.78 | Peak | --- | --- |
| 2 | 4874.000 | 39.70 | -14.30 | 54.00 | 34.69 | 35.18 | 4.61 | 34.78 | Average | --- | --- |
| 3 | 7311.000 | 56.60 | -17.40 | 74.00 | 49.14 | 36.92 | 5.64 | 35.10 | Peak | --- | --- |
| 4 | 7311.000 | 42.61 | -11.39 | 54.00 | 35.15 | 36.92 | 5.64 | 35.10 | Average | --- | --- |
| 5 | 9748.000 | 53.23 | | | 43.64 | 38.71 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|------------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 11 |


Horizontal

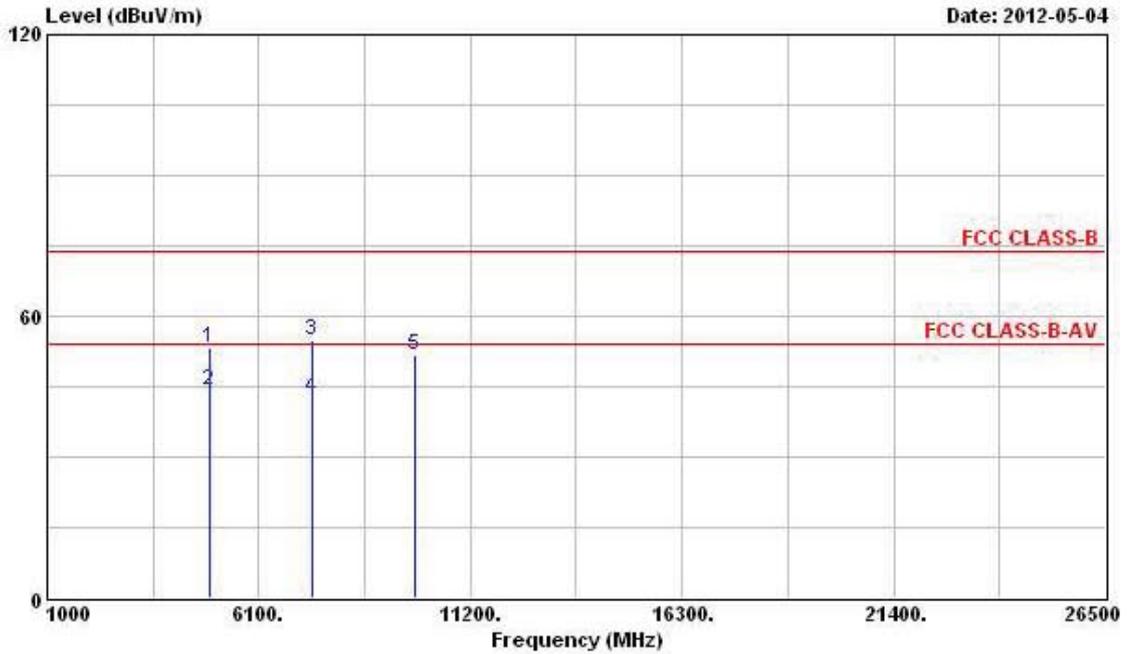

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 53.43 | -20.57 | 74.00 | 47.62 | 35.90 | 4.68 | 34.77 | Peak | --- | --- |
| 2 | 4924.000 | 44.38 | -9.62 | 54.00 | 38.57 | 35.90 | 4.68 | 34.77 | Average | --- | --- |
| 3 | 7386.000 | 55.01 | -18.99 | 74.00 | 46.60 | 37.88 | 5.65 | 35.12 | Peak | --- | --- |
| 4 | 7386.000 | 42.53 | -11.47 | 54.00 | 34.12 | 37.88 | 5.65 | 35.12 | Average | --- | --- |
| 5 | 9848.000 | 51.65 | | | 41.15 | 39.61 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

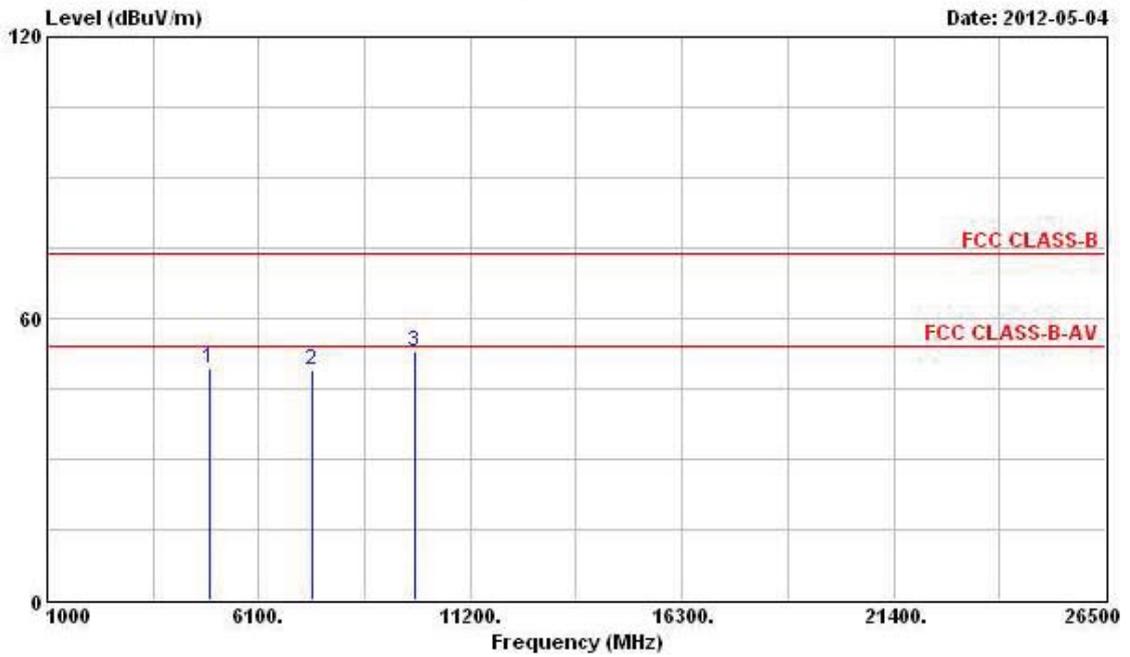


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 49.47 | -4.53 | 54.00 | 44.33 | 35.23 | 4.68 | 34.77 | PK | --- | --- |
| 2 | 7386.000 | 48.83 | -5.17 | 54.00 | 41.34 | 36.96 | 5.65 | 35.12 | PK | --- | --- |
| 3 | 9848.000 | 52.95 | | | 43.25 | 38.81 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 3 |


Horizontal

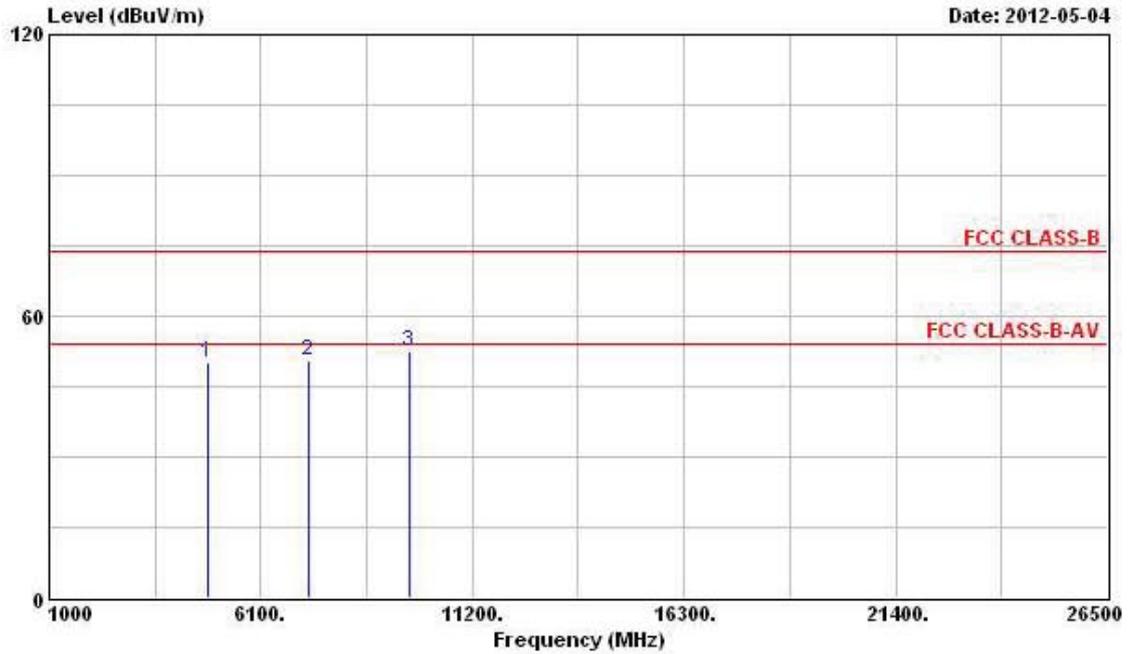

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4844.000 | 50.06 | -3.94 | 54.00 | 44.46 | 35.78 | 4.61 | 34.79 | PK | --- | --- |
| 2 | 7266.000 | 50.49 | -3.51 | 54.00 | 42.09 | 37.86 | 5.63 | 35.09 | PK | --- | --- |
| 3 | 9688.000 | 52.62 | | | 42.32 | 39.43 | 6.35 | 35.48 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

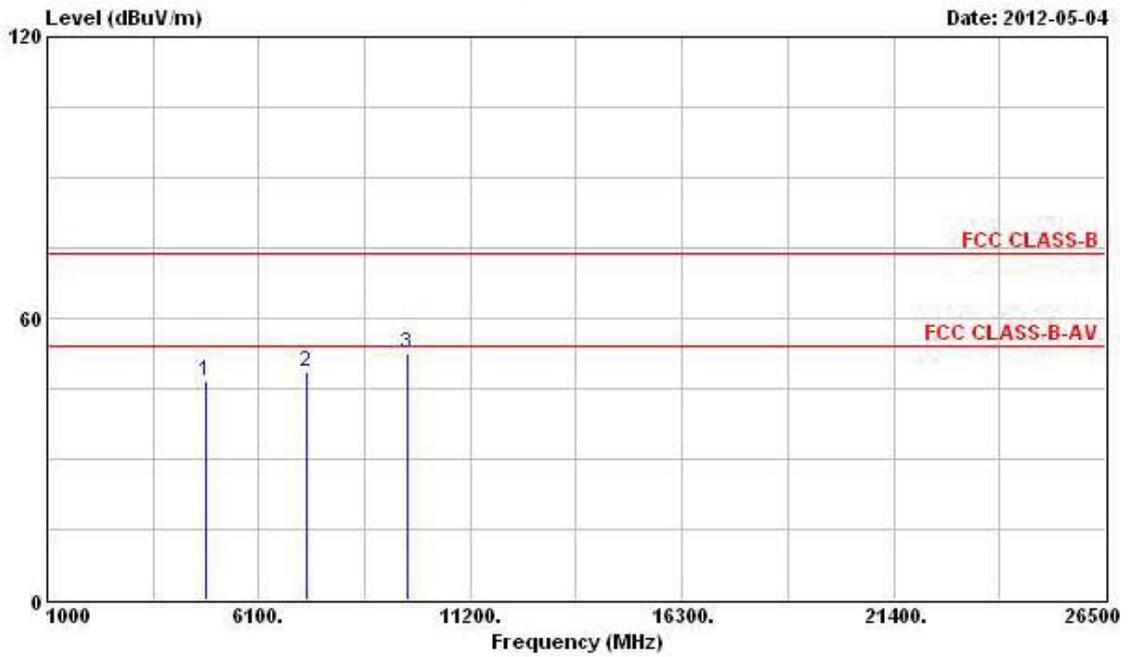


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4844.000 | 46.53 | -7.47 | 54.00 | 41.57 | 35.14 | 4.61 | 34.79 | PK | --- | --- |
| 2 | 7266.000 | 48.67 | -5.33 | 54.00 | 41.22 | 36.91 | 5.63 | 35.09 | PK | --- | --- |
| 3 | 9688.000 | 52.31 | | | 42.81 | 38.63 | 6.35 | 35.48 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 6 |


Horizontal

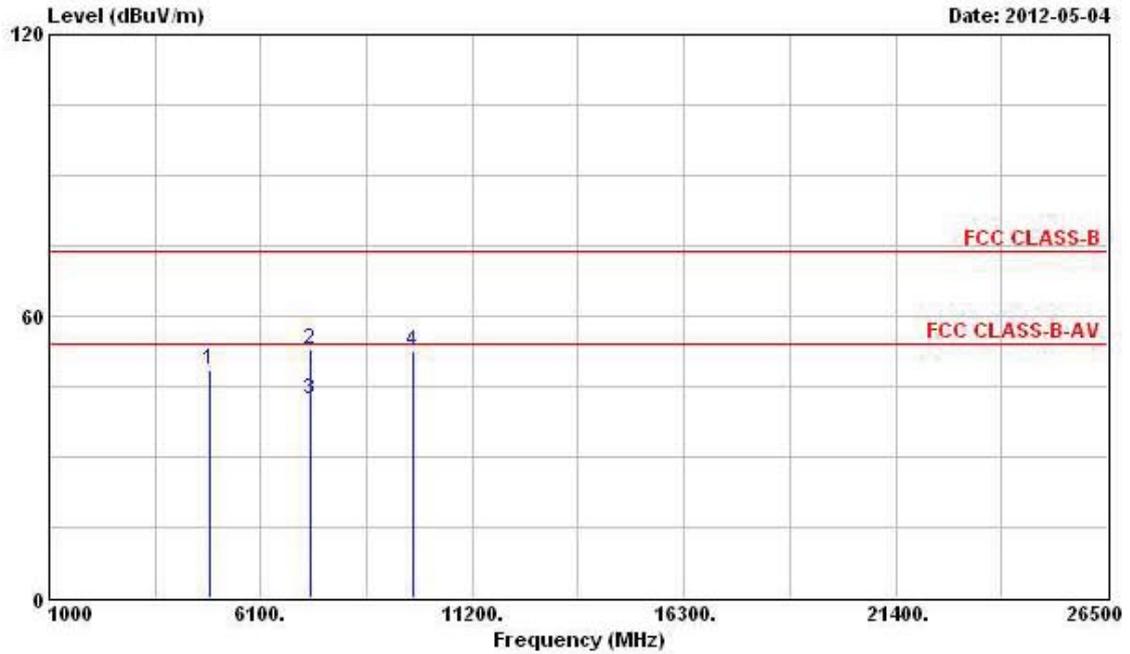

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 48.44 | -5.56 | 54.00 | 42.78 | 35.83 | 4.61 | 34.78 | PK | --- | --- |
| 2 | 7311.000 | 53.03 | -20.97 | 74.00 | 44.63 | 37.86 | 5.64 | 35.10 | Peak | --- | --- |
| 3 | 7311.000 | 42.37 | -11.63 | 54.00 | 33.97 | 37.86 | 5.64 | 35.10 | Average | --- | --- |
| 4 | 9748.000 | 52.47 | | | 42.08 | 39.51 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

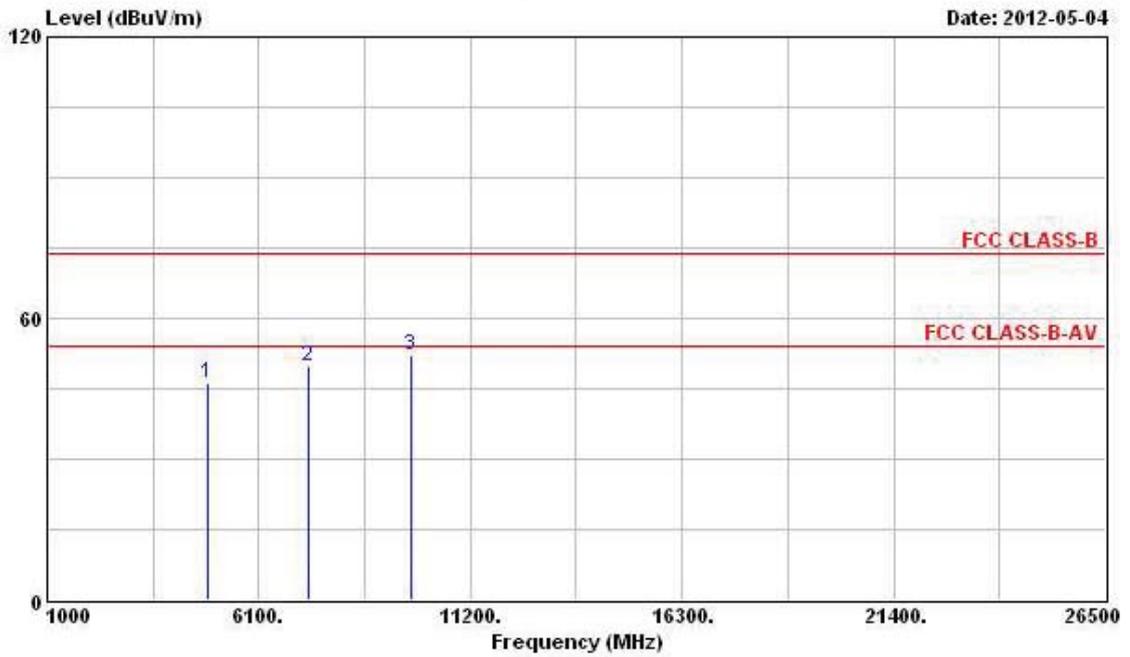


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 46.14 | -7.86 | 54.00 | 41.13 | 35.18 | 4.61 | 34.78 | PK | --- | --- |
| 2 | 7311.000 | 49.90 | -4.10 | 54.00 | 42.44 | 36.92 | 5.64 | 35.10 | PK | --- | --- |
| 3 | 9748.000 | 52.02 | | | 42.43 | 38.71 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 9 |


Horizontal

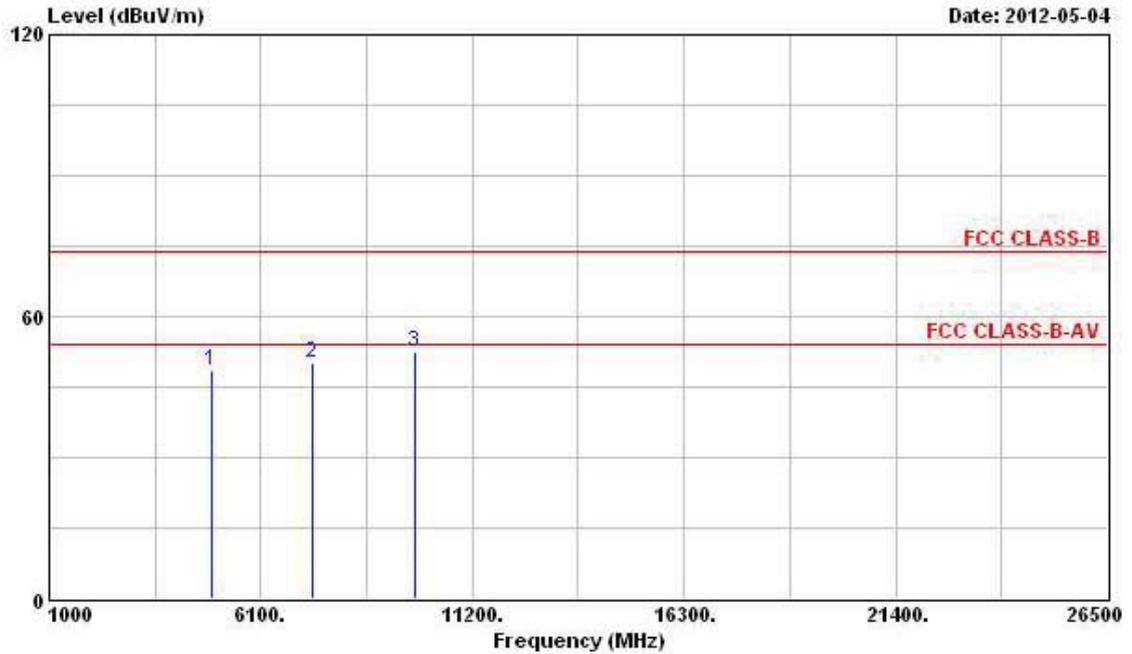

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBUV/m | dB | dBUV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4904.000 | 48.48 | -5.52 | 54.00 | 42.74 | 35.88 | 4.64 | 34.78 | PK | --- | --- |
| 2 | 7356.000 | 50.18 | -3.82 | 54.00 | 41.78 | 37.87 | 5.64 | 35.11 | PK | --- | --- |
| 3 | 9808.000 | 52.56 | | | 42.10 | 39.57 | 6.37 | 35.48 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

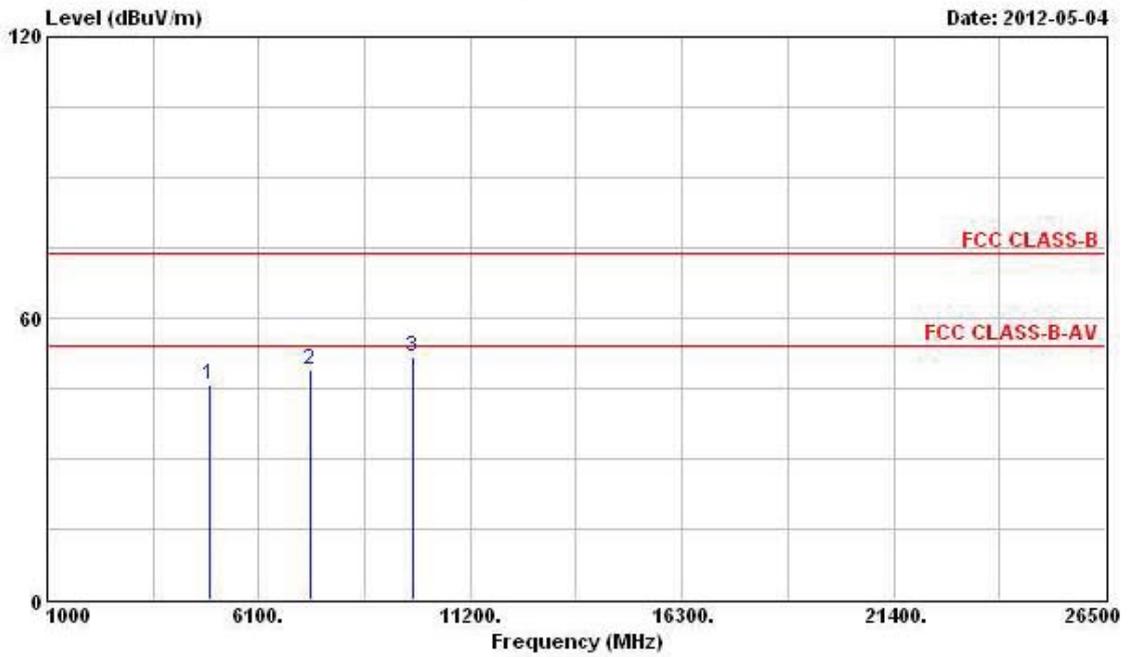


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|------------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | @ 4904.000 | 45.98 | -8.02 | 54.00 | 40.91 | 35.21 | 4.64 | 34.78 | PK | --- | --- |
| 2 | @ 7356.000 | 49.06 | -4.94 | 54.00 | 41.59 | 36.94 | 5.64 | 35.11 | PK | --- | --- |
| 3 | 9808.000 | 51.83 | | | 42.17 | 38.77 | 6.37 | 35.48 | Peak | --- | --- |

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

For Two Chains:

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 1 |


Horizontal

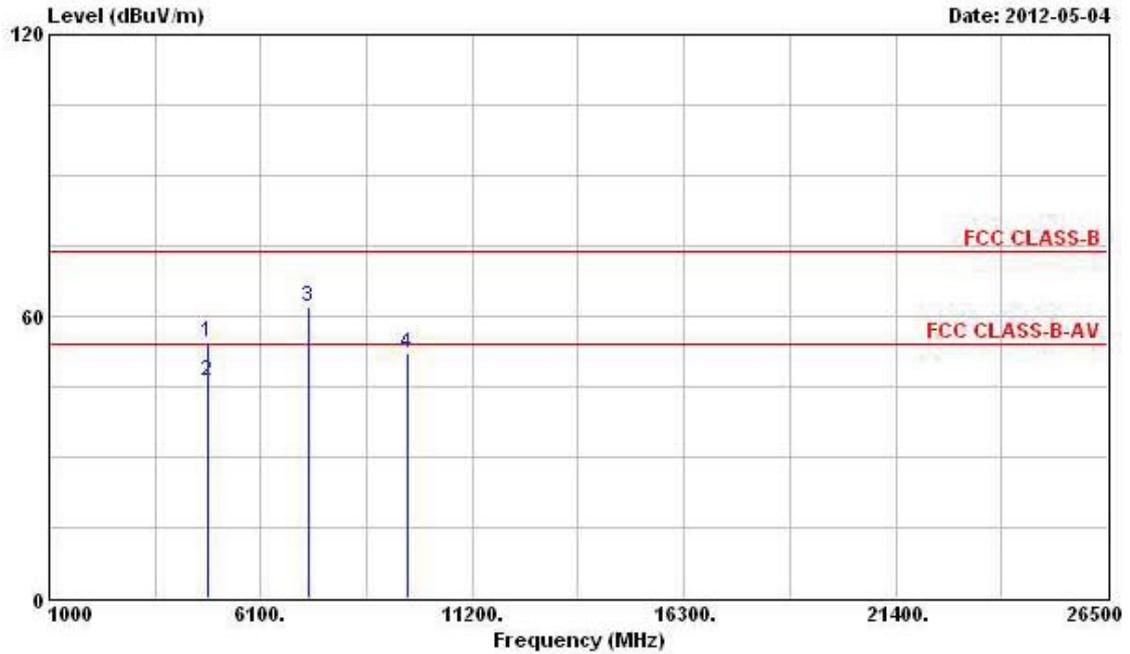

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 54.34 | -19.66 | 74.00 | 48.80 | 35.76 | 4.58 | 34.80 | Peak | --- | --- |
| 2 @ | 4824.000 | 46.22 | -7.78 | 54.00 | 40.68 | 35.76 | 4.58 | 34.80 | Average | --- | --- |
| 3 @ | 7236.000 | 62.08 | | | 53.68 | 37.85 | 5.63 | 35.08 | Peak | --- | --- |
| 4 | 9648.000 | 52.14 | | | 41.88 | 39.39 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 3 and 4 are on an un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

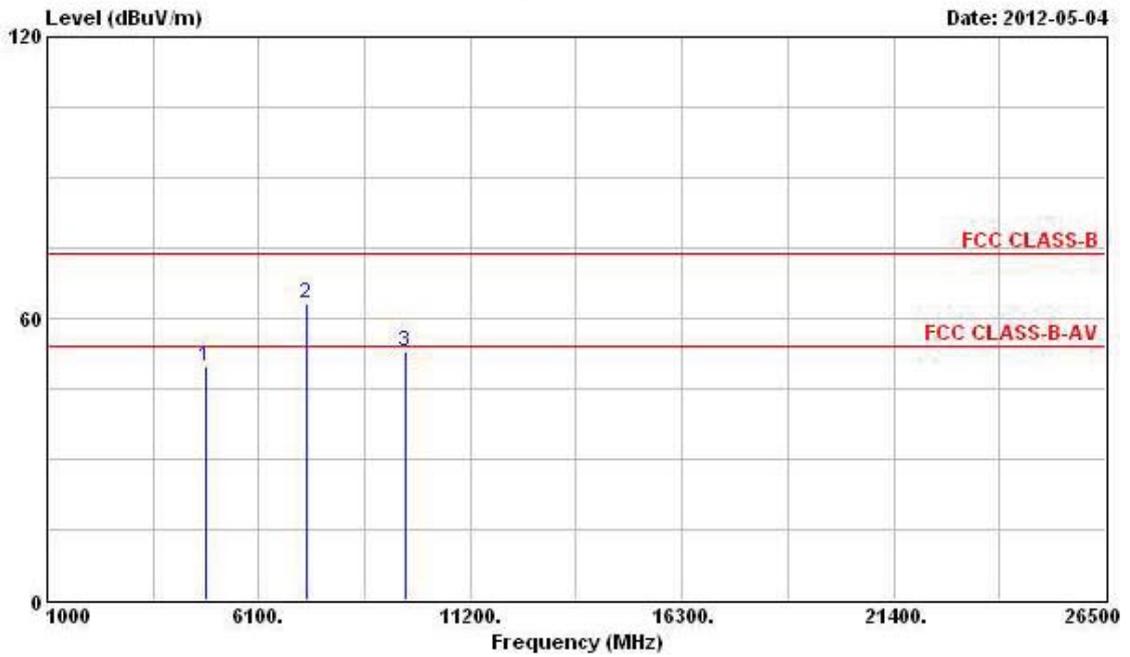


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|--------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4824.000 | 49.71 | -4.29 | 54.00 | 44.80 | 35.13 | 4.58 | 34.80 | PK | --- | --- |
| 2 | 7236.000 | 63.05 | | | 55.60 | 36.90 | 5.63 | 35.08 | Peak | --- | --- |
| 3 | 9648.000 | 53.05 | | | 43.59 | 38.59 | 6.34 | 35.47 | Peak | --- | --- |

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 6 |


Horizontal

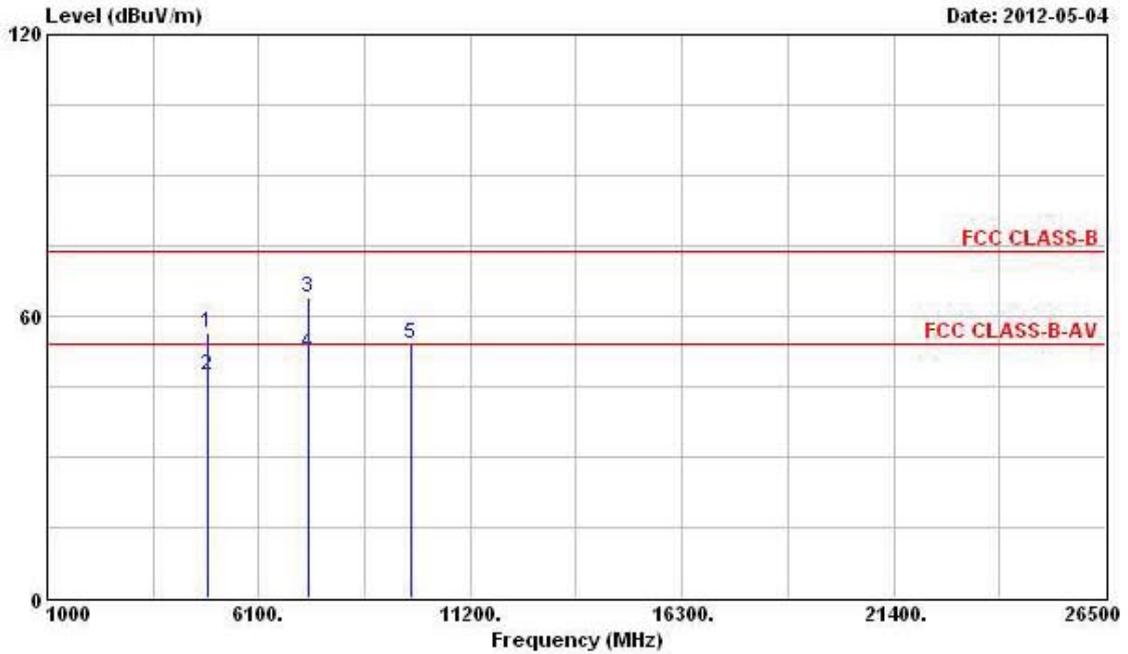

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 56.40 | -17.60 | 74.00 | 50.74 | 35.83 | 4.61 | 34.78 | Peak | --- | --- |
| 2 @ | 4874.000 | 47.23 | -6.77 | 54.00 | 41.57 | 35.83 | 4.61 | 34.78 | Average | --- | --- |
| 3 @ | 7311.000 | 63.83 | -10.17 | 74.00 | 55.43 | 37.86 | 5.64 | 35.10 | Peak | --- | --- |
| 4 @ | 7311.000 | 51.99 | -2.01 | 54.00 | 43.59 | 37.86 | 5.64 | 35.10 | Average | --- | --- |
| 5 | 9748.000 | 54.08 | | | 43.69 | 39.51 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

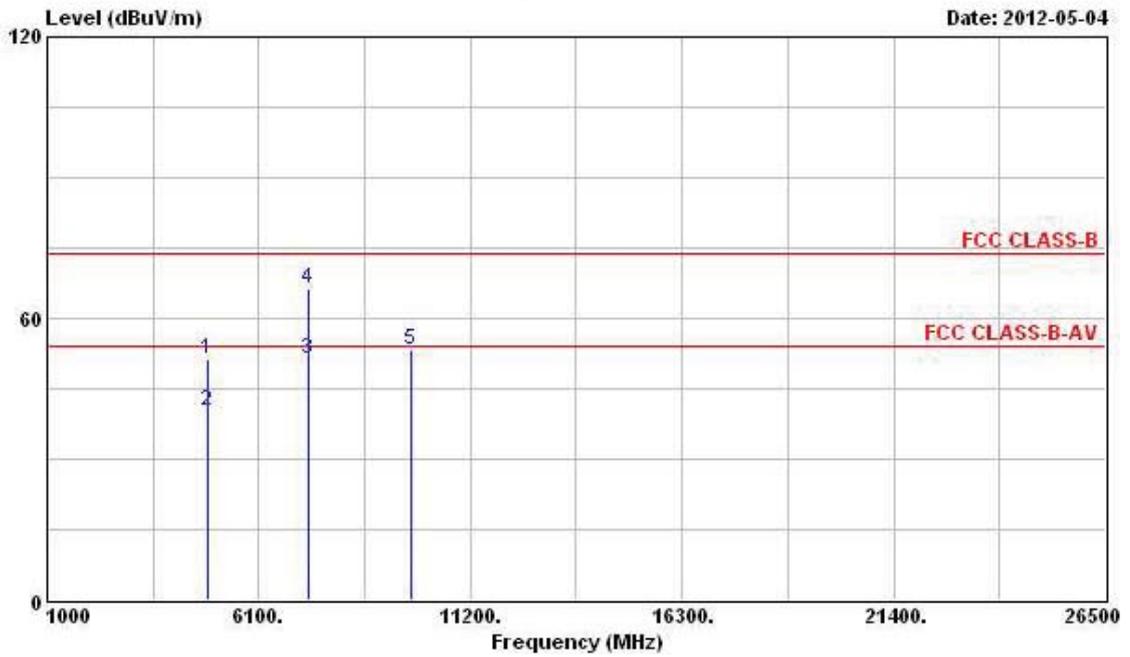


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 51.41 | -22.59 | 74.00 | 46.40 | 35.18 | 4.61 | 34.78 | Peak | --- | --- |
| 2 | 4874.000 | 40.44 | -13.56 | 54.00 | 35.43 | 35.18 | 4.61 | 34.78 | Average | --- | --- |
| 3 | 7311.000 | 51.30 | -2.70 | 54.00 | 43.84 | 36.92 | 5.64 | 35.10 | Average | --- | --- |
| 4 | 7311.000 | 66.15 | -7.85 | 74.00 | 58.69 | 36.92 | 5.64 | 35.10 | Peak | --- | --- |
| 5 | 9748.000 | 53.23 | | | 43.64 | 38.71 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|------------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch. 11 |


Horizontal

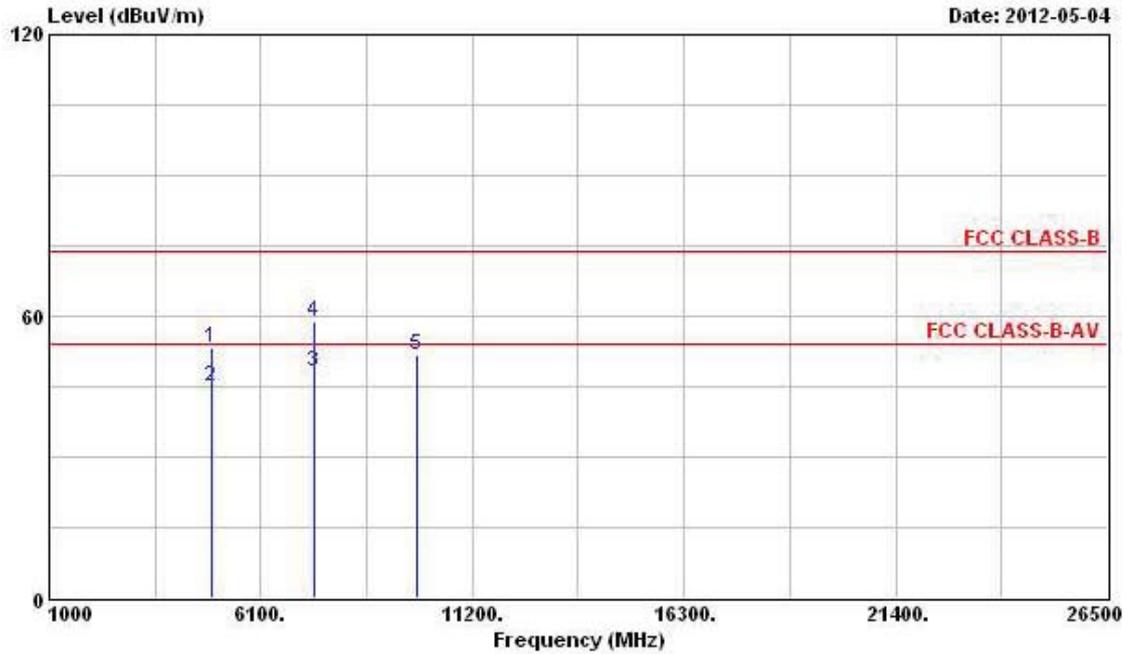

| | Freq | Level | Over Limit | Limit Line | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|------------|--------|------------|------------|------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 53.39 | -20.61 | 74.00 | 47.58 | 35.90 | 4.68 | 34.77 | Peak | --- | --- |
| 2 | @ 4924.000 | 44.94 | -9.06 | 54.00 | 39.13 | 35.90 | 4.68 | 34.77 | Average | --- | --- |
| 3 | @ 7386.000 | 48.31 | -5.69 | 54.00 | 39.90 | 37.88 | 5.65 | 35.12 | Average | --- | --- |
| 4 | 7386.000 | 58.66 | -15.34 | 74.00 | 50.25 | 37.88 | 5.65 | 35.12 | Peak | --- | --- |
| 5 | 9848.000 | 51.67 | | | 41.17 | 39.61 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

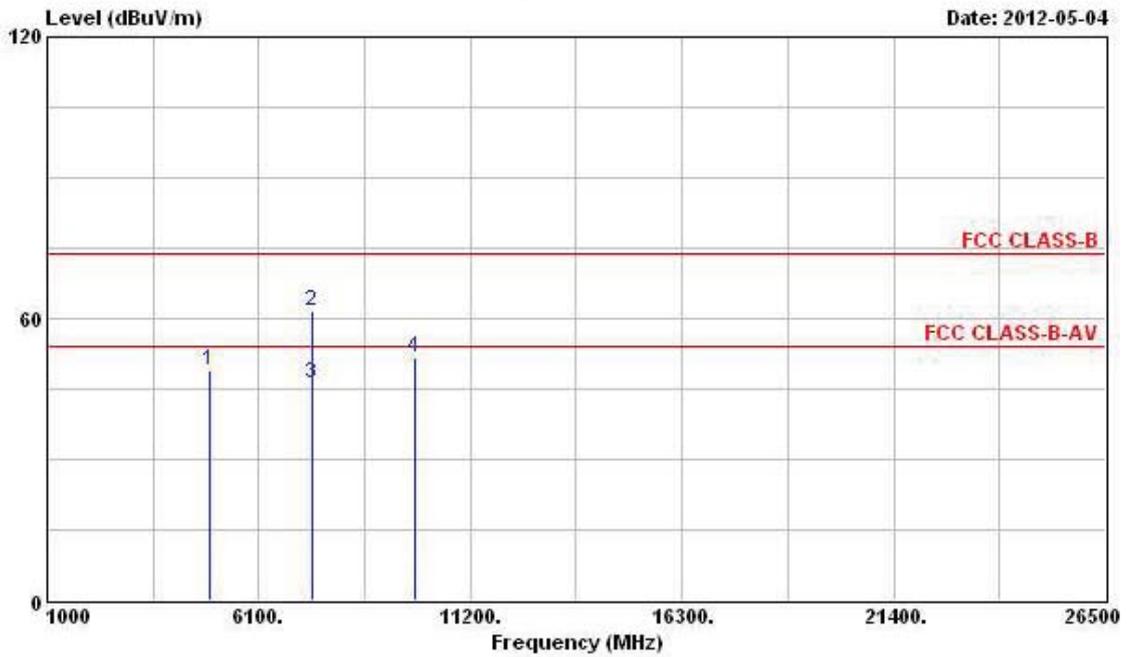


| | Freq | Level | Over Limit | Limit Line | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4924.000 | 48.80 | -5.20 | 54.00 | 43.66 | 35.23 | 4.68 | 34.77 | PK | --- | --- |
| 2 | 7386.000 | 61.58 | -12.42 | 74.00 | 54.09 | 36.96 | 5.65 | 35.12 | Peak | --- | --- |
| 3 | 7386.000 | 46.20 | -7.80 | 54.00 | 38.71 | 36.96 | 5.65 | 35.12 | Average | --- | --- |
| 4 | 9848.000 | 51.88 | | | 42.18 | 38.81 | 6.38 | 35.49 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 3 |


Horizontal

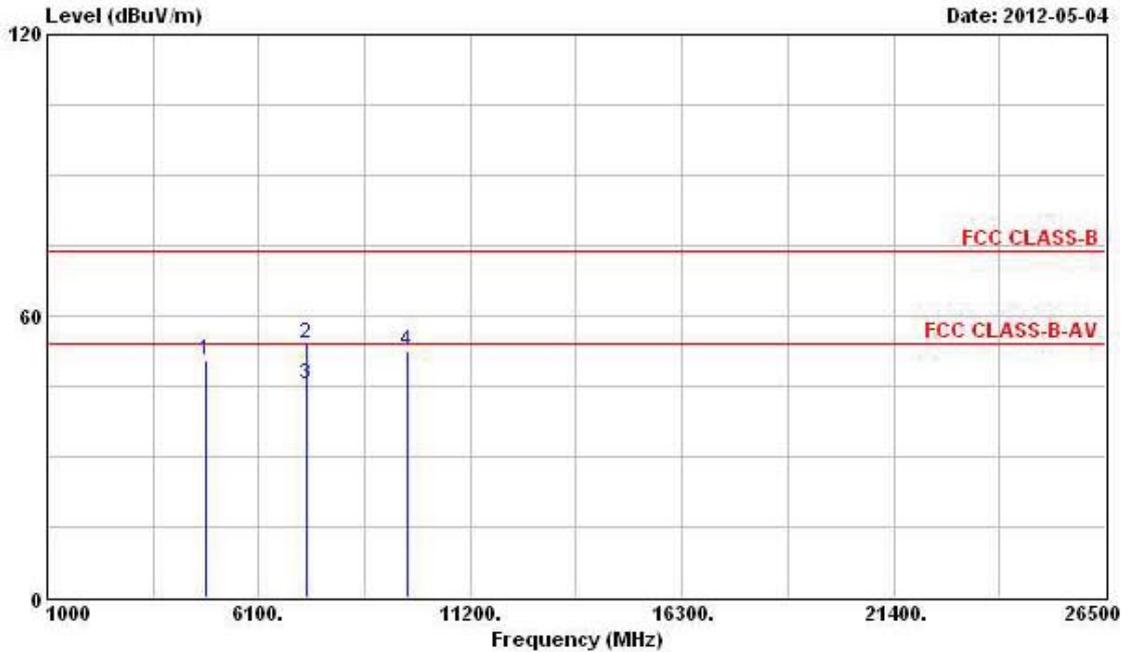

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4844.000 | 50.46 | -3.54 | 54.00 | 44.86 | 35.78 | 4.61 | 34.79 | PK | --- | --- |
| 2 | 7266.000 | 53.90 | -20.10 | 74.00 | 45.50 | 37.86 | 5.63 | 35.09 | Peak | --- | --- |
| 3 | 7266.000 | 45.36 | -8.64 | 54.00 | 36.96 | 37.86 | 5.63 | 35.09 | Average | --- | --- |
| 4 | 9688.000 | 52.60 | | | 42.30 | 39.43 | 6.35 | 35.48 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

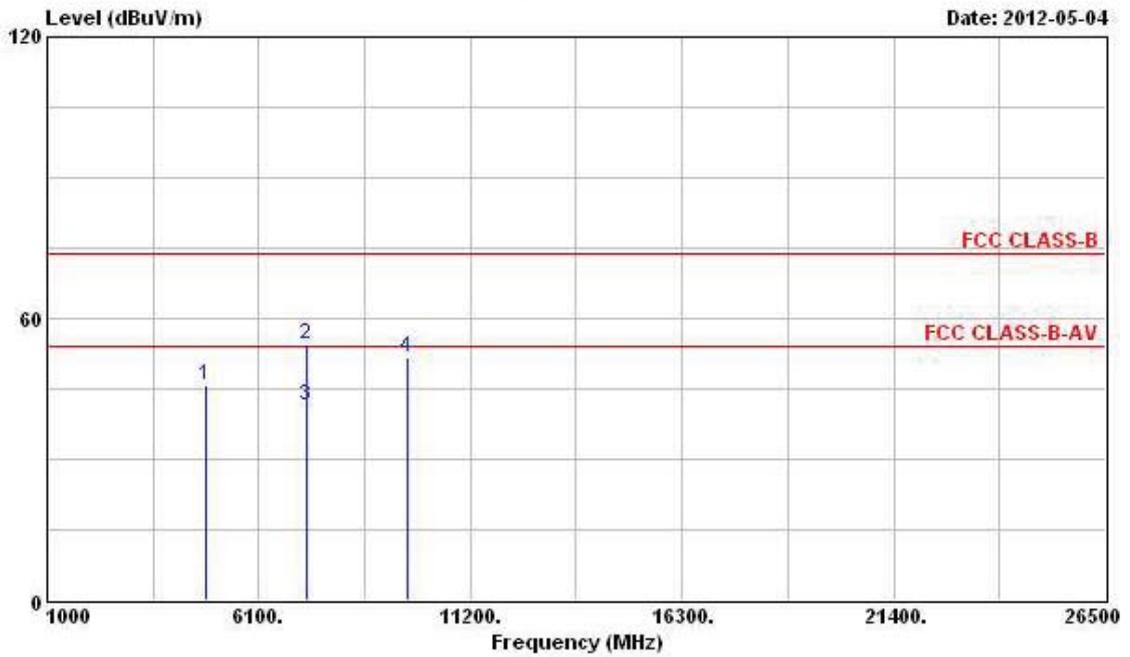


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4844.000 | 45.98 | -8.02 | 54.00 | 41.02 | 35.14 | 4.61 | 34.79 | PK | --- | --- |
| 2 | 7266.000 | 54.56 | -19.44 | 74.00 | 47.11 | 36.91 | 5.63 | 35.09 | Peak | --- | --- |
| 3 | 7266.000 | 41.64 | -12.36 | 54.00 | 34.19 | 36.91 | 5.63 | 35.09 | Average | --- | --- |
| 4 | 9688.000 | 51.62 | | | 42.12 | 38.63 | 6.35 | 35.48 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 6 |


Horizontal

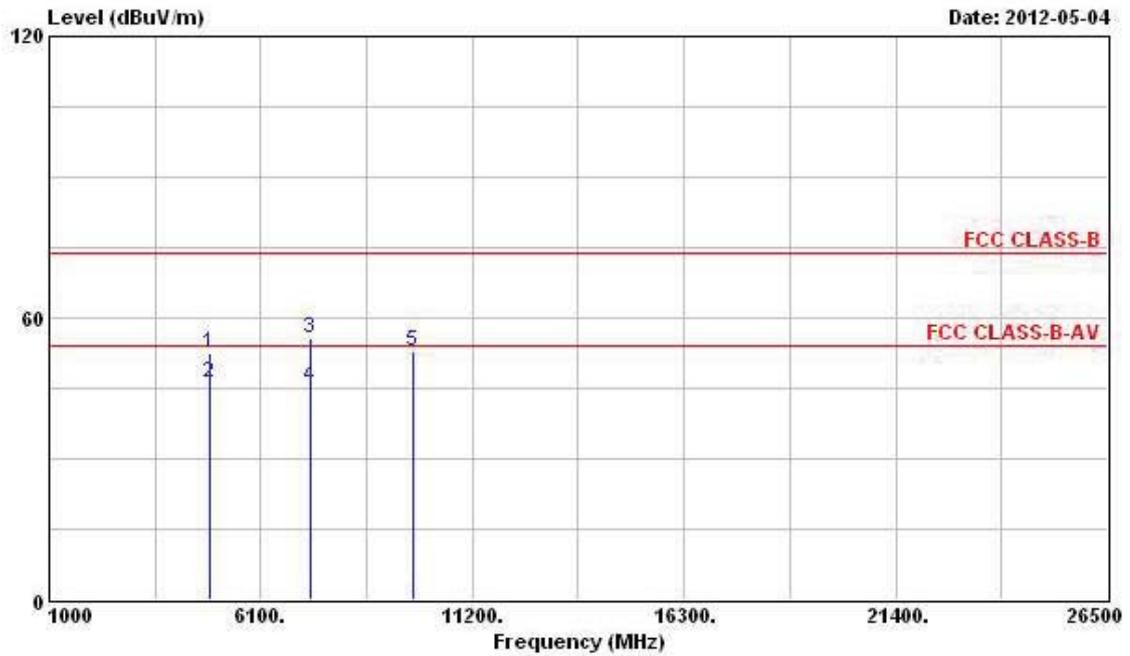

| | Freq | Level | Over Limit | Limit Line | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|------------|--------|------------|------------|------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 52.55 | -21.45 | 74.00 | 46.89 | 35.83 | 4.61 | 34.78 | Peak | --- | --- |
| 2 | @ 4874.000 | 46.03 | -7.97 | 54.00 | 40.37 | 35.83 | 4.61 | 34.78 | Average | --- | --- |
| 3 | 7311.000 | 55.75 | -18.25 | 74.00 | 47.35 | 37.86 | 5.64 | 35.10 | Peak | --- | --- |
| 4 | @ 7311.000 | 45.50 | -8.50 | 54.00 | 37.10 | 37.86 | 5.64 | 35.10 | Average | --- | --- |
| 5 | 9748.000 | 53.09 | | | 42.70 | 39.51 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 5 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

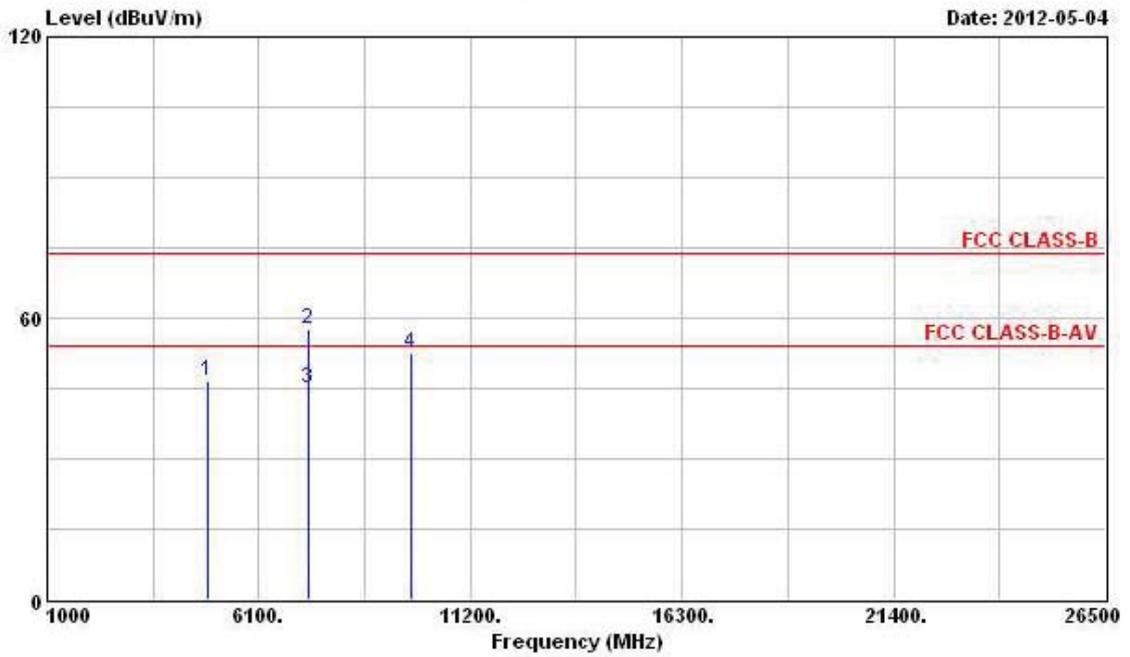


| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4874.000 | 46.73 | -7.27 | 54.00 | 41.72 | 35.18 | 4.61 | 34.78 | PK | --- | --- |
| 2 | 7311.000 | 57.63 | -16.37 | 74.00 | 50.17 | 36.92 | 5.64 | 35.10 | Peak | --- | --- |
| 3 | 7311.000 | 45.18 | -8.82 | 54.00 | 37.72 | 36.92 | 5.64 | 35.10 | Average | --- | --- |
| 4 | 9748.000 | 52.41 | | | 42.82 | 38.71 | 6.36 | 35.48 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

| | | | |
|-----------------|--------------|---------------|-----------------------|
| Final Test Date | May 04, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch. 9 |


Horizontal

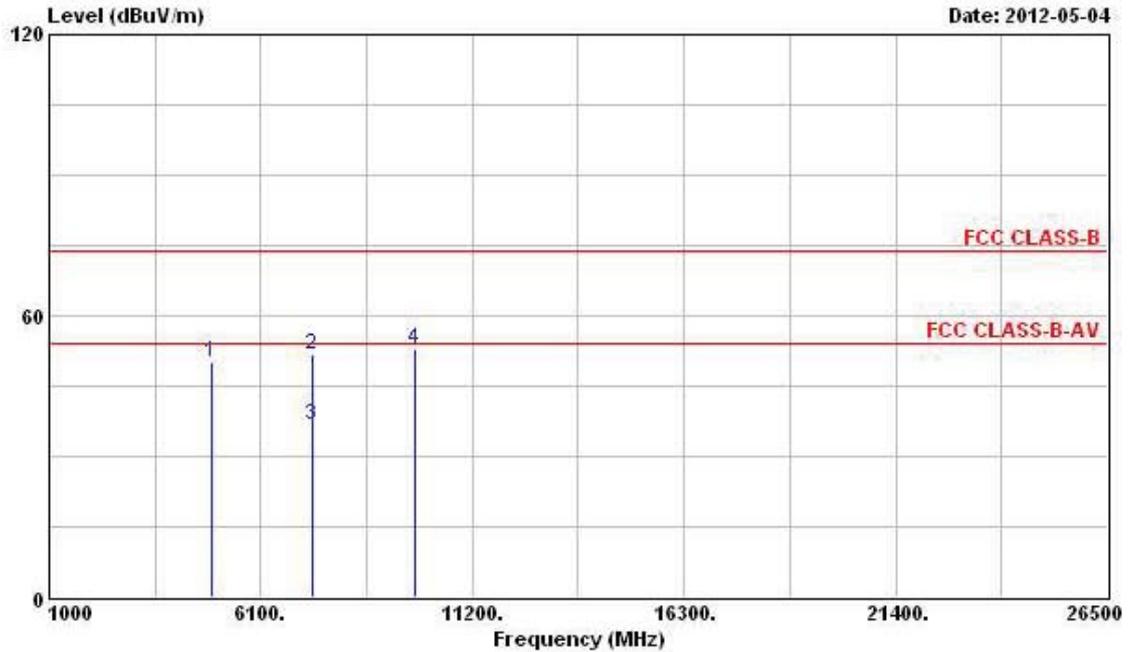

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 | 4904.000 | 50.16 | -3.84 | 54.00 | 44.42 | 35.88 | 4.64 | 34.78 | PK | --- | --- |
| 2 | 7356.000 | 51.68 | -22.32 | 74.00 | 43.28 | 37.87 | 5.64 | 35.11 | Peak | --- | --- |
| 3 | 7356.000 | 36.86 | -17.14 | 54.00 | 28.46 | 37.87 | 5.64 | 35.11 | Average | --- | --- |
| 4 | 9808.000 | 52.87 | | | 42.41 | 39.57 | 6.37 | 35.48 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

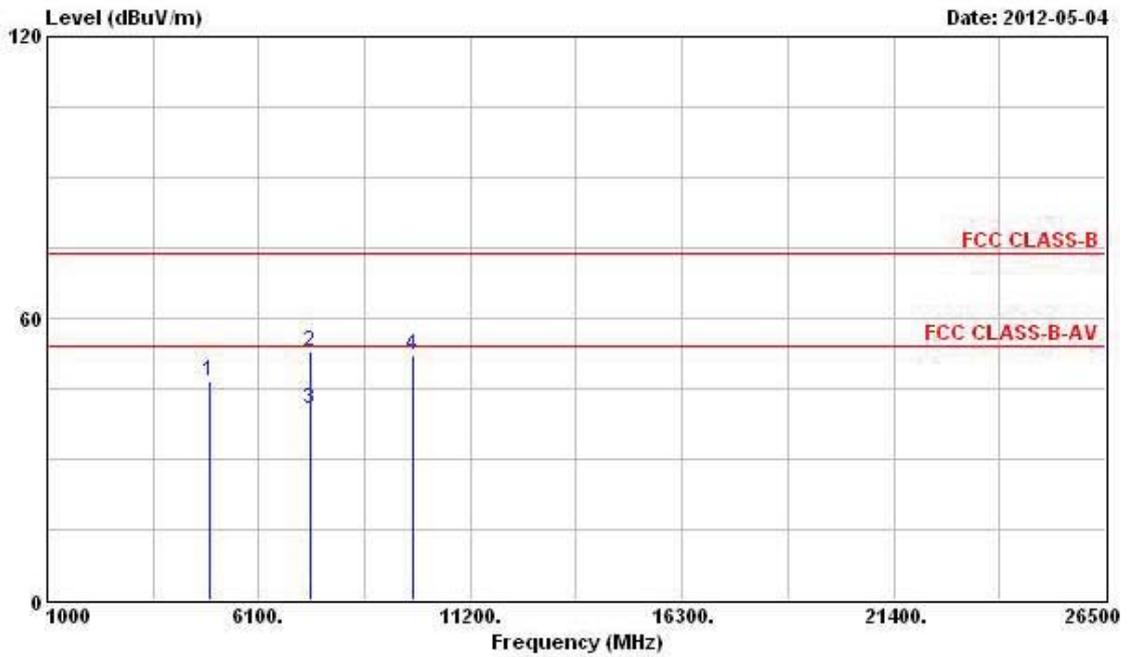

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 4904.000 | 46.76 | -7.24 | 54.00 | 41.69 | 35.21 | 4.64 | 34.78 | PK | --- | --- |
| 2 | 7356.000 | 52.76 | -21.24 | 74.00 | 45.29 | 36.94 | 5.64 | 35.11 | Peak | --- | --- |
| 3 @ | 7356.000 | 40.82 | -13.18 | 54.00 | 33.35 | 36.94 | 5.64 | 35.11 | Average | --- | --- |
| 4 | 9808.000 | 51.95 | | | 42.29 | 38.77 | 6.37 | 35.48 | Peak | --- | --- |

Note: The item 4 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6 Band Edge and Fundamental Emissions Measurement

3.6.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|--------------------------|--|--------------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Span Frequency | 100 MHz |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak |

3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.6.7 Test Result of Band Edge and Fundamental Emissions

For Single Chain:

| | | | |
|-----------------|--------------|---------------|----------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11b Ch. 1, 6, 11 |

Channel 1

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2385.620 | 48.15 | -5.85 | 54.00 | 13.34 | 31.79 | 3.02 | 0.00 | Average | --- | --- |
| 2 @ | 2410.890 | 104.61 | | | 69.73 | 31.86 | 3.02 | 0.00 | Average | --- | --- |
| 1 | 2371.370 | 60.04 | -13.96 | 74.00 | 25.33 | 31.72 | 2.99 | 0.00 | Peak | --- | --- |
| 2 @ | 2410.890 | 108.52 | | | 73.64 | 31.86 | 3.02 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 6

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2435.970 | 103.07 | | | 68.10 | 31.92 | 3.05 | 0.00 | Average | --- | --- |
| 1 @ | 2438.060 | 107.03 | | | 71.99 | 31.99 | 3.05 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Channel 11

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2461.050 | 104.16 | | | 69.05 | 32.06 | 3.05 | 0.00 | Average | --- | --- |
| 2 @ | 2483.500 | 47.86 | -6.14 | 54.00 | 12.65 | 32.13 | 3.08 | 0.00 | Average | --- | --- |
| 1 @ | 2461.050 | 108.06 | | | 72.95 | 32.06 | 3.05 | 0.00 | Peak | --- | --- |
| 2 | 2486.700 | 60.34 | -13.66 | 74.00 | 25.13 | 32.13 | 3.08 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|------------------------|--------------|----------------------|---------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11g Ch.1, 6, 11 |

Channel 1

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|---------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2390.000 | 52.62 | -1.38 | 54.00 | 17.81 | 31.79 | 3.02 | 0.00 | Average | --- | --- |
| 2 @ | 2407.090 | 105.37 | | | 70.49 | 31.86 | 3.02 | 0.00 | Average | --- | --- |
| 1 @ | 2390.000 | 68.43 | -5.57 | 74.00 | 33.62 | 31.79 | 3.02 | 0.00 | Peak | --- | --- |
| 2 @ | 2407.850 | 114.80 | | | 79.92 | 31.86 | 3.02 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 6

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|---------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2440.530 | 106.27 | | | 71.23 | 31.99 | 3.05 | 0.00 | Average | --- | --- |
| 1 @ | 2440.340 | 115.64 | | | 80.60 | 31.99 | 3.05 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Channel 11

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|---------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2467.700 | 104.19 | | | 69.05 | 32.06 | 3.08 | 0.00 | Average | --- | --- |
| 2 @ | 2483.500 | 52.77 | -1.23 | 54.00 | 17.56 | 32.13 | 3.08 | 0.00 | Average | --- | --- |
| 1 @ | 2466.370 | 113.48 | | | 78.34 | 32.06 | 3.08 | 0.00 | Peak | --- | --- |
| 2 @ | 2483.660 | 70.58 | -3.42 | 74.00 | 35.37 | 32.13 | 3.08 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|-----------------|--------------|---------------|-----------------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch.1, 6, 11 |

Channel 1

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2390.000 | 52.94 | -1.06 | 54.00 | 18.13 | 31.79 | 3.02 | 0.00 | Average | --- | --- |
| 2 @ | 2406.330 | 104.65 | | | 69.77 | 31.86 | 3.02 | 0.00 | Average | --- | --- |
| 1 @ | 2390.000 | 71.30 | -2.70 | 74.00 | 36.49 | 31.79 | 3.02 | 0.00 | Peak | --- | --- |
| 2 @ | 2407.850 | 116.09 | | | 81.21 | 31.86 | 3.02 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 6

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2440.340 | 105.70 | | | 70.66 | 31.99 | 3.05 | 0.00 | Average | --- | --- |
| 1 @ | 2440.530 | 116.60 | | | 81.56 | 31.99 | 3.05 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Channel 11

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2467.130 | 103.98 | | | 68.84 | 32.06 | 3.08 | 0.00 | Average | --- | --- |
| 2 @ | 2483.500 | 52.92 | -1.08 | 54.00 | 17.71 | 32.13 | 3.08 | 0.00 | Average | --- | --- |
| 1 @ | 2467.700 | 115.10 | | | 79.96 | 32.06 | 3.08 | 0.00 | Peak | --- | --- |
| 2 @ | 2483.850 | 72.43 | -1.57 | 74.00 | 37.22 | 32.13 | 3.08 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|-----------------|--------------|---------------|----------------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch.3, 6, 9 |

Channel 3

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2388.660 | 52.47 | -1.53 | 54.00 | 17.66 | 31.79 | 3.02 | 0.00 | Average | --- | --- |
| 2 @ | 2417.730 | 98.71 | | | 63.83 | 31.86 | 3.02 | 0.00 | Average | --- | --- |
| 1 @ | 2385.810 | 68.52 | -5.48 | 74.00 | 33.71 | 31.79 | 3.02 | 0.00 | Peak | --- | --- |
| 2 @ | 2413.740 | 110.10 | | | 75.22 | 31.86 | 3.02 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 6

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2445.850 | 99.30 | | | 64.26 | 31.99 | 3.05 | 0.00 | Average | --- | --- |
| 1 @ | 2441.860 | 110.52 | | | 75.48 | 31.99 | 3.05 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Channel 9

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2455.540 | 97.68 | | | 62.57 | 32.06 | 3.05 | 0.00 | Average | --- | --- |
| 2 @ | 2484.610 | 52.90 | -1.10 | 54.00 | 17.69 | 32.13 | 3.08 | 0.00 | Average | --- | --- |
| 1 @ | 2456.490 | 109.41 | | | 74.30 | 32.06 | 3.05 | 0.00 | Peak | --- | --- |
| 2 @ | 2487.460 | 67.31 | -6.69 | 74.00 | 32.10 | 32.13 | 3.08 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Two Chains:

| | | | |
|-----------------|--------------|---------------|-----------------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (20MHz) Ch.1, 6, 11 |

Channel 1

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2390.000 | 52.59 | -1.41 | 54.00 | 17.78 | 31.79 | 3.02 | 0.00 | Average | --- | --- |
| 2 @ | 2407.850 | 104.53 | | | 69.65 | 31.86 | 3.02 | 0.00 | Average | --- | --- |
| 1 @ | 2390.000 | 66.12 | -7.88 | 74.00 | 31.31 | 31.79 | 3.02 | 0.00 | Peak | --- | --- |
| 2 @ | 2409.370 | 115.14 | | | 80.26 | 31.86 | 3.02 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 6

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2431.410 | 102.45 | | | 67.48 | 31.92 | 3.05 | 0.00 | Average | --- | --- |
| 1 @ | 2431.980 | 113.24 | | | 78.27 | 31.92 | 3.05 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Channel 11

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2465.610 | 103.98 | | | 68.84 | 32.06 | 3.08 | 0.00 | Average | --- | --- |
| 2 @ | 2483.500 | 52.91 | -1.09 | 54.00 | 17.70 | 32.13 | 3.08 | 0.00 | Average | --- | --- |
| 1 @ | 2464.850 | 114.40 | | | 79.26 | 32.06 | 3.08 | 0.00 | Peak | --- | --- |
| 2 @ | 2483.850 | 71.58 | -2.42 | 74.00 | 36.37 | 32.13 | 3.08 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

| | | | |
|------------------------|--------------|----------------------|----------------------------|
| Final Test Date | May 03, 2012 | Test Site No. | 03CH02-HY |
| Temperature | 24.6°C | Humidity | 62% |
| Test Engineer | Streak | Configuration | 802.11n (40MHz) Ch.3, 6, 9 |

Channel 3

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|---------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2390.000 | 52.70 | -1.30 | 54.00 | 17.89 | 31.79 | 3.02 | 0.00 | Average | --- | --- |
| 2 @ | 2413.740 | 98.52 | | | 63.64 | 31.86 | 3.02 | 0.00 | Average | --- | --- |
| 1 @ | 2388.090 | 68.10 | -5.90 | 74.00 | 33.29 | 31.79 | 3.02 | 0.00 | Peak | --- | --- |
| 2 @ | 2414.500 | 109.64 | | | 74.76 | 31.86 | 3.02 | 0.00 | Peak | --- | --- |

The item 2 is Fundamental Emissions.

Channel 6

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|---------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2445.660 | 100.24 | | | 65.20 | 31.99 | 3.05 | 0.00 | Average | --- | --- |
| 1 @ | 2444.330 | 111.10 | | | 76.06 | 31.99 | 3.05 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Channel 9

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark | Ant Pos | Table Pos |
|-----|-------------|---------------|-------------------|-------------------|--------------------------|-----------------------|-------------------|----------------------|---------------|----------------|------------------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | | cm | deg |
| 1 @ | 2455.730 | 98.03 | | | 62.92 | 32.06 | 3.05 | 0.00 | Average | --- | --- |
| 2 @ | 2485.940 | 52.90 | -1.10 | 54.00 | 17.69 | 32.13 | 3.08 | 0.00 | Average | --- | --- |
| 1 @ | 2454.210 | 108.65 | | | 73.54 | 32.06 | 3.05 | 0.00 | Peak | --- | --- |
| 2 @ | 2483.660 | 66.03 | -7.97 | 74.00 | 30.82 | 32.13 | 3.08 | 0.00 | Peak | --- | --- |

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band

| | | | |
|-----------------|--------------|----------------|-------------|
| Final Test Date | May 15, 2012 | Test Site No. | TH01-HY |
| Temperature | 26.3°C | Humidity | 28% |
| Test Engineer | Ian | Configurations | 802.11b/g/n |


For Single Chain:

Low Band Edge Plot on Configuration IEEE 802.11b 2412 MHz Port 1

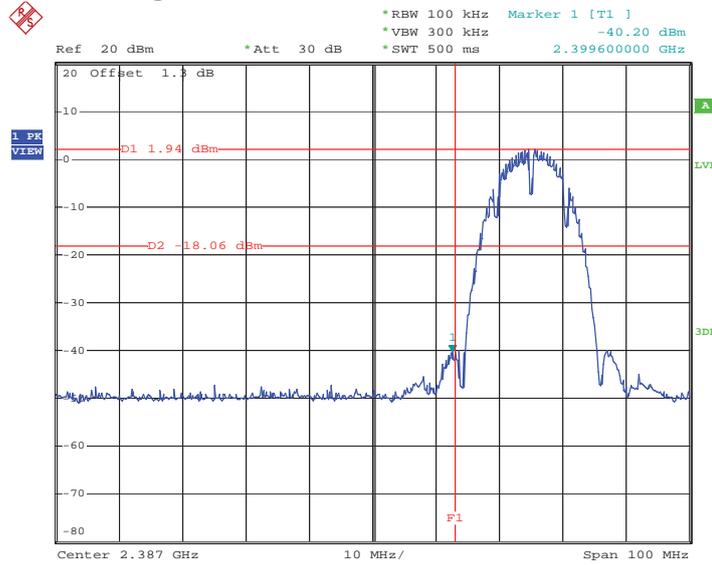


Date: 15.MAY.2012 13:39:21

High Band Edge Plot on Configuration IEEE 802.11b 2462 MHz Port 1

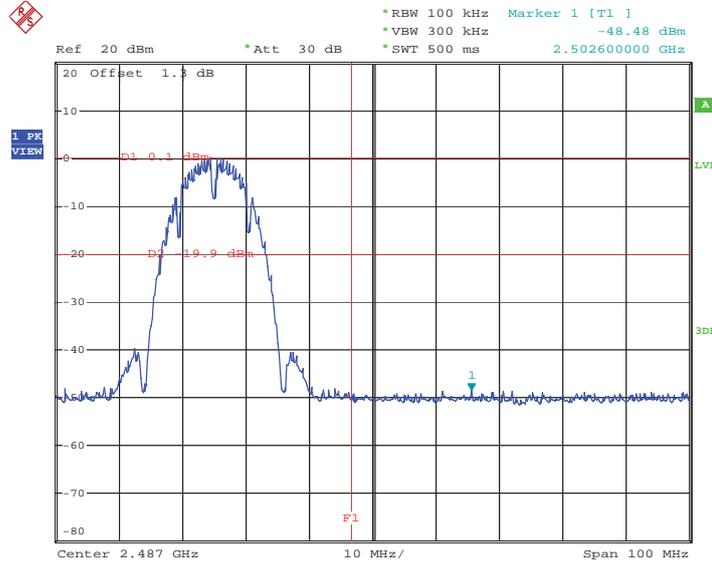


Date: 15.MAY.2012 13:55:02

Low Band Edge Plot on Configuration IEEE 802.11g 2412 MHz Port 1

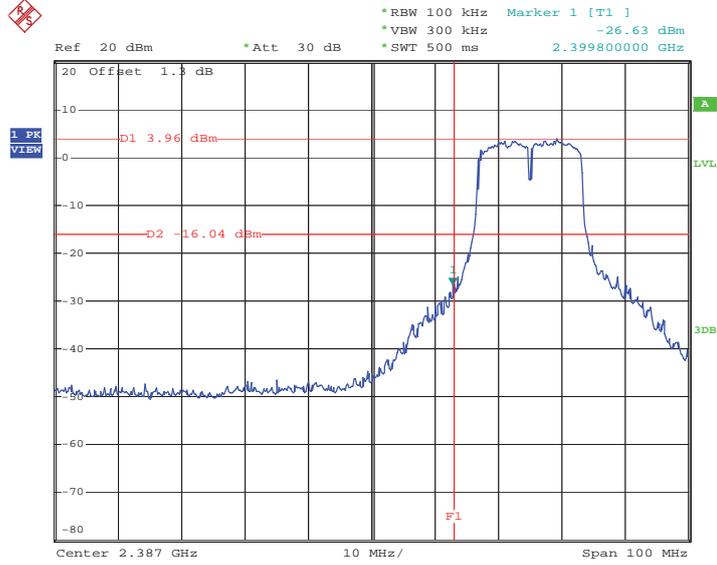


Date: 15.MAY.2012 14:28:59

High Band Edge Plot on Configuration IEEE 802.11g 2462 MHz Port 1

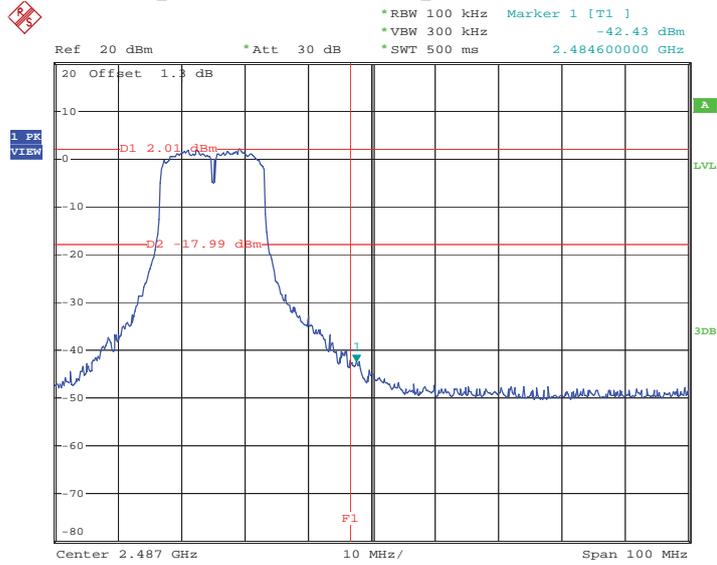


Date: 15.MAY.2012 15:50:17

Low Band Edge Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

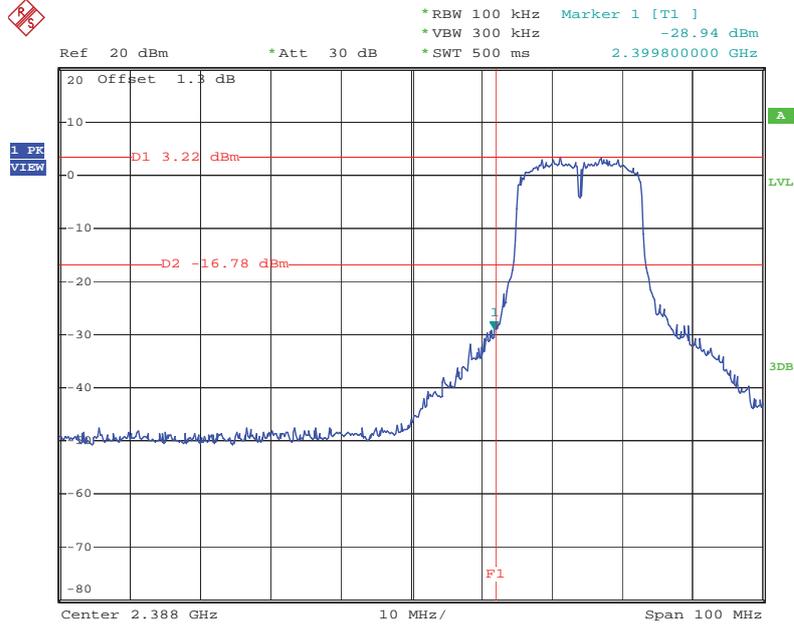


Date: 15.MAY.2012 16:01:22

High Band Edge Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

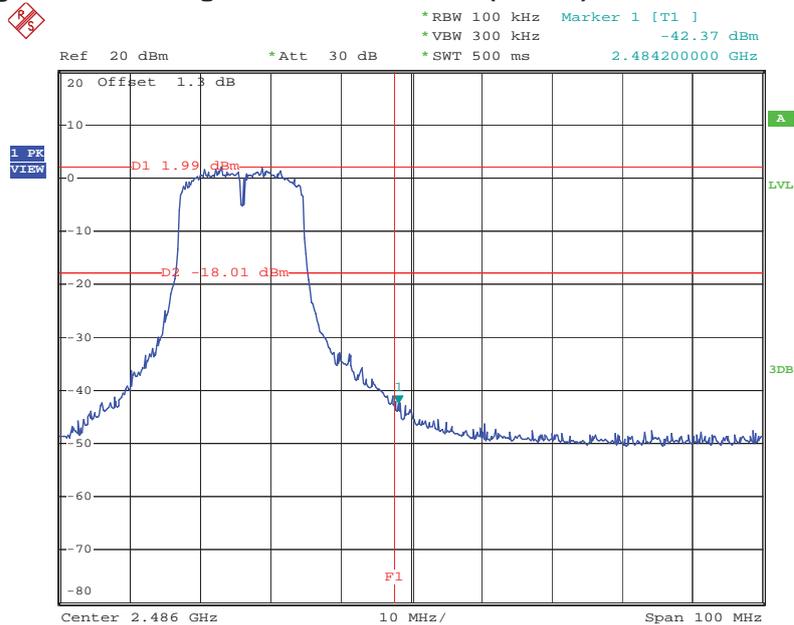


Date: 15.MAY.2012 16:08:29

Low Band Edge Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

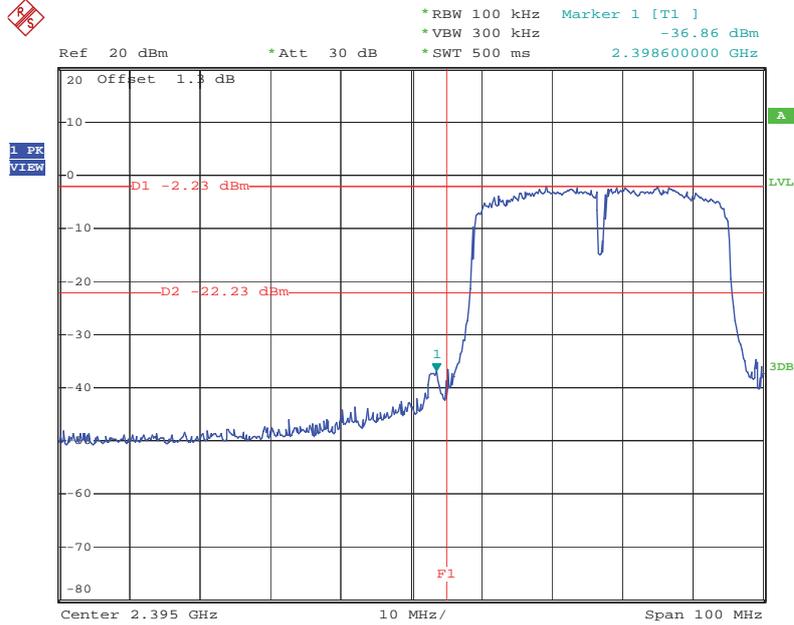


Date: 15.MAY.2012 16:23:42

High Band Edge Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

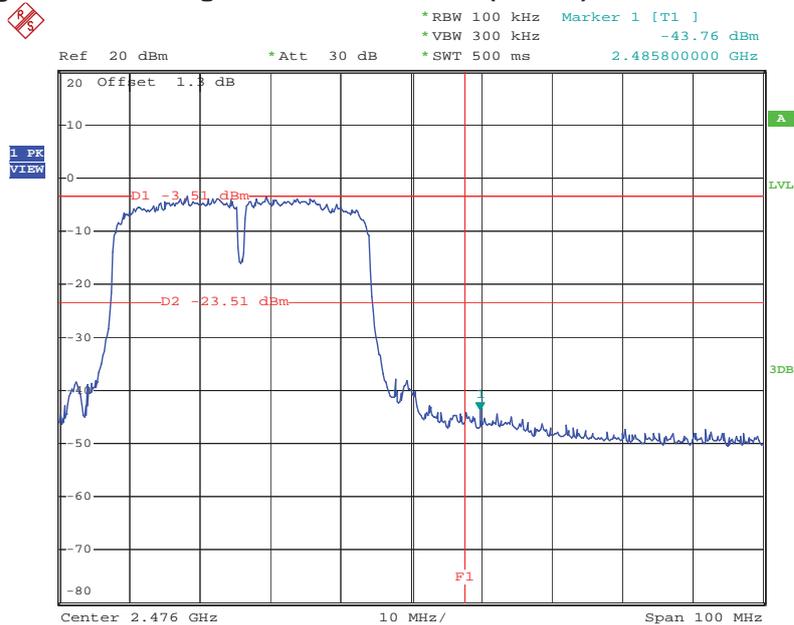


Date: 15.MAY.2012 16:28:53

For Two Chains
Low Band Edge Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 1

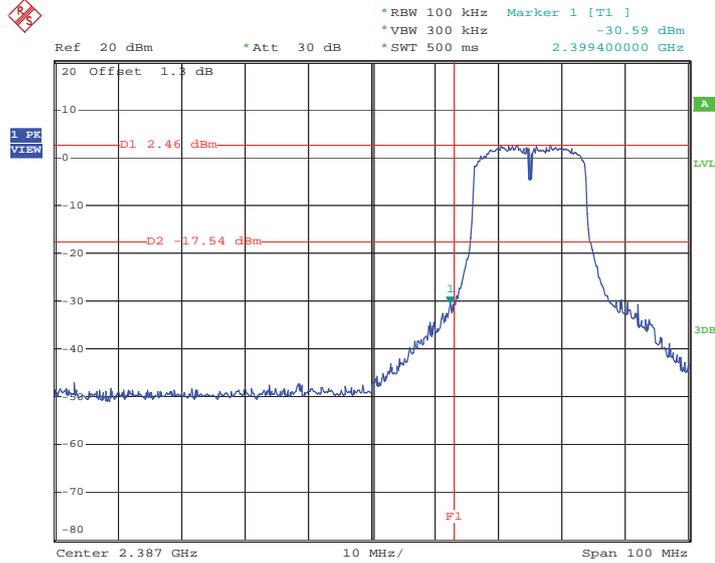


Date: 15.MAY.2012 17:51:23

High Band Edge Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 1

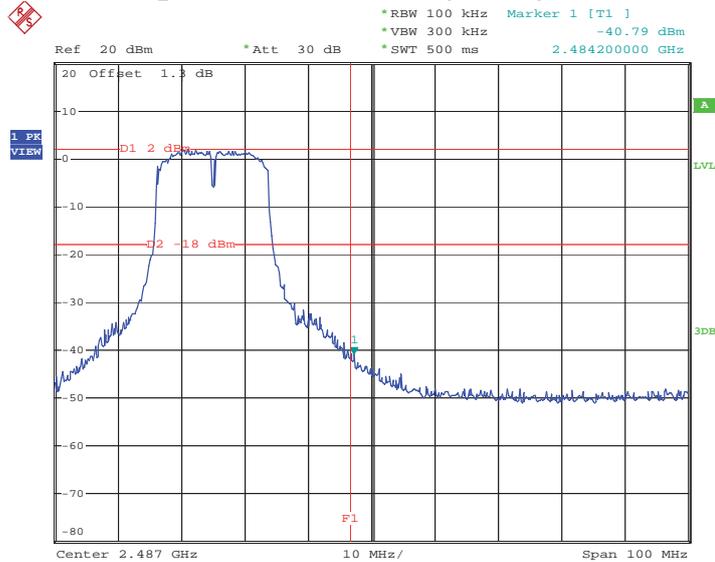


Date: 15.MAY.2012 17:56:08

Low Band Edge Plot on Configuration IEEE 802.11n (20MHz) 2412 MHz Port 2

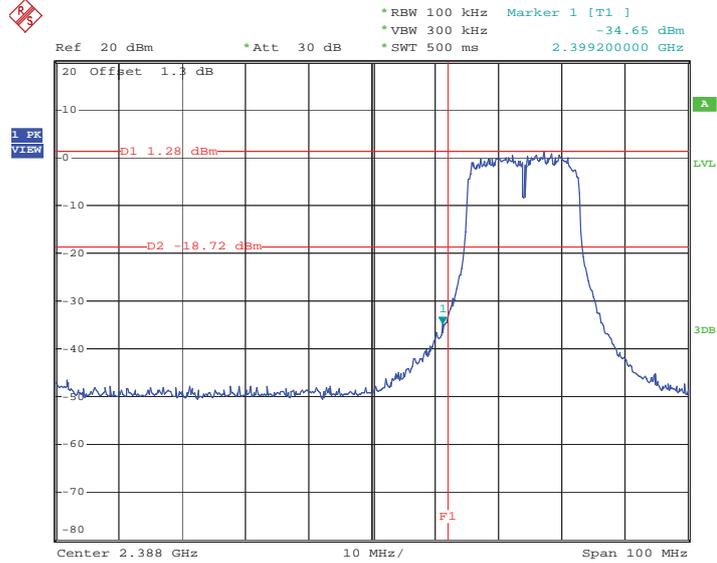


Date: 15.MAY.2012 18:54:48

High Band Edge Plot on Configuration IEEE 802.11n (20MHz) 2462 MHz Port 2

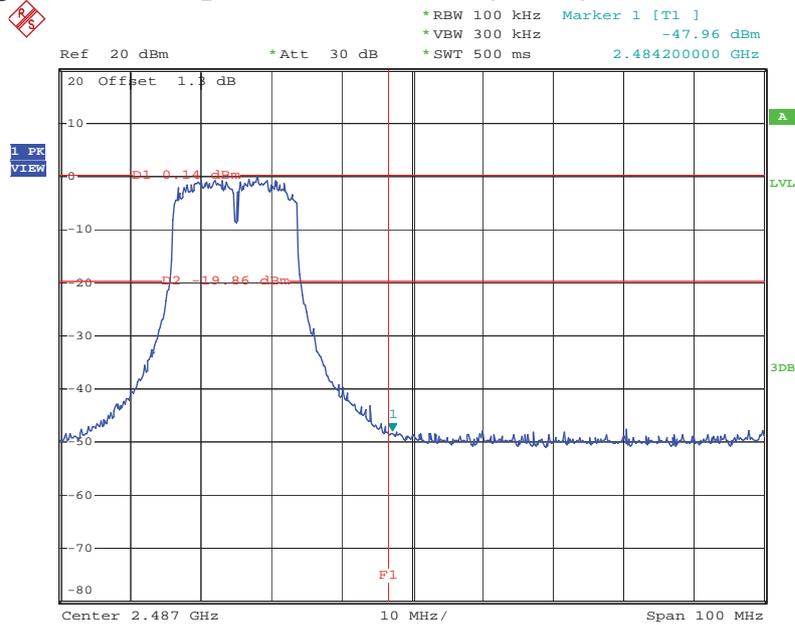


Date: 15.MAY.2012 18:02:19

Low Band Edge Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 1

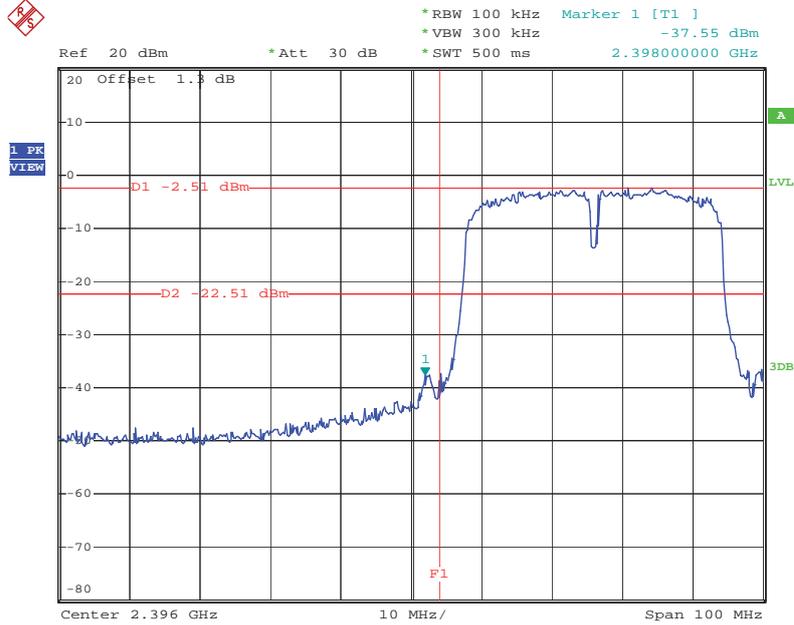


Date: 15.MAY.2012 19:05:03

High Band Edge Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 1

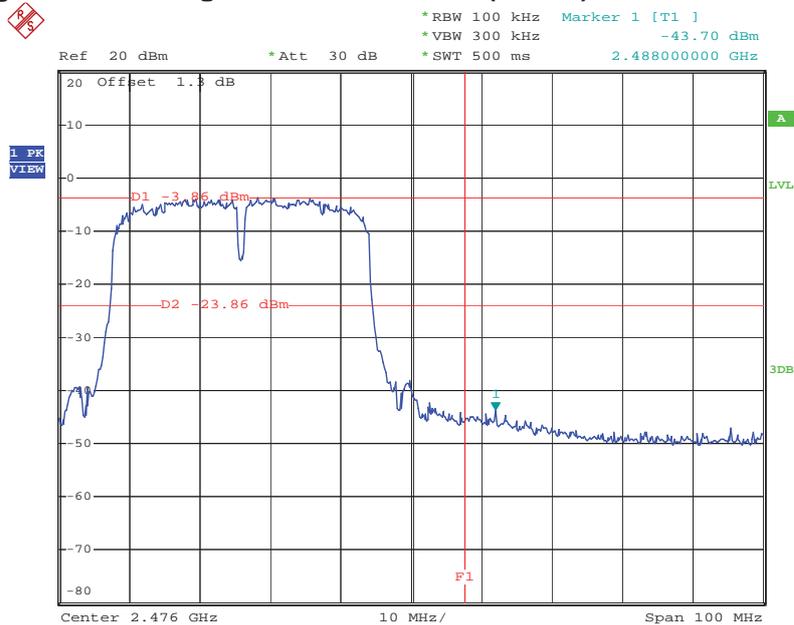


Date: 15.MAY.2012 19:17:34

Low Band Edge Plot on Configuration IEEE 802.11n (40MHz) 2422 MHz Port 2

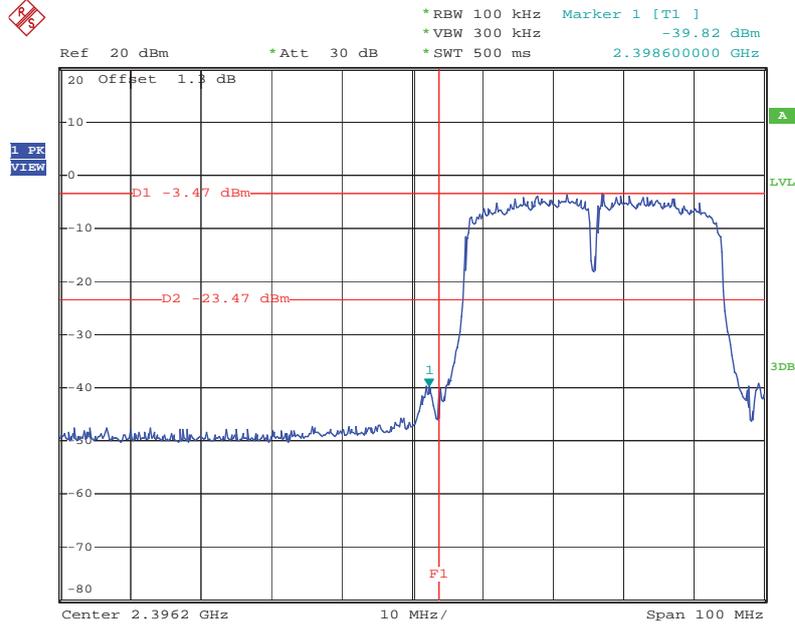

Date: 15.MAY.2012 20:05:01

High Band Edge Plot on Configuration IEEE 802.11n (40MHz) 2452 MHz Port 2

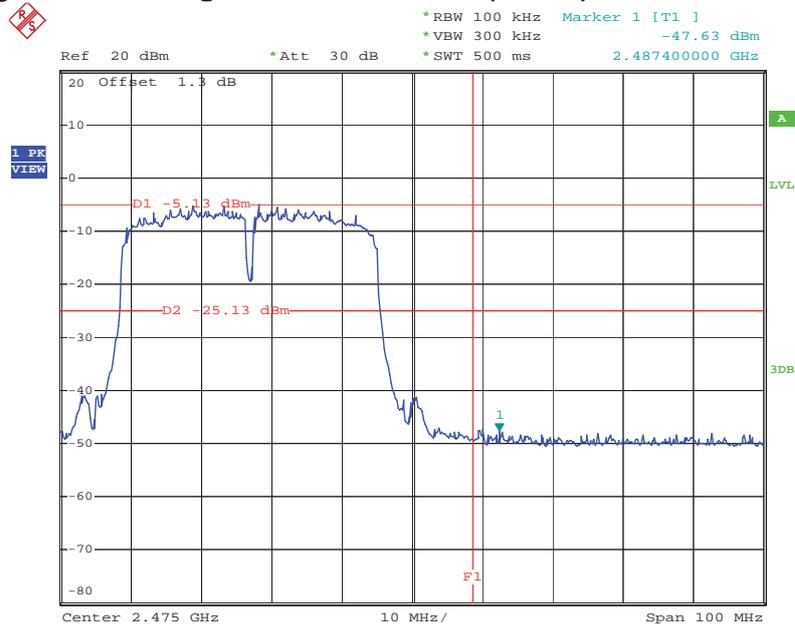

Date: 15.MAY.2012 19:21:47

3.7 Antenna Requirements

3.7.1 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.7.2 Antenna Connector Construction

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

4 LIST OF MEASURING EQUIPMENTS

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|------------------------|--------------------------------|-----------|------------|------------------|------------------|----------------------|
| EMC Receiver | R&S | ESCS 30 | 100174 | 9 kHz ~ 2.75 GHz | Mar. 23, 2012 | Conduction (CO04-HY) |
| LISN | SCHWARZBECK MESS-ELEKTRONIK | NSLK 8127 | 8127-477 | 9kHz – 30MHz | Feb. 08, 2012 | Conduction (CO04-HY) |
| LISN (Support Unit) | EMCO | 3810/2NM | 9703-1839 | 9 kHz ~ 30 MHz | Apr. 20, 2012 | Conduction (CO04-HY) |
| RF Cable-CON | HUBER+SUHNER | RG213/U | CB049 | 9 kHz ~ 30 MHz | Apr. 25, 2012 | Conduction (CO04-HY) |

Note: Calibration Interval of instruments listed above is one year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|----------------------------|--------------|------------------|-------------|-----------------|------------------|---------------------|
| Spectrum Analyzer | R&S | FSP 40 | 100305 | 9KHz~40GHz | Feb. 21, 2012 | Conducted (TH01-HY) |
| DC Power Source | G.W. | GPC-6030D | C671845 | DC 1V ~ 60V | Jun. 03, 2011 | Conducted (TH01-HY) |
| Temp. and Humidity Chamber | Giant Force | GTH-225-20-SP-SD | MAA1112-007 | -20 ~ 100°C | Dec. 07, 2011 | Conducted (TH01-HY) |
| Signal Generator | R&S | SMR40 | 100116 | 10MHz ~ 40GHz | Jun. 07, 2011 | Conducted (TH01-HY) |
| Power Sensor | Anritsu | MA2411B | 1027452 | 300MHz ~ 40GHz | Jan. 12, 2012 | Conducted (TH01-HY) |
| Power Meter | Anritsu | ML2495A | 1124009 | 300MHz ~ 40GHz | Jan. 12, 2012 | Conducted (TH01-HY) |
| RF Cable-2m | HUBER+SUHNER | SUCOFLEX_104 | SN 345672/4 | 1GHz ~ 26.5GHz | Dec. 03, 2011 | Conducted (TH01-HY) |
| RF Cable-3m | HUBER+SUHNER | SUCOFLEX_104 | SN 345668/4 | 1GHz ~ 26.5GHz | Dec. 03, 2011 | Conducted (TH01-HY) |

Note: Calibration Interval of instruments listed above is one year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|-----------------|--------------|-----------|-------------|-----------------|------------------|---------------------|
| AC Power Source | HPC | HPA-500W | HPA-9100024 | AC 0 ~ 300V | Jun. 09, 2011* | Conducted (TH01-HY) |

Note: Calibration Interval of instruments listed above is two year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|--------------------------|----------------|-------------|------------|--------------------|------------------|-----------------------|
| Spectrum Analyzer | R&S | FSP40 | 100593 | 9kHz ~ 40GHz | Sep. 01, 2011 | Radiation (03CH02-HY) |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH02-HY | 30MHz ~ 1GHz 3m | May 11, 2011 | Radiation (03CH02-HY) |
| Amplifier | Agilent | 8447D | 2944A11146 | 100kHz ~ 1.3GHz | Jul. 25, 2011 | Radiation (03CH02-HY) |
| Amplifier | Agilent | 8449B | 3008A02373 | 1 Hz ~ 26.5GHz | Jul. 25, 2011 | Radiation (03CH02-HY) |
| Horn Antenna | ETS-LINDGREN | 3117 | 00091920 | 1GHz ~ 18GHz | Nov. 15, 2011 | Radiation (03CH02-HY) |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30MHz ~ 1GHz | Nov. 11, 2011 | Radiation (03CH02-HY) |
| RF Cable-high | SUHNER | SUCOFLEX106 | 03CH02-HY | 1GHz ~ 40GHz | Mar. 06, 2012 | Radiation (03CH02-HY) |
| Bilog Antenna | SCHAFFNER | CBL61128 | 2723 | 30MHz ~ 2GHz | Oct. 22, 2011 | Radiation (03CH02-HY) |
| Turn Table | HD | DS 420 | 420/649/00 | 0~ 360 degree | N/A | Radiation (03CH02-HY) |
| Antenna Mast | HD | MA 240 | 240/559/00 | 1 ~ 4 m | N/A | Radiation (03CH02-HY) |

Note: Calibration Interval of instruments listed above is one year.

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark |
|--------------|--------------|-----------|------------|-----------------|------------------|-----------------------|
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 9 kHz - 30 MHz | Jul. 29, 2010* | Radiation (03CH02-HY) |

Note: Calibration Interval of instruments listed above is two year.

5 TEST LOCATION

| | |
|--------|--|
| SHIJR | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0973 |
| LINKOU | ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695 |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740 |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626 |
| NEIHU | ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777 |
| JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-111208

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

| | |
|---------------------------------------|--|
| Accreditation Criteria | : ISO/IEC 17025:2005 |
| Accreditation Number | : 1190 |
| Originally Accredited | : December 15, 2003 |
| Effective Period | : January 10, 2010 to January 09, 2013 |
| Accredited Scope | : Testing Field, see described in the Appendix |
| Specific Accreditation Program | : Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities |



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 08, 2011

P1, total 24 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix