



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Belkin International, Inc.
Applicant Address	12045 East Waterfront Drive, Playa Vista, CA 90094
FCC ID	K7SF9K1102V3

Product Name	N600 DB Wireless N+ Router
Brand Name	belkin
Model No.	F9K1102v5
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Feb. 24, 2016
Final Test Date	Apr. 07, 2016
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r02, KDB662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Class II Change	9
3.8. Table for Supporting Units	10
3.9. Table for Parameters of Test Software Setting	11
3.10. EUT Operation during Test	11
3.11. Duty Cycle	11
3.12. Test Configurations	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. 6dB Spectrum Bandwidth Measurement	29
4.4. Maximum Conducted Output Power Measurement.....	33
4.5. Power Spectral Density Measurement	36
4.6. Radiated Emissions Measurement	43
4.7. Band Edge Emissions Measurement	65
4.8. Frequency Stability Measurement	72
4.9. Antenna Requirements	77
5. LIST OF MEASURING EQUIPMENTS	78
6. MEASUREMENT UNCERTAINTY.....	80
APPENDIX A. TEST PHOTOS	A1 ~ A4


History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N1172-24AB	Rev. 01	Initial issue of report	May 26, 2016

1. VERIFICATION OF COMPLIANCE

Product Name : N600 DB Wireless N+ Router
Brand Name : belkin
Model No. : F9K1102v5
Applicant : Belkin International, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 24, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

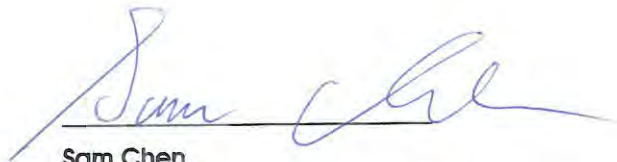

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	16.49 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	5.94 dB
4.5	15.407(a)	Power Spectral Density	Complies	7.63 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.10 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.05 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11a: 18.23 MHz IEEE 802.11n MCS0 (HT20): 22.14 MHz IEEE 802.11n MCS0 (HT40): 53.84 MHz Band 4: IEEE 802.11a: 18.41 MHz IEEE 802.11n MCS0 (HT20): 26.83 MHz IEEE 802.11n MCS0 (HT40): 40.09 MHz
Maximum Conducted Output Power	Band 1: IEEE 802.11a: 21.66 dBm IEEE 802.11n MCS0 (HT20): 22.33 dBm IEEE 802.11n MCS0 (HT40): 21.94 dBm Band 4: IEEE 802.11a: 21.41 dBm IEEE 802.11n MCS0 (HT20): 24.06 dBm IEEE 802.11n MCS0 (HT40): 19.79 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
Beamforming Function	☐ With beamforming	☒ Without beamforming
Operate Condition	☒ Indoor	☐ Outdoor

Antenna and Band width

Antenna	Two (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11a	V	X
IEEE 802.11n	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n.		

3.2. Accessories

Power	Brand	Model	Rating
Adapter	LEI	MT12-Y120100-A1	Input: 100-120V~60Hz, 0.3A Output: 12V, 1A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
0	-	-	PCB Antenna	I-PEX	1.9	-
1	-	-	PCB Antenna	I-PEX	1.9	-
2	-	-	PCB Antenna	I-PEX	-	3.53
3	-	-	PCB Antenna	I-PEX	-	3.53

Note: The EUT has four antennas.

For 2.4 GHz WLAN function:

For IEEE 802.11b mode (1TX/1RX):

Ant. 0 was fixed to use as transmitting antenna and receiving antenna.

For IEEE 802.11g/n mode (2TX/2RX):

Ant. 0 and Ant. 1 will transmit/receive the same signal simultaneously.


Ant. 0 and Ant. 1 can be used as transmitting/receiving antennas.

For 5GHz WLAN function:

For IEEE 802.11a/n mode (2TX/2RX):

Ant. 2 and Ant. 3 will transmit/receive the same signal simultaneously.

Ant. 2 and Ant. 3 can be used as transmitting/receiving antennas.

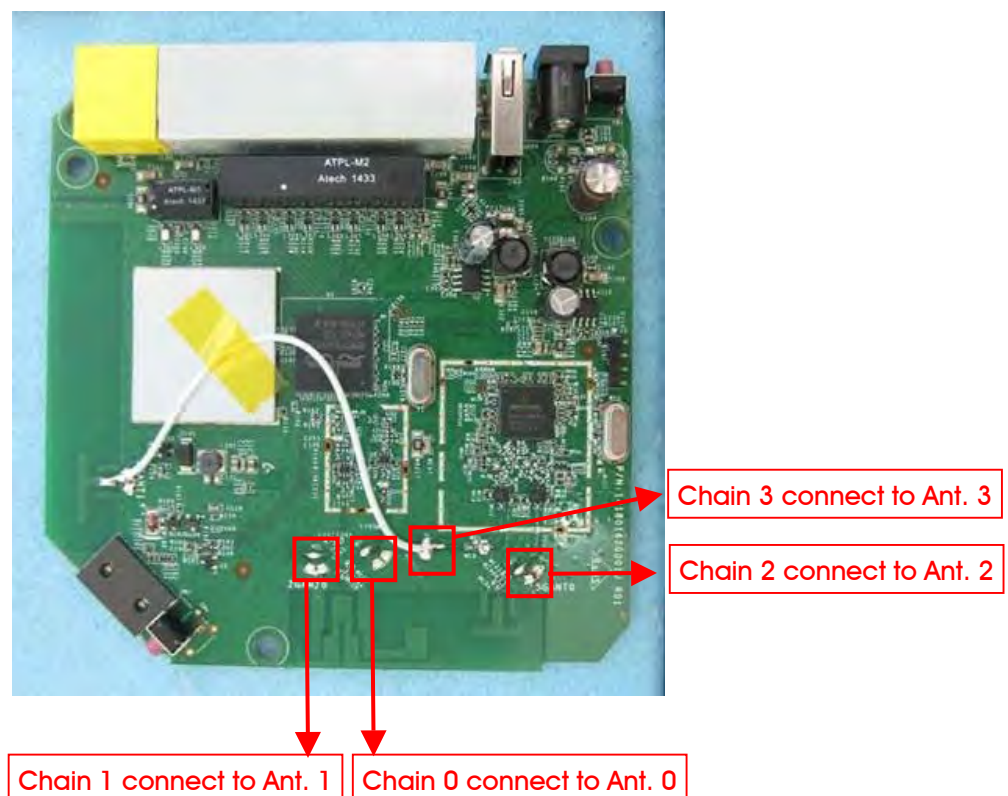

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3
	11n HT20	Band 1&4	MCS0	36/40/48/149/1 57/165	2+3
	11n HT40	Band 1&4	MCS0	38/46/151/159	2+3
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3
	11n HT20	Band 1&4	MCS0	36/40/48/149/1 57/165	2+3
	11n HT40	Band 1&4	MCS0	38/46/151/159	2+3
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3
	11n HT20	Band 1&4	MCS0	36/40/48/149/1 57/165	2+3
	11n HT40	Band 1&4	MCS0	38/46/151/159	2+3
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	2+3
	11n HT20	Band 4	MCS0	149/157/165	2+3
	11n HT40	Band 4	MCS0	151/159	2+3
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3
	11n HT20	Band 1&4	MCS0	36/40/48/149/1 57/165	2+3
	11n HT40	Band 1&4	MCS0	38/46/151/159	2+3
Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	2+3
	11n HT20	Band 1&4	MCS0	36/40/48/149/1 57/165	2+3
	11n HT40	Band 1&4	MCS0	38/46/151/159	2+3
Frequency Stability	20 MHz	Band 1&4	-	40/157	3
	40 MHz	Band 1&4	-	38/151	3

Note: The EUT could be used in Y-axis only.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link - EUT in Y-axis

For Radiated Emission test (Below 1GHz):

Mode 1. Normal Link - EUT in Y-axis

For Radiated Emission test (Above 1GHz):

Mode 1. CTX

For Co-location MPE Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA4N1172-24AA) test is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR242483AA and FR242483AB.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Updating the Brand Name from "Belkin" to "belkin". 2. Updating the Model Name from "F9K1102v3" to "F9K1102v5".	Do not effect the test results.
3. Updating adapter (Model name: MT12-Y120100-A1) to Level VI energy efficiency. 4. Updating the Flash version.	1. AC Conducted Emissions 2. Radiated Emissions below 1GHz
5. Updating 5GHz Band 1 to "New Rules" from "Old Rules".	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. Maximum Conducted Output Power 3. Power Spectral Density 4. Radiated Emissions above 1GHz 5. Band Edge Emissions 6. Frequency Stability
6. Updating 5GHz Band 4 to "New Rules" from "Old Rules".	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. 6dB Spectrum Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Radiated Emissions above 1GHz 6. Band Edge Emissions 7. Frequency Stability

3.8. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
Flash disk	Transcend	604108 8255	DoC

For Test Site No: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E4300	DoC
Flash disk	Silicon Power	I-Series	DoC

For Test Site No: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	MTool 2.0.2.6					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	60	62	67	54	65	61
802.11n MCS0 HT20	60	65	70	53	80	60
Mode	NCB: 40MHz					
802.11n MCS0 HT40	5190 MHz	5230 MHz	5755 MHz	5795 MHz		
	40	69	40	59		

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.064	2.096	98.47	0.07	0.01
802.11n MCS0 HT20	1.904	1.936	98.35	0.07	0.01
802.11n MCS0 HT40	0.930	0.970	95.88	0.18	1.08

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

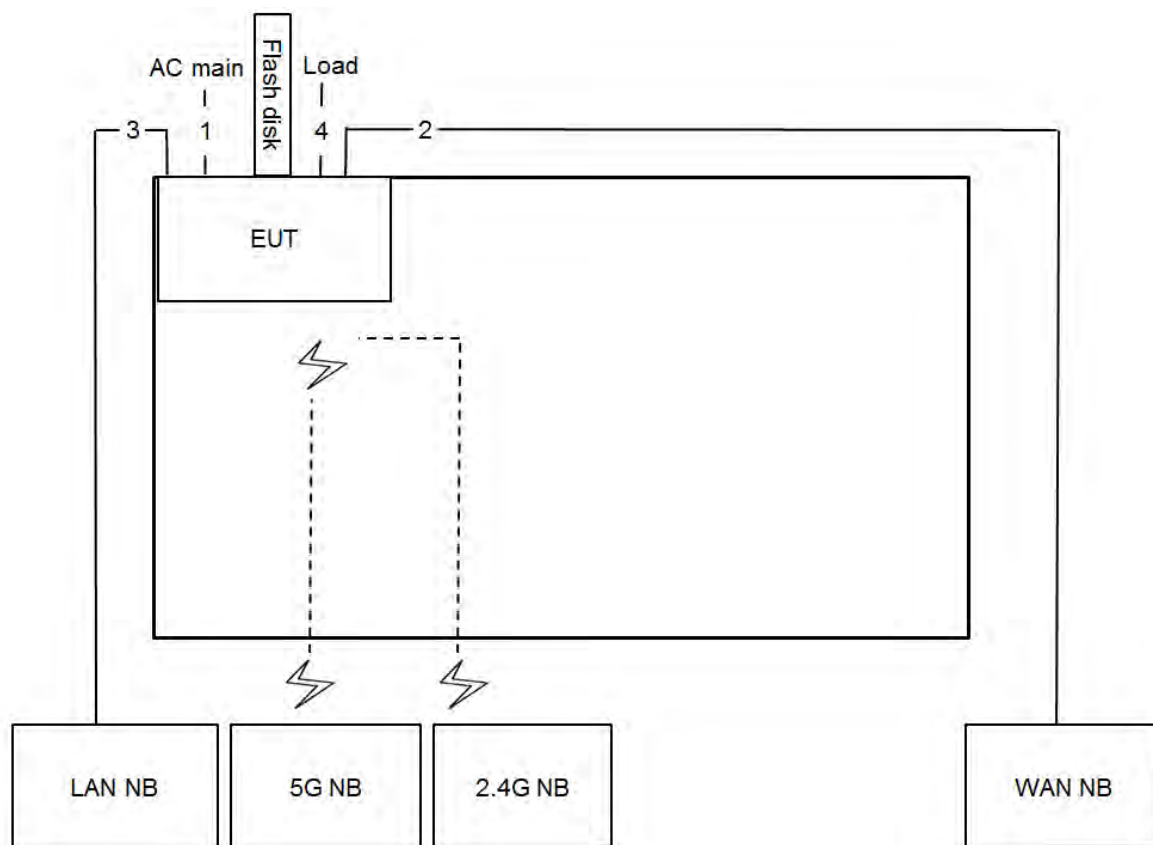

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1.5m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

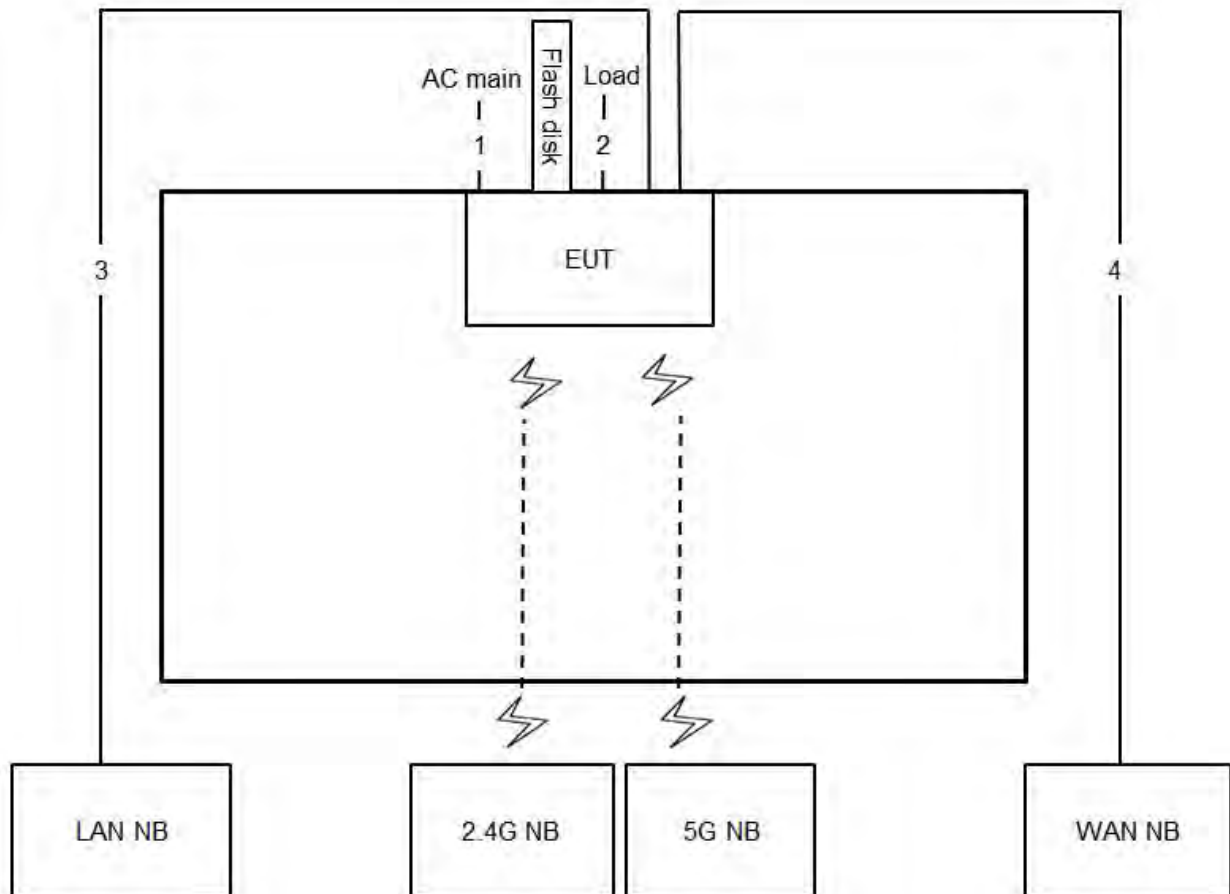

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable*3	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m

Test Configuration: above 1GHz

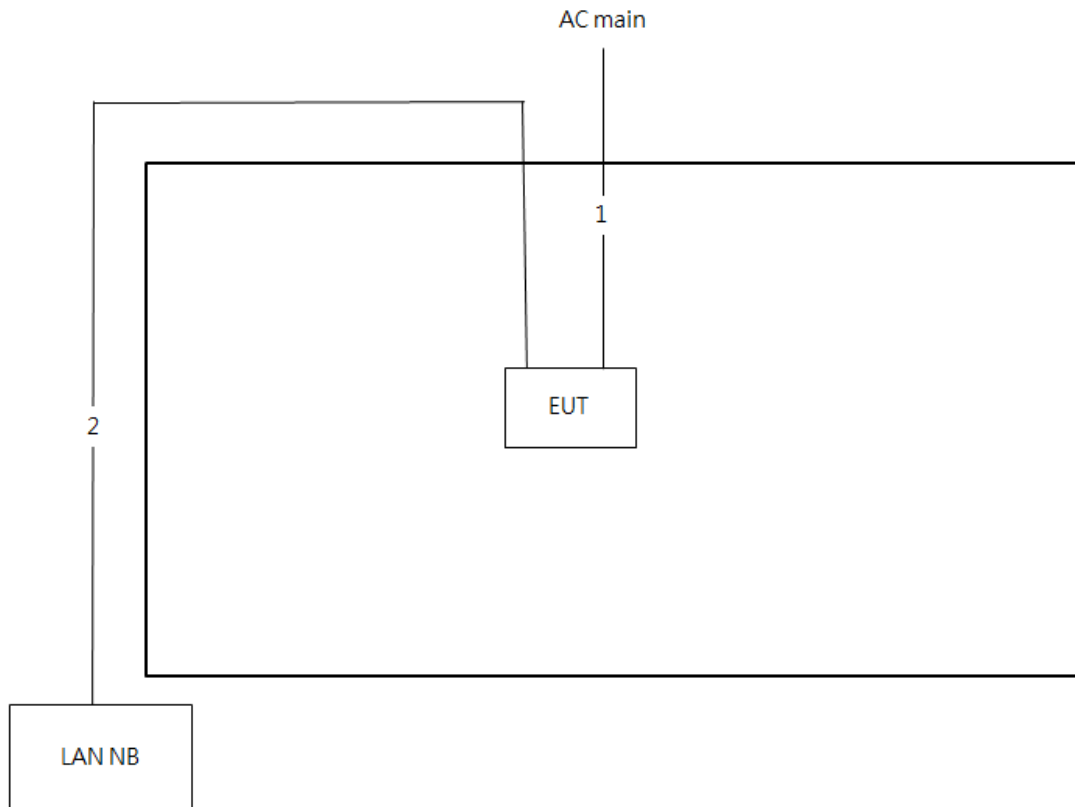

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



10 cm

10 cm

EUT

5

Non-conductive Table
1.5 x 1 m

5

6

7

1

1

3.3

3.1

3.3

3

LISN

3.2

80cm

40cm

2

Conducting Ground Plane
Extends At Least 0.5m
Beyond EUT System Footprint

Bonded To Ground Plane


- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	57%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link		

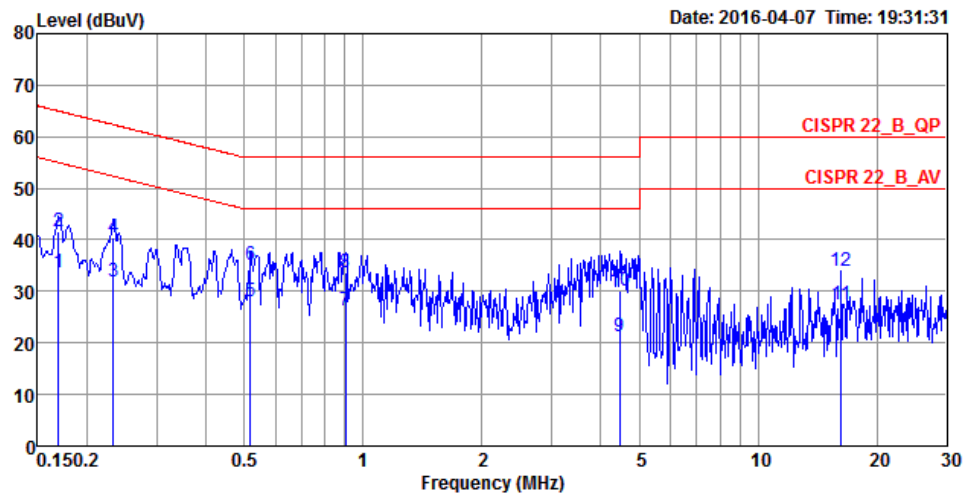

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1694	33.77	-21.22	54.99	23.73	10.02	0.02	LINE	Average
2	0.1694	41.53	-23.46	64.99	31.49	10.02	0.02	LINE	QP
3	0.2329	31.98	-20.37	52.35	22.03	9.92	0.03	LINE	Average
4	0.2329	40.44	-21.91	62.35	30.49	9.92	0.03	LINE	QP
5	0.5182	28.01	-17.99	46.00	18.05	9.92	0.04	LINE	Average
6	0.5182	35.12	-20.88	56.00	25.16	9.92	0.04	LINE	QP
7	0.9039	26.38	-19.62	46.00	16.39	9.94	0.05	LINE	Average
8	0.9039	33.69	-22.31	56.00	23.70	9.94	0.05	LINE	QP
9	4.4540	21.13	-24.87	46.00	11.05	10.00	0.08	LINE	Average
10	4.4540	30.06	-25.94	56.00	19.98	10.00	0.08	LINE	QP
11	16.2286	27.35	-22.65	50.00	16.84	10.25	0.26	LINE	Average
12	16.2286	33.83	-26.17	60.00	23.32	10.25	0.26	LINE	QP

Temperature	25°C	Humidity	57%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link		

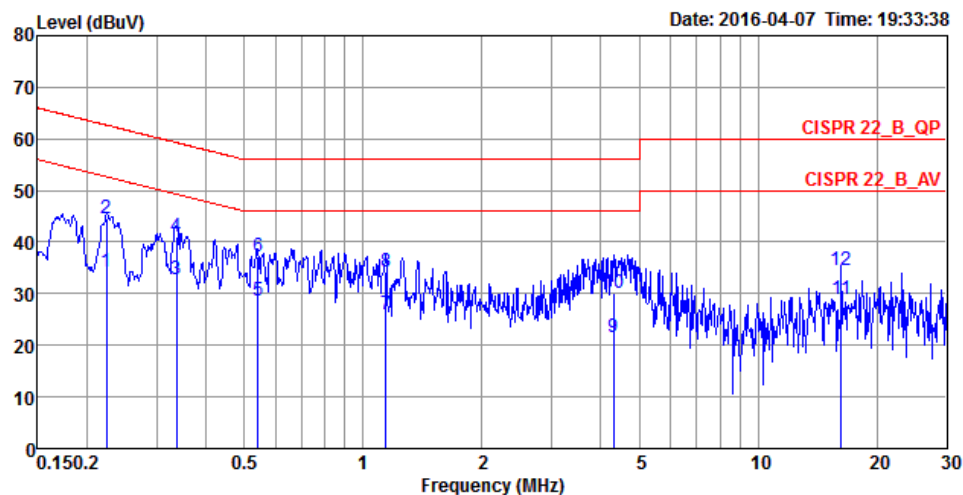

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.2244	34.25	-18.41	52.66	24.30	9.92	0.03	NEUTRAL	Average
2	0.2244	44.70	-17.96	62.66	34.75	9.92	0.03	NEUTRAL	QP
3	0.3374	32.78	-16.49	49.27	22.82	9.92	0.04	NEUTRAL	Average
4	0.3374	41.00	-18.27	59.27	31.04	9.92	0.04	NEUTRAL	QP
5	0.5407	28.59	-17.41	46.00	18.62	9.93	0.04	NEUTRAL	Average
6	0.5407	37.23	-18.77	56.00	27.26	9.93	0.04	NEUTRAL	QP
7	1.1413	26.03	-19.97	46.00	16.04	9.94	0.05	NEUTRAL	Average
8	1.1413	34.19	-21.81	56.00	24.20	9.94	0.05	NEUTRAL	QP
9	4.3146	21.66	-24.34	46.00	11.58	10.00	0.08	NEUTRAL	Average
10	4.3146	29.98	-26.02	56.00	19.90	10.00	0.08	NEUTRAL	QP
11	16.2280	28.83	-21.17	50.00	18.32	10.25	0.26	NEUTRAL	Average
12	16.2280	34.67	-25.33	60.00	24.16	10.25	0.26	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	20.78	16.58
	5200 MHz	22.35	16.85
	5240 MHz	35.65	18.23
	5745 MHz	22.09	16.58
	5785 MHz	32.43	18.41
	5825 MHz	27.57	17.19
802.11n MCS0 HT20	5180 MHz	29.91	17.63
	5200 MHz	35.65	18.06
	5240 MHz	40.96	22.14
	5745 MHz	19.57	17.54
	5785 MHz	40.78	26.83
	5825 MHz	29.91	17.97
802.11n MCS0 HT40	5190 MHz	45.36	37.05
	5230 MHz	90.44	53.84
	5755 MHz	40.00	36.90
	5795 MHz	88.41	40.09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5180 MHz

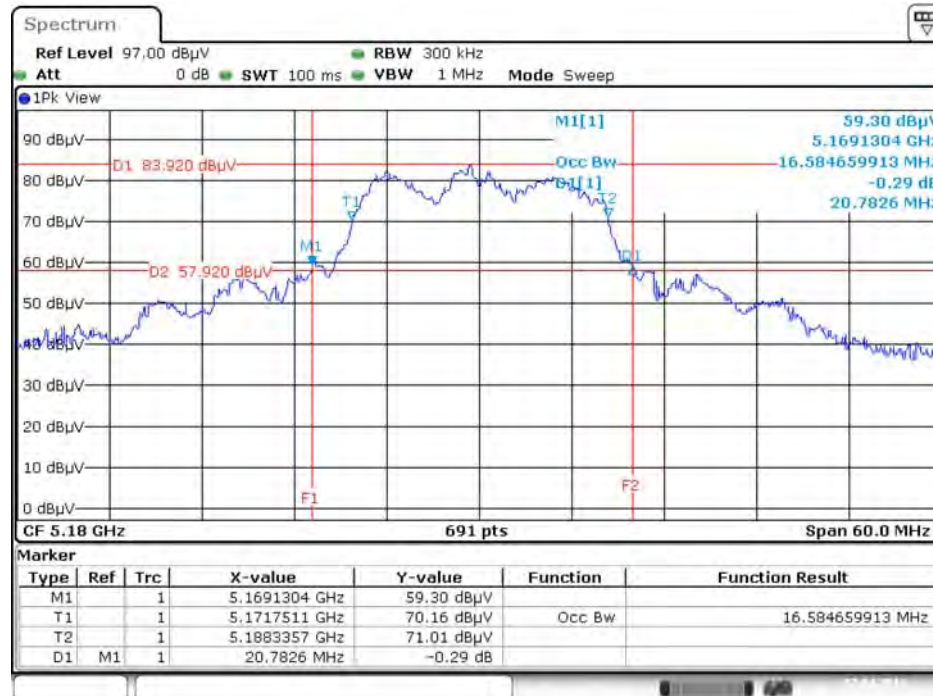


Date: 7.APR.2016 16:33:15

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5200 MHz

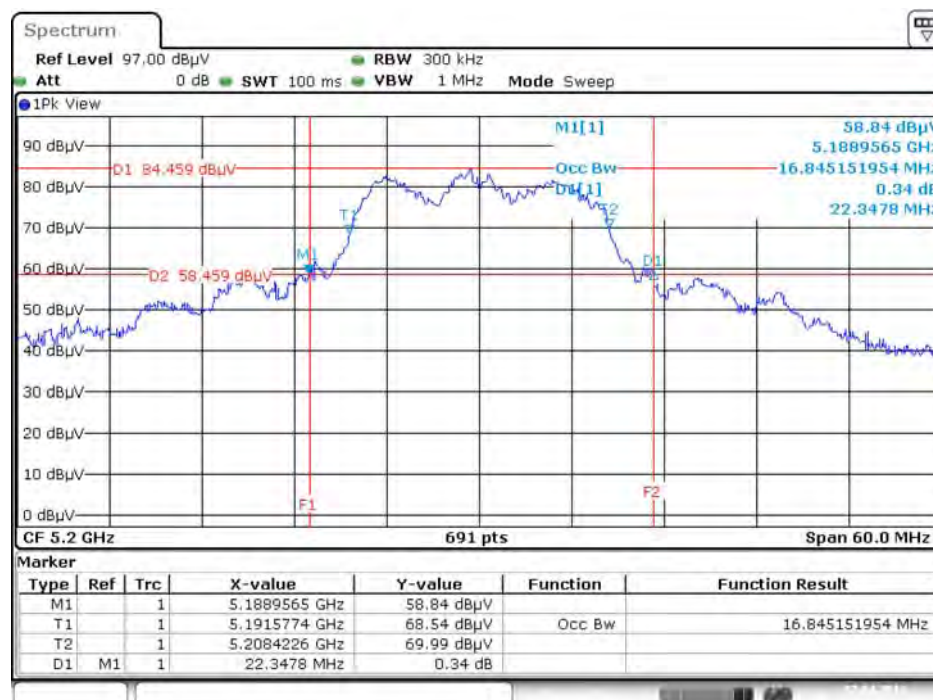


Date: 7.APR.2016 16:34:06

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5240 MHz

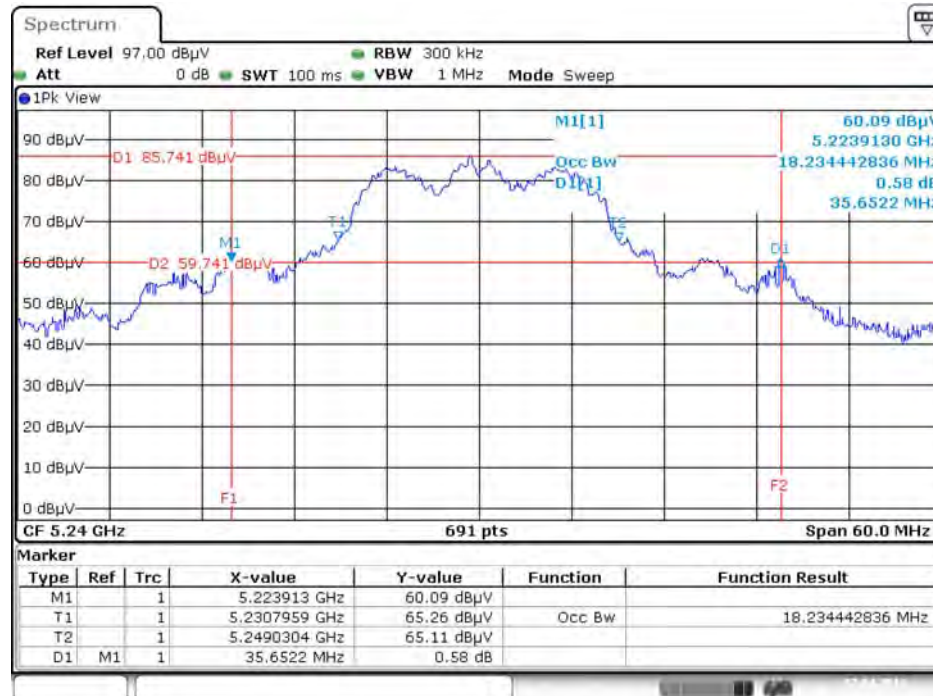


Date: 7.APR.2016 16:34:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5745 MHz

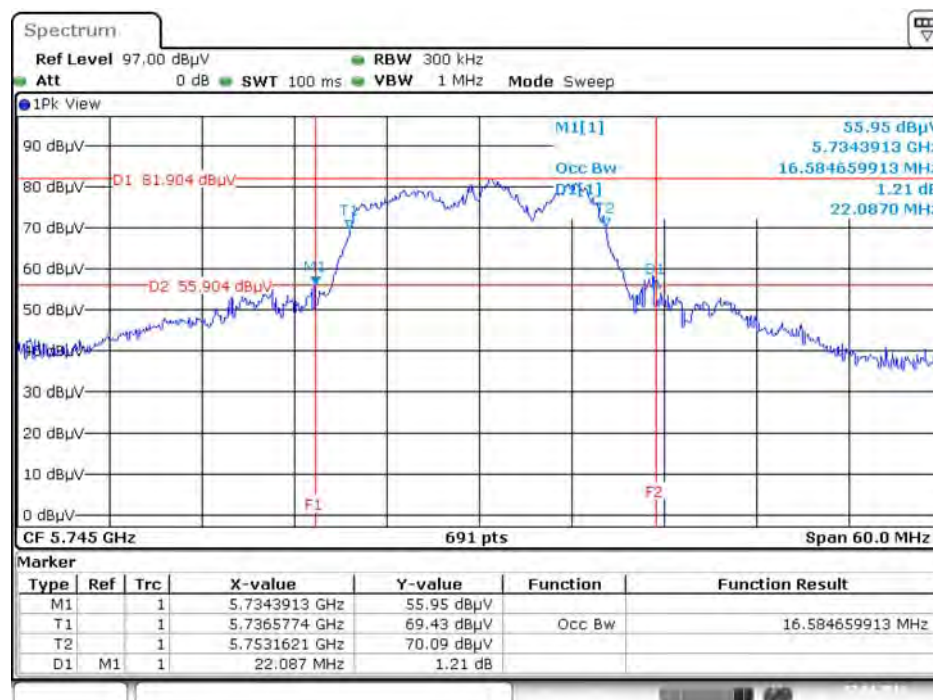


Date: 7.APR.2016 16:35:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5785 MHz

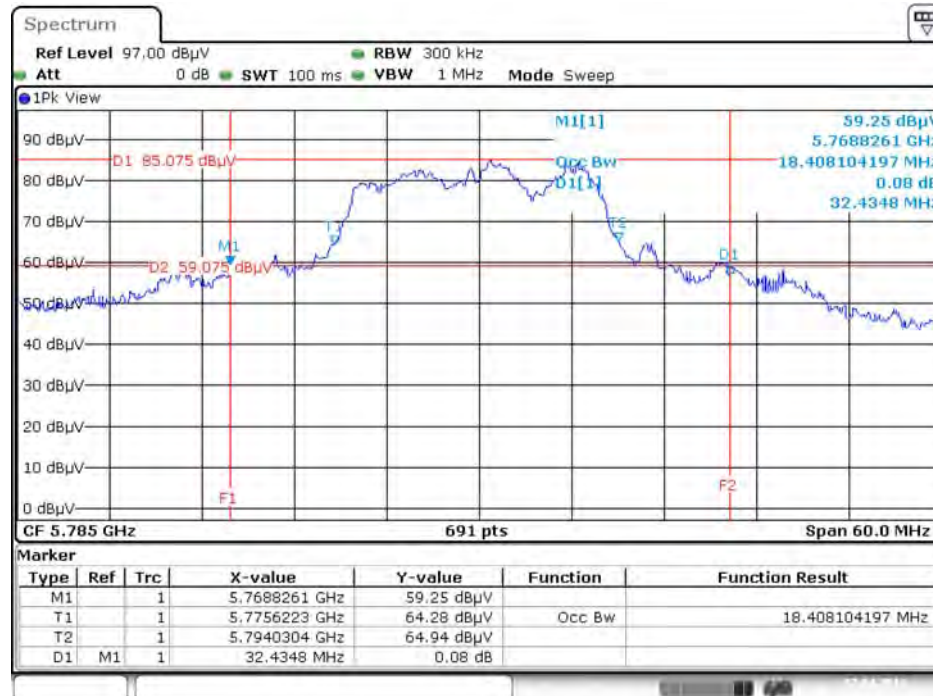


Date: 7. APR 2016 16:35:50

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5825 MHz

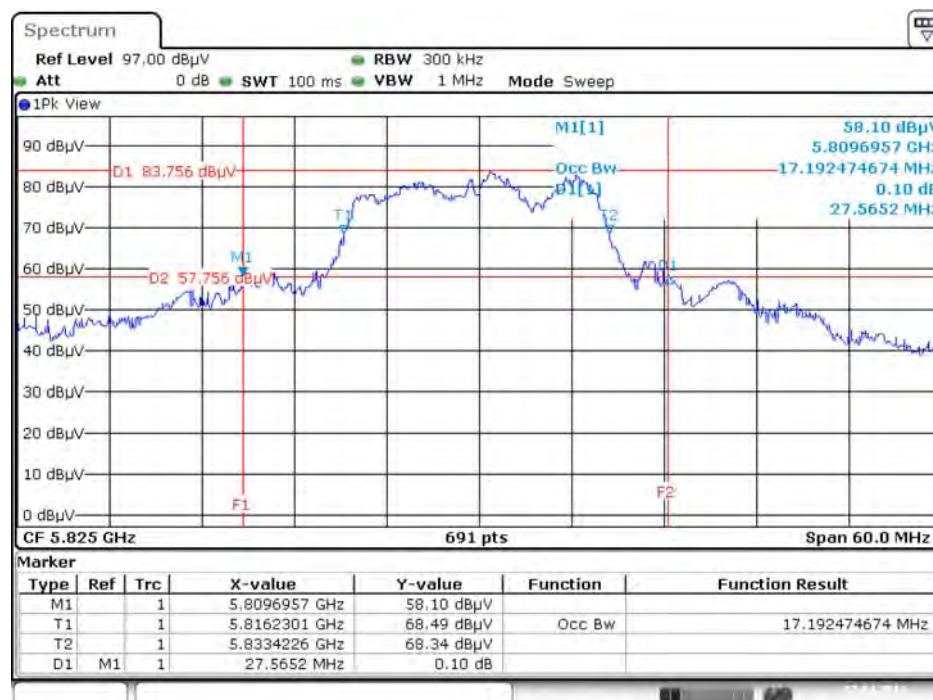


Date: 7. APR 2016 16:36:22

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3 / 5180 MHz

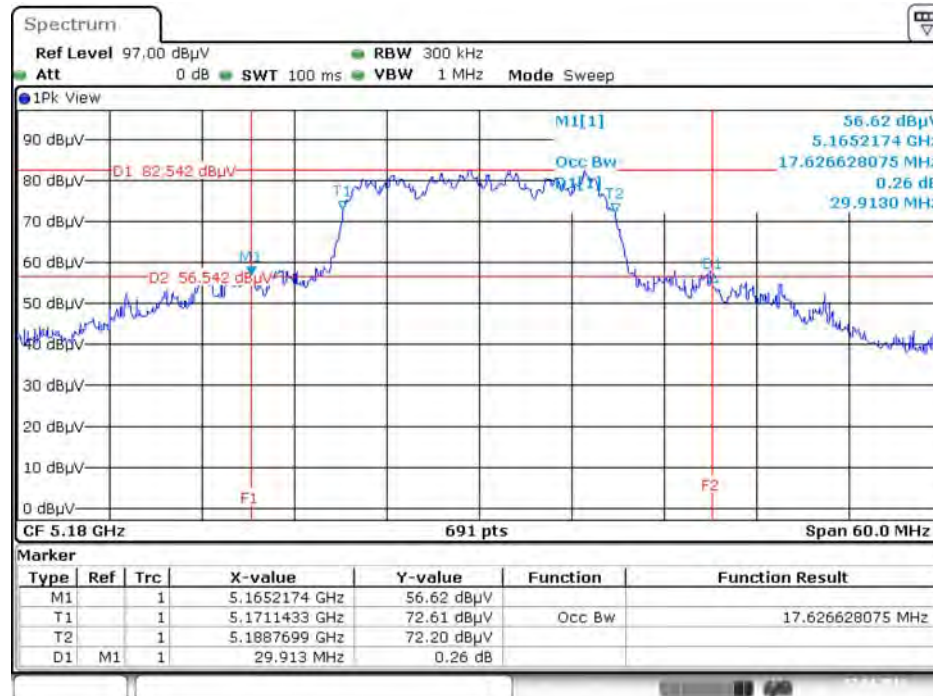


Date: 7.APR.2016 16:54:37

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3 / 5200 MHz

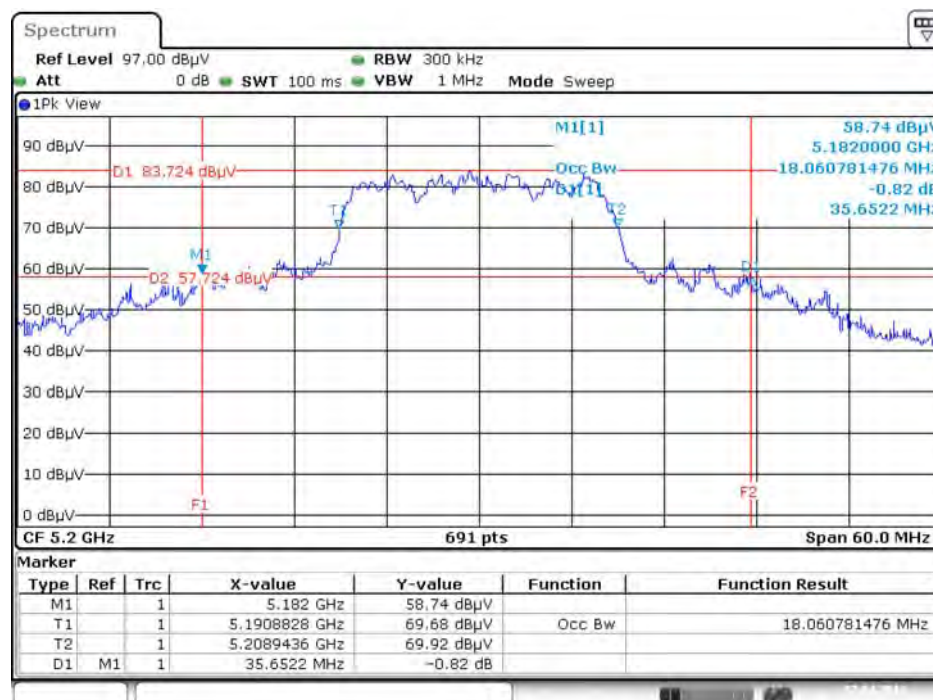


Date: 7.APR.2016 16:55:12


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3 / 5240 MHz

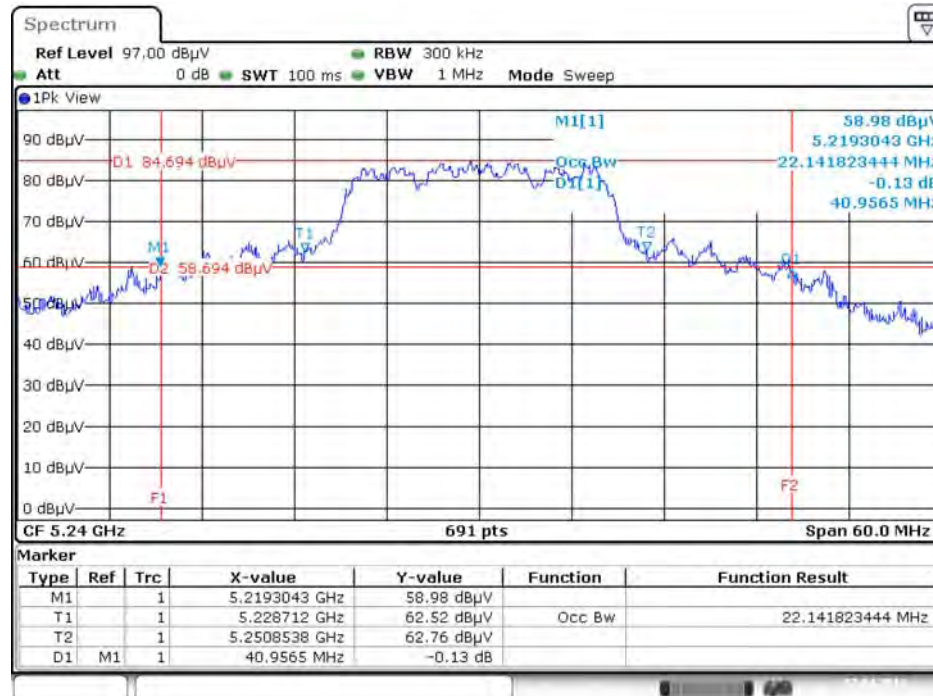

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3 / 5745 MHz

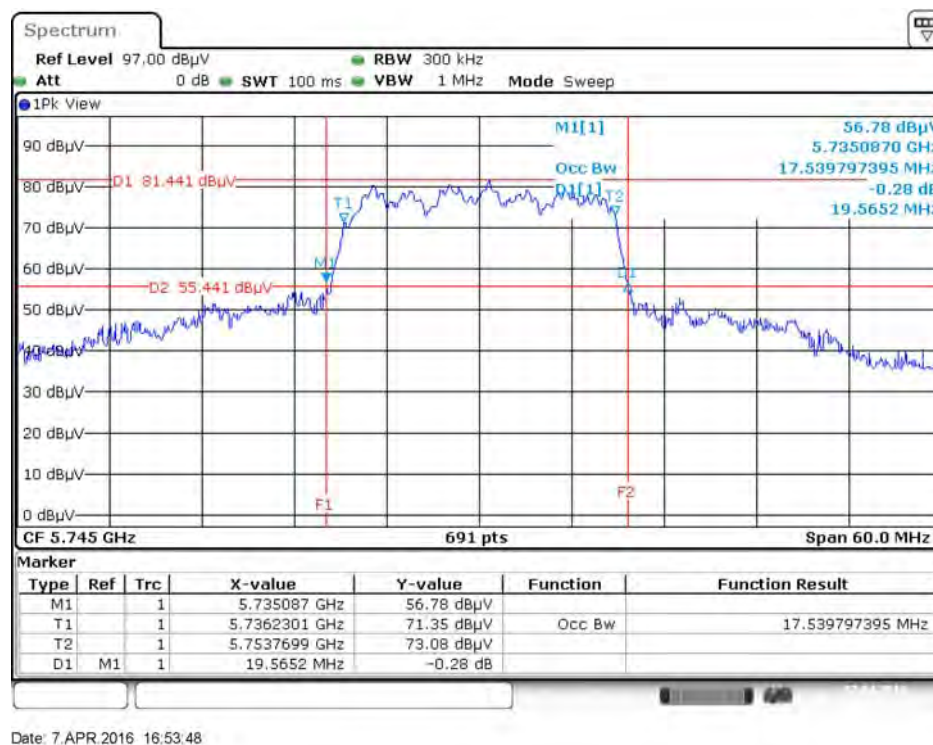


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2
+ Ant. 3 / 5785 MHz

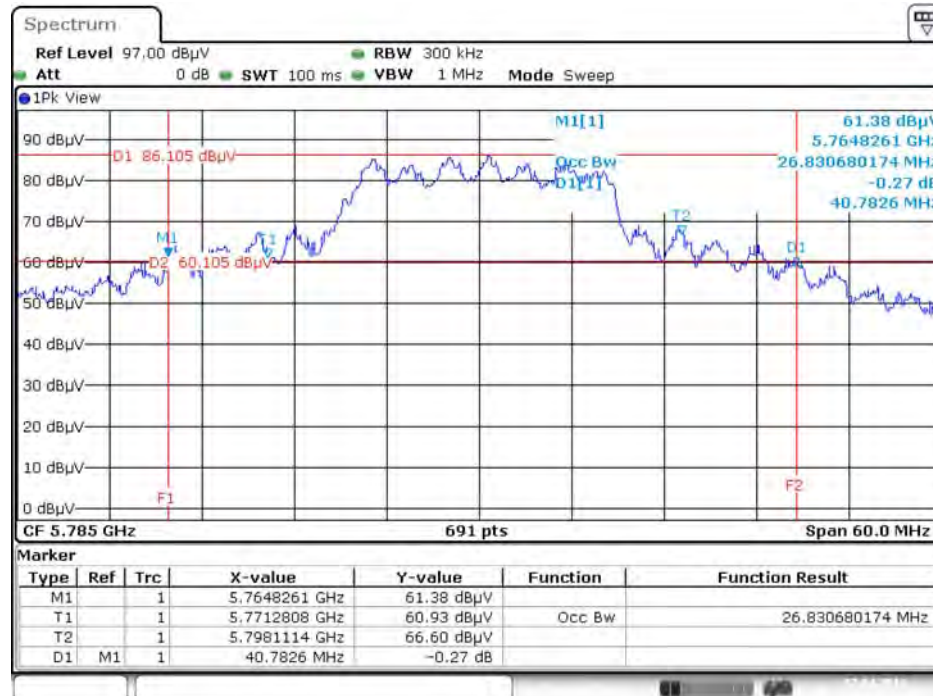


Date: 7.APR.2016 16:46:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2
+ Ant. 3 / 5825 MHz

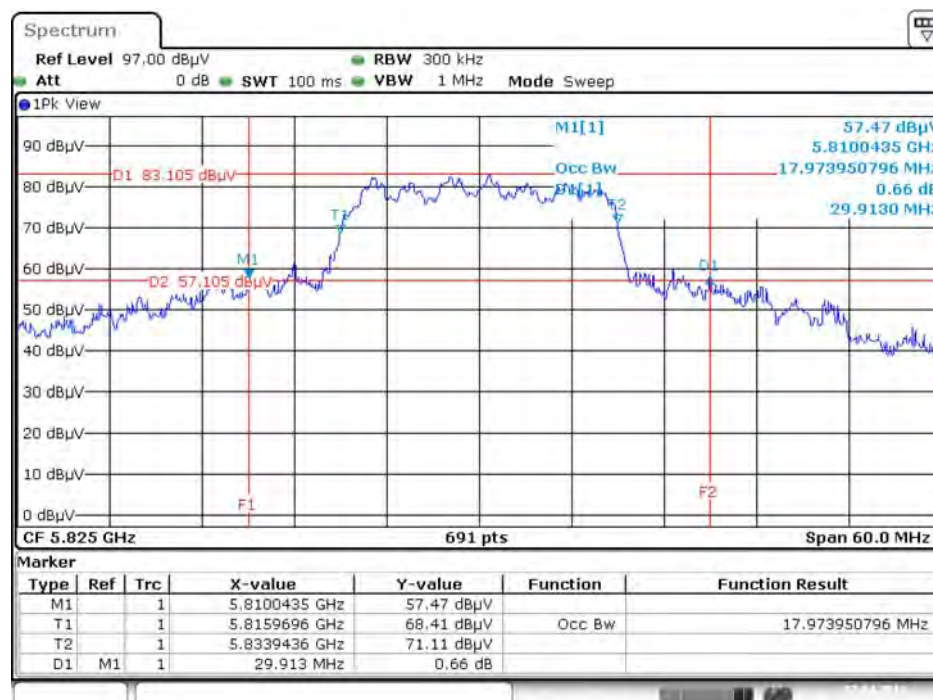


Date: 7.APR.2016 16:44:45


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3 / 5190 MHz

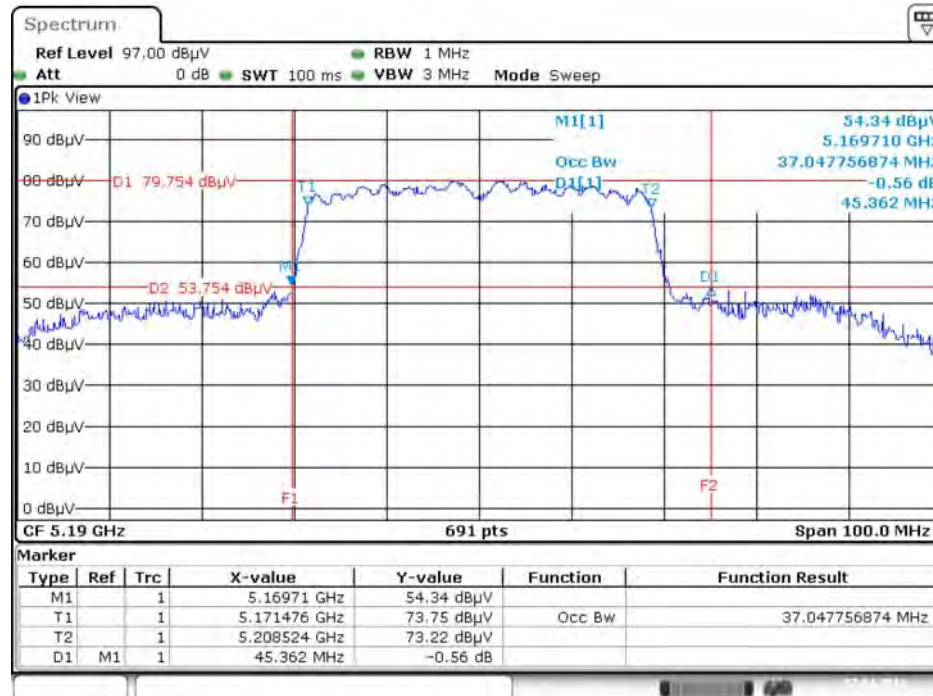

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3 / 5230 MHz

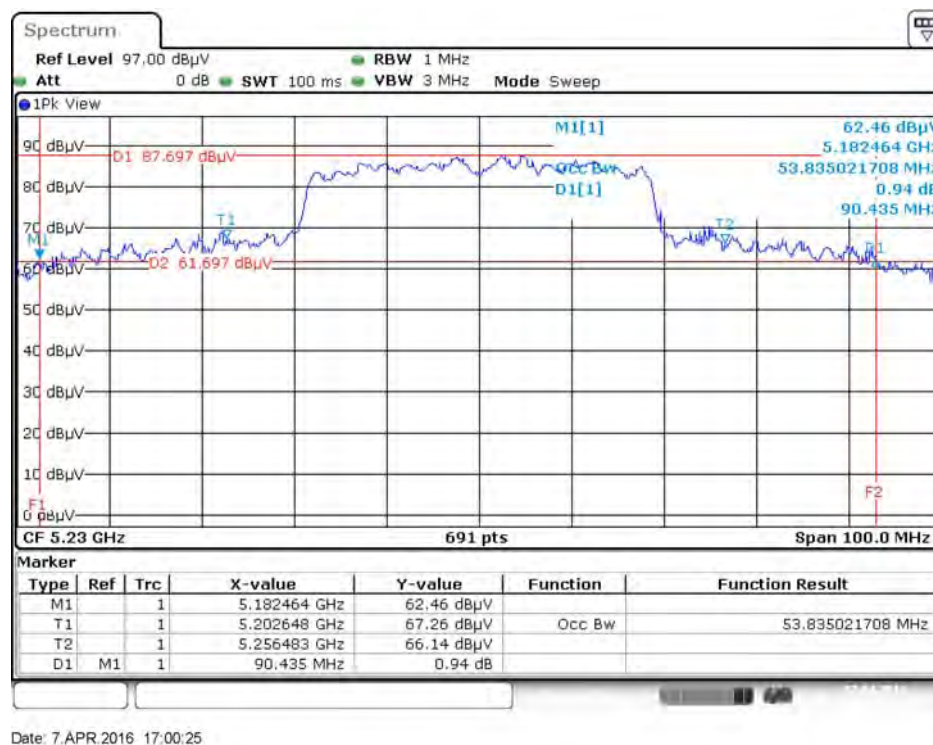


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3 / 5755 MHz

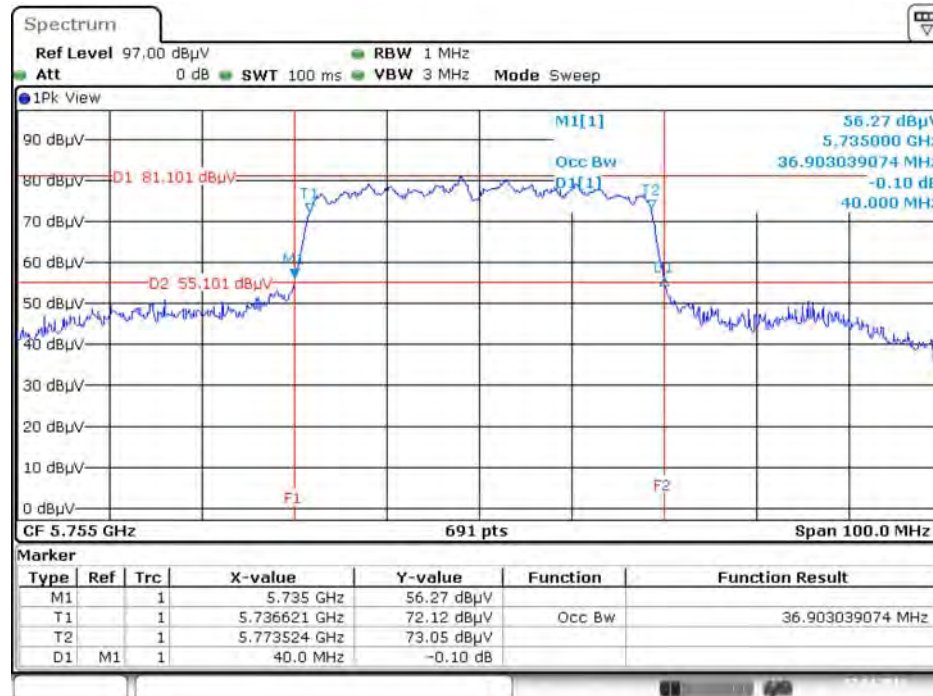

Date: 7.APR.2016 17:01:07

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3 / 5795 MHz

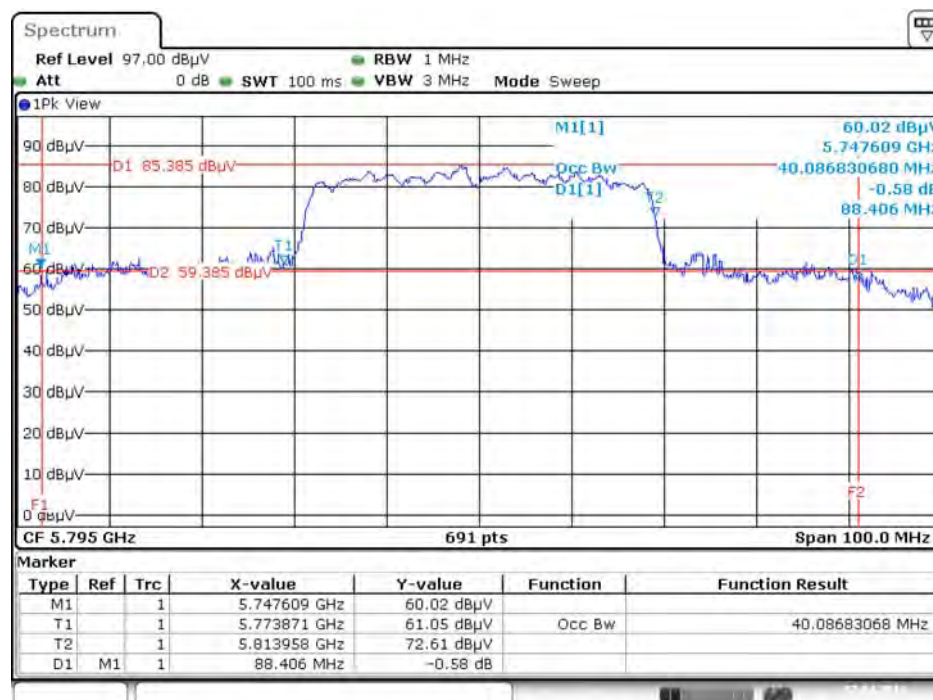

Date: 7.APR.2016 17:01:41

4.3. 6dB Spectrum Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 6dB Spectrum Bandwidth


Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	15.01	500	Complies
	5785 MHz	15.07	500	Complies
	5825 MHz	15.59	500	Complies
802.11n MCS0 HT20	5745 MHz	15.77	500	Complies
	5785 MHz	15.71	500	Complies
	5825 MHz	15.77	500	Complies
802.11n MCS0 HT40	5755 MHz	35.83	500	Complies
	5795 MHz	35.48	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5745 MHz

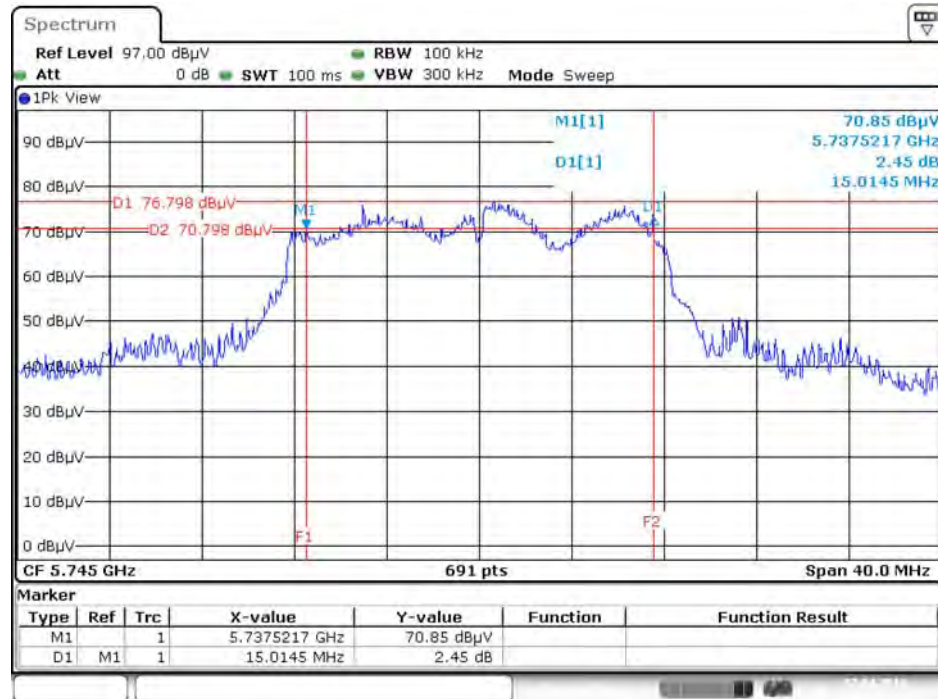


Date: 7.APR.2016 16:40:35

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3 / 5785 MHz

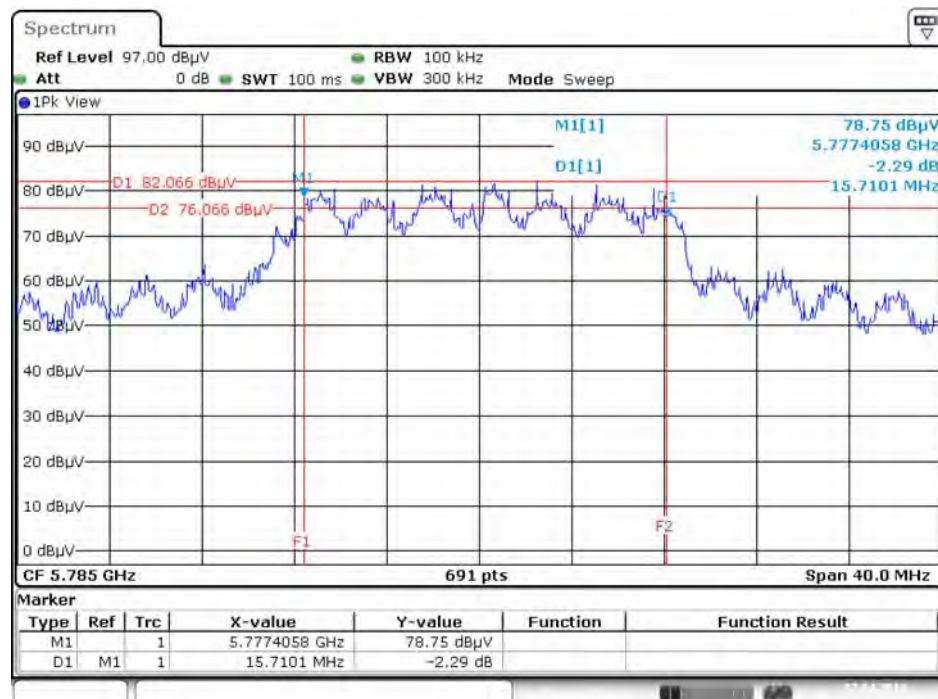

Date: 7.APR.2016 16:42:49

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3 / 5795MHz

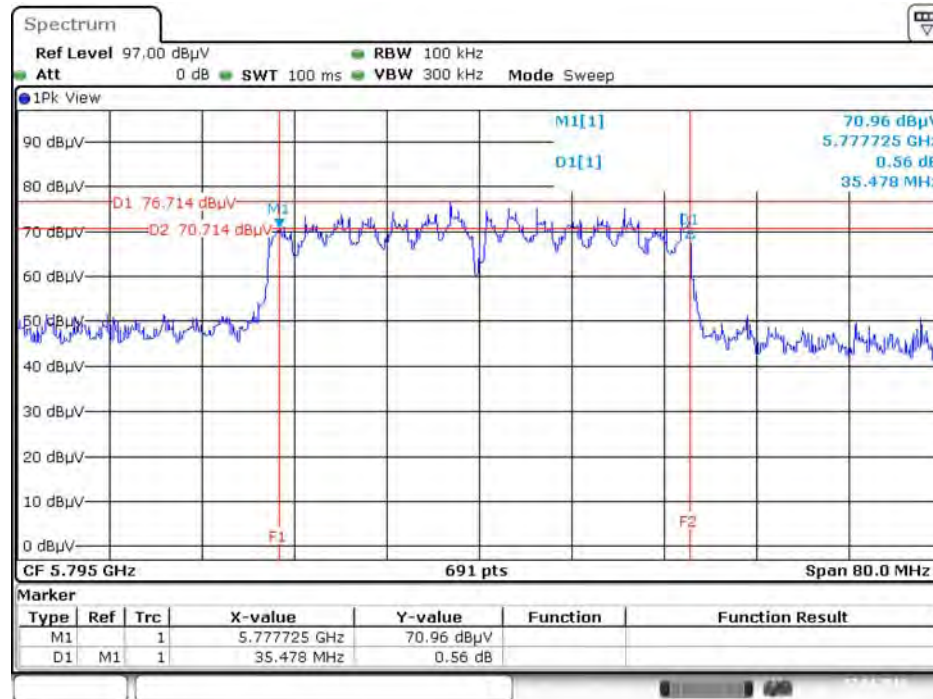

Date: 7.APR.2016 17:03:24

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

Frequency Band		Limit
☒	5.15~5.25 GHz	
	Operating Mode	
	☐ Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
	☒ Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
	☐ Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
	☐ Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
---	----------------	--

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout



4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu	Test Date	Apr. 07, 2016

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 2	Ant. 3	Total		
802.11a	5180 MHz	16.23	17.37	19.85	30.00	Complies
	5200 MHz	16.86	17.96	20.46	30.00	Complies
	5240 MHz	18.22	19.04	21.66	30.00	Complies
	5745 MHz	15.25	16.25	18.79	30.00	Complies
	5785 MHz	17.77	18.95	21.41	30.00	Complies
	5825 MHz	16.66	17.91	20.34	30.00	Complies
802.11n MCS0 HT20	5180 MHz	16.13	17.31	19.77	30.00	Complies
	5200 MHz	17.46	18.57	21.06	30.00	Complies
	5240 MHz	19.07	19.56	22.33	30.00	Complies
	5745 MHz	14.94	15.72	18.36	30.00	Complies
	5785 MHz	20.76	21.32	24.06	30.00	Complies
	5825 MHz	16.27	17.75	20.08	30.00	Complies
802.11n MCS0 HT40	5190 MHz	11.14	12.23	14.73	30.00	Complies
	5230 MHz	18.19	19.57	21.94	30.00	Complies
	5755 MHz	11.15	12.31	14.78	30.00	Complies
	5795 MHz	16.23	17.27	19.79	30.00	Complies

4.5. Power Spectral Density Measurement

4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
☒	5.15~5.25 GHz	
	Operating Mode	
☐	Outdoor access point	17 dBm/MHz
☒	Indoor access point	17 dBm/MHz
☐	Fixed point-to-point access points	17 dBm/MHz
☐	Mobile and portable client devices	11 dBm/MHz
☒	5.725~5.85 GHz	30 dBm/500kHz

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should $\leq 30 \text{ dBm}$.

4.5.4. Test Setup Layout

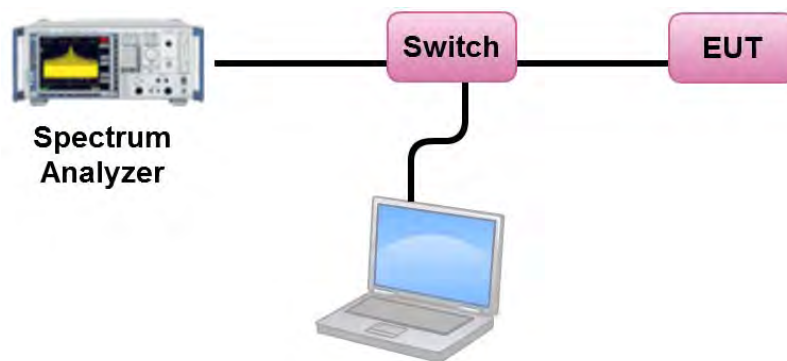

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu		

Configuration IEEE 802.11a / Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	6.48	16.46	Complies
40	5200 MHz	7.05	16.46	Complies
48	5240 MHz	8.30	16.46	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.54\text{dBi}$, so limit = 17-(6.54-6)= 16.46dBm/MHz

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	5.37	-3.01	2.36	29.46	Complies
157	5785 MHz	8.01	-3.01	5.00	29.46	Complies
165	5825 MHz	6.85	-3.01	3.84	29.46	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.54\text{dBi}$, so limit = 30-(6.54-6)= 29.46dBm/500kHz

Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	6.43	16.46	Complies
40	5200 MHz	7.65	16.46	Complies
48	5240 MHz	8.83	16.46	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.54\text{dBi}$, so limit = 17-(6.54-6)= 16.46dBm/MHz

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	4.83	-3.01	1.82	29.46	Complies
157	5785 MHz	10.65	-3.01	7.64	29.46	Complies
165	5825 MHz	6.65	-3.01	3.64	29.46	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.54\text{dBi}$, so limit = 30-(6.54-6)= 29.46dBm/500kHz

Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-1.46	16.46	Complies
46	5230 MHz	5.82	16.46	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.54\text{dBi}$, so limit = 17-(6.54-6)= 16.46dBm/MHz


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	-1.45	-3.01	-4.46	29.46	Complies
159	5795 MHz	3.74	-3.01	0.73	29.46	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 6.54\text{dBi}$, so limit = 30-(6.54-6)= 29.46dBm/500kHz


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5240 MHz

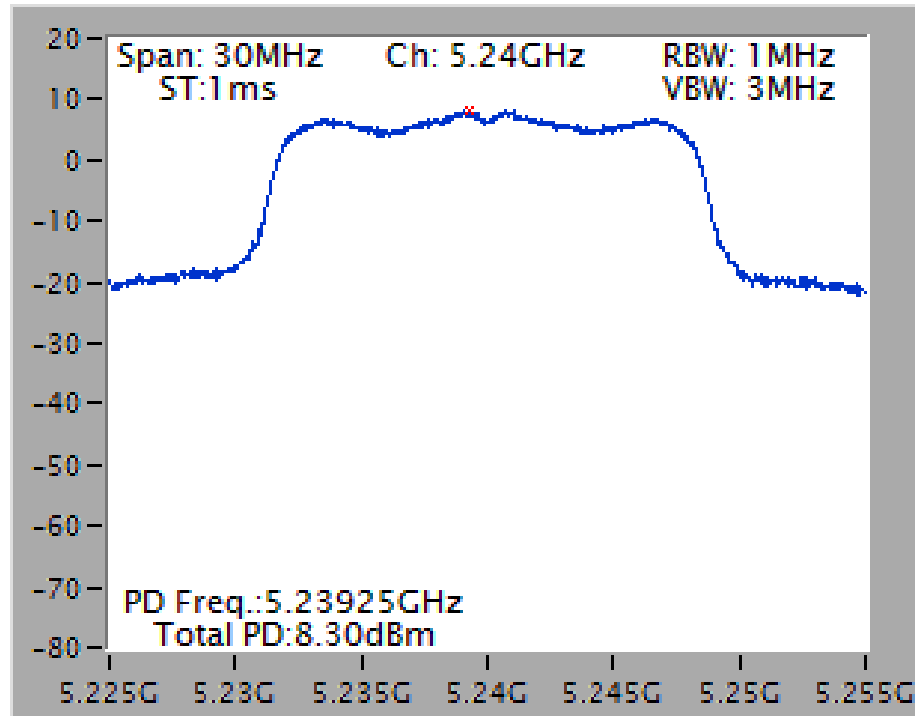


Power Density Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5785 MHz

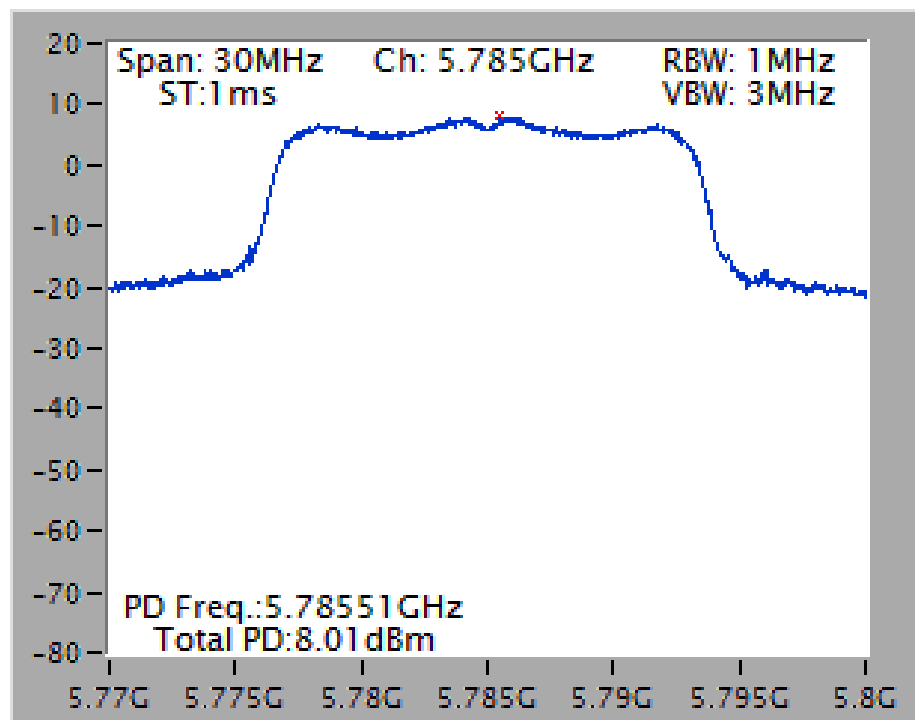


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3 / 5240 MHz

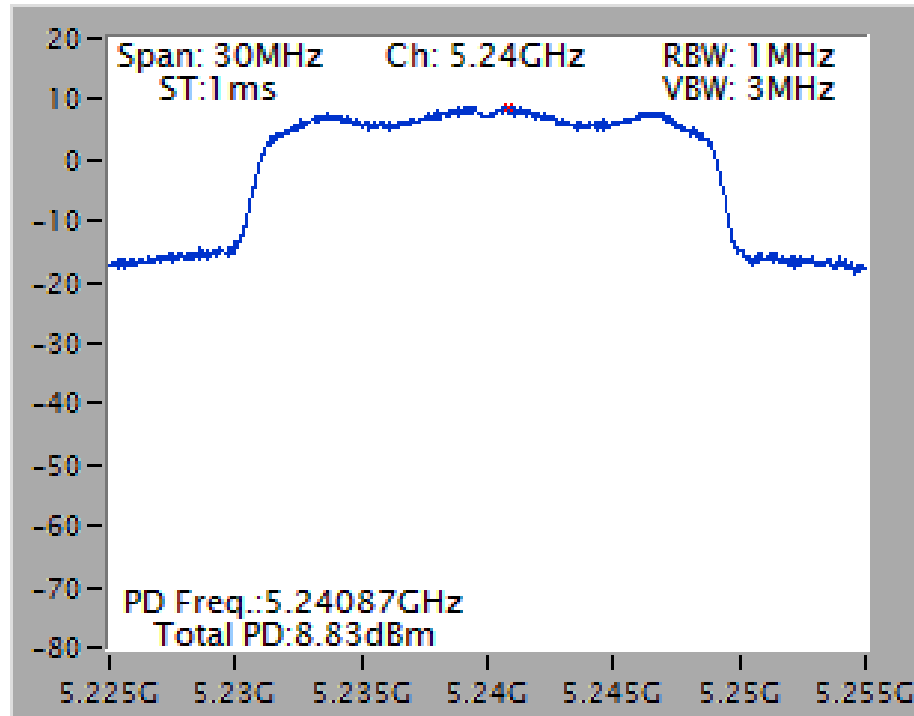


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 2 + Ant. 3 / 5785 MHz

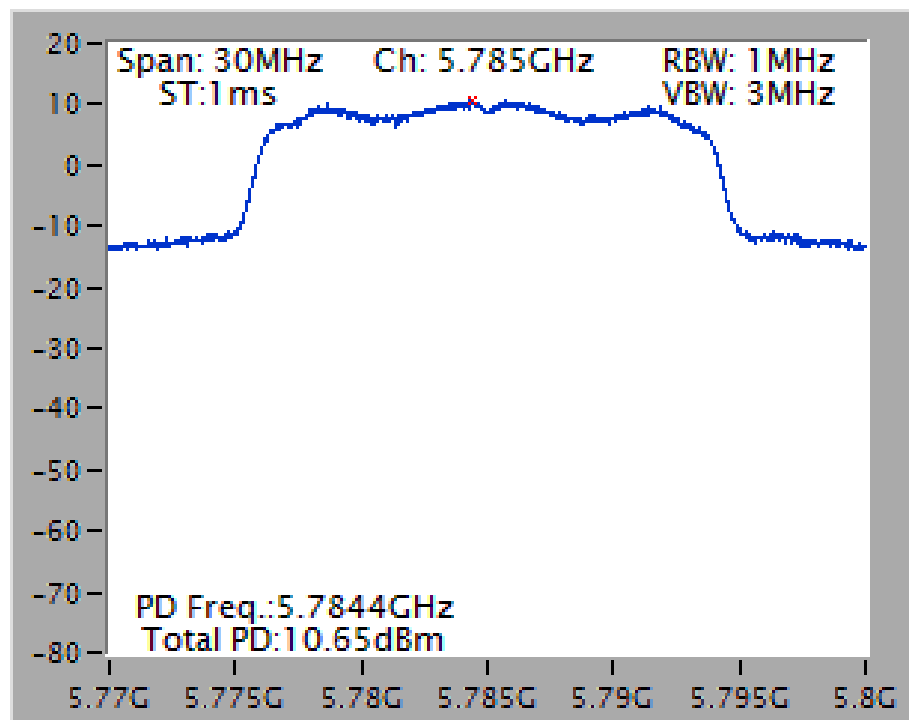

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3 / 5230 MHz

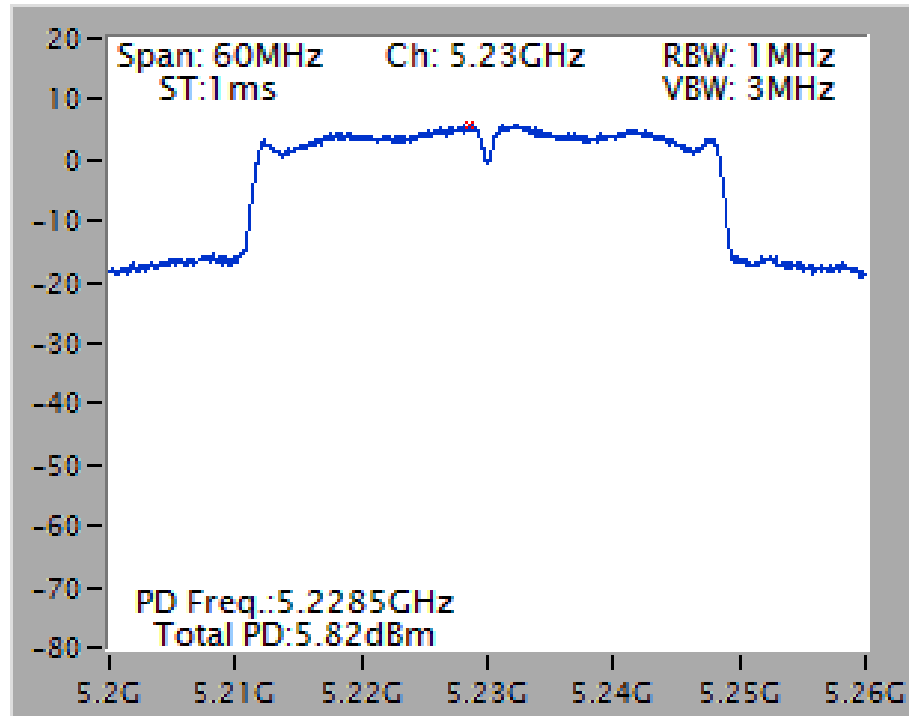

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 2 + Ant. 3 / 5795 MHz

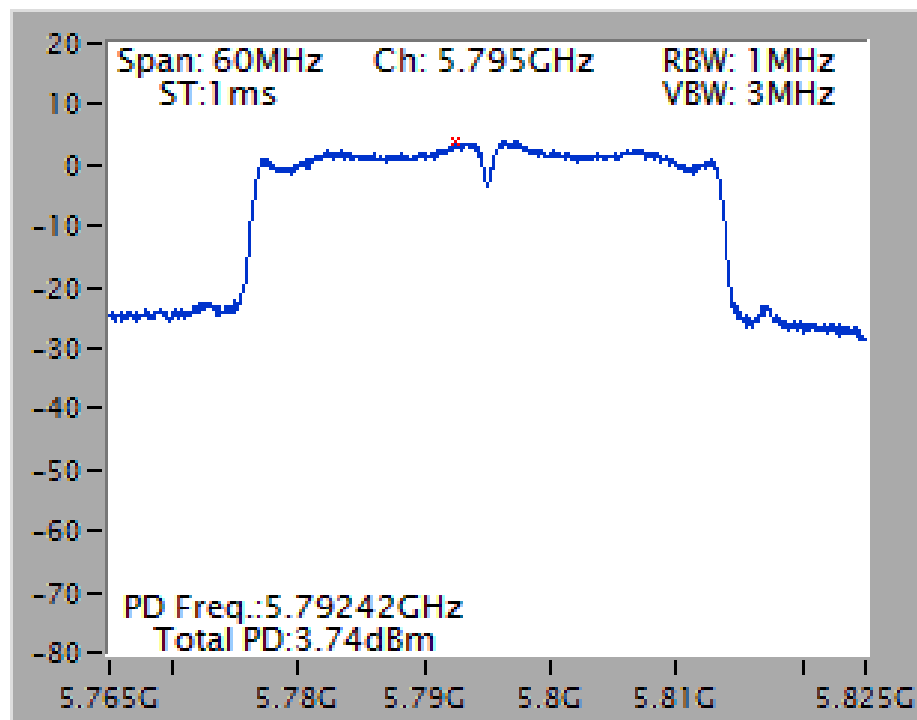

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

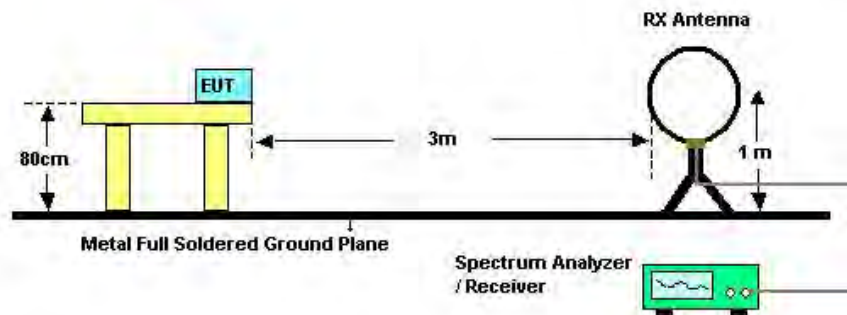

For Radiated Emissions: 30MHz~1GHz

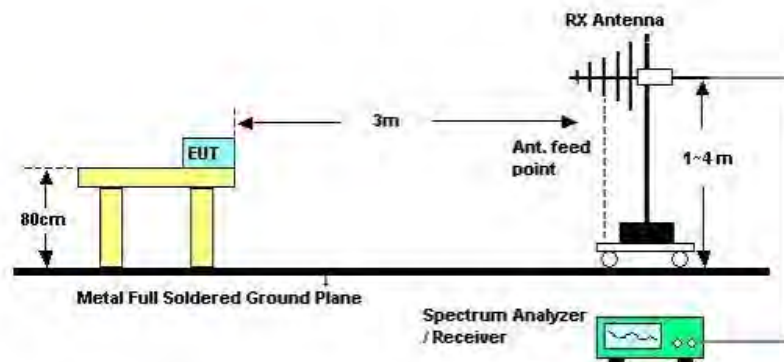

For Radiated Emissions: Above 1GHz

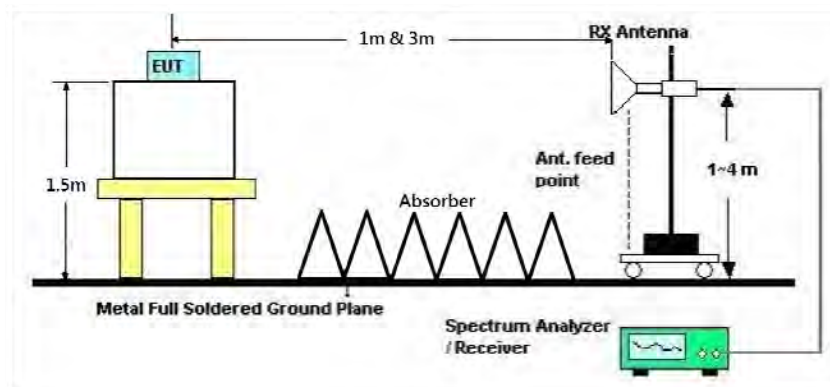

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	61%
Test Engineer	Lucke Hsieh	Configurations	Normal Link
Test Date	Apr. 02, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	61%
Test Engineer	Lucke Hsieh	Configurations	Normal Link

Horizontal

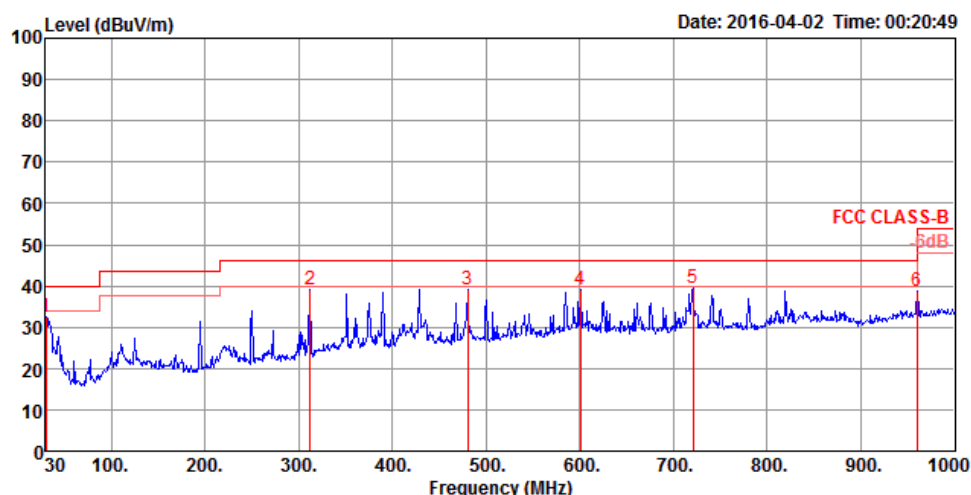

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	32.51	40.00	-7.49	38.82	0.49	25.60	32.40	100	359 Peak	HORIZONTAL
2	312.27	39.06	46.00	-6.94	49.49	1.51	20.35	32.29	150	120 Peak	HORIZONTAL
3	480.08	39.13	46.00	-6.87	45.87	1.90	23.71	32.35	150	191 Peak	HORIZONTAL
4	600.36	39.23	46.00	-6.77	44.12	2.12	25.40	32.41	125	24 Peak	HORIZONTAL
5	720.64	39.43	46.00	-6.57	43.33	2.32	26.12	32.34	150	32 Peak	HORIZONTAL
6	960.23	38.88	54.00	-15.12	39.18	2.69	28.20	31.19	125	68 Peak	HORIZONTAL

Vertical

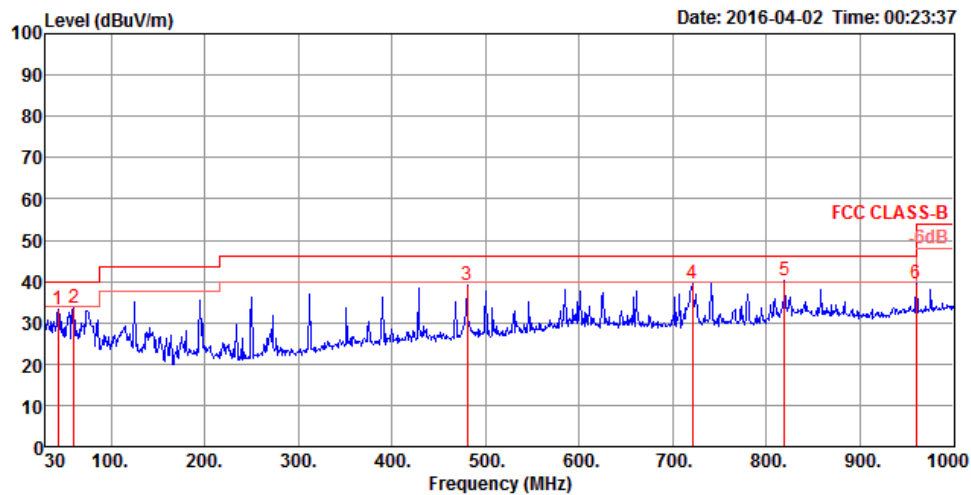

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	43.58	33.33	40.00	-6.67	47.15	0.58	18.01	32.41	100	127 Peak	VERTICAL
2	60.07	33.62	40.00	-6.38	51.63	0.69	13.70	32.40	100	224 Peak	VERTICAL
3	480.08	39.02	46.00	-6.98	45.76	1.90	23.71	32.35	100	139 Peak	VERTICAL
4	720.64	39.60	46.00	-6.40	43.50	2.32	26.12	32.34	125	60 Peak	VERTICAL
5	819.58	40.09	46.00	-5.91	42.72	2.48	27.03	32.14	150	30 Peak	VERTICAL
6	960.23	39.47	54.00	-14.53	39.77	2.69	28.20	31.19	125	234 Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 36 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15538.00	50.11	54.00	-3.89	33.57	13.78	38.38	35.62	186	234 Average	HORIZONTAL
2	15538.20	63.74	74.00	-10.26	47.20	13.78	38.38	35.62	186	234 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15535.52	65.05	74.00	-8.95	48.51	13.78	38.38	35.62	186	246 Peak	VERTICAL
2	15540.80	50.34	54.00	-3.66	33.80	13.78	38.38	35.62	186	246 Average	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 40 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15592.76	64.70	74.00	-9.30	48.23	13.83	38.26	35.62	187	254	Peak
2	15597.92	50.87	54.00	-3.13	34.40	13.83	38.26	35.62	187	254	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15600.92	50.78	54.00	-3.22	34.38	13.87	38.15	35.62	190	256	Average
2	15605.92	65.12	74.00	-8.88	48.72	13.87	38.15	35.62	190	256	Peak

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 48 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15718.68	50.84	54.00	-3.16	34.63	13.95	37.91	35.65	184	254 Average	HORIZONTAL
2	15723.48	66.13	74.00	-7.87	49.92	13.95	37.91	35.65	184	254 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15721.60	50.49	54.00	-3.51	34.28	13.95	37.91	35.65	185	267 Average	VERTICAL
2	15726.16	64.42	74.00	-9.58	48.21	13.95	37.91	35.65	185	267 Peak	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 149 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11490.44	46.23	54.00	-7.77	30.66	11.02	39.90	35.35	212	127 Average	HORIZONTAL
2	11495.28	59.96	74.00	-14.04	44.39	11.02	39.90	35.35	212	127 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11496.36	56.65	74.00	-17.35	41.08	11.02	39.90	35.35	208	161 Peak	VERTICAL
2	11496.80	43.50	54.00	-10.50	27.93	11.02	39.90	35.35	208	161 Average	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 157 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11569.76	50.83	54.00	-3.17	35.38	11.05	39.77	35.37	212	42 Average	HORIZONTAL
2	11569.80	65.04	74.00	-8.96	49.59	11.05	39.77	35.37	212	42 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11561.08	56.09	74.00	-17.91	40.64	11.05	39.77	35.37	210	206 Peak	VERTICAL
2	11569.84	43.47	54.00	-10.53	28.02	11.05	39.77	35.37	210	206 Average	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 165 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11649.96	48.74	54.00	-5.26	33.42	11.08	39.63	35.39	188	34	Average	HORIZONTAL
2	11650.08	63.27	74.00	-10.73	47.95	11.08	39.63	35.39	188	34	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11651.80	43.53	54.00	-10.47	28.26	11.09	39.57	35.39	178	294	Average	VERTICAL
2	11656.08	56.15	74.00	-17.85	40.88	11.09	39.57	35.39	178	294	Peak	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 36 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15533.88	65.26	74.00	-8.74	48.72	13.78	38.38	35.62	186	253 Peak	HORIZONTAL
2	15536.60	50.03	54.00	-3.97	33.49	13.78	38.38	35.62	186	253 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15537.60	49.77	54.00	-4.23	33.23	13.78	38.38	35.62	194	108 Average	VERTICAL
2	15542.04	63.20	74.00	-10.80	46.66	13.78	38.38	35.62	194	108 Peak	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 40 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15596.68	50.80	54.00	-3.20	34.33	13.83	38.26	35.62	182	258 Average	HORIZONTAL
2	15602.00	65.55	74.00	-8.45	49.15	13.87	38.15	35.62	182	258 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15597.48	64.70	74.00	-9.30	48.23	13.83	38.26	35.62	185	248 Peak	VERTICAL
2	15600.28	50.72	54.00	-3.28	34.25	13.83	38.26	35.62	185	248 Average	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 48 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15721.68	50.90	54.00	-3.10	34.69	13.95	37.91	35.65	185	251 Average	HORIZONTAL
2	15726.56	65.25	74.00	-8.75	49.04	13.95	37.91	35.65	185	251 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15718.36	65.97	74.00	-8.03	49.76	13.95	37.91	35.65	182	265 Peak	VERTICAL
2	15720.92	50.73	54.00	-3.27	34.52	13.95	37.91	35.65	182	265 Average	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 149 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11489.88	46.24	54.00	-7.76	30.67	11.02	39.90	35.35	188	28 Average	HORIZONTAL
2	11490.00	60.90	74.00	-13.10	45.33	11.02	39.90	35.35	188	28 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11490.96	43.76	54.00	-10.24	28.19	11.02	39.90	35.35	166	253 Average	VERTICAL
2	11496.88	57.03	74.00	-16.97	41.46	11.02	39.90	35.35	166	253 Peak	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 157 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11569.88	63.50	74.00	-10.50	48.05	11.05	39.77	35.37	208	132 Peak	HORIZONTAL
2	11570.24	49.20	54.00	-4.80	33.75	11.05	39.77	35.37	208	132 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11569.88	47.09	54.00	-6.91	31.64	11.05	39.77	35.37	283	56 Average	VERTICAL
2	11569.92	63.23	74.00	-10.77	47.78	11.05	39.77	35.37	283	56 Peak	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 165 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.04	60.14	74.00	-13.86	44.82	11.08	39.63	35.39	208	141	Peak	HORIZONTAL
2	11650.20	46.35	54.00	-7.65	31.03	11.08	39.63	35.39	208	141	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11644.44	57.38	74.00	-16.62	42.06	11.08	39.63	35.39	185	136	Peak	VERTICAL
2	11657.76	43.75	54.00	-10.25	28.48	11.09	39.57	35.39	185	136	Average	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 38 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15568.88	48.21	54.00	-5.79	31.74	13.83	38.26	35.62	187	249 Average	HORIZONTAL
2	15575.36	61.32	74.00	-12.68	44.85	13.83	38.26	35.62	187	249 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15577.92	48.26	54.00	-5.74	31.79	13.83	38.26	35.62	185	292 Average	VERTICAL
2	15579.96	61.46	74.00	-12.54	44.99	13.83	38.26	35.62	185	292 Peak	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 46 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15694.12	62.69	74.00	-11.31	46.47	13.95	37.91	35.64	186	249 Peak	HORIZONTAL
2	15694.24	49.85	54.00	-4.15	33.63	13.95	37.91	35.64	186	249 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	15687.72	62.22	74.00	-11.78	45.92	13.91	38.03	35.64	185	247 Peak	VERTICAL
2	15693.28	49.12	54.00	-4.88	32.90	13.95	37.91	35.64	185	247 Average	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 151 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11507.28	43.46	54.00	-10.54	27.89	11.02	39.90	35.35	193	246 Average	HORIZONTAL
2	11518.64	56.28	74.00	-17.72	40.77	11.04	39.83	35.36	193	246 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11507.96	43.29	54.00	-10.71	27.72	11.02	39.90	35.35	176	235 Average	VERTICAL
2	11518.88	56.45	74.00	-17.55	40.94	11.04	39.83	35.36	176	235 Peak	VERTICAL

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 159 / Ant. 2 + Ant. 3
Test Date	Mar. 02, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11581.16	55.91	74.00	-18.09	40.46	11.05	39.77	35.37	249	213 Peak	HORIZONTAL
2	11597.72	43.34	54.00	-10.66	27.96	11.06	39.70	35.38	249	213 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg	
1	11580.04	56.33	74.00	-17.67	40.88	11.05	39.77	35.37	233	174 Peak	VERTICAL
2	11580.92	42.87	54.00	-11.13	27.42	11.05	39.77	35.37	233	174 Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3 MHz for Peak

4.7.3. Test Procedures

The test procedure is the same as section 4.6.3.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 2 + Ant. 3
Test Date	Mar. 01, 2016~Mar. 02, 2016		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5150.00	52.85	54.00	-1.15	47.77	7.26	31.45	33.63	289	218	Average	HORIZONTAL
2	5150.00	70.87	74.00	-3.13	65.79	7.26	31.45	33.63	289	218	Peak	HORIZONTAL
3 0	5180.80	100.75			95.58	7.31	31.48	33.62	289	218	Average	HORIZONTAL
4 0	5186.20	110.71			105.54	7.31	31.48	33.62	289	218	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5149.60	47.91	54.00	-6.09	42.83	7.26	31.45	33.63	292	211	Average	HORIZONTAL
2	5149.60	62.85	74.00	-11.15	57.77	7.26	31.45	33.63	292	211	Peak	HORIZONTAL
3 0	5201.20	112.08			106.86	7.34	31.50	33.62	292	211	Peak	HORIZONTAL
4 0	5201.60	102.83			97.58	7.36	31.51	33.62	292	211	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5150.00	44.27	54.00	-9.73	39.19	7.26	31.45	33.63	285	212	Average	HORIZONTAL
2	5150.00	56.29	74.00	-17.71	51.21	7.26	31.45	33.63	285	212	Peak	HORIZONTAL
3 0	5241.20	103.02			97.70	7.40	31.54	33.62	285	212	Average	HORIZONTAL
4 0	5241.80	112.80			107.47	7.40	31.54	33.61	285	212	Peak	HORIZONTAL
5	5350.00	46.24	54.00	-7.76	40.64	7.55	31.65	33.60	285	212	Average	HORIZONTAL
6	5350.00	58.86	74.00	-15.14	53.26	7.55	31.65	33.60	285	212	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11a CH 149, 157, 165 / Ant. 2 + Ant. 3
Test Date	Mar. 01, 2016~Mar. 02, 2016		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5713.40	51.11	54.00	-2.89	45.17	7.48	32.06	33.60	253	245 Average	HORIZONTAL
2	5714.60	69.12	74.00	-4.88	63.18	7.48	32.06	33.60	253	245 Peak	HORIZONTAL
3	5724.40	76.98	78.20	-1.22	71.08	7.42	32.08	33.60	253	245 Peak	HORIZONTAL
4 0	5744.40	109.14			103.28	7.36	32.10	33.60	253	245 Peak	HORIZONTAL
5 0	5744.60	99.37			93.51	7.36	32.10	33.60	253	245 Average	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5653.60	59.41	74.00	-14.59	53.30	7.72	31.98	33.59	265	211 Peak	HORIZONTAL
2	5712.40	46.51	54.00	-7.49	40.57	7.48	32.06	33.60	265	211 Average	HORIZONTAL
3	5723.20	59.73	78.20	-18.47	53.83	7.42	32.08	33.60	265	211 Peak	HORIZONTAL
4 0	5784.40	103.20			97.42	7.24	32.14	33.60	265	211 Average	HORIZONTAL
5 0	5784.40	112.93			107.15	7.24	32.14	33.60	265	211 Peak	HORIZONTAL
6	5852.40	59.51	78.20	-18.69	53.67	7.23	32.22	33.61	265	211 Peak	HORIZONTAL
7	5860.00	45.89	54.00	-8.11	40.01	7.25	32.24	33.61	265	211 Average	HORIZONTAL
8	5860.60	58.63	74.00	-15.37	52.75	7.25	32.24	33.61	265	211 Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 0	5824.20	101.73			95.92	7.22	32.20	33.61	264	209 Average	HORIZONTAL
2 0	5824.40	111.55			105.74	7.22	32.20	33.61	264	209 Peak	HORIZONTAL
3	5850.00	74.83	78.20	-3.37	68.99	7.23	32.22	33.61	264	209 Peak	HORIZONTAL
4	5860.00	52.87	54.00	-1.13	46.99	7.25	32.24	33.61	264	209 Average	HORIZONTAL
5	5860.80	69.18	74.00	-4.82	63.30	7.25	32.24	33.61	264	209 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 36, 40, 48 / Ant. 2 + Ant. 3
Test Date	Mar. 01, 2016~Mar. 02, 2016		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5148.20	70.33	74.00	-3.67	65.25	7.26	31.45	33.63	291	217	Peak	HORIZONTAL
2	5148.40	52.78	54.00	-1.22	47.70	7.26	31.45	33.63	291	217	Average	HORIZONTAL
3 0	5180.60	99.86			94.69	7.31	31.48	33.62	291	217	Average	HORIZONTAL
4 0	5180.60	110.23			105.06	7.31	31.48	33.62	291	217	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5145.60	65.71	74.00	-8.29	60.63	7.26	31.45	33.63	291	212	Peak	HORIZONTAL
2	5149.20	48.43	54.00	-5.57	43.35	7.26	31.45	33.63	291	212	Average	HORIZONTAL
3 0	5198.40	112.30			107.08	7.34	31.50	33.62	291	212	Peak	HORIZONTAL
4 0	5200.40	101.91			96.69	7.34	31.50	33.62	291	212	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5145.20	57.50	74.00	-16.50	52.42	7.26	31.45	33.63	290	214	Peak	HORIZONTAL
2	5150.00	44.84	54.00	-9.16	39.76	7.26	31.45	33.63	290	214	Average	HORIZONTAL
3 0	5238.20	103.46			98.14	7.40	31.54	33.62	290	214	Average	HORIZONTAL
4 0	5241.20	113.83			108.51	7.40	31.54	33.62	290	214	Peak	HORIZONTAL
5	5350.00	46.44	54.00	-7.56	40.84	7.55	31.65	33.60	290	214	Average	HORIZONTAL
6	5353.60	59.42	74.00	-14.58	53.82	7.55	31.65	33.60	290	214	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT20 CH 149, 157, 165 / Ant. 2 + Ant. 3
Test Date	Mar. 01, 2016		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5713.80	52.10	54.00	-1.90	46.16	7.48	32.06	33.60	267	209 Average	HORIZONTAL
2	5714.20	70.75	74.00	-3.25	64.81	7.48	32.06	33.60	267	209 Peak	HORIZONTAL
3	5724.00	77.15	78.20	-1.05	71.25	7.42	32.08	33.60	267	209 Peak	HORIZONTAL
4 0	5744.40	109.90			104.04	7.36	32.10	33.60	267	209 Peak	HORIZONTAL
5 0	5744.60	100.01			94.15	7.36	32.10	33.60	267	209 Average	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5711.80	48.18	54.00	-5.82	42.24	7.48	32.06	33.60	265	213 Average	HORIZONTAL
2	5711.80	63.20	74.00	-10.80	57.26	7.48	32.06	33.60	265	213 Peak	HORIZONTAL
3	5724.40	68.34	78.20	-9.86	62.44	7.42	32.08	33.60	265	213 Peak	HORIZONTAL
4 0	5784.40	104.81			99.03	7.24	32.14	33.60	265	213 Average	HORIZONTAL
5 0	5784.40	114.19			108.41	7.24	32.14	33.60	265	213 Peak	HORIZONTAL
6	5850.40	64.64	78.20	-13.56	58.80	7.23	32.22	33.61	265	213 Peak	HORIZONTAL
7	5860.60	47.76	54.00	-6.24	41.88	7.25	32.24	33.61	265	213 Average	HORIZONTAL
8	5860.60	63.49	74.00	-10.51	57.61	7.25	32.24	33.61	265	213 Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1 0	5824.40	110.54			104.73	7.22	32.20	33.61	261	208 Peak	HORIZONTAL
2 0	5824.60	100.67			94.86	7.22	32.20	33.61	261	208 Average	HORIZONTAL
3	5850.00	74.53	78.20	-3.67	68.69	7.23	32.22	33.61	261	208 Peak	HORIZONTAL
4	5860.00	52.93	54.00	-1.07	47.05	7.25	32.24	33.61	261	208 Average	HORIZONTAL
5	5862.20	69.67	74.00	-4.33	63.79	7.25	32.24	33.61	261	208 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 38, 46 / Ant. 2 + Ant. 3
Test Date	Mar. 01, 2016		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5148.40	67.14	74.00	-6.86	62.06	7.26	31.45	33.63	300	210	Peak	HORIZONTAL
2	5150.00	52.92	54.00	-1.08	47.84	7.26	31.45	33.63	300	210	Average	HORIZONTAL
3 0	5188.40	101.39			96.17	7.34	31.50	33.62	300	210	Peak	HORIZONTAL
4 0	5191.20	92.13			86.91	7.34	31.50	33.62	300	210	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5150.00	52.84	54.00	-1.16	47.76	7.26	31.45	33.63	300	140	Average	HORIZONTAL
2	5150.00	68.75	74.00	-5.25	63.67	7.26	31.45	33.63	300	140	Peak	HORIZONTAL
3 0	5228.20	109.09			103.80	7.38	31.53	33.62	300	140	Peak	HORIZONTAL
4 0	5228.80	100.04			94.75	7.38	31.53	33.62	300	140	Average	HORIZONTAL
5	5350.60	47.41	54.00	-6.59	41.81	7.55	31.65	33.60	300	140	Average	HORIZONTAL
6	5359.60	61.16	74.00	-12.84	55.53	7.57	31.66	33.60	300	140	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	22°C	Humidity	50%
Test Engineer	Lucke Hsieh/Paul Chen/ Akina Chiu	Configurations	IEEE 802.11n MCS0 HT40 CH 151, 159 / Ant. 2 + Ant. 3
Test Date	Mar. 01, 2016~Mar. 02, 2016		

Channel 151

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5713.40	67.47	74.00	-6.53	61.53	7.48	32.06	33.60	176	170	Peak	VERTICAL
2	5715.00	52.89	54.00	-1.11	46.95	7.48	32.06	33.60	176	170	Average	VERTICAL
3	5721.00	70.26	78.20	-7.94	64.32	7.48	32.06	33.60	176	170	Peak	VERTICAL
4 0	5753.40	90.72			84.86	7.36	32.10	33.60	176	170	Average	VERTICAL
5 0	5753.40	101.62			95.76	7.36	32.10	33.60	176	170	Peak	VERTICAL

Item 4, 5 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5706.80	60.51	74.00	-13.49	54.57	7.48	32.06	33.60	264	243	Peak	HORIZONTAL
2	5714.60	47.70	54.00	-6.30	41.76	7.48	32.06	33.60	264	243	Average	HORIZONTAL
3	5724.20	67.12	78.20	-11.08	61.22	7.42	32.08	33.60	264	243	Peak	HORIZONTAL
4 0	5797.40	97.65			91.91	7.18	32.16	33.60	264	243	Average	HORIZONTAL
5 0	5797.40	106.49			100.75	7.18	32.16	33.60	264	243	Peak	HORIZONTAL
6	5850.80	69.30	78.20	-8.90	63.46	7.23	32.22	33.61	264	243	Peak	HORIZONTAL
7	5860.40	52.79	54.00	-1.21	46.91	7.25	32.24	33.61	264	243	Average	HORIZONTAL
8	5860.40	69.13	74.00	-4.87	63.25	7.25	32.24	33.61	264	243	Peak	HORIZONTAL

Item 4, 5 are the fundamental frequency at 5795 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

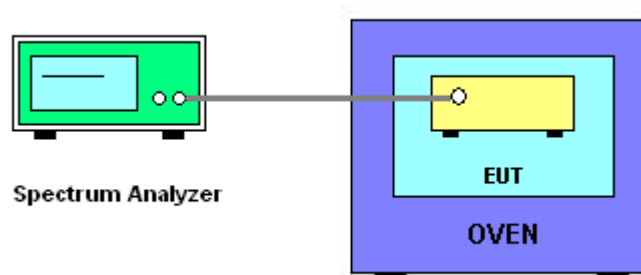

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu	Test Date	Apr. 07, 2016

Mode: 20 MHz / Ant. 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5199.9916	5199.9910	5199.9908	5199.9903
110.00	5199.9912	5199.9906	5199.9897	5199.9888
93.50	5199.9908	5199.9905	5199.9900	5199.9890
Max. Deviation (MHz)	0.0092	0.0095	0.0103	0.0112
Max. Deviation (ppm)	1.77	1.83	1.98	2.15
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5200.0036	5200.0022	5200.0004	5199.9981
-20	5200.0020	5200.0007	5199.9990	5199.9966
-10	5200.0005	5199.9993	5199.9977	5199.9958
0	5199.9991	5199.9979	5199.9960	5199.9938
10	5199.9978	5199.9965	5199.9950	5199.9932
20	5199.9966	5199.9953	5199.9937	5199.9918
30	5199.9952	5199.9941	5199.9927	5199.9911
40	5199.9936	5199.9921	5199.9905	5199.9885
50	5199.9919	5199.9907	5199.9892	5199.9865
Max. Deviation (MHz)	0.0081	0.0093	0.0108	0.0135
Max. Deviation (ppm)	1.56	1.79	2.08	2.60
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9952	5784.9944	5784.9943	5784.9936
110.00	5784.9948	5784.9942	5784.9933	5784.9926
93.50	5784.9947	5784.9941	5784.9940	5784.9935
Max. Deviation (MHz)	0.0053	0.0059	0.0067	0.0074
Max. Deviation (ppm)	0.92	1.02	1.16	1.28
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5785.0014	5785.0000	5784.9982	5784.9959
-20	5784.9998	5784.9985	5784.9968	5784.9944
-10	5784.9983	5784.9971	5784.9955	5784.9936
0	5784.9969	5784.9957	5784.9938	5784.9916
10	5784.9956	5784.9943	5784.9928	5784.9910
20	5784.9944	5784.9931	5784.9915	5784.9896
30	5784.9930	5784.9919	5784.9905	5784.9889
40	5784.9914	5784.9899	5784.9883	5784.9863
50	5784.9897	5784.9885	5784.9870	5784.9843
Max. Deviation (MHz)	0.0103	0.0115	0.0130	0.0157
Max. Deviation (ppm)	1.78	1.99	2.25	2.71
Result	Complies			

Mode: 40 MHz / Ant. 3

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5189.9945	5189.9941	5189.9940	5189.9937
110.00	5189.9944	5189.9942	5189.9934	5189.9925
93.50	5189.9936	5189.9935	5189.9934	5189.9930
Max. Deviation (MHz)	0.0064	0.0065	0.0066	0.0075
Max. Deviation (ppm)	1.23	1.25	1.27	1.45
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5189.9985	5189.9971	5189.9953	5189.9930
-20	5189.9969	5189.9956	5189.9939	5189.9915
-10	5189.9954	5189.9942	5189.9926	5189.9907
0	5189.9940	5189.9928	5189.9909	5189.9887
10	5189.9927	5189.9914	5189.9899	5189.9881
20	5189.9915	5189.9902	5189.9886	5189.9867
30	5189.9901	5189.9890	5189.9876	5189.9860
40	5189.9885	5189.9870	5189.9854	5189.9834
50	5189.9868	5189.9856	5189.9841	5189.9814
Max. Deviation (MHz)	0.0132	0.0144	0.0159	0.0186
Max. Deviation (ppm)	2.54	2.77	3.06	3.58
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9944	5754.9937	5754.9933	5754.9929
110.00	5754.9943	5754.9938	5754.9936	5754.9933
93.50	5754.9936	5754.9935	5754.9927	5754.9926
Max. Deviation (MHz)	0.0064	0.0065	0.0073	0.0074
Max. Deviation (ppm)	1.11	1.13	1.27	1.29
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5754.9971	5754.9957	5754.9939	5754.9916
-20	5754.9955	5754.9942	5754.9925	5754.9901
-10	5754.9940	5754.9928	5754.9912	5754.9893
0	5754.9926	5754.9914	5754.9895	5754.9873
10	5754.9913	5754.9900	5754.9885	5754.9867
20	5754.9901	5754.9888	5754.9872	5754.9853
30	5754.9887	5754.9876	5754.9862	5754.9846
40	5754.9871	5754.9856	5754.9840	5754.9820
50	5754.9854	5754.9842	5754.9827	5754.9800
Max. Deviation (MHz)	0.0146	0.0158	0.0173	0.0200
Max. Deviation (ppm)	2.54	2.75	3.01	3.48
Result	Complies			

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10940	0.1MHz ~ 1.3GHz	Feb. 24, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov.13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%