



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Belkin International, Inc.
Applicant Address	12045 East Waterfront Drive, Playa Vista, CA 90094
FCC ID	K7SF9K1118V2

Product Name	AC1800 DB Wi-Fi Dual-Band AC+ Gigabit Router
Brand Name	Belkin
Model No.	F9K1118v2
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Apr. 03, 2013
Final Test Date	Apr. 26, 2013
Submission Type	Original Equipment
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009**,

47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03 and KDB 662911 D01 v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details	3
3.2. Accessories	5
3.3. Table for Filed Antenna	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	9
3.8. Table for Parameters of Test Software Setting	10
3.9. EUT Operation during Test.....	10
3.10. Duty Cycle.....	11
3.11. Test Configurations.....	13
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement	16
4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement.....	22
4.3. Maximum Conducted Output Power Measurement.....	30
4.4. Power Spectral Density Measurement.....	33
4.5. Peak Excursion Measurement	39
4.6. Radiated Emissions Measurement.....	53
4.7. Band Edge Emissions Measurement.....	70
4.8. Frequency Stability Measurement.....	76
4.9. Antenna Requirements	78
5. LIST OF MEASURING EQUIPMENTS	79
6. TEST LOCATION	81
APPENDIX A. PHOTOGRAPHS OF EUT	A1 ~ A15
APPENDIX B. TEST PHOTOS	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~ C3
APPENDIX D. CO-LOCATION REPORT	D1 ~ D3



1. CERTIFICATE OF COMPLIANCE

Product Name : AC1800 DB Wi-Fi Dual-Band AC+ Gigabit Router
Brand Name : Belkin
Model No. : F9K1118v2
Applicant : Belkin International, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 03, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen' is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.25 dB
4.2	15.407(a)	26dB Spectrum Bandwidth & 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.19 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.03 dB
4.5	15.407(a)	Peak Excursion	Complies	1.95 dB
4.6	15.407(b)	Radiated Emissions	Complies	3.04 dB
4.7	15.407(b)	Band Edge Emissions	Complies	1.11 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0, Nss1 (20MHz): 17.92 MHz ; 802.11ac MCS0, Nss1 (40MHz): 36.16 MHz ; 802.11ac MCS0, Nss1 (80MHz): 74.88 MHz
Maximum Conducted Output Power	802.11ac MCS0, Nss1 (20MHz): 14.25 dBm ; 802.11ac MCS0, Nss1 (40MHz): 15.76 dBm ; 802.11ac MCS0, Nss1 (80MHz): 15.81 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	4
Channel Band Width (99%)	16.96 MHz
Maximum Conducted Output Power	14.25 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Ant.s (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9, Nss1-3
802.11ac (VHT40)	3	MCS 0-9, Nss1-3
802.11ac (VHT80)	3	MCS 0-9, Nss1-3
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40 and VHT80 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80. Note 3: Modulation modes consist of below configuration: 11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac		

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	LEI	ML30-V120250-A1	INPUT: 120Vac, 60Hz, 0.8A OUTPUT: 12Vdc, 2.5A
Adapter 2	DVE.	DSA-30PFB-12 FUS 120250	INPUT: 100-240Vac, 50/60Hz, 0.8A OUTPUT: 12Vdc, 2.5A

3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Arcadyan	-	Dipole Antenna	I-PEX	3.98	-
2	Arcadyan	-	Dipole Antenna	I-PEX	4.60	-
3	Arcadyan	-	Dipole Antenna	I-PEX	-	4.11
4	Arcadyan	-	Dipole Antenna	I-PEX	-	4.06
5	Arcadyan	-	Dipole Antenna	I-PEX	-	4.09

Note: The EUT has five antennas.

<For 2.4GHz Band>

For IEEE 802.11b mode (1TX/1RX):

Only Ant. 1 can be used as transmitting/receiving antenna.


For IEEE 802.11n/g mode (2TX/2RX):

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

<For 5GHz Band>

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 3, Ant. 4 and Ant. 5 could transmit/receive simultaneously.

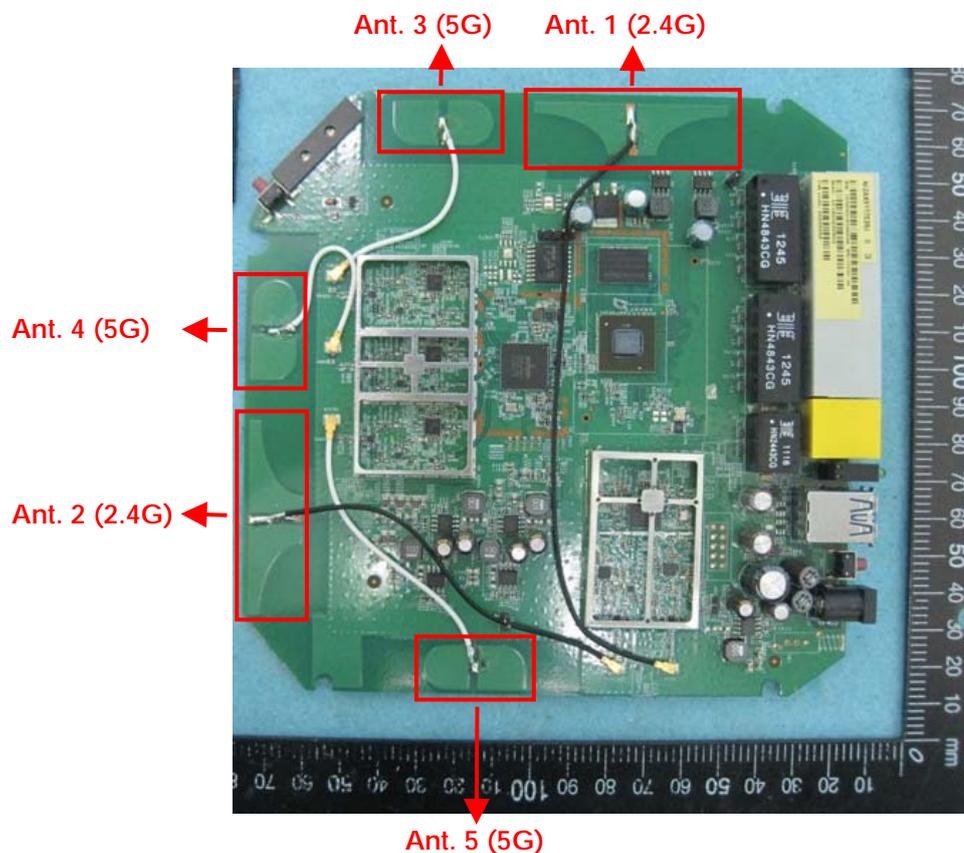

3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal link		-	-	-
Max. Conducted Output Power	11ac 20MHz	Band 1	MCS0, Nss1	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0, Nss1	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0, Nss1	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
Power Spectral Density	11ac 20MHz	Band 1	MCS0, Nss1	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0, Nss1	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0, Nss1	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	11ac 20MHz	Band 1	MCS0, Nss1	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0, Nss1	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0, Nss1	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
Radiated Emission Below 1GHz	Normal link		-	-	-
Radiated Emission Above 1GHz	11ac 20MHz	Band 1	MCS0, Nss1	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0, Nss1	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0, Nss1	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
Band Edge Emission	11ac 20MHz	Band 1	MCS0, Nss1	36/40/48	3+4+5
	11ac 40MHz	Band 1	MCS0, Nss1	38/46	3+4+5
	11ac 80MHz	Band 1	MCS0, Nss1	42	3+4+5
	11a	Band 1	6Mbps	36/40/48	3+4+5
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Upstanding EUT + Adapter 1

Mode 2. Upstanding EUT + Adapter 2

For Radiated Emissions below 1GHz test:

Mode 1. Upstanding EUT + Adapter 1

Mode 2. Upstanding EUT + Adapter 2

<For MPE and Co-location Test>:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix C) and Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

For AC Power Line Conducted Emissions and Radiated Emissions below 1GHz tests:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Notebook	DELL	E6430	QDS-BRCM1049LE
Flash disk3.0	Silicon	I-Series	DoC
Flash disk3.0	ADATA	C103	DoC

For Radiated Emissions above 1GHz, 26dB Spectrum Bandwidth, Maximum Conducted Output Power, Power Spectral Density, Peak Excursion, Band Edge Emissions and Frequency Stability tests:

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	QDS-BRCM1049LE

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5

Test Software Version	Manual Tool Version : 2.0.0.3		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	31	31	31

Power Parameters of IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5

Test Software Version	Manual Tool Version : 2.0.0.3	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	36	36

Power Parameters of IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5

Test Software Version	Manual Tool Version : 2.0.0.3
Frequency	5210 MHz
MCS0 80MHz	38

Power Parameters of IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5


Test Software Version	Manual Tool Version : 2.0.0.3		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11a	31	31	31

3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.10. Duty Cycle

IEEE 802.11ac MCS0, Nss1 20MHz

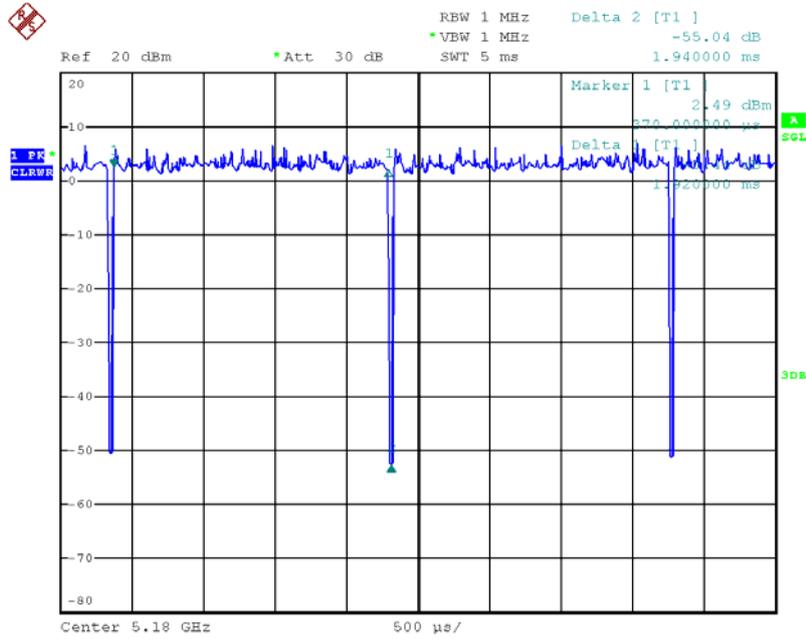


Date: 18.APR.2013 16:45:00

IEEE 802.11ac MCS0, Nss1 40MHz

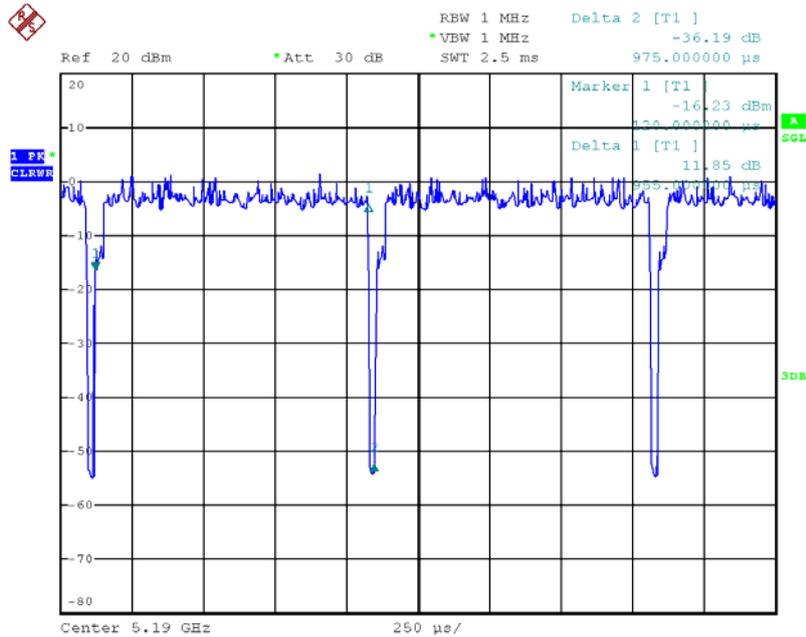


Date: 18.APR.2013 16:43:57

IEEE 802.11ac MCS0, Nss1 80MHz

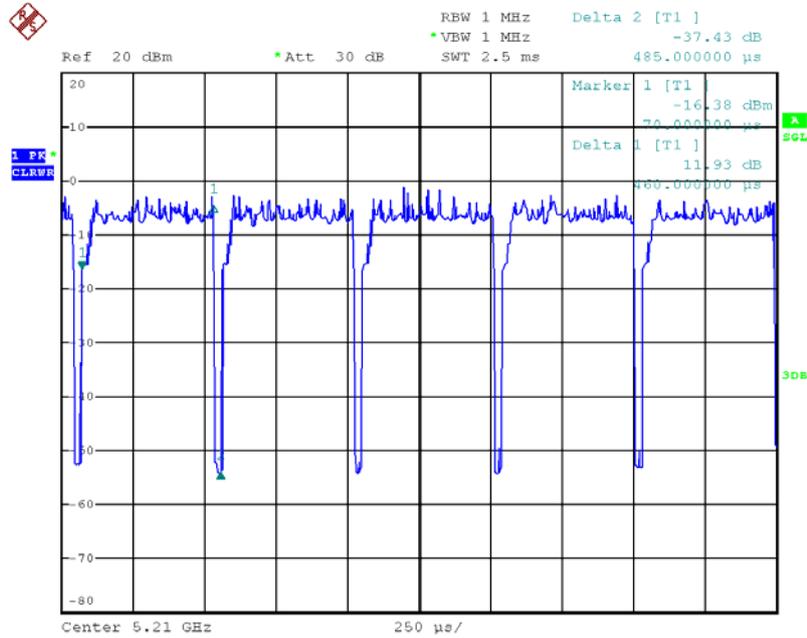

Date: 18.APR.2013 16:40:46


IEEE 802.11a

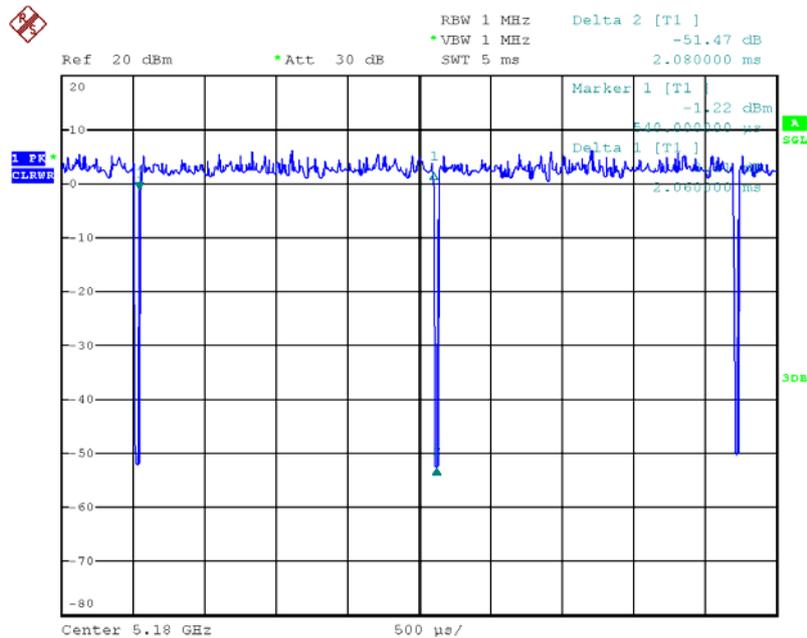

Date: 18.APR.2013 16:46:05

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

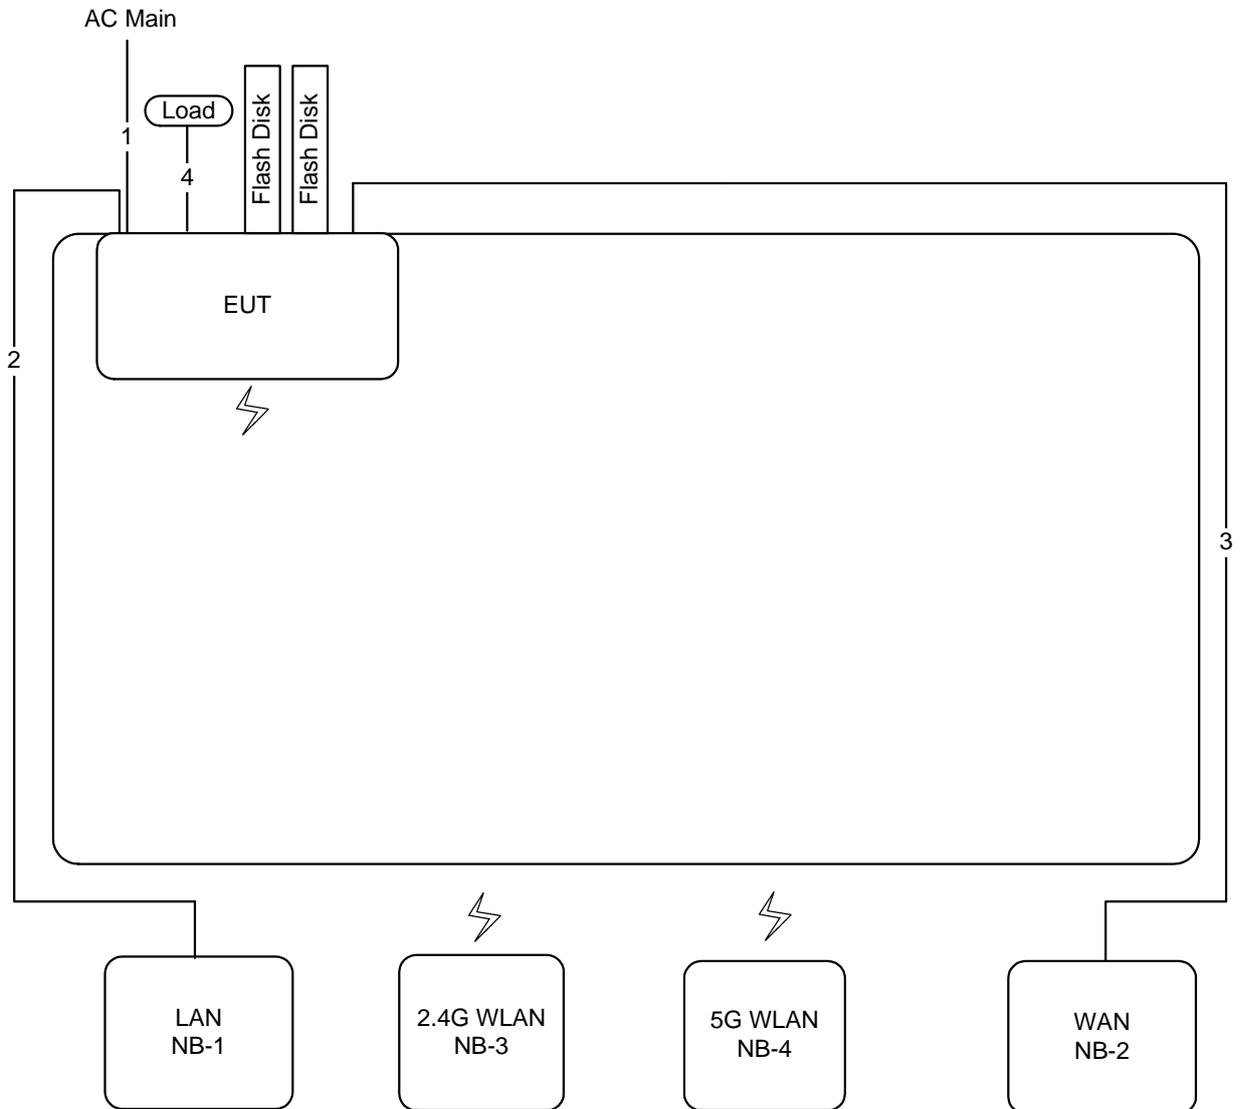

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

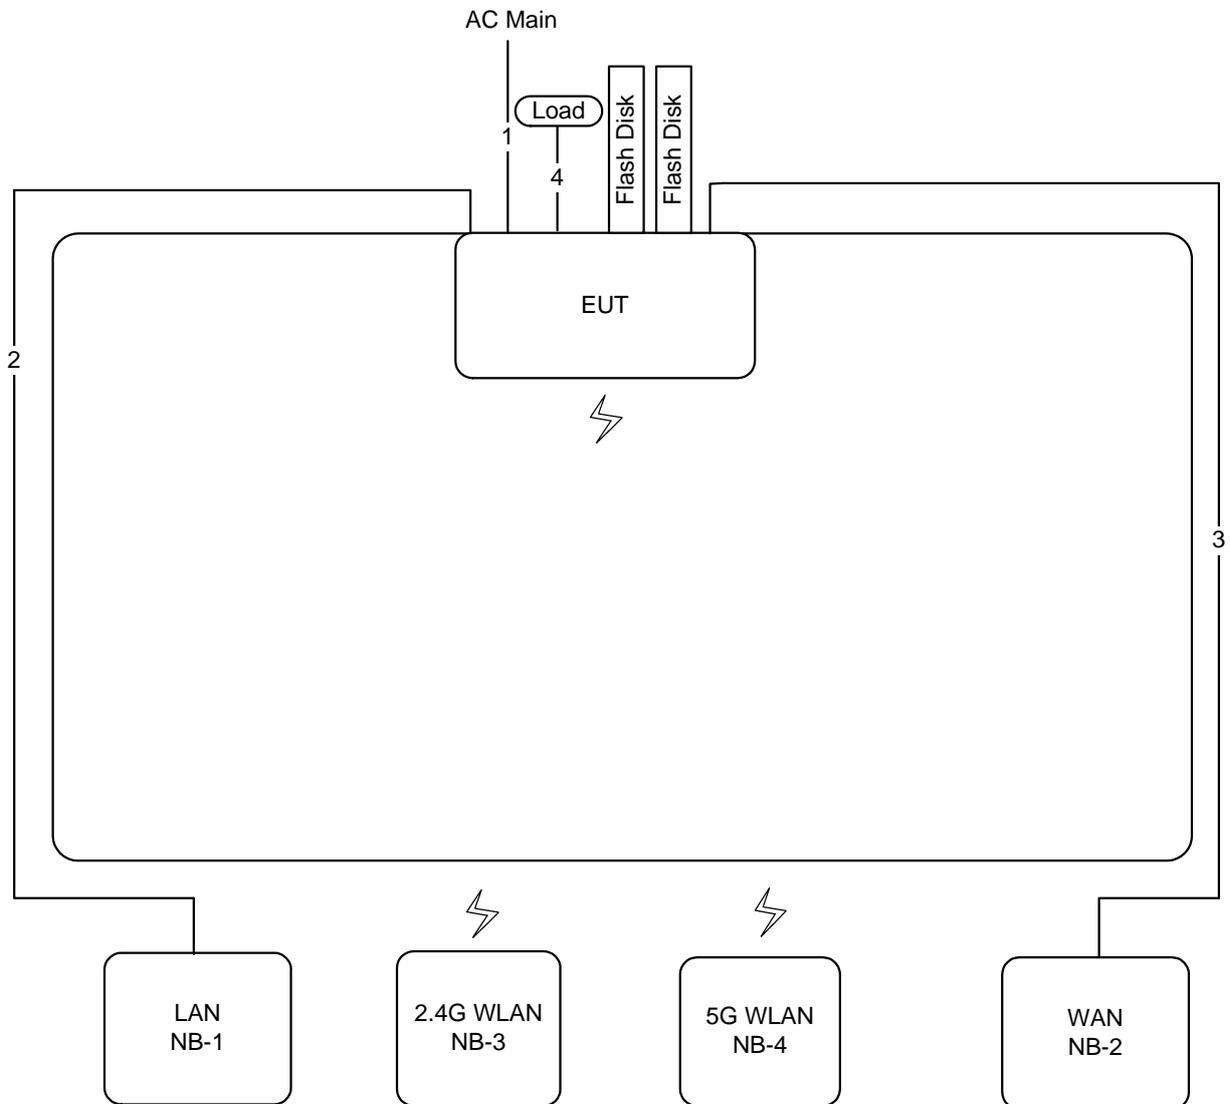

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1m

Test Configuration: above 1GHz

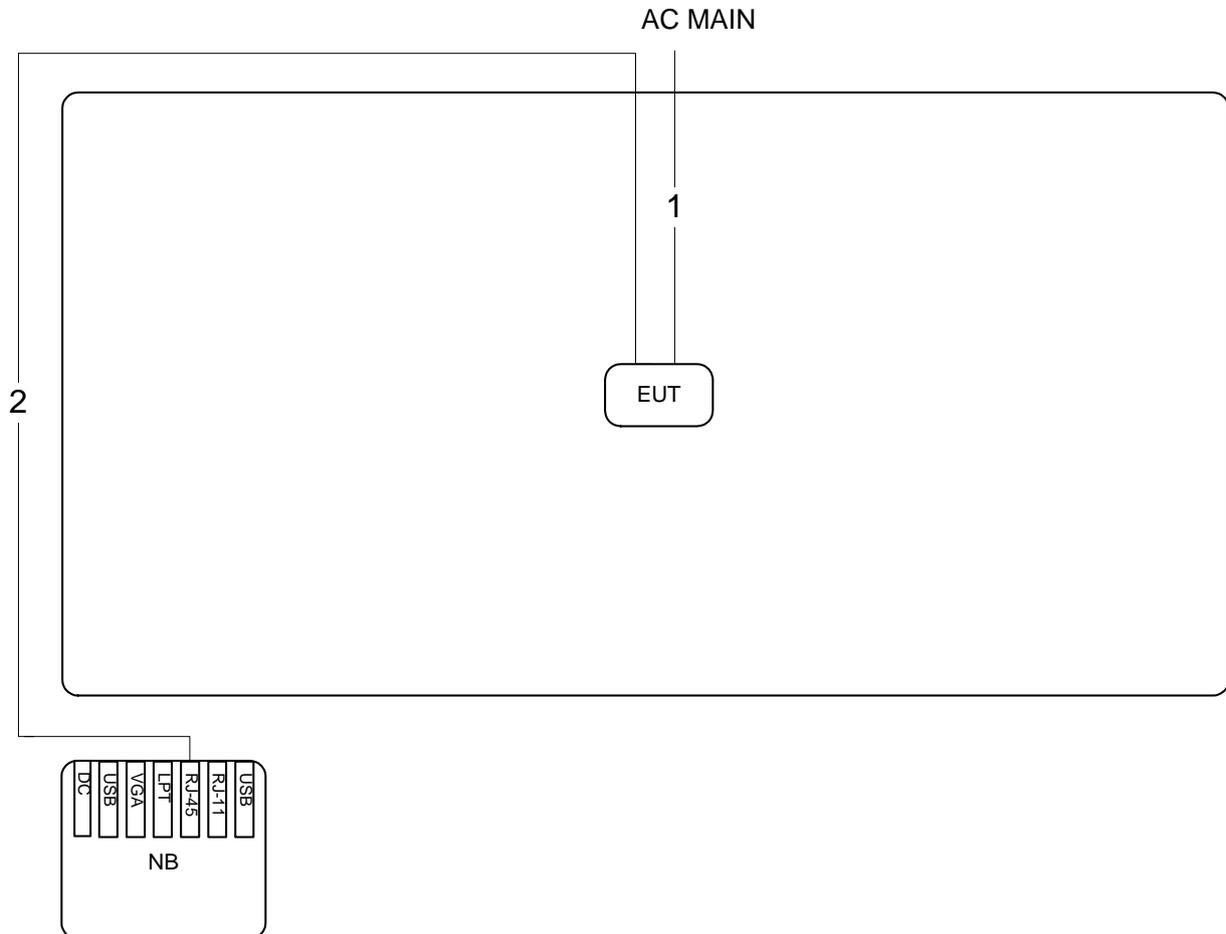

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

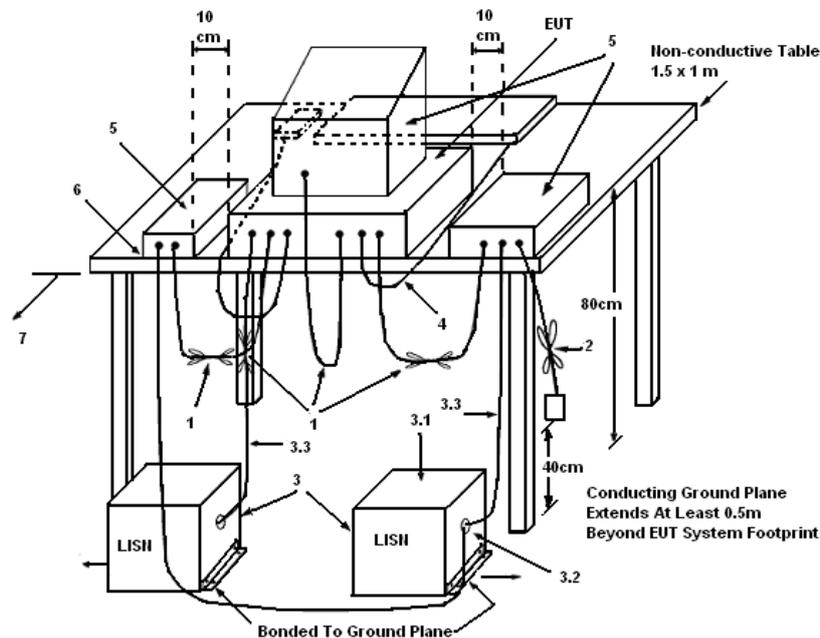

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	50%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 1.

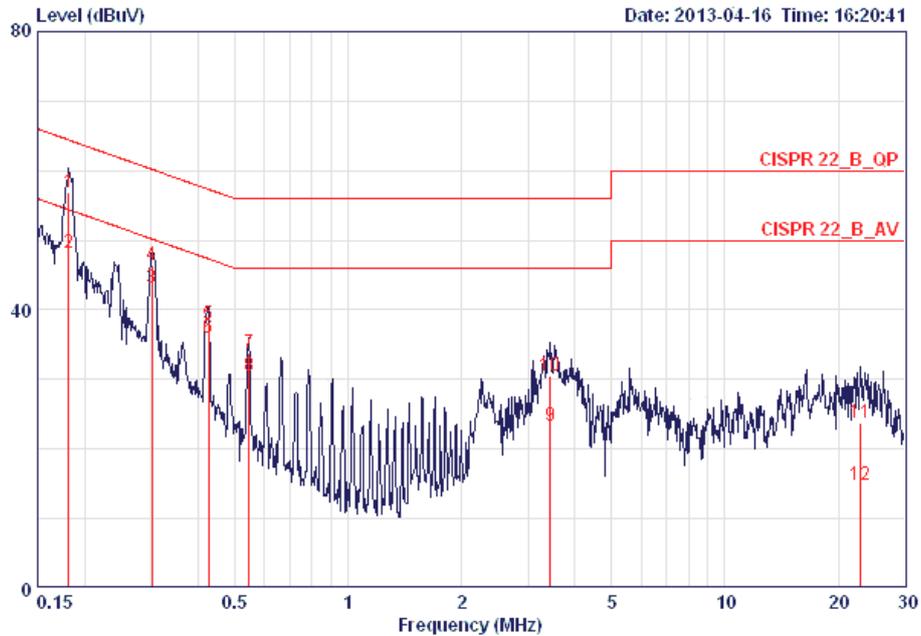

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18152	56.99	-7.42	64.42	56.65	0.15	0.19	QP
2	0.18152	48.16	-6.25	54.42	47.82	0.15	0.19	AVERAGE
3	0.30188	43.24	-6.95	50.19	42.89	0.15	0.20	AVERAGE
4	0.30188	46.40	-13.79	60.19	46.05	0.15	0.20	QP
5	0.42599	38.03	-19.30	57.33	37.68	0.15	0.20	QP
6	0.42599	35.86	-11.47	47.33	35.51	0.15	0.20	AVERAGE
7	0.54644	33.76	-22.25	56.00	33.40	0.16	0.20	QP
8	0.54644	30.56	-15.45	46.00	30.20	0.16	0.20	AVERAGE
9	3.436	23.34	-22.66	46.00	22.85	0.21	0.27	AVERAGE
10	3.436	30.60	-25.40	56.00	30.11	0.21	0.27	QP
11	22.775	23.68	-36.32	60.00	22.62	0.54	0.53	QP
12	22.775	14.91	-35.09	50.00	13.85	0.54	0.53	AVERAGE

Temperature	24°C	Humidity	50%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 1.

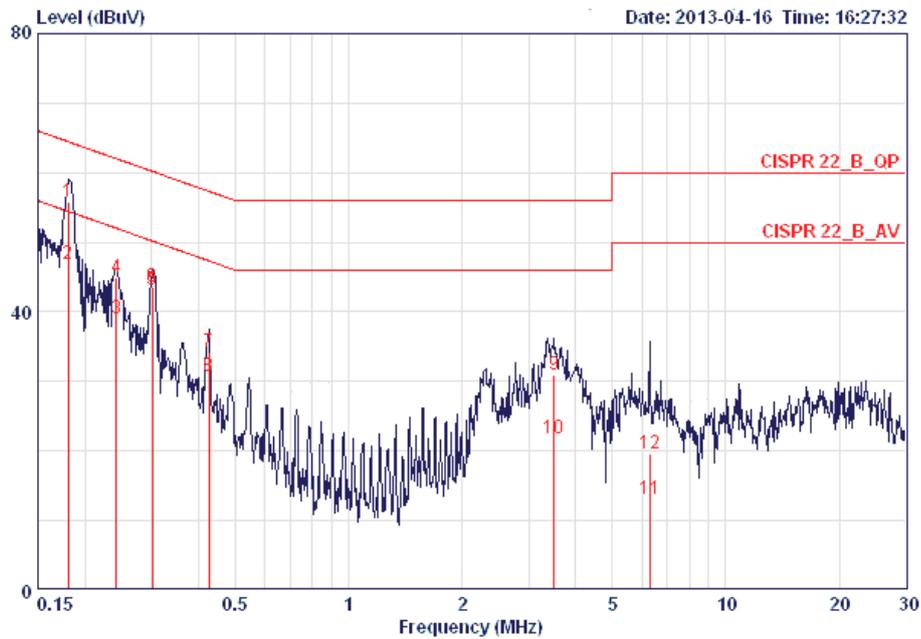


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18056	55.82	-8.64	64.46	55.55	0.08	0.19	QP
2	0.18056	46.91	-7.55	54.46	46.64	0.08	0.19	AVERAGE
3	0.24165	38.92	-13.12	52.04	38.64	0.08	0.20	AVERAGE
4	0.24165	44.85	-17.19	62.04	44.57	0.08	0.20	QP
5	0.30188	43.26	-6.93	50.19	42.98	0.08	0.20	AVERAGE
6	0.30188	43.58	-16.61	60.19	43.30	0.08	0.20	QP
7	0.42599	34.14	-23.19	57.33	33.86	0.08	0.20	QP
8	0.42599	30.65	-16.68	47.33	30.37	0.08	0.20	AVERAGE
9	3.509	31.02	-24.98	56.00	30.62	0.13	0.28	QP
10	3.509	21.89	-24.11	46.00	21.49	0.13	0.28	AVERAGE
11	6.285	13.14	-36.86	50.00	12.65	0.17	0.32	AVERAGE
12	6.285	19.67	-40.33	60.00	19.18	0.17	0.32	QP

Note:


Level = Read Level + LISN Factor + Cable Loss

Temperature	24°C	Humidity	50%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link	Test Mode	Mode 2.

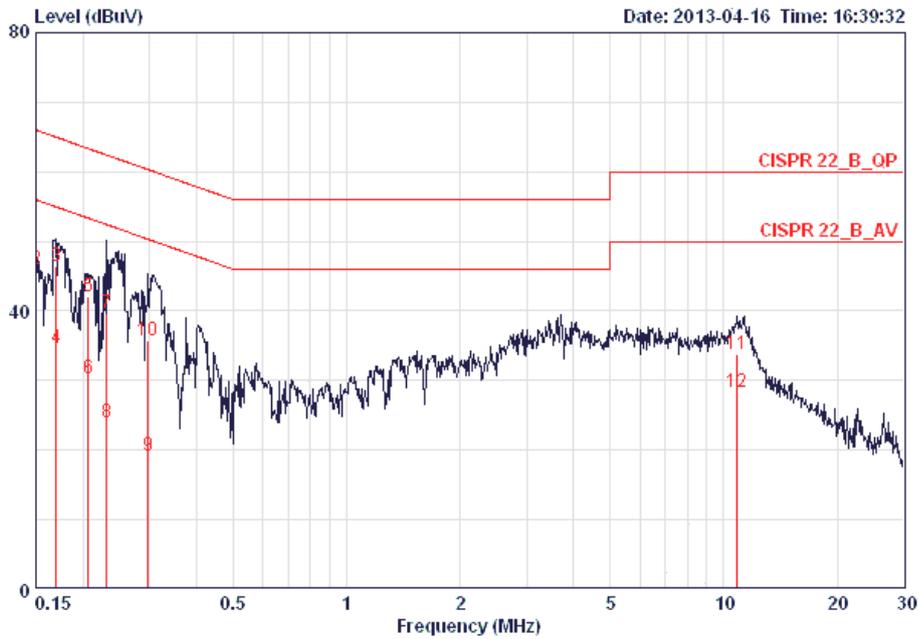

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15000	26.29	-29.71	56.00	25.95	0.16	0.18	AVERAGE
2	0.15000	46.09	-19.91	66.00	45.75	0.16	0.18	QP
3	0.16944	46.43	-18.56	64.99	46.08	0.16	0.19	QP
4	0.16944	34.60	-20.39	54.99	34.25	0.16	0.19	AVERAGE
5	0.20614	42.01	-21.35	63.36	41.66	0.15	0.20	QP
6	0.20614	30.34	-23.02	53.36	29.99	0.15	0.20	AVERAGE
7	0.23162	39.70	-22.69	62.39	39.35	0.15	0.20	QP
8	0.23162	23.90	-28.49	52.39	23.55	0.15	0.20	AVERAGE
9	0.29712	19.18	-31.14	50.32	18.83	0.15	0.20	AVERAGE
10	0.29712	35.83	-24.49	60.32	35.48	0.15	0.20	QP
11	10.847	33.79	-26.21	60.00	33.06	0.35	0.38	QP
12	10.847	28.32	-21.68	50.00	27.59	0.35	0.38	AVERAGE

Temperature	24°C	Humidity	50%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 2.

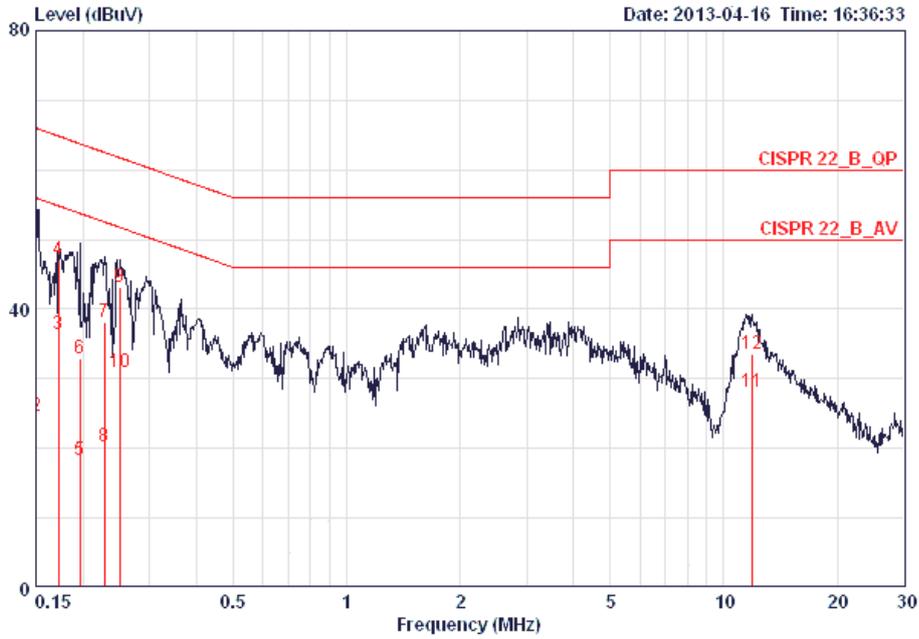

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	45.46	-20.54	66.00	45.20	0.08	0.18	QP
2	0.15000	24.56	-31.44	56.00	24.30	0.08	0.18	AVERAGE
3	0.17215	36.35	-18.51	54.86	36.08	0.08	0.19	AVERAGE
4	0.17215	46.98	-17.88	64.86	46.71	0.08	0.19	QP
5	0.19654	18.41	-35.35	53.76	18.13	0.08	0.20	AVERAGE
6	0.19654	32.81	-30.95	63.76	32.53	0.08	0.20	QP
7	0.22797	38.19	-24.33	62.52	37.91	0.08	0.20	QP
8	0.22797	20.26	-32.26	52.52	19.98	0.08	0.20	AVERAGE
9	0.25078	43.11	-18.62	61.73	42.83	0.08	0.20	QP
10	0.25078	31.02	-20.71	51.73	30.74	0.08	0.20	AVERAGE
11	11.870	28.10	-21.90	50.00	27.43	0.27	0.40	AVERAGE
12	11.870	33.51	-26.49	60.00	32.84	0.27	0.40	QP

Note:

$$\text{Level} = \text{Read Level} + \text{LISN Factor} + \text{Cable Loss}$$

4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	Approximately 1% of the emission bandwidth
VB	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RB	1 % to 5 % of the OBW
VB	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

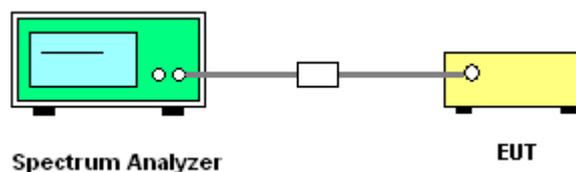

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth & 99% Occupied Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.00	17.76
40	5200 MHz	20.00	17.92
48	5240 MHz	20.00	17.92

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	38.72	36.16
46	5230 MHz	38.40	35.84

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	79.36	74.88

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	19.84	16.96
40	5200 MHz	19.84	16.96
48	5240 MHz	19.84	16.96

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1
20MHz / Ant. 3+ Ant. 4+ Ant. 5 / 5180 MHz**

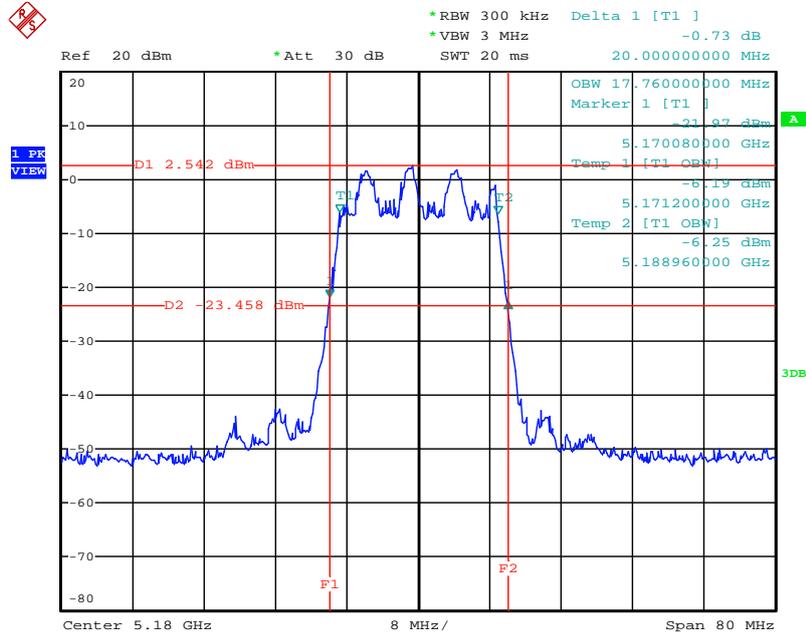


Date: 26.APR.2013 07:47:59

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1
20MHz / Ant. 3+ Ant. 4+ Ant. 5 / 5200 MHz**

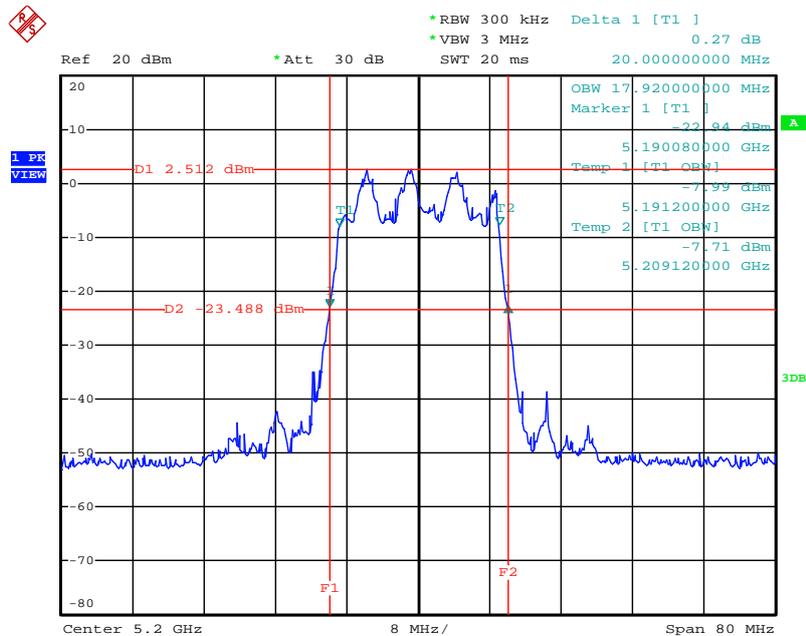


Date: 26.APR.2013 07:47:28

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1
20MHz / Ant. 3+ Ant. 4+ Ant. 5 / 5240 MHz**

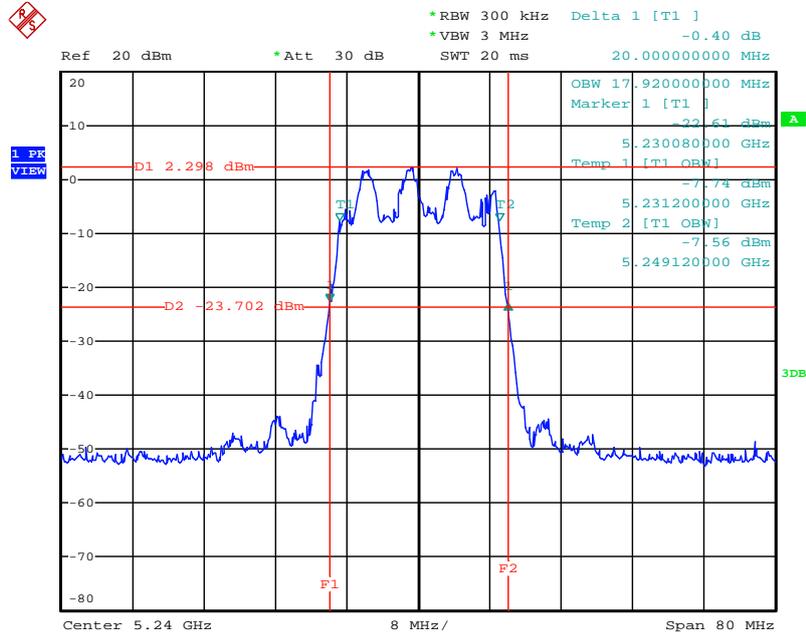


Date: 26.APR.2013 07:45:59

**26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1
40MHz / Ant. 3+ Ant. 4+ Ant. 5 / 5190 MHz**

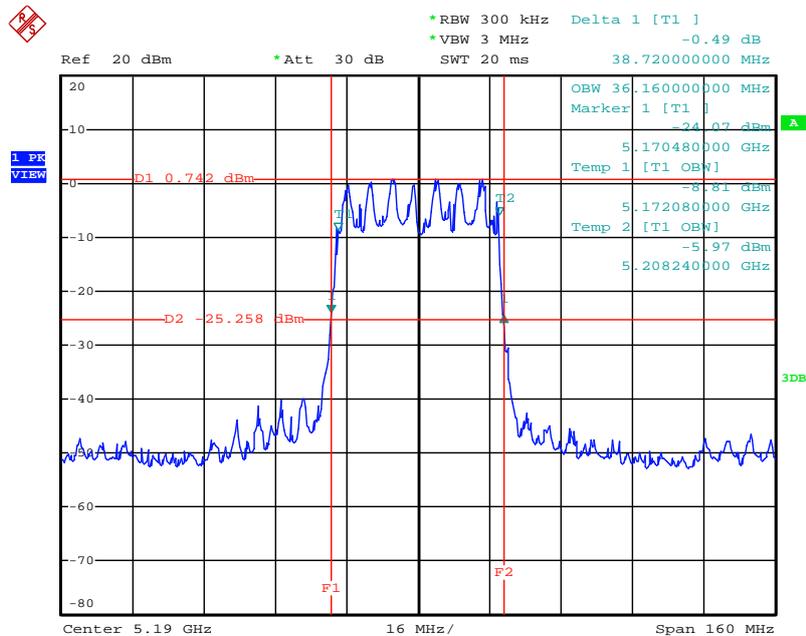


Date: 26.APR.2013 07:48:33

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1
40MHz / Ant. 3+ Ant. 4+ Ant. 5 / 5230 MHz

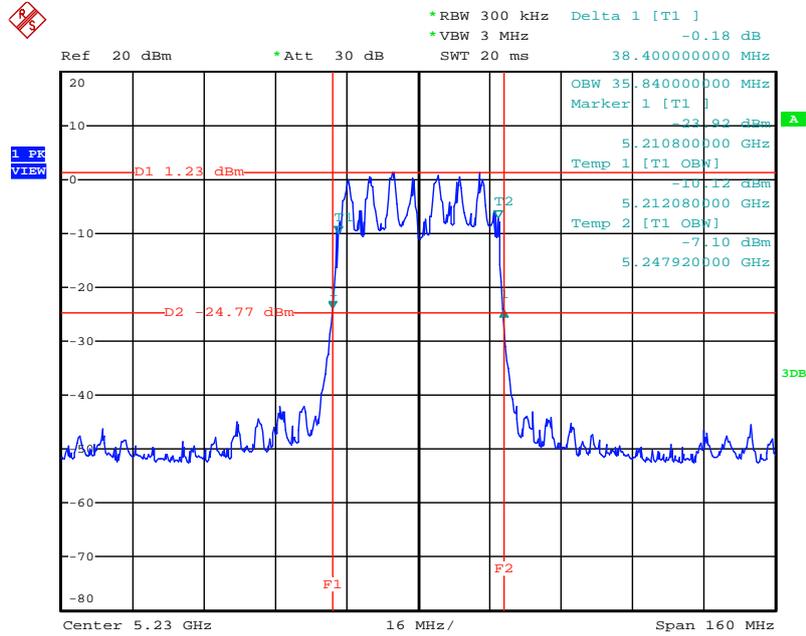


Date: 26.APR.2013 07:48:55

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0, Nss1
80MHz / Ant. 3+ Ant. 4+ Ant. 5 / 5210 MHz

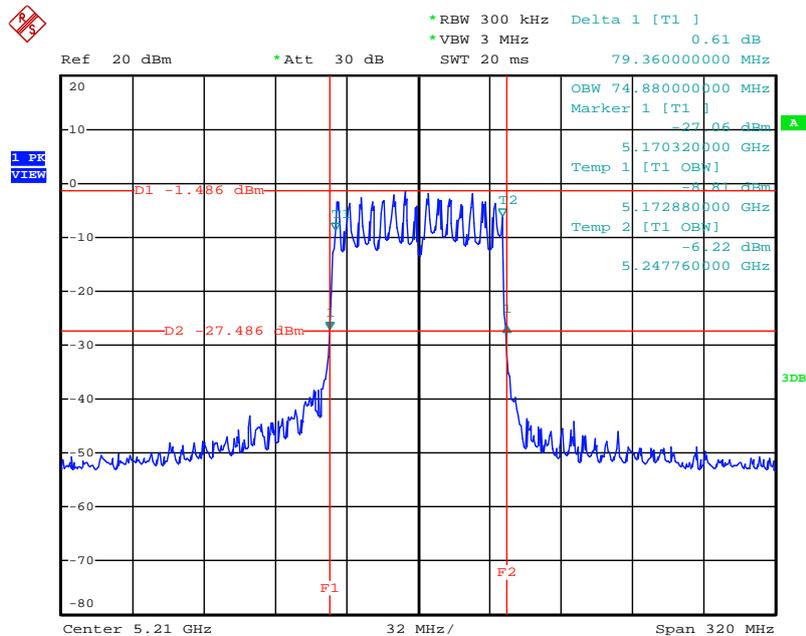


Date: 26.APR.2013 07:49:35

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 3+ Ant. 4+ Ant. 5 / 5180 MHz

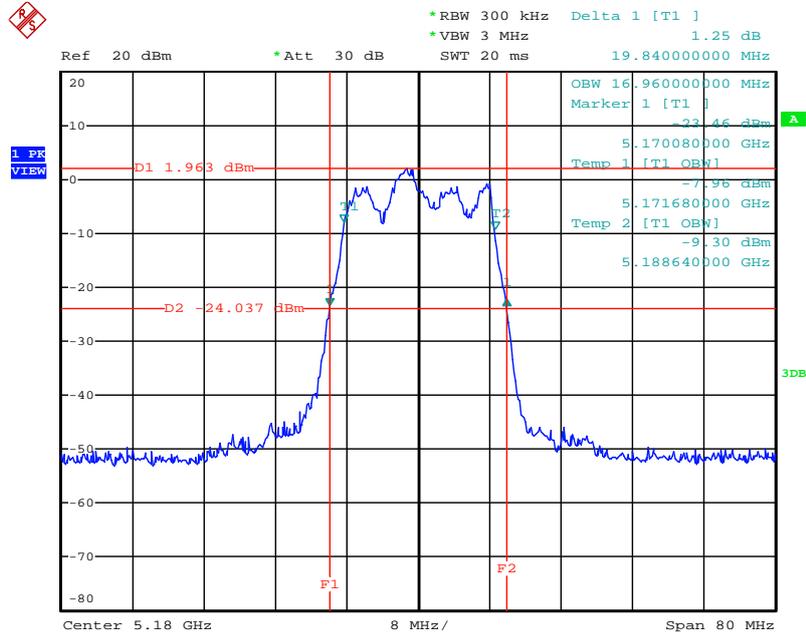


Date: 26.APR.2013 07:44:01

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 3+ Ant. 4+ Ant. 5 / 5200 MHz

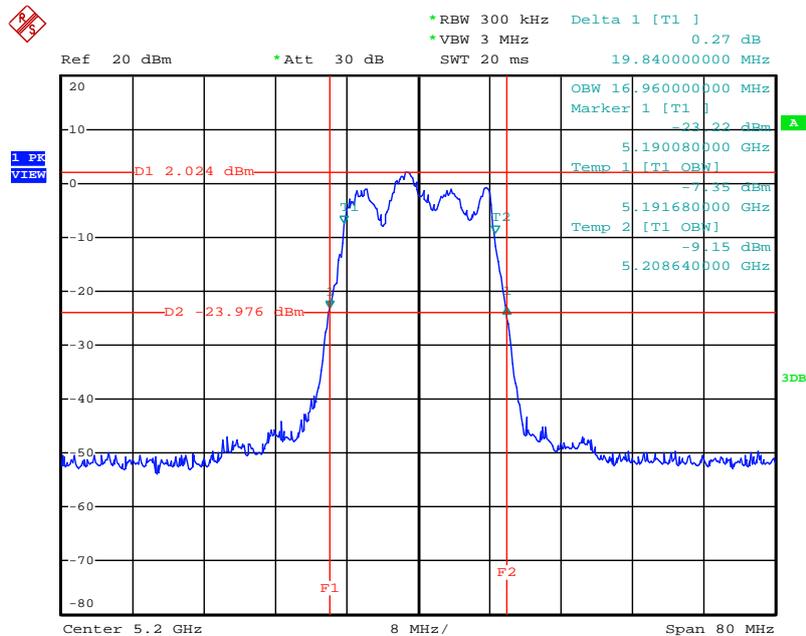

Date: 26.APR.2013 07:44:48

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
 Ant. 3+ Ant. 4+ Ant. 5 / 5240 MHz

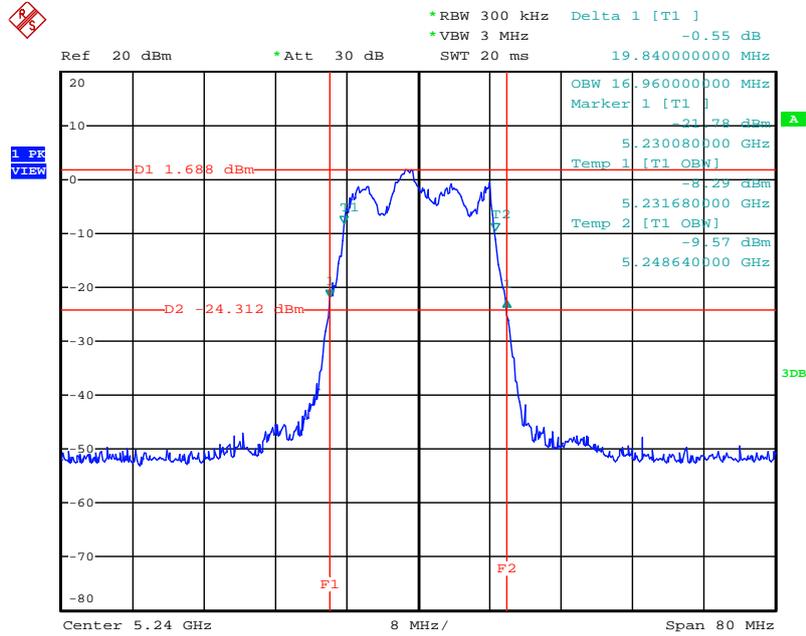

Date: 26.APR.2013 07:45:12

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power =>(4) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v01r02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

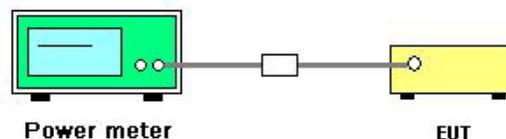

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.3	Ant.4	Ant.5			
36	5180 MHz	9.43	9.89	8.96	14.21	17.00	Complies
40	5200 MHz	9.62	9.94	8.81	14.25	17.00	Complies
48	5240 MHz	9.45	9.98	8.71	14.18	17.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.3	Ant.4	Ant.5			
38	5190 MHz	11.21	11.39	10.28	15.76	17.00	Complies
46	5230 MHz	11.15	11.31	10.25	15.70	17.00	Complies

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.3	Ant.4	Ant.5			
42	5210 MHz	11.36	11.45	10.21	15.81	17.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5

Channel	Frequency	Conducted Power (dBm)			Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant.3	Ant.4	Ant.5			
36	5180 MHz	9.45	9.83	8.73	14.13	16.98	Complies
40	5200 MHz	9.47	9.99	8.81	14.22	16.98	Complies
48	5240 MHz	9.64	9.98	8.71	14.25	16.98	Complies

Note: Power Limit= $4+10*\log(B)$ or 17dBm; $4+10*\log(19.84)=16.98\text{dBm}<17\text{dBm}$, so power limit=16.98dBm

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15–5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v01r02 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

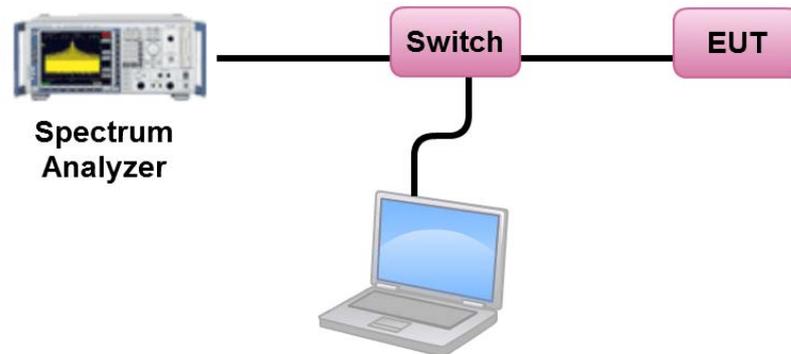

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Date	Apr. 26, 2013		

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+Ant. 4+Ant. 5

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.05	1.14	Complies
40	5200 MHz	1.01	1.14	Complies
48	5240 MHz	1.06	1.14	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 8.86\text{dBi} > 6\text{dBi}$, so limit = $4 - (8.86 - 6) = 1.14\text{dBm/MHz}$.

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+Ant. 4+Ant. 5

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-0.01	1.14	Complies
46	5230 MHz	-0.20	1.14	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 8.86\text{dBi} > 6\text{dBi}$, so limit = $4 - (8.86 - 6) = 1.14\text{dBm/MHz}$.

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+Ant. 4+Ant. 5

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-3.21	1.14	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 8.86\text{dBi} > 6\text{dBi}$, so limit = $4 - (8.86 - 6) = 1.14\text{dBm/MHz}$.

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Date	Apr. 26, 2013		

Configuration IEEE 802.11a / Ant. 3+Ant. 4+Ant. 5


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.05	1.14	Complies
40	5200 MHz	1.11	1.14	Complies
48	5240 MHz	1.05	1.14	Complies

Note: Directional gain= $G_{ANT} + 10\log(N_{ANT}/N_{SS}) = 8.86\text{dBi} > 6\text{dBi}$, so limit = $4 - (8.86 - 6) = 1.14\text{dBm/MHz}$.


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5 /
5240 MHz

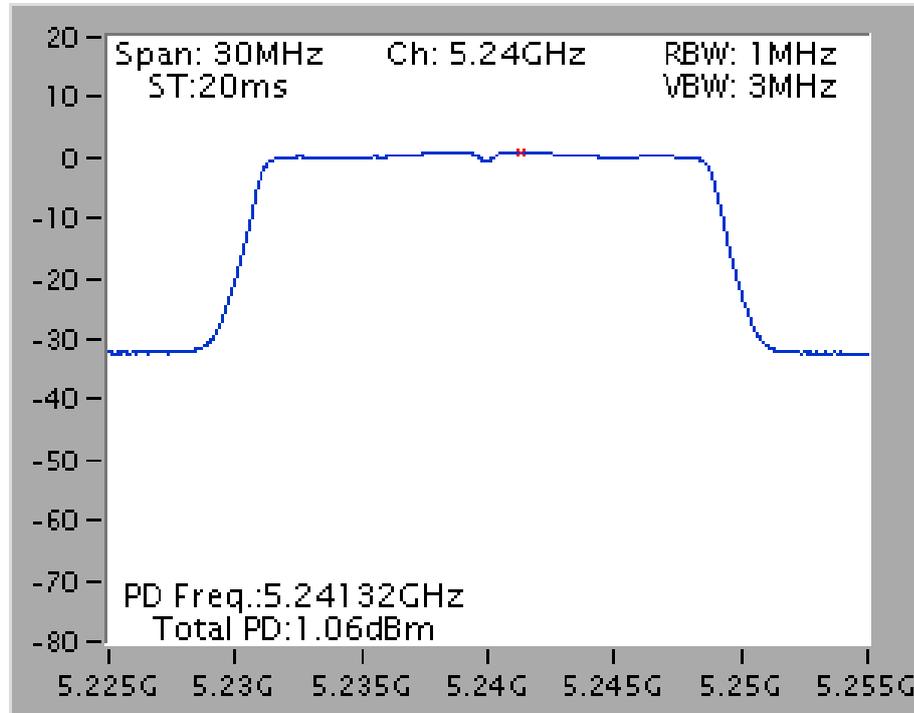


Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5 /
5190 MHz

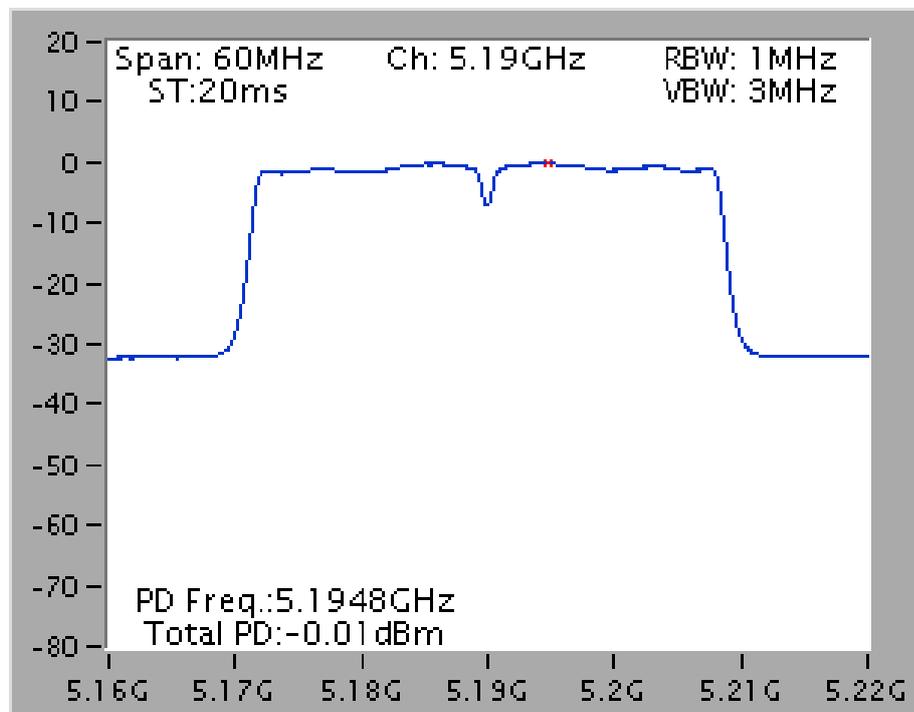

Power Density Plot on Configuration IEEE 802.11ac MCS0, Nss1 VHT 80MHz / Ant. 3+ Ant. 4+ Ant. 5 / 5210 MHz

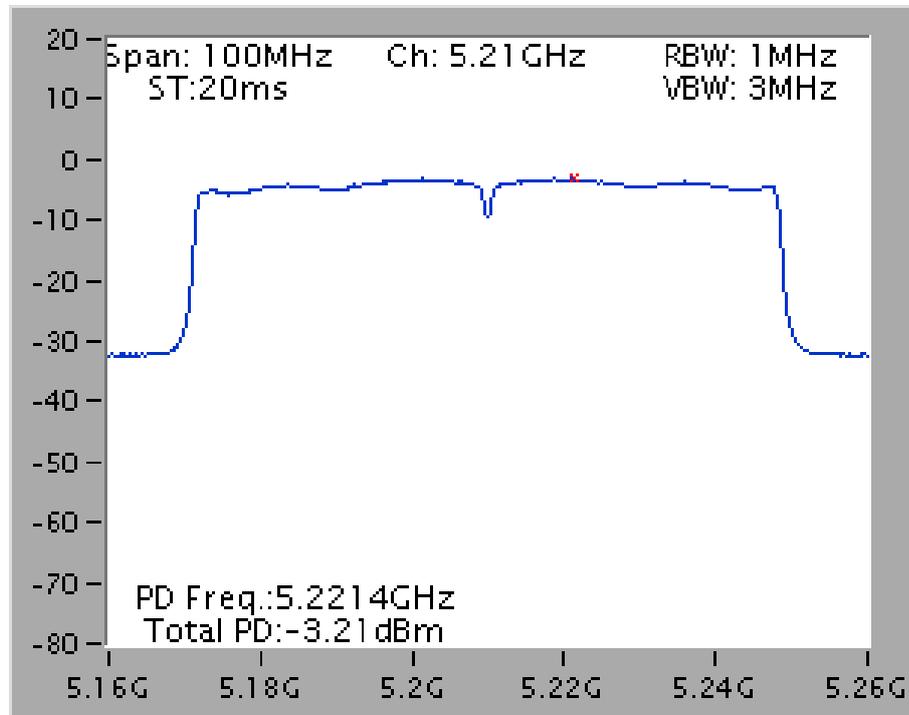

Power Density Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5 / 5200 MHz

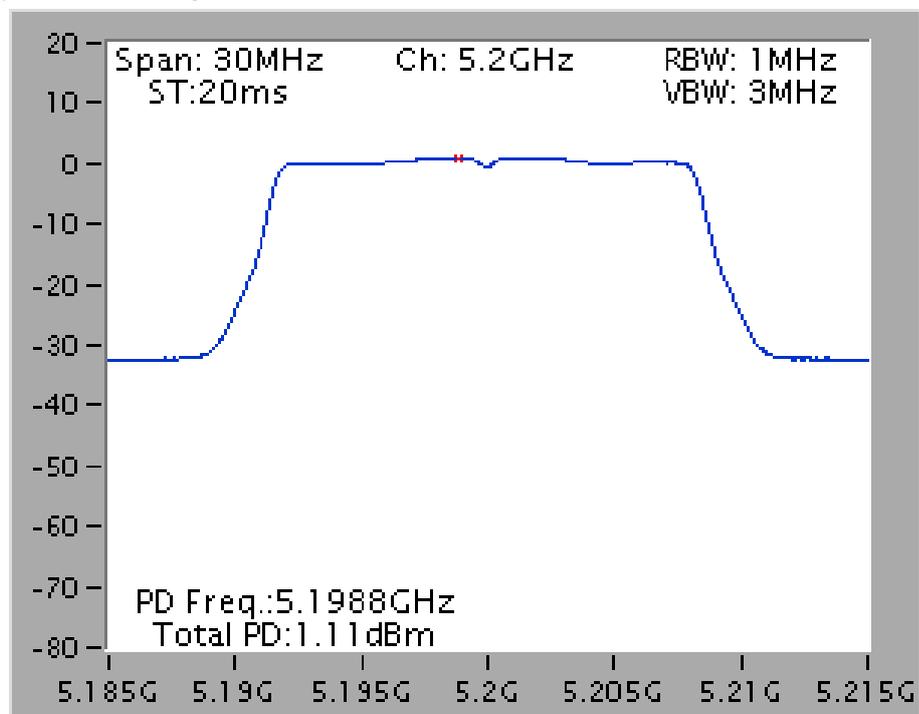

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz (Peak Trace) / 1MHz (Average Trace)
VB	3MHz (Peak Trace) / 3MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Peak : Trace :Max hold/Average: Trace Average Sweep Count 100
Sweep Time	AUTO

4.5.3. Test Procedures

1. The test procedure is the same as section 4.6.3.
2. Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
3. Delta Mark trace A Maximum frequency and trace B same frequency.
4. Repeat the above procedure until measurements for all frequencies were complete.
5. Testing each modulation mode on a single channel in single operating band at single output port. All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5200MHz	9.71	13	Complies
QPSK(MCS1)	5200MHz	9.82	13	Complies
16QAM(MCS3)	5200MHz	9.69	13	Complies
64QAM(MCS5)	5200MHz	9.76	13	Complies
256QAM(MCS8)	5200MHz	10.26	13	Complies

Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5190MHz	8.99	13	Complies
QPSK(MCS1)	5190MHz	8.61	13	Complies
16QAM(MCS3)	5190MHz	9.85	13	Complies
64QAM(MCS5)	5190MHz	10.49	13	Complies
256QAM(MCS8)	5190MHz	11.05	13	Complies

Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5


Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5210 MHz	9.31	13	Complies
QPSK(MCS1)	5210 MHz	9.09	13	Complies
16QAM(MCS3)	5210 MHz	9.47	13	Complies
64QAM(MCS5)	5210 MHz	10.34	13	Complies
256QAM(MCS8)	5210 MHz	10.04	13	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5


Channel	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(6Mbps)	5240MHz	8.70	13	Complies
QPSK(12Mbps)	5240MHz	8.24	13	Complies
16QAM(24Mbps)	5240MHz	8.55	13	Complies
64QAM(48Mbps)	5240MHz	9.09	13	Complies

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5 / BSPK(MCS0) / 5200 MHz

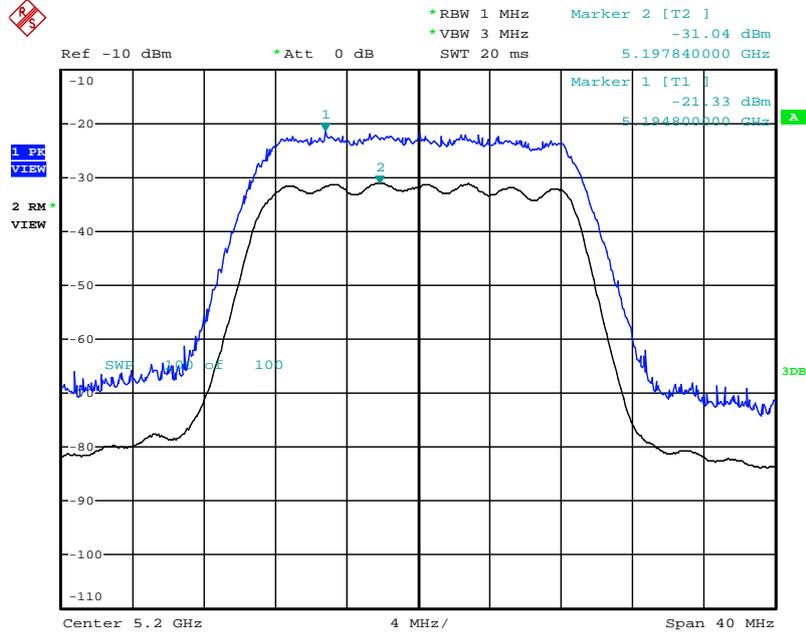


Date: 26.APR.2013 08:50:14

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5 / QPSK(MCS1) / 5200 MHz

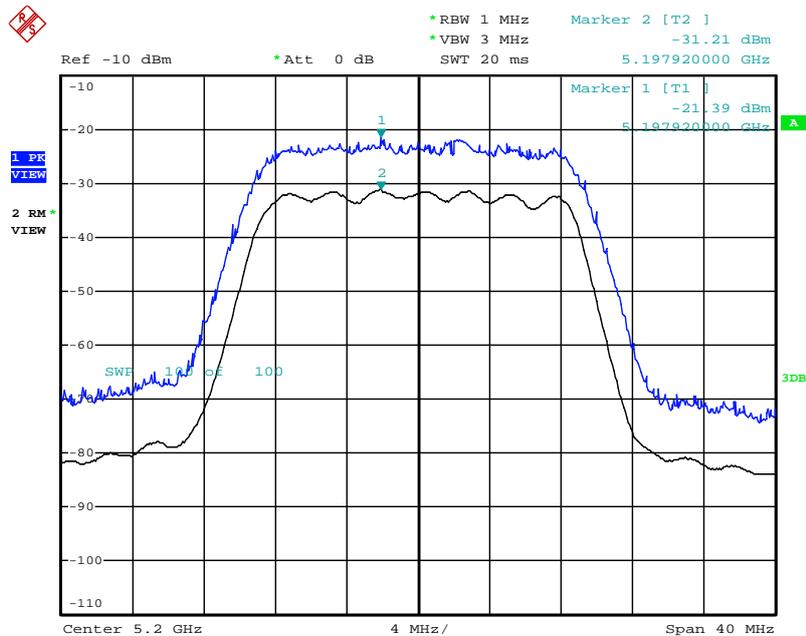


Date: 26.APR.2013 08:50:46

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5 / 16QAM(MCS3) / 5200 MHz

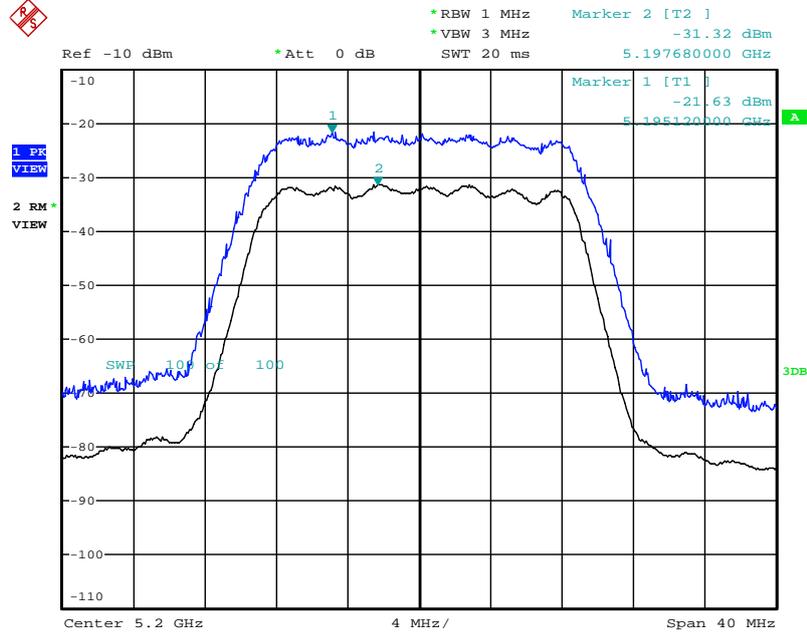


Date: 26.APR.2013 08:51:15

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5 / 64QAM(MCS5) / 5200 MHz

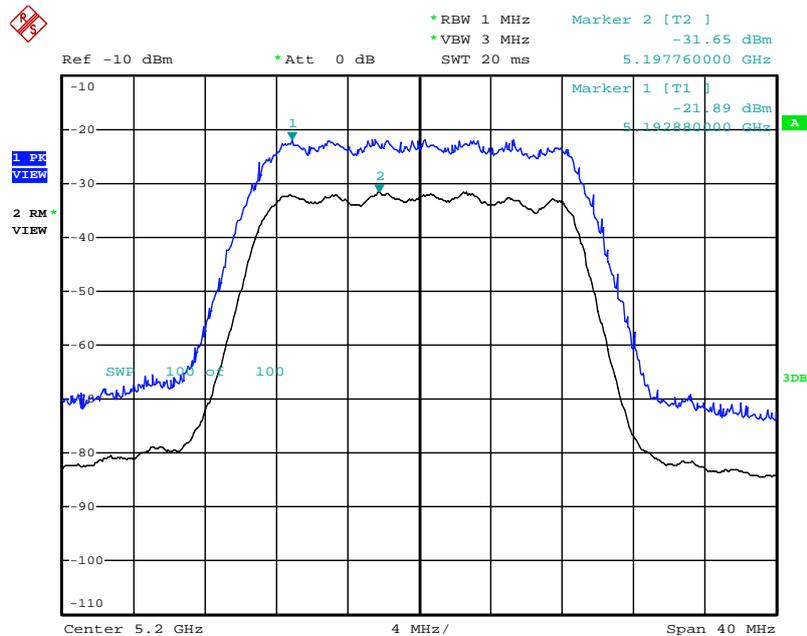


Date: 26.APR.2013 08:52:01

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 20MHz / Ant. 3+ Ant. 4+ Ant. 5 / 256QAM(MCS8) / 5200 MHz

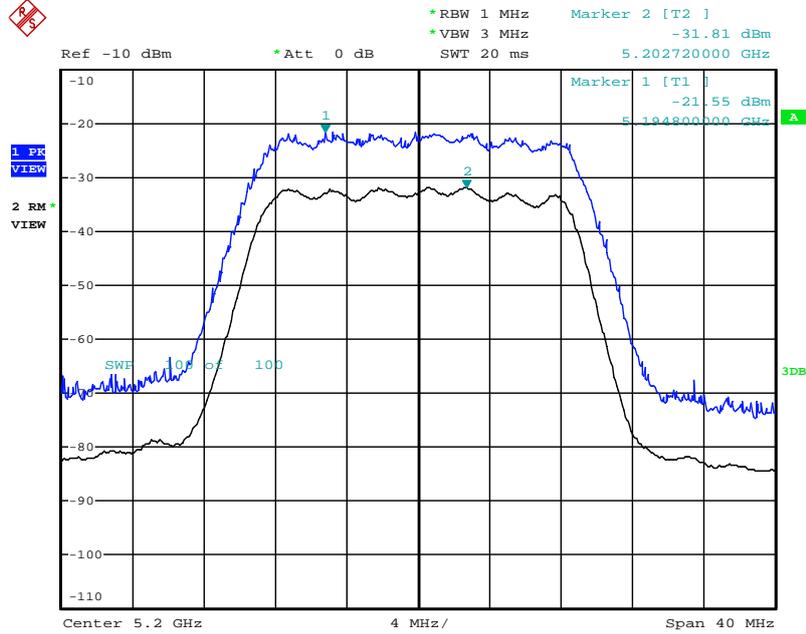


Date: 26.APR.2013 08:53:07

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5 / BSPK(MCS0) / 5190 MHz

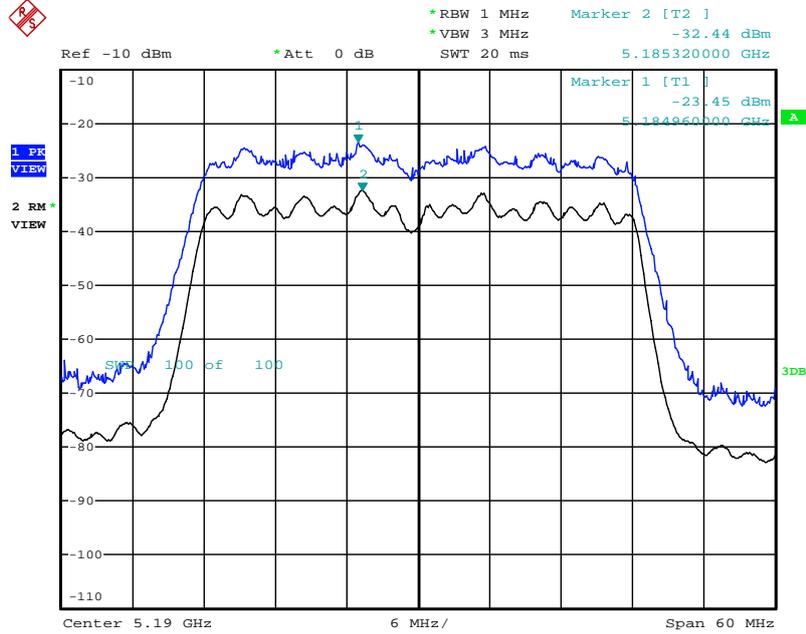


Date: 26.APR.2013 09:01:12

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5 / QPSK(MCS1) / 5190 MHz

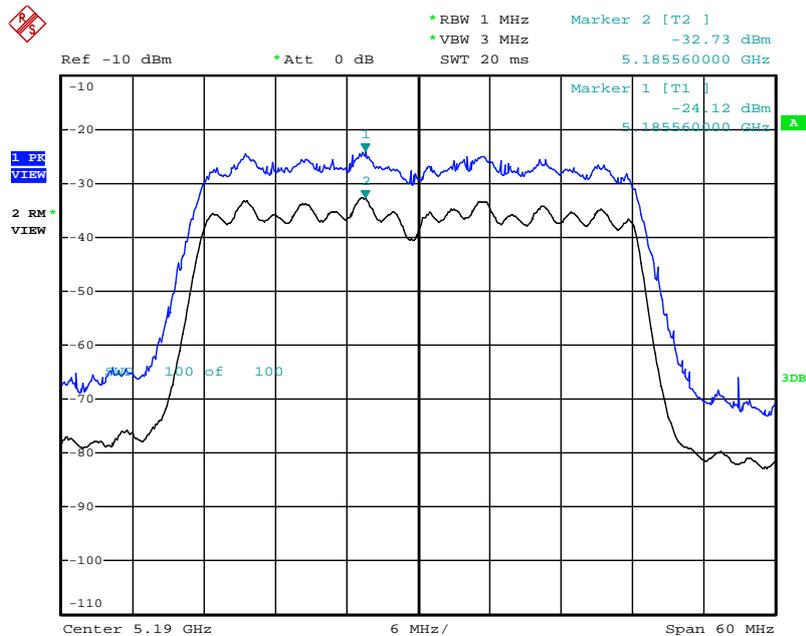


Date: 26.APR.2013 09:01:35

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5 / 16QAM(MCS3) / 5190 MHz

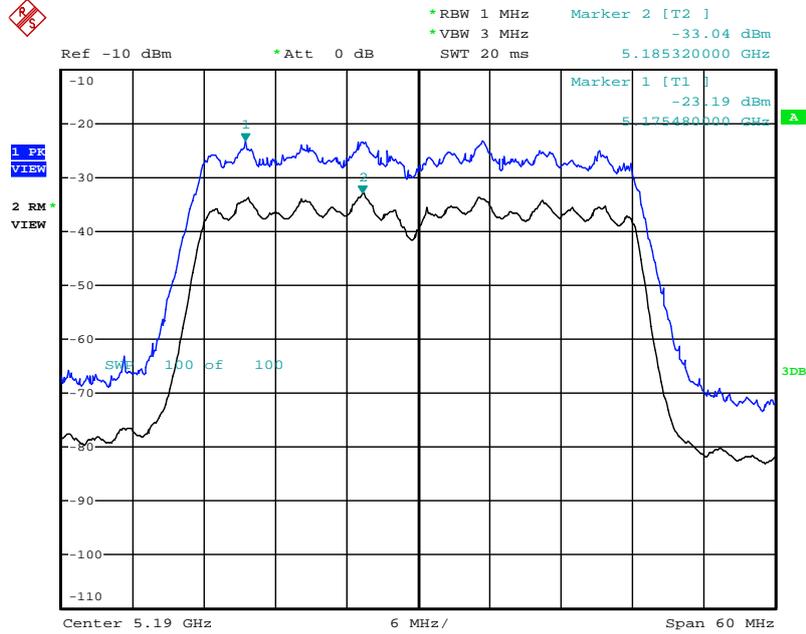


Date: 26.APR.2013 09:02:21

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 40MHz / Ant. 3+ Ant. 4+ Ant. 5 / 64QAM(MCS5) / 5190 MHz

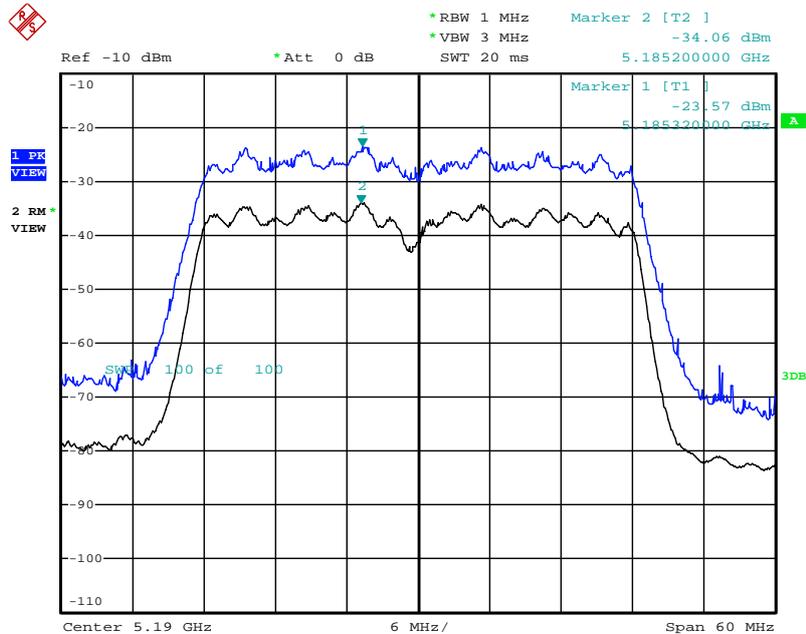


Date: 26.APR.2013 09:03:34

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5 / BSPK(MCS0) / 5210 MHz

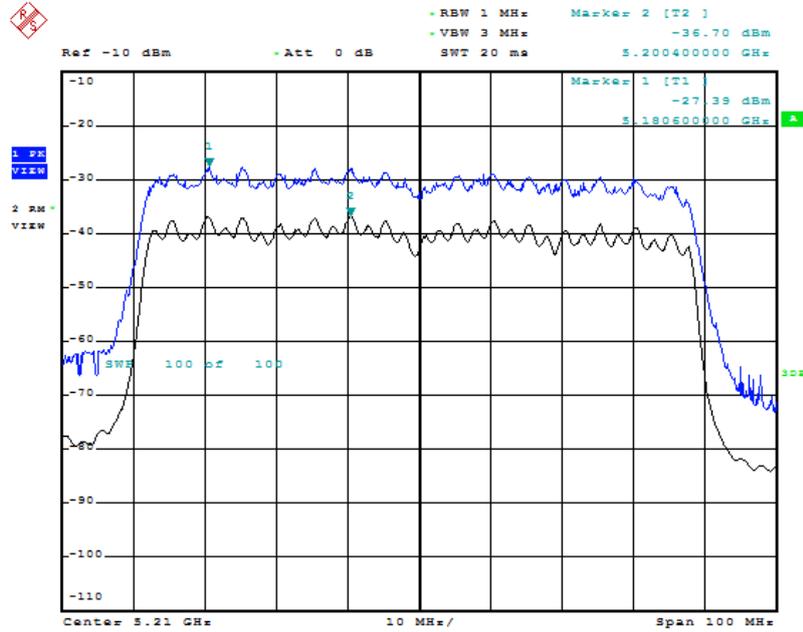


Date: 26.APR.2013 09:06:56

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5 / QPSK(MCS1) / 5210 MHz

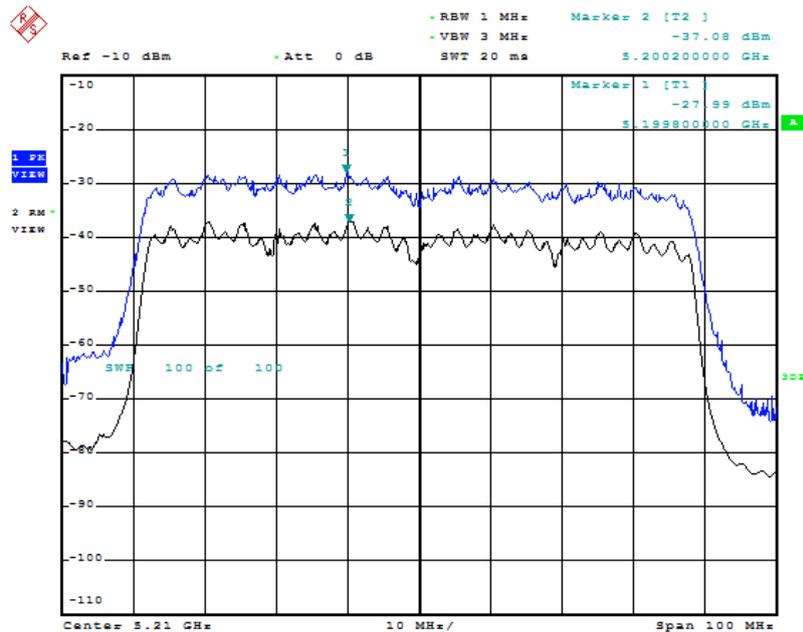


Date: 26.APR.2013 09:07:21

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5 / 16QAM(MCS3) / 5210 MHz

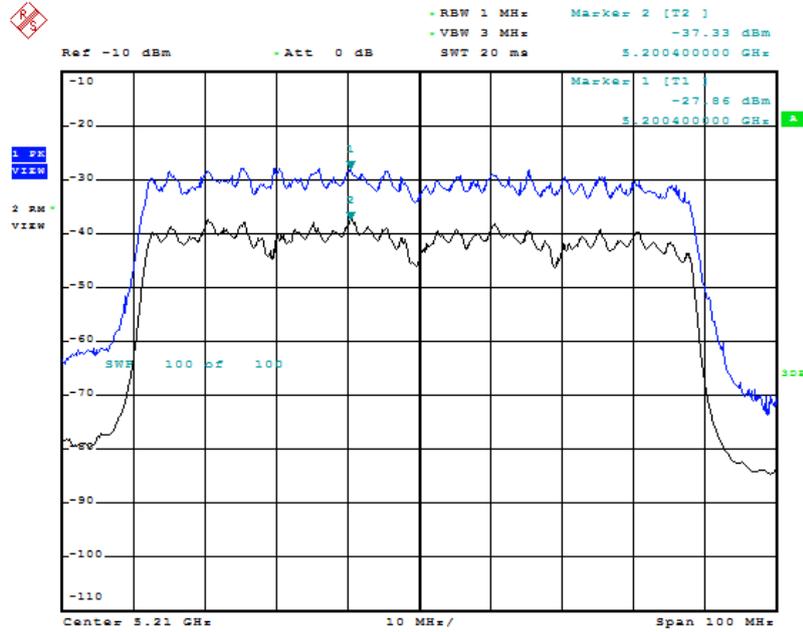


Date: 26.APR.2013 09:07:49

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5 / 64QAM(MCS5) / 5210 MHz

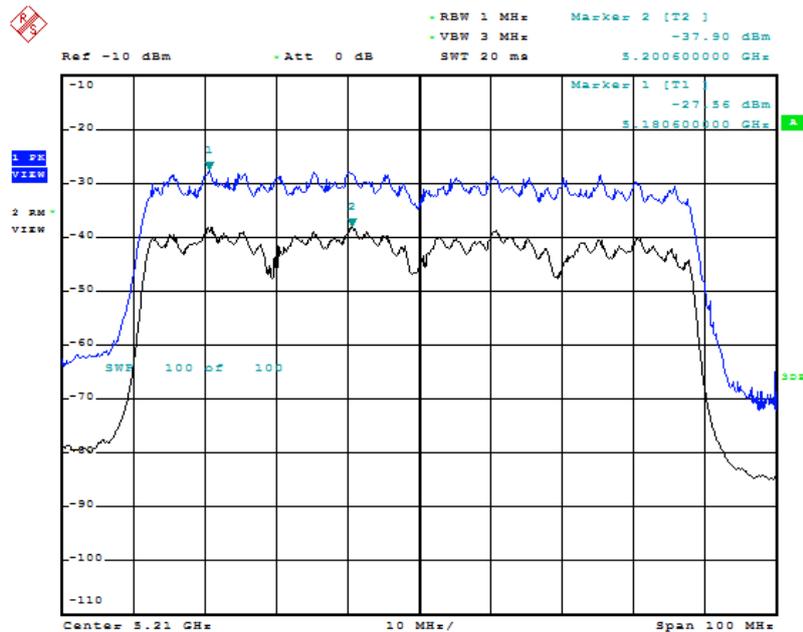


Date: 26.APR.2013 09:08:17

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0, Nss1 80MHz / Ant. 3+ Ant. 4+ Ant. 5 / 256QAM(MCS8) / 5210 MHz

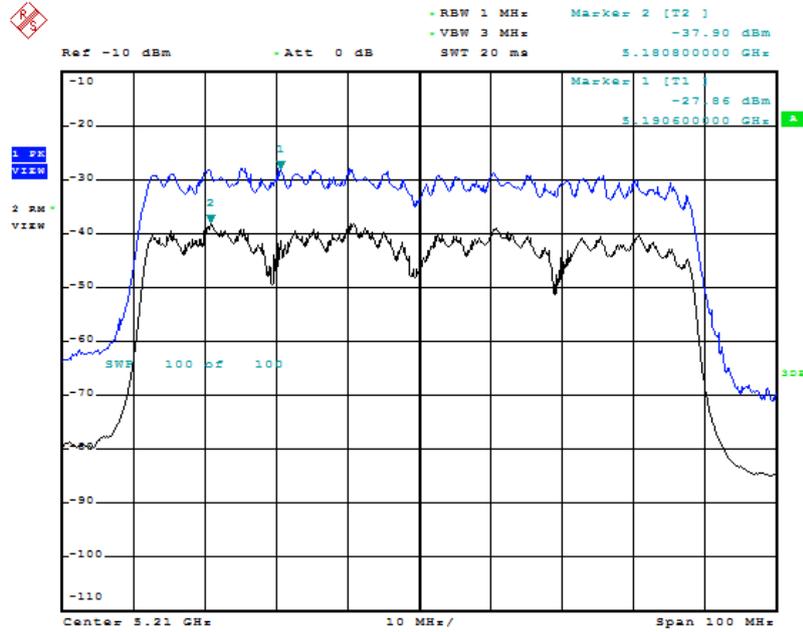


Date: 26.APR.2013 09:08:42

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5 / BSPK(6Mbps) / 5240 MHz

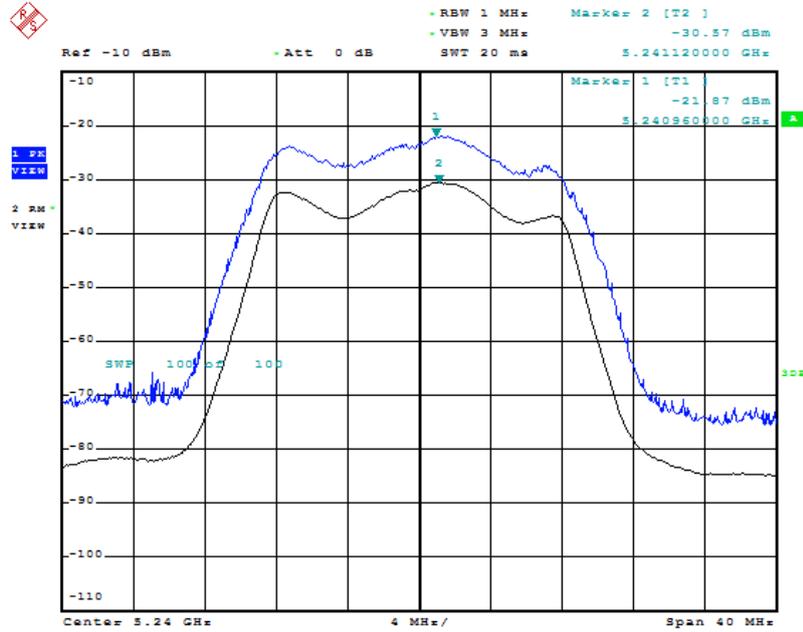


Date: 26.APR.2013 08:47:53

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5 / QPSK(12Mbps) / 5240 MHz

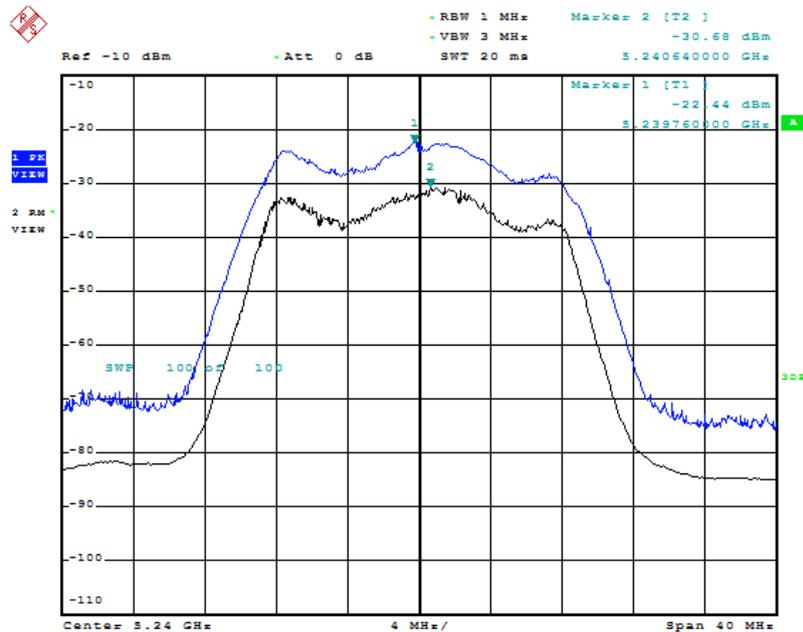


Date: 26.APR.2013 08:48:21

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5 / 16QAM(24Mbps) / 5240 MHz

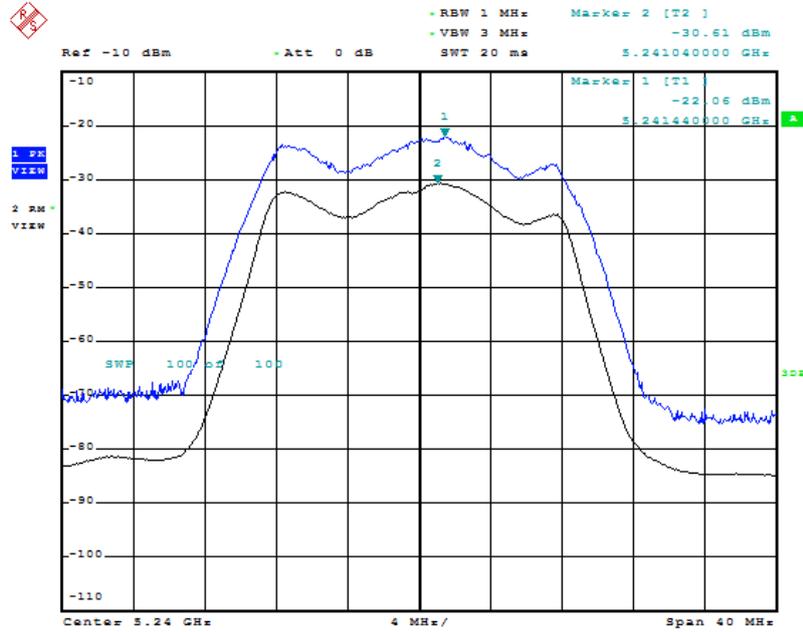

Date: 26.APR.2013 08:48:47

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 3+ Ant. 4+ Ant. 5 / 64QAM(48Mbps) / 5240 MHz

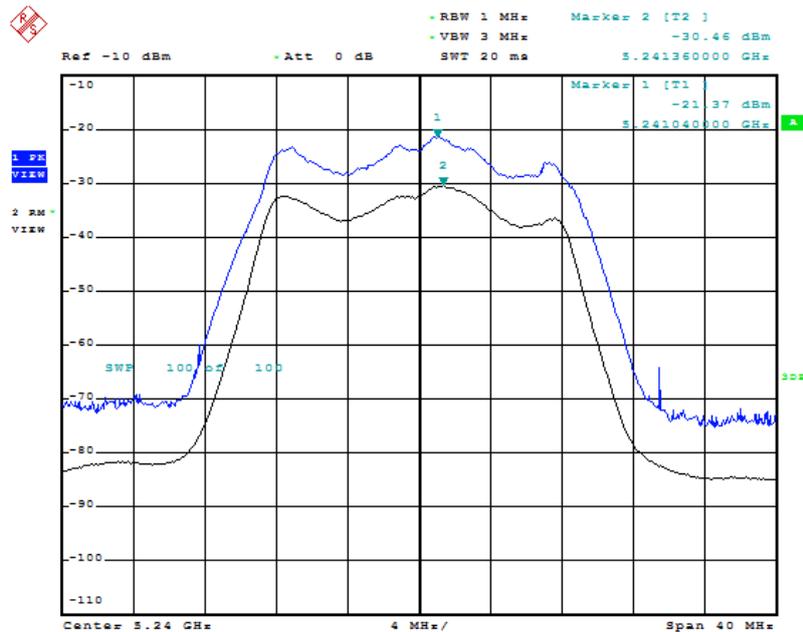

Date: 26.APR.2013 08:49:16

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

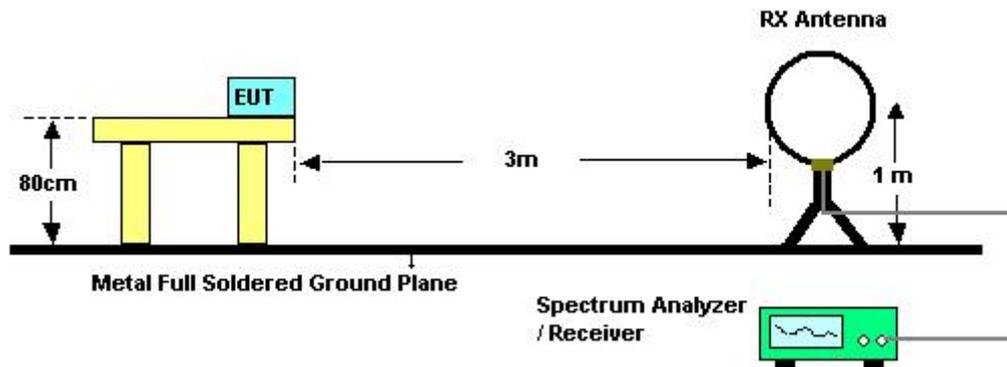

For radiated emissions above 1GHz

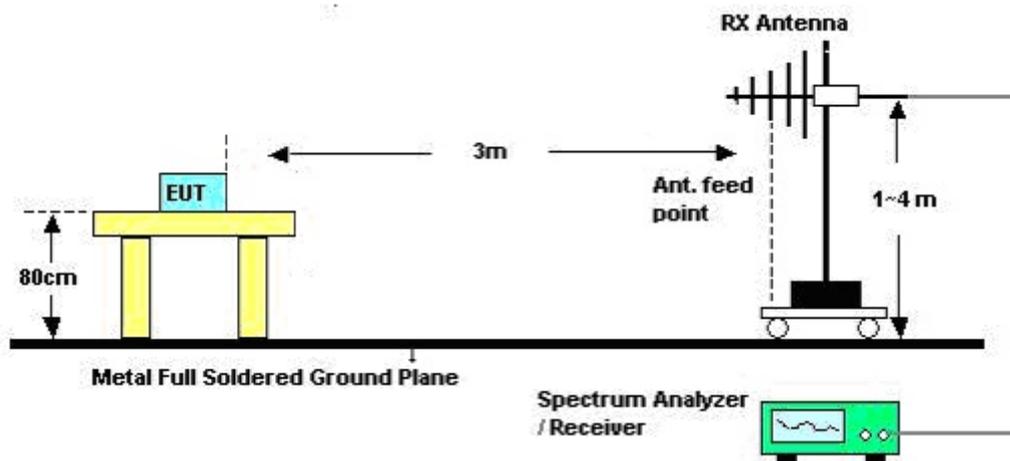

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	60%
Test Engineer	Robert Chang	Configurations	Normal Link
Test Date	Apr. 23, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	60%
Test Engineer	Robert Chang	Configurations	Normal Link
Test Mode	Mode 1.		

Horizontal

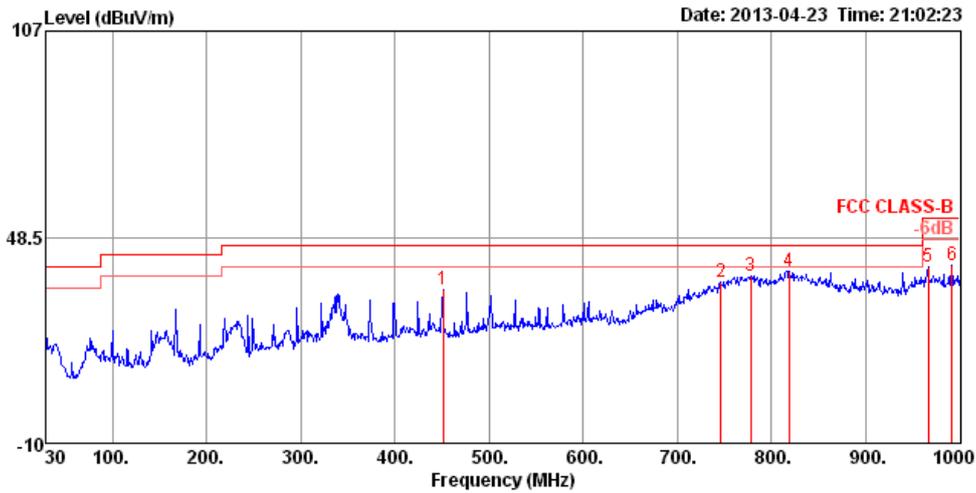

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	450.98	33.77	46.00	-12.23	46.10	2.65	16.21	31.19	100	273	HORIZONTAL Peak
2	745.86	35.66	46.00	-10.34	43.84	3.51	19.68	31.37	150	94	HORIZONTAL Peak
3	777.87	37.51	46.00	-8.49	45.47	3.63	19.75	31.34	150	107	HORIZONTAL Peak
4 pp	818.61	38.80	46.00	-7.20	46.01	3.72	20.27	31.20	100	264	HORIZONTAL Peak
5	966.05	40.01	54.00	-13.99	45.90	4.11	21.09	31.09	100	244	HORIZONTAL Peak
6	991.27	40.60	54.00	-13.40	46.22	4.19	21.33	31.14	100	244	HORIZONTAL Peak

Vertical

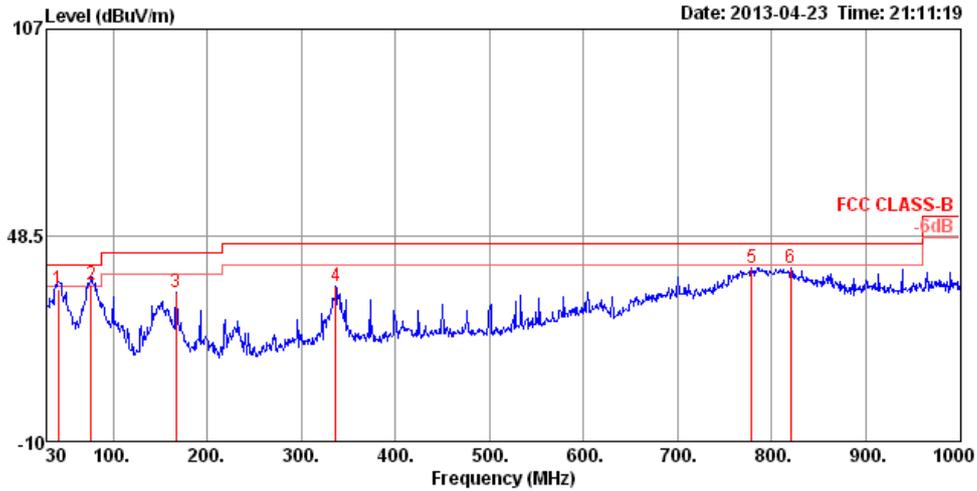

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	41.64	33.28	40.00	-6.72	53.11	0.76	11.27	31.86	125	94 VERTICAL	QP
2 pp	76.56	34.65	40.00	-5.35	58.99	1.03	6.32	31.69	200	197 VERTICAL	QP
3	166.77	32.42	43.50	-11.08	53.07	1.57	9.32	31.54	100	168 VERTICAL	Peak
4	336.52	33.98	46.00	-12.02	49.20	2.28	13.87	31.37	150	2 VERTICAL	Peak
5 pk	778.84	39.39	46.00	-6.61	47.34	3.63	19.76	31.34	100	172 VERTICAL	Peak
6	820.55	39.20	46.00	-6.80	46.38	3.72	20.29	31.19	100	150 VERTICAL	Peak

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	22°C	Humidity	60%
Test Engineer	Robert Chang	Configurations	Normal Link
Test Mode	Mode 2.		

Horizontal

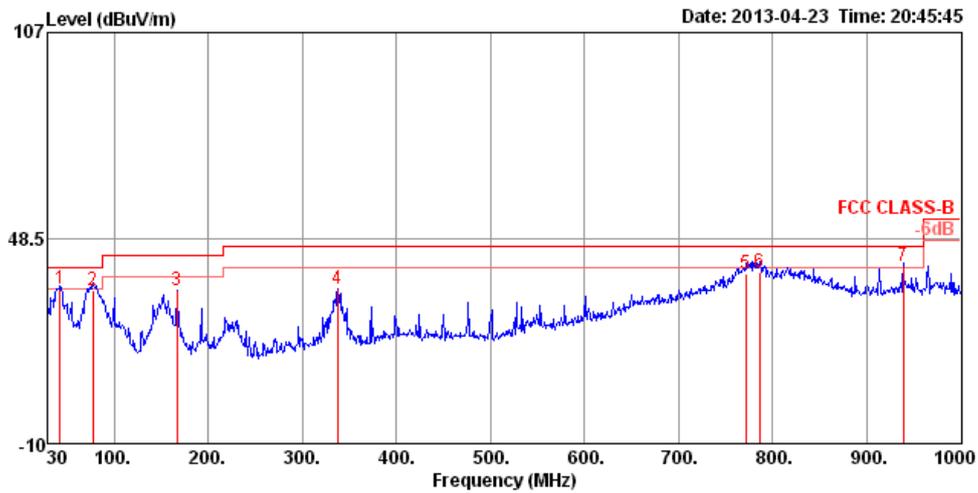

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	42.61	33.92	40.00	-6.08	54.24	0.77	10.76	31.85	100	15	VERTICAL	QP
2	77.53	33.57	40.00	-6.43	57.71	1.03	6.53	31.70	100	343	VERTICAL	QP
3 pk	166.77	33.62	43.50	-9.88	54.27	1.57	9.32	31.54	100	235	VERTICAL	Peak
4	337.49	33.96	46.00	-12.04	49.16	2.28	13.89	31.37	150	7	VERTICAL	Peak
5	771.08	38.44	46.00	-7.56	46.53	3.61	19.66	31.36	100	157	VERTICAL	QP
6	785.63	38.86	46.00	-7.14	46.79	3.64	19.75	31.32	100	126	VERTICAL	QP
7 pp	938.89	40.72	46.00	-5.28	47.03	4.04	20.78	31.13	150	112	VERTICAL	QP

Vertical

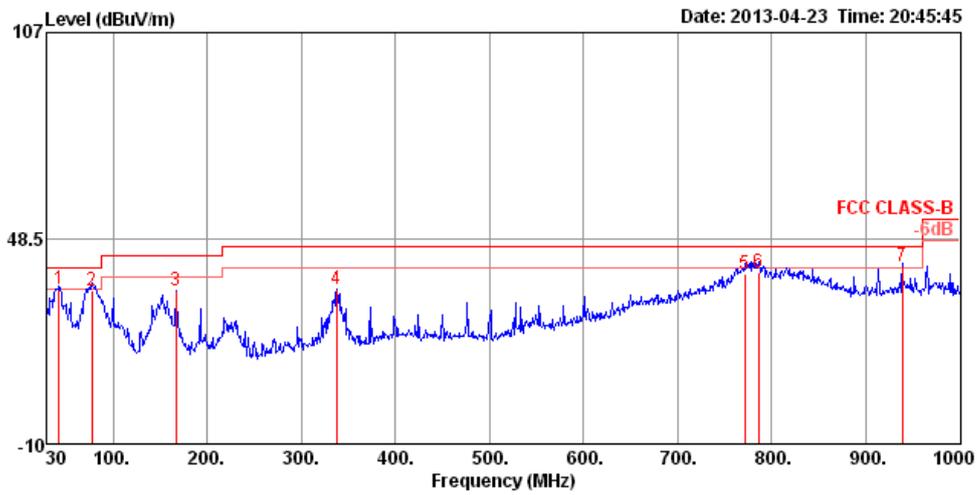

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	42.61	33.92	40.00	-6.08	54.24	0.77	10.76	31.85	100	15 VERTICAL	QP
2	77.53	33.57	40.00	-6.43	57.71	1.03	6.53	31.70	100	343 VERTICAL	QP
3 pk	166.77	33.62	43.50	-9.88	54.27	1.57	9.32	31.54	100	235 VERTICAL	Peak
4	337.49	33.96	46.00	-12.04	49.16	2.28	13.89	31.37	150	7 VERTICAL	Peak
5	771.08	38.44	46.00	-7.56	46.53	3.61	19.66	31.36	100	157 VERTICAL	QP
6	785.63	38.86	46.00	-7.14	46.79	3.64	19.75	31.32	100	126 VERTICAL	QP
7 pp	938.89	40.72	46.00	-5.28	47.03	4.04	20.78	31.13	150	112 VERTICAL	QP

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz Ch 36 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4964.12	43.40	54.00	-10.60	39.13	5.83	33.64	35.20 Average	100	102	HORIZONTAL
2	4964.13	50.26	74.00	-23.74	45.99	5.83	33.64	35.20 Peak	100	102	HORIZONTAL
3	5395.77	50.00	54.00	-4.00	44.56	6.15	34.49	35.20 Average	40	278	HORIZONTAL
4	5395.86	56.53	74.00	-17.47	51.09	6.15	34.49	35.20 Peak	158	278	HORIZONTAL
5	15539.54	46.43	54.00	-7.57	27.87	16.03	38.12	35.59 Average	100	92	HORIZONTAL
6	15539.81	60.38	74.00	-13.62	41.82	16.03	38.12	35.59 Peak	100	92	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4964.10	51.50	74.00	-22.50	47.23	5.83	33.64	35.20 Peak	100	269	VERTICAL
2	4964.13	44.42	54.00	-9.58	40.15	5.83	33.64	35.20 Average	100	269	VERTICAL
3	5395.77	50.68	54.00	-3.32	45.24	6.15	34.49	35.20 Average	100	284	VERTICAL
4	5395.82	57.73	74.00	-16.27	52.29	6.15	34.49	35.20 Peak	100	284	VERTICAL
5	15539.53	46.45	54.00	-7.55	27.89	16.03	38.12	35.59 Average	100	208	VERTICAL
6	15540.18	60.34	74.00	-13.66	41.78	16.03	38.12	35.59 Peak	100	208	VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz Ch 40 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4983.29	43.56	54.00	-10.44	39.25	5.84	33.67	35.20	Average	100	90	HORIZONTAL
2	4983.30	49.96	74.00	-24.04	45.65	5.84	33.67	35.20	Peak	100	90	HORIZONTAL
3	5416.61	49.15	54.00	-4.85	43.63	6.16	34.56	35.20	Average	162	276	HORIZONTAL
4	5416.65	54.76	74.00	-19.24	49.24	6.16	34.56	35.20	Peak	162	276	HORIZONTAL
5	15599.59	47.18	54.00	-6.82	28.41	16.31	38.04	35.58	Average	100	168	HORIZONTAL
6	15600.23	61.29	74.00	-12.71	42.52	16.31	38.04	35.58	Peak	100	168	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4983.26	54.31	74.00	-19.69	50.00	5.84	33.67	35.20	Peak	108	282	VERTICAL
2	4983.29	48.03	54.00	-5.97	43.72	5.84	33.67	35.20	Average	108	282	VERTICAL
3	5416.61	49.85	54.00	-4.15	44.33	6.16	34.56	35.20	Average	100	270	VERTICAL
4	5416.69	55.96	74.00	-18.04	50.44	6.16	34.56	35.20	Peak	100	270	VERTICAL
5	15600.27	61.14	74.00	-12.86	42.37	16.31	38.04	35.58	Peak	100	238	VERTICAL
6	15600.44	47.08	54.00	-6.92	28.31	16.31	38.04	35.58	Average	100	238	VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz Ch 48 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5021.61	45.53	54.00	-8.47	41.13	5.87	33.73	35.20 Average	100	92	HORIZONTAL
2	5021.62	51.82	74.00	-22.18	47.42	5.87	33.73	35.20 Peak	100	92	HORIZONTAL
3	5458.26	50.96	54.00	-3.04	45.35	6.18	34.63	35.20 Average	160	288	HORIZONTAL
4	5458.39	58.01	74.00	-15.99	52.40	6.18	34.63	35.20 Peak	160	288	HORIZONTAL
5	15719.53	48.08	54.00	-5.92	28.99	16.80	37.85	35.56 Average	100	183	HORIZONTAL
6	15720.21	61.76	74.00	-12.24	42.67	16.80	37.85	35.56 Peak	100	183	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5021.63	49.45	54.00	-4.55	45.05	5.87	33.73	35.20 Average	8960	281	VERTICAL
2	5021.65	55.80	74.00	-18.20	51.40	5.87	33.73	35.20 Peak	108	281	VERTICAL
3	5458.29	50.00	54.00	-4.00	44.39	6.18	34.63	35.20 Average	100	270	VERTICAL
4	5458.35	56.90	74.00	-17.10	51.29	6.18	34.63	35.20 Peak	100	270	VERTICAL
5	15719.51	48.40	54.00	-5.60	29.31	16.80	37.85	35.56 Average	100	333	VERTICAL
6	15720.14	62.98	74.00	-11.02	43.89	16.80	37.85	35.56 Peak	100	333	VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 40MHz Ch 38 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15569.76	46.43	54.00	-7.57	27.75	16.17	38.09	35.58	Average	100	247	HORIZONTAL
2	15569.87	60.42	74.00	-13.58	41.74	16.17	38.09	35.58	Peak	100	247	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15569.82	46.47	54.00	-7.53	27.79	16.17	38.09	35.58	Average	100	136	VERTICAL
2	15570.37	60.36	74.00	-13.64	41.68	16.17	38.09	35.58	Peak	100	136	VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 40MHz Ch 46 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.57	47.36	54.00	-6.64	28.35	16.66	37.91	35.56	Average	100	308 HORIZONTAL
2	15689.74	60.99	74.00	-13.01	41.98	16.66	37.91	35.56	Peak	100	308 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.73	47.34	54.00	-6.66	28.33	16.66	37.91	35.56	Average	100	154 VERTICAL
2	15690.32	61.50	74.00	-12.50	42.49	16.66	37.91	35.56	Peak	100	154 VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 80MHz Ch 42 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15627.54	46.98	54.00	-7.02	28.18	16.38	37.99	35.57	Average	100	279 HORIZONTAL
2	15630.78	60.30	74.00	-13.70	41.43	16.45	37.99	35.57	Peak	100	279 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15628.72	47.51	54.00	-6.49	28.64	16.45	37.99	35.57	Average	100	138 VERTICAL
2	15629.17	60.30	74.00	-13.70	41.43	16.45	37.99	35.57	Peak	100	138 VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a Ch 36 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4964.10	50.48	74.00	-23.52	46.21	5.83	33.64	35.20	Peak	100	254	HORIZONTAL
2	4964.10	43.48	54.00	-10.52	39.21	5.83	33.64	35.20	Average	100	254	HORIZONTAL
3	5395.69	56.62	74.00	-17.38	51.18	6.15	34.49	35.20	Peak	158	277	HORIZONTAL
4	5395.79	49.94	54.00	-4.06	44.50	6.15	34.49	35.20	Average	158	277	HORIZONTAL
5	15539.81	46.30	54.00	-7.70	27.74	16.03	38.12	35.59	Average	100	227	HORIZONTAL
6	15540.47	60.20	74.00	-13.80	41.64	16.03	38.12	35.59	Peak	100	227	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4963.98	52.60	74.00	-21.40	48.33	5.83	33.64	35.20	Peak	110	281	VERTICAL
2	4964.11	46.15	54.00	-7.85	41.88	5.83	33.64	35.20	Average	110	281	VERTICAL
3	5395.78	57.30	74.00	-16.70	51.86	6.15	34.49	35.20	Peak	100	271	VERTICAL
4	5395.79	50.18	54.00	-3.82	44.74	6.15	34.49	35.20	Average	100	271	VERTICAL
5	15539.61	46.30	54.00	-7.70	27.74	16.03	38.12	35.59	Average	100	190	VERTICAL
6	15540.45	60.96	74.00	-13.04	42.40	16.03	38.12	35.59	Peak	100	190	VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a Ch 40 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4983.30	44.28	54.00	-9.72	39.97	5.84	33.67	35.20	Average	110	92	HORIZONTAL
2	4983.45	50.60	74.00	-23.40	46.29	5.84	33.67	35.20	Peak	110	92	HORIZONTAL
3	5416.59	49.02	54.00	-4.98	43.50	6.16	34.56	35.20	Average	160	277	HORIZONTAL
4	5416.68	55.27	74.00	-18.73	49.75	6.16	34.56	35.20	Peak	160	277	HORIZONTAL
5	15600.16	47.04	54.00	-6.96	28.27	16.31	38.04	35.58	Average	100	156	HORIZONTAL
6	15600.31	61.43	74.00	-12.57	42.66	16.31	38.04	35.58	Peak	100	156	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4983.24	52.84	74.00	-21.16	48.53	5.84	33.67	35.20	Peak	110	280	VERTICAL
2	4983.27	46.52	54.00	-7.48	42.21	5.84	33.67	35.20	Average	110	280	VERTICAL
3	5416.53	55.24	74.00	-18.76	49.72	6.16	34.56	35.20	Peak	100	261	VERTICAL
4	5416.60	49.12	54.00	-4.88	43.60	6.16	34.56	35.20	Average	100	261	VERTICAL
5	15600.21	47.05	54.00	-6.95	28.28	16.31	38.04	35.58	Average	100	61	VERTICAL
6	15600.42	61.28	74.00	-12.72	42.51	16.31	38.04	35.58	Peak	100	61	VERTICAL



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a Ch 48 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5021.63	45.47	54.00	-8.53	41.07	5.87	33.73	35.20 Average	100	92	HORIZONTAL
2	5021.65	51.44	74.00	-22.56	47.04	5.87	33.73	35.20 Peak	100	92	HORIZONTAL
3	5458.21	57.49	74.00	-16.51	51.88	6.18	34.63	35.20 Peak	159	284	HORIZONTAL
4	5458.27	50.72	54.00	-3.28	45.11	6.18	34.63	35.20 Average	159	284	HORIZONTAL
5	15719.50	48.28	54.00	-5.72	29.19	16.80	37.85	35.56 Average	100	262	HORIZONTAL
6	15719.65	62.19	74.00	-11.81	43.10	16.80	37.85	35.56 Peak	100	262	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5021.60	56.52	74.00	-17.48	52.12	5.87	33.73	35.20 Peak	106	281	VERTICAL
2	5021.63	50.12	54.00	-3.88	45.72	5.87	33.73	35.20 Average	106	281	VERTICAL
3	5458.25	57.16	74.00	-16.84	51.55	6.18	34.63	35.20 Peak	100	270	VERTICAL
4	5458.27	49.93	54.00	-4.07	44.32	6.18	34.63	35.20 Average	100	270	VERTICAL
5	15719.51	48.24	54.00	-5.76	29.15	16.80	37.85	35.56 Average	100	135	VERTICAL
6	15720.49	62.31	74.00	-11.69	43.22	16.80	37.85	35.56 Peak	100	135	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.25 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 20MHz Ch 36, 40, 48 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5100.40	52.57	54.00	-1.43	12.74	5.92	33.91	0.00 Average	116	282	VERTICAL
2	5105.60	63.58	74.00	-10.42	23.73	5.94	33.91	0.00 Peak	116	282	VERTICAL
3	5180.40	105.55			65.48	5.99	34.08	0.00 Average	116	282	VERTICAL
4	5180.80	115.81			75.74	5.99	34.08	0.00 Peak	116	282	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5116.80	64.46	74.00	-9.54	24.58	5.94	33.94	0.00 Peak	100	19	VERTICAL
2	5118.80	52.57	54.00	-1.43	12.69	5.94	33.94	0.00 Average	100	19	VERTICAL
3	5201.60	104.14			64.03	6.00	34.11	0.00 Average	100	19	VERTICAL
4	5201.60	116.21			76.10	6.00	34.11	0.00 Peak	100	19	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5081.40	44.84	54.00	-9.16	5.06	5.91	33.87	0.00 Average	102	285	VERTICAL
2	5082.10	56.85	74.00	-17.15	17.07	5.91	33.87	0.00 Peak	102	285	VERTICAL
3	5239.30	106.67			66.47	6.02	34.18	0.00 Average	102	285	VERTICAL
4	5244.90	117.57			77.36	6.03	34.18	0.00 Peak	102	285	VERTICAL
5	5394.80	48.72	54.00	-5.28	8.08	6.15	34.49	0.00 Average	102	285	VERTICAL
6	5394.80	60.30	74.00	-13.70	19.66	6.15	34.49	0.00 Peak	102	285	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 40MHz Ch 38, 46 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.80	67.29	74.00	-6.71	27.32	5.96	34.01	0.00	Peak	100	15 VERTICAL
2	5149.20	52.71	54.00	-1.29	12.74	5.96	34.01	0.00	Average	100	15 VERTICAL
3	5186.40	99.15			59.08	5.99	34.08	0.00	Average	100	15 VERTICAL
4	5186.40	111.10			71.03	5.99	34.08	0.00	Peak	100	15 VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.20	51.84	54.00	-2.16	11.87	5.96	34.01	0.00	Average	104	282 VERTICAL
2	5145.60	62.84	74.00	-11.16	22.87	5.96	34.01	0.00	Peak	104	282 VERTICAL
3	5225.20	102.83			62.66	6.02	34.15	0.00	Average	104	282 VERTICAL
4	5225.20	115.07			74.90	6.02	34.15	0.00	Peak	104	282 VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11ac MCS0, Nss1 80MHz Ch 42 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	52.89	54.00	-1.11	12.92	5.96	34.01	0.00	Average	102	75	VERTICAL
2	5150.00	67.26	74.00	-6.74	27.29	5.96	34.01	0.00	Peak	102	75	VERTICAL
3	5216.00	109.17			69.01	6.01	34.15	0.00	Peak	102	75	VERTICAL
4	5220.00	94.98			54.82	6.01	34.15	0.00	Average	102	75	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	57%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a Ch 36, 40, 48 / Ant. 3+ Ant. 4+ Ant. 5
Test Date	Apr. 21, 2013		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5106.40	63.95	74.00	-10.05	24.10	5.94	33.91	0.00	Peak	100	18 VERTICAL
2	5106.80	52.86	54.00	-1.14	13.01	5.94	33.91	0.00	Average	100	18 VERTICAL
3	5175.60	115.22			75.19	5.99	34.04	0.00	Peak	100	18 VERTICAL
4	5186.40	104.65			64.58	5.99	34.08	0.00	Average	100	18 VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5117.20	52.79	54.00	-1.21	12.91	5.94	33.94	0.00	Average	100	17 VERTICAL
2	5118.00	63.82	74.00	-10.18	23.94	5.94	33.94	0.00	Peak	100	17 VERTICAL
3	5205.60	114.13			74.02	6.00	34.11	0.00	Peak	100	17 VERTICAL
4	5206.40	103.60			63.49	6.00	34.11	0.00	Average	100	17 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5078.60	45.61	54.00	-8.39	5.83	5.91	33.87	0.00	Average	104	279 VERTICAL
2	5078.60	57.98	74.00	-16.02	18.20	5.91	33.87	0.00	Peak	104	279 VERTICAL
3	5238.60	118.43			78.23	6.02	34.18	0.00	Peak	104	279 VERTICAL
4	5239.30	108.15			67.95	6.02	34.18	0.00	Average	104	279 VERTICAL
5	5398.30	58.83	74.00	-15.17	18.19	6.15	34.49	0.00	Peak	104	279 VERTICAL
6	5399.00	47.78	54.00	-6.22	7.10	6.15	34.53	0.00	Average	104	279 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

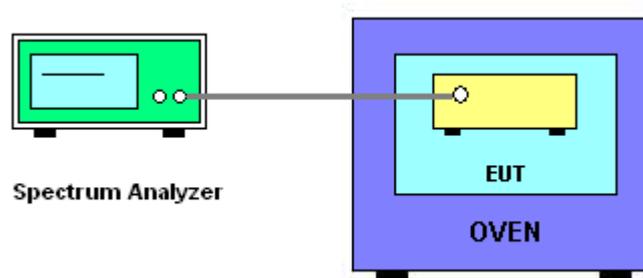

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5200.0092
110.00	5200.0088
93.50	5200.0064
Max. Deviation (MHz)	0.009200
Max. Deviation (ppm)	1.77

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5199.9964
-20	5199.9952
-10	5199.9936
0	5199.9938
10	5199.9942
20	5199.9944
30	5200.0210
40	5200.0232
50	5200.0228
Max. Deviation (MHz)	0.023200
Max. Deviation (ppm)	4.46

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz-30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz-30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz-18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz-40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Apr. 15, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz ~ 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz-40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz - 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz-40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz-40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

*** Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085