



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Belkin International, Inc.
Applicant Address	12045 East Waterfront Drive, Playa Vista, CA 90094
FCC ID	K7SF9K1122V1

Product Name	N600DB Wireless Range Extender
Brand Name	belkin
Model No.	F9K1122V2
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Feb. 24, 2016
Final Test Date	May 30, 2016
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r02, KDB662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Class II Change	9
3.8. Table for Supporting Units	10
3.9. Table for Parameters of Test Software Setting	10
3.10. EUT Operation during Test	10
3.11. Duty Cycle.....	11
3.12. Test Configurations	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. 6dB Spectrum Bandwidth Measurement	29
4.4. Maximum Conducted Output Power Measurement.....	33
4.5. Power Spectral Density Measurement	36
4.6. Radiated Emissions Measurement	43
4.7. Band Edge Emissions Measurement	66
4.8. Frequency Stability Measurement	74
4.9. Antenna Requirements	79
5. LIST OF MEASURING EQUIPMENTS	80
6. MEASUREMENT UNCERTAINTY	82
APPENDIX A. TEST PHOTOS	A1 ~ A4



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N1172-35AB	Rev. 01	Initial issue of report	Jun. 23, 2016



1. VERIFICATION OF COMPLIANCE

Product Name : N600DB Wireless Range Extender
Brand Name : belkin
Model No. : F9K1122V2
Applicant : Belkin International, Inc.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Feb. 24, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads "Sam Chen". The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies
4.4	15.407(a)	Maximum Conducted Output Power	Complies
4.5	15.407(a)	Power Spectral Density	Complies
4.6	15.407(b)	Radiated Emissions	Complies
4.7	15.407(b)	Band Edge Emissions	Complies
4.8	15.407(g)	Frequency Stability	Complies
4.9	15.203	Antenna Requirements	Complies

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	802.11b/g: WLAN (1TX1RX) 802.11n: WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From internal power supply
Modulation	IEEE 802.11a: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11a: 18.58 MHz IEEE 802.11n MCS0 (HT20): 18.41 MHz IEEE 802.11n MCS0 (HT40): 34.88 MHz Band 4: IEEE 802.11a: 17.19 MHz IEEE 802.11n MCS0 (HT20): 18.41 MHz IEEE 802.11n MCS0 (HT40): 37.34 MHz
Maximum Conducted Output Power	Band 1: IEEE 802.11a: 17.83 dBm IEEE 802.11n MCS0 (HT20): 18.91 dBm IEEE 802.11n MCS0 (HT40): 18.55 dBm Band 4: IEEE 802.11a: 17.74 dBm IEEE 802.11n MCS0 (HT20): 18.92 dBm IEEE 802.11n MCS0 (HT40): 18.19 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor

Antenna and Bandwidth

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
IEEE 802.11a	V	X	X	X
IEEE 802.11n	X	X	V	V

IEEE 11n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).
Then EUT support HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	Cortec	AN2450-48A63GO	Omni-Directional Antenna	I-PEX	3.2	4.2
2	Cortec	AN2450-48A63GO	Omni-Directional Antenna	I-PEX	3.2	4.2

Note: The EUT has two antennas

<For 2.4GHz Function>

For IEEE 802.11b/g mode (1TX/1RX)

Only Ant. 1 could transmit/receive simultaneously.

For IEEE 802.11n mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

<For 5GHz Function>

For IEEE 802.11a mode (1TX/1RX)

Only Ant. 1 could transmit/receive simultaneously.

For IEEE 802.11n mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.



3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
5725~5850 MHz Band 4	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157/165	1
	11n HT20	Band 1&4	MCS0	36/40/48/149/157/165	1+2
	11n HT40	Band 1&4	MCS0	38/46/151/159	1+2
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157/165	1
	11n HT20	Band 1&4	MCS0	36/40/48/149/157/165	1+2
	11n HT40	Band 1&4	MCS0	38/46/151/159	1+2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157/165	1
	11n HT20	Band 1&4	MCS0	36/40/48/149/157/165	1+2
	11n HT40	Band 1&4	MCS0	38/46/151/159	1+2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1
	11n HT20	Band 4	MCS0	149/157/165	1+2
	11n HT40	Band 4	MCS0	151/159	1+2
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157/165	1
	11n HT20	Band 1&4	MCS0	36/40/48/149/157/165	1+2
	11n HT40	Band 1&4	MCS0	38/46/151/159	1+2
Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/157/165	1
	11n HT20	Band 1&4	MCS0	36/40/48/149/157/165	1+2
	11n HT40	Band 1&4	MCS0	38/46/151/159	1+2
Frequency Stability	20 MHz	Band 1&4	-	40/157	1
	40 MHz	Band 1&4	-	38/151	1

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link

For Radiated Emission test <Below 1GHz>:

The EUT was performed at Y axis and Z axis position. The worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.

Mode 1. Normal Link + Place EUT in Z axis

For Radiated Emission test <Above 1GHz>:

The EUT was performed at Y axis and Z axis position. The worst case was found at Z axis, so it was selected to perform test and its test result was written in the report.

Mode 1. CTX + Place EUT in Z axis

For Co-location MPE:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA4N172-35AB) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR2D1257-01AA and FR2D1257-01AB.

Below is the table for the change of the product with respect to the original one.

Description	Performance Checking
1. Updating brand name to "belkin" from "Belkin".	After evaluating, it is not necessary to verify.
2. Updating model name to "F9K1122V2" from "F9K1121V1".	
3. Updating applicant to applicant address to "12045 East Waterfront Drive, Playa Vista, CA 90094 " from "12045 East Waterfront Drive, Playa Vista, CA 90094, USA".	
4. Updating the flash memory.	<ol style="list-style-type: none"> 1. AC Power Line Conducted Emissions 2. Radiated Emissions Below 1GHz
5. Updating Band 1 to "New Rules " from "Old Rules".	<ol style="list-style-type: none"> 1. 26dB Bandwidth and 99% Occupied Bandwidth 2. Maximum Conducted Output Power 3. Power Spectral Density 4. Radiated Emissions Above 1GHz 5. Band Edge Emissions 6. Frequency Stability
6. Updating Band 4 to "New Rules " from "Old Rules".	<ol style="list-style-type: none"> 1. 26dB Bandwidth and 99% Occupied Bandwidth 2. 6dB Spectrum Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Radiated Emission Above 1GHz 6. Band Edge Emissions 7. Frequency Stability

3.8. Table for Supporting Units

For Test Site No: 03CH01-CB <Below 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
NB *2	APPLE	MACpro	N/A

For Test Site No: 03CH01-CB <Above 1GHz>

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*3	DELL	E6430	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	MP_TEST 1.3.8.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	63	63	63	61	63	63
802.11n MCS0 HT20	63/61	63/61	63/61	63/62	63/63	63/62
Mode	NCB: 40MHz					
802.11n MCS0 HT40	5190 MHz	5230 MHz	5755 MHz	5795 MHz		
	59/57	63/61	60/59	63/63		

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.000	1.000	100.00%	0.00	0.01
802.11n MCS0 HT20	1.000	1.000	100.00%	0.00	0.01
802.11n MCS0 HT40	1.000	1.000	100.00%	0.00	0.01

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

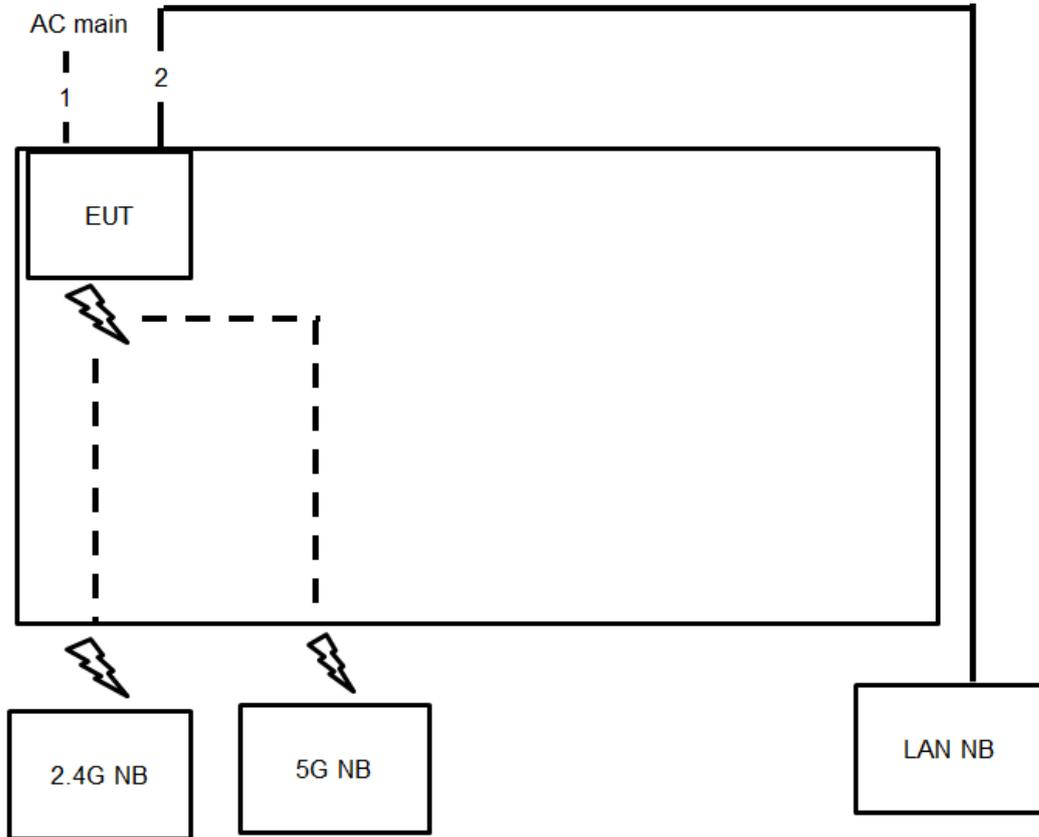

Item	Connection	Shield	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

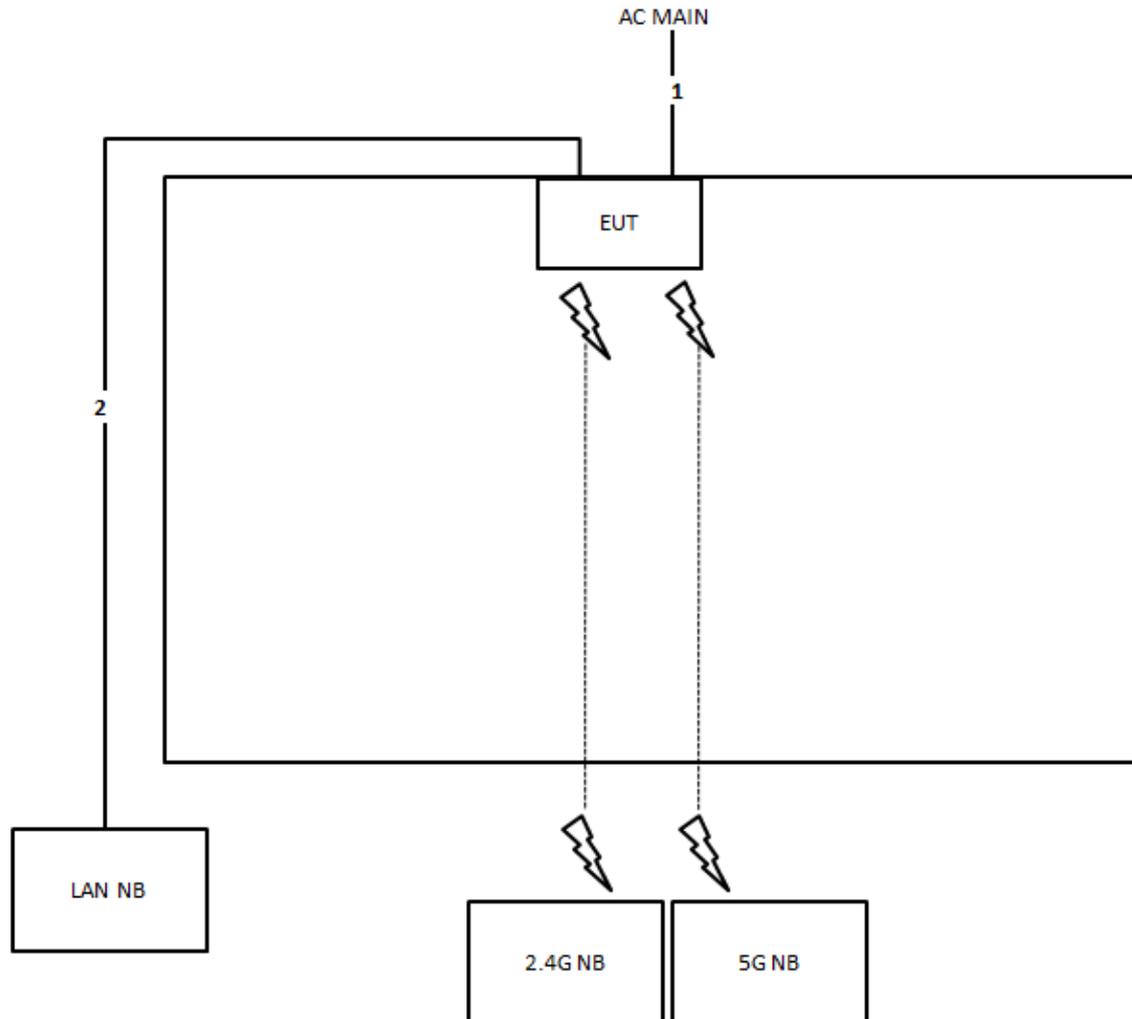

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

Test Configuration: above 1GHz

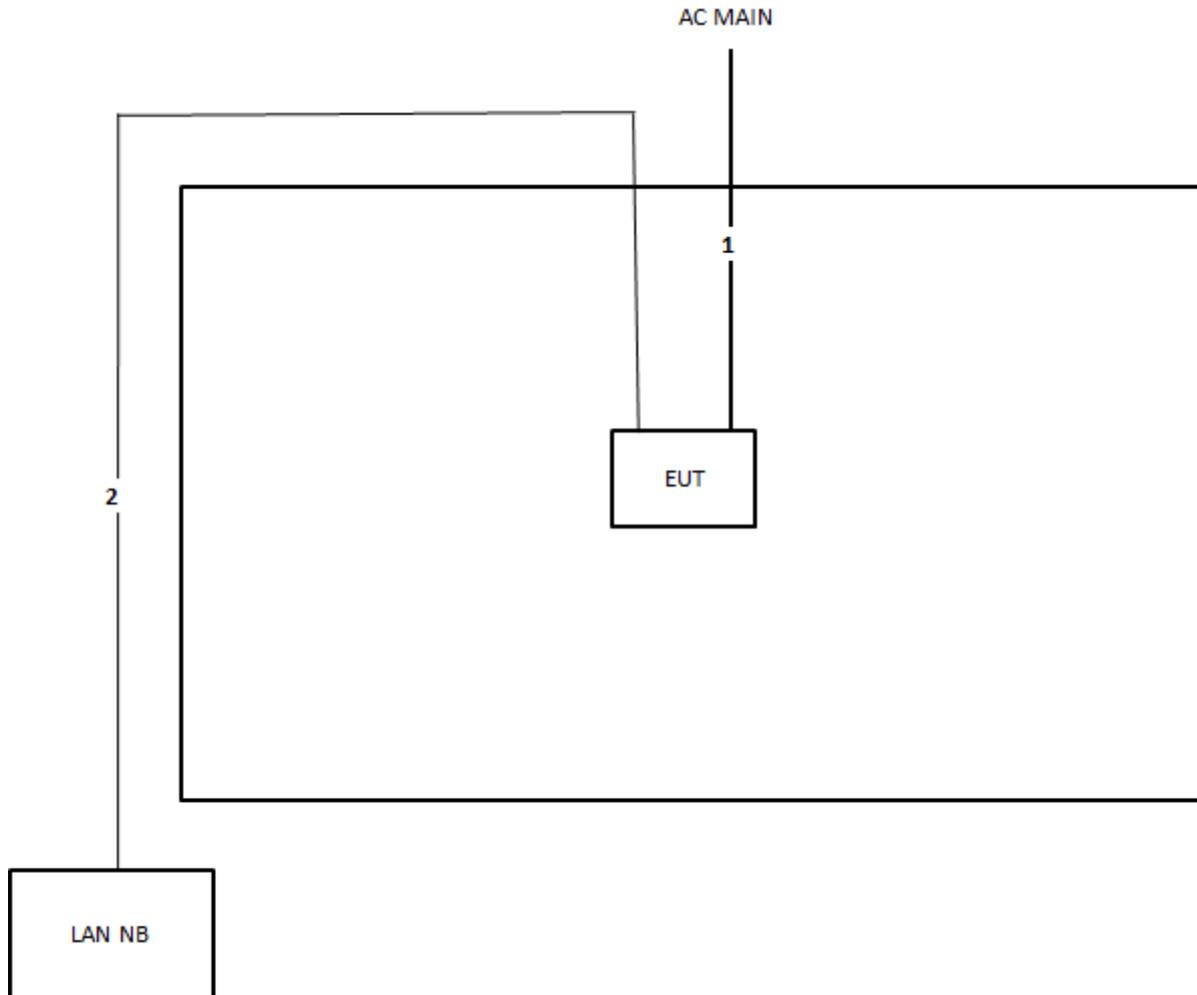

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

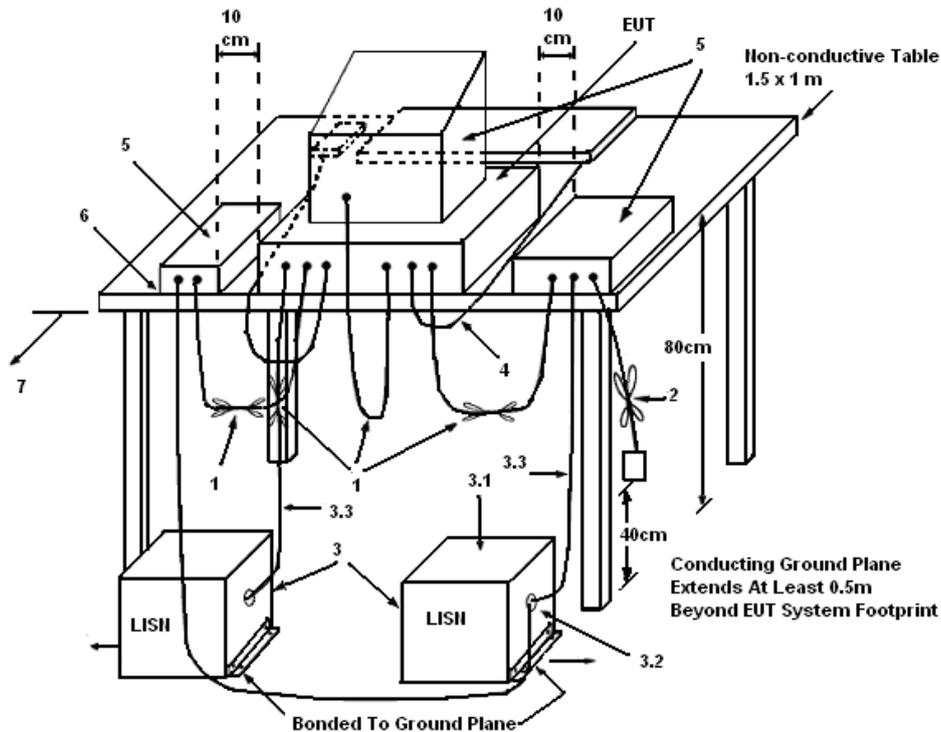

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20°C	Humidity	60%
Test Engineer	Hank Yang	Phase	Line
Configuration	Normal Link		

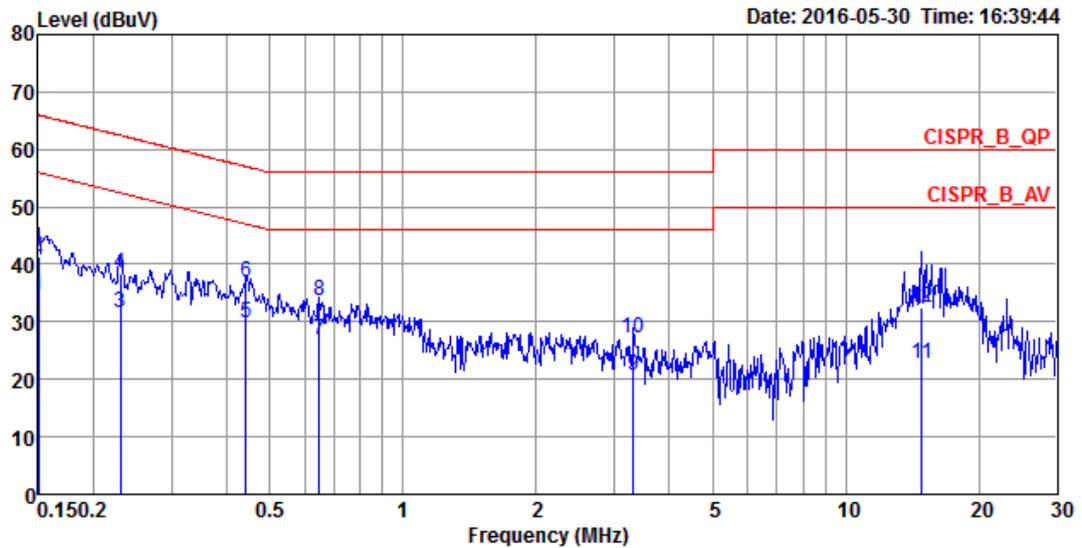

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1500	34.56	-21.44	56.00	24.52	10.02	0.02	LINE	Average
2	0.1500	41.41	-24.59	66.00	31.37	10.02	0.02	LINE	QP
3	0.2304	31.44	-21.00	52.44	21.49	9.92	0.03	LINE	Average
4	0.2304	38.39	-24.05	62.44	28.44	9.92	0.03	LINE	QP
5	0.4421	29.68	-17.34	47.02	19.72	9.92	0.04	LINE	Average
6	0.4421	36.83	-20.19	57.02	26.87	9.92	0.04	LINE	QP
7	0.6474	26.87	-19.13	46.00	16.90	9.93	0.04	LINE	Average
8	0.6474	33.51	-22.49	56.00	23.54	9.93	0.04	LINE	QP
9	3.3105	20.56	-25.44	46.00	10.52	9.98	0.06	LINE	Average
10	3.3105	27.21	-28.79	56.00	17.17	9.98	0.06	LINE	QP
11	14.8281	22.77	-27.23	50.00	12.28	10.23	0.26	LINE	Average
12	14.8281	32.53	-27.47	60.00	22.04	10.23	0.26	LINE	QP

Temperature	20°C	Humidity	60%
Test Engineer	Hank Yang	Phase	Neutral
Configuration	Normal Link		

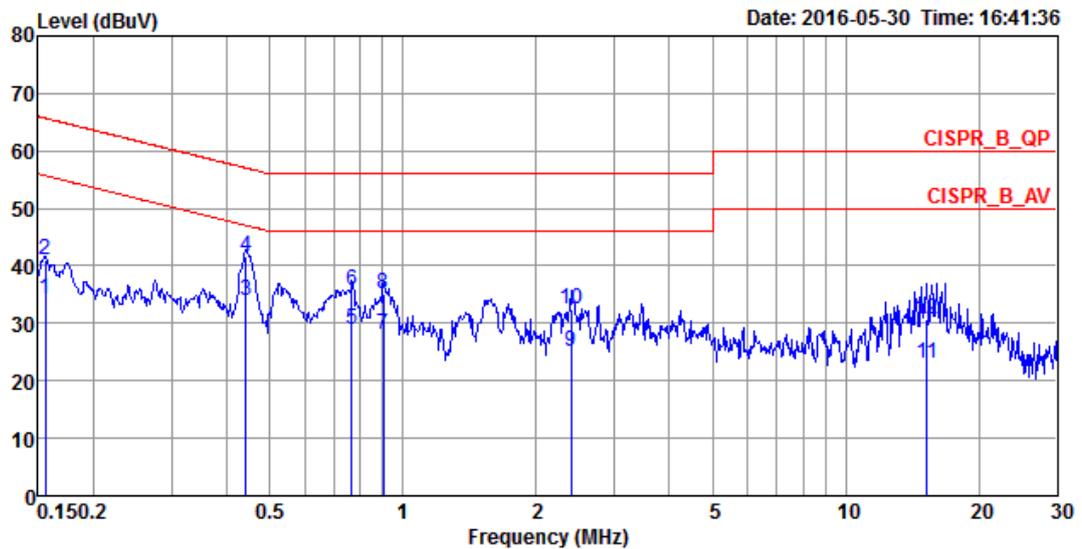

	Freq	Level	Over Limit	Limit Line	Read Level	LISM Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1557	34.19	-21.50	55.69	24.15	10.02	0.02	NEUTRAL	Average
2	0.1557	41.05	-24.64	65.69	31.01	10.02	0.02	NEUTRAL	QP
3	0.4421	34.05	-12.97	47.02	24.09	9.92	0.04	NEUTRAL	Average
4	0.4421	41.52	-15.50	57.02	31.56	9.92	0.04	NEUTRAL	QP
5	0.7670	28.98	-17.02	46.00	19.02	9.93	0.03	NEUTRAL	Average
6	0.7670	35.83	-20.17	56.00	25.87	9.93	0.03	NEUTRAL	QP
7	0.9039	28.06	-17.94	46.00	18.07	9.94	0.05	NEUTRAL	Average
8	0.9039	35.25	-20.75	56.00	25.26	9.94	0.05	NEUTRAL	QP
9	2.3962	25.00	-21.00	46.00	14.97	9.97	0.06	NEUTRAL	Average
10	2.3962	32.36	-23.64	56.00	22.33	9.97	0.06	NEUTRAL	QP
11	15.2261	22.89	-27.11	50.00	12.40	10.23	0.26	NEUTRAL	Average
12	15.2261	30.61	-29.39	60.00	20.12	10.23	0.26	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	55%
Test Engineer	Gino Huang		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	28.70	17.19
	5200 MHz	32.17	17.63
	5240 MHz	34.70	18.58
	5745 MHz	23.57	17.19
	5785 MHz	23.48	17.02
	5825 MHz	23.48	16.93
802.11n MCS0 HT20	5180 MHz	21.22	17.45
	5200 MHz	22.52	18.41
	5240 MHz	20.78	17.37
	5745 MHz	23.13	18.41
	5785 MHz	23.22	18.41
	5825 MHz	23.74	18.41
802.11n MCS0 HT40	5190 MHz	41.30	34.88
	5230 MHz	45.65	34.73
	5755 MHz	41.01	35.17
	5795 MHz	45.80	37.34

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5180 MHz




Date: 15.APR.2016 10:52:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5200 MHz

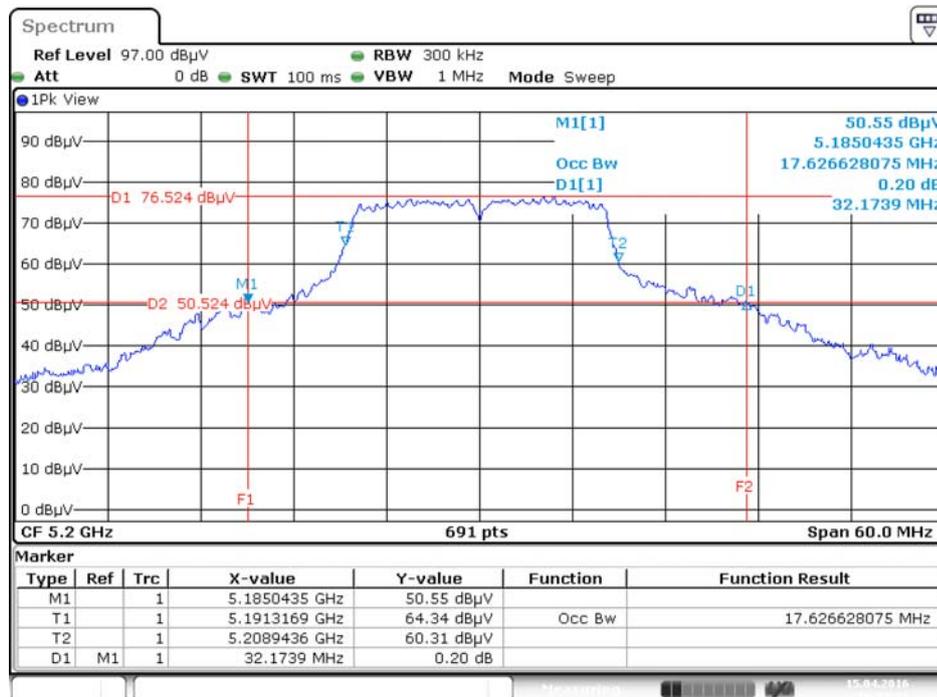


Date: 15.APR.2016 10:53:10

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5240 MHz

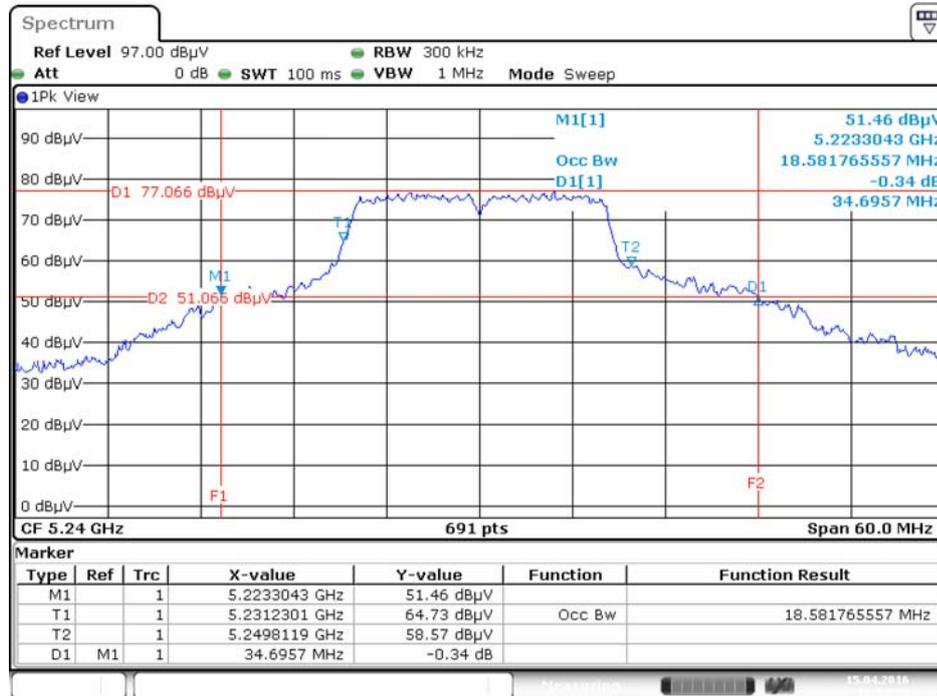


Date: 15.APR.2016 10:53:53

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5745 MHz

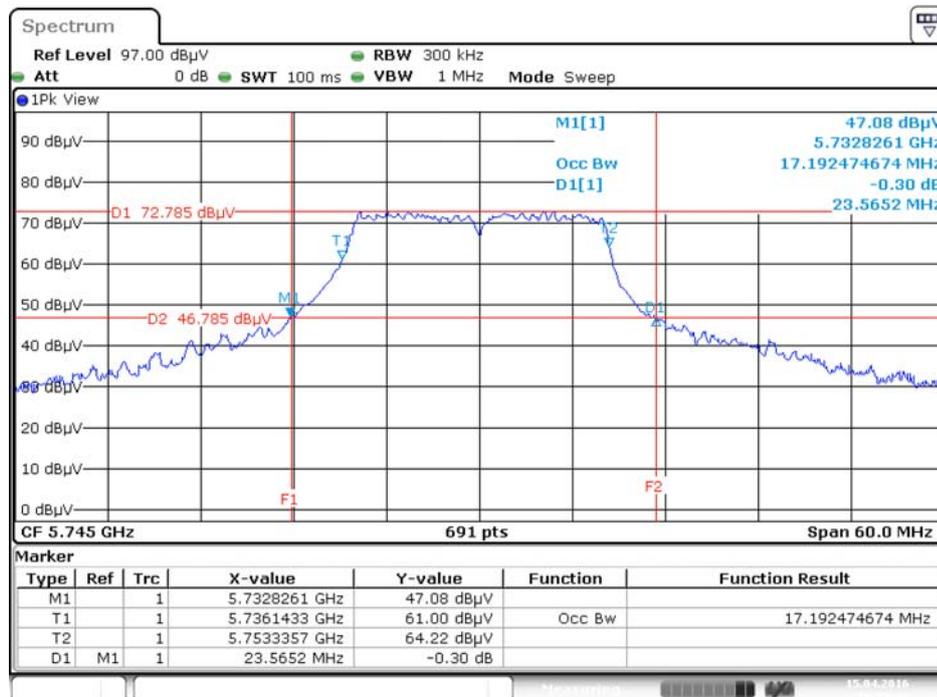


Date: 15.APR.2016 10:54:42

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5785 MHz

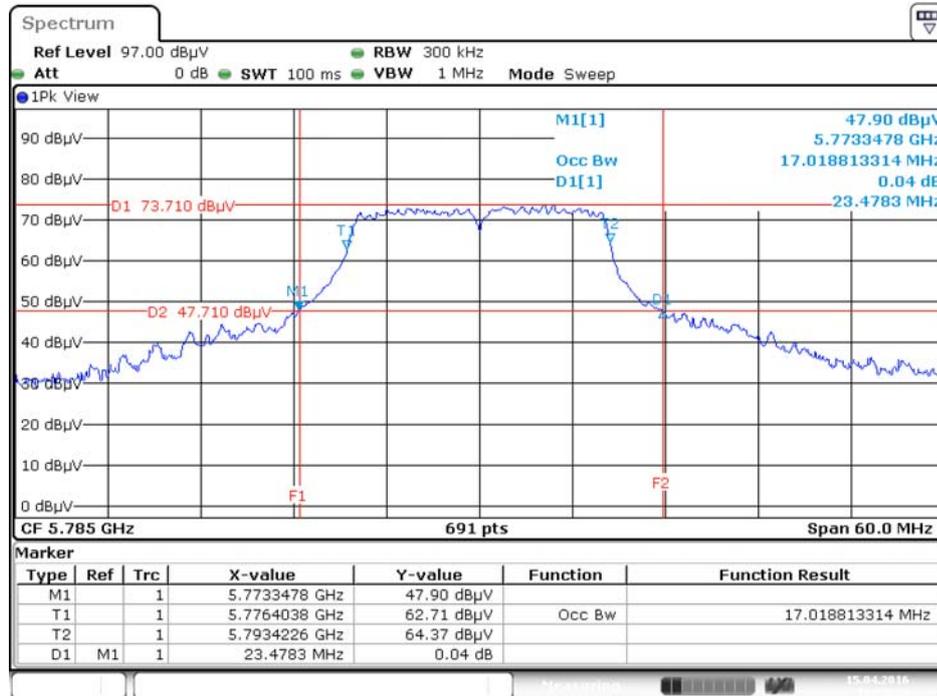


Date: 15.APR.2016 10:55:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5825 MHz

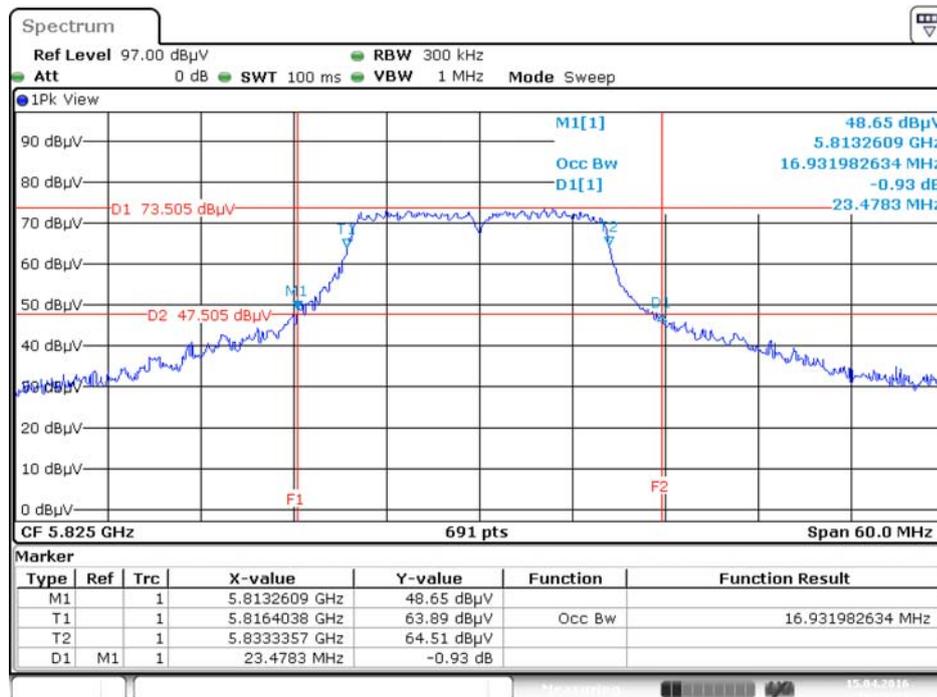


Date: 15.APR.2016 10:56:11

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5180 MHz

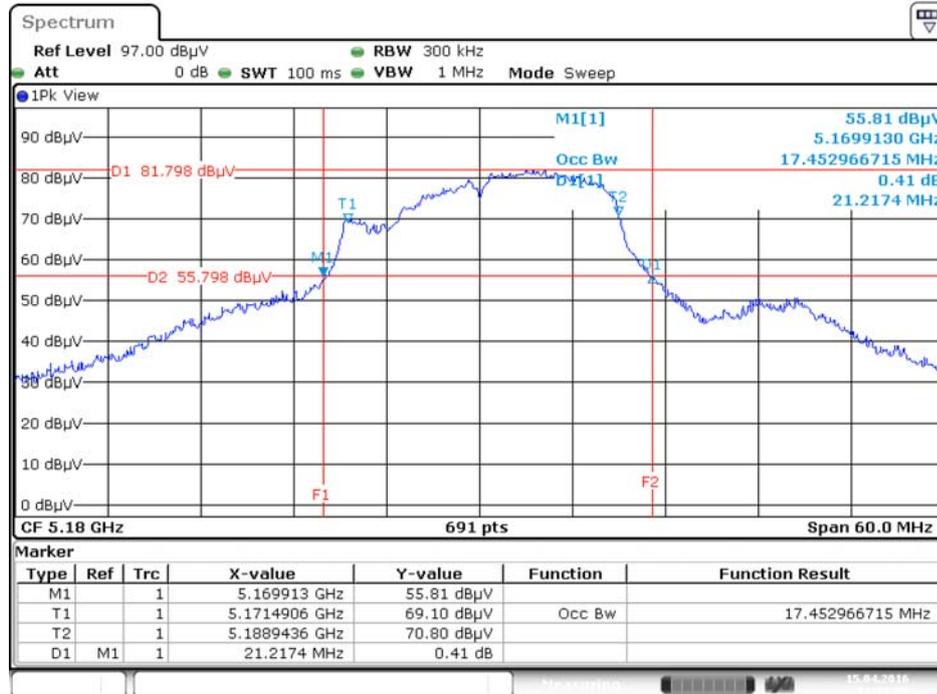


Date: 15.APR.2016 11:01:00

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2/ 5200 MHz

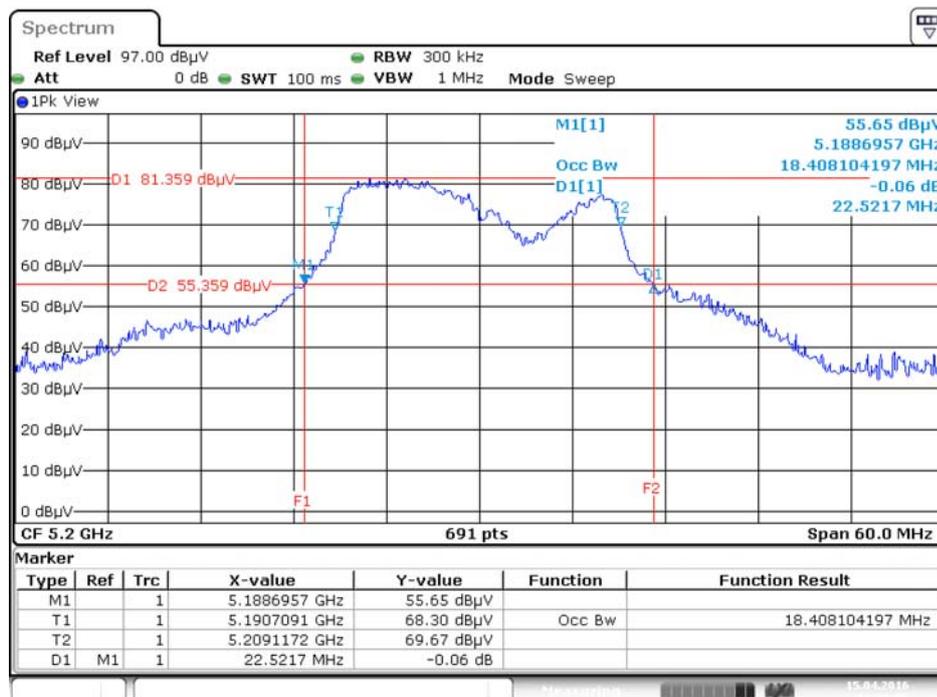


Date: 15.APR.2016 11:01:55

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5240 MHz

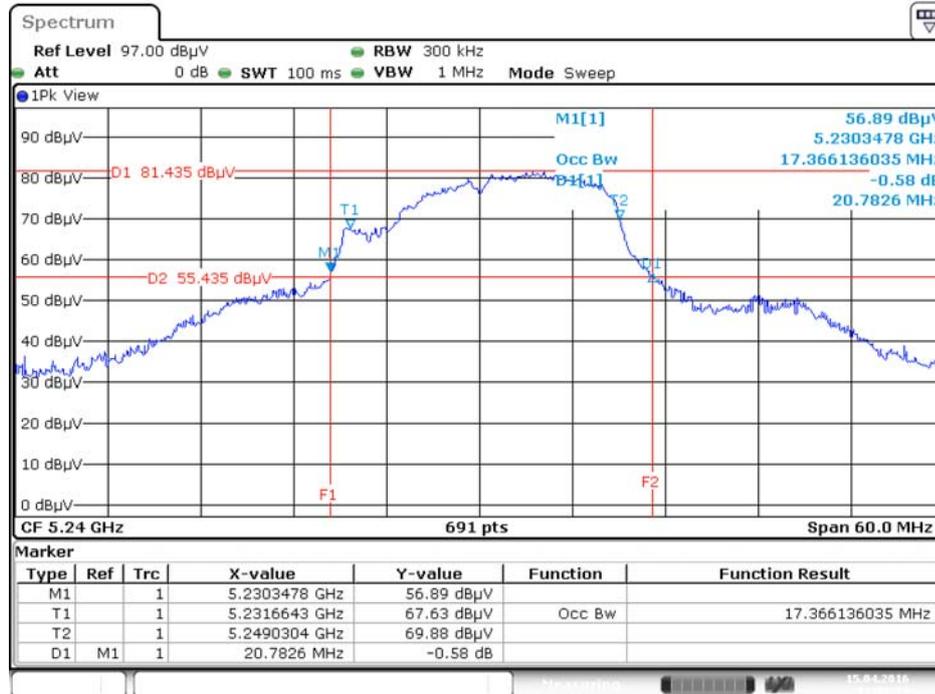


Date: 15.APR.2016 11:02:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5745 MHz

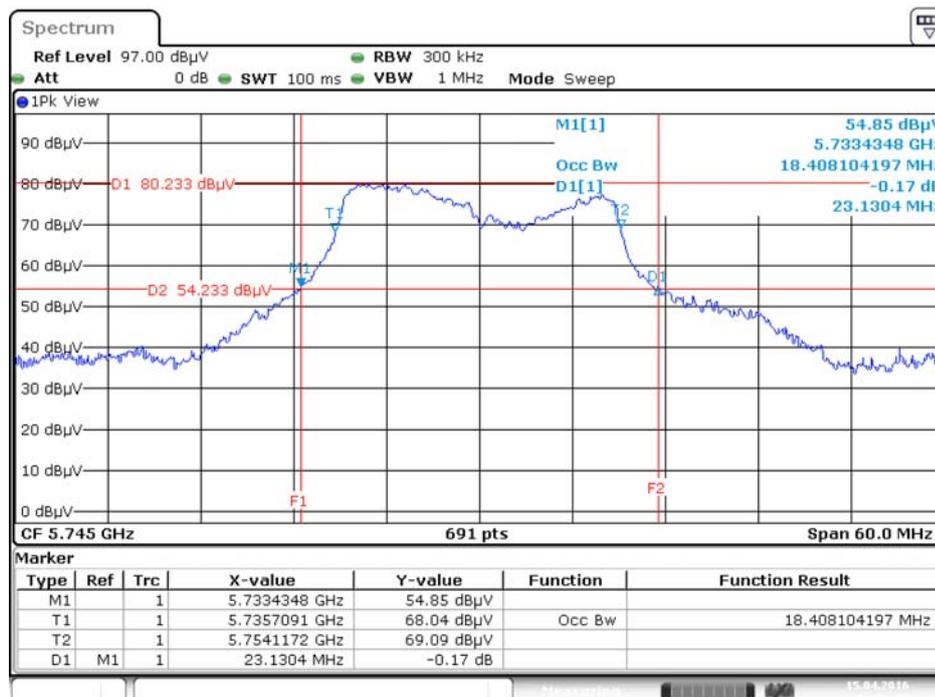


Date: 15.APR.2016 10:59:28

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5785 MHz

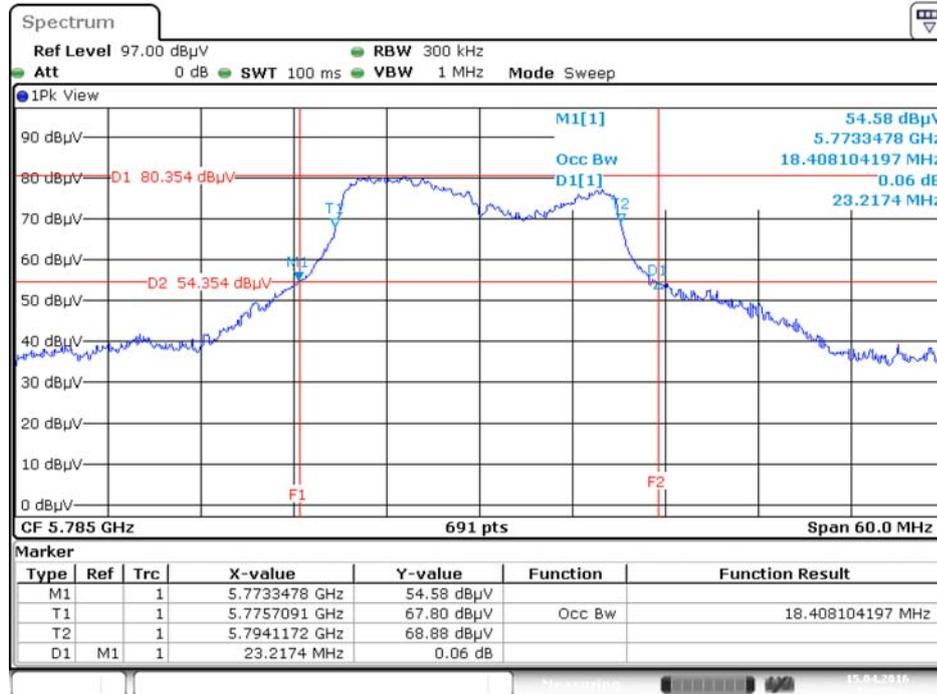


Date: 15.APR.2016 10:58:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5825 MHz

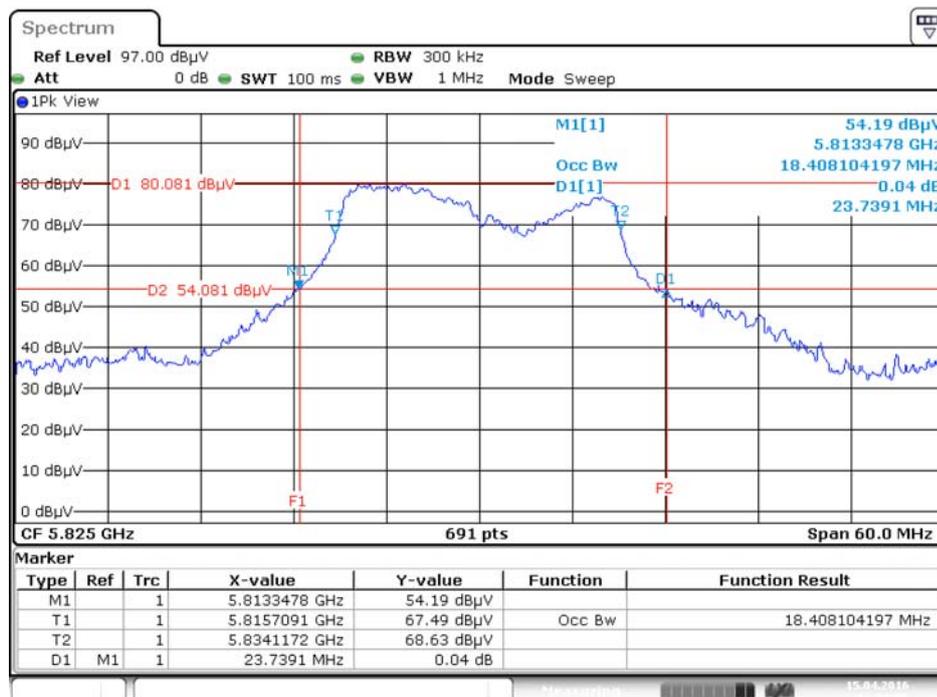


Date: 15.APR.2016 10:57:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 / 5190 MHz

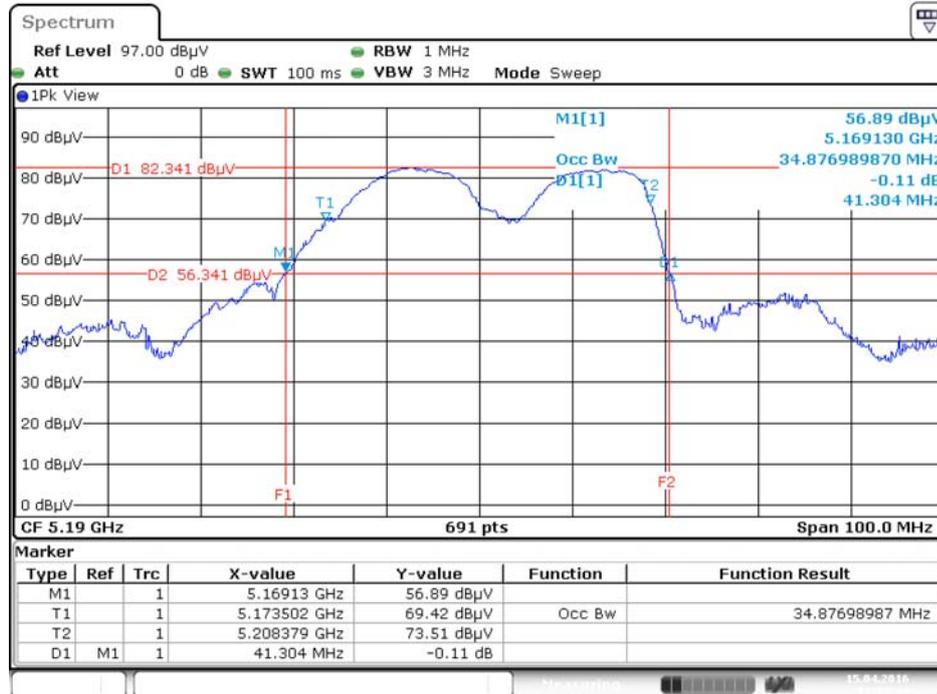


Date: 15.APR.2016 11:03:43

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 / 5230 MHz

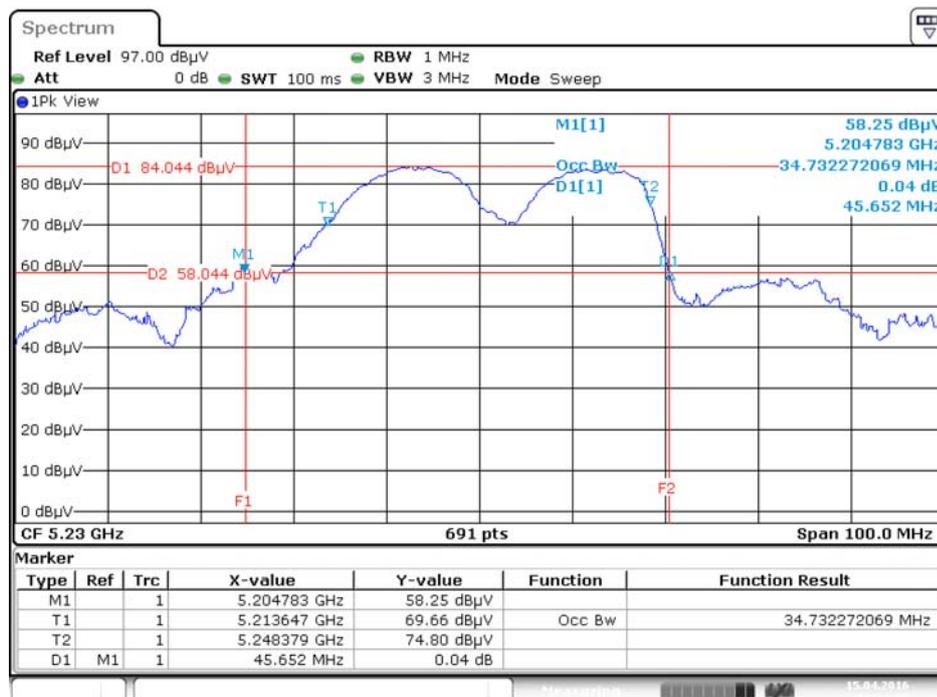


Date: 15.APR.2016 11:04:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 / 5755 MHz

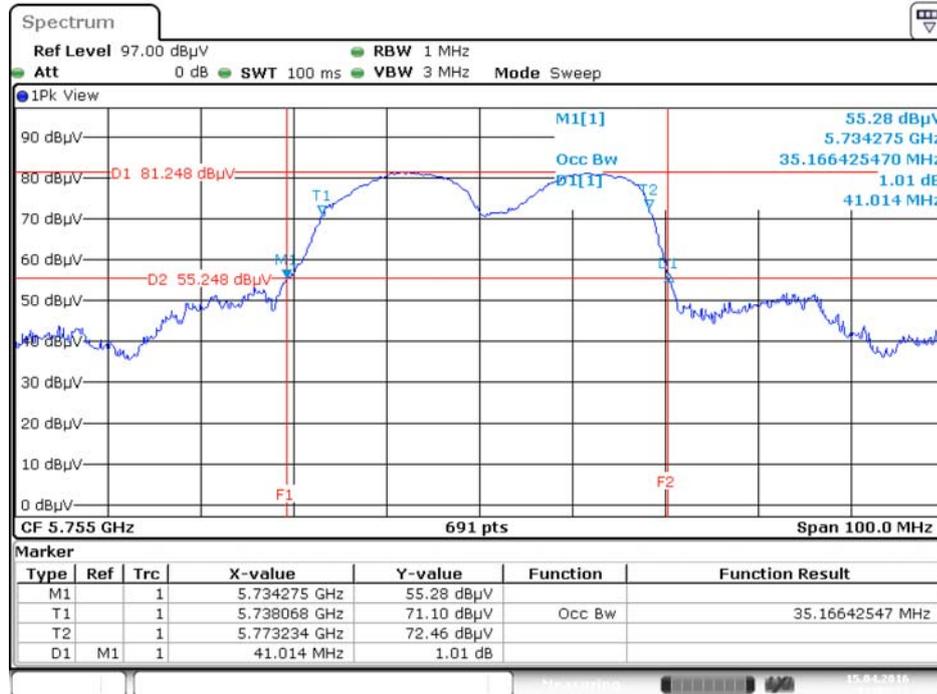

Date: 15.APR.2016 11:05:20

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2/ 5795 MHz

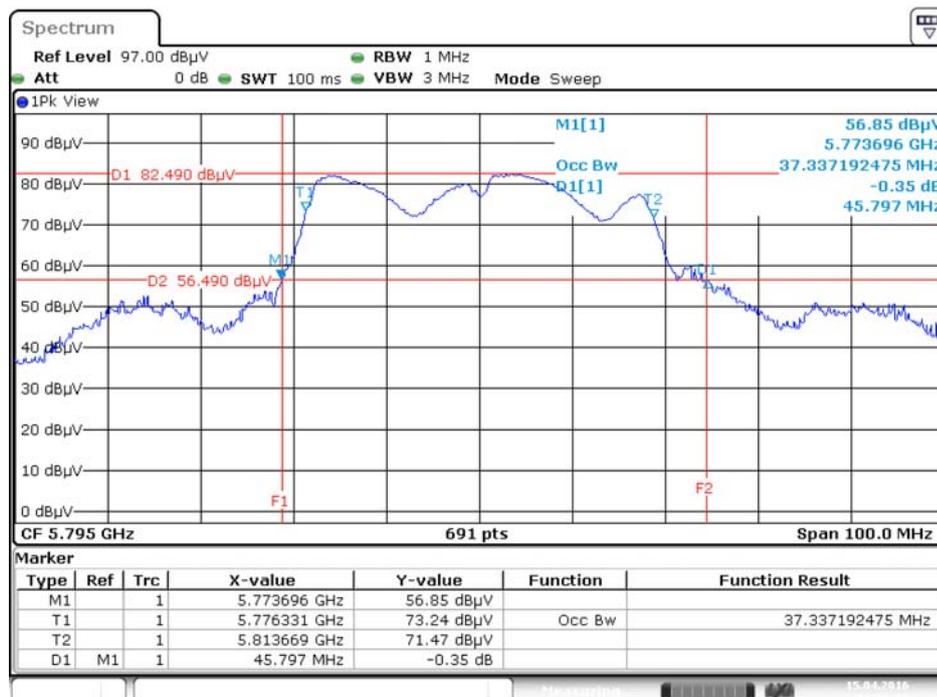

Date: 15.APR.2016 11:06:14

4.3. 6dB Spectrum Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 6dB Spectrum Bandwidth


Temperature	25°C	Humidity	55%
Test Engineer	Gino Huang		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.52	500	Complies
	5785 MHz	16.41	500	Complies
	5825 MHz	16.46	500	Complies
802.11n MCS0 HT20	5745 MHz	17.68	500	Complies
	5785 MHz	17.68	500	Complies
	5825 MHz	17.68	500	Complies
802.11n MCS0 HT40	5755 MHz	36.41	500	Complies
	5795 MHz	36.17	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 / 5785 MHz

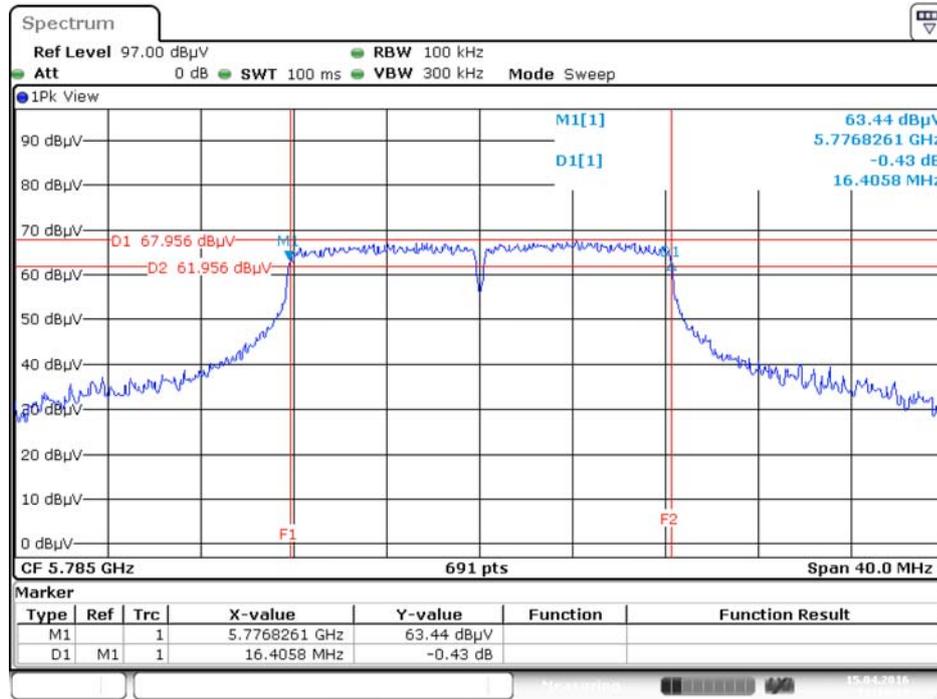


Date: 15.APR.2016 11:14:18

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5745 MHz

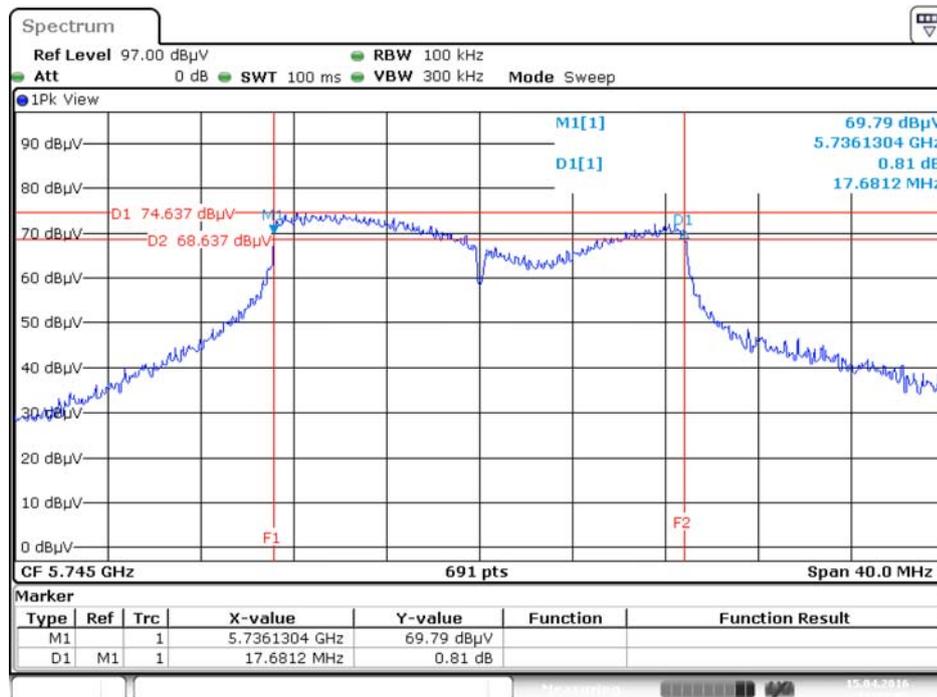

Date: 15.APR.2016 11:11:03

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 / 5795MHz

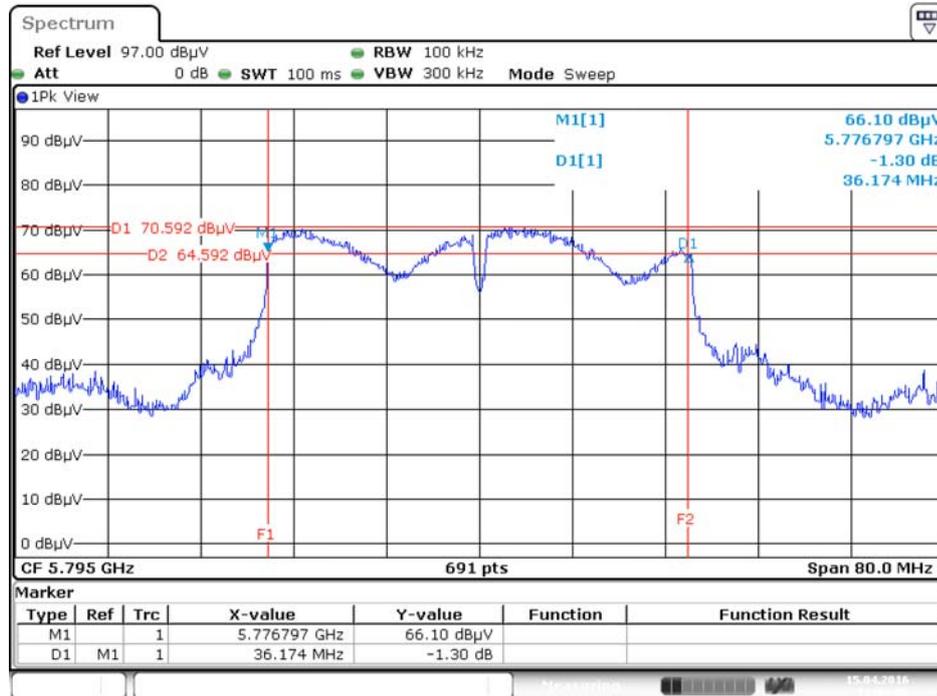

Date: 15.APR.2016 11:09:05

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p>
<input checked="" type="checkbox"/> Indoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<input type="checkbox"/> Fixed point-to-point access points	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p>
<input type="checkbox"/> Mobile and portable client devices	<p>The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>

<input checked="" type="checkbox"/>	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
-------------------------------------	----------------	--

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout



4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	55%
Test Engineer	Gino Huang	Test Date	Apr. 13, 2016~May 16, 2016

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1				
802.11a	5180 MHz	17.54			30.00	Complies
	5200 MHz	17.76			30.00	Complies
	5240 MHz	17.83			30.00	Complies
	5745 MHz	16.81			30.00	Complies
	5785 MHz	17.74			30.00	Complies
	5825 MHz	17.11			30.00	Complies
Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11n MCS0 HT20	5180 MHz	15.86	15.94	18.91	30.00	Complies
	5200 MHz	15.67	15.75	18.72	30.00	Complies
	5240 MHz	15.73	15.81	18.78	30.00	Complies
	5745 MHz	15.86	15.95	18.92	30.00	Complies
	5785 MHz	15.79	15.86	18.84	30.00	Complies
	5825 MHz	15.09	15.14	18.13	30.00	Complies
802.11n MCS0 HT40	5190 MHz	13.87	13.75	16.82	30.00	Complies
	5230 MHz	15.49	15.58	18.55	30.00	Complies
	5755 MHz	13.74	13.63	16.70	30.00	Complies
	5795 MHz	15.12	15.23	18.19	30.00	Complies

4.5. Power Spectral Density Measurement

4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should ≤ 30 dBm.

4.5.4. Test Setup Layout

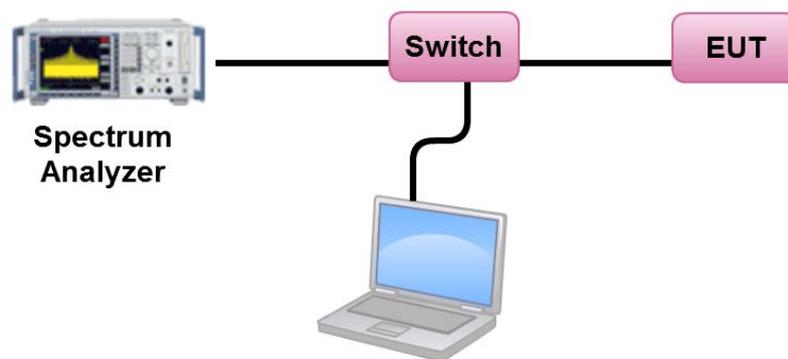

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	55%
Test Engineer	Gino Huang	Test Date	Apr. 13, 2016~May 16, 2016

Configuration IEEE 802.11a / Ant. 1

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	4.37	17.00	Complies
40	5200 MHz	4.61	17.00	Complies
48	5240 MHz	4.60	17.00	Complies

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	3.65	-3.01	0.64	30.00	Complies
157	5785 MHz	4.53	-3.01	1.52	30.00	Complies
165	5825 MHz	3.93	-3.01	0.92	30.00	Complies

Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	5.70	15.79	Complies
40	5200 MHz	5.54	15.79	Complies
48	5240 MHz	5.57	15.79	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} S_{j,k} \right\}^2}{N_{ANT}} \right] = 7.21\text{ dBi}$, so limit = $17 - (7.21 - 6) = 15.79\text{ dBm}$

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	5.69	-3.01	2.68	28.79	Complies
157	5785 MHz	5.62	-3.01	2.61	28.79	Complies
165	5825 MHz	4.91	-3.01	1.90	28.79	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} S_{j,k} \right\}^2}{N_{ANT}} \right] = 7.21\text{ dBi}$, so limit = $30 - (7.21 - 6) = 28.79\text{ dBm/500kHz}$

Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.67	15.79	Complies
46	5230 MHz	2.29	15.79	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 7.21\text{ dBi}$, so limit = $17 - (7.21 - 6) = 15.79\text{ dBm}$


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	0.55	-3.01	-2.46	28.79	Complies
159	5795 MHz	1.99	-3.01	-1.02	28.79	Complies

Note: $Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 7.21\text{ dBi}$, so limit = $30 - (7.21 - 6) = 28.79\text{ dBm/500kHz}$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5200 MHz

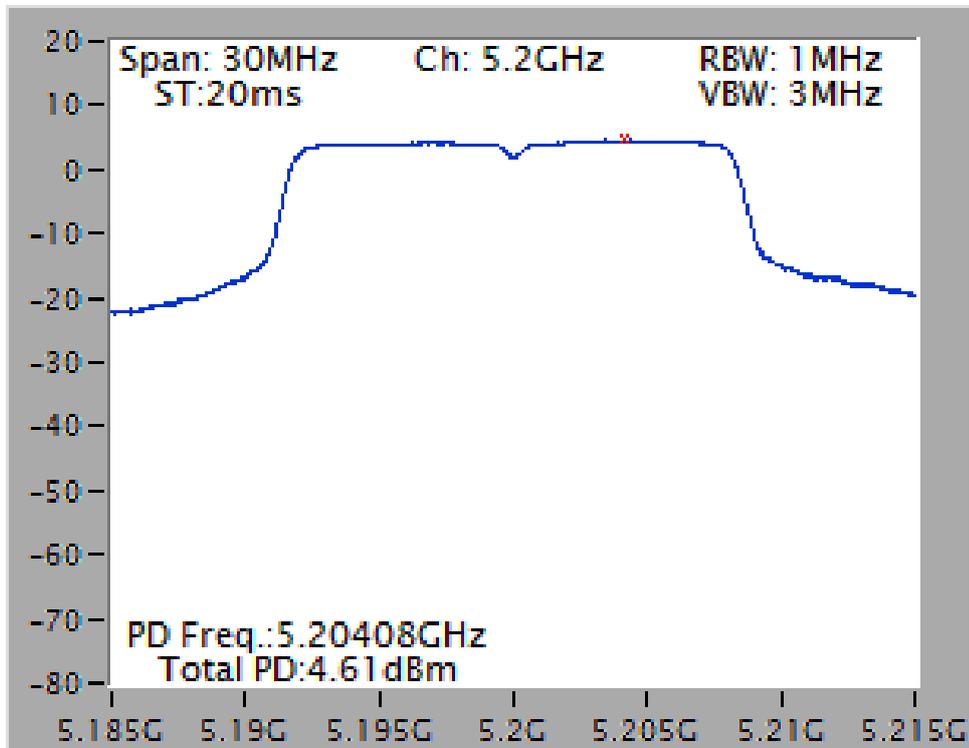


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 / 5785 MHz

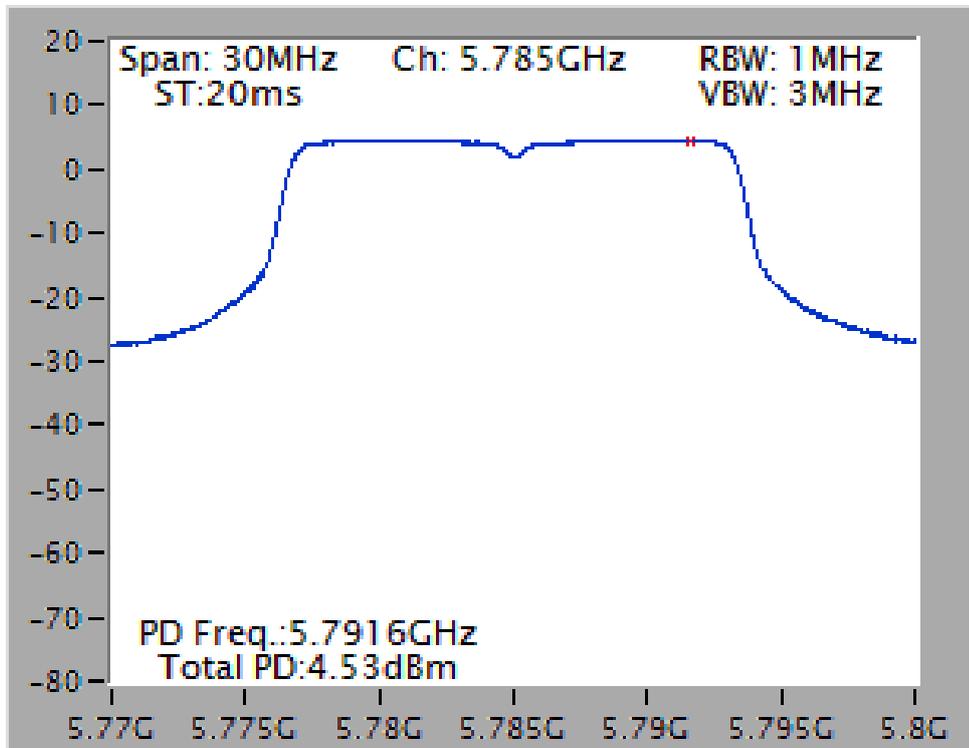


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5180 MHz

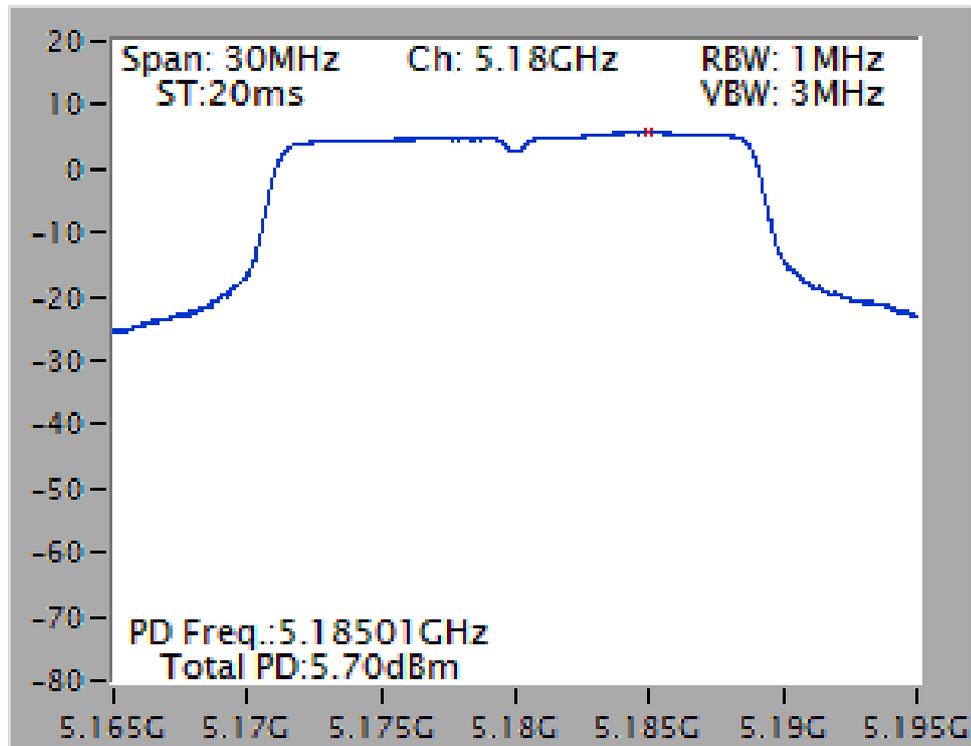


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / Ant. 1 + Ant. 2 / 5745 MHz

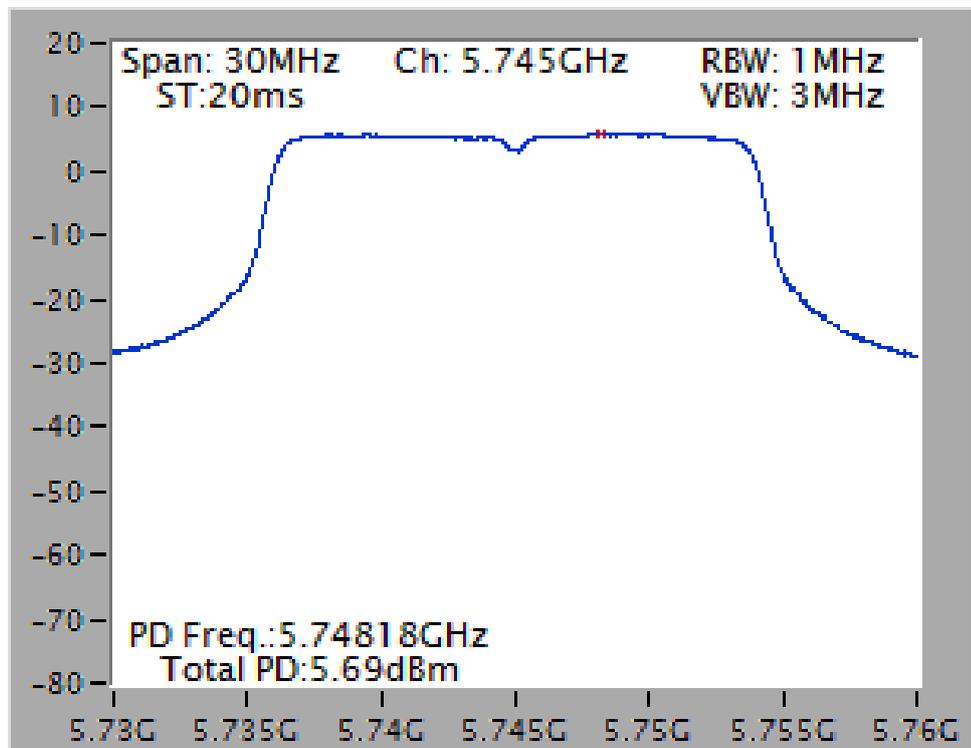

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 / 5230 MHz

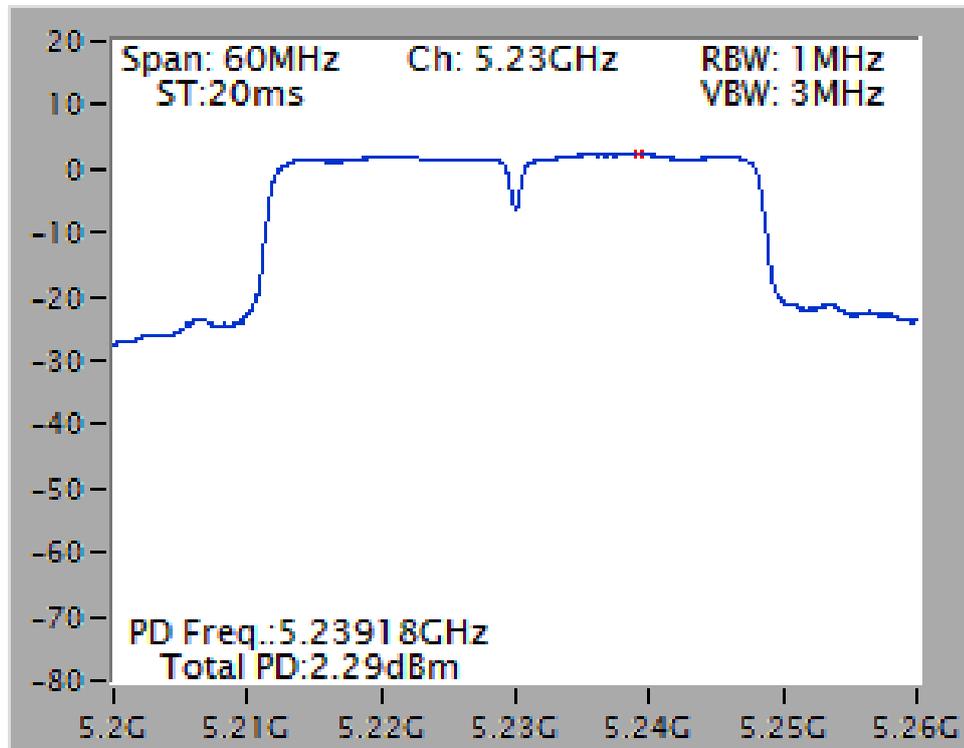

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / Ant. 1 + Ant. 2 / 5795 MHz

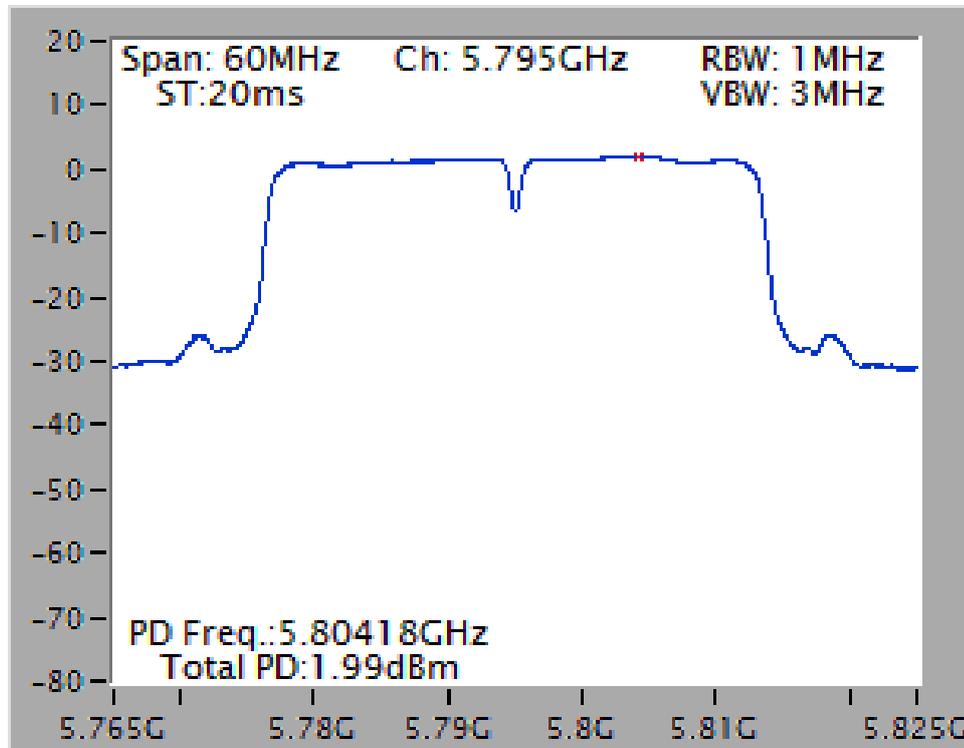

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

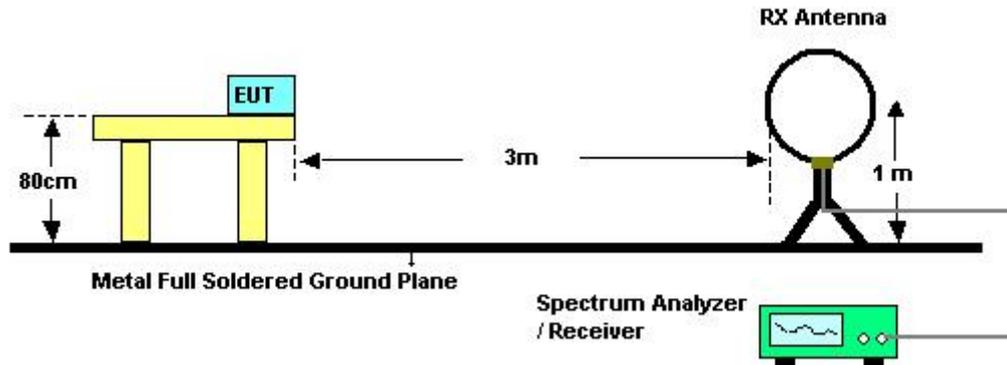

For Radiated Emissions: 30MHz~1GHz

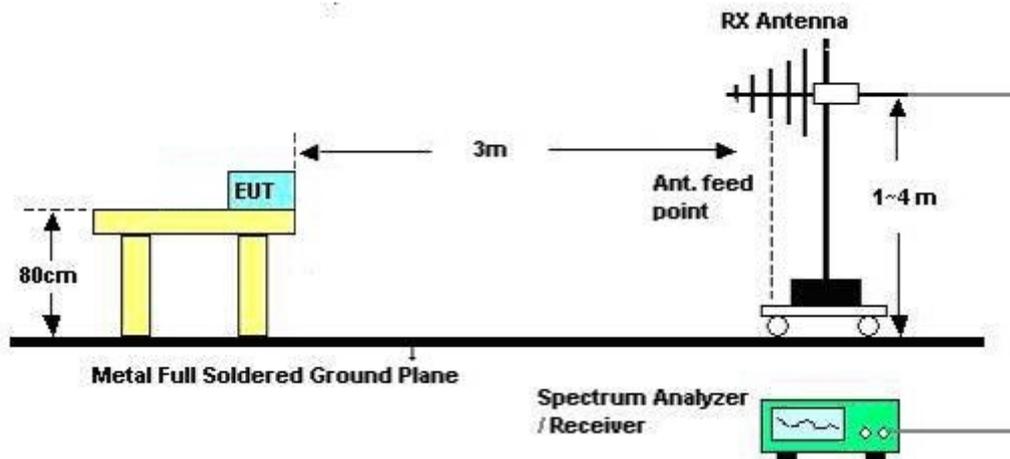

For Radiated Emissions: Above 1GHz

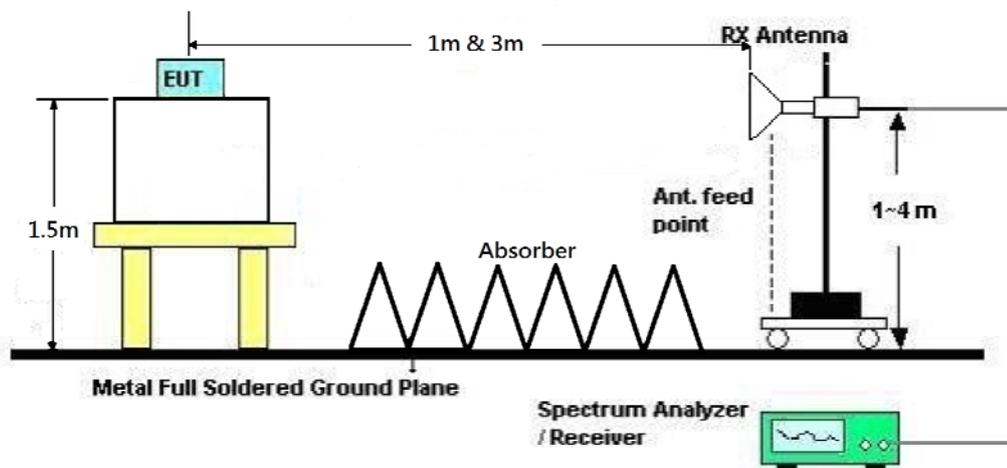

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	Normal Link
Test Date	May 27, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	Normal Link

Horizontal

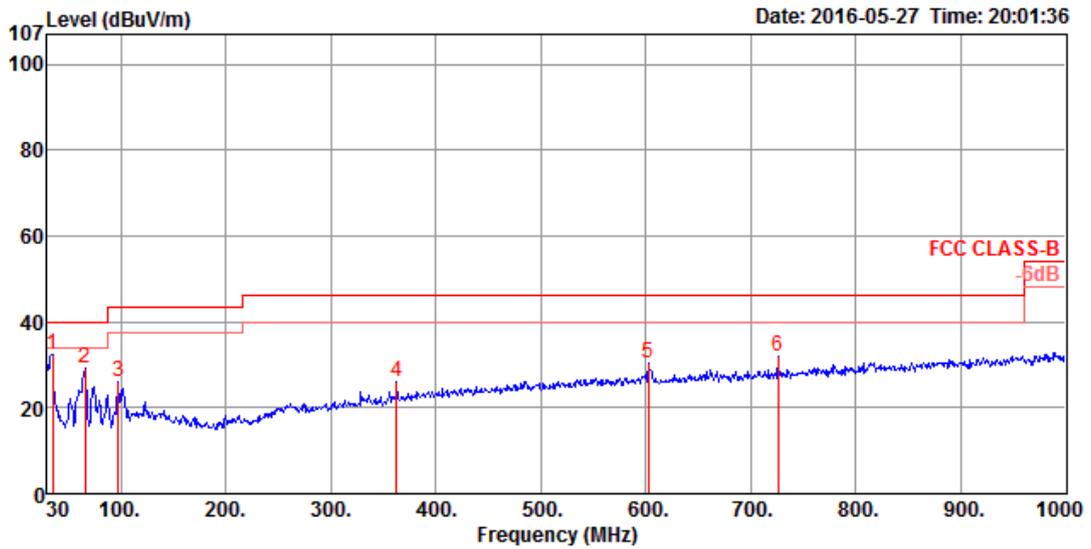

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	34.85	32.53	40.00	-7.47	42.00	0.60	22.57	32.64	125	229	Peak	HORIZONTAL
2	65.89	29.30	40.00	-10.70	48.80	0.81	12.30	32.61	100	292	Peak	HORIZONTAL
3	97.90	25.91	43.50	-17.59	41.19	0.97	16.32	32.57	125	290	Peak	HORIZONTAL
4	362.71	26.19	46.00	-19.81	35.53	1.87	21.32	32.53	125	133	Peak	HORIZONTAL
5	602.30	30.33	46.00	-15.67	35.82	2.38	24.82	32.69	100	271	Peak	HORIZONTAL
6	725.49	31.90	46.00	-14.10	36.02	2.63	25.80	32.55	100	246	Peak	HORIZONTAL

Vertical

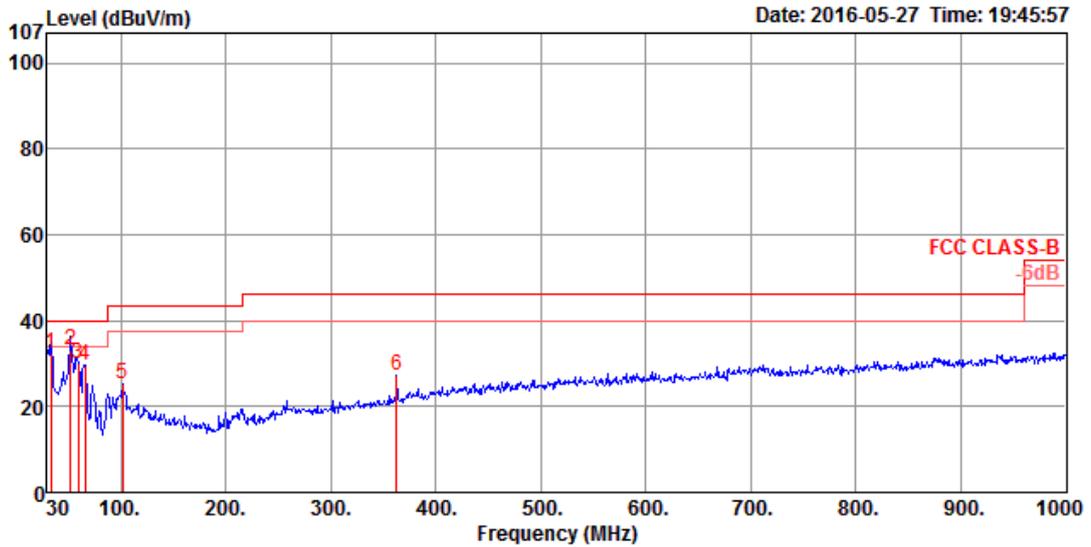

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	33.88	32.27	40.00	-7.73	41.23	0.59	23.09	32.64	100	17 QP	VERTICAL
2	52.31	33.15	40.00	-6.85	51.18	0.72	13.88	32.63	100	32 QP	VERTICAL
3	59.10	30.19	40.00	-9.81	49.55	0.76	12.50	32.62	100	360 Peak	VERTICAL
4	65.89	29.67	40.00	-10.33	49.17	0.81	12.30	32.61	125	104 Peak	VERTICAL
5	101.78	25.09	43.50	-18.41	39.77	0.99	16.90	32.57	100	359 Peak	VERTICAL
6	362.71	27.17	46.00	-18.83	36.51	1.87	21.32	32.53	125	203 Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 36 / Ant. 1
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15540.07	44.42	54.00	-9.58	30.88	11.01	38.39	35.86	150	61	Average	HORIZONTAL
2	15540.92	57.80	74.00	-16.20	44.26	11.01	38.39	35.86	150	61	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15540.32	44.48	54.00	-9.52	30.94	11.01	38.39	35.86	150	38	Average	VERTICAL
2	15541.71	57.82	74.00	-16.18	44.28	11.01	38.39	35.86	150	38	Peak	VERTICAL



Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 40 / Ant. 1
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.62	43.83	54.00	-10.17	30.31	11.01	38.37	35.86	150	130	Average	HORIZONTAL
2	15602.27	56.86	74.00	-17.14	43.34	11.01	38.37	35.86	150	130	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15599.87	56.93	74.00	-17.07	43.40	11.01	38.38	35.86	150	97	Peak	VERTICAL
2	15601.20	43.74	54.00	-10.26	30.22	11.01	38.37	35.86	150	97	Average	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 48 / Ant. 1
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15718.48	57.48	74.00	-16.52	43.98	11.01	38.35	35.86	150	191	Peak	HORIZONTAL
2	15721.84	43.65	54.00	-10.35	30.15	11.01	38.35	35.86	150	191	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15718.14	43.53	54.00	-10.47	30.03	11.01	38.35	35.86	150	158	Average	VERTICAL
2	15720.87	56.54	74.00	-17.46	43.04	11.01	38.35	35.86	150	158	Peak	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 149 / Ant. 1
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11487.83	55.55	74.00	-18.45	41.77	10.51	39.20	35.93	150	241	Peak	HORIZONTAL
2	11488.14	41.96	54.00	-12.04	28.18	10.51	39.20	35.93	150	241	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11488.00	41.86	54.00	-12.14	28.08	10.51	39.20	35.93	150	208	Average	VERTICAL
2	11488.55	55.42	74.00	-18.58	41.64	10.51	39.20	35.93	150	208	Peak	VERTICAL



Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 157 / Ant. 1
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11570.38	55.97	74.00	-18.03	42.23	10.51	39.15	35.92	150	301	Peak	HORIZONTAL
2	11571.74	42.48	54.00	-11.52	28.74	10.51	39.15	35.92	150	301	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11568.31	55.59	74.00	-18.41	41.85	10.51	39.15	35.92	150	268	Peak	VERTICAL
2	11571.64	42.59	54.00	-11.41	28.85	10.51	39.15	35.92	150	268	Average	VERTICAL



Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 165 / Ant. 1
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11647.65	42.78	54.00	-11.22	29.09	10.51	39.09	35.91	150	349	Average	HORIZONTAL
2	11647.71	55.64	74.00	-18.36	41.95	10.51	39.09	35.91	150	349	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11647.81	42.56	54.00	-11.44	28.87	10.51	39.09	35.91	150	319	Average	VERTICAL
2	11648.82	56.45	74.00	-17.55	42.76	10.51	39.09	35.91	150	319	Peak	VERTICAL



Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 36 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15539.45	57.61	74.00	-16.39	44.07	11.01	38.39	35.86	150	151	Peak	HORIZONTAL
2	15540.30	44.17	54.00	-9.83	30.63	11.01	38.39	35.86	150	151	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15539.15	57.95	74.00	-16.05	44.41	11.01	38.39	35.86	150	175	Peak	VERTICAL
2	15542.31	44.51	54.00	-9.49	30.97	11.01	38.39	35.86	150	175	Average	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 40 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.74	57.39	74.00	-16.61	43.86	11.01	38.38	35.86	150	134	Peak	HORIZONTAL
2	15602.50	43.57	54.00	-10.43	30.05	11.01	38.37	35.86	150	134	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15600.81	43.58	54.00	-10.42	30.06	11.01	38.37	35.86	150	134	Average	VERTICAL
2	15601.47	57.00	74.00	-17.00	43.48	11.01	38.37	35.86	150	134	Peak	VERTICAL



Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 48 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15717.61	57.19	74.00	-16.81	43.69	11.01	38.35	35.86	150	99	Peak	HORIZONTAL
2	15719.92	43.74	54.00	-10.26	30.24	11.01	38.35	35.86	150	99	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15720.12	43.65	54.00	-10.35	30.15	11.01	38.35	35.86	150	86	Average	VERTICAL
2	15721.02	56.88	74.00	-17.12	43.38	11.01	38.35	35.86	150	86	Peak	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 149 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11487.76	55.04	74.00	-18.96	41.26	10.51	39.20	35.93	150	139 Peak	HORIZONTAL
2	11490.90	41.91	54.00	-12.09	28.13	10.51	39.20	35.93	150	139 Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11488.04	41.99	54.00	-12.01	28.21	10.51	39.20	35.93	150	115 Average	VERTICAL
2	11488.17	55.46	74.00	-18.54	41.68	10.51	39.20	35.93	150	115 Peak	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 157 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11568.70	55.67	74.00	-18.33	41.93	10.51	39.15	35.92	150	194	Peak	HORIZONTAL
2	11569.82	42.59	54.00	-11.41	28.85	10.51	39.15	35.92	150	194	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11569.62	42.74	54.00	-11.26	29.00	10.51	39.15	35.92	150	155	Average	VERTICAL
2	11570.66	56.36	74.00	-17.64	42.62	10.51	39.15	35.92	150	155	Peak	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 165 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11650.09	55.88	74.00	-18.12	42.19	10.51	39.09	35.91	150	318	Peak	HORIZONTAL
2	11651.11	42.86	54.00	-11.14	29.19	10.51	39.07	35.91	150	318	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11647.91	56.45	74.00	-17.55	42.76	10.51	39.09	35.91	150	280	Peak	VERTICAL
2	11647.95	42.65	54.00	-11.35	28.96	10.51	39.09	35.91	150	280	Average	VERTICAL



Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT40 CH 38 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15572.15	57.17	74.00	-16.83	43.64	11.01	38.38	35.86	150	239	Peak	HORIZONTAL
2	15572.50	44.26	54.00	-9.74	30.73	11.01	38.38	35.86	150	239	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15567.82	58.10	74.00	-15.90	44.57	11.01	38.38	35.86	150	269	Peak	VERTICAL
2	15569.55	44.48	54.00	-9.52	30.95	11.01	38.38	35.86	150	269	Average	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT40 CH 46 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15687.84	43.31	54.00	-10.69	29.80	11.01	38.36	35.86	150	62 Average	HORIZONTAL
2	15690.83	56.34	74.00	-17.66	42.83	11.01	38.36	35.86	150	62 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15687.69	56.28	74.00	-17.72	42.77	11.01	38.36	35.86	150	134 Peak	VERTICAL
2	15691.95	43.24	54.00	-10.76	29.74	11.01	38.35	35.86	150	134 Average	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT40 CH 151 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11507.66	41.97	54.00	-12.03	28.19	10.51	39.20	35.93	150	168	Average	HORIZONTAL
2	11510.14	54.90	74.00	-19.10	41.11	10.51	39.20	35.92	150	168	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11507.80	41.84	54.00	-12.16	28.06	10.51	39.20	35.93	150	146	Average	VERTICAL
2	11510.60	55.57	74.00	-18.43	41.78	10.51	39.20	35.92	150	146	Peak	VERTICAL

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT40 CH 159 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11592.19	42.09	54.00	-11.91	28.37	10.51	39.12	35.91	150	135	Average	HORIZONTAL
2	11592.21	55.44	74.00	-18.56	41.72	10.51	39.12	35.91	150	135	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11591.91	42.05	54.00	-11.95	28.33	10.51	39.12	35.91	150	185	Average	VERTICAL
2	11591.92	55.72	74.00	-18.28	42.00	10.51	39.12	35.91	150	185	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.



4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 1
Test Date	Apr. 12, 2016		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5148.60	67.40	74.00	-6.60	62.85	7.88	33.17	36.50	201	280	Peak	VERTICAL
2	5149.80	52.14	54.00	-1.86	47.59	7.88	33.17	36.50	201	280	Average	VERTICAL
3	5183.40	110.64			105.99	7.91	33.23	36.49	201	280	Peak	VERTICAL
4	5185.60	101.08			96.43	7.91	33.23	36.49	201	280	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5102.80	47.76	54.00	-6.24	43.34	7.84	33.09	36.51	196	289	Average	VERTICAL
2	5104.00	60.12	74.00	-13.88	55.70	7.84	33.09	36.51	196	289	Peak	VERTICAL
3	5203.60	110.84			106.13	7.92	33.28	36.49	196	289	Peak	VERTICAL
4	5205.40	101.17			96.46	7.92	33.28	36.49	196	289	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5118.80	60.52	74.00	-13.48	56.06	7.85	33.12	36.51	198	280	Peak	VERTICAL
2	5139.80	47.51	54.00	-6.49	42.99	7.87	33.15	36.50	198	280	Average	VERTICAL
3	5235.80	112.10			107.33	7.91	33.34	36.48	198	280	Peak	VERTICAL
4	5237.60	102.61			97.84	7.91	33.34	36.48	198	280	Average	VERTICAL
5	5350.40	50.21	54.00	-3.79	45.26	7.88	33.53	36.46	198	280	Average	VERTICAL
6	5357.60	61.70	74.00	-12.30	56.73	7.88	33.55	36.46	198	280	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11a CH 149, 157, 165 / Ant. 1
Test Date	Apr. 12, 2016		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5713.80	66.05	68.20	-2.15	59.58	8.43	34.41	36.37	199	17	Peak	VERTICAL
2	5724.40	76.96	78.20	-1.24	70.46	8.42	34.45	36.37	199	17	Peak	VERTICAL
3	5738.60	110.65			104.15	8.42	34.45	36.37	199	17	Peak	VERTICAL
4	5741.40	100.80			94.25	8.42	34.50	36.37	199	17	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5701.80	61.64	68.20	-6.56	55.23	8.43	34.36	36.38	202	239	Peak	VERTICAL
2	5725.00	61.31	78.20	-16.89	54.81	8.42	34.45	36.37	202	239	Peak	VERTICAL
3	5782.60	100.23			93.59	8.41	34.59	36.36	202	239	Average	VERTICAL
4	5788.20	109.92			103.27	8.41	34.59	36.35	202	239	Peak	VERTICAL
5	5854.00	61.91	78.20	-16.29	55.08	8.39	34.78	36.34	202	239	Peak	VERTICAL
6	5867.00	62.21	68.20	-5.99	55.33	8.39	34.83	36.34	202	239	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5828.40	110.30			103.52	8.39	34.73	36.34	202	242	Peak	VERTICAL
2	5829.00	100.73			93.95	8.39	34.73	36.34	202	242	Average	VERTICAL
3	5850.00	74.05	78.20	-4.15	67.22	8.39	34.78	36.34	202	242	Peak	VERTICAL
4	5861.40	66.73	68.20	-1.47	59.85	8.39	34.83	36.34	202	242	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5142.20	67.65	74.00	-6.35	63.10	7.88	33.17	36.50	218	317	Peak	VERTICAL
2	5146.00	49.15	54.00	-4.85	44.60	7.88	33.17	36.50	218	317	Average	VERTICAL
3	5185.00	112.60			107.95	7.91	33.23	36.49	218	317	Peak	VERTICAL
4	5185.20	103.02			98.37	7.91	33.23	36.49	218	317	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5087.20	59.72	74.00	-14.28	55.34	7.83	33.06	36.51	205	323	Peak	VERTICAL
2	5099.20	47.13	54.00	-6.87	42.71	7.84	33.09	36.51	205	323	Average	VERTICAL
3	5203.00	102.79			98.08	7.92	33.28	36.49	205	323	Average	VERTICAL
4	5203.00	112.72			108.01	7.92	33.28	36.49	205	323	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5139.20	46.53	54.00	-7.47	42.01	7.87	33.15	36.50	201	331	Average	VERTICAL
2	5143.40	59.06	74.00	-14.94	54.51	7.88	33.17	36.50	201	331	Peak	VERTICAL
3	5247.80	112.13			107.35	7.90	33.36	36.48	201	331	Peak	VERTICAL
4	5248.40	102.36			97.58	7.90	33.36	36.48	201	331	Average	VERTICAL
5	5350.40	48.79	54.00	-5.21	43.84	7.88	33.53	36.46	201	331	Average	VERTICAL
6	5354.60	61.08	74.00	-12.92	56.11	7.88	33.55	36.46	201	331	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT20 CH 149, 157, 165 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Channel 149

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5714.40	63.55	68.20	-4.65	57.08	8.43	34.41	36.37	194	322	Peak	VERTICAL
2	5723.20	75.90	78.20	-2.30	69.40	8.42	34.45	36.37	194	322	Peak	VERTICAL
3	5738.80	112.15			105.60	8.42	34.50	36.37	194	322	Peak	VERTICAL
4	5739.40	102.26			95.71	8.42	34.50	36.37	194	322	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5687.80	61.22	68.20	-6.98	54.85	8.44	34.31	36.38	198	15	Peak	VERTICAL
2	5723.80	60.54	78.20	-17.66	54.04	8.42	34.45	36.37	198	15	Peak	VERTICAL
3	5790.40	100.91			94.22	8.40	34.64	36.35	198	15	Average	VERTICAL
4	5790.40	110.58			103.89	8.40	34.64	36.35	198	15	Peak	VERTICAL
5	5850.00	60.91	78.20	-17.29	54.08	8.39	34.78	36.34	198	15	Peak	VERTICAL
6	5888.80	63.07	68.20	-5.13	56.15	8.38	34.87	36.33	198	15	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5830.40	100.34			93.56	8.39	34.73	36.34	199	318	Average	VERTICAL
2	5831.60	110.23			103.45	8.39	34.73	36.34	199	318	Peak	VERTICAL
3	5850.00	67.57	78.20	-10.63	60.74	8.39	34.78	36.34	199	318	Peak	VERTICAL
4	5866.80	61.48	68.20	-6.72	54.60	8.39	34.83	36.34	199	318	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT40 CH 38, 46 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5150.00	52.94	54.00	-1.06	48.39	7.88	33.17	36.50	205	328	Average	VERTICAL
2	5150.00	66.57	74.00	-7.43	62.02	7.88	33.17	36.50	205	328	Peak	VERTICAL
3	5191.20	105.80			101.12	7.92	33.25	36.49	205	328	Peak	VERTICAL
4	5191.60	96.33			91.65	7.92	33.25	36.49	205	328	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5137.20	46.38	54.00	-7.62	41.86	7.87	33.15	36.50	204	319	Average	VERTICAL
2	5138.00	59.78	74.00	-14.22	55.26	7.87	33.15	36.50	204	319	Peak	VERTICAL
3	5234.00	107.91			103.14	7.91	33.34	36.48	204	319	Peak	VERTICAL
4	5234.80	98.43			93.66	7.91	33.34	36.48	204	319	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	22.1°C	Humidity	58%
Test Engineer	John Tang / Lucke Hsieh	Configurations	IEEE 802.11n MCS0 HT40 CH 151, 159 / Ant. 1 + Ant. 2
Test Date	Apr. 12, 2016		

Channel 151

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5715.00	67.05	68.20	-1.15	60.58	8.43	34.41	36.37	205	322	Peak	VERTICAL
2	5719.00	72.71	78.20	-5.49	66.24	8.43	34.41	36.37	205	322	Peak	VERTICAL
3	5738.60	105.93			99.43	8.42	34.45	36.37	205	322	Peak	VERTICAL
4	5739.40	96.51			89.96	8.42	34.50	36.37	205	322	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5705.60	61.35	68.20	-6.85	54.94	8.43	34.36	36.38	197	14	Peak	VERTICAL
2	5717.20	61.11	78.20	-17.09	54.64	8.43	34.41	36.37	197	14	Peak	VERTICAL
3	5790.80	97.31			90.62	8.40	34.64	36.35	197	14	Average	VERTICAL
4	5790.80	107.10			100.41	8.40	34.64	36.35	197	14	Peak	VERTICAL
5	5850.60	64.43	78.20	-13.77	57.60	8.39	34.78	36.34	197	14	Peak	VERTICAL
6	5897.00	62.12	68.20	-6.08	55.15	8.38	34.92	36.33	197	14	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5795 MHz.

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c-f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.8.4. Test Setup Layout

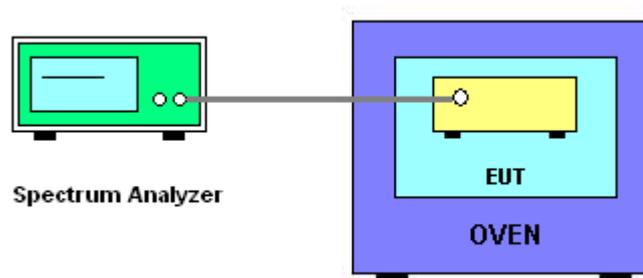

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	55%
Test Engineer	Gino Huang	Test Date	Apr. 13, 2016~May 16, 2016

Mode: 20 MHz / Ant. 1

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5200.0195	5200.0187	5200.0184	5200.0183
110.00	5200.0191	5200.0184	5200.0183	5200.0176
93.50	5200.0190	5200.0185	5200.0179	5200.0175
Max. Deviation (MHz)	0.0195	0.0187	0.0184	0.0183
Max. Deviation (ppm)	3.75	3.60	3.54	3.52
Result	Complies			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5200.0251	5200.0249	5200.0246	5200.0236
-20	5200.0241	5200.0235	5200.0225	5200.0216
-10	5200.0231	5200.0228	5200.0225	5200.0221
0	5200.0213	5200.0203	5200.0202	5200.0195
10	5200.0201	5200.0192	5200.0188	5200.0181
20	5200.0191	5200.0184	5200.0183	5200.0175
30	5200.0178	5200.0168	5200.0161	5200.0154
40	5200.0176	5200.0171	5200.0167	5200.0161
50	5200.0158	5200.0155	5200.0150	5200.0145
Max. Deviation (MHz)	0.0251	0.0249	0.0246	0.0236
Max. Deviation (ppm)	4.83	4.79	4.73	4.54
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5785.0198	5785.0192	5785.0184	5785.0176
110.00	5785.0191	5785.0187	5785.0182	5785.0174
93.50	5785.0187	5785.0185	5785.0179	5785.0172
Max. Deviation (MHz)	0.0198	0.0192	0.0184	0.0176
Max. Deviation (ppm)	3.42	3.32	3.18	3.04
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5785 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5785.0246	5785.0236	5785.0228	5785.0220
-20	5785.0239	5785.0229	5785.0226	5785.0222
-10	5785.0231	5785.0229	5785.0221	5785.0216
0	5785.0212	5785.0209	5785.0200	5785.0191
10	5785.0206	5785.0204	5785.0201	5785.0196
20	5785.0191	5785.0190	5785.0180	5785.0178
30	5785.0178	5785.0171	5785.0164	5785.0158
40	5785.0172	5785.0165	5785.0164	5785.0154
50	5785.0169	5785.0168	5785.0167	5785.0165
Max. Deviation (MHz)	0.0246	0.0236	0.0228	0.0222
Max. Deviation (ppm)	4.25	4.08	3.94	3.84
Result	Complies			

Mode: 40 MHz / Ant. 1

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5190.0193	5190.0186	5190.0183	5190.0173
110.00	5190.0191	5190.0190	5190.0185	5190.0180
93.50	5190.0190	5190.0188	5190.0186	5190.0181
Max. Deviation (MHz)	0.0193	0.0190	0.0186	0.0181
Max. Deviation (ppm)	3.72	3.66	3.58	3.49
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5190.0251	5190.0246	5190.0237	5190.0227
-20	5190.0241	5190.0232	5190.0231	5190.0226
-10	5190.0240	5190.0239	5190.0229	5190.0222
0	5190.0227	5190.0221	5190.0213	5190.0210
10	5190.0211	5190.0208	5190.0201	5190.0195
20	5190.0191	5190.0188	5190.0186	5190.0179
30	5190.0178	5190.0168	5190.0167	5190.0160
40	5190.0169	5190.0167	5190.0164	5190.0160
50	5190.0160	5190.0159	5190.0155	5190.0149
Max. Deviation (MHz)	0.0251	0.0246	0.0237	0.0227
Max. Deviation (ppm)	4.84	4.74	4.57	4.37
Result	Complies			

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5755.0197	5755.0187	5755.0181	5755.0171
110.00	5755.0191	5755.0186	5755.0180	5755.0176
93.50	5755.0190	5755.0187	5755.0186	5755.0180
Max. Deviation (MHz)	0.0197	0.0187	0.0186	0.0180
Max. Deviation (ppm)	3.42	3.25	3.23	3.13
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5755 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5755.0214	5755.0210	5755.0200	5755.0197
-20	5755.0209	5755.0208	5755.0199	5755.0190
-10	5755.0205	5755.0198	5755.0191	5755.0182
0	5755.0201	5755.0198	5755.0188	5755.0180
10	5755.0196	5755.0195	5755.0190	5755.0183
20	5755.0191	5755.0181	5755.0171	5755.0170
30	5755.0178	5755.0172	5755.0162	5755.0153
40	5755.0163	5755.0154	5755.0151	5755.0141
50	5755.0149	5755.0143	5755.0138	5755.0134
Max. Deviation (MHz)	0.0214	0.0210	0.0200	0.0197
Max. Deviation (ppm)	3.72	3.65	3.48	3.42
Result	Complies			

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz ~ 30MHz	Dec. 01, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Callbration Date	Remark
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%