

RF Exposure Report

FCC Rule Part : CFR §2.1093
Standards : 47 CFR FCC Part 1.1310
Report No. : SFAHGL-WTW-P25050525 R1
Applicant : Belkin International, Inc.
Address : 555 S. Aviation Blvd., Suite 180, El Segundo, CA 90245, USA
Product : BoostCharge Magnetic Charging Car Mount
FCC ID : K7SWIC010
Brand : belkin
Model No. : WIC010
Sample Received Date : May 23, 2025
Date of Testing : May 26, 2025
Lab Address : No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location : No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City, Taiwan
FCC Accredited No. : TW0003

CERTIFICATION: The above equipment have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch–Lin Kou Laboratories**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies.

Prepared By :



Vera Huang / Specialist

Approved By :



Gordon Lin / Manager



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1. Description of Equipment Under Test	4
2. Description of Test Modes	4
3. Preface.....	4
4. SAR Measurement System	5
4.1 DASYS8 Module WPT - MAGPy System	5
4.1.1 Robot	6
4.1.2 Probes	7
4.1.3 Data Acquisition Electronics (DAE).....	7
5. Compliance Evaluation	8
6. Simulation Results	9
7. System Check and Validation Sources.....	10
7.1 Device	11
8. Human Exposure Limits.....	12
8.1 Limits for Maximum Permissible Exposure	12
9. Specific Absorption Rate Limits.....	13
10. SAR and Induced H-field & E-field Measurement Procedure.....	14
10.1 Magnetic Fields	15
11. System Validation	16
12. Evaluation Results.....	17
13. Calibration of Test Equipment.....	19
14. References	19
15. Measurement Uncertainty	20
16. Information of the Testing Laboratories	25
Appendix A. Measurement Test Result	
Appendix C. Calibration Certificate for Probe	
Appendix D. System Verification for Probe	

1. Description of Equipment Under Test

EUT Type	BoostCharge Magnetic Charging Car Mount
FCC ID	K7SWIC010
Brand Name	belkin
Model Name	WIC010
Operating Frequency	Coil 1: 111-148kHz / 360kHz
Uplink Modulations	FSK
Antenna Type	Coil Antenna
EUT Stage	Engineering Sample

Note: The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

2. Description of Test Modes

The test modes are presented in the report as below.

Test Mode	Test Condition
A	Charging Mode (EUT with iPhone 11) – 111-148kHz
B	Charging Mode (EUT with iPhone 16) – 360kHz

3. Preface

The objective of this report is the numerical exposure investigation of one Wireless Power Transfer (WPT) charger (further referred to as "device under test" or "EUT") designed by Belkin International, Inc. (further referred to as "applicant"). In particular the Specific Absorption Rate (SAR, heat damage hazard) and internal electric fields was investigated and compared to exposure limits specified by FCC [1].

4. SAR Measurement System

4.1 DASy8 Module WPT - MAGPy System

SPEAG offers two types of MAGPy systems: one for fast and easy in situ evaluations (MAGPy V2) and one for high precision robot-based evaluations in the lab (Module WPT). DASy8 Module WPT is based on the MAGPy technology integrated in our DASy8 product line for high precision robot-based evaluations. It is the only system for demonstrating compliance of wireless power transfer (WPT) devices according to IEC PAS 63184 (Chapter 8 "Measurement and numerical combination methods") and it enables fully automated compliance testing compatible with FCC KDB 680106 D01.

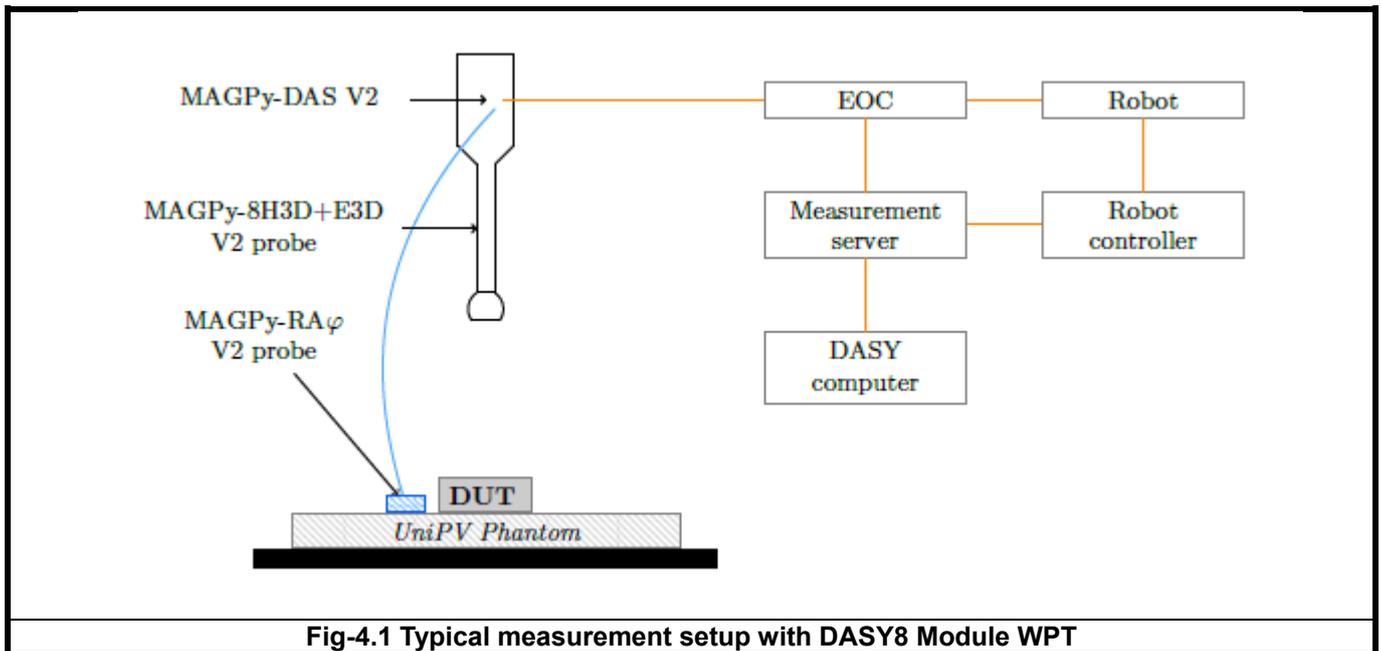


Fig-4.1 Typical measurement setup with DASy8 Module WPT

RF Exposure Report

4.1.1 Robot

DASY8 Module WPT is composed of the isotropic probe MAGPy-8H3D+E3D Version 2, the reference probe (MAGPy-RA ϕ), and the data acquisition system (MAGPy-DAS) mounted to the DASY8 robot via the emergency stop (MAGPy-ES). The induced electric (E-) fields and specific absorption rate (SAR) are assessed with Sim4Life's Quasi-Static EM Solver (P-EM-QS) using only the measured data. At each probe location, eight isotropic H-field values are acquired in parallel. The dedicated graphical user interface (GUI) fully automates the testing workflow. The WPT robot series have many features that are important for our application:

- Evaluation of H-field (3 kHz – 10 MHz)
- Demonstration of compliance (3 kHz – 4 MHz) according to IEC PAS 63184.

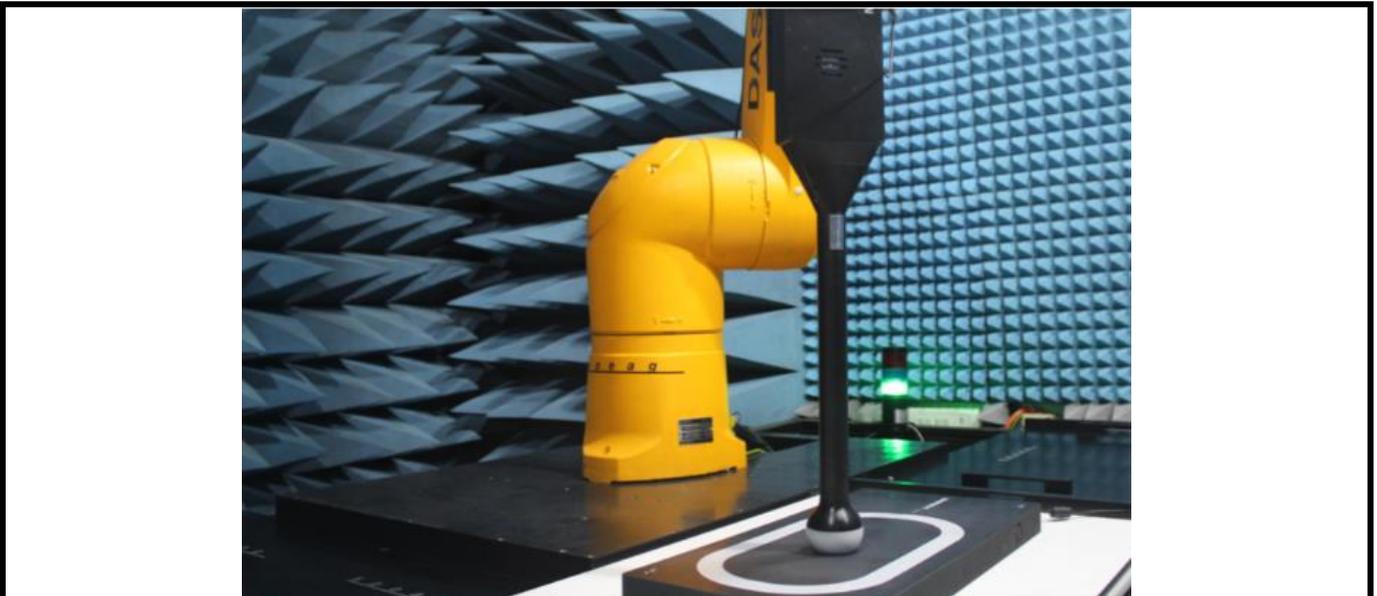


Fig-4.2 SPEAG DASY8 System

RF Exposure Report

4.1.2 Probes

The MAGPy-H3D probe consists of eight isotropic H-field sensors and one isotropic E-field sensor:

Model	MAGPy-8H3D+E3D V2	
Construction	The MAGPy-8H3D+E3D V2 probe (Figure 3.10.1) consists of eight isotropic H-field subprobes and one isotropic E-field subprobe that are all integrated inside the probe head with a flat tip.	
Frequency	3 kHz–10 MHz	
Temperature range	0–40 °C	
Dynamic Range	H-field sub-probes: 0.1–3200A/m (0.12 μT–4 mT) E-field sub-probes: 0.08–2000V/m	
Dimensions	Probe head diameter: 60 mm MAGPy-8H3D+E3D V2 & MAGPy-DAS V2: 110mm×635mm×35mm	

4.1.3 Data Acquisition Electronics (DAE)

Model	MAGPy-DAS	
Construction	The MAGPy-DAS V2 is a speed-optimized unit that can process up to 27 input channels in real-time with a sampling rate of 25 MHz.	
Measurement Range	27×14 Bit ADC Channels with 25 MSPs	
Batterys	The MAGPy-DAS V2 includes rechargeable batteries, which can be charged via a high power 15V USB-C power supply. The USB-C port for the charging is labeled with a lightning sign on the side of the DAS box. The charging takes about 3 hours and typical lifetime in operation is about 2 h. MAGPy-DAS V2 can also be powered by an external power supply.	

5. Compliance Evaluation

DASY8 Module WPT SW version V2.8 offers compliance evaluation with respect to:

Reference levels based on the incident H- and E-fields measured from the volume scan.


Basic restrictions based on the peak induced E-field, peak induced current density, and peak spatial-average SAR calculated from the Sim4Life simulation.

SPEAG released a DASY8 Module WPT system (SW Module WPT V2.8) for E and H-field measurement. The system also supports a Sim4Life plug-in that includes components for importing 3D H-field scan data (Hx, Hy, Hz values in the measurement volume) to the Sim4Life simulation platform. A magneto quasi-static (MQS) simulation is automatically set up to solve for a lossy half-space Phantom setup. The lossy half-space has muscle tissue dielectric properties ($\sigma = 0.75$ S/m, $\rho = 1000$ kg/m³). The induced electric (E-) fields and specific absorption rate (SAR) are assessed with Sim4Life's Quasi-Static EM Solver (P-EM-QS) using only the measured data.

The post-processing engine determines the maximum induced E-field, current density, and SAR values in a homogeneous half-space of muscle tissue equivalent media (half-space muscle phantom) positioned at the compliance distance. In general, the compliance distance corresponds to the closest point (with respect to the exposure source) the human body (e.g., a part of the hand) can reach during the operation of the source.

The relative dielectric constant, conductivity, and mass density of the homogeneous phantom used in the simulations were 55, 0.75 S/m, and 1000 kg/m³, respectively, which correspond to the phantom. The phantom dimension was adapted according to the coil-to-phantom distance to guarantee that the uncertainty compared to an infinite phantom block is <0.1 dB.

6. Simulation Results

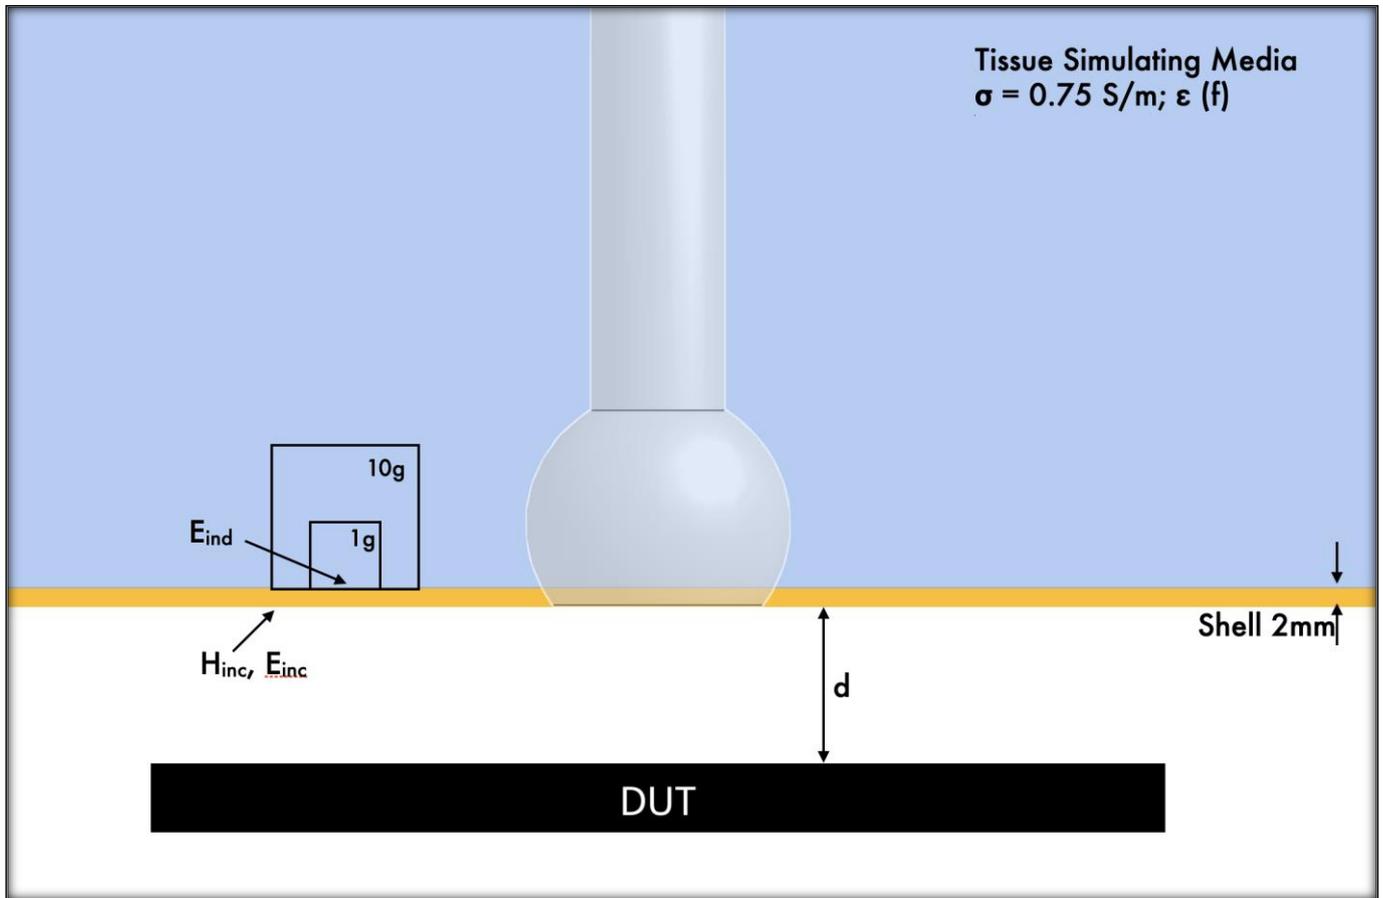

The distance used in the test raw data for simulation and compliance evaluation results is defined as the spacing between the top surface of the DUT and the bottom surface of the fictive phantom shell (with a thickness of 2 mm). In this case, the evaluation is made at distance d . Typically $d = 0$, i.e., at the DUT surface. The evaluation locations of the incident fields (i.e., H_{inc} and E_{inc}) as well as the induced fields (e.g., E_{ind} , psSAR1g, and psSAR10g) are also illustrated.

7. System Check and Validation Sources

For the DASY8 Module WPT, a set of four system validation sources (3 kHz, 85 kHz, 400 kHz and 6.78 MHz) are available. These sources consist of series resonant spiral coils, fed with an integrated current source. The current source consists of an oscillator and an amplifier at the appropriate frequency. A monitoring port in the form of a SMB connector is available on the device to monitor the current through the coil. The port offers the voltage across a 1Ω resistor connected in series with the coil, therefore the current I corresponds to the measured voltage V_{test} port ($I = V_{\text{test}} \text{ port}$). The voltage on the port can thus be monitored with an oscilloscope and this should be equal to the current through the coil.

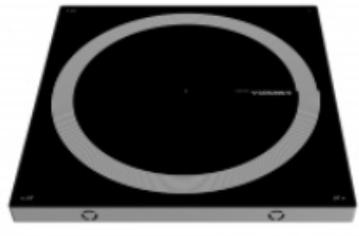
Target values ($H_{\text{inc,max}}$, $E_{\text{ind,max}}$, $J_{\text{ind,max}}$, SAR) for each source have been determined for several distances through simulations using the MQS solver in Sim4Life.



Fig-7.1 System Verification Setup for Frequency 400 kHz

RF Exposure Report

7.1 Device

Model	V-Coil500/3 V2	
Frequency (kHz)	3	
Coil Dimension (mm)	500x500	
No. of Turns	11	
Current Source	I500/3	
Current Monitor Port	SMB	
Dimensions	500 x 500 x 35 mm	

Model	V-Coil350/85 V2	
Frequency (kHz)	85	
Coil Dimension (mm)	350x200	
No. of Turns	13	
Current Source	I350/85	
Current Monitor Port	SMB	
Dimensions	250x500x35	

Model	V-Coil50/400 V2	
Frequency (kHz)	400	
Coil Dimension (mm)	50x50	
No. of Turns	11	
Current Source	I50/400	
Current Monitor Port	SMB	
Dimensions	125x250x35	

Model	V-Coil25/6780 V2	
Frequency (kHz)	6780	
Coil Dimension (mm)	25x25	
No. of Turns	11	
Current Source	I25/6780	
Current Monitor Port	SMB	
Dimensions	125x250x35	

8. Human Exposure Limits

8.1 Limits for Maximum Permissible Exposure

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

680106 D01 RF Exposure Wireless Charging Apps v04, section 3.2 as reproduced below:

3.2 Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz

The RF exposure limits, as set forth in § 1.1310, do not cover the frequency range below 100 kHz for Specific Absorption Rate (SAR) and below 300 kHz for Maximum Permitted Exposure (MPE). In addition, present limitations of RF exposure evaluation systems prevent an accurate evaluation of SAR below 4MHz. For these reasons, a specific MPE-based RF Exposure compliance procedure for devices operating in the aforementioned low-frequency ranges has been set in place. Accordingly, for § 2.1091-Mobile devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic field, respectively.

9. Specific Absorption Rate Limits

Specific Absorption Rate (47 CFR Ch. I § 1.1310 10-1-20 Edition)

Condition	Uncontrolled Environment		Controlled Environment	
	(General Public)		(Occupational)	
	SAR Limit	Mass Avg.	SAR Limit	Mass Avg.
SAR averaged over the whole body mass	0.08 W/kg	whole body	0.4 W/kg	whole body
Peak spatially-averaged SAR	1.6 W/kg	1 g of tissue*	8 W/kg	1 g of tissue*
Peak spatially-averaged SAR for extremities, such as hands, wrists, feet, ankles, and pinnae	4.0 W/kg	10 g of tissue*	20 W/kg	10 g of tissue*

* Defined as a tissue volume in the shape of a cube.

10. SAR and Induced H-field & E-field Measurement Procedure

According to the IEC PAS 63184:2021 and FCC KDB 680106 D01v04 standard, the system for demonstration of compliance of any WPT device or any device generating a high H-field in the frequency range from 3 kHz to 4MHz. the recommended procedure for Evaluation of internal E-field, current density and SAR against basic restrictions. At frequencies above 4 MHz, the induced fields can be directly measured with DASY8 Module SAR. There is the consists of the following steps:

- (a) Make EUT to transmit maximum output power
- (b) Position the probe, connected and placed close to the EUT coil/antenna
- (c) The EUT that creates the electromagnetic field is placed on the measurement platform
- (d) Perform testing steps on the DASY system
- (e) Record the ps SAR (1g. avg.) and Induced H-field & E-field scan value

10.1 Magnetic Fields

Figure 10.2 shows a xy-cutplane for the simulated magnetic field strength through the center of the EUT. It can be seen how the main PCBs ground and the ferrite confine the main part of the magnetic field to the dedicated WPT receiver location above the EUT.

Analogue to the setup of the measurement (cf. section 10) the simulated magnetic field (Hfield) strength was evaluated along the corresponding line above the active coil. The measurements start at $z = 0.6$ mm, which corresponds to the "sensor center to tip distance" of the "MAGPy-H3D" $z = 0$ field probe. The simulated line starts at the top of the EUTs housing at (0 mm).

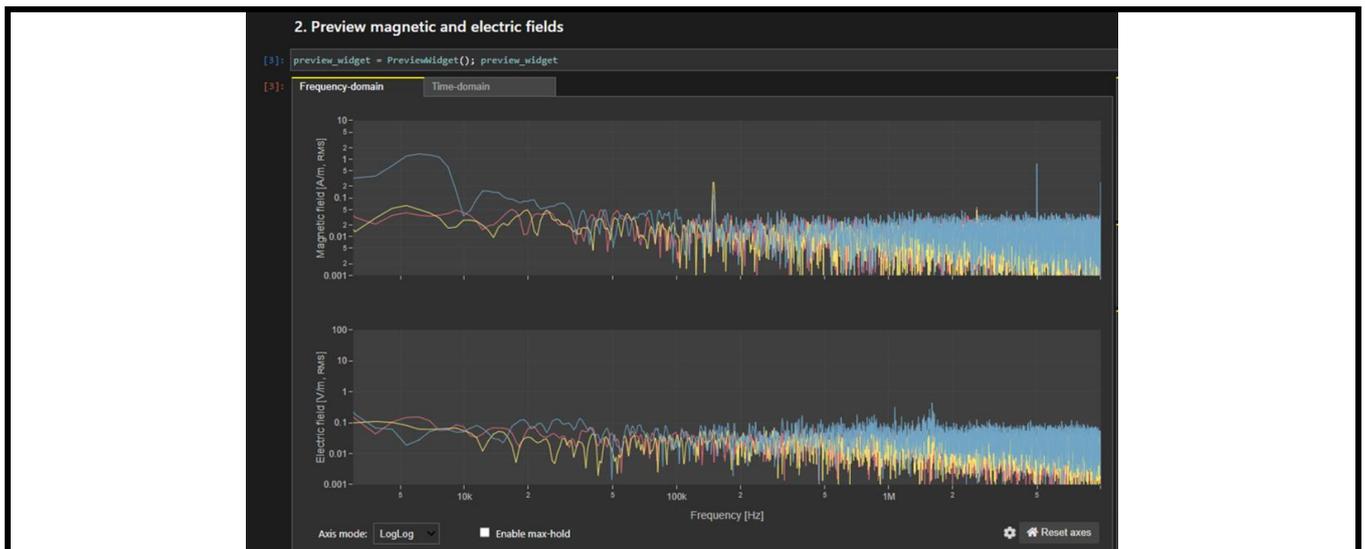


Fig-10.1 Preview magnetic and electric fields

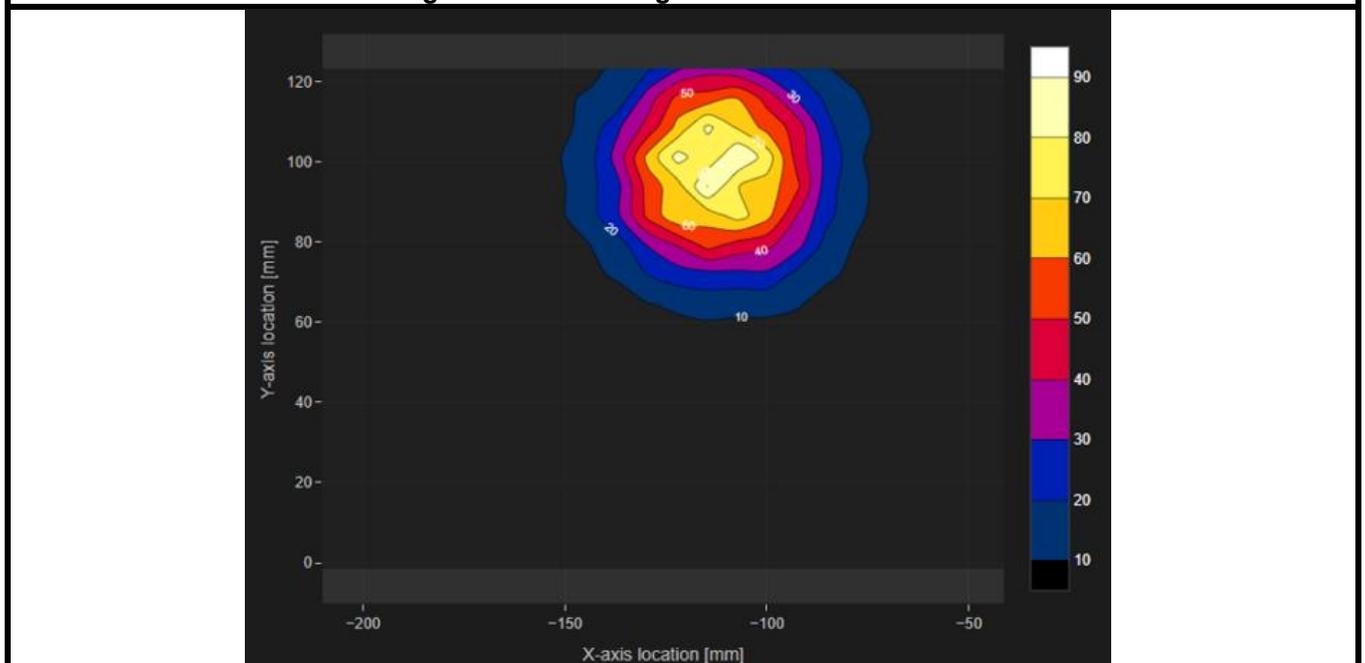


Fig-10.2 The simulated magnetic field displayed on a xy-plane through the DUT.

11. System Validation

For the DASY8 Module WPT, a set of four system validation sources (3 kHz, 85 kHz, 400 kHz, and 6.78 MHz) is available. These sources consist of series resonant spiral coils fed with an integrated current source. The current source comprises an oscillator and an amplifier operating at the appropriate frequency. A monitoring port in the form of an SMB connector is provided on the device to monitor the current through the coil. The port offers the voltage across a 1Ω resistor connected in series with the coil; therefore, the current I corresponds to the measured voltage V_{test} port ($I = V_{test}$ port). The voltage on the port can thus be monitored with an oscilloscope, and it should be equal to the current through the coil.

SPEAG developed the evaluation system DASY8 Module WPT for small-to-large size wireless power transfer (WPT) devices, which combines subsystems of DASY8, MAGPy, and Sim4Life. The IT'IS Foundation was tasked with developing the system check and validation sources for WPT evaluations.

The table below shows the target value and measured value after normalization to 1A. When comparing to the target value provided by SPEAG calibration, the verification data should be within its specification of 1.23 dB.

85 kHz source SN 1020_0mm

Test date: 2025/5/26

	Hinc	Ecube	Local	Eline	Jarea	SAR1g	SAR10g
Data source	[A/m]	[V/m]	[V/m]	[V/m]	[A/m ²]	[mW/kg]	[mW/kg]
Ref. (sigma=0.75)	204	3.3	3.33	3.34	2.32	6.32	4.71
New meas	192	3.15	3.18	3.18	2.21	5.74	4.28
Deviation [dB]	-0.53	-0.40	-0.40	-0.43	-0.42	-0.42	-0.42

Note: Refer to Appendix D for more details.

400 kHz source SN 1015_0mm

Test date: 2025/5/26

	Hinc	Ecube	Local	Eline	Jarea	SAR1g	SAR10g
Data source	[A/m]	[V/m]	[V/m]	[V/m]	[A/m ²]	[mW/kg]	[mW/kg]
Ref. (sigma=0.75)	264	4.18	4.28	4.29	2.67	7.06	3.55
New meas	259	4.08	4.18	4.19	2.58	6.51	3.22
Deviation [dB]	-0.17	-0.21	-0.21	-0.20	-0.30	-0.35	-0.42

Note: Refer to Appendix D for more details.

Uncertainty for system check

	Hinc	Ecube	Local	Eline	Jarea	SAR1g	SAR10g
Data source	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]
Measurement	1.33	1.44	1.45	1.48	1.36	1.27	1.25
Source drift	0.43	0.43	0.43	0.43	0.43	0.43	0.43
Combined unc.	1.40	1.50	1.51	1.54	1.43	1.34	1.32

12. Evaluation Results

Mode A_Charging Mode (EUT with iPhone 11) – 111-148kHz

Electric field Strength Result

Plot No.	Test Position	Separation Distance (mm)	Load Battery Capacity	Einc (V/m,RMS)	Einc Limit (V/m,RMS)	Result
1	Front Face	0	7%	27.7	614	PASS
2	Rear Face	0	10%	0.987	614	PASS
3	Left Side	0	8%	0.203	614	PASS
4	Right Side	0	9%	0.385	614	PASS
5	Top Side	0	10%	0.48	614	PASS
6	Bottom Side	0	7%	0.183	614	PASS

Magnetic field Strength Result

Plot No.	Test Position	Separation Distance (mm)	Load Battery Capacity	Hinc (A/m,RMS)	Hinc Limit (A/m,RMS)	Result
1	Front Face	0	7%	25.7	1.63	EXCEED*
2	Rear Face	0	10%	0.466	1.63	PASS
3	Left Side	0	8%	0.221	1.63	PASS
4	Right Side	0	9%	0.208	1.63	PASS
5	Top Side	0	10%	0.122	1.63	PASS
6	Bottom Side	0	7%	0.108	1.63	PASS

* An assessment of peak spatial-average SAR limits shall be conducted for the EUT when Maximum Permissible Exposure limits are exceeded.

Peak Spatial-Average SAR Evaluation (Simulation Results)

Plot No.	Test Position	Separation Distance (mm)	Peak spatial-average SAR [mW/kg]	Limit (W/kg)	Result
1	Front Face	0	0.00146	1.6	PASS
2	Rear Face	0	0.00000038	1.6	PASS
3	Left Side	0	0.000000225	1.6	PASS
4	Right Side	0	0.000000708	1.6	PASS
5	Top Side	0	0.000000169	1.6	PASS
6	Bottom Side	0	0.00000024	1.6	PASS

Note:

1. The Measurement results refer to Appendix A for more details.
2. The Calibration Certificate for Probe refer to Appendix C.
3. The System Check refer to Appendix D.
4. Multi-frequency enhancement was enabled during evaluation by DASY8/6.

RF Exposure Report

Mode B_Charging Mode (EUT with iPhone 16) – 360kHz

Electric field Strength Result

Plot No.	Test Position	Separation Distance (mm)	Load Battery Capacity	Einc (V/m,RMS)	Einc Limit (V/m,RMS)	Result
7	Front Face	0	9%	22.7	614	PASS
8	Rear Face	0	11%	2.23	614	PASS
9	Left Side	0	10%	20.1	614	PASS
10	Right Side	0	8%	42.2	614	PASS
11	Top Side	0	9%	28.3	614	PASS
12	Bottom Side	0	7%	7.79	614	PASS

Magnetic field Strength Result

Plot No.	Test Position	Separation Distance (mm)	Load Battery Capacity	Hinc (A/m,RMS)	Hinc Limit (A/m,RMS)	Result
7	Front Face	0	9%	4.36	1.63	EXCEED*
8	Rear Face	0	11%	1.96	1.63	EXCEED*
9	Left Side	0	10%	2.38	1.63	EXCEED*
10	Right Side	0	8%	1.47	1.63	PASS
11	Top Side	0	9%	0.494	1.63	PASS
12	Bottom Side	0	7%	0.208	1.63	PASS

* An assessment of peak spatial-average SAR limits shall be conducted for the EUT when Maximum Permissible Exposure limits are exceeded.

Peak Spatial-Average SAR Evaluation (Simulation Results)

Plot No.	Test Position	Separation Distance (mm)	Peak spatial-average SAR [mW/kg]	Limit (W/kg)	Result
7	Front Face	0	0.00114	1.6	PASS
8	Rear Face	0	0.00104	1.6	PASS
9	Left Side	0	0.000548	1.6	PASS
10	Right Side	0	0.000197	1.6	PASS
11	Top Side	0	0.000019	1.6	PASS
12	Bottom Side	0	0.0000343	1.6	PASS

Note:

1. The Measurement results refer to Appendix A for more details.
2. The Calibration Certificate for Probe refer to Appendix C.
3. The System Check refer to Appendix D.
4. Multi-frequency enhancement was enabled during evaluation by DASY8/6.

Conclusion:

The SPEAG DASY8 Module WPT-MAGPY system automatically configures a magneto quasi-static (MQS) simulation for a lossy half-space phantom with muscle tissue properties ($\sigma = 0.75 \text{ S/m}$, $\rho = 1000 \text{ kg/m}^3$). Sim4Life's Quasi-Static EM Solver evaluates the induced E-fields and SAR, yielding a peak spatial-average SAR of $< 1.6 \text{ W/kg}$, which demonstrates regulatory compliance.

Test Engineer : Vick Ko



13. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
MAGPy Field Probe Sensor System	SPEAG	MAGPy-8H3D+E3DV2	3078	Jun. 06, 2024	1 Year
		MAGPy-DASV2	3070		
PowerSource	SPEAG	V-Coil350/85V2	1020	May 28, 2024	1 Year
PowerSource	SPEAG	V-Coil50/400V2	1015	May 27, 2024	1 Year

14. References

- [1] Federal Communications Commission (FCC, USA), "FCC Radiofrequency radiation exposure limits, 47 C.F.R. § 1.1310," 2020.

15. Measurement Uncertainty

DASY8 Uncertainty Budget for Peak <i>H</i> -field according to IEC/IEEE 63184						
Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(<i>c_f</i>)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Gradient uncertainty	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E-field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.10
12	Surface field reconstruction	0.3	N	1	1	0.3
Combined uncertainty (<i>k</i> = 1)						0.59
Expanded uncertainty (<i>k</i> = 2)						1.33 (16.6%)

Preliminary Uncertainty Budget of Peak H -Field

RF Exposure Report

DASY8 Uncertainty Budget for Peak Cube-Average E_{ind} according to IEC/IEEE 63184

Item	Error Description	Unc. Value (\pm dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (\pm dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Gradient uncertainty	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0.18	R	$\sqrt{3}$	1	0.10
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.24	N	1	1	0.24
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Quasistatic approximation	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.68
Expanded uncertainty ($k = 2$)						1.37 (17.1%)

Preliminary Uncertainty Budget of Peak Cube-Average E_{ind}

DASY8 Uncertainty Budget for Peak Line-Average E_{ind} according to IEC/IEEE 63184

Item	Error Description	Unc. Value (\pm dB)	Probab. Distr.	Div.	(c_i)	Std. Unc. (\pm dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Gradient uncertainty	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.1	N	1	1	0.1
12	Surface field reconstruction	0.2	N	1	1	0.2
Numerical simulations						
13	Grid resolution	0.25	R	$\sqrt{3}$	1	0.14
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.27	N	1	1	0.27
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Quasistatic approximation	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.70
Expanded uncertainty ($k = 2$)						1.41 (17.6%)

Preliminary Uncertainty Budget of Peak Line-Average E_{ind}

RF Exposure Report

DASY8 Uncertainty Budget for psSAR_{1g} according to IEC/IEEE 63184

Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Gradient uncertainty	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic <i>E</i> -field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.02	N	1	1	0.02
12	Surface field reconstruction	0.1	N	1	1	0.1
Numerical simulations						
13	Grid resolution	0.02	R	$\sqrt{3}$	1	0.01
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.09	N	1	1	0.09
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Quasistatic approximation	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.60
Expanded uncertainty ($k = 2$)						1.20 (31.9%)

Preliminary Uncertainty Budget of psSAR_{1g}

DASY8 Uncertainty Budget for psSAR_{10g} according to IEC/IEEE 63184

Item	Error Description	Unc. Value (±dB)	Probab. Distr.	Div.	(c)	Std. Unc. (±dB)
Measurement system						
1	Amplitude calibration uncertainty	0.35	N	1	1	0.35
2	Probe anisotropy	0.6	R	$\sqrt{3}$	1	0.35
3	Probe dynamic linearity	0.2	R	$\sqrt{3}$	1	0.12
4	Probe frequency domain response	0.3	R	$\sqrt{3}$	1	0.17
5	Probe frequency linear interp. fit	0.15	R	$\sqrt{3}$	1	0.09
6	Gradient uncertainty	0.1	R	$\sqrt{3}$	1	0.06
7	Parasitic E-field sensitivity	0.1	R	$\sqrt{3}$	1	0.06
8	Detection limit	0.15	R	$\sqrt{3}$	1	0.09
9	Readout electronics	0	N	1	1	0
10	Probe positioning	0.19	N	1	1	0.19
11	Repeatability	0.02	N	1	1	0.02
12	Surface field reconstruction	0.1	N	1	1	0.1
Numerical simulations						
13	Grid resolution	0	R	$\sqrt{3}$	1	0
14	Tissue parameters	0	R	$\sqrt{3}$	1	0
15	Exposure position	0	R	$\sqrt{3}$	1	0
16	Source representation	0.04	N	1	1	0.04
17	Convergence and power budget	0	R	$\sqrt{3}$	1	0
18	Boundary conditions	0.1	R	$\sqrt{3}$	1	0.06
19	Quasistatic approximation	0.1	R	$\sqrt{3}$	1	0.06
Combined uncertainty ($k = 1$)						0.74
Expanded uncertainty ($k = 2$)						1.19 (31.4%)

Preliminary Uncertainty Budget of psSAR_{10g}

16. Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety/SAR Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---