


EXHIBIT A - SAR SETUP PHOTOGRAPHS

Body-worn with accessories – Leather Case, belt-clip and microphone:

Setup Entire View



Setup Side View

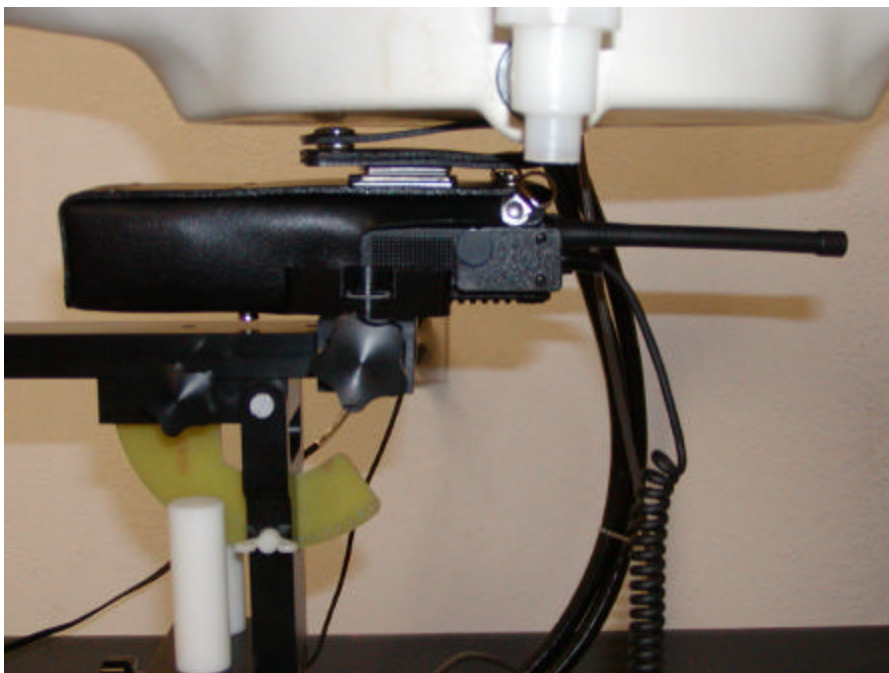


Setup Top View




Body-worn:

Setup Entire View

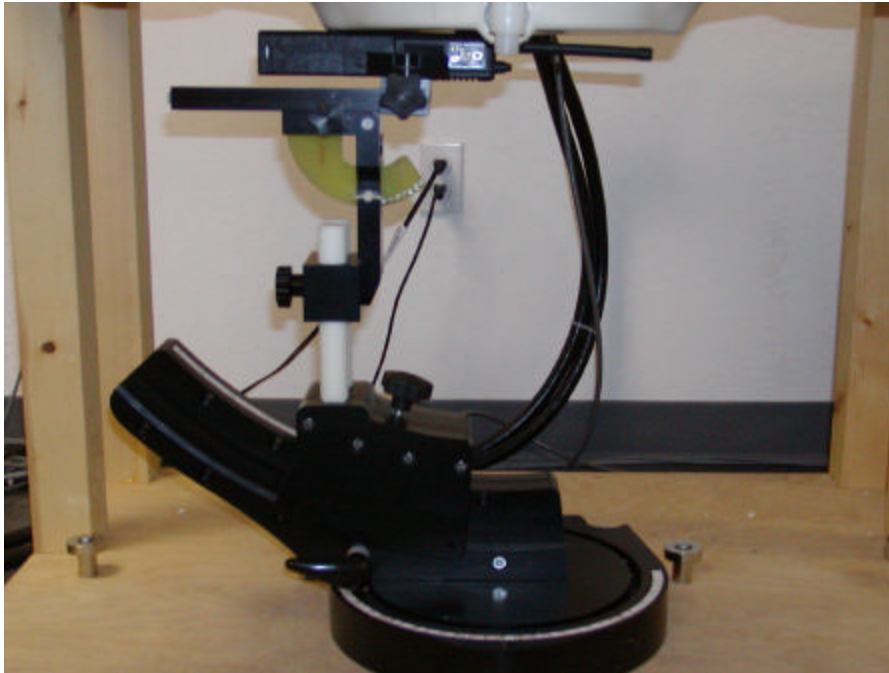

Setup Side View

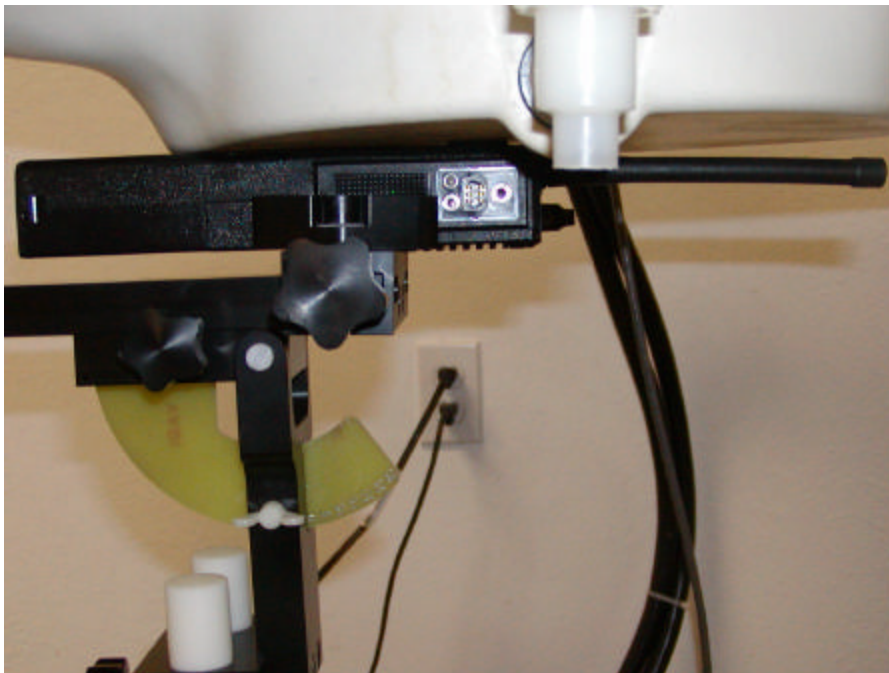

Setup Top View




2.5cm Separation face-held with earphone:**Setup Entire View****Setup Side View**

Setup Top View




2.5cm Separation face-held

Setup Entire View

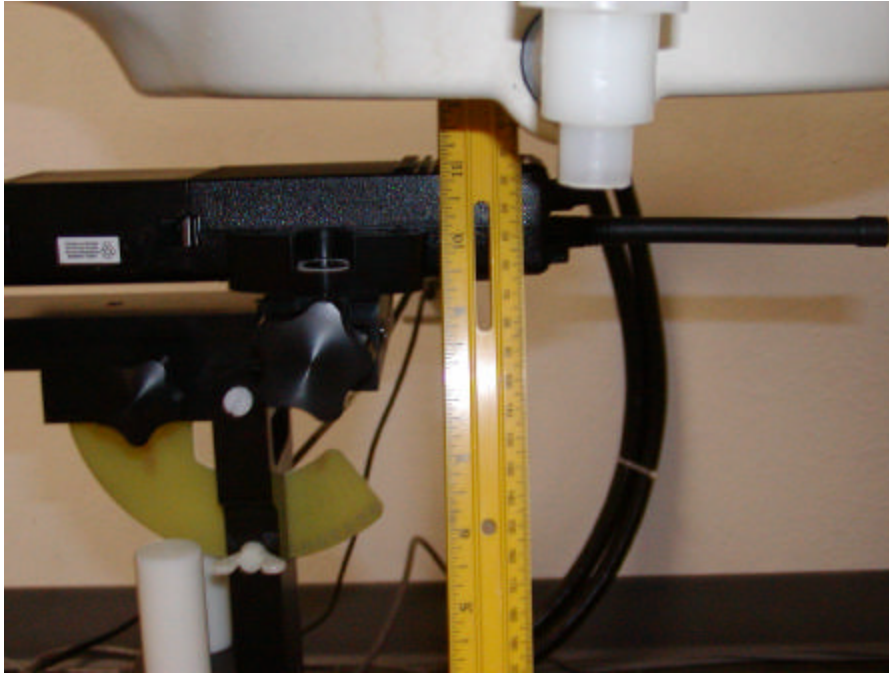

Setup Side View

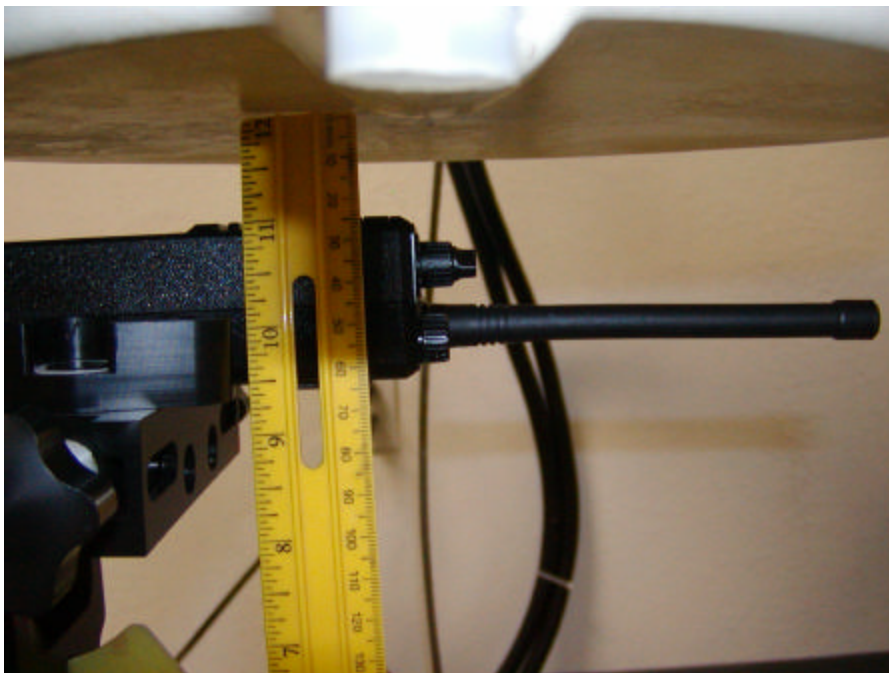

Setup Top View



EXHIBIT B - EUT PHOTOGRAPHS

Chassis - Front View





Chassis - Back View




Chassis - Top View

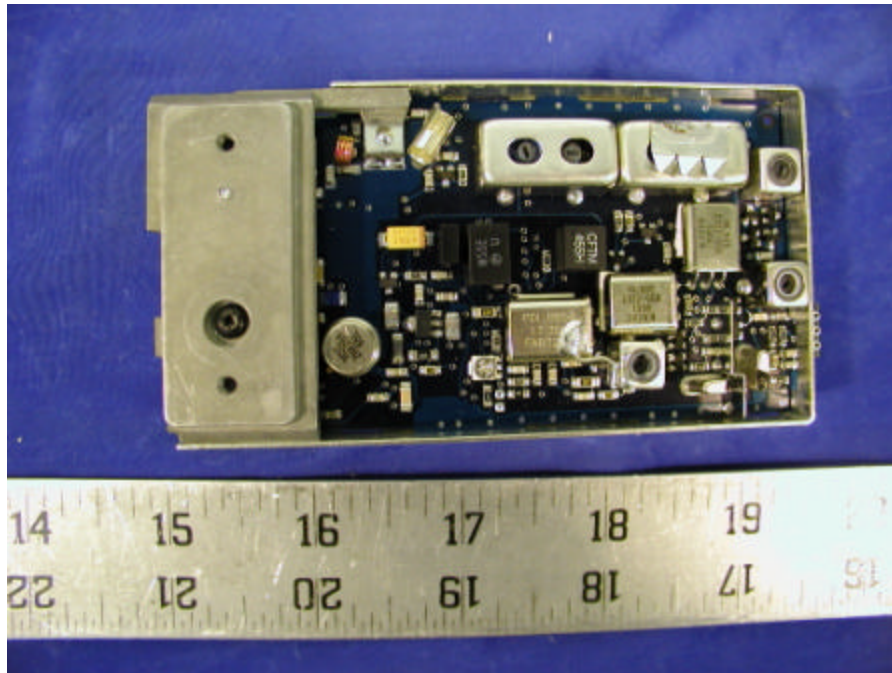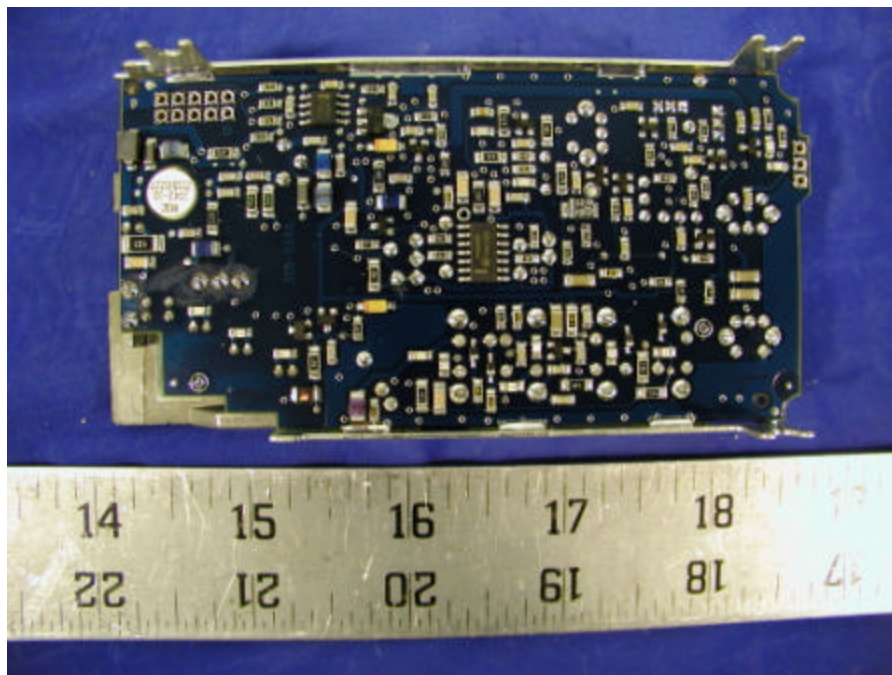

Transceiver Board - Component View**Transceiver Board - Solder View**


Antenna Connection

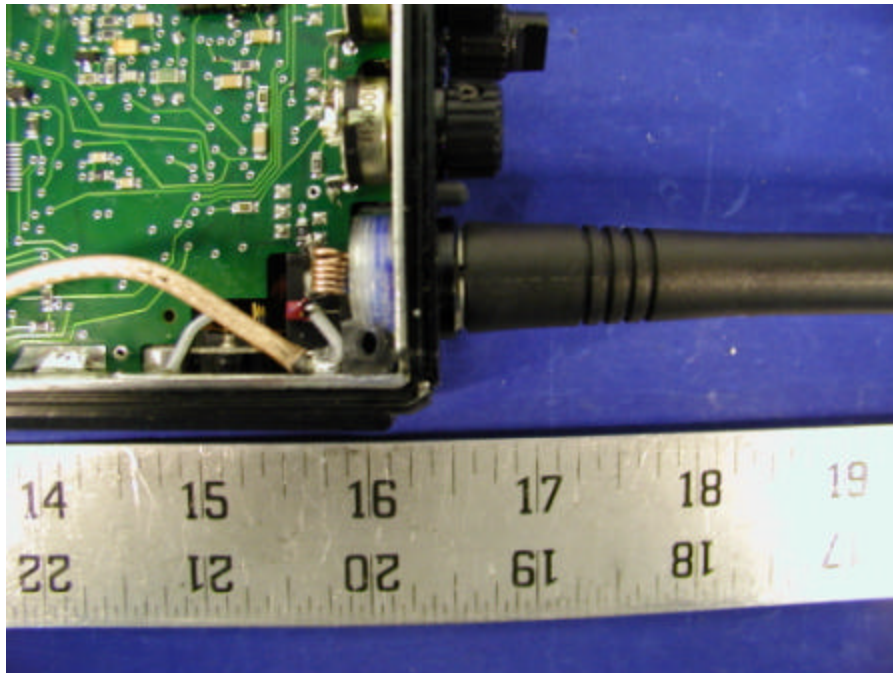


Antenna




System Control Board Component View

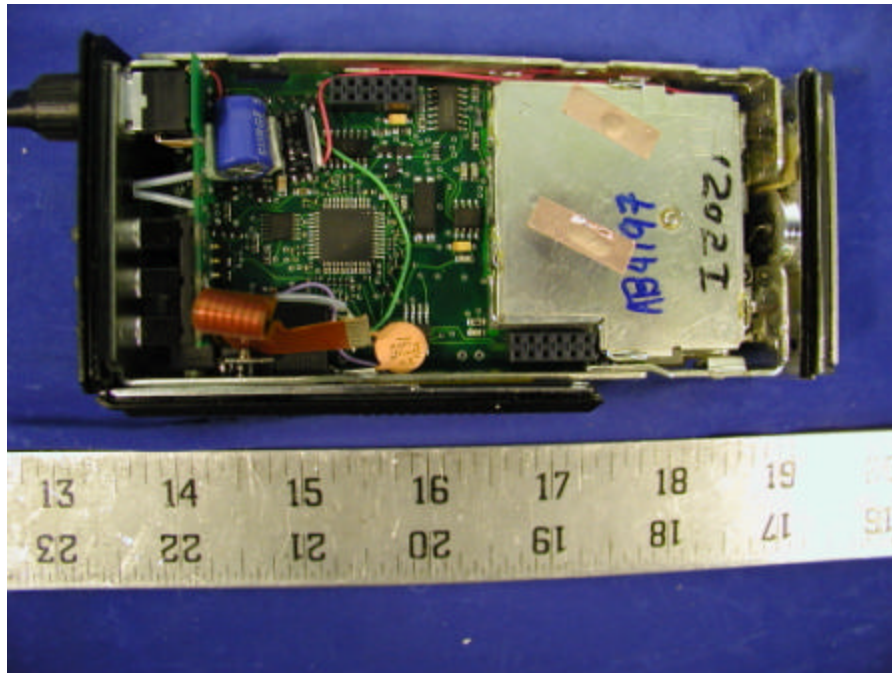


System Control Board Solder View

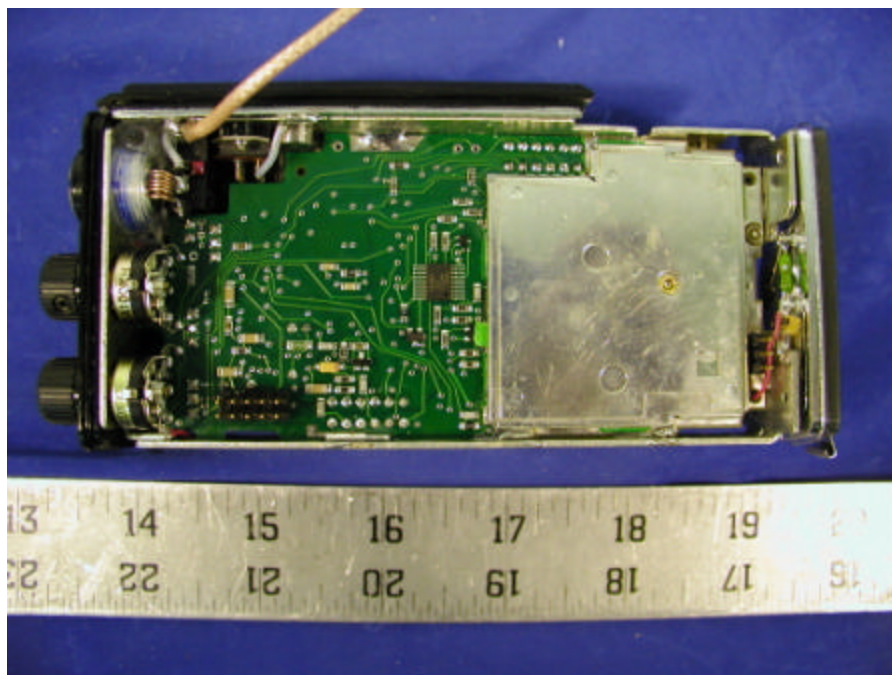


System Control Board Component View

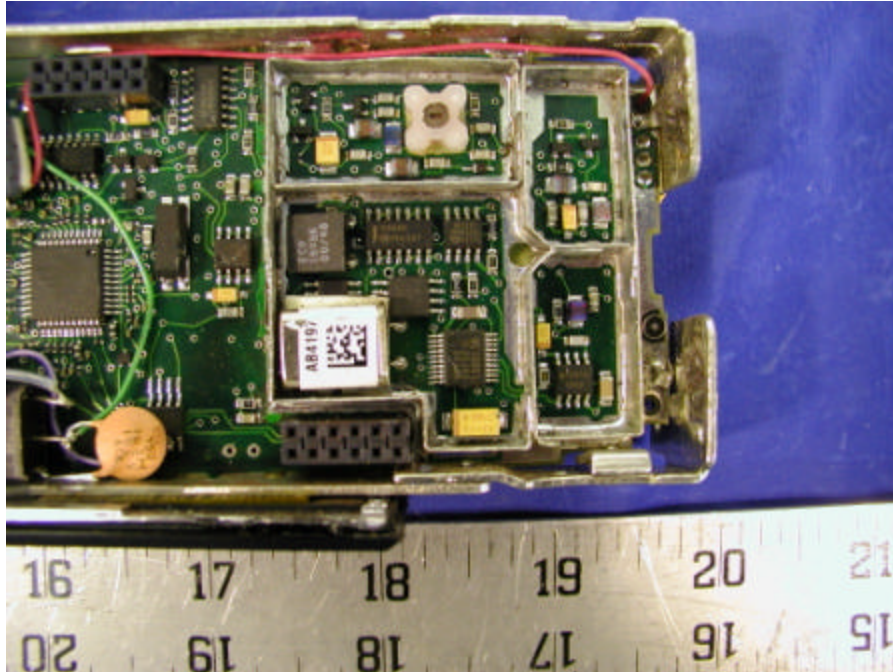

System Control Board Solder View

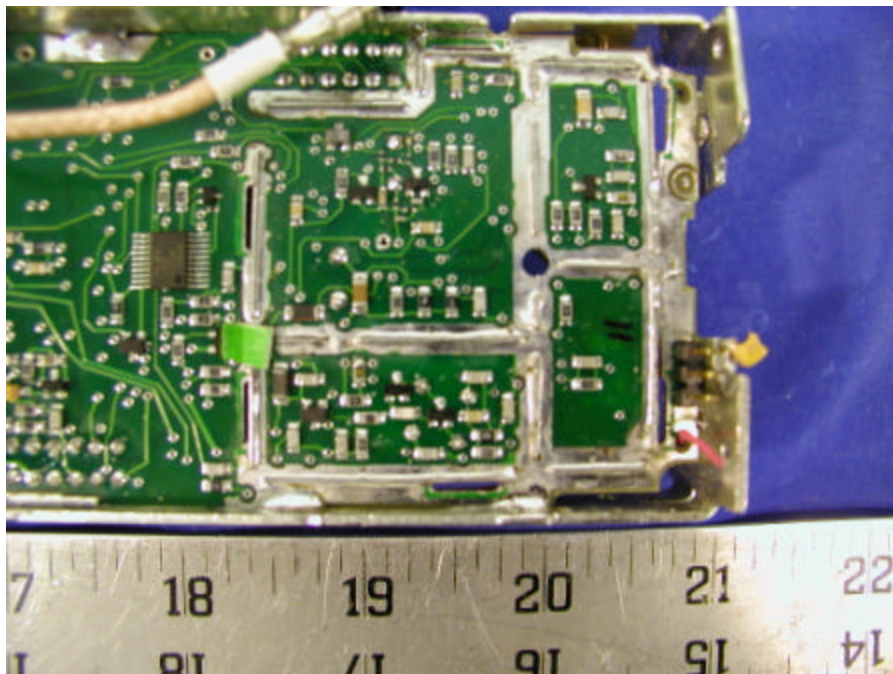


Battery Front**Battery Bottom**

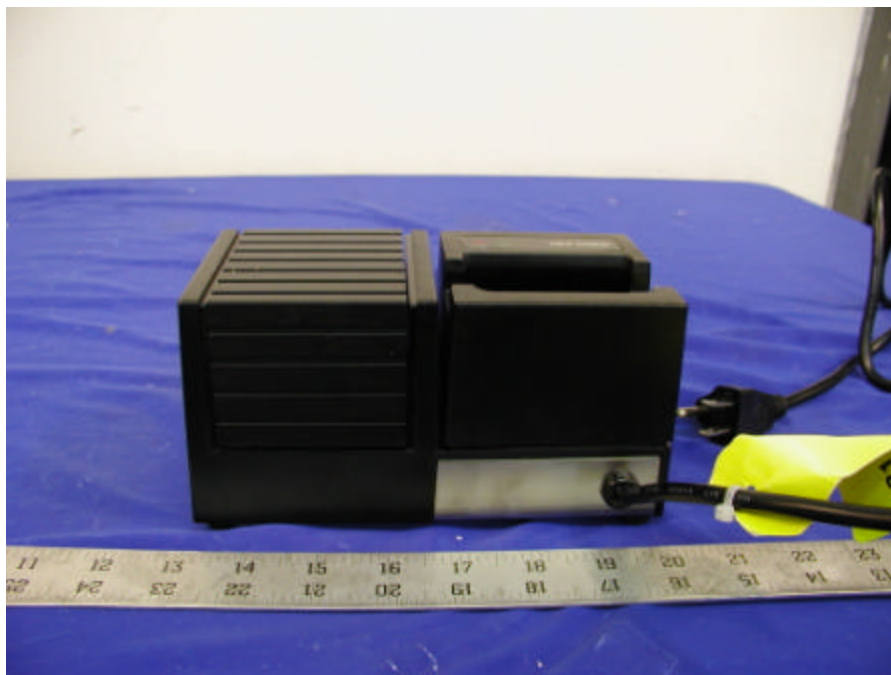Battery Top**Charger Front**

[illegible]


Radio Interface Box

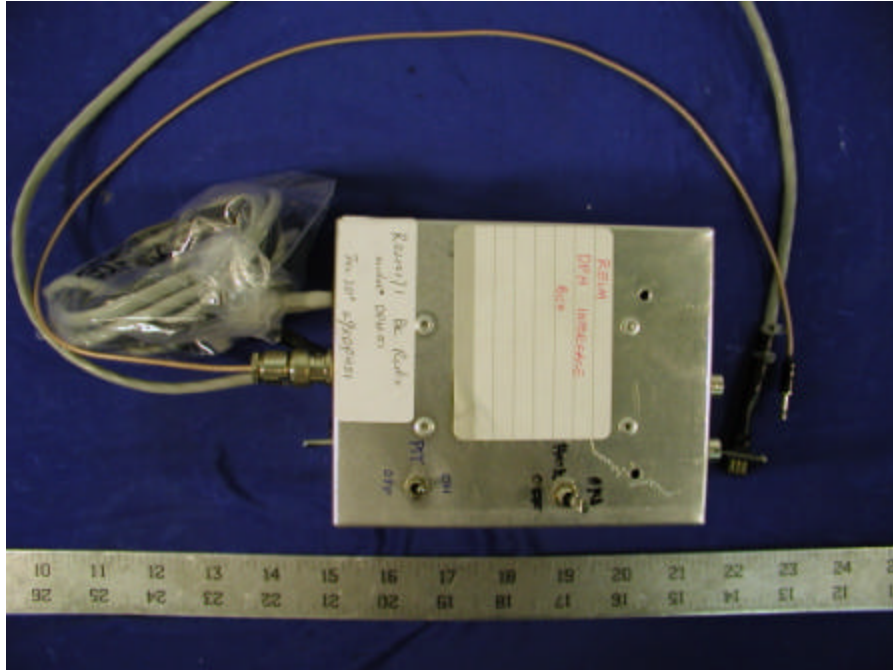

Microphone



View of Earphone

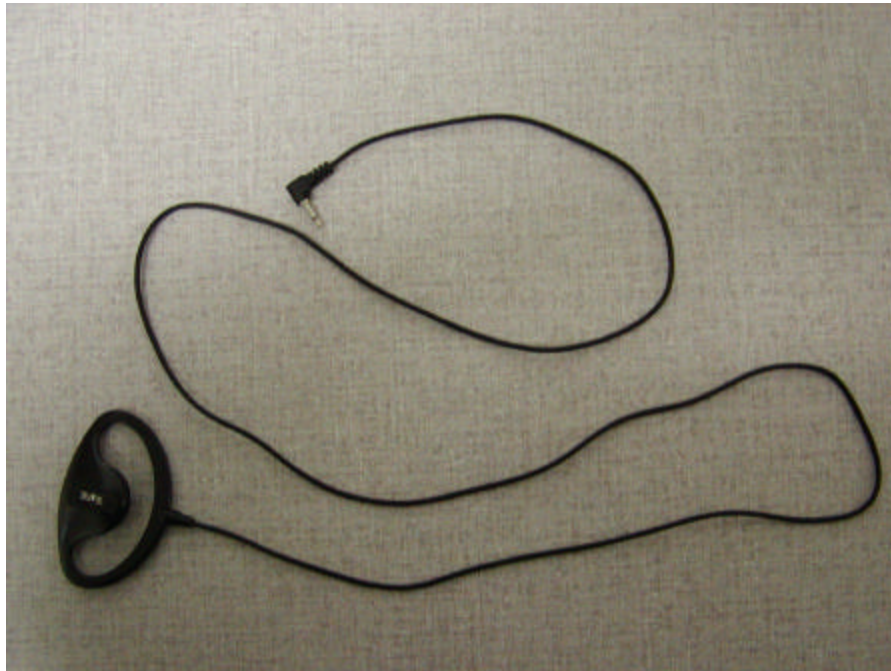

Back View of Leather Case with Belt Clip



Front View of Leather Case with Belt Clip



Side View of Leather Case with Belt Clip



EUT – Front View / Antenna Hotspot Area

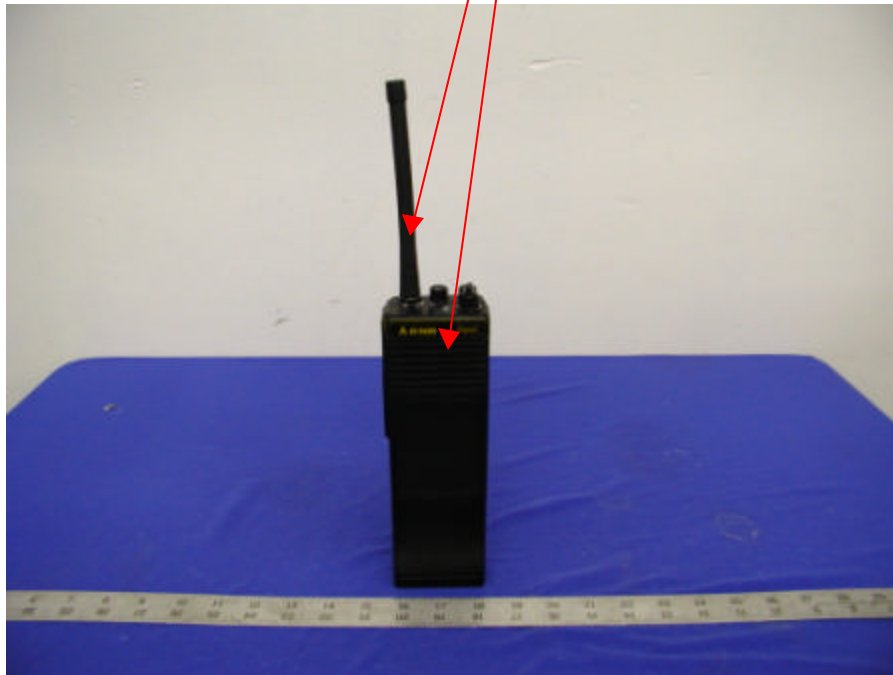


EXHIBIT C – Z-Axis

DPH51

SAM Phantom; Section; Position: ; Frequency: 174 MHz

Probe: ET3DV6 - SN1604; ConvF(8.80,8.80,8.80); Crest factor: 1.0; 150: $\sigma = 0.79 \text{ mho/m}$, $\epsilon_r = 61.1$, $\rho = 1.00 \text{ g/cm}^3$

: , 0

Z-Axis: Dx = 0.0, Dy = 0.0, Dz = 2.0

