

FCC TEST REPORT

REPORT NO.: RF971219L12A

MODEL NO.: DAP-1360

RECEIVED: Dec. 19, 2008

TESTED: Jan. 07 ~ Jan. 12, 2009

ISSUED: Jun. 26, 2009

APPLICANT: D-Link Corporation

ADDRESS: 17595 Mt. Herrmann, Fountain Valley, CA
92708, U.S.A.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 113 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	RADIATED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	CONDUCTED EMISSION MEASUREMENT	34
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	34
4.2.2	TEST INSTRUMENTS	34
4.2.3	TEST PROCEDURES	35
4.2.4	DEVIATION FROM TEST STANDARD	35
4.2.5	TEST SETUP	36
4.2.6	EUT OPERATING CONDITIONS	36
4.2.7	TEST RESULTS	37
4.3	6dB BANDWIDTH MEASUREMENT	39
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	39
4.3.2	TEST INSTRUMENTS	39
4.3.3	TEST PROCEDURE	39
4.3.4	DEVIATION FROM TEST STANDARD	39
4.3.5	TEST SETUP	40
4.3.6	EUT OPERATING CONDITIONS	40
4.3.7	TEST RESULTS	41
4.4	MAXIMUM PEAK OUTPUT POWER	59
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	59
4.4.2	INSTRUMENTS	59
4.4.3	TEST PROCEDURES	59
4.4.4	DEVIATION FROM TEST STANDARD	59
4.4.5	TEST SETUP	60
4.4.6	EUT OPERATING CONDITIONS	60
4.4.7	TEST RESULTS	61
4.5	POWER SPECTRAL DENSITY MEASUREMENT	64
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	64
4.5.2	TEST INSTRUMENTS	64
4.5.3	TEST PROCEDURE	64
4.5.4	DEVIATION FROM TEST STANDARD	64



A D T

4.5.5	TEST SETUP	65
4.5.6	EUT OPERATING CONDITION	65
4.5.7	TEST RESULTS	66
4.6	BAND EDGES MEASUREMENT	84
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	84
4.6.2	TEST INSTRUMENTS	84
4.6.3	TEST PROCEDURE	85
4.6.4	DEVIATION FROM TEST STANDARD	85
4.6.5	EUT OPERATING CONDITION	86
4.6.6	TEST RESULTS	86
4.7	ANTENNA REQUIREMENT	110
4.7.1	STANDARD APPLICABLE	110
4.7.2	ANTENNA CONNECTED CONSTRUCTION	110
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	111
6.	INFORMATION ON THE TESTING LABORATORIES	112
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	113

1. CERTIFICATION

PRODUCT: Wireless N Access Point, Wireless N Range Extender

MODEL: DAP-1360

BRAND: D-Link

APPLICANT: D-Link Corporation

TESTED: Jan. 07 ~ Jan. 12, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (model: DAP-1360) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch,** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Jun. 26, 2009
Andrea Hsia / Specialist

TECHNICAL

ACCEPTANCE : Long Chen , **DATE:** Jun. 26, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** Jun. 26, 2009
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -17.02dB at 0.369MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.31dB at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless N Access Point, Wireless N Range Extender
MODEL NO.	DAP-1360
FCC ID	KA2AP1360A1
POWER SUPPLY	5Vdc from AC Adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 300.0Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, Draft 802.11n (20MHz) 7 for Draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	852.842mW
ANTENNA TYPE	Dipole antenna with 5dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ACCESSORY DEVICES	AC Adapter

NOTE:

- This report is issued as a supplementary report of the original BV ADT report No.: RF971219L12. This report is prepared for FCC class II permissive change. The difference is changing the product name.
- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	1TX
Draft 802.11n (20MHz)	1TX / 2TX
Draft 802.11n (40MHz)	1TX / 2TX

- The EUT was powered by the following adapter:

BRAND	D-Link
MODEL	CF1505-B
INPUT POWER	100-120Vac, 50-60Hz, 0.4A
OUTPUT POWER	5Vdc, 2.5A
POWER LINE	1.8m non-shielded cable with one core

- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

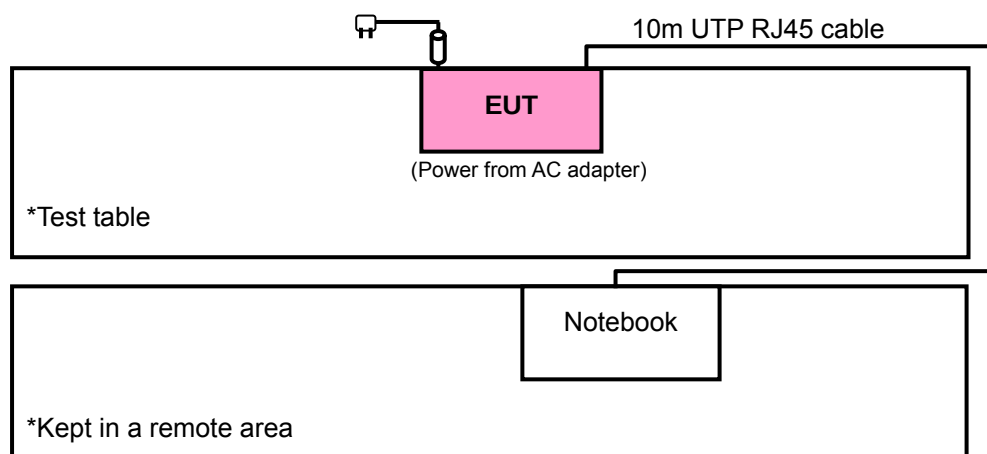

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION	AXIS
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	2TX	X
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	1TX	X
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	1TX	X
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	14.4	2TX	X
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15	1TX	X
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	30	2TX	X

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION	AXIS
Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	14.4	2TX	X

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION
Draft 802.11n (20MHz)	1 to 11	6	OFDM	BPSK	14.4	2TX

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION	AXIS
802.11b	1 to 11	1, 11	DSSS	DBPSK	1	2TX	X
802.11g	1 to 11	1, 11	OFDM	BPSK	6	1TX	X
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2	1TX	X
Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	14.4	2TX	X
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15	1TX	X
Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	30	2TX	X

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, TX function, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX FUNCTION	AXIS
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	2TX	X
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	1TX	X
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	1TX	X
Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	14.4	2TX	X
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15	1TX	X
Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	30	2TX	X

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D531	CN-0XM006-48 643-81U-2610	QDS-BRCM1020

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as communication partners to transfer data.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 460141.
 5. The IC Site Registration No. is IC 7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

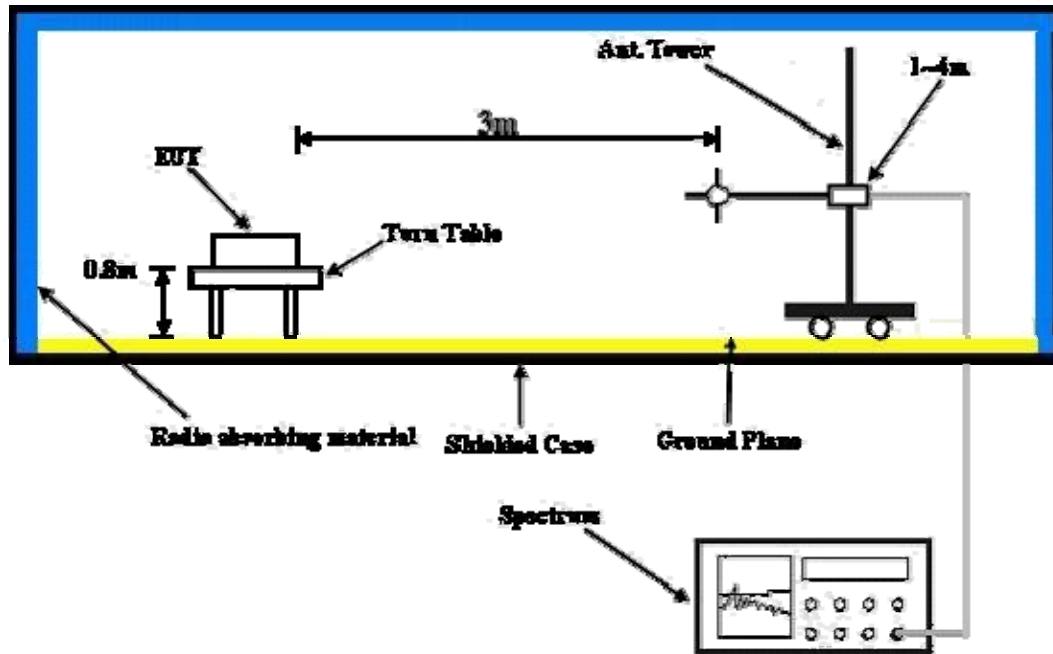

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared notebook system outside of testing area to act as a communication partners.
- The communication partner connected with EUT via a RJ45 UTP cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

802.11b DSSS MODULATION: 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	57.26 PK	74.00	-16.74	1.17 H	242	24.20	33.06
2	2386.00	47.58 AV	54.00	-6.42	1.17 H	242	14.52	33.06
3	*2412.00	105.06 PK			1.17 H	242	71.88	33.18
4	*2412.00	100.90 AV			1.17 H	242	67.72	33.18
5	#7236.00	58.46 PK	85.06	-26.60	1.20 H	331	13.16	45.30
6	#7236.00	50.90 AV	80.90	-30.00	1.20 H	331	5.60	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	62.80 PK	74.00	-11.20	1.18 V	360	29.74	33.06
2	2386.00	52.45 AV	54.00	-1.55	1.18 V	360	19.39	33.06
3	*2412.00	117.37 PK			1.17 V	360	84.19	33.18
4	*2412.00	112.75 AV			1.17 V	360	79.57	33.18
5	#7236.00	62.01 PK	97.37	-35.36	1.11 V	38	16.71	45.30
6	#7236.00	55.56 AV	92.75	-37.19	1.11 V	38	10.26	45.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “#”: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.18 PK			1.15 H	50	72.90	33.28
2	*2437.00	101.76 AV			1.15 H	50	68.48	33.28
3	7311.00	57.63 PK	74.00	-16.37	1.10 H	338	12.10	45.53
4	7311.00	50.20 AV	54.00	-3.80	1.10 H	338	4.67	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.09 PK			1.14 V	340	84.81	33.28
2	*2437.00	113.57 AV			1.14 V	340	80.29	33.28
3	2724.00	53.29 PK	74.00	-20.71	1.14 V	42	18.98	34.32
4	2724.00	44.73 AV	54.00	-9.27	1.14 V	42	10.42	34.32
5	4874.00	49.31 PK	74.00	-24.69	1.28 V	230	10.16	39.14
6	4874.00	41.99 AV	54.00	-12.01	1.28 V	230	2.84	39.14
7	7311.00	60.25 PK	74.00	-13.75	1.26 V	66	14.72	45.53
8	7311.00	52.55 AV	54.00	-1.45	1.26 V	66	7.02	45.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.67 PK			1.00 H	191	70.29	33.38
2	*2462.00	99.58 AV			1.00 H	191	66.20	33.38
3	2483.50	57.18 PK	74.00	-16.82	1.00 H	191	23.72	33.46
4	2483.50	47.39 AV	54.00	-6.61	1.00 H	191	13.93	33.46
5	7386.00	55.87 PK	74.00	-18.13	1.11 H	185	10.12	45.76
6	7386.00	47.05 AV	54.00	-6.95	1.11 H	185	1.30	45.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.84 PK			1.14 V	360	82.46	33.38
2	*2462.00	111.25 AV			1.14 V	360	77.87	33.38
3	2483.50	61.43 PK	74.00	-12.57	1.16 V	360	27.97	33.46
4	2483.50	51.13 AV	54.00	-2.87	1.16 V	360	17.67	33.46
5	7386.00	59.51 PK	74.00	-14.49	1.13 V	66	13.76	45.76
6	7386.00	51.56 AV	54.00	-2.44	1.13 V	66	5.81	45.76

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

802.11g OFDM MODULATION: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.60 PK	74.00	-9.40	1.32 H	97	31.52	33.08
2	2390.00	48.58 AV	54.00	-5.42	1.32 H	97	15.50	33.08
3	*2412.00	99.77 PK			1.00 H	95	66.59	33.18
4	*2412.00	89.86 AV			1.00 H	95	56.68	33.18
5	#7236.00	53.12 PK	79.77	-26.65	1.09 H	270	7.82	45.30
6	#7236.00	40.33 AV	69.86	-29.53	1.09 H	270	-4.97	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.20 PK	74.00	-4.80	1.07 V	204	36.12	33.08
2	2390.00	52.06 AV	54.00	-1.94	1.07 V	204	18.98	33.08
3	*2412.00	113.04 PK			1.28 V	206	79.86	33.18
4	*2412.00	102.45 AV			1.28 V	206	69.27	33.18
5	#7236.00	57.69 PK	93.04	-35.35	1.00 V	172	12.39	45.30
6	#7236.00	42.65 AV	82.45	-39.80	1.00 V	172	-2.65	45.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. "#": The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.28 PK	74.00	-16.72	1.27 H	96	24.20	33.08
2	2390.00	47.00 AV	54.00	-7.00	1.27 H	96	13.92	33.08
3	*2437.00	102.23 PK			1.27 H	96	68.95	33.28
4	*2437.00	101.31 AV			1.27 H	96	68.03	33.28
5	2483.50	63.12 PK	74.00	-10.88	1.27 H	97	29.66	33.46
6	2483.50	48.43 AV	54.00	-5.57	1.27 H	97	14.97	33.46
7	7311.00	59.02 PK	74.00	-14.98	1.18 H	330	13.49	45.53
8	7311.00	45.60 AV	54.00	-8.40	1.18 H	330	0.07	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.21 PK	74.00	-13.79	1.06 V	206	27.13	33.08
2	2390.00	48.90 AV	54.00	-5.10	1.06 V	206	15.82	33.08
3	*2437.00	115.57 PK			1.03 V	206	82.29	33.28
4	*2437.00	105.03 AV			1.03 V	206	71.75	33.28
5	2483.50	69.71 PK	74.00	-4.29	1.12 V	207	36.25	33.46
6	2483.50	52.63 AV	54.00	-1.37	1.12 V	207	19.17	33.46
7	7311.00	66.31 PK	74.00	-7.69	1.00 V	184	20.78	45.53
8	7311.00	52.44 AV	54.00	-1.56	1.00 V	184	6.91	45.53

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.73 PK			1.26 H	99	64.35	33.38
2	*2462.00	87.85 AV			1.26 H	99	54.47	33.38
3	2483.50	55.93 PK	74.00	-18.07	1.26 H	96	22.47	33.46
4	2483.50	47.45 AV	54.00	-6.55	1.26 H	96	13.99	33.46
5	7386.00	53.47 PK	74.00	-20.53	1.01 H	0	7.72	45.76
6	7386.00	39.77 AV	54.00	-14.23	1.01 H	0	-5.98	45.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.02 PK			1.11 V	92	77.64	33.38
2	*2462.00	100.68 AV			1.11 V	92	67.30	33.38
3	2483.50	67.76 PK	74.00	-6.24	1.14 V	93	34.30	33.46
4	2483.50	52.28 AV	54.00	-1.72	1.14 V	93	18.82	33.46
5	7386.00	53.47 PK	74.00	-20.53	1.01 V	96	7.72	45.76
6	7386.00	40.12 AV	54.00	-13.88	1.01 V	96	-5.63	45.76

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

DRAFT 802.11n (20MHz) OFDM MODULATION: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.21 PK	74.00	-9.79	1.00 H	99	31.13	33.08
2	2390.00	48.11 AV	54.00	-5.89	1.00 H	99	15.03	33.08
3	*2412.00	99.41 PK			1.00 H	99	66.23	33.18
4	*2412.00	89.38 AV			1.00 H	99	56.20	33.18
5	#7236.00	54.04 PK	79.41	-25.37	1.10 H	360	8.74	45.30
6	#7236.00	39.86 AV	69.38	-29.52	1.10 H	360	-5.44	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.55 PK	74.00	-1.45	1.09 V	205	39.47	33.08
2	2390.00	51.98 AV	54.00	-2.02	1.09 V	205	18.90	33.08
3	*2412.00	112.52 PK			1.08 V	246	79.34	33.18
4	*2412.00	102.25 AV			1.08 V	246	69.07	33.18
5	#7236.00	53.00 PK	92.52	-39.52	1.09 V	360	7.70	45.30
6	#7236.00	40.36 AV	82.25	-41.89	1.09 V	360	-4.94	45.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.
 6. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.13 PK			1.00 H	82	68.85	33.28
2	*2437.00	92.05 AV			1.00 H	82	58.77	33.28
3	7311.00	59.14 PK	74.00	-14.86	1.20 H	333	13.61	45.53
4	7311.00	44.27 AV	54.00	-9.73	1.20 H	333	-1.26	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.94 PK	74.00	-13.06	1.14 V	92	27.86	33.08
2	2390.00	49.21 AV	54.00	-4.79	1.14 V	92	16.13	33.08
3	*2437.00	115.16 PK			1.15 V	91	81.88	33.28
4	*2437.00	104.83 AV			1.15 V	91	71.55	33.28
5	2483.50	72.27 PK	74.00	-1.73	1.12 V	93	38.81	33.46
6	2483.50	52.69 AV	54.00	-1.31	1.12 V	93	19.23	33.46
7	7311.00	62.64 PK	74.00	-11.36	1.04 V	32	17.11	45.53
8	7311.00	47.97 AV	54.00	-6.03	1.04 V	32	2.44	45.53

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.94 PK			1.22 H	101	63.56	33.38
2	*2462.00	86.69 AV			1.22 H	101	53.31	33.38
3	2483.50	54.14 PK	74.00	-19.86	1.22 H	101	20.68	33.46
4	2483.50	46.24 AV	54.00	-7.76	1.22 H	101	12.78	33.46
5	7386.00	53.42 PK	74.00	-20.58	1.00 H	360	7.66	45.76
6	7386.00	40.11 AV	54.00	-13.89	1.00 H	360	-5.65	45.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.84 PK			1.12 V	95	76.46	33.38
2	*2462.00	99.87 AV			1.12 V	95	66.49	33.38
3	2483.50	71.17 PK	74.00	-2.83	1.13 V	92	37.71	33.46
4	2483.50	51.94 AV	54.00	-2.06	1.13 V	92	18.48	33.46
5	7386.00	53.21 PK	74.00	-20.79	1.00 V	35	7.45	45.76
6	7386.00	41.08 AV	54.00	-12.92	1.00 V	35	-4.68	45.76

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

DRAFT 802.11n (20MHz) OFDM MODULATION: 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.73 PK	74.00	-16.27	1.00 H	95	24.65	33.08
2	2390.00	47.43 AV	54.00	-6.57	1.00 H	95	14.35	33.08
3	*2412.00	100.48 PK			1.00 H	95	67.30	33.18
4	*2412.00	89.35 AV			1.00 H	95	56.17	33.18
5	#7236.00	52.48 PK	80.48	-28.00	1.00 H	0	7.18	45.30
6	#7236.00	39.55 AV	69.35	-29.80	1.00 H	0	-5.75	45.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.59 PK	74.00	-5.41	1.16 V	360	35.51	33.08
2	2390.00	52.12 AV	54.00	-1.88	1.16 V	360	19.04	33.08
3	*2412.00	114.84 PK			1.13 V	360	81.66	33.18
4	*2412.00	103.32 AV			1.13 V	360	70.14	33.18
5	#7236.00	53.13 PK	94.84	-41.71	1.16 V	360	7.83	45.30
6	#7236.00	40.02 AV	83.32	-43.30	1.16 V	360	-5.28	45.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.
 6. “ # ”: The radiated frequency is out the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.52 PK			1.23 H	115	70.24	33.28
2	*2437.00	92.37 AV			1.23 H	115	59.09	33.28
3	7311.00	60.51 PK	74.00	-13.49	1.02 H	208	14.98	45.53
4	7311.00	46.84 AV	54.00	-7.16	1.02 H	208	1.31	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.40 PK	74.00	-12.60	1.13 V	184	28.32	33.08
2	2390.00	48.45 AV	54.00	-5.55	1.13 V	184	15.37	33.08
3	*2437.00	117.86 PK			1.08 V	204	84.58	33.28
4	*2437.00	106.26 AV			1.08 V	204	72.98	33.28
5	2483.50	70.25 PK	74.00	-3.75	1.09 V	201	36.79	33.46
6	2483.50	52.09 AV	54.00	-1.91	1.09 V	201	18.63	33.46
7	7311.00	66.15 PK	74.00	-7.85	1.00 V	190	20.62	45.53
8	7311.00	52.29 AV	54.00	-1.71	1.00 V	190	6.76	45.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.59 PK			1.00 H	82	64.21	33.38
2	*2462.00	86.53 AV			1.00 H	82	53.15	33.38
3	2483.50	58.70 PK	74.00	-15.30	1.00 H	82	25.24	33.46
4	2483.50	47.80 AV	54.00	-6.20	1.00 H	82	14.34	33.46
5	7386.00	53.36 PK	74.00	-20.64	1.00 H	180	7.61	45.76
6	7386.00	40.26 AV	54.00	-13.74	1.00 H	180	-5.49	45.76
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.75 PK			1.17 V	93	78.37	33.38
2	*2462.00	100.59 AV			1.17 V	93	67.21	33.38
3	2483.50	66.52 PK	74.00	-7.48	1.14 V	91	33.06	33.46
4	2483.50	52.49 AV	54.00	-1.51	1.14 V	91	19.03	33.46
5	7386.00	53.65 PK	74.00	-20.35	1.14 V	0	7.90	45.76
6	7386.00	40.44 AV	54.00	-13.56	1.14 V	0	-5.31	45.76

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

DRAFT 802.11n (40MHz) OFDM MODULATION: 1TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.70 PK	74.00	-15.30	1.22 H	115	25.62	33.08
2	2390.00	47.59 AV	54.00	-6.41	1.22 H	115	14.51	33.08
3	*2422.00	94.11 PK			1.22 H	115	60.89	33.22
4	*2422.00	83.80 AV			1.22 H	115	50.58	33.22
5	7266.00	53.10 PK	74.00	-20.90	1.14 H	0	7.70	45.39
6	7266.00	39.93 AV	54.00	-14.07	1.14 H	0	-5.47	45.39
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.12 PK	74.00	-7.88	1.05 V	124	33.04	33.08
2	2390.00	52.20 AV	54.00	-1.80	1.05 V	124	19.12	33.08
3	*2422.00	105.64 PK			1.03 V	125	72.42	33.22
4	*2422.00	95.57 AV			1.03 V	125	62.35	33.22
5	7266.00	52.82 PK	74.00	-21.18	1.00 V	360	7.42	45.39
6	7266.00	40.12 AV	54.00	-13.88	1.00 V	360	-5.28	45.39

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	96.15 PK			1.00 H	81	62.87	33.28
2	*2437.00	85.98 AV			1.00 H	81	52.70	33.28
3	7311.00	53.78 PK	74.00	-20.22	1.10 H	0	8.25	45.53
4	7311.00	39.72 AV	54.00	-14.28	1.10 H	0	-5.81	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.69 PK			1.07 V	196	74.41	33.28
2	*2437.00	97.62 AV			1.07 V	196	64.34	33.28
3	2483.50	68.51 PK	74.00	-5.49	1.08 V	197	35.05	33.46
4	2483.50	52.47 AV	54.00	-1.53	1.08 V	197	19.01	33.46
5	7311.00	53.73 PK	74.00	-20.27	1.06 V	360	8.20	45.53
6	7311.00	40.08 AV	54.00	-13.92	1.06 V	360	-5.45	45.53

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	92.68 PK			1.22 H	115	59.34	33.34
2	*2452.00	82.59 AV			1.22 H	115	49.25	33.34
3	2483.50	59.60 PK	74.00	-14.40	1.22 H	115	26.14	33.46
4	2483.50	47.65 AV	54.00	-6.35	1.22 H	115	14.19	33.46
5	7356.00	53.04 PK	74.00	-20.96	1.10 H	0	7.37	45.67
6	7356.00	40.02 AV	54.00	-13.98	1.10 H	0	-5.65	45.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.96 PK			1.00 V	150	70.62	33.34
2	*2452.00	93.70 AV			1.00 V	150	60.36	33.34
3	2483.50	66.08 PK	74.00	-7.92	1.22 V	148	32.62	33.46
4	2483.50	52.65 AV	54.00	-1.35	1.22 V	148	19.19	33.46
5	7356.00	53.85 PK	74.00	-20.15	1.22 V	360	8.18	45.67
6	7356.00	40.47 AV	54.00	-13.53	1.22 V	360	-5.20	45.67

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

DRAFT 802.11n (40MHz) OFDM MODULATION: 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.19 PK	74.00	-15.81	1.18 H	205	25.11	33.08
2	2390.00	47.13 AV	54.00	-6.87	1.18 H	205	14.05	33.08
3	*2422.00	95.23 PK			1.18 H	205	62.01	33.22
4	*2422.00	83.82 AV			1.18 H	205	50.60	33.22
5	7266.00	52.81 PK	74.00	-21.19	1.06 H	0	7.41	45.39
6	7266.00	39.93 AV	54.00	-14.07	1.06 H	0	-5.47	45.39
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.31 PK	74.00	-7.69	1.06 V	175	33.23	33.08
2	2390.00	52.07 AV	54.00	-1.93	1.06 V	175	18.99	33.08
3	*2422.00	107.47 PK			1.01 V	176	74.25	33.22
4	*2422.00	95.58 AV			1.01 V	176	62.36	33.22
5	7266.00	53.65 PK	74.00	-20.35	1.06 V	180	8.25	45.39
6	7266.00	40.98 AV	54.00	-13.02	1.06 V	180	-4.42	45.39

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.61 PK			1.30 H	143	62.33	33.28
2	*2437.00	84.96 AV			1.30 H	143	51.68	33.28
3	7311.00	53.63 PK	74.00	-20.37	1.09 H	360	8.10	45.53
4	7311.00	39.97 AV	54.00	-14.03	1.09 H	360	-5.56	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.03 PK			1.02 V	194	74.75	33.28
2	*2437.00	96.12 AV			1.02 V	194	62.84	33.28
3	2483.50	68.51 PK	74.00	-5.49	1.07 V	198	35.05	33.46
4	2483.50	52.50 AV	54.00	-1.50	1.07 V	198	19.04	33.46
5	7311.00	53.63 PK	74.00	-20.37	1.21 V	180	8.10	45.53
6	7311.00	40.47 AV	54.00	-13.53	1.21 V	180	-5.06	45.53

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 1000hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.34 PK			1.20 H	117	60.00	33.34
2	*2452.00	81.91 AV			1.20 H	117	48.57	33.34
3	2483.50	59.72 PK	74.00	-14.28	1.20 H	117	26.26	33.46
4	2483.50	47.59 AV	54.00	-6.41	1.20 H	117	14.13	33.46
5	7356.00	53.15 PK	74.00	-20.85	1.20 H	0	7.48	45.67
6	7356.00	39.90 AV	54.00	-14.10	1.20 H	0	-5.77	45.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	105.54 PK			1.03 V	205	72.20	33.34
2	*2452.00	93.61 AV			1.03 V	205	60.27	33.34
3	2483.50	67.55 PK	74.00	-6.45	1.06 V	204	34.09	33.46
4	2483.50	52.65 AV	54.00	-1.35	1.06 V	204	19.19	33.46
5	7356.00	53.85 PK	74.00	-20.15	1.06 V	180	8.18	45.67
6	7356.00	40.74 AV	54.00	-13.26	1.06 V	180	-4.93	45.67

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

BELOW 1GHz WORST-CASE DATA : DRAFT 802.11n (20MHz) OFDM MODULATION: 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH 999hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.73	32.13 QP	40.00	-7.87	1.00 H	244	20.84	11.30
2	131.00	35.55 QP	43.50	-7.95	2.00 H	157	23.37	12.18
3	249.60	37.64 QP	46.00	-8.36	1.00 H	106	24.83	12.81
4	480.97	35.29 QP	46.00	-10.71	1.50 H	49	16.62	18.66
5	500.42	39.44 QP	46.00	-6.56	1.50 H	142	20.18	19.25
6	753.18	37.60 QP	46.00	-8.40	1.00 H	139	13.56	24.03
7	877.61	36.58 QP	46.00	-9.42	1.50 H	283	10.69	25.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.06	33.95 QP	40.00	-6.05	1.00 V	331	20.53	13.42
2	64.90	31.07 QP	40.00	-8.93	1.25 V	337	18.58	12.49
3	131.00	34.39 QP	43.50	-9.11	1.00 V	19	22.21	12.18
4	375.98	35.67 QP	46.00	-10.33	1.50 V	10	20.19	15.48
5	480.97	39.53 QP	46.00	-6.47	1.25 V	121	20.87	18.66
6	500.42	40.53 QP	46.00	-5.47	1.25 V	91	21.28	19.25
7	803.73	36.08 QP	46.00	-9.92	1.50 V	118	10.74	25.34
8	877.61	35.95 QP	46.00	-10.05	1.25 V	199	10.06	25.90

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 22, 2008	Sep. 21, 2009
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 29, 2008	Dec. 28, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 30, 2008	Jul. 29, 2009
Software ADT	ADT_Cond_ V7.3.6	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

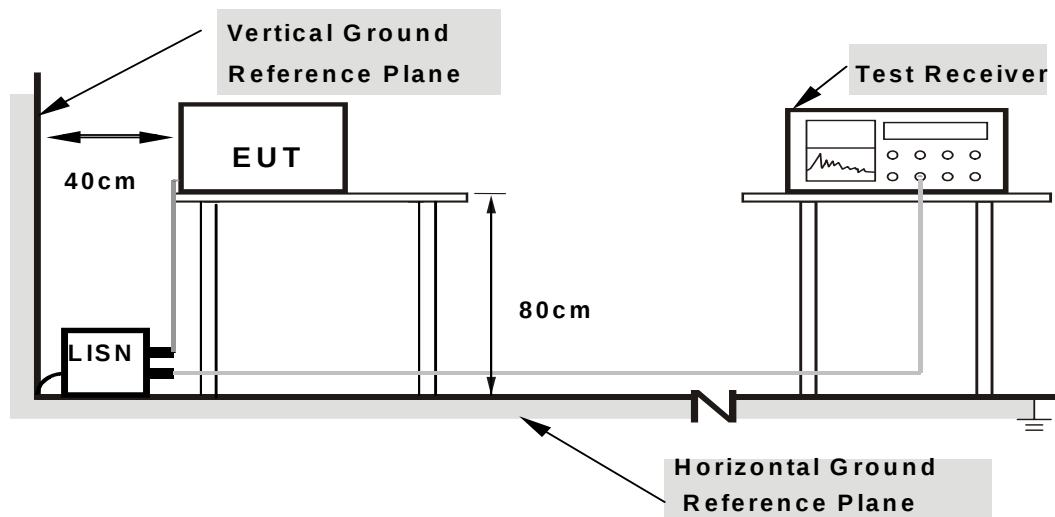

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS

Conducted Worst-Case Data: DRAFT 802.11n (20MHz) OFDM MODULATION: 2TX

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	14.4Mbps	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH, 991hPa	TESTED BY	Mark Liao

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	46.10	-	46.23	-	66.00	56.00	-19.77	-
2	0.369	0.14	41.12	-	41.26	-	58.53	48.53	-17.27	-
3	0.900	0.17	36.62	-	36.79	-	56.00	46.00	-19.21	-
4	2.430	0.21	38.40	-	38.61	-	56.00	46.00	-17.39	-
5	4.891	0.30	34.01	-	34.31	-	56.00	46.00	-21.69	-
6	9.250	0.41	36.43	-	36.84	-	60.00	50.00	-23.16	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

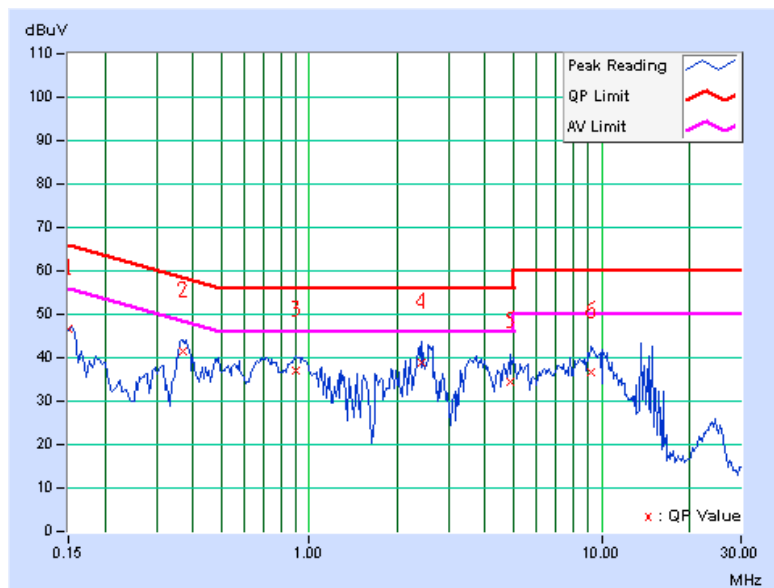

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	14.4Mbps	INPUT POWER	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	23deg. C, 67%RH, 991hPa	TESTED BY	Mark Liao

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.13	47.83	-	47.96	-	66.00	56.00	-18.04	-
2	0.369	0.15	41.36	-	41.51	-	58.53	48.53	-17.02	-
3	0.943	0.17	34.22	-	34.39	-	56.00	46.00	-21.61	-
4	2.543	0.23	37.33	-	37.56	-	56.00	46.00	-18.44	-
5	8.688	0.46	34.02	-	34.48	-	60.00	50.00	-25.52	-
6	14.895	0.66	28.59	-	29.25	-	60.00	50.00	-30.75	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

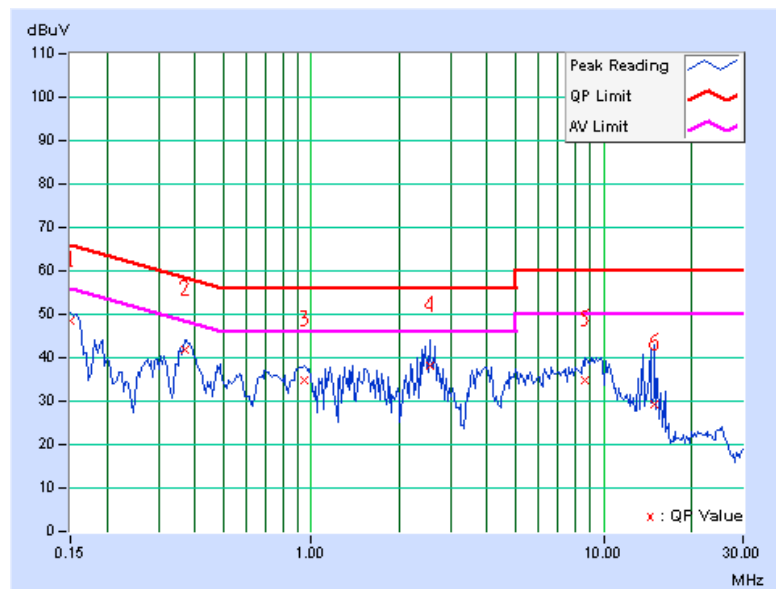

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b DSSS MODULATION: 2TX

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.09	10.11	0.5	PASS
6	2437	10.09	10.10	0.5	PASS
11	2462	10.08	10.09	0.5	PASS



Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms [T1] MK VIEW

Marker 1 [T1] 1.65 dBm 2.40702 GHz

Delta 2 [T1] 0.00 dB 10.09 MHz

D1 7.65 dBm D2 1.65 dBm

F1 F2

Center 2.412 GHz 3 MHz/ Span 30 MHz

BUREAU VERITAS 1828

A D T

Ref 20 dBm Att 30 dB [T1] MK VIEW

Marker 1 [T1] 2.17 dBm 2.43201 GHz

Delta 2 [T1] 0.00 dB 10.09 MHz

D1 8.17 dBm

D2 2.17 dBm

F1 F2

Center 2.437 GHz 3 MHz/ Span 30 MHz

BUREAU VERITAS 1828

A D T

Ref 20 dBm Att 30 dB RBW 100 kHz [T1] MK VIEW
 VBW 300 kHz
 SWT 5 ms

Marker 1 [T1] 0.33 dBm
 2.45702 GHz

Delta 2 [T1] 0.00 dB
 10.08 MHz

D1 6.33 dBm
 D2 0.33 dBm

F1 F2

Center 2.462 GHz 3 MHz/ Span 30 MHz

BUREAU VERITAS
 1828

A D T

Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 5 ms [T1] MK VIEW

Marker 1 [T1] 2.65 dBm 2.40701 GHz

Delta 2 [T1] 0.00 dB 10.11 MHz

D1 8.65 dBm D2 2.65 dBm


F1 F2

Center 2.412 GHz 3 MHz/ Span 30 MHz


BUREAU VERITAS 1828

A D T

CH 6

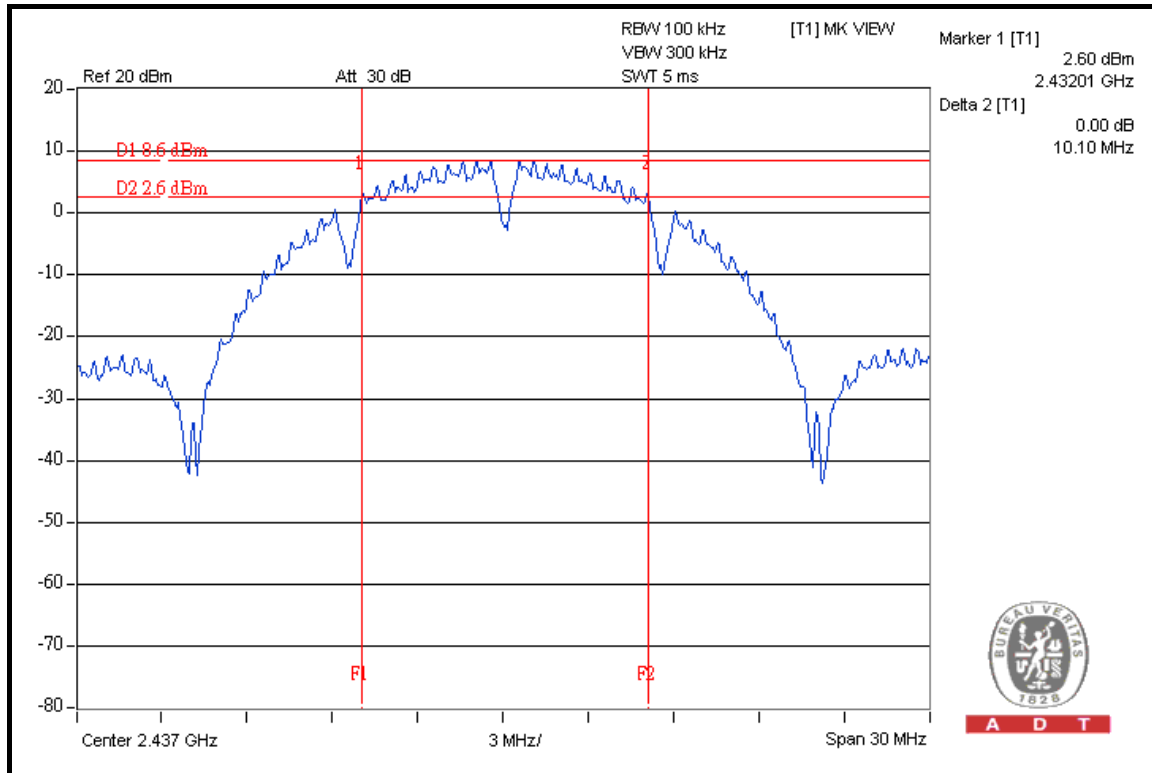

CH 11

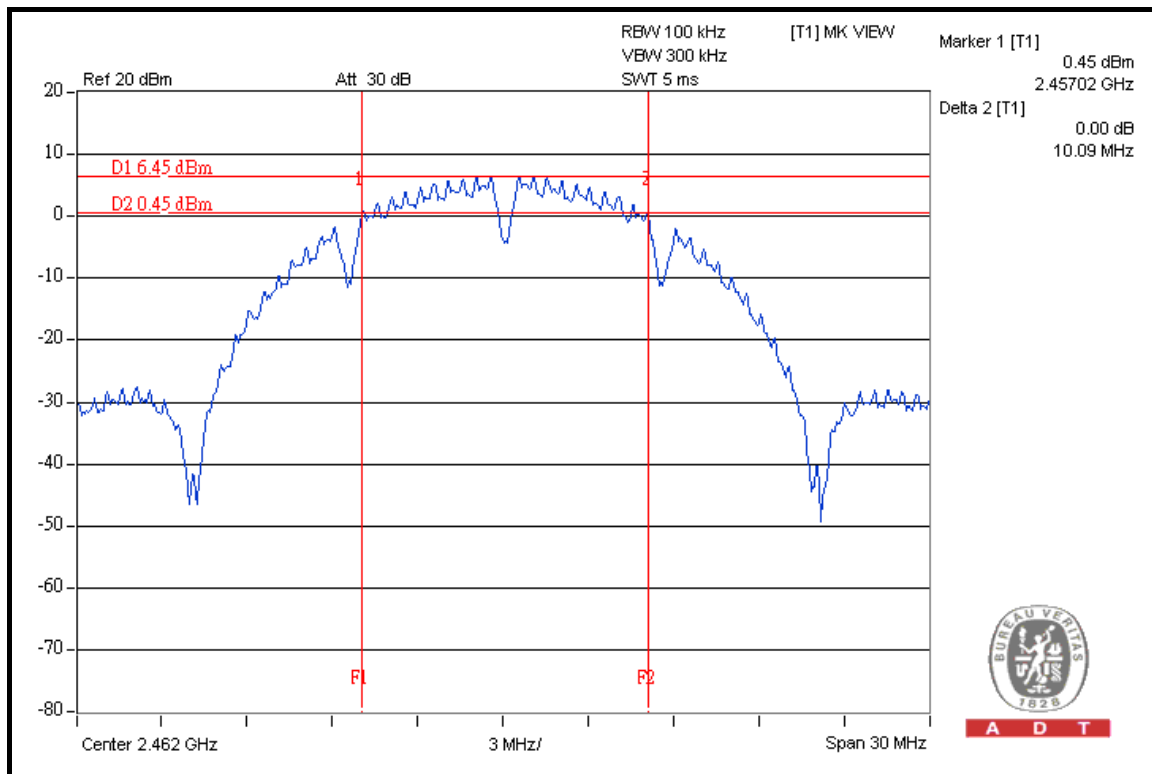


802.11g OFDM MODULATION: 1TX

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.48	0.5	PASS
6	2437	16.44	0.5	PASS
11	2462	16.48	0.5	PASS


CH 1

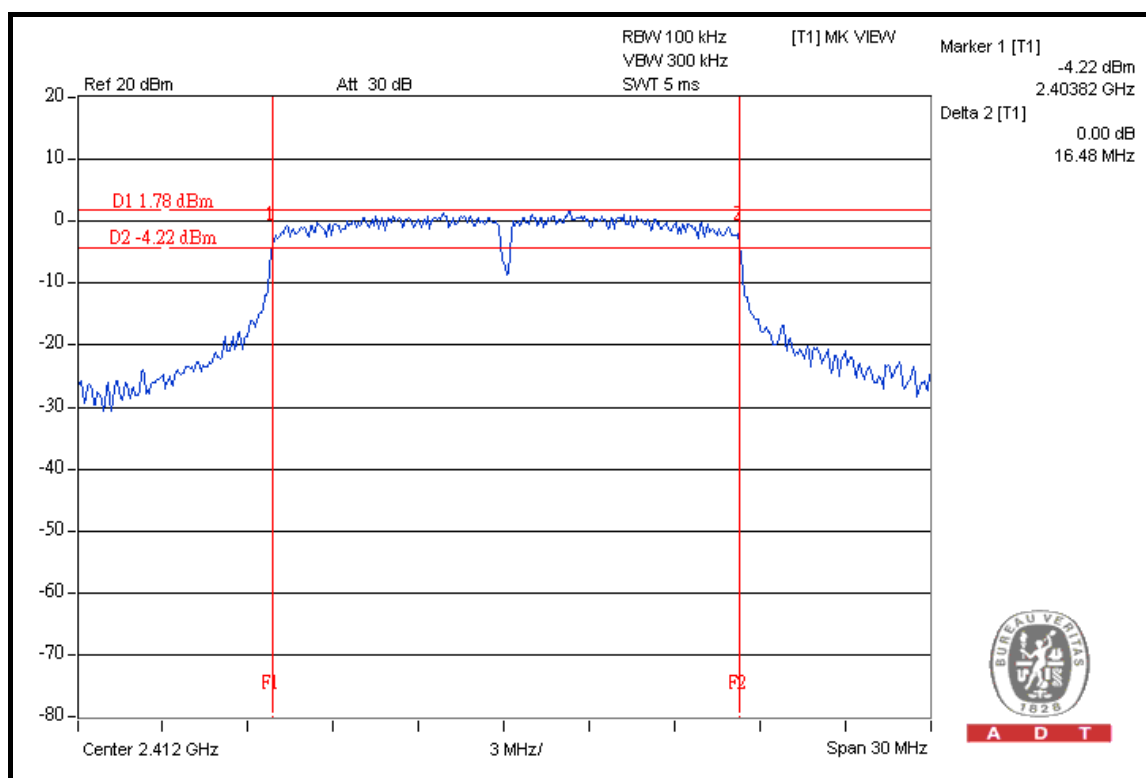




A D T

CH 6

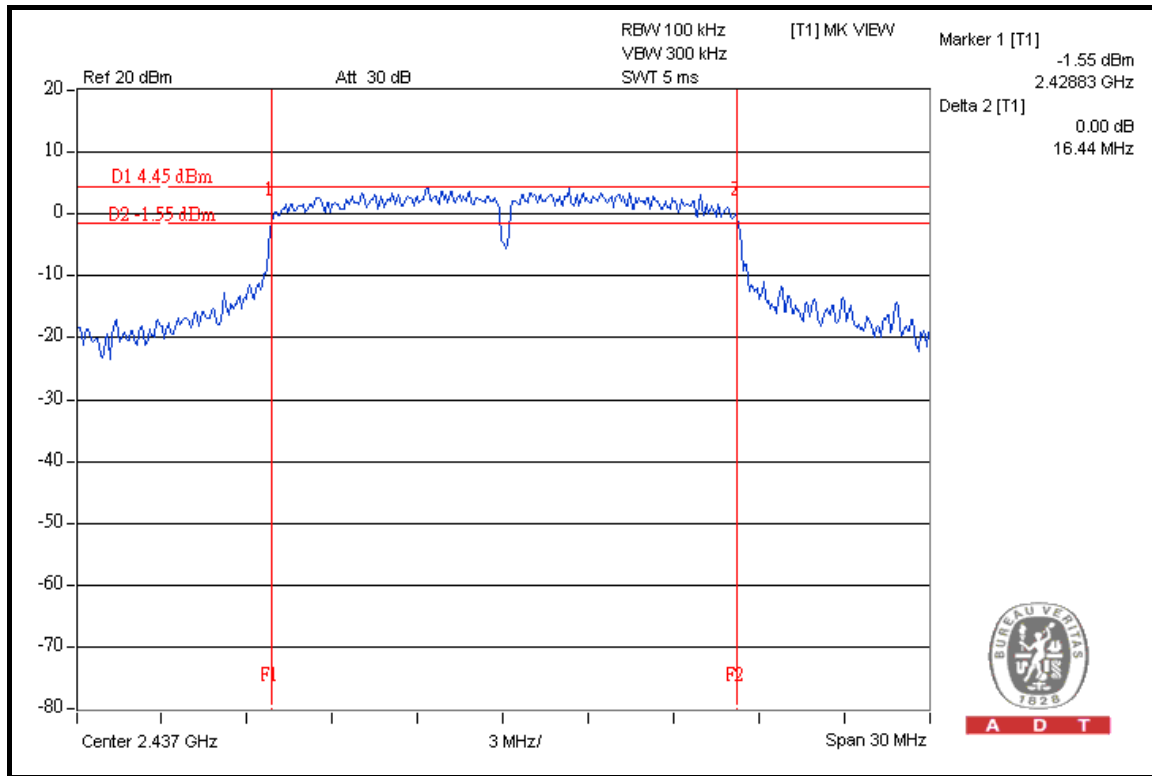

A D T

CH 11

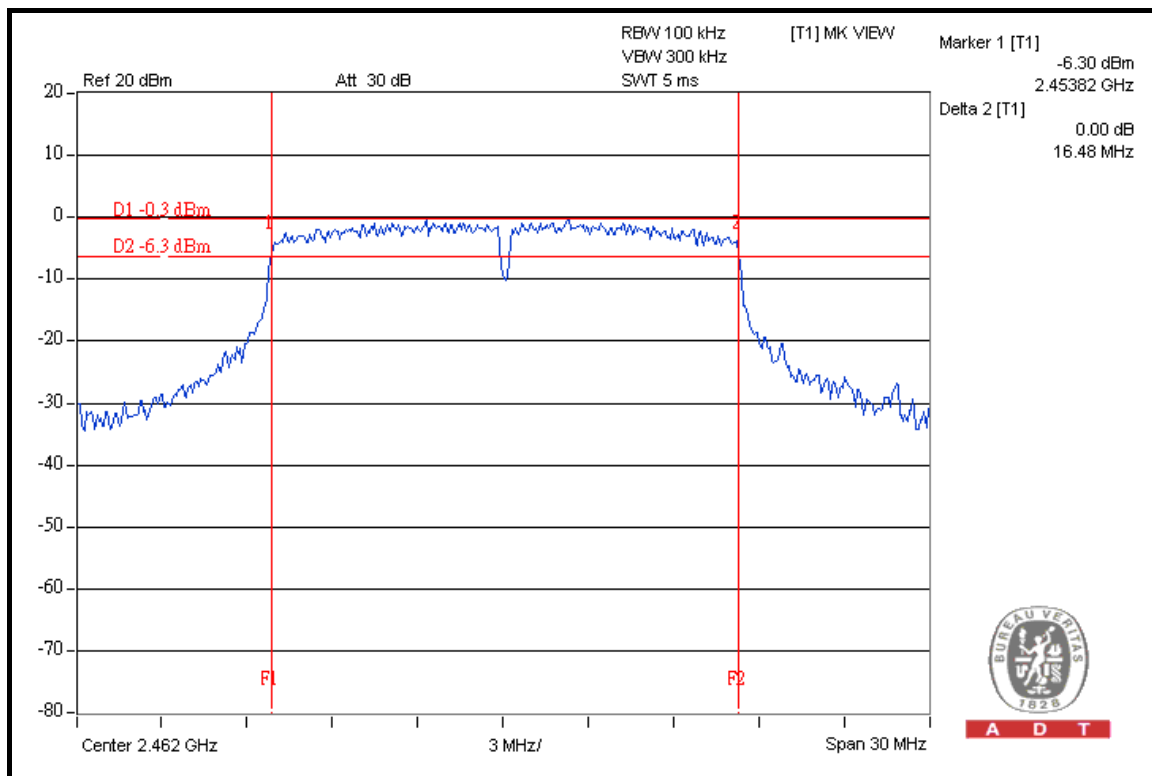


A D T

DRAFT 802.11n (20MHz) OFDM MODULATION: 1TX


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.72	0.5	PASS
6	2437	17.80	0.5	PASS
11	2462	17.70	0.5	PASS


CH 1

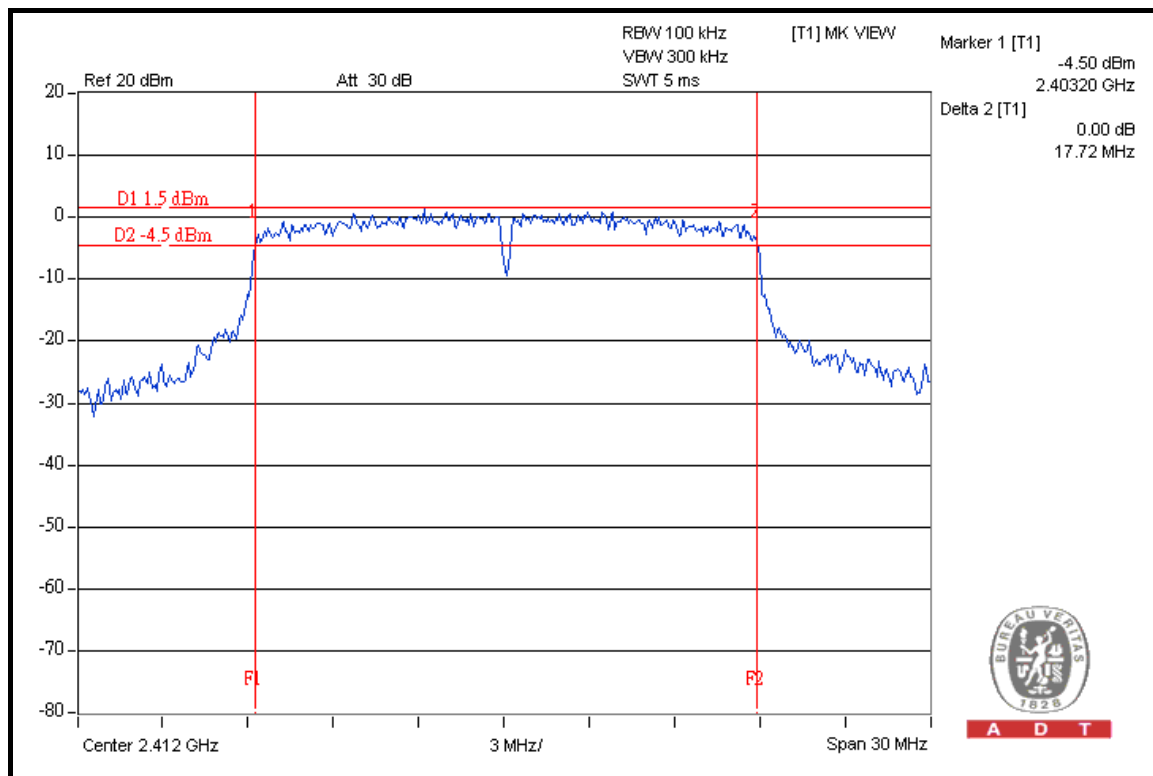

CH 6

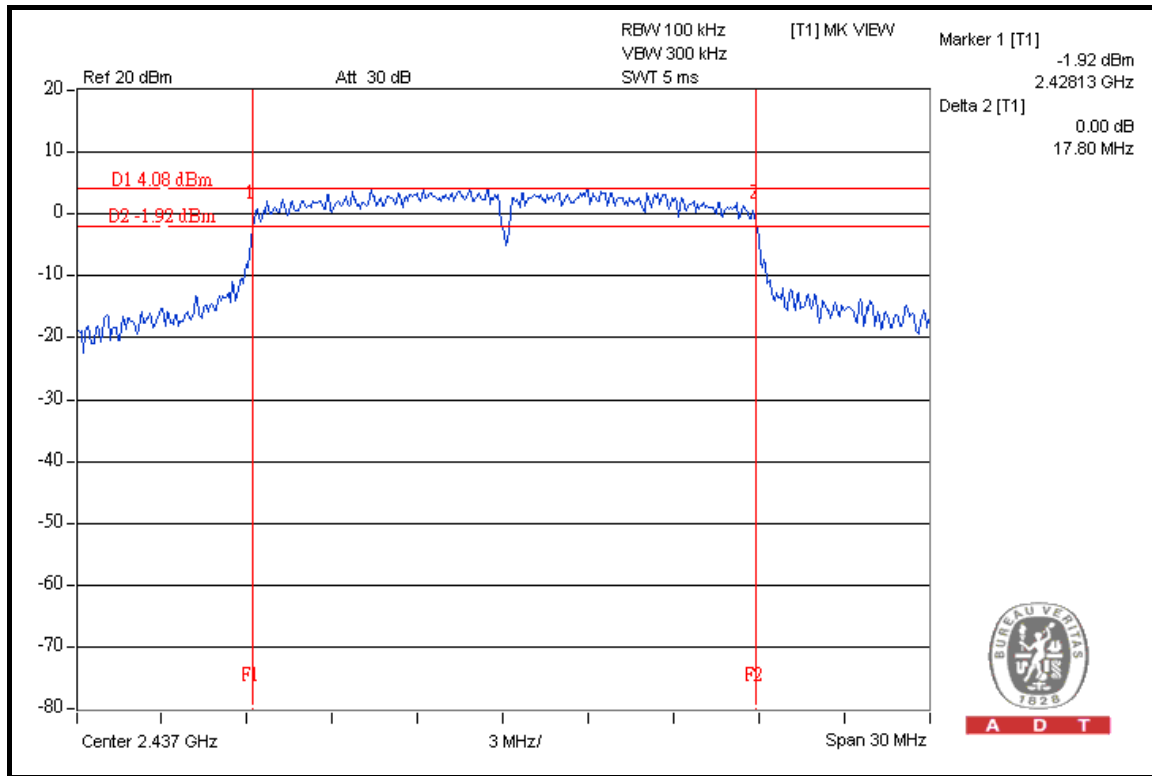

CH 11

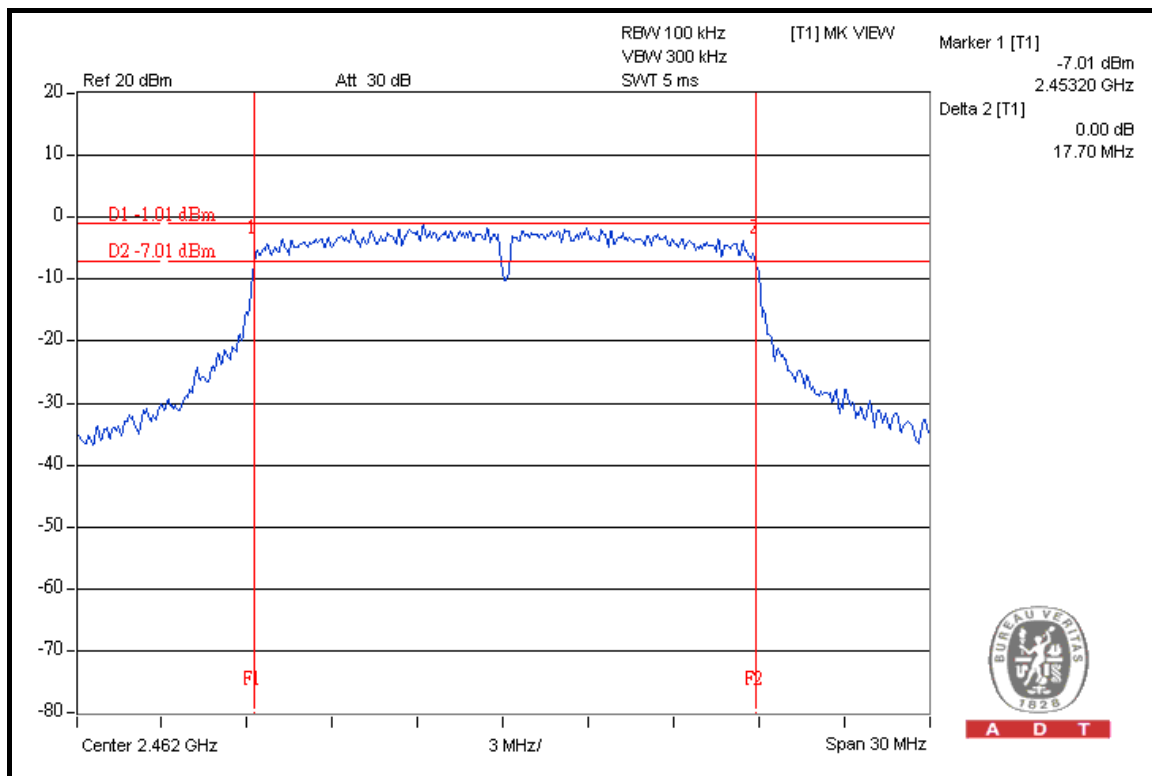

**A D T****DRAFT 802.11n (20MHz) OFDM MODULATION: 2TX**


MODULATION TYPE	BPSK	TRANSFER RATE	14.4Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.72	17.70	0.5	PASS
6	2437	17.72	17.70	0.5	PASS
11	2462	17.72	17.70	0.5	PASS




A D T

FOR CHAIN 0: CH 1

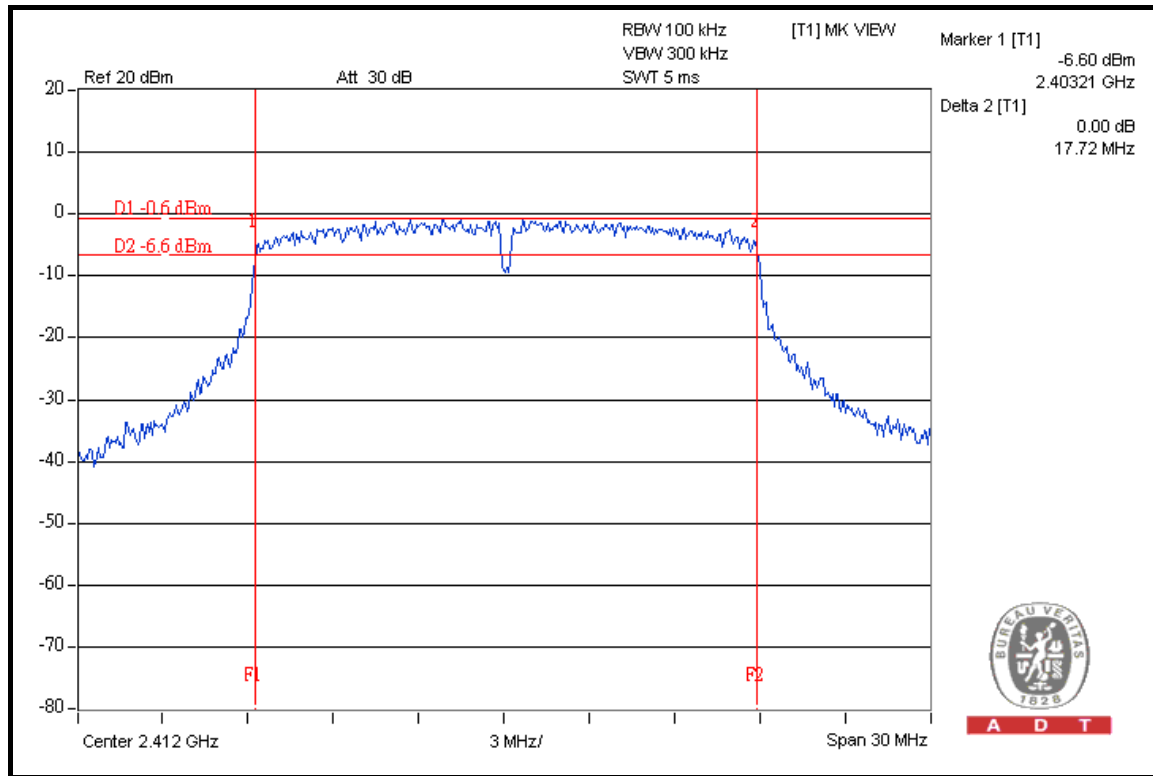


CH 6

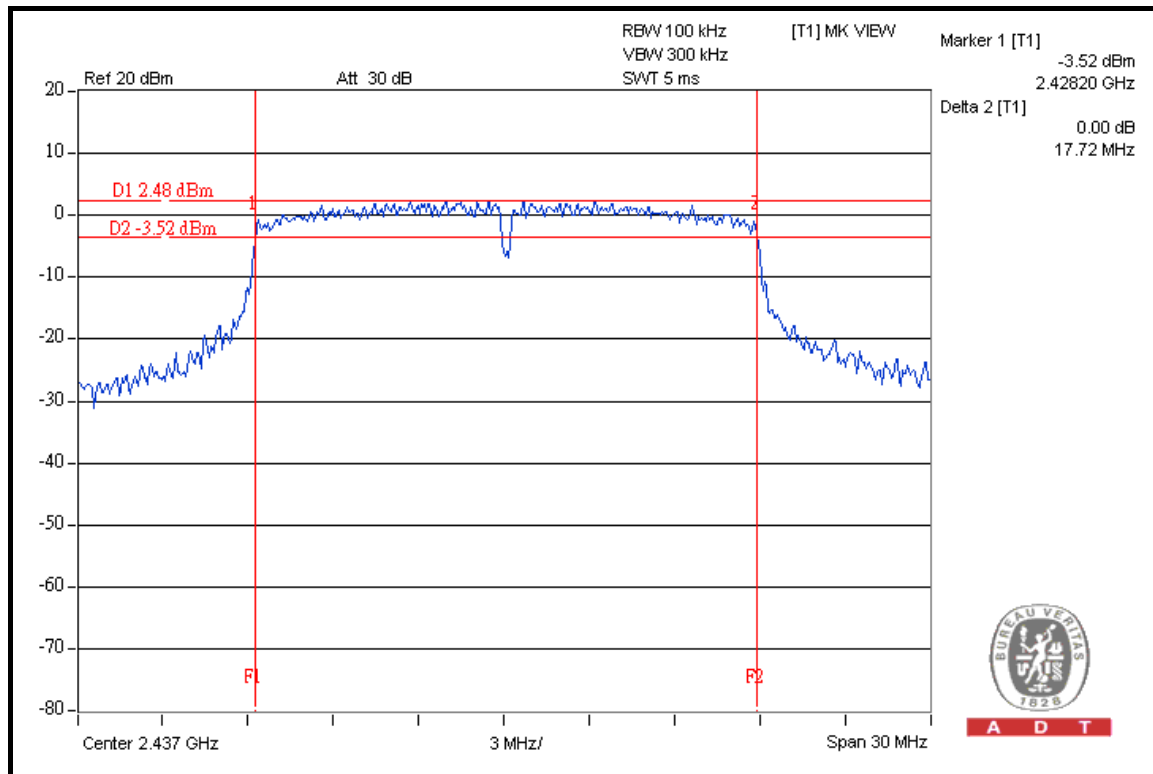




A D T

CH 11

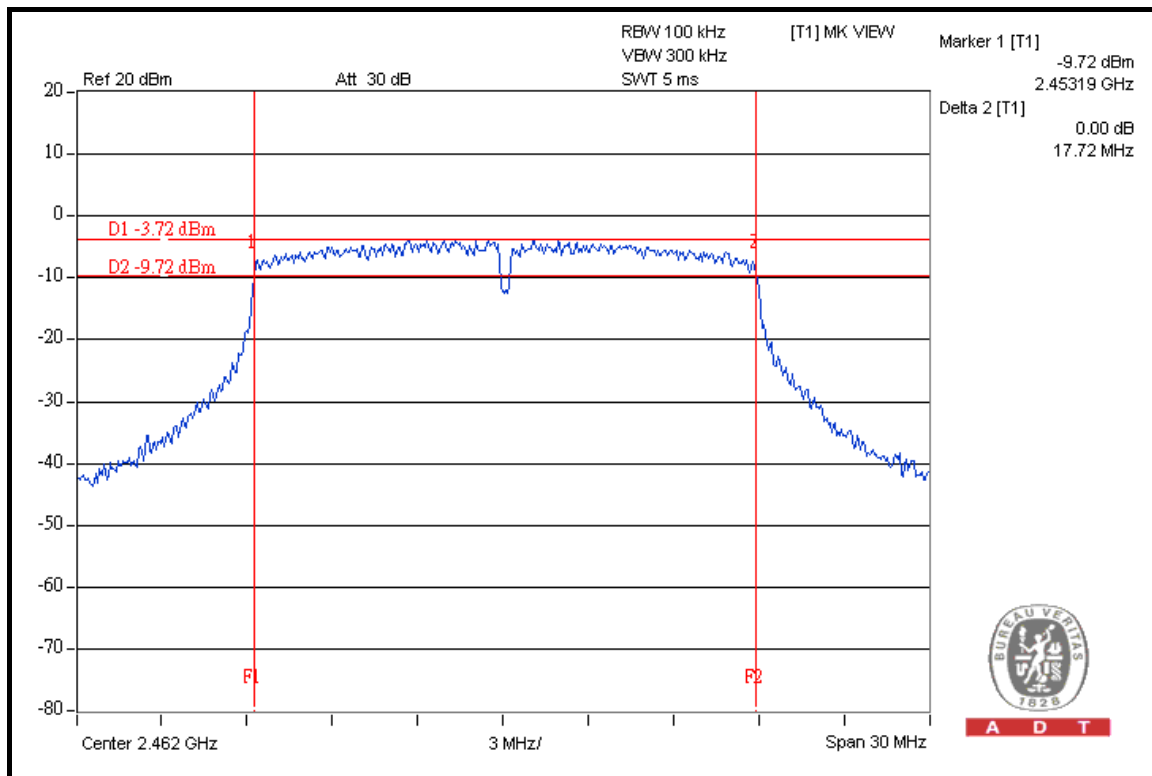


FOR CHAIN 1: CH 1

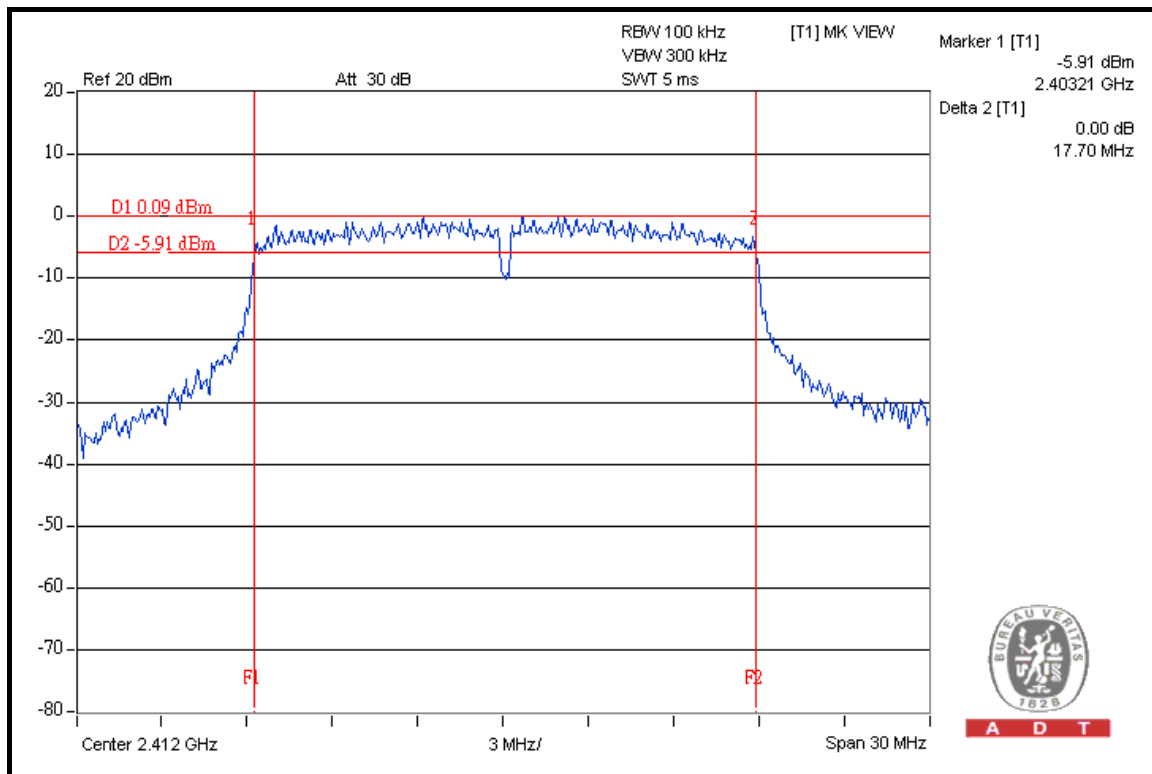




A D T

CH 6

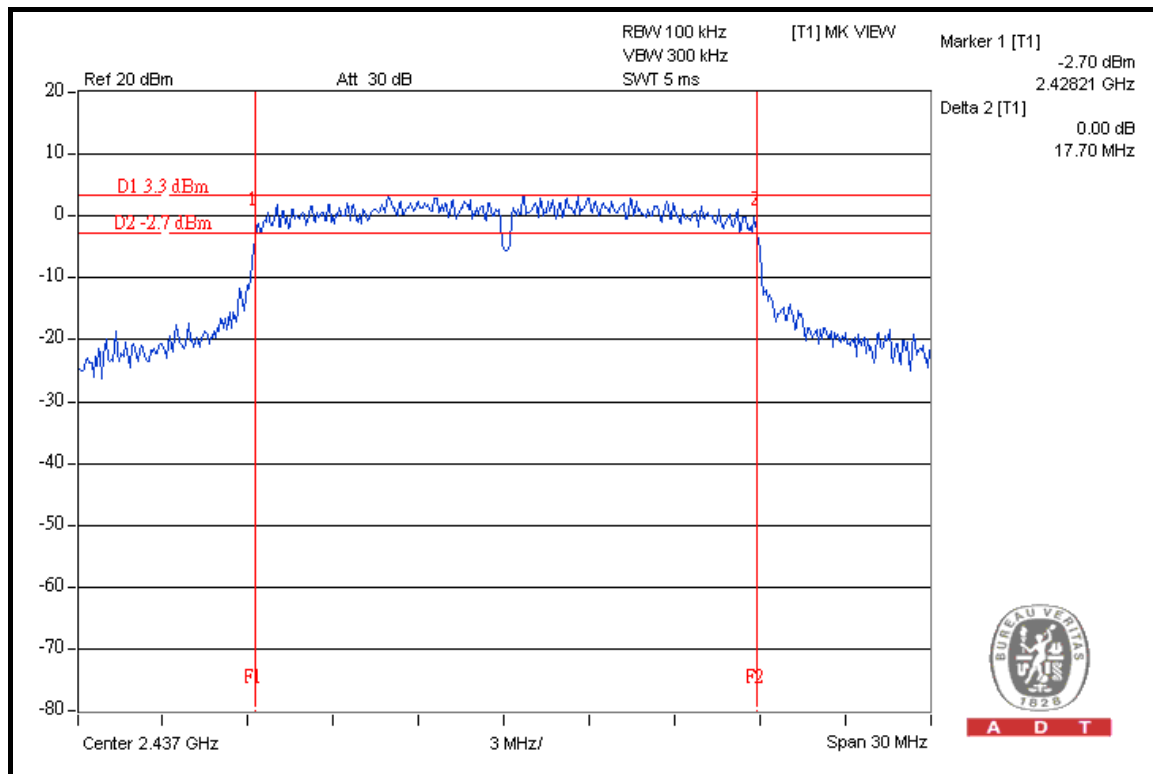

CH 11

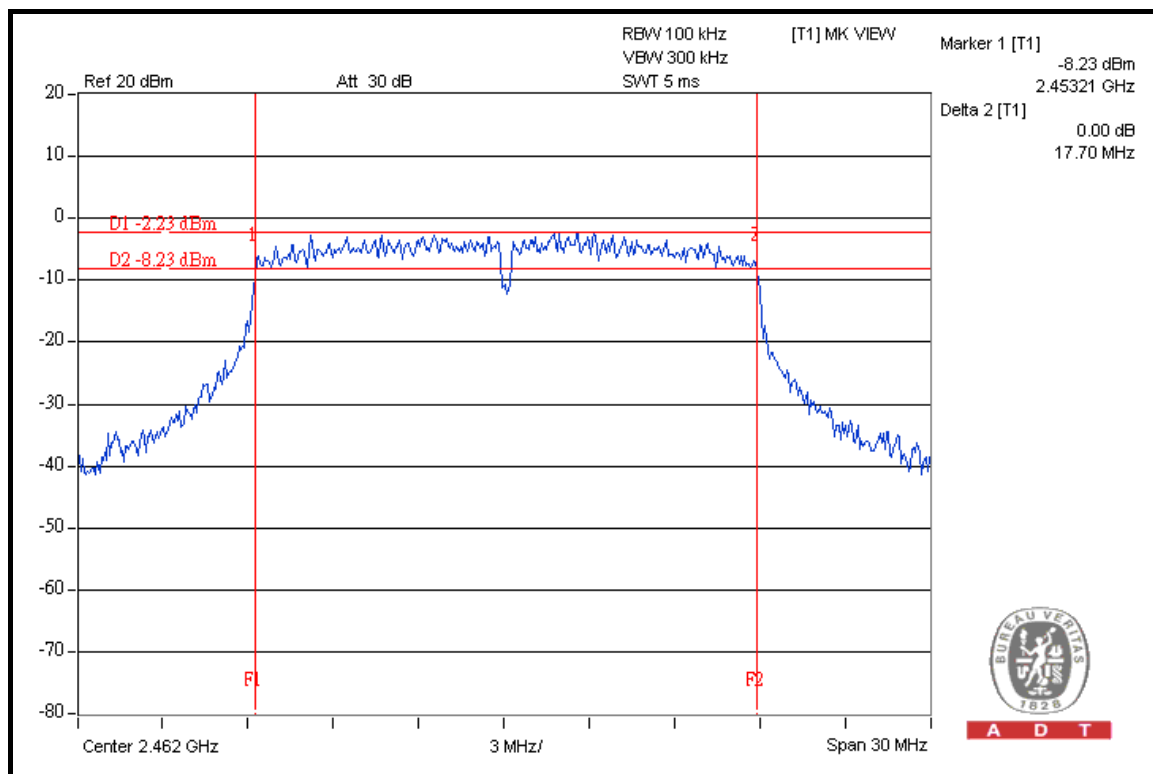


DRAFT 802.11n (40MHz) OFDM MODULATION: 1TX


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.50	0.5	PASS
4	2437	36.50	0.5	PASS
7	2452	36.54	0.5	PASS


CH 1

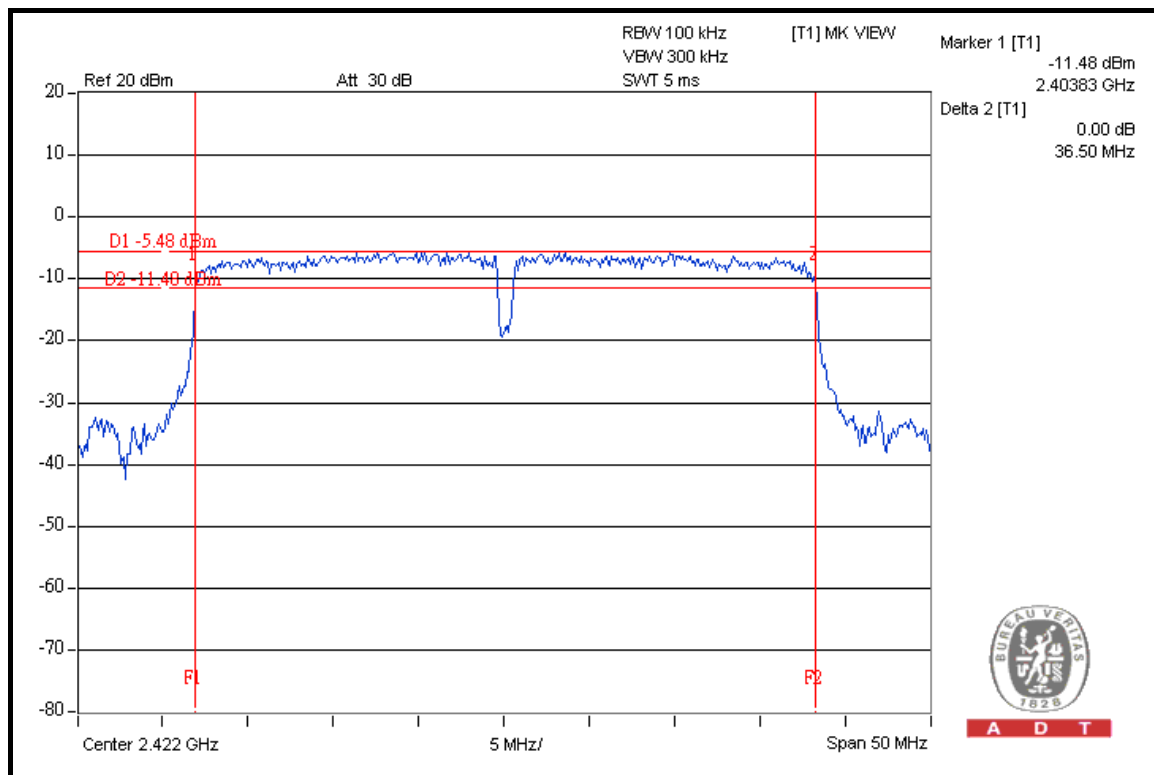

CH 4

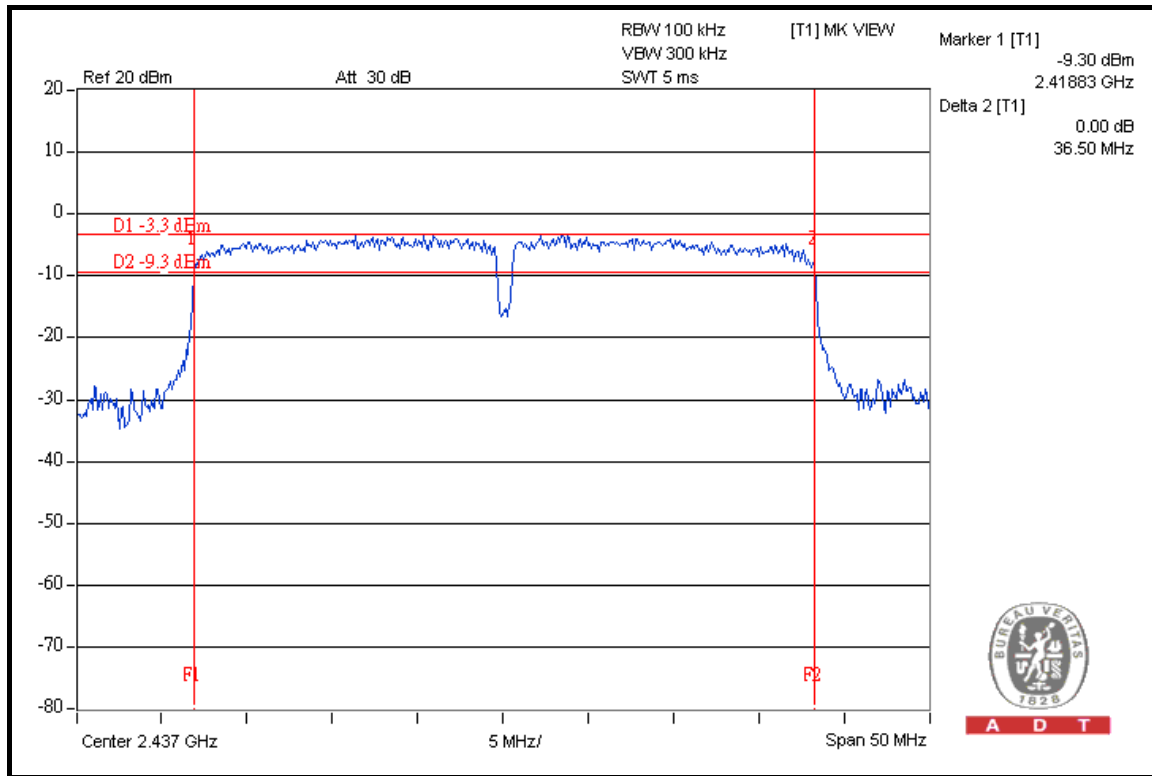

CH 7

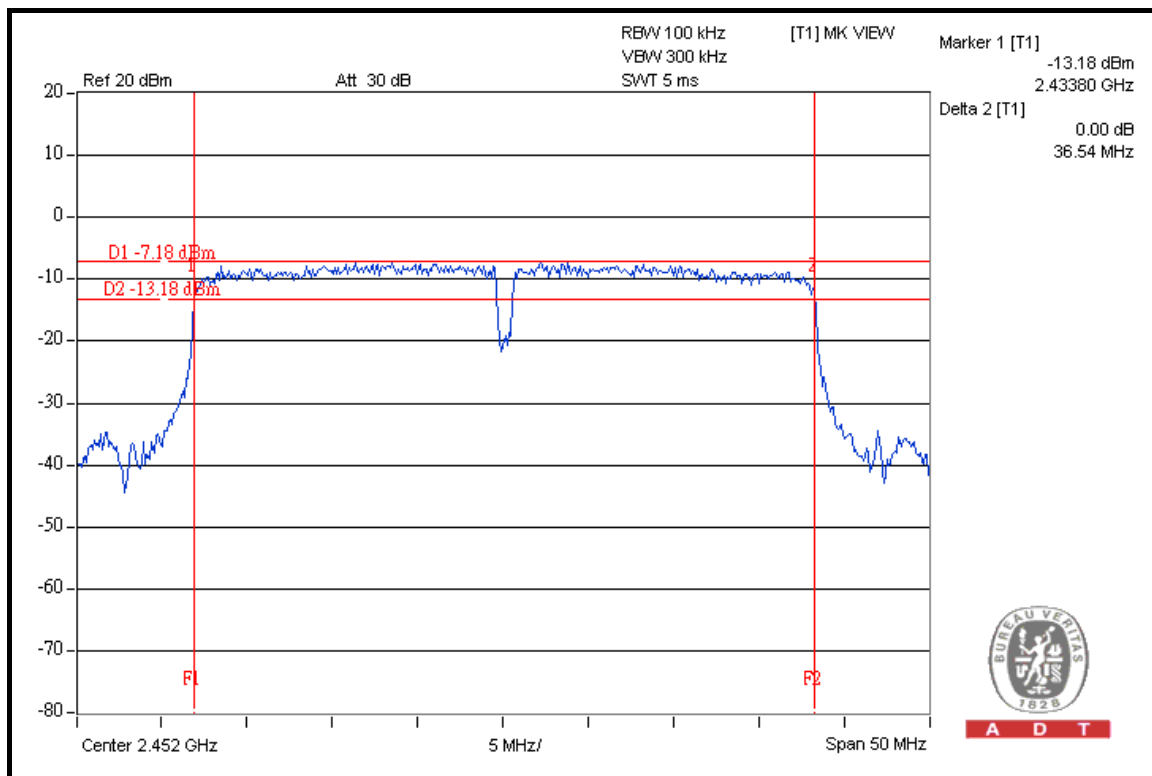




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION: 2TX


MODULATION TYPE	BPSK	TRANSFER RATE	30.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2422	36.49	36.46	0.5	PASS
4	2437	36.53	36.54	0.5	PASS
7	2452	36.45	36.48	0.5	PASS

FOR CHAIN 0: CH 1

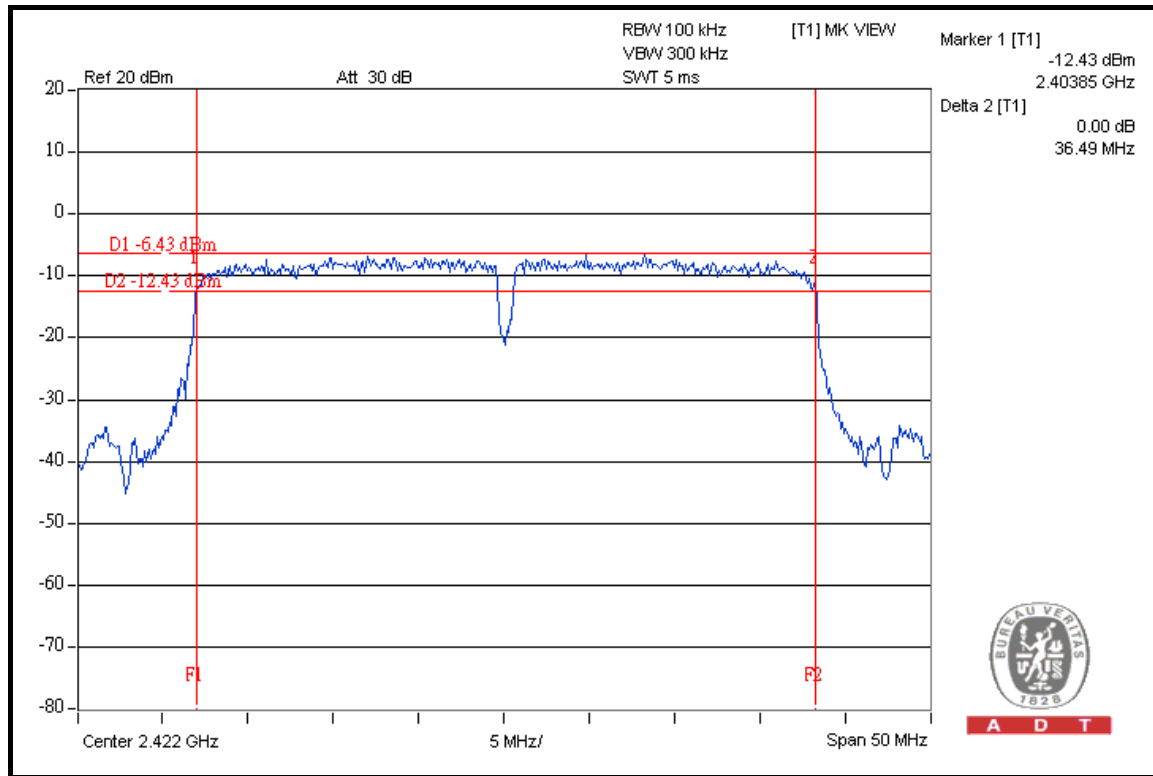


CH 4

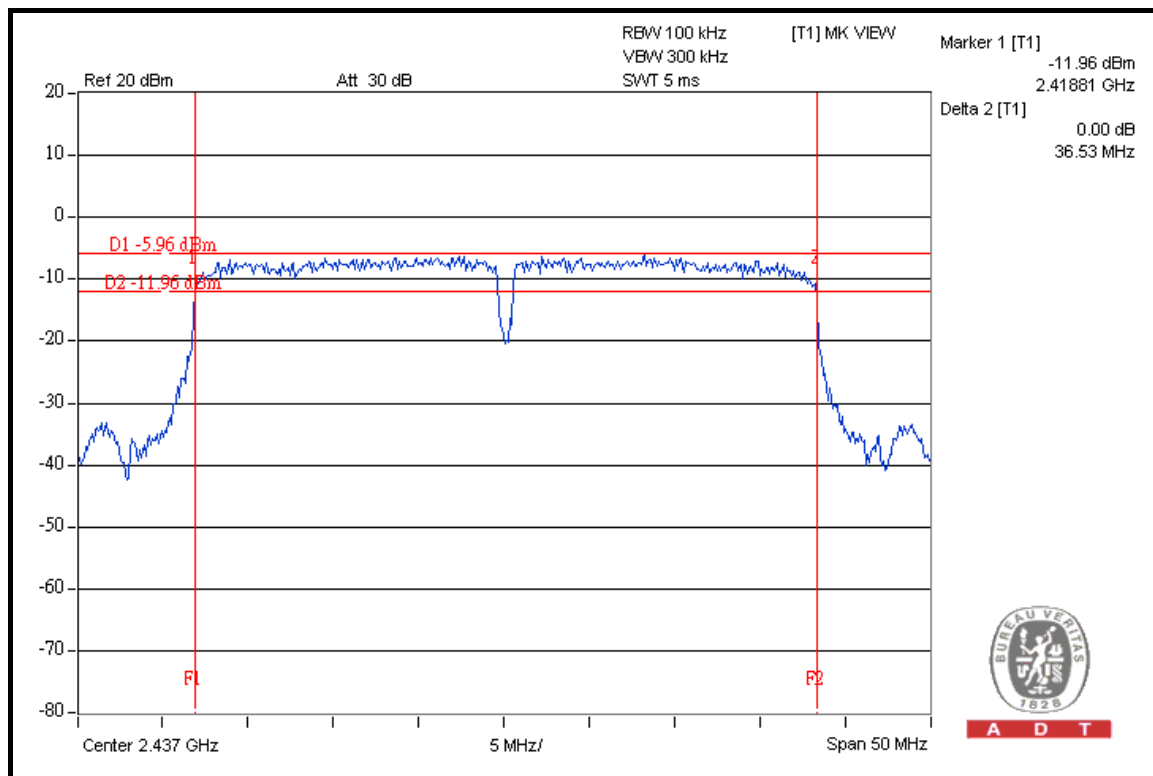




A D T

CH 7

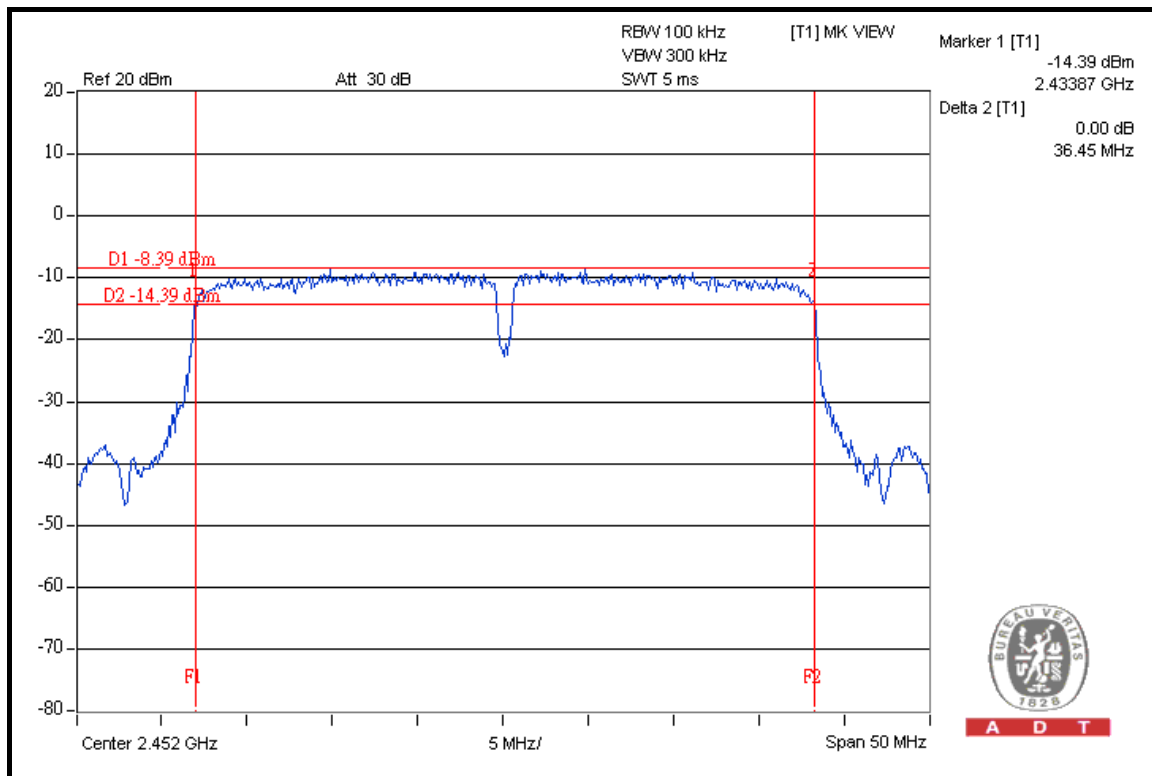


FOR CHAIN 1: CH 1

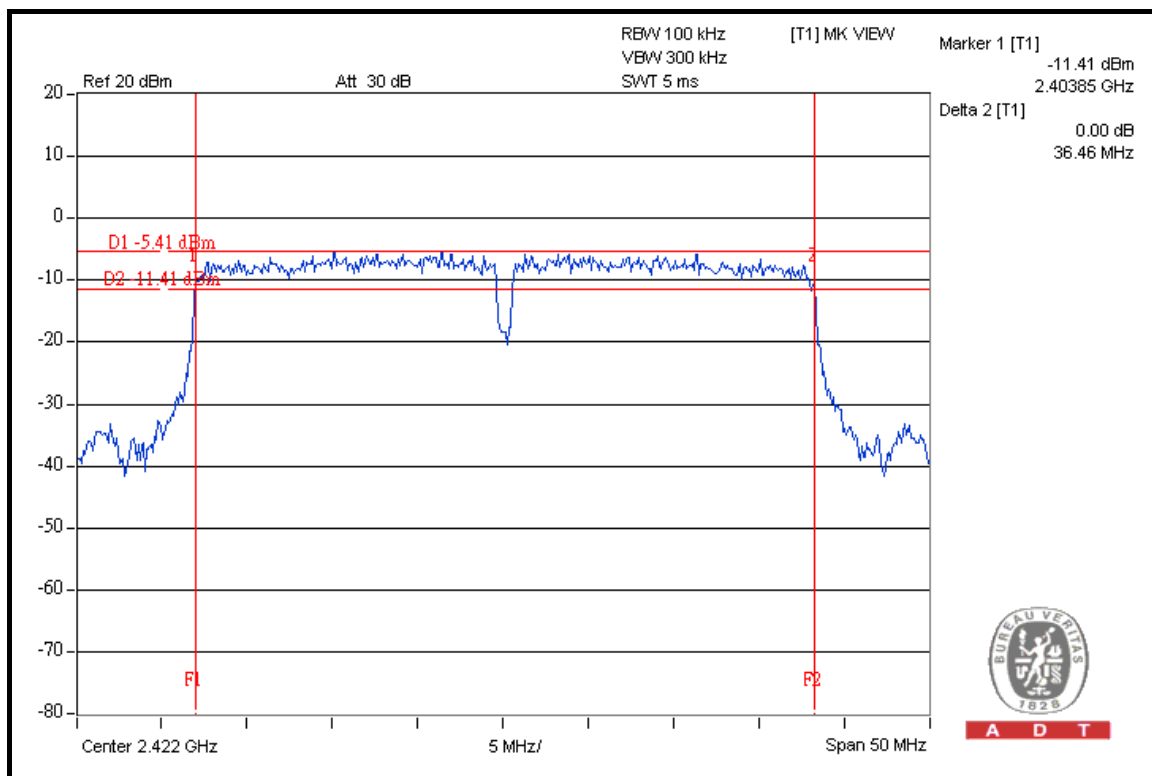




A D T

CH 4

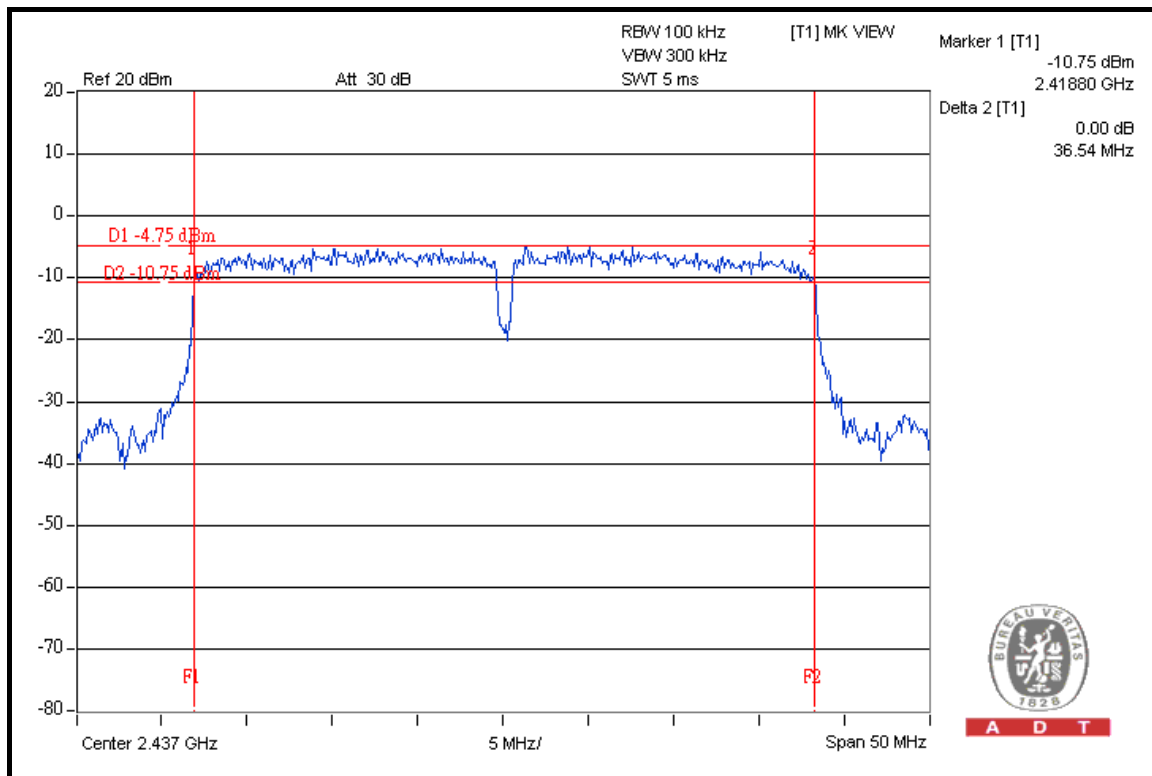

A D T

CH 7

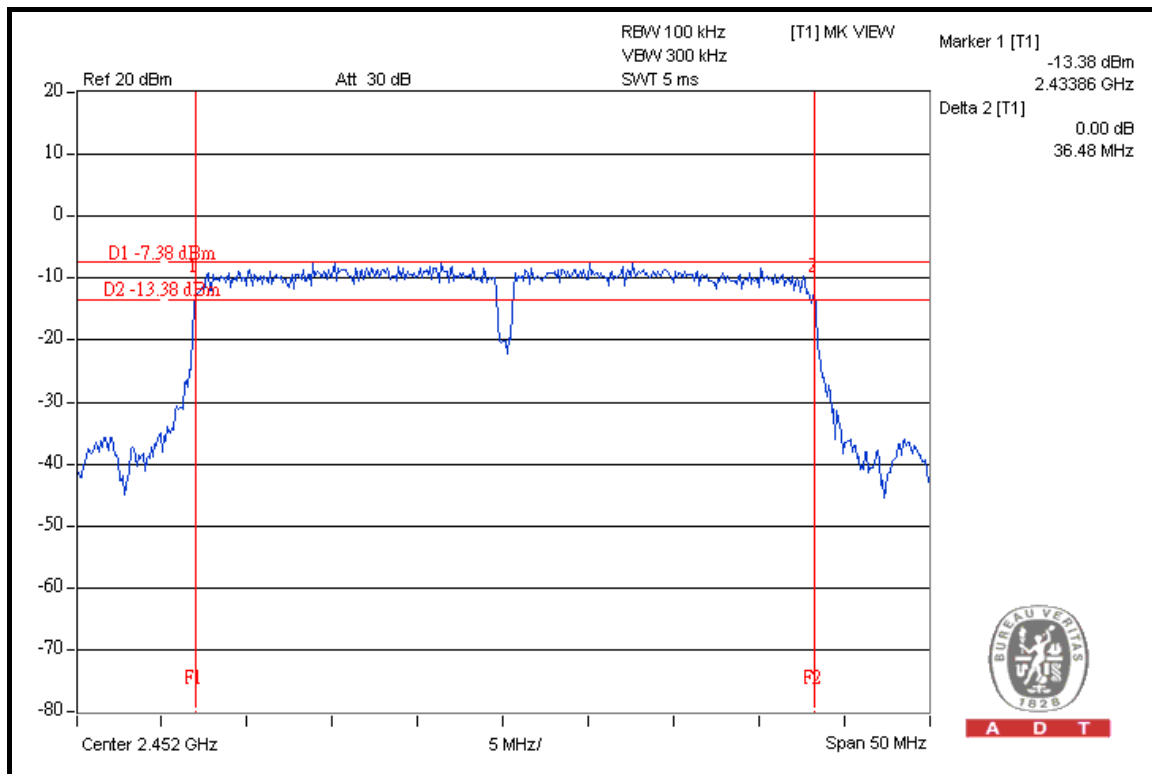

A D T

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
HIGH SPEED PEAK POWER METER	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
POWER SENSOR	MA2444B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

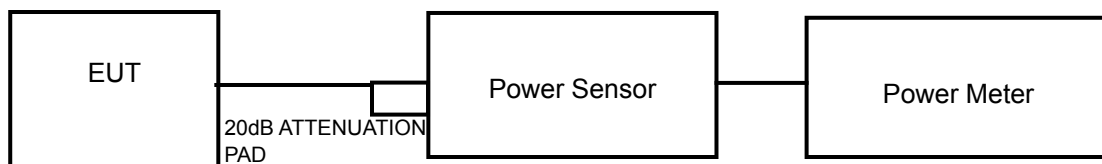

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b DSSS MODULATION: 2TX

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	21.11	22.04	289.078	24.61	30	PASS
6	2437	21.56	22.06	303.913	24.83	30	PASS
11	2462	19.54	20.02	190.411	22.80	30	PASS

802.11g OFDM MODULATIO: 1TX

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	254.097	24.05	30	PASS
6	2437	446.684	26.50	30	PASS
11	2462	160.694	22.06	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION: 1TX

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	225.424	23.53	30	PASS
6	2437	401.791	26.04	30	PASS
11	2462	127.938	21.07	30	PASS

DRAFT 802.11n (20MHz) OFDM MODULATION: 2TX

MODULATION TYPE	BPSK	TRANSFER RATE	14.4Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.04	23.53	426.796	26.30	30	PASS
6	2437	26.02	26.56	852.842	29.31	30	PASS
11	2462	20.06	21.04	228.449	23.59	30	PASS



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION: 1TX

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2422	127.057	21.04	30	PASS
4	2437	199.986	23.01	30	PASS
7	2452	89.536	19.52	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION: 2TX

MODULATION TYPE	BPSK	TRANSFER RATE	30.0.Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	20.01	21.04	227.288	23.57	30	PASS
4	2437	20.56	21.55	256.652	24.09	30	PASS
7	2452	18.07	19.06	144.659	21.60	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION: 2TX


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-12.20	-11.22	0.136	-8.67	8	PASS
6	2437	-11.64	-11.40	0.141	-8.51	8	PASS
11	2462	-13.52	-13.46	0.090	-10.48	8	PASS

FOR CHAIN 0: CH 1

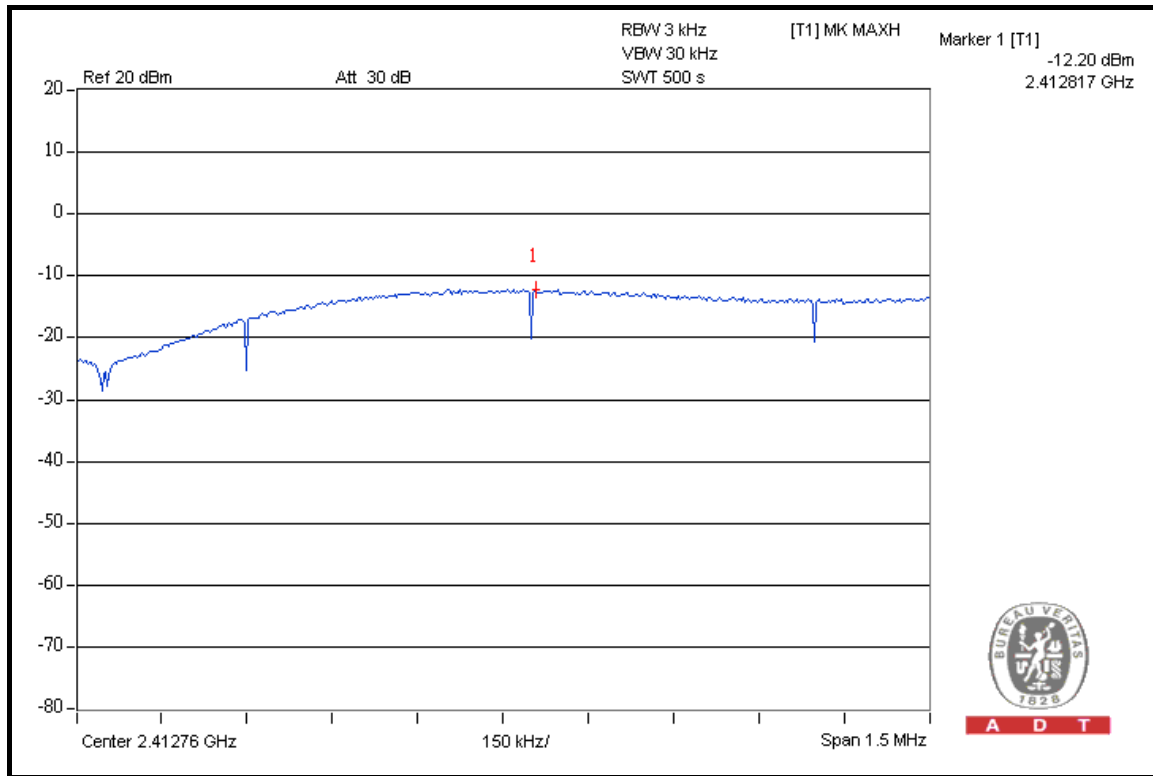


CH 6

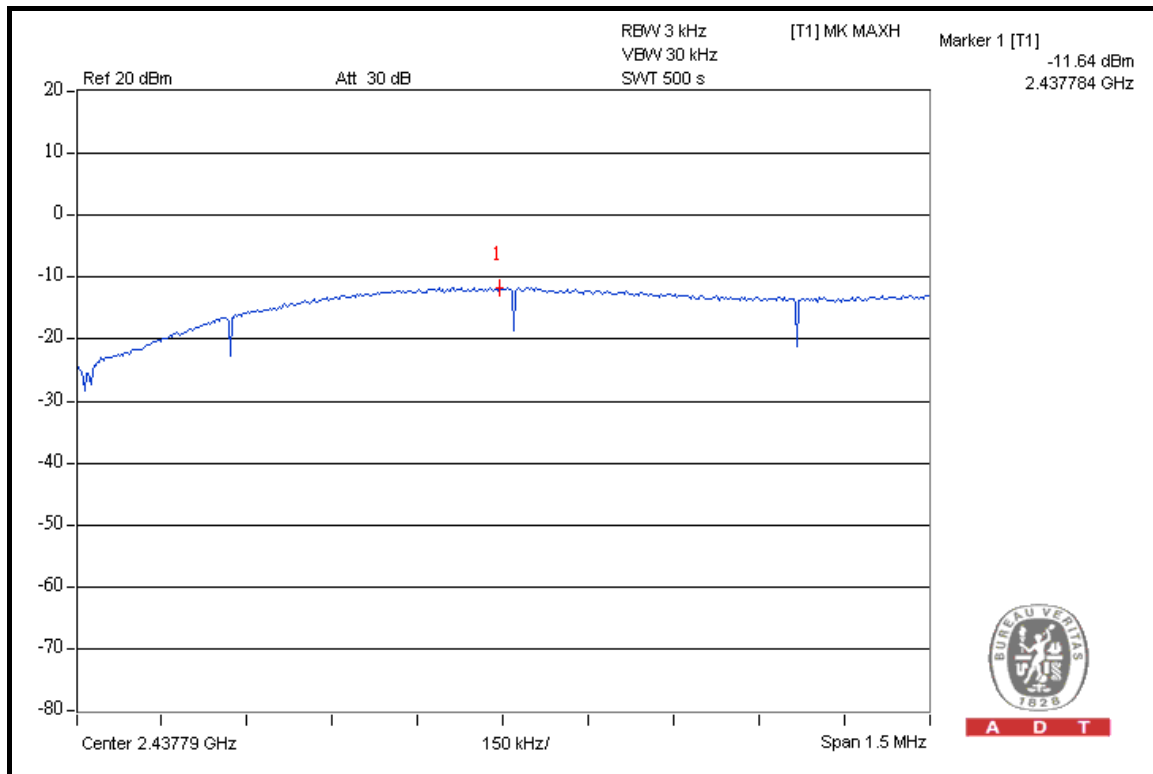




A D T

CH 11

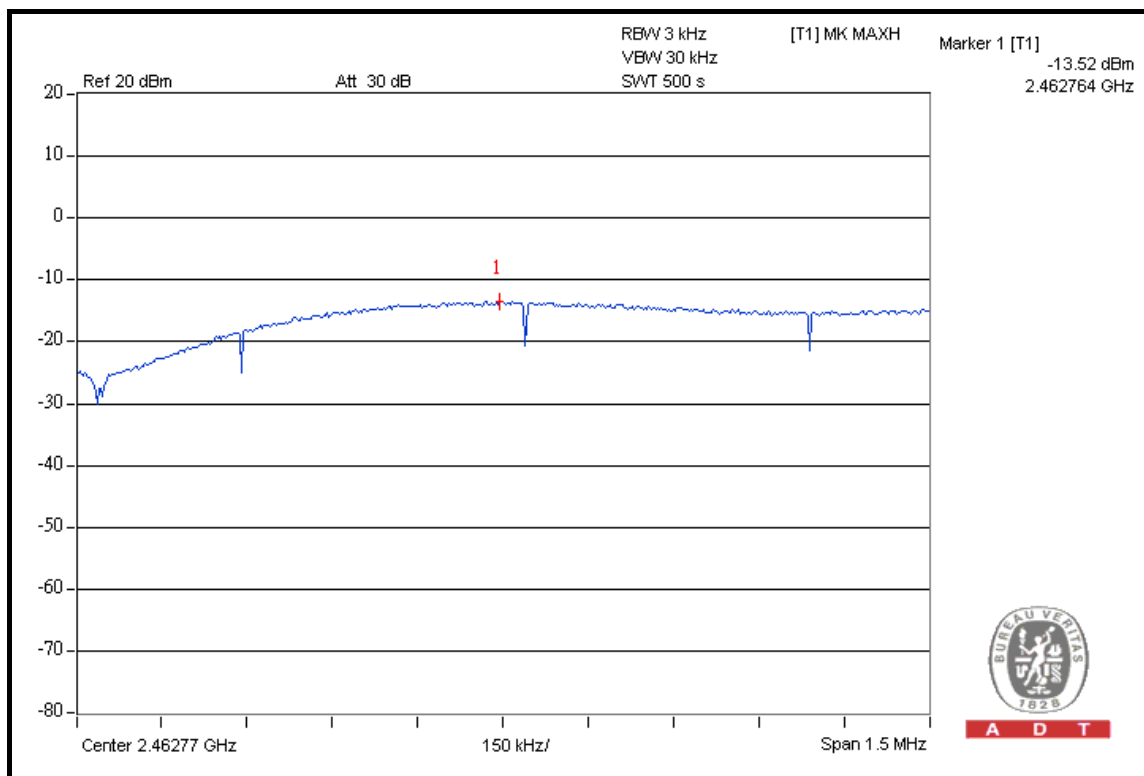


FOR CHAIN 1: CH 1

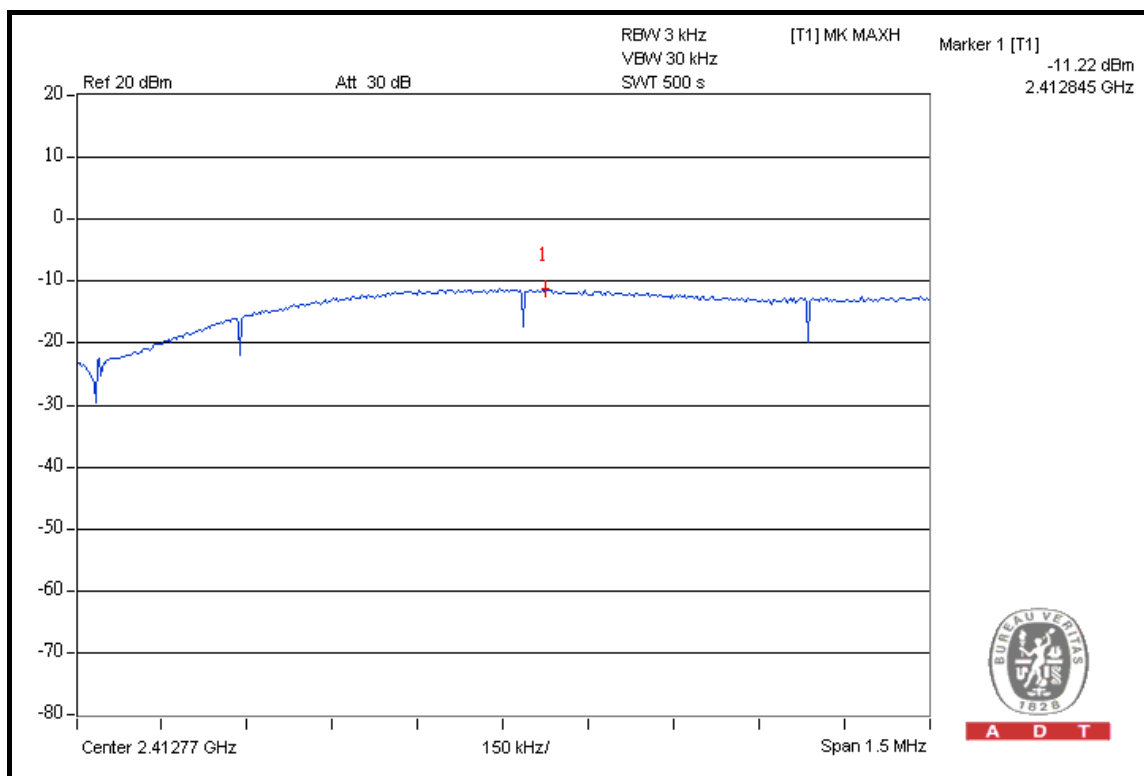




A D T

CH 6

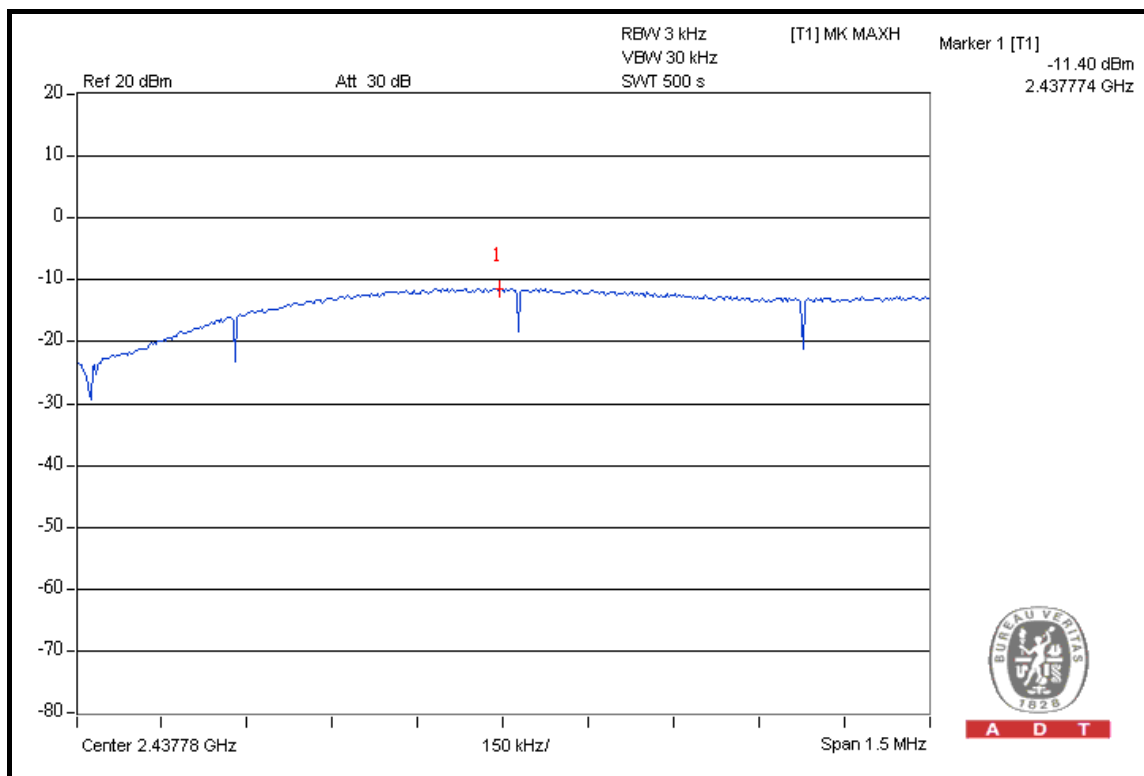

CH 11

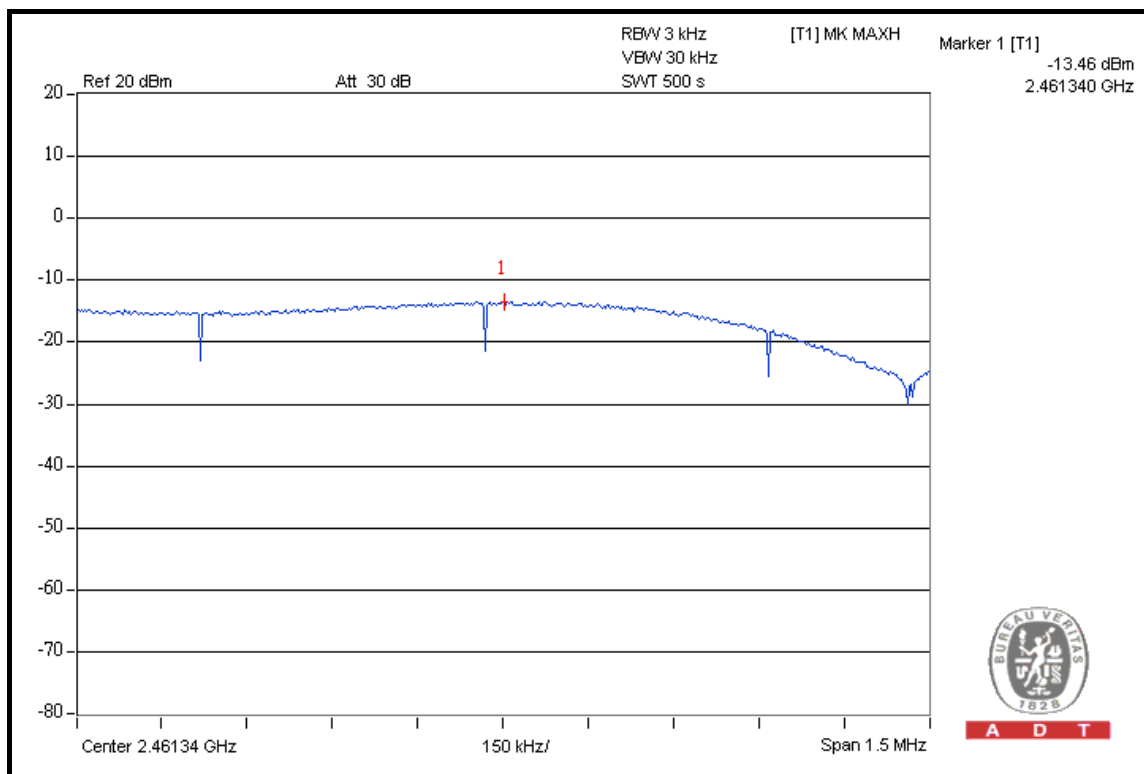


802.11g OFDM MODULATION: 1TX

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.65	8	PASS
6	2437	-10.00	8	PASS
11	2462	-14.88	8	PASS


CH 1

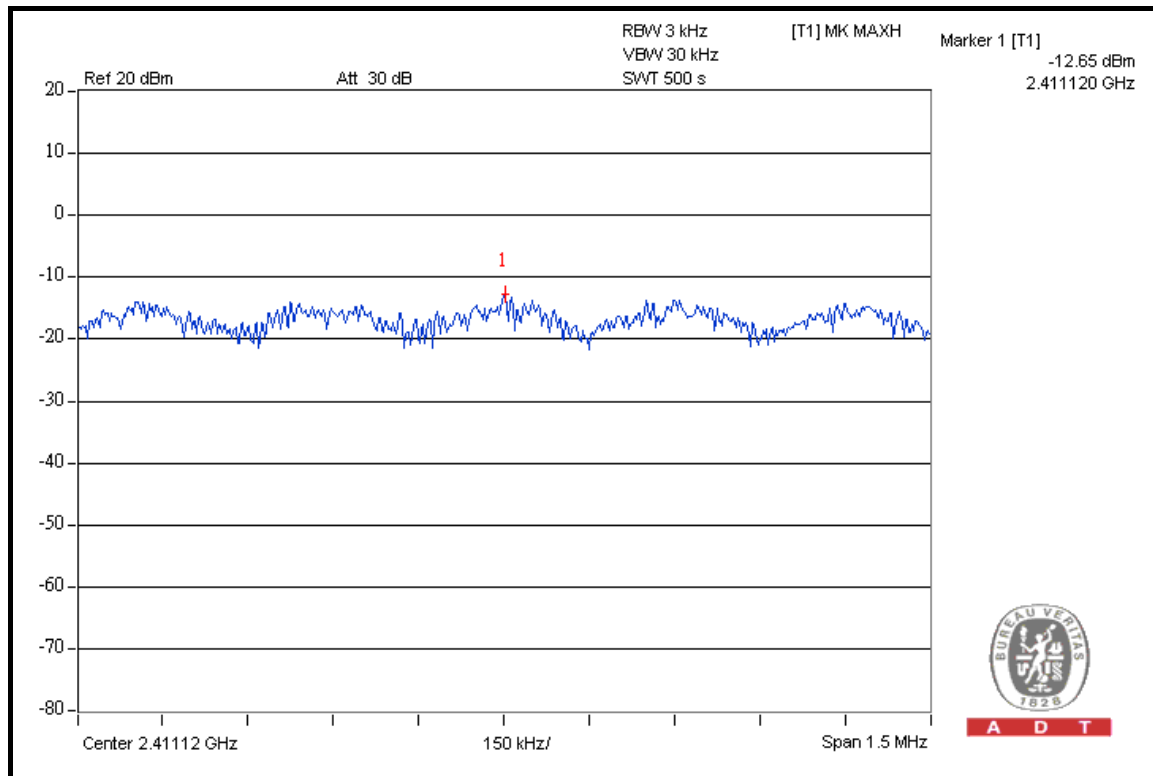




A D T

CH 6

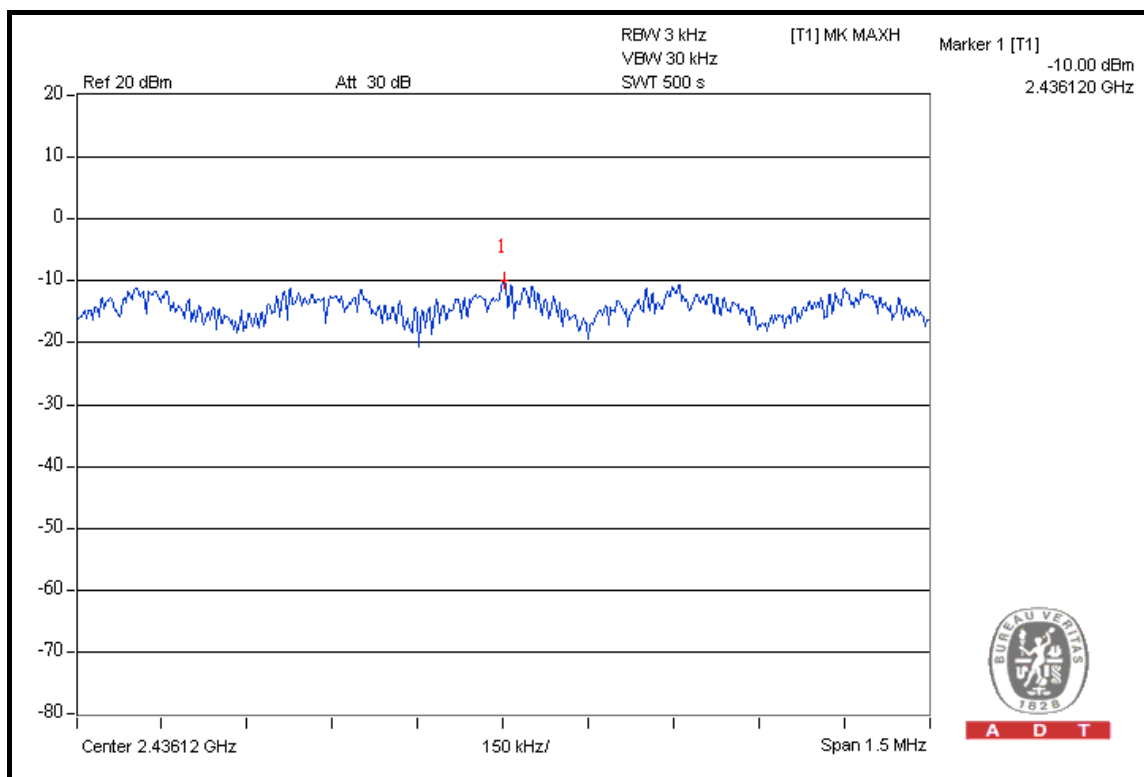

CH 11

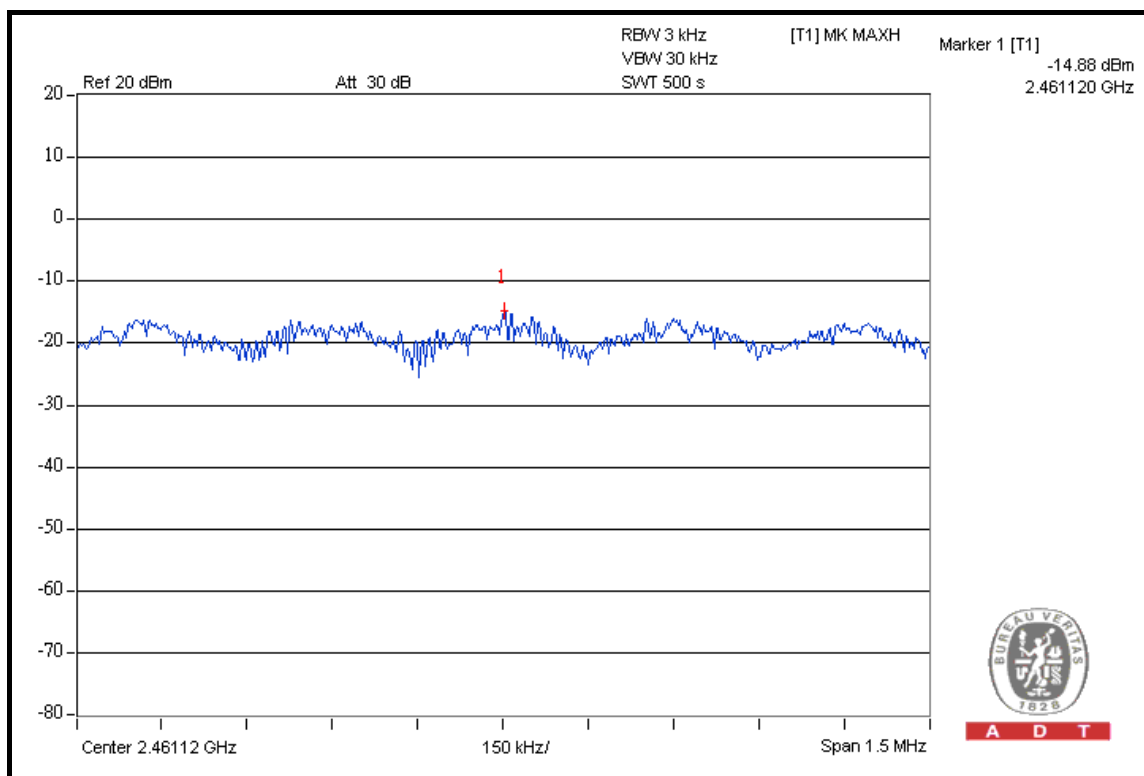


DRAFT 802.11n (20MHz) OFDM MODULATION: 1TX

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-12.58	8	PASS
6	2437	-9.89	8	PASS
11	2462	-15.09	8	PASS


CH 1

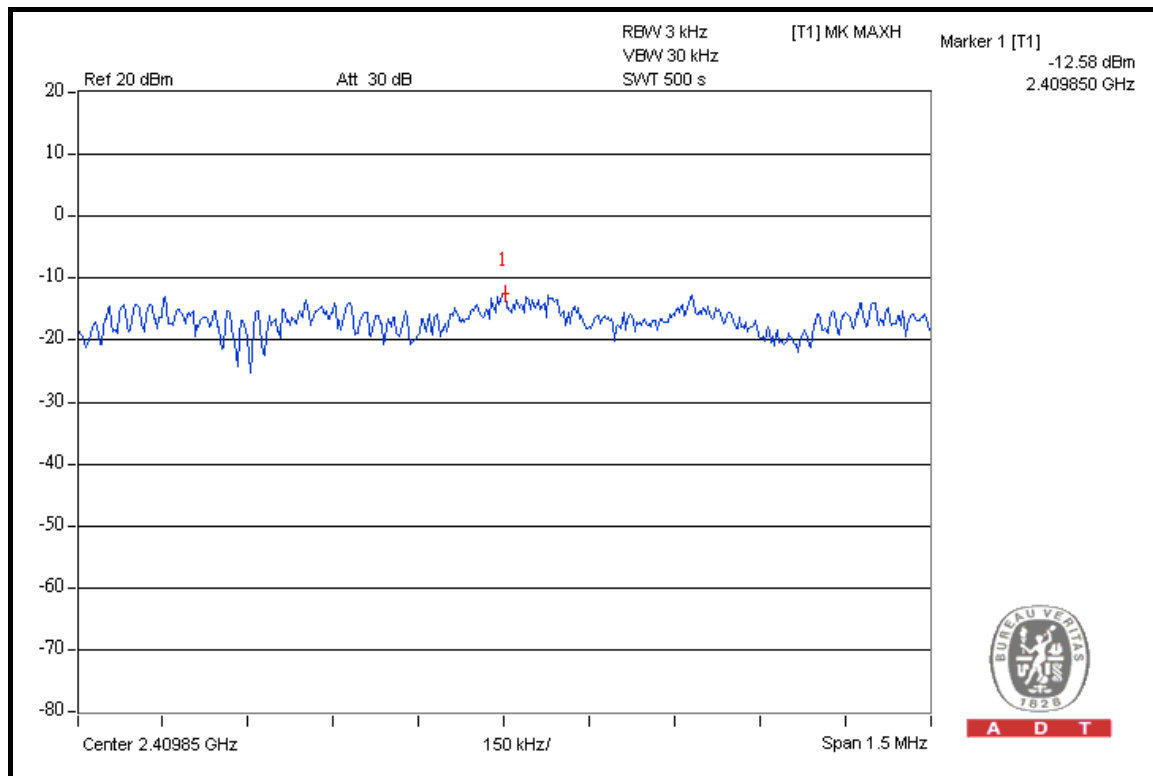




A D T

CH 6

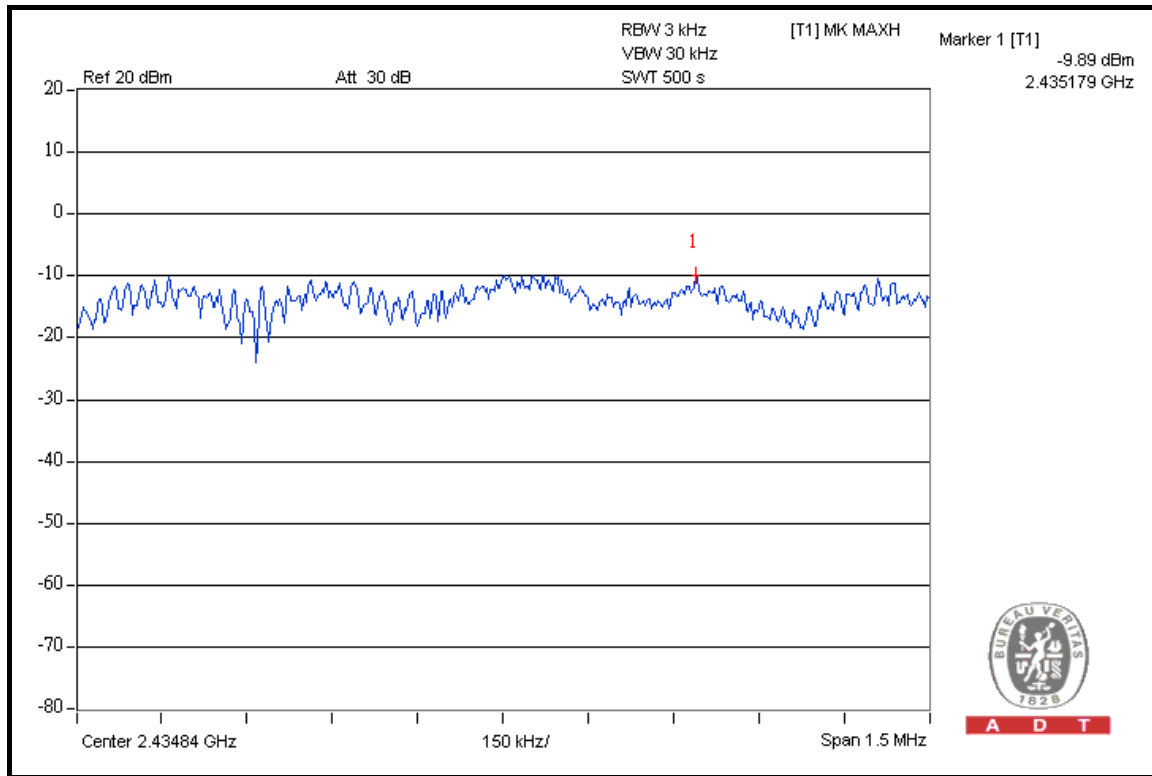

A D T

CH 11

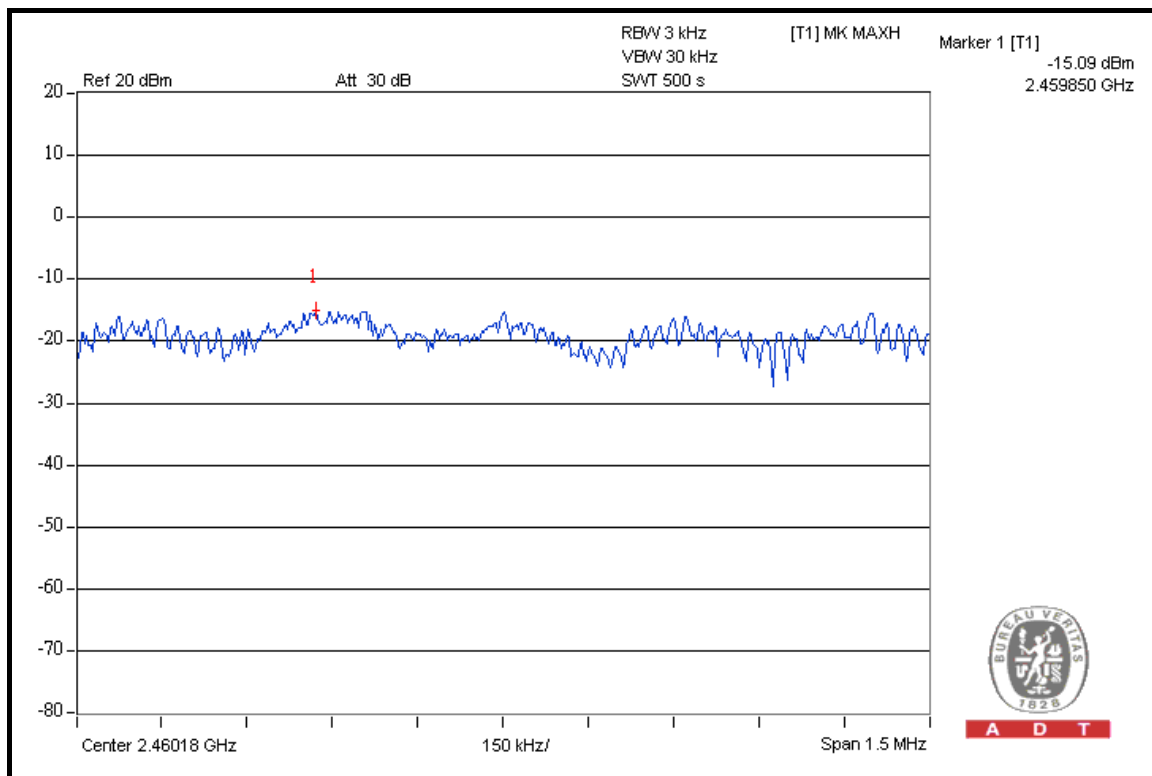

A D T

**A D T****DRAFT 802.11n (20MHz) OFDM MODULATION: 2TX**


MODULATION TYPE	BPSK	TRANSFER RATE	14.4Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	-12.71	-13.57	0.098	-10.11	8	PASS
6	2437	-9.83	-10.57	0.192	-7.17	8	PASS
11	2462	-15.88	-16.15	0.050	-13.00	8	PASS




A D T

FOR CHAIN 0: CH 1

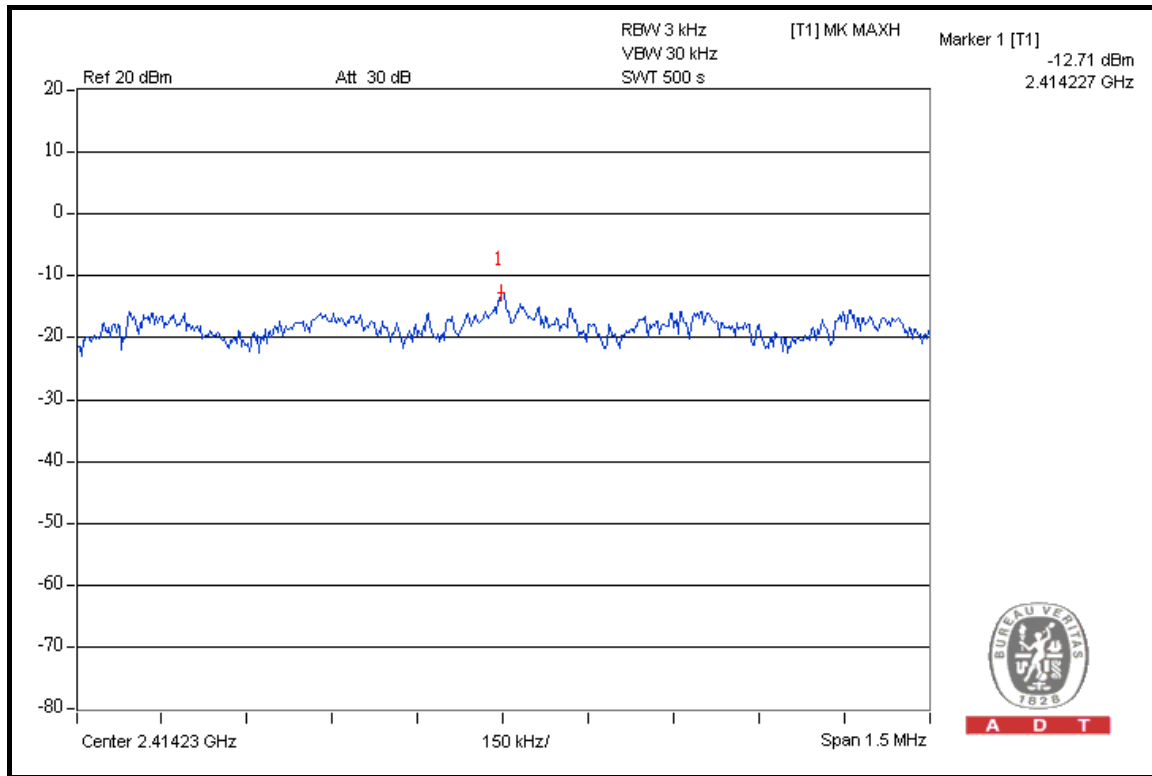


CH 6

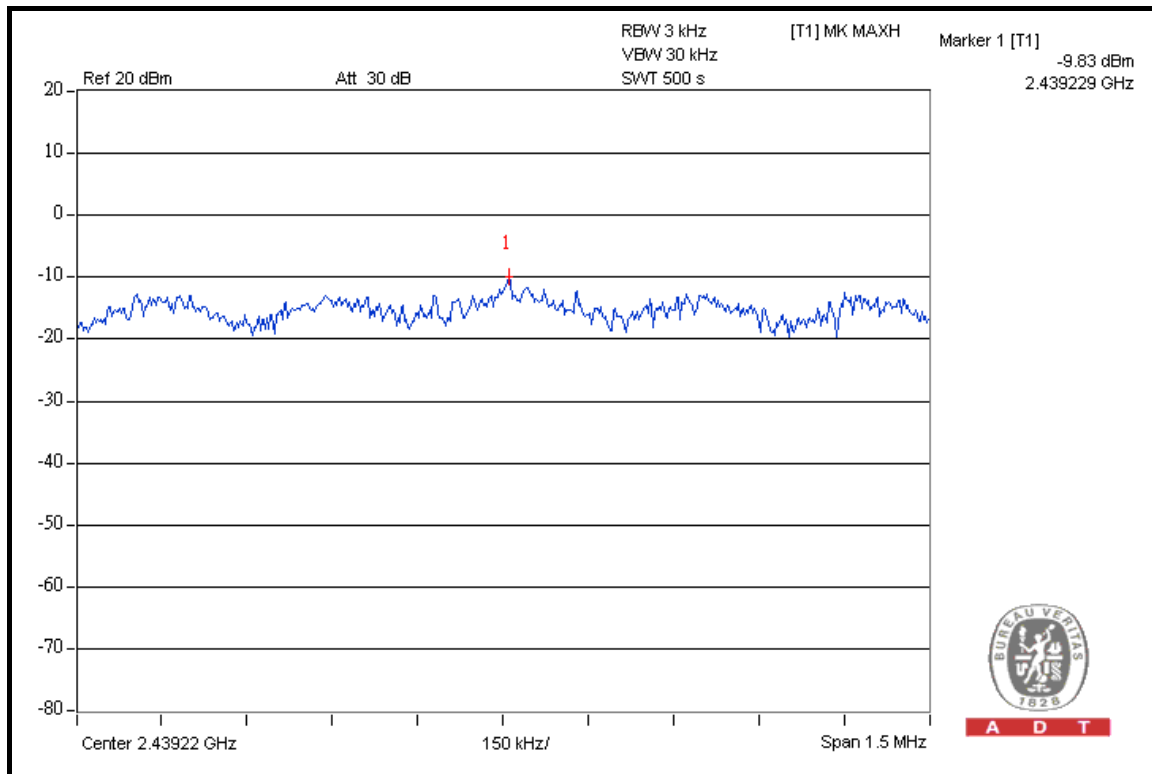




A D T

CH 11

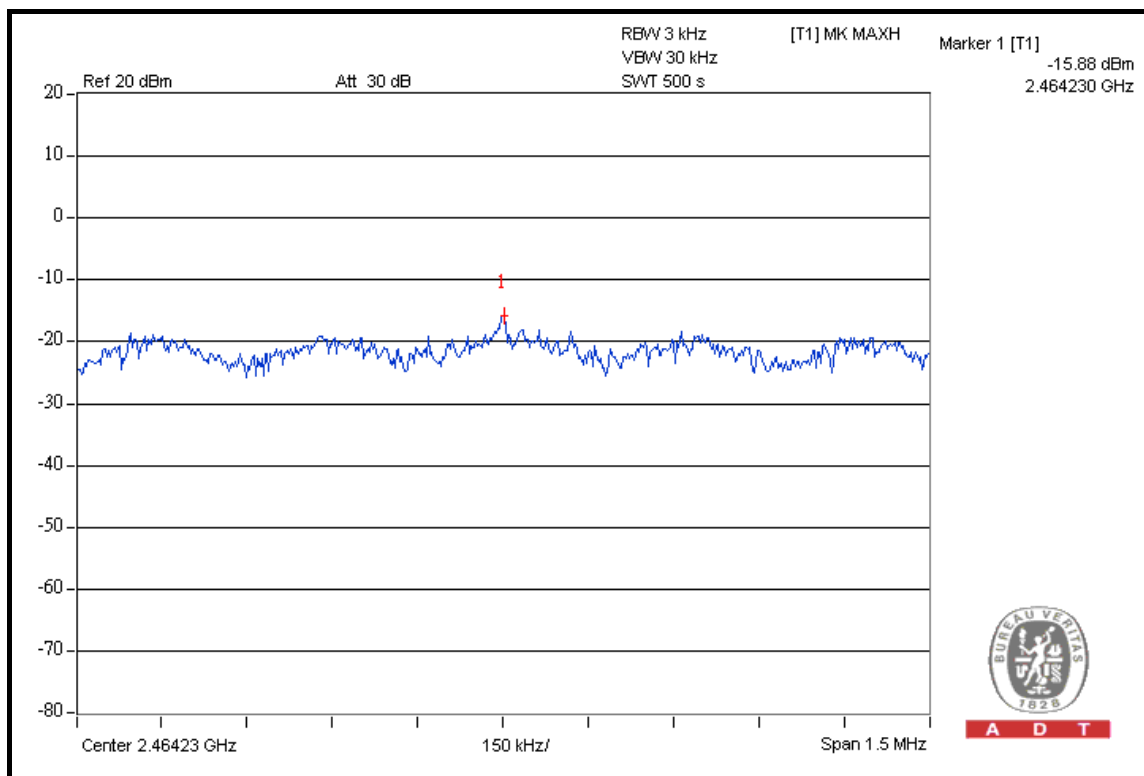


FOR CHAIN 1: CH 1

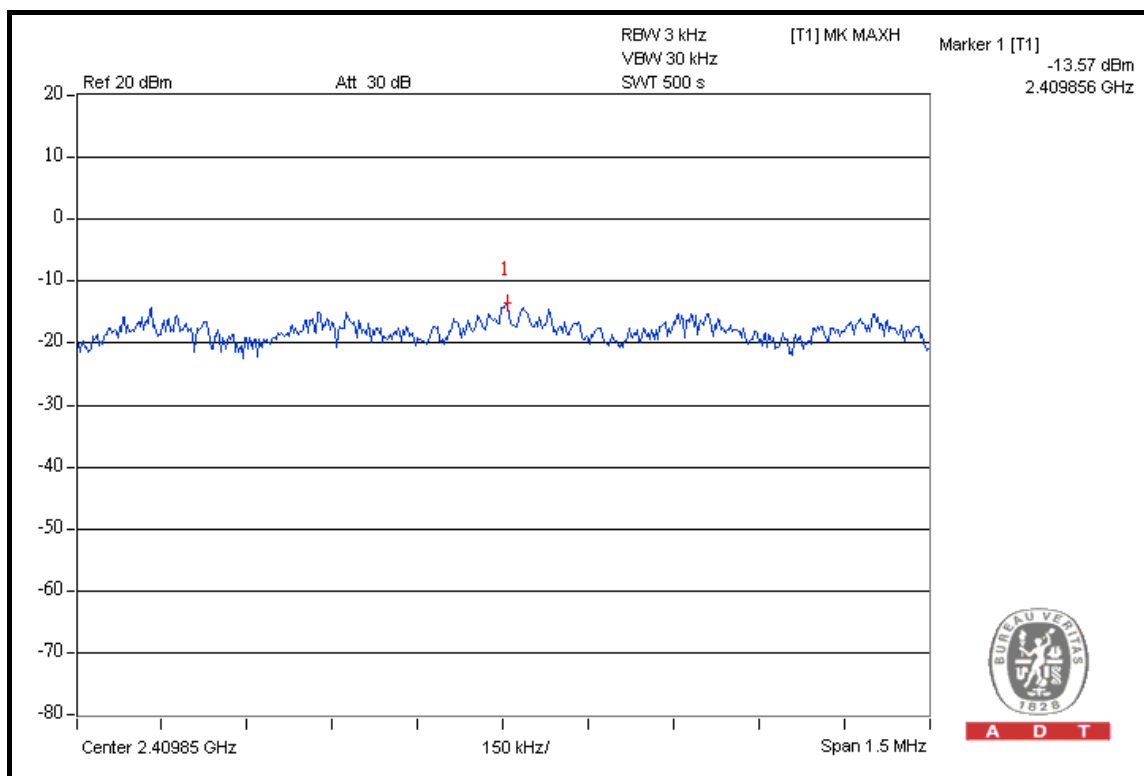




A D T

CH 6

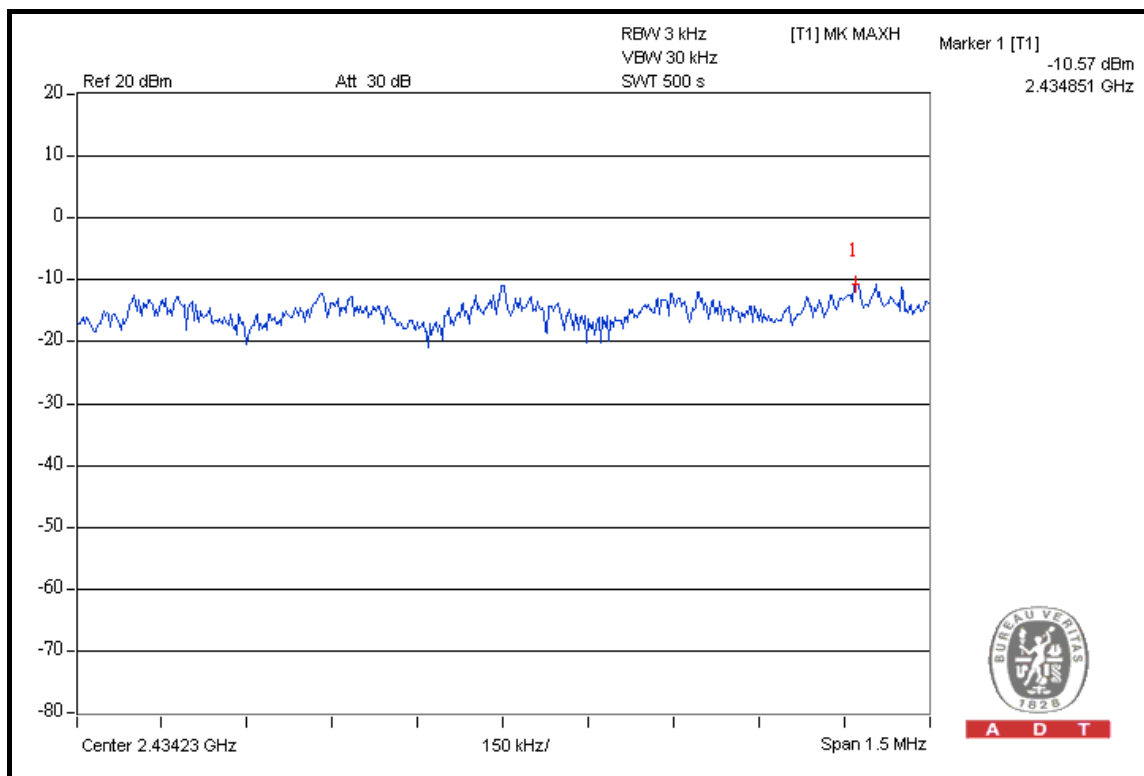

CH 11

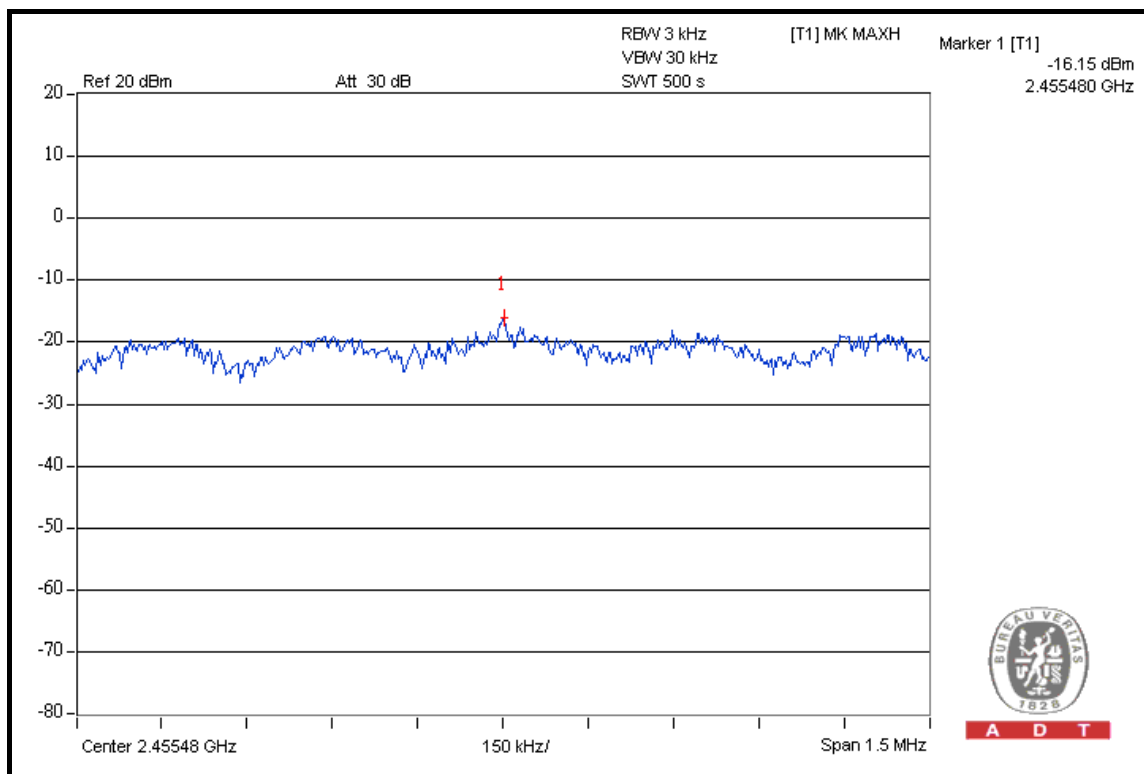


DRAFT 802.11n (40MHz) OFDM MODULATION: 1TX

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2422	-18.07	8	PASS
4	2437	-15.89	8	PASS
7	2452	-19.37	8	PASS


CH 1

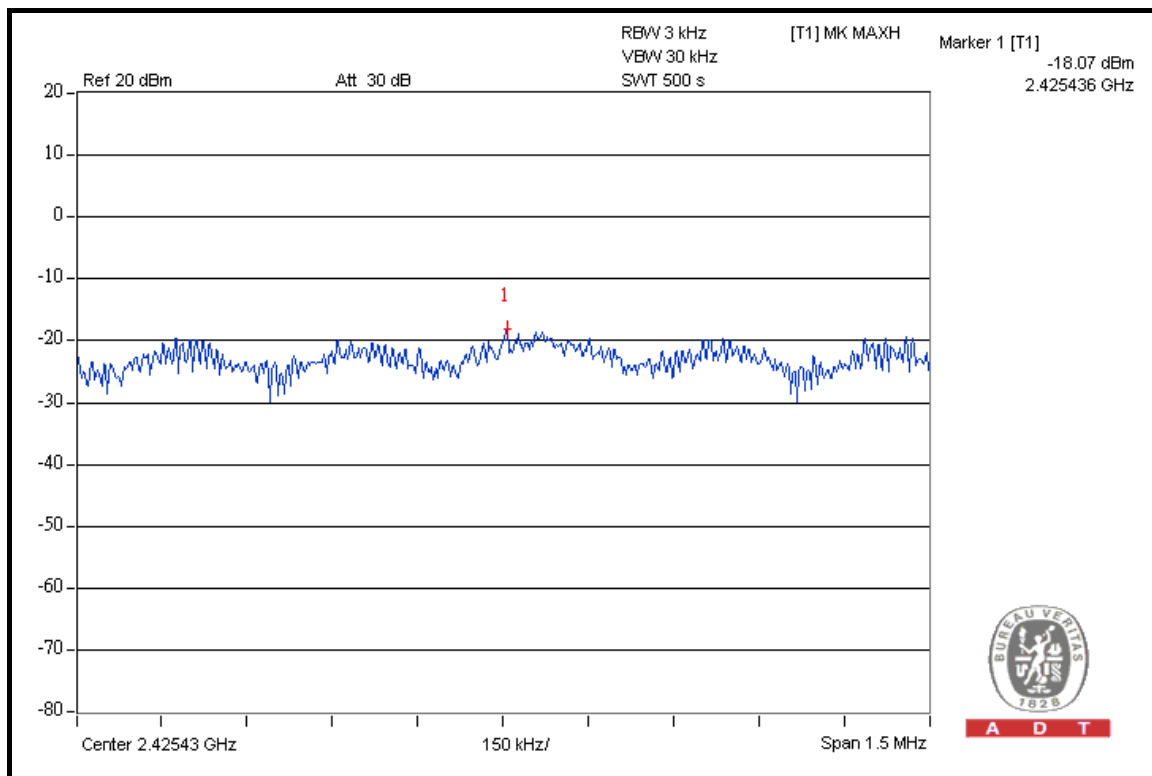




A D T

CH 4

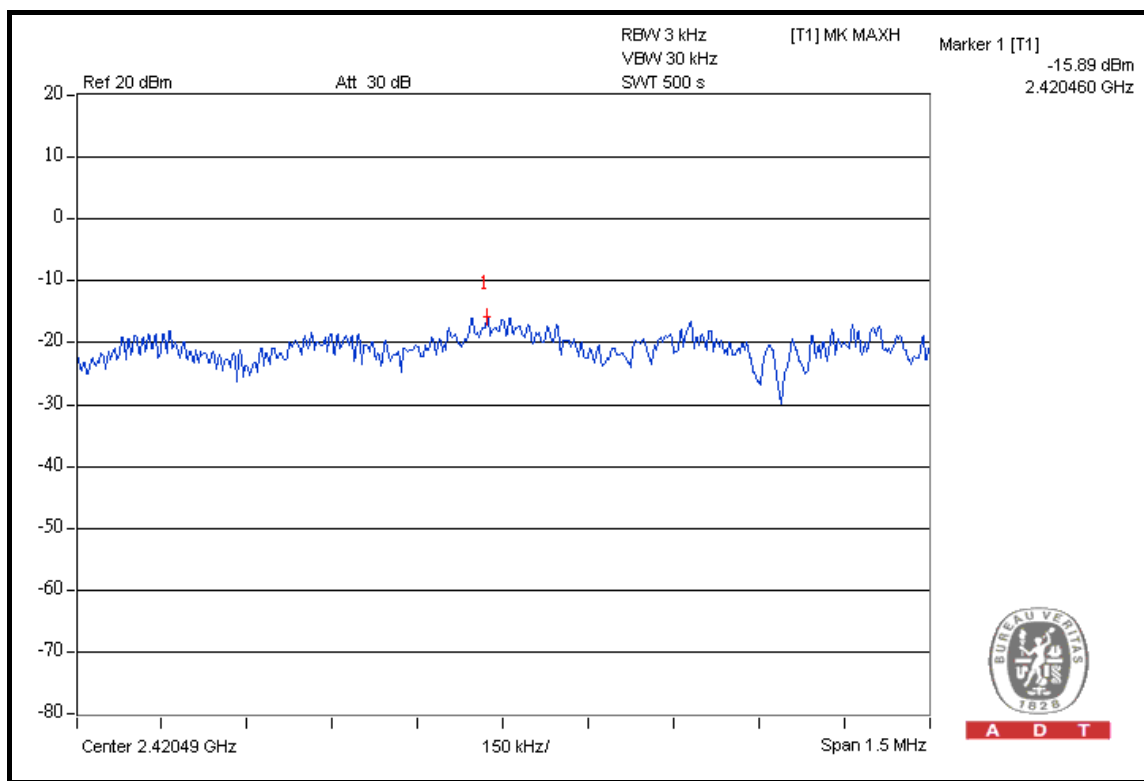

CH 7

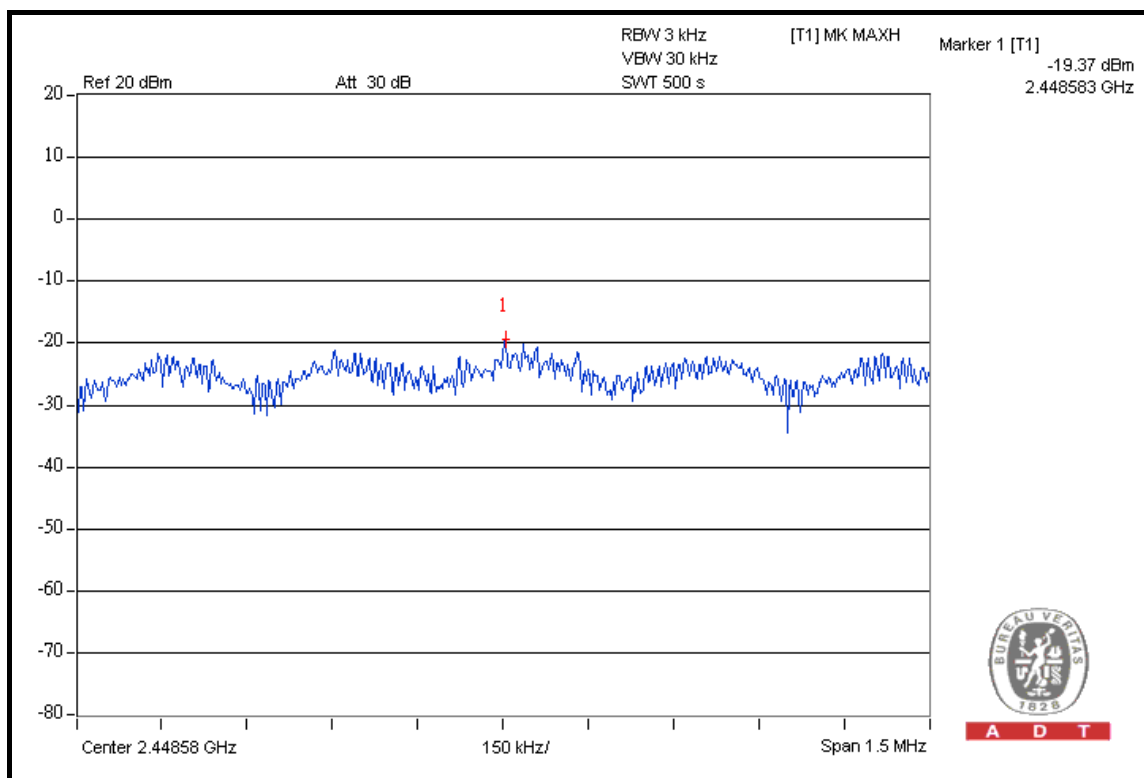


DRAFT 802.11n (40MHz) OFDM MODULATION: 2TX


MODULATION TYPE	BPSK	TRANSFER RATE	30.0Mbps
INPUT POWER	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 64%RH, 991hPa
TESTED BY	Dean Wang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2422	-18.26	-19.34	0.027	-15.76	8	PASS
4	2437	-17.71	-18.69	0.030	-15.16	8	PASS
7	2452	-20.07	-21.19	0.017	-17.58	8	PASS

FOR CHAIN 0: CH 1

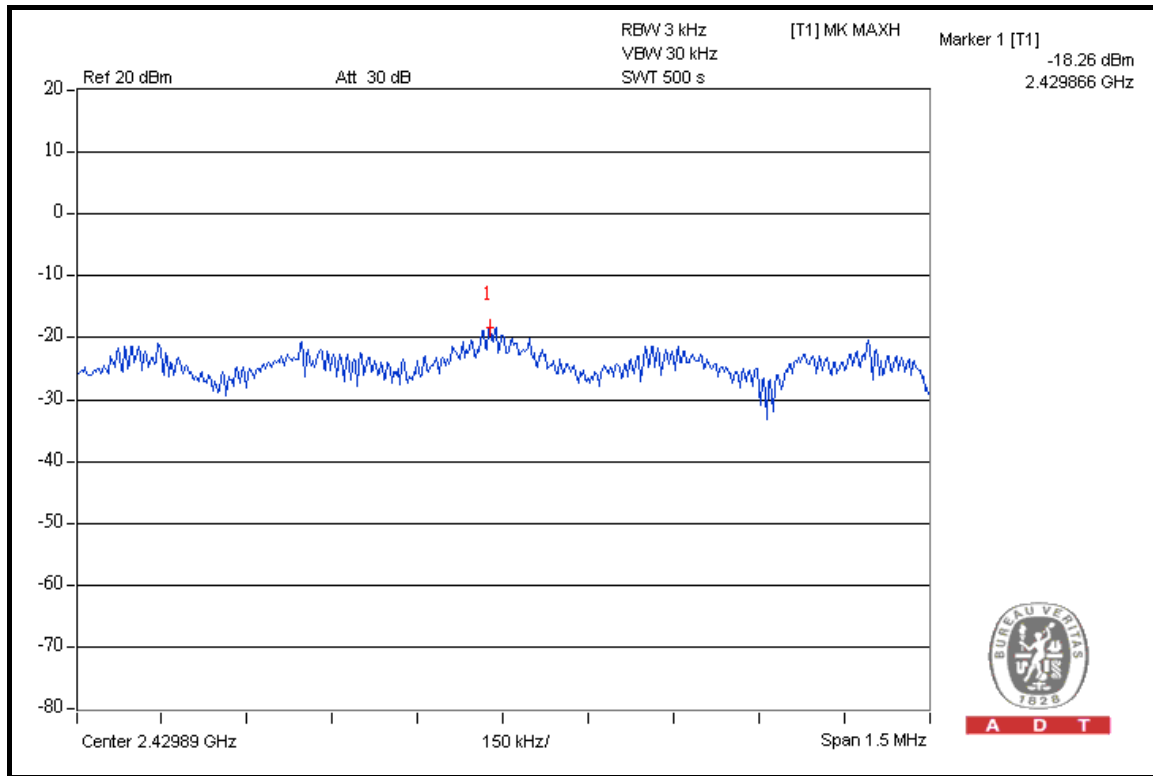


CH 4

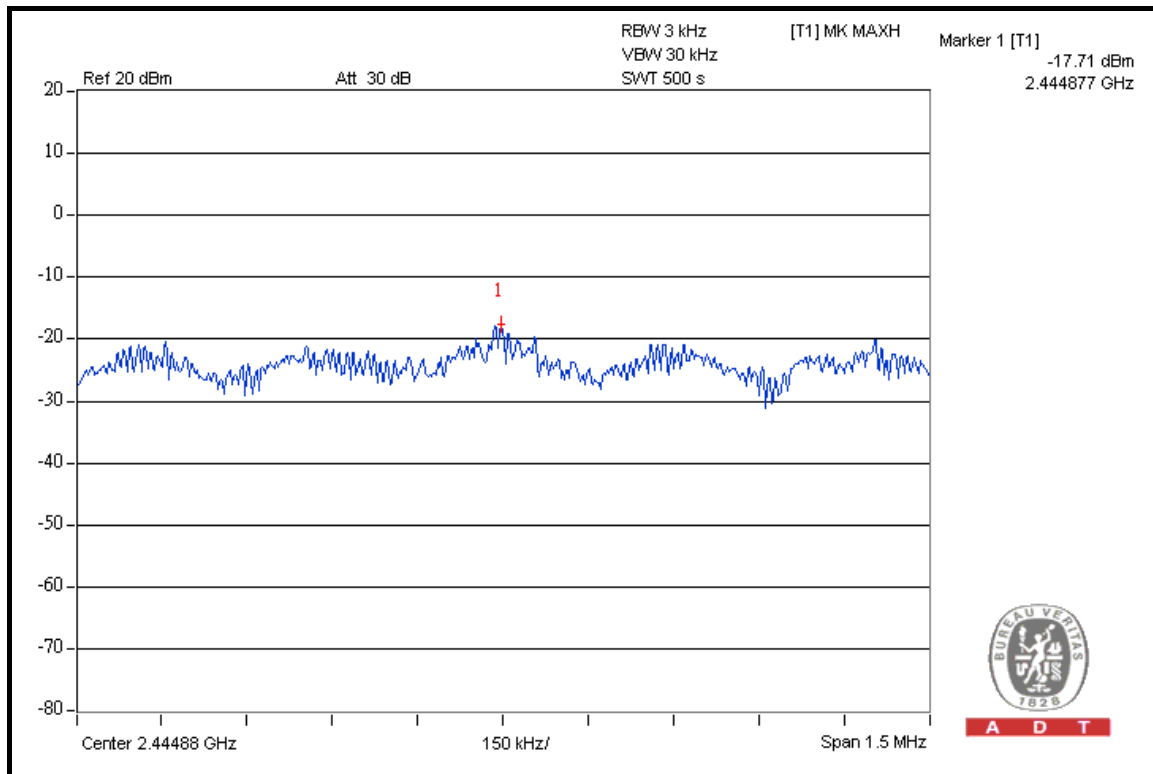




A D T

CH 7

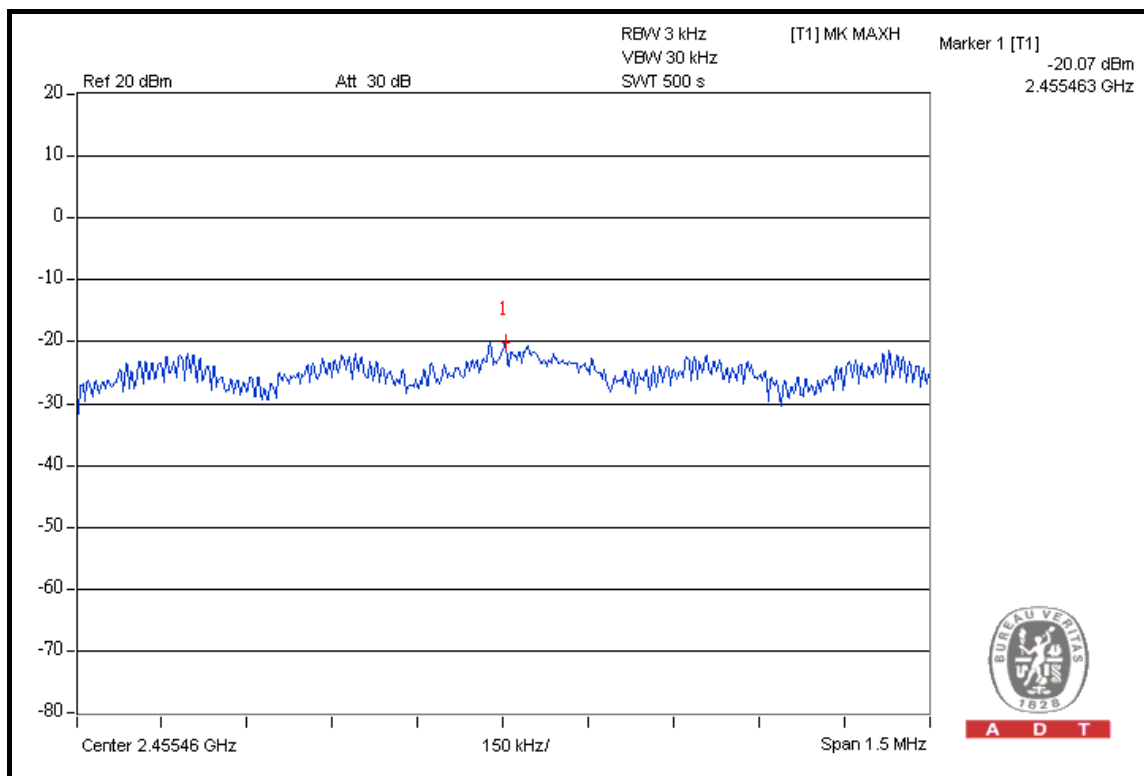


FOR CHAIN 1: CH 1

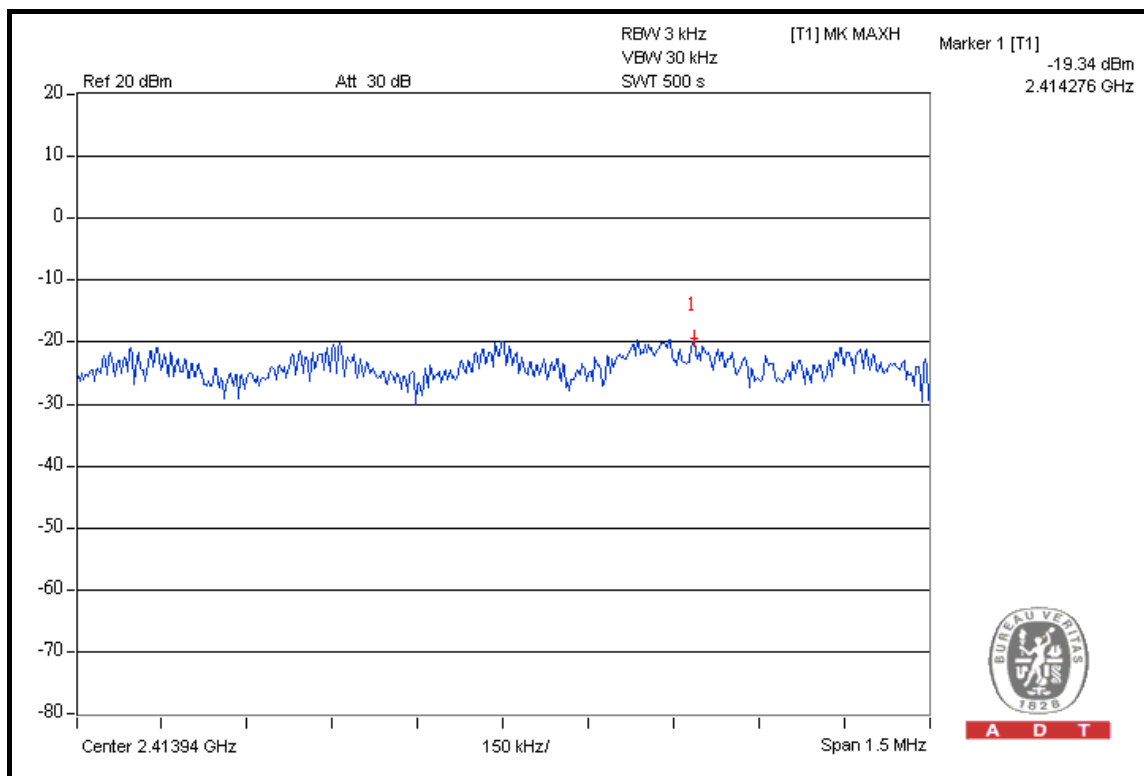




A D T

CH 4

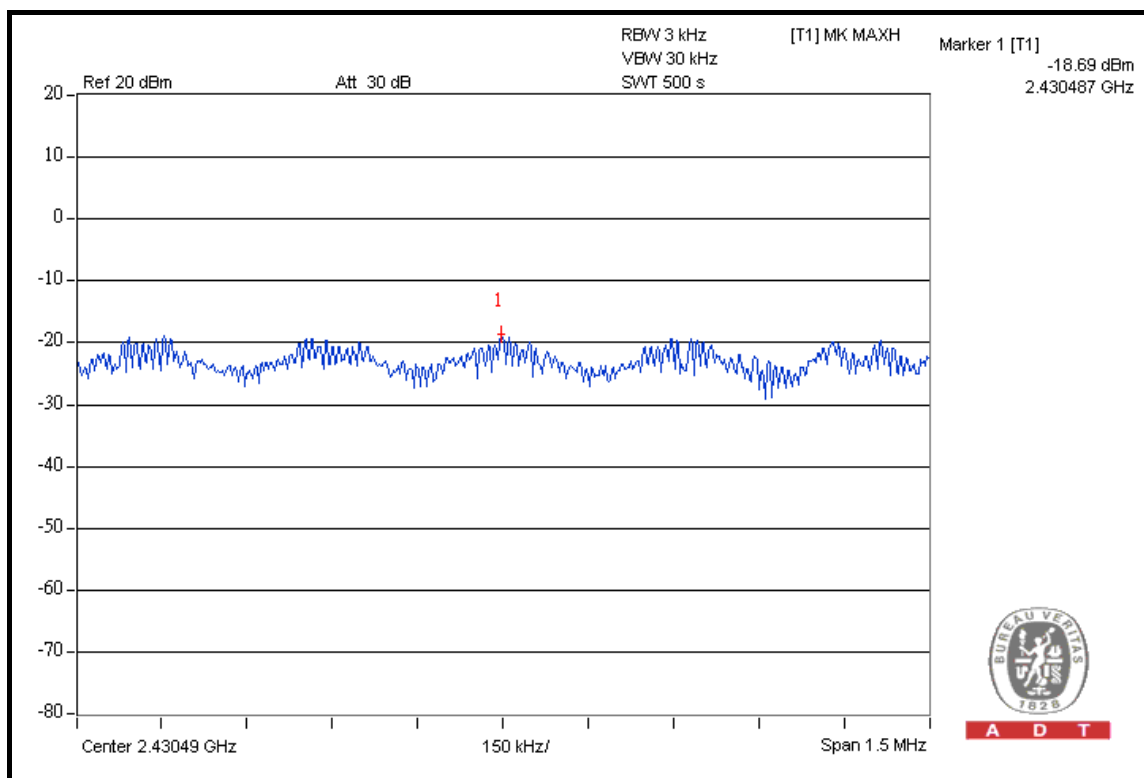

A D T

CH 7

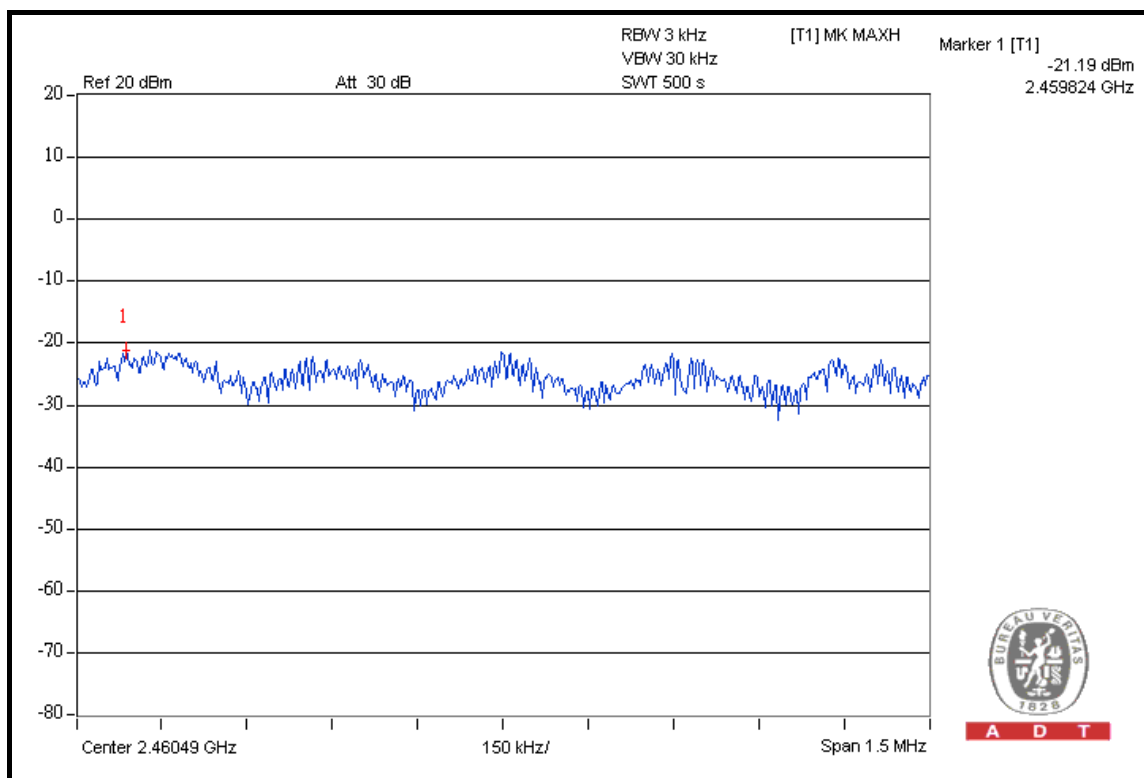

A D T

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
FOR CONDUCTED MEASUREMENT				
SPECTRUM ANALYZER	FSP 40	100041	Apr. 22, 2008	Apr. 21, 2009
FOR RADIATED MEASUREMENT				
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 28, 2008	May 27, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 25, 2008	Apr. 24, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 20, 2008	May 19, 2009
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

FOR CONDUCTED MEASUREMENT

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

FOR RADIATED MEASUREMENT

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz)

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION: 2TX

NOTE 1: The band edge emission plot on the next page shows 55.28dBc between carrier maximum power and local maximum emission in restrict band (2.32680GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 117.37dBuV/m (Peak), so the maximum field strength in restrict band is $117.37 - 55.28 = 62.09\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 59.88dBc between carrier maximum power and local maximum emission in restrict band (2.31546GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 112.75dBuV/m (Average), so the maximum field strength in restrict band is $112.75 - 59.88 = 52.87\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 53.26dBc between carrier maximum power and local maximum emission in restrict band (2.48800GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 115.84dBuV/m (Peak), so the maximum field strength in restrict band is $115.84 - 53.26 = 62.58\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 60.22dBc between carrier maximum power and local maximum emission in restrict band (2.48820GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 111.25dBuV/m (Average), so the maximum field strength in restrict band is $111.25 - 60.22 = 51.03\text{dBuV/m}$ which is under 54dBuV/m limit.




A D T

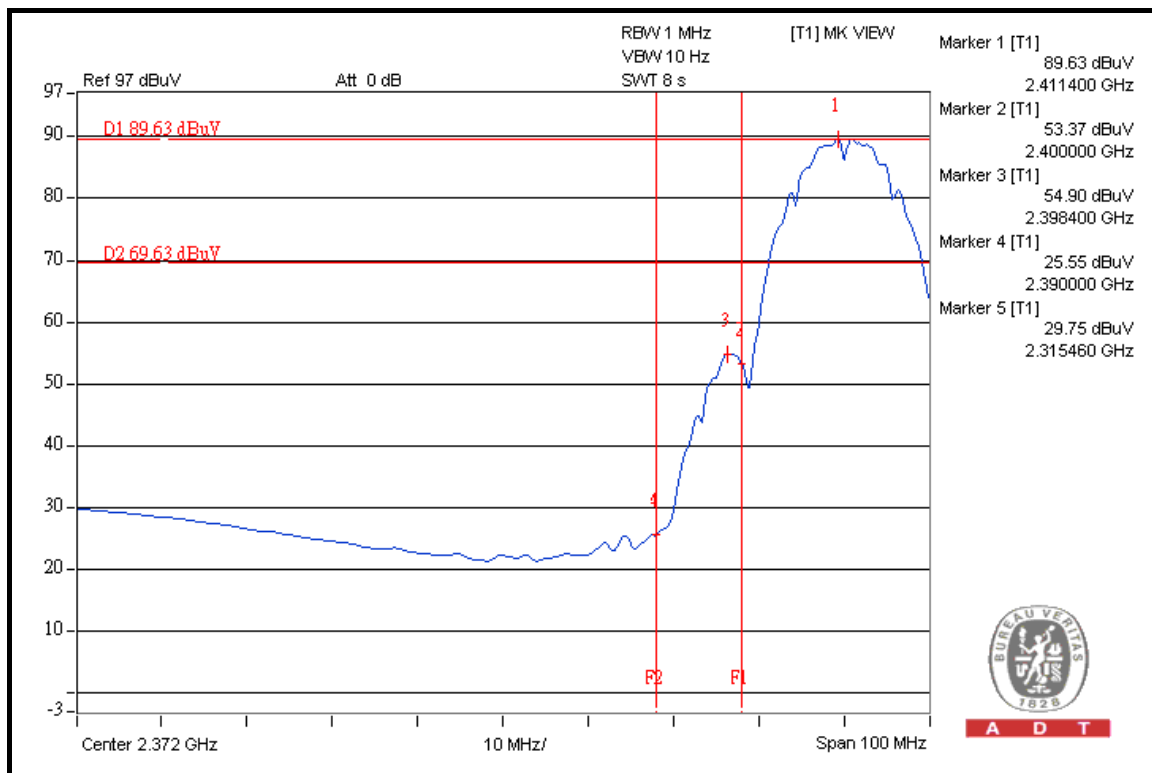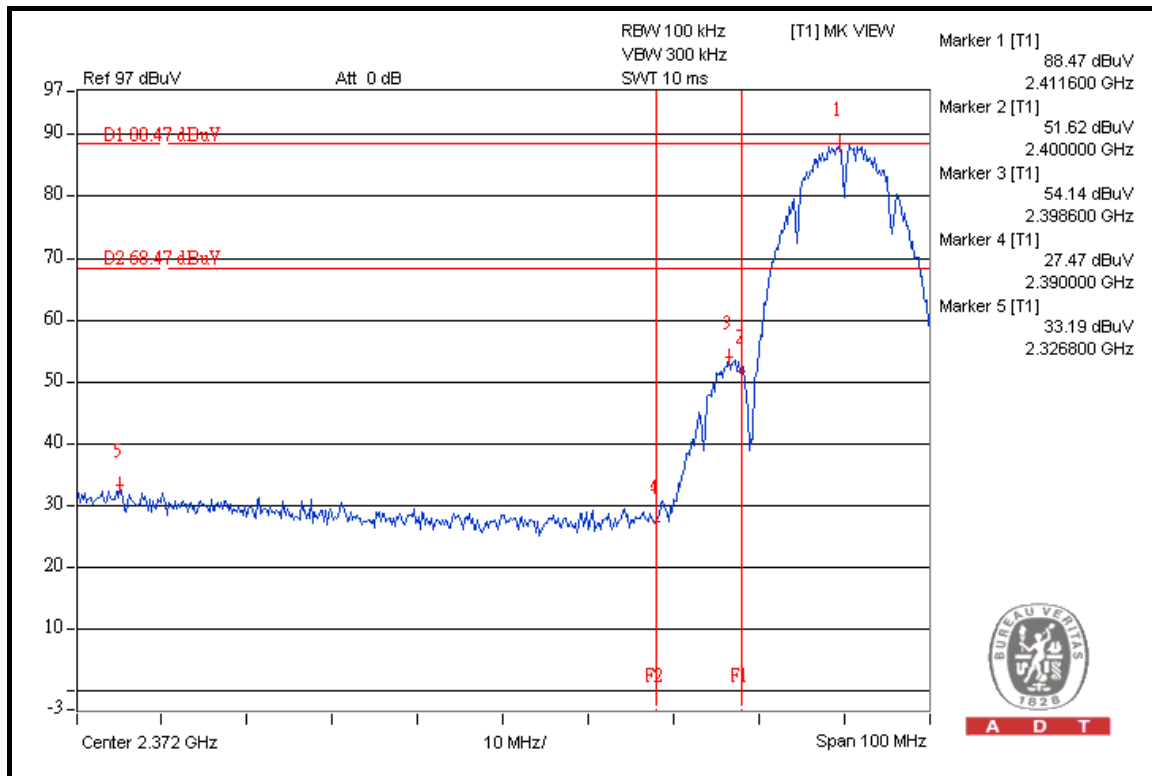




A D T

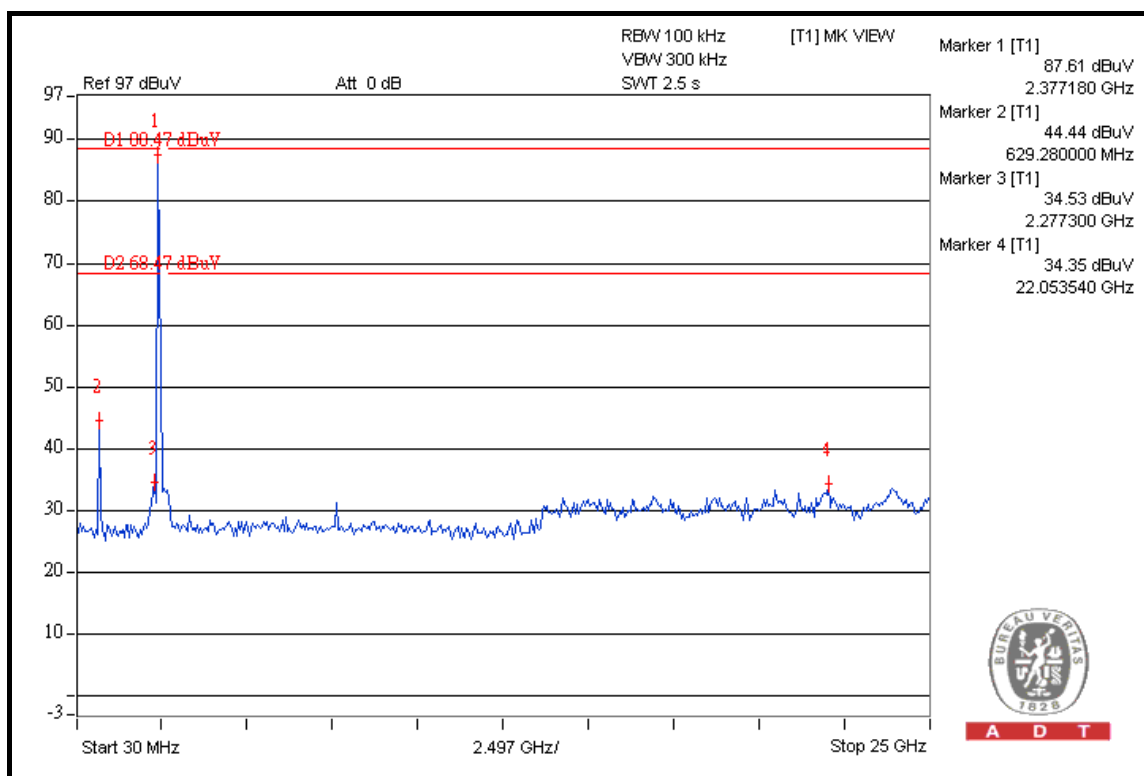



A D T

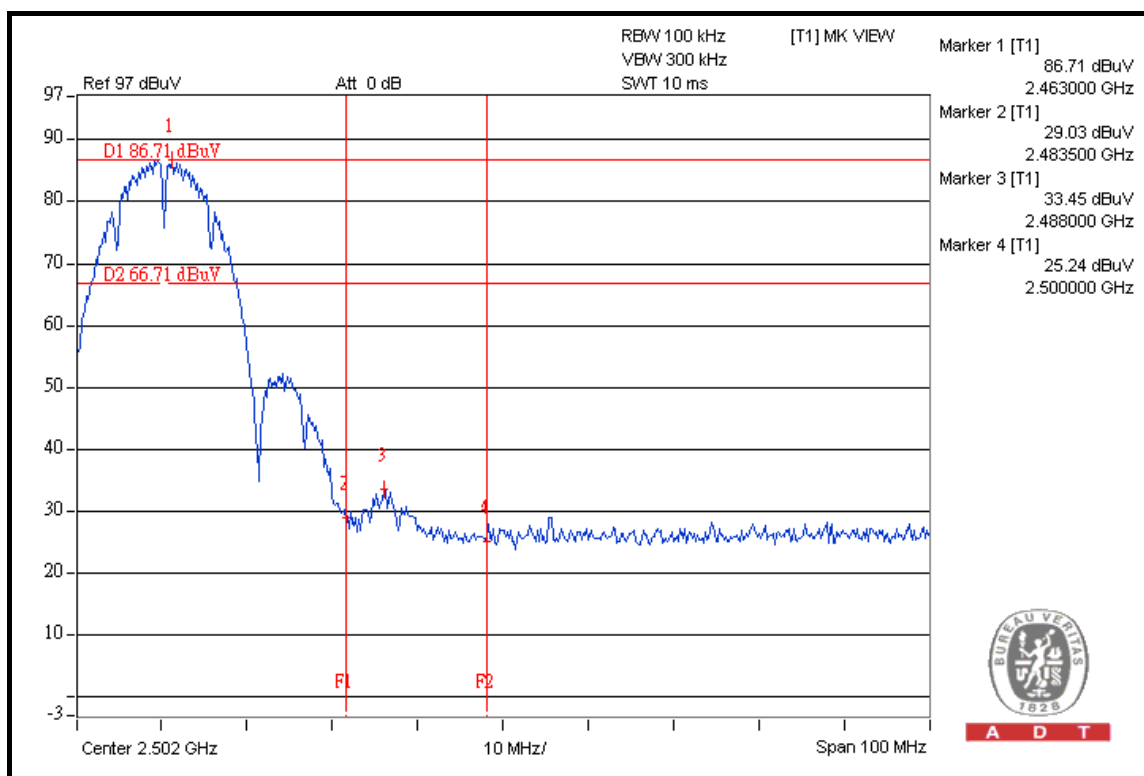

A D T



A D T

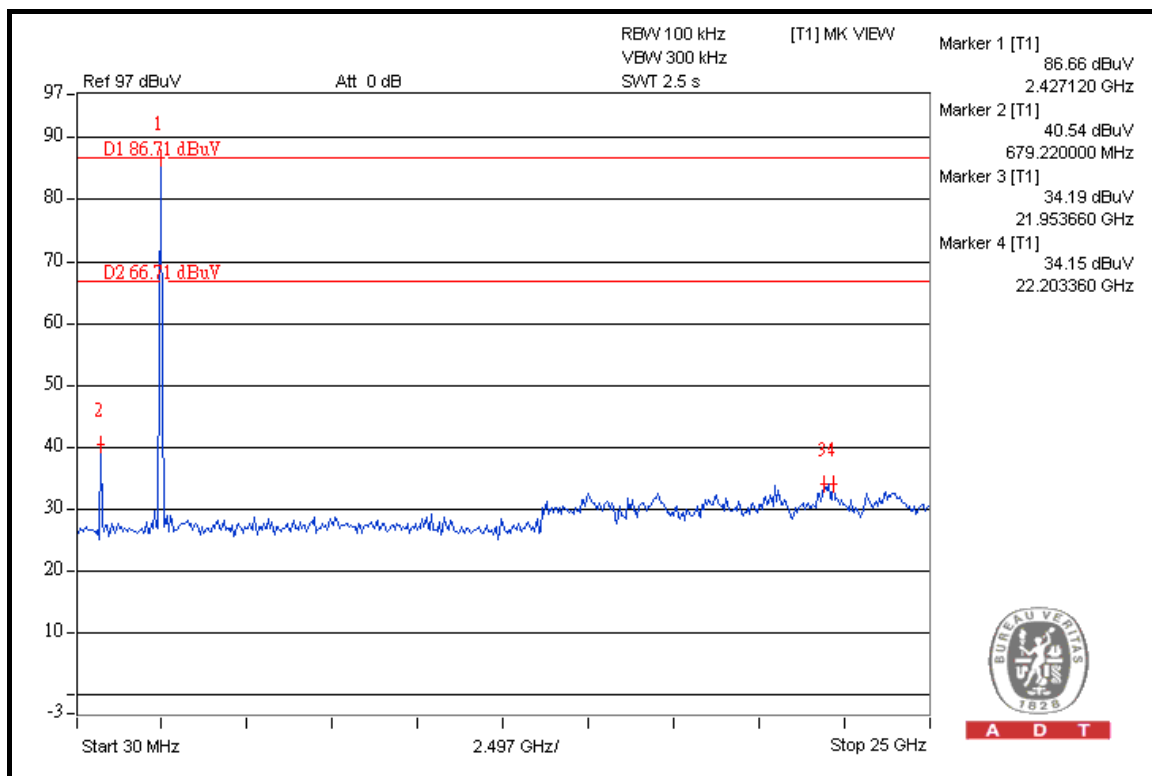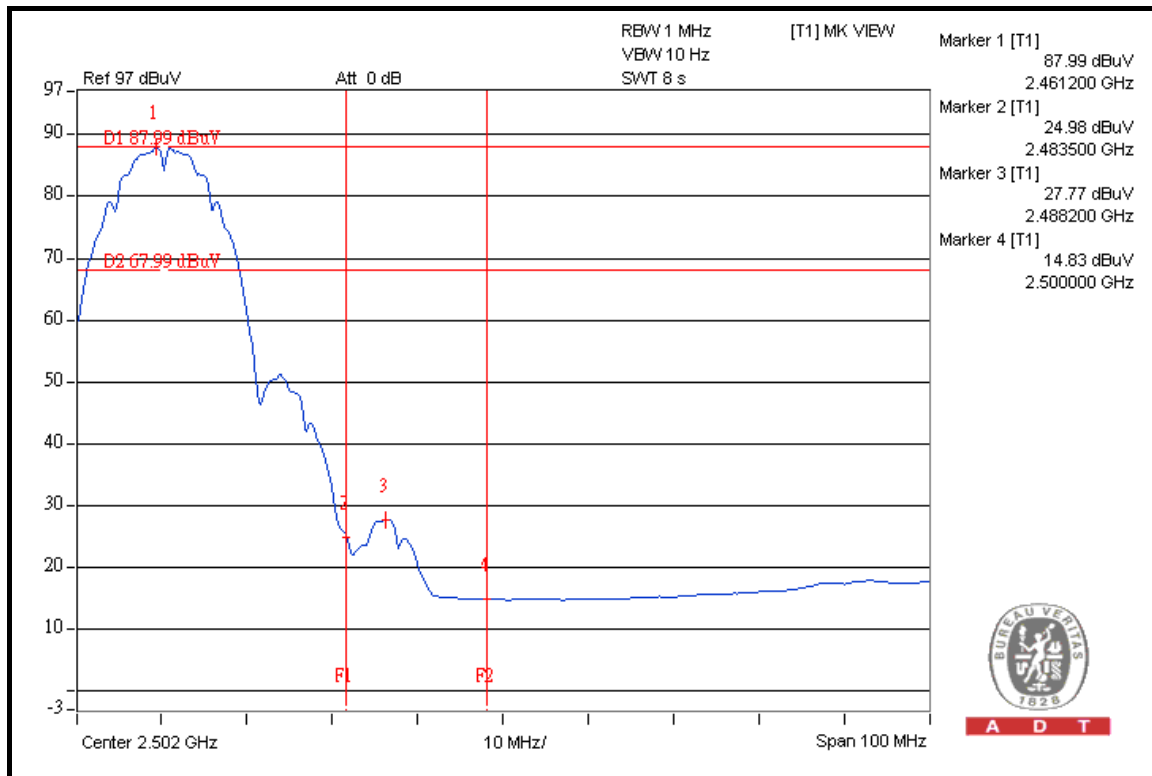

802.11g OFDM MODULATION: 1TX

NOTE 1: The band edge emission plot on the next page shows 41.43dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 113.04dBuV/m (Peak), so the maximum field strength in restrict band is $113.04 - 41.43 = 71.61\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 48.48dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 102.45dBuV/m (Average), so the maximum field strength in restrict band is $102.45 - 48.48 = 53.97\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 42.43dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 111.02dBuV/m (Peak), so the maximum field strength in restrict band is $111.02 - 42.43 = 68.59\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 48.71dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 100.68dBuV/m (Average), so the maximum field strength in restrict band is $100.68 - 48.71 = 51.97\text{dBuV/m}$ which is under 54dBuV/m limit.




A D T

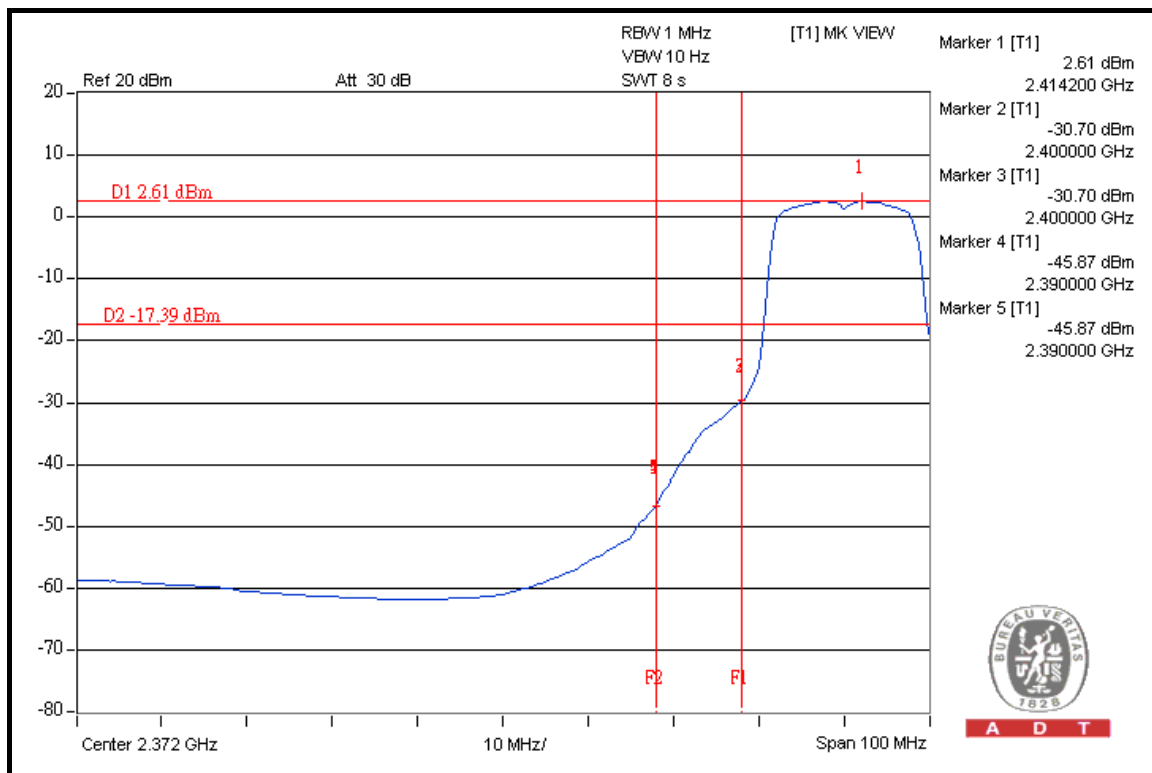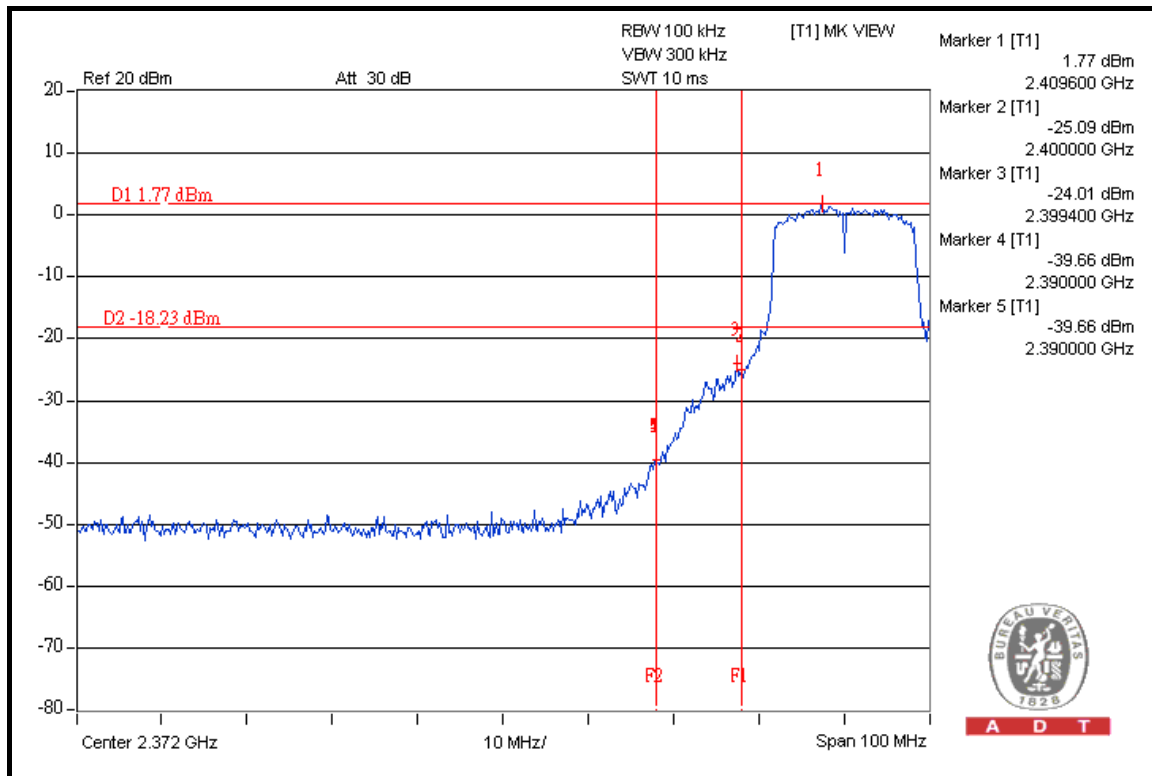




A D T

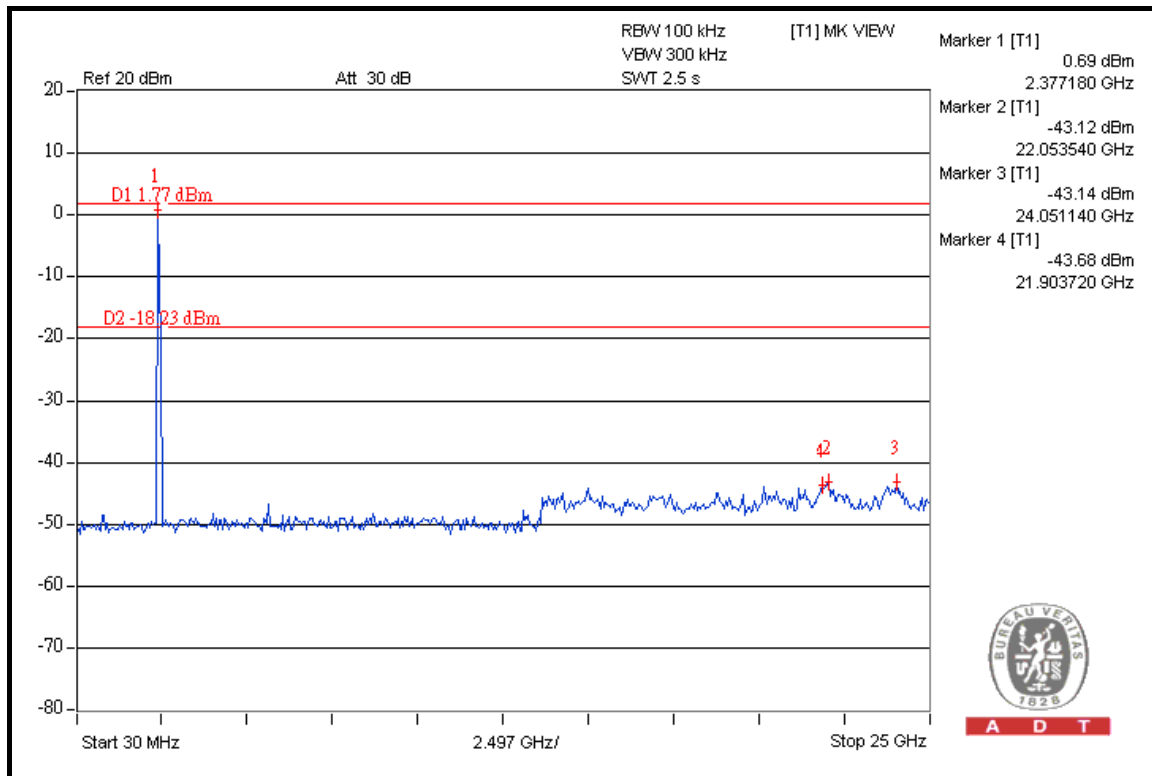



A D T

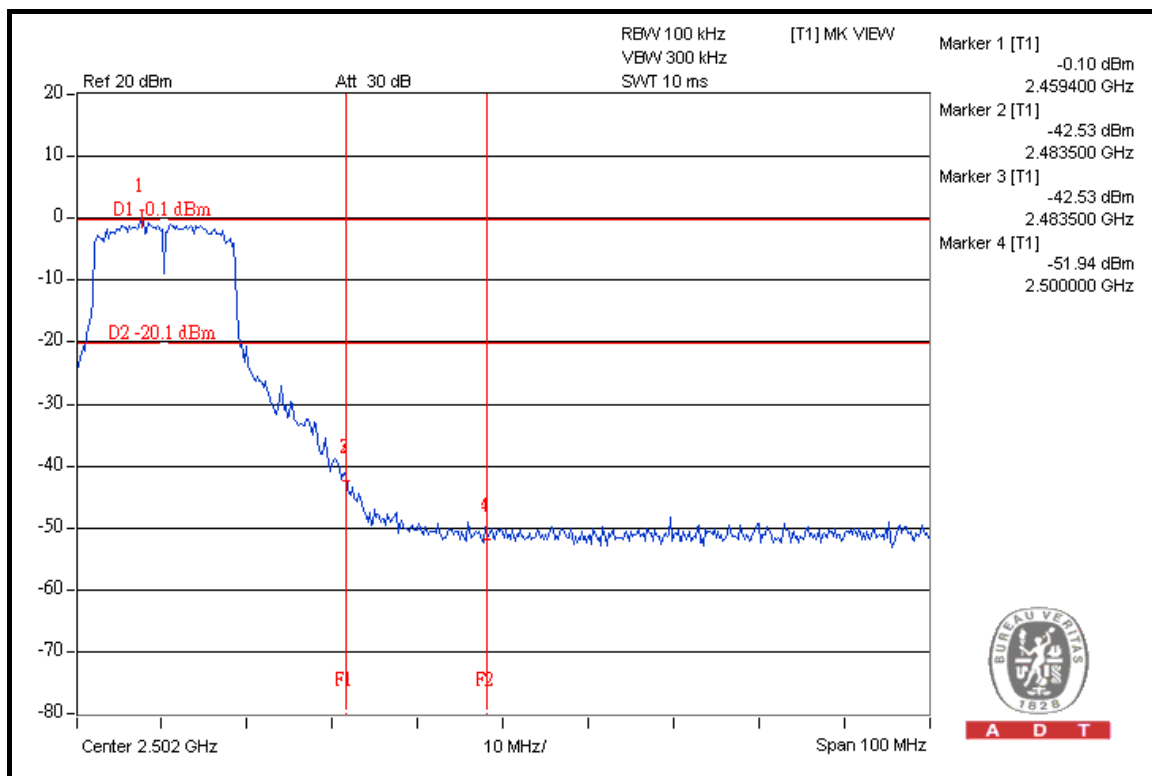

A D T



A D T

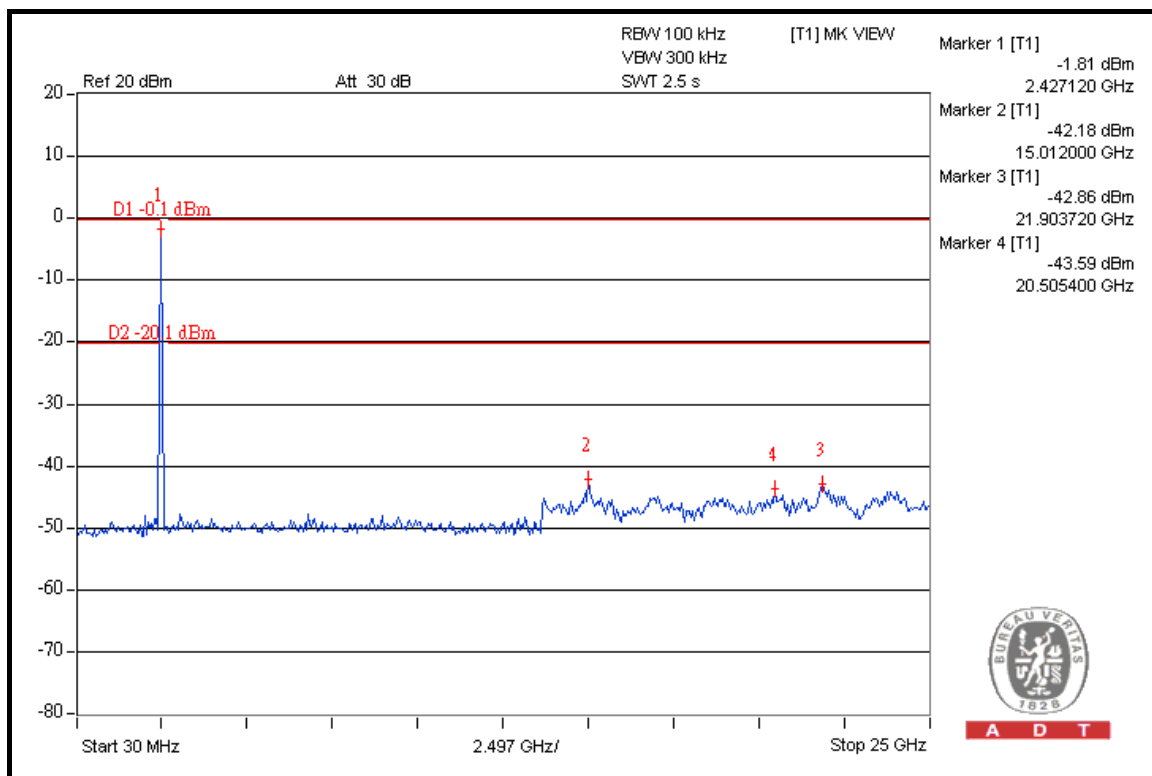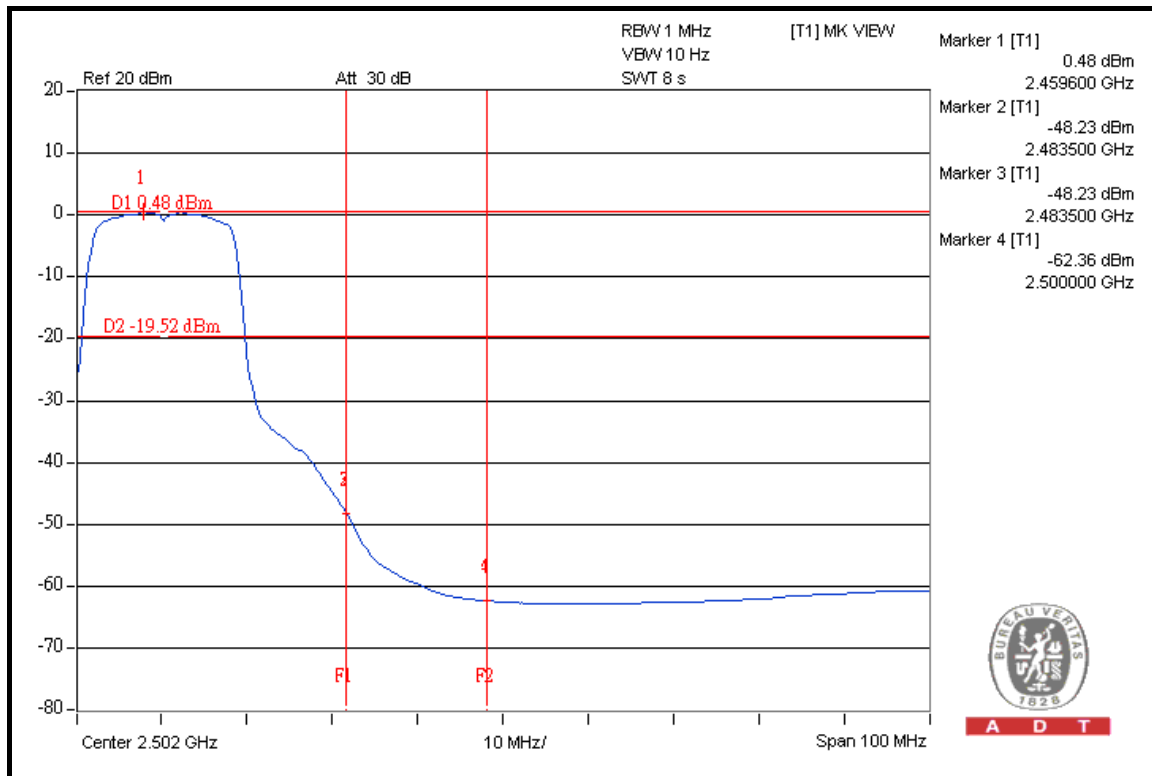

DRAFT 802.11n (20MHz) OFDM MODULATION: 1TX

NOTE 1: The band edge emission plot on the next page shows 39.59dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 112.52dBuV/m (Peak), so the maximum field strength in restrict band is $112.52 - 39.59 = 72.93\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 49.54dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 102.25dBuV/m (Average), so the maximum field strength in restrict band is $102.25 - 49.54 = 52.71\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 41.07dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 109.84dBuV/m (Peak), so the maximum field strength in restrict band is $109.84 - 41.07 = 68.77\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 48.27dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 99.87dBuV/m (Average), so the maximum field strength in restrict band is $99.87 - 48.27 = 51.60\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

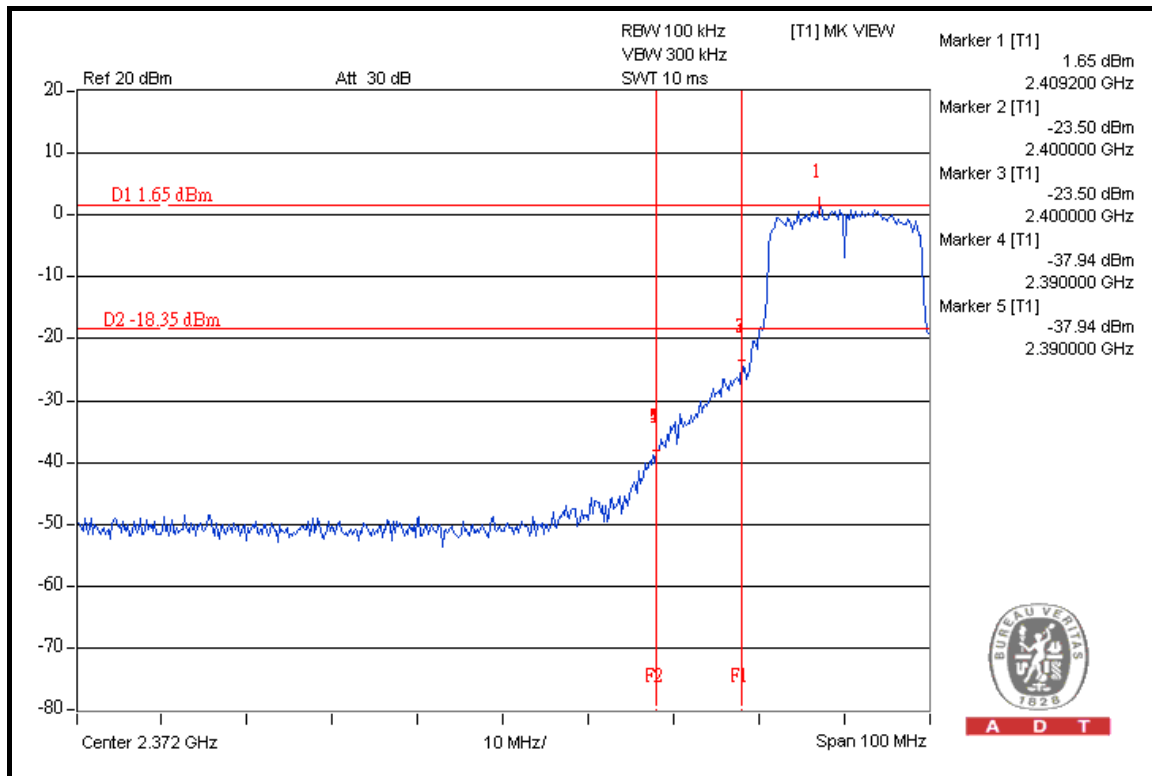


A D T

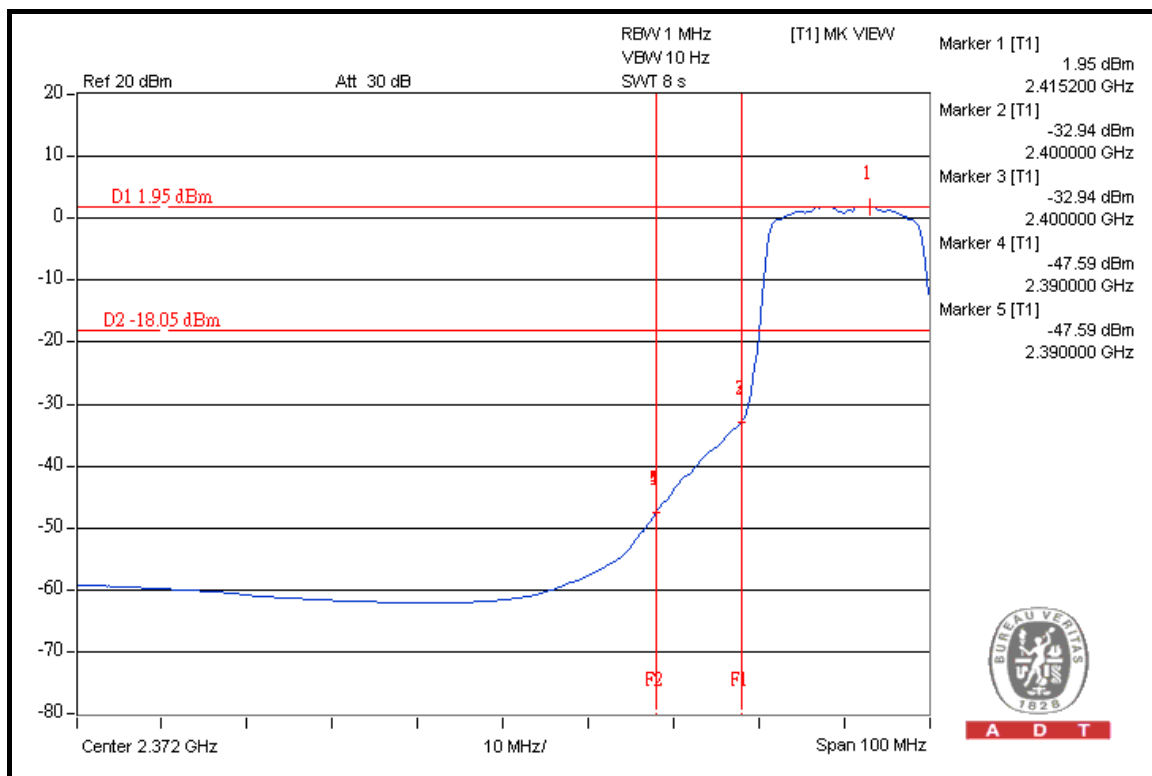


A D T



A D T

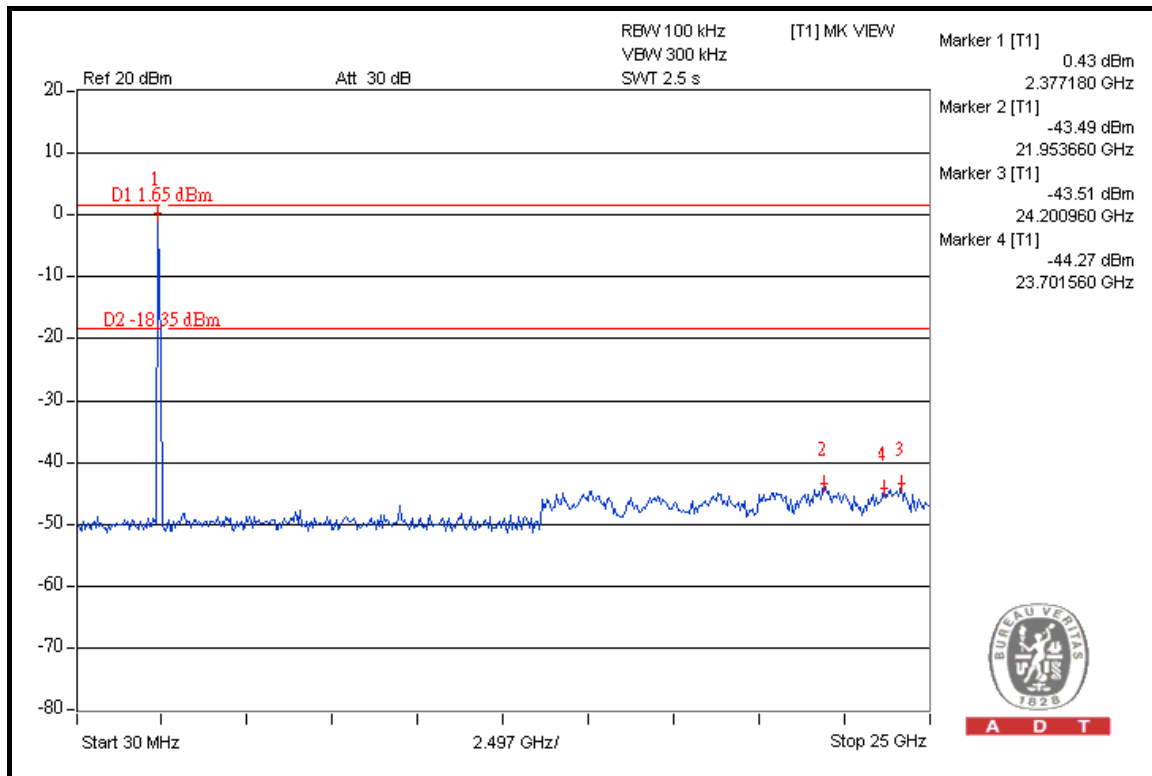


A D T

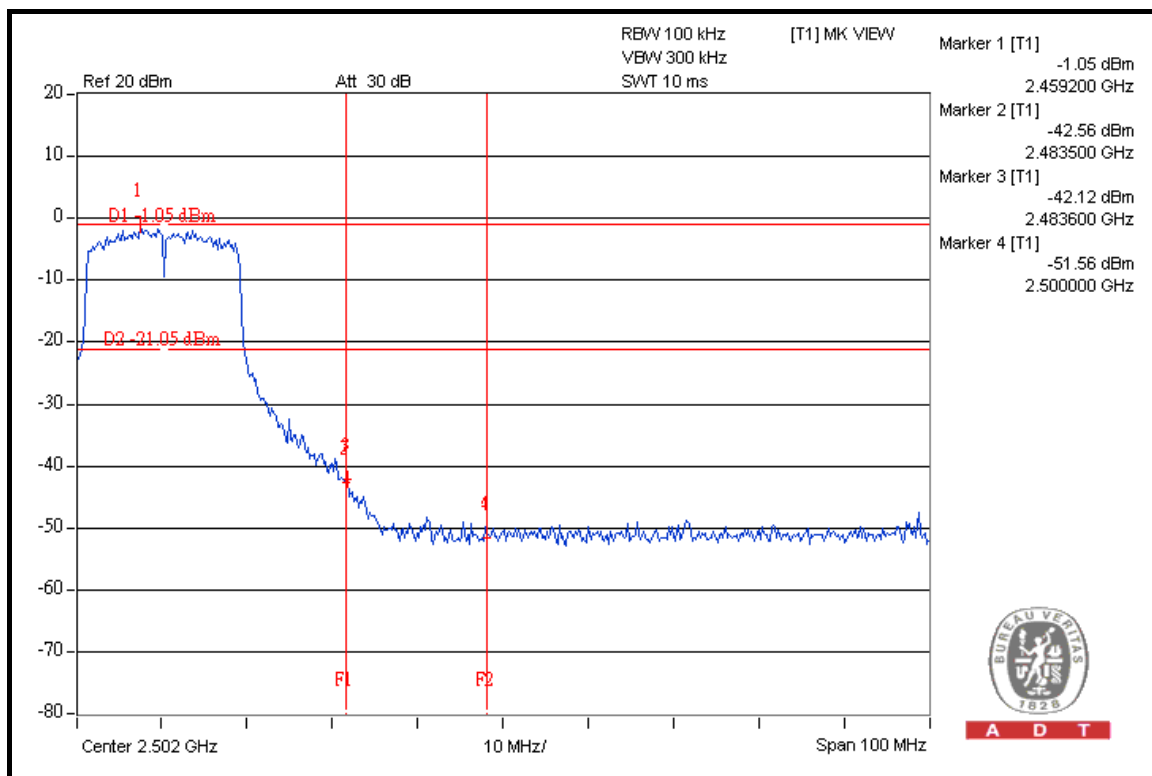


A D T



A D T

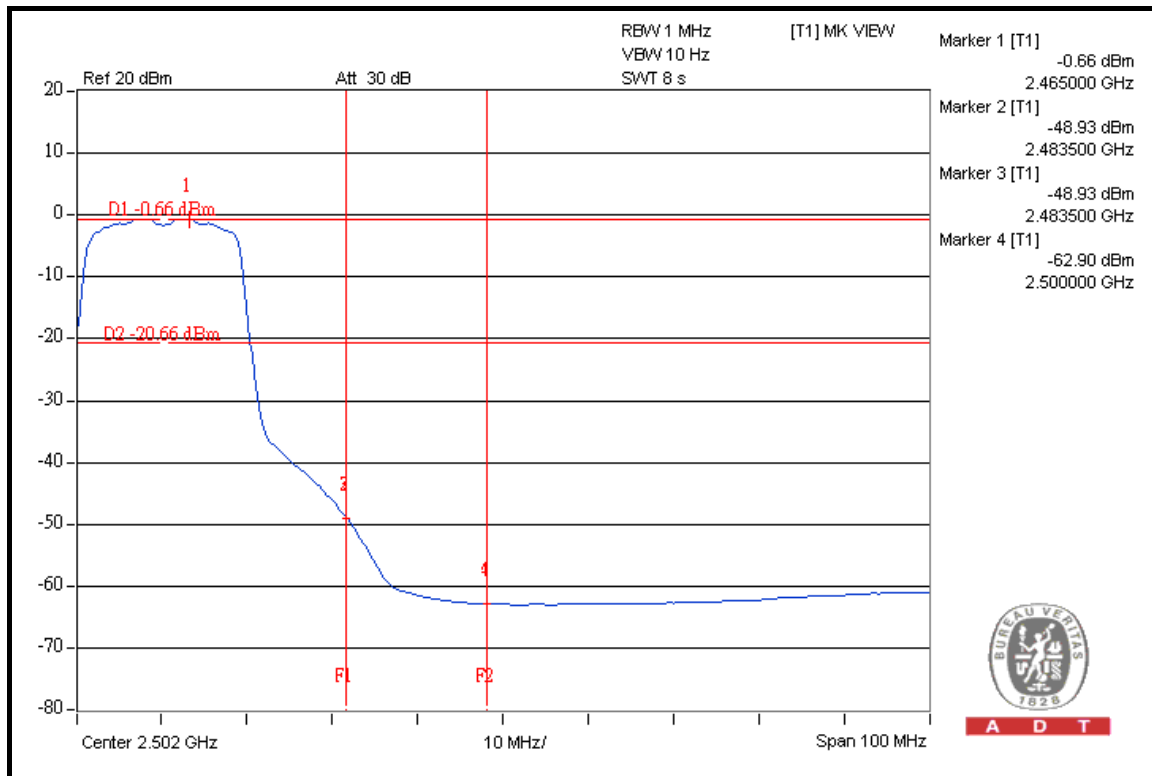

A D T

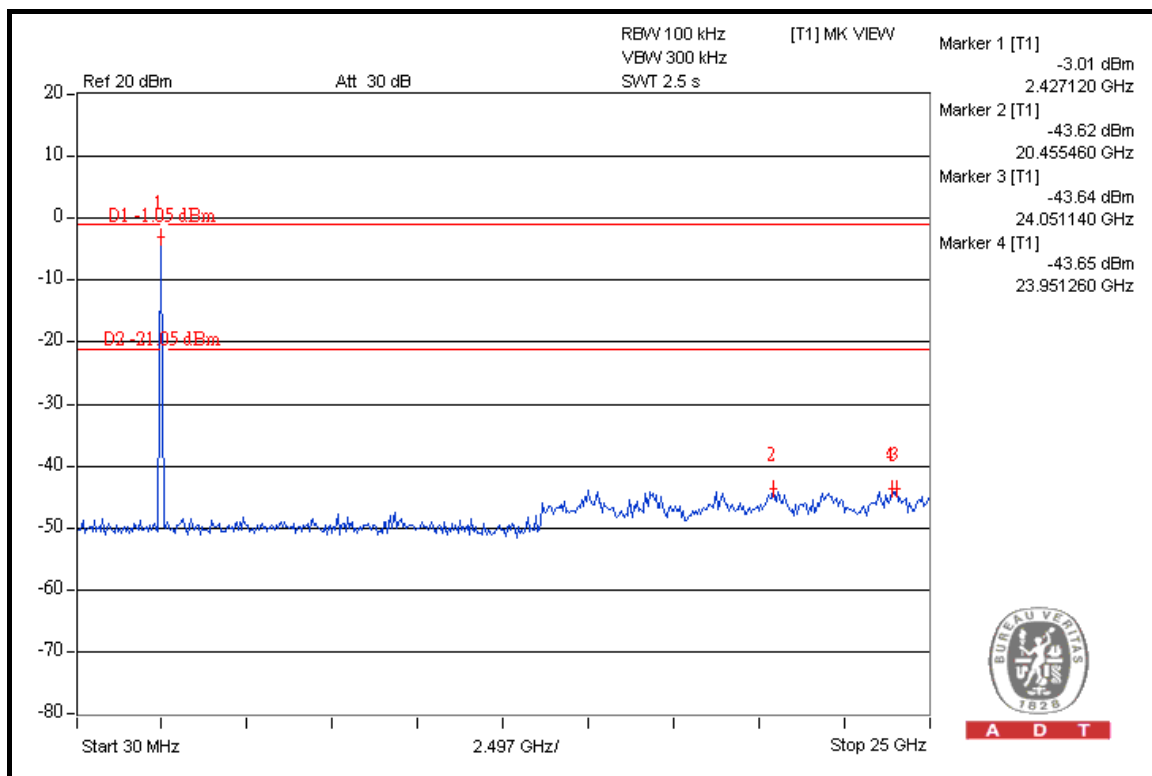

A D T

DRAFT 802.11n (20MHz) OFDM MODULATION: 2TX

NOTE 1: The band edge emission plot on the next page shows 49.33dBc between carrier maximum power and local maximum emission in restrict band (2.3884GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 114.84dBuV/m (Peak), so the maximum field strength in restrict band is $114.84 - 49.33 = 65.51\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 51.09dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 103.32dBuV/m (Average), so the maximum field strength in restrict band is $103.32 - 51.09 = 52.23\text{dBuV/m}$ which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 47.46dBc between carrier maximum power and local maximum emission in restrict band (2.4844GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 111.75dBuV/m (Peak), so the maximum field strength in restrict band is $111.75 - 47.46 = 64.29\text{dBuV/m}$ which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 50.38dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 100.59dBuV/m (Average), so the maximum field strength in restrict band is $100.59 - 50.38 = 50.21\text{dBuV/m}$ which is under 54dBuV/m limit.



A D T

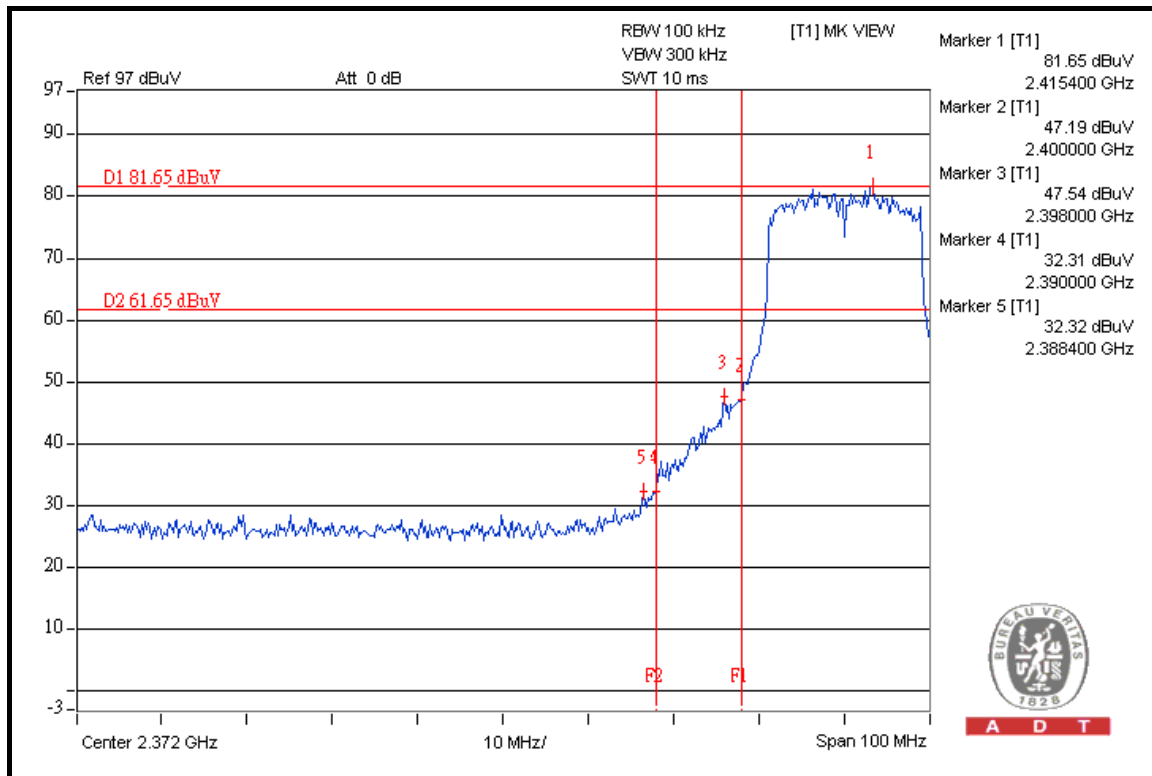


A D T

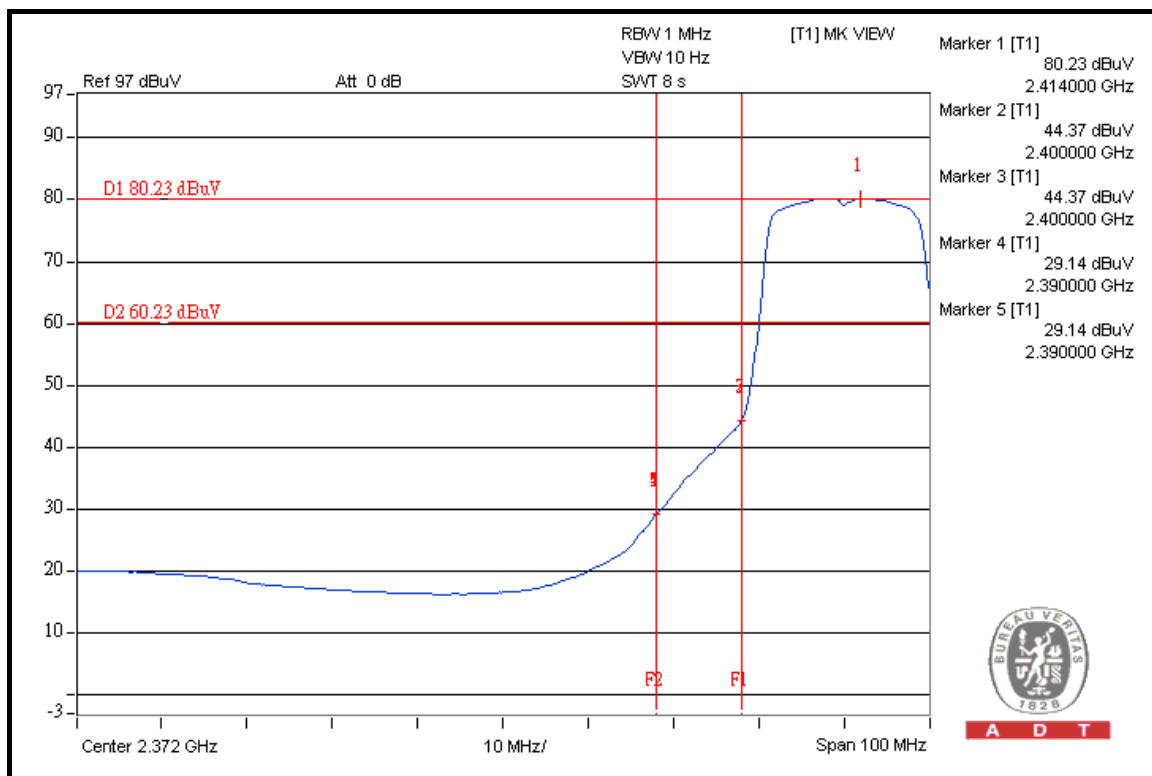


A D T



A D T

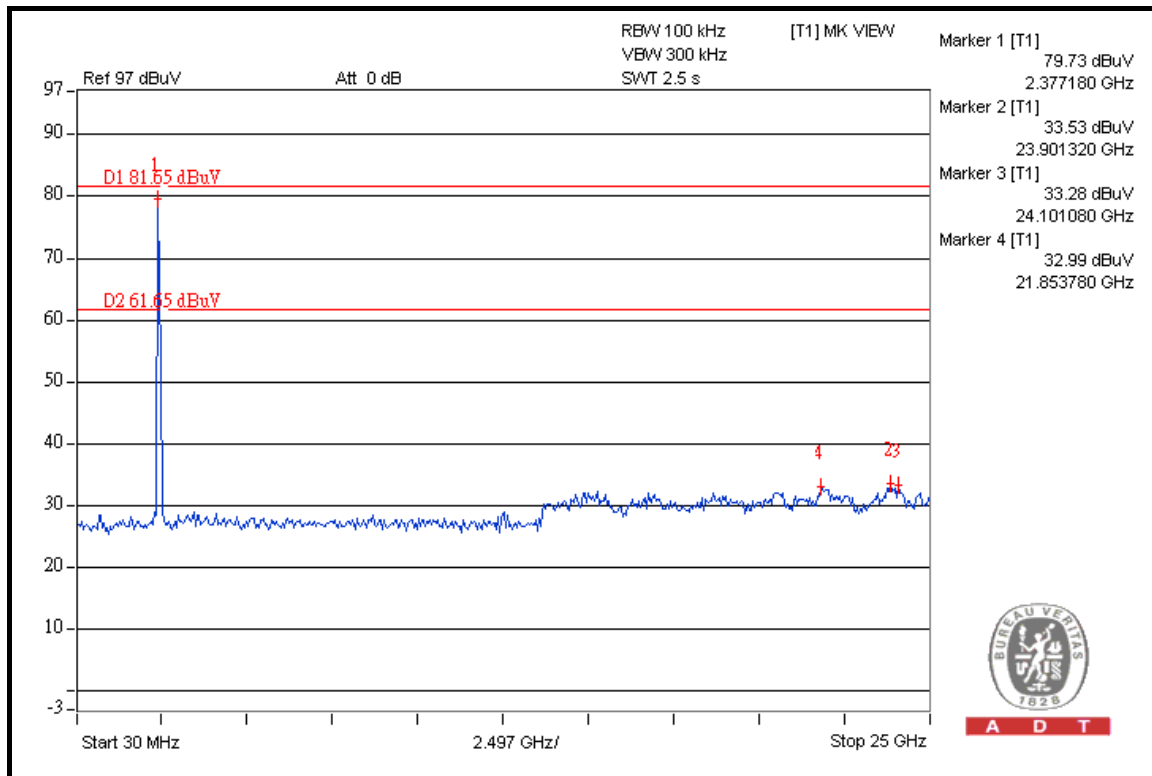



A D T

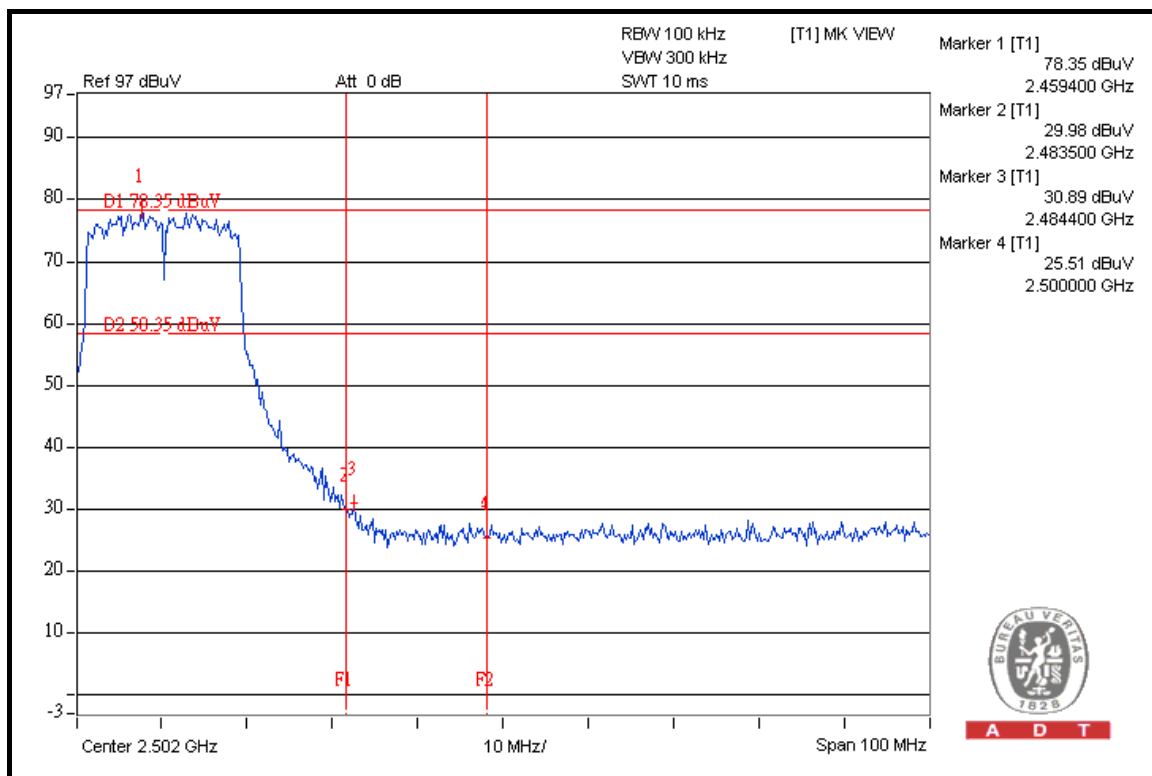

A D T



A D T

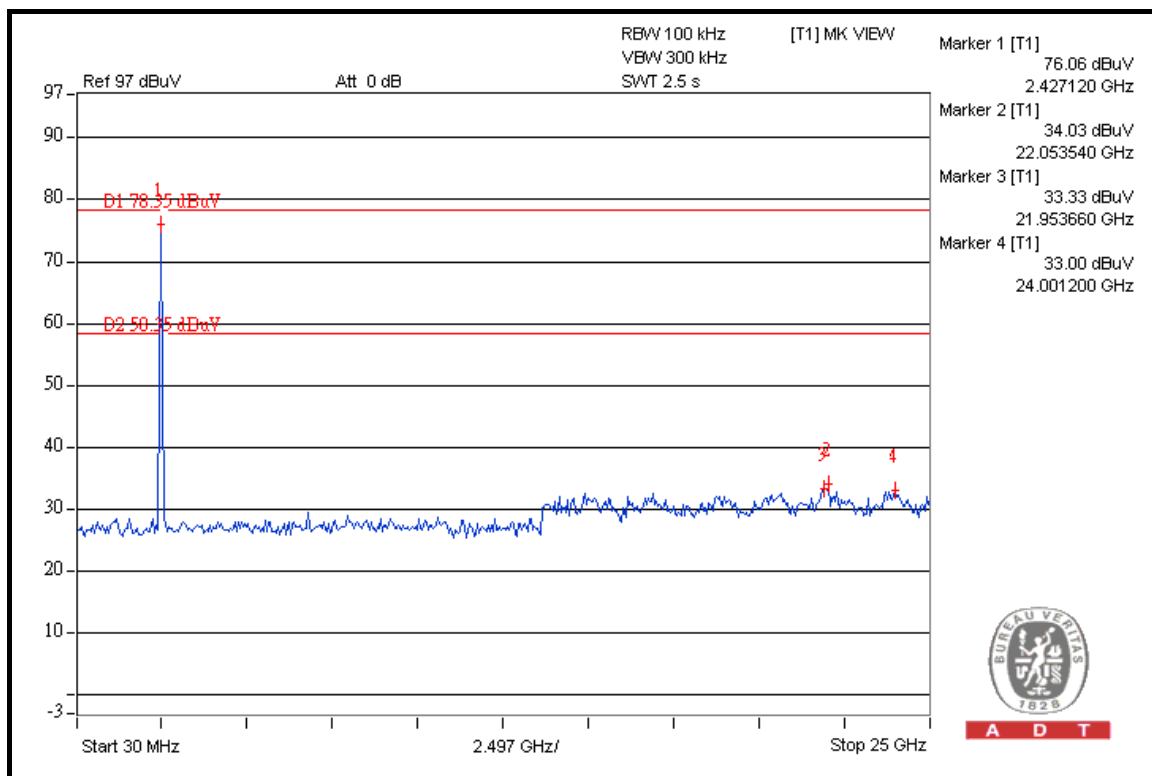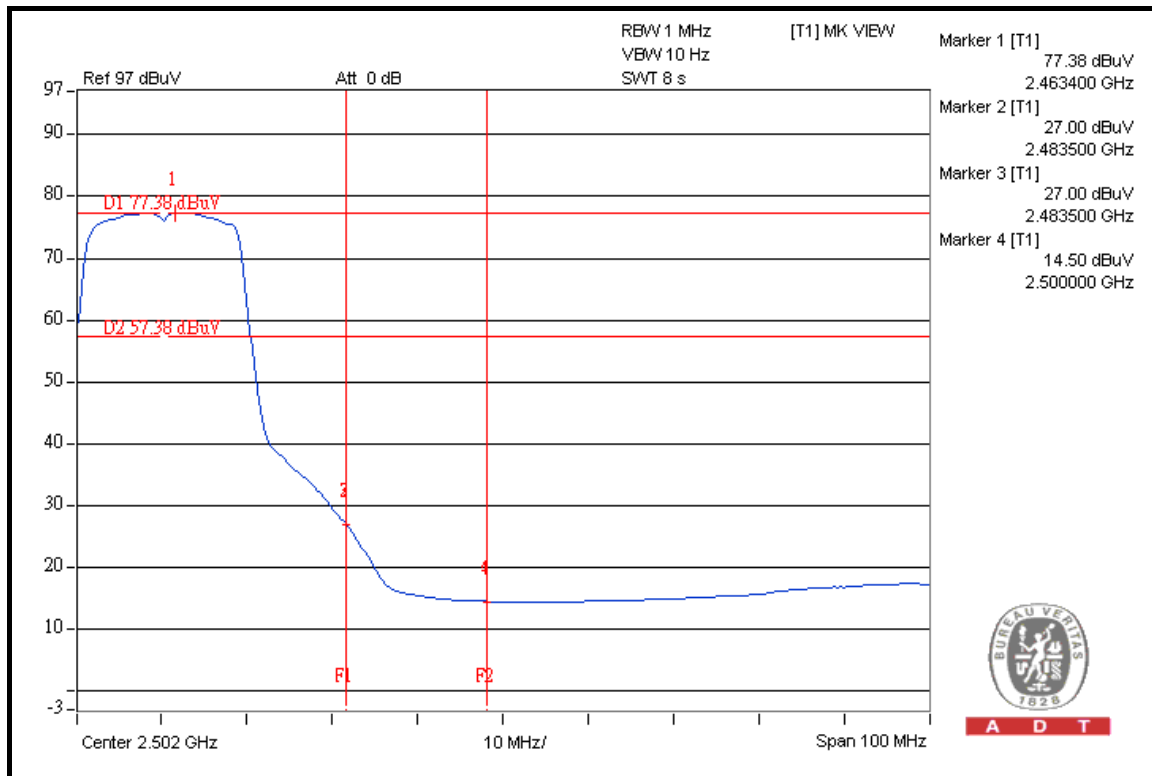

DRAFT 802.11n (40MHz) OFDM MODULATION: 1TX

NOTE 1: The band edge emission plot on the next page shows 36.97dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 105.64dBuV/m (Peak), so the maximum field strength in restrict band is $105.64 - 36.97 = 68.67$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 42.59dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 95.57dBuV/m (Average), so the maximum field strength in restrict band is $95.57 - 42.59 = 52.98$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 36.26dBc between carrier maximum power and local maximum emission in restrict band (2.4836GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 103.96dBuV/m (Peak), so the maximum field strength in restrict band is $103.96 - 36.26 = 67.70$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 40.73dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 93.70dBuV/m (Average), so the maximum field strength in restrict band is $93.70 - 40.73 = 52.97$ dBuV/m which is under 54dBuV/m limit.



A D T

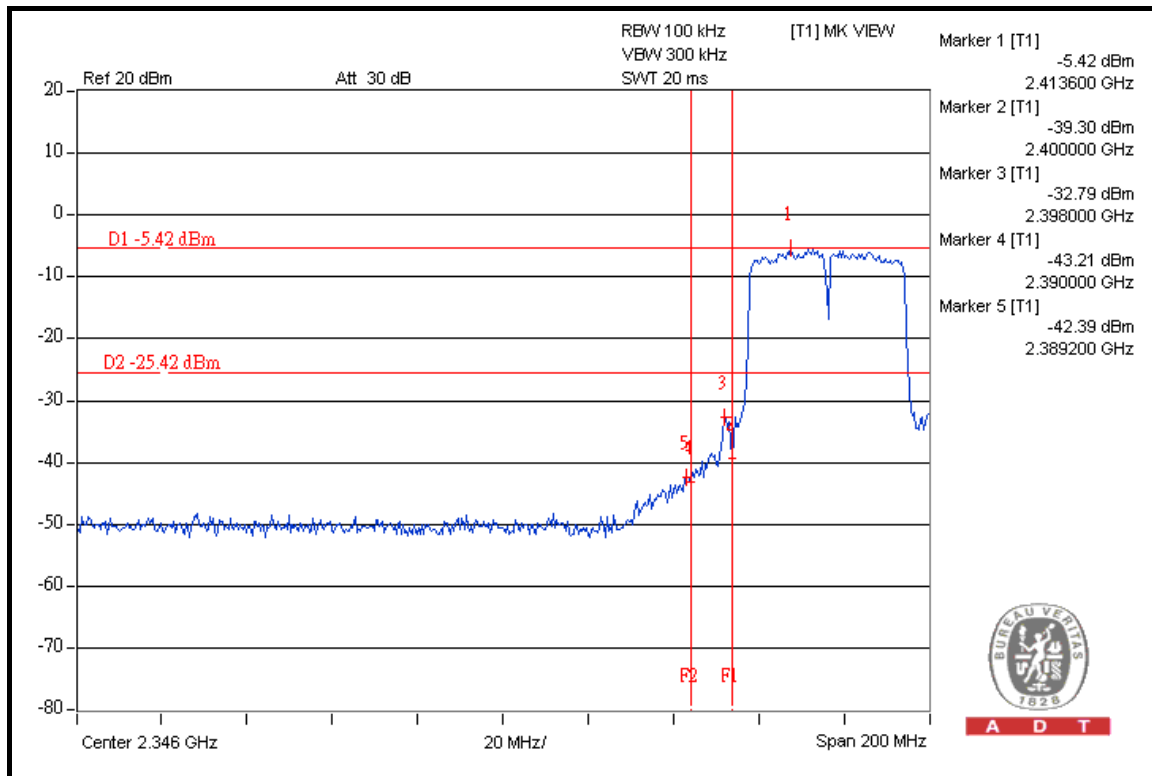


A D T

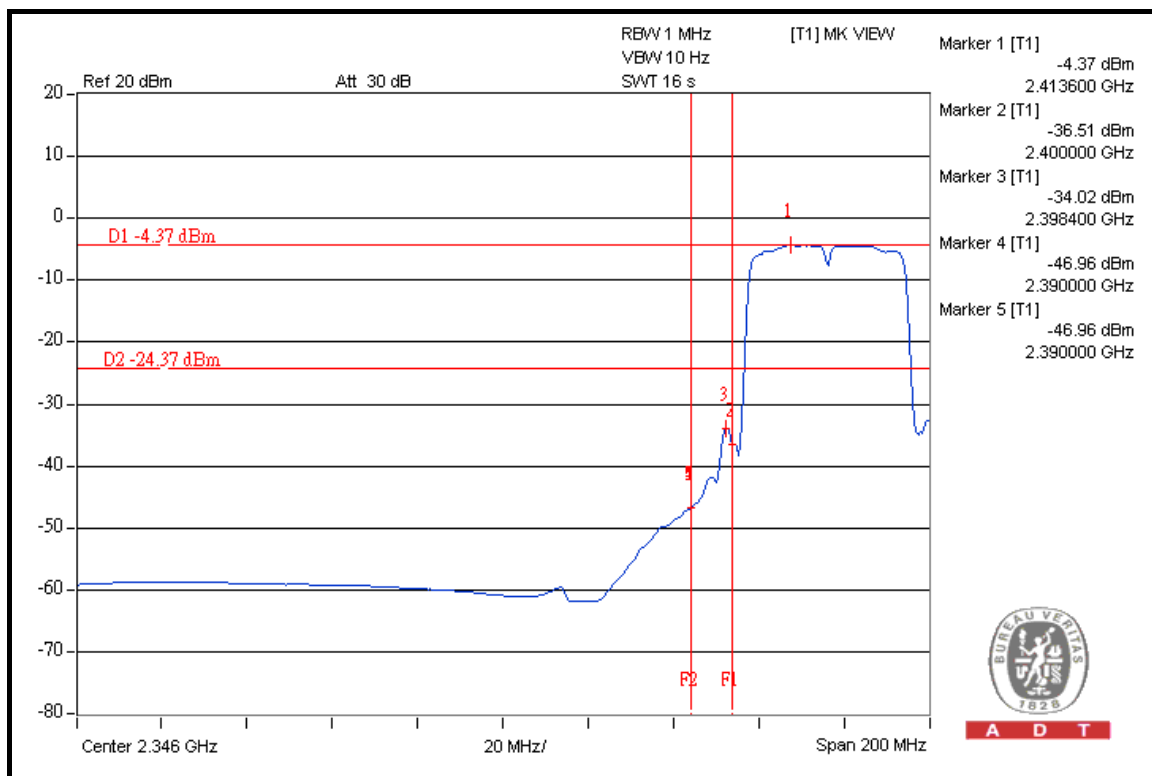


A D T



A D T

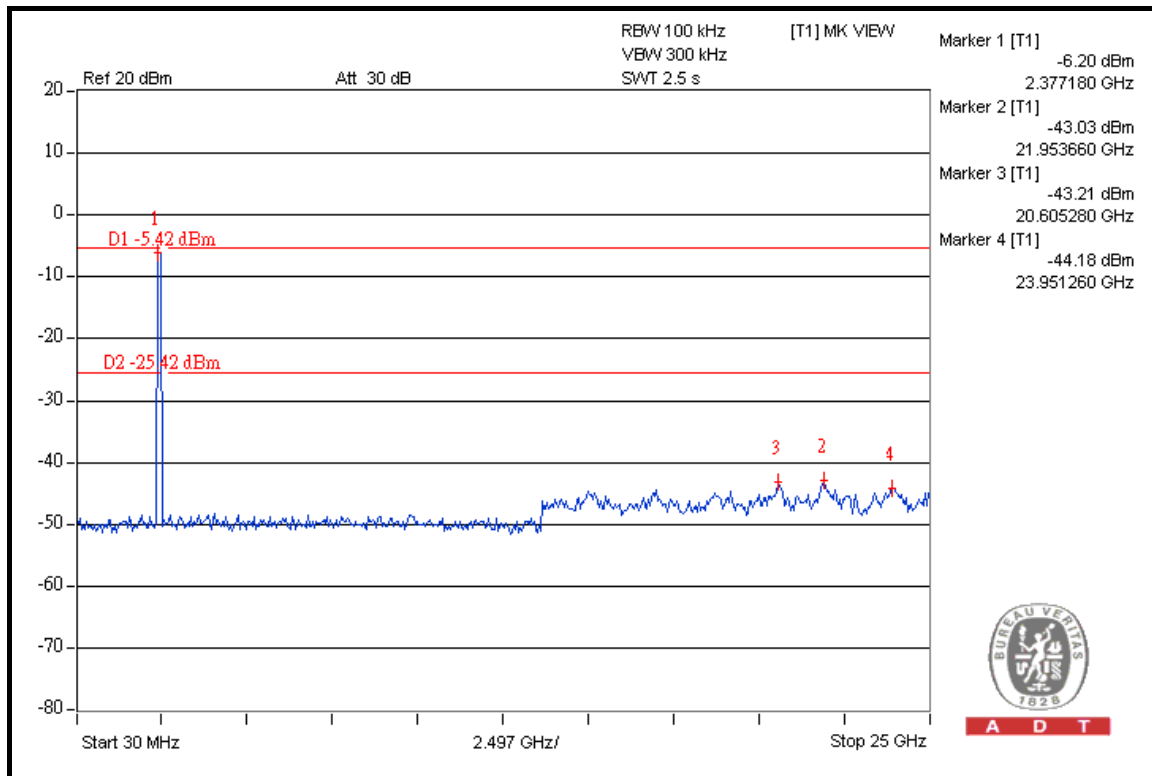



A D T

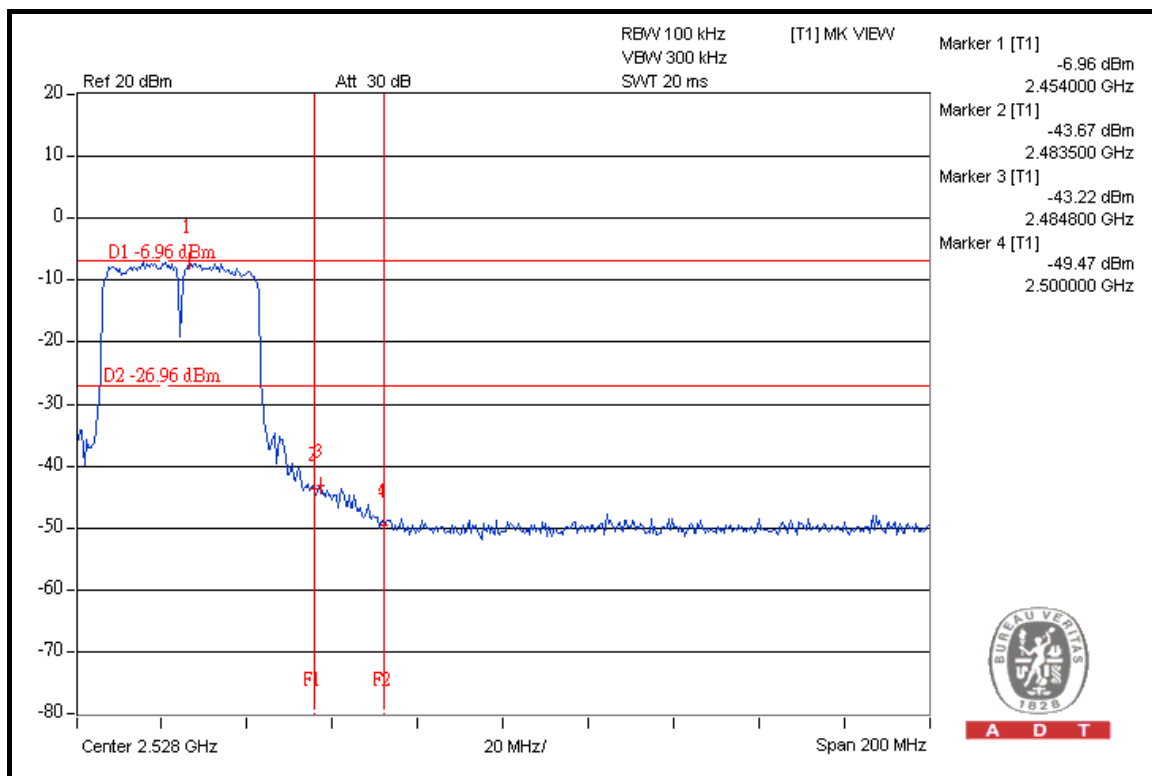

A D T



A D T

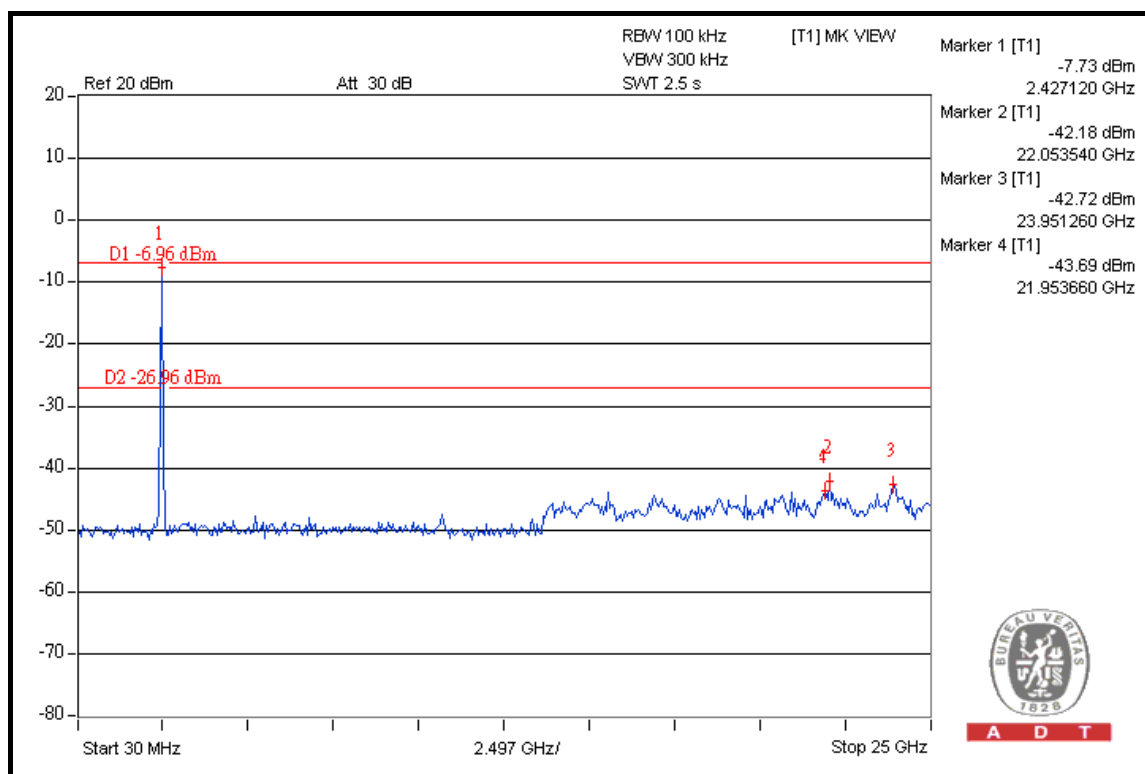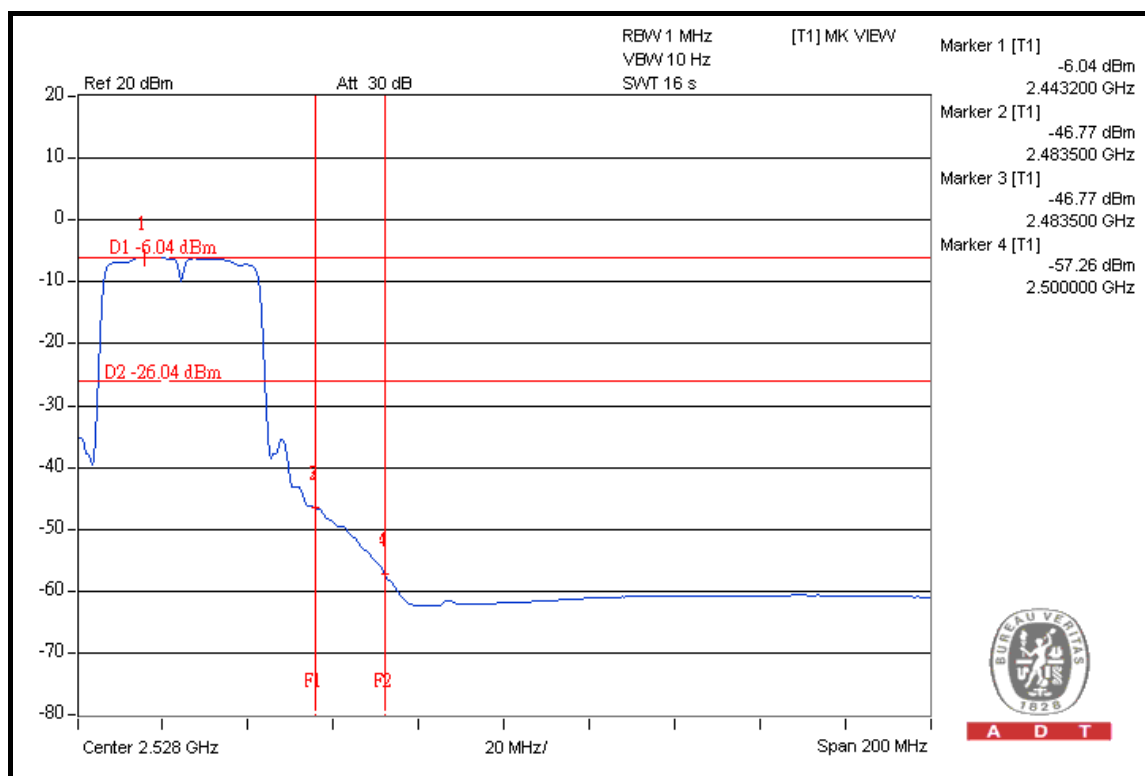

DRAFT 802.11n (40MHz) OFDM MODULATION: 2TX

NOTE 1: The band edge emission plot on the next page shows 40.01dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 107.47dBuV/m (Peak), so the maximum field strength in restrict band is $107.47 - 40.01 = 67.46$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next page shows 42.60dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 95.58dBuV/m (Average), so the maximum field strength in restrict band is $95.58 - 42.60 = 52.98$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 39.04dBc between carrier maximum power and local maximum emission in restrict band (2.4840GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 105.54dBuV/m (Peak), so the maximum field strength in restrict band is $105.54 - 39.04 = 66.50$ dBuV/m which is under 74dBuV/m limit.


The band edge emission plot on the next third page shows 41.69dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 93.61dBuV/m (Average), so the maximum field strength in restrict band is $93.61 - 41.69 = 51.92$ dBuV/m which is under 54dBuV/m limit.



A D T

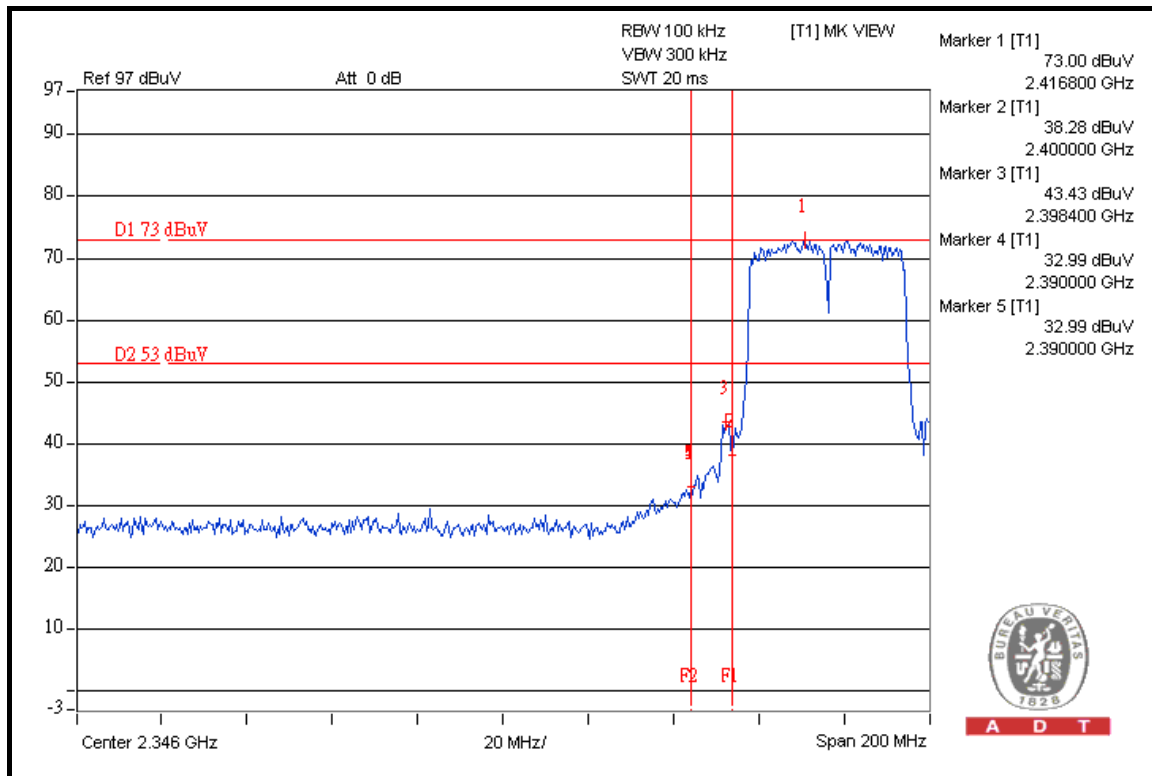


A D T

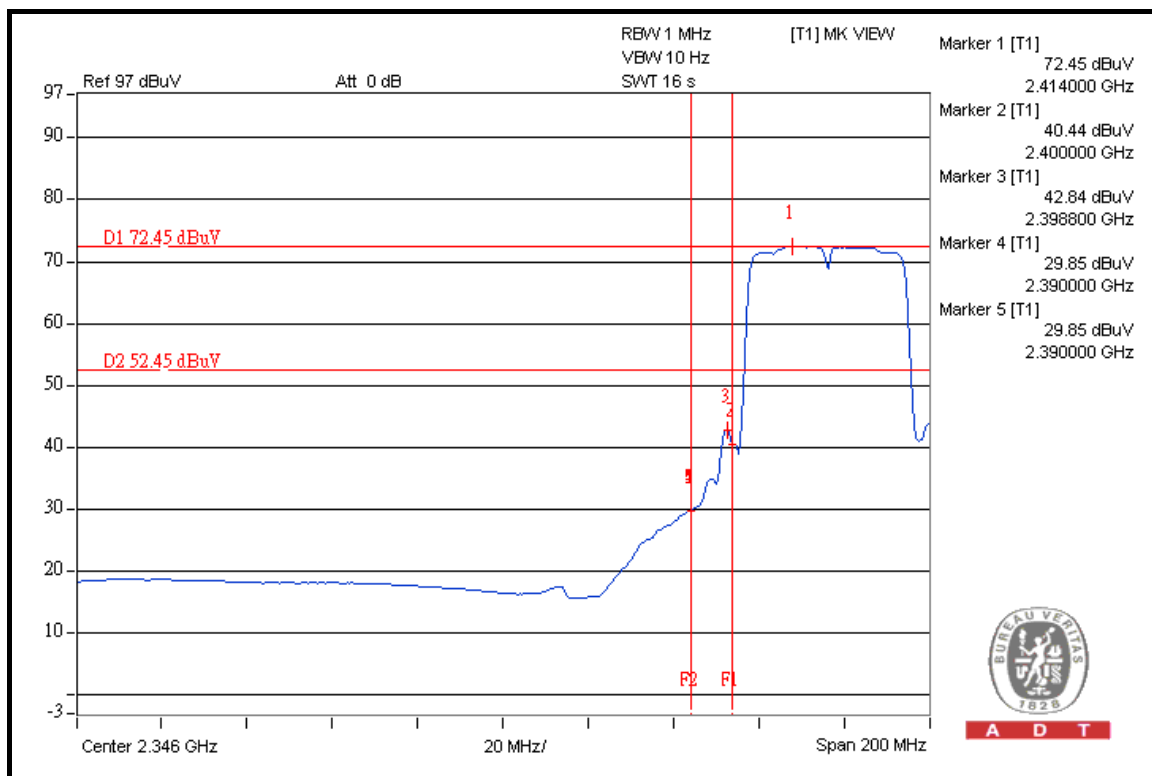


A D T



A D T

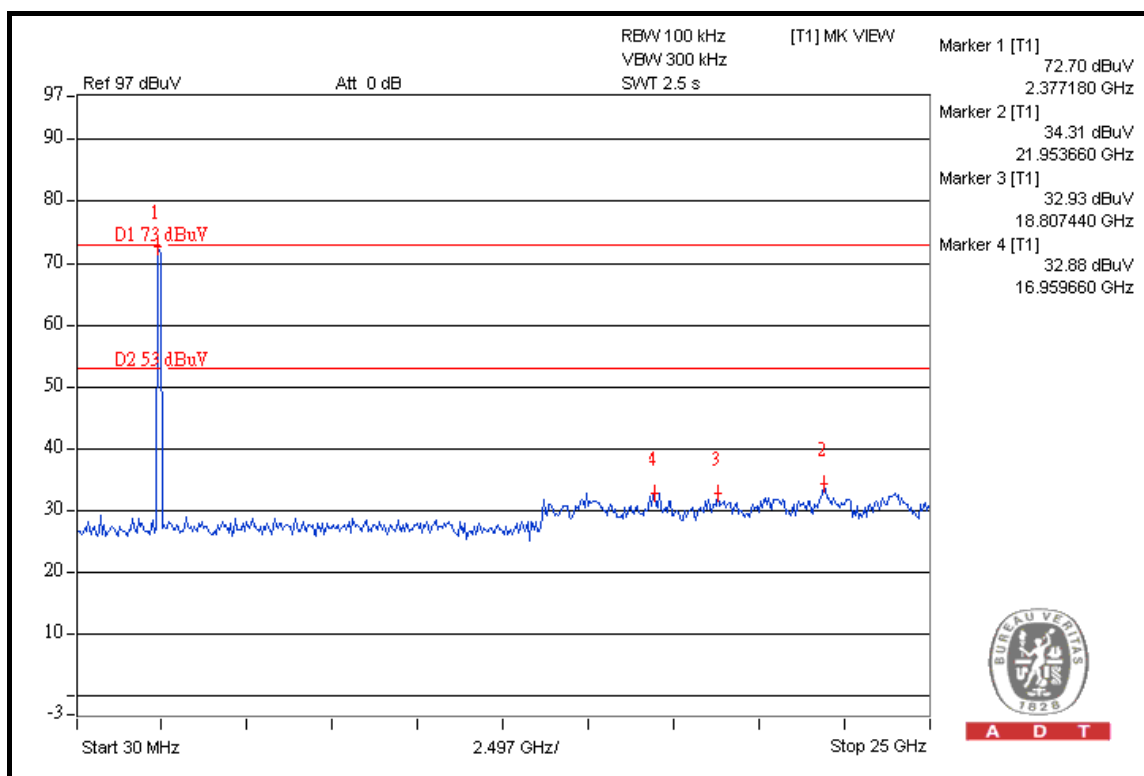



A D T

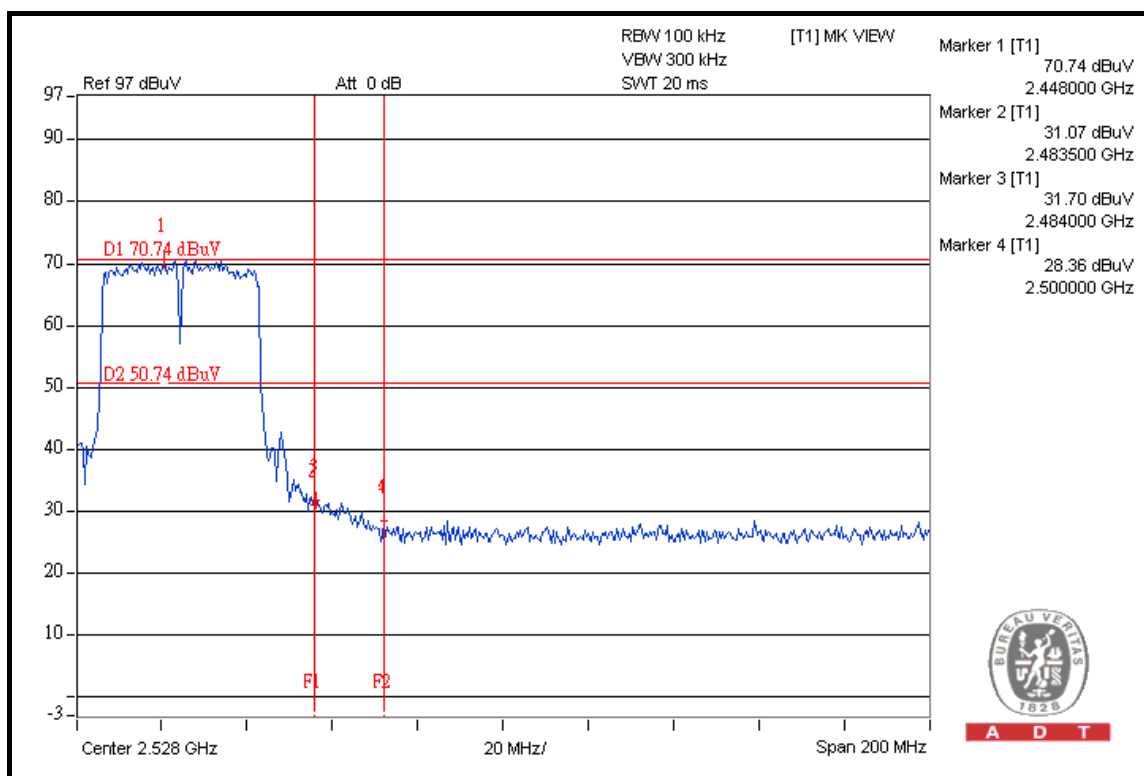

A D T



A D T

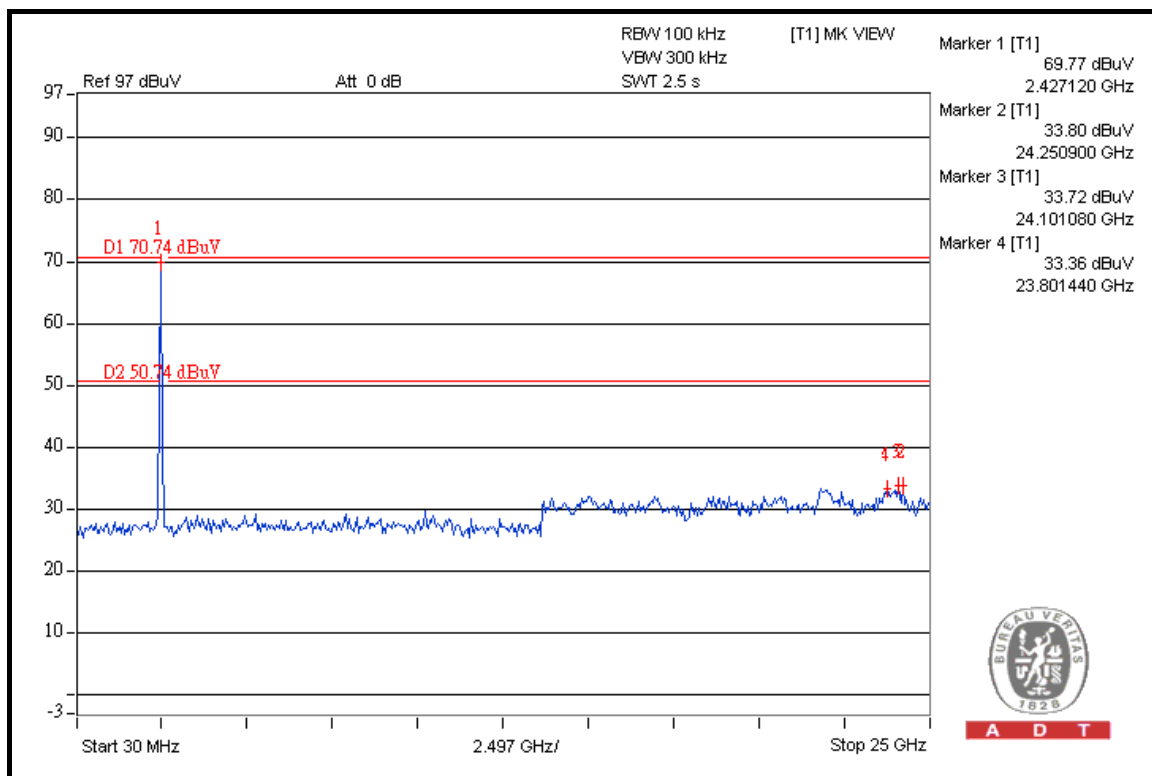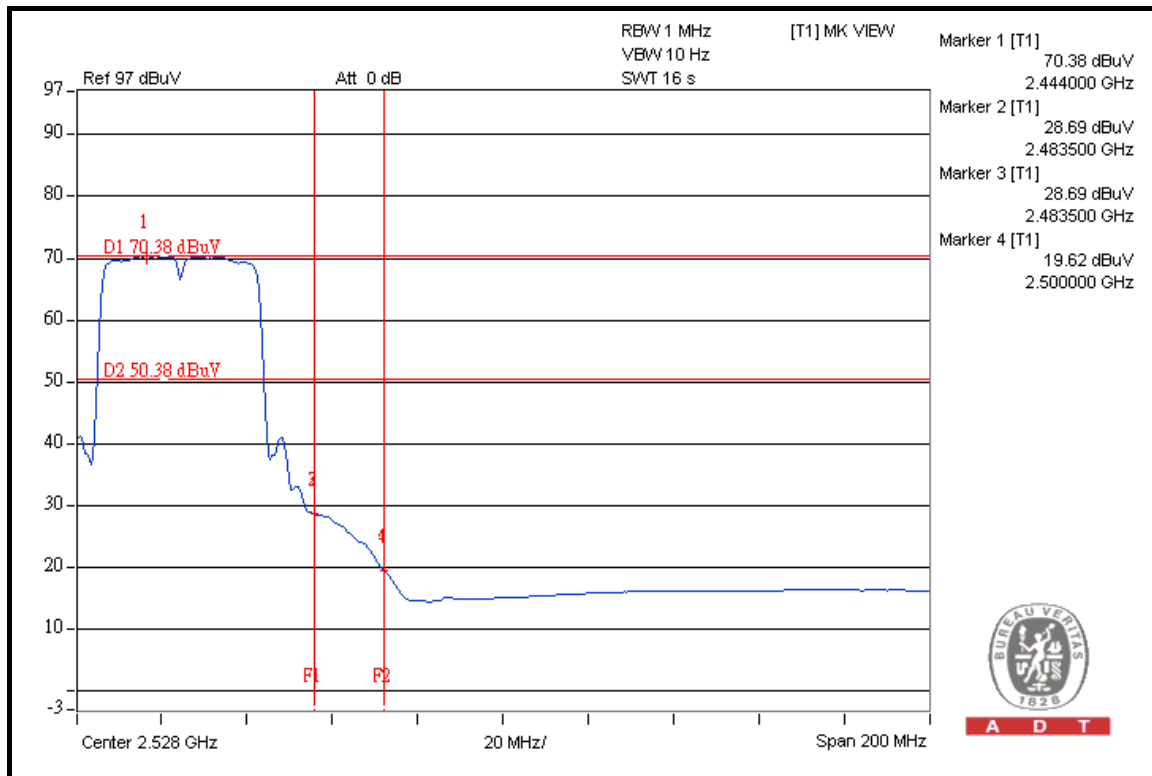

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with R-SMA antenna connector. The maximum Gain of the antenna is 5.0dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---