



FCC Radio Test Report

FCC ID: KA2AP2360B1

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Issued Date : May 06, 2014
Project No. : 1404C050
Equipment : 1) AirPremier N PoE Access Point with
Plenum-rated Chassis
2) Wireless N PoE Access Point with
Plenum-rated Chassis
Model Name : 1)DAP-2360; 2)DWP-2360
Applicant : D-LINK CORPORATION
Address : No. 289, Sinhu 3rd Rd., Neihu District,
Taiwan

Tested by: Neutron Engineering Inc. EMC Laboratory
Date of Receipt: Apr. 08, 2014
Date of Test: Apr. 08, 2014 ~ May 05, 2014

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

Neutron Engineering Inc.

No.3, Jinshagang 1st Road, ShiXia,
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



Neutron Engineering Inc.

Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (NML) of R.O.C, or National Institute of Standards and Technology (NIST) of U.S.A.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	14
4 . EMC EMISSION TEST	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.1.8 EUT TEST PHOTO	19
4.2 RADIATED EMISSION MEASUREMENT	20
4.2.1 RADIATED EMISSION LIMITS	20
4.2.2 TEST PROCEDURE	21
4.2.3 DEVIATION FROM TEST STANDARD	21
4.2.4 TEST SETUP	22
4.2.5 EUT OPERATING CONDITIONS	23
4.2.6 EUT TEST CONDITIONS	23
4.2.7 TEST RESULTS (9K~ 30MHZ)	24
4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	25
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	32
4.2.10 EUT TEST PHOTO	61
5 . BANDWIDTH TEST	64
5.1 APPLIED PROCEDURES	64
5.1.1 TEST PROCEDURE	64
5.1.2 DEVIATION FROM STANDARD	64
5.1.3 TEST SETUP	64
5.1.4 EUT OPERATION CONDITIONS	64
5.1.5 EUT TEST CONDITIONS	64
5.1.6 TEST RESULTS	65



Table of Contents	Page
5.1.7 EUT TEST PHOTO	77
6 . MAXIMUM OUTPUT POWER TEST	78
6.1 APPLIED PROCEDURES / LIMIT	78
6.1.1 TEST PROCEDURE	78
6.1.2 DEVIATION FROM STANDARD	78
6.1.3 TEST SETUP	78
6.1.4 EUT OPERATION CONDITIONS	78
6.1.5 EUT TEST CONDITIONS	78
6.1.6 TEST RESULTS	79
6.1.7 EUT TEST PHOTO	82
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	83
7.1 APPLIED PROCEDURES / LIMIT	83
7.1.1 TEST PROCEDURE	83
7.1.2 DEVIATION FROM STANDARD	83
7.1.3 TEST SETUP	83
7.1.4 EUT OPERATION CONDITIONS	83
7.1.5 EUT TEST CONDITIONS	83
7.1.6 TEST RESULTS	84
7.1.7 EUT TEST PHOTO	114
8 . POWER SPECTRAL DENSITY TEST	115
8.1 APPLIED PROCEDURES / LIMIT	115
8.1.1 TEST PROCEDURE	115
8.1.2 DEVIATION FROM STANDARD	115
8.1.3 TEST SETUP	115
8.1.4 EUT OPERATION CONDITIONS	115
8.1.5 EUT TEST CONDITIONS	115
8.1.6 TEST RESULTS	116
8.1.7 EUT TEST PHOTO	130
9 . MEASUREMENT INSTRUMENTS LIST	131
10. EUT PHOTOS	133



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FCCP-1-1404C050	Original Issue.	May 06, 2014



1. CERTIFICATION

Equipment : 1) AirPremier N PoE Access Point with Plenum-rated Chassis
2) Wireless N PoE Access Point with Plenum-rated Chassis
Brand Name : D-Link
Model Name : 1)DAP-2360; 2)DWP-2360
Applicant : D-LINK CORPORATION
Date of Test : Apr. 08, 2014 ~ May 05, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart C(15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1404C050) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.209/15.205	Transmitter Radiated Emissions	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r01 (Measurement Guidelines of DTS)



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
Neutron's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	1) AirPremier N PoE Access Point with Plenum-rated Chassis 2) Wireless N PoE Access Point with Plenum-rated Chassis	
Brand Name	D-Link	
Model Name	1)DAP-2360; 2)DWP-2360	
Model Difference	1.The EUT were two samples:	
	Sample Description	
	Sample 1	Market without POE adapter
	Sample 2	Market with POE adapter
	2. These two models only differ in model name because of different sales areas	
Product Description	Operation Frequency	2412~2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 300 Mbps
	Output Power (Max.)	802.11b: 27.36 dBm 802.11g:27.02dBm 802.11n(20MHz): 27.44 dBm 802.11n(40MHz): 28.61 dBm
Power Source	1. DC voltage supplied from AC/DC adapter. #1 Manufacture/Model: YEOU DIANN/AMS9-1201000FU2(US)- Without Switch #2Manufacture/Model: FRECOM/F12W3-120100SPAU(US)- Without Switch 2. DC Voltage supplied from POE Manufacture/Model: METOUCH/SA06-20S48-V	
Power Rating	1. Adapter: #1I/P AC100-240V~50/60Hz 0.5A/27VA O/P:DC12V/1.0A #2I/P:100-240V~50/60Hz 0.3A O/P:DC12V/1 A 2. POE:O/P DC +48V 0.4A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2. CH 01 – CH 11 for 802.11b, 802.11g, 802.11n(20MHz)
CH 03 – CH 09 for 802.11n(40MHz)

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	WANSIH ELECTRONIC CO., LTD.	WSS007	Dipole	RP-SMA	5	TX/RX
2	WANSIH ELECTRONIC CO., LTD.	WSS007	Dipole	RP-SMA	5	TX/RX

Note:

(1) The EUT incorporates a MIMO function. Physically, the EUT provides two completed two transmitters and two receivers (2T2R), all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}** , that is Directional gain=5.

- 4.

Operating Mode TX Mode	1TX	2TX
802.11b	V (ANT 1 or ANT 2)	-
802.11g	V (ANT 1 or ANT 2)	-
802.11n(20MHz)	-	V (ANT 1 + ANT 2)
802.11n(40MHz)	-	V (ANT 1 + ANT 2)



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09
Mode 5	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 5	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DBPSK (1Mbps)
802.11g mode: OFDM (6Mbps)
802.11n HT20 mode : BPSK (13Mbps)
802.11n HT40 mode : BPSK (27Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.
- (4) Conducted test with adapter and PoE, and found that adapter was in the worst case and which was recorded in the report



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	Duck_1_1-9		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b DSSS	19	28.5	21
IEEE 802.11g OFDM	11.5	20	13.5
IEEE 802.11n (20MHz)	9.5	13.5	9
Frequency (MHz)	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n (40MHz)	7	13.5	7.5




3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted TX Mode:

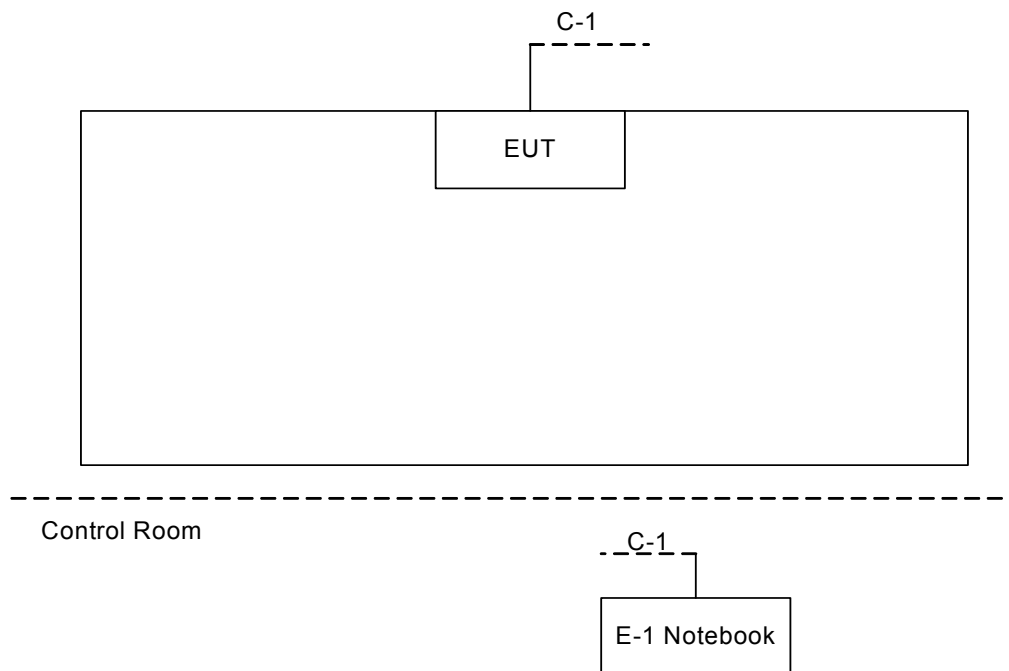

Radiated TX Mode:

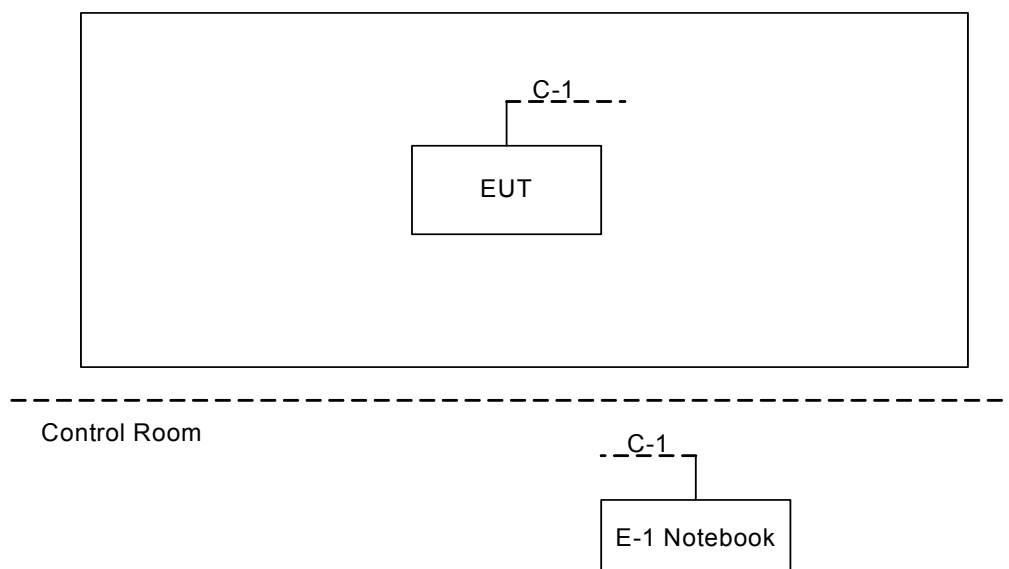



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Notebook	HP	HP NB 331	DOC	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	RJ45 Cable



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

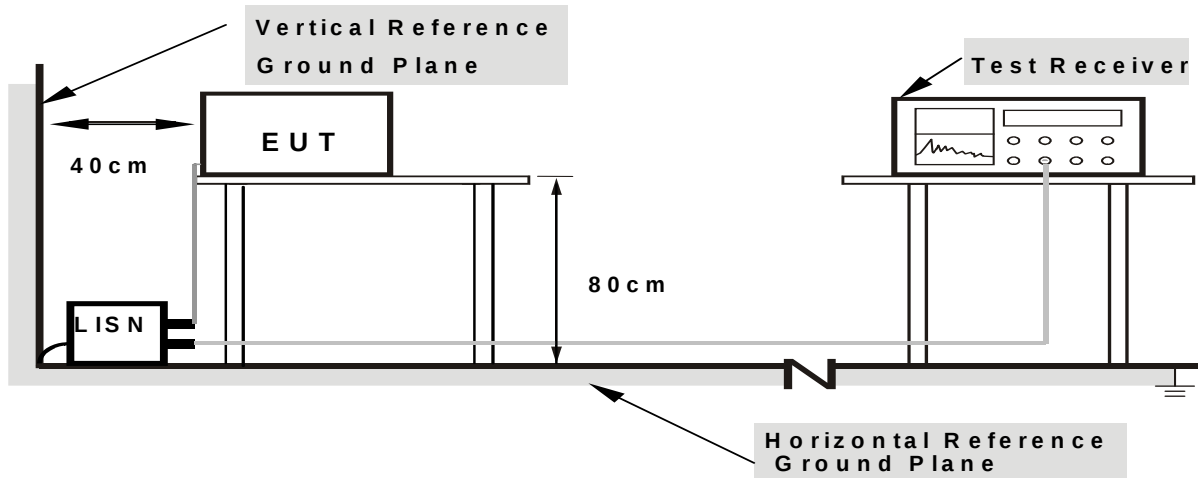

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS


Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.



Test Mode : TX MODE

Line

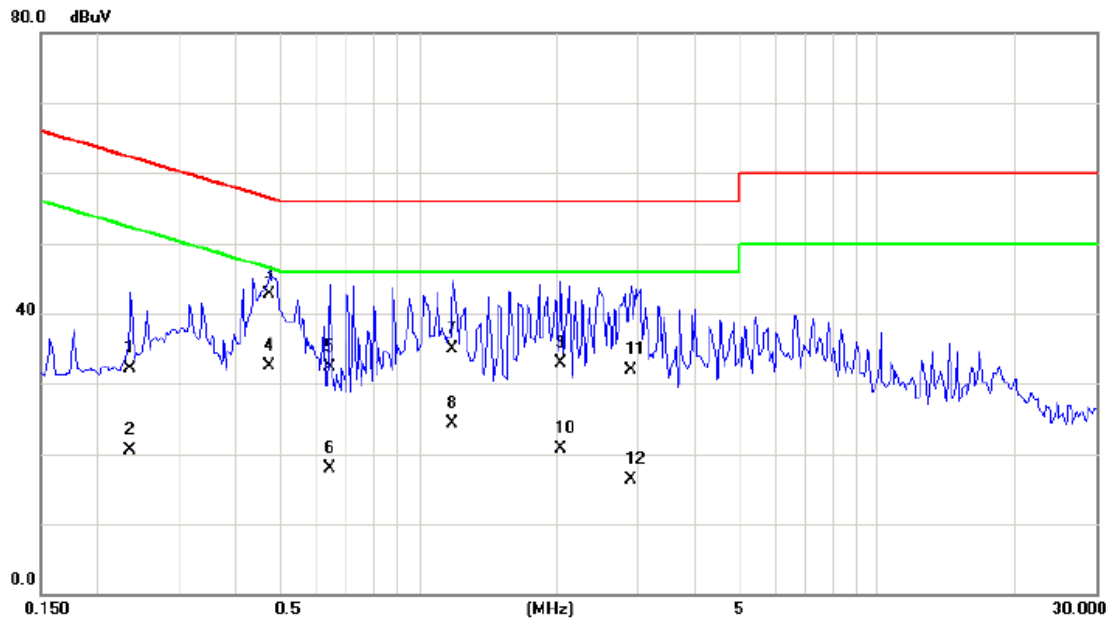


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2360	22.40	9.65	32.05	62.24	-30.19	QP	
2		0.2360	10.80	9.65	20.45	52.24	-31.79	AVG	
3	*	0.4742	33.10	9.70	42.80	56.44	-13.64	QP	
4		0.4742	22.90	9.70	32.60	46.44	-13.84	AVG	
5		0.6422	22.50	9.72	32.22	56.00	-23.78	QP	
6		0.6422	8.20	9.72	17.92	46.00	-28.08	AVG	
7		1.1852	25.20	9.75	34.95	56.00	-21.05	QP	
8		1.1852	14.60	9.75	24.35	46.00	-21.65	AVG	
9		2.0484	23.10	9.84	32.94	56.00	-23.06	QP	
10		2.0484	10.80	9.84	20.64	46.00	-25.36	AVG	
11		2.9117	22.10	9.86	31.96	56.00	-24.04	QP	
12		2.9117	6.50	9.86	16.36	46.00	-29.64	AVG	



Test Mode : TX MODE

Neutral

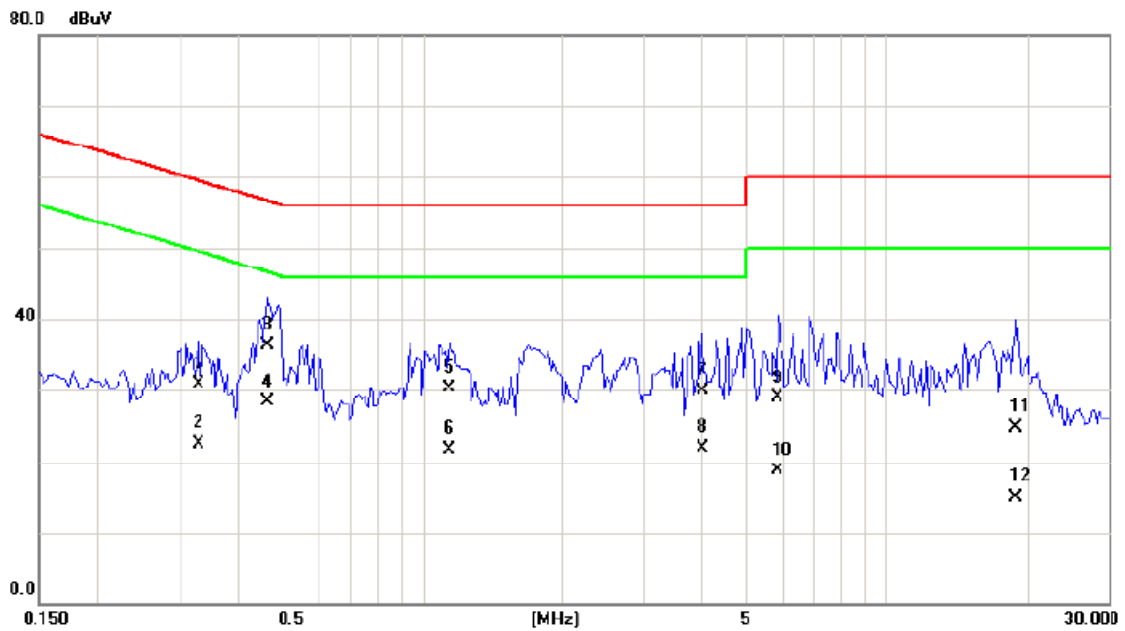

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3297	21.20	9.72	30.92	59.46	-28.54	QP	
2		0.3297	12.80	9.72	22.52	49.46	-26.94	AVG	
3		0.4625	26.60	9.74	36.34	56.65	-20.31	QP	
4	*	0.4625	18.60	9.74	28.34	46.65	-18.31	AVG	
5		1.1422	20.60	9.78	30.38	56.00	-25.62	QP	
6		1.1422	11.90	9.78	21.68	46.00	-24.32	AVG	
7		4.0156	20.00	9.92	29.92	56.00	-26.08	QP	
8		4.0156	11.90	9.92	21.82	46.00	-24.18	AVG	
9		5.8320	19.00	9.97	28.97	60.00	-31.03	QP	
10		5.8320	8.70	9.97	18.67	50.00	-31.33	AVG	
11		18.9297	14.30	10.42	24.72	60.00	-35.28	QP	
12		18.9297	4.40	10.42	14.82	50.00	-35.18	AVG	



4.1.8 EUT TEST PHOTO

Conducted Measurement Photos





4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector



4.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

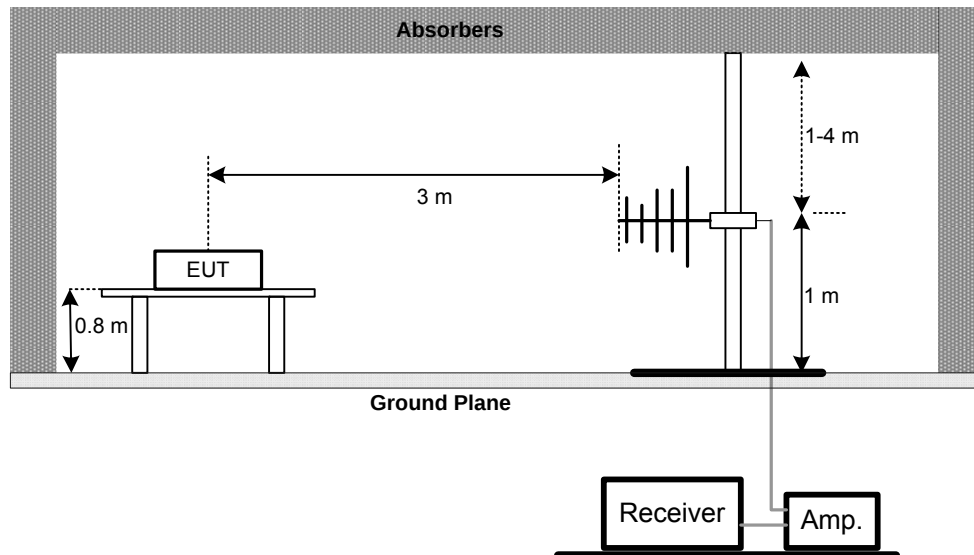

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

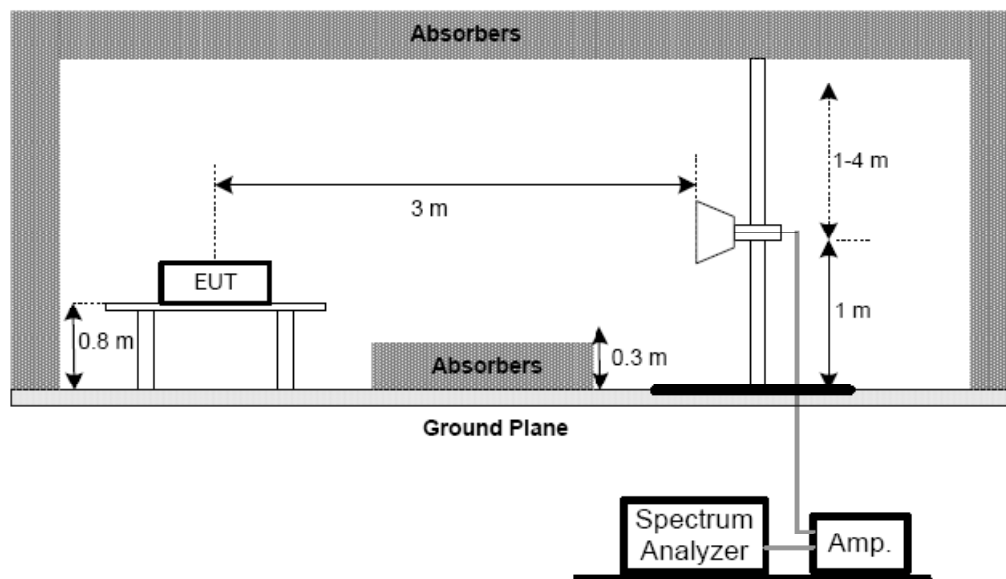

(C) For radiated emissions below 30MHz

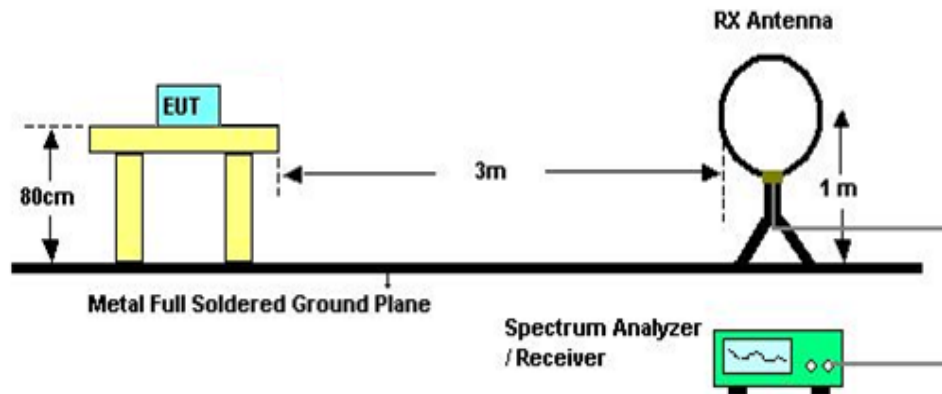

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz



4.2.7 TEST RESULTS (9K~ 30MHZ)

Test Mode : TX Mode 2412MHz

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0096	0°	68.35	24.30	92.65	127.99	-35.34	AVG
0.0096	0°	72.35	24.30	96.65	147.99	-51.34	PEAK
0.0167	0°	70.35	24.30	94.65	123.15	-28.50	AVG
0.0167	0°	79.35	24.30	103.65	143.15	-39.50	PEAK
0.0262	0°	56.36	23.91	80.27	119.24	-38.97	AVG
0.0262	0°	60.12	23.91	84.03	139.24	-55.21	PEAK
0.0341	0°	61.36	23.41	84.77	116.95	-32.18	AVG
0.0341	0°	65.38	23.41	88.79	136.95	-48.16	PEAK
0.5730	0°	18.72	20.03	38.75	72.44	-33.69	QP
1.7541	0°	18.95	19.52	38.47	69.54	-31.07	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0094	90°	76.35	24.30	100.65	128.13	-27.48	AVG
0.0094	90°	82.36	24.30	106.66	148.13	-41.47	PEAK
0.0262	90°	56.38	23.91	80.29	119.24	-38.95	AVG
0.0262	90°	59.35	23.91	83.26	139.24	-55.98	PEAK
0.0354	90°	57.35	23.32	80.67	116.62	-35.95	AVG
0.0354	90°	58.35	23.32	81.67	136.62	-54.95	PEAK
0.0471	90°	59.35	22.58	81.93	114.14	-32.21	AVG
0.0471	90°	63.35	22.58	85.93	134.14	-48.21	PEAK
0.4935	90°	17.45	19.82	37.27	73.74	-36.47	QP
1.7174	90°	18.63	19.53	38.16	69.54	-31.38	QP

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.




4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHZ)

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.




Test Mode:	TX B MODE CHANNEL 01
------------	----------------------

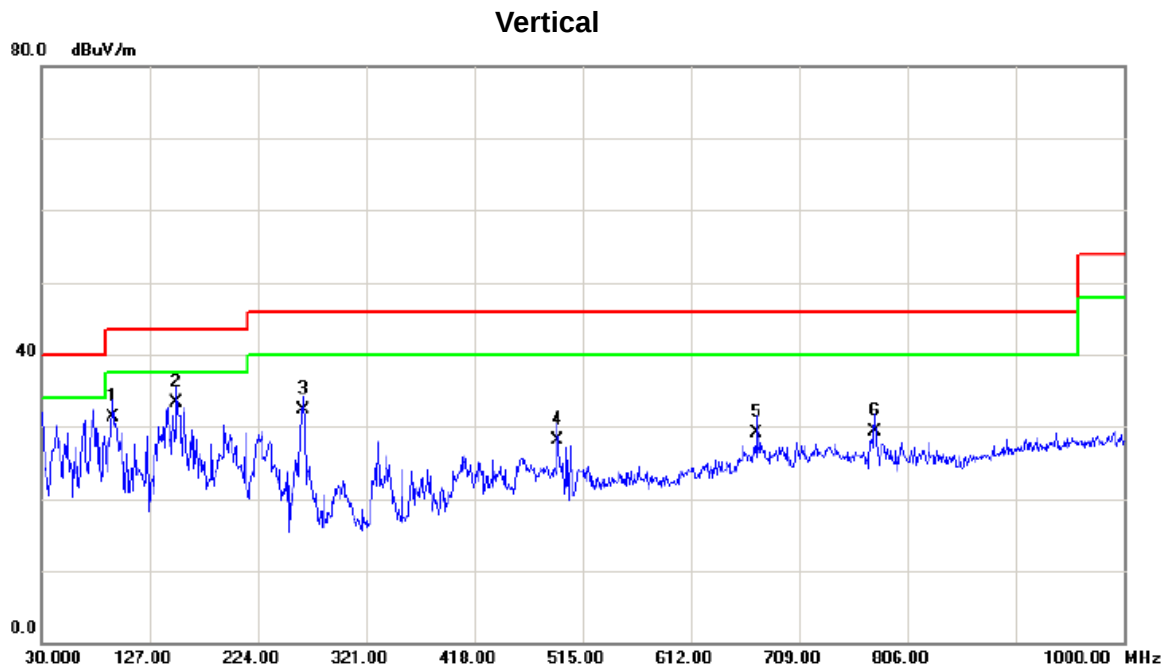

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		94.0200	48.65	-17.43	31.22	43.50	-12.28	QP	
2	*	151.2500	47.02	-13.72	33.30	43.50	-10.20	QP	
3		264.7400	46.55	-14.34	32.21	46.00	-13.79	QP	
4		492.6900	38.22	-10.13	28.09	46.00	-17.91	QP	
5		671.1700	34.37	-5.24	29.13	46.00	-16.87	QP	
6		776.9000	33.25	-3.94	29.31	46.00	-16.69	QP	




Test Mode:	TX B MODE CHANNEL 01
------------	----------------------

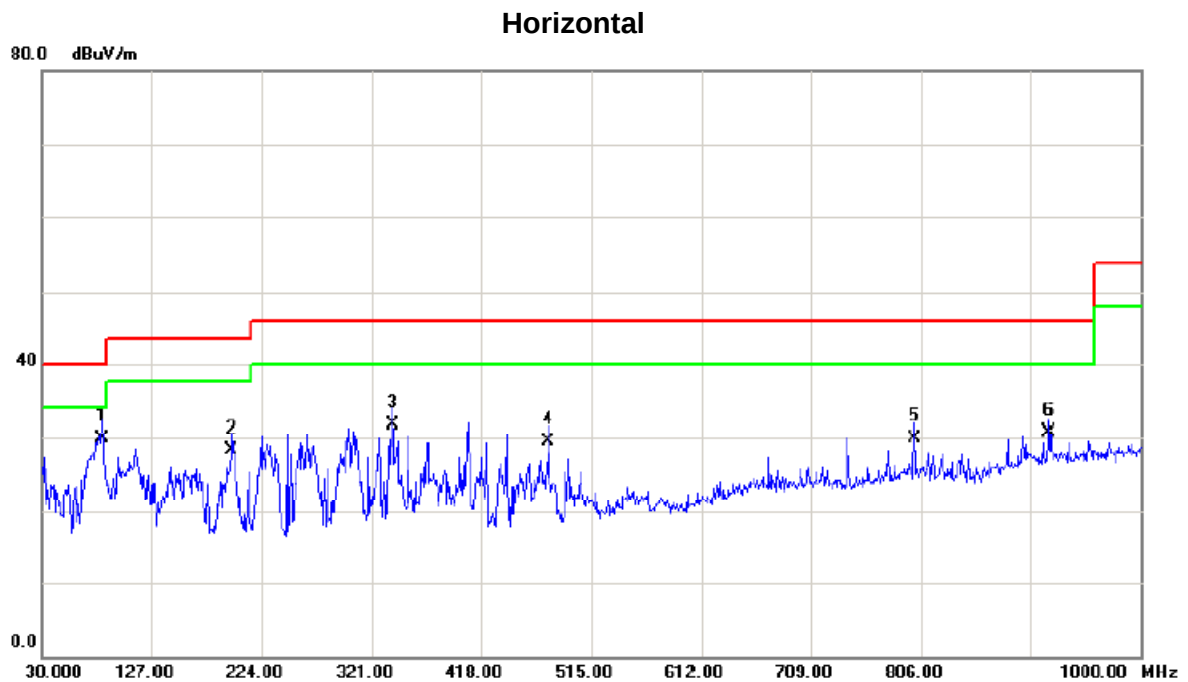

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	83.3500	47.69	-17.75	29.94	40.00	-10.06	QP	
2		197.8100	43.27	-15.00	28.27	43.50	-15.23	QP	
3		339.4300	43.05	-11.42	31.63	46.00	-14.37	QP	
4		477.1700	39.27	-9.69	29.58	46.00	-16.42	QP	
5		800.1800	33.09	-3.11	29.98	46.00	-16.02	QP	
6		919.4900	31.65	-0.97	30.68	46.00	-15.32	QP	



Test Mode:	TX B MODE CHANNEL 06
------------	----------------------

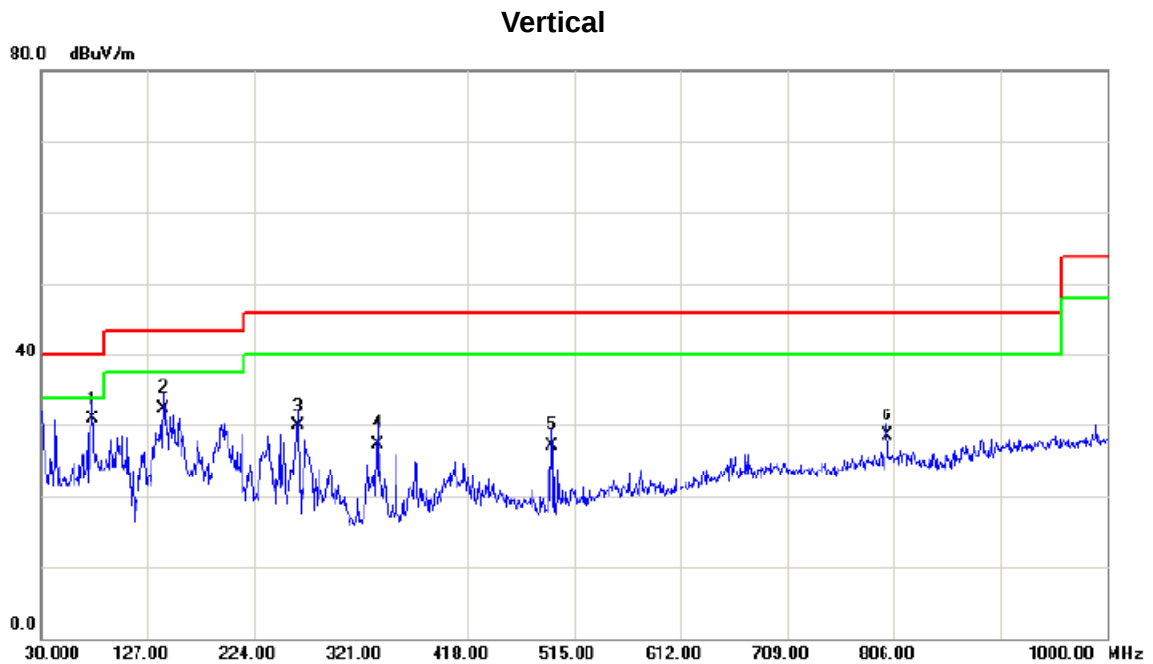


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	77.5300	47.96	-17.13	30.83	40.00	-9.17	QP	
2		141.5500	46.32	-13.78	32.54	43.50	-10.96	QP	
3		264.7400	44.25	-14.34	29.91	46.00	-16.09	QP	
4		337.4900	38.79	-11.41	27.38	46.00	-18.62	QP	
5		494.6300	37.23	-10.18	27.05	46.00	-18.95	QP	
6		800.1800	31.57	3.11	28.46	46.00	17.54	QP	



Test Mode:	TX B MODE CHANNEL 06
------------	----------------------


Horizontal

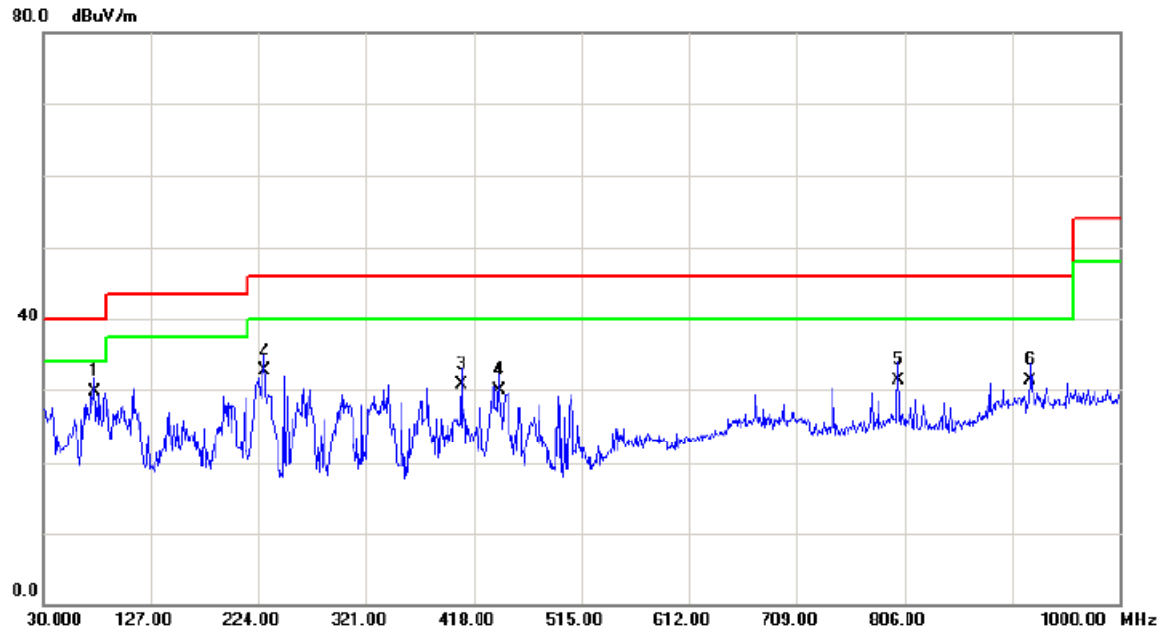

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	77.5300	46.78	-17.13	29.65	40.00	-10.35	QP	
2		229.8200	47.21	-14.49	32.72	46.00	-13.28	QP	
3		406.3600	40.46	-9.75	30.71	46.00	-15.29	QP	
4		441.2800	39.02	-9.08	29.94	46.00	-16.06	QP	
5		800.1800	34.38	-3.11	31.27	46.00	-14.73	QP	
6		919.4900	32.35	-0.97	31.38	46.00	-14.62	QP	



Test Mode:	TX B MODE CHANNEL 11
------------	----------------------

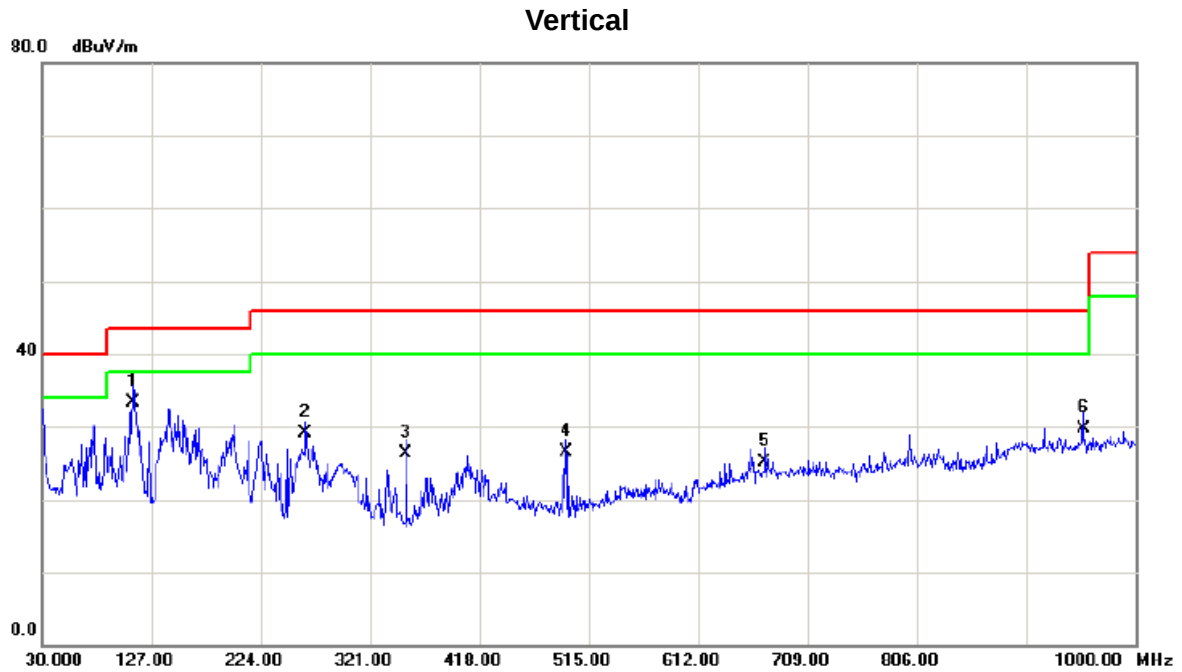


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	110.5100	47.96	-14.69	33.27	43.50	-10.23	QP	
2		263.7700	43.58	-14.42	29.16	46.00	-16.84	QP	
3		353.0100	37.69	-11.37	26.32	46.00	-19.68	QP	
4		494.6300	36.64	-10.18	26.46	46.00	-19.54	QP	
5		671.1700	30.35	-5.24	25.11	46.00	-20.89	QP	
6		953.4400	30.27	-0.48	29.79	46.00	-16.21	QP	



Test Mode: TX B MODE CHANNEL 11

Horizontal

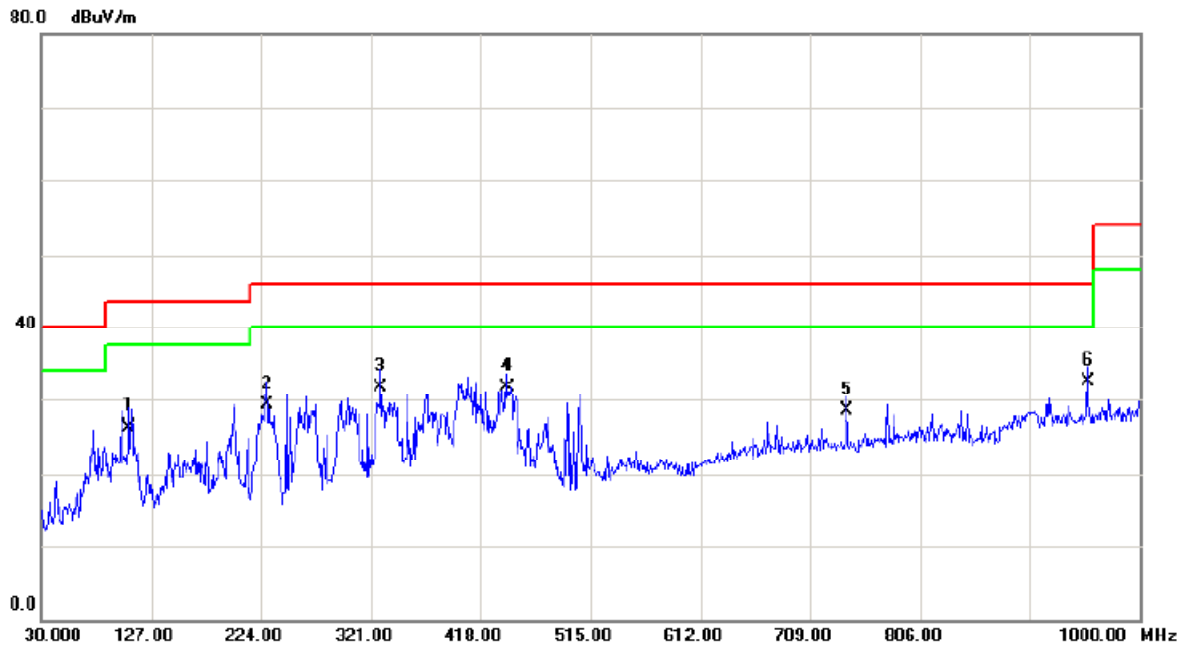

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		108.5700	41.35	-14.95	26.40	43.50	-17.10	QP	
2		229.8200	43.76	-14.49	29.27	46.00	-16.73	QP	
3		329.7300	43.16	-11.38	31.78	46.00	-14.22	QP	
4		441.2800	40.85	-9.08	31.77	46.00	-14.23	QP	
5		741.9800	33.41	-4.89	28.52	46.00	-17.48	QP	
6	*	953.4400	32.90	-0.48	32.42	46.00	-13.58	QP	



4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



Test Mode : TX B MODE 2412MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2372.90	V	30.60	19.44	34.04	64.64	53.48	74.00	54.00	X/E
2411.20	V	81.77	79.65	34.16	115.93	113.81			X/F
4823.79	V	42.60	37.90	6.43	49.03	44.33	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	H	23.77	13.86	34.09	57.86	47.95	74.00	54.00	X/E
2411.10	H	73.02	70.77	34.16	107.18	104.93	74.00	54.00	X/F
4824.10	H	45.38	39.70	6.43	51.81	46.13	74.00	54.00	X/H

Test Mode : TX B MODE 2437MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2396.20	V	29.52	19.88	34.10	63.62	53.98	74.00	54.00	X/E
2437.50	V	79.10	76.13	34.23	113.33	110.36			X/F
2483.50	V	27.95	18.53	34.37	62.32	52.90	74.00	54.00	X/E
4873.83	V	46.12	39.60	6.58	52.70	46.18	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2396.50	H	27.46	19.30	34.11	61.57	53.41	74.00	54.00	X/E
2436.10	H	78.67	75.86	34.23	112.90	110.09			X/F
2483.50	H	28.35	15.13	34.37	62.72	49.50	74.00	54.00	X/E
4874.00	H	44.27	35.69	6.58	50.85	42.27	74.00	54.00	X/H



Test Mode : TX B MODE 2462MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2461.40	V	82.83	80.56	34.31	117.14	114.87			X/F
2483.50	V	28.95	19.19	34.37	63.32	53.56	74.00	54.00	X/E
4923.75	V	42.31	35.79	6.72	49.03	42.51	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2461.10	H	74.89	72.75	34.31	109.20	107.06			X/F
2483.50	H	25.28	15.14	34.37	59.65	49.51	74.00	54.00	X/E
4924.00	H	43.57	35.16	6.72	50.29	41.88	74.00	54.00	X/H





TX CH01 (Above 1000 MHz, Vertical)

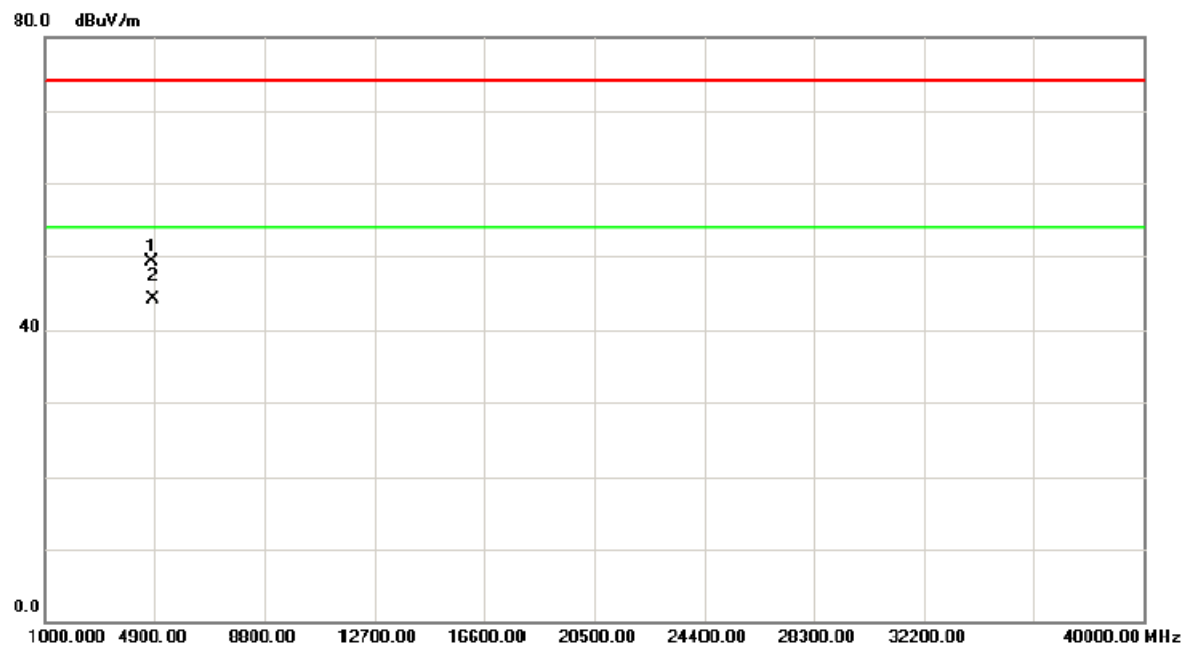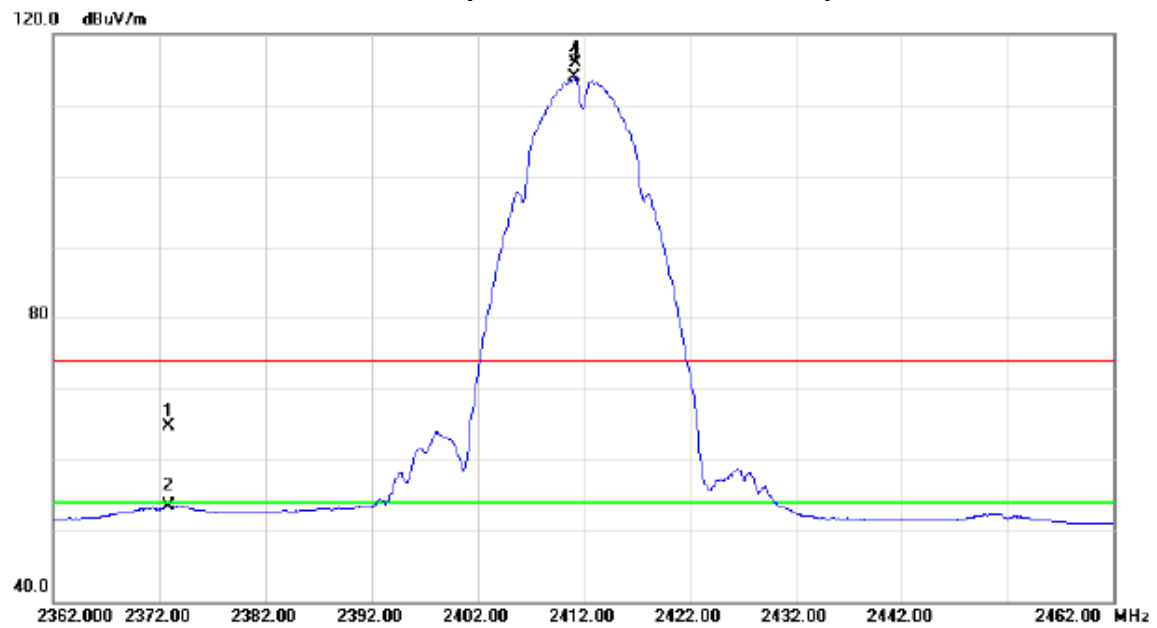





TX CH01 (Above 1000 MHz, Horizontal)

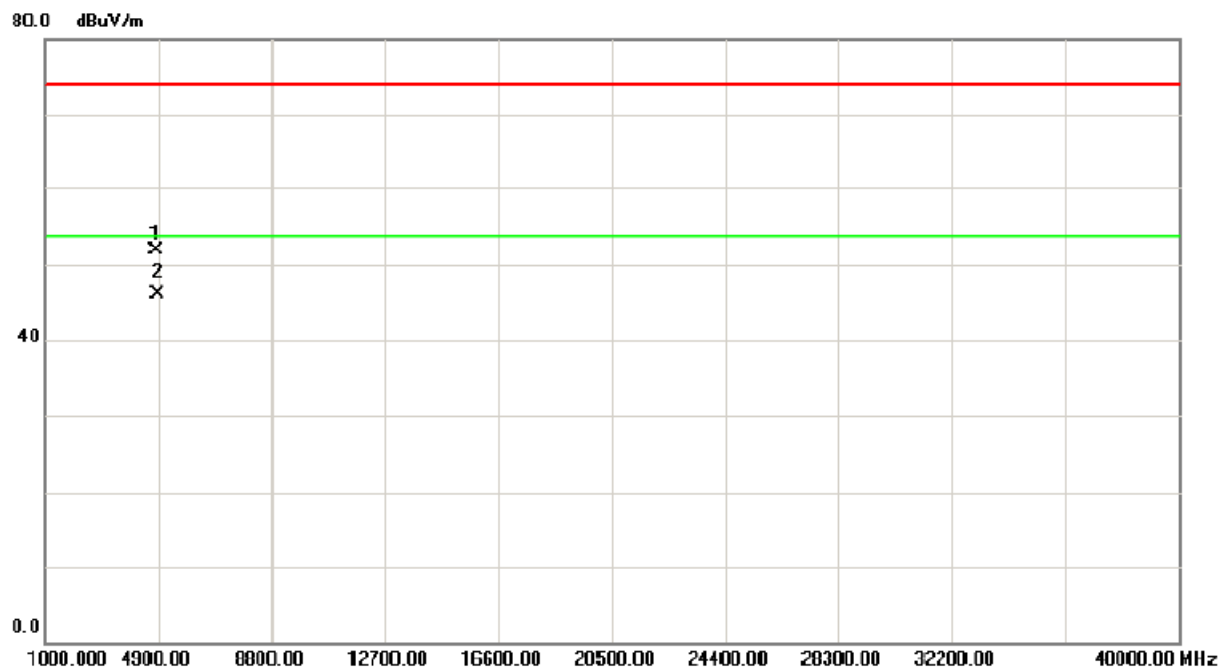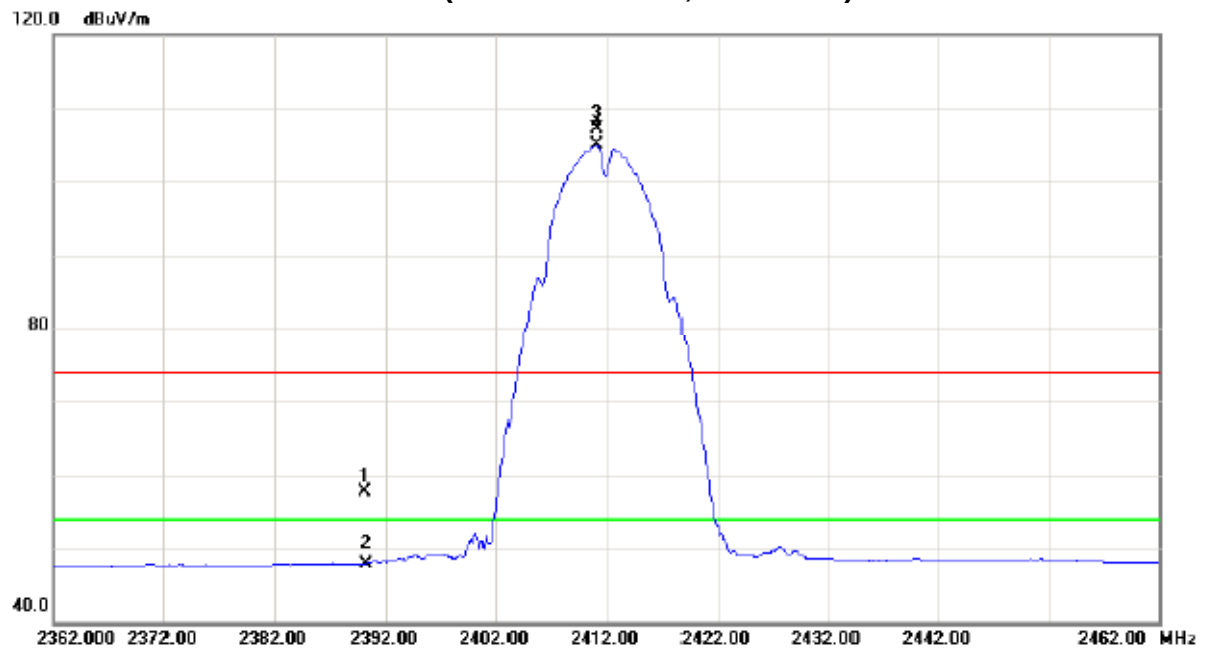





TX CH06 (Above 1000 MHz, Vertical)

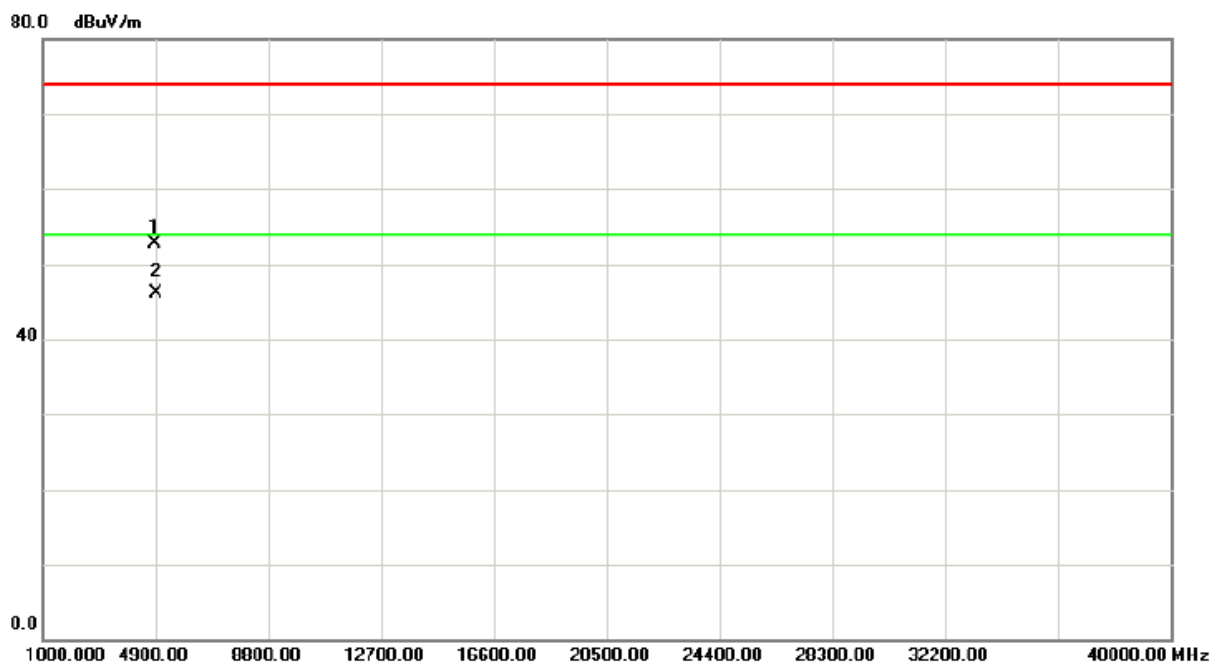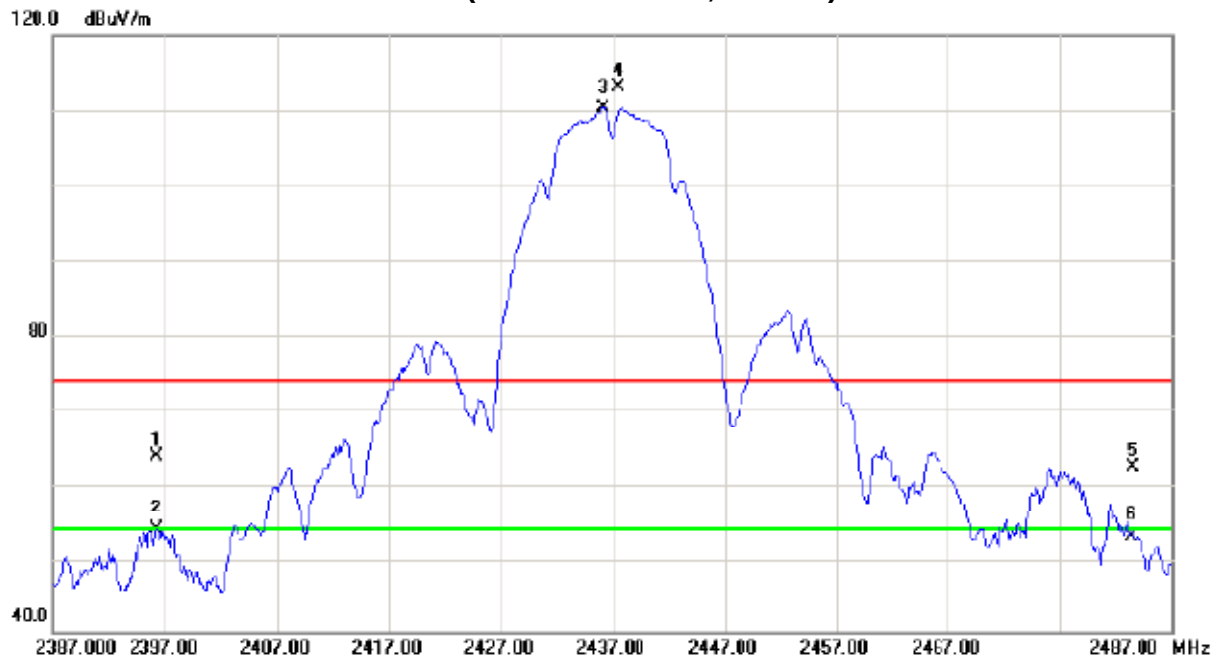





TX CH06 (Above 1000 MHz, Horizontal)

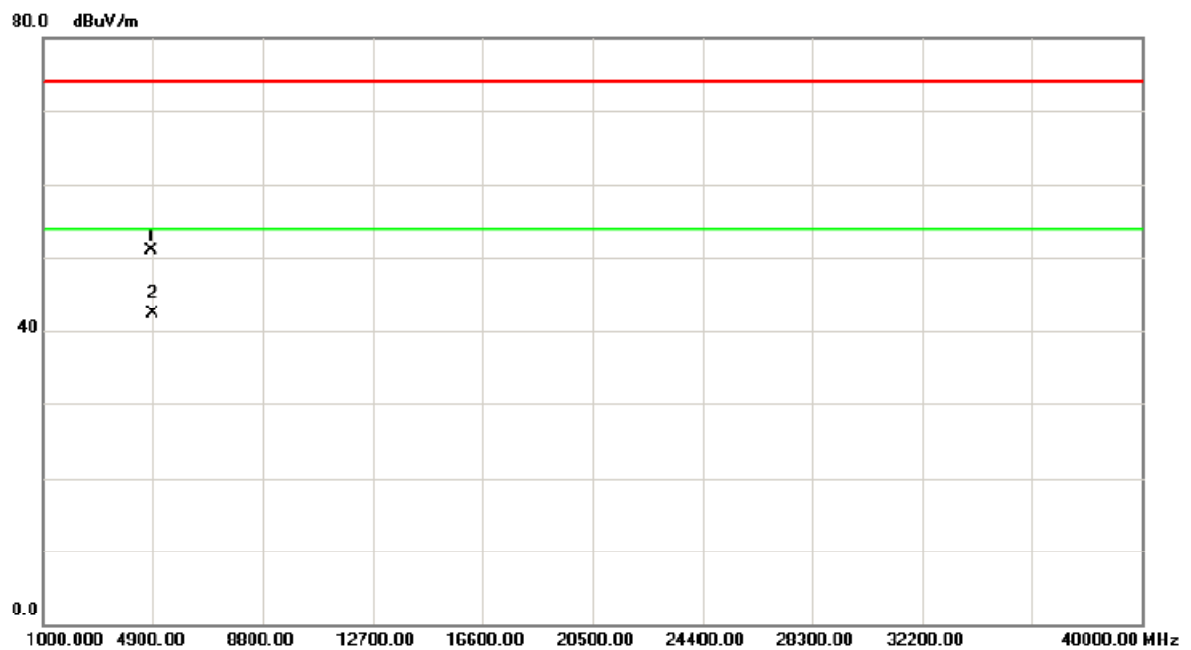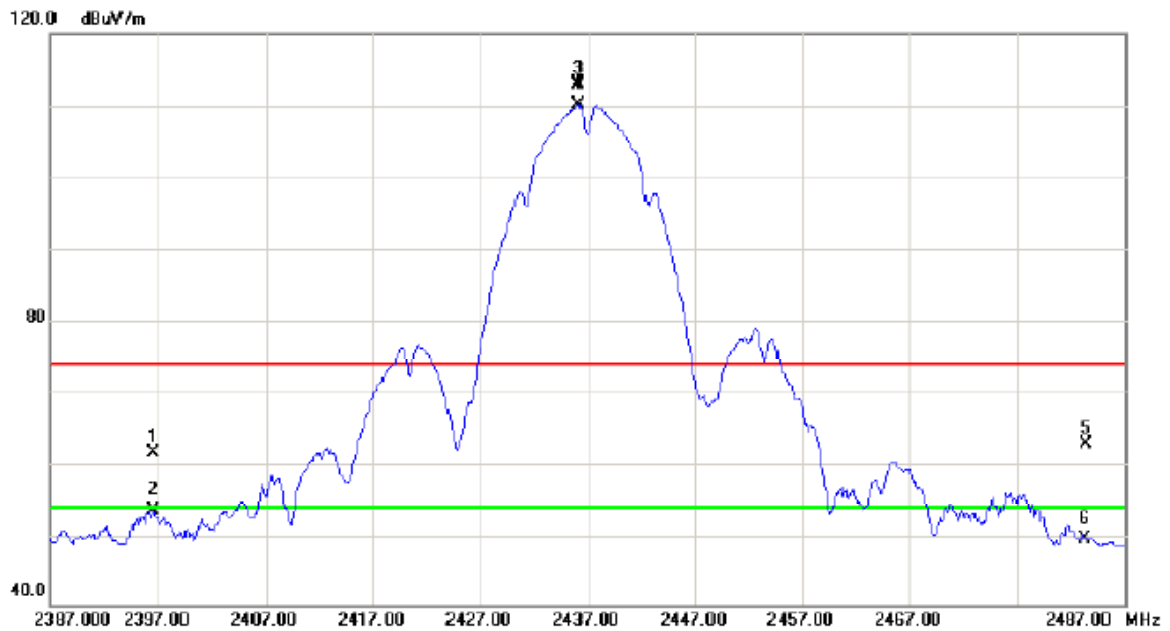




TX CH11 (Above 1000 MHz, Vertical)

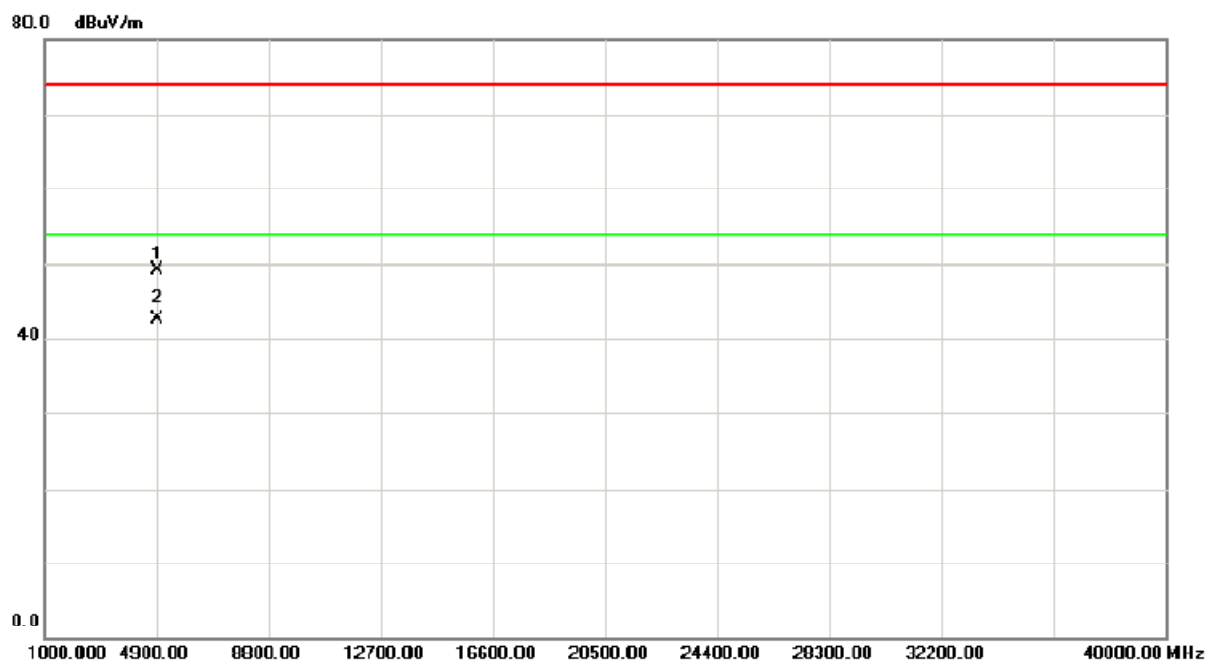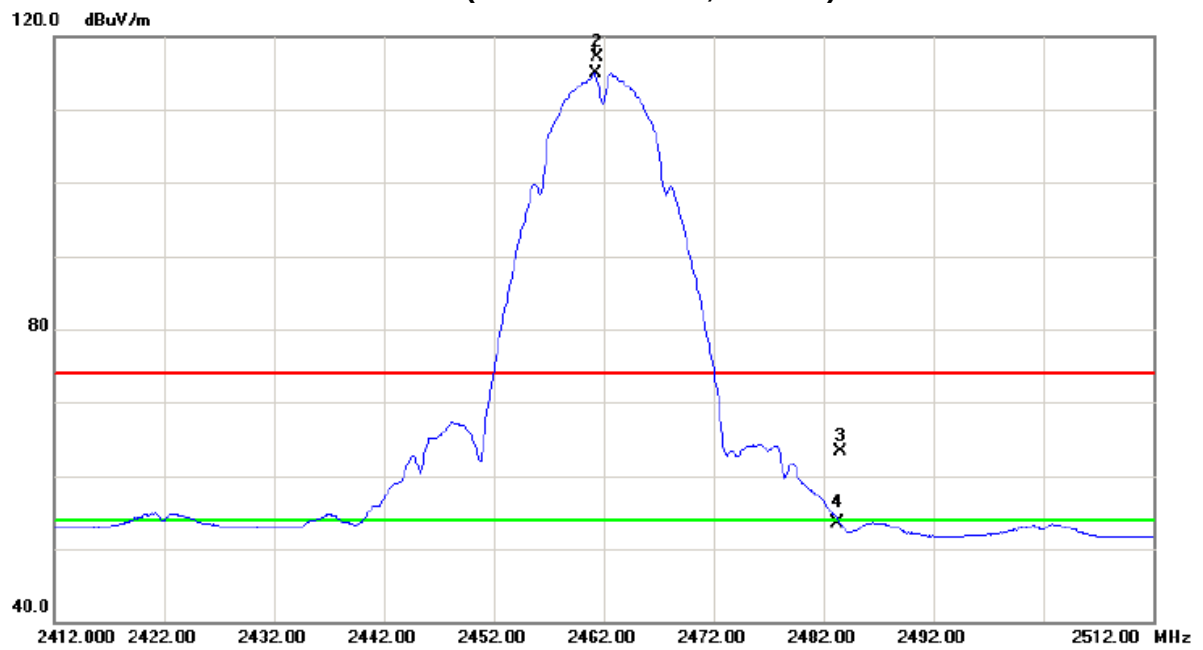




TX CH11 (Above 1000 MHz, Horizontal)

120.0 dBuV/m

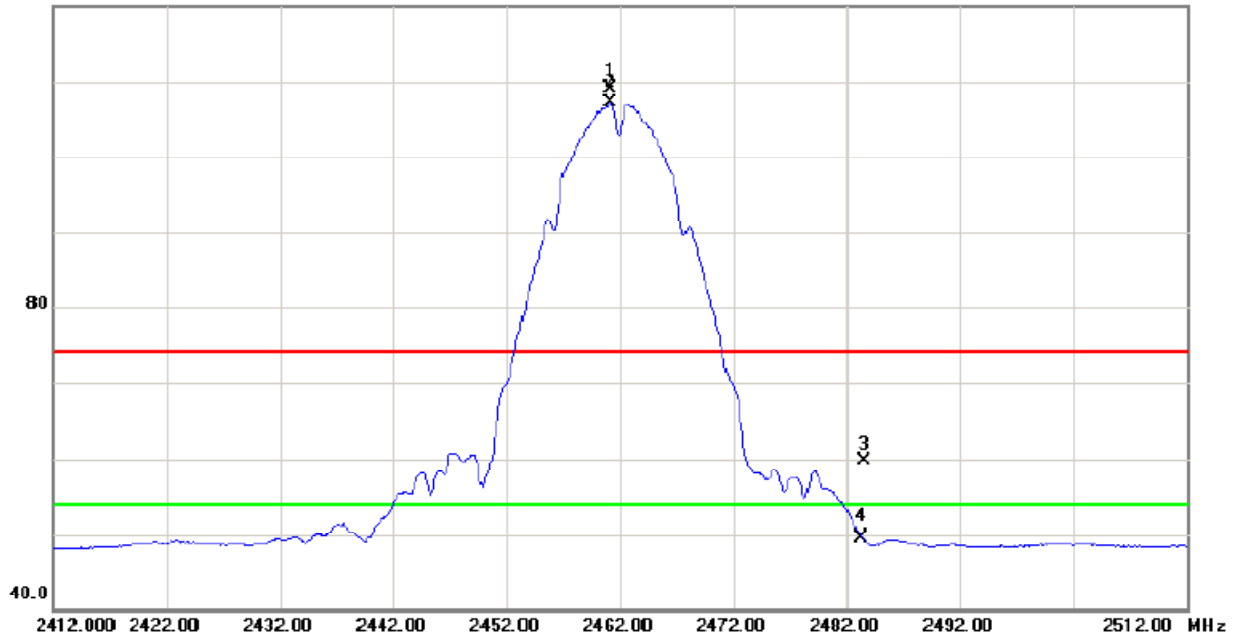

80.0 dBuV/m

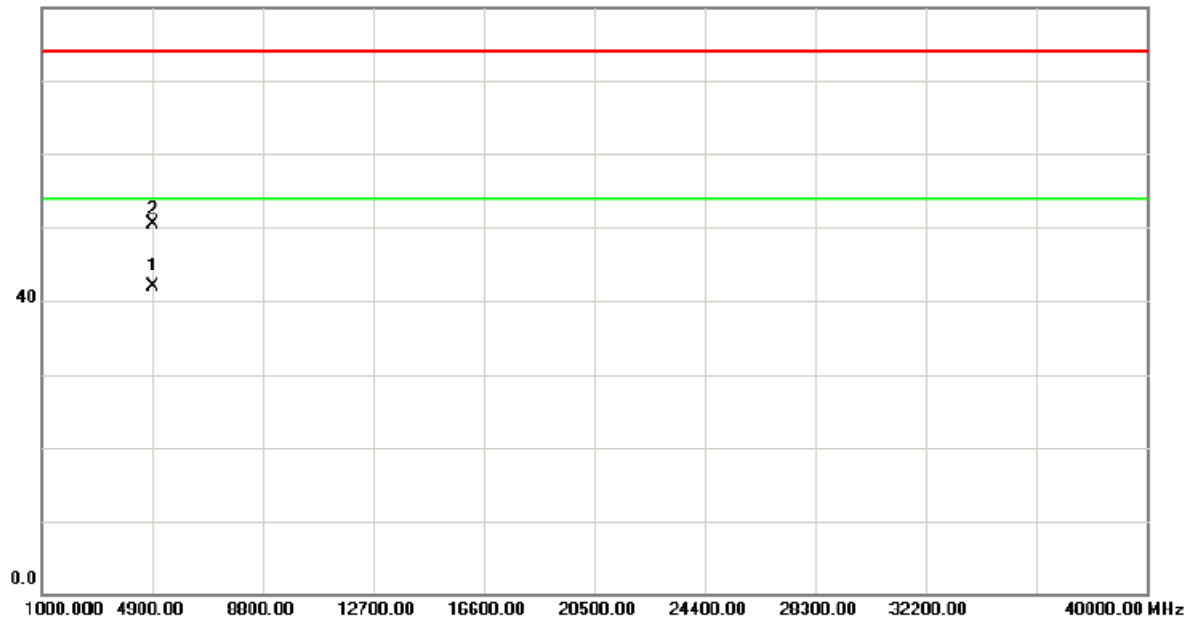



Test Mode : TX G MODE 2412MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	31.56	18.97	34.09	65.65	53.06	74.00	54.00	X/E
2418.10	V	74.45	67.59	34.18	108.63	101.77			X/F
4824.00	V	47.38	39.60	6.43	53.81	46.03	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	H	25.44	14.65	34.09	59.53	48.74	74.00	54.00	X/E
2405.20	H	66.91	58.15	34.14	101.05	92.29			X/F
4823.85	H	45.76	37.09	6.43	52.19	43.52	74.00	54.00	X/H

Test Mode : TX G MODE 2437MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2400.00	V	28.56	19.80	34.12	62.68	53.92	74.00	54.00	X/E
2442.70	V	82.20	73.45	34.25	116.45	107.70			X/F
4873.79	V	47.83	39.05	6.58	54.41	45.63	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2443.40	H	75.27	67.30	34.25	109.52	101.55			X/F
4874.30	H	45.86	37.65	6.58	52.44	44.23	74.00	54.00	X/H



Test Mode : TX G MODE 2462MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2457.30	V	77.45	68.62	34.29	111.74	102.91			X/F
2483.50	V	32.16	19.40	34.37	66.53	53.77	74.00	54.00	X/E
4924.00	V	43.89	35.71	6.72	50.61	42.43	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2464.90	H	69.99	61.07	34.31	104.30	95.38			X/F
2483.50	H	26.82	15.16	34.37	61.19	49.53	74.00	54.00	X/E
4923.89	H	43.72	36.65	6.72	50.44	43.37	74.00	54.00	X/H





TX CH01 (Above 1000 MHz, Vertical)

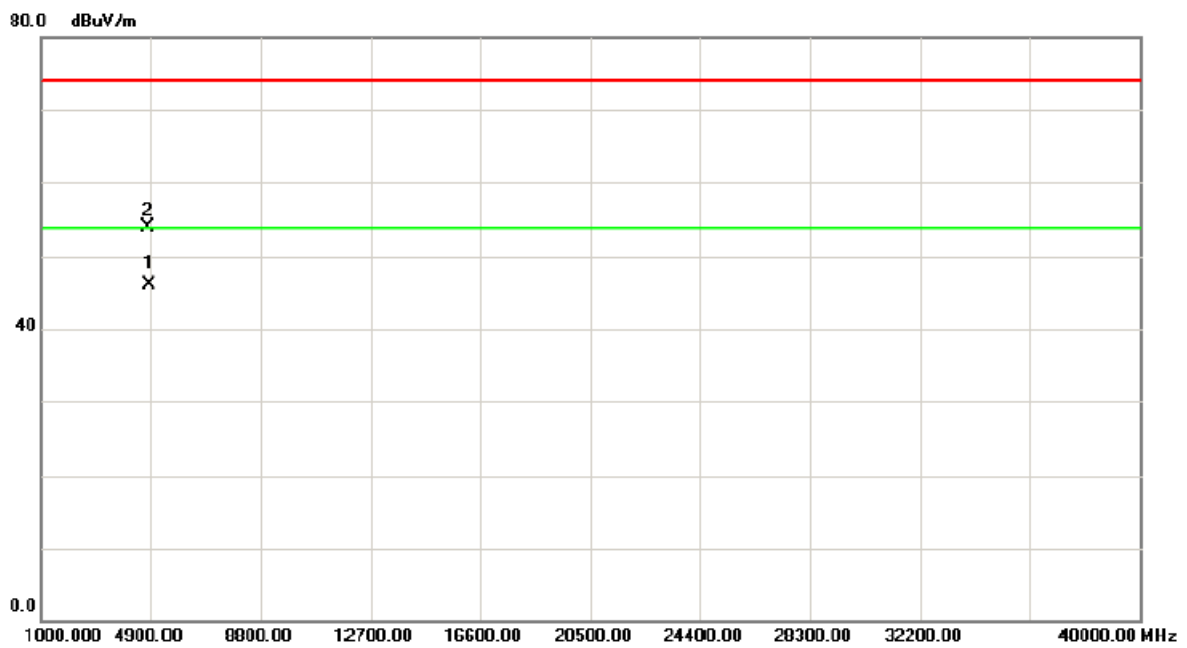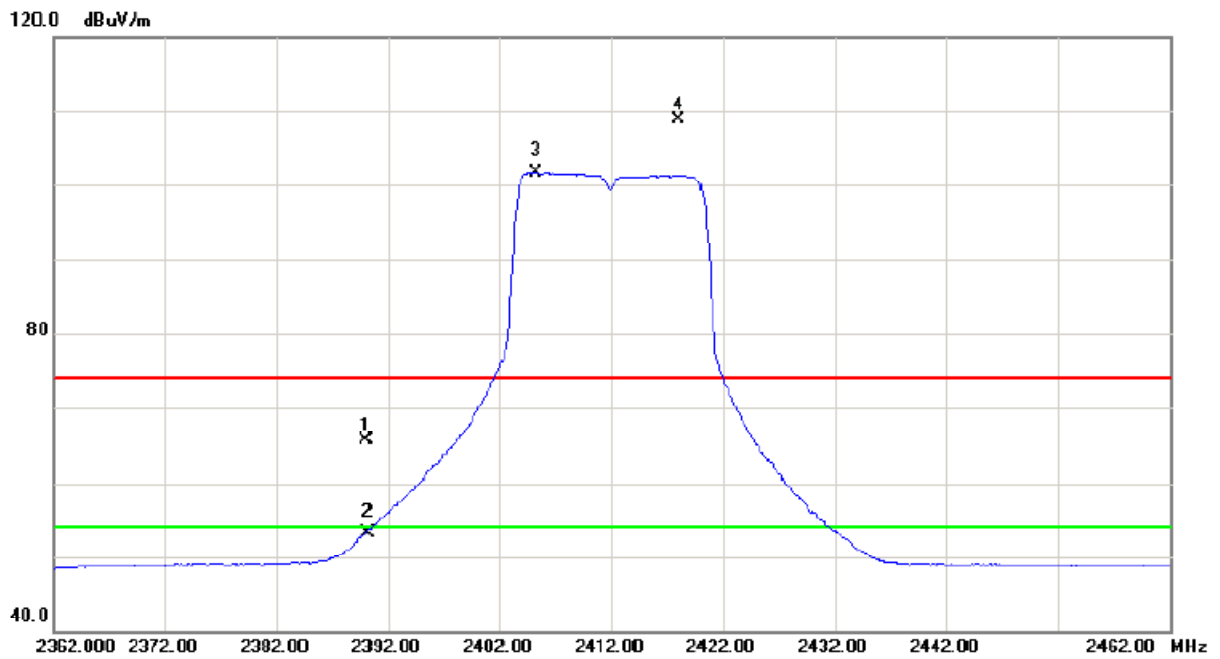





TX CH01 (Above 1000 MHz, Horizontal)

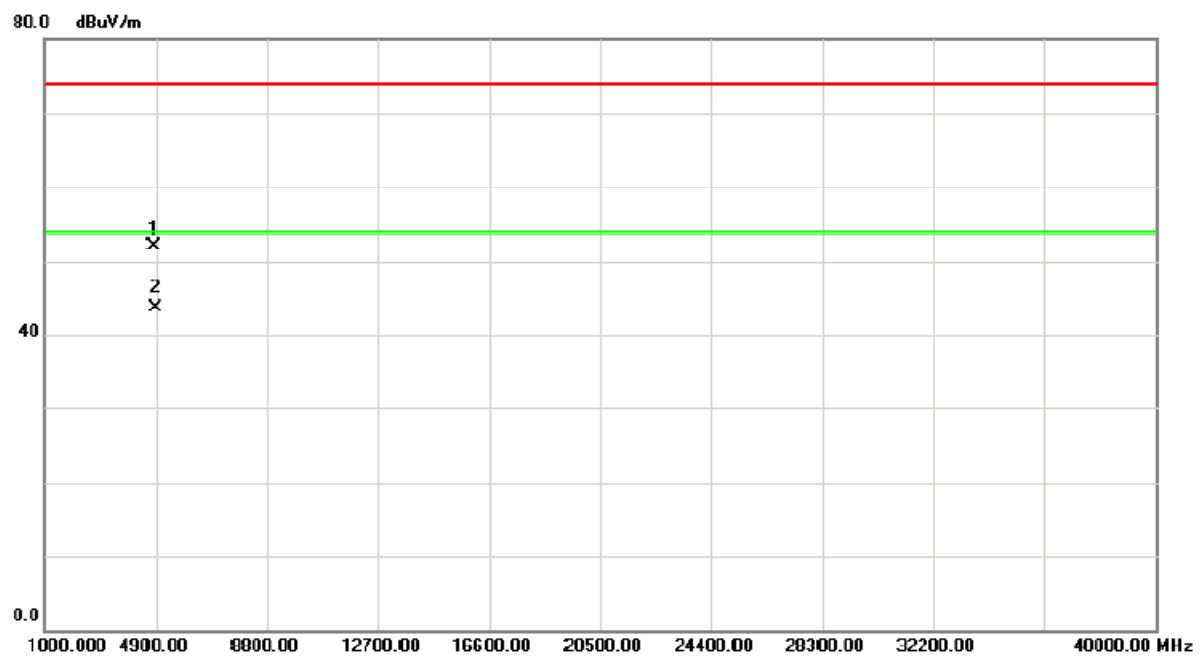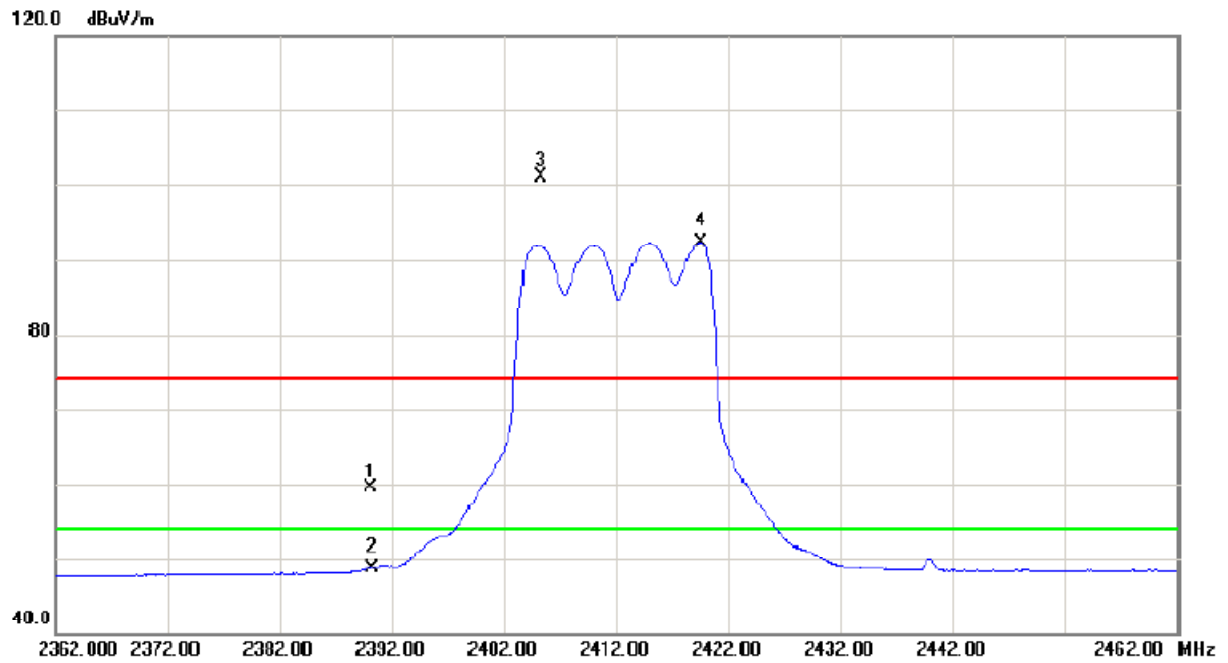





TX CH06 (Above 1000 MHz, Vertical)

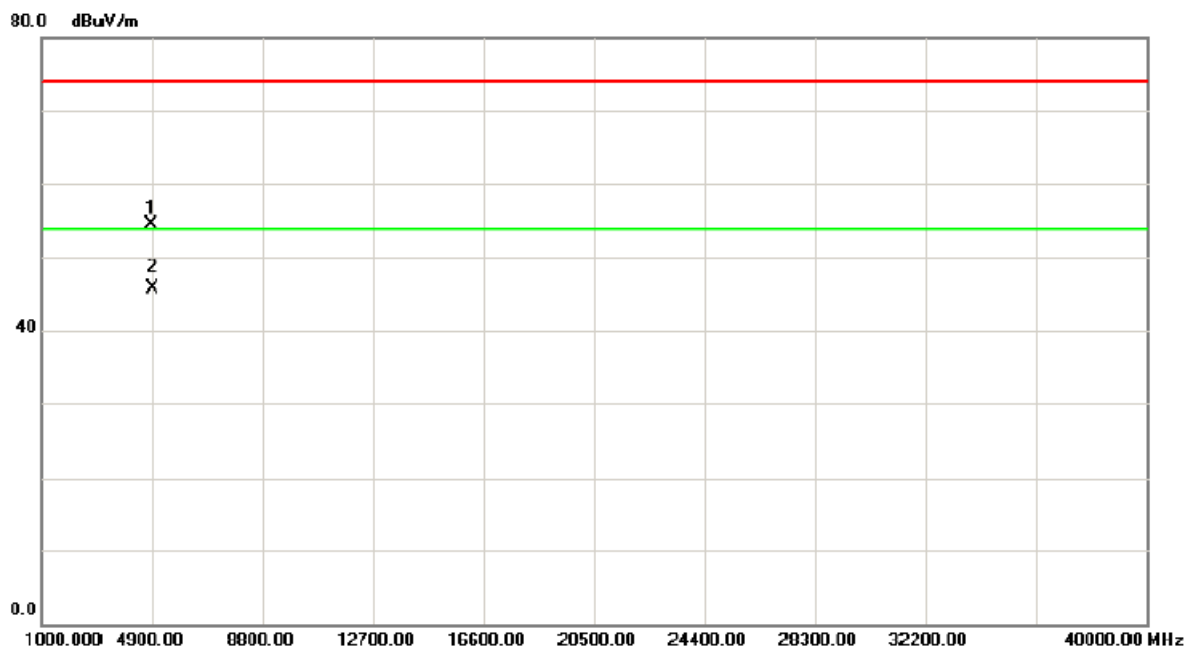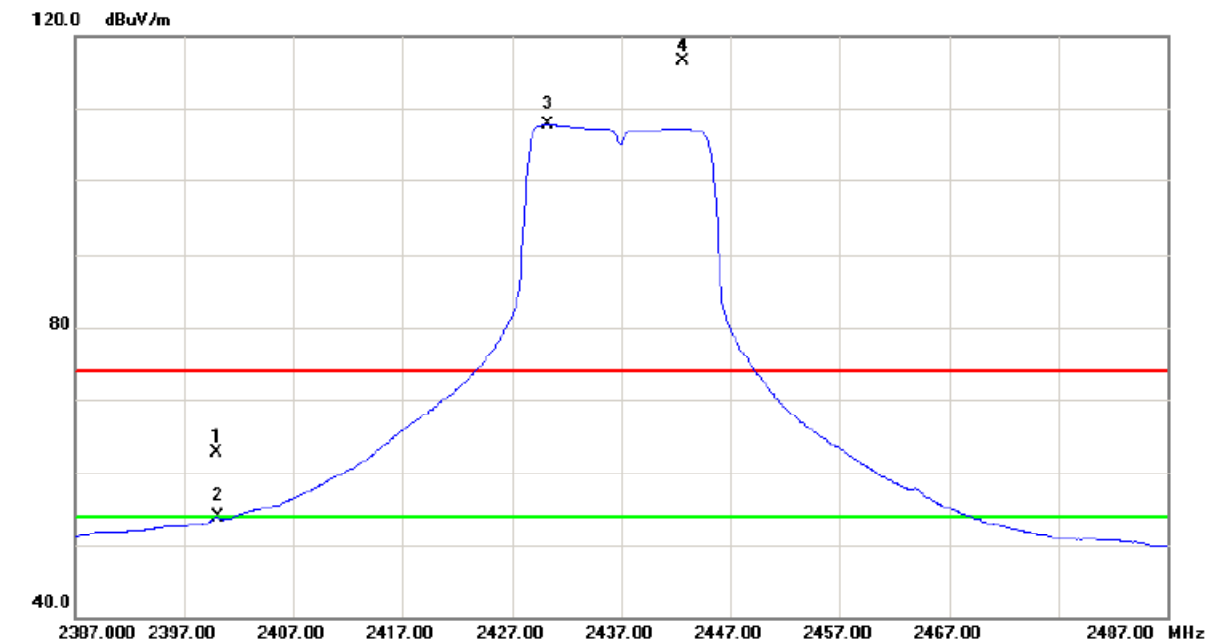





TX CH06 (Above 1000 MHz, Horizontal)

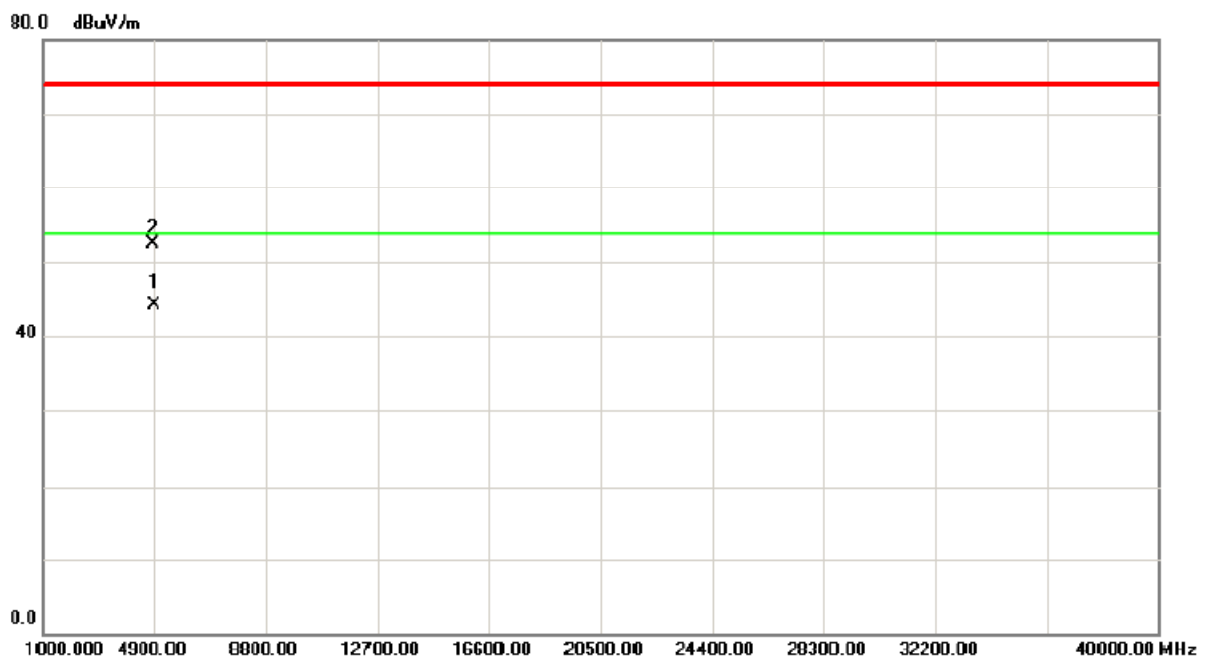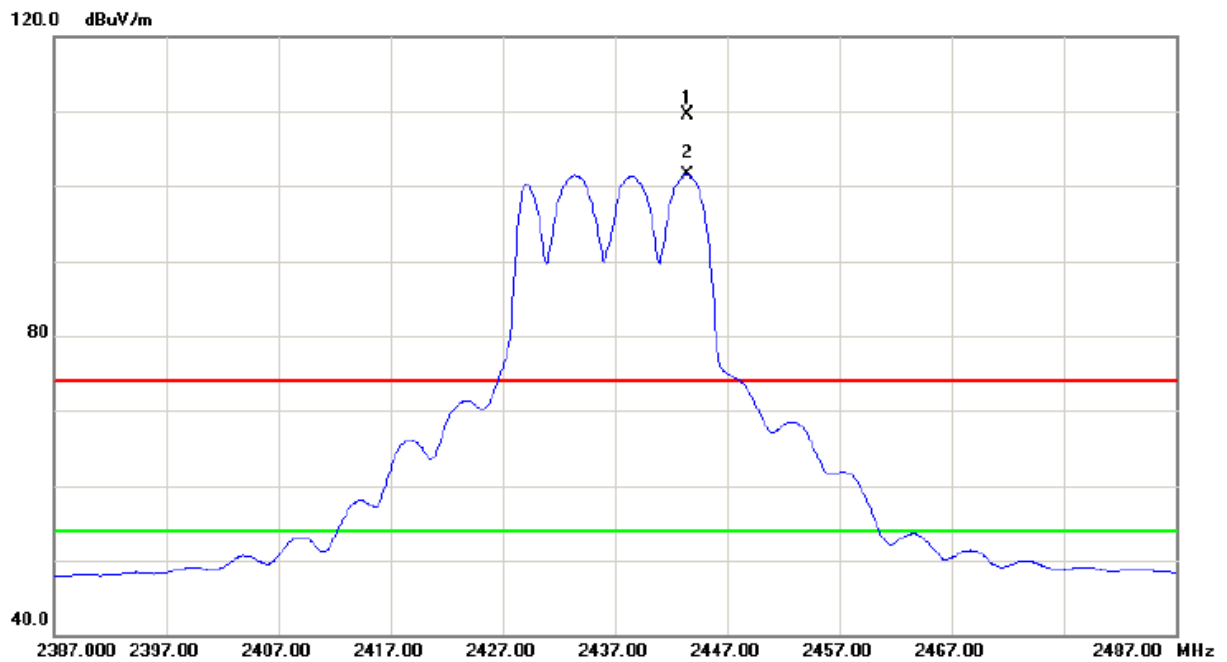





TX CH11 (Above 1000 MHz, Vertical)

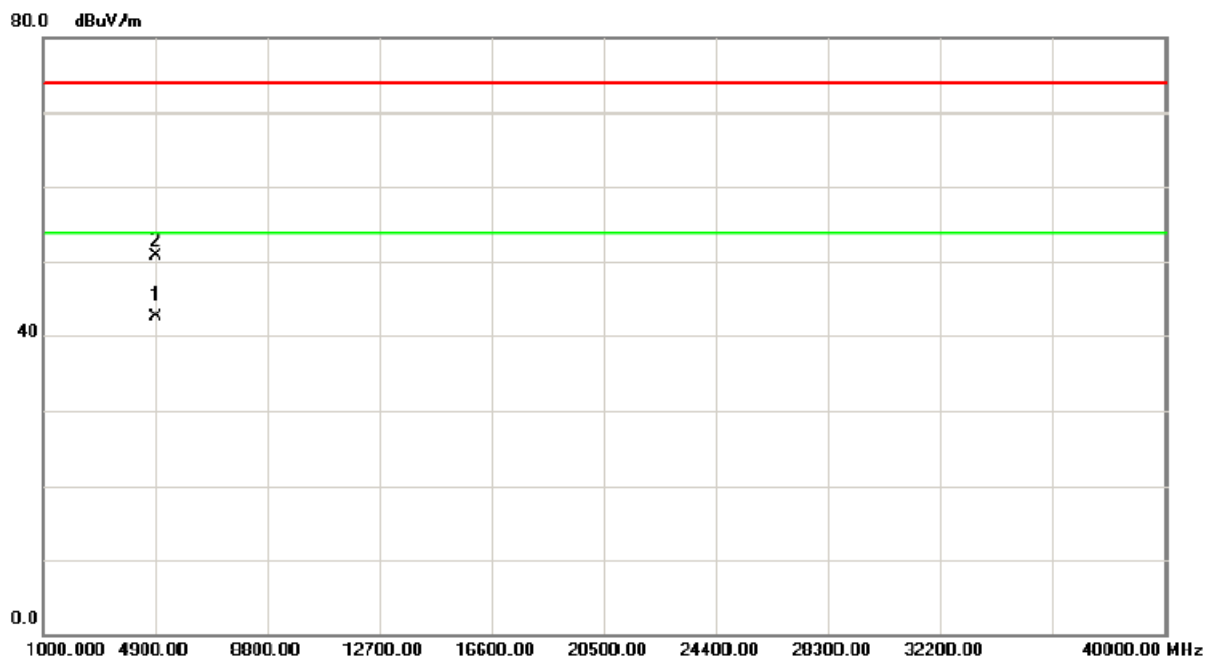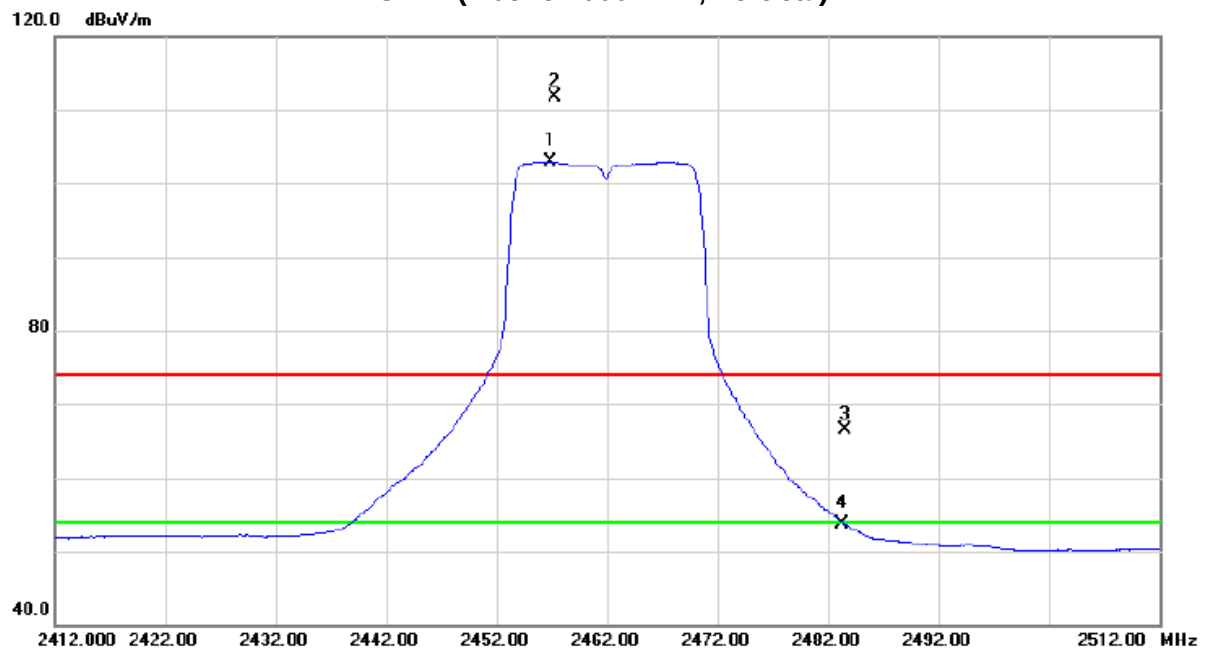



TX CH11 (Above 1000 MHz, Horizontal)

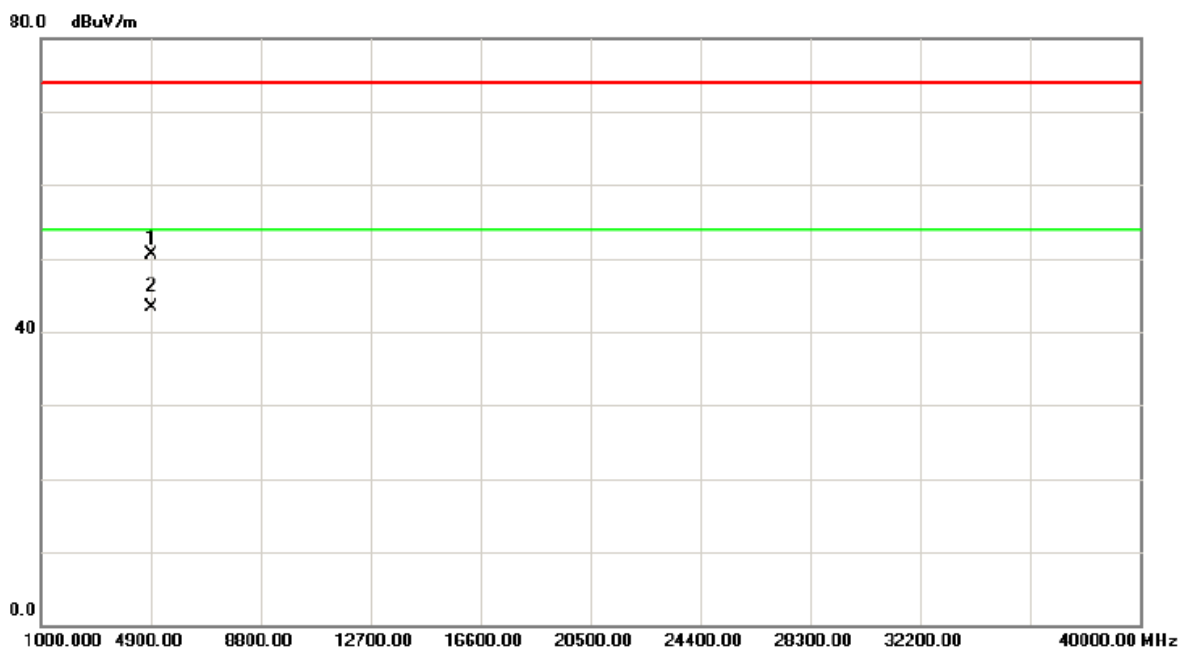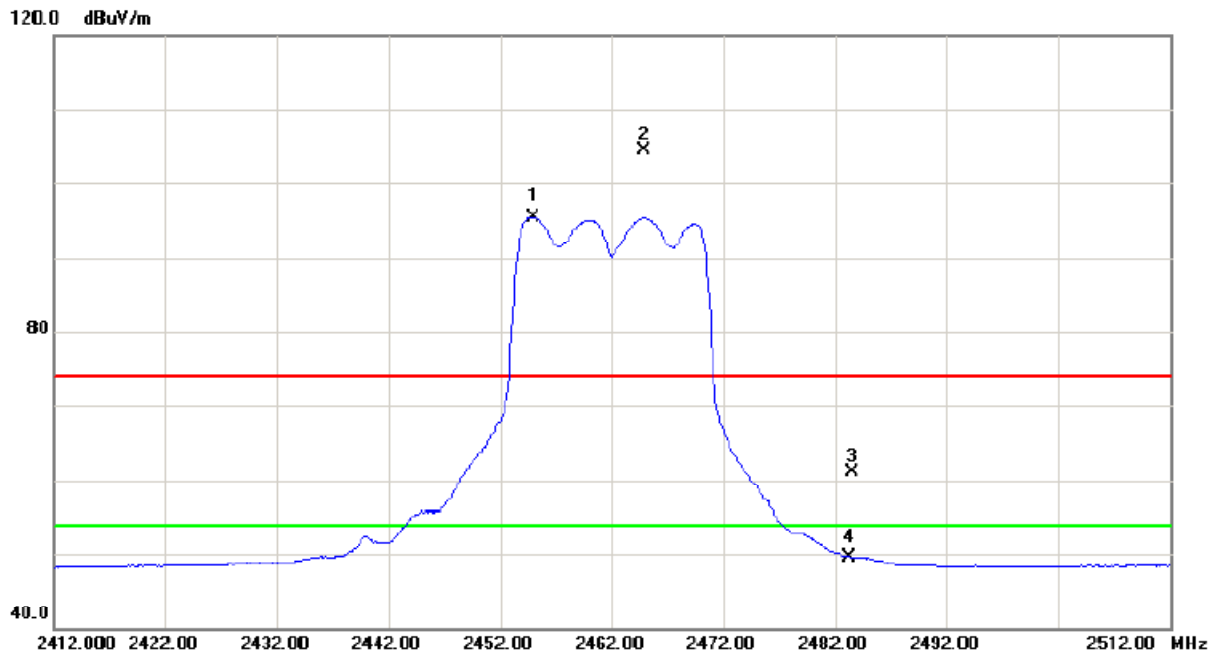



Test Mode : TX N-20M MODE 2412MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	30.83	19.52	34.09	64.92	53.61	74.00	54.00	X/E
2406.40	V	78.05	67.58	34.14	112.19	101.72			X/F
4823.67	V	46.60	38.19	6.43	53.03	44.62	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	H	25.34	14.17	34.09	59.43	48.26	74.00	54.00	X/E
2413.10	H	62.32	53.36	34.16	96.48	87.52			X/F
4824.10	H	47.16	39.70	6.43	53.59	46.13	74.00	54.00	X/H

Test Mode : TX N-20M MODE 2437MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2400.00	V	28.79	19.85	34.12	62.91	53.97	74.00	54.00	X/E
2430.90	V	81.04	70.86	34.21	115.25	105.07			X/F
4874.30	V	46.83	39.05	6.58	53.41	45.63	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2434.00	H	67.89	59.64	34.22	102.11	93.86			X/F
4873.90	H	48.69	39.18	6.58	55.27	45.76	74.00	54.00	X/H



Test Mode : TX N-20M MODE 2462MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2466.50	V	78.66	68.29	34.32	112.98	102.61			X/F
2483.50	V	31.32	19.42	34.37	65.69	53.79	74.00	54.00	X/E
4923.96	V	45.85	38.45	6.72	52.57	45.17	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2467.50	H	64.86	56.12	34.32	99.18	90.44			X/F
2483.50	H	24.38	14.08	34.37	58.75	48.45	74.00	54.00	X/E
4924.10	H	48.09	39.47	6.72	54.81	46.19	74.00	54.00	X/H





TX CH01 (Above 1000 MHz, Vertical)

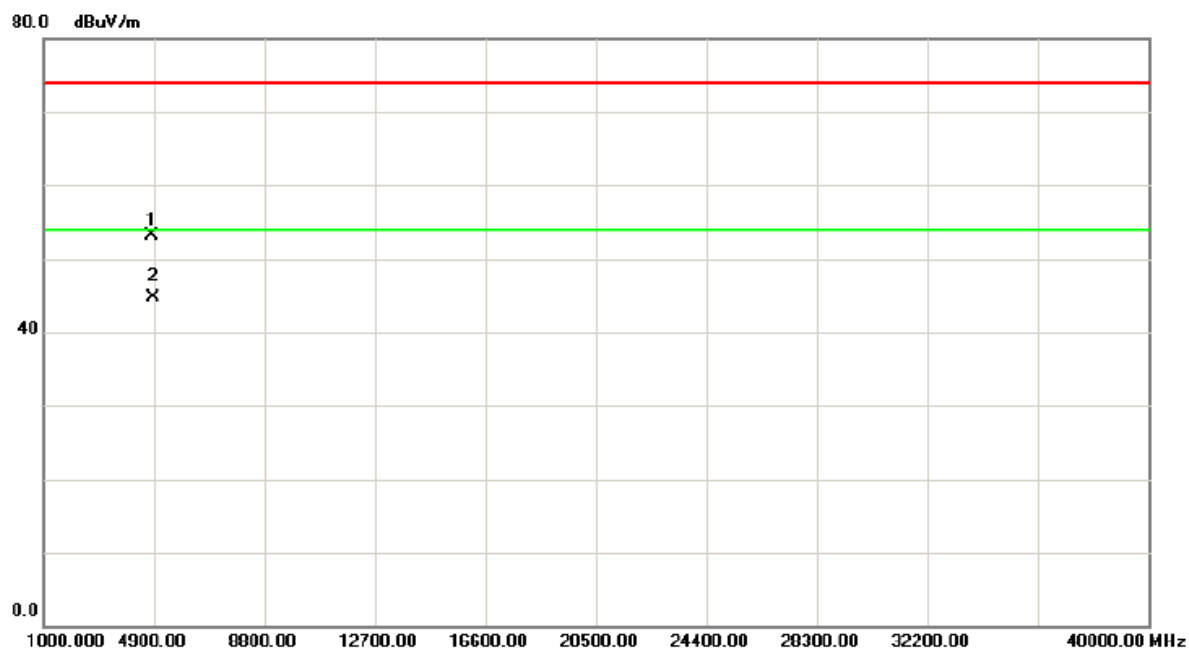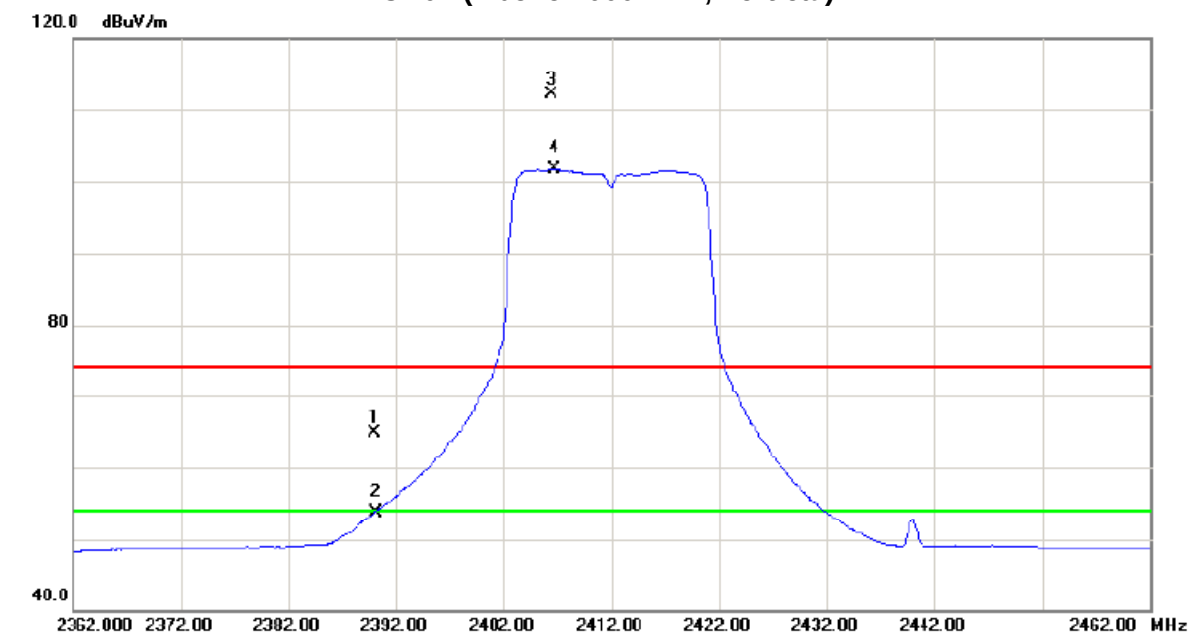





TX CH01 (Above 1000 MHz, Horizontal)

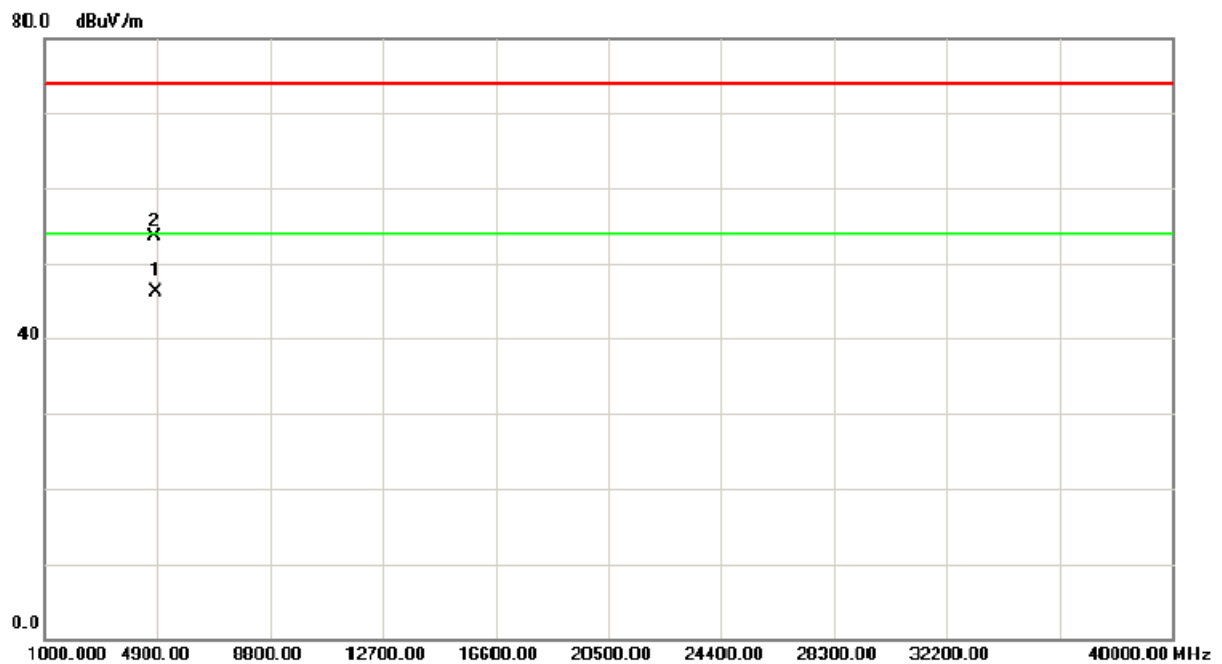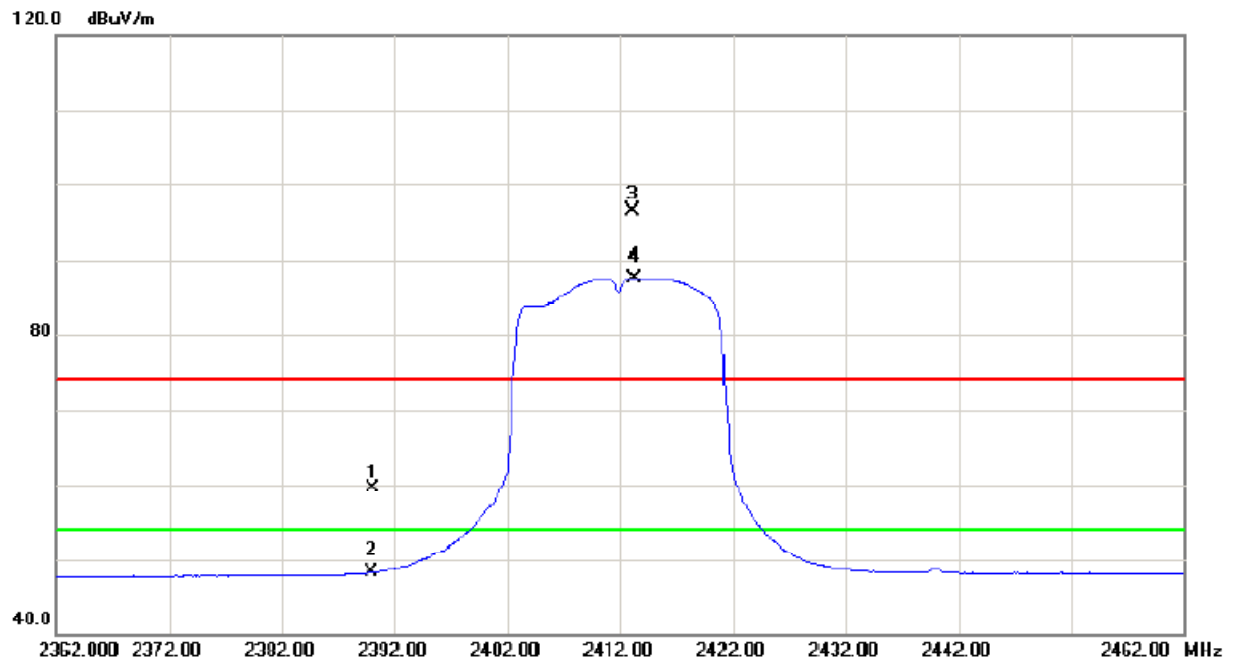





TX CH06 (Above 1000 MHz, Vertical)

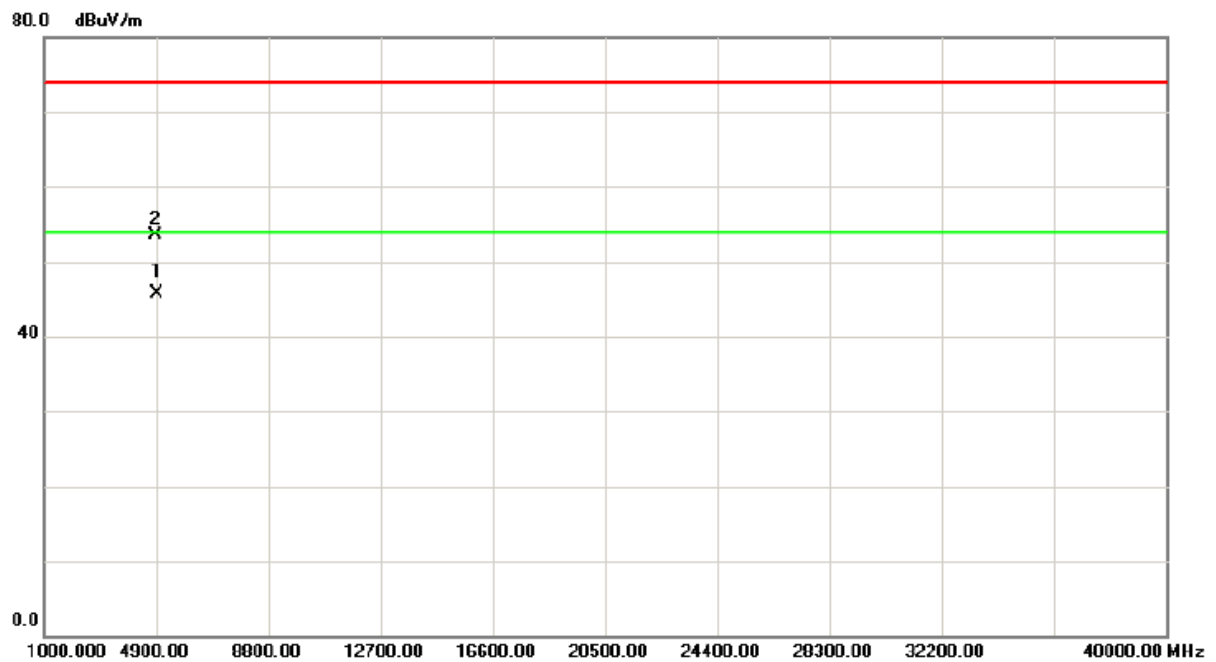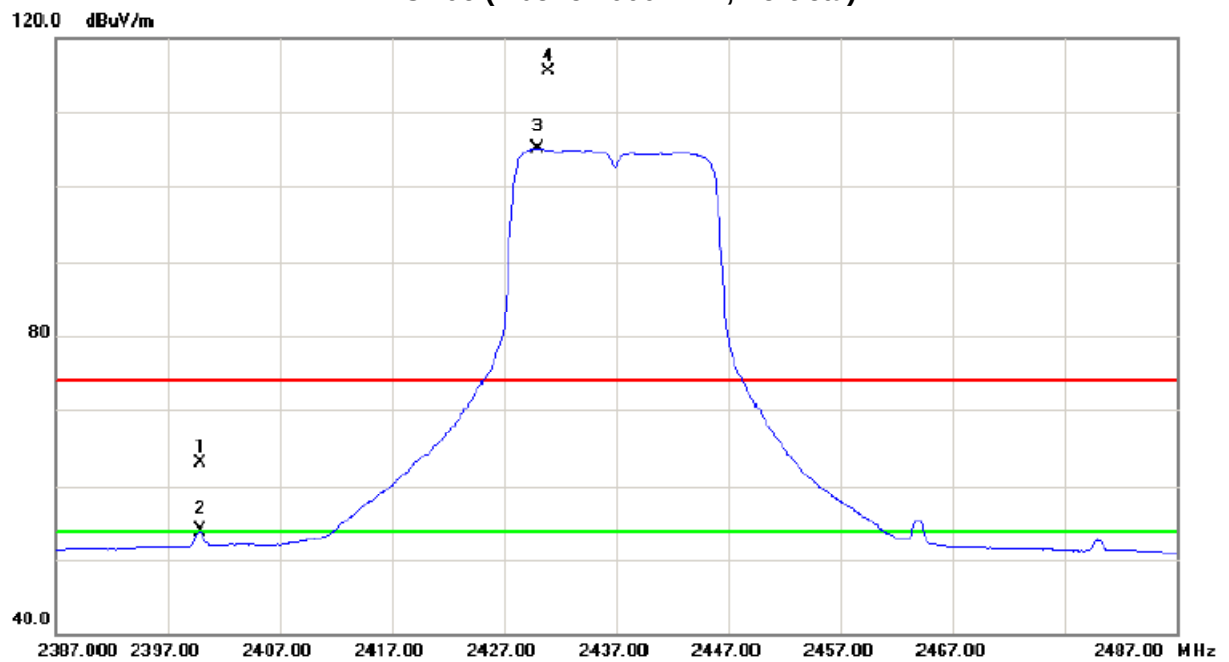





TX CH06 (Above 1000 MHz, Horizontal)

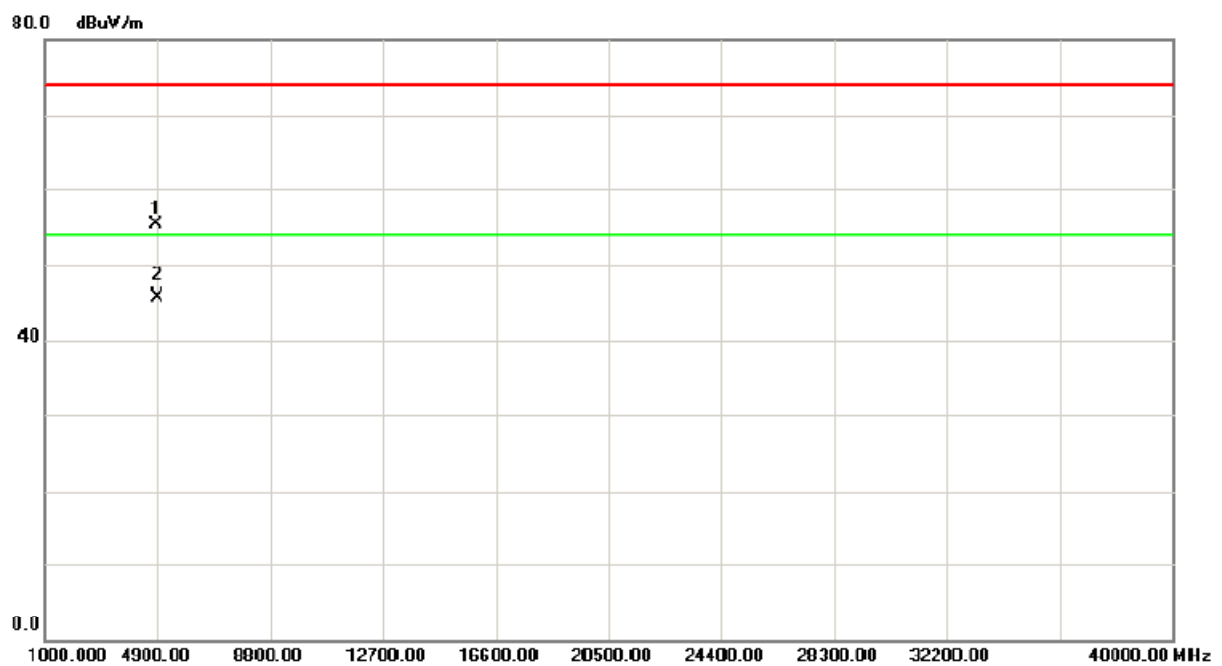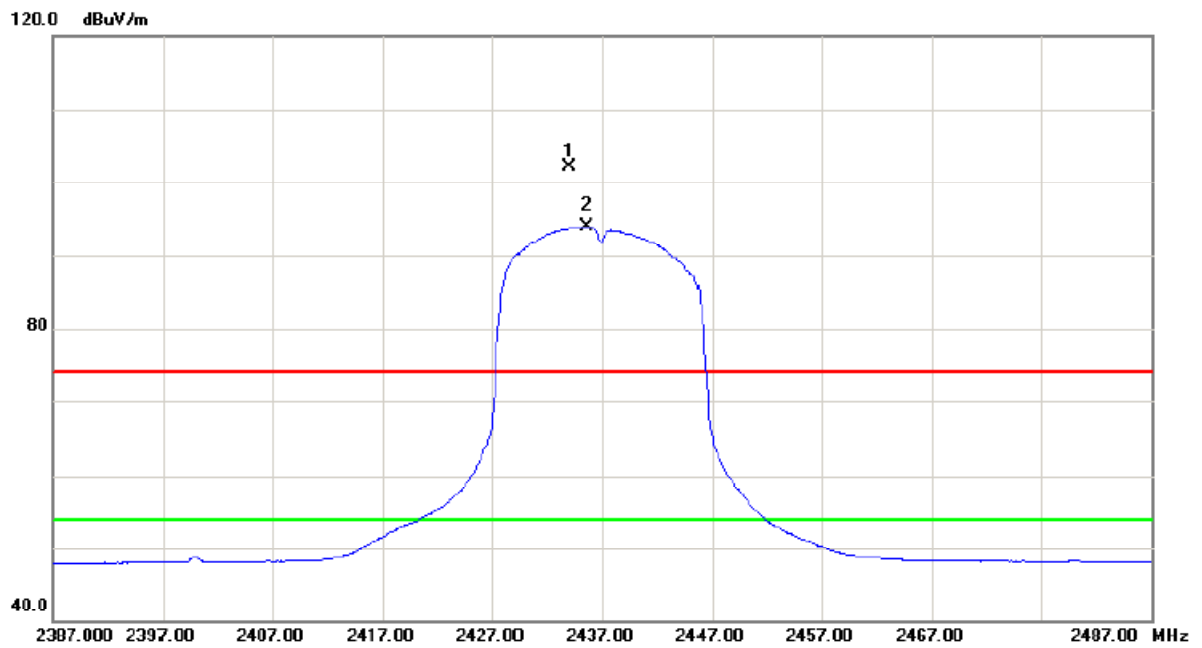





TX CH11 (Above 1000 MHz, Vertical)

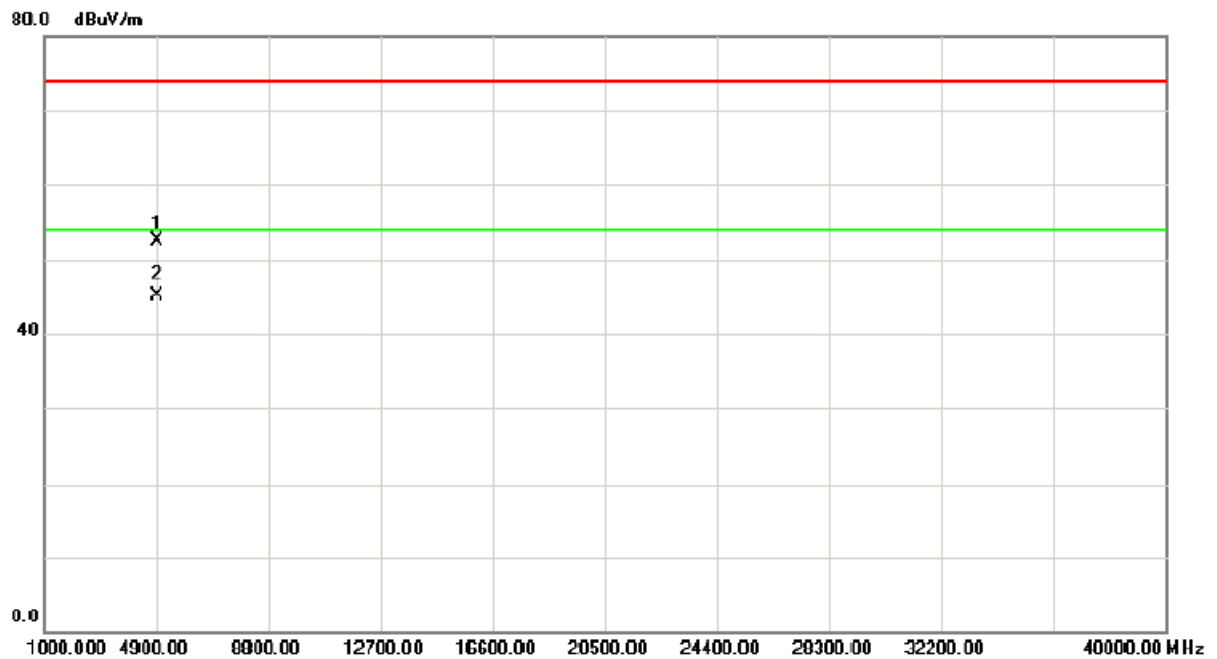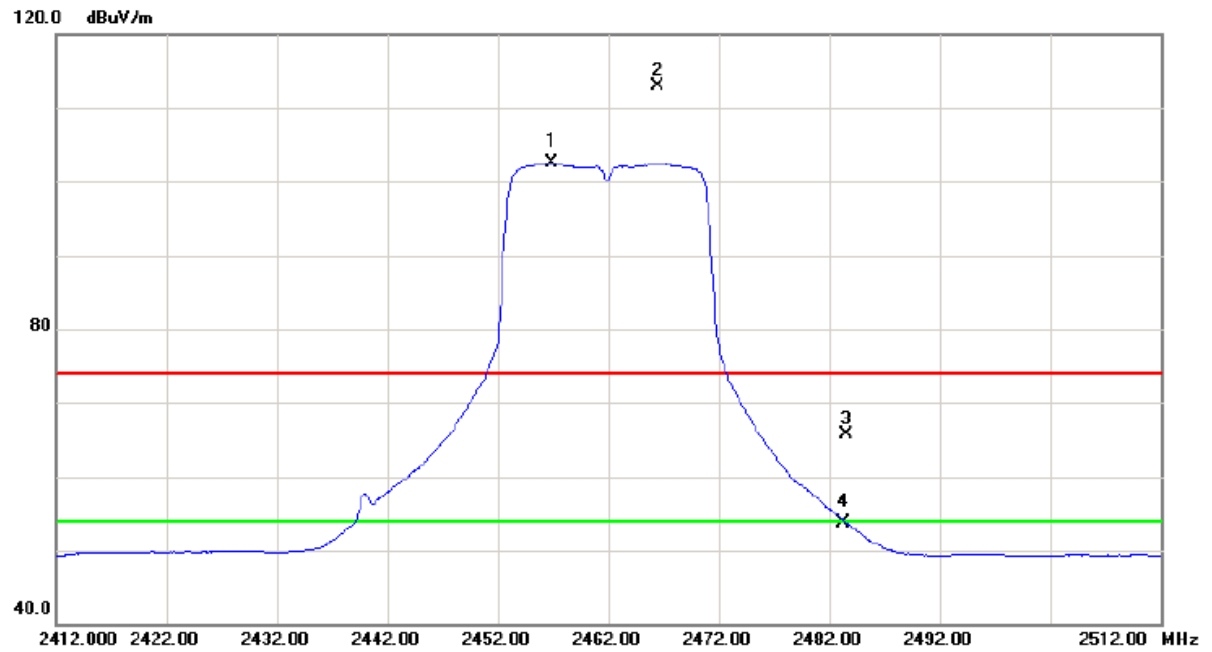



TX CH11 (Above 1000 MHz, Horizontal)

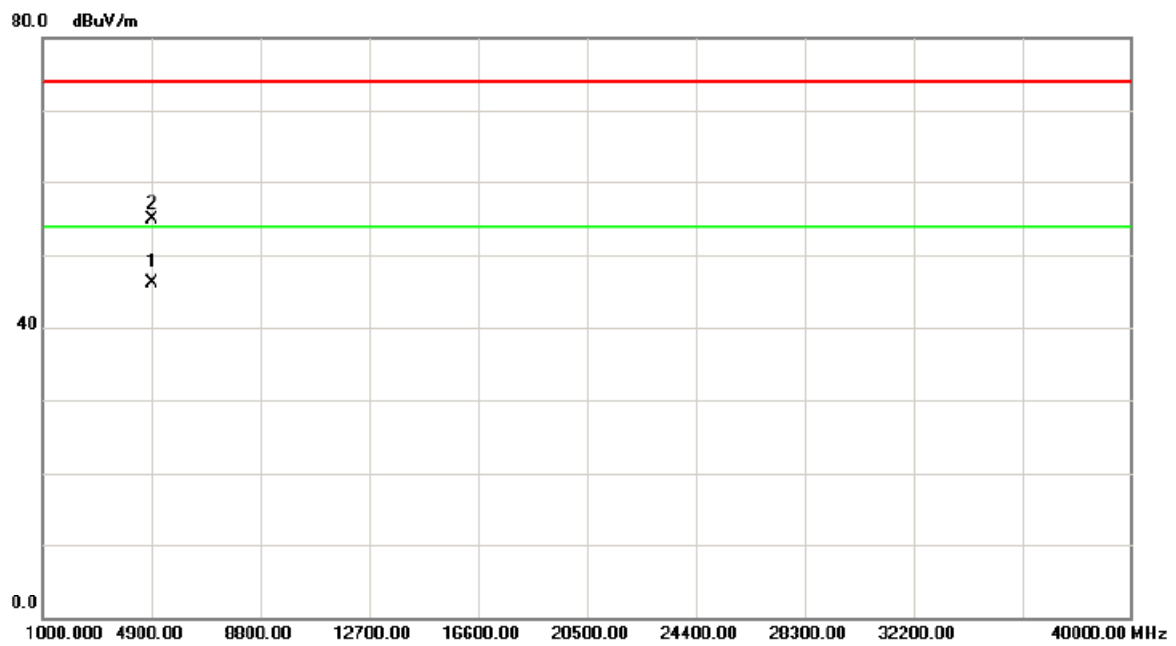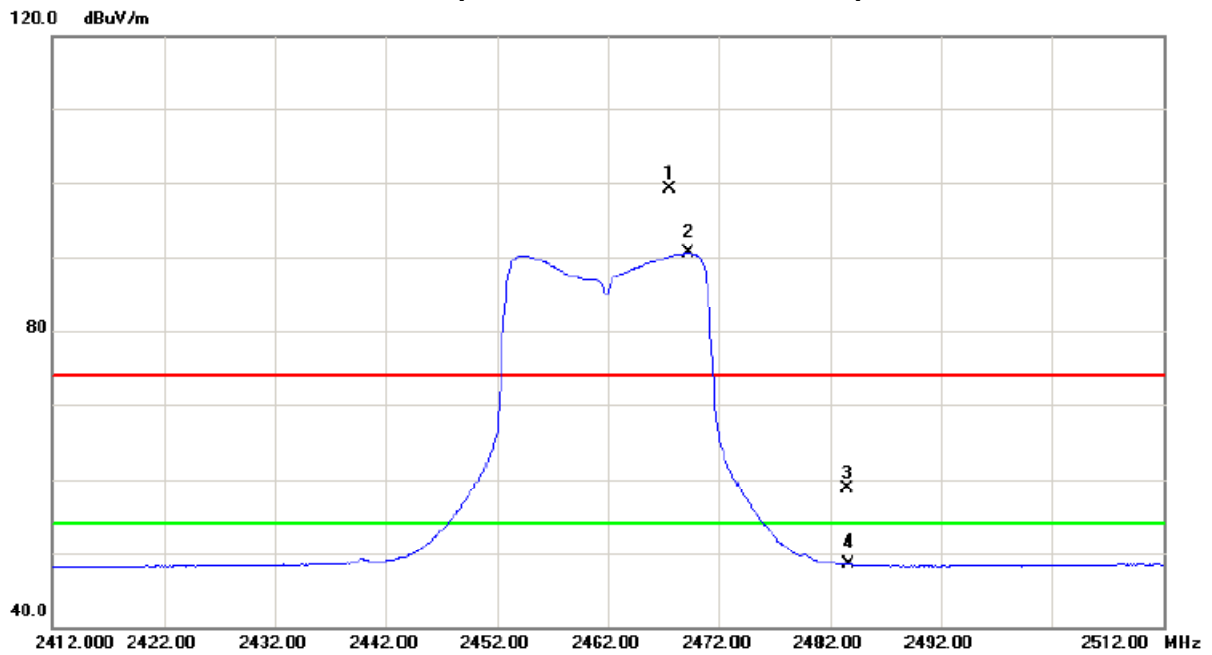



Test Mode : TX N-40M MODE 2422MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	33.22	19.78	34.09	67.31	53.87	74.00	54.00	X/E
2412.80	V	73.84	62.63	34.16	108.00	96.79			X/F
4844.00	V	47.39	39.52	6.50	53.89	46.02	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	H	24.77	14.54	34.09	58.86	48.63	74.00	54.00	X/E
2425.40	H	59.55	50.87	34.20	93.75	85.07			X/F
4843.85	H	45.73	37.55	6.50	52.23	44.05	74.00	54.00	X/H

Test Mode : TX N-40M MODE 2437MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2400.00	V	27.95	19.74	34.12	62.07	53.86	74.00	54.00	X/E
2439.60	V	68.80	59.57	34.24	103.04	93.81			X/F
4873.50	V	46.45	37.75	6.58	53.03	44.33	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2400.00	H	29.36	18.47	34.12	63.48	52.59			X/E
2438.80	H	59.41	50.53	34.23	93.64	84.76			X/F
4874.00	H	46.83	38.75	6.58	53.41	45.33	74.00	54.00	X/H


Test Mode : TX N-40M MODE 2452MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2483.40	V	73.73	63.34	34.23	107.96	97.57			X/F
2483.50	V	33.26	18.99	34.37	67.63	53.36	74.00	54.00	X/E
4904.10	V	47.54	39.96	6.67	54.21	46.63	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2452.80	H	58.87	49.20	34.27	93.14	83.47			X/F
2483.50	H	35.30	17.46	34.37	69.67	51.83	74.00	54.00	X/E
4903.63	H	45.86	37.37	6.67	52.53	44.04	74.00	54.00	X/H





TX CH03 (Above 1000 MHz, Vertical)

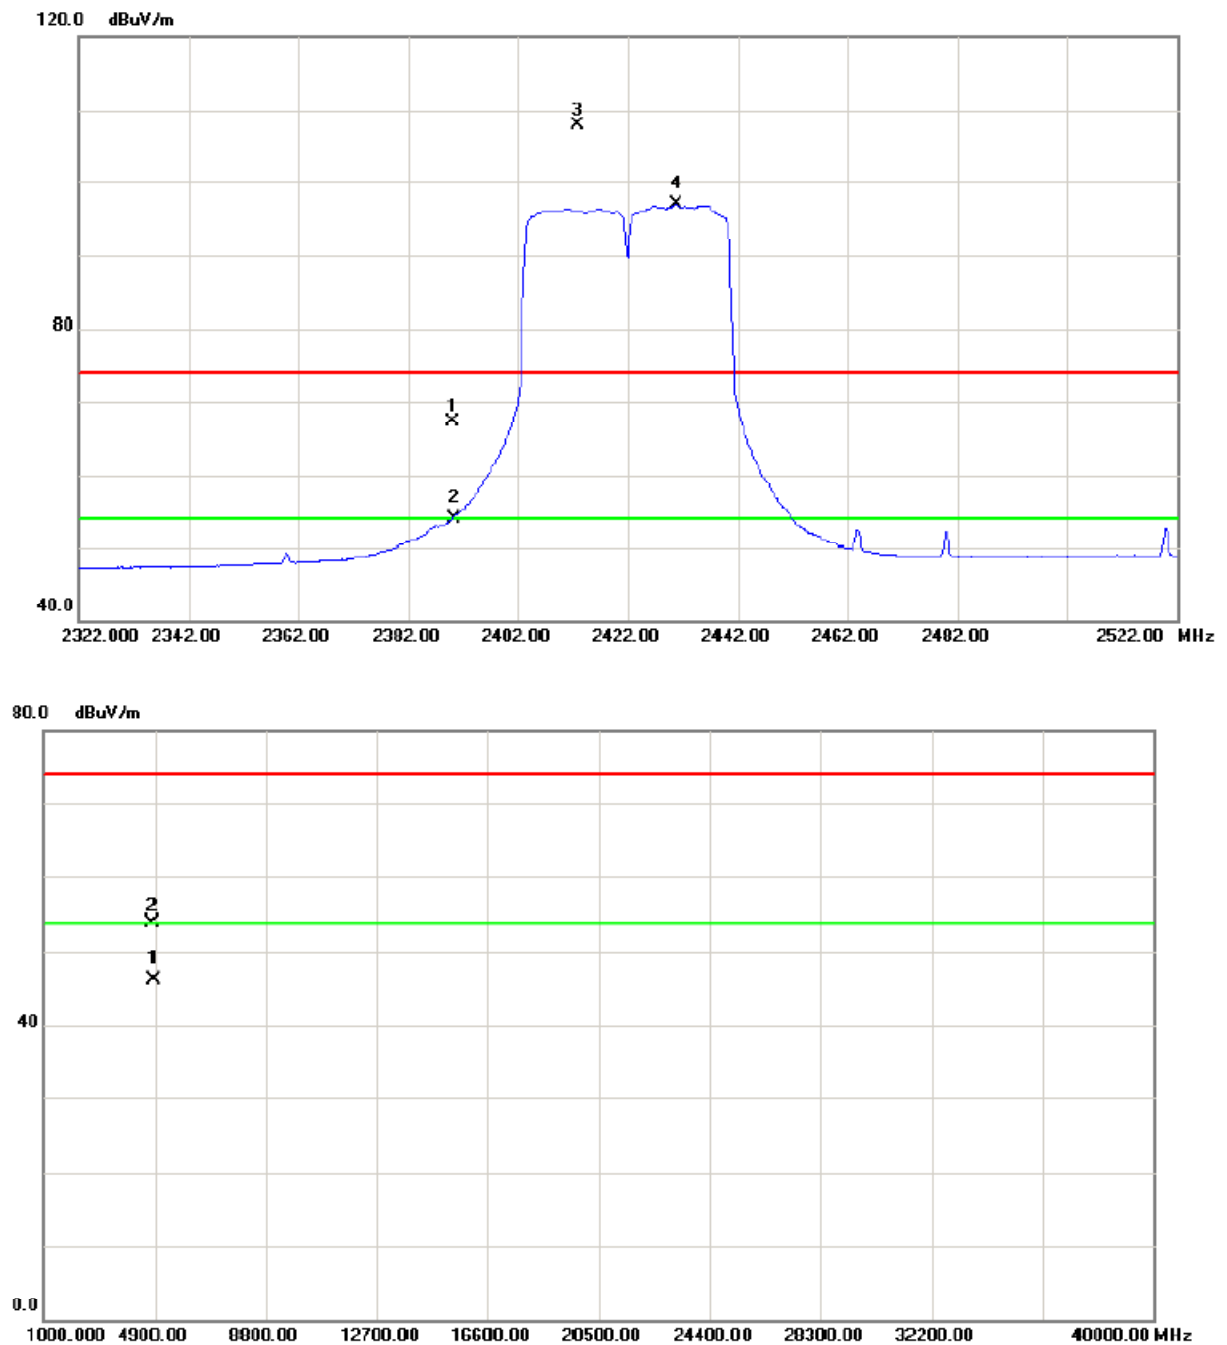





TX CH03 (Above 1000 MHz, Horizontal)

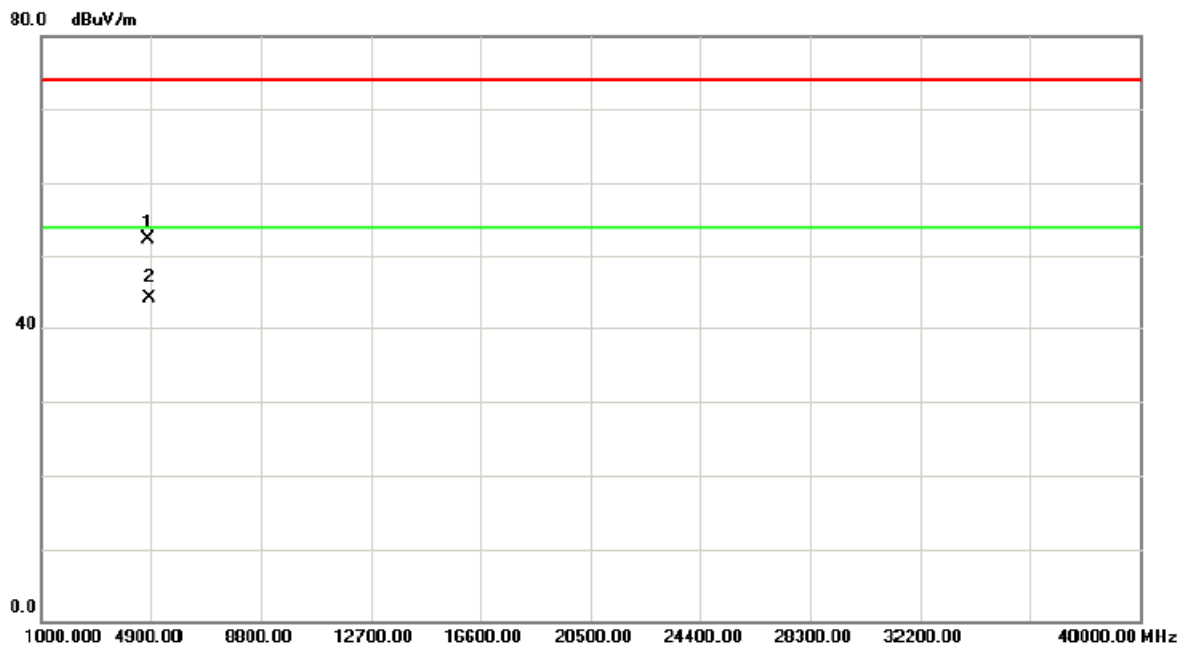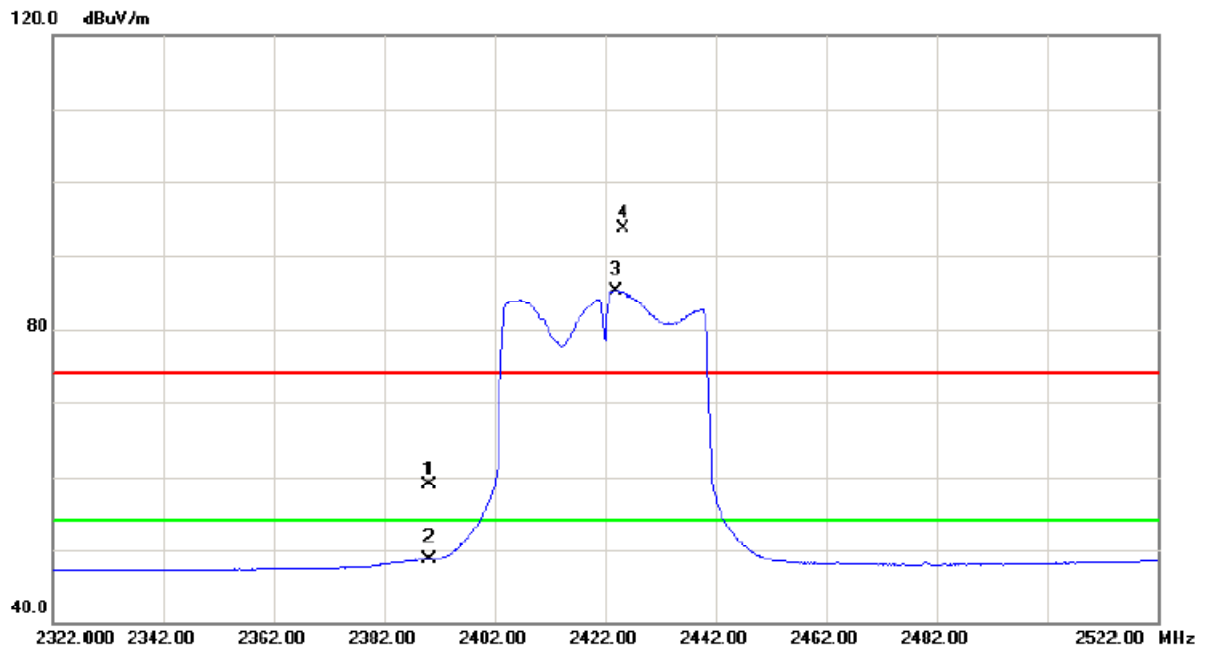





TX CH06 (Above 1000 MHz, Vertical)

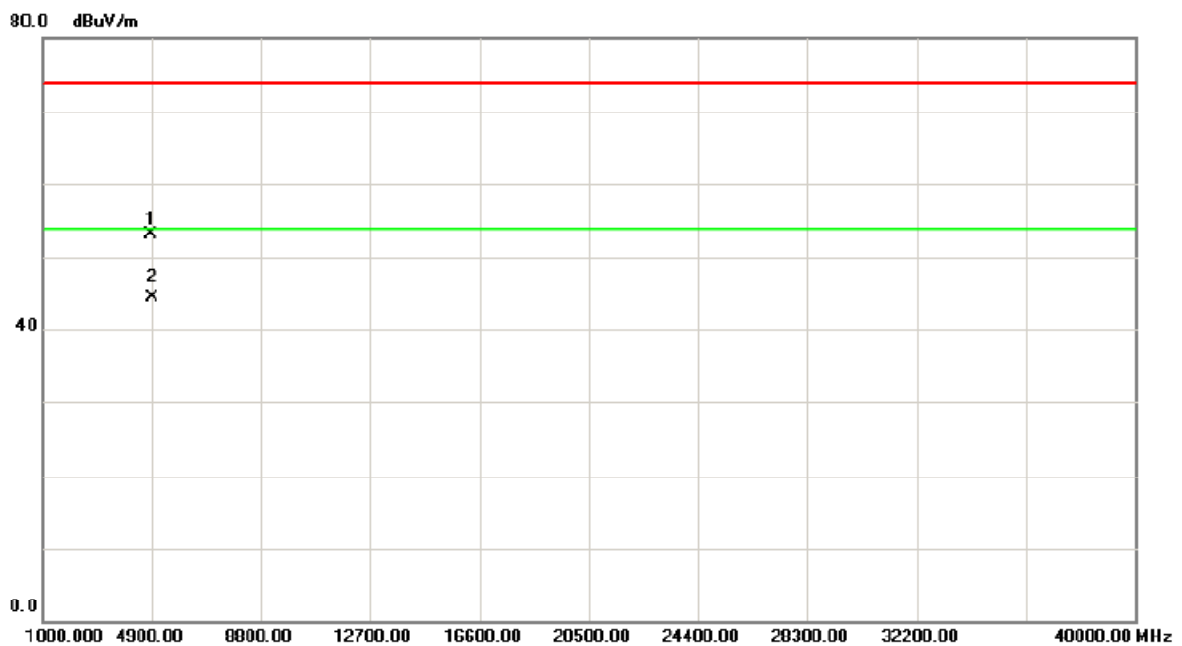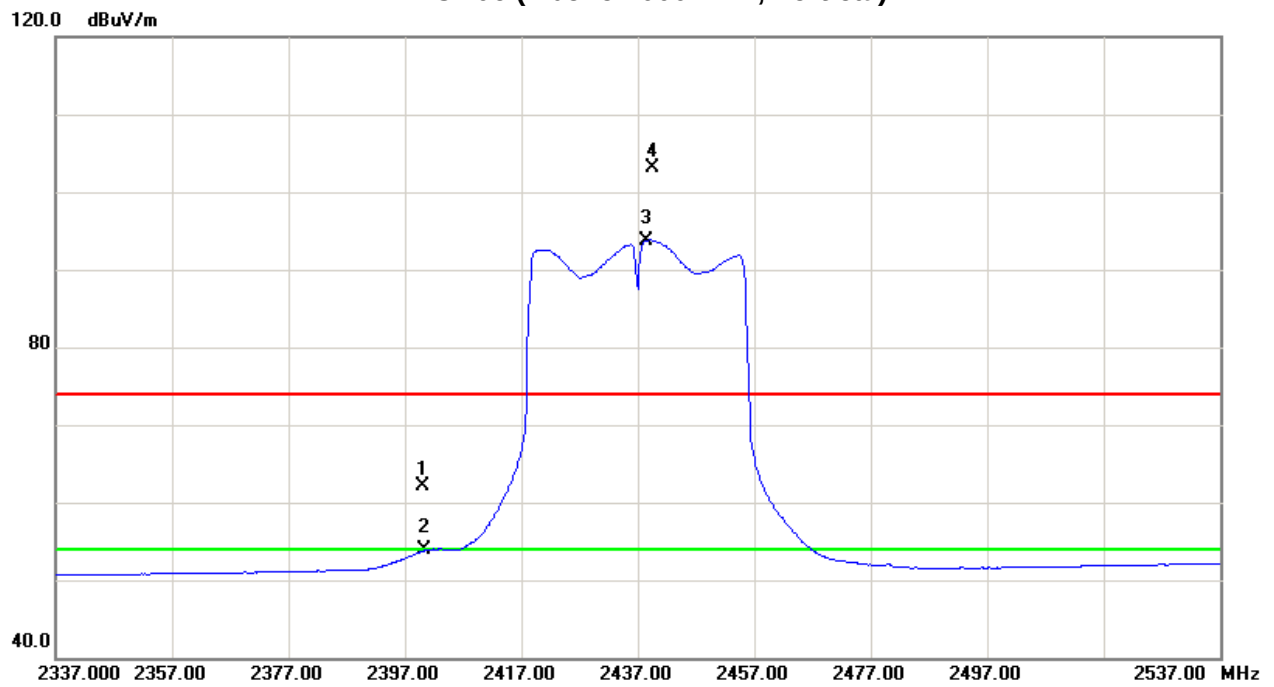





TX CH06 (Above 1000 MHz, Horizontal)

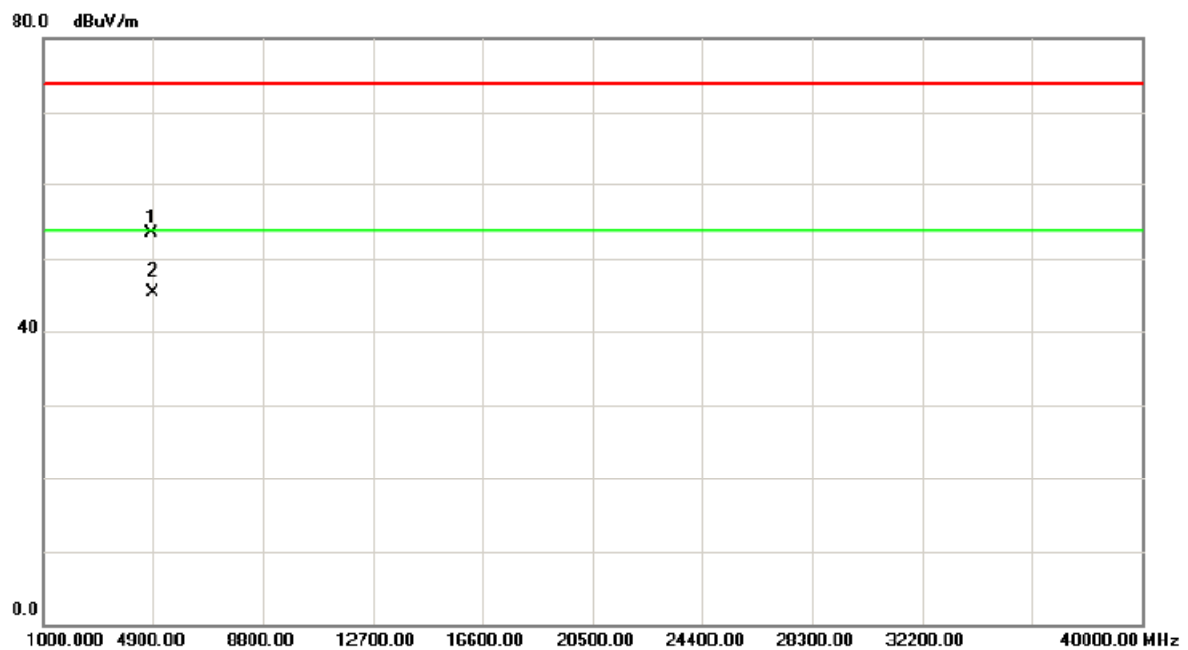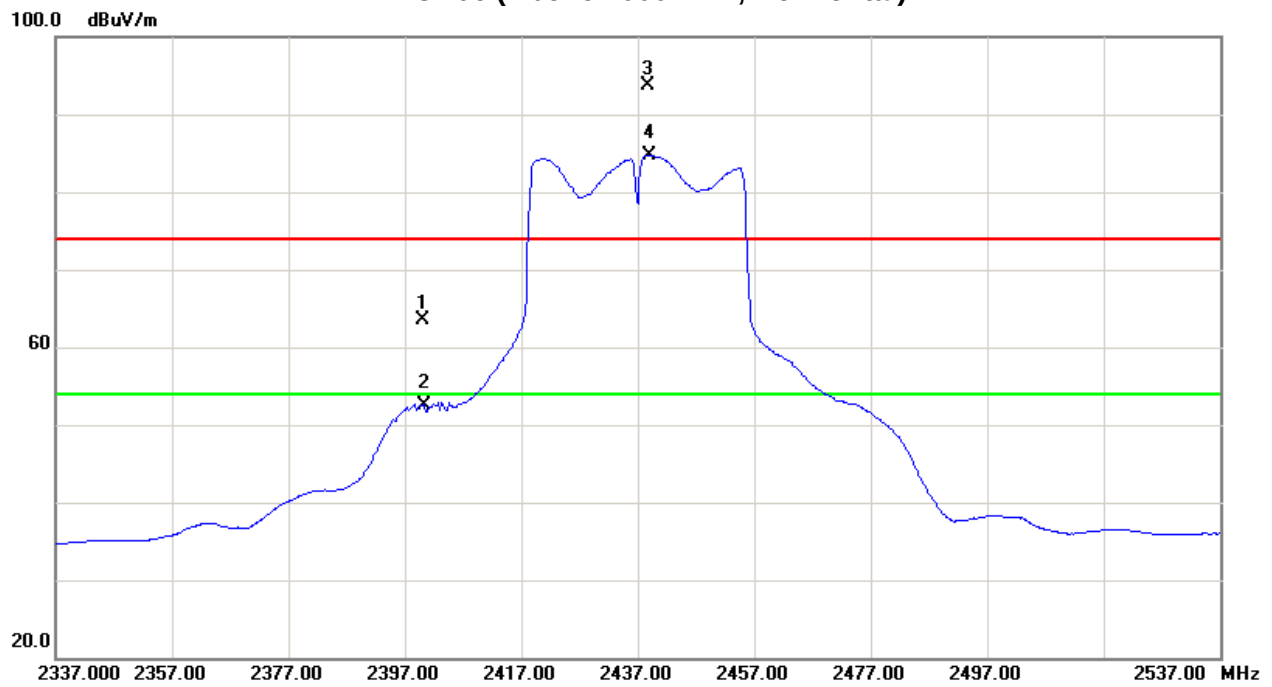





TX CH09 (Above 1000 MHz, Vertical)

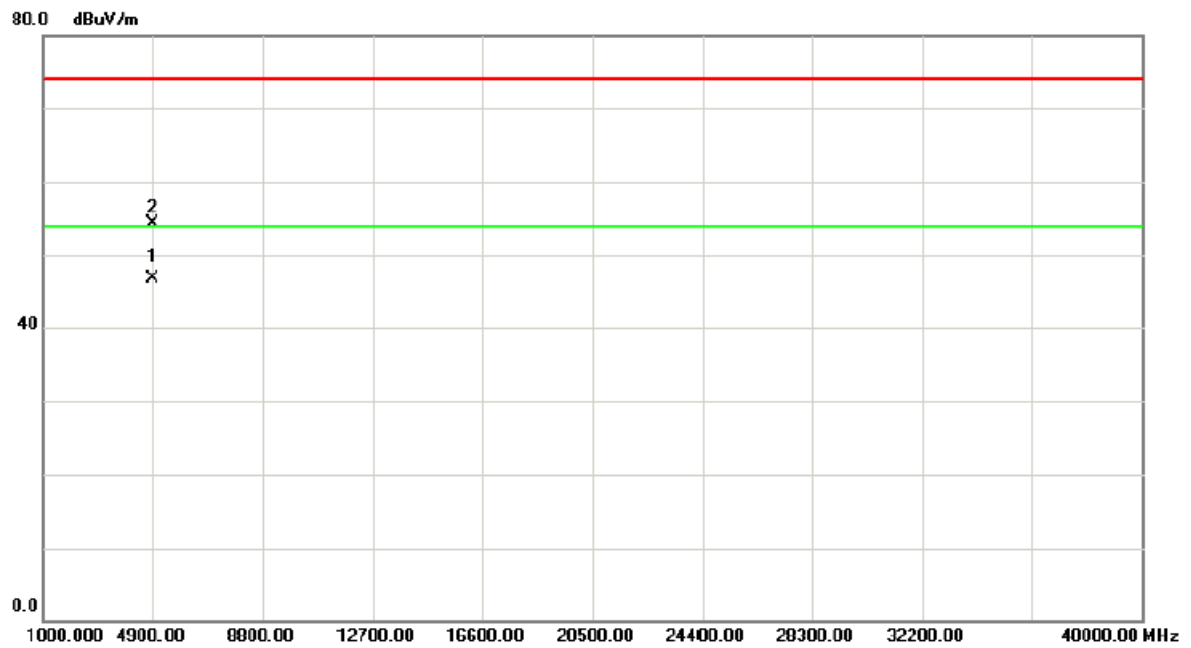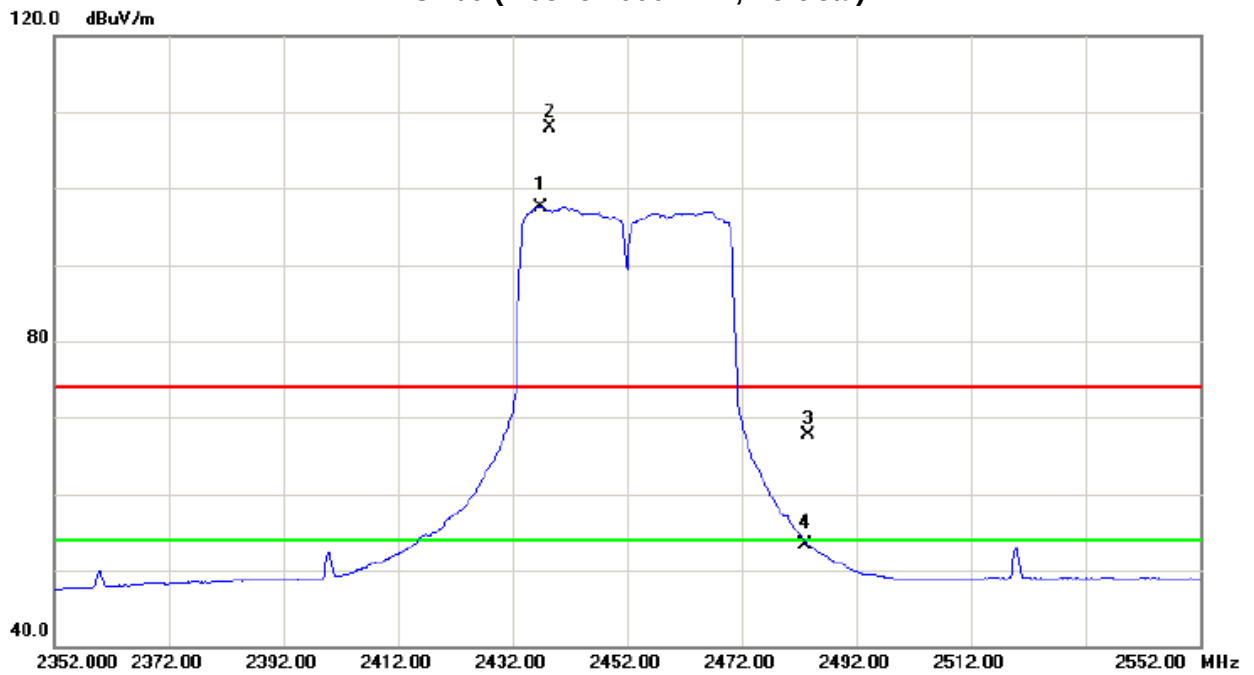



TX CH09 (Above 1000 MHz, Horizontal)

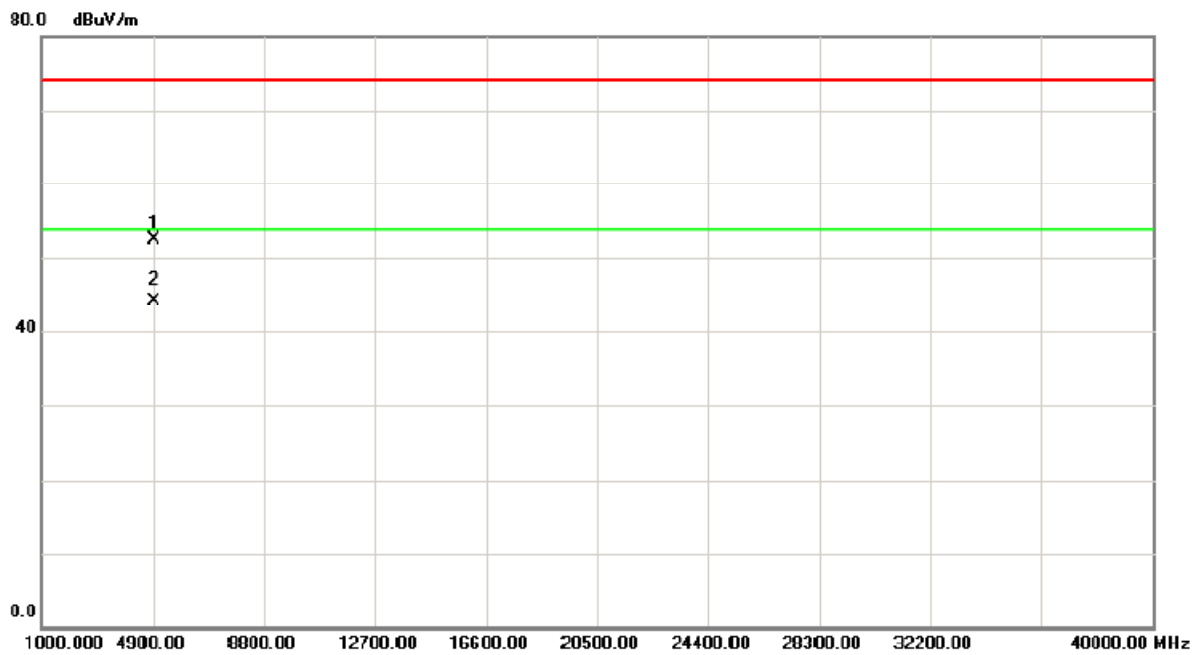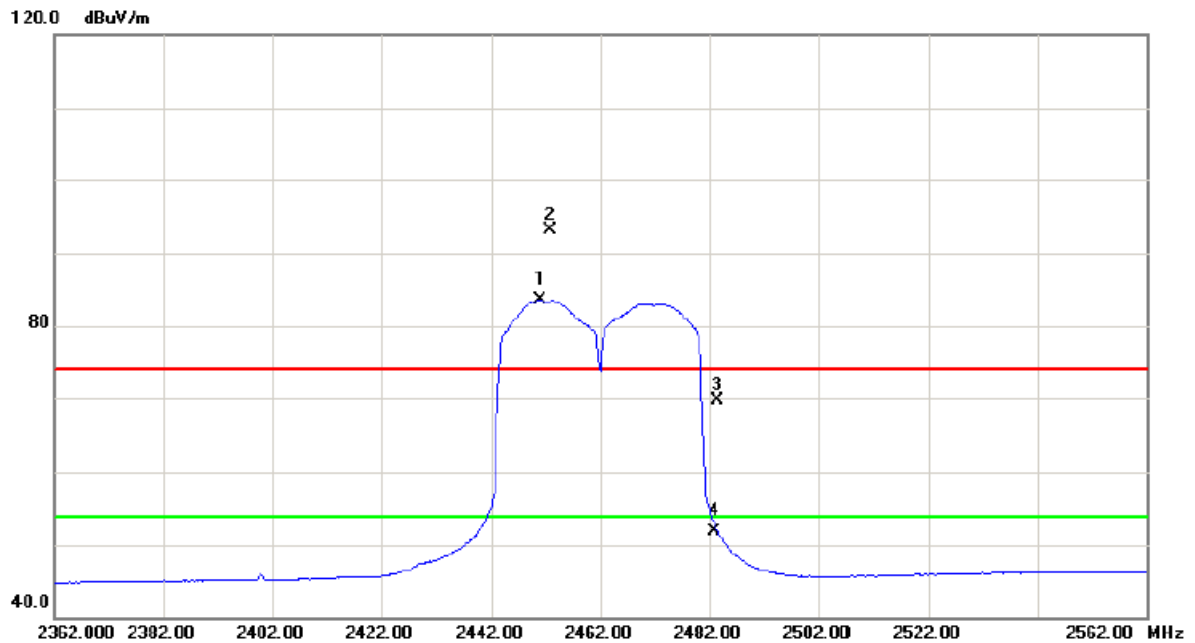




4.2.10 EUT TEST PHOTO

**Radiated Measurement Photos
9K~30MHz**






**Radiated Measurement Photos
30~1000MHz**

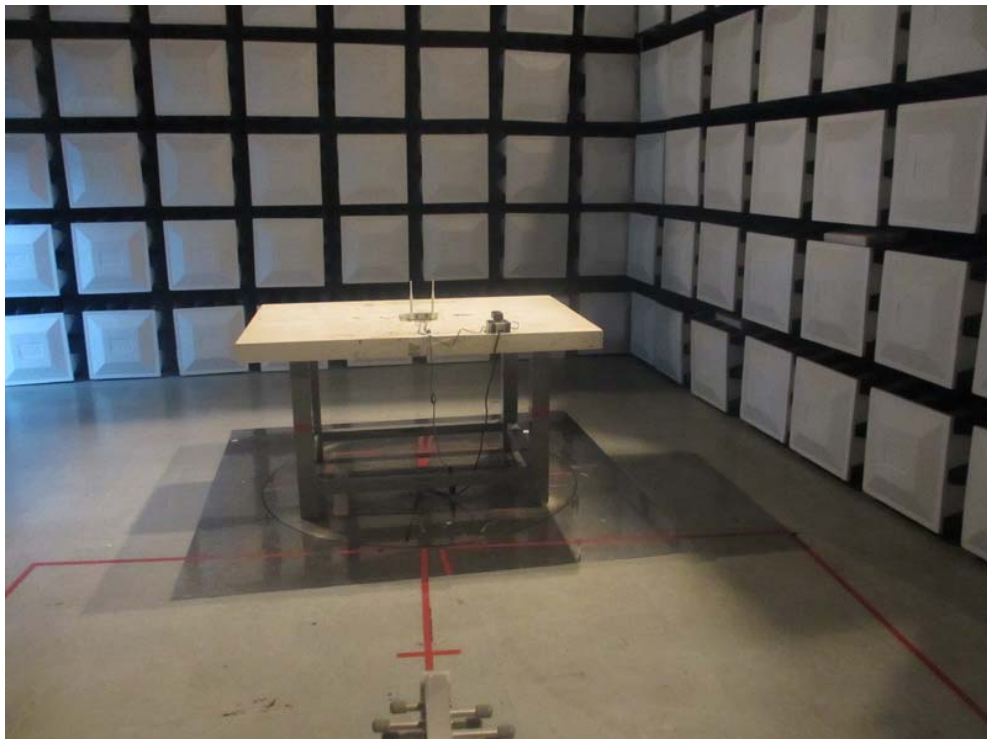

**Radiated Measurement Photos
Above 1000MHz**

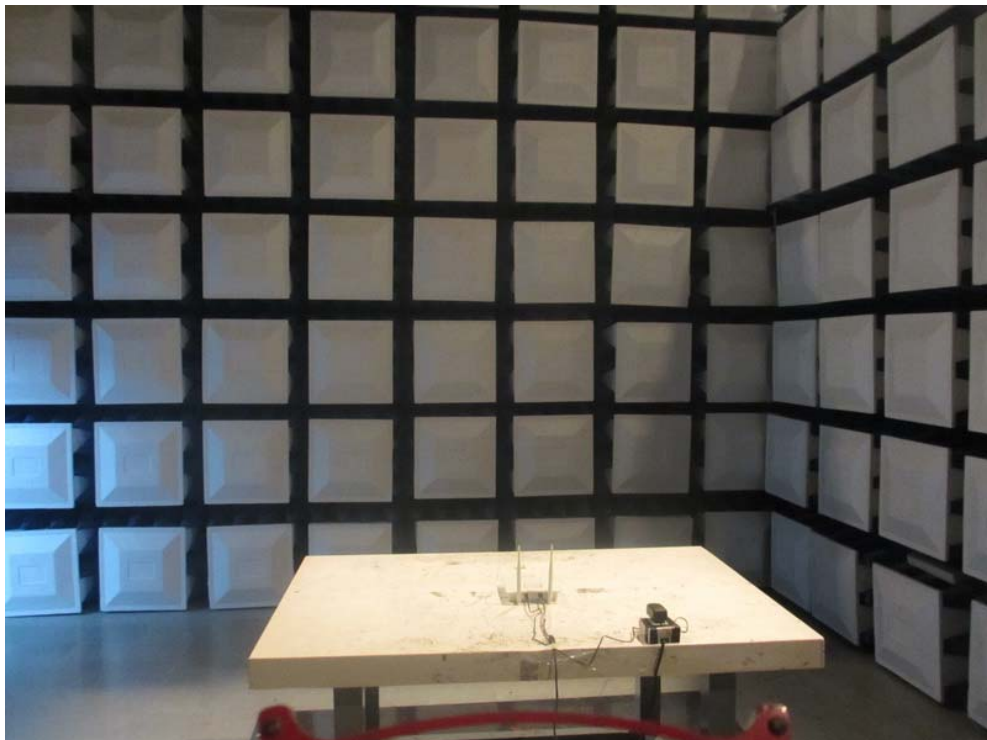



5. BANDWIDTH TEST

5.1 Applied procedures

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

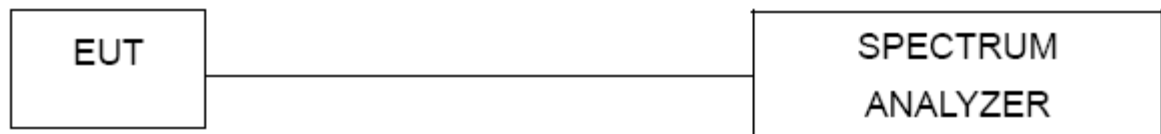

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C


Relative Humidity: 55%



Test Voltage: AC 120V/60Hz



5.1.6 TEST RESULTS


Test Mode : TX B Mode_CH01/06/11


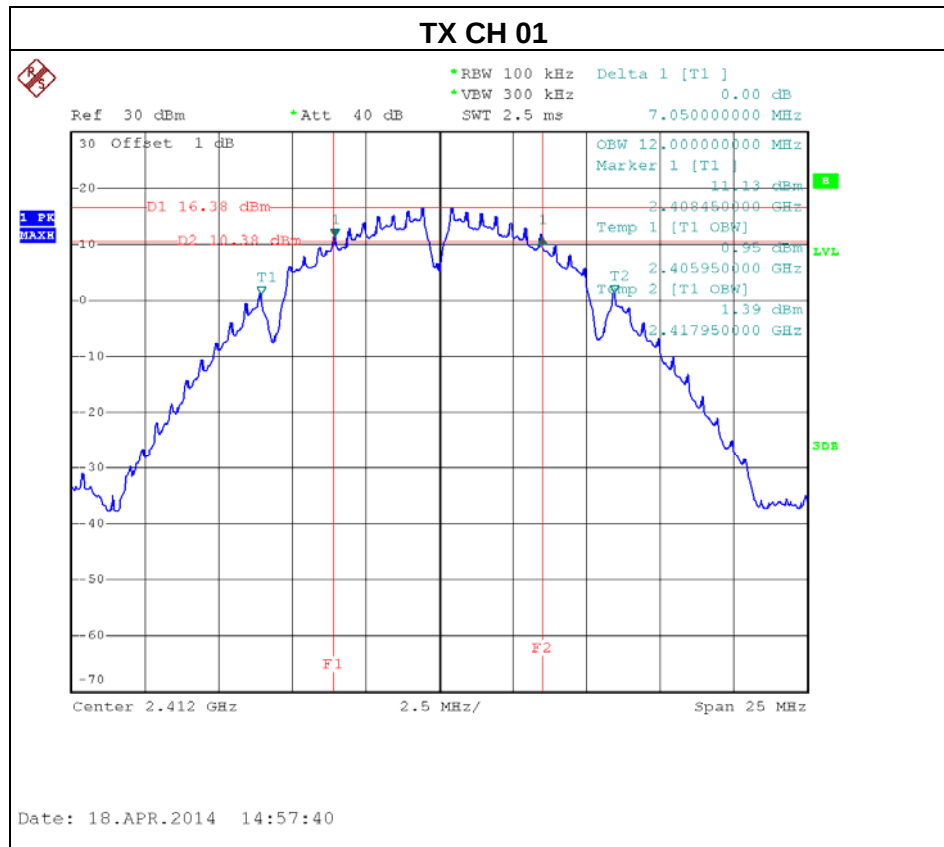


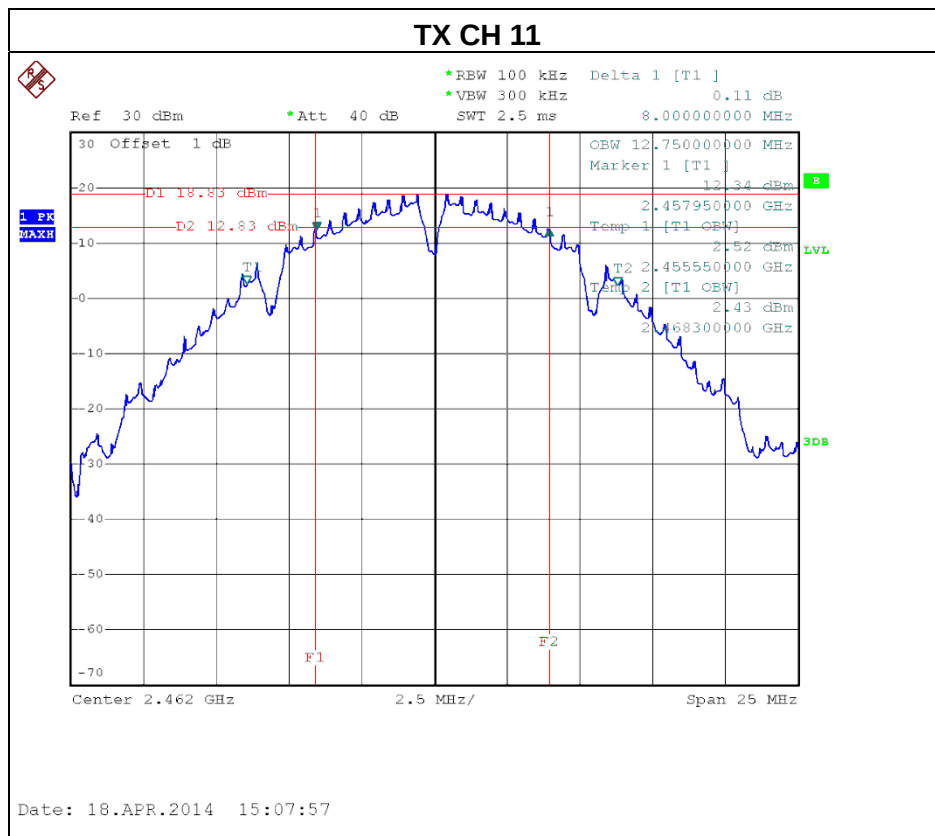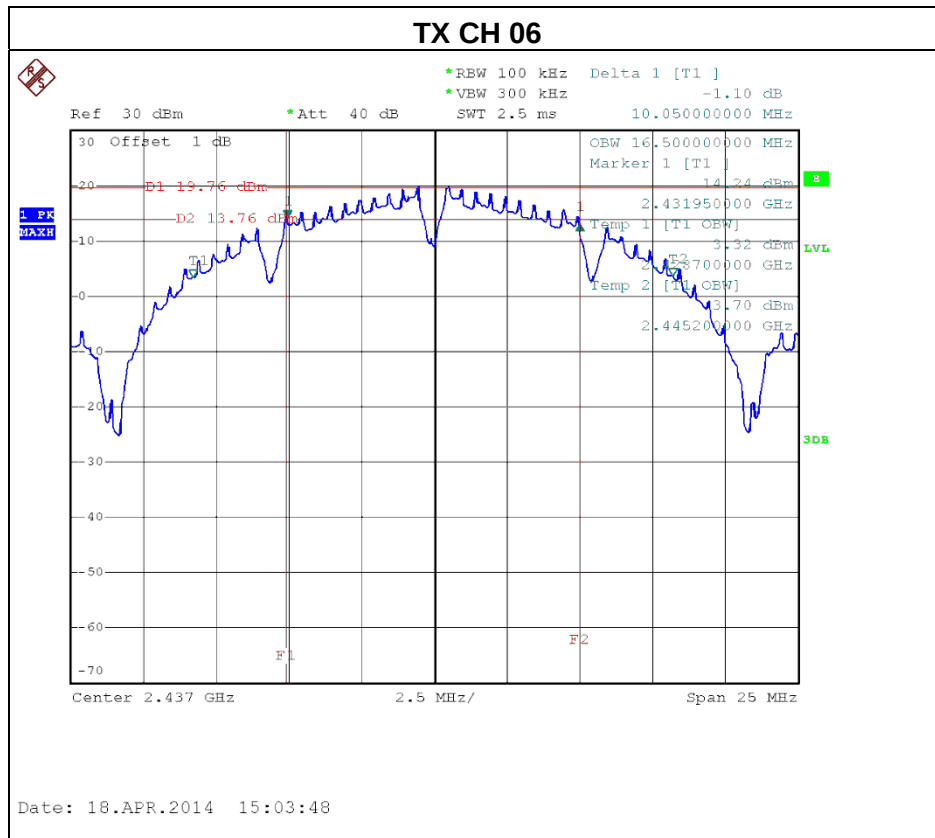




Test Mode: TX G Mode_CH01/06/11


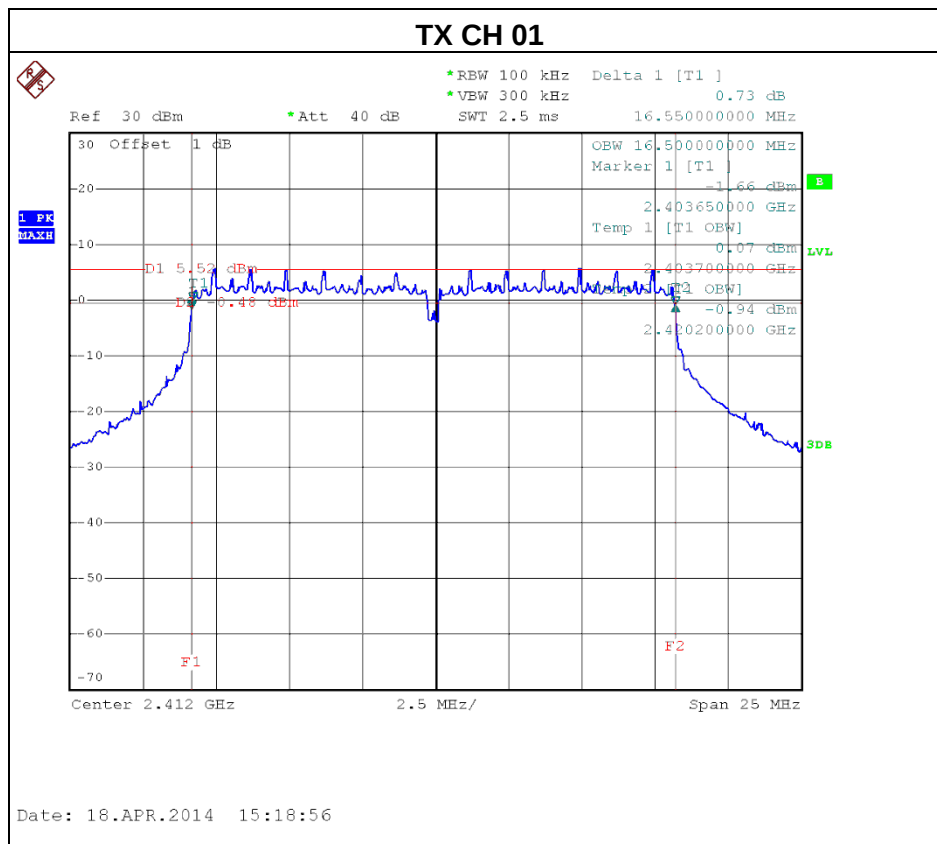


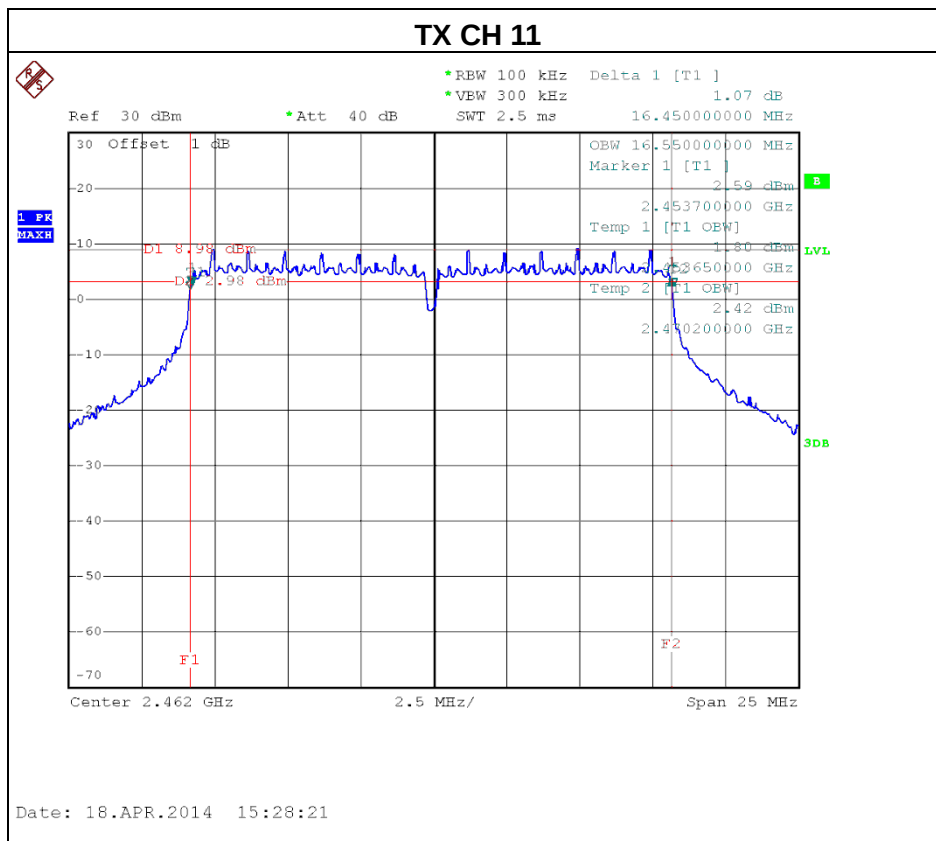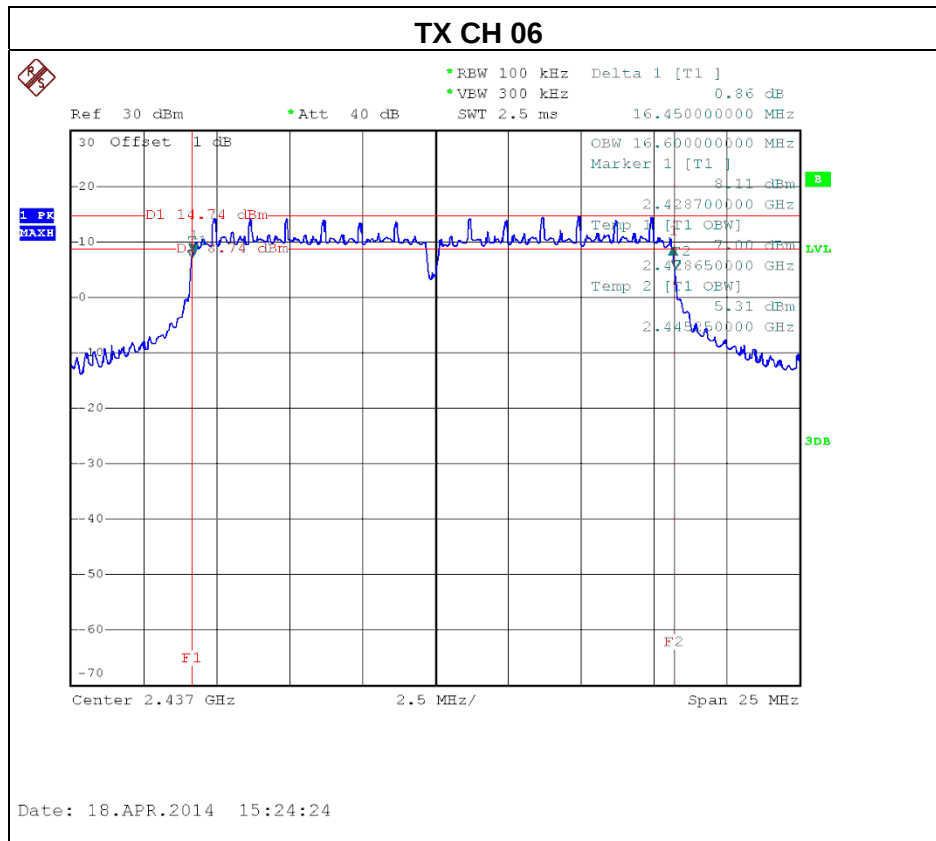




Test Mode : TX N-20MHz Mode_CH01/06/11_ANT 1


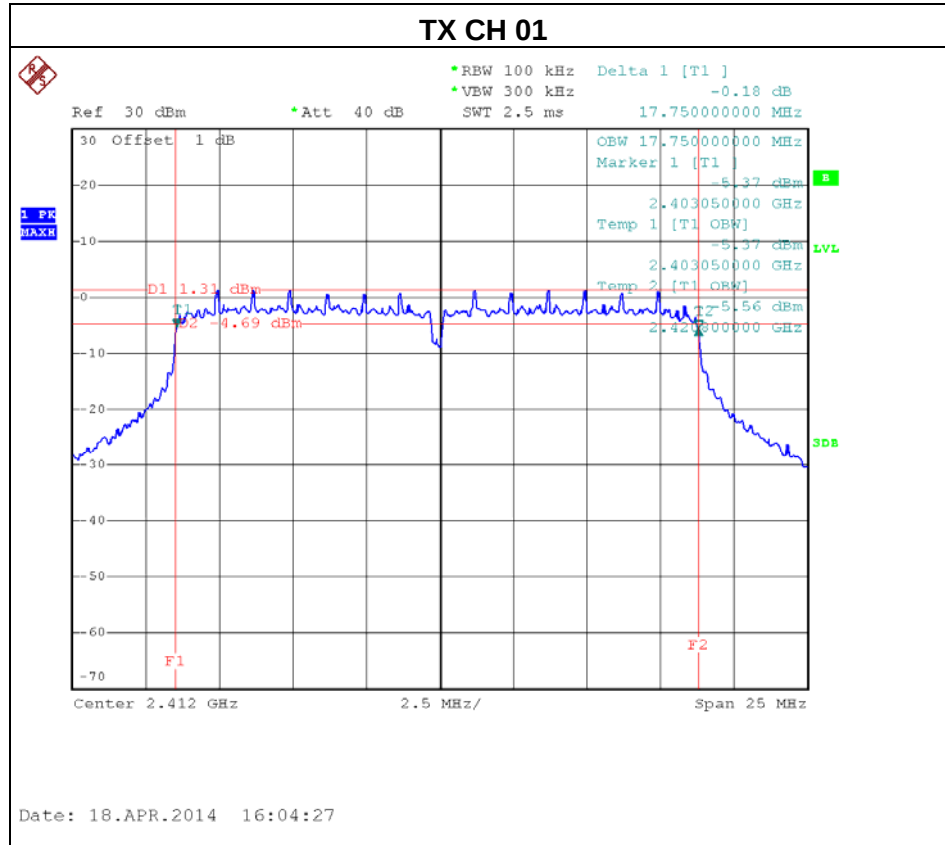


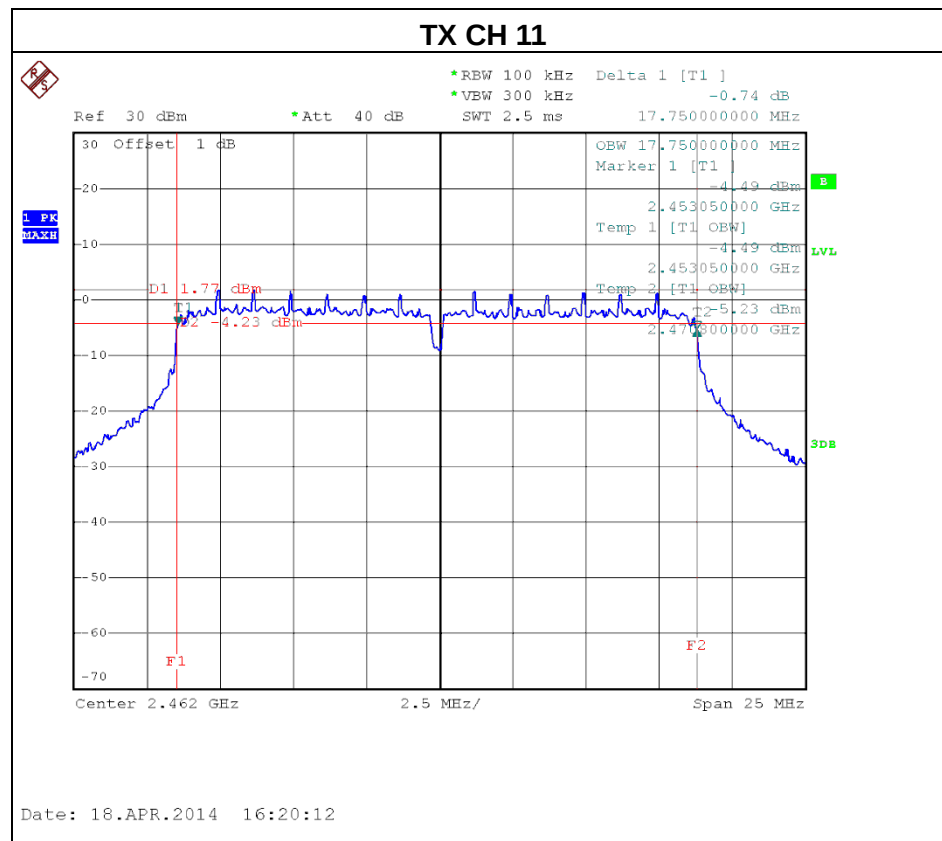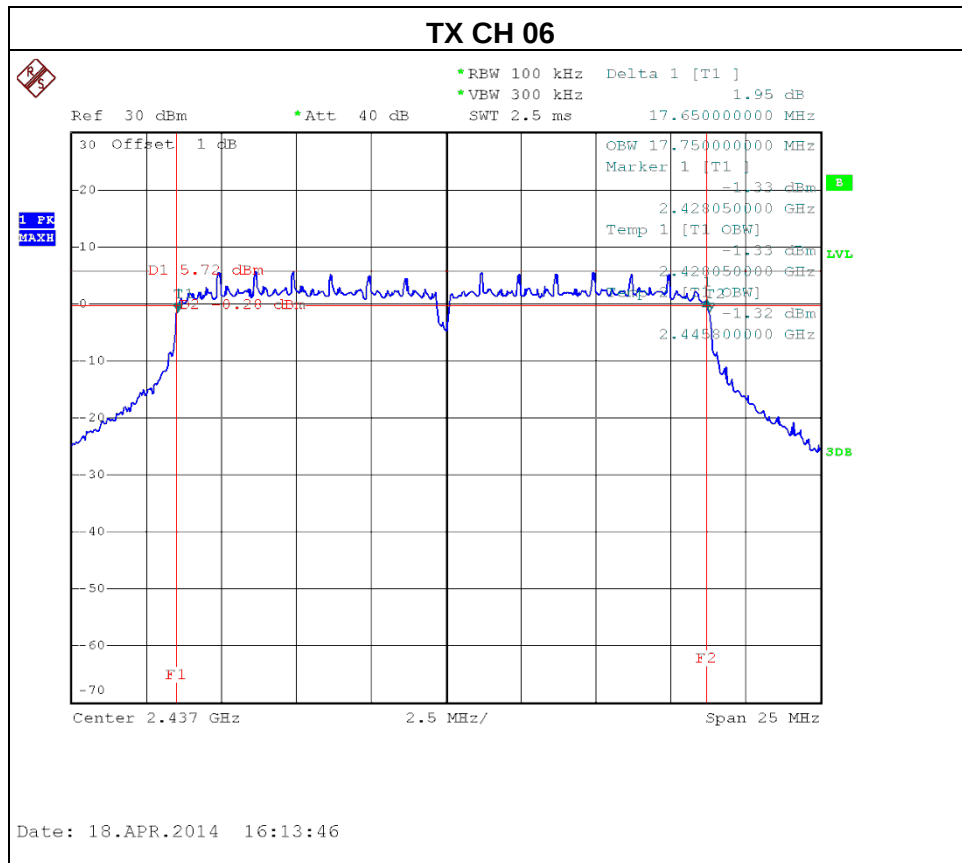




Test Mode : TX N-20MHz Mode_CH01/06/11_ANT 2


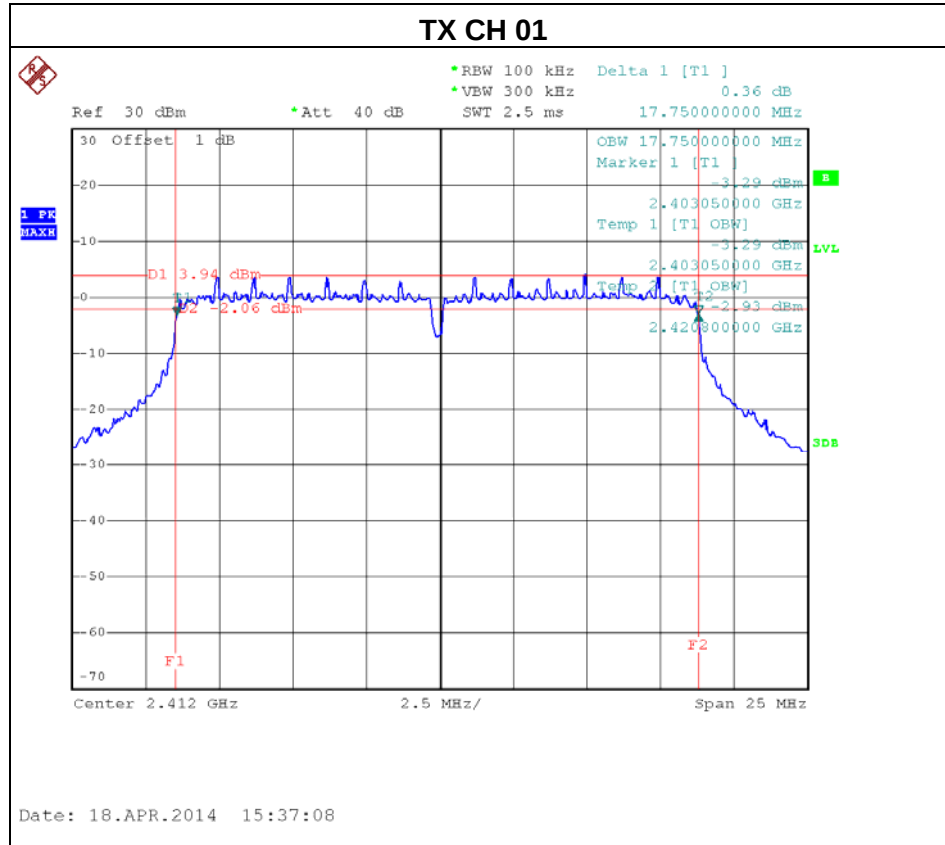


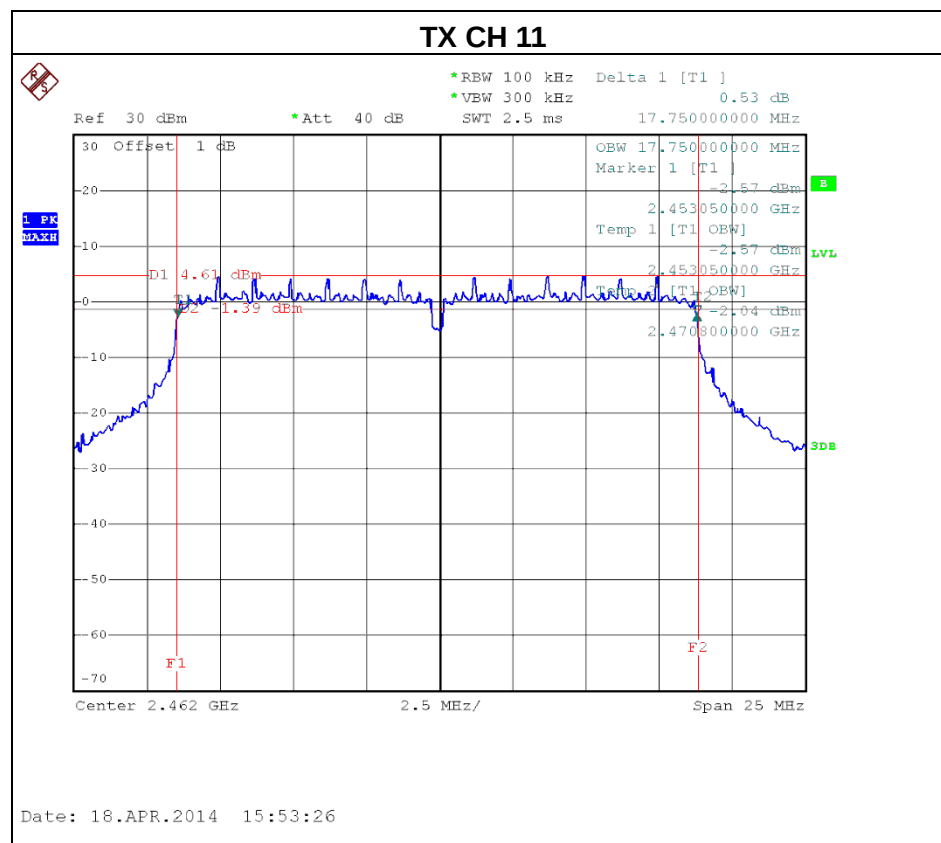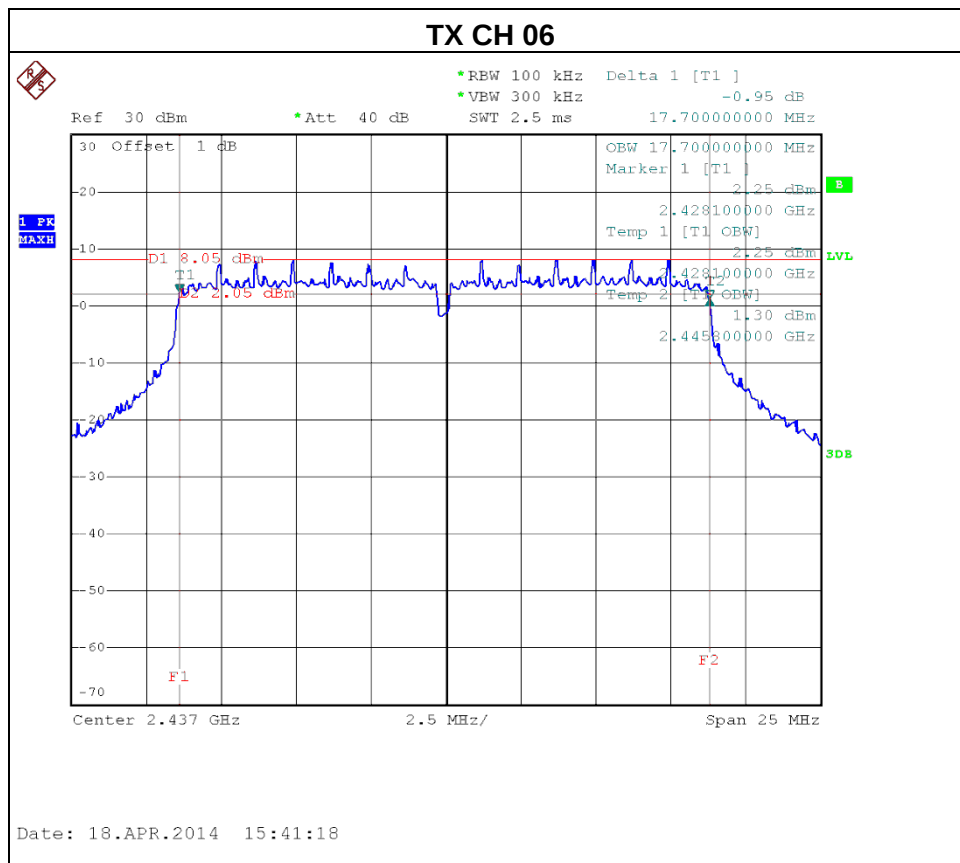




Test Mode : TX N-40MHz Mode_CH03/06/09_ANT 1


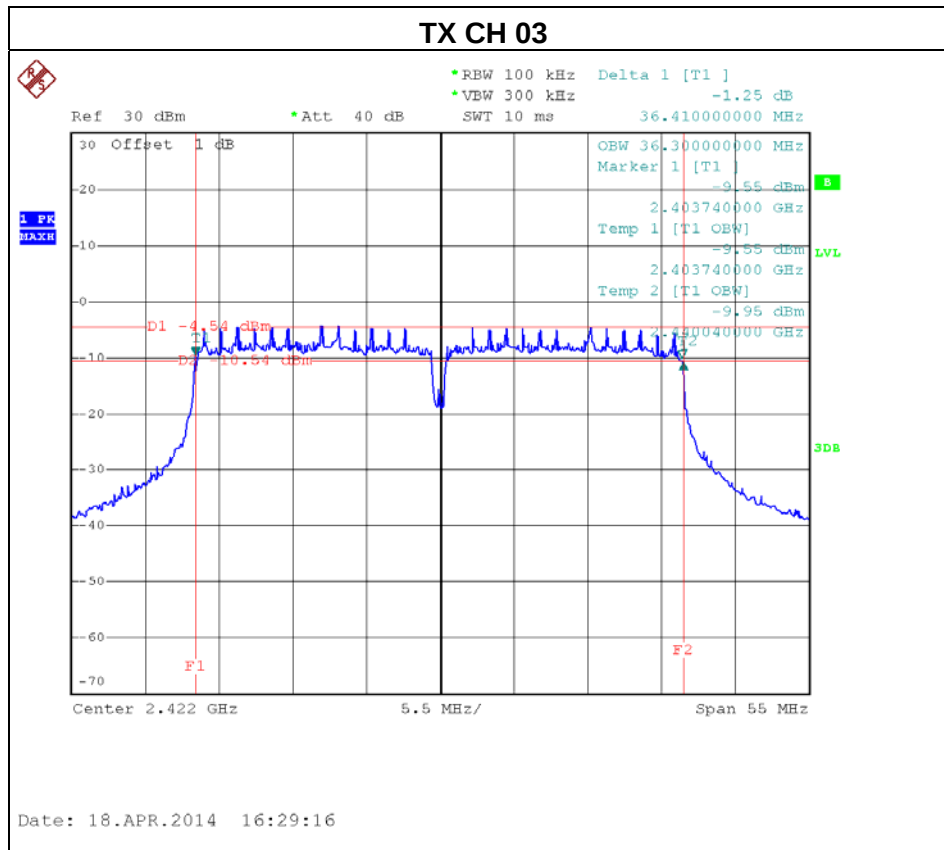


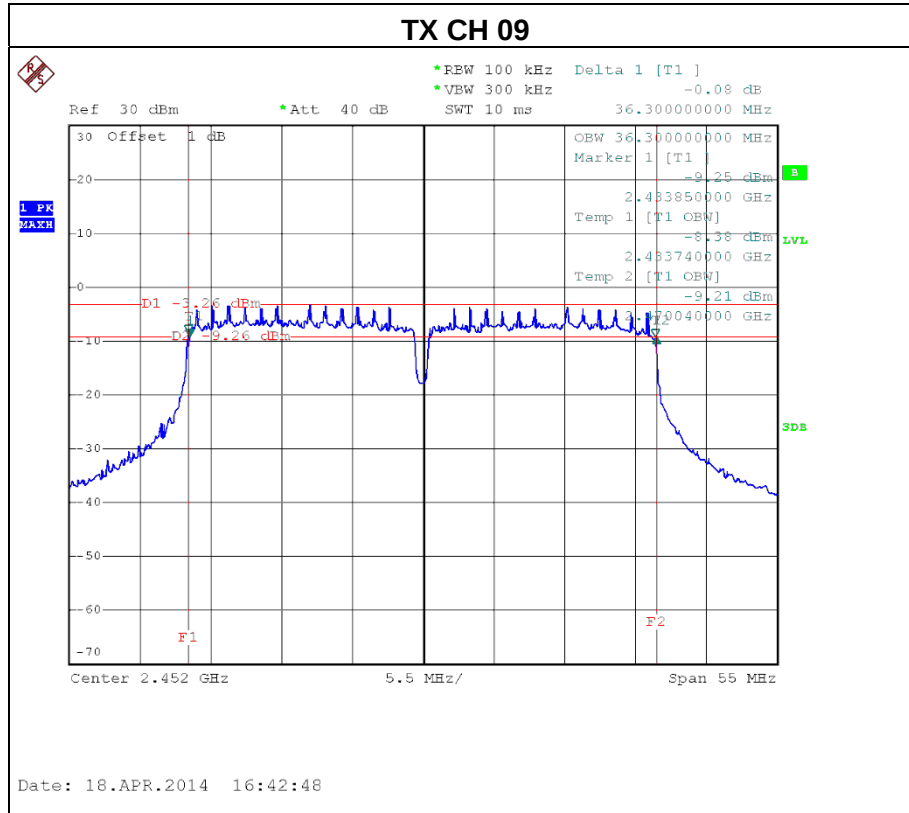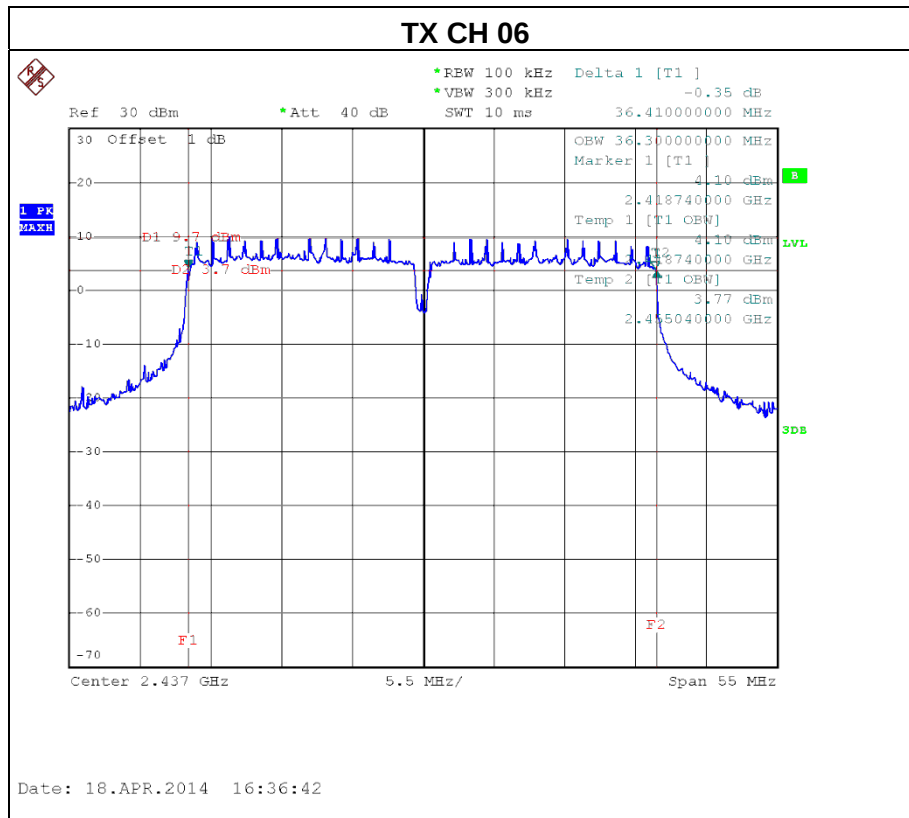



Test Mode : TX N-40MHz Mode_CH03/06/09_ANT 2

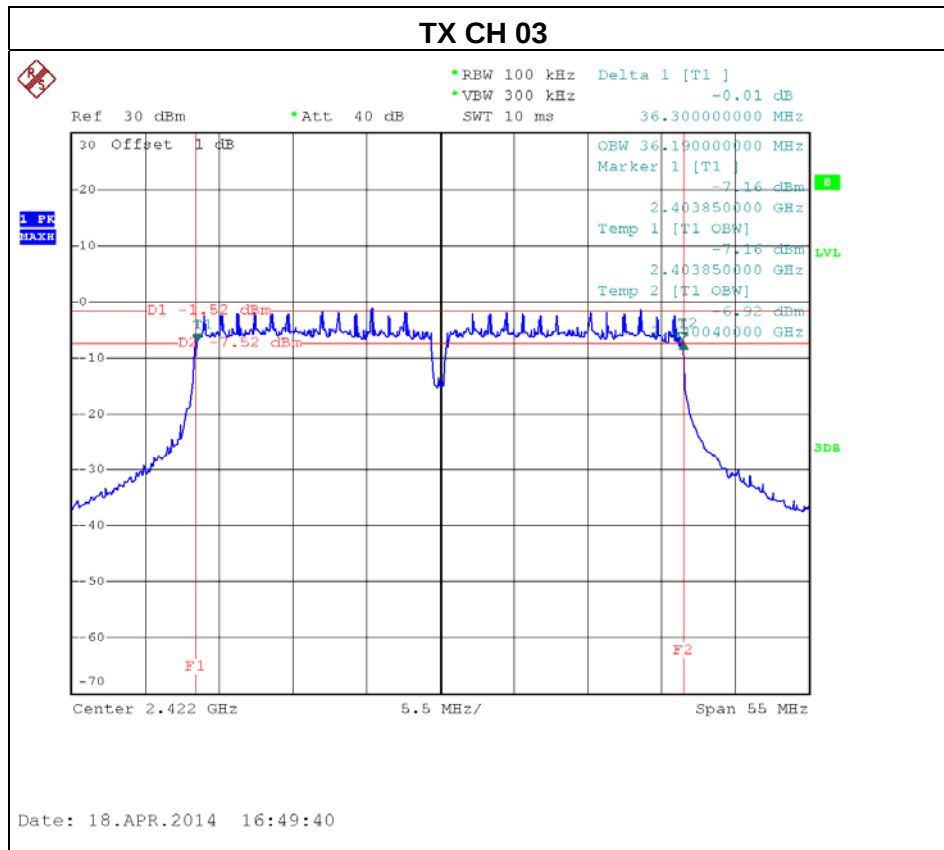


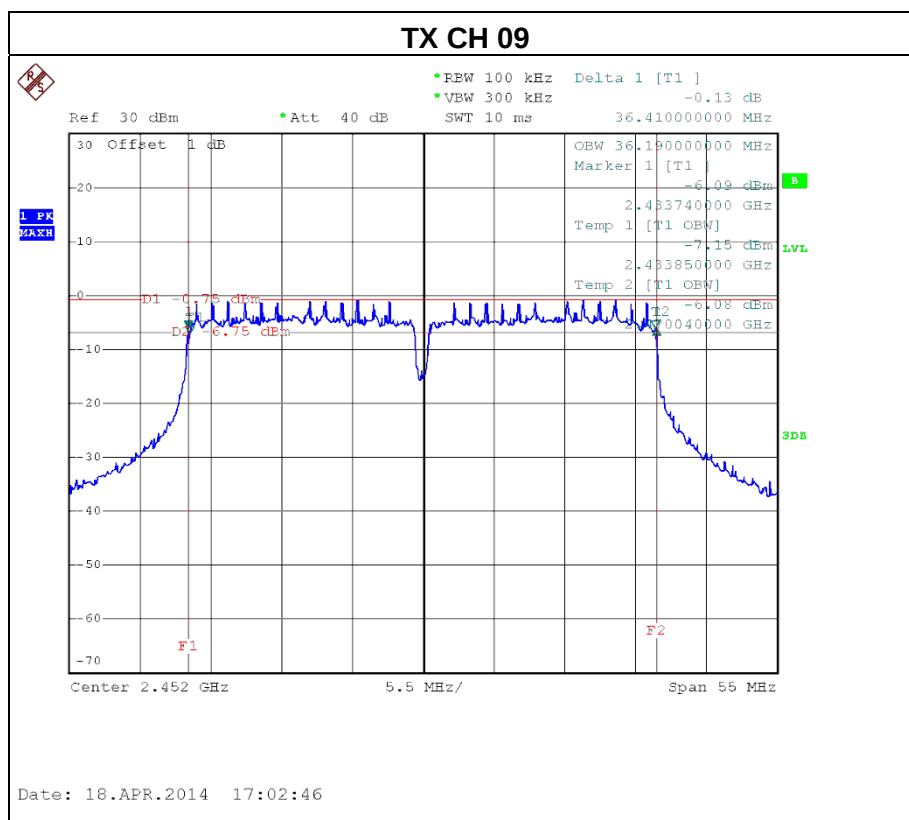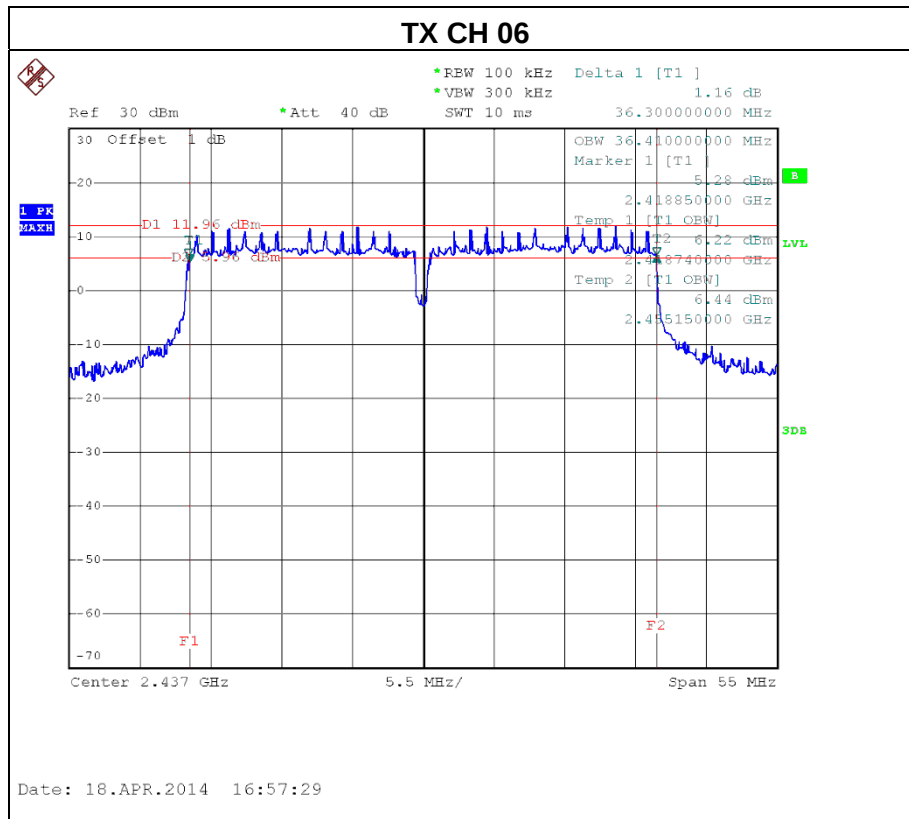



5.1.7 EUT TEST PHOTO

BANDWIDTH MEASUREMENT PHOTO

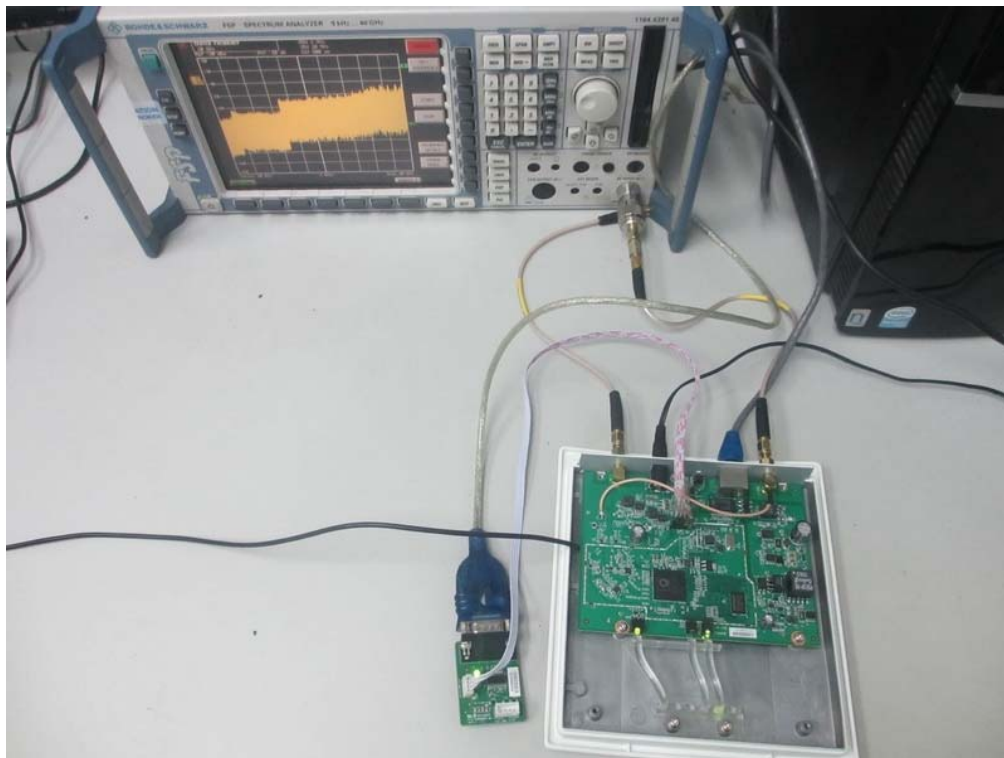



6. MAXIMUM OUTPUT POWER TEST

6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.3 of FCC KDB 558074 D01 DTS Meas Guidance v03r01.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

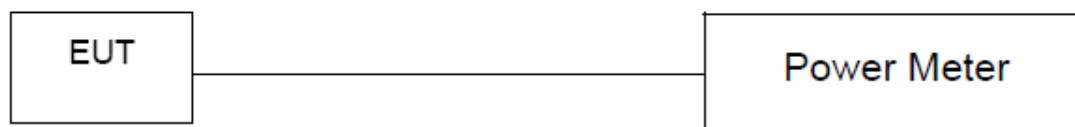

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz



6.1.6 TEST RESULTS

Test Mode : TX B Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	23.14	30	1
CH06	2437	27.36	30	1
CH11	2462	25.42	30	1

Test Mode : TX G Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	23.05	30	1
CH06	2437	27.02	30	1
CH11	2462	25.28	30	1



Test Mode : TX N-20M Mode_ANT 1

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	22.04	30	1
CH06	2437	23.95	30	1
CH11	2462	22.17	30	1

Test Mode : TX N-20M Mode_ANT 2

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	22.12	30	1
CH06	2437	24.86	30	1
CH11	2462	23.07	30	1

Test Mode : TX N-20M Mode_Total

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH01	2412	25.09	30	1
CH06	2437	27.44	30	1
CH11	2462	25.65	30	1



Test Mode : TX N-40M Mode_ANT 1

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH03	2422	20.84	30	1
CH06	2437	25.13	30	1
CH09	2452	21.81	30	1

Test Mode : TX N-40M Mode_ANT 2

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH03	2422	21.31	30	1
CH06	2437	26.02	30	1
CH09	2452	21.99	30	1


Test Mode : TX N-40M Mode_Total

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH03	2422	24.09	30	1
CH06	2437	28.61	30	1
CH09	2452	24.91	30	1



6.1.7 EUT TEST PHOTO

MAXIMUM OUTPUT POWER MEASUREMENT PHOTO

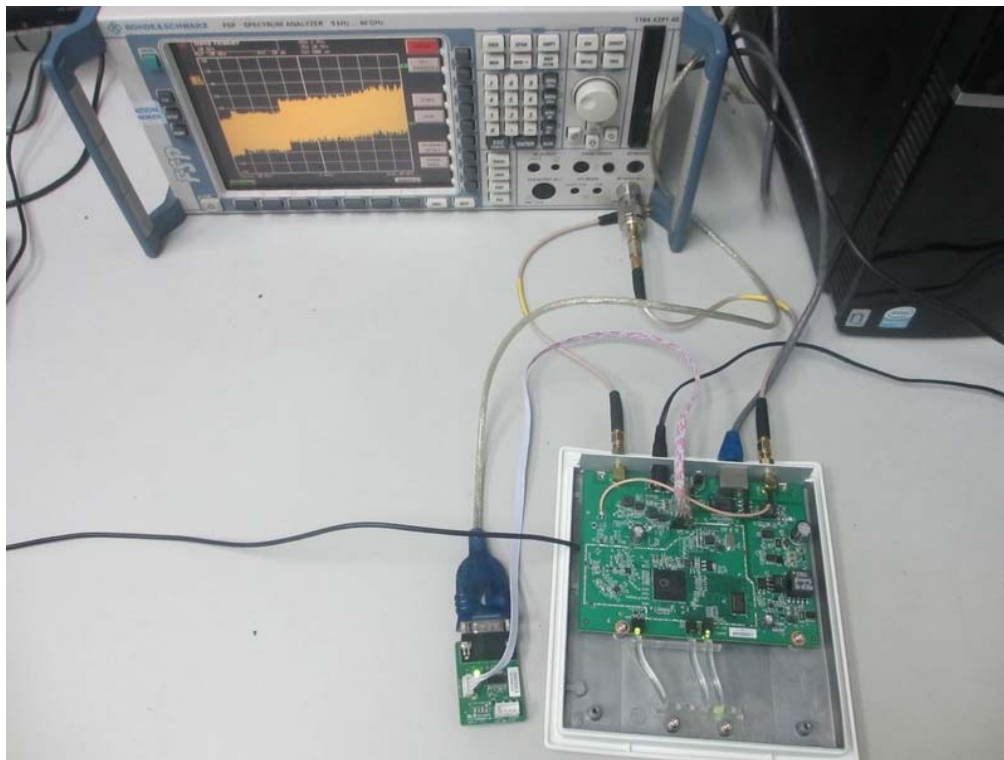



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz




7.1.6 TEST RESULTS

Test Mode :	TX B Mode
-------------	-----------




TX B mode CH01


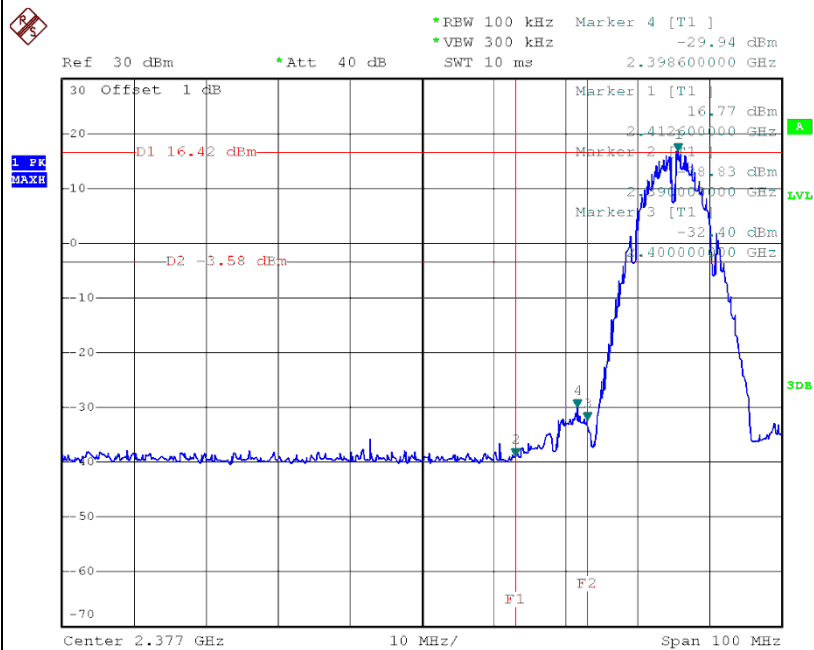


Date: 18.APR.2014 14:59:17

TX B mode CH11

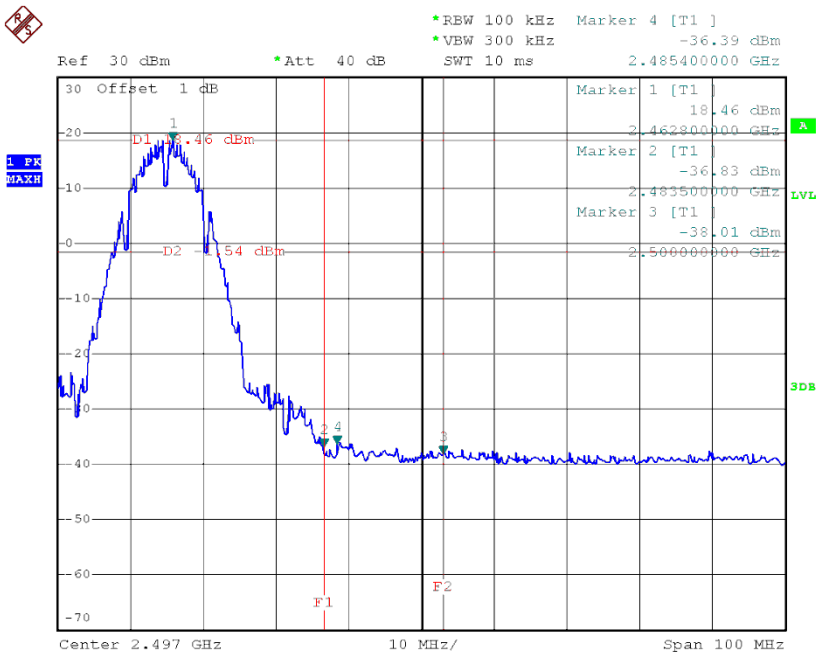


Date: 18.APR.2014 15:09:51

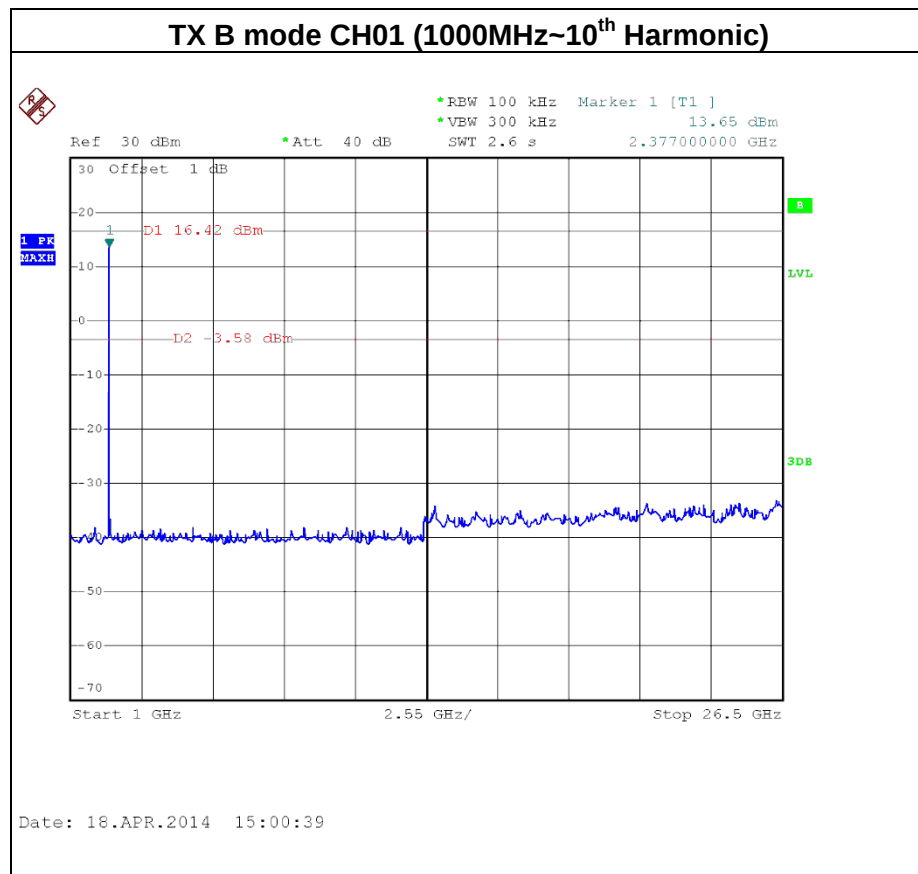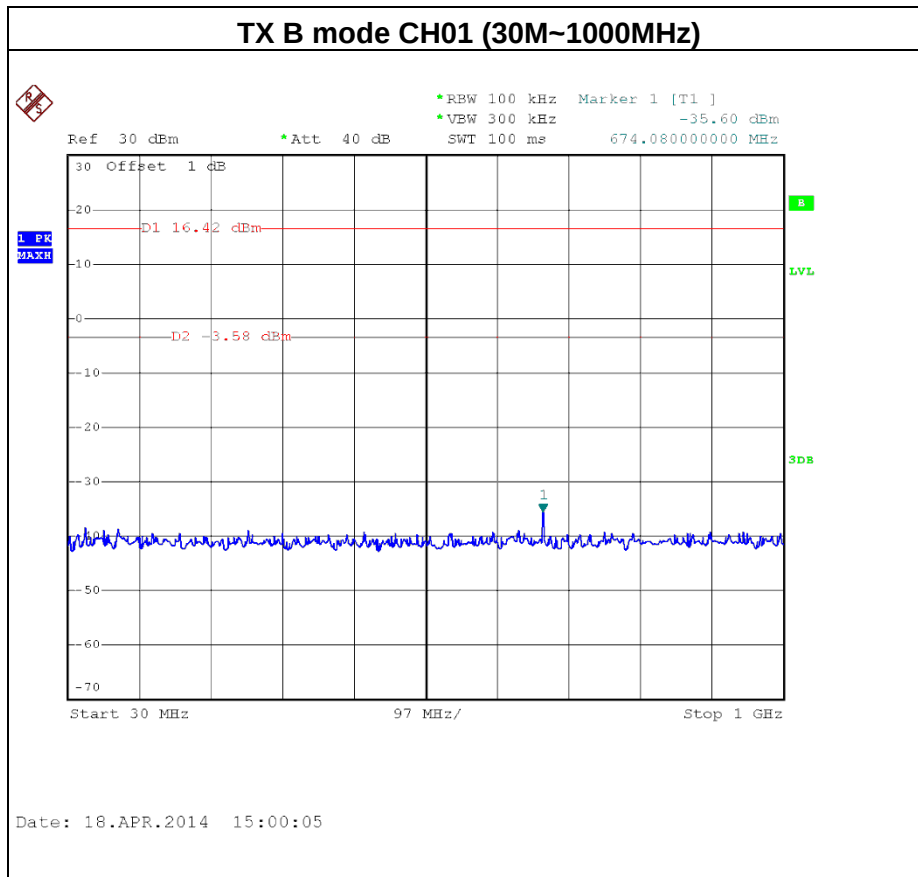




TX B mode CH06 (30M~1000MHz)

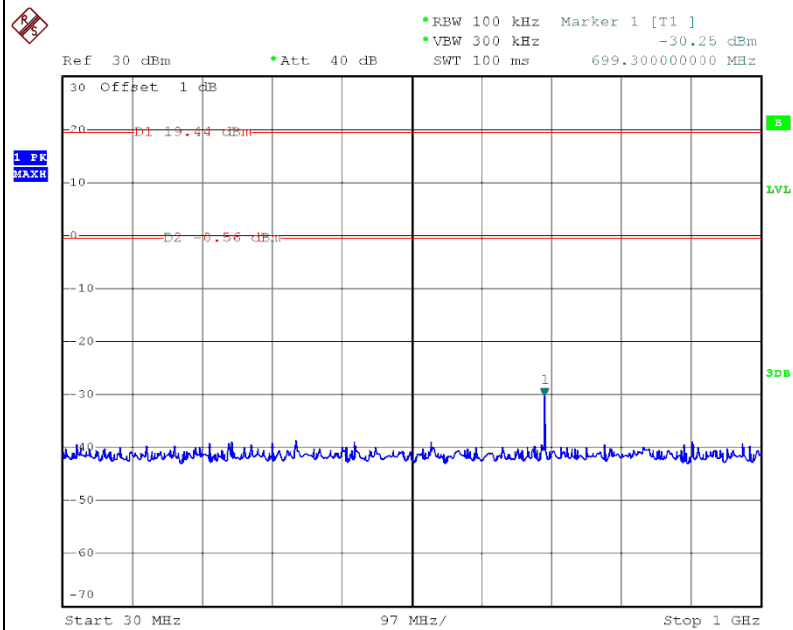

Date: 18.APR.2014 15:05:08


TX B mode CH06 (1000MHz~10th Harmonic)

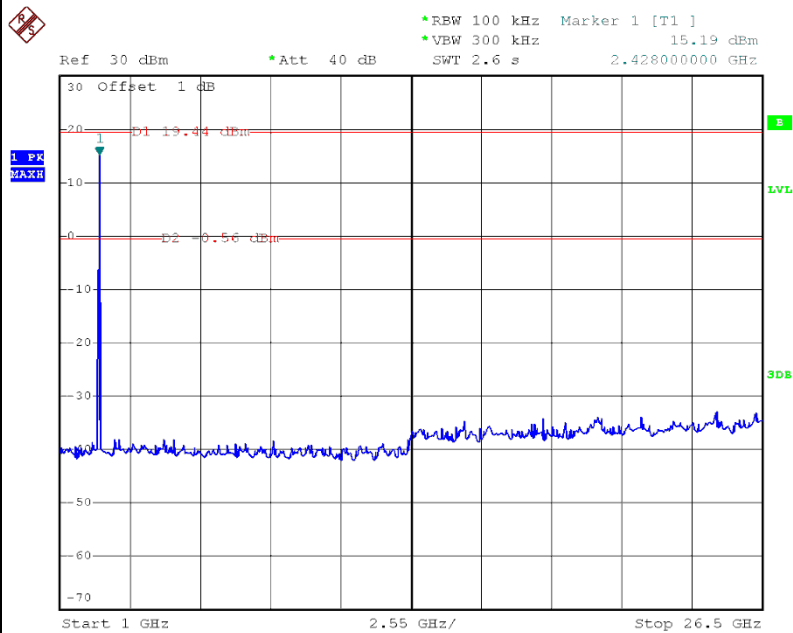

Date: 18.APR.2014 15:05:30




TX B mode CH11 (30M~1000MHz)

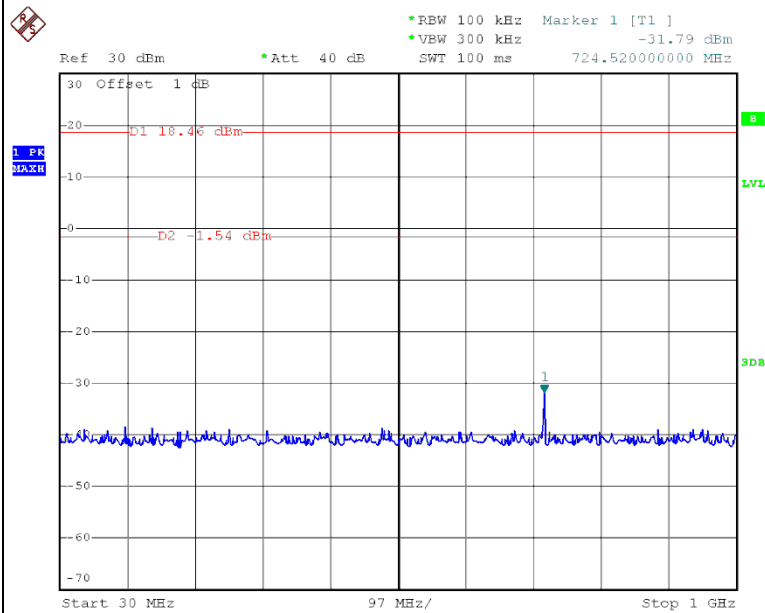

Date: 18.APR.2014 15:10:22

TX B mode CH11 (1000MHz~10th Harmonic)

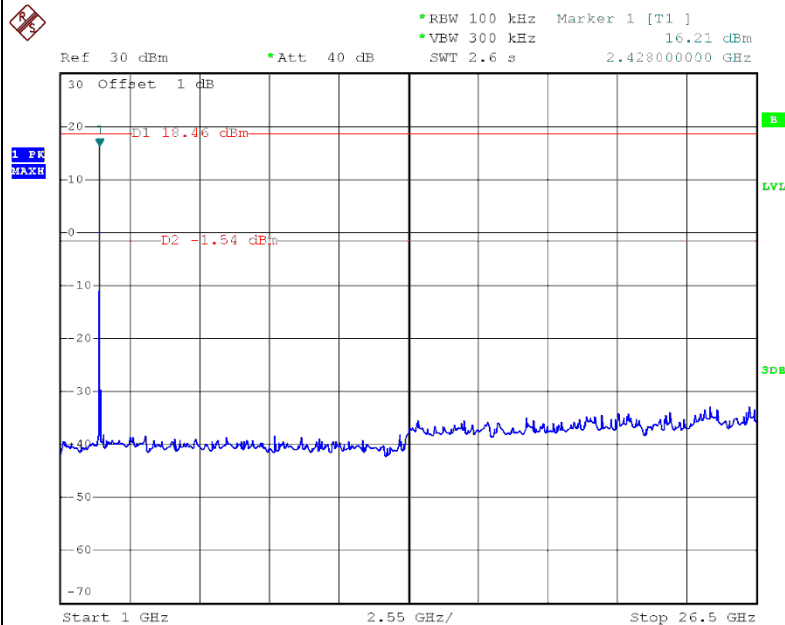


Date: 18.APR.2014 15:11:01



Test Mode :	TX G Mode
--------------------	------------------




TX G mode CH01


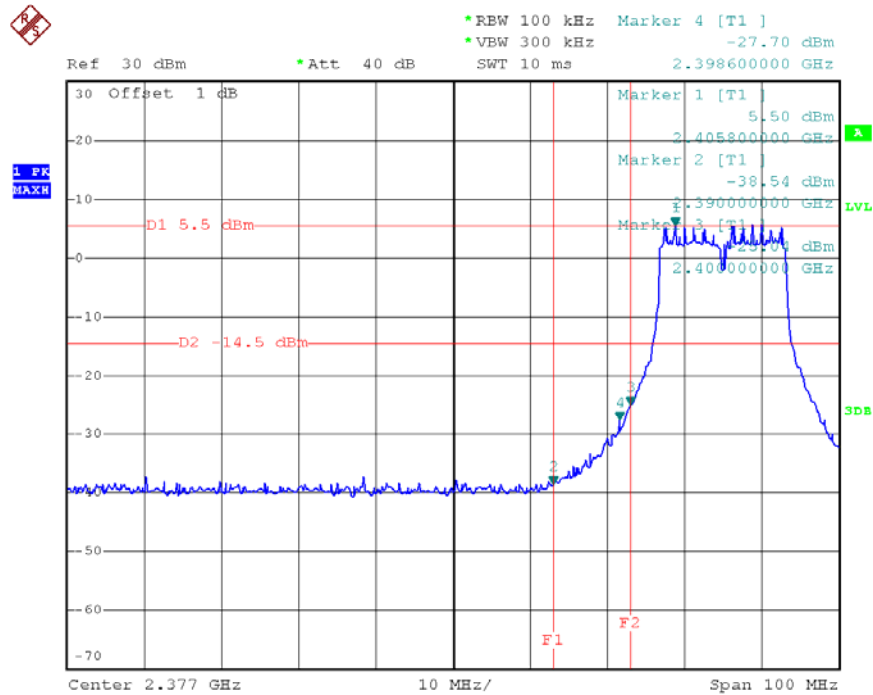




Date: 18.APR.2014 15:20:52

TX G mode CH11

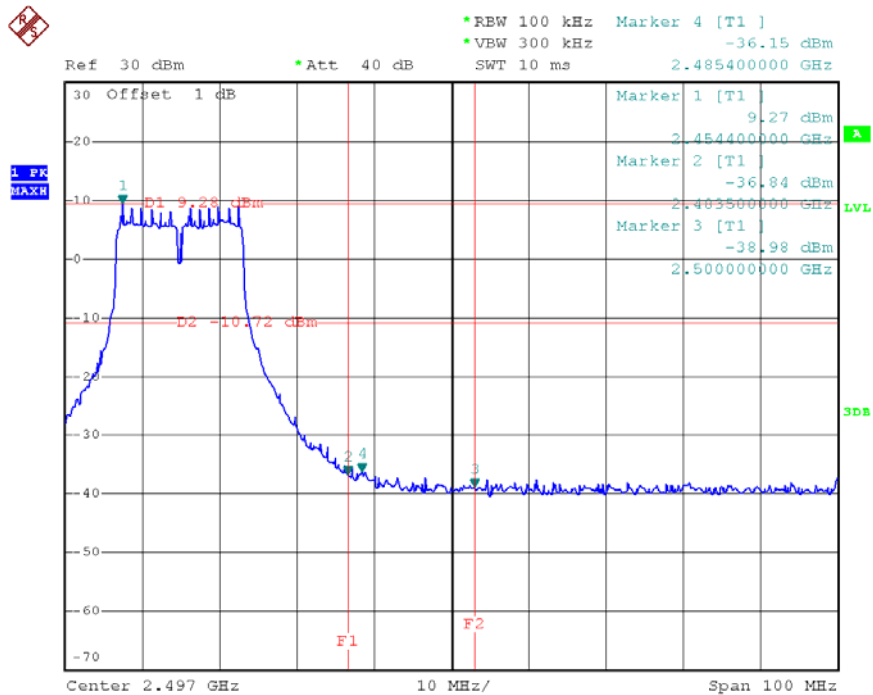


Date: 18.APR.2014 15:29:54

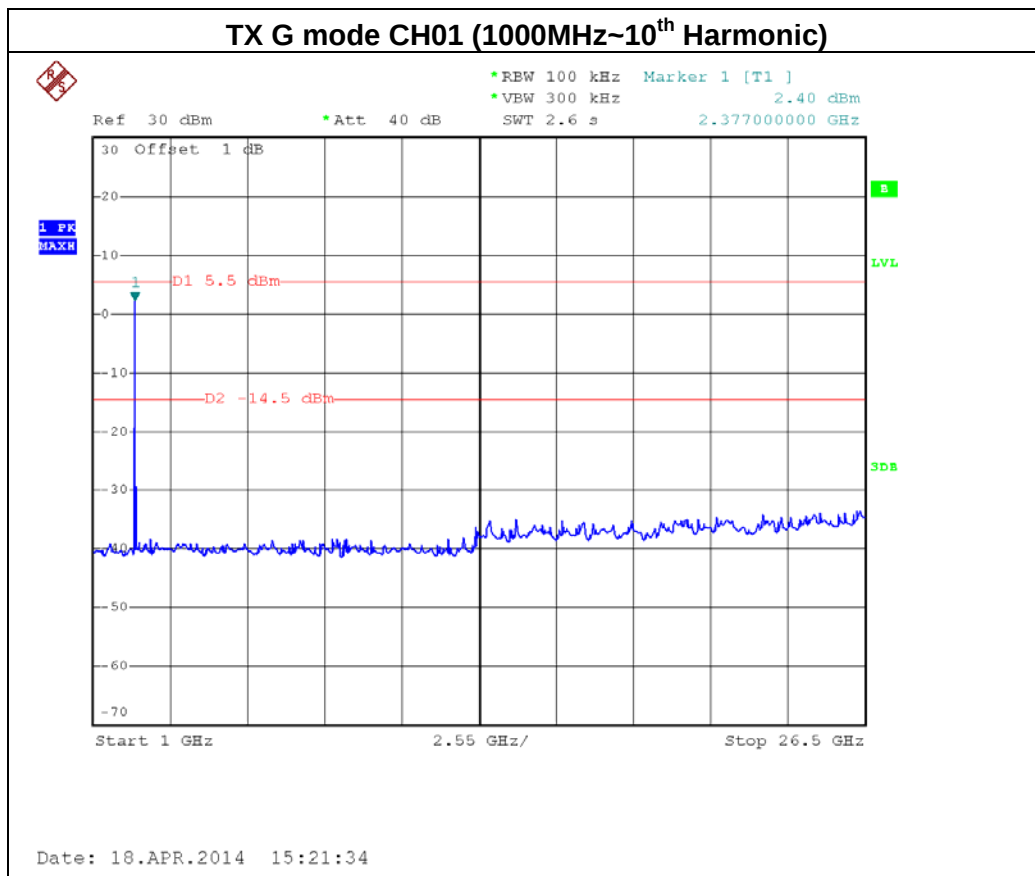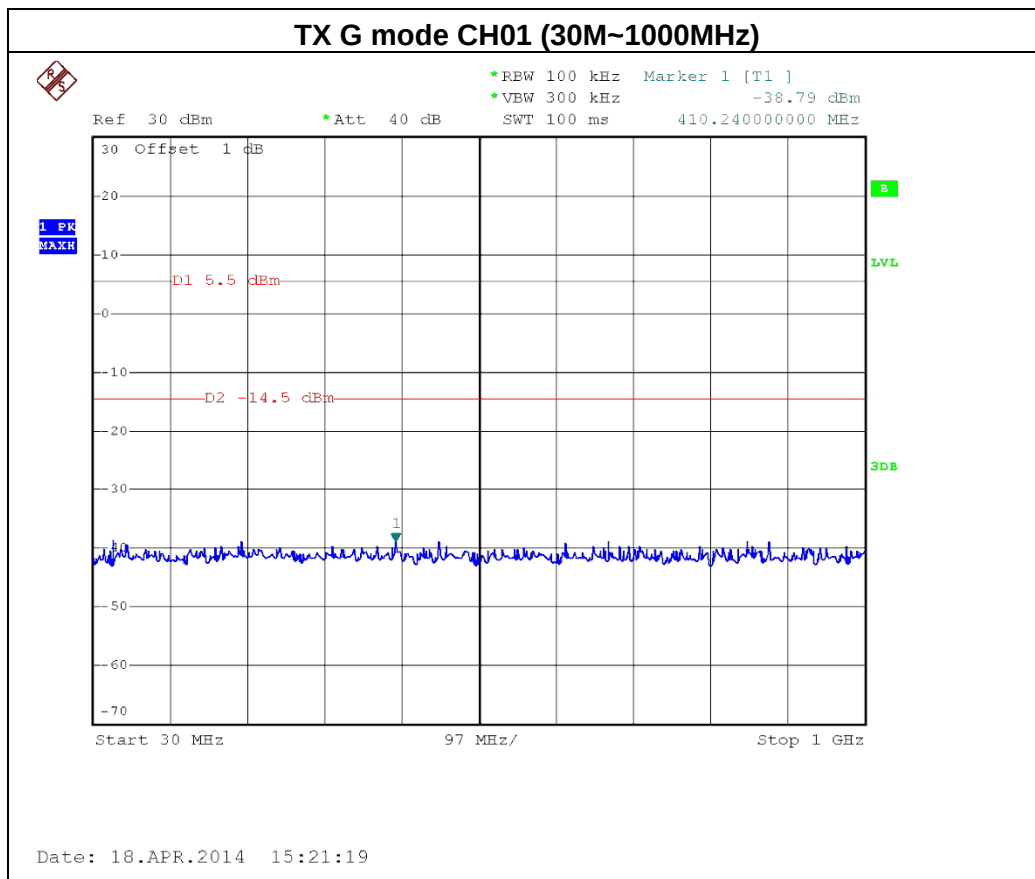

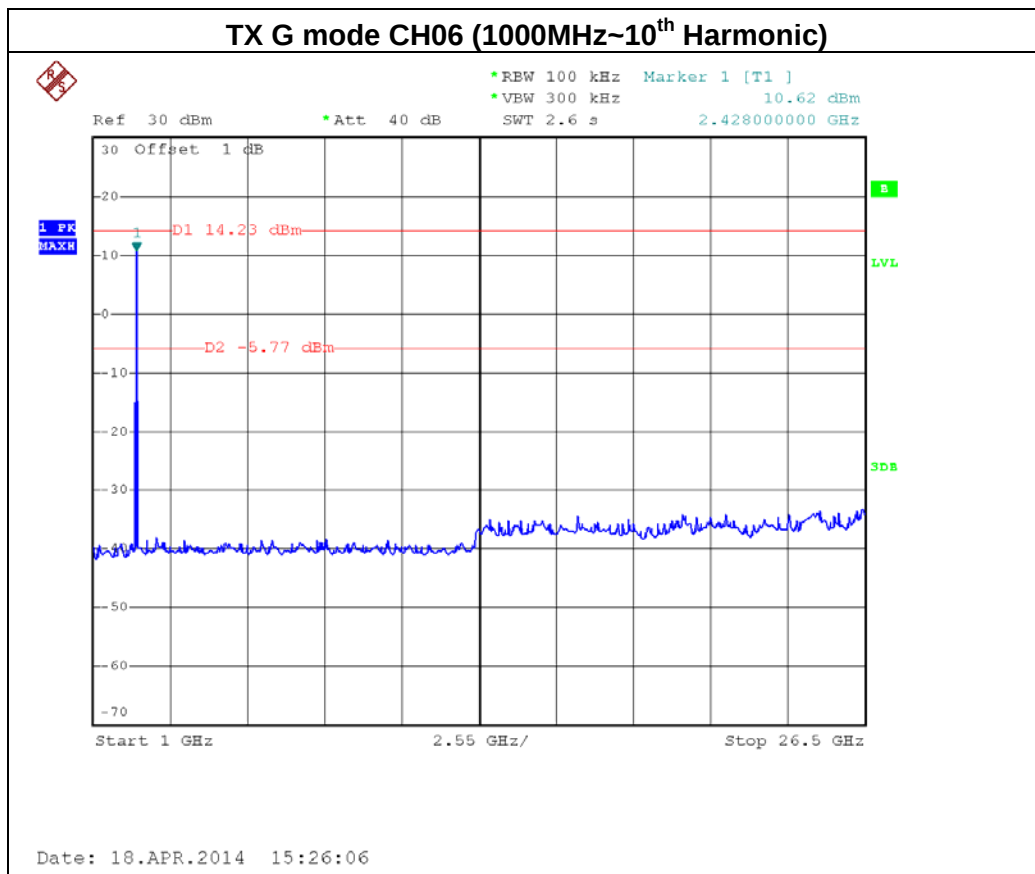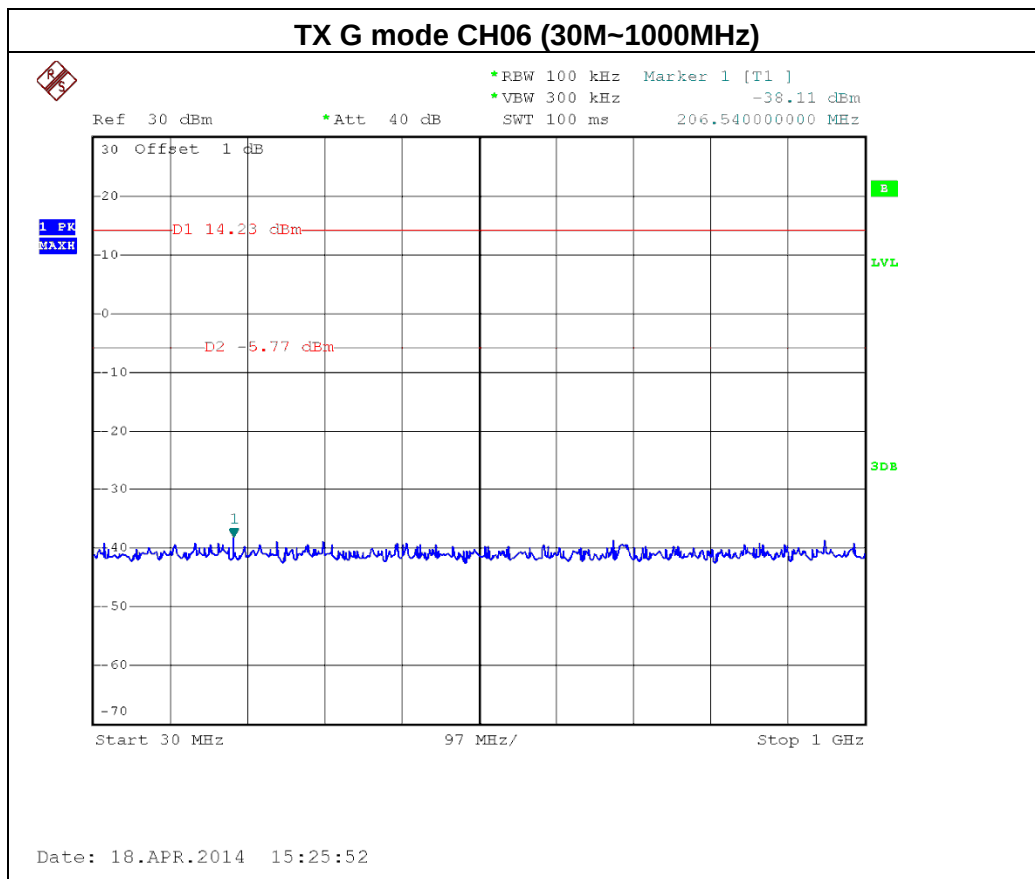




TX G mode CH11 (30M~1000MHz)

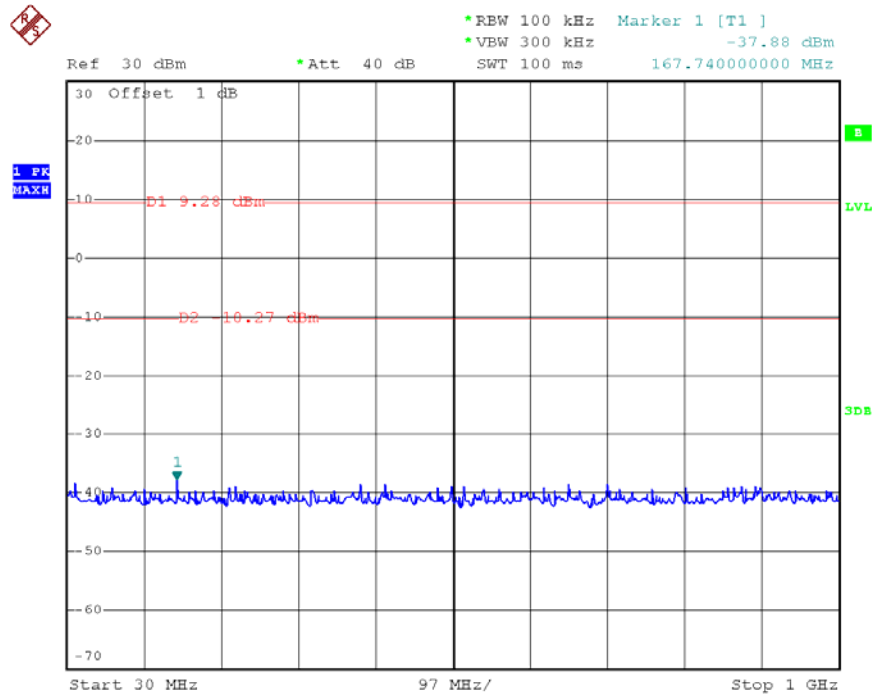

Date: 18.APR.2014 15:30:22

TX G mode CH11 (1000MHz~10th Harmonic)

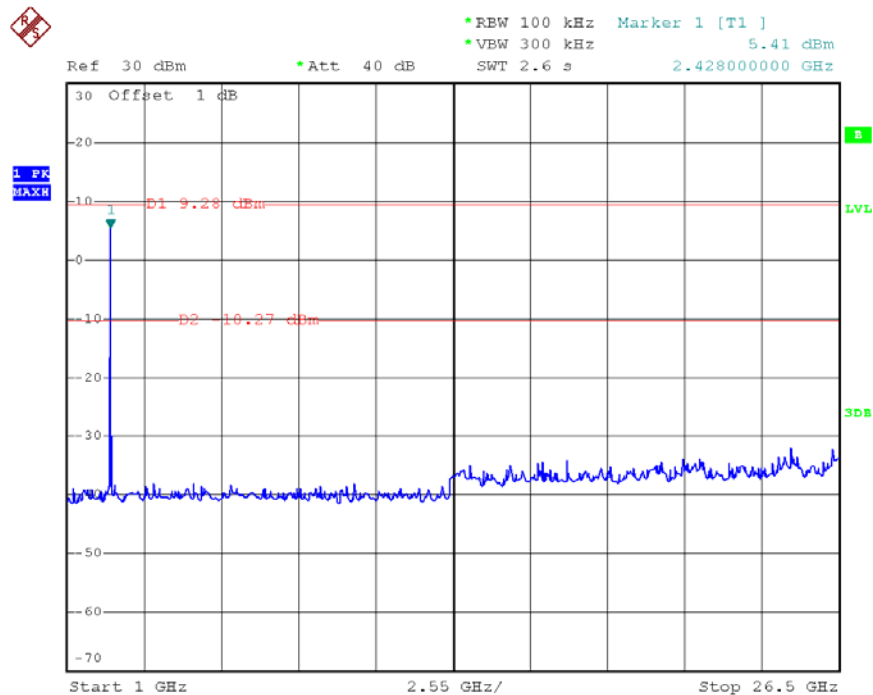


Date: 18.APR.2014 15:30:35



Test Mode :	TX N-20M Mode_ANT 1
--------------------	----------------------------




TX HT20 mode CH01


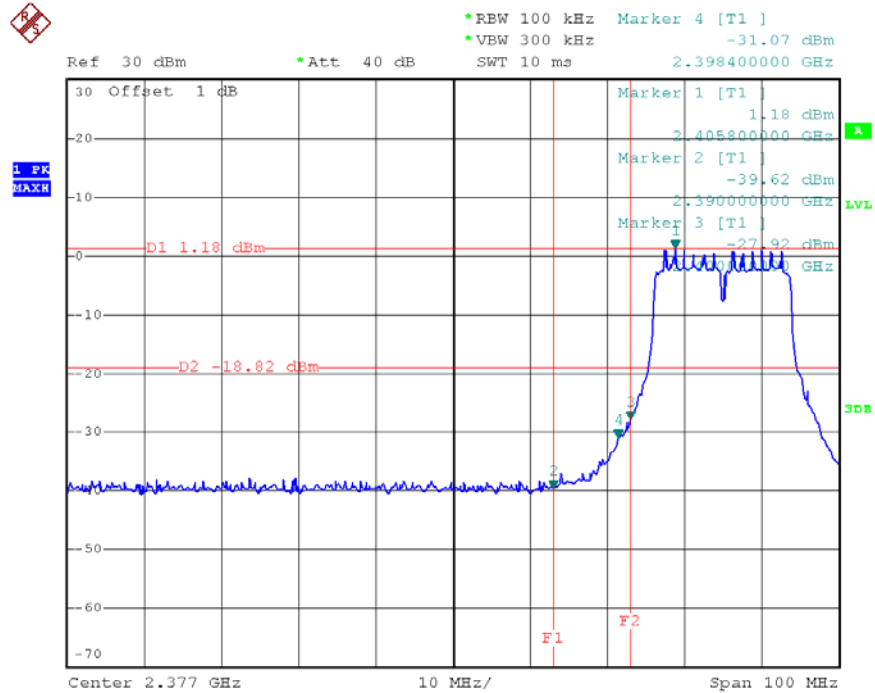




Date: 18.APR.2014 16:07:40



TX HT20 mode CH11

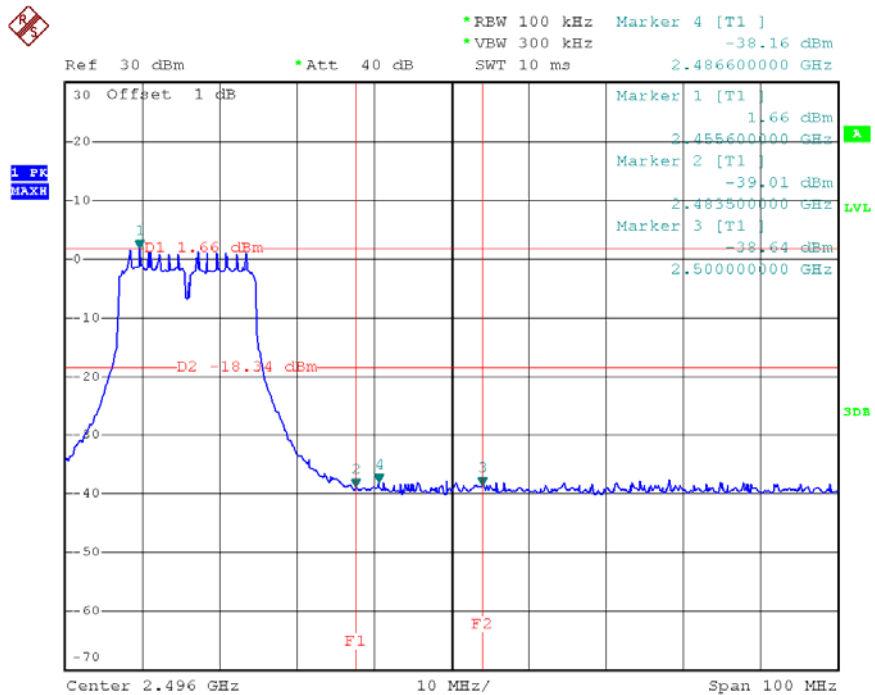

Date: 18.APR.2014 16:23:46

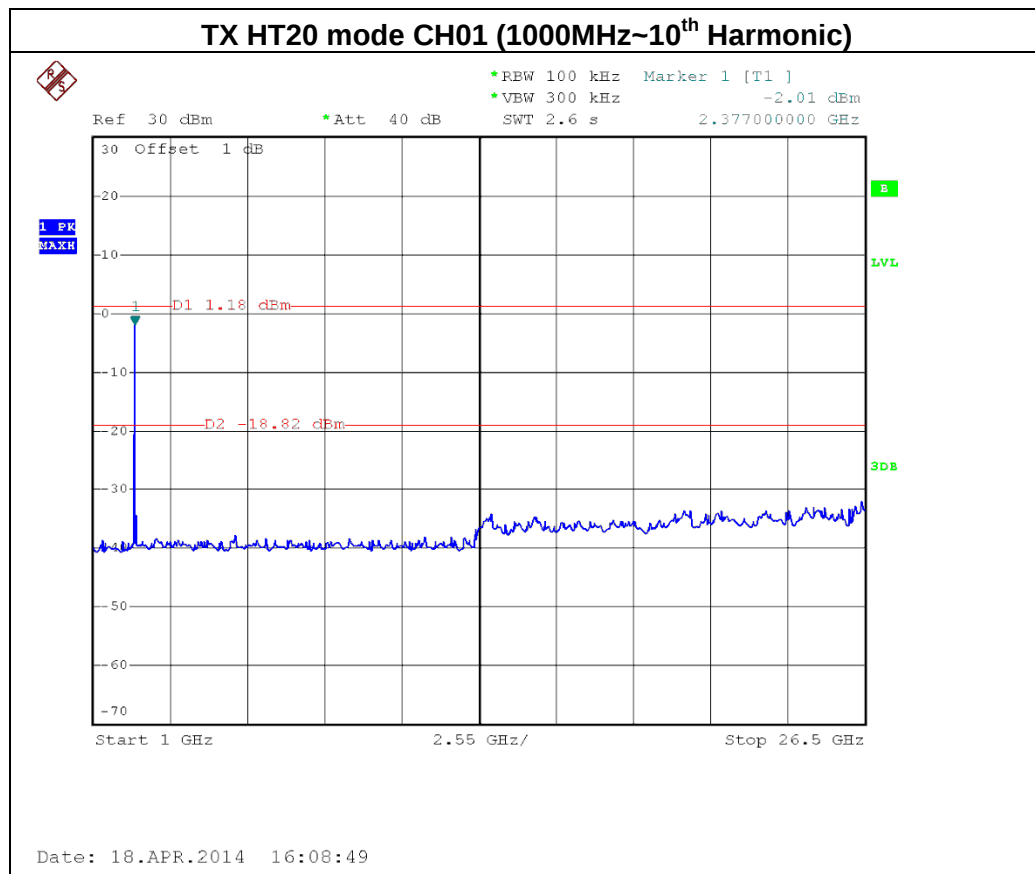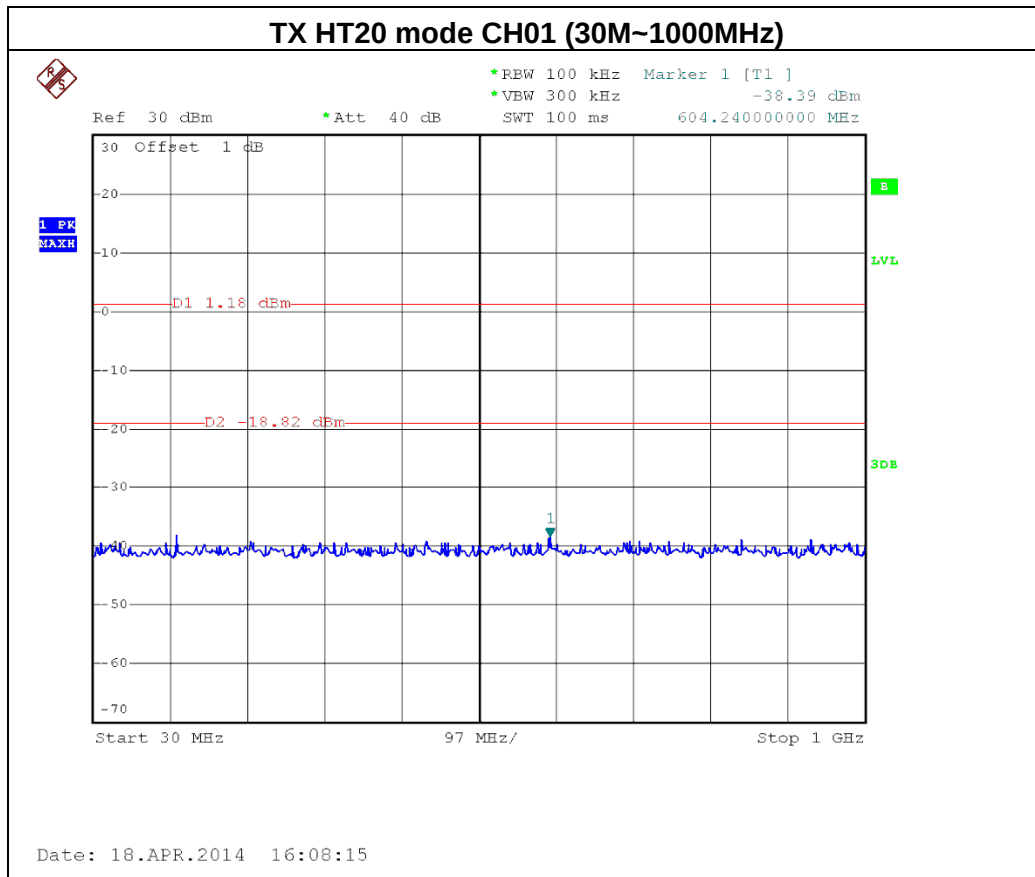

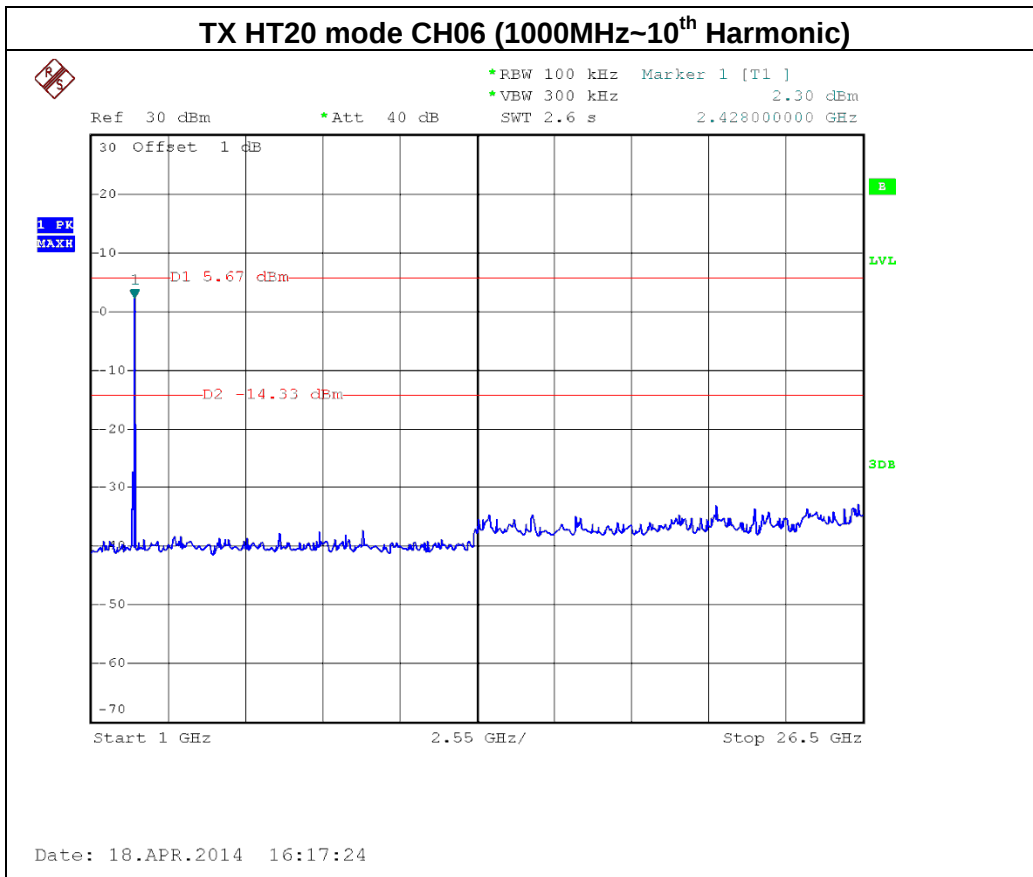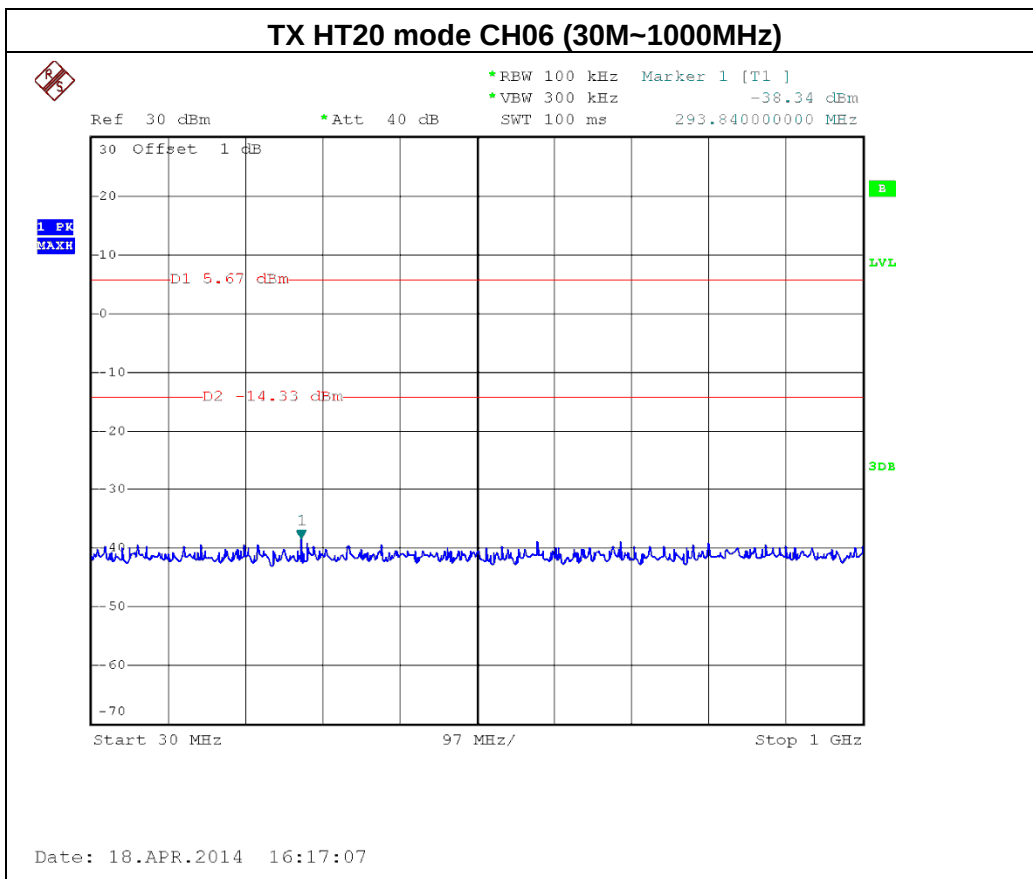

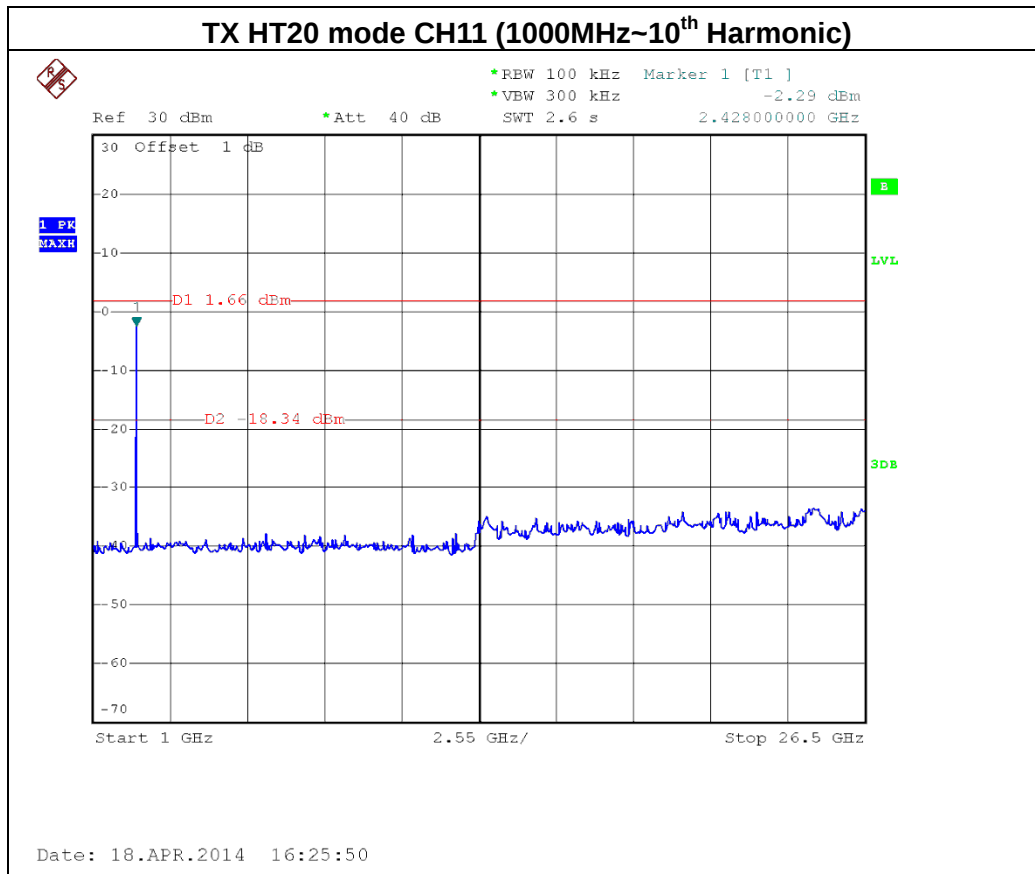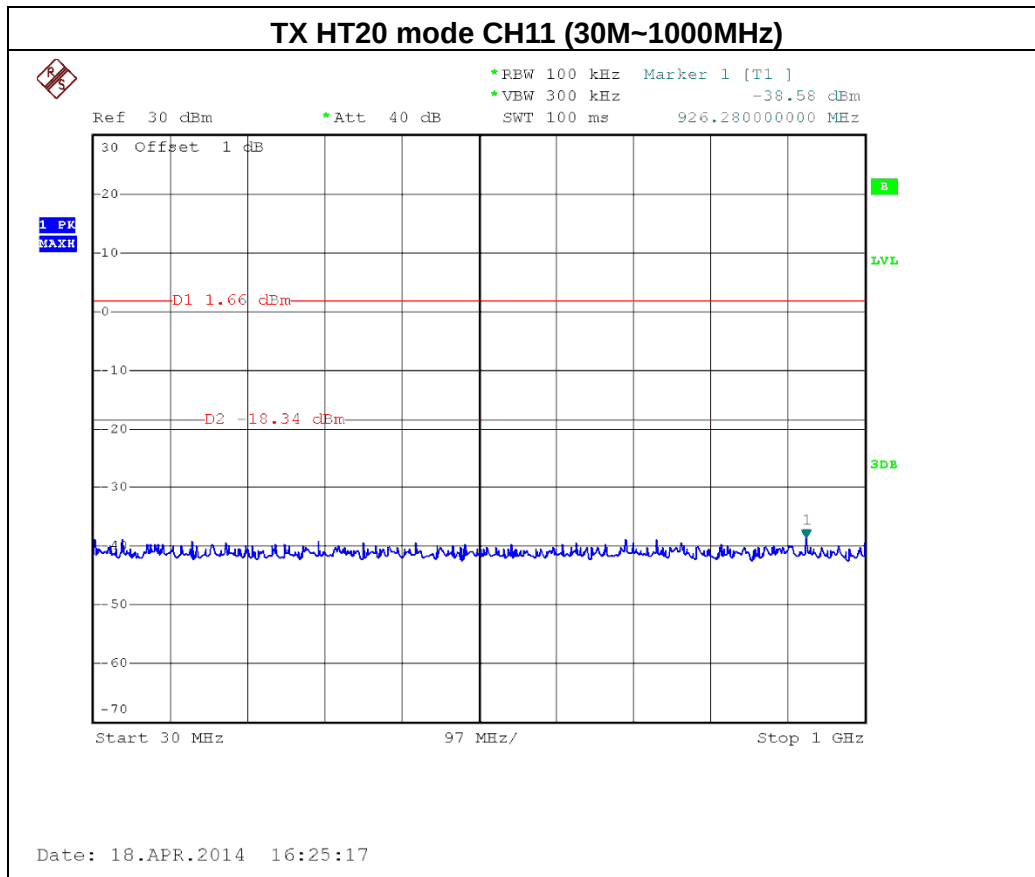




Test Mode :	TX N-20M Mode_ANT 2
--------------------	---------------------




TX HT20 mode CH01


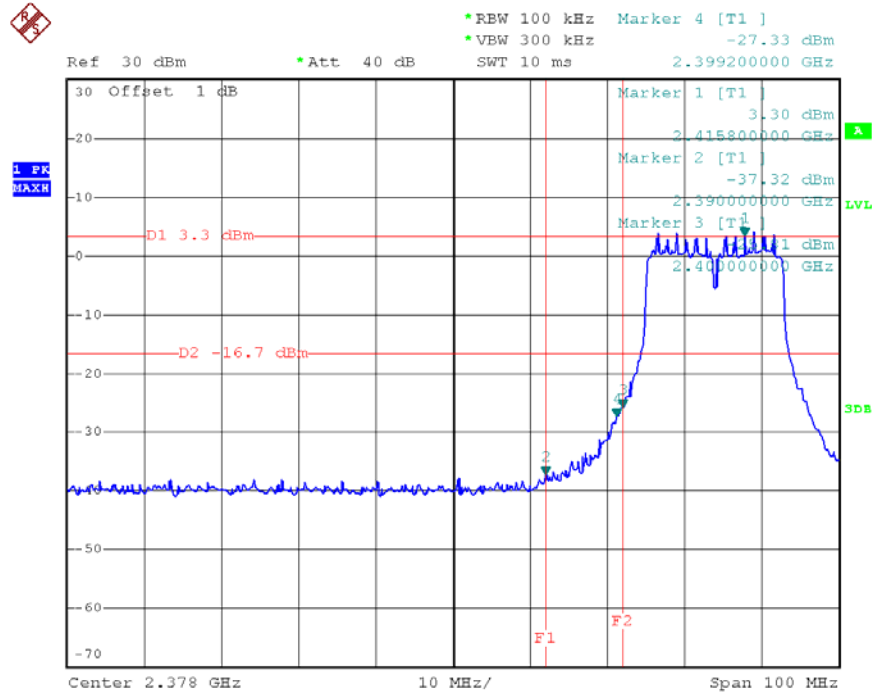




Date: 18.APR.2014 15:38:35



TX HT20 mode CH11

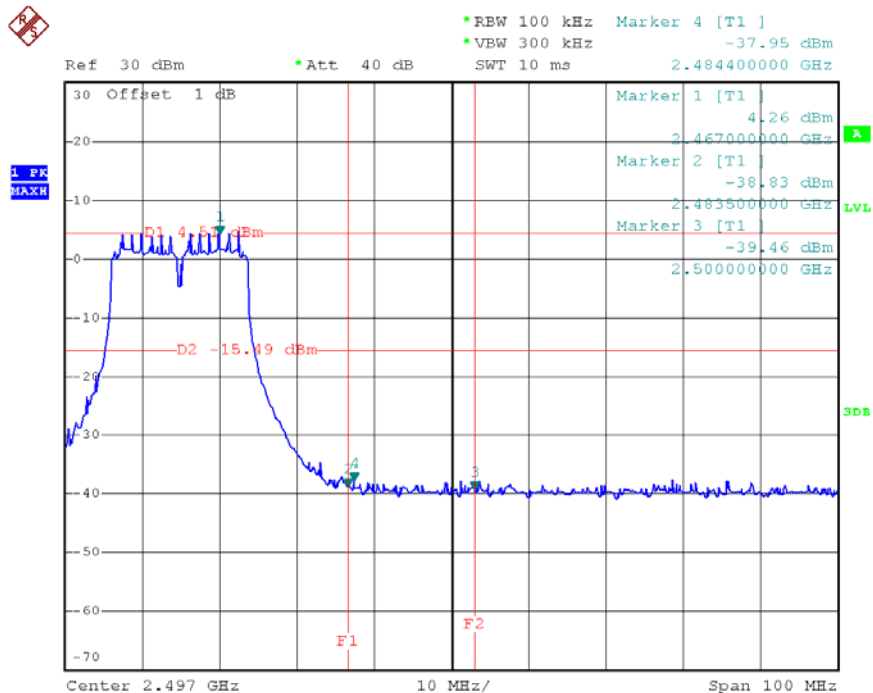

Date: 18.APR.2014 15:55:56

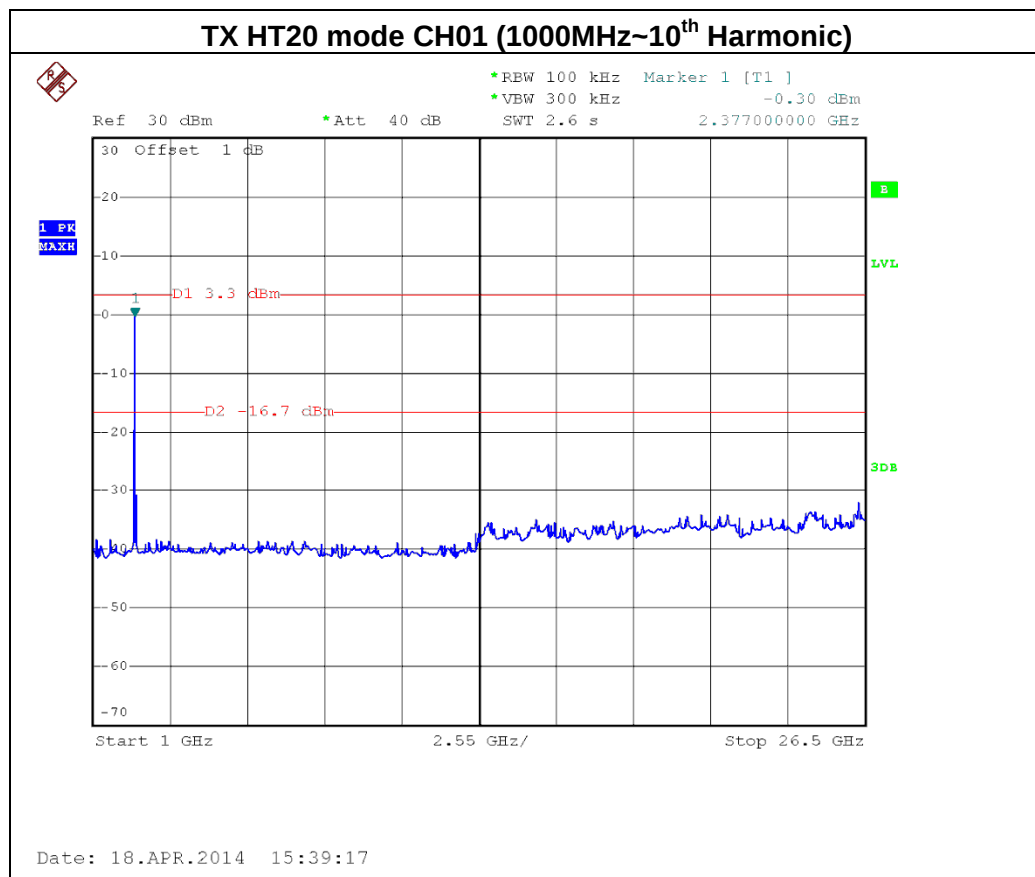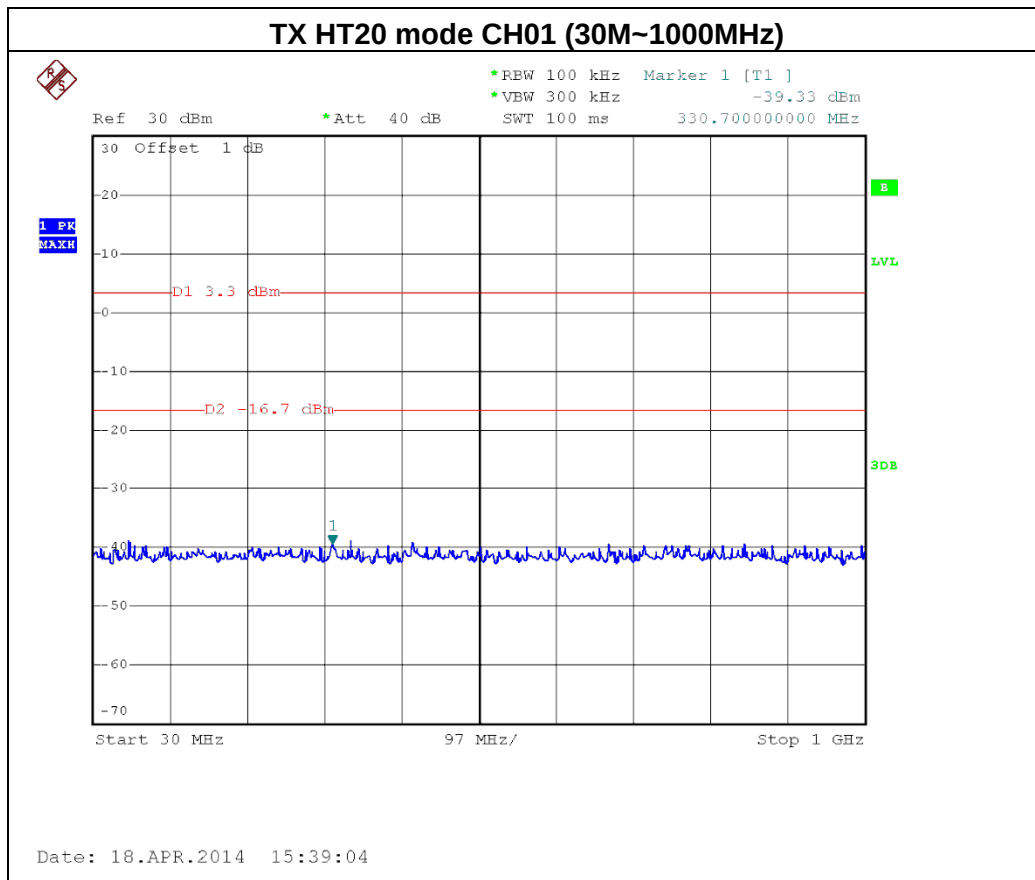

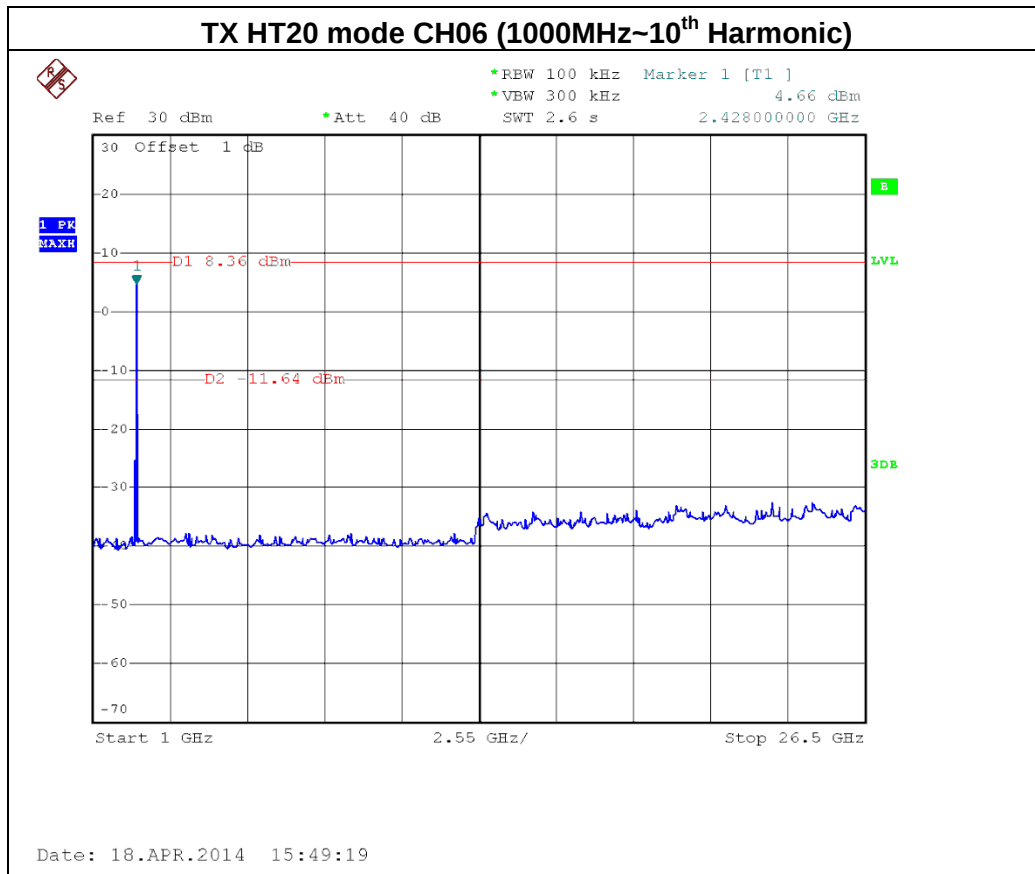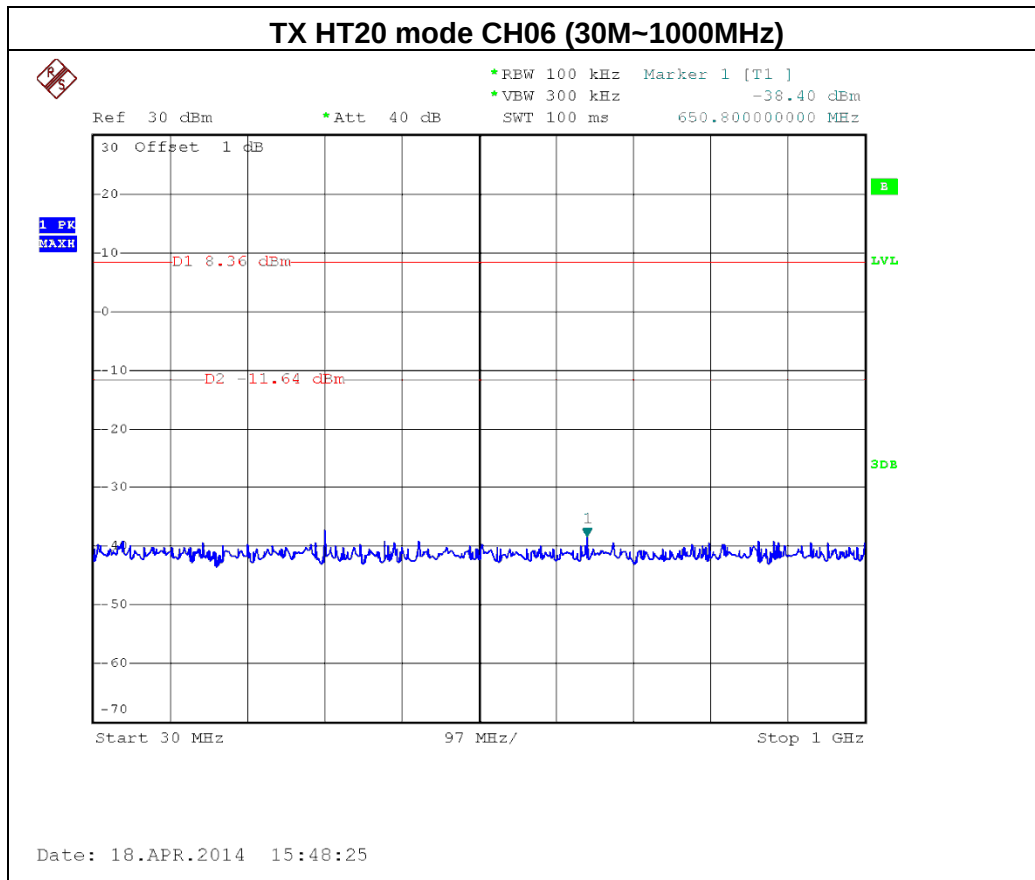

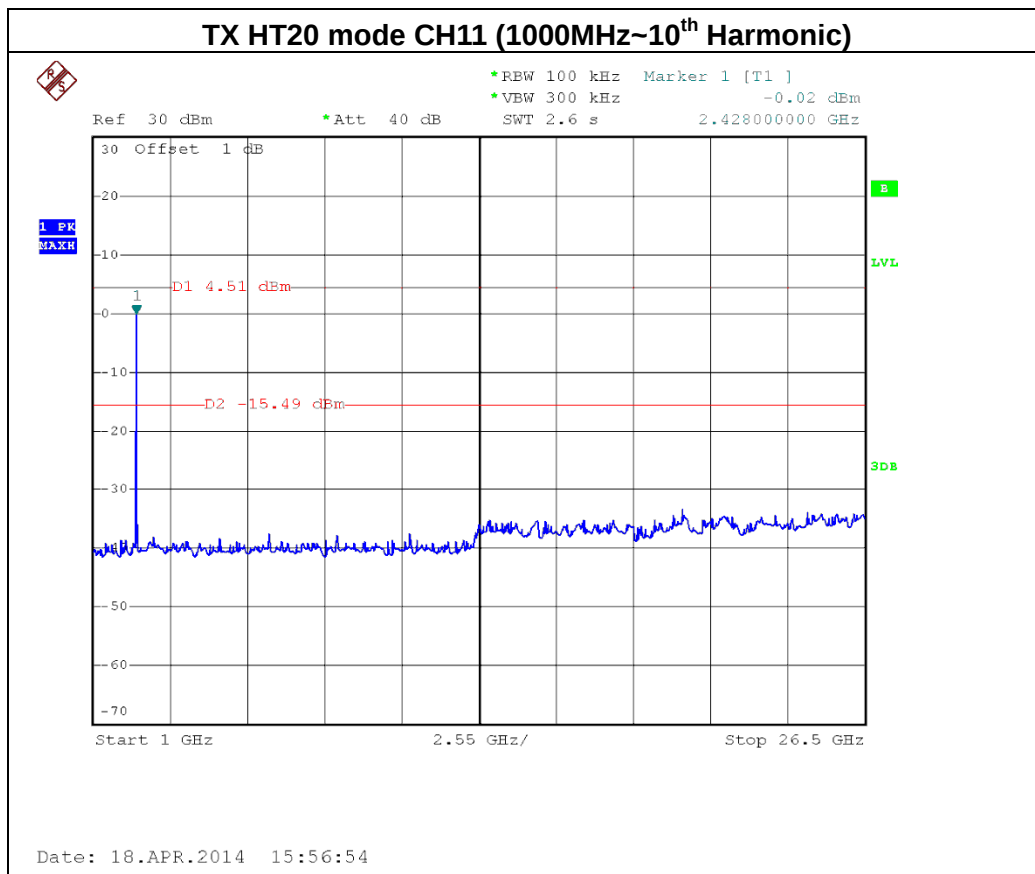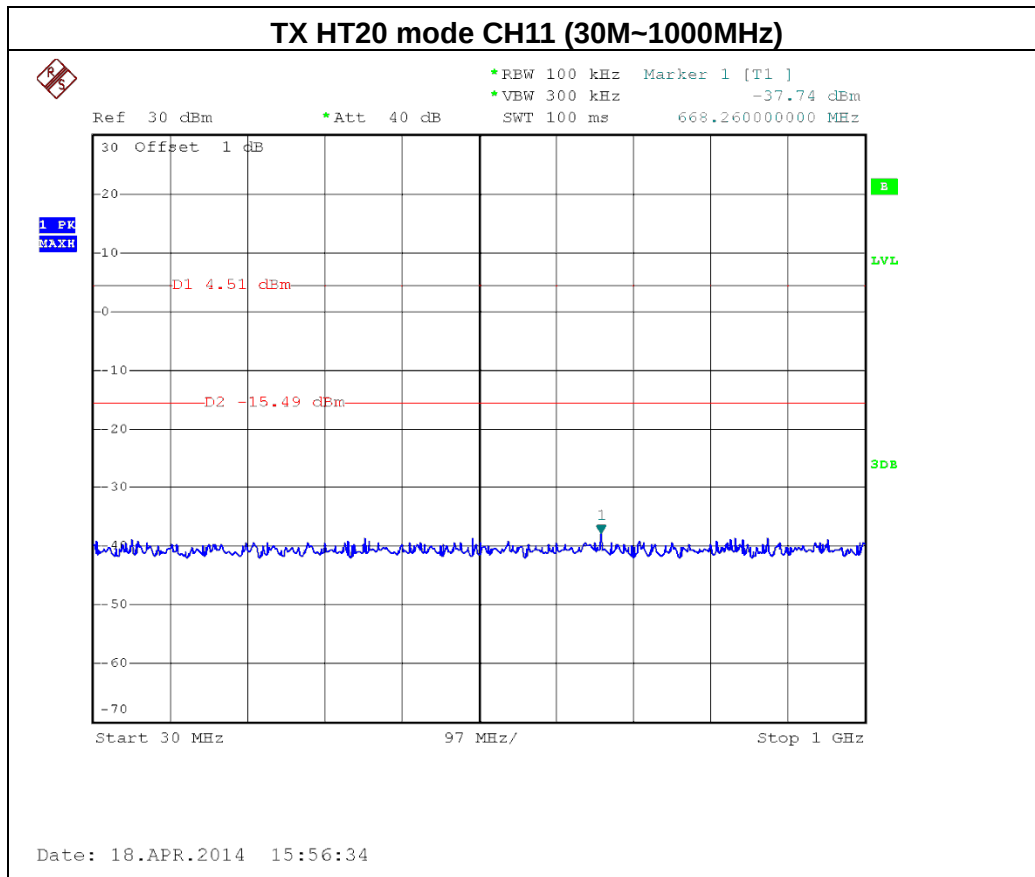




Test Mode :	TX N-40M Mode_ANT 1
--------------------	----------------------------




TX HT40 mode CH03

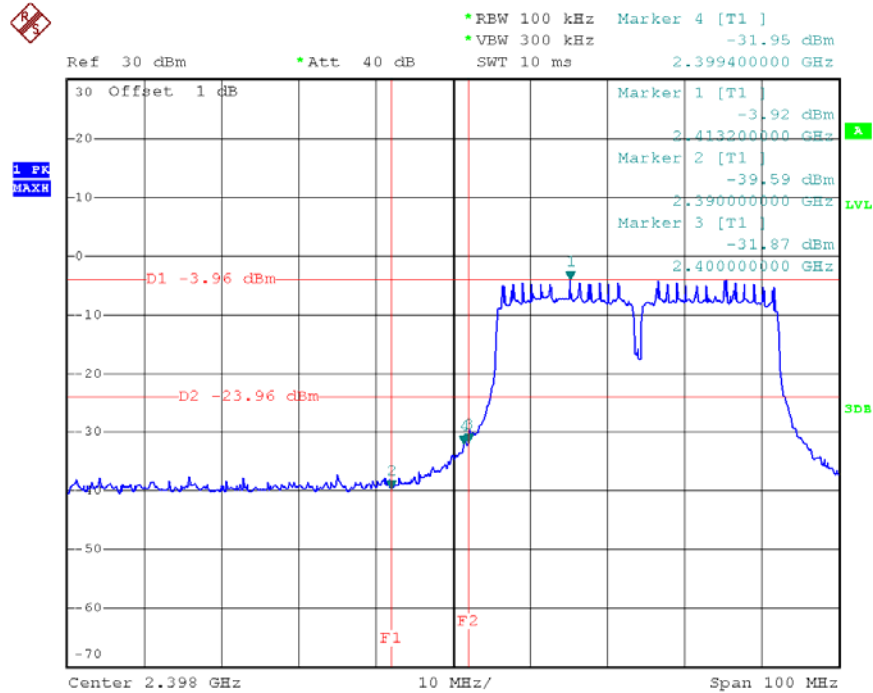


Date: 18.APR.2014 16:32:00

TX HT40 mode CH09

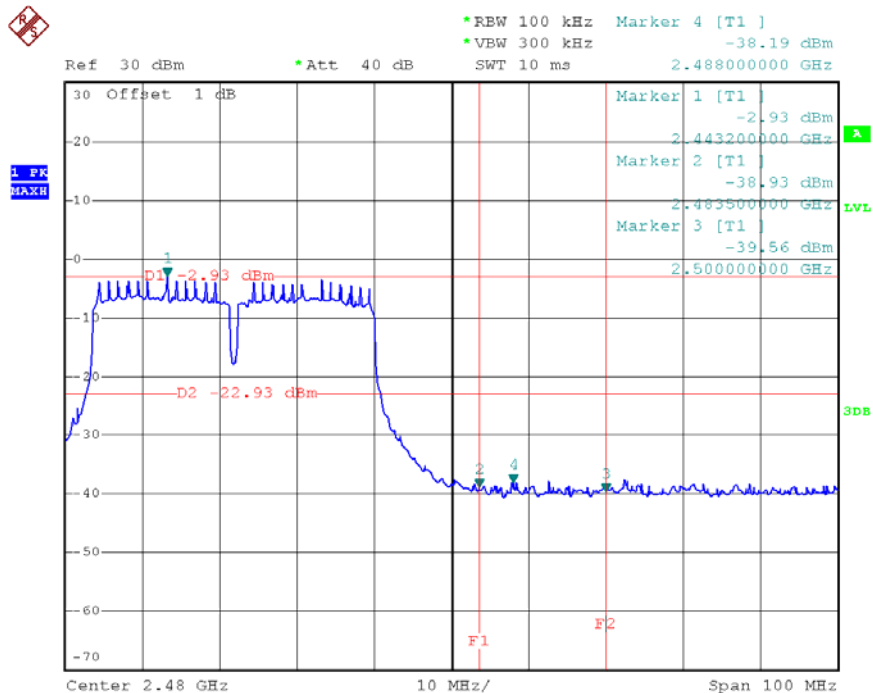




TX HT40 mode CH03 (30M~1000MHz)

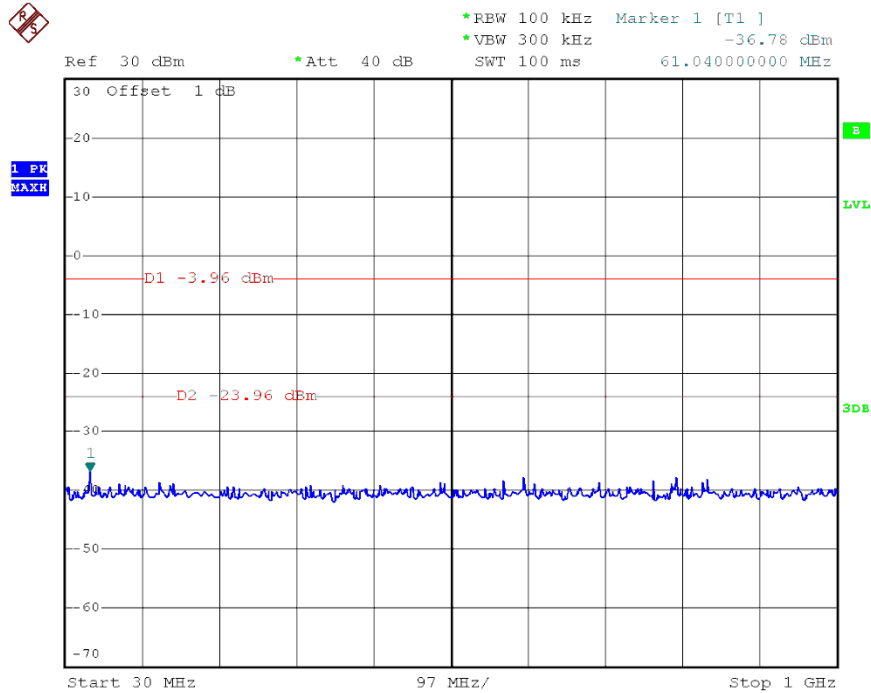

Date: 18.APR.2014 16:32:34


TX HT40 mode CH03 (1000MHz~10th Harmonic)

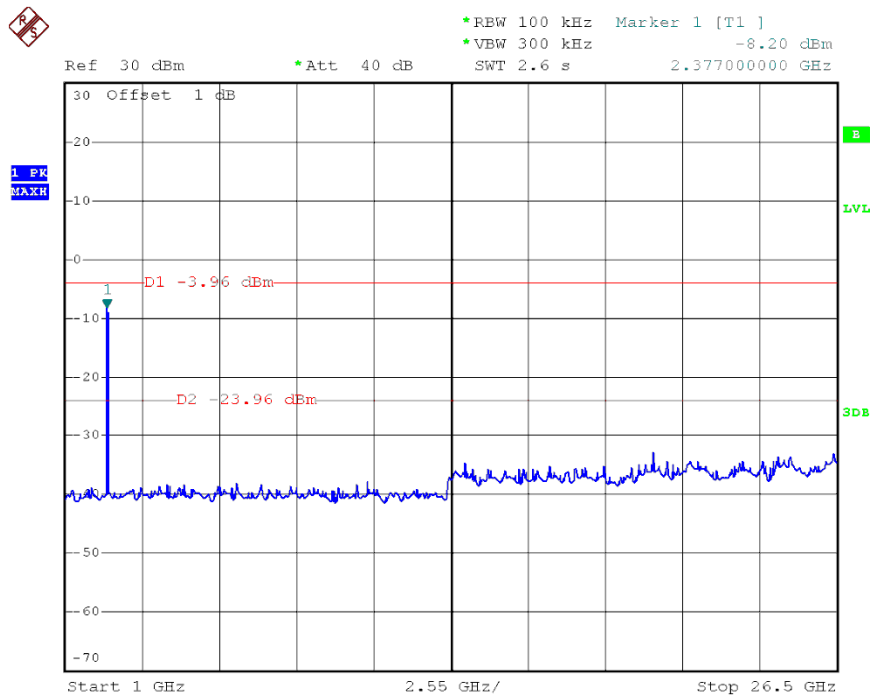

Date: 18.APR.2014 16:33:03




TX HT40 mode CH06 (30M~1000MHz)


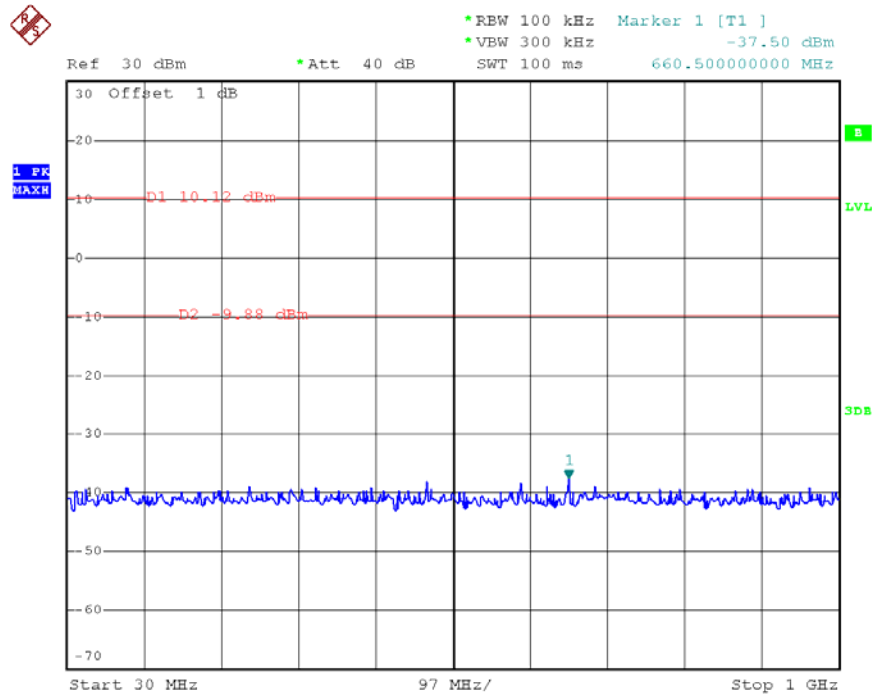


Date: 18.APR.2014 16:38:33

TX HT40 mode CH06 (1000MHz~10th Harmonic)

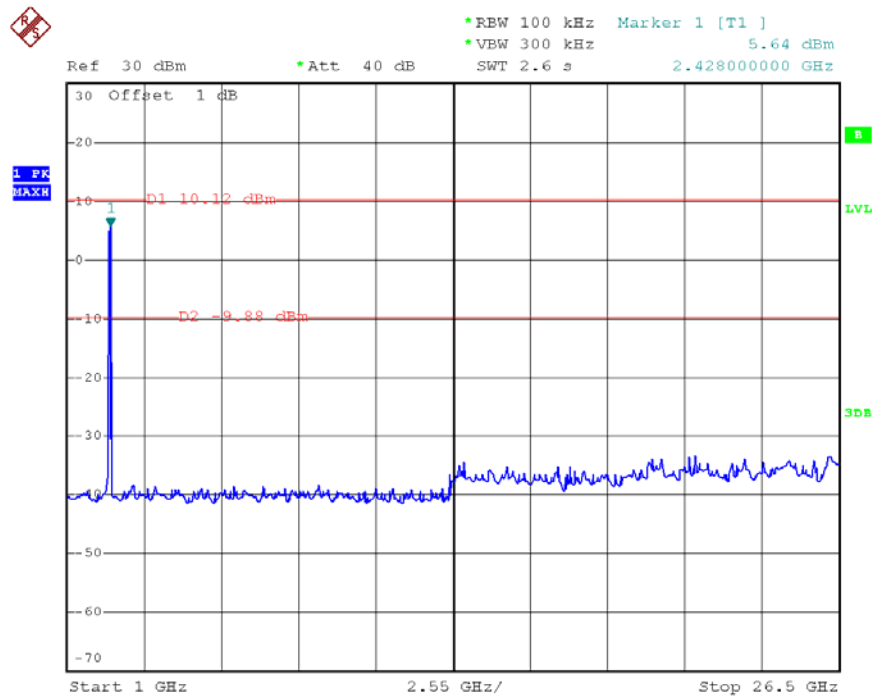

Date: 18.APR.2014 16:39:10

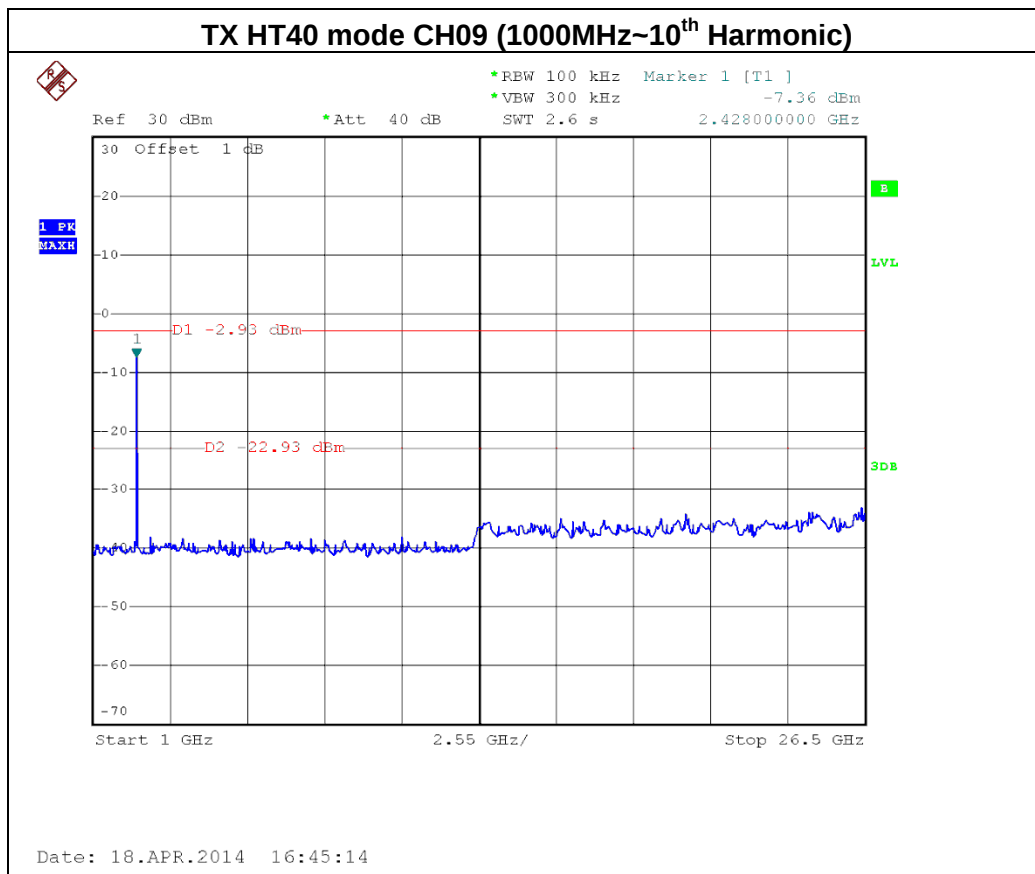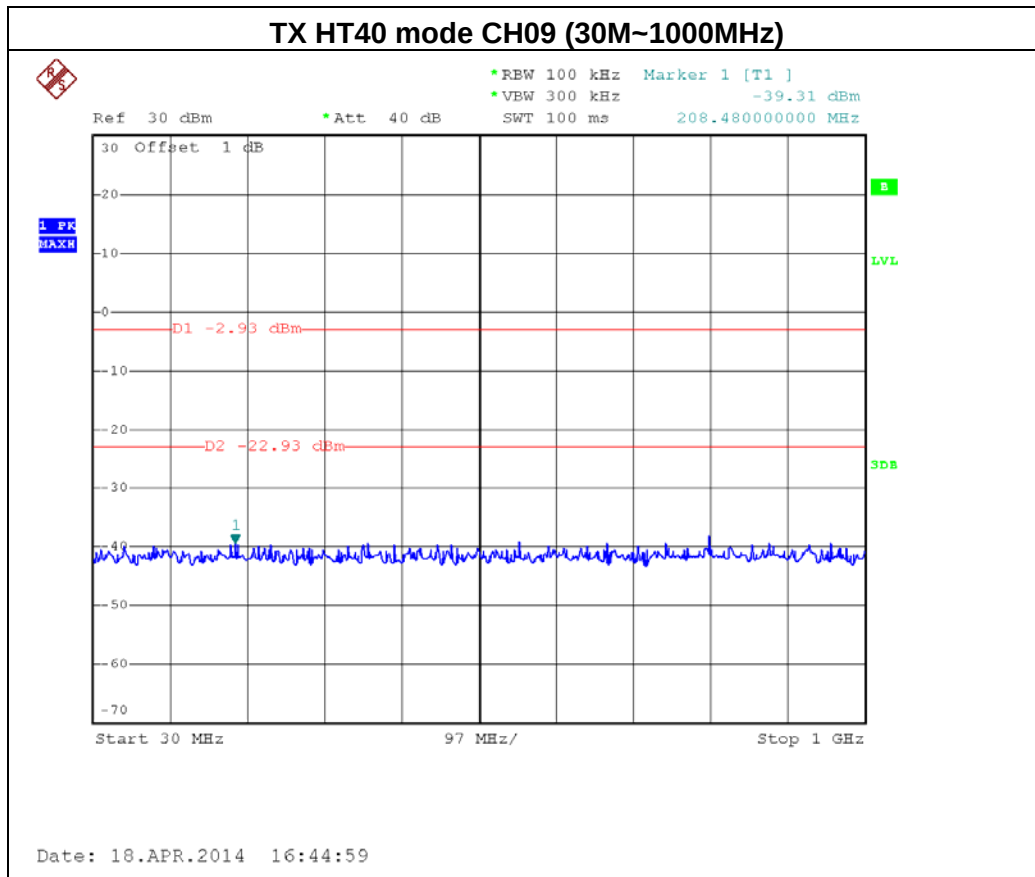




Test Mode :	TX N-40M Mode_ANT 2
--------------------	----------------------------




TX HT40 mode CH03

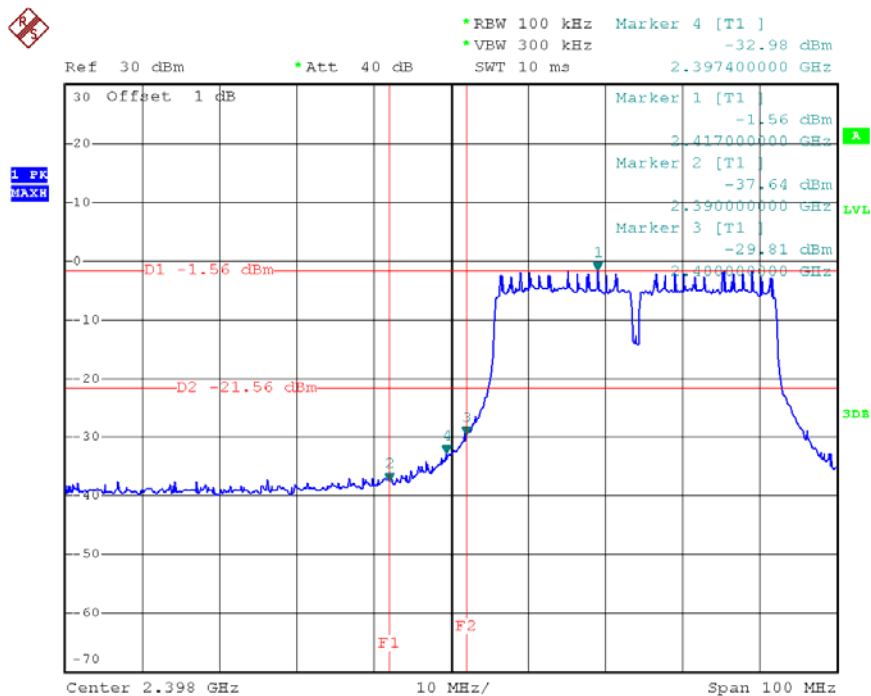

Date: 18.APR.2014 16:54:24


TX HT40 mode CH09

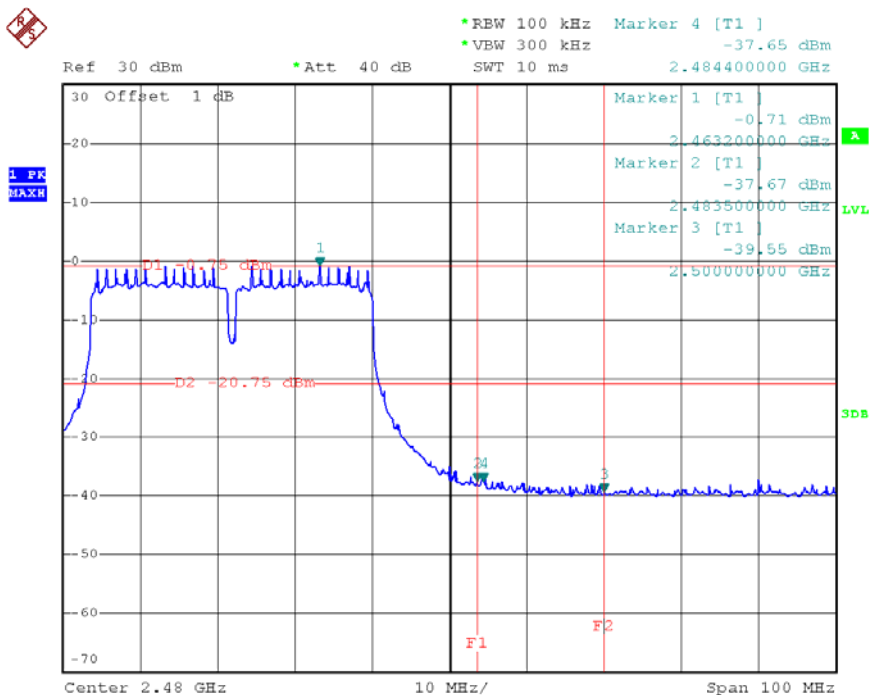

Date: 18.APR.2014 17:05:00




TX HT40 mode CH03 (30M~1000MHz)

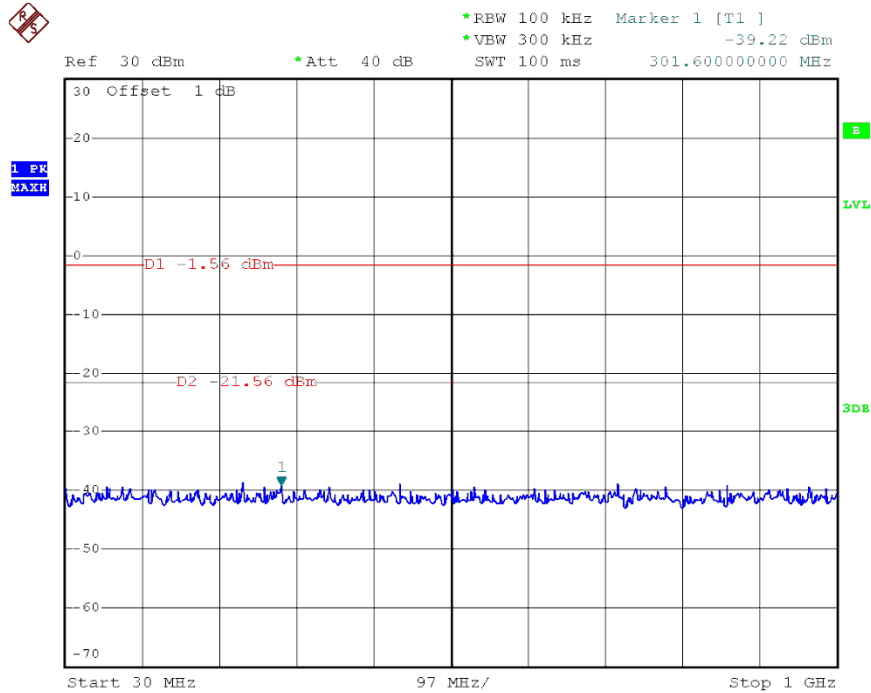

Date: 18.APR.2014 16:54:57


TX HT40 mode CH03 (1000MHz~10th Harmonic)

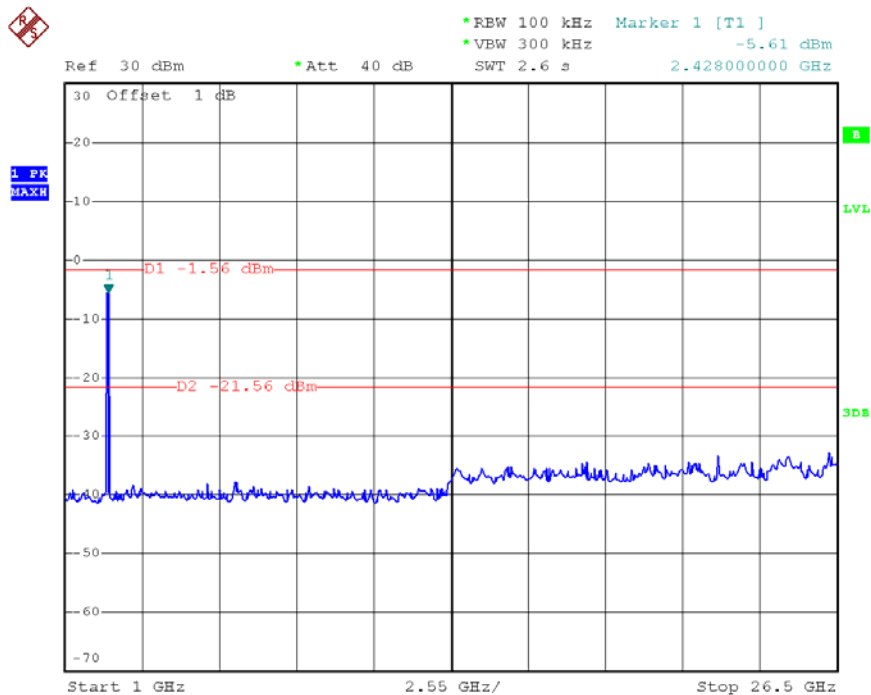

Date: 18.APR.2014 16:55:15




TX HT40 mode CH06 (30M~1000MHz)


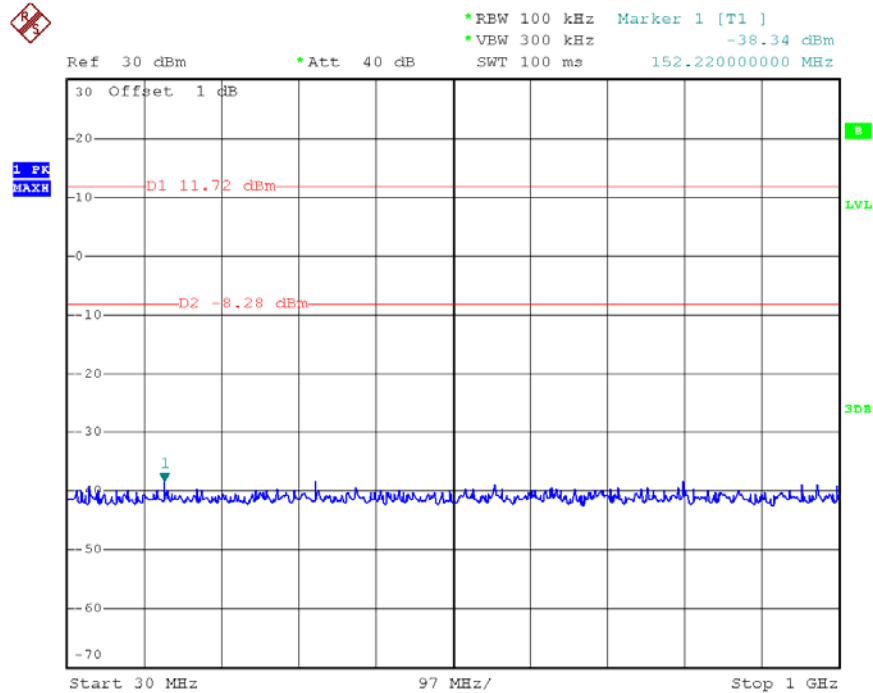


Date: 18.APR.2014 16:59:13

TX HT40 mode CH06 (1000MHz~10th Harmonic)

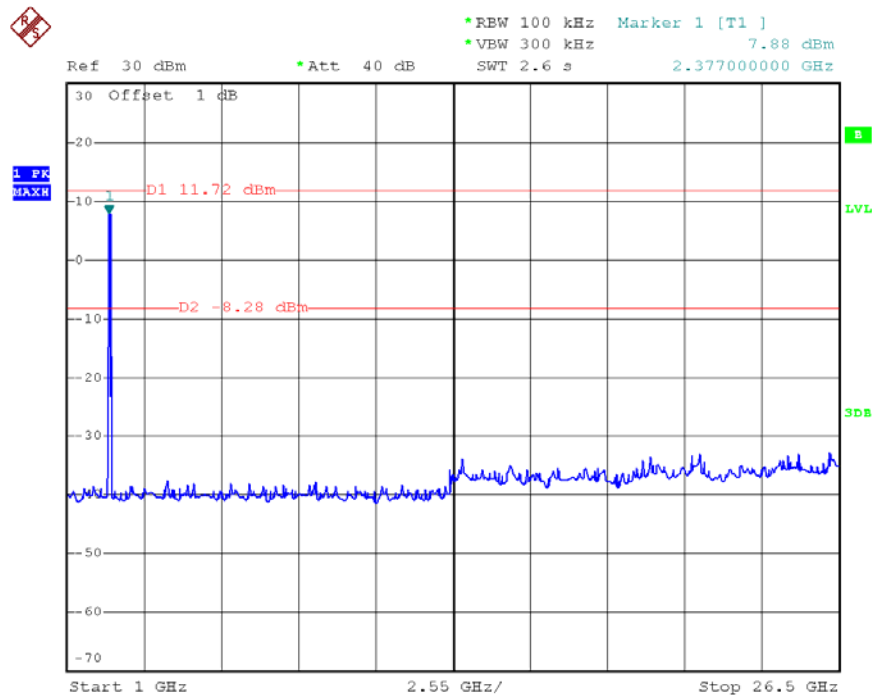


Date: 18.APR.2014 16:59:29

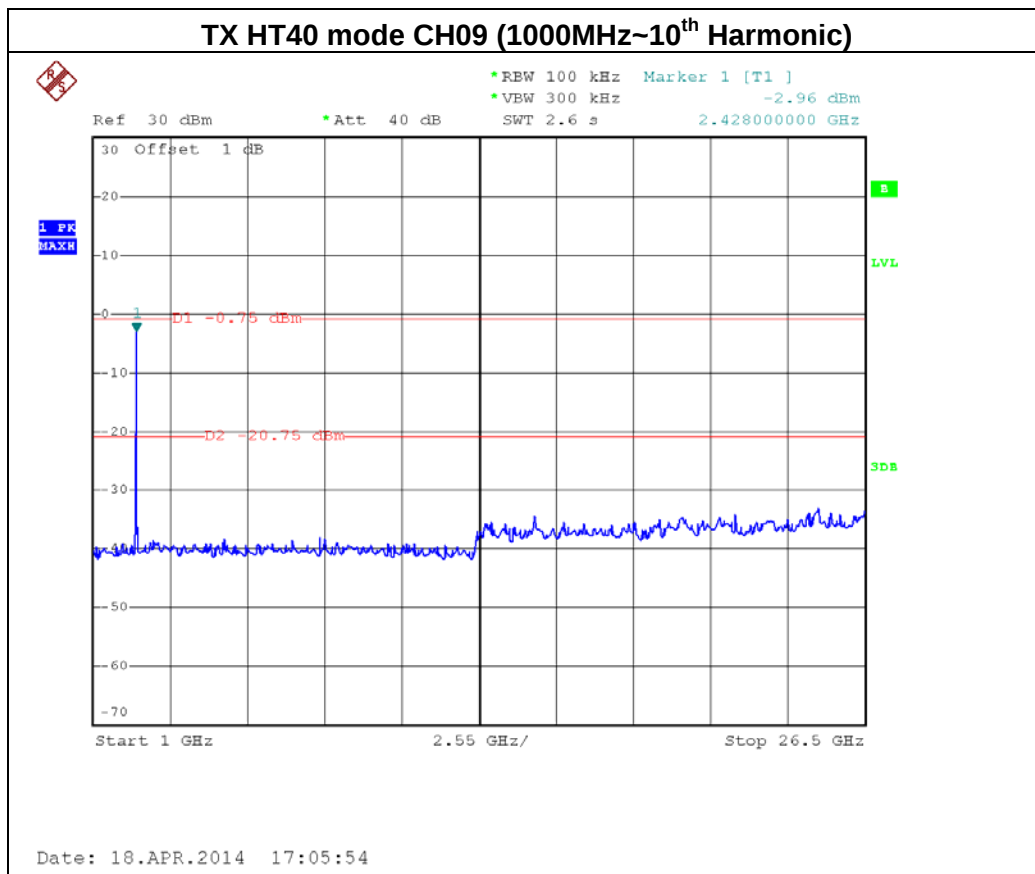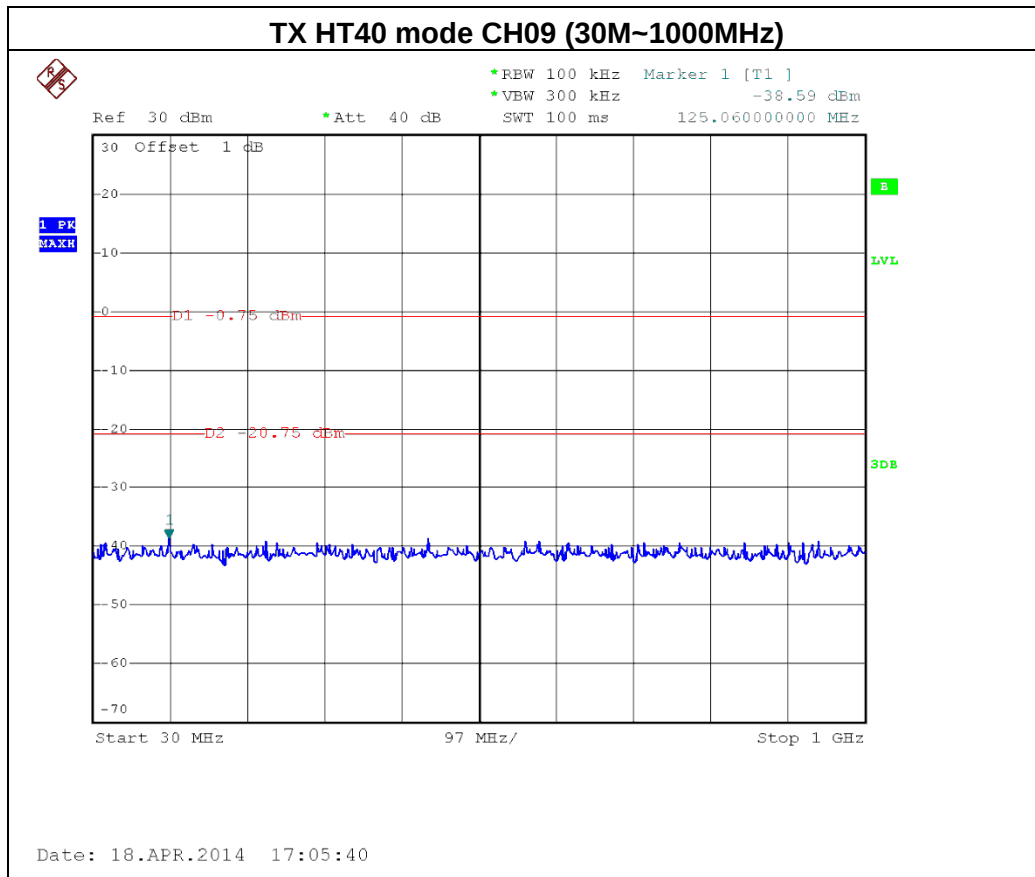



7.1.7 EUT TEST PHOTO

ANTENNA CONDUCTED SPURIOUS EMISSION MEASUREMENT PHOTO

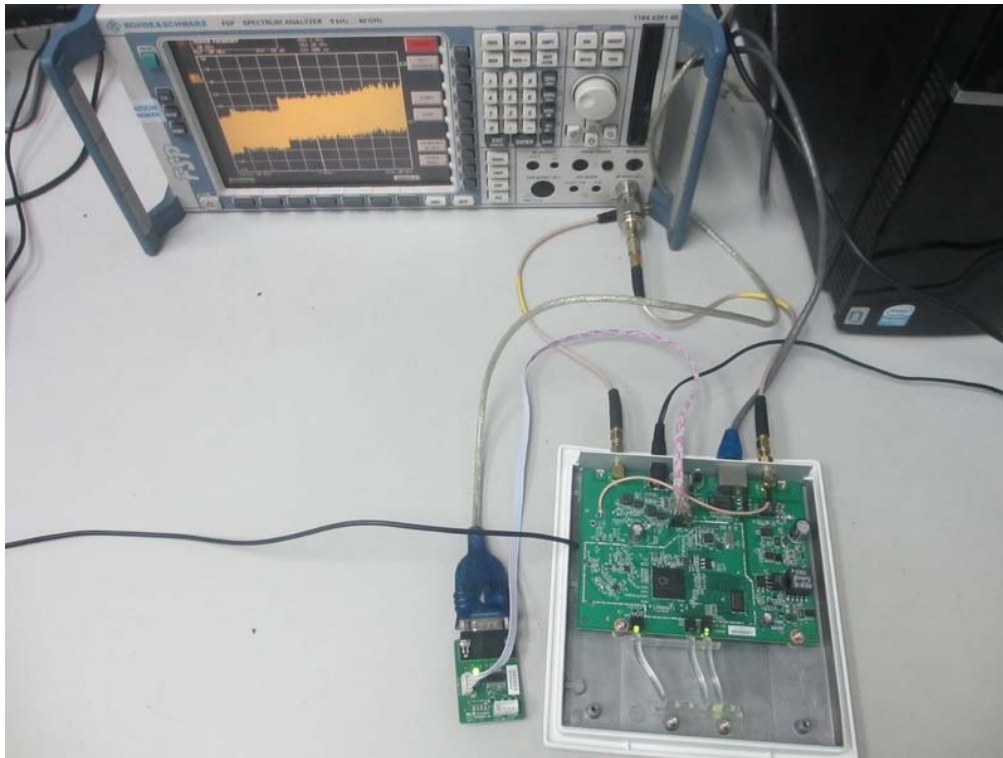



8. POWER SPECTRAL DENSITY TEST

8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

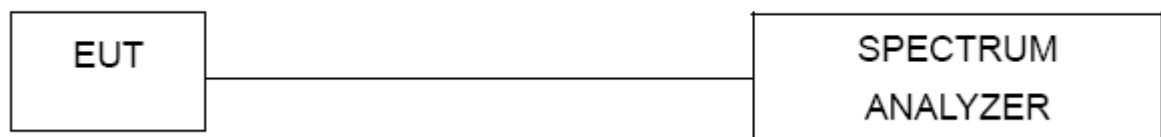

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


8.1.5 EUT TEST CONDITIONS



Temperature: 25°C
Relative Humidity: 55%
Test Voltage: AC 120V/60Hz



8.1.6 TEST RESULTS


Test Mode :TX B Mode_CH01/06/11


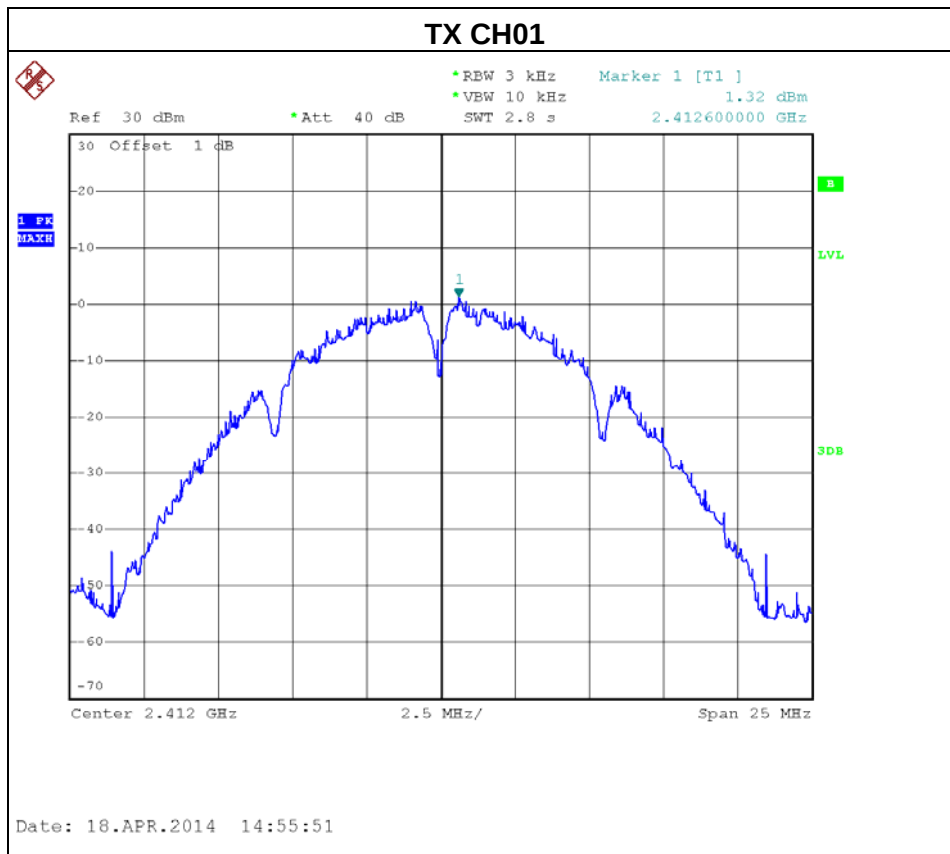


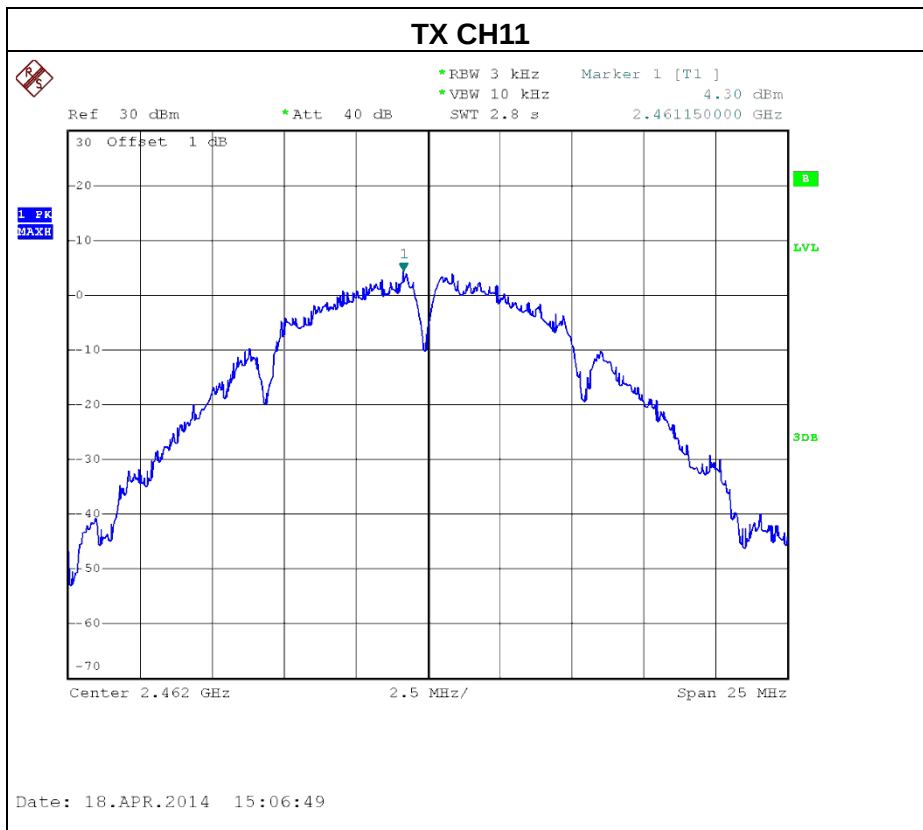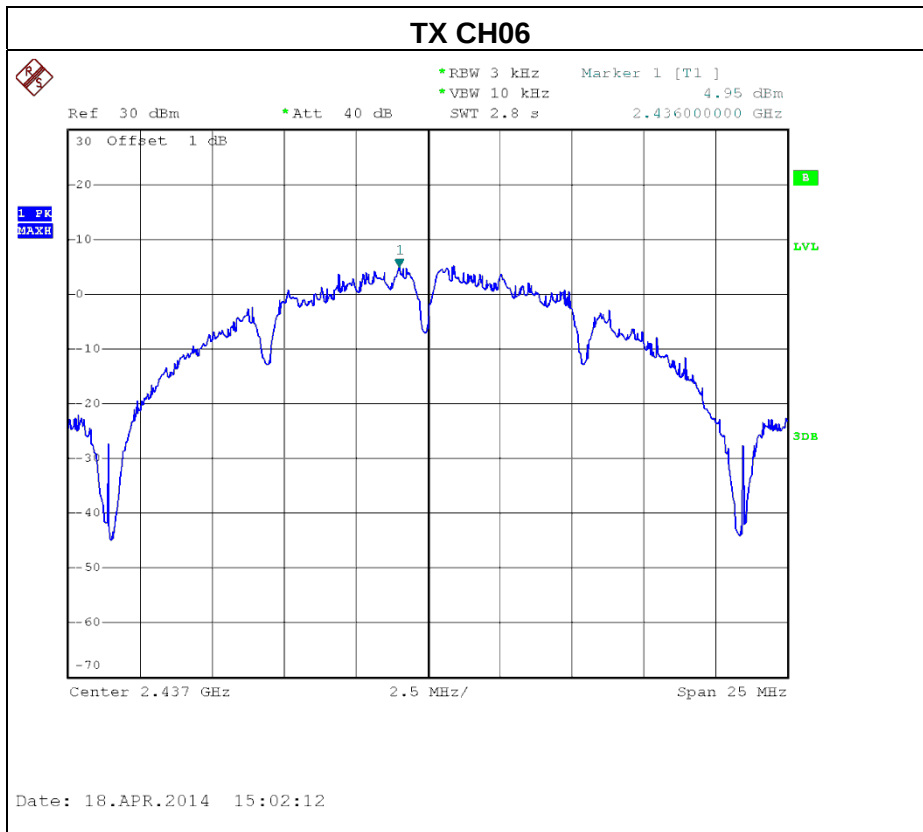




Test Mode :TX G Mode_CH01/06/11


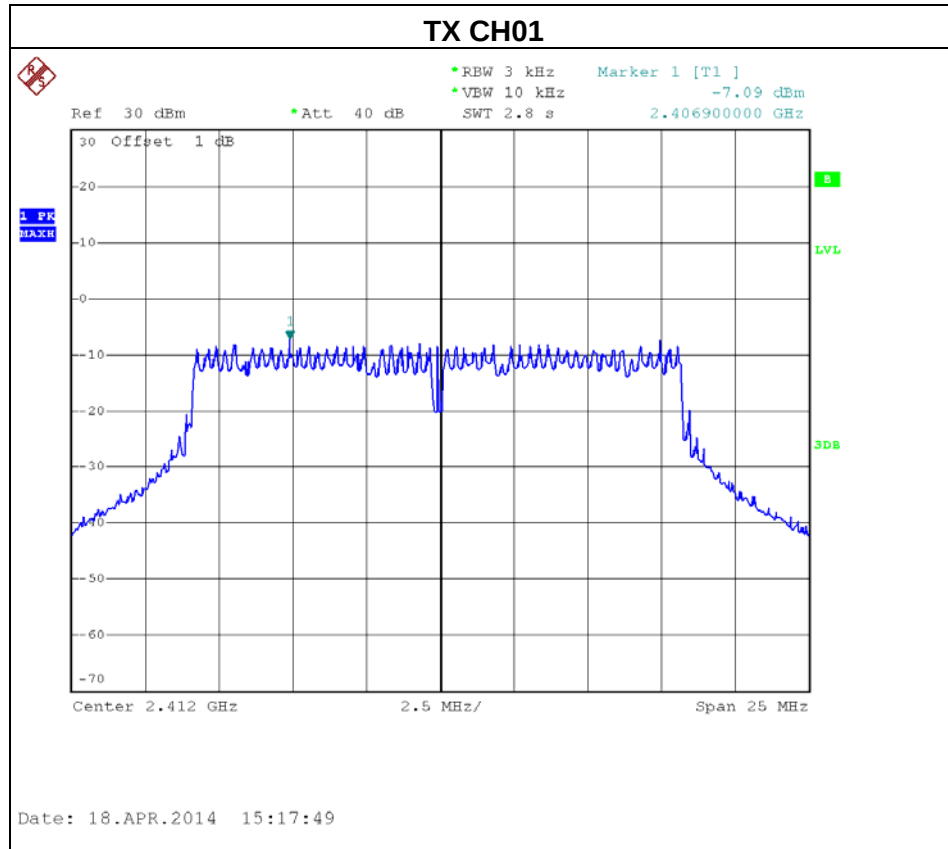


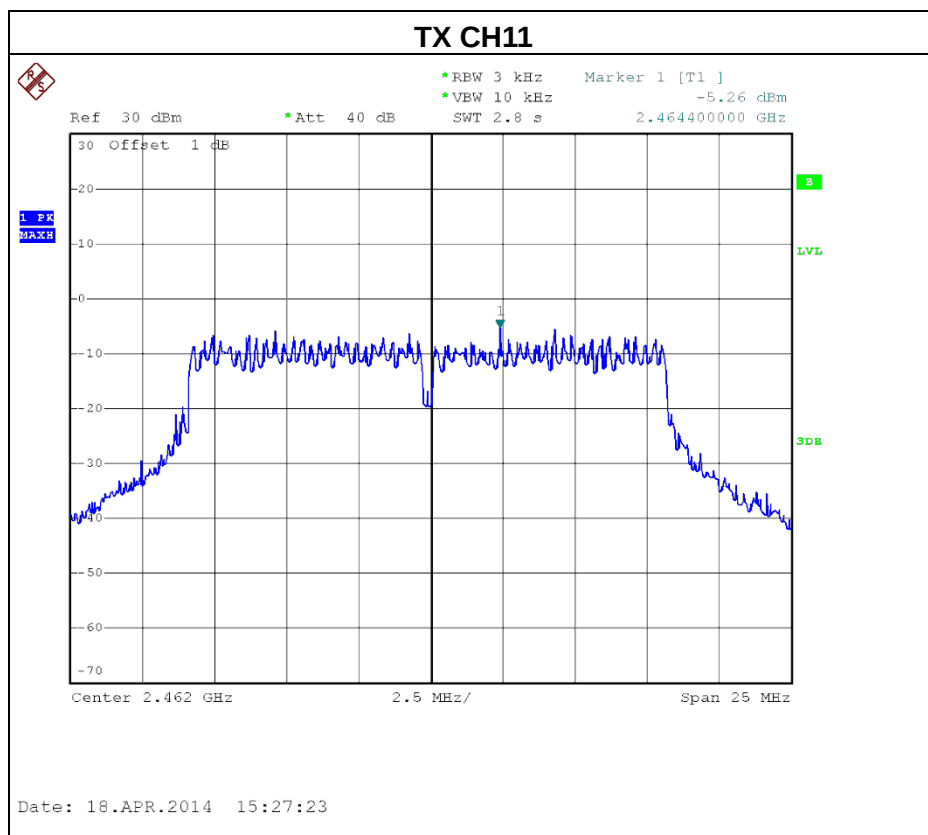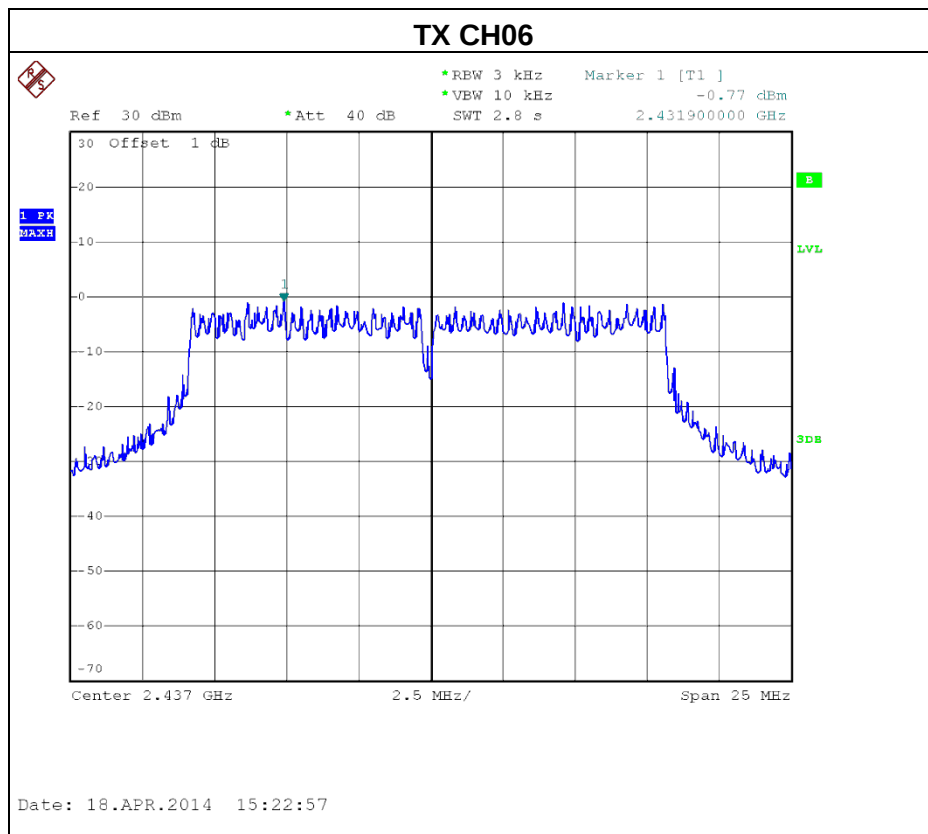




Test Mode : TX N-20M Mode_CH01/06/11_ANT 1


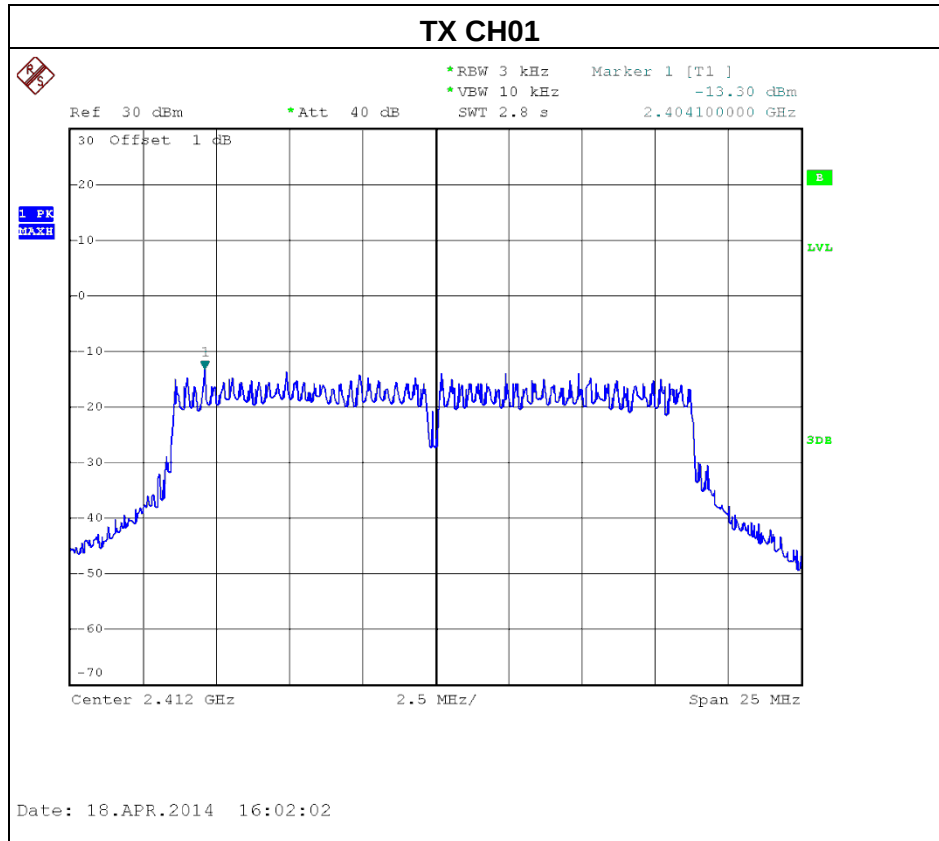


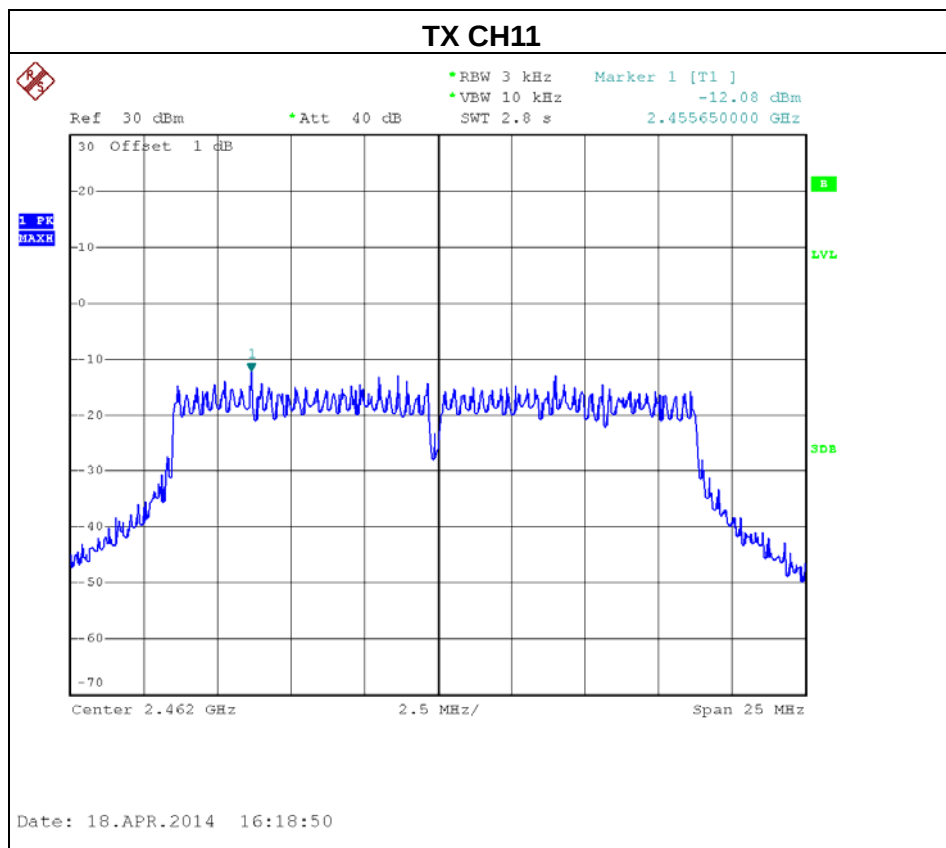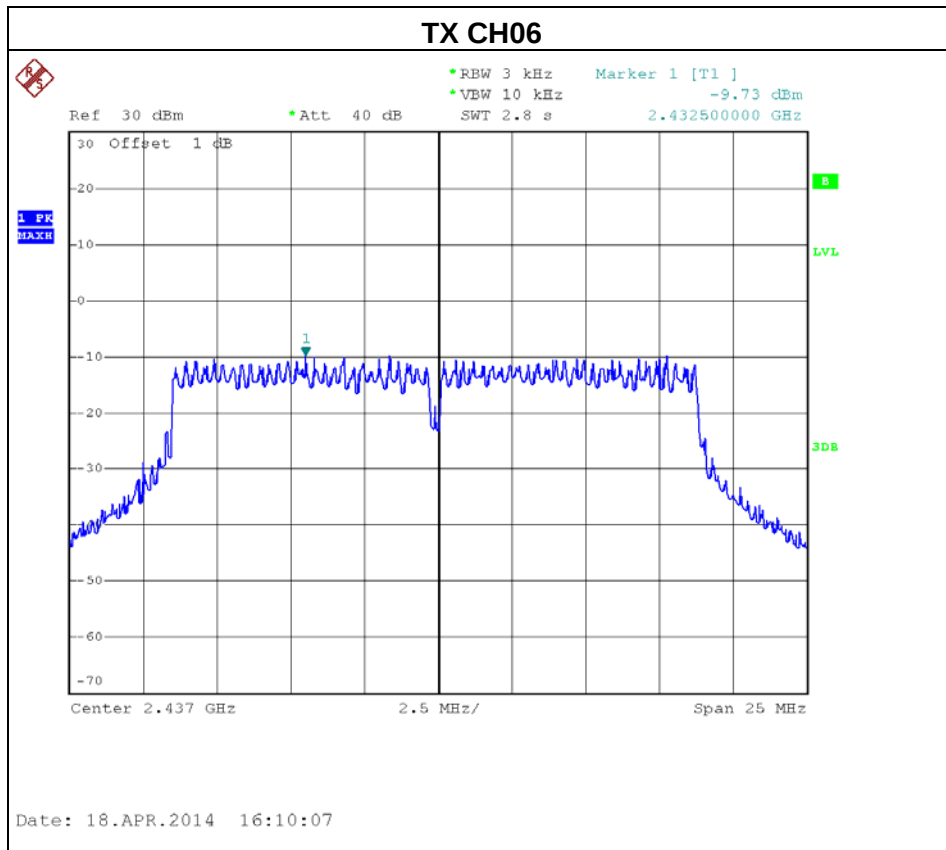



Test Mode : TX N-20M Mode_CH01/06/11_ANT 2

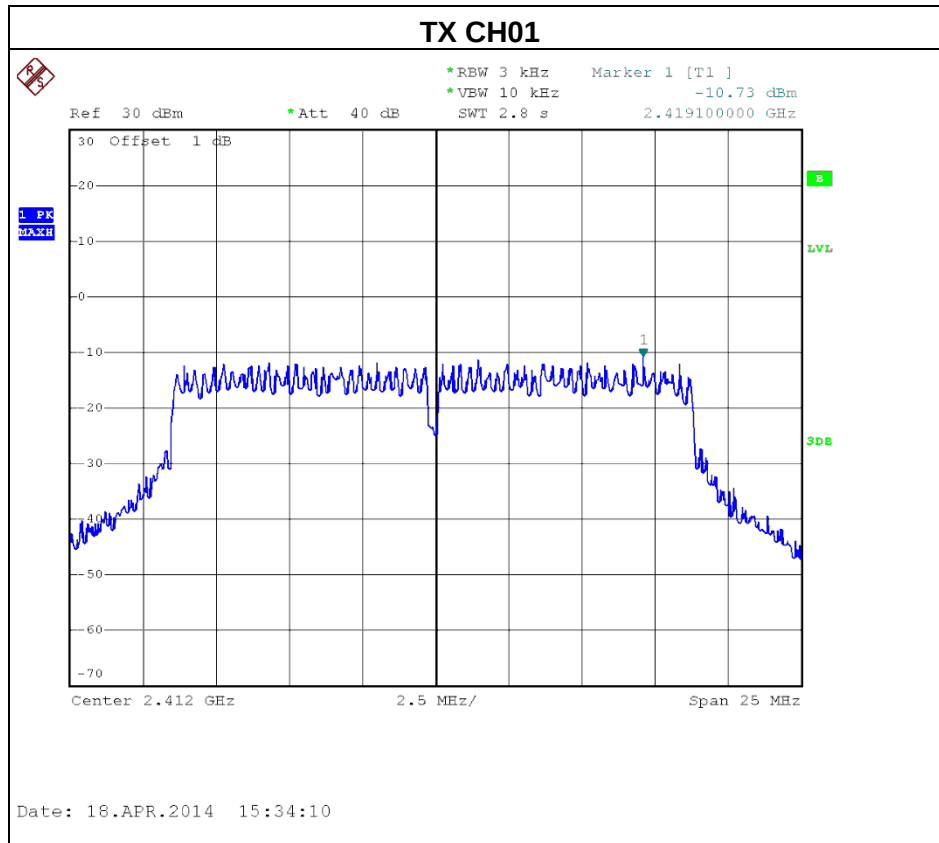

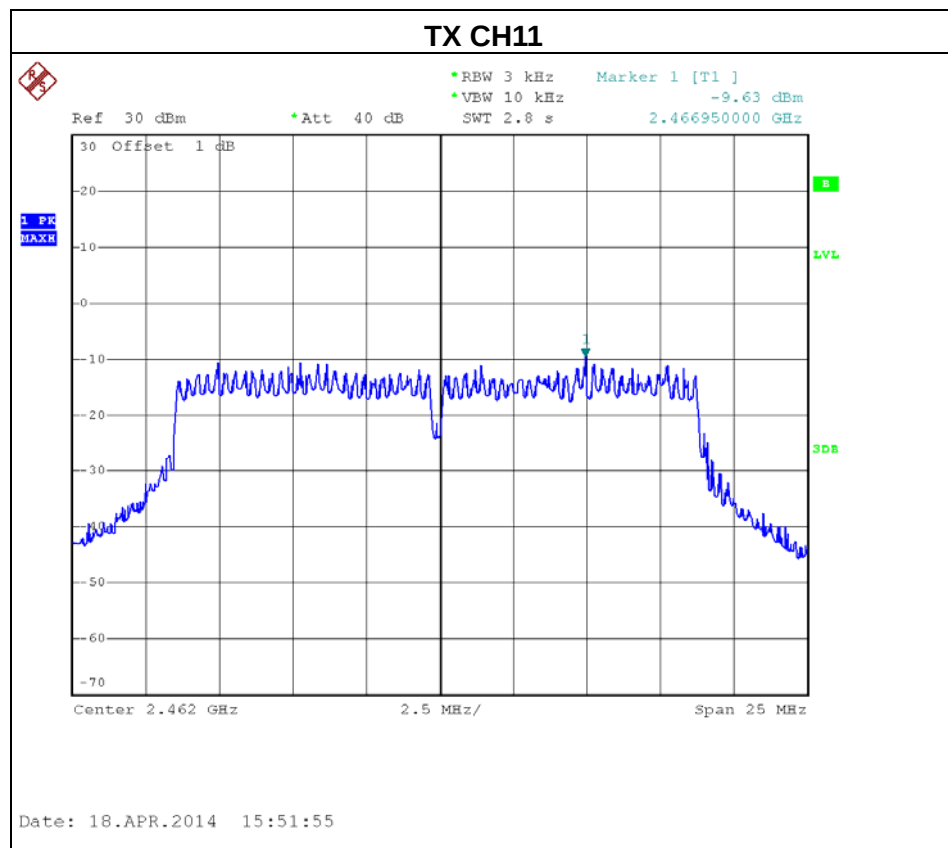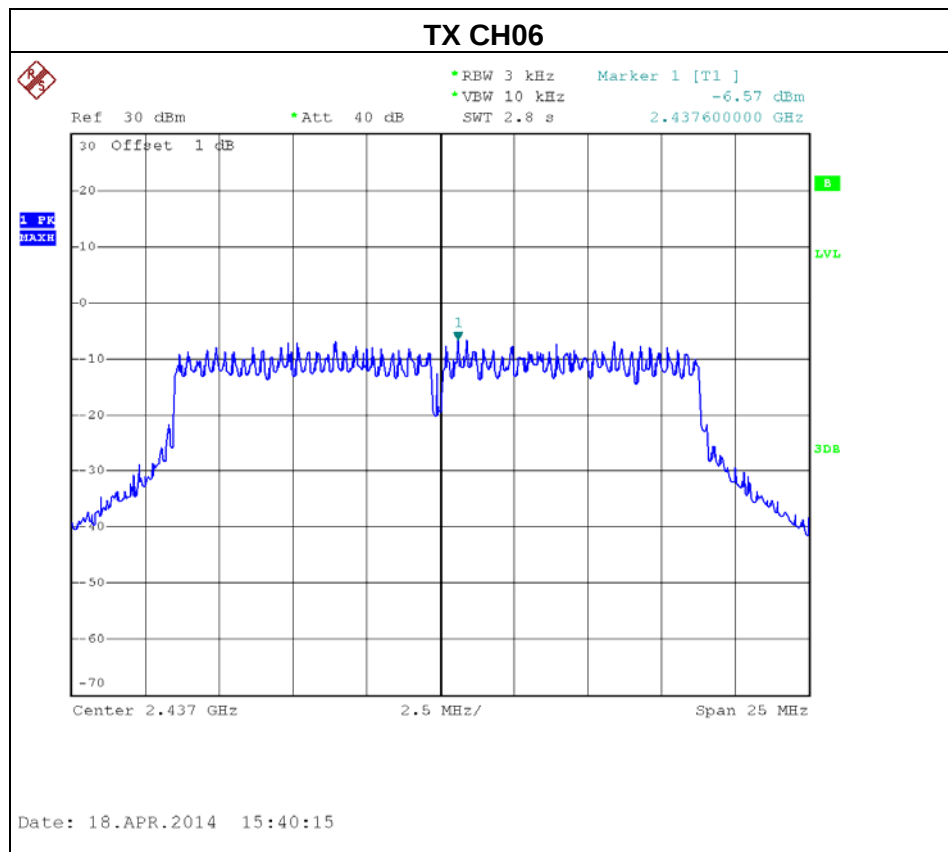






Test Mode : TX N-20M Mode_CH01/06/11_Total			
Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH01	2412	-8.82	8
CH06	2437	-4.86	8
CH11	2462	-7.67	8



Test Mode : TX N-40M Mode_CH03/06/09_ANT 1

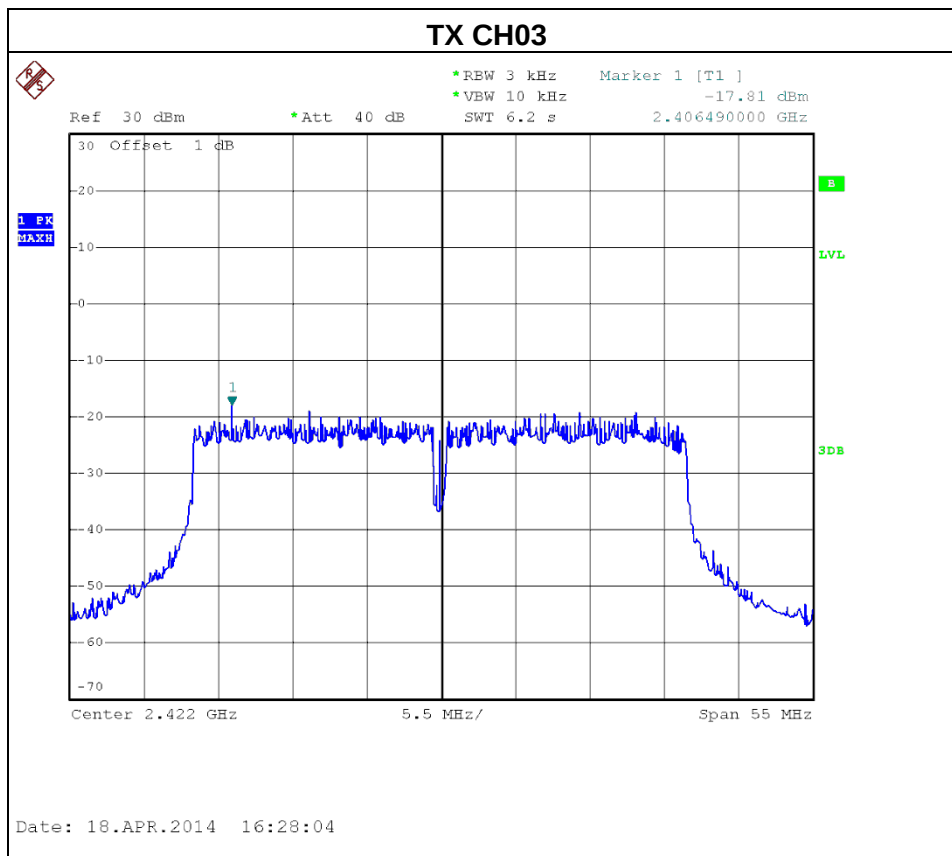

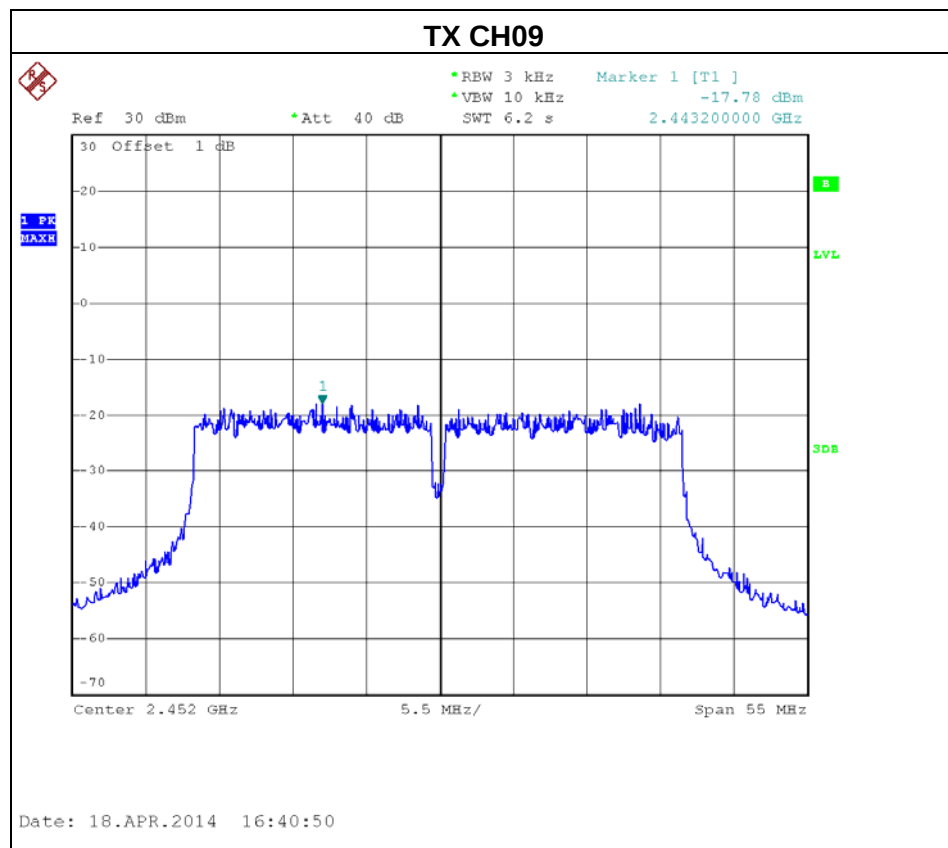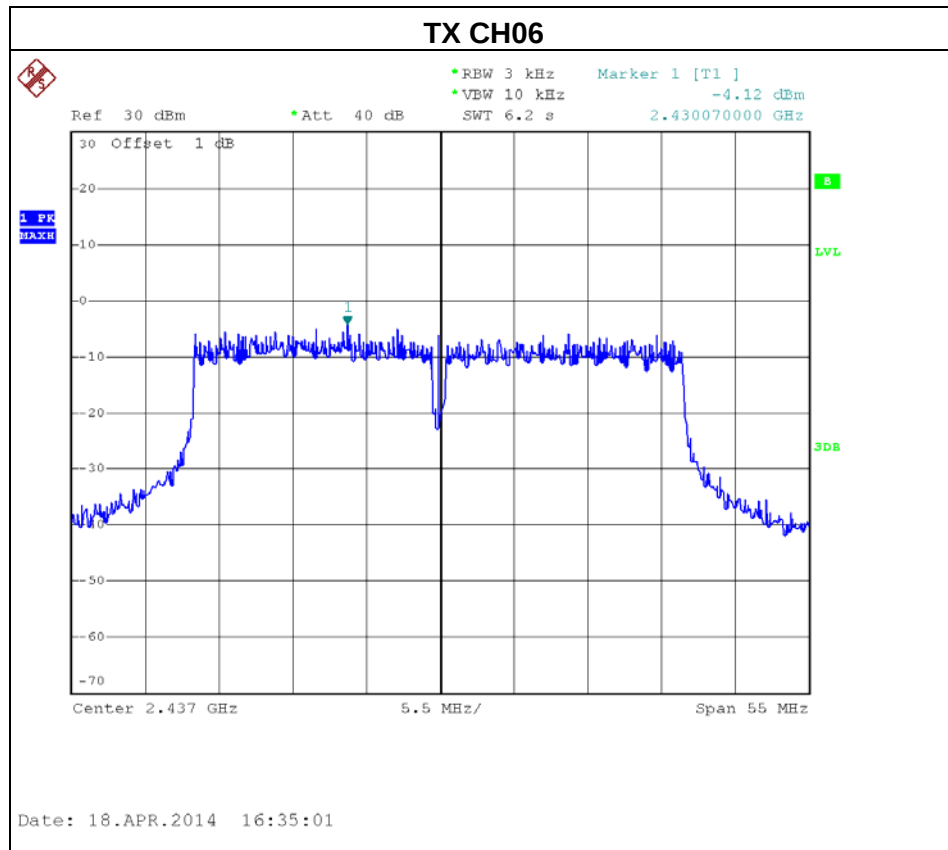



TX CH03




*REW 3 kHz Marker 1 [T1]

*VBW 10 kHz -15.31 dBm

SWT 6.2 s 2.432890000 GHz

Ref 30 dBm *Att 40 dB





30 Offset 1 dB

1 BW
MAXH

15.31
LVL

30
3DB

Center 2.422 GHz 5.5 MHz/ Span 55 MHz

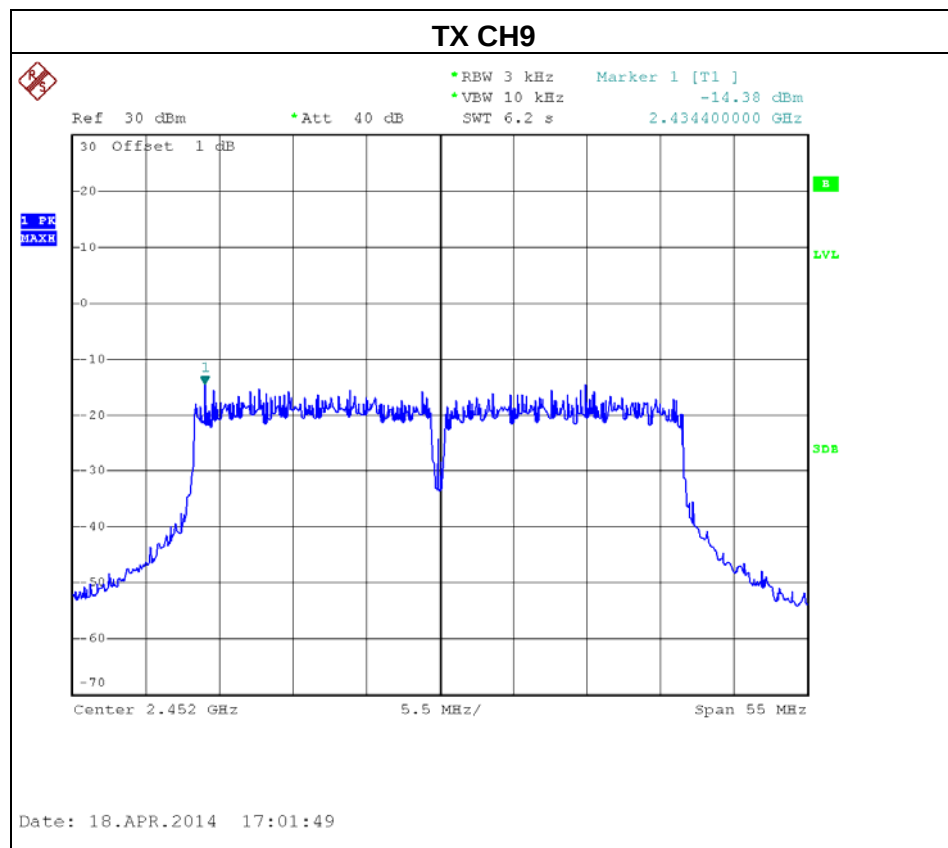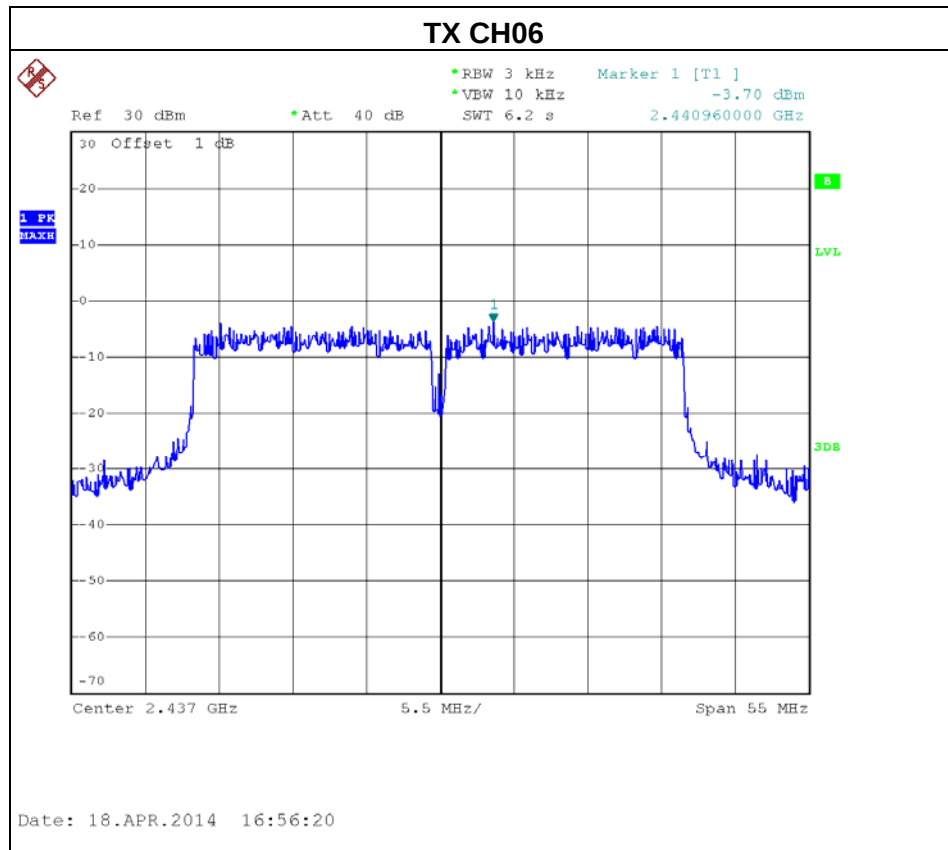




Test Mode : TX N-40M Mode_CH03/06/09_Total			
Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH03	2422	-13.37	8
CH06	2437	-0.89	8
CH09	2452	-12.75	8



8.1.7 EUT TEST PHOTO

POWER SPECTRAL DENSITY MEASUREMENT PHOTO

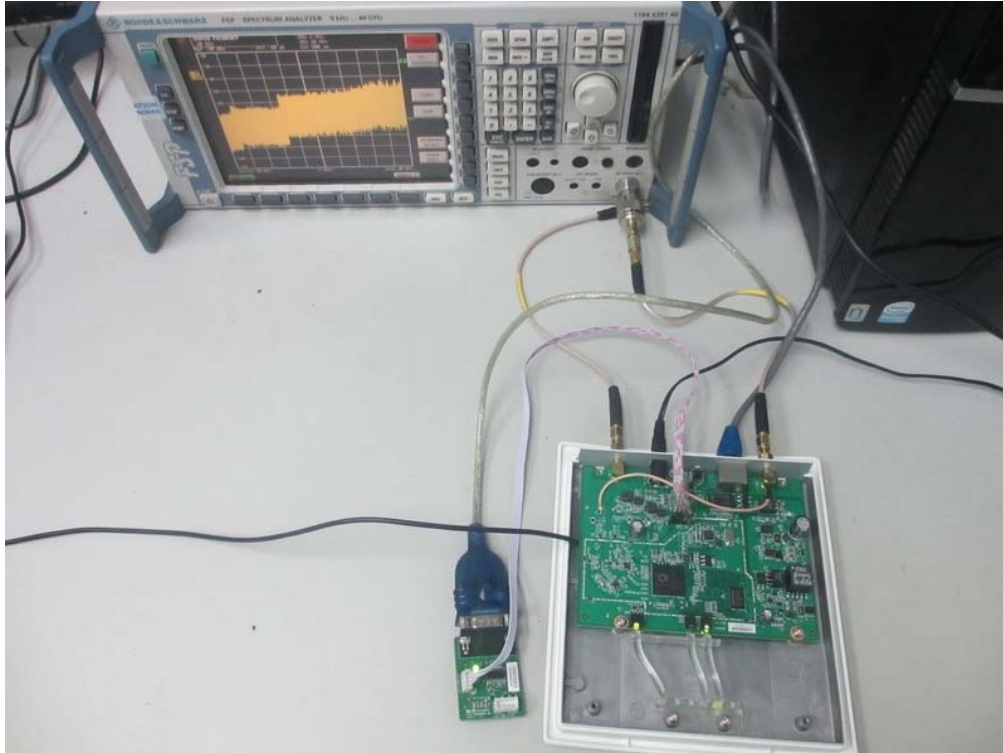



9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 29, 2015
2	LISN	R&S	ENV216	100087	Nov. 09, 2014
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Mar. 29, 2015
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29, 2015

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29, 2015
2	Amplifier	HP	8447D	2944A09673	Mar. 29, 2015
3	Test Receiver	R&S	ESCI	100382	Mar. 29, 2015
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Mar. 29, 2015
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29, 2015
7	Spectrum	Agilent	E4408B	US39240143	Nov. 09, 2014
8	Test Cable	HUBER+SUHNER	C-45	N/A	Mar. 29, 2015
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 22, 2014

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09, 2014

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Mar. 29, 2015
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Mar. 29, 2015



Antenna Conducted Spurious Emission Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09, 2014


Power Spectral Density Measurement


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

10. EUT PHOTOS



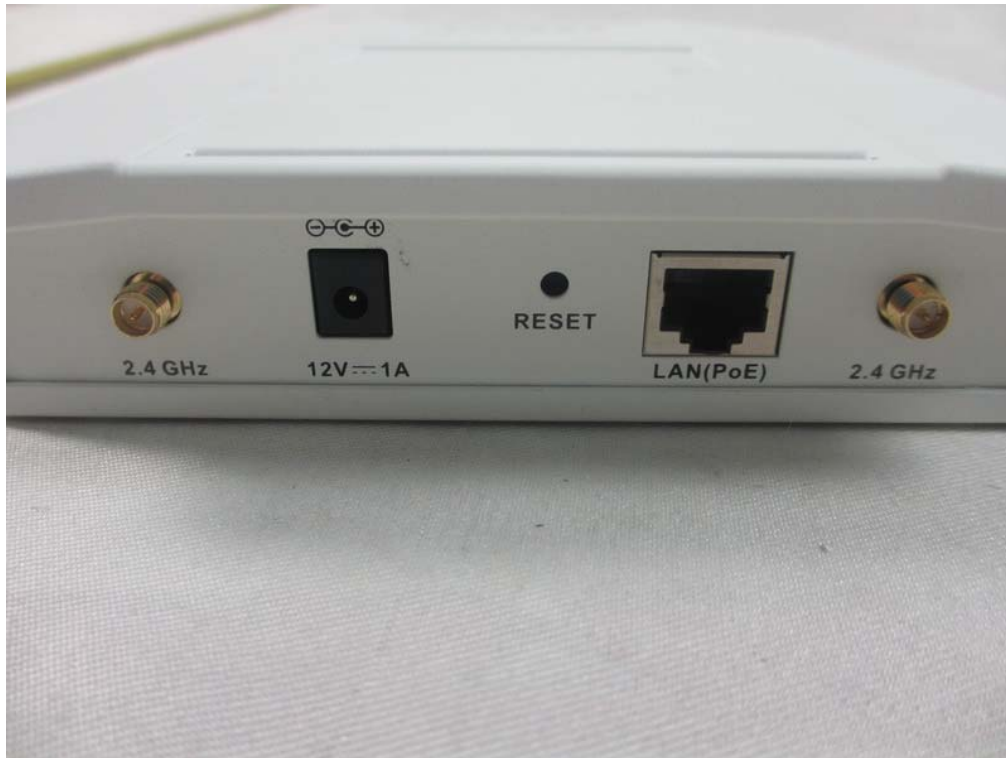

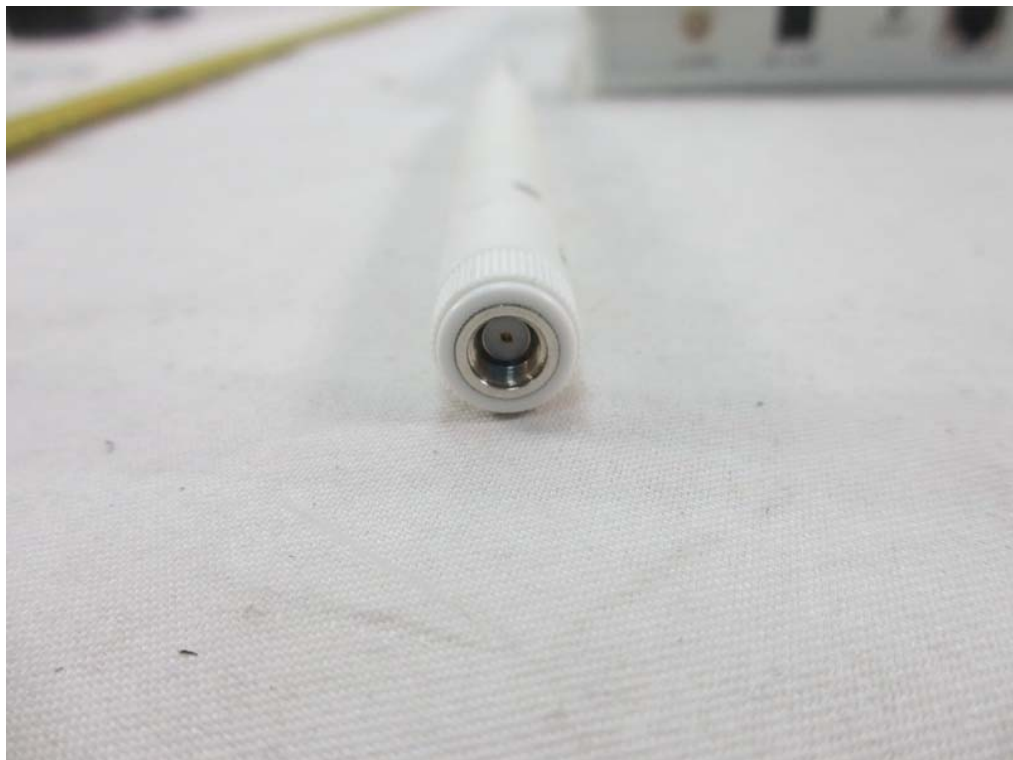

Adapter: YEOU DIANN / AMS9-1201000FU2



Adapter: FRECOM / F12W3-120100SPAU



POE: METOUCH/SA06-20S48-V



POE: METOUCH/SA06-20S48-V

