

FCC Test Report

Report No.: RF180524C23

FCC ID: KA2AP3315A1

Test Model: DAP-3315

Received Date: Jun. 01, 2018

Test Date: Jun. 21, 2018 ~ Aug. 26, 2018

Issued Date: Sep. 12, 2018

Applicant: D-Link Corporation

Address: 17595 Mt. Herrmann, Fountain Valley, California, United States, 92708

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan, R.O.C.

FCC Registration /
Designation Number: 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards.....	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Set Up	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement.....	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results	34
4.3 6 dB Bandwidth Measurement.....	36
4.3.1 Limits of 6 dB Bandwidth Measurement.....	36
4.3.2 Test Setup.....	36
4.3.3 Test Instruments	36
4.3.4 Test Procedure	36
4.3.5 Deviation from Test Standard	36
4.3.6 EUT Operating Conditions.....	36
4.3.7 Test Results	37
4.4 Occupied Bandwidth Measurement.....	39
4.4.1 Test Setup.....	39
4.4.2 Test Instruments	39
4.4.3 Test Procedure	39
4.4.4 Deviation from Test Standard	39
4.4.5 EUT Operating Conditions.....	39
4.4.6 Test Results	40
4.5 Conducted Output Power Measurement	42
4.5.1 Limits of Conducted Output Power Measurement.....	42
4.5.2 Test Setup.....	42
4.5.3 Test Instruments	42
4.5.4 Test Procedures.....	42
4.5.5 Deviation from Test Standard	42
4.5.6 EUT Operating Conditions.....	42
4.5.7 Test Results	43

4.6	Power Spectral Density Measurement	45
4.6.1	Limits of Power Spectral Density Measurement.....	45
4.6.2	Test Setup.....	45
4.6.3	Test Instruments	45
4.6.4	Test Procedure	45
4.6.5	Deviation from Test Standard	45
4.6.6	EUT Operating Condition	45
4.6.7	Test Results	46
4.7	Conducted Out of Band Emission Measurement	48
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	48
4.7.2	Test Setup.....	48
4.7.3	Test Instruments	48
4.7.4	Test Procedure	48
4.7.5	Deviation from Test Standard	48
4.7.6	EUT Operating Condition	48
4.7.7	Test Results	49
5	Pictures of Test Arrangements.....	65
	Appendix – Information on the Testing Laboratories	66

Release Control Record

Issue No.	Description	Date Issued
RF180524C23	Original Release	Sep. 12, 2018

1 Certificate of Conformity

Product: Wireless N Exterior Access Point

Brand: D-Link Corporation

Test Model: DAP-3315

Sample Status: Engineering Sample

Applicant: D-Link Corporation

Test Date: Jun. 21, 2018 ~ Aug. 26, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Evonne Liu, **Date:** Sep. 12, 2018
Evonne Liu / Specialist

Approved by : Dylan Chiou, **Date:** Sep. 12, 2018
Dylan Chiou / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -7.71 dB at 0.44742 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.01 dB at 2499.72 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless N Exterior Access Point
Brand	D-Link Corporation
Test Model	DAP-3315
Status of EUT	Engineering Sample
Power Supply Rating	24 Vdc (POE)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 150 Mbps
Operating Frequency	2412 ~ 2462 MHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
Output Power	301.861 mW
Antenna Type	Dual-polarization Panel antenna with 10 dBi gain
Antenna Connector	N/A
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below

Note:

- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

- The EUT contains following accessory devices.

Product	Brand	Model	Description
PoE	GOSPELL	G0989A-240-050	I/P: 100-240 Vac, 50/60 Hz, 0.5 A O/P: 24 Vdc, 0.5 A
GND Cable	N/A	N/A	0.17 m non-shielded cable w/o core

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1 GHz **RE<1G**: Radiated Emission below 1 GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	11	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	11	OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Gavin Wu

3.3 Duty Cycle of Test Signal


802.11b: Duty cycle of test signal is 100 %, duty factor is not required.

Duty cycle of test signal is < 98 %, duty factor shall be considered.

802.11g: Duty cycle = $2.022/2.077 = 0.974$, Duty factor = $10 * \log(1/0.974) = 0.11$

802.11n (HT20): Duty cycle = $1.887/1.942 = 0.972$, Duty factor = $10 * \log(1/0.972) = 0.12$


802.11n (HT40): Duty cycle = $0.924/0.967 = 0.956$, Duty factor = $10 * \log(1/0.956) = 0.20$

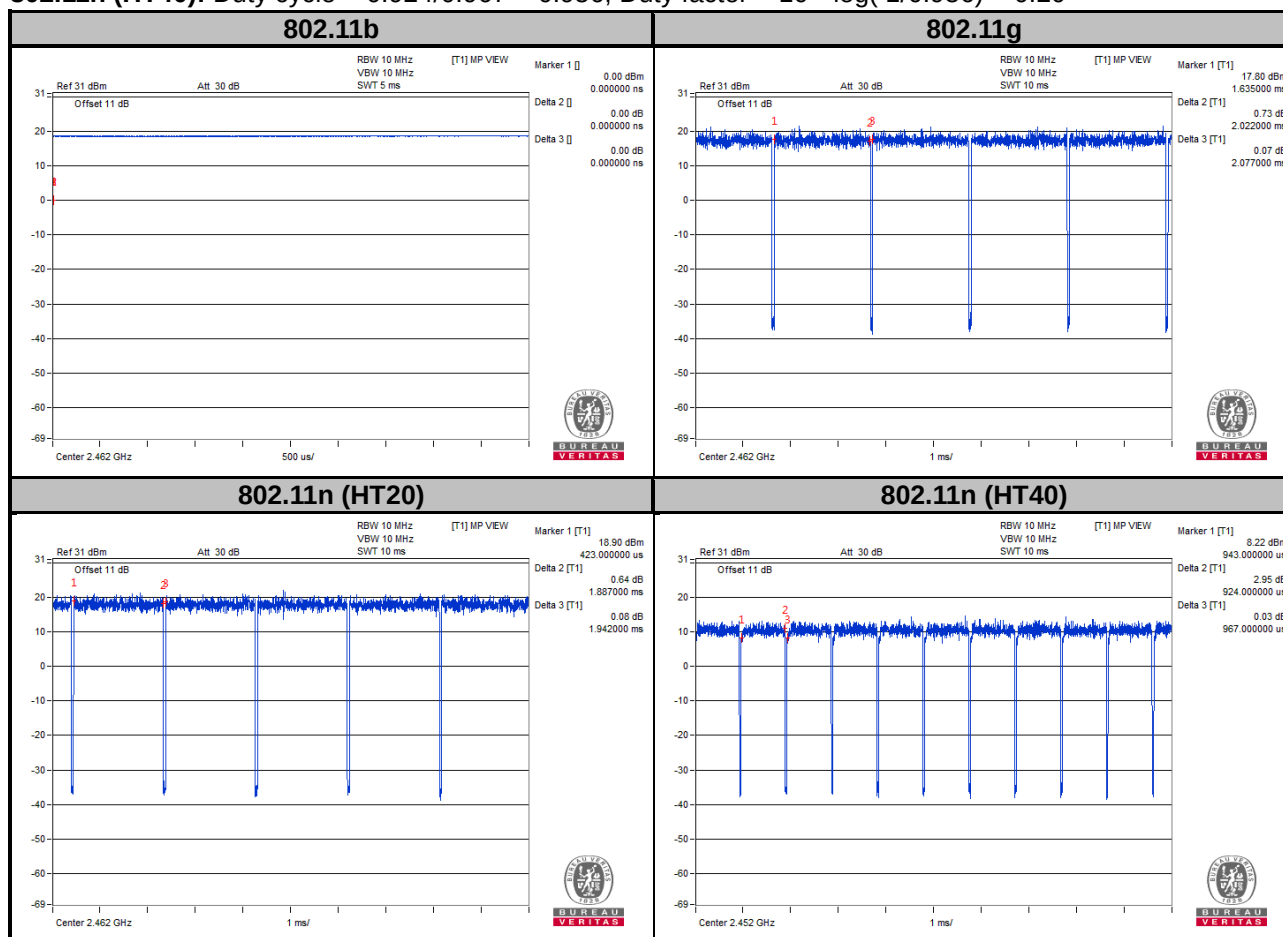

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4.1 Configuration of System under Test

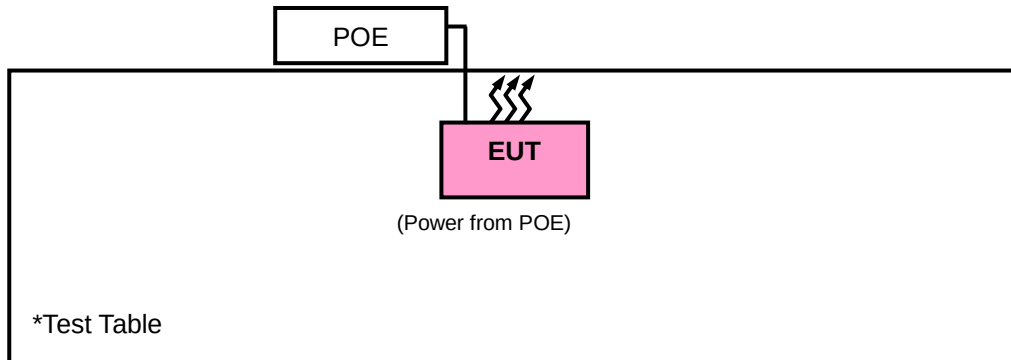

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v04

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 17, 2017	Oct. 16, 2018
Spectrum Analyzer Agilent	N9010A	MY52220207	Dec. 07, 2017	Dec. 06, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	9120D	209	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Fixed Attenuator Mini-Circuits	BW-N4W5+	PAD-ATT4-01	Jan. 29, 2018	Jan. 28, 2019
Loop Antenna ETS-Lindgren	3127-722	00117725	Mar. 16, 2018	Mar. 15, 2019
Preamplifier EMCI	EMC001340	980201	Nov. 01, 2017	Oct. 31, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 20, 2017	Oct. 19, 2018
Power Meter Anritsu	ML2495A	0842014	Apr. 26, 2018	Apr. 25, 2019
Power Sensor Anritsu	MA2411B	0738404	Apr. 26, 2018	Apr. 25, 2019
RF Coaxial Cable	8D-FB	Cable-RF3-04	Oct. 19, 2017	Oct. 18, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	230129/4	Oct. 19, 2017	Oct. 18, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	250723/4	Oct. 19, 2017	Oct. 18, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450F-10.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 1 kHz ;
11n (HT20): RBW = 1 MHz, VBW = 1 kHz ; 11n (HT40): RBW = 1 MHz, VBW = 3 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

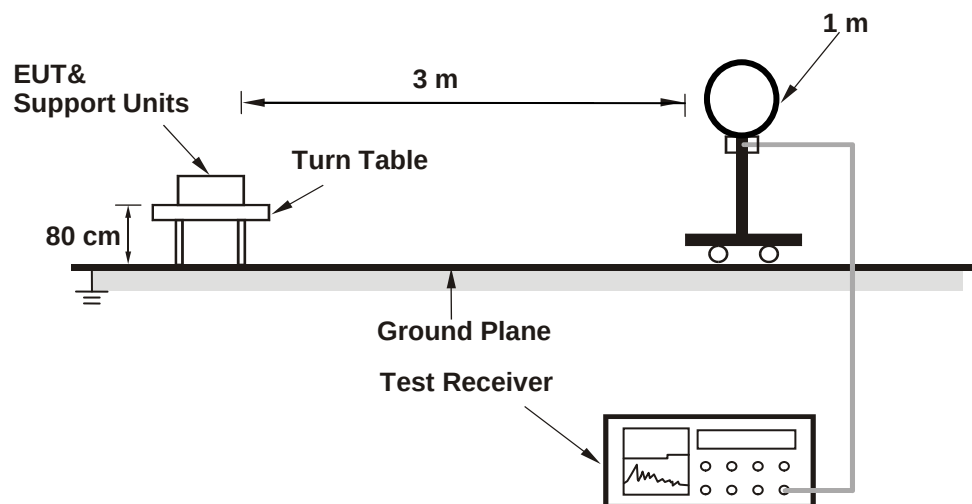

<Radiated Emission 30 MHz to 1 GHz>

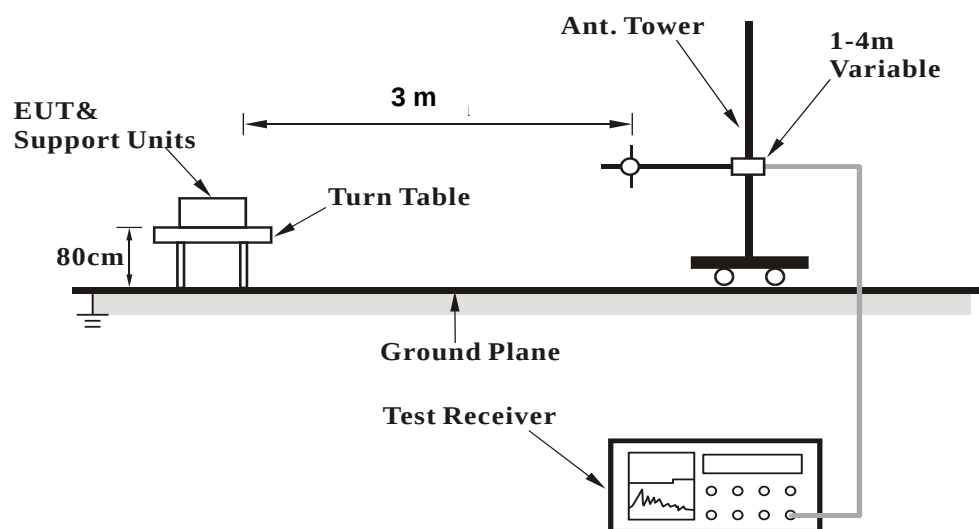

<Radiated Emission above 1 GHz>

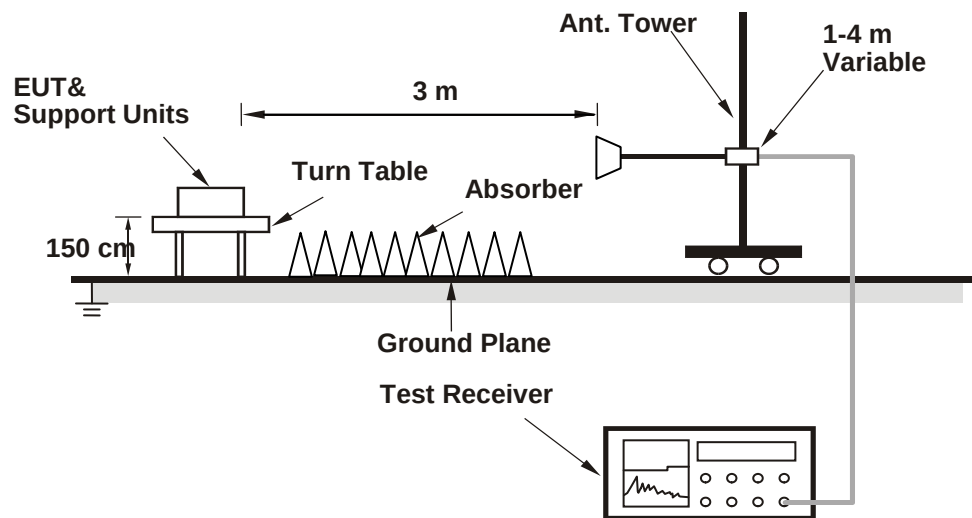

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data : 802.11b

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyong Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2371.04	46.14	52.22	54	-7.86	27.08	4.34	37.5	150	197	Average
2371.04	59.04	65.12	74	-14.96	27.08	4.34	37.5	150	197	Peak
2412	105.31	111.22			27.23	4.38	37.52	150	197	Average
2412	109.12	115.03			27.23	4.38	37.52	150	197	Peak
4824	49.86	64.77	54	-4.14	31.17	6.81	52.89	113	240	Average
4824	50.46	65.37	74	-23.54	31.17	6.81	52.89	113	240	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2367.54	52.48	58.64	54	-1.52	27.01	4.33	37.5	156	184	Average
2367.54	65.06	71.22	74	-8.94	27.01	4.33	37.5	156	184	Peak
2412	111.13	117.04			27.23	4.38	37.52	156	184	Average
2412	115.23	121.14			27.23	4.38	37.52	156	184	Peak
4824	51.11	66.02	54	-2.89	31.17	6.81	52.89	102	138	Average
4824	52.69	67.6	74	-21.31	31.17	6.81	52.89	102	138	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyoung Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.8	45.75	51.75	54	-8.25	27.16	4.36	37.52	149	195	Average
2389.8	58.1	64.1	74	-15.9	27.16	4.36	37.52	149	195	Peak
2437	106.14	111.82			27.38	4.4	37.46	149	195	Average
2437	110.13	115.81			27.38	4.4	37.46	149	195	Peak
2484.12	47.22	52.58	54	-6.78	27.53	4.43	37.32	149	195	Average
2484.12	60.1	65.46	74	-13.9	27.53	4.43	37.32	149	195	Peak
4874	48.73	63.48	54	-5.27	31.25	6.86	52.86	113	245	Average
4874	52.8	67.55	74	-21.2	31.25	6.86	52.86	113	245	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	52.3	58.3	54	-1.7	27.16	4.36	37.52	154	184	Average
2389.94	64.23	70.23	74	-9.77	27.16	4.36	37.52	154	184	Peak
2437	110.78	116.46			27.38	4.4	37.46	154	184	Average
2437	115.02	120.7			27.38	4.4	37.46	154	184	Peak
2483.52	52.71	58.07	54	-1.29	27.53	4.43	37.32	154	184	Average
2483.52	65.5	70.86	74	-8.5	27.53	4.43	37.32	154	184	Peak
4874	50.13	64.88	54	-3.87	31.25	6.86	52.86	100	137	Average
4874	52.23	66.98	74	-21.77	31.25	6.86	52.86	100	137	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyong Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	108.77	114.29			27.46	4.41	37.39	163	193	Average
2462	112.38	117.9			27.46	4.41	37.39	163	193	Peak
2499.96	46.38	51.58	54	-7.62	27.61	4.44	37.25	163	193	Average
2499.96	58.48	63.68	74	-15.52	27.61	4.44	37.25	163	193	Peak
4924	52.97	67.63	54	-1.03	31.34	6.89	52.89	110	244	Average
4924	56.24	70.9	74	-17.76	31.34	6.89	52.89	110	244	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	113.17	118.69			27.46	4.41	37.39	136	185	Average
2462	117.77	123.29			27.46	4.41	37.39	136	185	Peak
2499.88	52.06	57.26	54	-1.94	27.61	4.44	37.25	136	185	Average
2499.88	63.92	85.34	74	-10.08	27.61	4.95	53.98	136	185	Peak
4924	51.77	66.43	54	-2.23	31.34	6.89	52.89	100	136	Average
4924	54.74	69.4	74	-19.26	31.34	6.89	52.89	100	136	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyong Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2366.28	52.69	58.85	54	-1.31	27.01	4.33	37.5	152	194	Average
2366.28	66.45	72.61	74	-7.55	27.01	4.33	37.5	152	194	Peak
2412	105.11	111.02			27.23	4.38	37.52	152	194	Average
2412	114.49	120.4			27.23	4.38	37.52	152	194	Peak
4824	33.64	48.55	54	-20.36	31.17	6.81	52.89	100	220	Average
4824	44.72	59.62	74	-29.28	31.17	6.82	52.89	100	220	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2368.8	52.8	58.88	54	-1.2	27.08	4.34	37.5	161	181	Average
2368.8	65.54	71.62	74	-8.46	27.08	4.34	37.5	161	181	Peak
2412	104.91	110.82			27.23	4.38	37.52	161	181	Average
2412	114.13	120.04			27.23	4.38	37.52	161	181	Peak
4824	33.91	48.82	54	-20.09	31.17	6.81	52.89	100	117	Average
4824	44.46	59.36	74	-29.54	31.17	6.82	52.89	100	117	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyoung Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.82	51.4	57.38	54	-2.6	27.16	4.36	37.5	162	192	Average
2388.82	64	69.98	74	-10	27.16	4.36	37.5	162	192	Peak
2437	109.76	115.44			27.38	4.4	37.46	162	192	Average
2437	113.72	119.4			27.38	4.4	37.46	162	192	Peak
2486.44	51.88	57.24	54	-2.12	27.53	4.43	37.32	162	192	Average
2486.44	65.59	70.95	74	-8.41	27.53	4.43	37.32	162	192	Peak
4874	33.96	48.71	54	-20.04	31.25	6.86	52.86	146	207	Average
4874	45.72	60.47	74	-28.28	31.25	6.86	52.86	146	207	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	52.09	58.09	54	-1.91	27.16	4.36	37.52	137	182	Average
2389.94	65.12	71.12	74	-8.88	27.16	4.36	37.52	137	182	Peak
2437	105.78	111.46			27.38	4.4	37.46	137	182	Average
2437	114.73	120.41			27.38	4.4	37.46	137	182	Peak
2484.12	52.93	58.29	54	-1.07	27.53	4.43	37.32	137	182	Average
2484.12	66.01	71.37	74	-7.99	27.53	4.43	37.32	137	182	Peak
4874	33.64	48.39	54	-20.36	31.25	6.86	52.86	100	238	Average
4874	44.84	59.59	74	-29.16	31.25	6.86	52.86	100	238	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyong Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	113.12	118.64			27.46	4.41	37.39	163	196	Average
2462	117.33	122.85			27.46	4.41	37.39	163	196	Peak
2500	51.62	56.82	54	-2.38	27.61	4.44	37.25	163	196	Average
2500	64.47	69.67	74	-9.53	27.61	4.44	37.25	163	196	Peak
4924	39.64	55	54	-14.36	31.34	6.19	52.89	200	305	Average
4924	48.2	63.56	74	-25.8	31.34	6.19	52.89	200	305	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	113.46	118.98			27.46	4.41	37.39	146	185	Average
2462	116.96	122.48			27.46	4.41	37.39	146	185	Peak
2499.72	52.99	58.19	54	-1.01	27.61	4.44	37.25	146	185	Average
2499.72	66.03	71.23	74	-7.97	27.61	4.44	37.25	146	185	Peak
4924	37.64	53	54	-16.36	31.34	6.19	52.89	191	48	Average
4924	47.23	62.59	74	-26.77	31.34	6.19	52.89	191	48	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

802.11n (HT20)

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyong Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2368.66	52.19	58.27	54	-1.81	27.08	4.34	37.5	188	190	Average
2368.66	66.21	72.29	74	-7.79	27.08	4.34	37.5	188	190	Peak
2412	111.46	117.37			27.23	4.38	37.52	188	190	Average
2412	115.56	121.47			27.23	4.38	37.52	188	190	Peak
4924	33.97	48.63	54	-20.03	31.34	6.89	52.89	100	326	Average
4924	45.67	60.33	74	-28.33	31.34	6.89	52.89	100	326	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2369.92	52.98	59.06	54	-1.02	27.08	4.34	37.5	179	180	Average
2369.92	66.36	72.44	74	-7.64	27.08	4.34	37.5	179	180	Peak
2412	111.46	117.37			27.23	4.38	37.52	179	180	Average
2412	115.59	121.5			27.23	4.38	37.52	179	180	Peak
4924	34.14	48.8	54	-19.86	31.34	6.89	52.89	100	232	Average
4924	43.75	58.41	74	-30.25	31.34	6.89	52.89	100	232	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyoung Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.12	49.59	55.57	54	-4.41	27.16	4.36	37.5	164	195	Average
2388.12	62.76	68.74	74	-11.24	27.16	4.36	37.5	164	195	Peak
2437	102.38	108.06			27.38	4.4	37.46	164	195	Average
2437	112.19	117.87			27.38	4.4	37.46	164	195	Peak
2487.16	47.58	52.94	54	-6.42	27.53	4.43	37.32	164	195	Average
2487.16	63.25	68.61	74	-10.75	27.53	4.43	37.32	164	195	Peak
4924	33.36	48.72	54	-20.64	31.34	6.19	52.89	100	143	Average
4924	43.24	58.6	74	-30.76	31.34	6.19	52.89	100	143	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	50.16	56.16	54	-3.84	27.16	4.36	37.52	152	185	Average
2389.94	61.87	67.87	74	-12.13	27.16	4.36	37.52	152	185	Peak
2437	104.18	109.86			27.38	4.4	37.46	152	185	Average
2437	114.46	120.14			27.38	4.4	37.46	152	185	Peak
2483.56	52.96	58.32	54	-1.04	27.53	4.43	37.32	152	185	Average
2483.56	66.88	72.24	74	-7.12	27.53	4.43	37.32	152	185	Peak
4924	33.26	48.62	54	-20.74	31.34	6.19	52.89	100	184	Average
4924	43.6	58.96	74	-30.4	31.34	6.19	52.89	100	184	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyong Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	107.47	112.99			27.46	4.41	37.39	132	196	Average
2462	116.94	122.46			27.46	4.41	37.39	132	196	Peak
2483.64	52.54	57.9	54	-1.46	27.53	4.43	37.32	132	196	Average
2483.64	66.52	71.88	74	-7.48	27.53	4.43	37.32	132	196	Peak
4924	41.24	55.9	54	-12.76	31.34	6.89	52.89	196	188	Average
4924	50.93	65.59	74	-23.07	31.34	6.89	52.89	196	188	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	109.97	115.49			27.46	4.41	37.39	136	183	Average
2462	119.38	124.9			27.46	4.41	37.39	136	183	Peak
2483.52	52.95	58.31	54	-1.05	27.53	4.43	37.32	136	183	Average
2483.52	66.43	71.79	74	-7.57	27.53	4.43	37.32	136	183	Peak
4924	41.07	55.73	54	-12.93	31.34	6.89	52.89	155	225	Average
4924	49.62	64.28	74	-24.38	31.34	6.89	52.89	155	225	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

802.11n (HT40)

EUT Test Condition		Measurement Detail	
Channel	Channel 3	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyoung Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2385.6	52.8	58.79	54	-1.2	27.16	4.35	37.5	166	195	Average
2385.6	66.29	72.28	74	-7.71	27.16	4.35	37.5	166	195	Peak
2422	103.69	109.45			27.31	4.39	37.46	166	195	Average
2422	113.46	119.22			27.31	4.39	37.46	166	195	Peak
2483.52	46.19	51.55	54	-7.81	27.53	4.43	37.32	166	195	Average
2483.52	58.16	63.52	74	-15.84	27.53	4.43	37.32	166	195	Peak
4844	33.66	48.51	54	-20.34	31.2	6.83	52.88	100	166	Average
4844	45.23	60.08	74	-28.77	31.2	6.83	52.88	100	166	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	52.96	58.96	54	-1.04	27.16	4.36	37.52	153	179	Average
2389.94	65.14	71.12	74	-8.86	27.16	4.36	37.5	153	179	Peak
2422	103.49	109.25			27.31	4.39	37.46	153	179	Average
2422	113.12	118.88			27.31	4.39	37.46	153	179	Peak
2483.52	46.88	52.24	54	-7.12	27.53	4.43	37.32	153	179	Average
2483.56	59.37	64.73	74	-14.63	27.53	4.43	37.32	153	179	Peak
4844	33.98	48.83	54	-20.02	31.2	6.83	52.88	100	308	Average
4844	44.11	58.96	74	-29.89	31.2	6.83	52.88	100	308	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2422 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyoung Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	52.06	58.06	54	-1.94	27.16	4.36	37.52	165	195	Average
2389.94	63.38	69.38	74	-10.62	27.16	4.36	37.52	165	195	Peak
2437	105.38	111.06			27.38	4.4	37.46	165	195	Average
2437	114.01	119.69			27.38	4.4	37.46	165	195	Peak
2483.64	51.64	57	54	-2.36	27.53	4.43	37.32	165	195	Average
2483.64	63.47	68.83	74	-10.53	27.53	4.43	37.32	165	195	Peak
4874	33.56	48.31	54	-20.44	31.25	6.86	52.86	100	244	Average
4874	45.58	60.33	74	-28.42	31.25	6.86	52.86	100	244	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	50.24	56.24	54	-3.76	27.16	4.36	37.52	151	181	Average
2389.94	61.77	67.77	74	-12.23	27.16	4.36	37.52	151	181	Peak
2437	105.38	111.06			27.38	4.4	37.46	151	181	Average
2437	114.63	120.31			27.38	4.4	37.46	151	181	Peak
2483.56	52.2	57.56	54	-1.8	27.53	4.43	37.32	151	181	Average
2483.56	63.48	68.84	74	-10.52	27.53	4.43	37.32	151	181	Peak
4874	34.38	49.13	54	-19.62	31.25	6.86	52.86	142	189	Average
4874	47.82	62.57	74	-26.18	31.25	6.86	52.86	142	189	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 9	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyoung Wang

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.94	45.86	51.86	54	-8.14	27.16	4.36	37.52	150	193	Average
2389.94	57.78	63.78	74	-16.22	27.16	4.36	37.52	150	193	Peak
2452	103.09	108.69			27.38	4.41	37.39	150	193	Average
2452	111.85	117.45			27.38	4.41	37.39	150	193	Peak
2490.88	49.57	54.85	54	-4.43	27.61	4.43	37.32	150	193	Average
2490.88	62.96	68.24	74	-11.04	27.61	4.43	37.32	150	193	Peak
4904	33.56	48.22	54	-20.44	31.31	6.88	52.85	119	206	Average
4904	44.81	59.47	74	-29.19	31.31	6.88	52.85	119	206	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.8	45.93	51.93	54	-8.07	27.16	4.36	37.52	136	185	Average
2389.8	56.87	62.87	74	-17.13	27.16	4.36	37.52	136	185	Peak
2452	102.39	107.99			27.38	4.41	37.39	136	185	Average
2452	111.57	117.17			27.38	4.41	37.39	136	185	Peak
2485.48	52.87	58.23	54	-1.13	27.53	4.43	37.32	136	185	Average
2485.48	65.68	71.04	74	-8.32	27.53	4.43	37.32	136	185	Peak
4904	33.89	48.55	54	-20.11	31.31	6.88	52.85	100	138	Average
4904	44.6	59.26	74	-29.4	31.31	6.88	52.85	100	138	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value
- 2452 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

9 kHz ~ 30 MHz Data:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:


802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Jisyong Wang

Horizontal

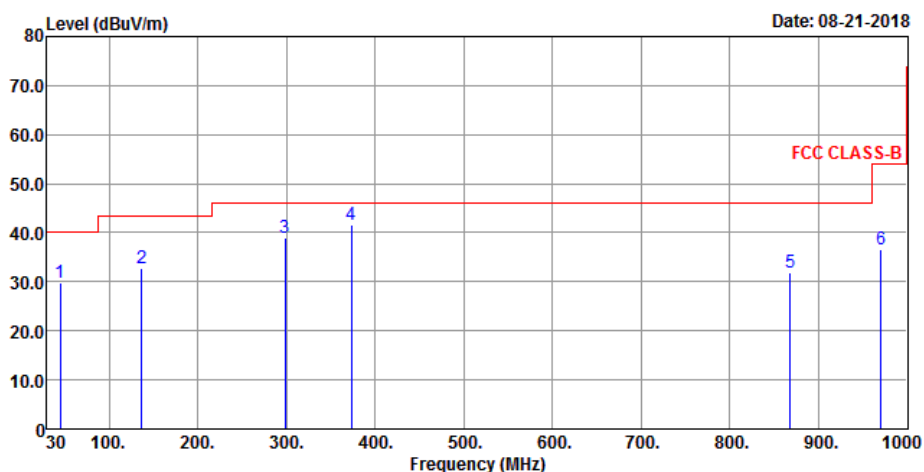

Vertical

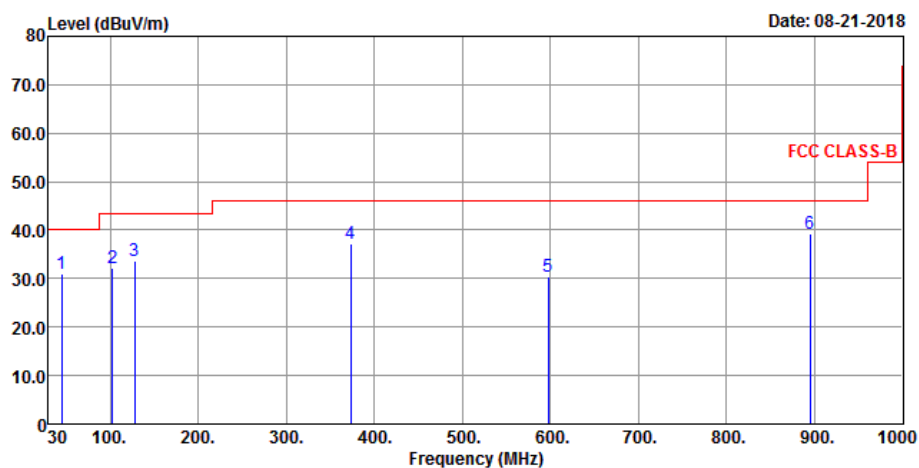

Antennal Polarity & Test Distance: Horizontal at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
44.55	29.9	46.93	40	-10.1	13.6	0.51	31.14	152	111	Peak
136.7	32.78	51.43	43.5	-10.72	12.14	0.92	31.71	132	251	Peak
298.69	38.95	56.22	46	-7.05	12.91	1.64	31.82	165	285	Peak
373.38	41.52	56.77	46	-4.48	14.7	1.98	31.93	147	152	Peak
868.08	31.76	36.72	46	-14.24	23.1	3.93	31.99	132	251	Peak
970.9	36.54	40.15	54	-17.46	23.91	4.34	31.86	165	258	Peak
Antennal Polarity & Test Distance: Vertical at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
44.55	30.87	47.9	40	-9.13	13.6	0.51	31.14	152	231	Peak
102.75	32.07	53.89	43.5	-11.43	9.34	0.76	31.92	165	251	Peak
127.97	33.74	53.19	43.5	-9.76	11.55	0.88	31.88	251	145	Peak
373.38	37.24	52.49	46	-8.76	14.7	1.98	31.93	132	251	Peak
597.45	30.32	40.11	46	-15.68	19.54	2.89	32.22	165	251	Peak
895.24	39.17	43.72	46	-6.83	23.45	4	32	111	152	Peak

Remarks:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
Margin value = Emission level – Limit value.
- The emission levels of other frequencies were very low against the limit.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 23, 2017	Nov. 22, 2018
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 05, 2017	Sep. 04, 2018
LISN/AMN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 26, 2018	Feb. 25, 2019
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 15, 2017	Aug. 14, 2018
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

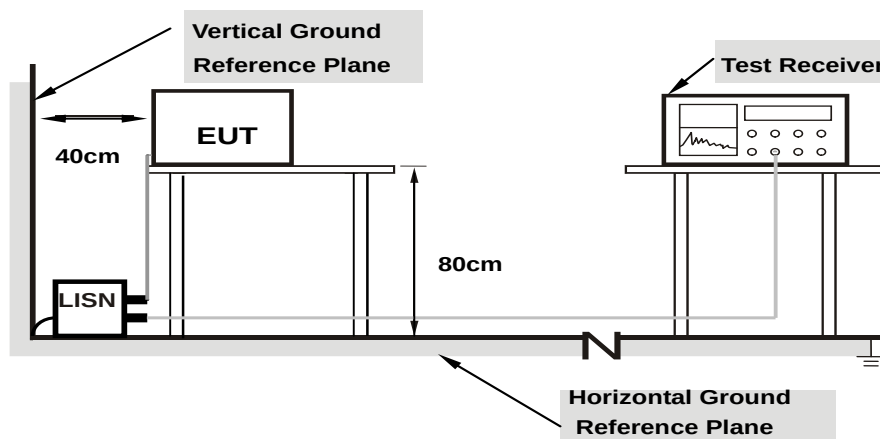

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Jisyong Wang	Test Date	2018/8/26
Test Mode	Mode 1		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	9.67	38.30	22.61	47.97	32.28	65.18	55.18	-17.21	-22.90
2	0.19301	9.67	34.68	20.47	44.35	30.14	63.91	53.91	-19.56	-23.77
3	0.20865	9.67	33.03	20.46	42.70	30.13	63.26	53.26	-20.56	-23.13
4	0.43464	9.67	35.59	20.29	45.26	29.96	57.16	47.16	-11.90	-17.20
5	0.74399	9.68	26.92	10.80	36.60	20.48	56.00	46.00	-19.40	-25.52
6	1.62798	9.70	22.35	7.73	32.05	17.43	56.00	46.00	-23.95	-28.57

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

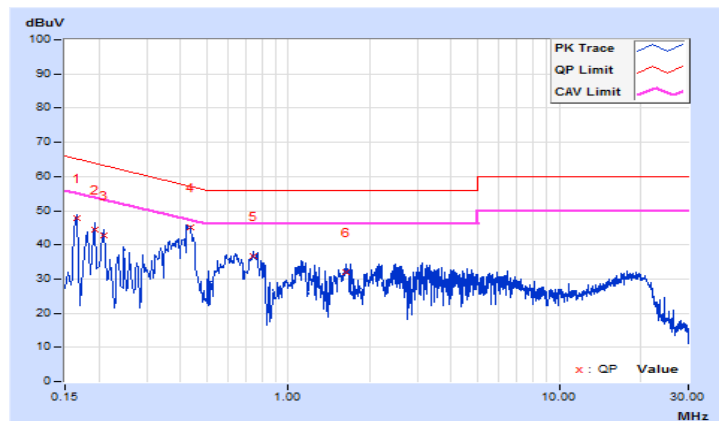


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Jisyong Wang	Test Date	2018/8/26
Test Mode	Mode 1		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17744	9.68	38.29	22.86	47.97	32.54	64.60	54.60	-16.63	-22.06
2	0.21256	9.68	34.11	20.52	43.79	30.20	63.10	53.10	-19.31	-22.90
3	0.26730	9.68	30.14	13.61	39.82	23.29	61.20	51.20	-21.38	-27.91
4	0.43543	9.68	36.04	20.49	45.72	30.17	57.15	47.15	-11.43	-16.98
5	3.47350	9.74	22.22	8.66	31.96	18.40	56.00	46.00	-24.04	-27.60
6	19.82512	10.04	21.52	8.91	31.56	18.95	60.00	50.00	-28.44	-31.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

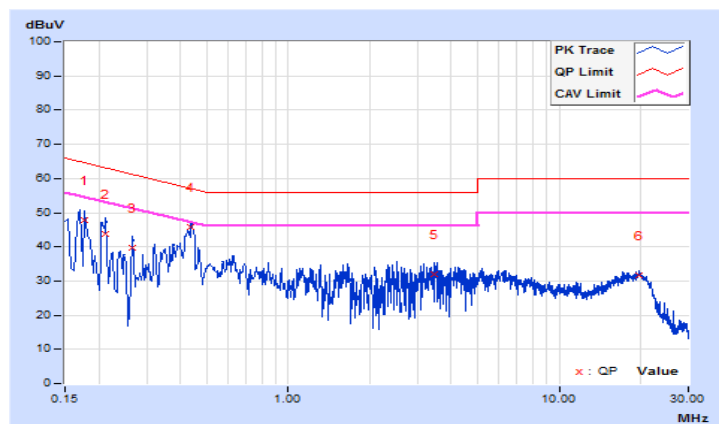


4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	10.03	9.58	0.5	Pass
6	2437	10.08	10.04	0.5	Pass
11	2462	9.57	10.03	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.14	15.10	0.5	Pass
6	2437	15.12	15.15	0.5	Pass
11	2462	15.11	15.07	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.15	15.13	0.5	Pass
6	2437	15.16	15.14	0.5	Pass
11	2462	15.14	15.13	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	33.88	33.89	0.5	Pass
6	2437	33.87	33.90	0.5	Pass
9	2452	33.86	33.90	0.5	Pass

Spectrum Plot of Worst Value


802.11b

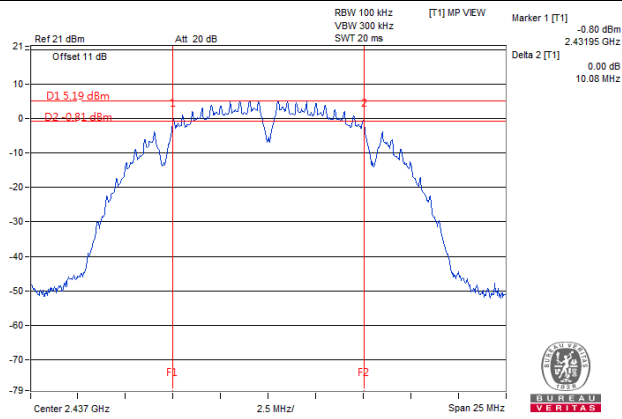


802.11g

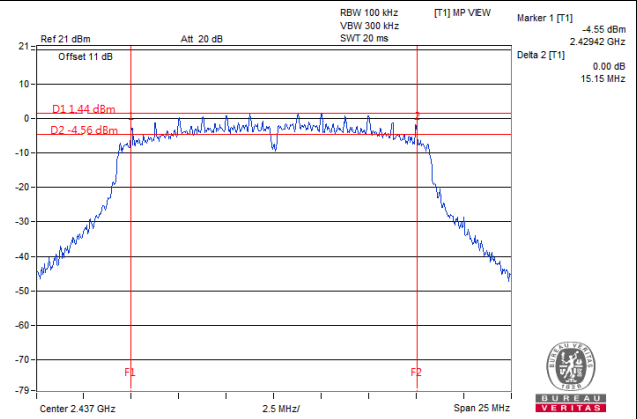

802.11n (HT20)

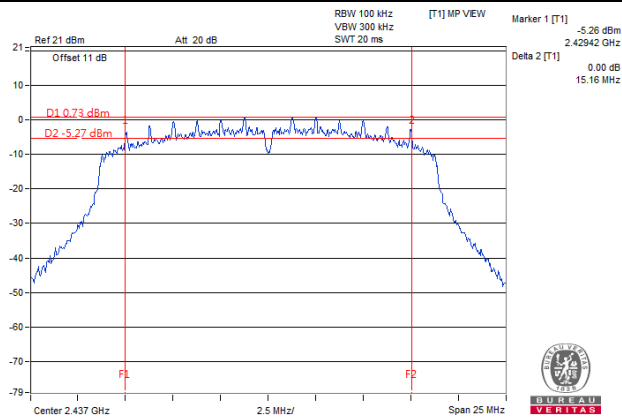


802.11n (HT40)

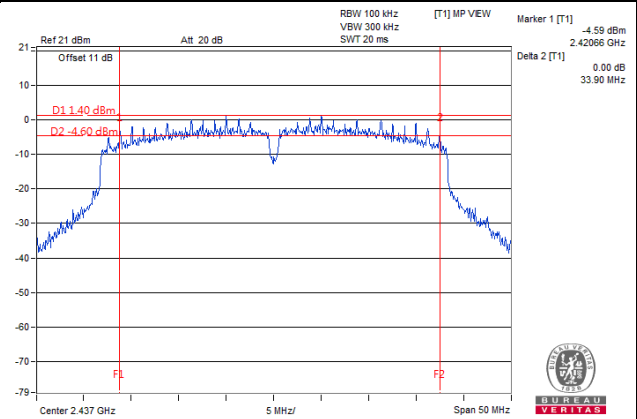

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	13.36	13.36	Pass
6	2437	13.26	13.36	Pass
11	2462	13.26	13.26	Pass

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	16.25	16.25	Pass
6	2437	16.16	16.25	Pass
11	2462	16.16	16.16	Pass

802.11n (HT20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	17.30	17.30	Pass
6	2437	17.30	17.30	Pass
11	2462	17.30	17.30	Pass

802.11n (HT40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
3	2422	36.06	36.06	Pass
6	2437	35.86	36.06	Pass
9	2452	35.96	35.86	Pass

Spectrum Plot of Worst Value


802.11b

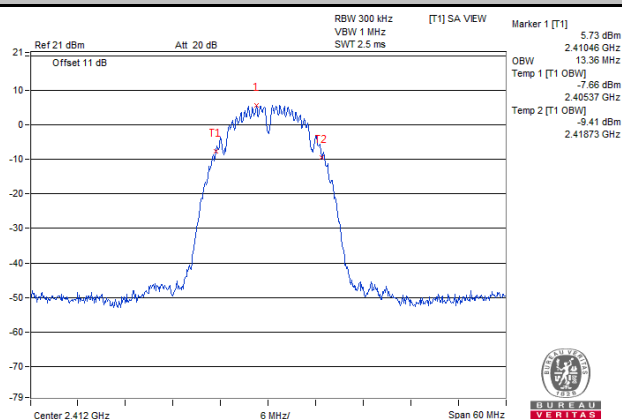


802.11g

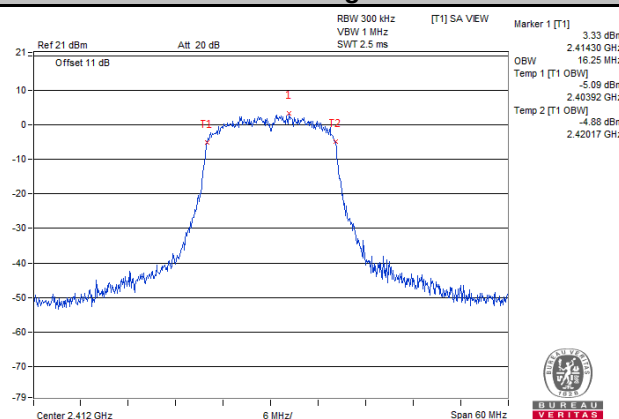

802.11n (HT20)

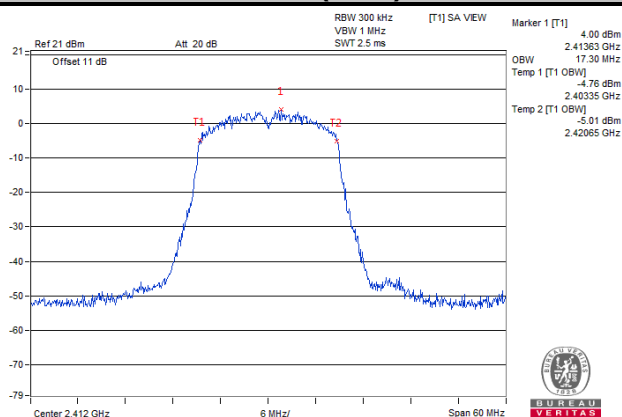

802.11n (HT40)

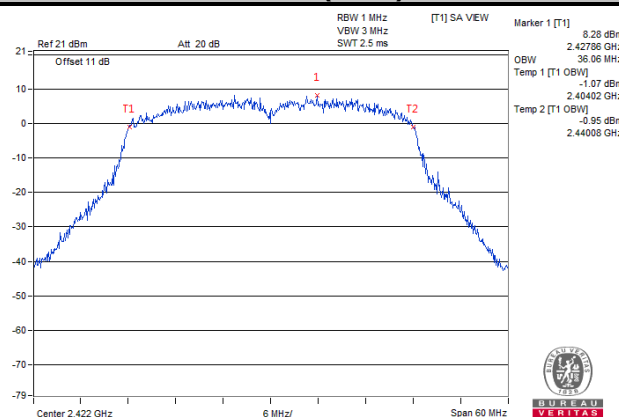

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20 MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

802.11b

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.79	15.63	74.49	18.72	30	Pass
6	2437	16.32	16.13	83.875	19.24	30	Pass
11	2462	18.78	18.57	147.454	21.69	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.23	17.32	120.478	20.81	30	Pass
6	2437	18.02	17.84	124.201	20.94	30	Pass
11	2462	21.45	21.38	277.041	24.43	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.52	17.74	130.55	21.16	30	Pass
6	2437	16.24	16.19	83.664	19.23	30	Pass
11	2462	21.94	21.63	301.861	24.80	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.52	16.69	103.16	20.14	30	Pass
6	2437	19.11	18.66	154.921	21.90	30	Pass
9	2452	15.74	15.45	72.572	18.61	30	Pass

802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	13.31	13.17	42.18	16.25	30	Pass
6	2437	13.73	13.53	46.15	16.64	30	Pass
11	2462	16.04	15.94	79.44	19.00	30	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	11.40	10.70	25.55	14.07	30	Pass
6	2437	11.17	11.05	25.83	14.12	30	Pass
11	2462	14.28	14.03	52.08	17.17	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	11.23	10.44	24.34	13.86	30	Pass
6	2437	9.28	9.04	16.49	12.17	30	Pass
11	2462	14.74	14.49	57.90	17.63	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	12.07	11.91	31.63	15.00	30	Pass
6	2437	13.89	13.15	45.14	16.55	30	Pass
9	2452	10.57	10.36	22.27	13.48	30	Pass

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

802.11b

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-9.59	3.01	-6.58	0.99	Pass
	6	2437	-9.26	3.01	-6.25	0.99	Pass
	11	2462	-6.10	3.01	-3.09	0.99	Pass
1	1	2412	-10.94	3.01	-7.93	0.99	Pass
	6	2437	-8.98	3.01	-5.97	0.99	Pass
	11	2462	-7.33	3.01	-4.32	0.99	Pass

NOTE: Directional gain = 10 dBi + 10log(2) = 13.01 dBi > 6 dBi , so the power density limit shall be reduced to 8-(13.01-6) = 0.99 dBm.

802.11g

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-14.41	3.01	-11.40	0.99	Pass
	6	2437	-12.91	3.01	-9.90	0.99	Pass
	11	2462	-10.50	3.01	-7.49	0.99	Pass
1	1	2412	-14.02	3.01	-11.01	0.99	Pass
	6	2437	-13.95	3.01	-10.94	0.99	Pass
	11	2462	-8.20	3.01	-5.19	0.99	Pass

NOTE: Directional gain = 10 dBi + 10log(2) = 13.01 dBi > 6 dBi , so the power density limit shall be reduced to 8-(13.01-6) = 0.99 dBm.

802.11n (HT20)


TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-13.66	3.01	-10.65	0.99	Pass
	6	2437	-14.43	3.01	-11.42	0.99	Pass
	11	2462	-9.90	3.01	-6.89	0.99	Pass
1	1	2412	-13.85	3.01	-10.84	0.99	Pass
	6	2437	-13.48	3.01	-10.47	0.99	Pass
	11	2462	-8.99	3.01	-5.98	0.99	Pass

NOTE: Directional gain = 10 dBi + 10log(2) = 13.01 dBi > 6 dBi , so the power density limit shall be reduced to 8-(13.01-6) = 0.99 dBm.

802.11n (HT40)

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	3	2422	-15.68	3.01	-12.67	0.99	Pass
	6	2437	-14.62	3.01	-11.61	0.99	Pass
	9	2452	-17.56	3.01	-14.55	0.99	Pass
1	3	2422	-16.62	3.01	-13.61	0.99	Pass
	6	2437	-13.93	3.01	-10.92	0.99	Pass
	9	2452	-17.58	3.01	-14.57	0.99	Pass

NOTE: Directional gain = 10 dBi + 10log(2) = 13.01 dBi > 6 dBi , so the power density limit shall be reduced to 8-(13.01-6) = 0.99 dBm.

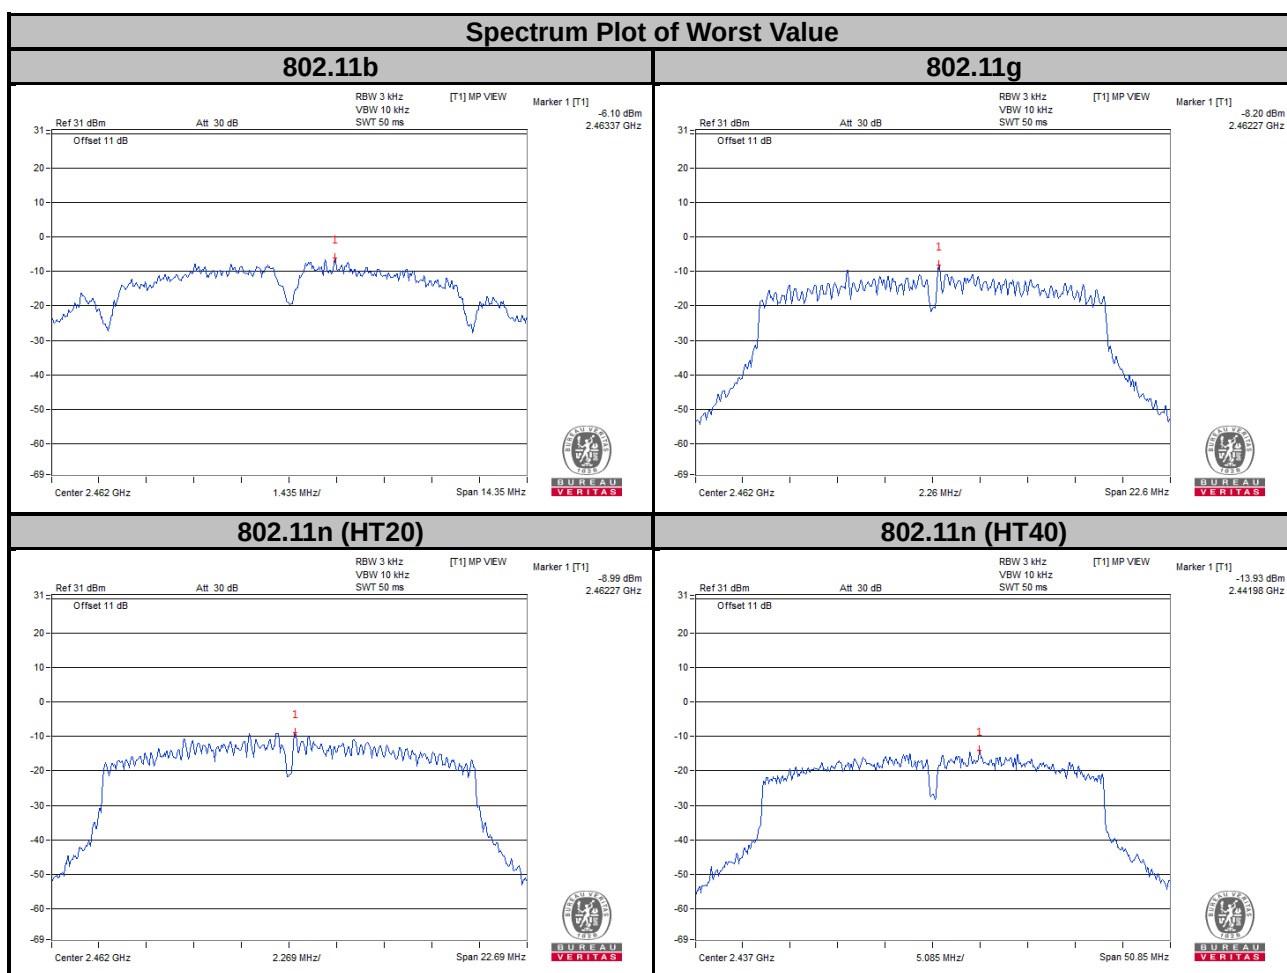


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.

802.11b



CHAIN 0

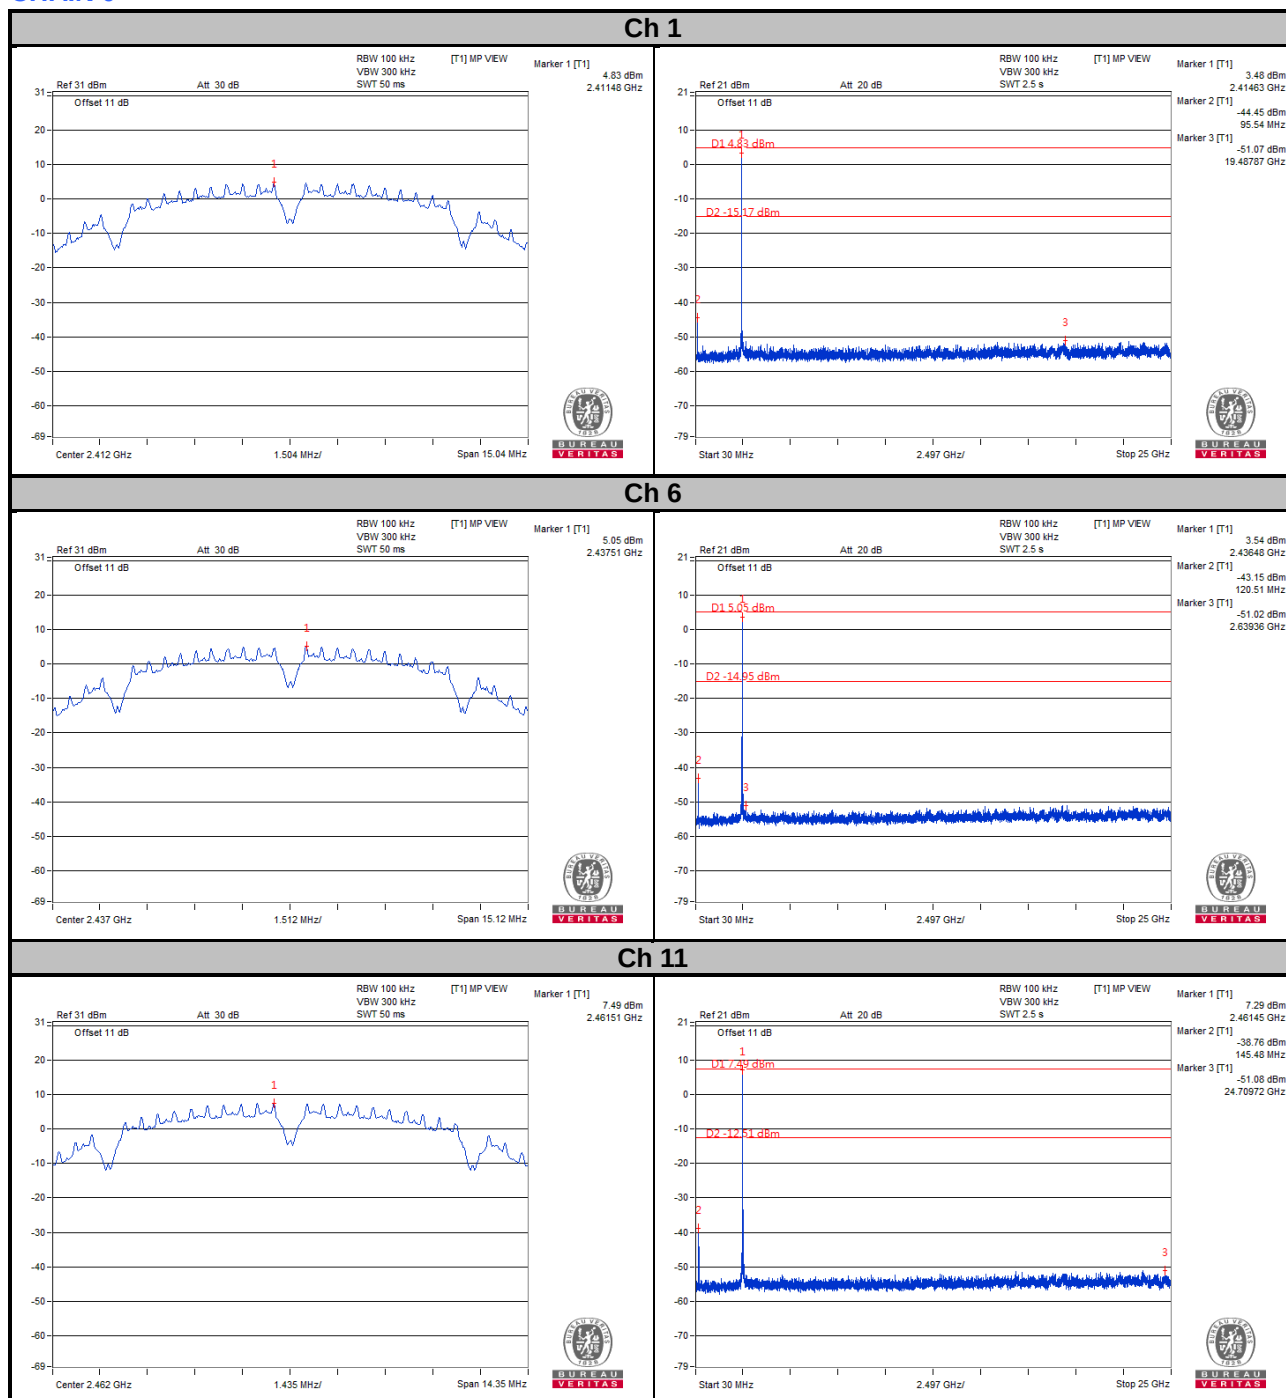


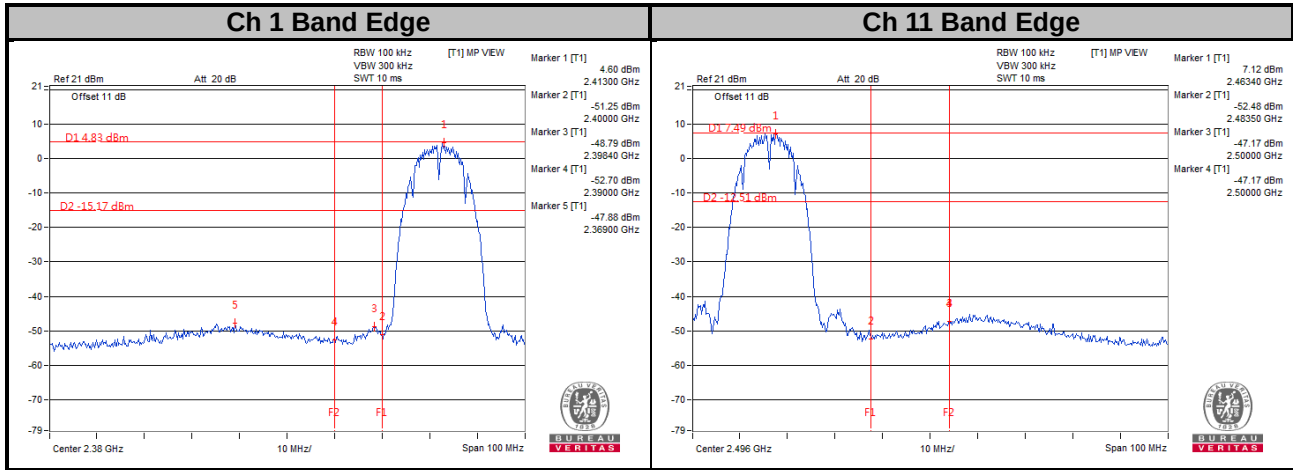


CHAIN 1



Ch 1

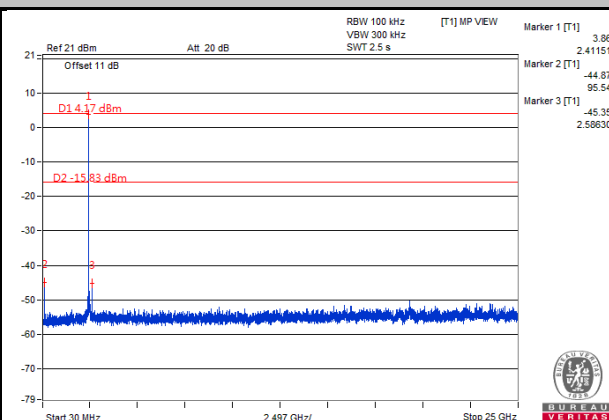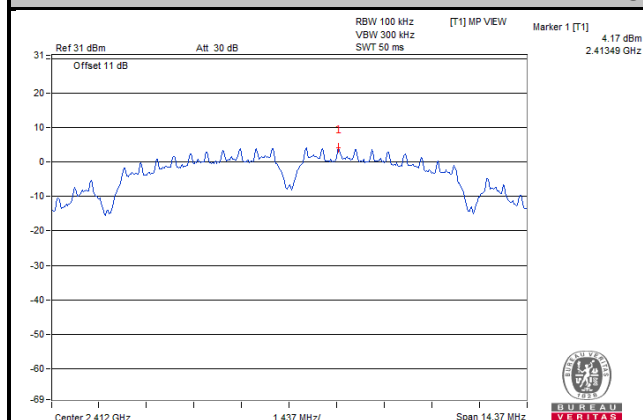


Ch 6

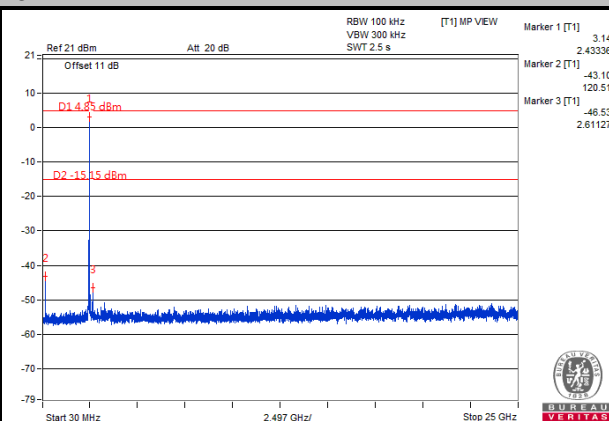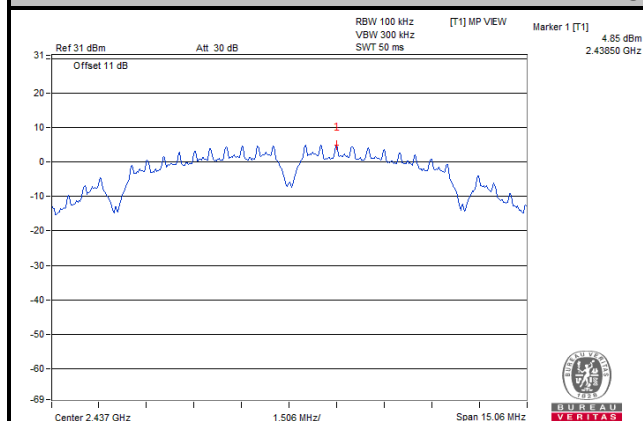



Ch 11

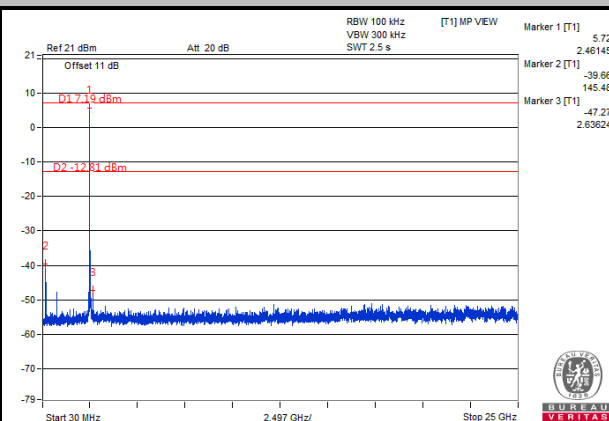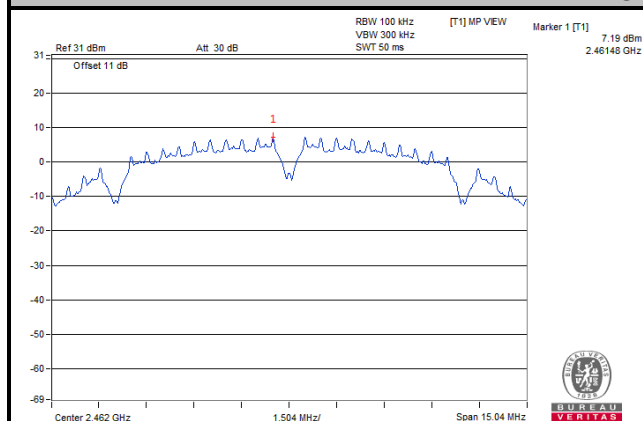


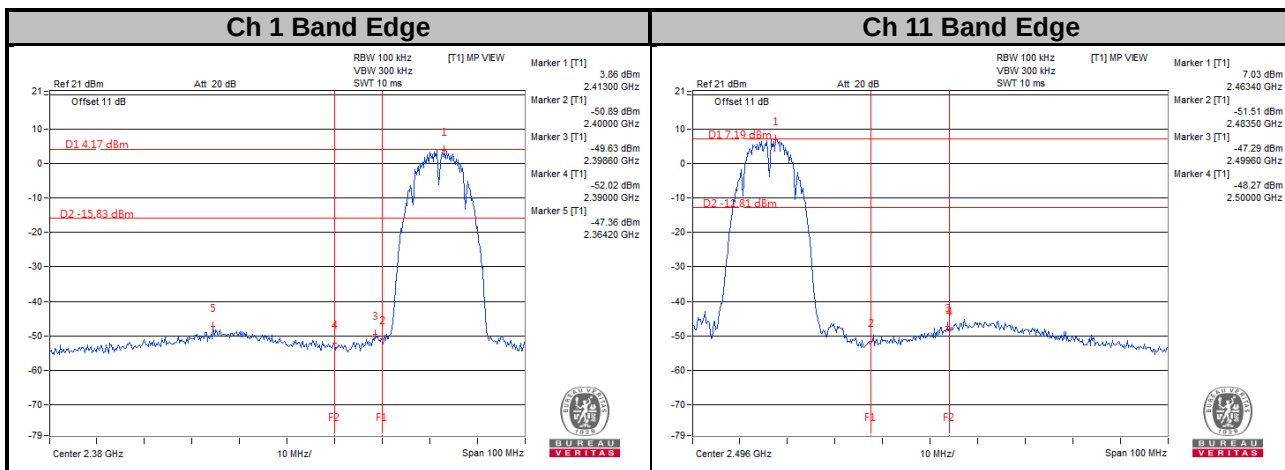


802.11g
CHAIN 0



Ch 1

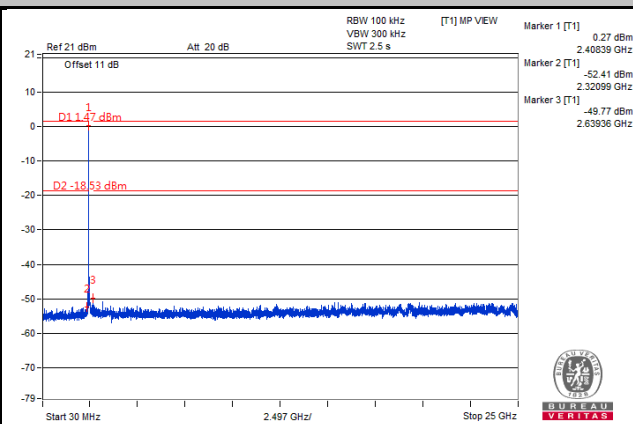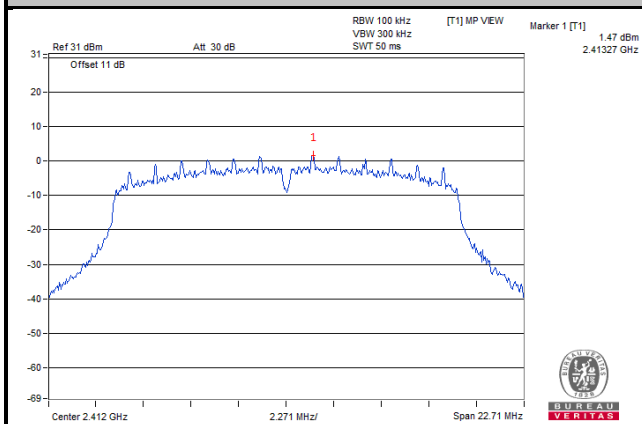


Ch 6

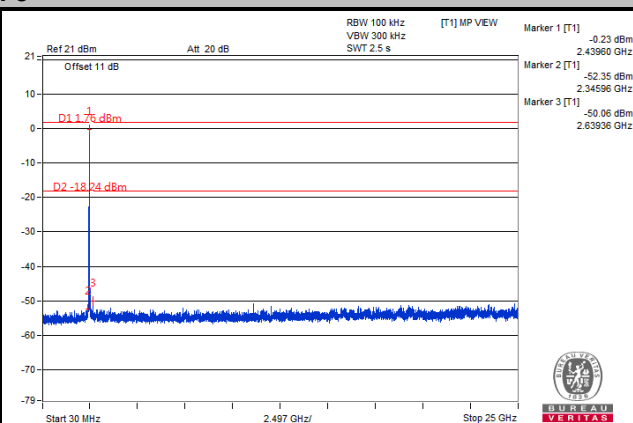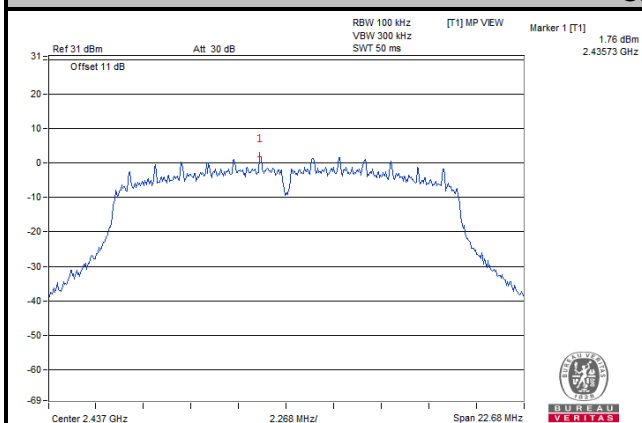



Ch 11

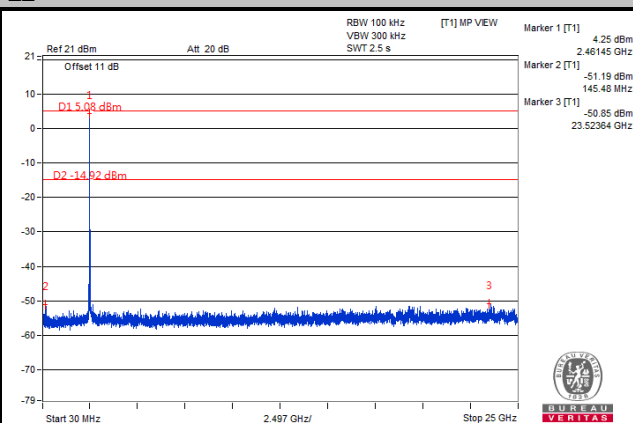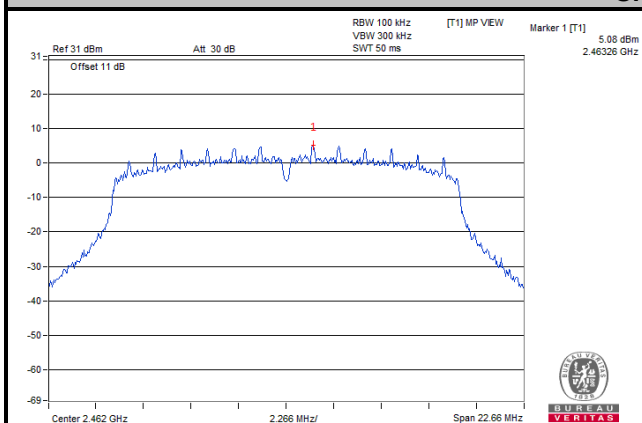


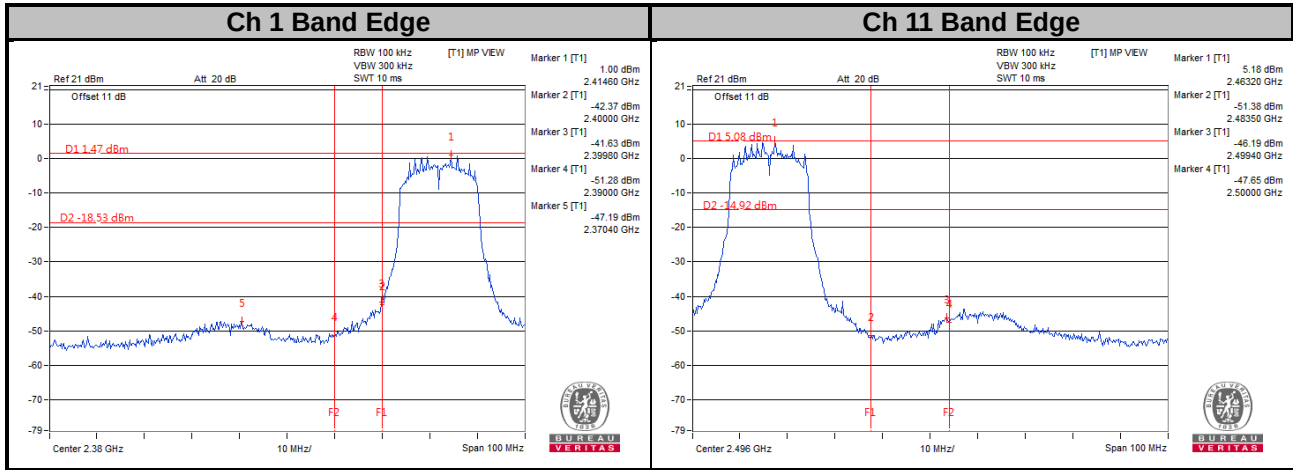


CHAIN 1



Ch 1

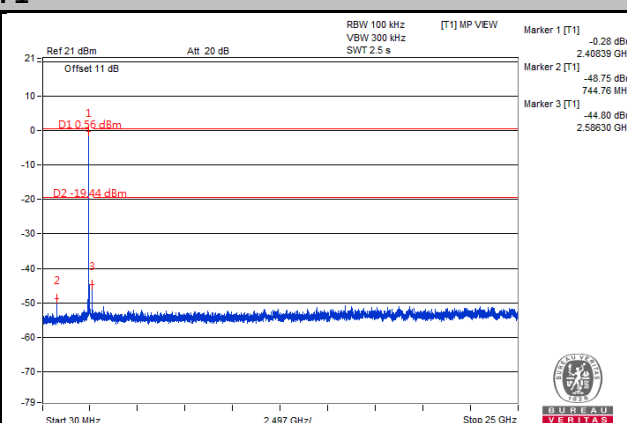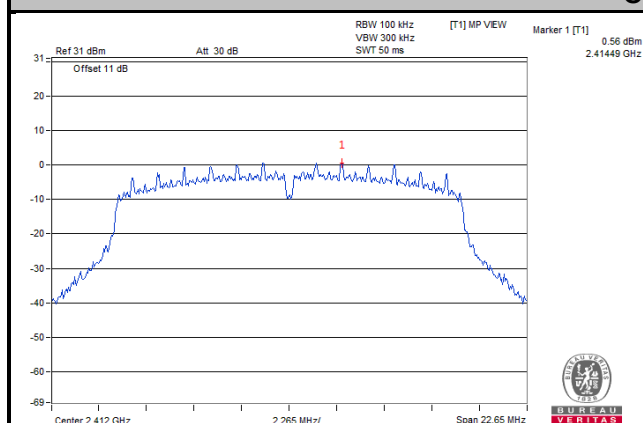


Ch 6

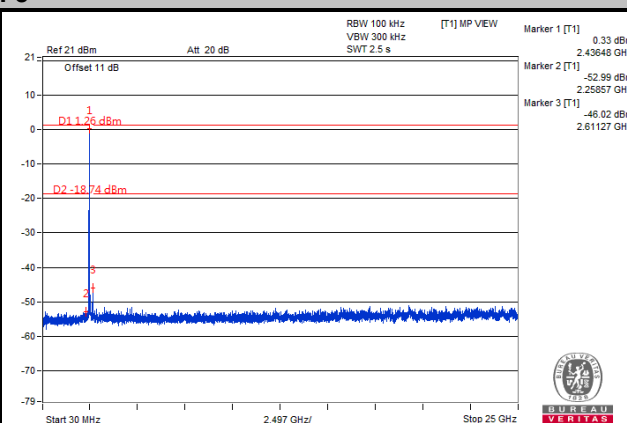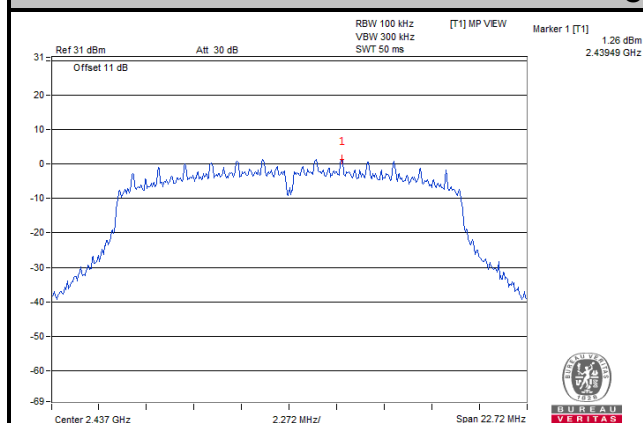



Ch 11

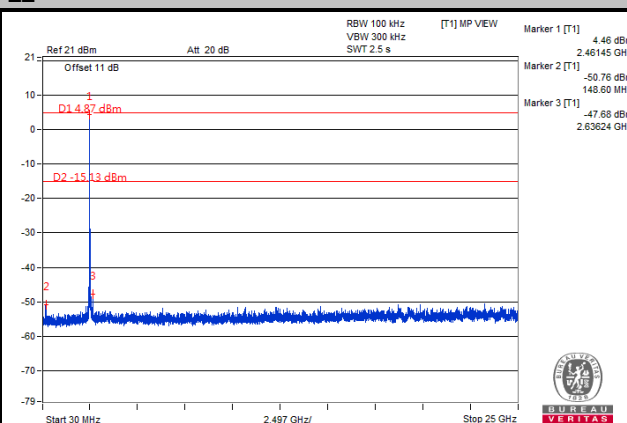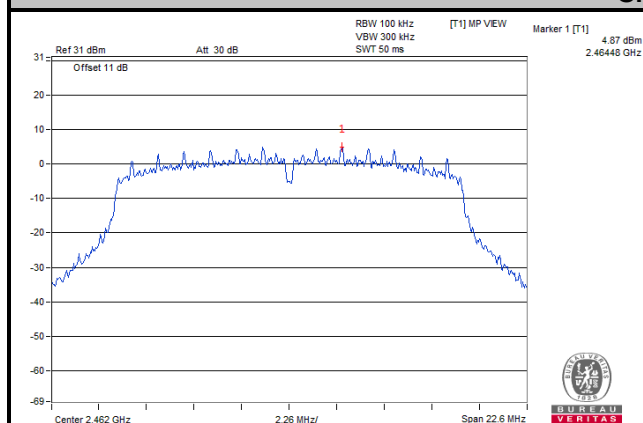


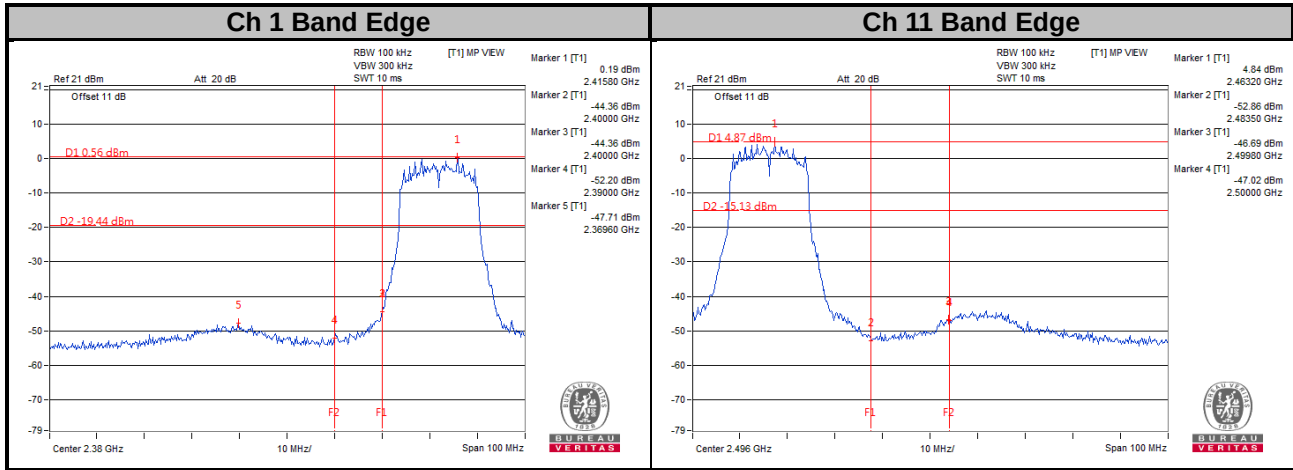


802.11n (HT20) CHAIN 0



Ch 1

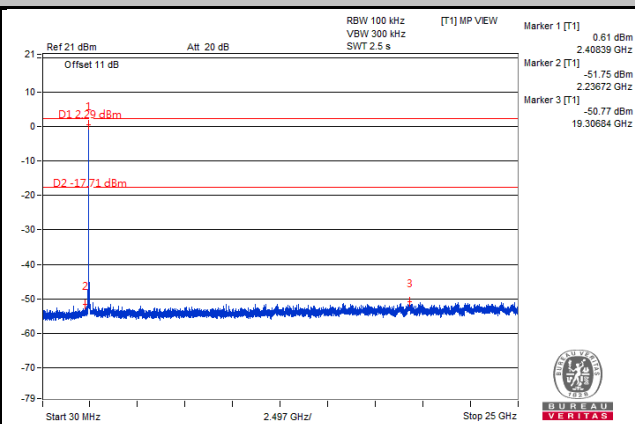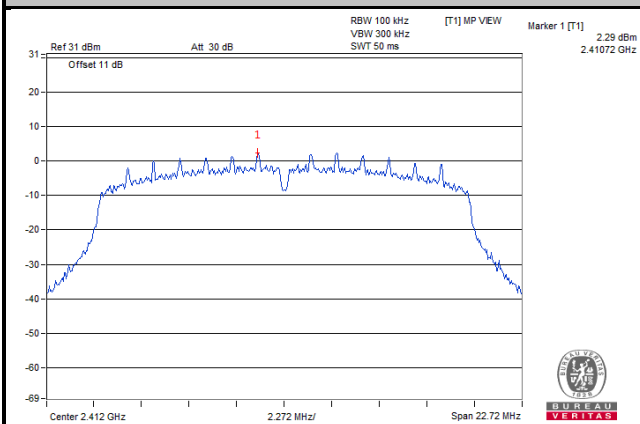


Ch 6

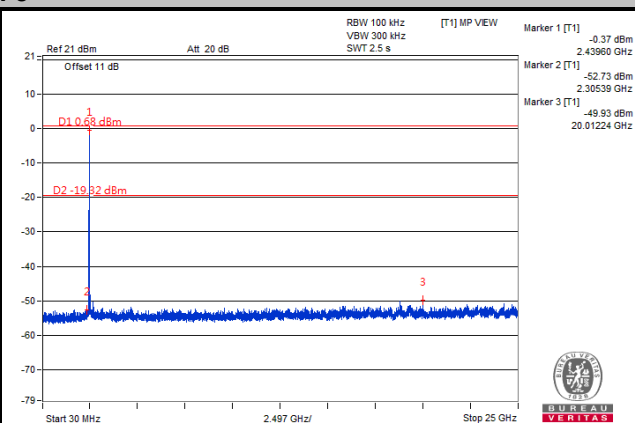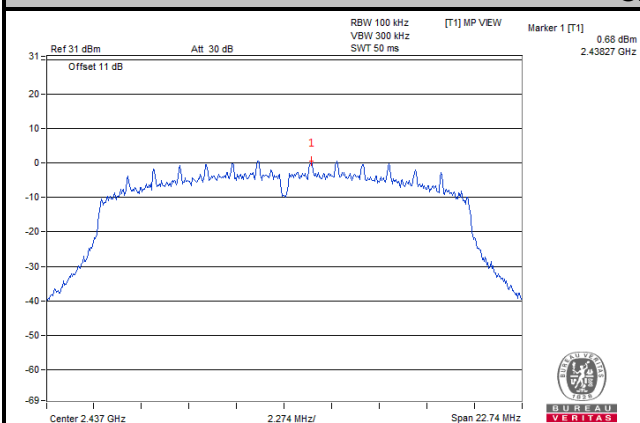



Ch 11

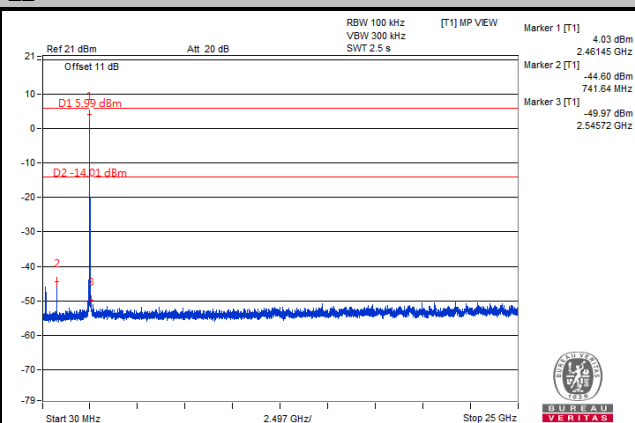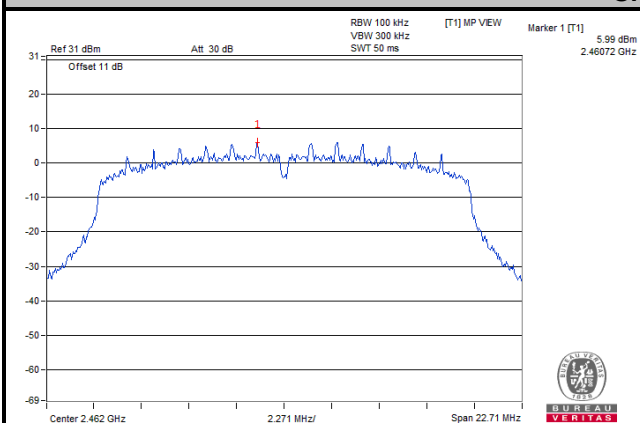


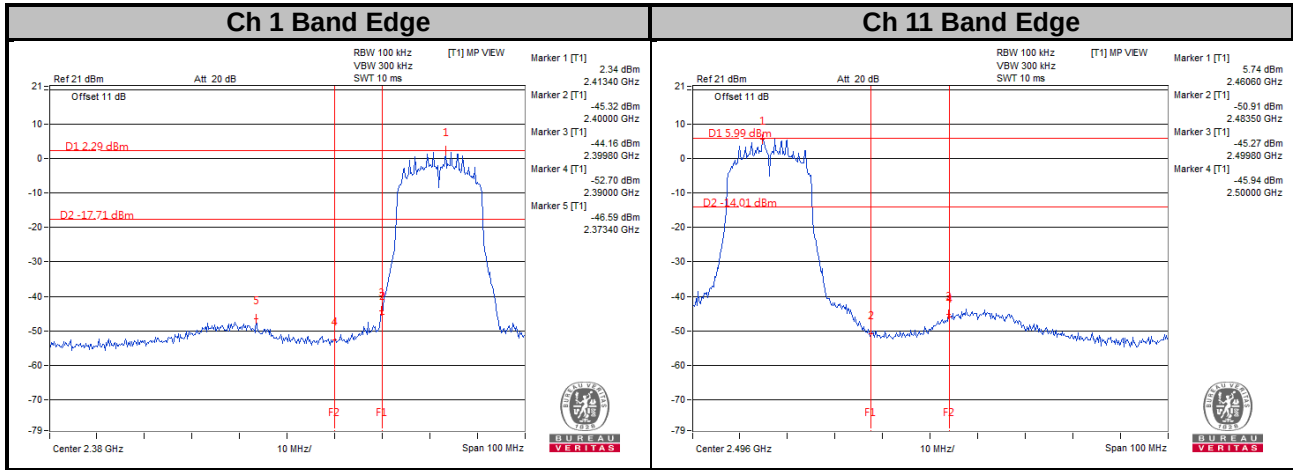


CHAIN 1



Ch 1

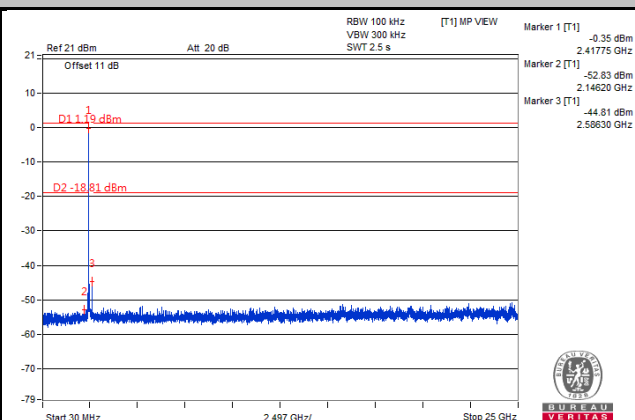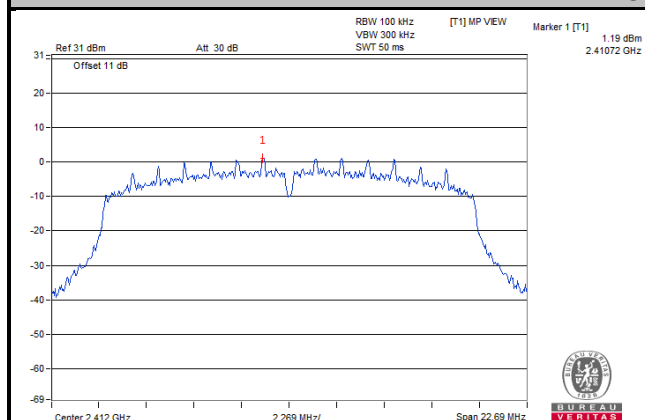


Ch 6

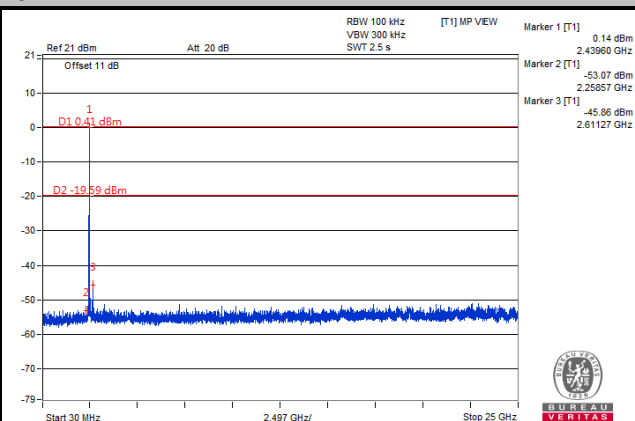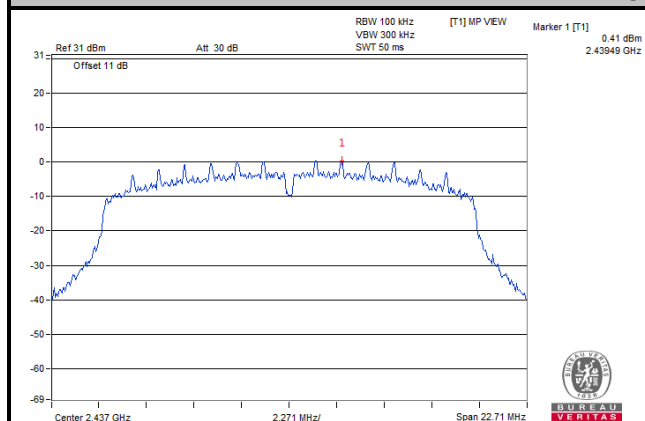


Ch 11

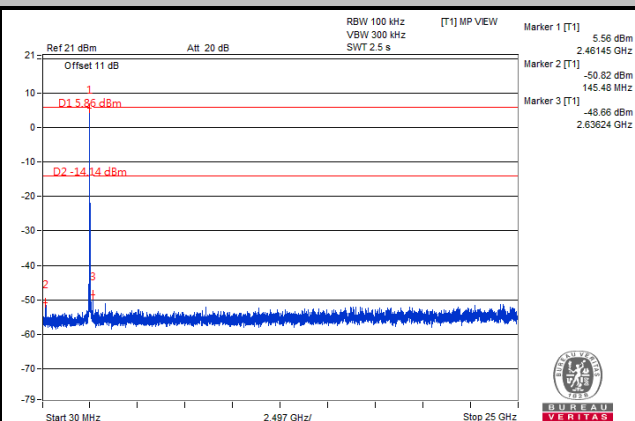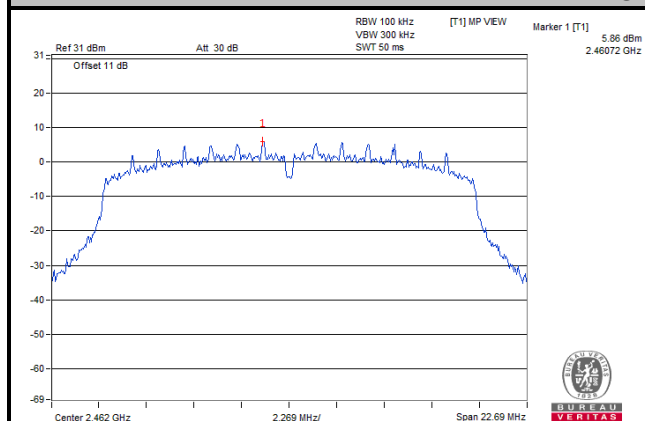

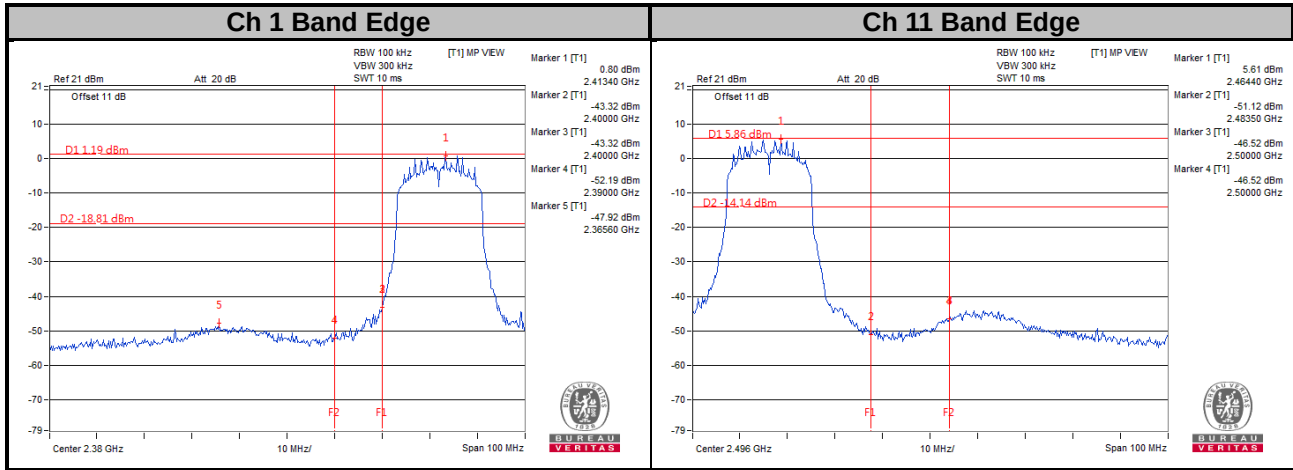


802.11n (HT40) CHAIN 0


Ch 3

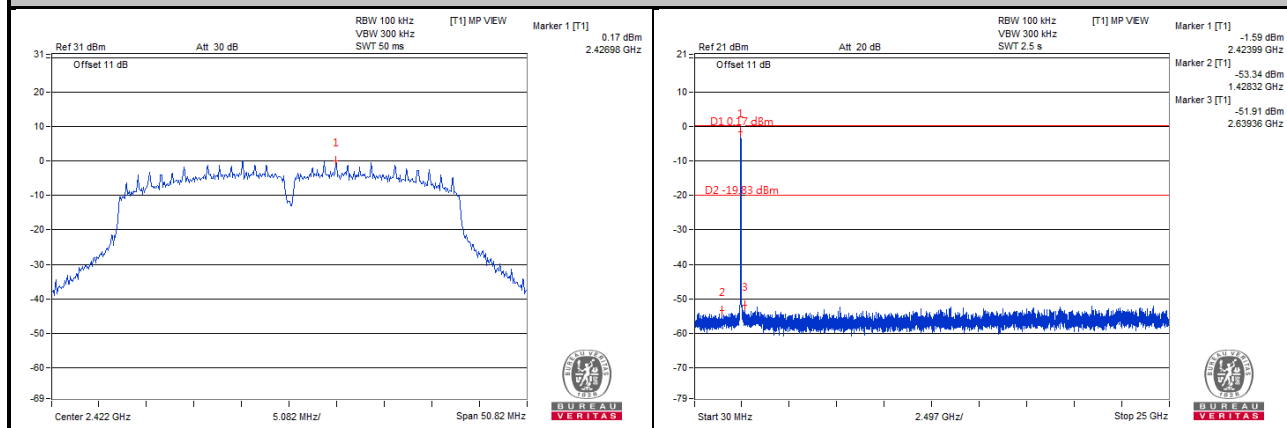


Ch 6

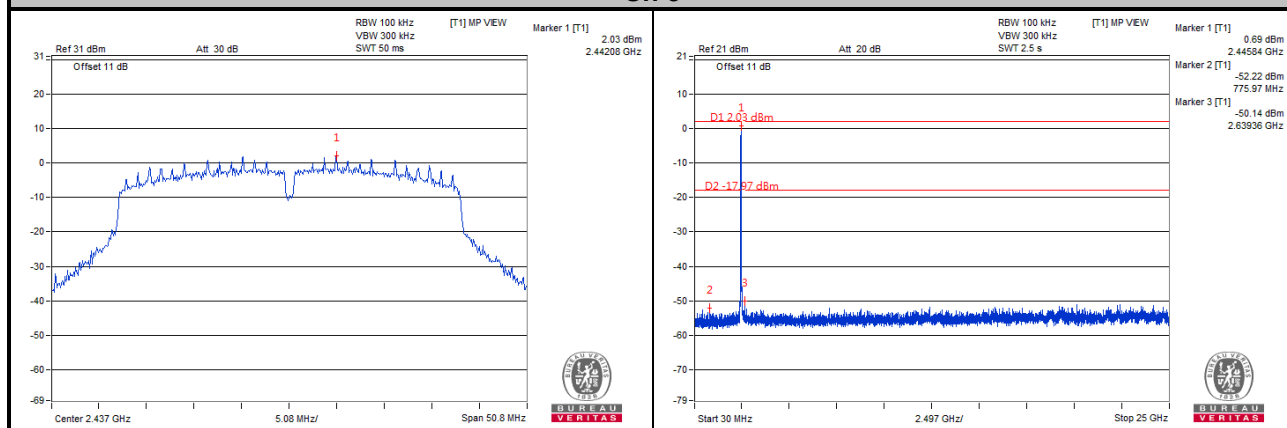



Ch 9

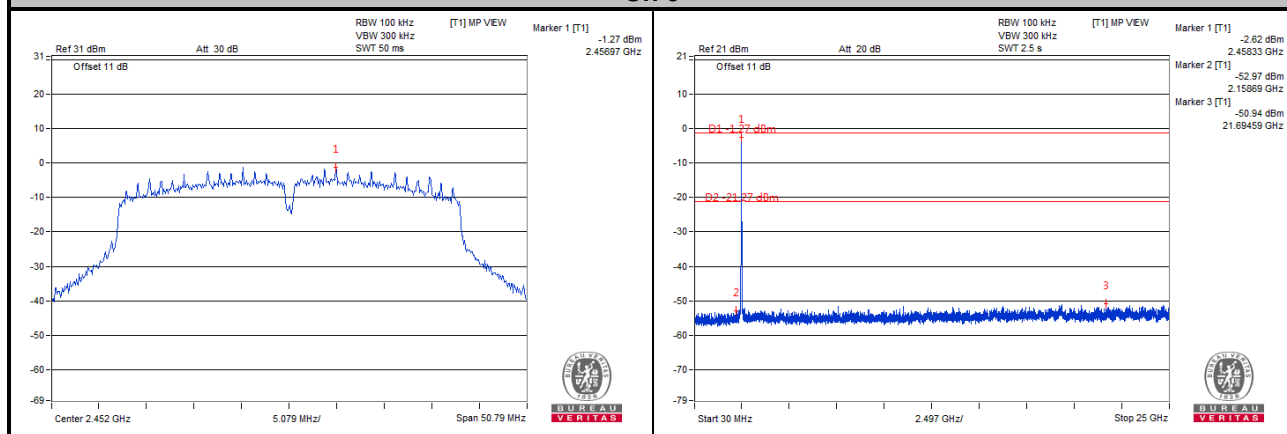


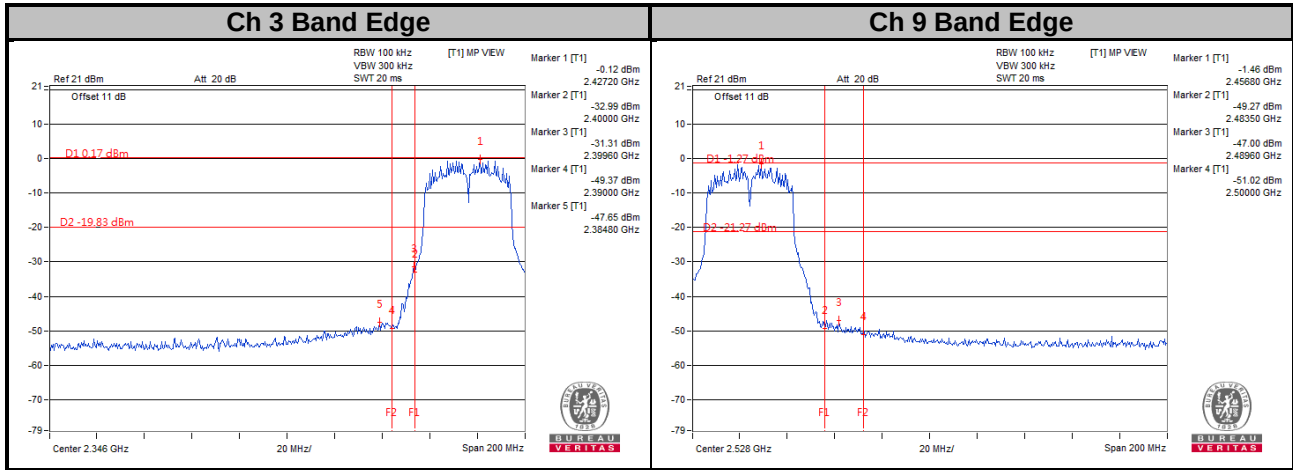


CHAIN 1



Ch 3

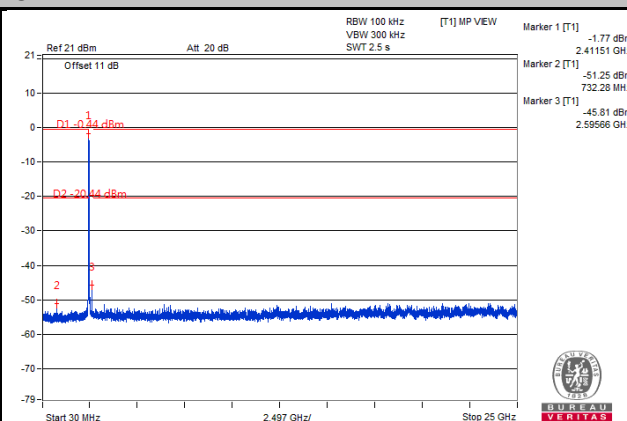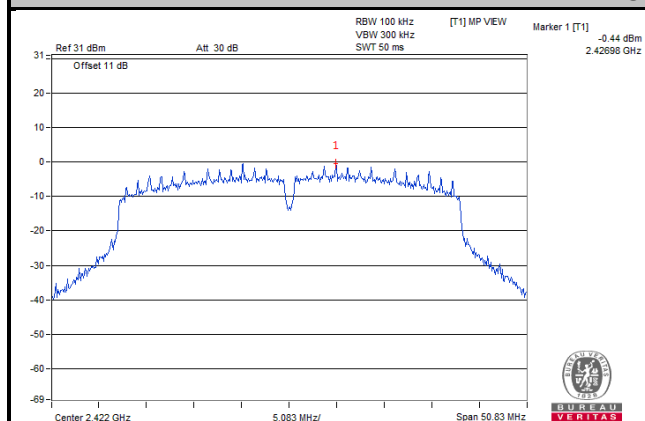


Ch 6

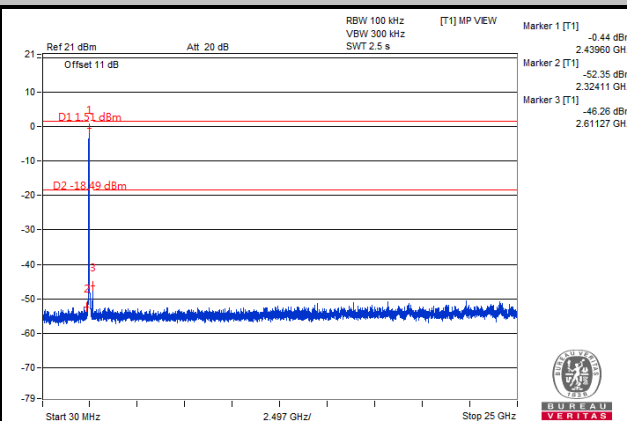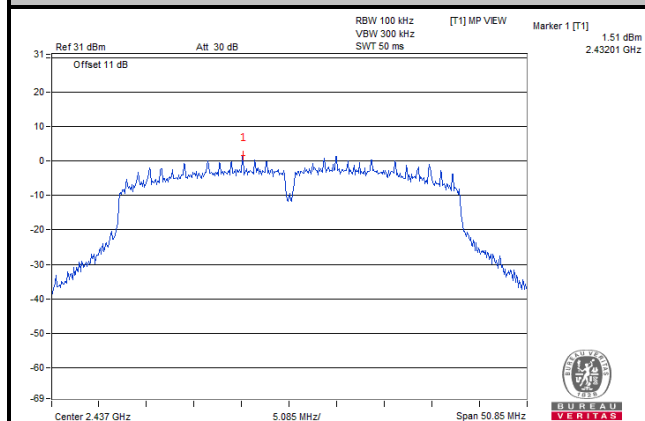

Ch 9

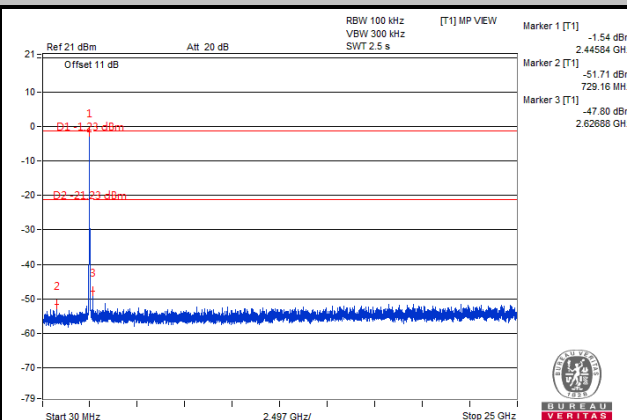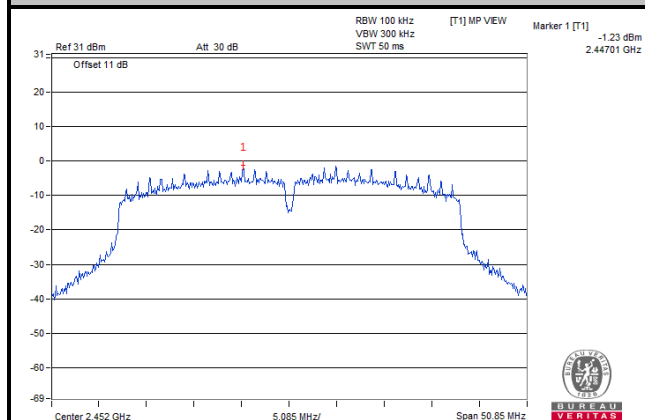

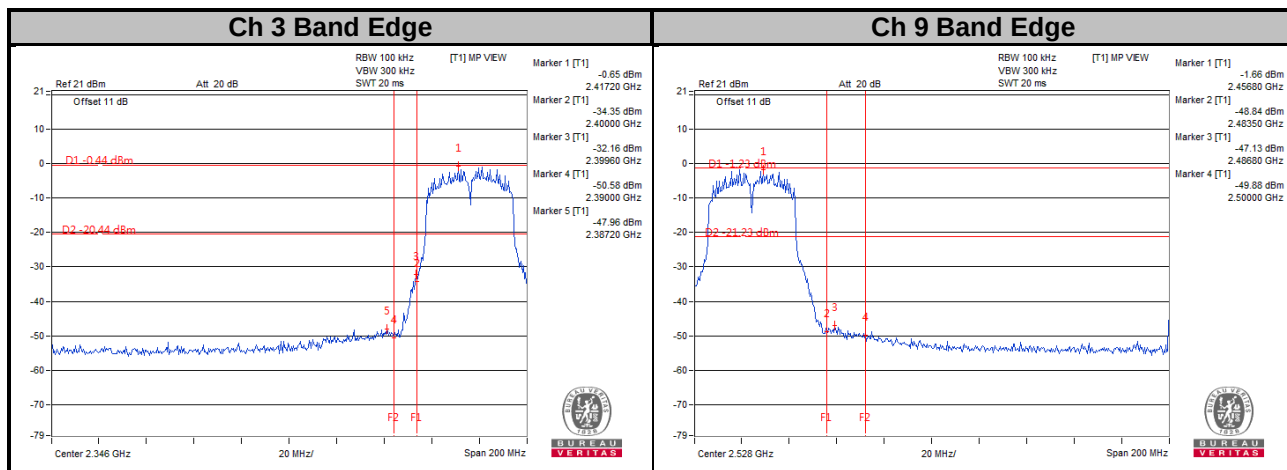

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---