


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	26°C	Humidity	68%
Test Engineer	Peter Wu	Configurations	2.4GHz + 5GHz

Horizontal

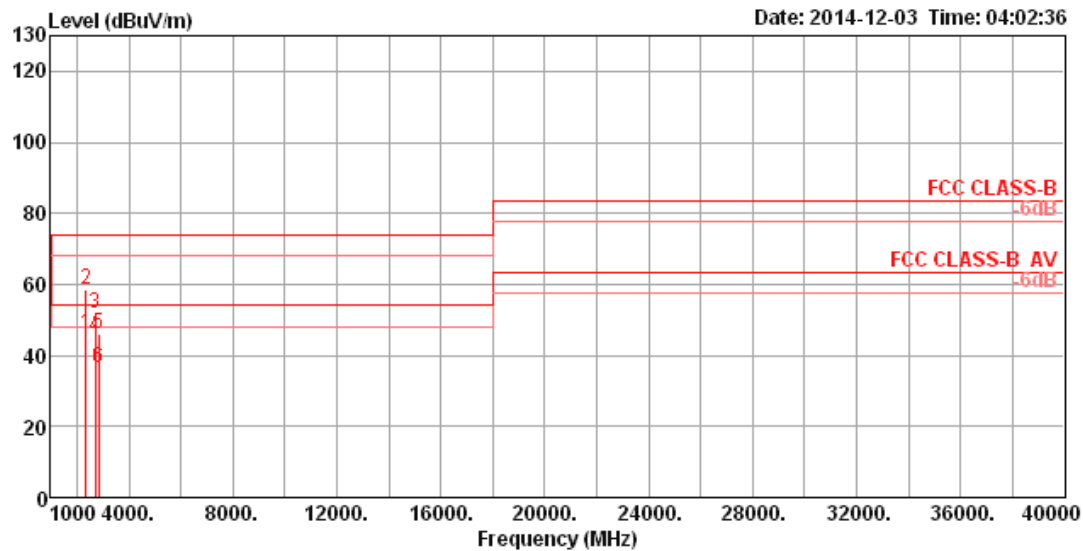

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2339.55	45.85	54.00	-8.15	48.13	4.33	28.39	35.00	98	233 Average	HORIZONTAL
2	2342.94	58.38	74.00	-15.62	60.66	4.33	28.39	35.00	98	233 Peak	HORIZONTAL
3	2719.85	51.97	74.00	-22.03	52.83	4.76	29.48	35.10	125	106 Peak	HORIZONTAL
4	2719.99	44.88	54.00	-9.12	45.74	4.76	29.48	35.10	125	106 Average	HORIZONTAL
5	2839.97	46.04	74.00	-27.96	46.40	4.89	29.90	35.15	125	178 Peak	HORIZONTAL
6	2839.99	36.53	54.00	-17.47	36.89	4.89	29.90	35.15	125	178 Average	HORIZONTAL

Vertical

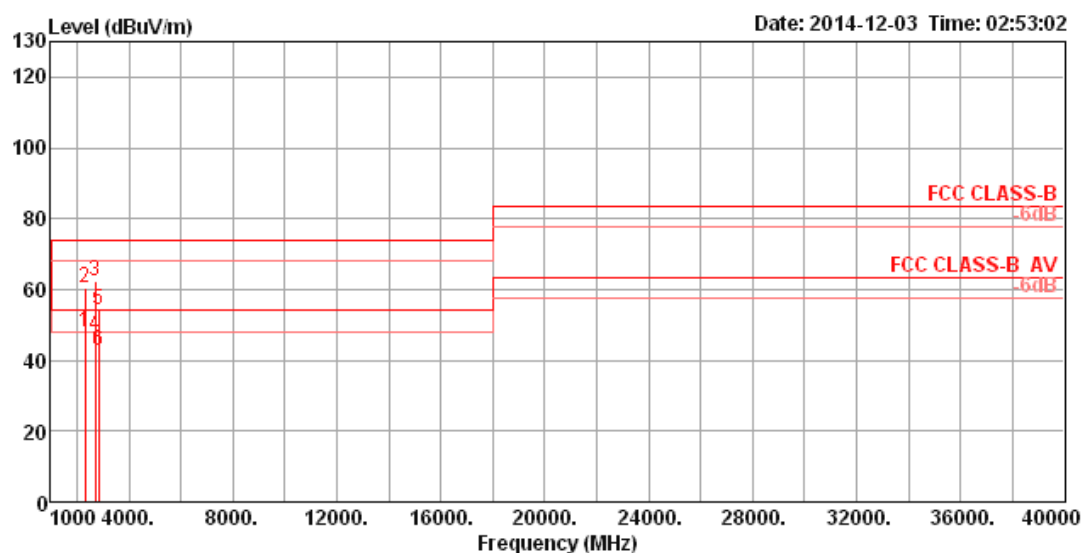

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2320.19	48.01	54.00	-5.99	50.34	4.30	28.36	34.99	255	172 Average	VERTICAL
2	2321.08	60.67	74.00	-13.33	63.00	4.30	28.36	34.99	255	172 Peak	VERTICAL
3	2719.88	62.52	74.00	-11.48	63.38	4.76	29.48	35.10	157	100 Peak	VERTICAL
4	2719.89	47.05	54.00	-6.95	47.91	4.76	29.48	35.10	157	100 Average	VERTICAL
5	2839.47	54.11	74.00	-19.89	54.47	4.89	29.90	35.15	6	100 Peak	VERTICAL
6	2839.90	42.69	54.00	-11.31	43.05	4.89	29.90	35.15	6	100 Average	VERTICAL