



# FCC RADIO TEST REPORT

Applicant : D-Link Corporation  
Address : 14420 Myford Road Suite 100, Irvine, California  
92606, United States  
Equipment : AX3000 Wall Plate Access Point  
Model No. : DAP-X3060W  
Trade Name : D-Link  
FCC ID : KA2APX3060WA1

**I HEREBY CERTIFY THAT :**

The sample was received on Mar. 31, 2025 and the testing was completed on Sep. 03, 2025 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## Contents

<b>1. Summary of Test Procedure and Test Results</b>	<b>4</b>
1.1 Applicable Standards	4
<b>2. Test Configuration of Equipment under Test</b>	<b>5</b>
2.1 Feature of Equipment under Test	5
2.2 Test Mode and Test Software	6
2.3 Description of Test System	7
2.4 General Information of Test	8
2.5 Measurement Uncertainty	8
<b>3. Test Equipment and Ancillaries Used for Tests</b>	<b>9</b>
<b>4. Test of AC Power Line Conducted Emission</b>	<b>10</b>
4.1 Test Limit	10
4.2 Test Procedures	10
4.3 Typical Test Setup	11
4.4 Test Result and Data	12
<b>5. Test of Spurious Emission (Radiated)</b>	<b>14</b>
5.1 Test Limit	14
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data (9kHz ~ 30MHz)	17
5.5 Test Result and Data (30MHz ~ 1GHz)	17
5.6 Test Result and Data (1GHz ~ 25GHz)	19
5.7 Restricted Bands of Operation	21



### History of this test report

Report No.	Issued Date	Description
25010405-TRFCC05	Sep. 08, 2025	Original



# 1. Summary of Test Procedure and Test Results

## 1.1 Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

**FCC Rules and Regulations Part 15 Subpart E §15.407**

Description of Test	Result
CO-LOCATION	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(25010405-TEFV01).



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

Operation Frequency Range	2.4GHz:802.11b/g/n(TurboQAM)/ax:2400-2483.5MHz 5GHz:802.11a/n/ac/ax:5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz
Center Frequency Range	2.4GHz:802.11b/g/n(TurboQAM)/ax:2412MHz-2462MHz 5GHz:802.11a/n/ac/ax:5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz
Modulation Type	2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM, 256QAM(TurboQAM) 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz: 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	DSSS, OFDM, OFDMA
Data Rate	2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 MCS0 – MCS9, VHT20/40(TurboQAM) 802.11ax: MCS0 – MCS11, HE20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/160 802.11ax: MCS0 – MCS11, HE20/40/80/160
Antenna Type	PCB Antenna
Antenna Gain	2400-2500MHz: ANT A: 2.98dBi, ANT B: 2.85dBi 5150-5250MHz: ANT A: 4.97dBi, ANT B: 4.93dBi 5250-5350MHz: ANT A: 4.99dBi, ANT B: 4.97dBi 5470-5725MHz: ANT A: 4.87dBi, ANT B: 4.93dBi 5725-5850MHz: ANT A: 4.93dBi, ANT B: 4.93dBi

Note:

1. EUT support TPC Function.
2. EUT support AP Mode(Master).
3. EUT only support Full RU.
4. WLAN 2.4GHz 802.11n Support TurboQAM.
5. WLAN 2.4GHz 802.11n(TurboQAM) & 802.11ax support beamforming Function.
6. WLAN 5GHz 802.11ac & 802.11ax support beamforming Function.
7. EUT FW: v1.01
8. For more details, please refer to the User's manual of the EUT.



### 2.2 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, "QSPR ver. 5.0.00200" under Windows OS system was executed to transmit and receive data via WLAN.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	11ax20 CH06 + 11a CH149, From POE
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	11ax20 CH06 + 11a CH149, From POE
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	11ax20 CH06 + 11a CH149, From POE
caused "Test Mode 1" generated the worst case, it was reported as the final data.	

Note:

There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.  
 For AC Power Line Conducted Emission, AC 240V / 60Hz is worst case.  
 For Radiated Spurious Emission, (9KHz ~30MHz & 30MHz ~ 1GHz), AC 240V / 60Hz is worst case.



### 2.3 Description of Test System

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	AUAS	P2430U	N/A	Adapter / 1.8m / NS
POE	CERIO	POE-S53VG	N/A	
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
POE	CERIO	POE-S53VG	N/A	
RJ45 Cable*2	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Notebook	AUAS	P2430U	N/A	Adapter / 1.8m / NS



**2.4 General Information of Test**

Organization	CerpPASS Technology Corp.		
<input checked="" type="checkbox"/> Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881		
	FCC	TW1439, TW1079	
	IC	4934E-1, 4934E-2	
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz		
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.		

Test Item	Test Site	Test period	Environmental Conditions	Tested By
Radiated Emissions	3M02-NK	2025/09/02	21.9°C / 65%	Park Chen
AC Power Line Conducted Emission	CON02-NK	2025/09/03	25.2°C / 62%	Park Chen

**2.5 Measurement Uncertainty**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.2dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB



### 3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2025/02/17	2026/02/16
Active Loop Antenna	Schwarzbeck	FMZB 1513	00414	2025/02/18	2026/02/17
Horn Antenna	EMCO	3115	31589	2025/02/20	2026/02/19
Horn Antenna	EMCO	3116	31974	2025/02/20	2026/02/19
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2025/05/19	2026/05/18
Spectrum Analyzer 44GHz	ROHDE & SCHWARZ	FSV3044	101744	2025/04/23	2026/04/22
Preamplifier	Agilent	8449B	3008A01954	2025/02/12	2026/02/11
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2024/10/15	2025/10/14
Preamplifier	EM Electronics corp.	EM330	60659	2024/12/16	2025/12/15
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2025/02/21	2026/02/20
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2025/02/26	2026/02/25
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2025/02/26	2026/02/25
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2025/02/26	2026/02/25
Cable-3m(10M-40G)	HUBER SUHNER	SF102	804619/2	2024/10/14	2025/10/13
Cable-1m(10M-40G)	HUBER SUHNER	SF102	804398/2	2024/10/14	2025/10/13
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	WOKEN	WFIL-H3000-18000F-03	WR377WC2B1	2024/10/15	2025/10/14
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFWC4M1	2025/02/21	2026/02/20
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFWC2J1	2025/02/21	2026/02/20

Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2025/05/19	2026/05/18
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	1197	2025/02/26	2026/02/25
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	101584	2025/02/26	2026/02/25
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2025/07/02	2026/07/01
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



## 4. Test of AC Power Line Conducted Emission

### 4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 4.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



### 4.3 Typical Test Setup

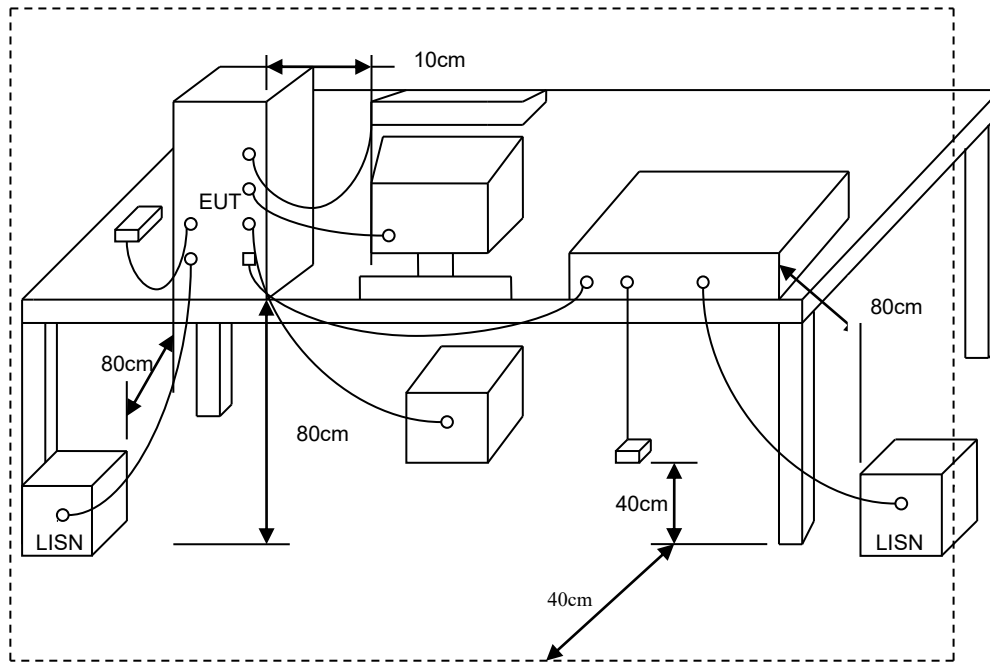




### 4.4 Test Result and Data

Test Mode : 11ax20 CH06+11a CH149  
Voltage : From POE(AC 240V/60Hz)  
Phase : Line

Data: 11

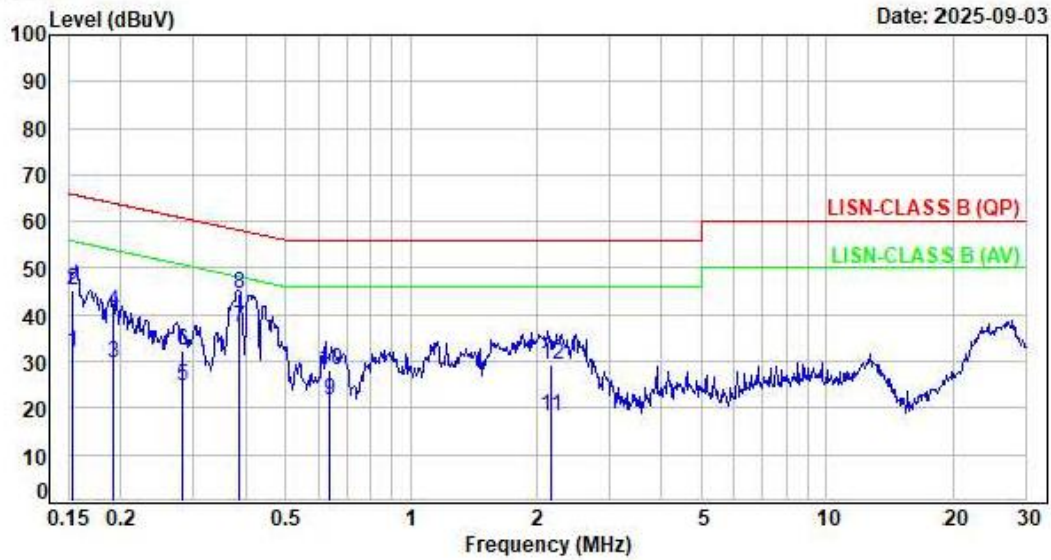

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1531	9.55	22.42	31.97	55.83	-23.86	Average	P
2	0.1531	9.55	35.56	45.11	65.83	-20.72	QP	P
3	0.1917	9.53	20.28	29.81	53.96	-24.15	Average	P
4	0.1917	9.53	31.09	40.62	63.96	-23.34	QP	P
5	0.2810	9.54	15.06	24.60	50.79	-26.19	Average	P
6	0.2810	9.54	22.81	32.35	60.79	-28.44	QP	P
7	0.3848	9.56	27.60	37.16	48.18	-11.02	Average	P
8	0.3848	9.56	35.01	44.57	58.18	-13.61	QP	P
9	0.6395	9.57	12.28	21.85	46.00	-24.15	Average	P
10	0.6395	9.57	18.47	28.04	56.00	-27.96	QP	P
11	2.1747	9.59	8.62	18.21	46.00	-27.79	Average	P
12	2.1747	9.59	19.86	29.45	56.00	-26.55	QP	P


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 11ax20 CH06+11a CH149  
Voltage : From POE(AC 240V/60Hz)  
Phase : Neutral

Data: 12

Date: 2025-09-03

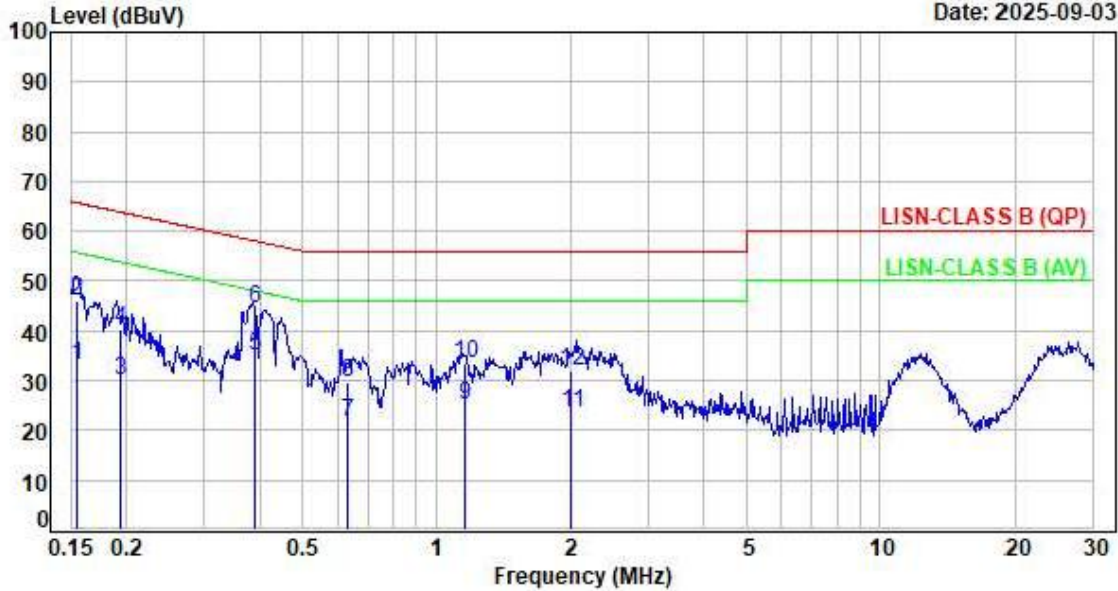

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1546	9.56	23.55	33.11	55.75	-22.64	Average	P
2	0.1546	9.56	36.29	45.85	65.75	-19.90	QP	P
3	0.1950	9.55	20.49	30.04	53.82	-23.78	Average	P
4	0.1950	9.55	30.71	40.26	63.82	-23.56	QP	P
5	0.3885	9.59	25.34	34.93	48.10	-13.17	Average	P
6	0.3885	9.59	34.75	44.34	58.10	-13.76	QP	P
7	0.6283	9.61	11.92	21.53	46.00	-24.47	Average	P
8	0.6283	9.61	19.98	29.59	56.00	-26.41	QP	P
9	1.1612	9.67	15.61	25.28	46.00	-20.72	Average	P
10	1.1612	9.67	23.84	33.51	56.00	-22.49	QP	P
11	2.0163	9.74	13.90	23.64	46.00	-22.36	Average	P
12	2.0163	9.74	22.22	31.96	56.00	-24.04	QP	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 5. Test of Spurious Emission (Radiated)

### 5.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



## 5.2 Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.  
(Z-AXIS is the worst.)




### 5.3 Typical Test Setup


Below 30MHz test setup

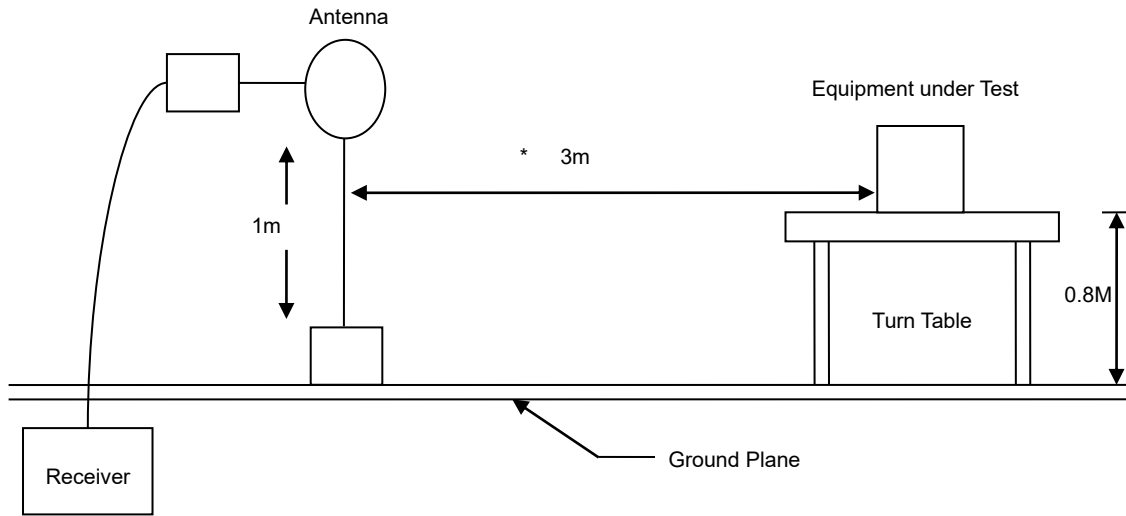

30MHz- 1GHz Test Setup

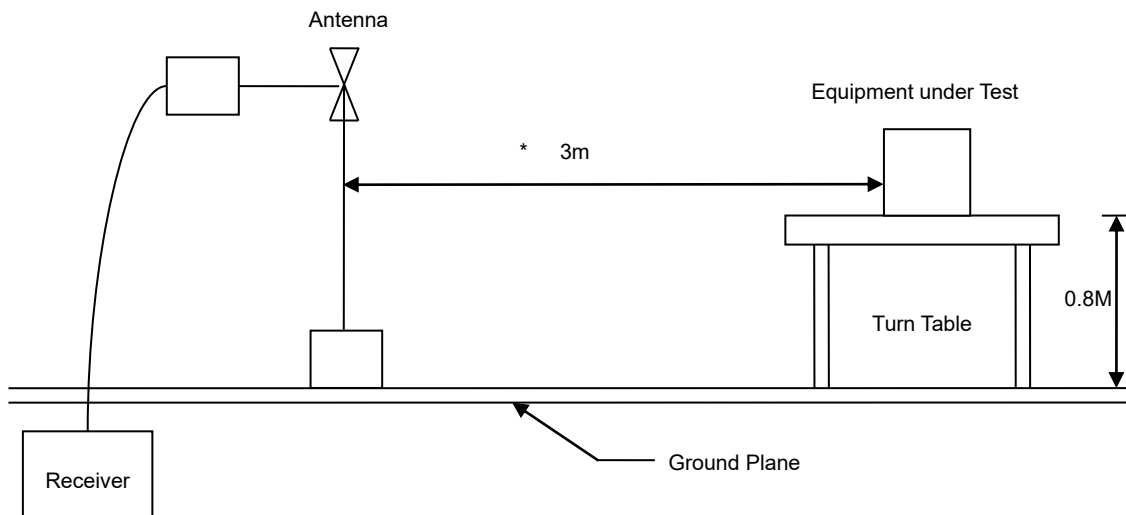

Above 1GHz Test Setup

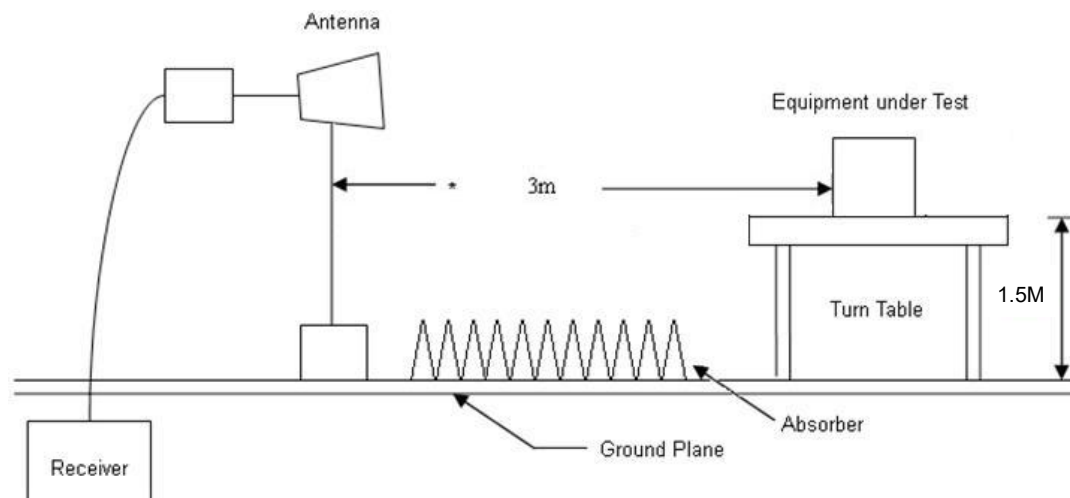




### 5.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

### 5.5 Test Result and Data (30MHz ~ 1GHz)

Test Mode : 11ax20 CH06+11a CH149  
Voltage : From POE(AC240V/60Hz)  
Pol : Vertical

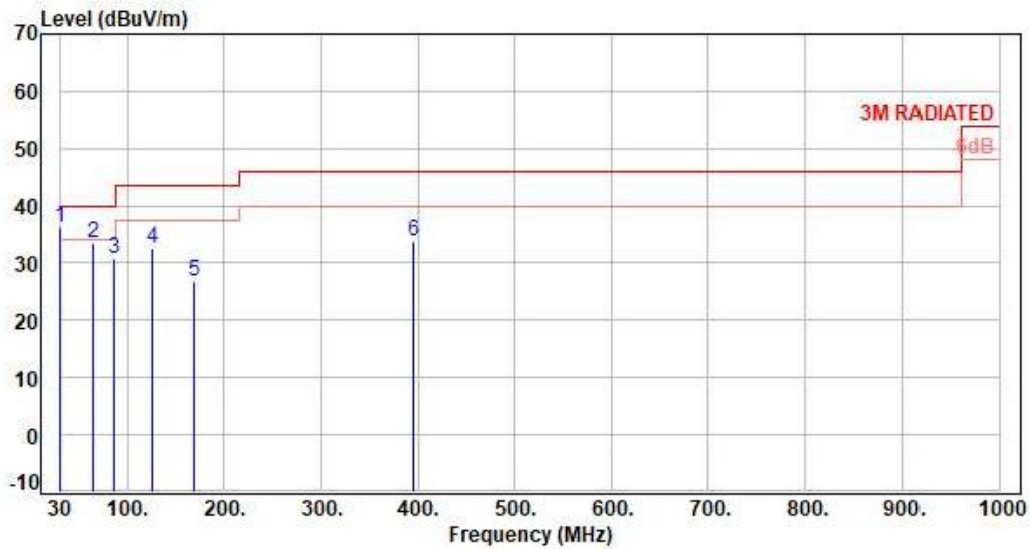


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.97	-10.27	46.36	36.09	40.00	-3.91	QP	100	153	P
2	64.92	-10.64	44.24	33.60	40.00	-6.40	Peak	400	0	P
3	86.26	-15.73	46.38	30.65	40.00	-9.35	Peak	400	0	P
4	126.03	-11.92	44.66	32.74	43.50	-10.76	Peak	400	0	P
5	168.71	-9.71	36.42	26.71	43.50	-16.79	Peak	400	0	P
6	394.72	-5.05	38.70	33.65	46.00	-12.35	Peak	400	0	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 11ax20 CH06+11a CH149  
Voltage : From POE(AC240V/60Hz)  
Pol : Horizontal

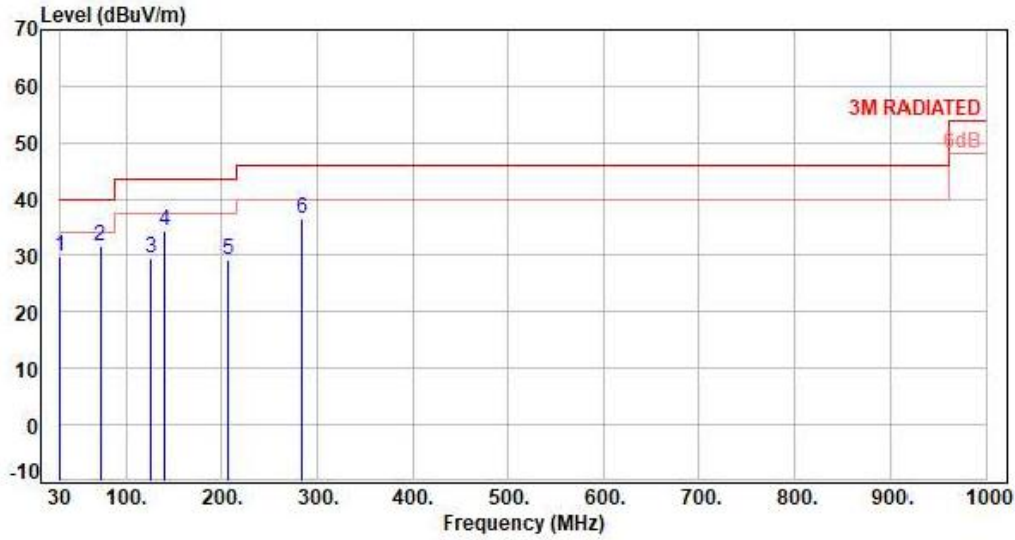


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.97	-10.27	40.07	29.80	40.00	-10.20	Peak	400	360	P
2	72.68	-12.77	44.41	31.64	40.00	-8.36	Peak	400	360	P
3	125.06	-12.02	41.67	29.65	43.50	-13.85	Peak	400	360	P
4	140.58	-10.31	44.84	34.53	43.50	-8.97	Peak	400	360	P
5	206.54	-12.52	41.81	29.29	43.50	-14.21	Peak	400	360	P
6	283.17	-9.17	45.59	36.42	46.00	-9.58	Peak	400	360	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



### 5.6 Test Result and Data (1GHz ~ 25GHz)

Test Mode : 11ax20 CH06+11a CH149  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

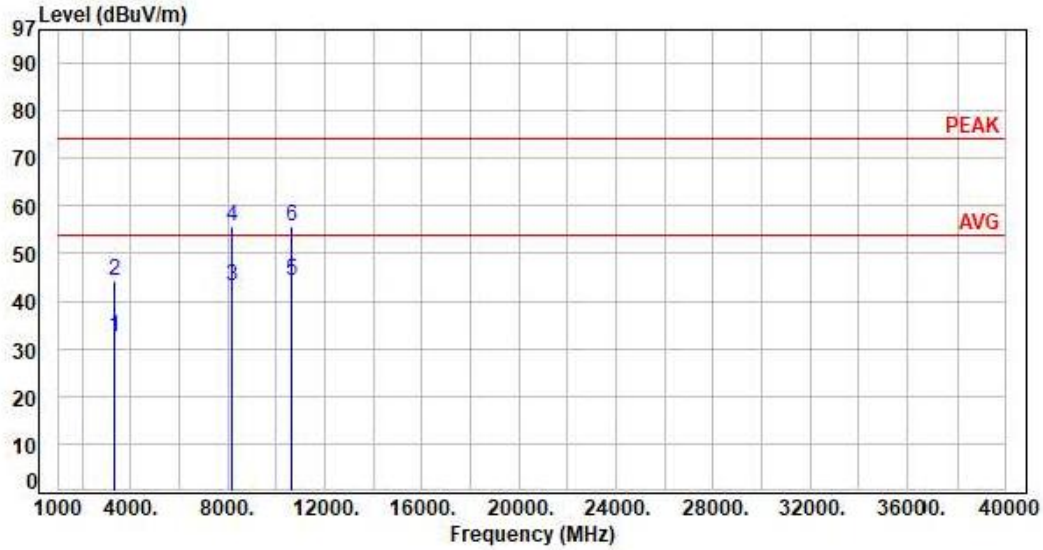


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	3308.00	2.14	30.25	32.39	54.00	-21.61	Average	100	142	P
2	3308.00	2.14	42.03	44.17	74.00	-29.83	Peak	100	142	P
3	8182.00	14.36	28.82	43.18	54.00	-10.82	Average	100	284	P
4	8182.00	14.36	41.19	55.55	74.00	-18.45	Peak	100	284	P
5	10600.00	15.69	28.57	44.26	54.00	-9.74	Average	100	216	P
6	10600.00	15.69	40.03	55.72	74.00	-18.28	Peak	100	216	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 11ax20 CH06+11a CH149  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

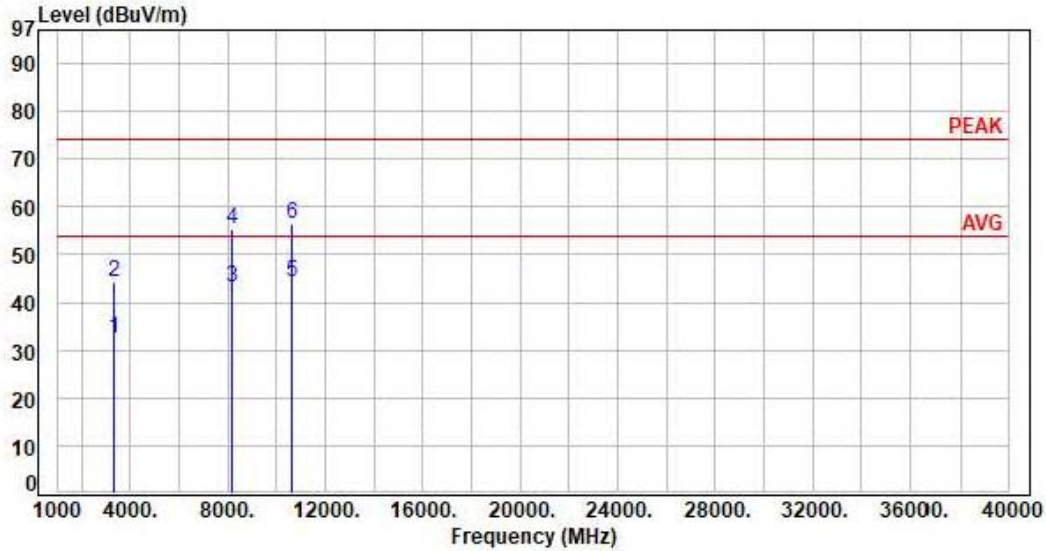

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	3308.00	2.14	30.29	32.43	54.00	-21.57	Average	100	41	P
2	3308.00	2.14	42.21	44.35	74.00	-29.65	Peak	100	41	P
3	8182.00	14.36	28.82	43.18	54.00	-10.82	Average	100	169	P
4	8182.00	14.36	40.93	55.29	74.00	-18.71	Peak	100	169	P
5	10600.00	15.69	28.58	44.27	54.00	-9.73	Average	100	133	P
6	10600.00	15.69	40.64	56.33	74.00	-17.67	Peak	100	133	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



### 5.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

-----THE END OF REPORT-----