




Test Mode : 2TX 11ax40 CH38 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

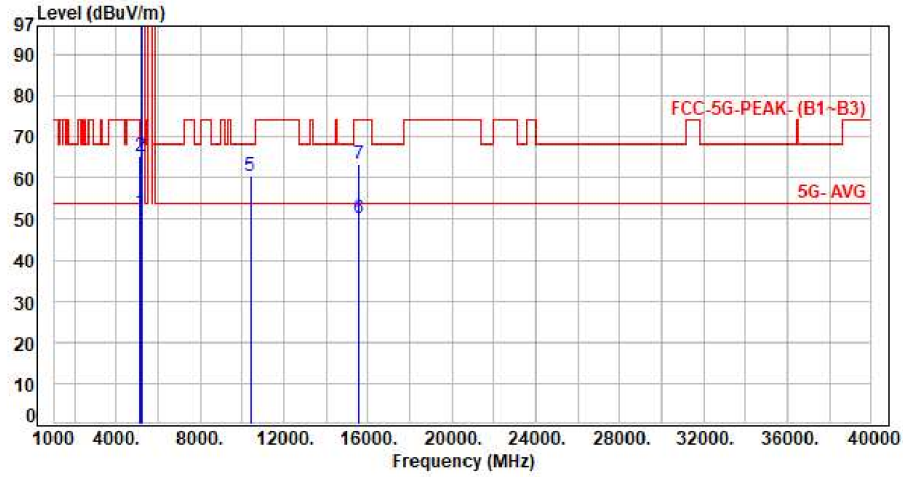


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	44.38	51.56	54.00	-2.44	Average	288	99	P
2	5150.00	7.18	57.98	65.16	74.00	-8.84	Peak	288	99	P
3	5190.00	7.28	89.60	96.88	200.00	-103.12	Average	288	99	P
4	5190.00	7.28	101.46	108.74	200.00	-91.26	Peak	288	99	P
5	10380.00	16.29	44.11	60.40	68.20	-7.80	Peak	100	207	P
6	15570.00	20.70	29.31	50.01	54.00	-3.99	Average	100	70	P
7	15570.00	20.70	42.84	63.54	74.00	-10.46	Peak	100	70	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

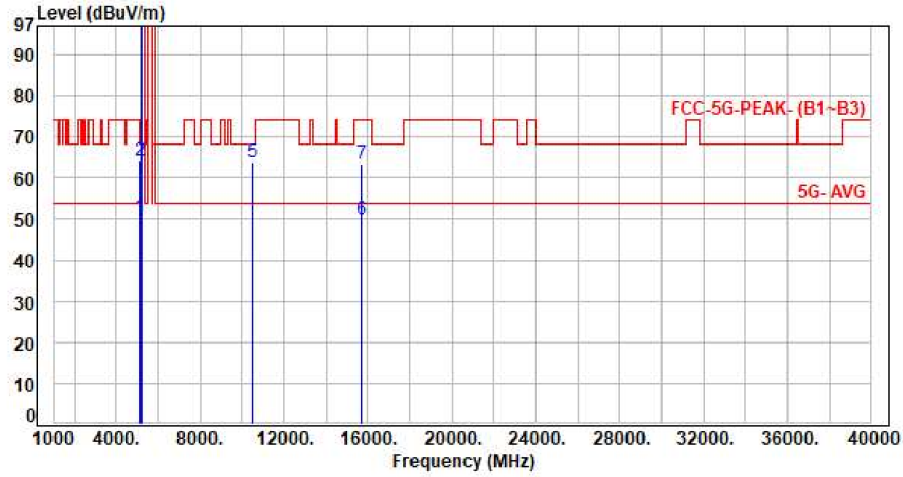


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	43.48	50.66	54.00	-3.34	Average	344	182	P
2	5150.00	7.18	57.05	64.23	74.00	-9.77	Peak	344	182	P
3	5230.00	7.31	93.45	100.76	200.00	-99.24	Average	344	182	P
4	5230.00	7.31	105.78	113.09	200.00	-86.91	Peak	344	182	P
5	10460.00	16.42	47.40	63.82	68.20	-4.38	Peak	100	168	P
6	15690.00	20.70	29.24	49.94	54.00	-4.06	Average	100	263	P
7	15690.00	20.70	42.59	63.29	74.00	-10.71	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH46 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

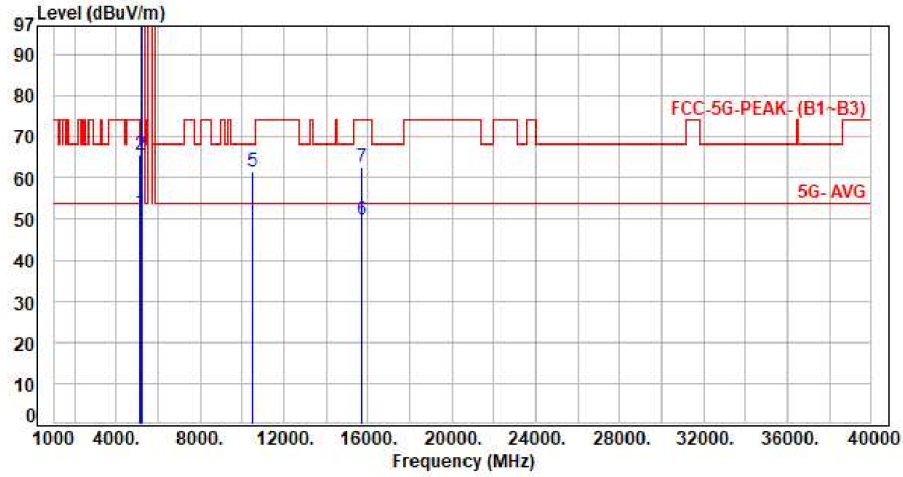


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	44.34	51.52	54.00	-2.48	Average	372	116	P
2	5150.00	7.18	58.48	65.66	74.00	-8.34	Peak	372	116	P
3	5230.00	7.31	92.98	100.29	200.00	-99.71	Average	372	116	P
4	5230.00	7.31	105.15	112.46	200.00	-87.54	Peak	372	116	P
5	10460.00	16.42	45.15	61.57	68.20	-6.63	Peak	100	213	P
6	15690.00	20.70	29.26	49.96	54.00	-4.04	Average	100	73	P
7	15690.00	20.70	42.13	62.83	74.00	-11.17	Peak	100	73	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

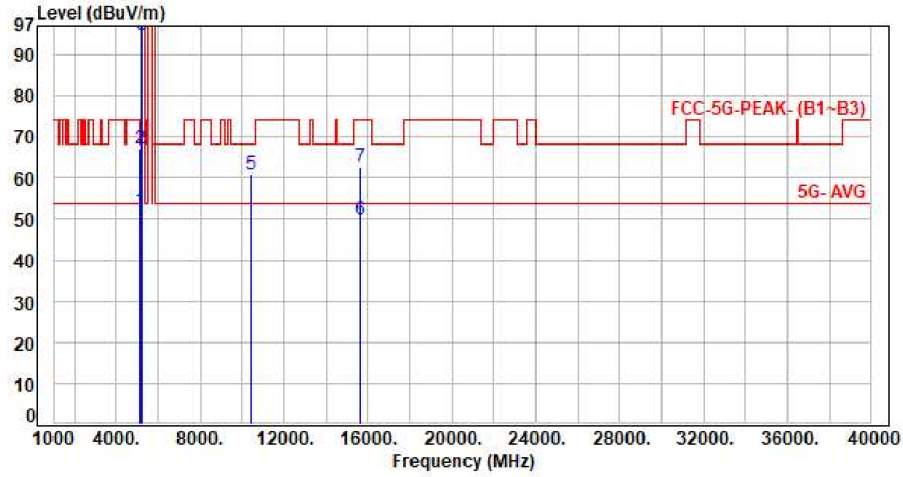


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	44.95	52.13	54.00	-1.87	Average	300	169	P
2	5150.00	7.18	60.01	67.19	74.00	-6.81	Peak	300	169	P
3	5210.00	7.31	87.46	94.77	200.00	-105.23	Average	300	169	P
4	5210.00	7.31	99.60	106.91	200.00	-93.09	Peak	300	169	P
5	10420.00	16.29	44.39	60.68	68.20	-7.52	Peak	100	166	P
6	15630.00	20.54	29.21	49.75	54.00	-4.25	Average	100	262	P
7	15630.00	20.54	42.18	62.72	74.00	-11.28	Peak	100	262	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH42 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

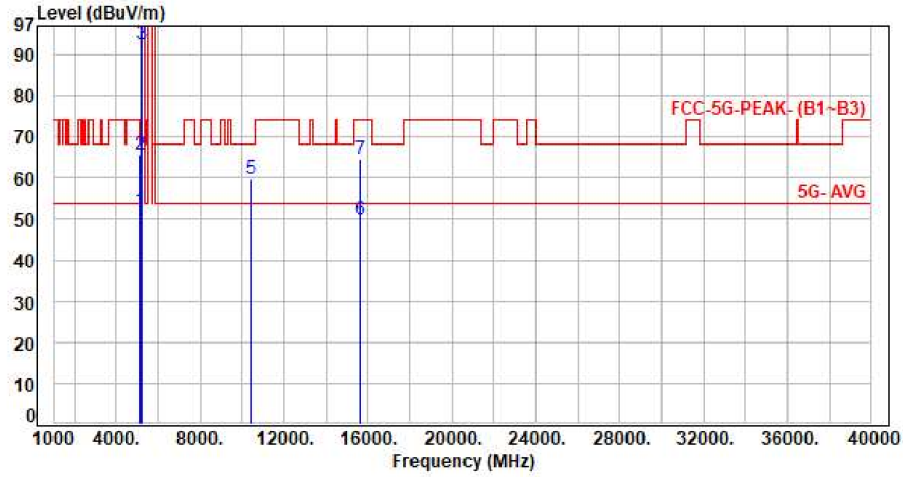


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5150.00	7.18	44.67	51.85	54.00	-2.15	Average	370	97	P
2	5150.00	7.18	58.63	65.81	74.00	-8.19	Peak	370	97	P
3	5210.00	7.31	85.40	92.71	200.00	-107.29	Average	370	97	P
4	5210.00	7.31	98.22	105.53	200.00	-94.47	Peak	370	97	P
5	10420.00	16.29	43.63	59.92	68.20	-8.28	Peak	100	212	P
6	15630.00	20.54	29.29	49.83	54.00	-4.17	Average	100	75	P
7	15630.00	20.54	44.05	64.59	74.00	-9.41	Peak	100	75	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH52 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

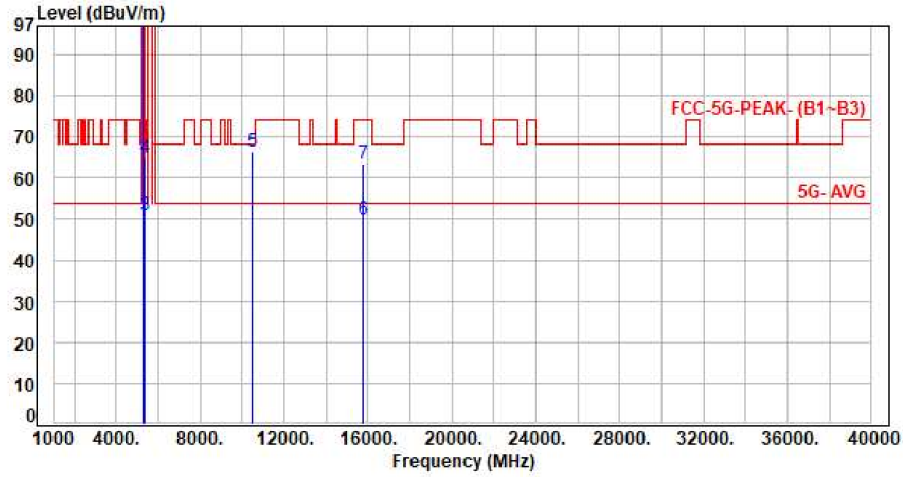


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	98.49	105.86	200.00	-94.14	Average	341	180	P
2	5260.00	7.37	107.80	115.17	200.00	-84.83	Peak	341	180	P
3	5350.00	7.67	43.41	51.08	54.00	-2.92	Average	341	180	P
4	5350.00	7.67	57.19	64.86	74.00	-9.14	Peak	341	180	P
5	10520.00	16.69	49.83	66.52	68.20	-1.68	Peak	100	171	P
6	15780.00	20.44	29.27	49.71	54.00	-4.29	Average	100	263	P
7	15780.00	20.44	42.92	63.36	74.00	-10.64	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH52 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

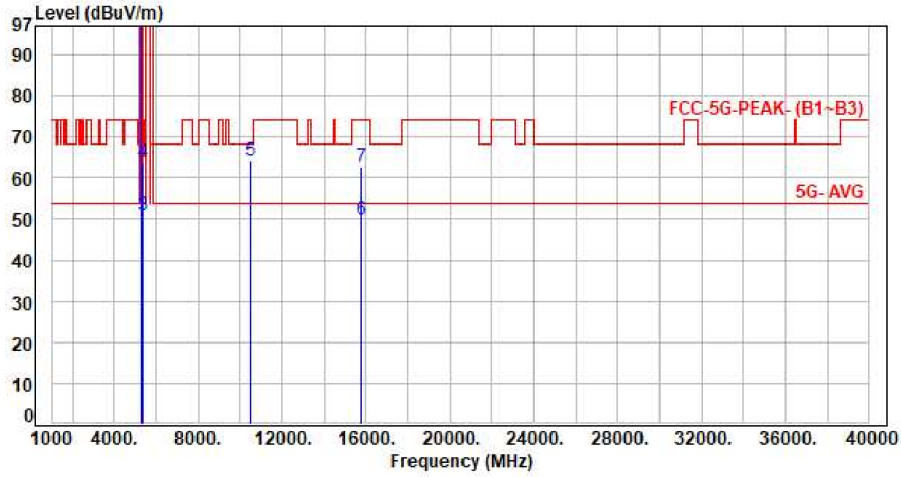


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	98.35	105.72	200.00	-94.28	Average	369	99	P
2	5260.00	7.37	108.16	115.53	200.00	-84.47	Peak	369	99	P
3	5350.00	7.67	43.07	50.74	54.00	-3.26	Average	369	99	P
4	5350.00	7.67	56.26	63.93	74.00	-10.07	Peak	369	99	P
5	10520.00	16.69	47.41	64.10	68.20	-4.10	Peak	100	211	P
6	15780.00	20.44	29.48	49.92	54.00	-4.08	Average	100	72	P
7	15780.00	20.44	42.24	62.68	74.00	-11.32	Peak	100	72	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

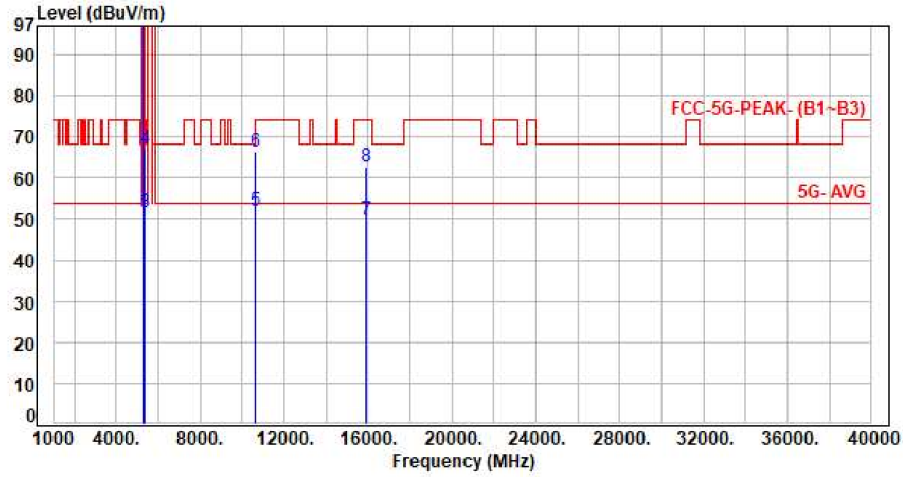


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	96.49	104.04	200.00	-95.96	Average	303	155	P
2	5300.00	7.55	106.50	114.05	200.00	-85.95	Peak	303	155	P
3	5350.00	7.67	44.01	51.68	54.00	-2.32	Average	303	155	P
4	5350.00	7.67	59.64	67.31	74.00	-6.69	Peak	303	155	P
5	10600.00	16.79	35.31	52.10	54.00	-1.90	Average	100	168	P
6	10600.00	16.79	49.54	66.33	74.00	-7.67	Peak	100	168	P
7	15900.00	20.22	29.61	49.83	54.00	-4.17	Average	100	261	P
8	15900.00	20.22	42.33	62.55	74.00	-11.45	Peak	100	261	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH60 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

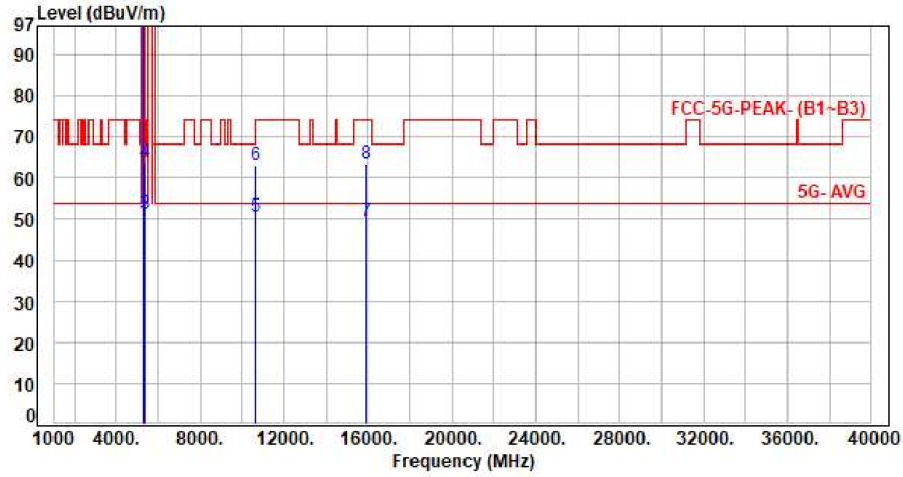


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	97.13	104.68	200.00	-95.32	Average	356	99	P
2	5300.00	7.55	106.46	114.01	200.00	-85.99	Peak	356	99	P
3	5350.00	7.67	43.52	51.19	54.00	-2.81	Average	356	99	P
4	5350.00	7.67	56.11	63.78	74.00	-10.22	Peak	356	99	P
5	10600.00	16.79	33.62	50.41	54.00	-3.59	Average	100	214	P
6	10600.00	16.79	46.21	63.00	74.00	-11.00	Peak	100	214	P
7	15900.00	20.22	29.36	49.58	54.00	-4.42	Average	100	76	P
8	15900.00	20.22	43.36	63.58	74.00	-10.42	Peak	100	76	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

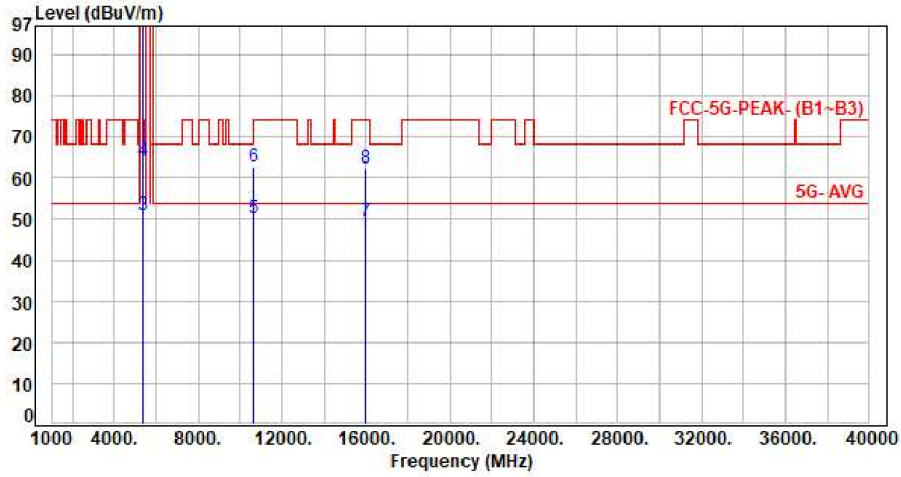


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	95.60	103.20	200.00	-96.80	Average	379	95	P
2	5320.00	7.60	105.51	113.11	200.00	-86.89	Peak	379	95	P
3	5350.00	7.67	43.39	51.06	54.00	-2.94	Average	379	95	P
4	5350.00	7.67	56.41	64.08	74.00	-9.92	Peak	379	95	P
5	10640.00	16.83	33.42	50.25	54.00	-3.75	Average	100	209	P
6	10640.00	16.83	45.90	62.73	74.00	-11.27	Peak	100	209	P
7	15960.00	20.15	29.34	49.49	54.00	-4.51	Average	100	264	P
8	15960.00	20.15	42.11	62.26	74.00	-11.74	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH64 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

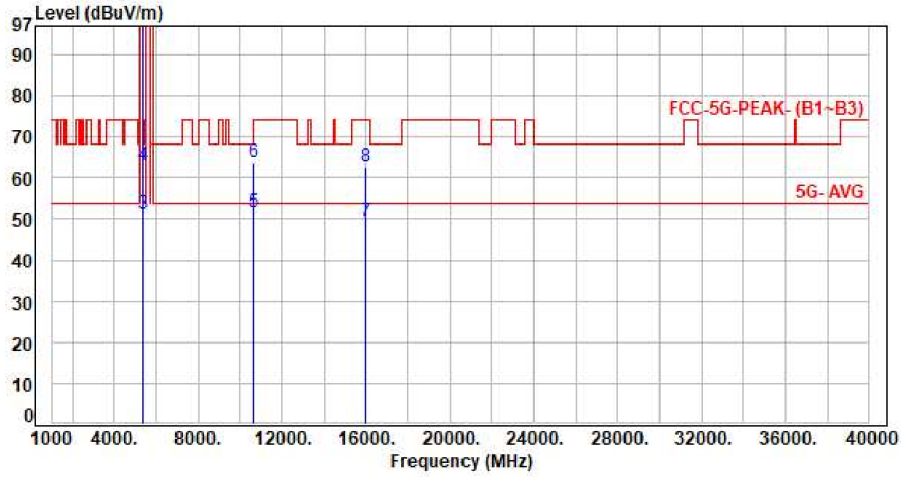


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	95.87	103.47	200.00	-96.53	Average	378	98	P
2	5320.00	7.60	105.20	112.80	200.00	-87.20	Peak	378	98	P
3	5350.00	7.67	43.55	51.22	54.00	-2.78	Average	378	98	P
4	5350.00	7.67	55.58	63.25	74.00	-10.75	Peak	378	98	P
5	10640.00	16.83	34.98	51.81	54.00	-2.19	Average	100	166	P
6	10640.00	16.83	47.12	63.95	74.00	-10.05	Peak	100	166	P
7	15960.00	20.15	29.19	49.34	54.00	-4.66	Average	100	73	P
8	15960.00	20.15	42.73	62.88	74.00	-11.12	Peak	100	73	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 N551 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

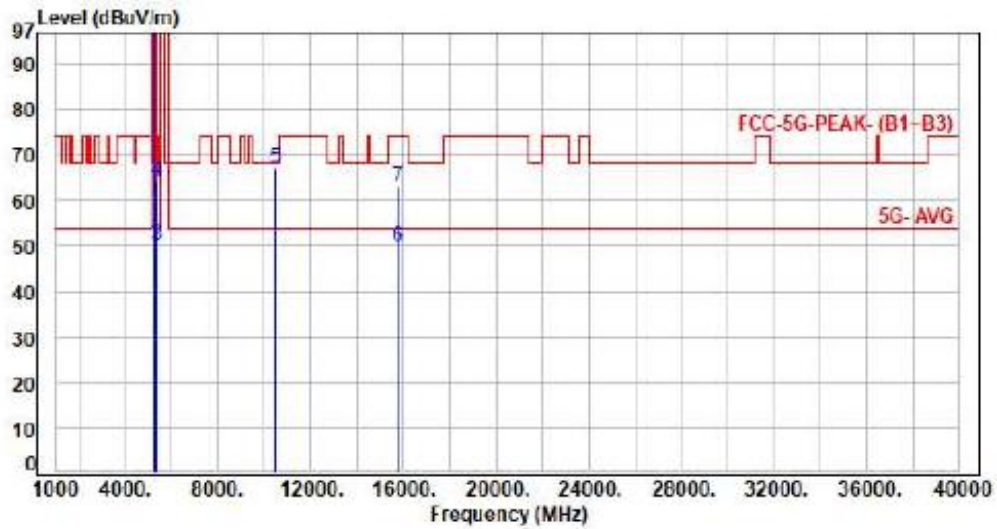

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	97.72	105.09	200.00	-94.91	Average	341	175	P
2	5260.00	7.57	110.04	117.41	200.00	-82.59	Peak	341	175	P
3	5350.00	7.67	42.57	50.24	54.00	-3.76	Average	341	175	P
4	5350.00	7.67	56.37	64.04	74.00	-9.96	Peak	341	175	P
5	10520.00	16.69	50.48	67.17	68.20	-1.03	Peak	100	163	P
6	15780.00	20.44	29.23	49.67	54.00	-4.33	Average	100	266	P
7	15780.00	20.44	42.60	63.04	74.00	-10.96	Peak	100	266	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH52 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

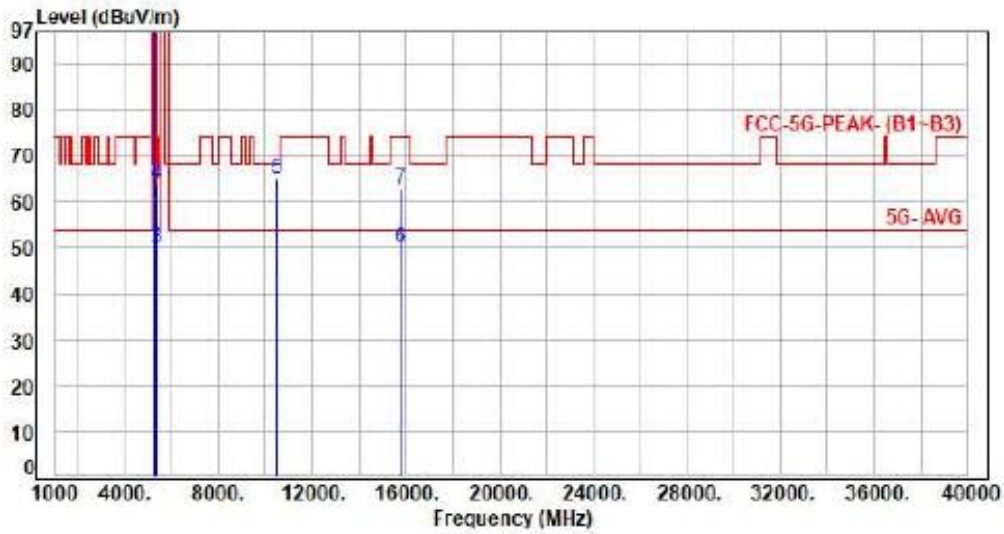


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5260.00	7.37	97.34	104.71	200.00	-95.29	Average	369	95	P
2	5260.00	7.37	110.64	118.01	200.00	-81.99	Peak	369	95	P
3	5350.00	7.67	42.29	49.96	54.00	-4.04	Average	369	95	P
4	5350.00	7.67	56.01	63.68	74.00	-10.32	Peak	369	95	P
5	10520.00	16.69	48.17	64.86	68.20	-3.34	Peak	100	214	P
6	15780.00	20.44	29.18	49.62	54.00	-4.38	Average	100	72	P
7	15780.00	20.44	42.13	62.57	74.00	-11.43	Peak	100	72	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

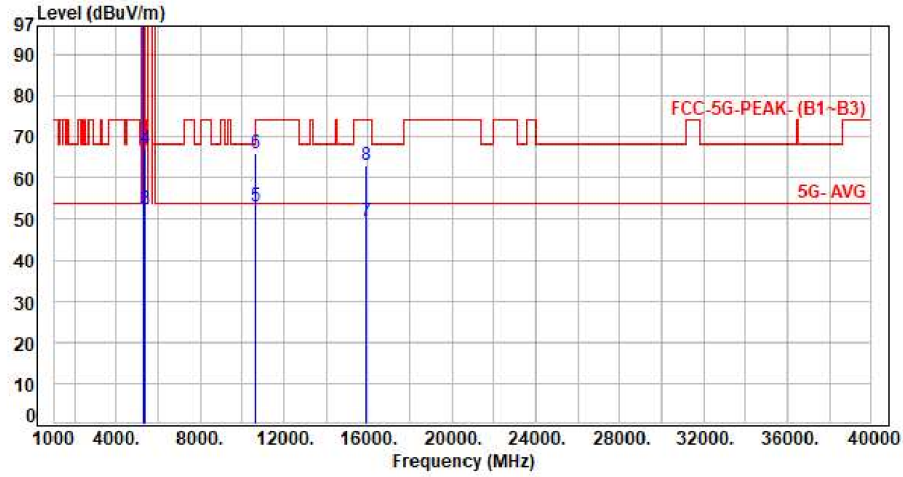


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	94.39	101.94	200.00	-98.06	Average	275	153	P
2	5300.00	7.55	107.89	115.44	200.00	-84.56	Peak	275	153	P
3	5350.00	7.67	44.79	52.46	54.00	-1.54	Average	275	153	P
4	5350.00	7.67	59.55	67.22	74.00	-6.78	Peak	275	153	P
5	10600.00	16.79	36.19	52.98	54.00	-1.02	Average	100	163	P
6	10600.00	16.79	49.09	65.88	74.00	-8.12	Peak	100	163	P
7	15900.00	20.22	29.34	49.56	54.00	-4.44	Average	100	263	P
8	15900.00	20.22	42.89	63.11	74.00	-10.89	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH60 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

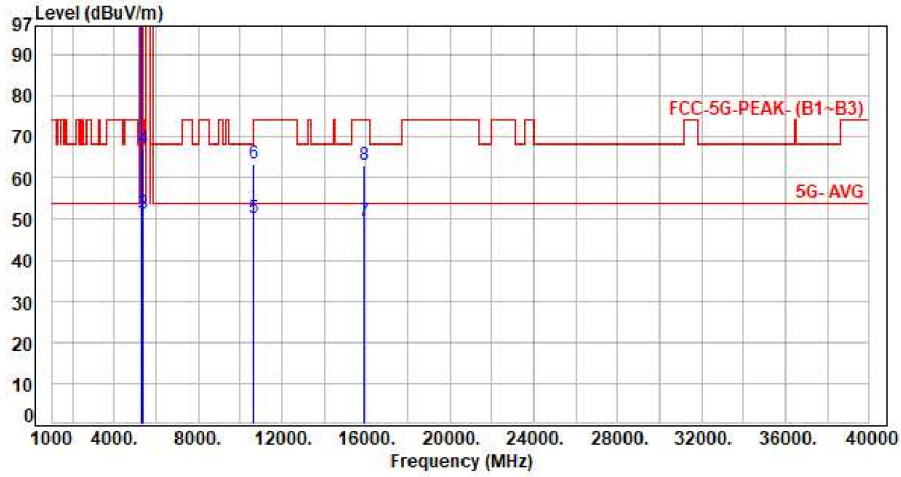


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5300.00	7.55	96.24	103.79	200.00	-96.21	Average	400	95	P
2	5300.00	7.55	109.62	117.17	200.00	-82.83	Peak	400	95	P
3	5350.00	7.67	43.67	51.34	54.00	-2.66	Average	400	95	P
4	5350.00	7.67	59.30	66.97	74.00	-7.03	Peak	400	95	P
5	10600.00	16.79	33.21	50.00	54.00	-4.00	Average	100	205	P
6	10600.00	16.79	46.48	63.27	74.00	-10.73	Peak	100	205	P
7	15900.00	20.22	29.34	49.56	54.00	-4.44	Average	100	74	P
8	15900.00	20.22	42.72	62.94	74.00	-11.06	Peak	100	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

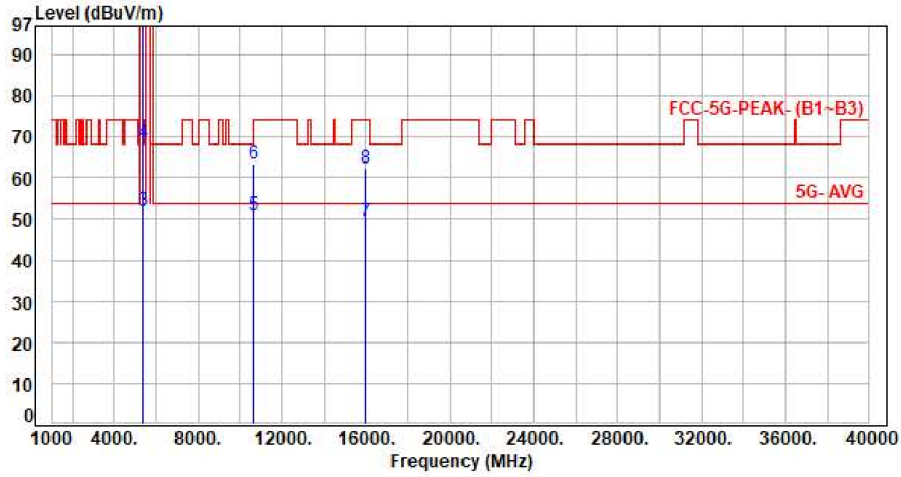


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	94.68	102.28	200.00	-97.72	Average	372	174	P
2	5320.00	7.60	107.73	115.33	200.00	-84.67	Peak	372	174	P
3	5350.00	7.67	44.29	51.96	54.00	-2.04	Average	372	174	P
4	5350.00	7.67	60.93	68.60	74.00	-5.40	Peak	372	174	P
5	10640.00	16.83	34.01	50.84	54.00	-3.16	Average	100	171	P
6	10640.00	16.83	46.60	63.43	74.00	-10.57	Peak	100	171	P
7	15960.00	20.15	29.24	49.39	54.00	-4.61	Average	100	262	P
8	15960.00	20.15	42.27	62.42	74.00	-11.58	Peak	100	262	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH64 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

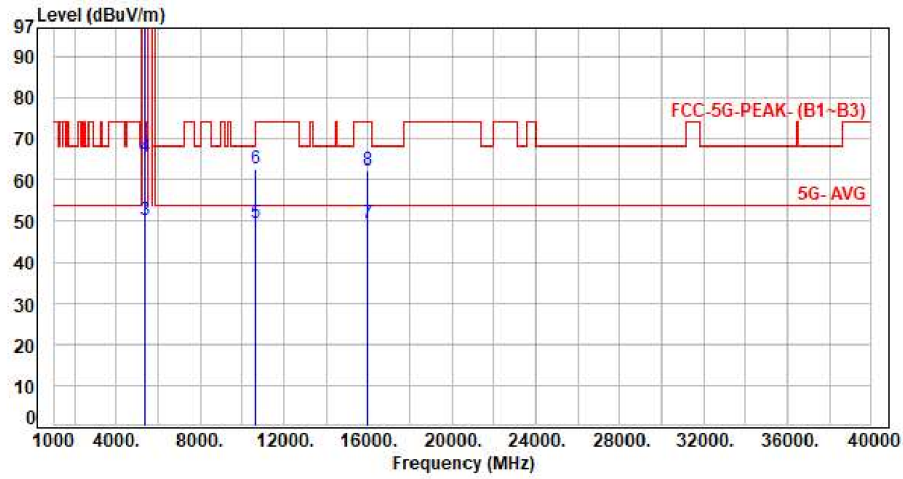


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5320.00	7.60	93.91	101.51	200.00	-98.49	Average	379	96	P
2	5320.00	7.60	107.85	115.45	200.00	-84.55	Peak	379	96	P
3	5350.00	7.67	42.67	50.34	54.00	-3.66	Average	379	96	P
4	5350.00	7.67	57.81	65.48	74.00	-8.52	Peak	379	96	P
5	10640.00	16.83	32.60	49.43	54.00	-4.57	Average	100	207	P
6	10640.00	16.83	45.70	62.53	74.00	-11.47	Peak	100	207	P
7	15960.00	20.15	29.29	49.44	54.00	-4.56	Average	100	76	P
8	15960.00	20.15	42.26	62.41	74.00	-11.59	Peak	100	76	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

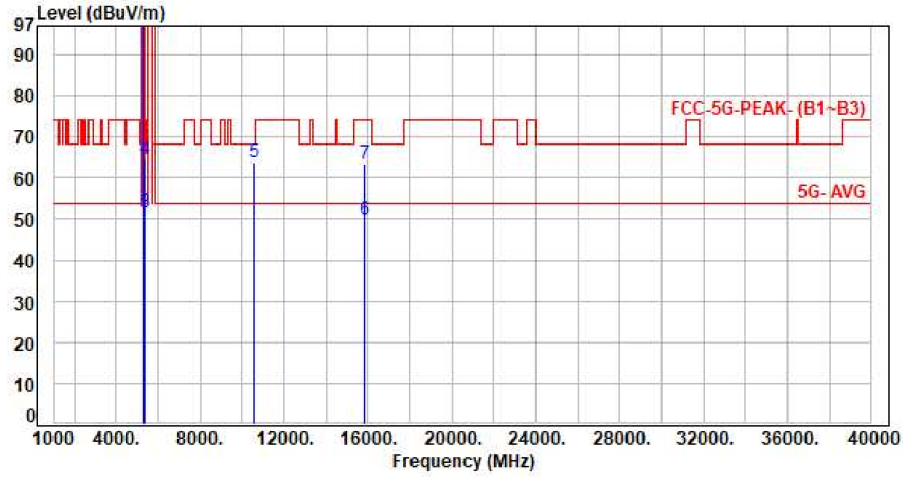

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.42	93.69	101.11	200.00	-98.89	Average	324	160	P
2	5270.00	7.42	106.18	113.60	200.00	-86.40	Peak	324	160	P
3	5350.00	7.67	43.95	51.62	54.00	-2.38	Average	324	160	P
4	5350.00	7.67	56.79	64.46	74.00	-9.54	Peak	324	160	P
5	10540.00	16.71	47.25	63.96	68.20	-4.24	Peak	100	168	P
6	15810.00	20.27	29.36	49.63	54.00	-4.37	Average	100	263	P
7	15810.00	20.27	43.21	63.48	74.00	-10.52	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor