




Test Mode : 2TX 11ax40 CH54 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

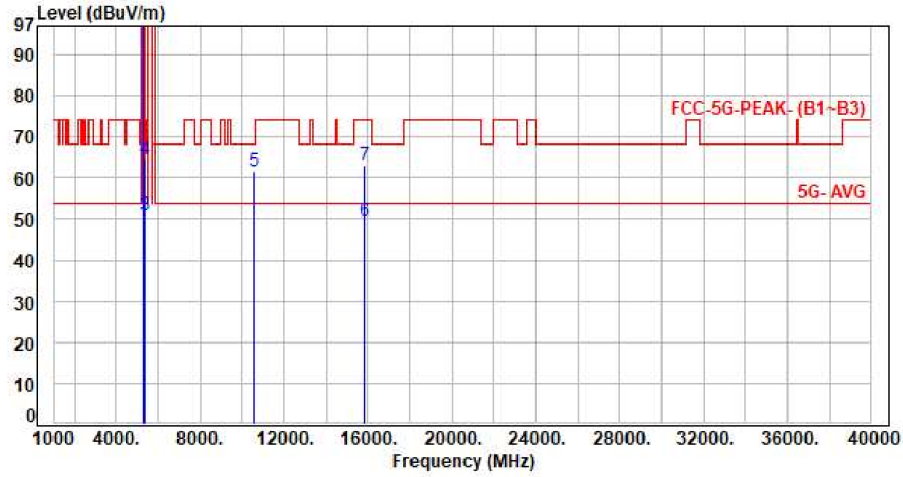


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5270.00	7.42	93.62	101.04	200.00	-98.96	Average	381	97	P
2	5270.00	7.42	106.21	113.63	200.00	-86.37	Peak	381	97	P
3	5350.00	7.67	43.34	51.01	54.00	-2.99	Average	381	97	P
4	5350.00	7.67	56.82	64.49	74.00	-9.51	Peak	381	97	P
5	10540.00	16.71	44.89	61.60	68.20	-6.60	Peak	100	209	P
6	15810.00	20.27	29.22	49.49	54.00	-4.51	Average	100	77	P
7	15810.00	20.27	42.80	63.07	74.00	-10.93	Peak	100	77	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

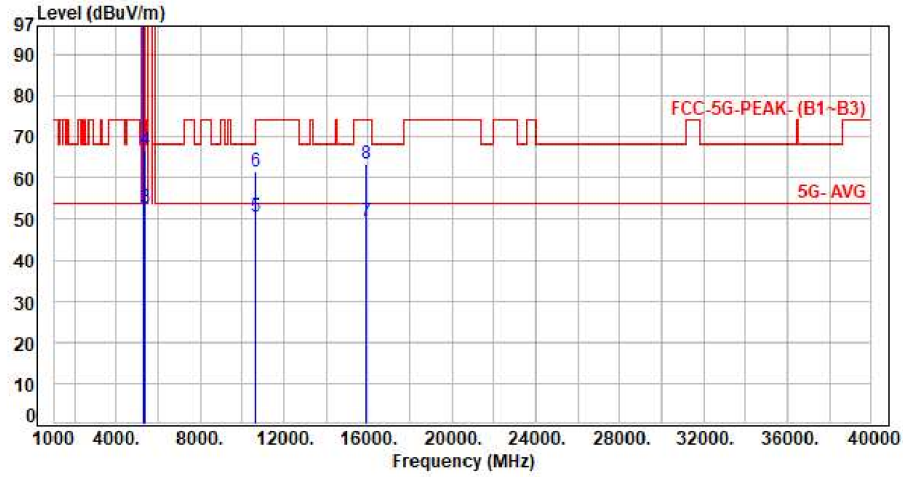


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.57	89.61	97.18	200.00	-102.82	Average	284	179	P
2	5310.00	7.57	101.58	109.15	200.00	-90.85	Peak	284	179	P
3	5350.00	7.67	45.24	52.91	54.00	-1.09	Average	284	179	P
4	5350.00	7.67	58.92	66.59	74.00	-7.41	Peak	284	179	P
5	10620.00	16.80	33.81	50.61	54.00	-3.39	Average	100	167	P
6	10620.00	16.80	44.87	61.67	74.00	-12.33	Peak	100	167	P
7	15930.00	20.18	29.21	49.39	54.00	-4.61	Average	100	259	P
8	15930.00	20.18	43.13	63.31	74.00	-10.69	Peak	100	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH62 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

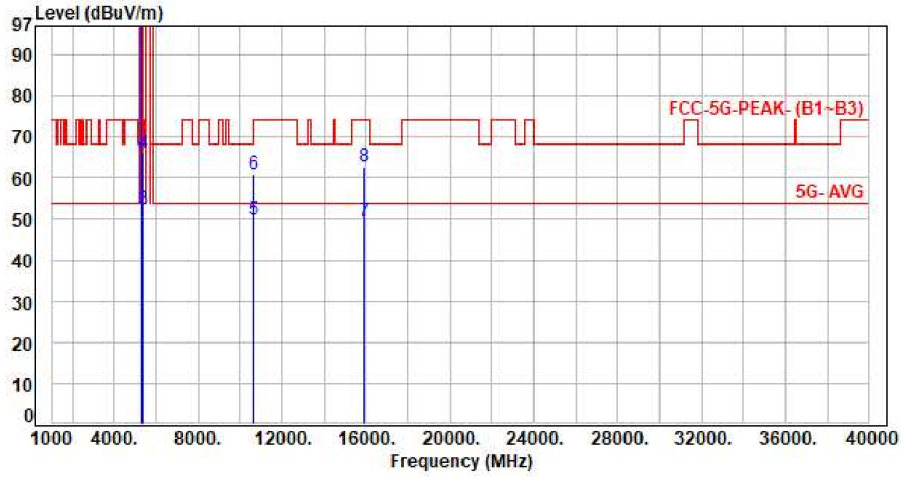


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5310.00	7.57	89.28	96.85	200.00	-103.15	Average	292	96	P
2	5310.00	7.57	101.65	109.22	200.00	-90.78	Peak	292	96	P
3	5350.00	7.67	44.81	52.48	54.00	-1.52	Average	292	96	P
4	5350.00	7.67	58.45	66.12	74.00	-7.88	Peak	292	96	P
5	10620.00	16.80	32.95	49.75	54.00	-4.25	Average	100	207	P
6	10620.00	16.80	44.23	61.03	74.00	-12.97	Peak	100	207	P
7	15930.00	20.18	29.34	49.52	54.00	-4.48	Average	100	71	P
8	15930.00	20.18	42.54	62.72	74.00	-11.28	Peak	100	71	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

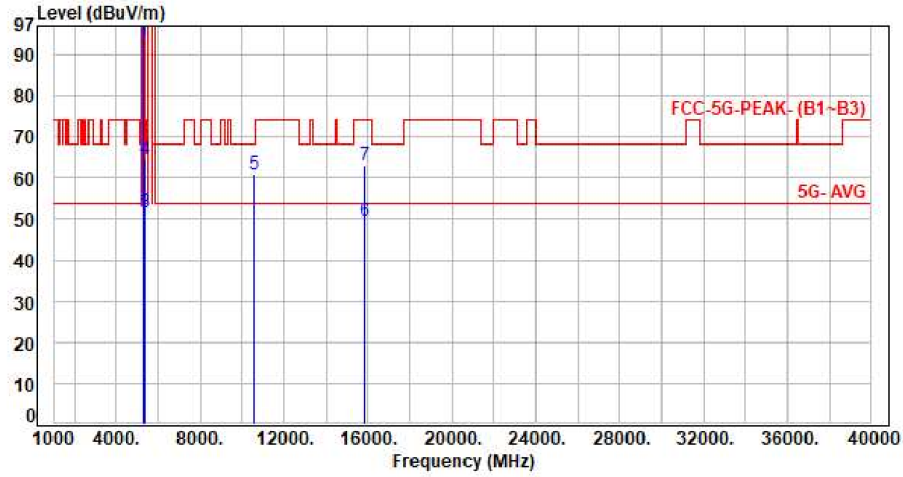


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.50	85.66	93.16	200.00	-106.84	Average	303	161	P
2	5290.00	7.50	98.70	106.20	200.00	-93.80	Peak	303	161	P
3	5350.00	7.67	43.83	51.50	54.00	-2.50	Average	303	161	P
4	5350.00	7.67	57.06	64.73	74.00	-9.27	Peak	303	161	P
5	10580.00	16.76	44.14	60.90	68.20	-7.30	Peak	100	171	P
6	15870.00	20.22	29.14	49.36	54.00	-4.64	Average	100	255	P
7	15870.00	20.22	42.95	63.17	74.00	-10.83	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH58 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

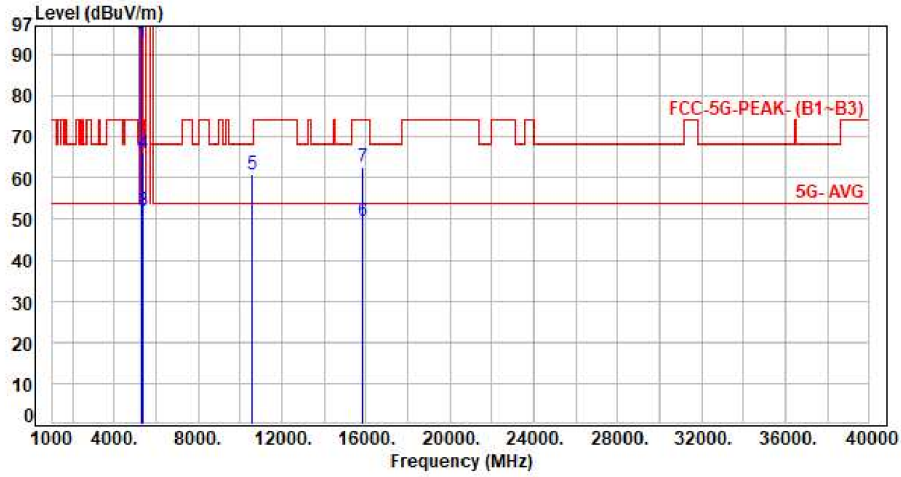


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5290.00	7.50	85.62	93.12	200.00	-106.88	Average	384	169	P
2	5290.00	7.50	98.66	106.16	200.00	-93.84	Peak	384	169	P
3	5350.00	7.67	44.31	51.98	54.00	-2.02	Average	384	169	P
4	5350.00	7.67	58.18	65.85	74.00	-8.15	Peak	384	169	P
5	10580.00	16.76	44.27	61.03	68.20	-7.17	Peak	100	208	P
6	15870.00	20.22	29.20	49.42	54.00	-4.58	Average	100	75	P
7	15870.00	20.22	42.55	62.77	74.00	-11.23	Peak	100	75	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

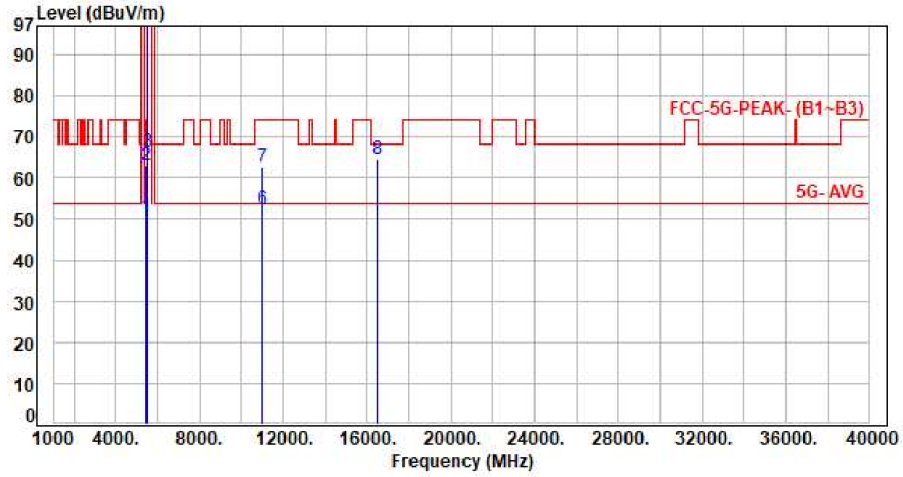


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.72	50.44	54.00	-3.56	Average	342	191	P
2	5460.00	7.72	55.20	62.92	74.00	-11.08	Peak	342	191	P
3	5470.00	7.72	58.50	66.22	68.20	-1.98	Peak	342	191	P
4	5500.00	7.73	95.44	103.17	200.00	-96.83	Average	342	191	P
5	5500.00	7.73	105.81	113.54	200.00	-86.46	Peak	342	191	P
6	11000.00	16.89	35.59	52.48	54.00	-1.52	Average	100	168	P
7	11000.00	16.89	45.94	62.83	74.00	-11.17	Peak	100	168	P
8	16500.00	22.03	42.42	64.45	68.20	-3.75	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH100 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

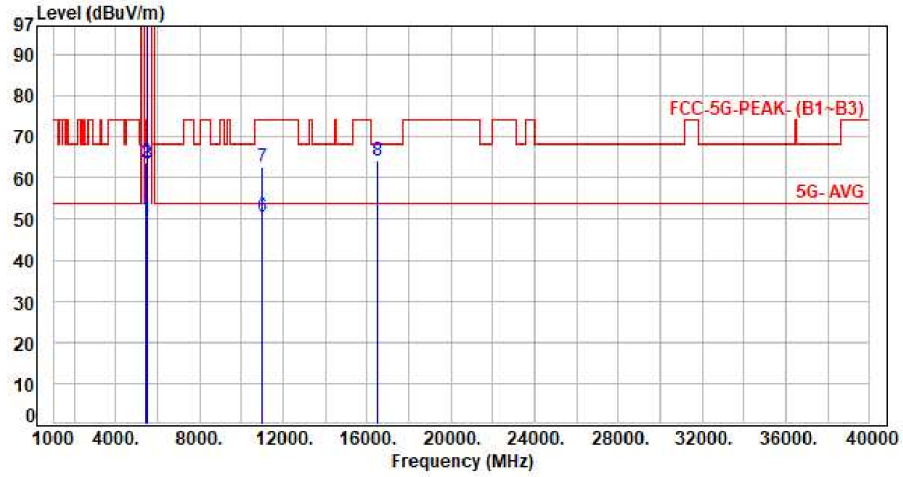


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.62	50.34	54.00	-3.66	Average	394	93	P
2	5460.00	7.72	56.02	63.74	74.00	-10.26	Peak	394	93	P
3	5470.00	7.72	55.63	63.35	68.20	-4.85	Peak	394	93	P
4	5500.00	7.73	93.91	101.64	200.00	-98.36	Average	394	93	P
5	5500.00	7.73	103.34	111.07	200.00	-88.93	Peak	394	93	P
6	11000.00	16.89	33.58	50.47	54.00	-3.53	Average	100	206	P
7	11000.00	16.89	45.93	62.82	74.00	-11.18	Peak	100	206	P
8	16500.00	22.03	42.26	64.29	68.20	-3.91	Peak	100	72	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

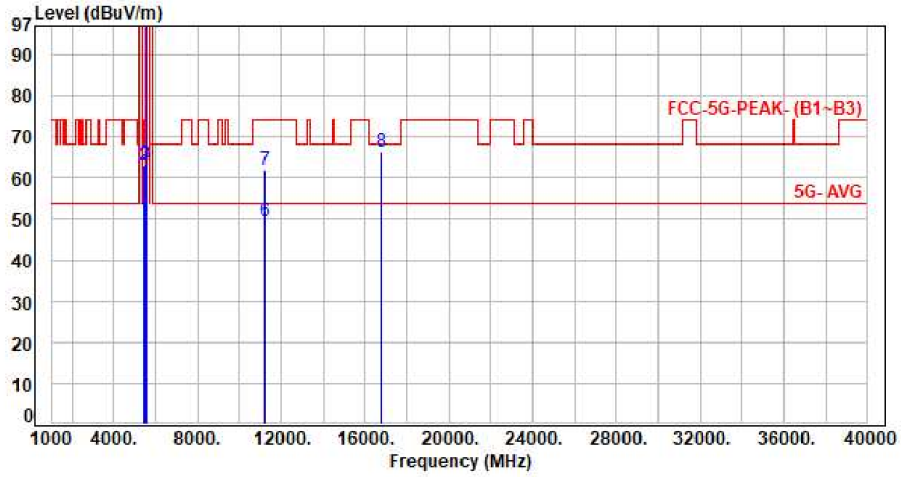


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.57	50.29	54.00	-3.71	Average	392	162	P
2	5460.00	7.72	55.41	63.13	74.00	-10.87	Peak	392	162	P
3	5470.00	7.72	55.73	63.45	68.20	-4.75	Peak	392	162	P
4	5600.00	7.47	96.84	104.31	200.00	-95.69	Average	392	162	P
5	5600.00	7.47	106.49	113.96	200.00	-86.04	Peak	392	162	P
6	11200.00	17.28	32.28	49.56	54.00	-4.44	Average	100	162	P
7	11200.00	17.28	44.79	62.07	74.00	-11.93	Peak	100	162	P
8	16800.00	23.79	42.73	66.52	68.20	-1.68	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH120 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

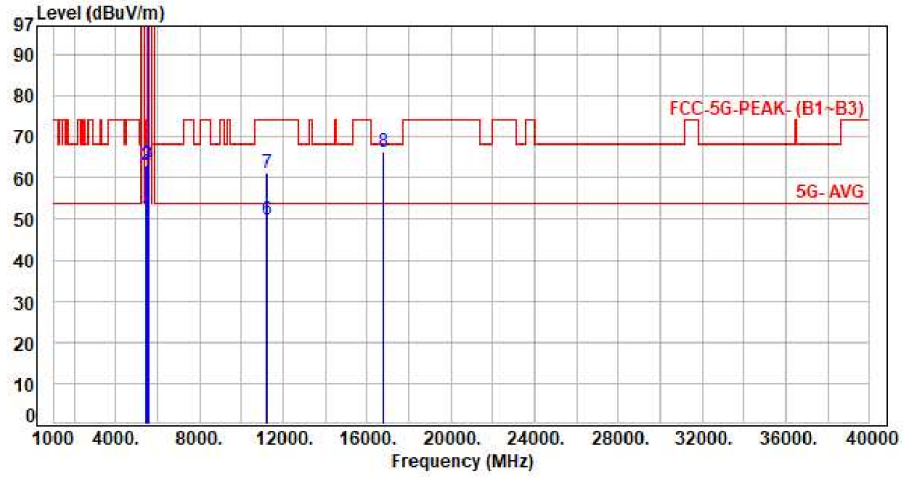


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.63	50.35	54.00	-3.65	Average	379	131	P
2	5460.00	7.72	55.43	63.15	74.00	-10.85	Peak	379	131	P
3	5470.00	7.72	55.77	63.49	68.20	-4.71	Peak	379	131	P
4	5600.00	7.47	97.96	105.43	200.00	-94.57	Average	379	131	P
5	5600.00	7.47	107.54	115.01	200.00	-84.99	Peak	379	131	P
6	11200.00	17.28	32.63	49.91	54.00	-4.09	Average	100	205	P
7	11200.00	17.28	43.85	61.13	74.00	-12.87	Peak	100	205	P
8	16800.00	23.79	42.64	66.43	68.20	-1.77	Peak	100	76	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

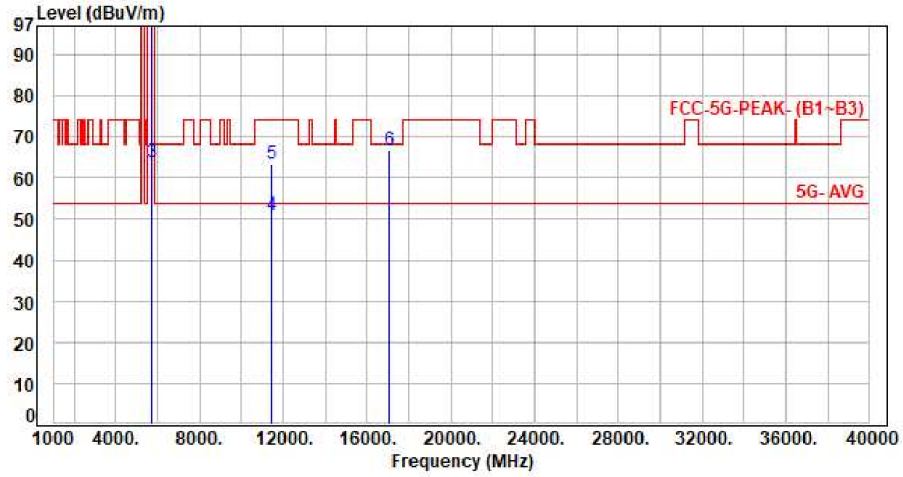


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	92.56	99.97	200.00	-100.03	Average	231	206	P
2	5700.00	7.41	102.09	109.50	200.00	-90.50	Peak	231	206	P
3	5725.00	7.39	56.26	63.65	68.20	-4.55	Peak	231	206	P
4	11400.00	17.69	33.20	50.89	54.00	-3.11	Average	100	162	P
5	11400.00	17.69	45.60	63.29	74.00	-10.71	Peak	100	162	P
6	17100.00	25.07	41.68	66.75	68.20	-1.45	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH140 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

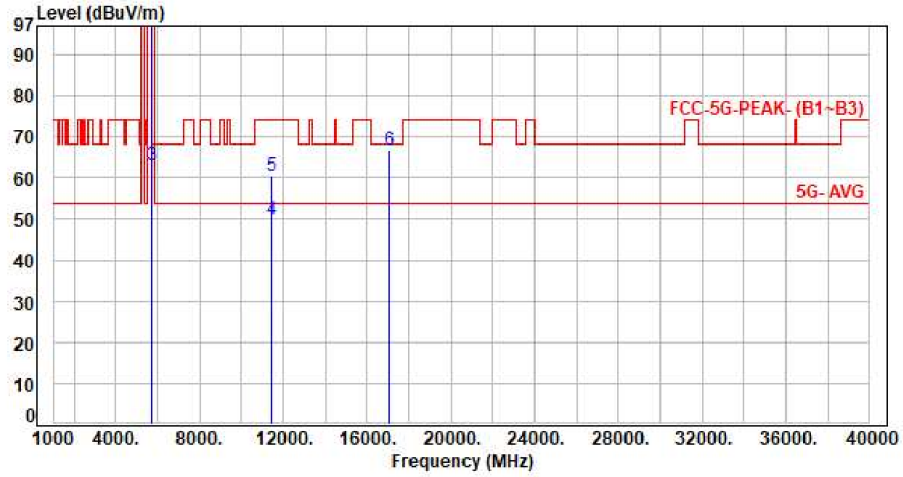


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	94.31	101.72	200.00	-98.28	Average	253	131	P
2	5700.00	7.41	103.94	111.35	200.00	-88.65	Peak	253	131	P
3	5725.00	7.39	55.75	63.14	68.20	-5.06	Peak	253	131	P
4	11400.00	17.69	32.05	49.74	54.00	-4.26	Average	100	209	P
5	11400.00	17.69	42.95	60.64	74.00	-13.36	Peak	100	209	P
6	17100.00	25.07	41.56	66.63	68.20	-1.57	Peak	100	71	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

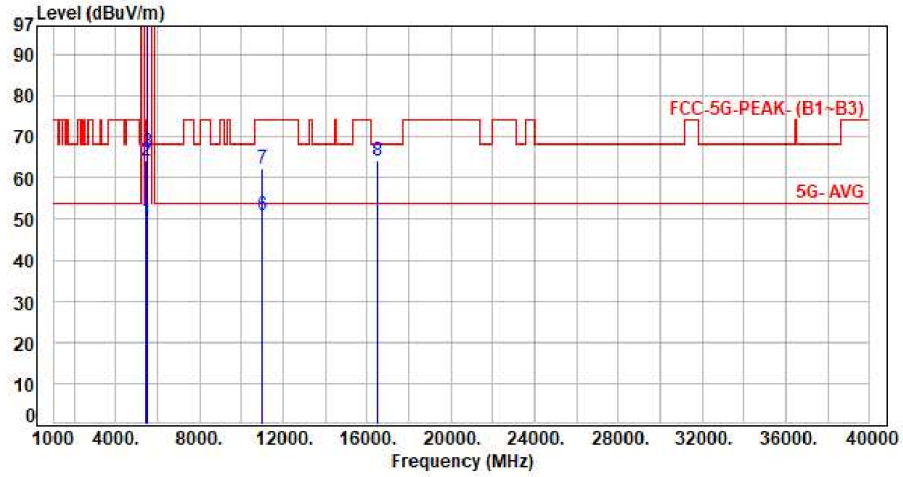


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.13	49.85	54.00	-4.15	Average	229	195	P
2	5460.00	7.72	56.62	64.34	74.00	-9.66	Peak	229	195	P
3	5470.00	7.72	58.53	66.25	68.20	-1.95	Peak	229	195	P
4	5500.00	7.73	92.67	100.40	200.00	-99.60	Average	229	195	P
5	5500.00	7.73	105.99	113.72	200.00	-86.28	Peak	229	195	P
6	11000.00	16.89	33.95	50.84	54.00	-3.16	Average	100	168	P
7	11000.00	16.89	45.55	62.44	74.00	-11.56	Peak	100	168	P
8	16500.00	22.03	42.12	64.15	68.20	-4.05	Peak	100	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH100 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

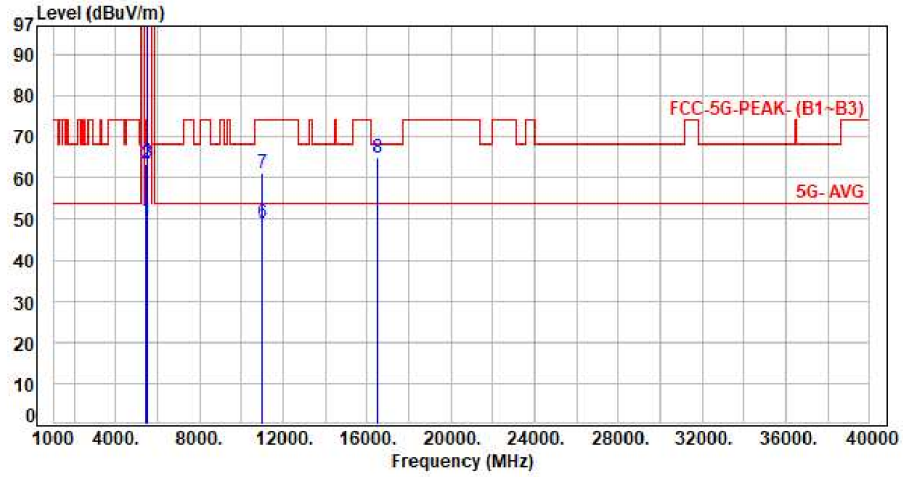


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.09	49.81	54.00	-4.19	Average	388	92	P
2	5460.00	7.72	55.55	63.27	74.00	-10.73	Peak	388	92	P
3	5470.00	7.72	56.06	63.78	68.20	-4.42	Peak	388	92	P
4	5500.00	7.73	91.43	99.16	200.00	-100.84	Average	388	92	P
5	5500.00	7.73	105.08	112.81	200.00	-87.19	Peak	388	92	P
6	11000.00	16.89	32.17	49.06	54.00	-4.94	Average	100	207	P
7	11000.00	16.89	44.45	61.34	74.00	-12.66	Peak	100	207	P
8	16500.00	22.03	42.99	65.02	68.20	-3.18	Peak	100	76	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

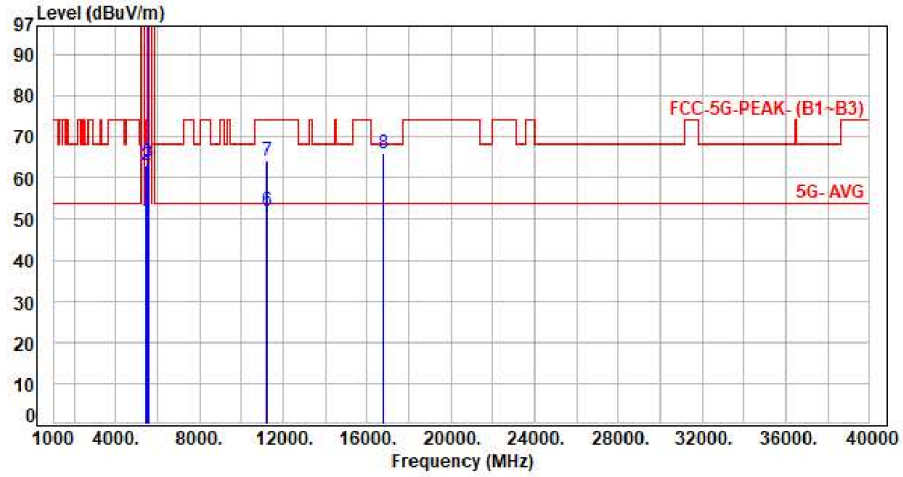


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.94	49.66	54.00	-4.34	Average	392	161	P
2	5460.00	7.72	55.34	63.06	74.00	-10.94	Peak	392	161	P
3	5470.00	7.72	55.99	63.71	68.20	-4.49	Peak	392	161	P
4	5600.00	7.47	95.94	103.41	200.00	-96.59	Average	392	161	P
5	5600.00	7.47	109.48	116.95	200.00	-83.05	Peak	392	161	P
6	11200.00	17.28	34.80	52.08	54.00	-1.92	Average	100	156	P
7	11200.00	17.28	46.84	64.12	74.00	-9.88	Peak	100	156	P
8	16800.00	23.79	42.23	66.02	68.20	-2.18	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH120 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

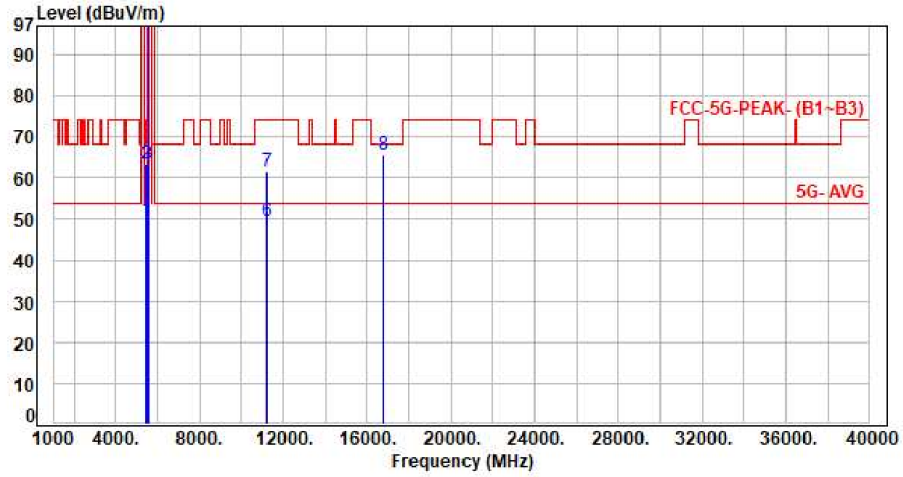


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.98	49.70	54.00	-4.30	Average	397	129	P
2	5460.00	7.72	55.82	63.54	74.00	-10.46	Peak	397	129	P
3	5470.00	7.72	55.74	63.46	68.20	-4.74	Peak	397	129	P
4	5600.00	7.47	96.54	104.01	200.00	-95.99	Average	397	129	P
5	5600.00	7.47	109.61	117.08	200.00	-82.92	Peak	397	129	P
6	11200.00	17.28	32.08	49.36	54.00	-4.64	Average	100	204	P
7	11200.00	17.28	44.28	61.56	74.00	-12.44	Peak	100	204	P
8	16800.00	23.79	41.77	65.56	68.20	-2.64	Peak	100	72	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH140 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

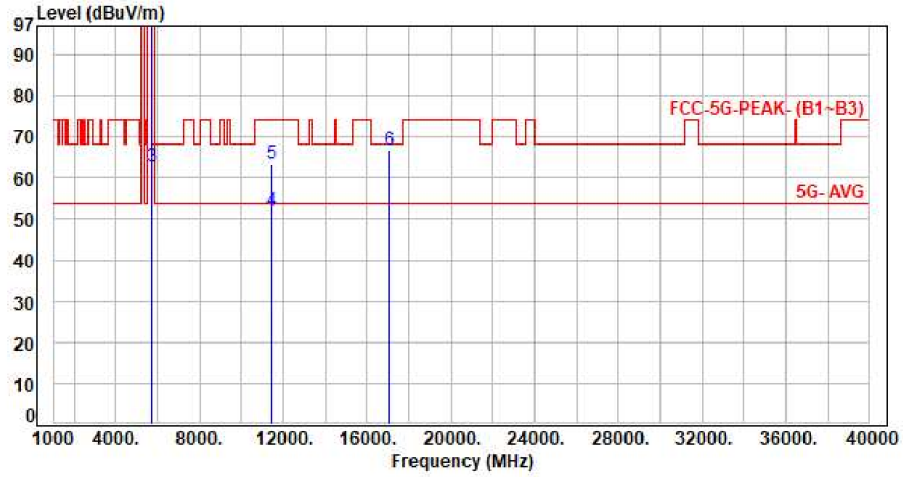

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	89.86	97.27	200.00	-102.73	Average	127	160	P
2	5700.00	7.41	102.97	110.38	200.00	-89.62	Peak	127	160	P
3	5725.00	7.39	55.32	62.71	68.20	-5.49	Peak	127	160	P
4	11400.00	17.69	34.36	52.05	54.00	-1.95	Average	100	161	P
5	11400.00	17.69	45.59	63.28	74.00	-10.72	Peak	100	161	P
6	17100.00	25.07	41.80	66.87	68.20	-1.33	Peak	100	268	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor