




Test Mode : 2TX 11ax20 CH140 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

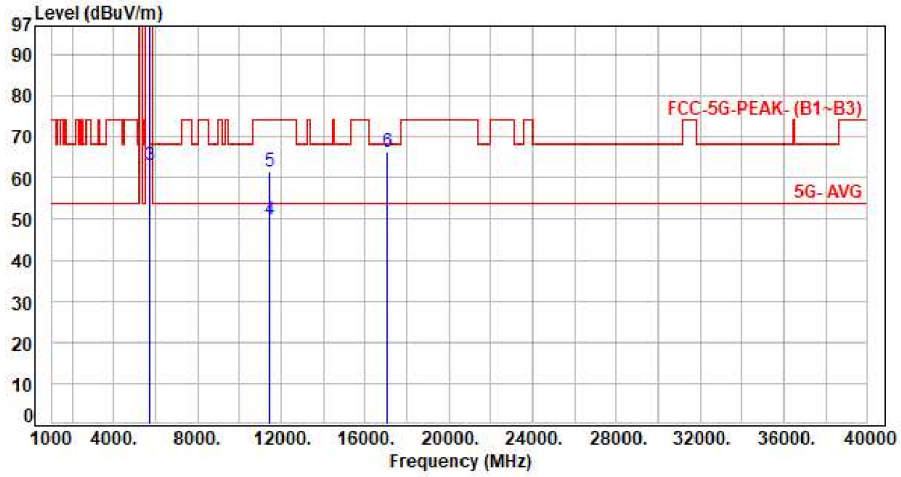


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5700.00	7.41	91.21	98.62	200.00	-101.38	Average	243	130	P
2	5700.00	7.41	104.44	111.85	200.00	-88.15	Peak	243	130	P
3	5725.00	7.39	55.66	63.05	68.20	-5.15	Peak	243	130	P
4	11400.00	17.69	32.12	49.81	54.00	-4.19	Average	100	211	P
5	11400.00	17.69	43.99	61.68	74.00	-12.32	Peak	100	211	P
6	17100.00	25.07	41.42	66.49	68.20	-1.71	Peak	100	73	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

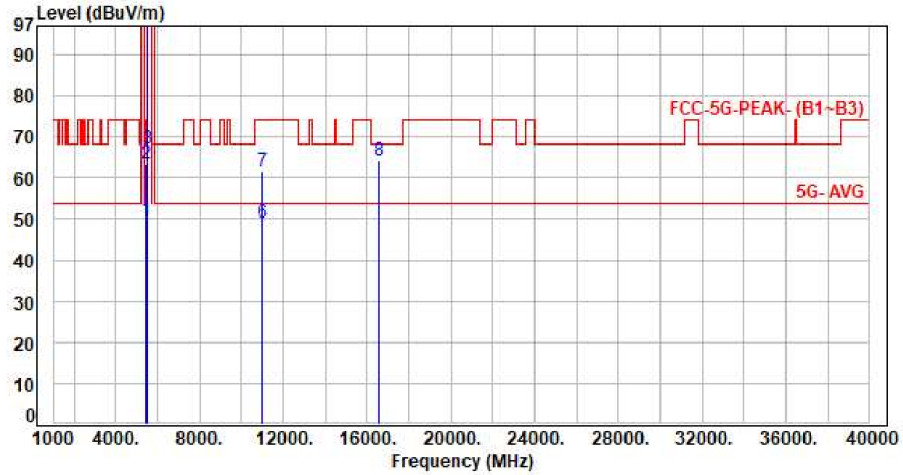


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	41.97	49.69	54.00	-4.31	Average	278	191	P
2	5460.00	7.72	55.88	63.60	74.00	-10.40	Peak	278	191	P
3	5470.00	7.72	59.32	67.04	68.20	-1.16	Peak	278	191	P
4	5510.00	7.70	88.17	95.87	200.00	-104.13	Average	278	191	P
5	5510.00	7.70	100.84	108.54	200.00	-91.46	Peak	278	191	P
6	11020.00	16.92	32.27	49.19	54.00	-4.81	Average	100	159	P
7	11020.00	16.92	44.72	61.64	74.00	-12.36	Peak	100	159	P
8	16530.00	22.07	42.22	64.29	68.20	-3.91	Peak	100	261	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH102 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

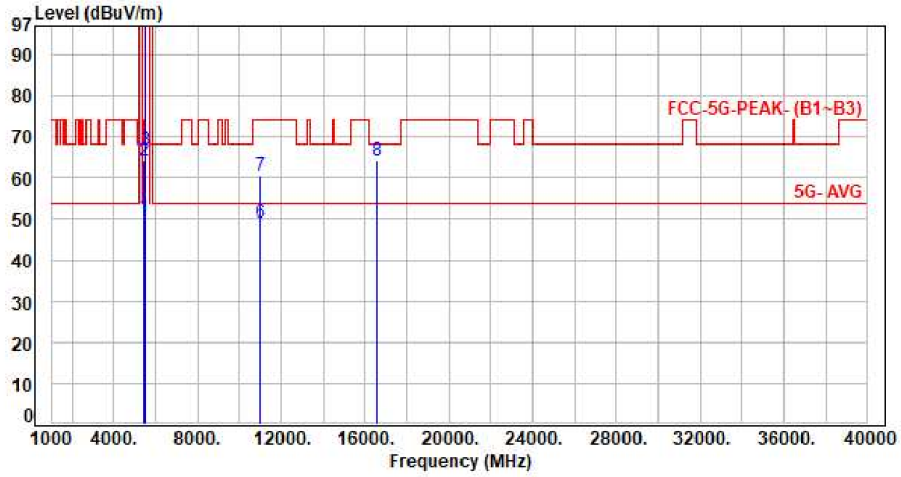


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.77	50.49	54.00	-3.51	Average	392	132	P
2	5460.00	7.72	56.56	64.28	74.00	-9.72	Peak	392	132	P
3	5470.00	7.72	59.00	66.72	68.20	-1.48	Peak	392	132	P
4	5510.00	7.70	88.94	96.64	200.00	-103.36	Average	392	132	P
5	5510.00	7.70	102.02	109.72	200.00	-90.28	Peak	392	132	P
6	11020.00	16.92	32.07	48.99	54.00	-5.01	Average	100	210	P
7	11020.00	16.92	43.51	60.43	74.00	-13.57	Peak	100	210	P
8	16530.00	22.07	41.99	64.06	68.20	-4.14	Peak	100	76	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

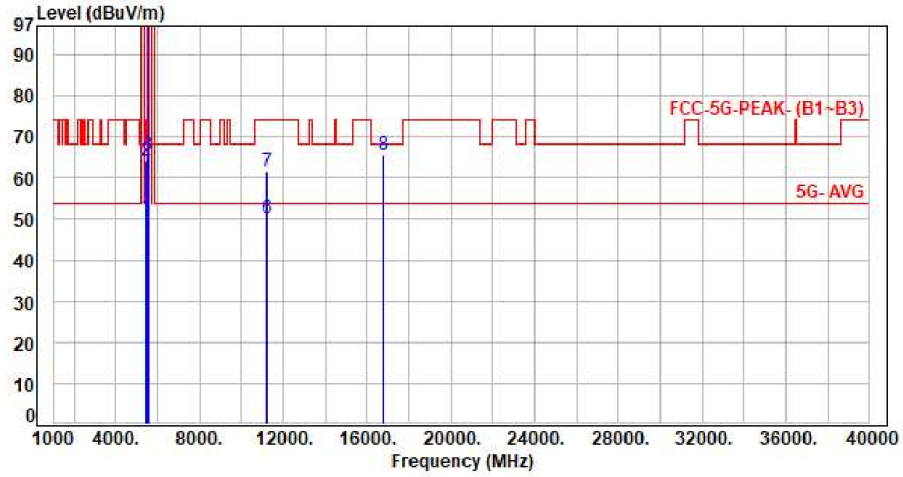


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.65	50.37	54.00	-3.63	Average	253	193	P
2	5460.00	7.72	56.52	64.24	74.00	-9.76	Peak	253	193	P
3	5470.00	7.72	57.78	65.50	68.20	-2.70	Peak	253	193	P
4	5590.00	7.49	93.82	101.31	200.00	-98.69	Average	253	193	P
5	5590.00	7.49	107.55	115.04	200.00	-84.96	Peak	253	193	P
6	11180.00	17.21	33.06	50.27	54.00	-3.73	Average	100	167	P
7	11180.00	17.21	44.55	61.76	74.00	-12.24	Peak	100	167	P
8	16770.00	23.55	42.22	65.77	68.20	-2.43	Peak	100	259	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH118 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

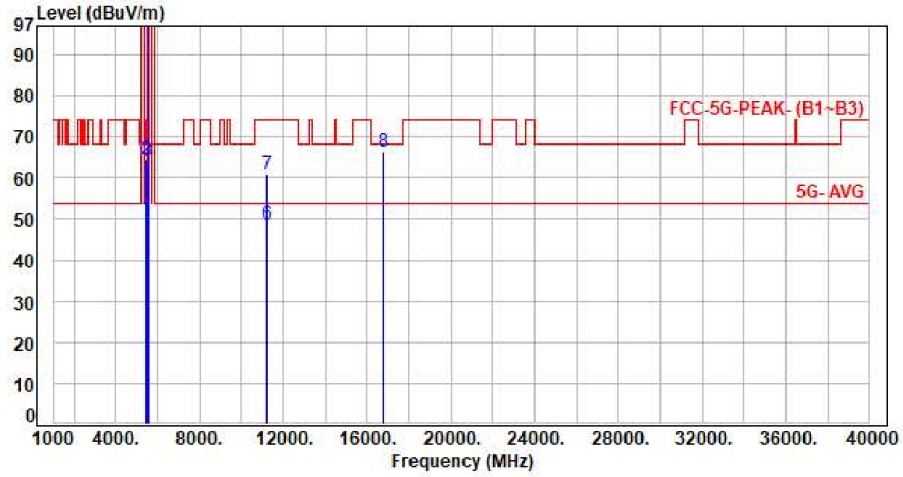


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.52	50.24	54.00	-3.76	Average	256	127	P
2	5460.00	7.72	56.74	64.46	74.00	-9.54	Peak	256	127	P
3	5470.00	7.72	56.55	64.27	68.20	-3.93	Peak	256	127	P
4	5590.00	7.49	93.72	101.21	200.00	-98.79	Average	256	127	P
5	5590.00	7.49	106.10	113.59	200.00	-86.41	Peak	256	127	P
6	11180.00	17.21	31.49	48.70	54.00	-5.30	Average	100	206	P
7	11180.00	17.21	43.73	60.94	74.00	-13.06	Peak	100	206	P
8	16770.00	23.55	42.66	66.21	68.20	-1.99	Peak	100	71	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

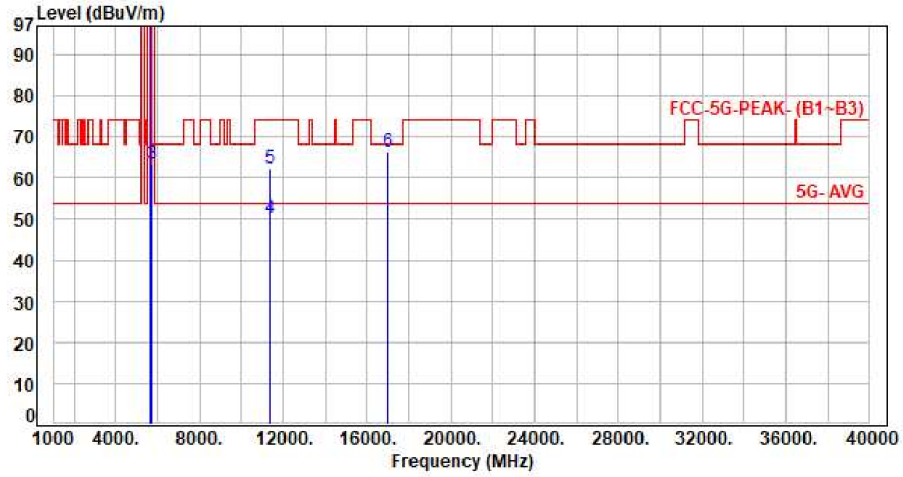


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	89.37	96.85	200.00	-103.15	Average	182	162	P
2	5670.00	7.48	101.28	108.76	200.00	-91.24	Peak	182	162	P
3	5725.00	7.39	56.11	63.50	68.20	-4.70	Peak	182	162	P
4	11340.00	17.52	32.77	50.29	54.00	-3.71	Average	100	166	P
5	11340.00	17.52	44.68	62.20	74.00	-11.80	Peak	100	166	P
6	17010.00	24.83	41.66	66.49	68.20	-1.71	Peak	100	254	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH134 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

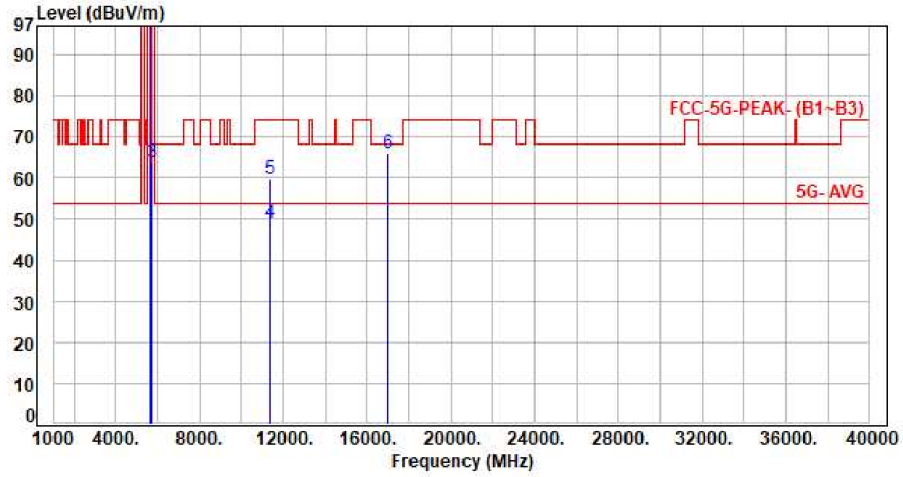


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5670.00	7.48	90.92	98.40	200.00	-101.60	Average	229	129	P
2	5670.00	7.48	104.05	111.53	200.00	-88.47	Peak	229	129	P
3	5725.00	7.39	56.49	63.88	68.20	-4.32	Peak	229	129	P
4	11340.00	17.52	31.40	48.92	54.00	-5.08	Average	100	213	P
5	11340.00	17.52	42.16	59.68	74.00	-14.32	Peak	100	213	P
6	17010.00	24.83	41.18	66.01	68.20	-2.19	Peak	100	73	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

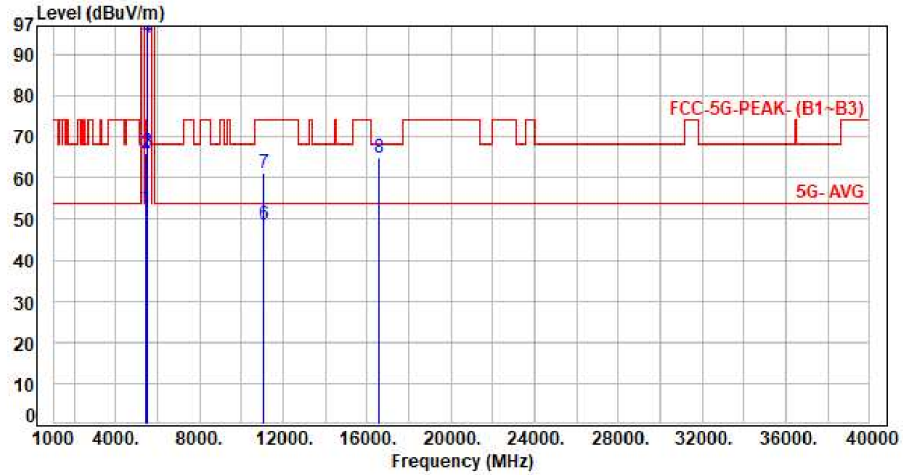


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	44.86	52.58	54.00	-1.42	Average	343	193	P
2	5460.00	7.72	58.45	66.17	74.00	-7.83	Peak	343	193	P
3	5470.00	7.72	58.69	66.41	68.20	-1.79	Peak	343	193	P
4	5530.00	7.65	86.40	94.05	200.00	-105.95	Average	343	193	P
5	5530.00	7.65	100.53	108.18	200.00	-91.82	Peak	343	193	P
6	11060.00	17.02	31.48	48.50	54.00	-5.50	Average	100	159	P
7	11060.00	17.02	44.24	61.26	74.00	-12.74	Peak	100	159	P
8	16590.00	22.16	42.74	64.90	68.20	-3.30	Peak	100	263	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH106 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

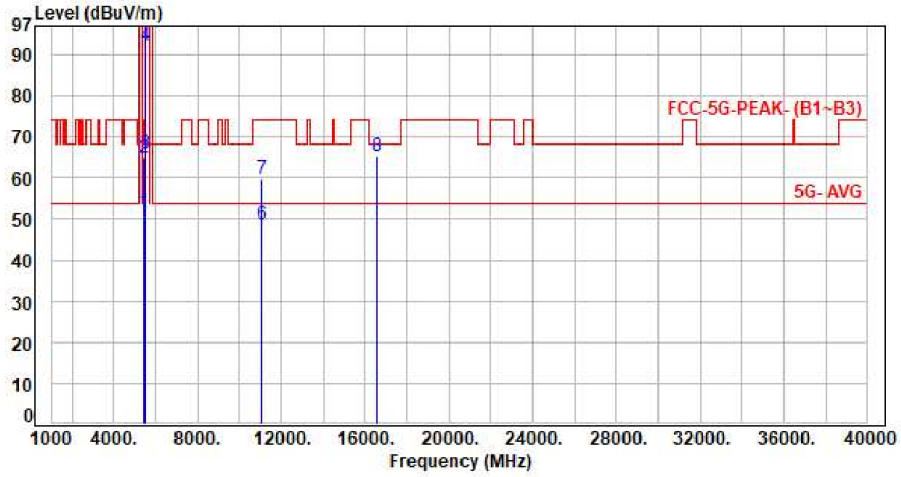


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	43.92	51.64	54.00	-2.36	Average	386	95	P
2	5460.00	7.72	57.27	64.99	74.00	-9.01	Peak	386	95	P
3	5470.00	7.72	58.42	66.14	68.20	-2.06	Peak	386	95	P
4	5530.00	7.65	84.57	92.22	200.00	-107.78	Average	386	95	P
5	5530.00	7.65	97.57	105.22	200.00	-94.78	Peak	386	95	P
6	11060.00	17.02	31.80	48.82	54.00	-5.18	Average	100	205	P
7	11060.00	17.02	42.55	59.57	74.00	-14.43	Peak	100	205	P
8	16590.00	22.16	43.17	65.33	68.20	-2.87	Peak	100	75	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

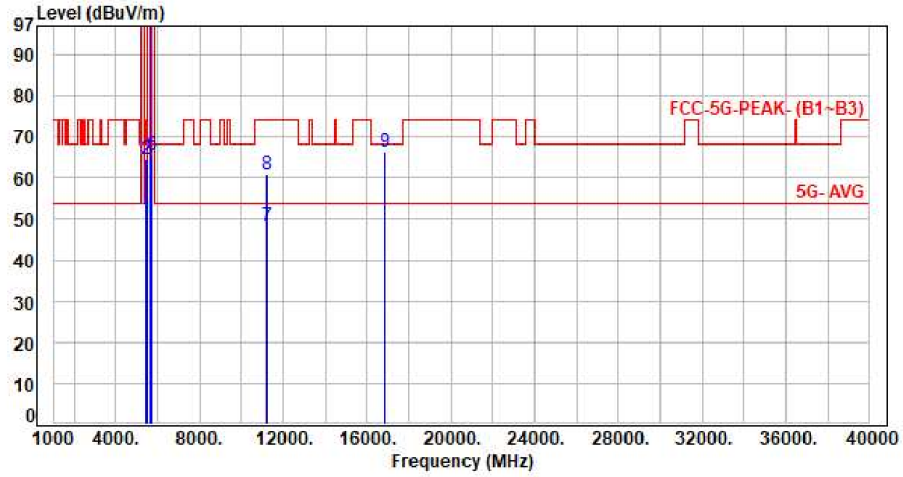


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.37	50.09	54.00	-3.91	Average	366	192	P
2	5460.00	7.72	56.80	64.52	74.00	-9.48	Peak	366	192	P
3	5470.00	7.72	56.79	64.51	68.20	-3.69	Peak	366	192	P
4	5610.00	7.48	88.89	96.37	200.00	-103.63	Average	366	192	P
5	5610.00	7.48	101.75	109.23	200.00	-90.77	Peak	366	192	P
6	5725.00	7.39	58.39	65.78	68.20	-2.42	Peak	366	192	P
7	11220.00	17.29	31.19	48.48	54.00	-5.52	Average	100	165	P
8	11220.00	17.29	43.61	60.90	74.00	-13.10	Peak	100	165	P
9	16830.00	23.87	42.62	66.49	68.20	-1.71	Peak	100	265	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH122 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

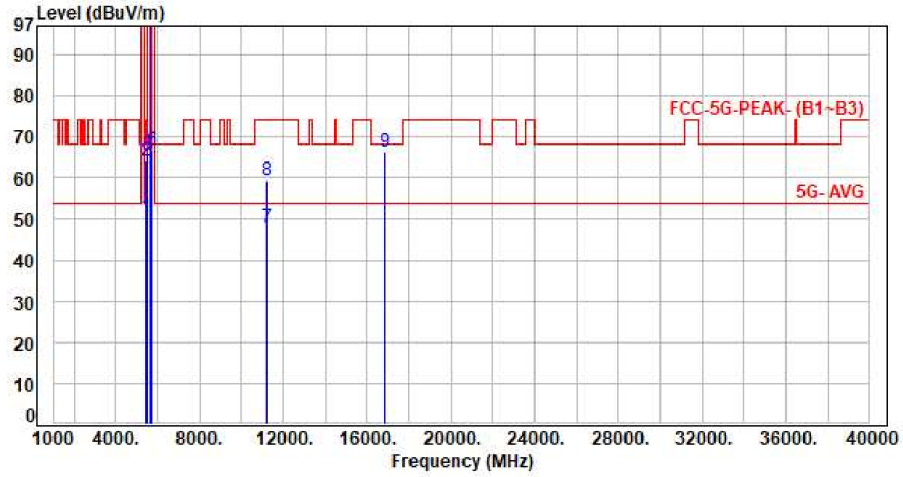


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.83	50.55	54.00	-3.45	Average	378	130	P
2	5460.00	7.72	56.44	64.16	74.00	-9.84	Peak	378	130	P
3	5470.00	7.72	57.95	65.67	68.20	-2.53	Peak	378	130	P
4	5610.00	7.48	88.47	95.95	200.00	-104.05	Average	378	130	P
5	5610.00	7.48	100.31	107.79	200.00	-92.21	Peak	378	130	P
6	5725.00	7.39	59.38	66.77	68.20	-1.43	Peak	378	130	P
7	11220.00	17.29	30.78	48.07	54.00	-5.93	Average	100	211	P
8	11220.00	17.29	42.27	59.56	74.00	-14.44	Peak	100	211	P
9	16830.00	23.87	42.51	66.38	68.20	-1.82	Peak	100	77	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

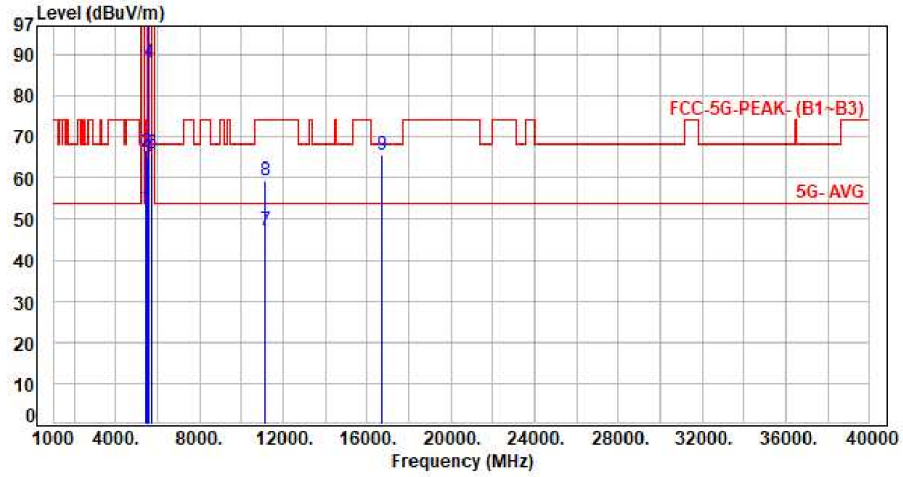


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	45.18	52.90	54.00	-1.10	Average	247	195	P
2	5460.00	7.72	58.81	66.53	74.00	-7.47	Peak	247	195	P
3	5470.00	7.72	57.22	64.94	68.20	-3.26	Peak	247	195	P
4	5570.00	7.55	80.77	88.32	200.00	-111.68	Average	247	195	P
5	5570.00	7.55	94.35	101.90	200.00	-98.10	Peak	247	195	P
6	5725.00	7.39	58.71	66.10	68.20	-2.10	Peak	247	195	P
7	11140.00	17.14	30.24	47.38	54.00	-6.62	Average	100	168	P
8	11140.00	17.14	42.42	59.56	74.00	-14.44	Peak	100	168	P
9	16710.00	23.04	42.43	65.47	68.20	-2.73	Peak	100	264	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax160 CH114 NSS1 MCS0  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

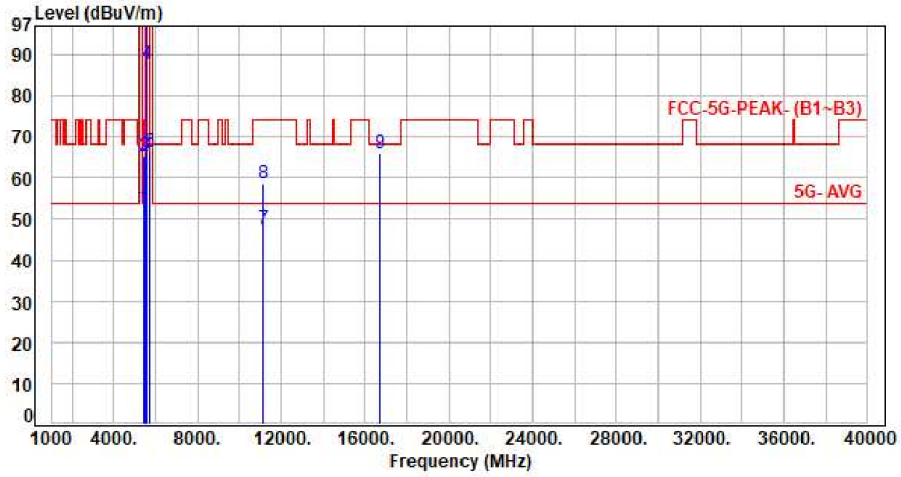


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	44.90	52.62	54.00	-1.38	Average	400	132	P
2	5460.00	7.72	57.64	65.36	74.00	-8.64	Peak	400	132	P
3	5470.00	7.72	57.98	65.70	68.20	-2.50	Peak	400	132	P
4	5570.00	7.55	80.20	87.75	200.00	-112.25	Average	400	132	P
5	5570.00	7.55	93.65	101.20	200.00	-98.80	Peak	400	132	P
6	5725.00	7.39	58.93	66.32	68.20	-1.88	Peak	400	132	P
7	11140.00	17.14	30.50	47.64	54.00	-6.36	Average	100	203	P
8	11140.00	17.14	41.41	58.55	74.00	-15.45	Peak	100	203	P
9	16710.00	23.04	42.82	65.86	68.20	-2.34	Peak	100	76	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

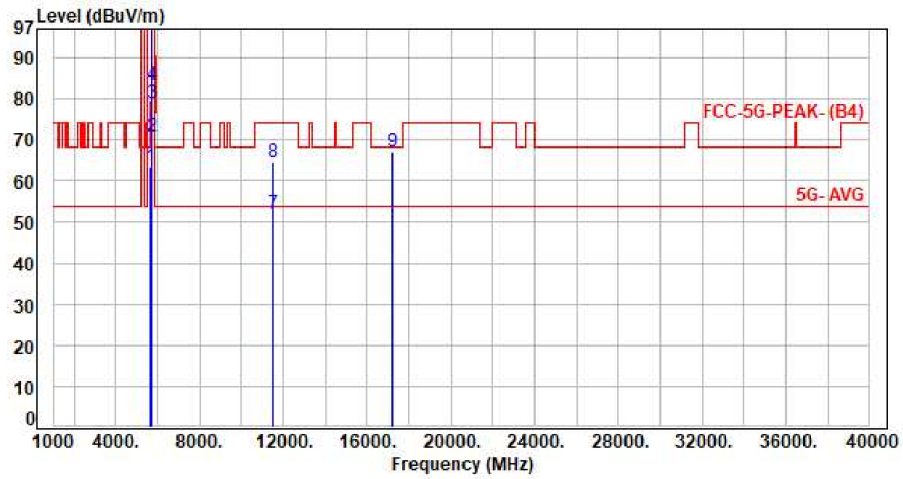


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.90	63.44	68.20	-4.76	Peak	240	168	P
2	5700.00	7.41	63.57	70.98	105.20	-34.22	Peak	240	168	P
3	5720.00	7.39	71.63	79.02	110.80	-31.78	Peak	240	168	P
4	5725.00	7.39	75.79	83.18	122.20	-39.02	Peak	240	168	P
5	5745.00	7.38	98.10	105.48	200.00	-94.52	Average	240	168	P
6	5745.00	7.38	107.84	115.22	200.00	-84.78	Peak	240	168	P
7	11490.00	17.85	34.06	51.91	54.00	-2.09	Average	100	173	P
8	11490.00	17.85	46.58	64.43	74.00	-9.57	Peak	100	173	P
9	17235.00	25.93	41.06	66.99	68.20	-1.21	Peak	100	262	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH149 6Mbps  
Voltage : From POE(AC120V/60Hz)  
Pol : Horizontal

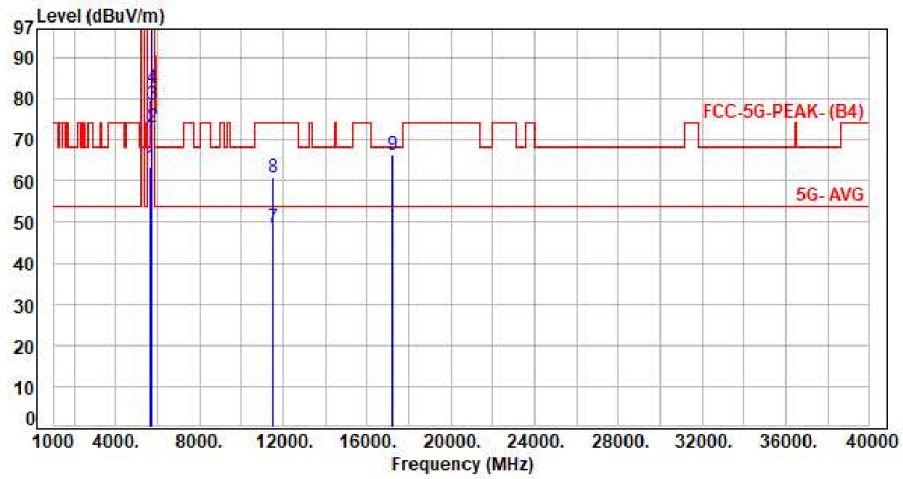


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.76	63.30	68.20	-4.90	Peak	275	132	P
2	5700.00	7.41	65.46	72.87	105.20	-32.33	Peak	275	132	P
3	5720.00	7.39	71.10	78.49	110.80	-32.31	Peak	275	132	P
4	5725.00	7.39	75.40	82.79	122.20	-39.41	Peak	275	132	P
5	5745.00	7.38	99.00	106.38	200.00	-93.62	Average	275	132	P
6	5745.00	7.38	108.61	115.99	200.00	-84.01	Peak	275	132	P
7	11490.00	17.85	30.79	48.64	54.00	-5.36	Average	100	204	P
8	11490.00	17.85	43.17	61.02	74.00	-12.98	Peak	100	204	P
9	17235.00	25.93	40.36	66.29	68.20	-1.91	Peak	100	72	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH157 6Mbps  
Voltage : From POE(AC120V/60Hz)  
Pol : Vertical

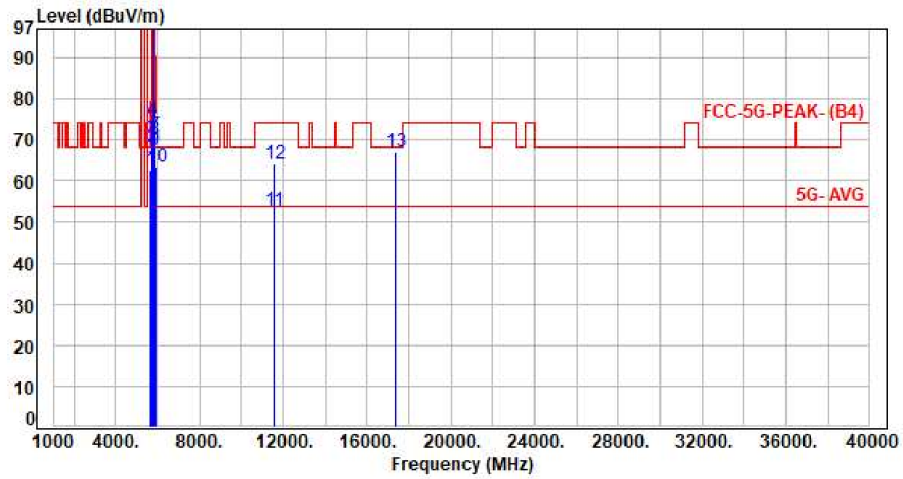

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.10	62.64	68.20	-5.56	Peak	222	170	P
2	5700.00	7.41	60.90	68.31	105.20	-36.89	Peak	222	170	P
3	5720.00	7.39	65.15	72.54	110.80	-38.26	Peak	222	170	P
4	5725.00	7.39	67.36	74.75	122.20	-47.45	Peak	222	170	P
5	5785.00	7.34	98.80	106.14	200.00	-93.86	Average	222	170	P
6	5785.00	7.34	108.66	116.00	200.00	-84.00	Peak	222	170	P
7	5850.00	7.30	64.06	71.36	122.20	-50.84	Peak	222	170	P
8	5855.00	7.32	62.68	70.00	110.80	-40.80	Peak	222	170	P
9	5875.00	7.39	60.19	67.58	105.20	-37.62	Peak	222	170	P
10	5925.00	7.51	55.97	63.48	68.20	-4.72	Peak	222	170	P
11	11570.00	18.75	34.07	52.82	54.00	-1.18	Average	100	166	P
12	11570.00	18.75	45.56	64.31	74.00	-9.69	Peak	100	166	P
13	17355.00	26.80	40.19	66.99	68.20	-1.21	Peak	100	267	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor