




Test Mode : 2TX 11a CH157 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

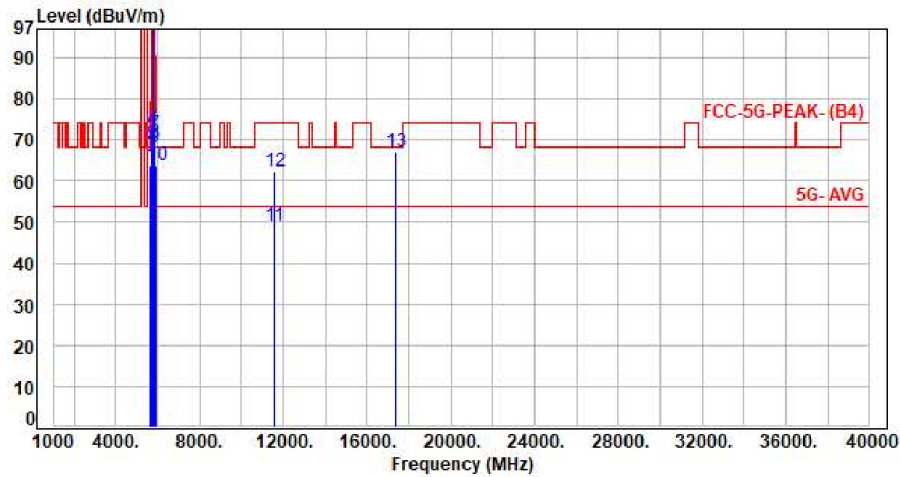


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	56.30	63.84	68.20	-4.36	Peak	390	133	P
2	5700.00	7.41	61.46	68.87	105.20	-36.33	Peak	390	133	P
3	5720.00	7.39	62.99	70.38	110.80	-40.42	Peak	390	133	P
4	5725.00	7.39	65.13	72.52	122.20	-49.68	Peak	390	133	P
5	5785.00	7.34	99.22	106.56	200.00	-93.44	Average	390	133	P
6	5785.00	7.34	108.92	116.26	200.00	-83.74	Peak	390	133	P
7	5850.00	7.30	64.23	71.53	122.20	-50.67	Peak	390	133	P
8	5855.00	7.32	61.95	69.27	110.80	-41.53	Peak	390	133	P
9	5875.00	7.39	60.86	68.25	105.20	-36.95	Peak	390	133	P
10	5925.00	7.51	56.27	63.78	68.20	-4.42	Peak	390	133	P
11	11570.00	18.75	30.41	49.16	54.00	-4.84	Average	100	212	P
12	11570.00	18.75	43.54	62.29	74.00	-11.71	Peak	100	212	P
13	17355.00	26.80	40.29	67.09	68.20	-1.11	Peak	100	73	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

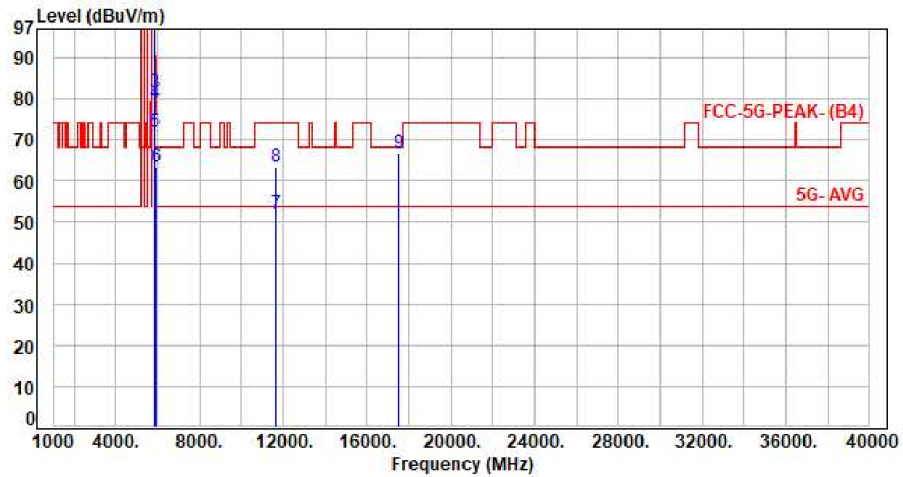


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	98.87	106.19	200.00	-93.81	Average	242	166	P
2	5825.00	7.32	108.10	115.42	200.00	-84.58	Peak	242	166	P
3	5850.00	7.30	74.13	81.43	122.20	-40.77	Peak	242	166	P
4	5855.00	7.32	71.46	78.78	110.80	-32.02	Peak	242	166	P
5	5875.00	7.39	64.66	72.05	105.20	-33.15	Peak	242	166	P
6	5925.00	7.51	56.09	63.60	68.20	-4.60	Peak	242	166	P
7	11650.00	18.84	33.14	51.98	54.00	-2.02	Average	100	220	P
8	11650.00	18.84	44.55	63.39	74.00	-10.61	Peak	100	220	P
9	17475.00	27.52	39.40	66.92	68.20	-1.28	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH165 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

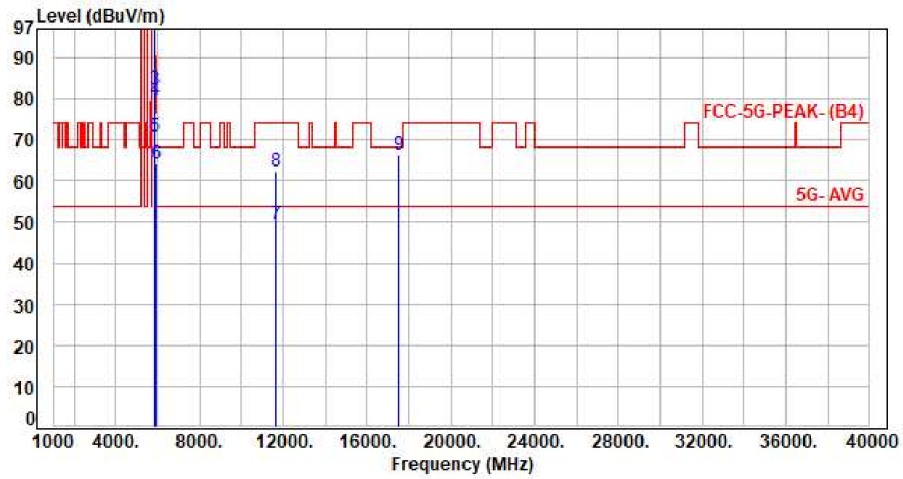


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	98.90	106.22	200.00	-93.78	Average	369	135	P
2	5825.00	7.32	108.51	115.83	200.00	-84.17	Peak	369	135	P
3	5850.00	7.30	74.91	82.21	122.20	-39.99	Peak	369	135	P
4	5855.00	7.32	72.50	79.82	110.80	-30.98	Peak	369	135	P
5	5875.00	7.39	63.30	70.69	105.20	-34.51	Peak	369	135	P
6	5925.00	7.51	56.65	64.16	68.20	-4.04	Peak	369	135	P
7	11650.00	18.84	30.51	49.35	54.00	-4.65	Average	100	206	P
8	11650.00	18.84	43.47	62.31	74.00	-11.69	Peak	100	206	P
9	17475.00	27.52	38.90	66.42	68.20	-1.78	Peak	100	77	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

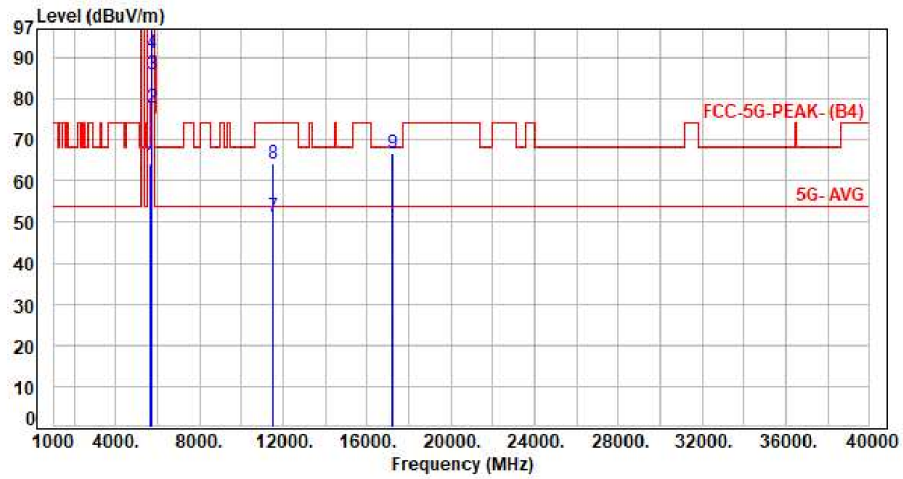


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	56.61	64.15	68.20	-4.05	Peak	219	167	P
2	5700.00	7.41	70.50	77.91	105.20	-27.29	Peak	219	167	P
3	5720.00	7.39	78.53	85.92	110.80	-24.88	Peak	219	167	P
4	5725.00	7.39	83.64	91.03	122.20	-31.17	Peak	219	167	P
5	5745.00	7.38	96.46	103.84	200.00	-96.16	Average	219	167	P
6	5745.00	7.38	109.73	117.11	200.00	-82.89	Peak	219	167	P
7	11490.00	17.85	33.47	51.32	54.00	-2.68	Average	100	163	P
8	11490.00	17.85	46.16	64.01	74.00	-9.99	Peak	100	163	P
9	17235.00	25.93	40.89	66.82	68.20	-1.38	Peak	100	266	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH149 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

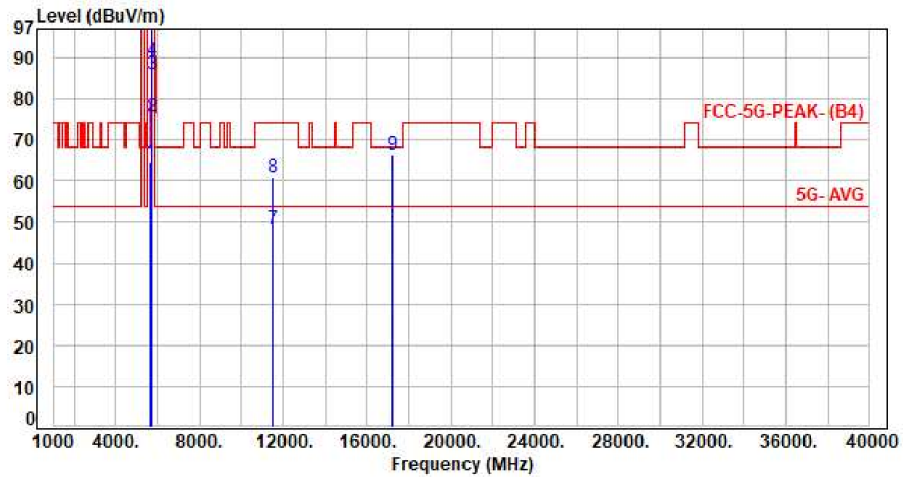


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	56.82	64.36	68.20	-3.84	Peak	274	131	P
2	5700.00	7.41	68.11	75.52	105.20	-29.68	Peak	274	131	P
3	5720.00	7.39	78.67	86.06	110.80	-24.74	Peak	274	131	P
4	5725.00	7.39	82.04	89.43	122.20	-32.77	Peak	274	131	P
5	5745.00	7.38	97.99	105.37	200.00	-94.63	Average	274	131	P
6	5745.00	7.38	110.64	118.02	200.00	-81.98	Peak	274	131	P
7	11490.00	17.85	30.39	48.24	54.00	-5.76	Average	100	205	P
8	11490.00	17.85	43.16	61.01	74.00	-12.99	Peak	100	205	P
9	17235.00	25.93	40.35	66.28	68.20	-1.92	Peak	100	72	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
 Voltage : From POE(AC120V/60Hz)
 Pol : Vertical

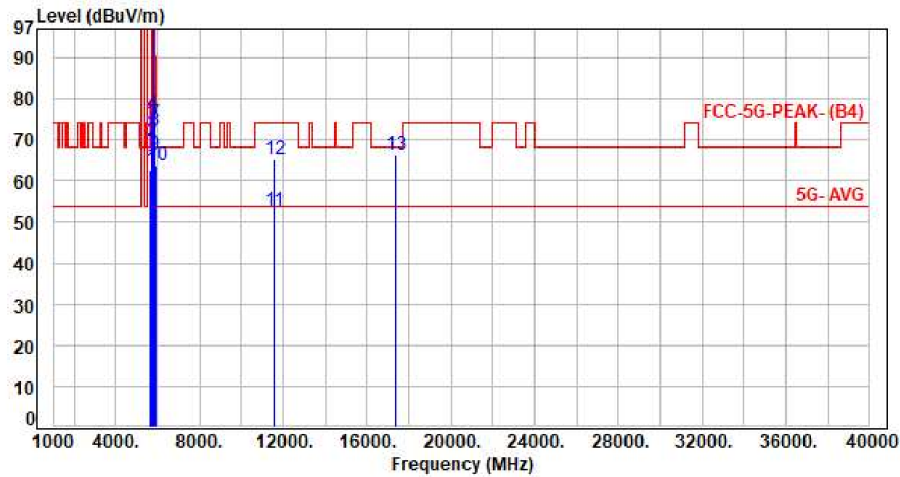


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.03	62.57	68.20	-5.63	Peak	212	164	P
2	5700.00	7.41	62.12	69.53	105.20	-35.67	Peak	212	164	P
3	5720.00	7.39	66.28	73.67	110.80	-37.13	Peak	212	164	P
4	5725.00	7.39	68.92	76.31	122.20	-45.89	Peak	212	164	P
5	5785.00	7.34	97.22	104.56	200.00	-95.44	Average	212	164	P
6	5785.00	7.34	110.04	117.38	200.00	-82.62	Peak	212	164	P
7	5850.00	7.30	66.69	73.99	122.20	-48.21	Peak	212	164	P
8	5855.00	7.32	64.92	72.24	110.80	-38.56	Peak	212	164	P
9	5875.00	7.39	59.15	66.54	105.20	-38.66	Peak	212	164	P
10	5925.00	7.51	56.19	63.70	68.20	-4.50	Peak	212	164	P
11	11570.00	18.75	33.81	52.56	54.00	-1.44	Average	100	165	P
12	11570.00	18.75	46.65	65.40	74.00	-8.60	Peak	100	165	P
13	17355.00	26.80	39.47	66.27	68.20	-1.93	Peak	100	259	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH157 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

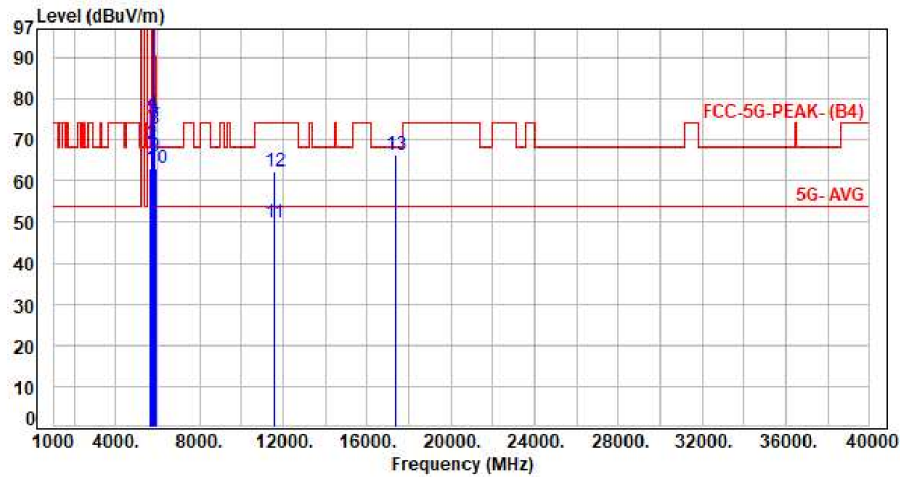


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	55.61	63.15	68.20	-5.05	Peak	251	130	P
2	5700.00	7.41	61.58	68.99	105.20	-36.21	Peak	251	130	P
3	5720.00	7.39	68.01	75.40	110.80	-35.40	Peak	251	130	P
4	5725.00	7.39	68.83	76.22	122.20	-45.98	Peak	251	130	P
5	5785.00	7.34	98.04	105.38	200.00	-94.62	Average	251	130	P
6	5785.00	7.34	111.62	118.96	200.00	-81.04	Peak	251	130	P
7	5850.00	7.30	66.03	73.33	122.20	-48.87	Peak	251	130	P
8	5855.00	7.32	65.43	72.75	110.80	-38.05	Peak	251	130	P
9	5875.00	7.39	58.52	65.91	105.20	-39.29	Peak	251	130	P
10	5925.00	7.51	55.56	63.07	68.20	-5.13	Peak	251	130	P
11	11570.00	18.75	31.22	49.97	54.00	-4.03	Average	100	209	P
12	11570.00	18.75	43.42	62.17	74.00	-11.83	Peak	100	209	P
13	17355.00	26.80	39.71	66.51	68.20	-1.69	Peak	100	73	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

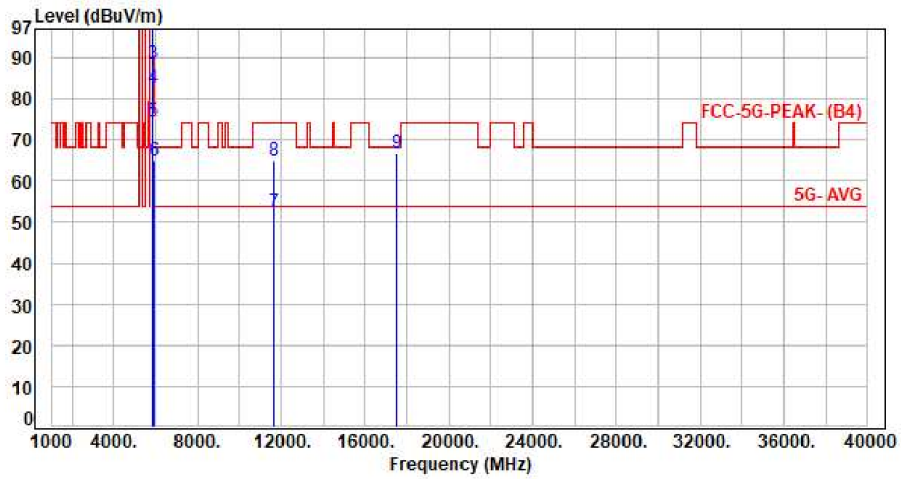


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	96.90	104.22	200.00	-95.78	Average	206	163	P
2	5825.00	7.32	109.77	117.09	200.00	-82.91	Peak	206	163	P
3	5850.00	7.30	81.06	88.36	122.20	-33.84	Peak	206	163	P
4	5855.00	7.32	75.41	82.73	110.80	-28.07	Peak	206	163	P
5	5875.00	7.39	67.14	74.53	105.20	-30.67	Peak	206	163	P
6	5925.00	7.51	57.27	64.78	68.20	-3.42	Peak	206	163	P
7	11650.00	18.84	33.46	52.30	54.00	-1.70	Average	100	162	P
8	11650.00	18.84	46.19	65.03	74.00	-8.97	Peak	100	162	P
9	17475.00	27.52	39.27	66.79	68.20	-1.41	Peak	100	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax20 CH165 NSS1 MCS0
 Voltage : From POE(AC120V/60Hz)
 Pol : Horizontal

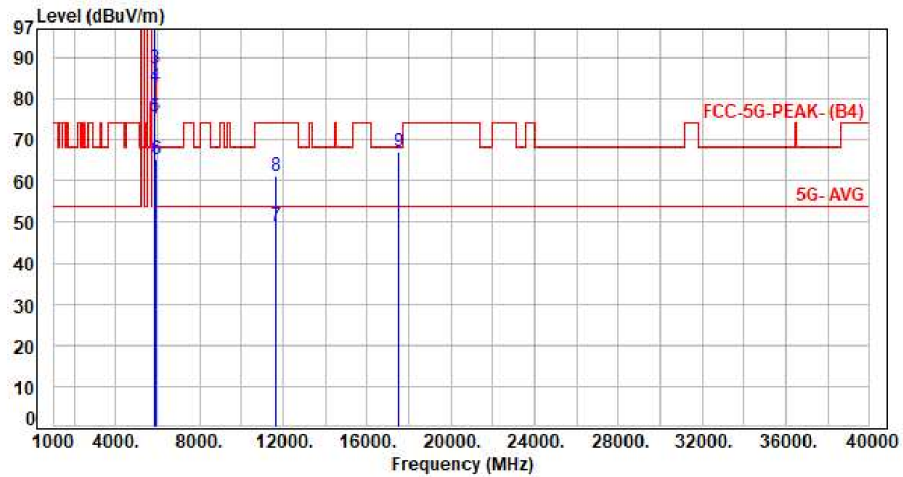


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5825.00	7.32	97.83	105.15	200.00	-94.85	Average	371	133	P
2	5825.00	7.32	111.26	118.58	200.00	-81.42	Peak	371	133	P
3	5850.00	7.30	80.12	87.42	122.20	-34.78	Peak	371	133	P
4	5855.00	7.32	75.71	83.03	110.80	-27.77	Peak	371	133	P
5	5875.00	7.39	68.33	75.72	105.20	-29.48	Peak	371	133	P
6	5925.00	7.51	57.86	65.37	68.20	-2.83	Peak	371	133	P
7	11650.00	18.84	30.10	48.94	54.00	-5.06	Average	100	214	P
8	11650.00	18.84	42.45	61.29	74.00	-12.71	Peak	100	214	P
9	17475.00	27.52	39.53	67.05	68.20	-1.15	Peak	100	71	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

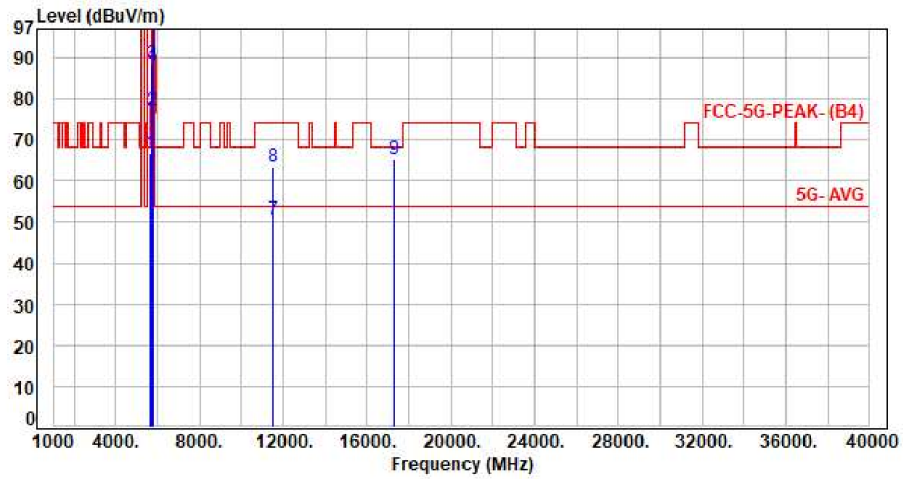


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	59.04	66.58	68.20	-1.62	Peak	222	167	P
2	5700.00	7.41	69.77	77.18	105.20	-28.02	Peak	222	167	P
3	5720.00	7.39	81.12	88.51	110.80	-22.29	Peak	222	167	P
4	5725.00	7.39	80.82	88.21	122.20	-33.99	Peak	222	167	P
5	5755.00	7.36	93.80	101.16	200.00	-98.84	Average	222	167	P
6	5755.00	7.36	106.58	113.94	200.00	-86.06	Peak	222	167	P
7	11510.00	18.00	32.66	50.66	54.00	-3.34	Average	100	165	P
8	11510.00	18.00	45.27	63.27	74.00	-10.73	Peak	100	165	P
9	17265.00	26.07	39.21	65.28	68.20	-2.92	Peak	100	262	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH151 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

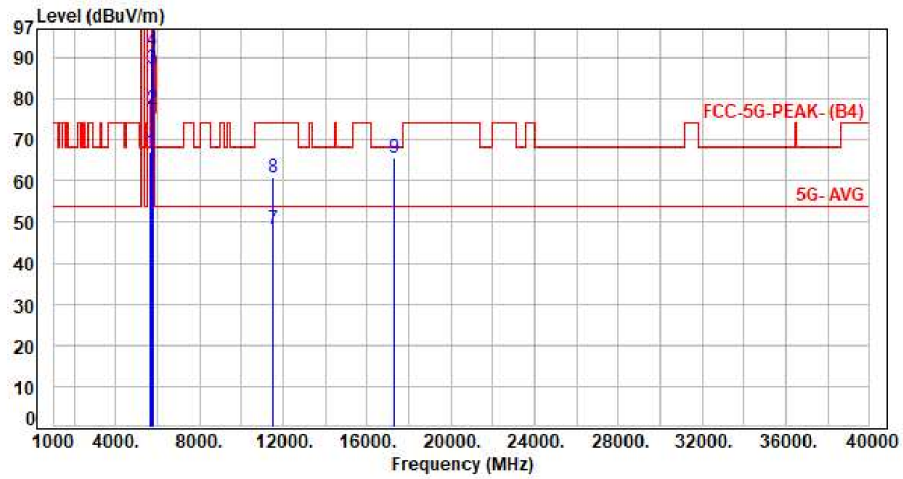


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	59.54	67.08	68.20	-1.12	Peak	397	131	P
2	5700.00	7.41	70.08	77.49	105.20	-27.71	Peak	397	131	P
3	5720.00	7.39	80.19	87.58	110.00	-23.22	Peak	397	131	P
4	5725.00	7.39	84.50	91.89	122.20	-30.31	Peak	397	131	P
5	5755.00	7.36	94.61	101.97	200.00	-98.03	Average	397	131	P
6	5755.00	7.36	107.28	114.64	200.00	-85.36	Peak	397	131	P
7	11510.00	18.00	30.48	48.48	54.00	-5.52	Average	100	208	P
8	11510.00	18.00	42.99	60.99	74.00	-13.01	Peak	100	208	P
9	17265.00	26.07	39.51	65.58	68.20	-2.62	Peak	100	74	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

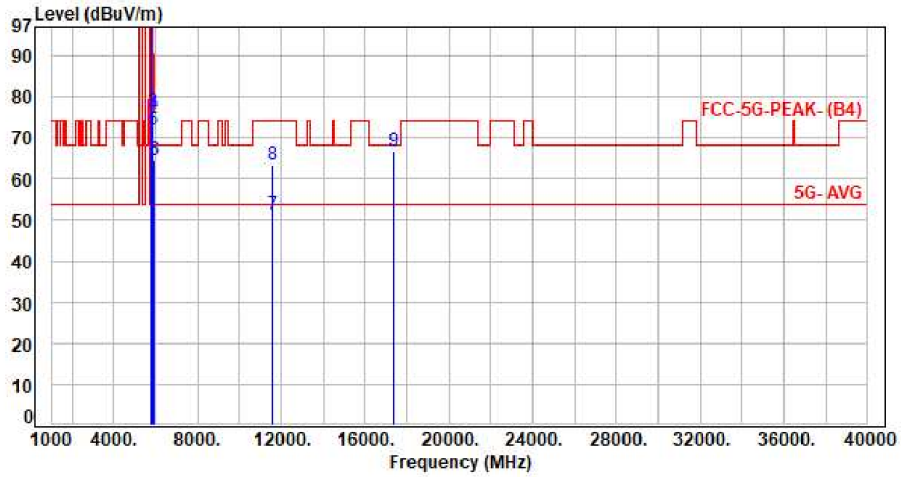


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.34	93.53	100.87	200.00	-99.13	Average	216	162	P
2	5795.00	7.34	105.98	113.32	200.00	-86.68	Peak	216	162	P
3	5850.00	7.30	69.21	76.51	122.20	-45.69	Peak	216	162	P
4	5855.00	7.32	68.23	75.55	110.80	-35.25	Peak	216	162	P
5	5875.00	7.39	64.43	71.82	105.20	-33.38	Peak	216	162	P
6	5925.00	7.51	56.99	64.50	68.20	-3.70	Peak	216	162	P
7	11590.00	19.00	32.26	51.26	54.00	-2.74	Average	100	171	P
8	11590.00	19.00	44.46	63.46	74.00	-10.54	Peak	100	171	P
9	17385.00	27.00	39.83	66.83	68.20	-1.37	Peak	100	265	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH159 NSS1 MCS0
Voltage : From POE(AC120V/60Hz)
Pol : Horizontal

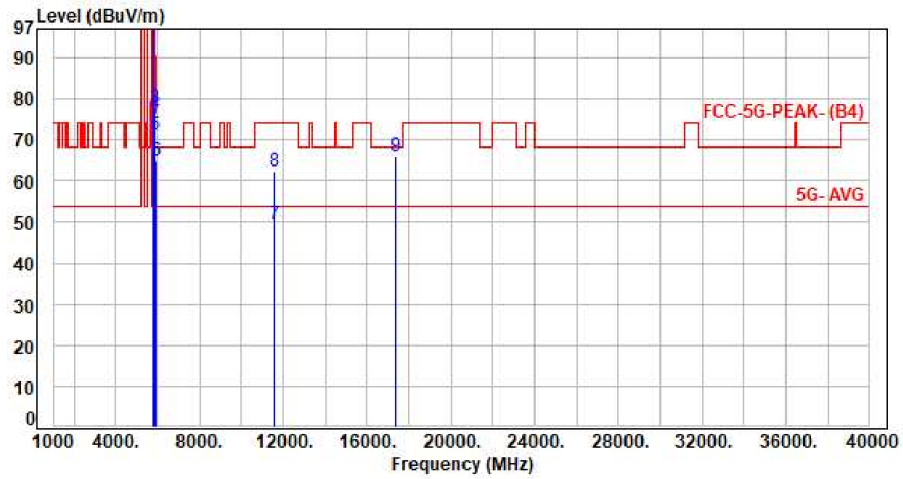


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5795.00	7.34	94.76	102.10	200.00	-97.90	Average	266	134	P
2	5795.00	7.34	106.33	113.67	200.00	-86.33	Peak	266	134	P
3	5850.00	7.30	70.69	77.99	122.20	-44.21	Peak	266	134	P
4	5855.00	7.32	68.88	76.20	110.80	-34.60	Peak	266	134	P
5	5875.00	7.39	63.69	71.08	105.20	-34.12	Peak	266	134	P
6	5925.00	7.51	57.31	64.82	68.20	-3.38	Peak	266	134	P
7	11590.00	19.00	30.36	49.36	54.00	-4.64	Average	100	221	P
8	11590.00	19.00	43.15	62.15	74.00	-11.85	Peak	100	221	P
9	17385.00	27.00	39.17	66.17	68.20	-2.03	Peak	100	75	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
 Voltage : From POE(AC120V/60Hz)
 Pol : Vertical

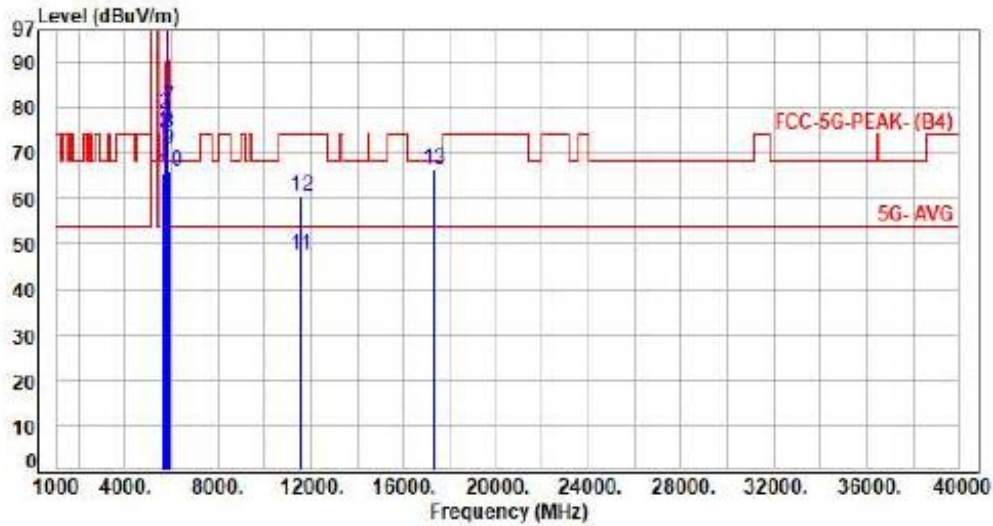


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	58.23	65.77	68.20	-2.43	Peak	244	169	P
2	5700.00	7.41	67.15	74.56	105.20	-30.64	Peak	244	169	P
3	5720.00	7.39	71.20	78.59	110.00	-32.21	Peak	244	169	P
4	5725.00	7.39	70.44	77.83	122.20	-44.37	Peak	244	169	P
5	5775.00	7.35	88.82	96.17	200.00	-103.83	Average	244	169	P
6	5775.00	7.35	100.90	108.25	200.00	-91.75	Peak	244	169	P
7	5850.00	7.30	72.81	80.11	122.20	-42.09	Peak	244	169	P
8	5855.00	7.32	67.36	74.68	110.00	-36.12	Peak	244	169	P
9	5875.00	7.39	63.26	70.65	105.20	-34.55	Peak	244	169	P
10	5925.00	7.51	58.37	65.88	60.20	-2.32	Peak	244	169	P
11	11550.00	17.40	30.13	47.53	54.00	-6.47	Average	100	162	P
12	11550.00	17.40	43.16	60.56	74.00	-13.44	Peak	100	162	P
13	17325.00	26.49	39.96	66.45	68.20	-1.75	Peak	100	264	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH155 NSS1 MCS0
 Voltage : From POE(AC120V/60Hz)
 Pol : Horizontal

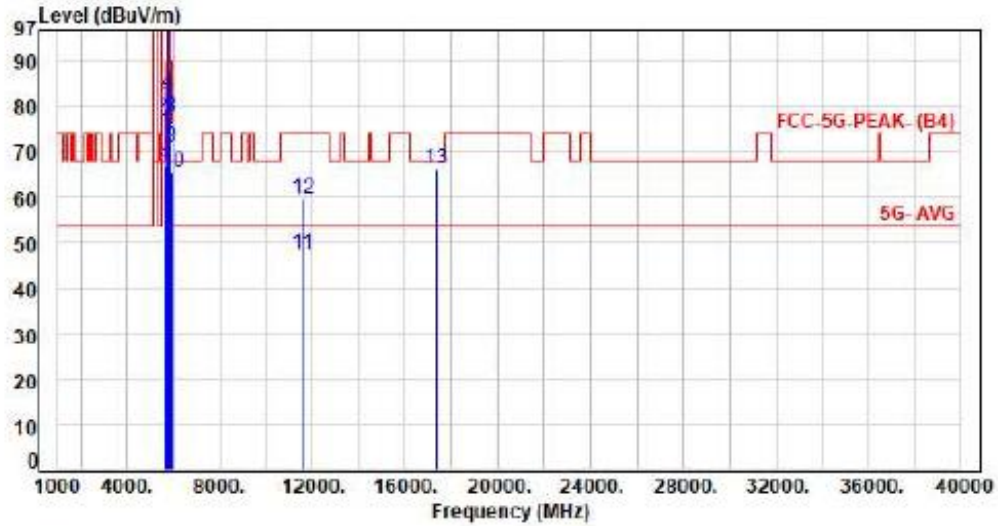


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5650.00	7.54	59.44	66.98	68.20	-1.22	Peak	400	132	P
2	5700.00	7.41	69.25	76.66	105.20	-28.54	Peak	400	132	P
3	5720.00	7.39	72.67	80.06	110.80	-30.74	Peak	400	132	P
4	5725.00	7.39	75.44	82.83	122.20	-39.37	Peak	400	132	P
5	5775.00	7.35	89.40	96.75	200.00	-103.25	Average	400	132	P
6	5775.00	7.35	101.67	109.02	200.00	-90.98	Peak	400	132	P
7	5850.00	7.30	70.34	77.64	122.20	-44.56	Peak	400	132	P
8	5855.00	7.32	70.41	77.73	110.80	-33.07	Peak	400	132	P
9	5875.00	7.39	63.08	71.27	105.20	-33.93	Peak	400	132	P
10	5925.00	7.51	58.23	65.74	68.20	-2.46	Peak	400	132	P
11	11550.00	17.40	30.33	47.73	54.00	-6.27	Average	100	211	P
12	11550.00	17.40	42.47	59.87	74.00	-14.13	Peak	100	211	P
13	17325.00	26.49	39.92	66.41	68.20	-1.79	Peak	100	73	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11a CH144 6Mbps
Voltage : From POE(AC120V/60Hz)
Pol : Vertical

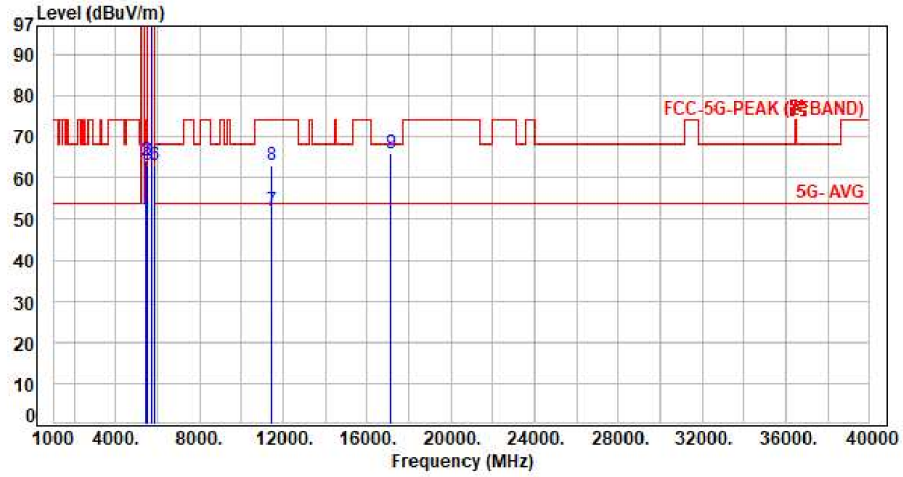

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5460.00	7.72	42.59	50.31	54.00	-3.69	Average	221	164	P
2	5460.00	7.72	56.35	64.07	74.00	-9.93	Peak	221	164	P
3	5470.00	7.72	55.44	63.16	68.20	-5.04	Peak	221	164	P
4	5720.00	7.39	96.49	103.88	200.00	-96.12	Average	221	164	P
5	5720.00	7.39	105.86	113.25	200.00	-86.75	Peak	221	164	P
6	5850.00	7.30	55.63	62.93	68.20	-5.27	Peak	221	164	P
7	11440.00	17.73	34.24	51.97	54.00	-2.03	Average	100	159	P
8	11440.00	17.73	45.16	62.89	74.00	-11.11	Peak	100	159	P
9	17160.00	25.52	40.54	66.06	68.20	-2.14	Peak	100	260	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor