


EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

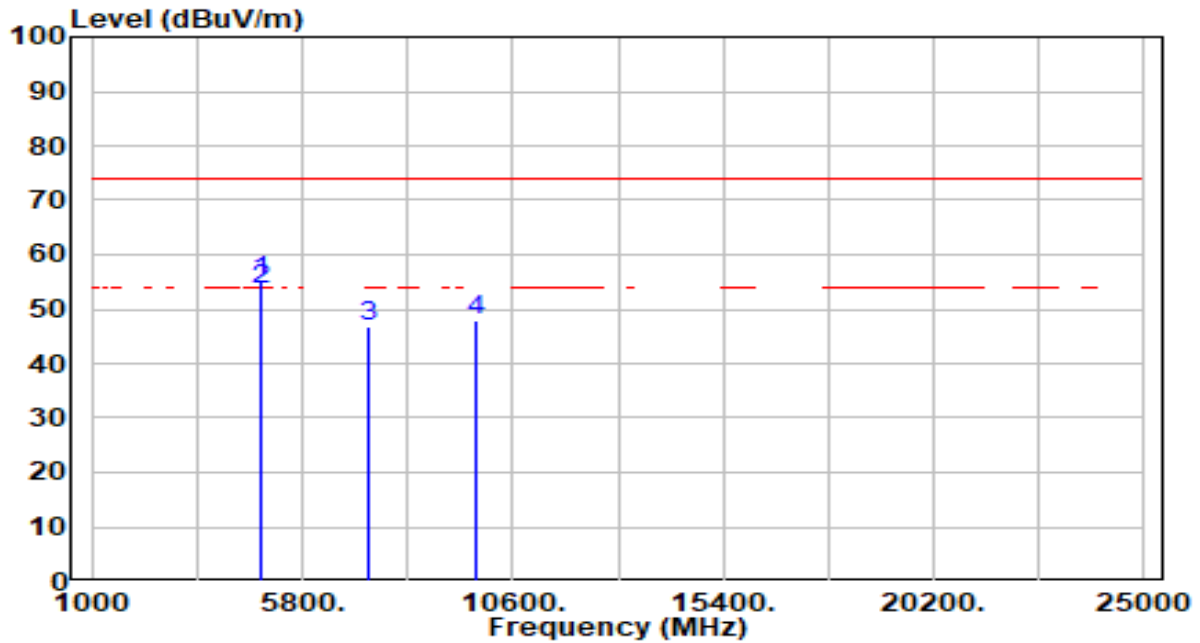


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	53.77	1.21	54.98	-19.02	74.00	201	253	Peak
2	*	4874.000	52.42	1.21	53.63	-0.57	54.00	201	253	Average
3		7311.000	39.71	7.25	46.96	-27.04	74.00	100	349	Peak
4		9748.000	41.01	6.85	47.86	-26.14	74.00	201	253	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

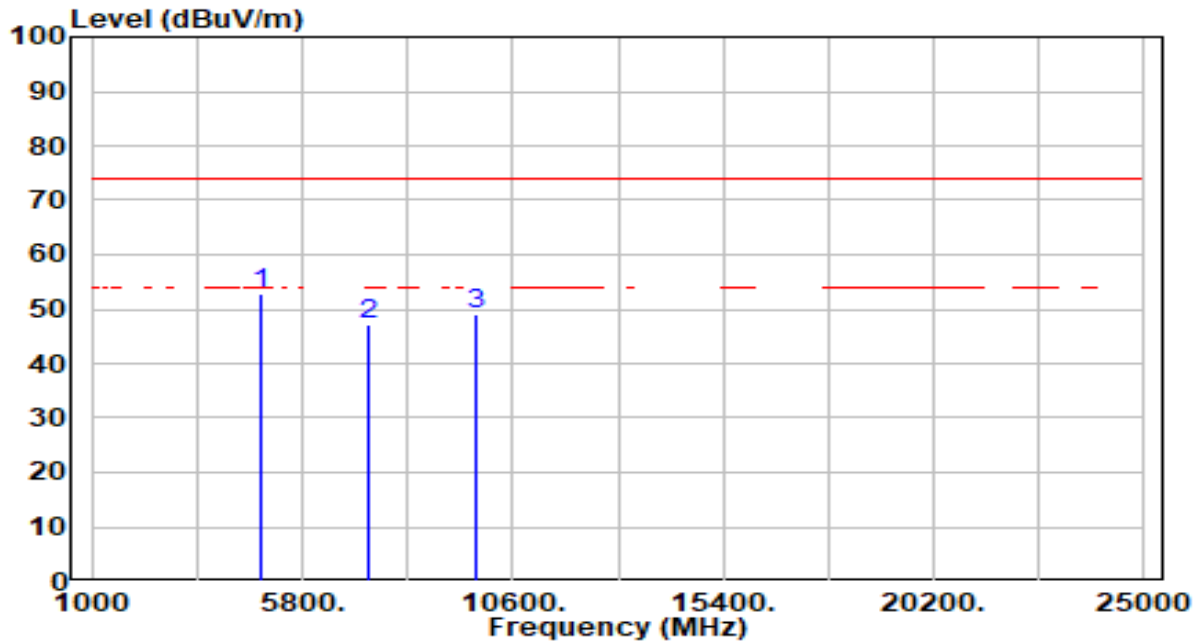


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	51.60	1.21	52.81	-21.19	74.00	200	248	Peak
2		7311.000	39.75	7.25	46.99	-27.01	74.00	200	167	Peak
3		9748.000	42.02	6.85	48.87	-25.13	74.00	200	274	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

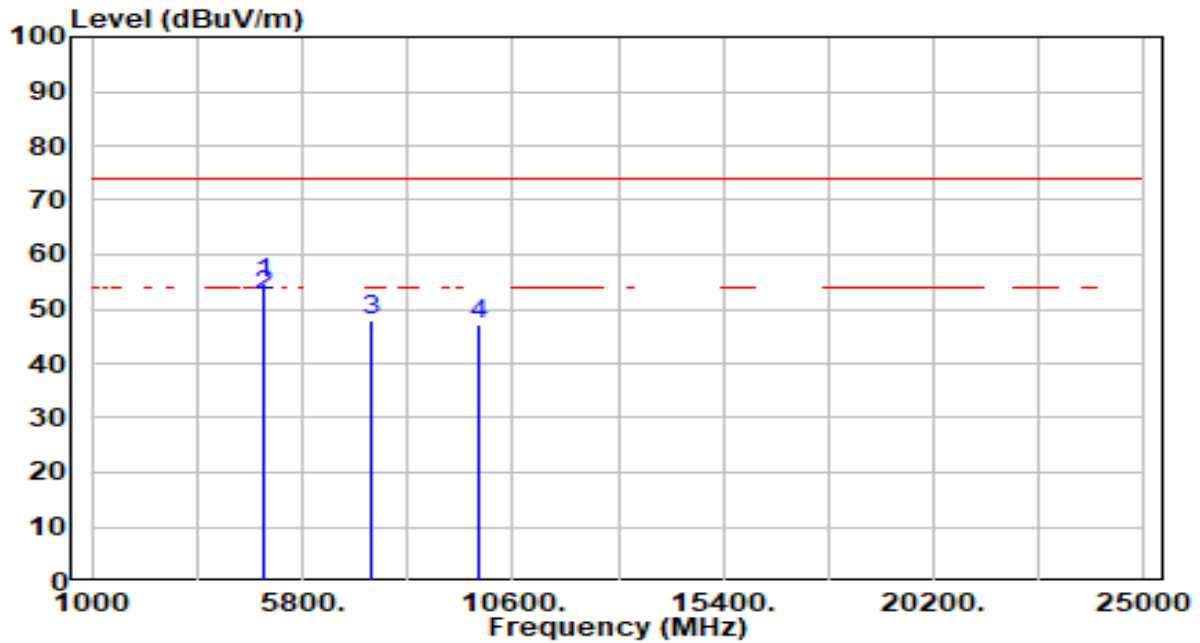


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	53.50	1.35	54.85	-19.15	74.00	200	336	Peak
2	*	4924.000	51.20	1.35	52.55	-1.45	54.00	200	336	Average
3		7386.000	40.82	7.25	48.06	-25.94	74.00	200	315	Peak
4		9848.000	40.36	6.93	47.30	-26.70	74.00	200	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

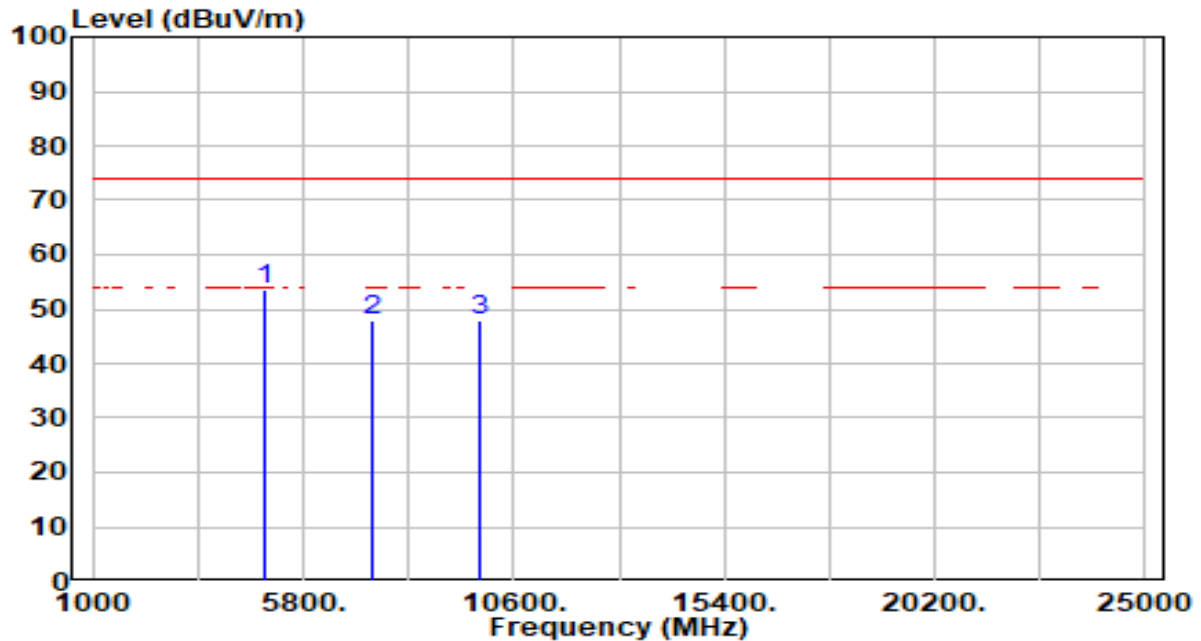


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	52.26	1.35	53.62	-20.38	74.00	200	241	Peak
2		7386.000	40.52	7.25	47.77	-26.23	74.00	100	100	Peak
3		9848.000	41.08	6.93	48.01	-25.99	74.00	100	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

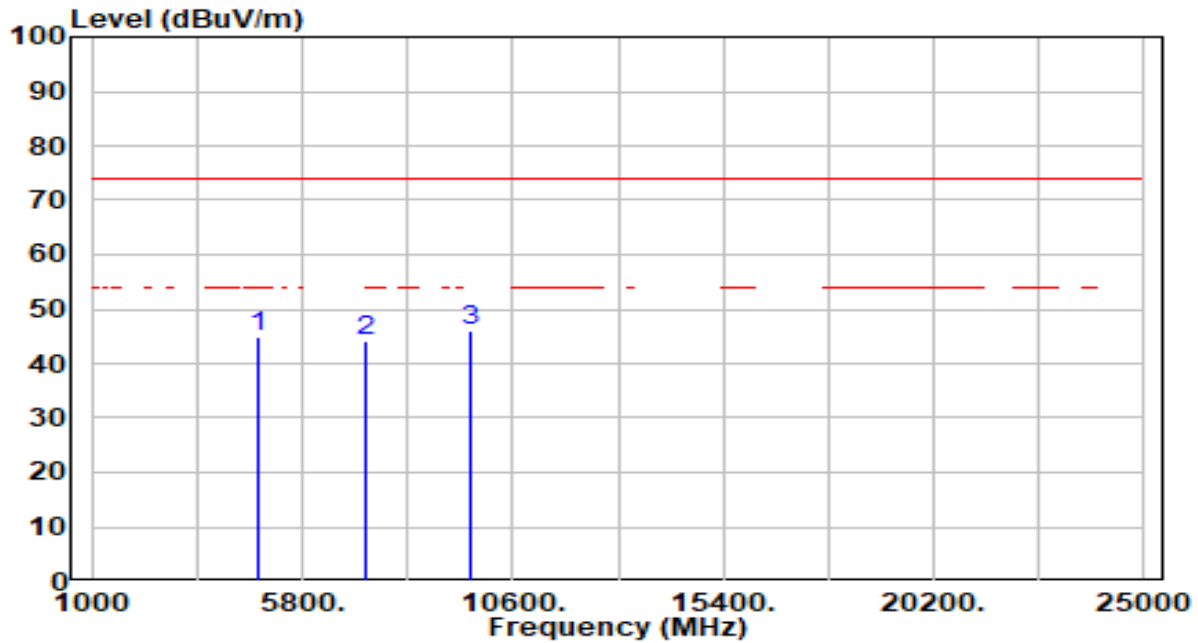


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4824.000	43.97	1.10	45.07	-28.93	74.00	200	244	Peak
2		7236.000	37.11	7.22	44.33	-29.67	74.00	100	255	Peak
3	*	9648.000	39.13	6.82	45.95	-28.05	74.00	100	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

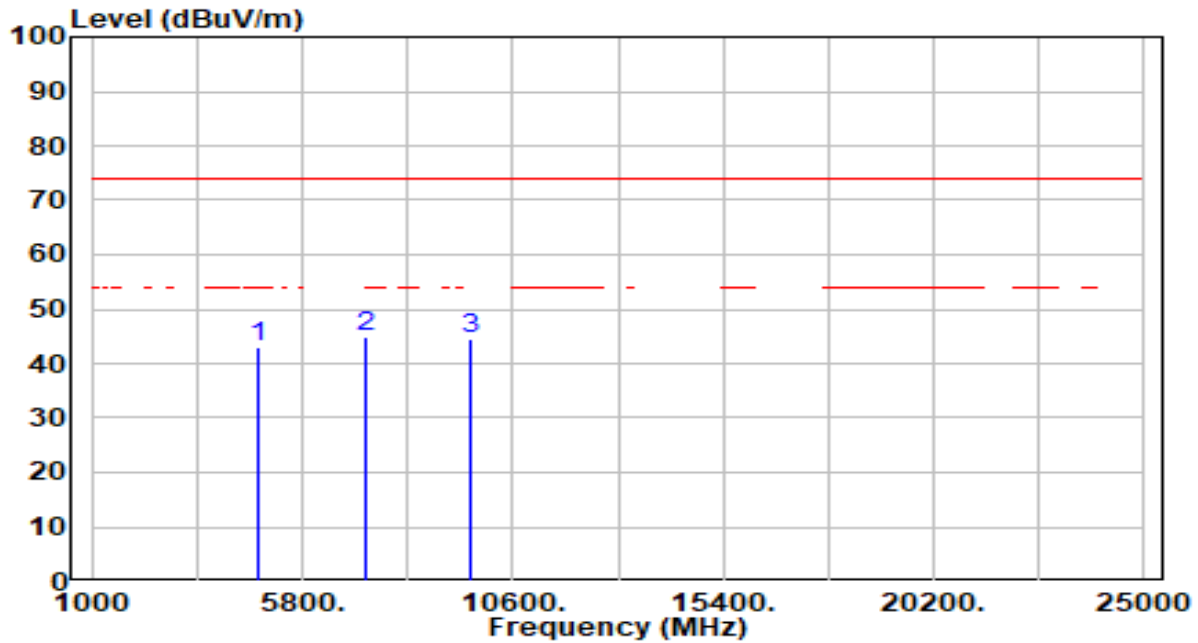


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.74	1.10	42.85	-31.15	74.00	200	230	Peak
2	* 7236.000	37.87	7.22	45.08	-28.92	74.00	100	42	Peak
3	9648.000	37.66	6.82	44.48	-29.52	74.00	100	309	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

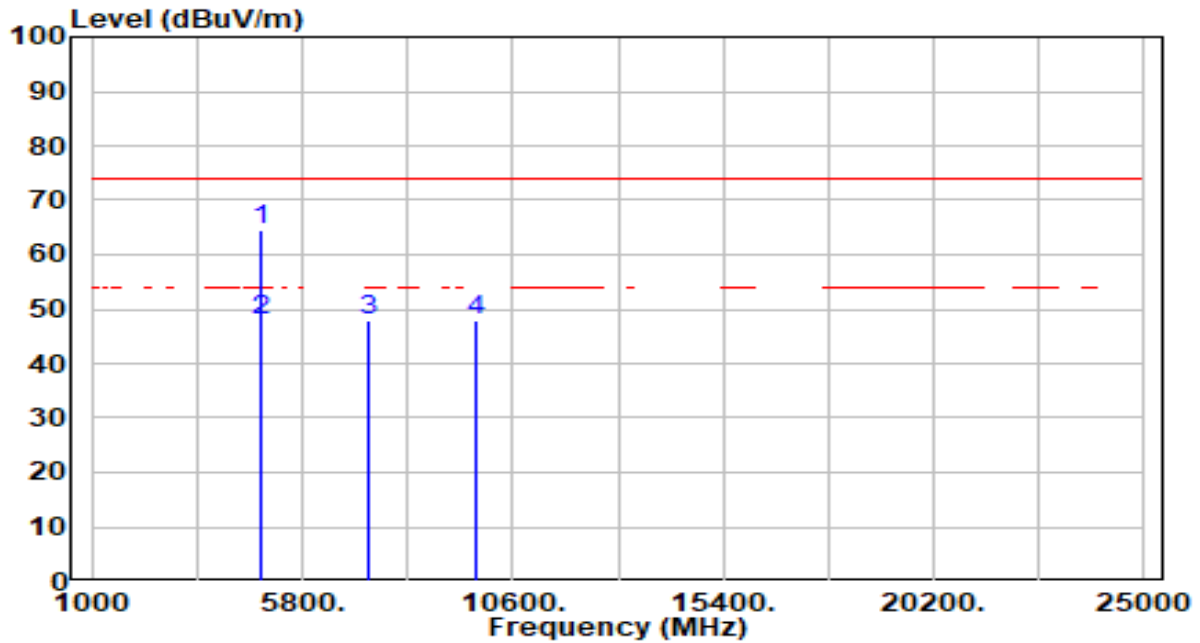


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	63.44	1.21	64.65	-9.35	74.00	200	252	Peak
2	*	4874.000	46.78	1.21	47.99	-6.01	54.00	200	252	Average
3		7311.000	40.60	7.25	47.85	-26.15	74.00	100	274	Peak
4		9748.000	41.03	6.85	47.89	-26.11	74.00	100	68	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

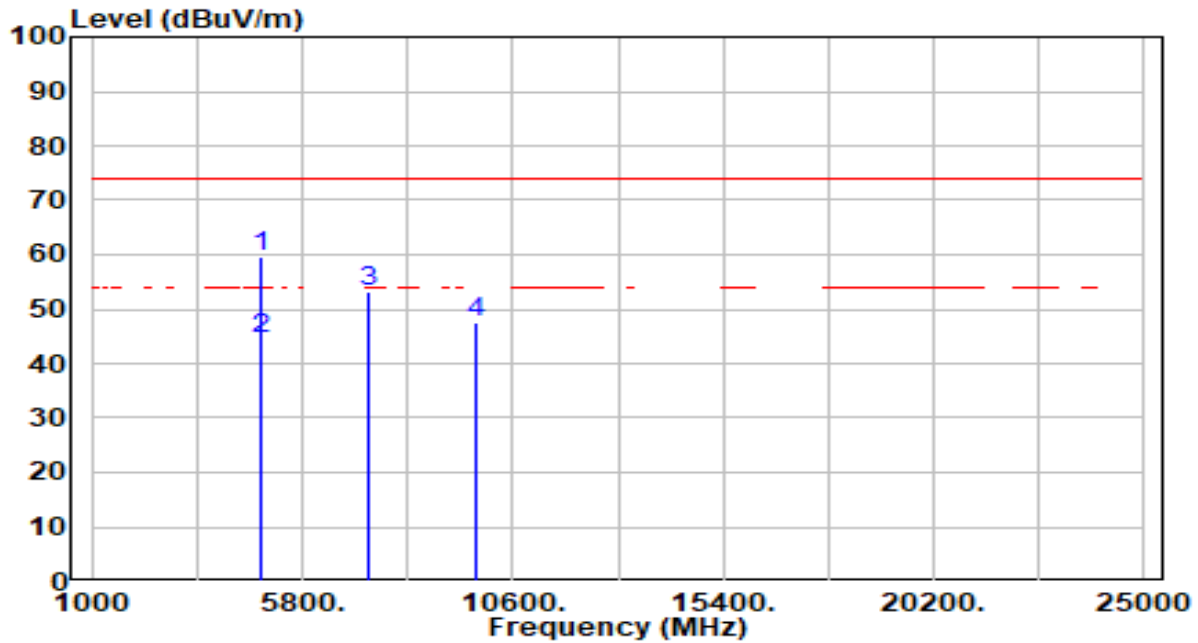


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	58.43	1.21	59.64	-14.36	74.00	174	54	Peak
2	*	4874.000	43.42	1.21	44.63	-9.37	54.00	174	54	Average
3		7311.000	45.84	7.25	53.09	-20.91	74.00	189	360	Peak
4		9748.000	40.84	6.85	47.69	-26.31	74.00	100	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

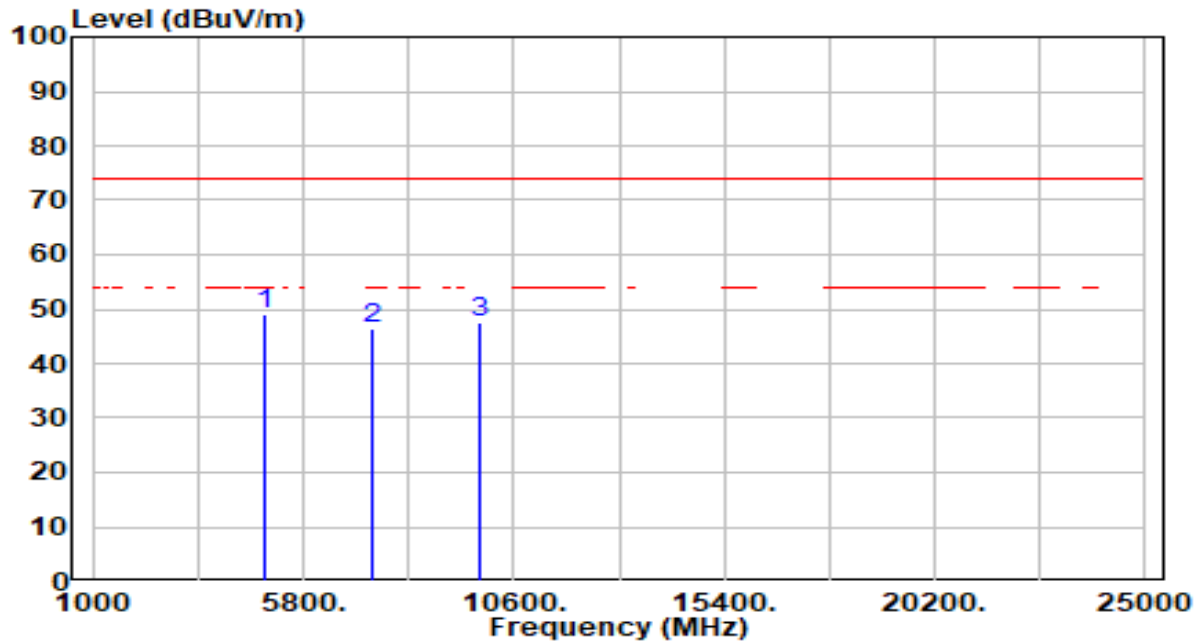


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4924.000	47.53	1.35	48.89	-25.11	74.00	200	232	Peak
2		7386.000	39.30	7.25	46.54	-27.46	74.00	200	215	Peak
3		9848.000	40.52	6.93	47.45	-26.55	74.00	100	22	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

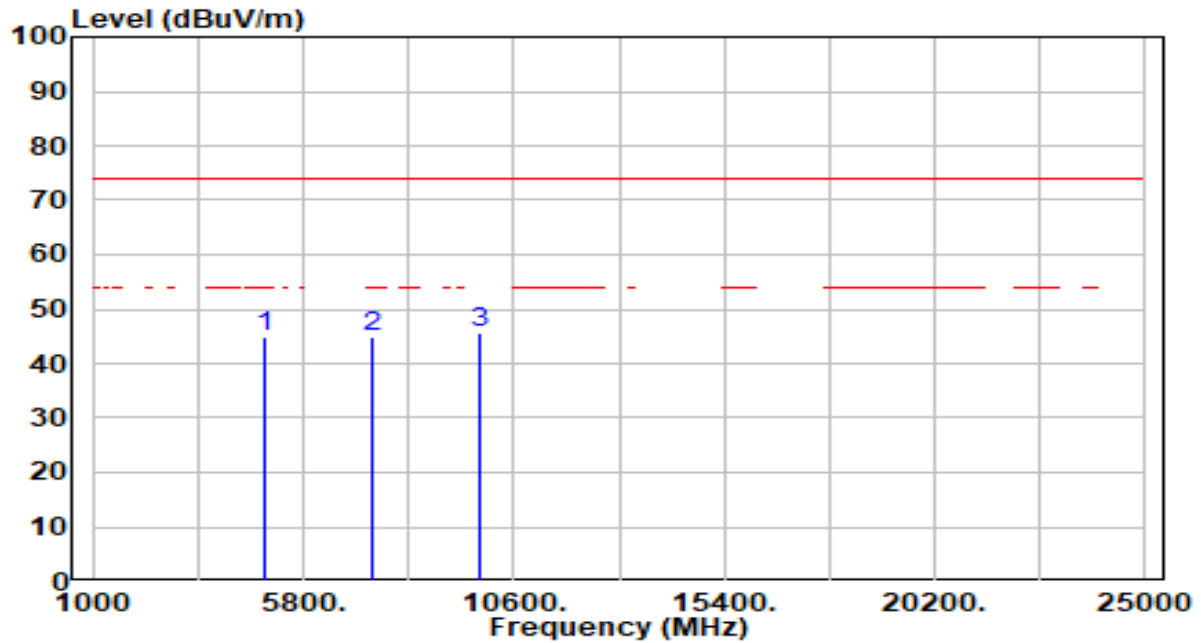


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	43.38	1.35	44.73	-29.27	74.00	100	41	Peak
2	7386.000	37.66	7.25	44.90	-29.10	74.00	100	233	Peak
3	* 9848.000	38.56	6.93	45.50	-28.50	74.00	200	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

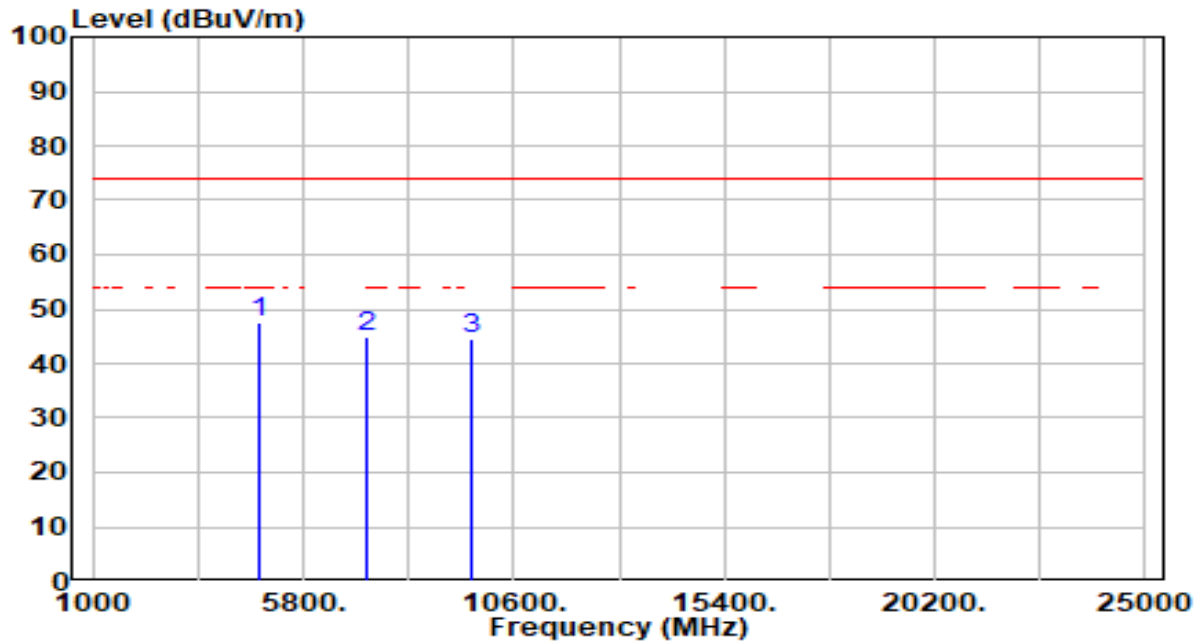


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	46.44	1.10	47.54	-26.46	74.00	200	229	Peak
2		7236.000	37.87	7.22	45.09	-28.91	74.00	200	51	Peak
3		9648.000	37.89	6.82	44.71	-29.29	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

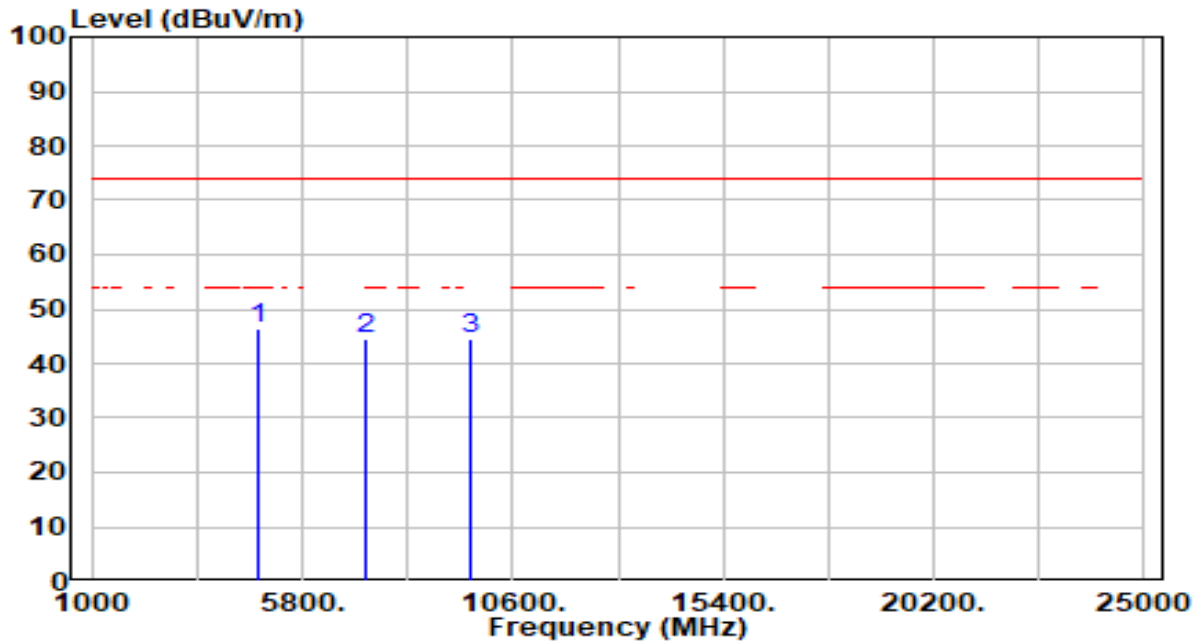


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	45.22	1.10	46.32	-27.68	74.00	200	244	Peak
2		7236.000	37.49	7.22	44.71	-29.29	74.00	200	258	Peak
3		9648.000	37.86	6.82	44.68	-29.32	74.00	200	74	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

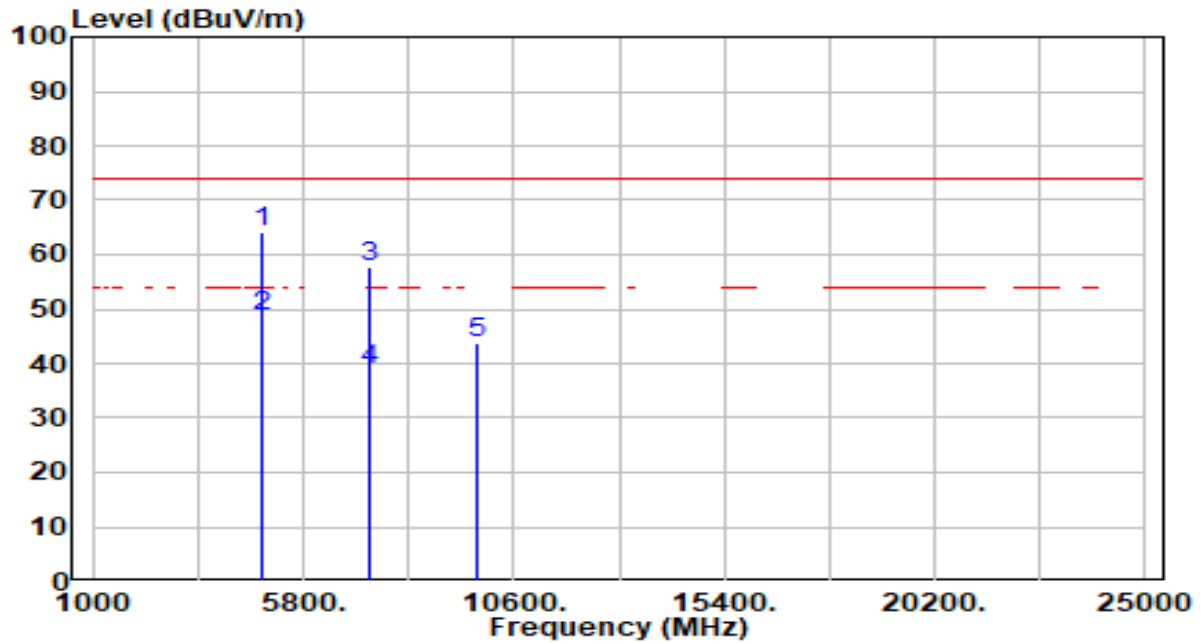


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	63.03	1.21	64.24	-9.76	74.00	200	246	Peak
2	*	4874.000	47.60	1.21	48.81	-5.19	54.00	200	246	Average
3		7311.000	50.52	7.25	57.77	-16.23	74.00	200	12	Peak
4		7311.000	31.63	7.25	38.88	-15.12	54.00	200	12	Average
5		9748.000	37.09	6.85	43.94	-30.06	74.00	200	352	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

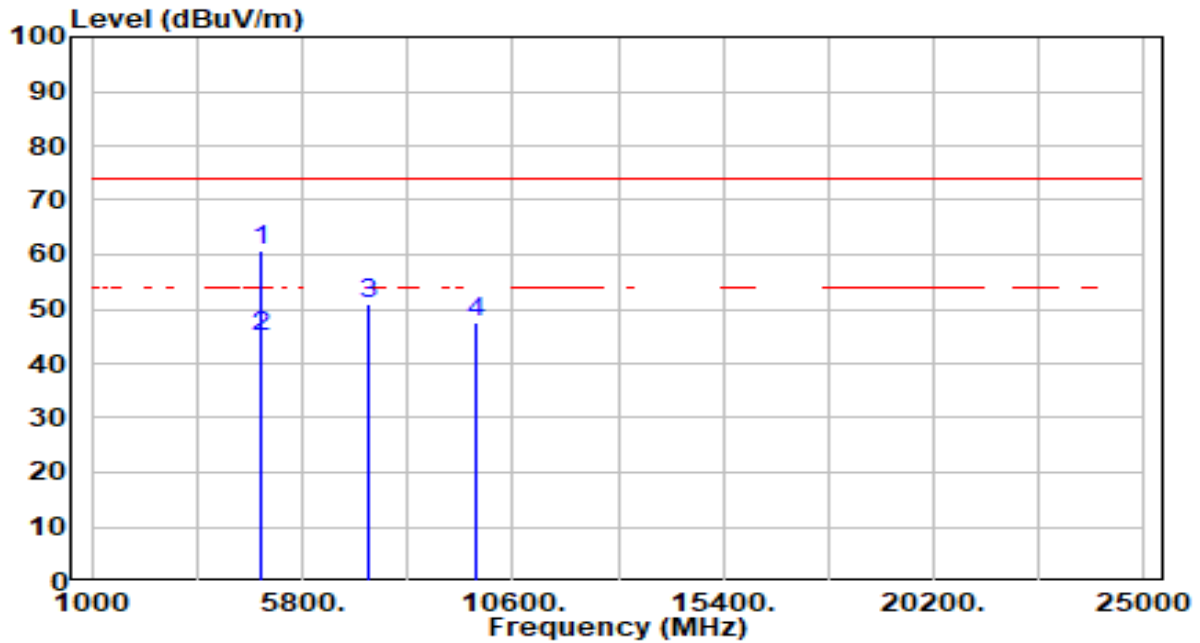


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	59.62	1.21	60.83	-13.17	74.00	200	57	Peak
2	*	4874.000	43.73	1.21	44.94	-9.06	54.00	200	57	Average
3		7311.000	43.65	7.25	50.89	-23.11	74.00	200	338	Peak
4		9748.000	40.86	6.85	47.71	-26.29	74.00	200	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

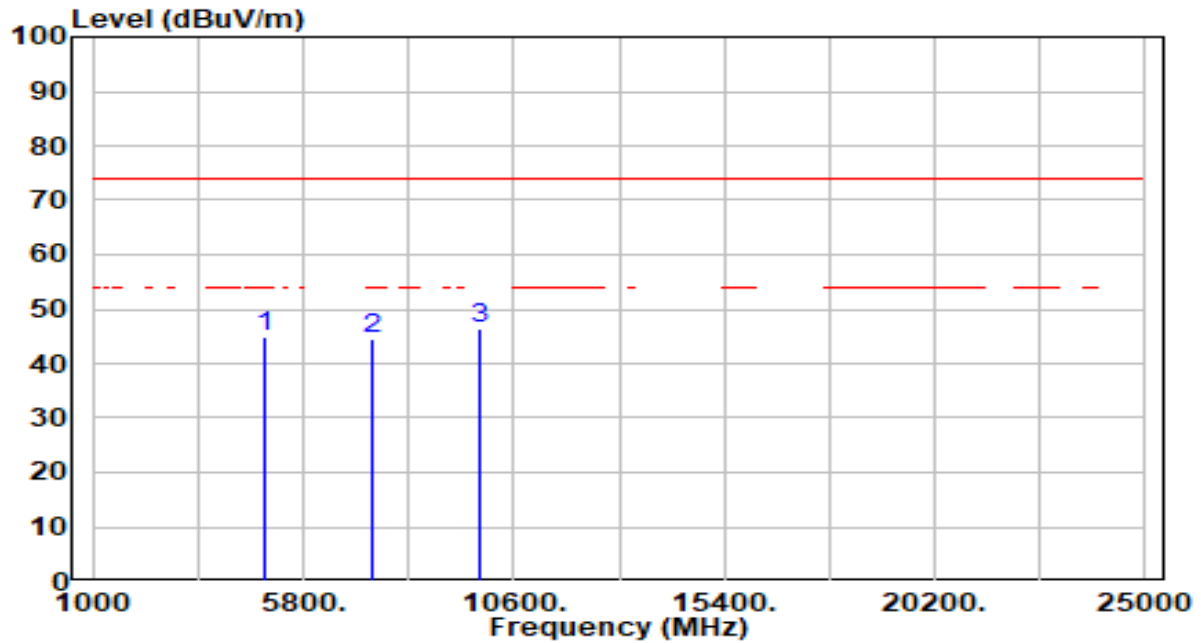


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	43.66	1.35	45.01	-28.99	74.00	200	233	Peak
2	7386.000	37.23	7.25	44.48	-29.52	74.00	200	116	Peak
3	* 9848.000	39.42	6.93	46.35	-27.65	74.00	200	99	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

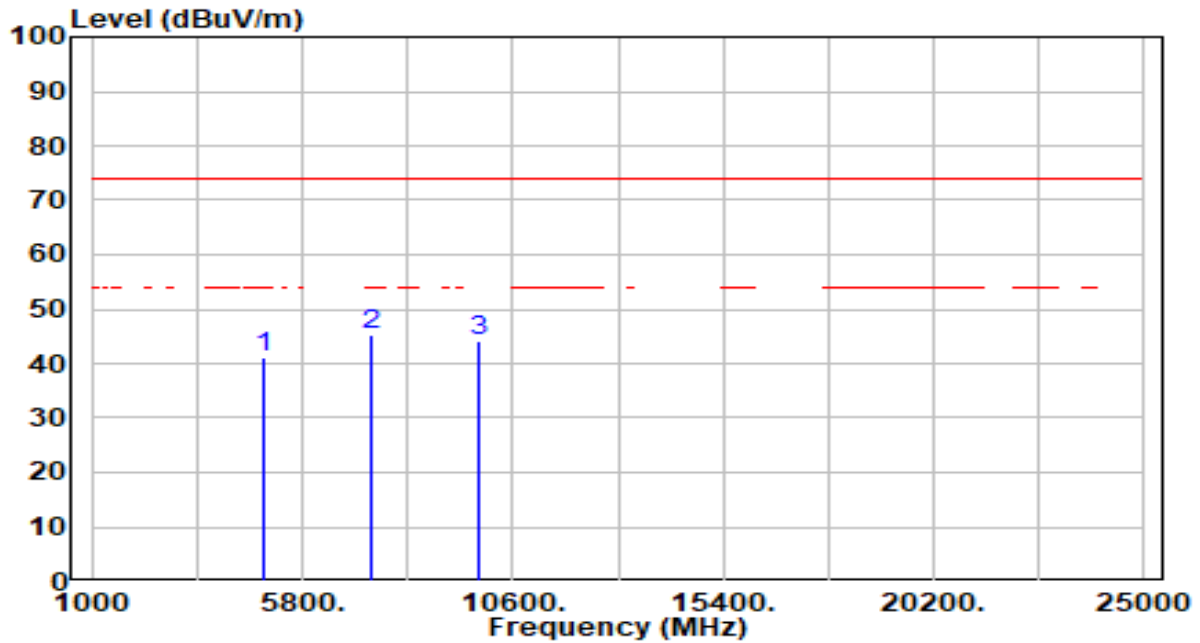


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	39.94	1.35	41.29	-32.71	74.00	200	306	Peak
2	*	7386.000	38.12	7.25	45.37	-28.63	74.00	200	280	Peak
3		9848.000	37.13	6.93	44.06	-29.94	74.00	200	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

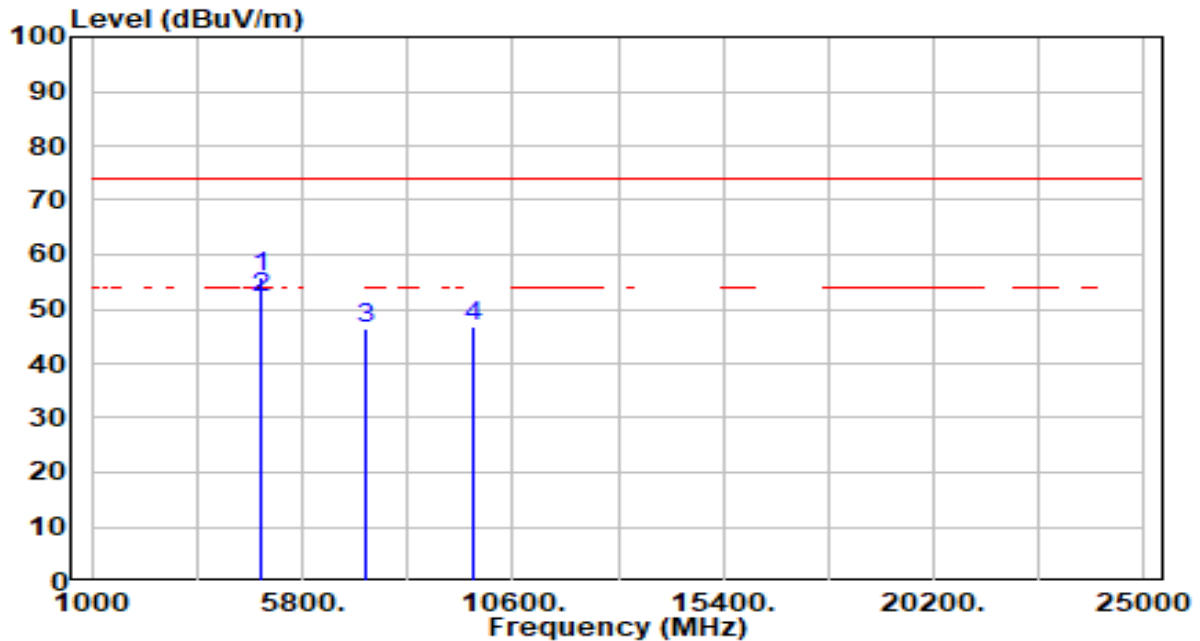


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4844.000	54.63	1.15	55.78	-18.22	74.00	200	93	Peak
2	*	4844.000	50.93	1.15	52.08	-1.92	54.00	200	93	Average
3		7266.000	39.35	7.23	46.58	-27.42	74.00	200	299	Peak
4		9688.000	40.10	6.80	46.91	-27.09	74.00	200	276	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

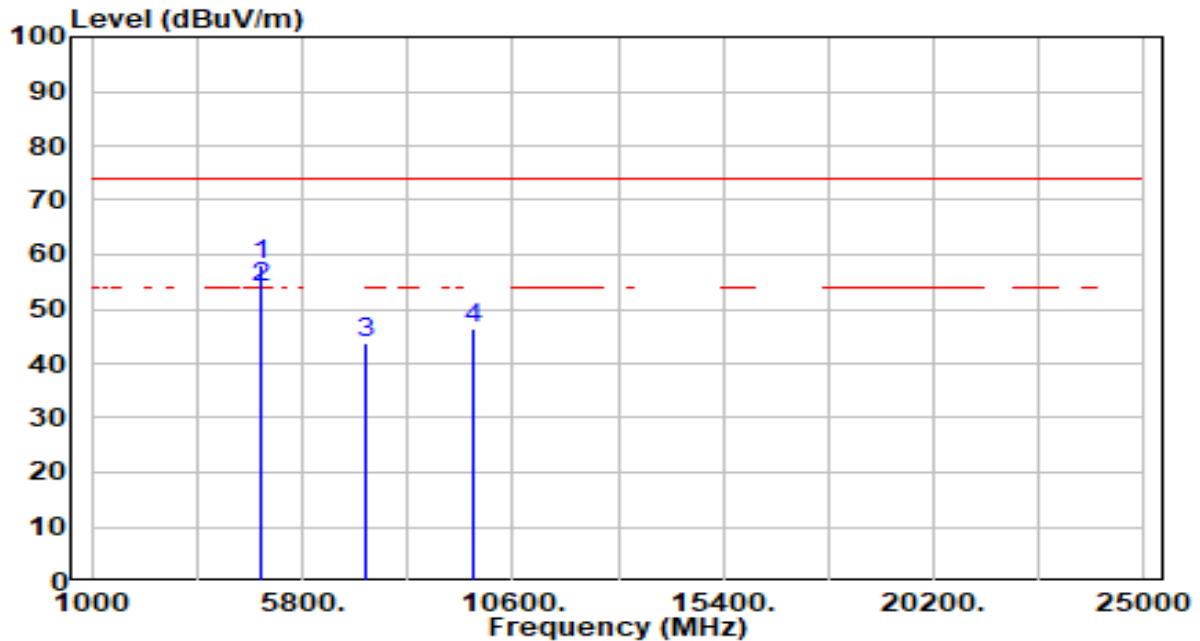


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4844.000	56.96	1.15	58.11	-15.89	74.00	200	75	Peak
2	*	4844.000	52.78	1.15	53.93	-0.07	54.00	200	75	Average
3		7266.000	36.44	7.23	43.68	-30.32	74.00	200	21	Peak
4		9688.000	39.64	6.80	46.44	-27.56	74.00	200	168	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

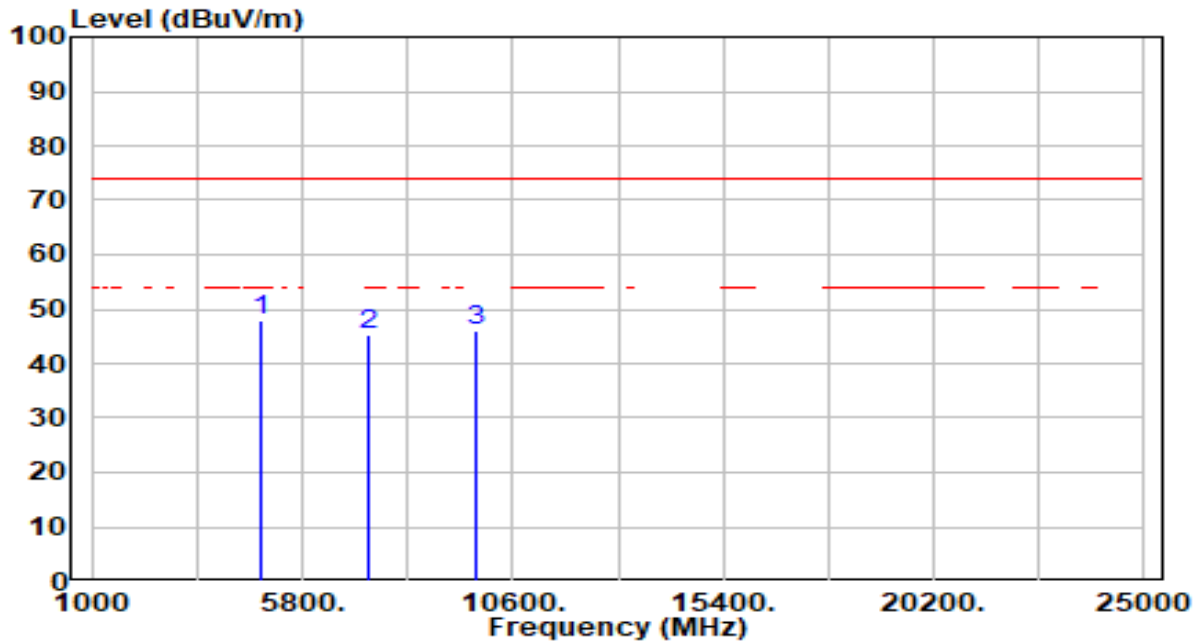


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	46.54	1.21	47.75	-26.25	74.00	200	256	Peak
2		7311.000	37.95	7.25	45.20	-28.80	74.00	200	46	Peak
3		9748.000	39.17	6.85	46.02	-27.98	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

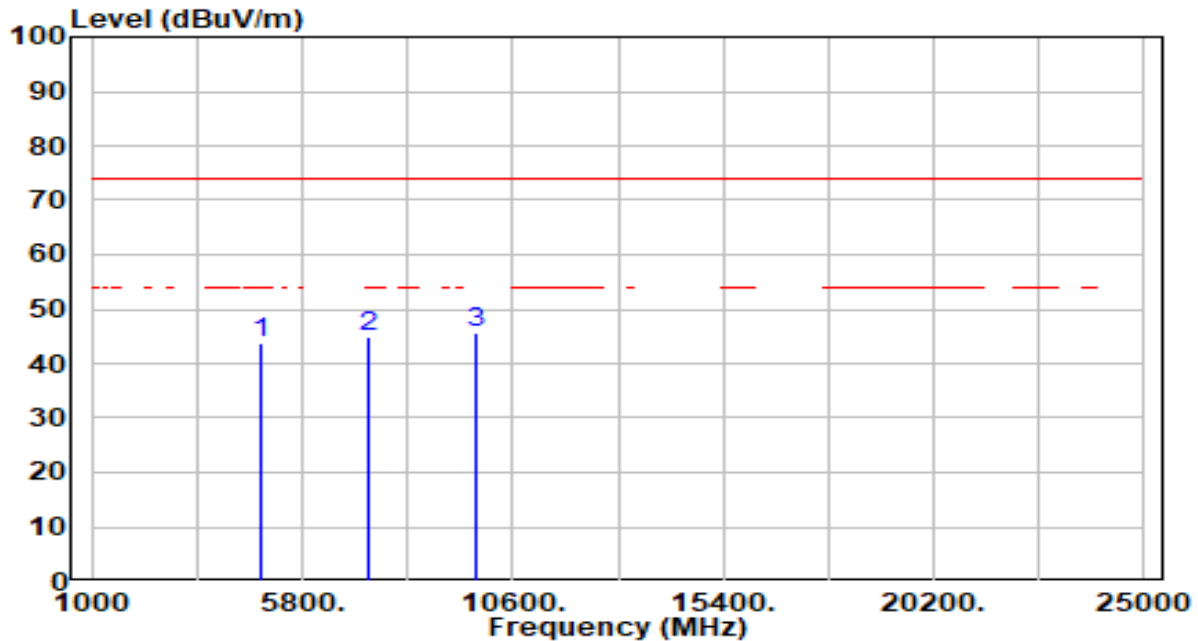


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.69	1.21	43.90	-30.10	74.00	200	45	Peak
2	7311.000	37.72	7.25	44.97	-29.03	74.00	200	331	Peak
3	* 9748.000	38.91	6.85	45.76	-28.24	74.00	200	89	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

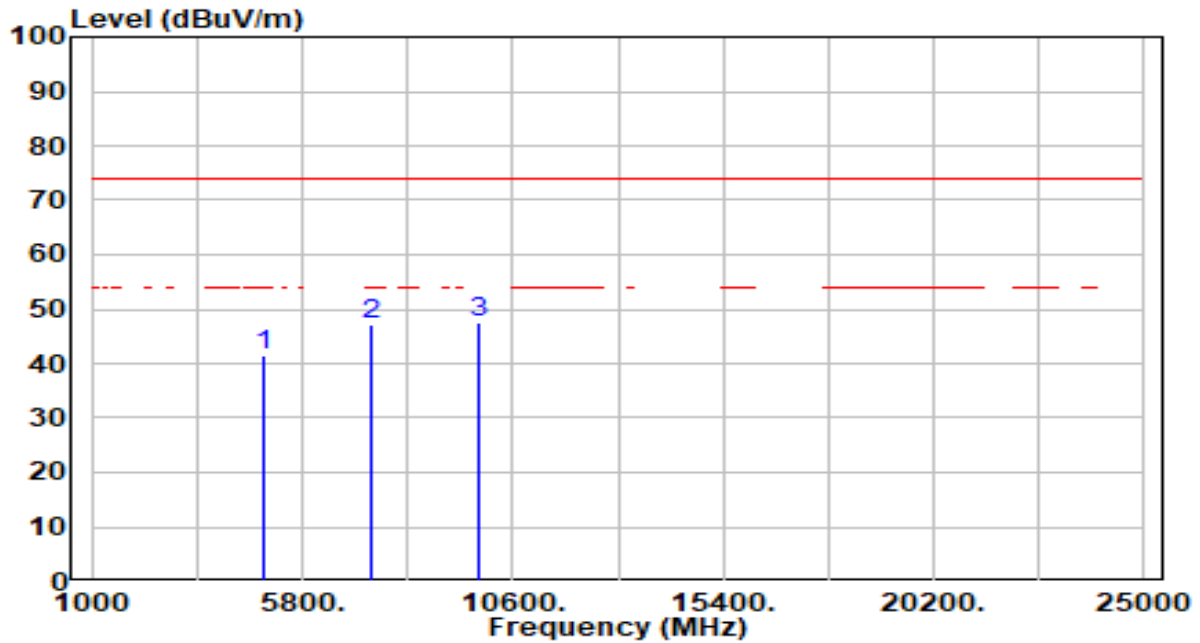


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	40.30	1.28	41.58	-32.42	74.00	100	224	Peak
2		7356.000	39.79	7.25	47.04	-26.96	74.00	100	326	Peak
3	*	9808.000	40.63	6.91	47.54	-26.46	74.00	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11n-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

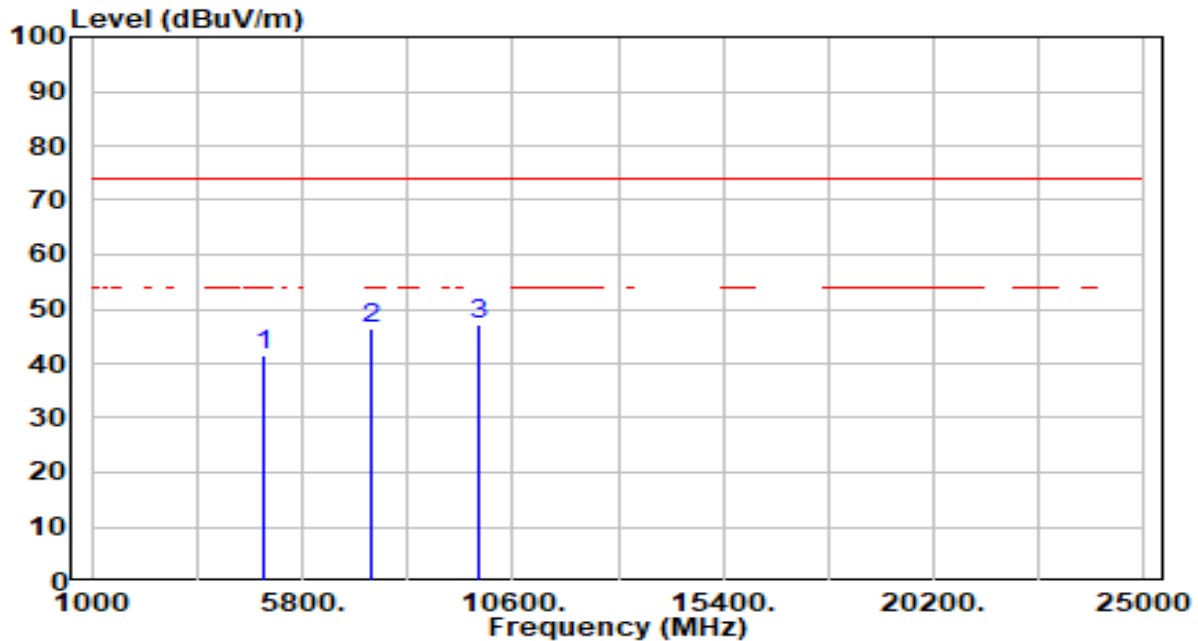


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	40.32	1.28	41.60	-32.40	74.00	100	65	Peak
2	7356.000	39.31	7.25	46.56	-27.44	74.00	100	337	Peak
3	* 9808.000	40.26	6.91	47.17	-26.83	74.00	100	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

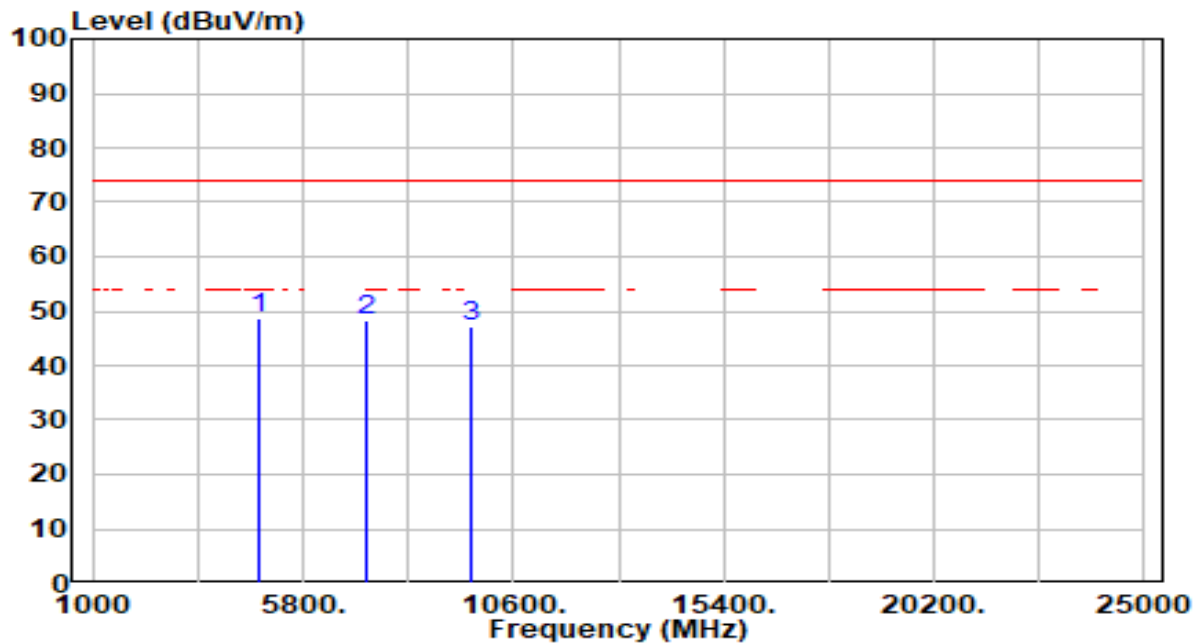


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	47.39	1.10	48.49	-25.51	74.00	100	0	Peak
2		7236.000	41.26	7.22	48.47	-25.53	74.00	100	179	Peak
3		9648.000	40.29	6.82	47.10	-26.90	74.00	100	279	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

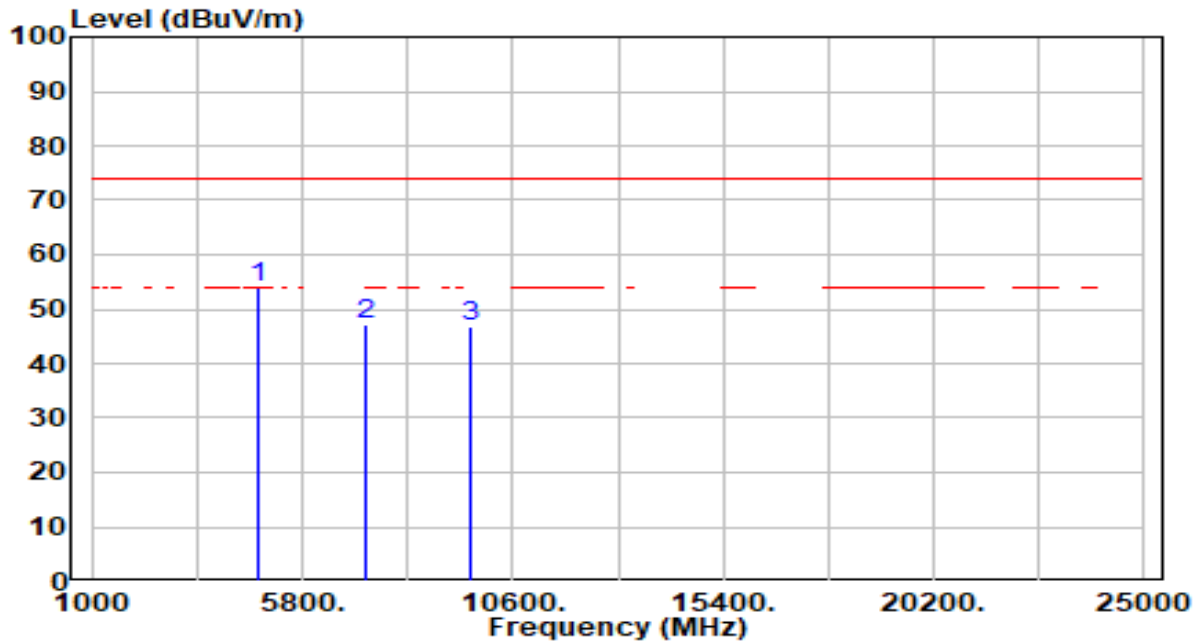


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4824.000	52.68	1.10	53.78	-20.22	74.00	100	66	Peak
2		7236.000	39.87	7.22	47.09	-26.91	74.00	100	312	Peak
3		9648.000	40.14	6.82	46.95	-27.05	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

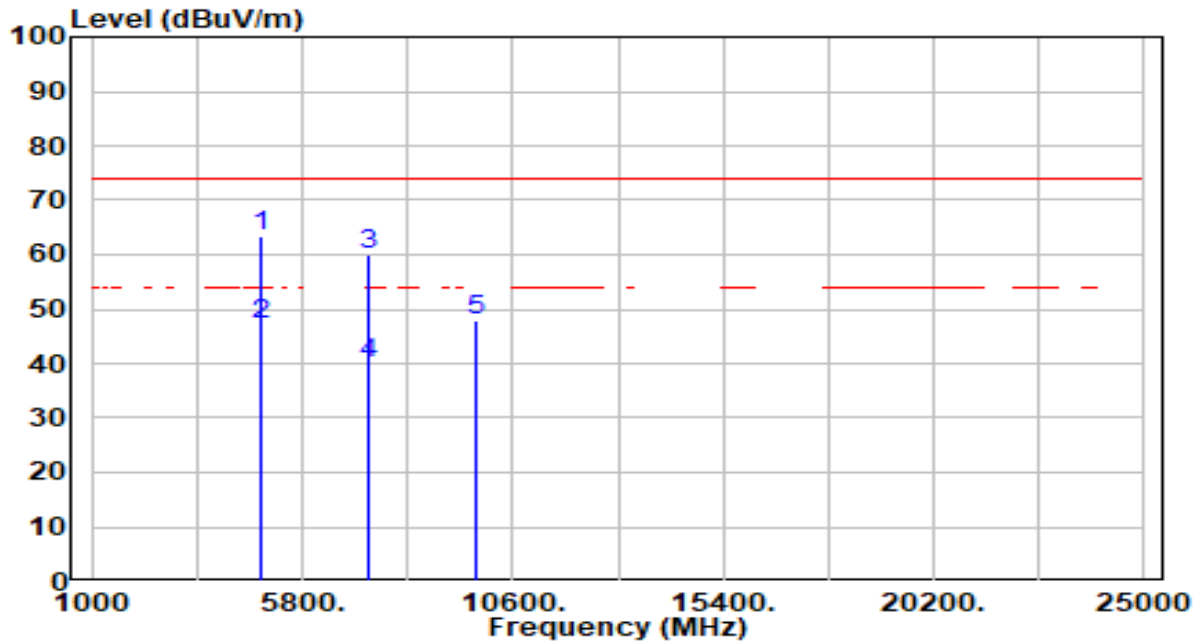


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	62.16	1.21	63.37	-10.63	74.00	166	224	Peak
2	*	4874.000	45.90	1.21	47.11	-6.89	54.00	166	224	Average
3		7311.000	52.92	7.25	60.17	-13.83	74.00	100	272	Peak
4		7311.000	32.74	7.25	39.99	-14.01	54.00	100	272	Average
5		9748.000	41.21	6.85	48.07	-25.93	74.00	100	186	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

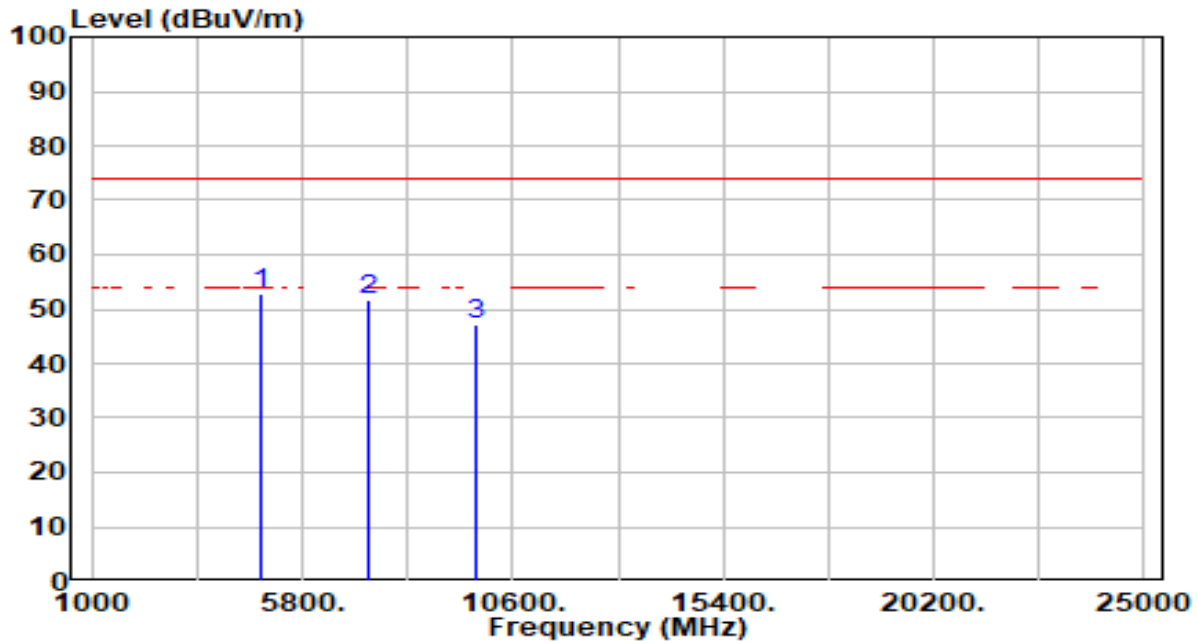


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4874.000	51.80	1.21	53.01	-20.99	74.00	100	75	Peak
2		7311.000	44.44	7.25	51.69	-22.31	74.00	100	47	Peak
3		9748.000	40.29	6.85	47.14	-26.86	74.00	100	272	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

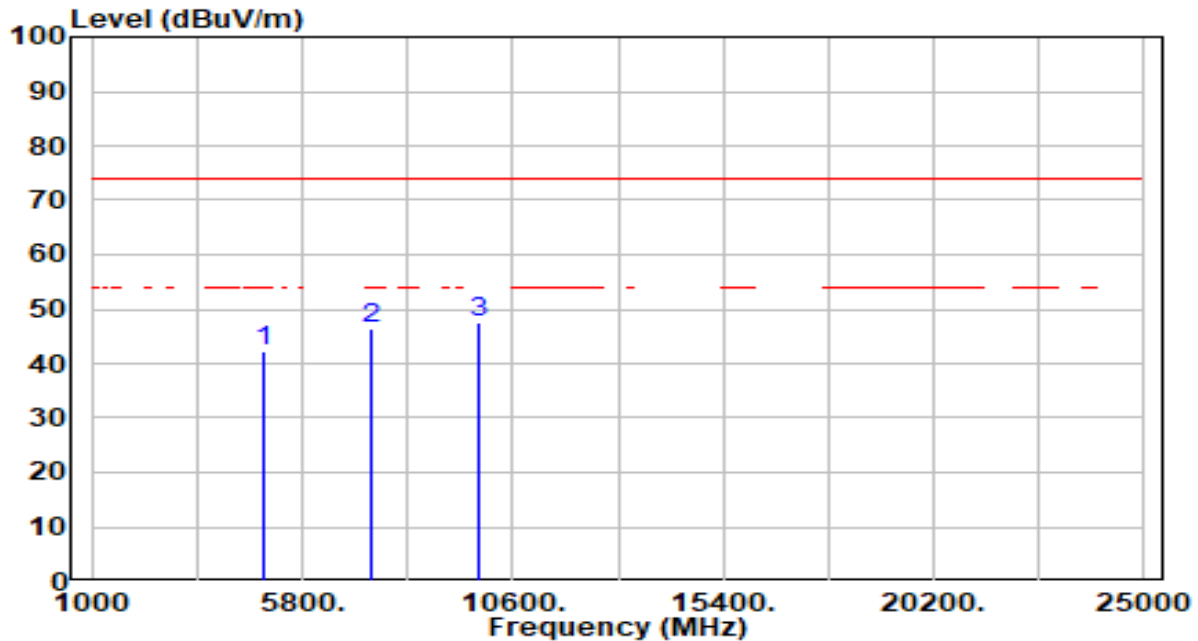


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	41.05	1.35	42.40	-31.60	74.00	100	209	Peak
2		7386.000	39.19	7.25	46.44	-27.56	74.00	100	40	Peak
3	*	9848.000	40.72	6.93	47.65	-26.35	74.00	100	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

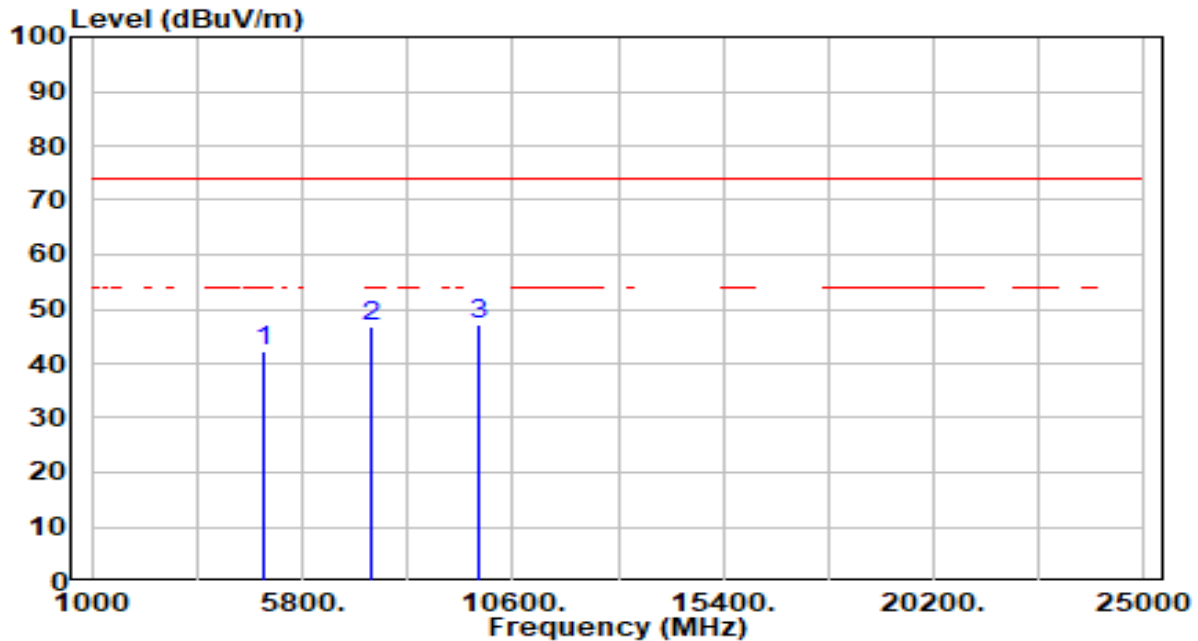


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4924.000	40.94	1.35	42.30	-31.70	74.00	100	63	Peak
2		7386.000	39.45	7.25	46.70	-27.30	74.00	100	309	Peak
3	*	9848.000	40.18	6.93	47.11	-26.89	74.00	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

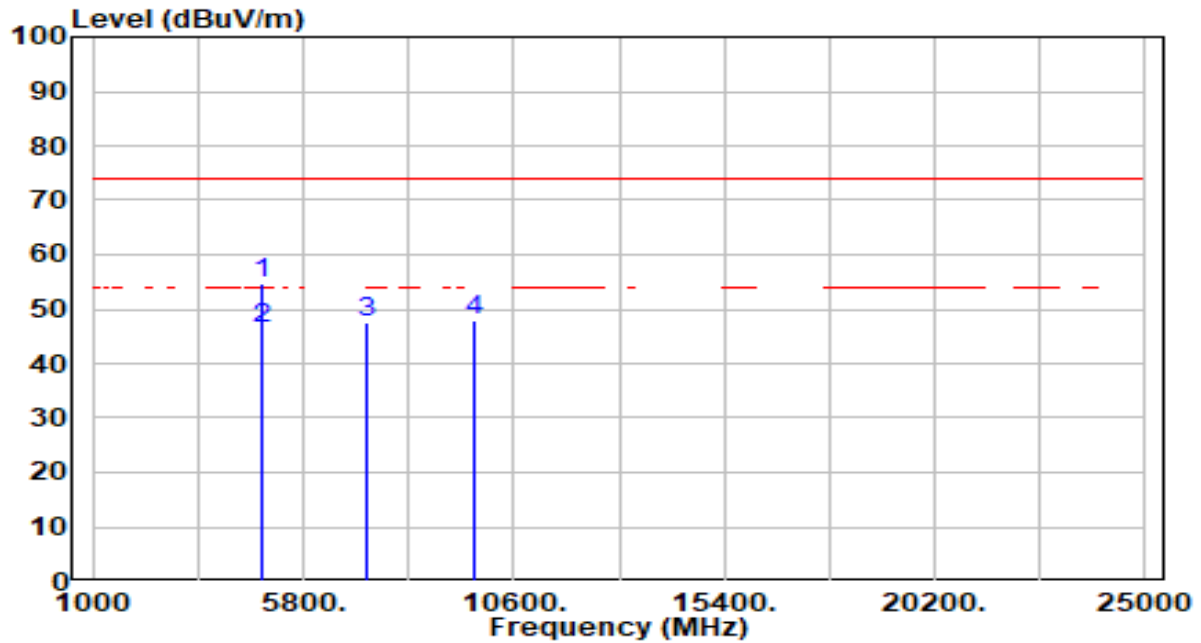


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4844.000	53.75	1.15	54.89	-19.11	74.00	100	80	Peak
2	*	4844.000	45.17	1.15	46.32	-7.68	54.00	100	80	Average
3		7266.000	40.25	7.23	47.48	-26.52	74.00	100	135	Peak
4		9688.000	40.94	6.80	47.74	-26.26	74.00	100	352	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

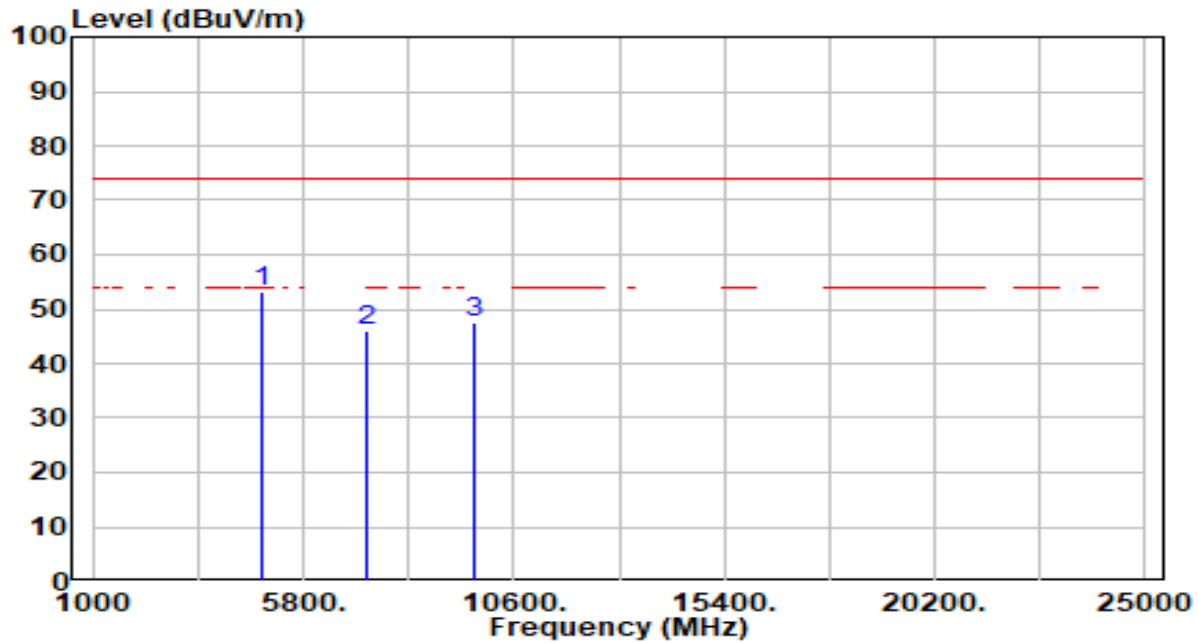


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	4844.000	52.08	1.15	53.22	-20.78	74.00	100	73	Peak
2		7266.000	38.85	7.23	46.08	-27.92	74.00	100	274	Peak
3		9688.000	40.57	6.80	47.37	-26.63	74.00	100	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

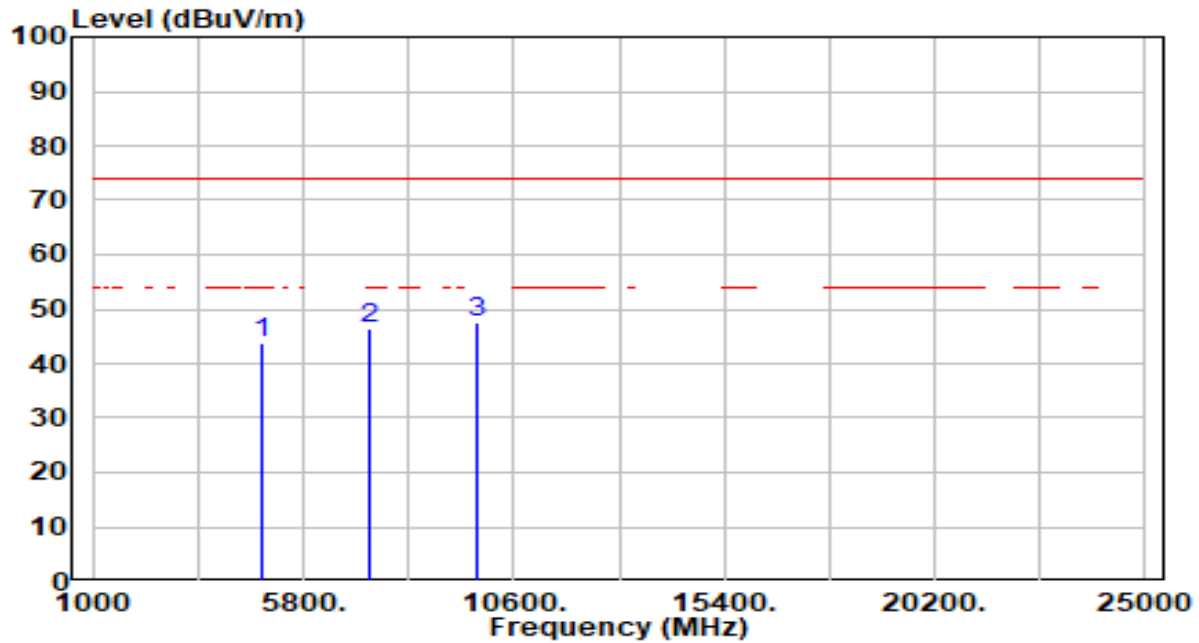


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.71	1.21	43.92	-30.08	74.00	100	280	Peak
2	7311.000	39.09	7.25	46.33	-27.67	74.00	100	235	Peak
3	* 9748.000	40.71	6.85	47.56	-26.44	74.00	100	59	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

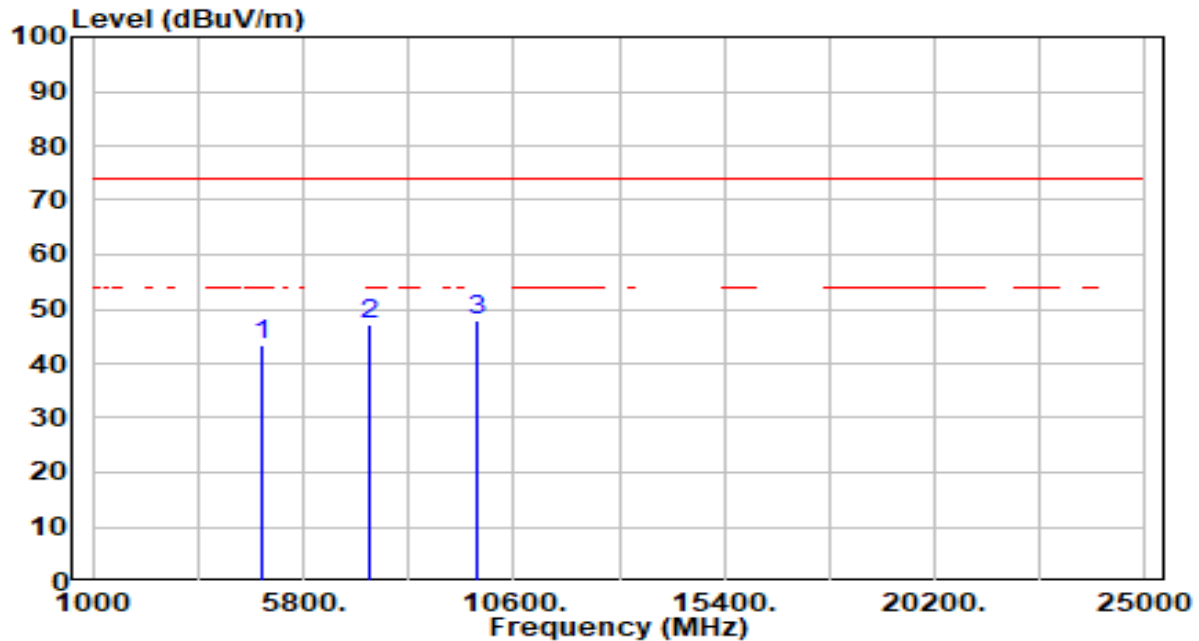


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	42.07	1.21	43.29	-30.71	74.00	100	73	Peak
2	7311.000	39.79	7.25	47.04	-26.96	74.00	100	50	Peak
3	* 9748.000	41.17	6.85	48.02	-25.98	74.00	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

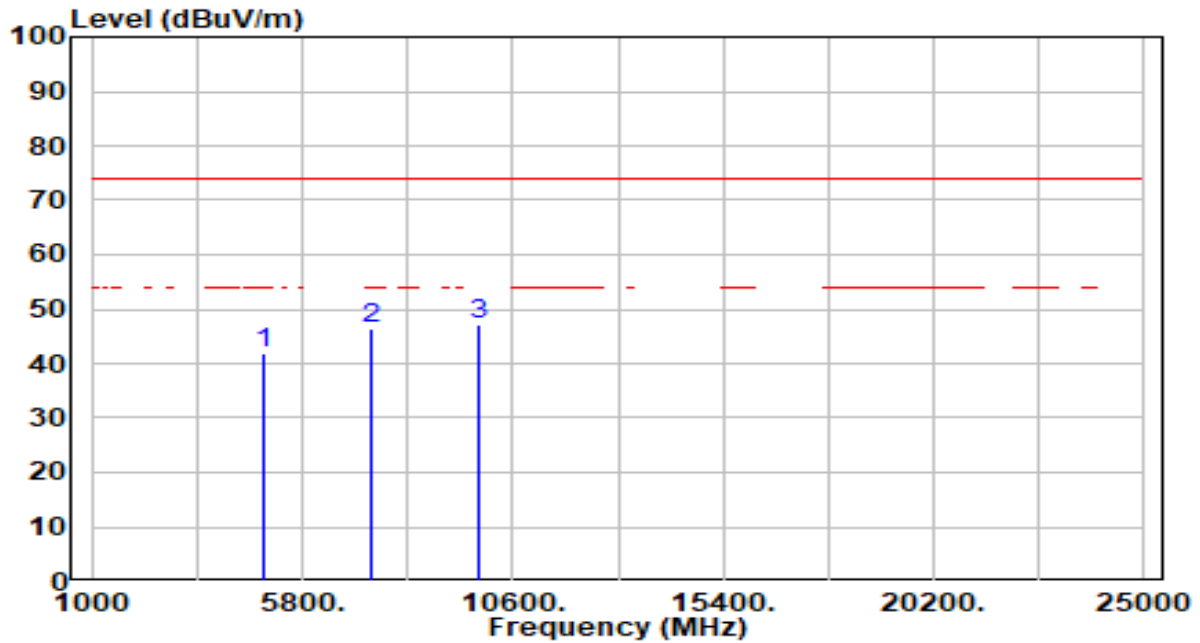


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	40.79	1.28	42.07	-31.93	74.00	100	205	Peak
2		7356.000	39.31	7.25	46.55	-27.45	74.00	100	0	Peak
3	*	9808.000	40.31	6.91	47.23	-26.77	74.00	100	101	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11ax-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

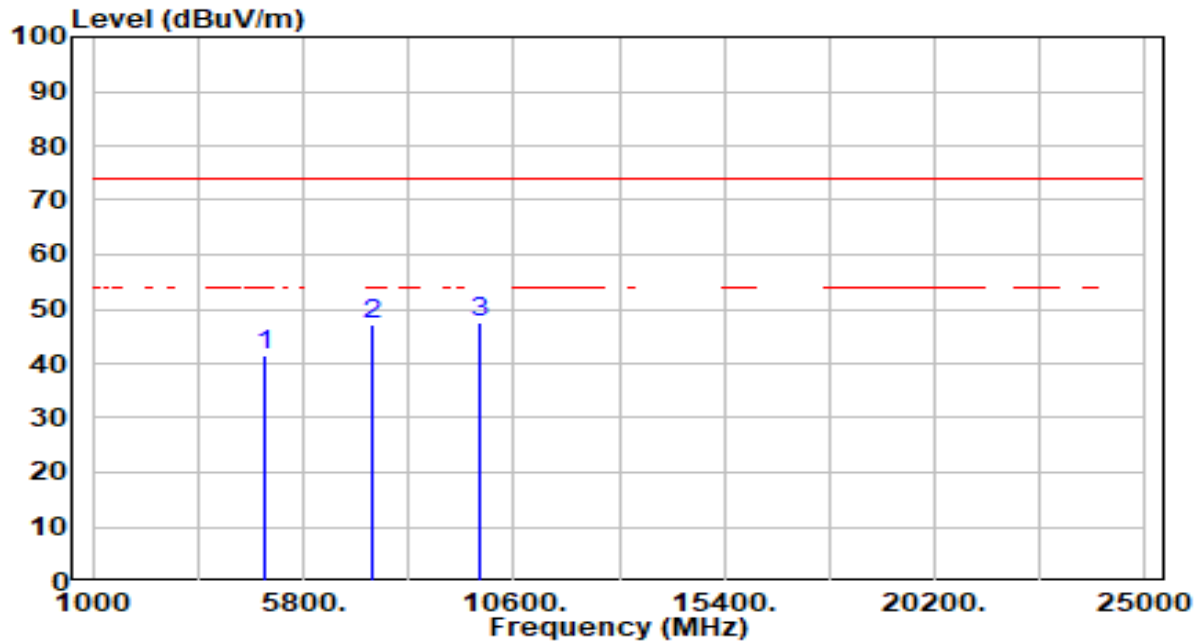

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4904.000	40.33	1.28	41.61	-32.39	74.00	100	81	Peak
2		7356.000	40.06	7.25	47.31	-26.69	74.00	100	107	Peak
3	*	9808.000	40.68	6.91	47.59	-26.41	74.00	100	124	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

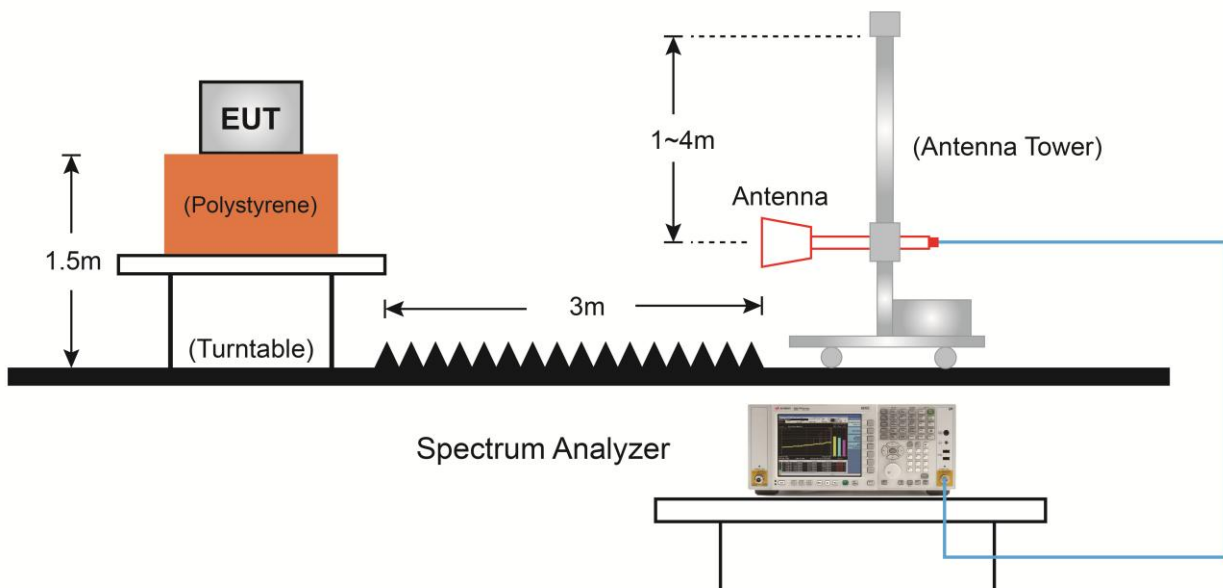7.7.4.Test Setup

7.7.5. Test Result

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

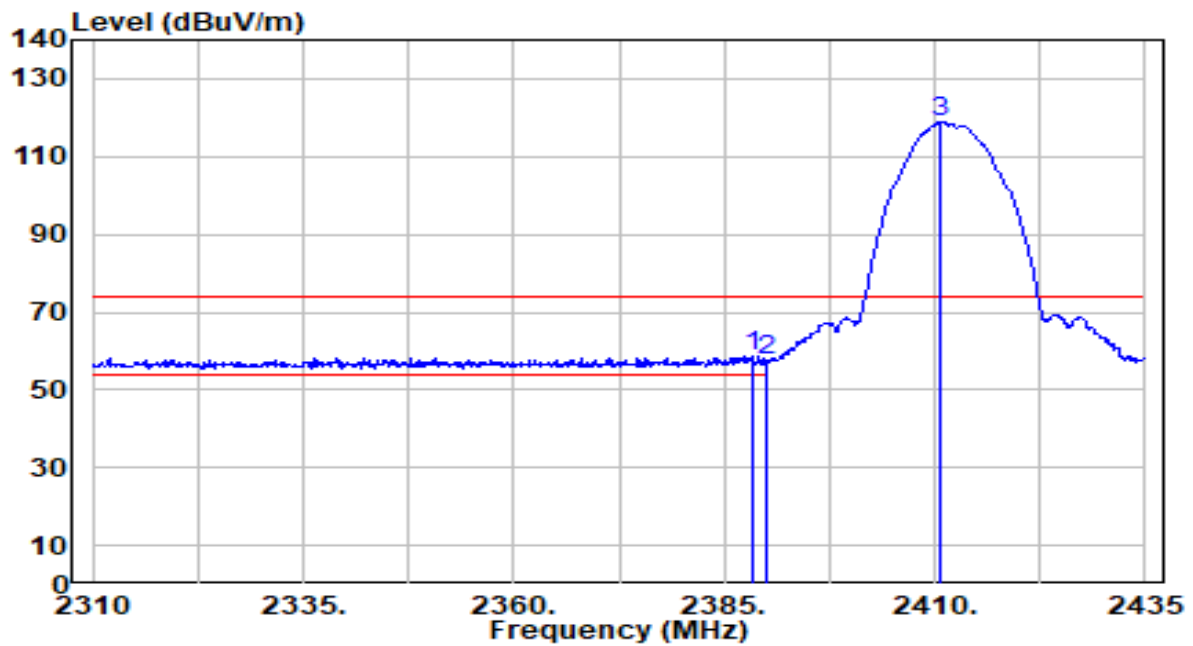


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.250	27.40	31.42	58.82	-15.18	74.00	164	179	Peak
2		2390.000	25.91	31.43	57.34	-16.66	74.00	164	179	Peak
3		2410.750	87.47	31.49	118.96	N/A	N/A	164	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

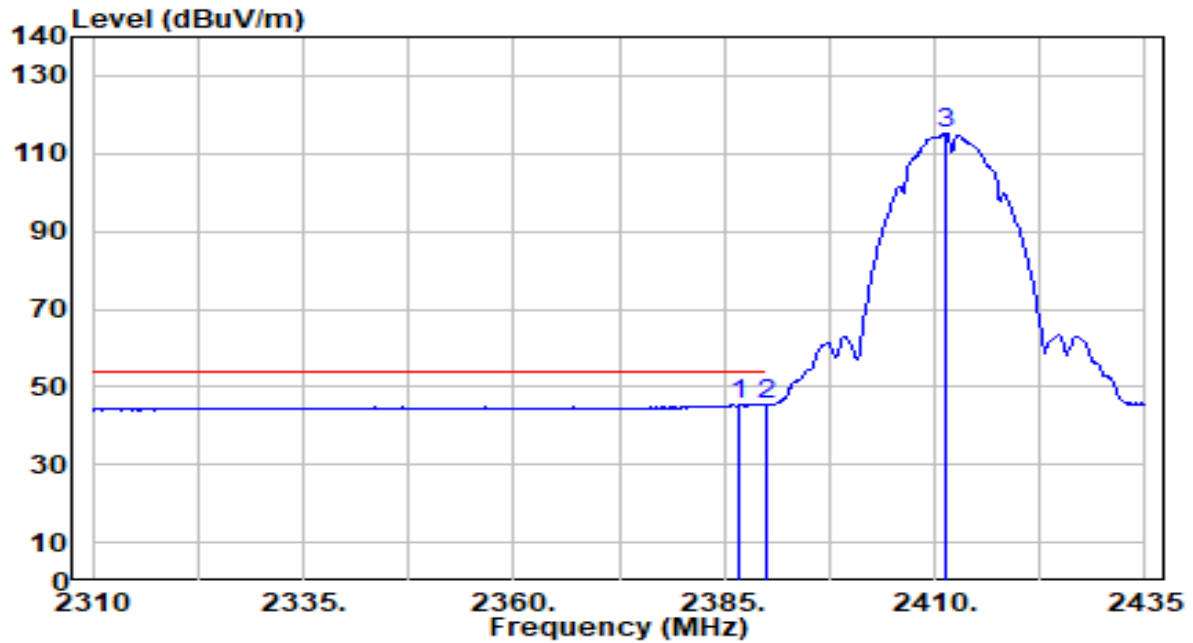


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.750	14.02	31.42	45.44	-8.56	54.00	164	179	Average
2		2390.000	13.78	31.43	45.21	-8.79	54.00	164	179	Average
3		2411.250	83.83	31.49	115.32	N/A	N/A	164	179	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

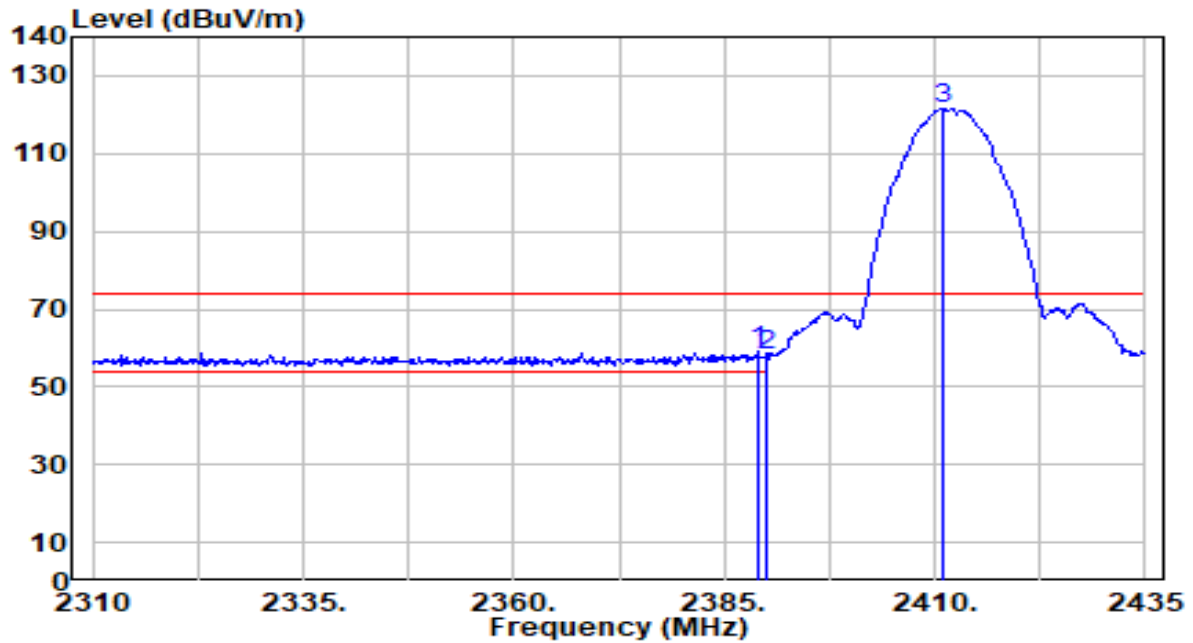


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	27.68	31.42	59.10	-14.90	74.00	100	219	Peak
2		2390.000	26.72	31.43	58.15	-15.85	74.00	100	219	Peak
3		2410.875	90.07	31.49	121.56	N/A	N/A	100	219	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

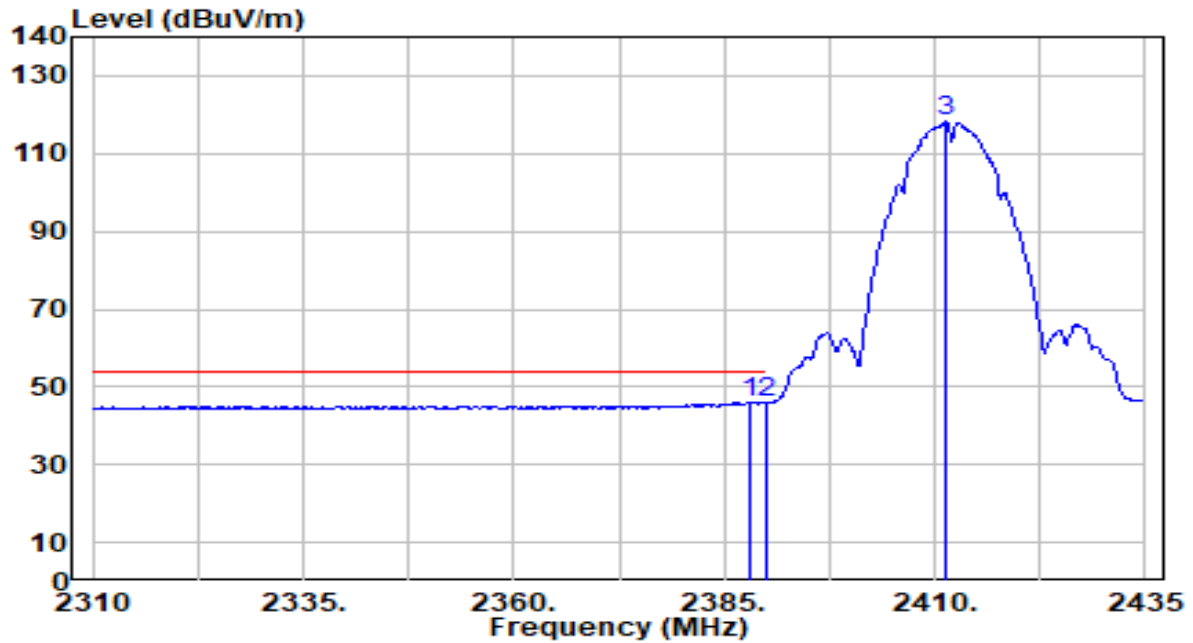


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	14.61	31.42	46.03	-7.97	54.00	100	219	Average
2		2390.000	14.43	31.43	45.86	-8.14	54.00	100	219	Average
3		2411.250	86.62	31.49	118.11	N/A	N/A	100	219	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

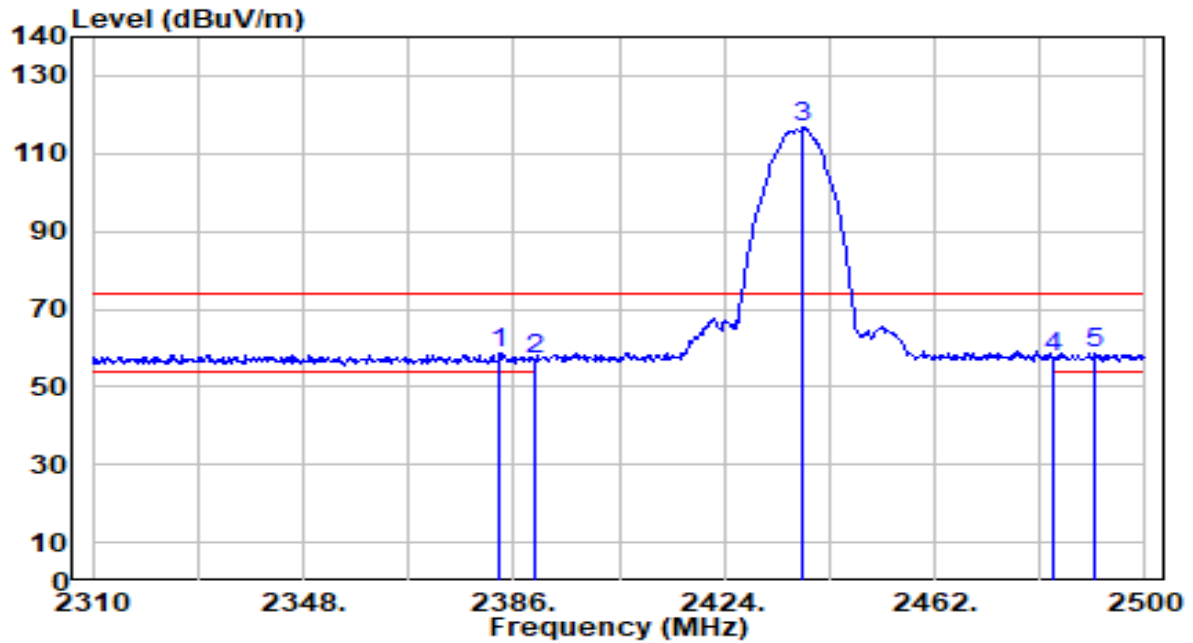


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2383.530	27.10	31.41	58.50	-15.50	74.00	100	328	Peak
2	*	2390.000	25.80	31.43	57.22	-16.78	74.00	100	328	Peak
3		2438.250	85.16	31.57	116.73	N/A	N/A	100	328	Peak
4		2483.500	25.88	31.71	57.59	-16.41	74.00	100	328	Peak
5		2491.070	27.11	31.73	58.84	-15.16	74.00	100	328	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

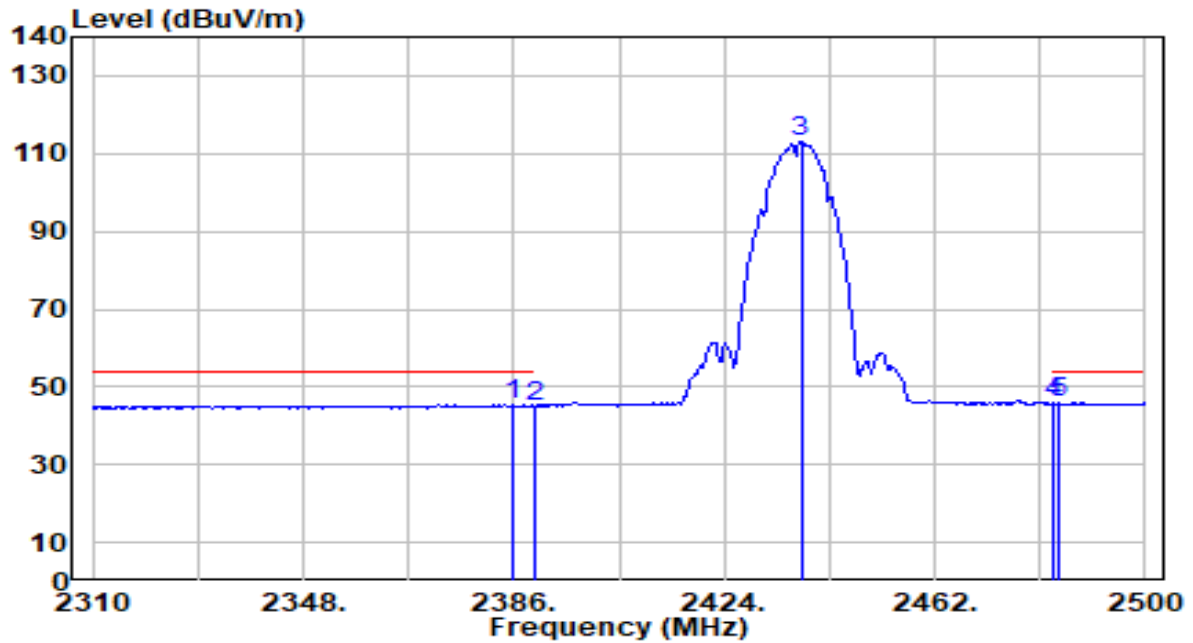


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	14.06	31.41	45.47	-8.53	54.00	100	328	Average
2	2390.000	13.67	31.43	45.09	-8.91	54.00	100	328	Average
3	2437.870	81.56	31.57	113.13	N/A	N/A	100	328	Average
4	2483.500	14.05	31.71	45.76	-8.24	54.00	100	328	Average
5	* 2484.230	14.08	31.71	45.80	-8.20	54.00	100	328	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

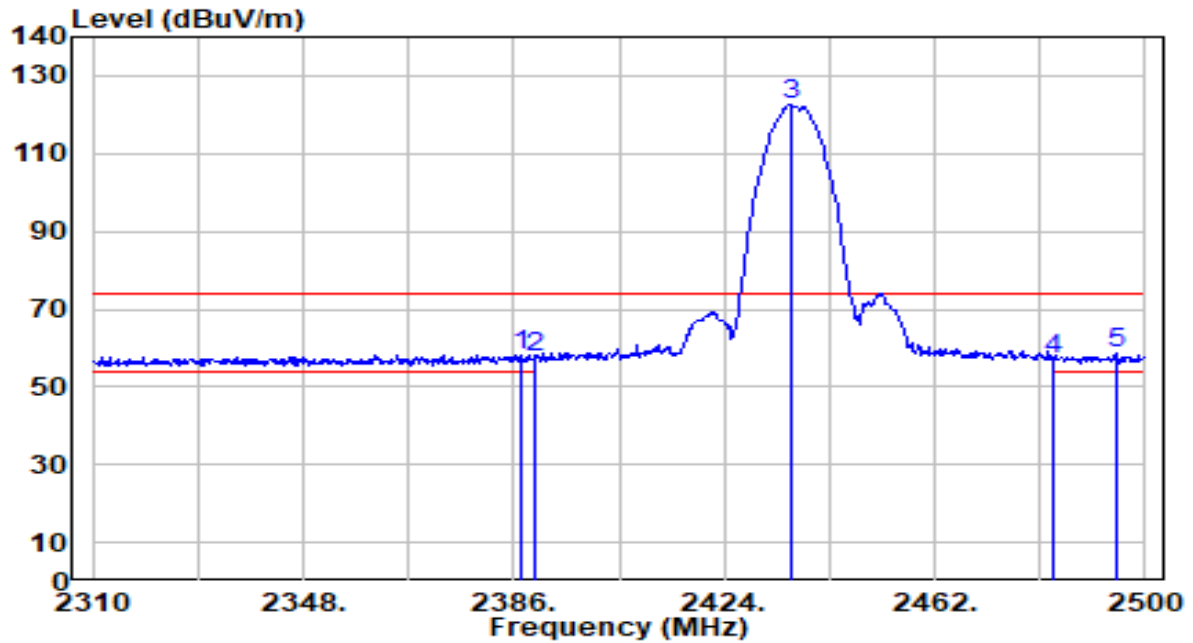


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	26.86	31.42	58.28	-15.72	74.00	138	131	Peak
2	2390.000	26.06	31.43	57.49	-16.51	74.00	138	131	Peak
3	2435.970	90.98	31.57	122.55	N/A	N/A	138	131	Peak
4	2483.500	25.17	31.71	56.88	-17.12	74.00	138	131	Peak
5	* 2494.680	26.74	31.74	58.48	-15.52	74.00	138	131	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Owen
Test Mode	802.11b_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

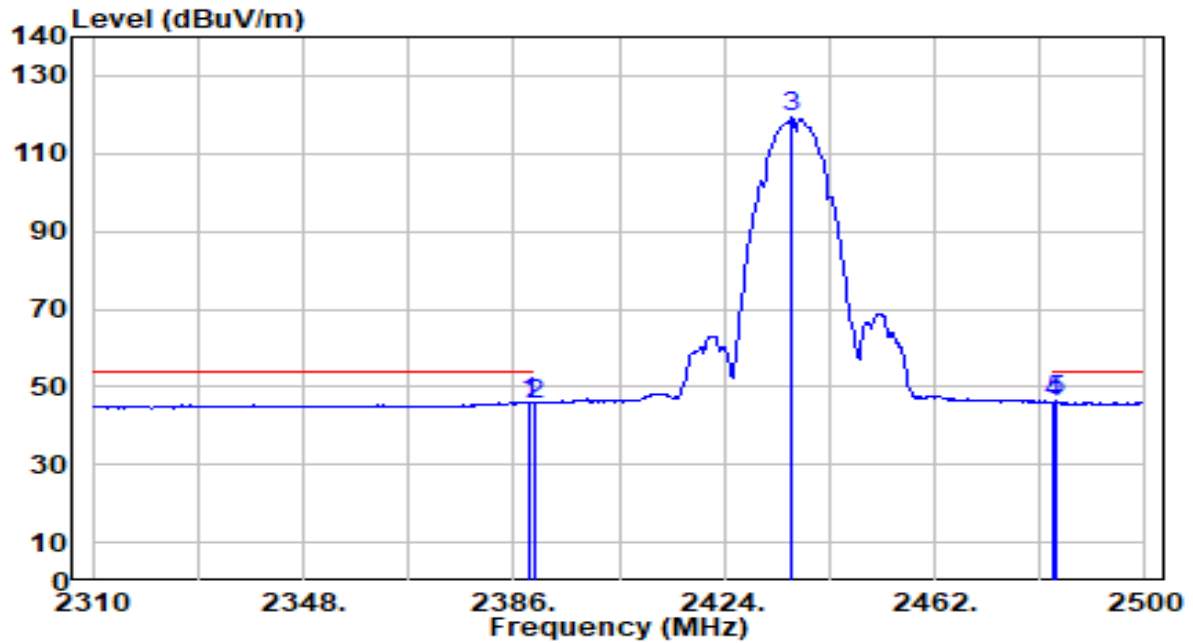


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	14.70	31.42	46.12	-7.88	54.00	138	131	Average
2	2390.000	14.24	31.43	45.67	-8.33	54.00	138	131	Average
3	2436.350	87.64	31.57	119.20	N/A	N/A	138	131	Average
4	2483.500	14.29	31.71	46.00	-8.00	54.00	138	131	Average
5	* 2484.040	14.54	31.71	46.25	-7.75	54.00	138	131	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11b_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

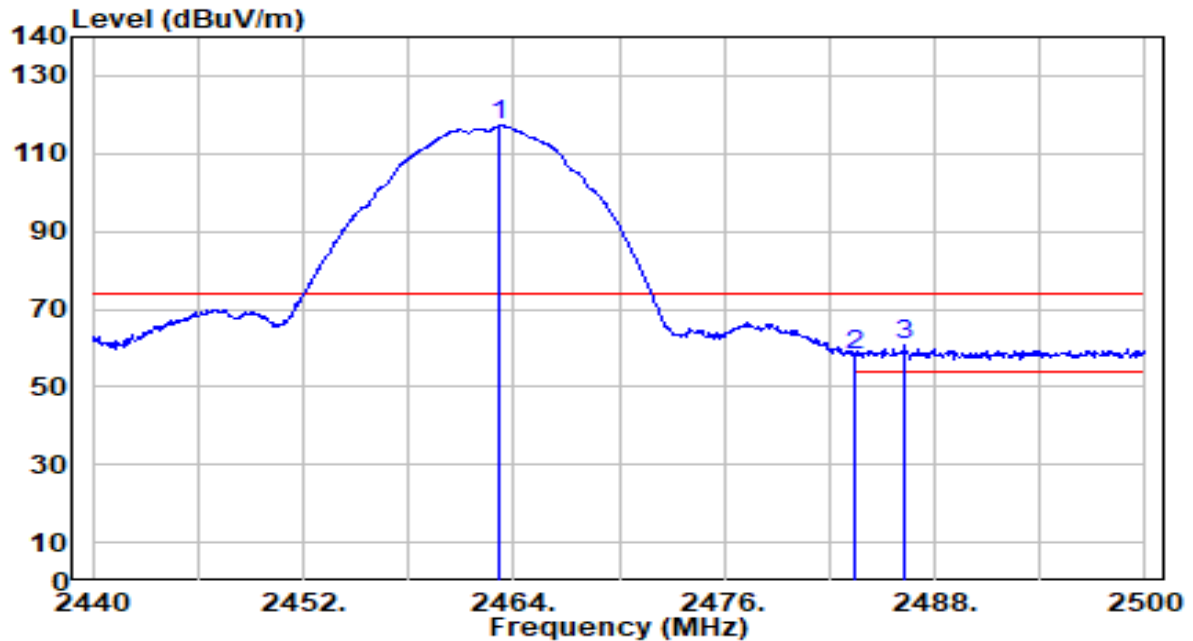


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.220	85.41	31.65	117.06	N/A	N/A	100	332	Peak
2	2483.500	26.46	31.71	58.17	-15.83	74.00	100	332	Peak
3	* 2486.260	28.91	31.72	60.63	-13.37	74.00	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11b_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

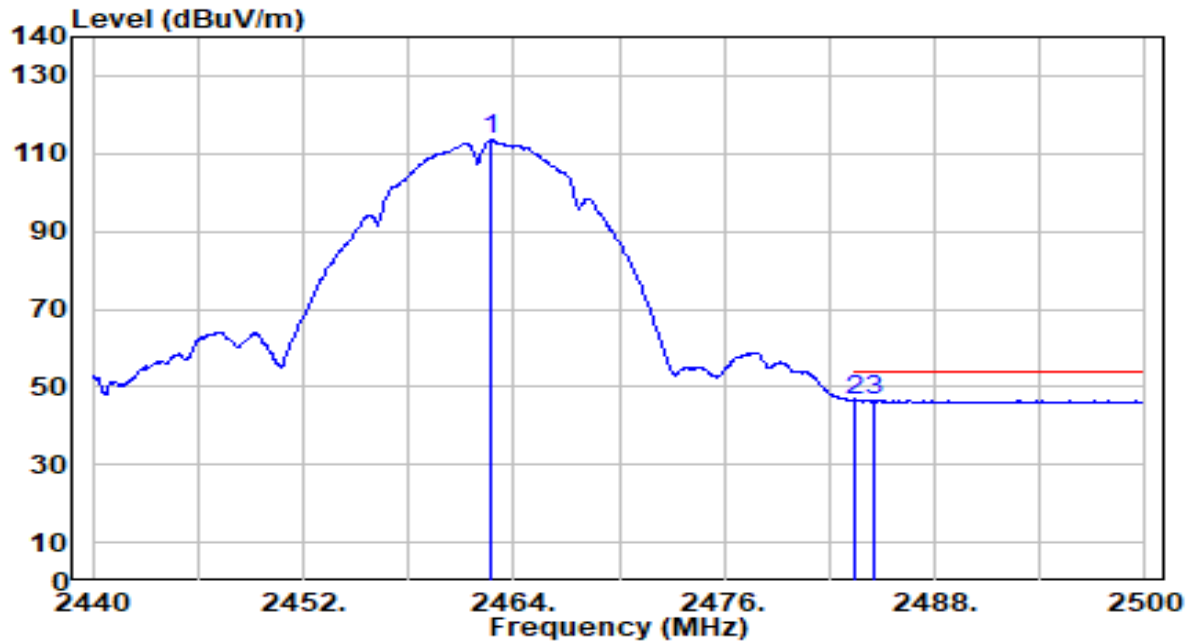


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	81.73	31.65	113.37	N/A	N/A	100	332	Average
2	2483.500	14.63	31.71	46.34	-7.66	54.00	100	332	Average
3	* 2484.580	14.77	31.71	46.48	-7.52	54.00	100	332	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11b_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

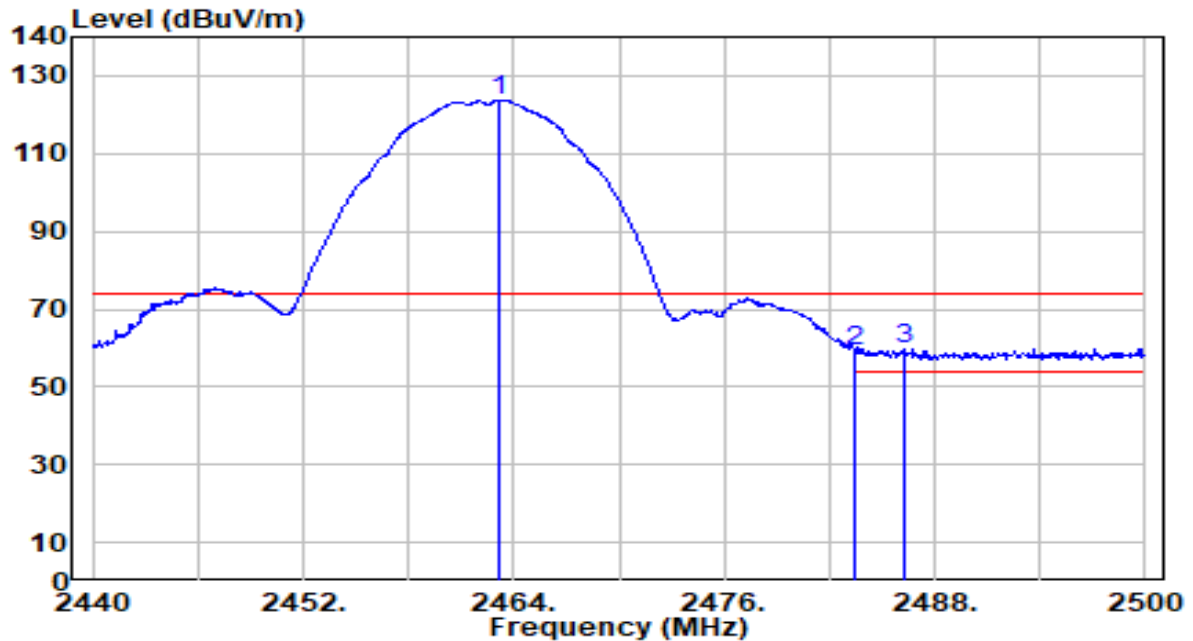


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.160	92.21	31.65	123.86	N/A	N/A	145	203	Peak
2	2483.500	27.63	31.71	59.34	-14.66	74.00	145	203	Peak
3	* 2486.200	27.97	31.72	59.69	-14.31	74.00	145	203	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11b_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

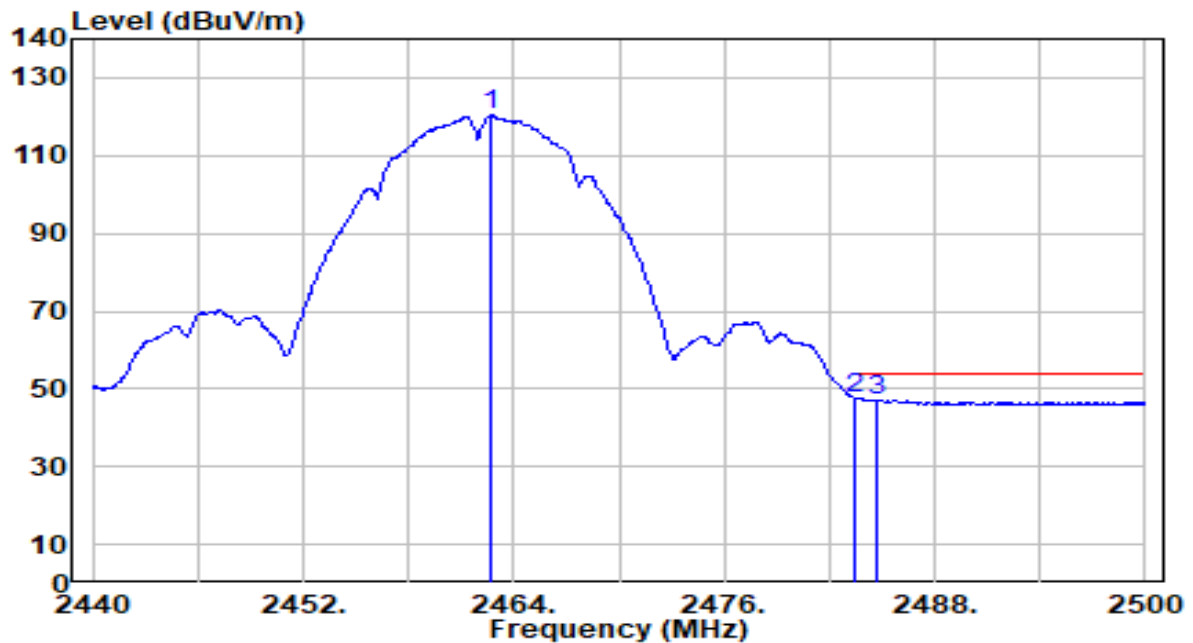


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.740	88.60	31.65	120.24	N/A	N/A	145	203	Average
2	*	2483.500	16.02	31.71	47.73	-6.27	54.00	145	203	Average
3		2484.760	15.33	31.71	47.04	-6.96	54.00	145	203	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

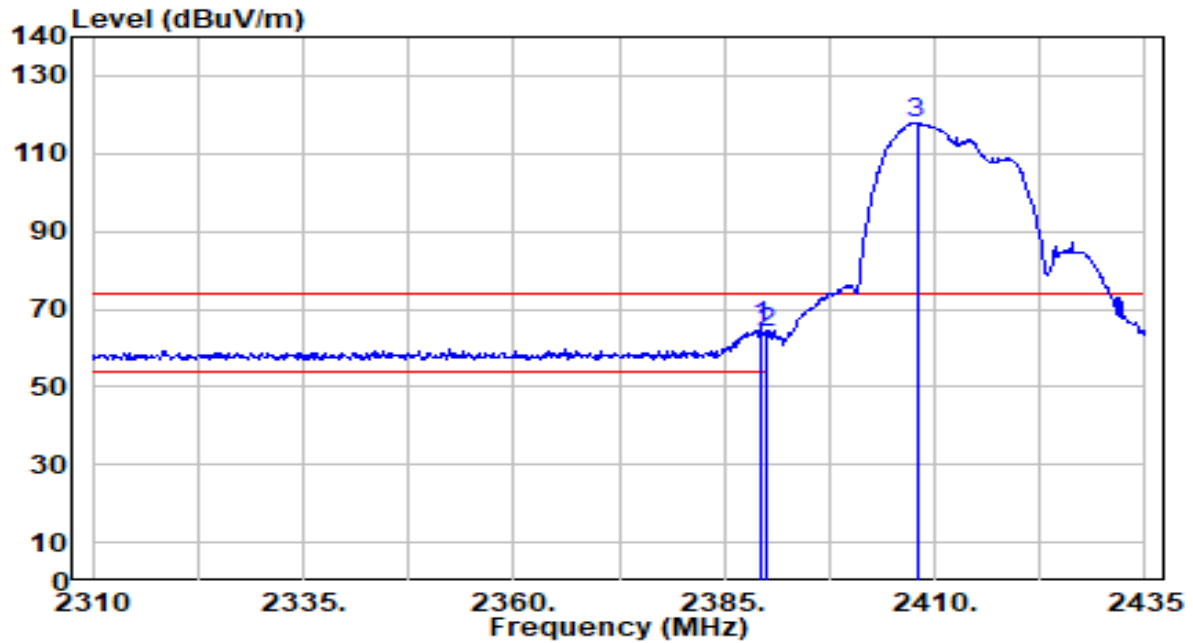


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.250	33.95	31.42	65.38	-8.62	74.00	114	138	Peak
2		2390.000	32.47	31.43	63.90	-10.10	74.00	114	138	Peak
3		2407.875	86.33	31.48	117.81	N/A	N/A	114	138	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

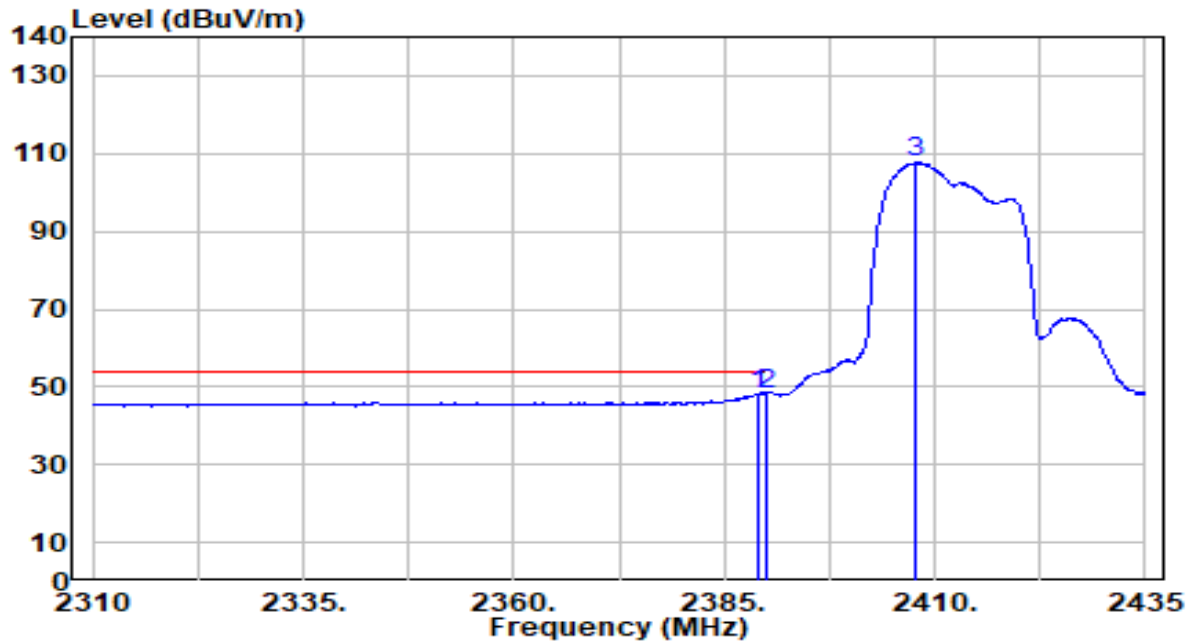


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	16.83	31.42	48.26	-5.74	54.00	114	138	Average
2	*	2390.000	16.84	31.43	48.26	-5.74	54.00	114	138	Average
3		2407.750	76.06	31.48	107.54	N/A	N/A	114	138	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

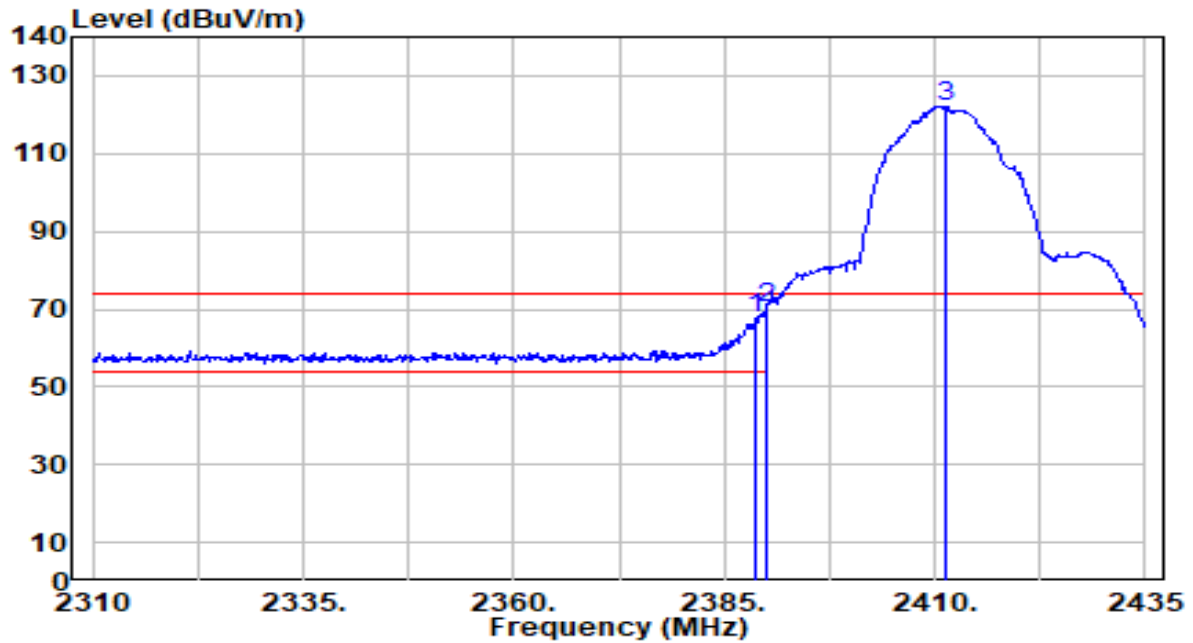


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.750	36.17	31.42	67.59	-6.41	74.00	158	134	Peak
2	*	2390.000	38.64	31.43	70.06	-3.94	74.00	158	134	Peak
3		2411.375	90.75	31.49	122.24	N/A	N/A	158	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

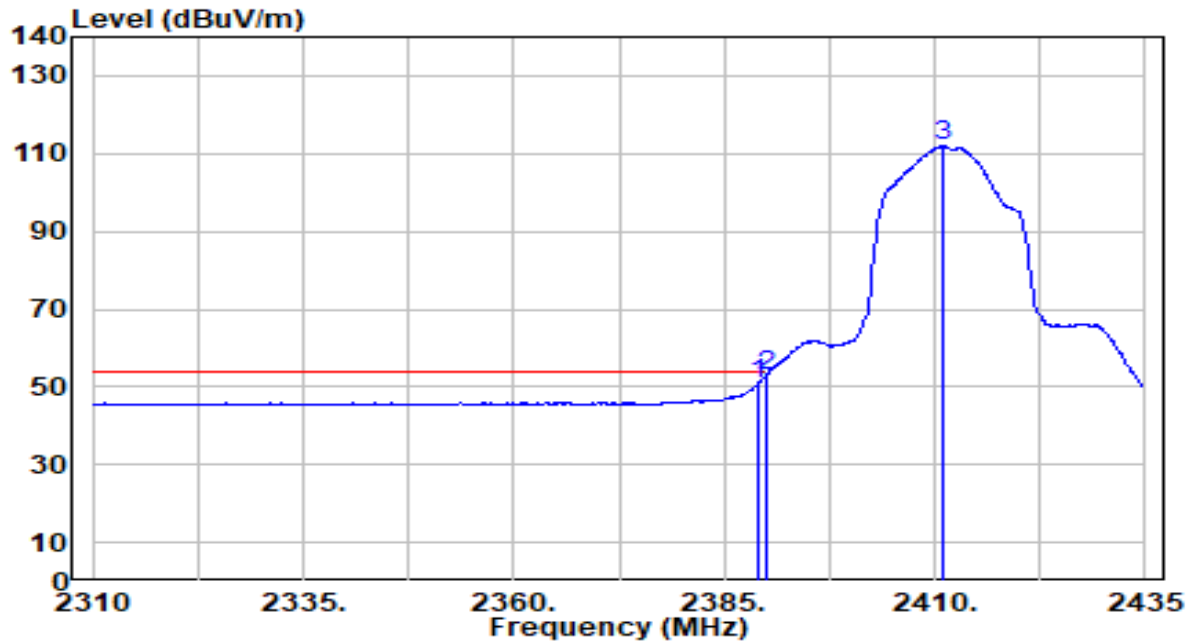


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	19.20	31.42	50.62	-3.38	54.00	158	134	Average
2	*	2390.000	21.67	31.43	53.09	-0.91	54.00	158	134	Average
3		2410.875	80.52	31.49	112.01	N/A	N/A	158	134	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

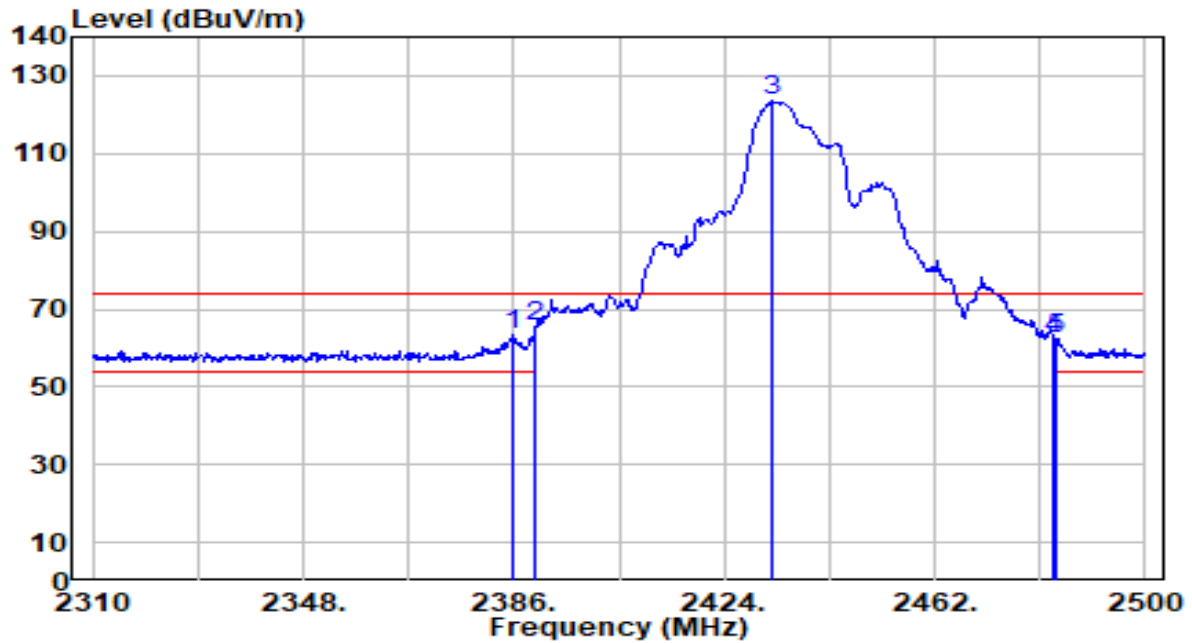


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.000	31.92	31.41	63.33	-10.67	74.00	105	141	Peak
2	*	2390.000	33.87	31.43	65.30	-8.70	74.00	105	141	Peak
3		2432.550	92.17	31.55	123.73	N/A	N/A	105	141	Peak
4		2483.500	30.75	31.71	62.46	-11.54	74.00	105	141	Peak
5		2484.040	30.87	31.71	62.58	-11.42	74.00	105	141	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

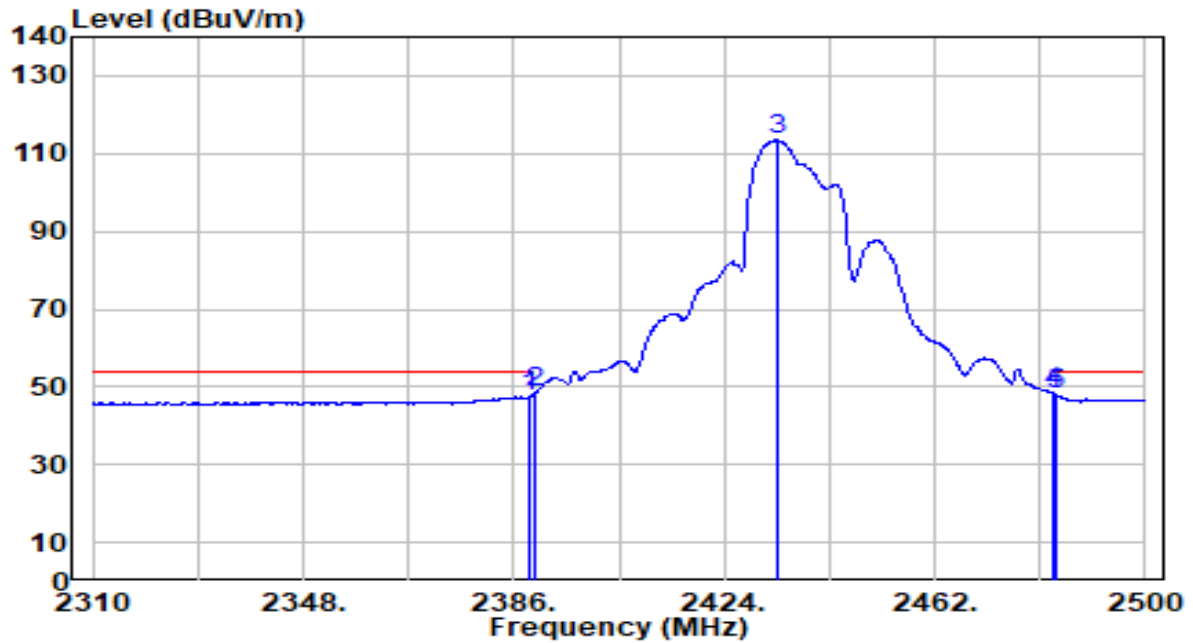


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.040	15.96	31.42	47.39	-6.61	54.00	105	141	Average
2	*	2390.000	17.13	31.43	48.56	-5.44	54.00	105	141	Average
3		2433.690	81.87	31.56	113.43	N/A	N/A	105	141	Average
4		2483.500	16.74	31.71	48.45	-5.55	54.00	105	141	Average
5		2484.040	16.42	31.71	48.13	-5.87	54.00	105	141	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

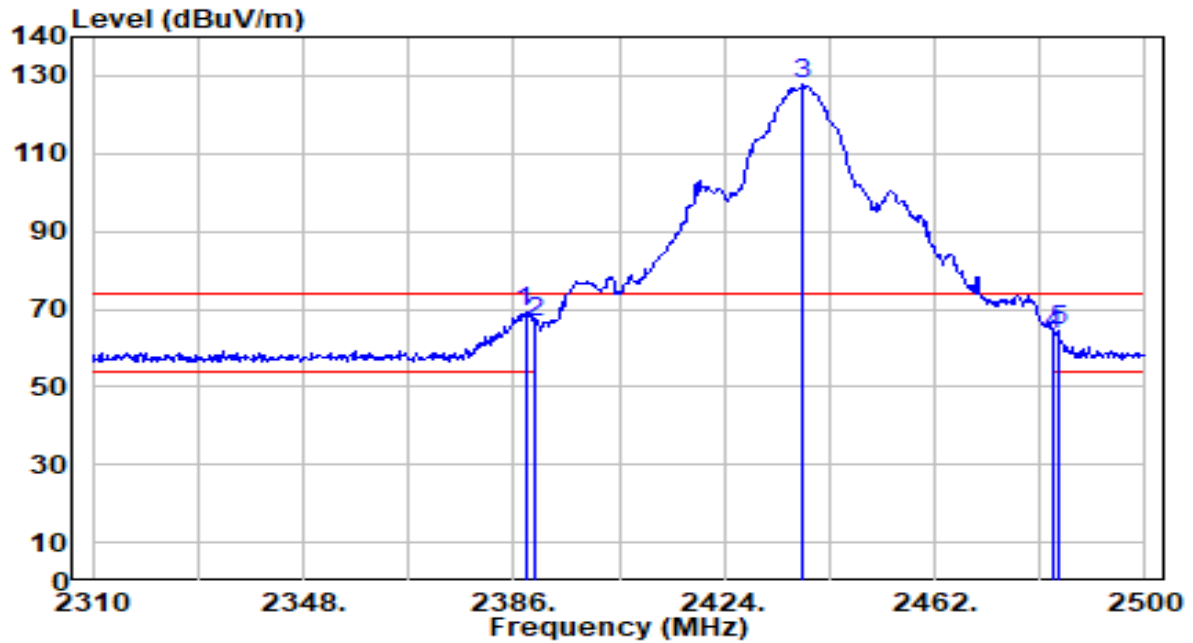


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.090	37.67	31.42	69.09	-4.91	74.00	115	136	Peak
2		2390.000	35.09	31.43	66.51	-7.49	74.00	115	136	Peak
3		2438.250	96.07	31.57	127.65	N/A	N/A	115	136	Peak
4		2483.500	31.91	31.71	63.62	-10.38	74.00	115	136	Peak
5		2484.230	32.75	31.71	64.46	-9.54	74.00	115	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

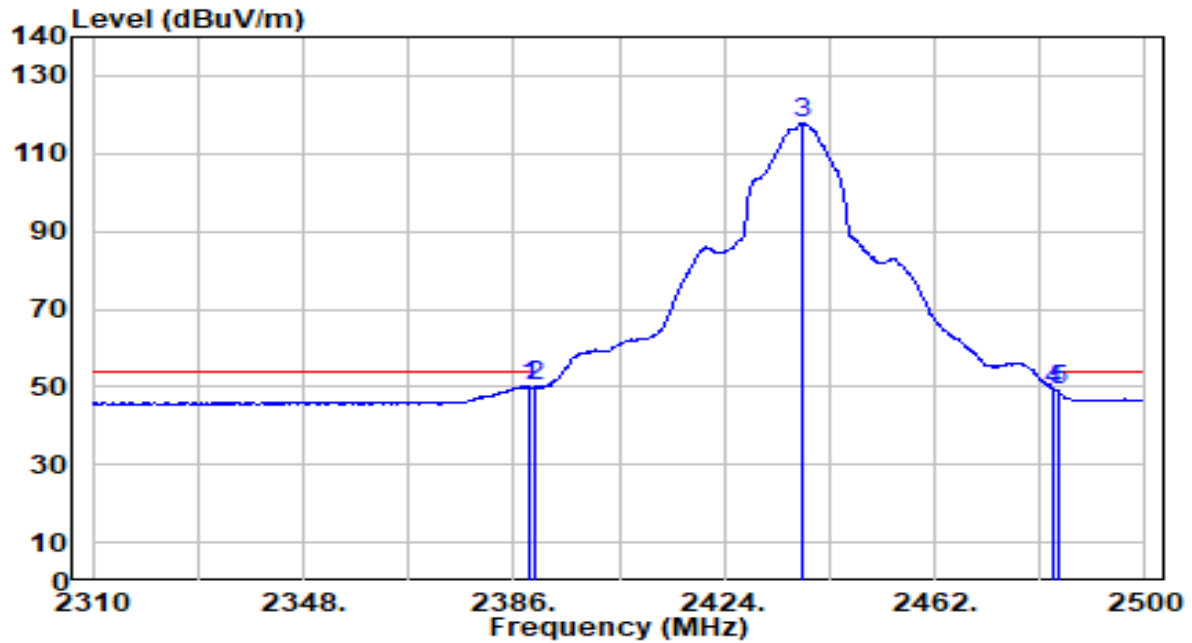


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.850	18.75	31.42	50.17	-3.83	54.00	115	136	Average
2		2390.000	18.58	31.43	50.00	-4.00	54.00	115	136	Average
3		2438.250	86.43	31.57	118.01	N/A	N/A	115	136	Average
4		2483.500	17.66	31.71	49.37	-4.63	54.00	115	136	Average
5		2484.230	17.30	31.71	49.01	-4.99	54.00	115	136	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

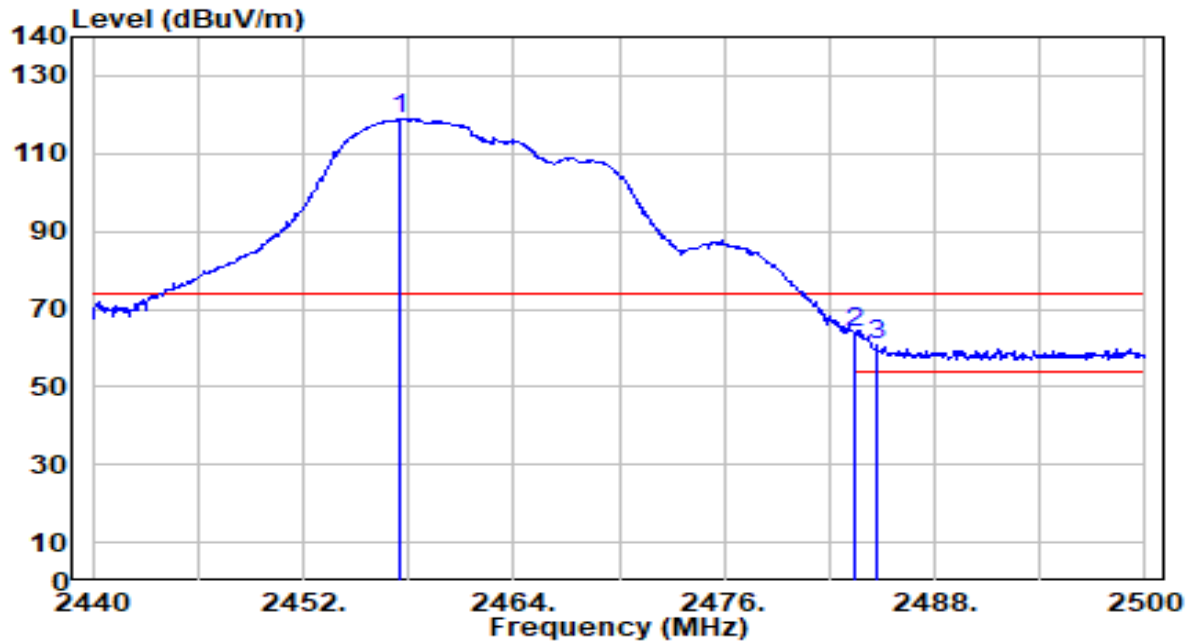


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.580	87.14	31.63	118.77	N/A	N/A	100	132	Peak
2	*	2483.500	32.15	31.71	63.86	-10.14	74.00	100	132	Peak
3		2484.700	28.87	31.71	60.59	-13.41	74.00	100	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

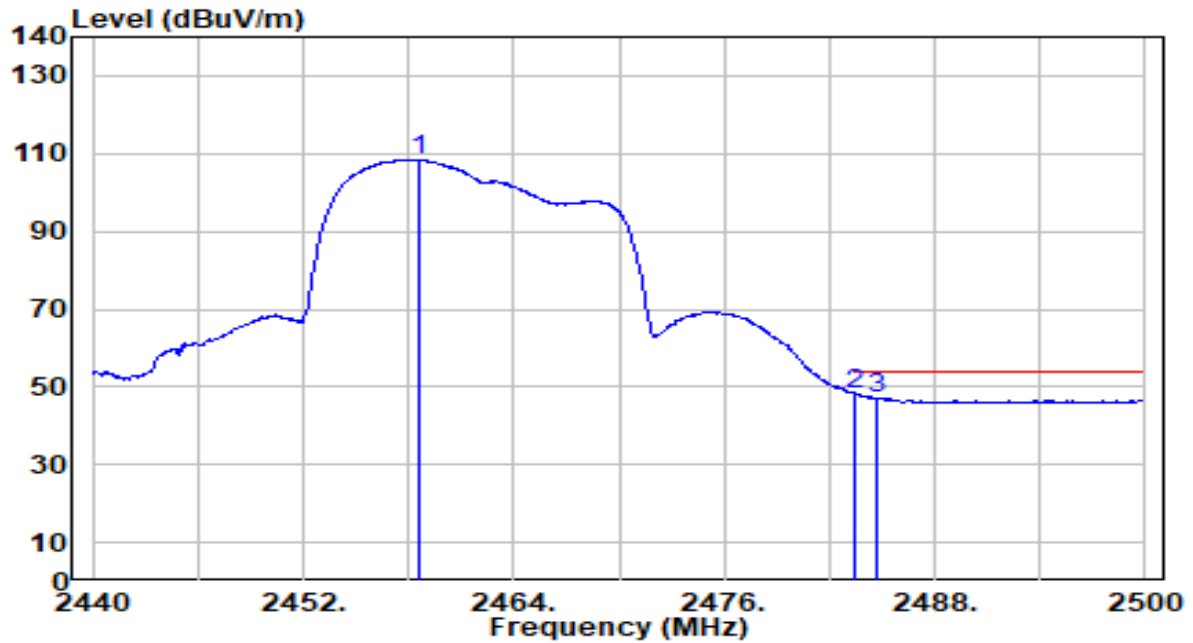


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2458.660	76.77	31.63	108.40	N/A	N/A	100	132	Average
2	*	2483.500	16.56	31.71	48.27	-5.73	54.00	100	132	Average
3		2484.760	15.44	31.71	47.16	-6.84	54.00	100	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

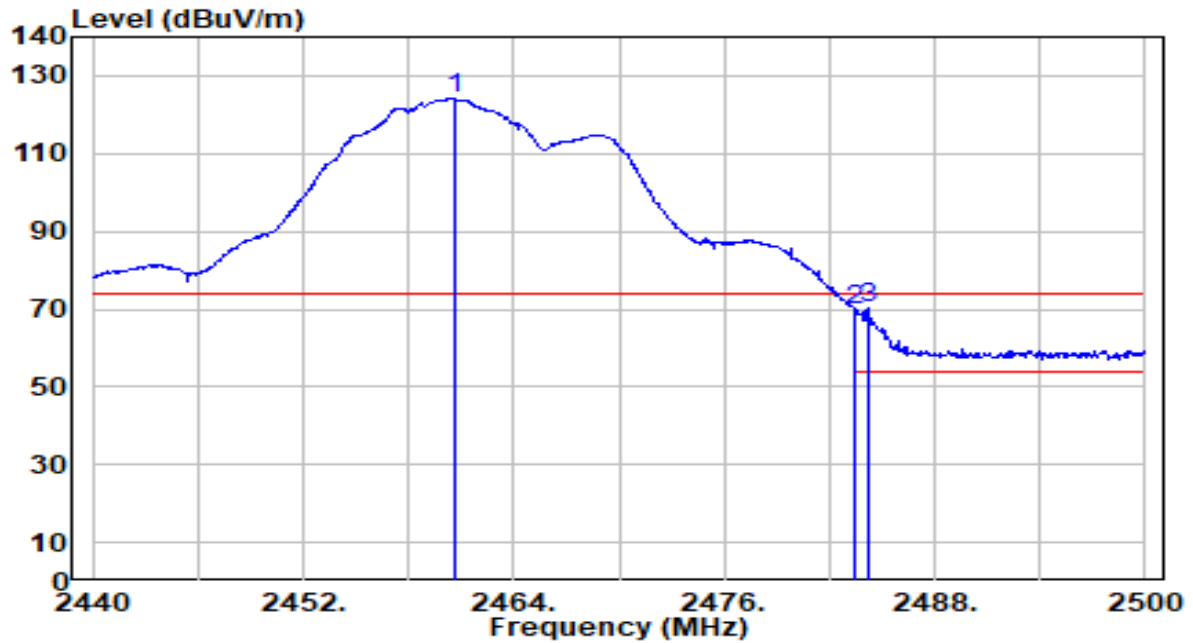


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.640	92.41	31.64	124.05	N/A	N/A	155	205	Peak
2		2483.500	38.03	31.71	69.74	-4.26	74.00	155	205	Peak
3	*	2484.160	38.68	31.71	70.39	-3.61	74.00	155	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11g_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

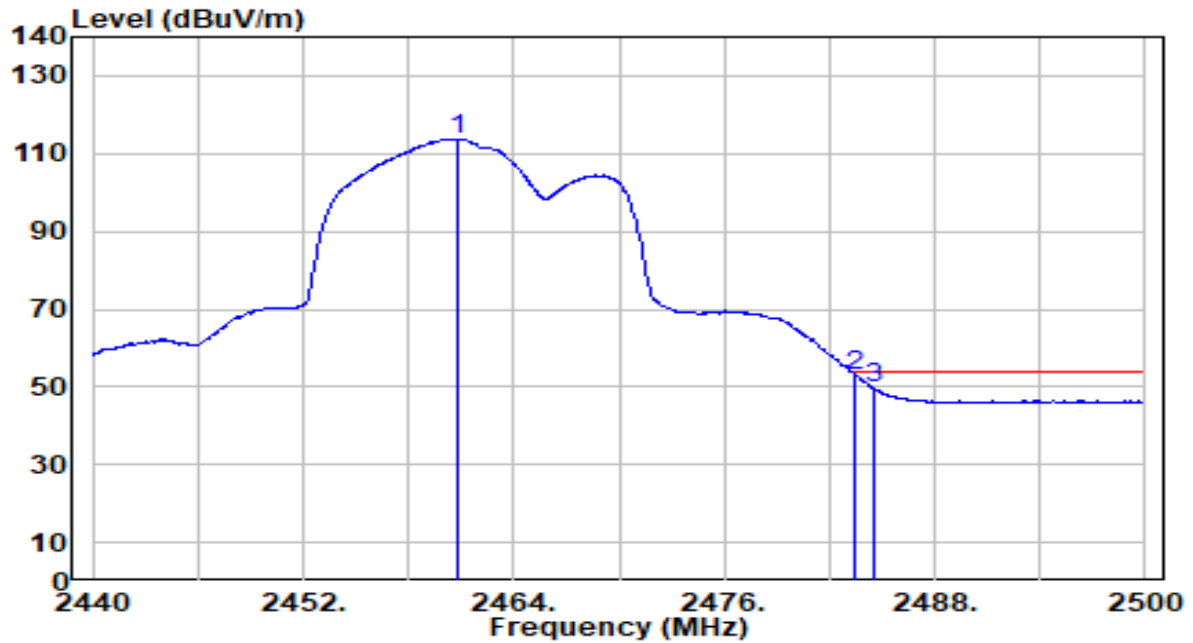


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.880	82.20	31.64	113.84	N/A	N/A	155	205	Average
2	*	2483.500	21.31	31.71	53.02	-0.98	54.00	155	205	Average
3		2484.520	18.03	31.71	49.75	-4.25	54.00	155	205	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

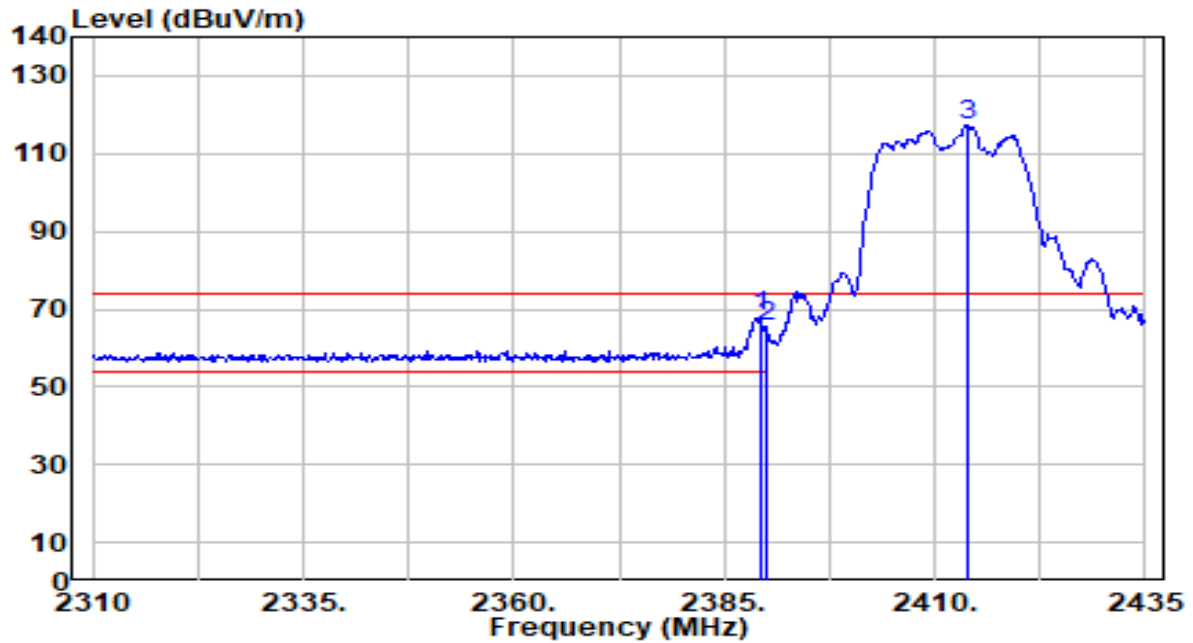


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.375	36.66	31.42	68.08	-5.92	74.00	200	127	Peak
2		2390.000	34.18	31.43	65.61	-8.39	74.00	200	127	Peak
3		2413.875	85.97	31.50	117.47	N/A	N/A	200	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

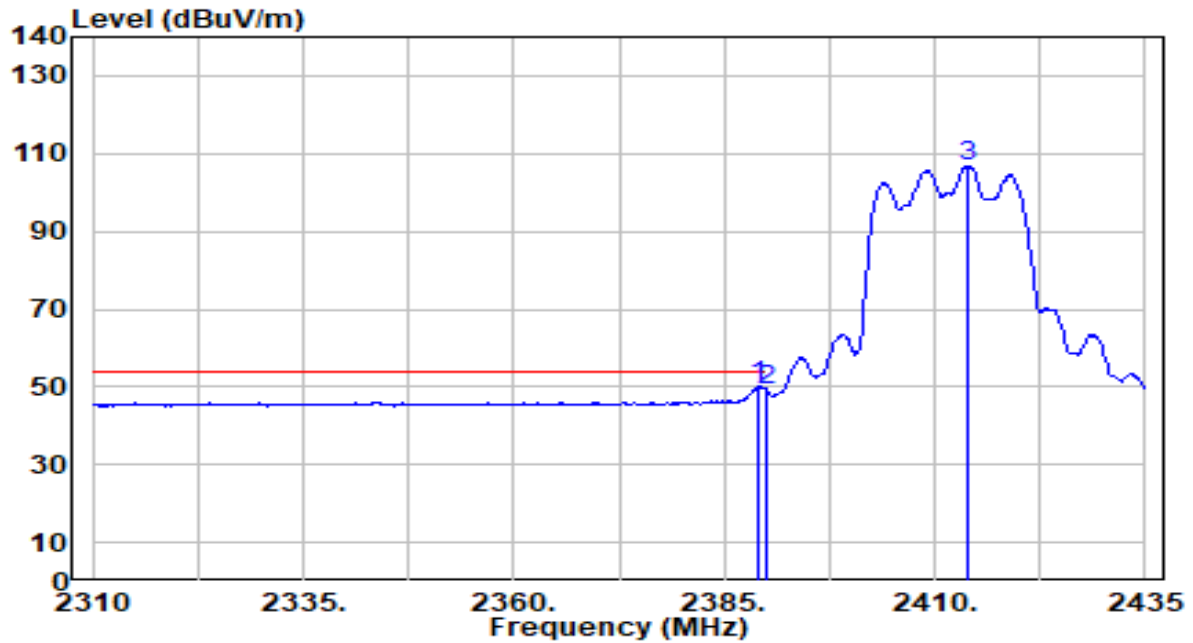


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	18.73	31.42	50.15	-3.85	54.00	200	127	Average
2		2390.000	17.62	31.43	49.04	-4.96	54.00	200	127	Average
3		2413.875	75.16	31.50	106.65	N/A	N/A	200	127	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

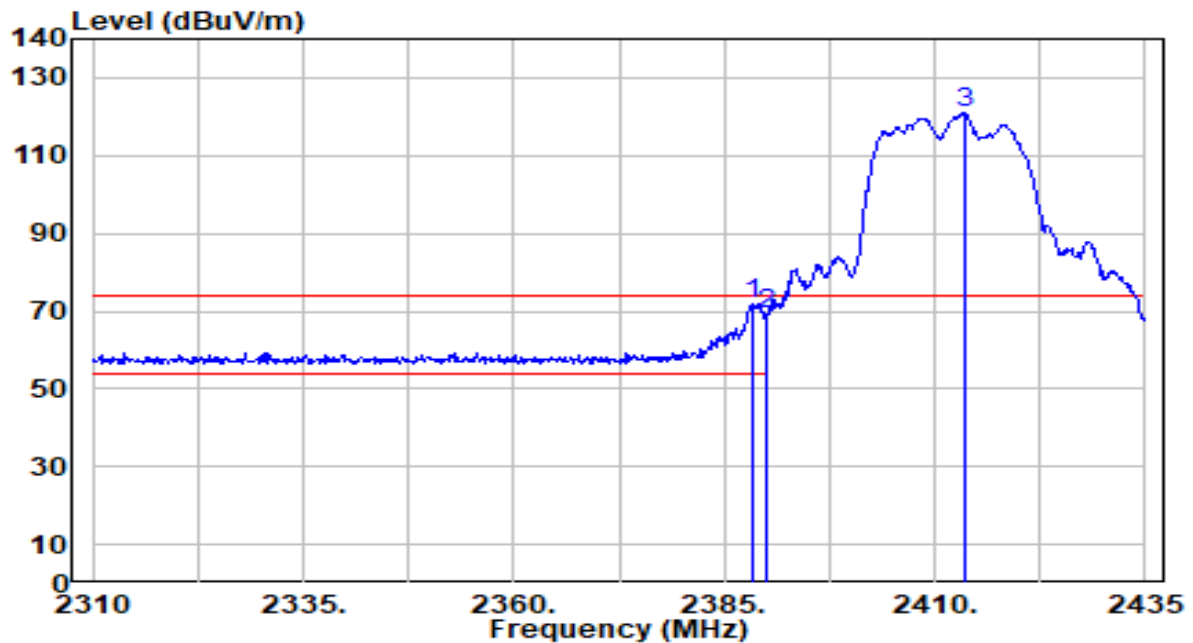


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.375	40.60	31.42	72.02	-1.98	74.00	123	111	Peak
2		2390.000	37.70	31.43	69.13	-4.87	74.00	123	111	Peak
3		2413.625	89.42	31.50	120.91	N/A	N/A	123	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

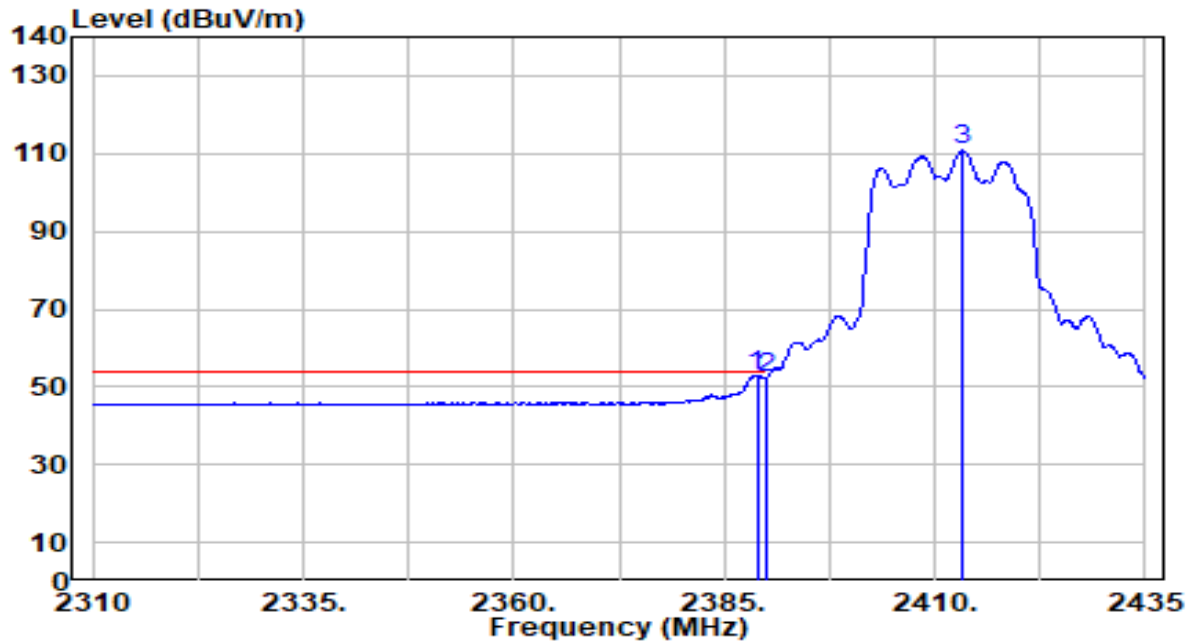


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	21.64	31.42	53.07	-0.93	54.00	123	111	Average
2		2390.000	20.80	31.43	52.22	-1.78	54.00	123	111	Average
3		2413.375	79.32	31.50	110.81	N/A	N/A	123	111	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

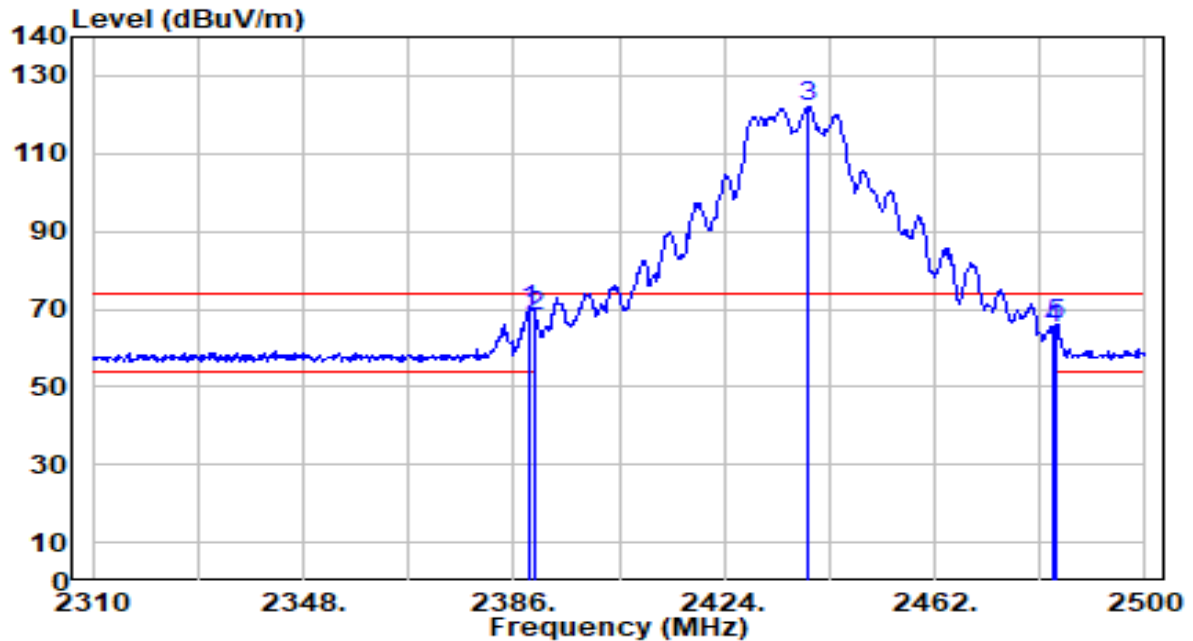


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.660	38.25	31.42	69.67	-4.33	74.00	181	119	Peak
2		2390.000	36.78	31.43	68.20	-5.80	74.00	181	119	Peak
3		2439.200	90.58	31.58	122.16	N/A	N/A	181	119	Peak
4		2483.500	33.21	31.71	64.92	-9.08	74.00	181	119	Peak
5		2484.040	34.42	31.71	66.13	-7.87	74.00	181	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

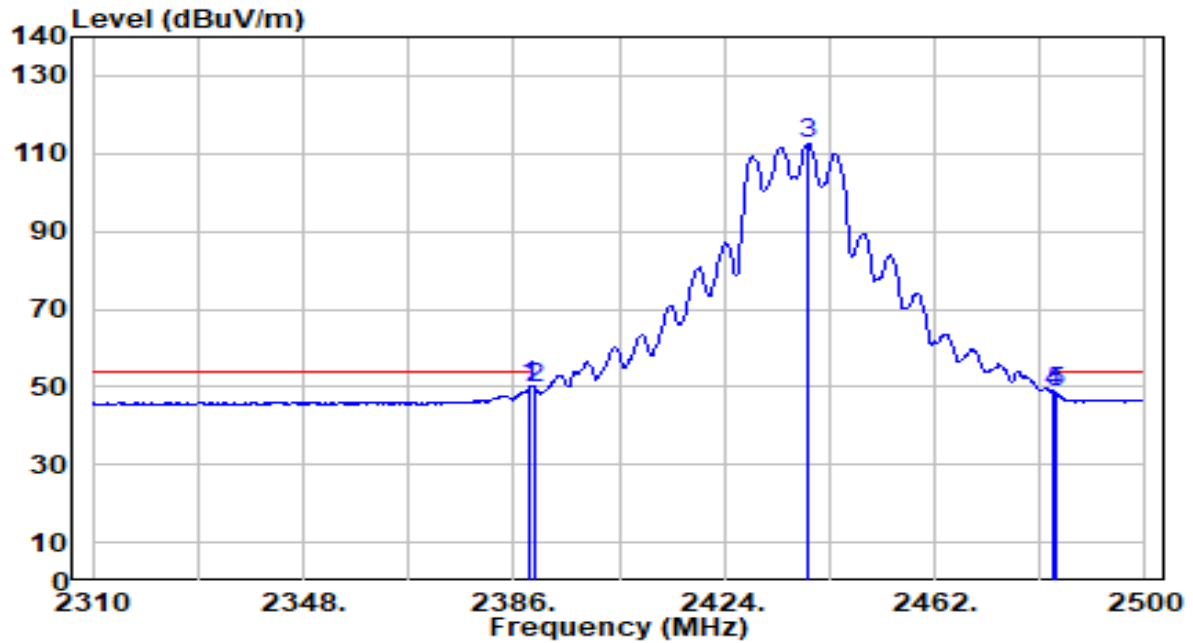


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	18.68	31.42	50.11	-3.89	54.00	181	119	Average
2		2390.000	17.97	31.43	49.40	-4.60	54.00	181	119	Average
3		2439.200	80.95	31.58	112.52	N/A	N/A	181	119	Average
4		2483.500	17.07	31.71	48.78	-5.22	54.00	181	119	Average
5		2484.040	16.93	31.71	48.64	-5.36	54.00	181	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

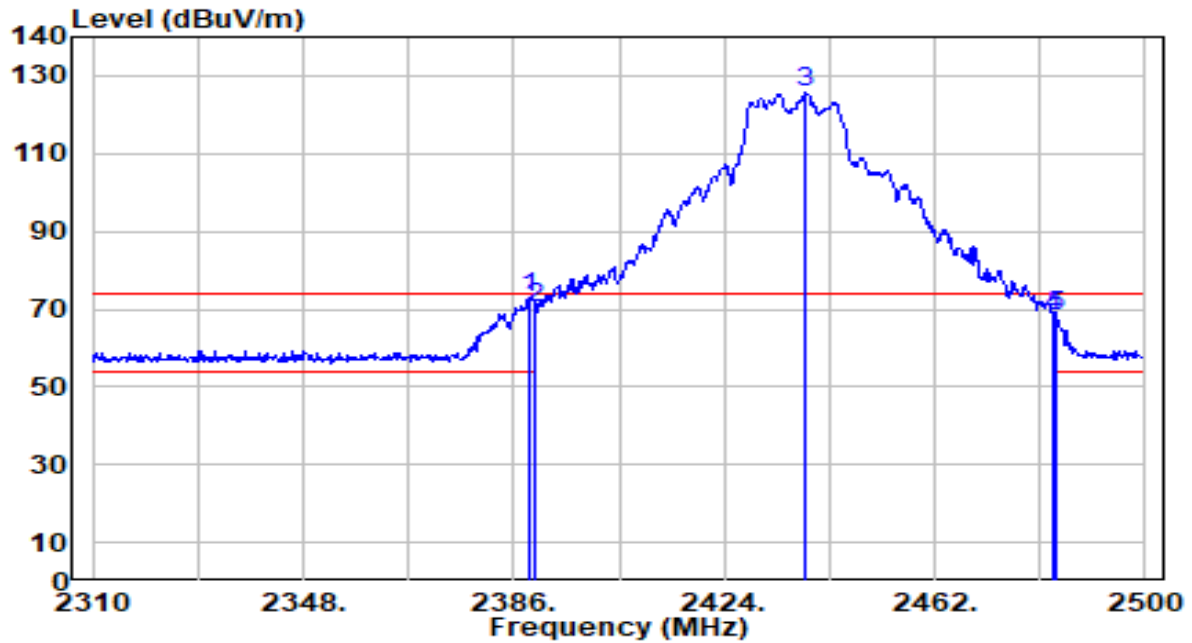


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.850	41.39	31.42	72.81	-1.19	74.00	112	235	Peak
2		2390.000	38.95	31.43	70.37	-3.63	74.00	112	235	Peak
3		2438.630	94.06	31.57	125.63	N/A	N/A	112	235	Peak
4		2483.500	36.47	31.71	68.18	-5.82	74.00	112	235	Peak
5		2484.040	36.69	31.71	68.40	-5.60	74.00	112	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

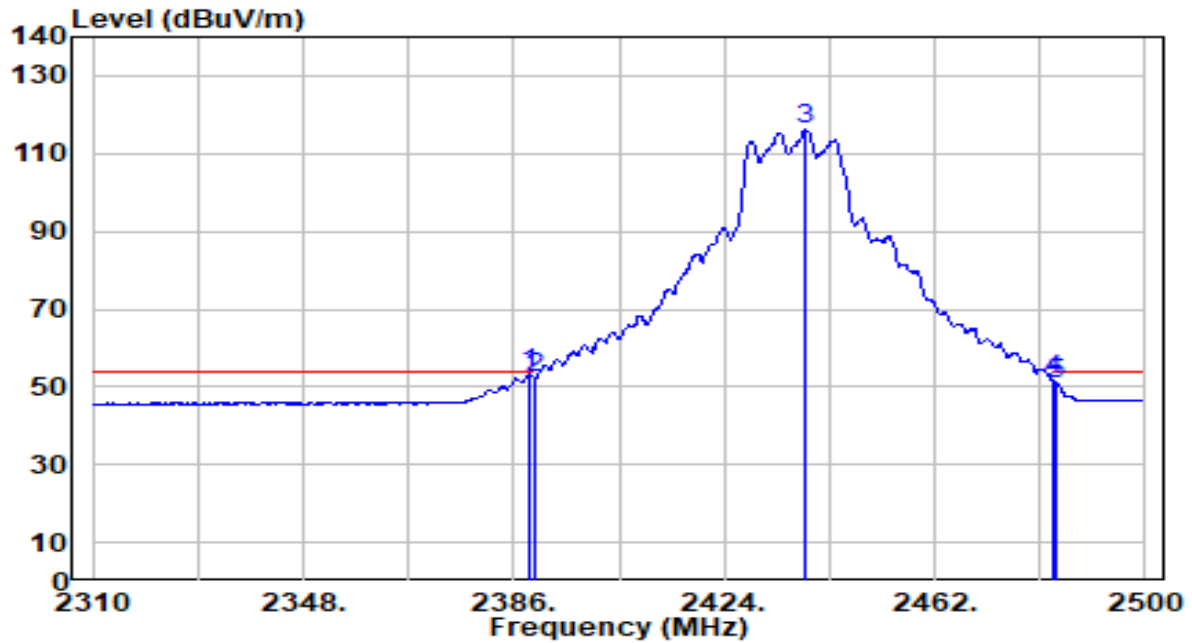


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	21.79	31.42	53.21	-0.79	54.00	112	235	Average
2		2390.000	20.80	31.43	52.23	-1.77	54.00	112	235	Average
3		2438.630	84.53	31.57	116.10	N/A	N/A	112	235	Average
4		2483.500	19.80	31.71	51.51	-2.49	54.00	112	235	Average
5		2484.040	19.18	31.71	50.89	-3.11	54.00	112	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

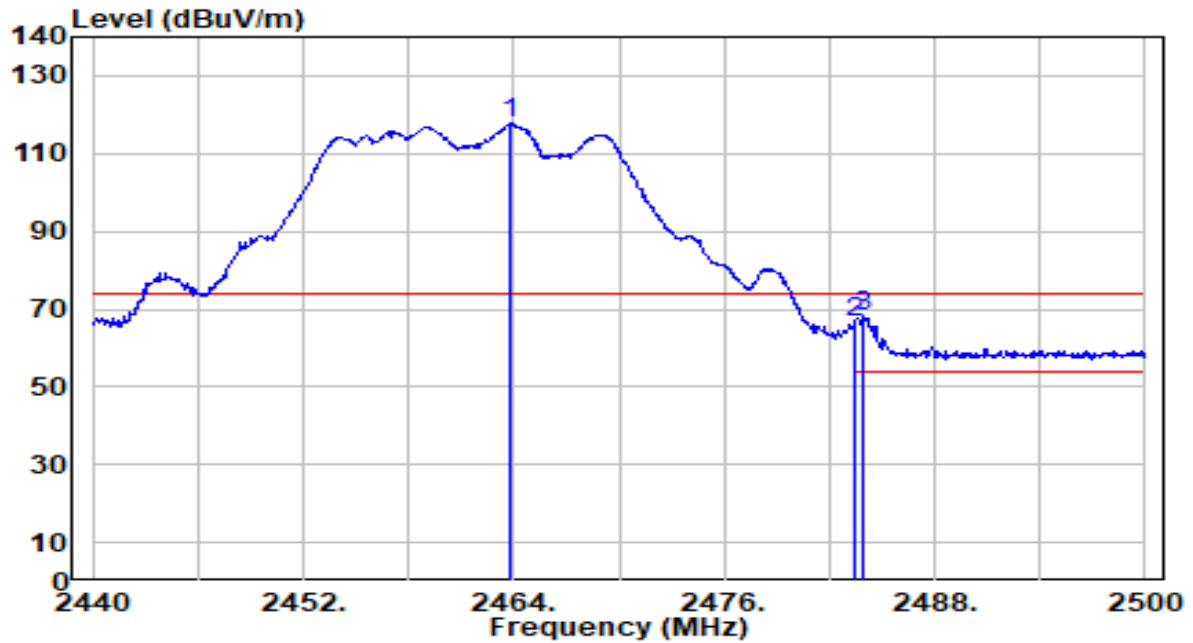


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.820	86.09	31.65	117.74	N/A	N/A	169	131	Peak
2	2483.500	34.78	31.71	66.49	-7.51	74.00	169	131	Peak
3	* 2483.920	36.49	31.71	68.20	-5.80	74.00	169	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

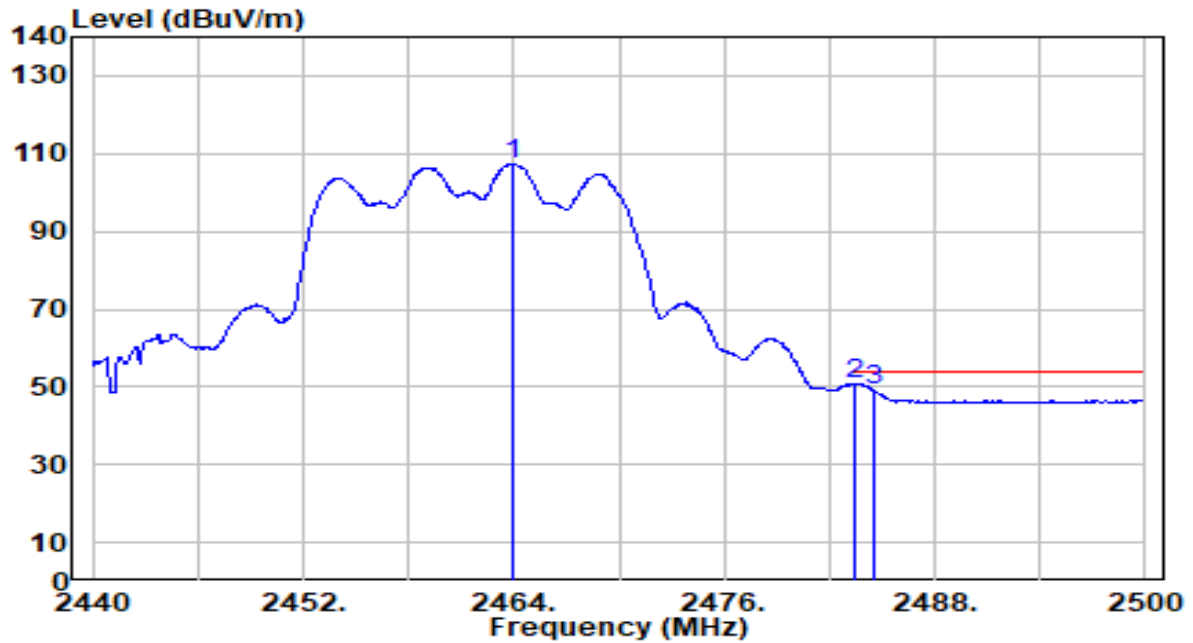


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.880	75.79	31.65	107.44	N/A	N/A	169	131	Average
2	*	2483.500	18.98	31.71	50.69	-3.31	54.00	169	131	Average
3		2484.520	17.30	31.71	49.01	-4.99	54.00	169	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

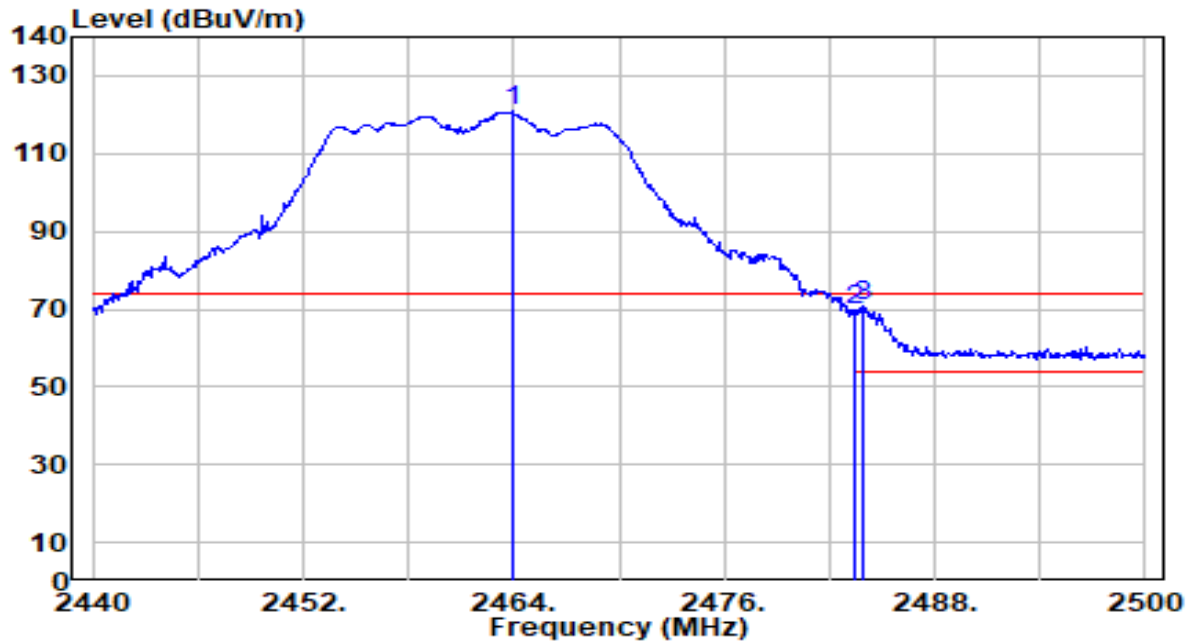


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.940	89.44	31.65	121.09	N/A	N/A	100	237	Peak
2	2483.500	37.90	31.71	69.61	-4.39	74.00	100	237	Peak
3	* 2483.860	39.02	31.71	70.73	-3.27	74.00	100	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

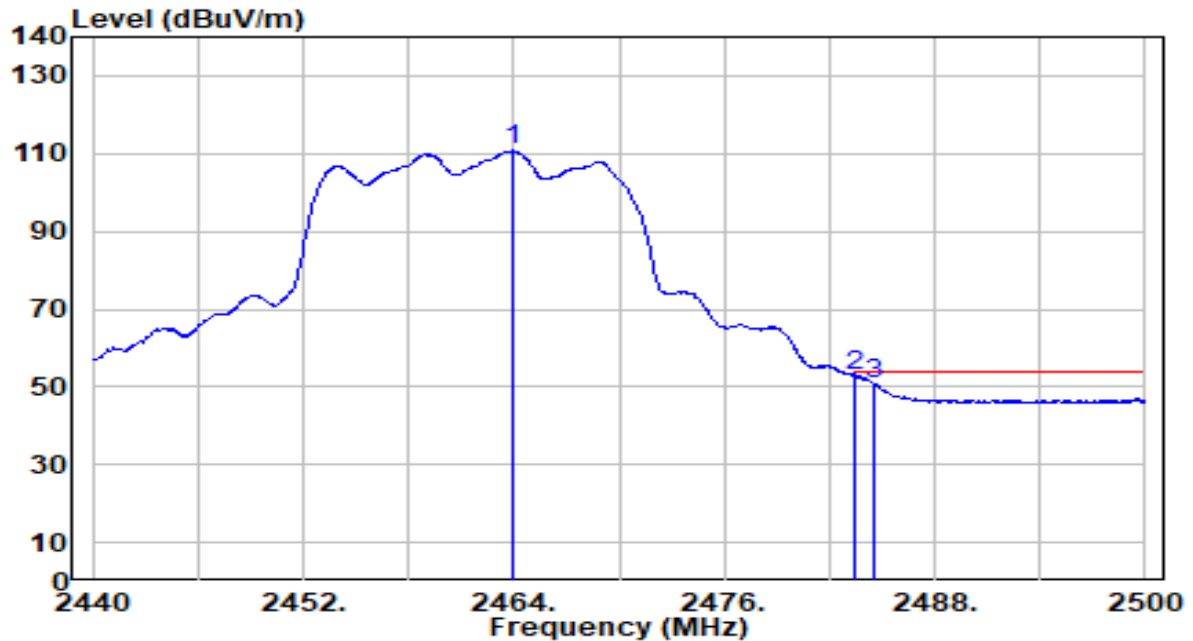


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.880	79.22	31.65	110.87	N/A	N/A	100	237	Average
2	*	2483.500	21.32	31.71	53.03	-0.97	54.00	100	237	Average
3		2484.520	19.20	31.71	50.91	-3.09	54.00	100	237	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

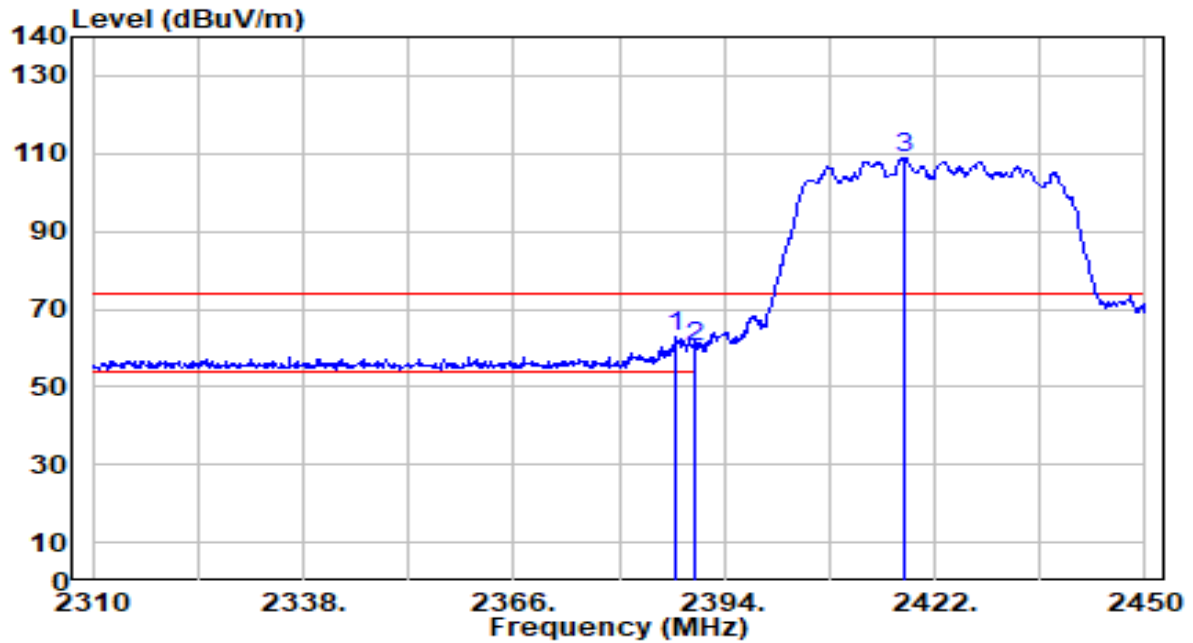


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.700	31.35	31.42	62.77	-11.23	74.00	172	194	Peak
2		2390.000	29.02	31.43	60.44	-13.56	74.00	172	194	Peak
3		2417.800	77.53	31.51	109.04	N/A	N/A	172	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

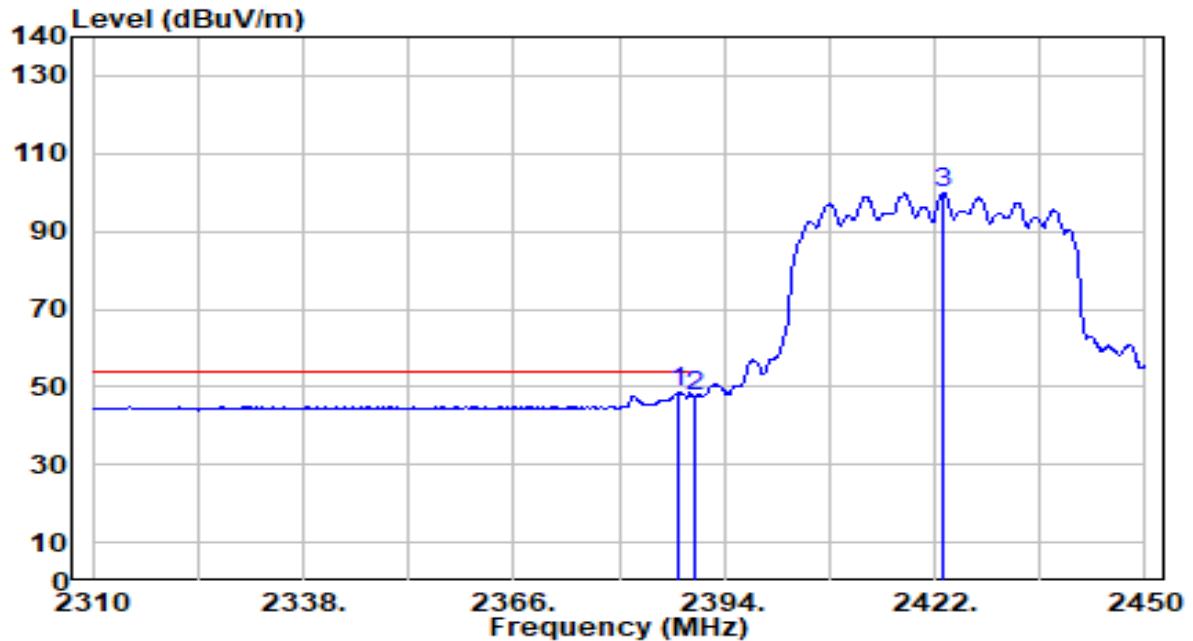


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.980	17.27	31.42	48.69	-5.31	54.00	172	194	Average
2		2390.000	16.28	31.43	47.71	-6.29	54.00	172	194	Average
3		2423.120	68.20	31.53	99.73	N/A	N/A	172	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

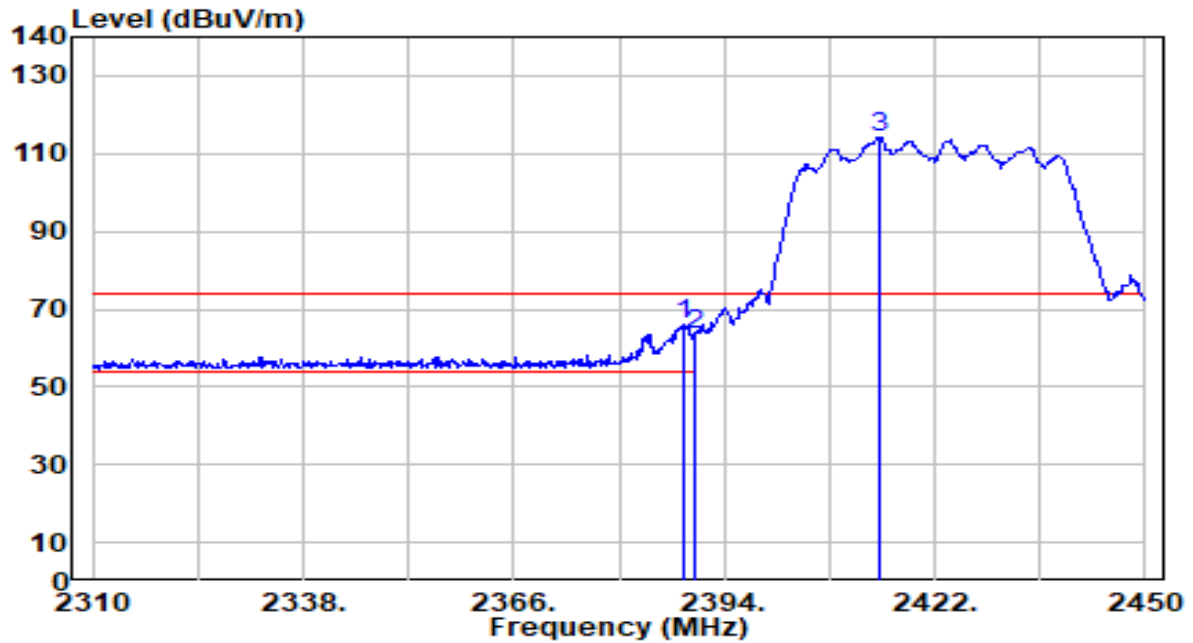


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.680	34.73	31.42	66.15	-7.85	74.00	143	229	Peak
2		2390.000	31.84	31.43	63.27	-10.73	74.00	143	229	Peak
3		2414.580	82.54	31.50	114.04	N/A	N/A	143	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

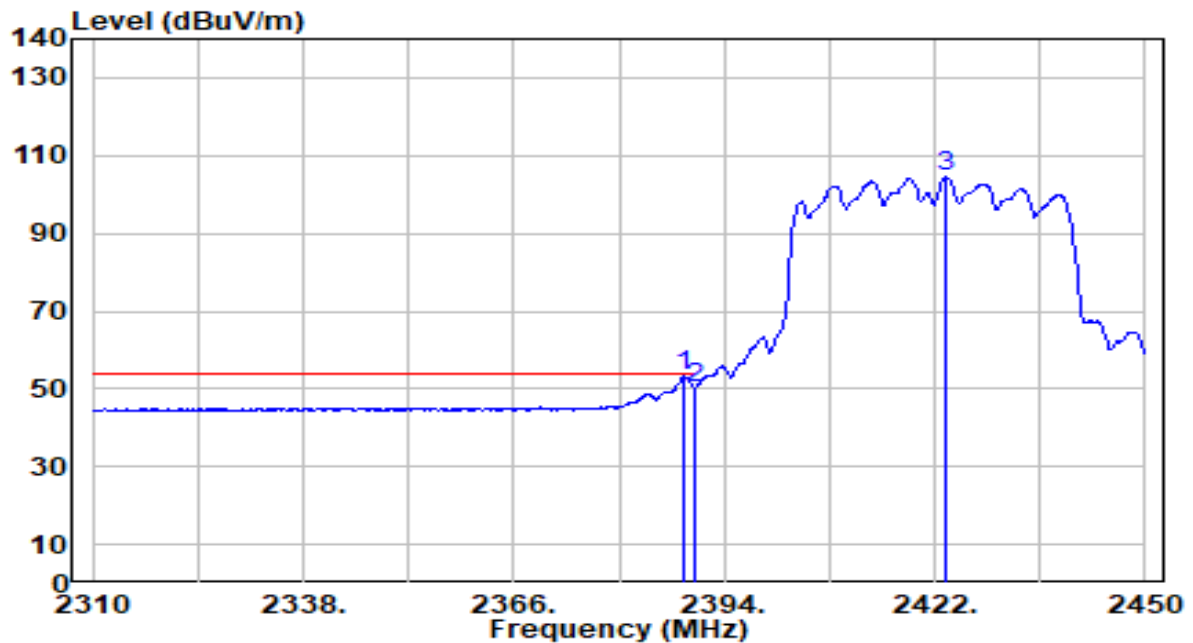


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.680	21.75	31.42	53.18	-0.82	54.00	143	229	Average
2		2390.000	18.81	31.43	50.24	-3.76	54.00	143	229	Average
3		2423.540	72.83	31.53	104.36	N/A	N/A	143	229	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

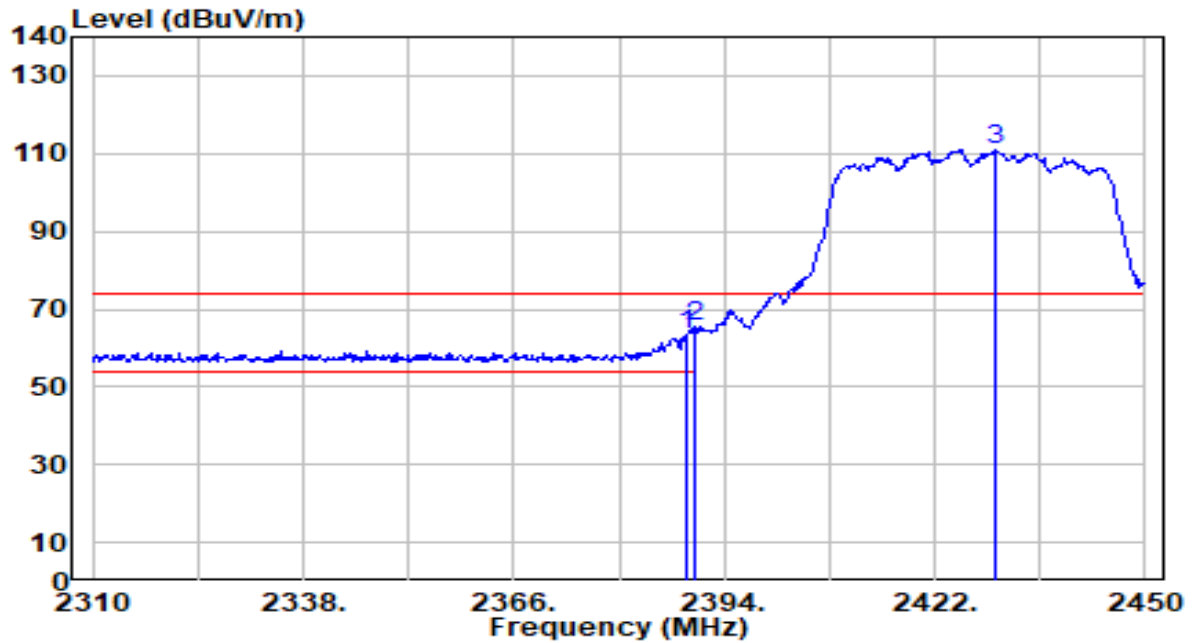


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.820	31.81	31.42	63.23	-10.77	74.00	100	161	Peak
2	*	2390.000	33.92	31.43	65.35	-8.65	74.00	100	161	Peak
3		2429.980	79.66	31.55	111.20	N/A	N/A	100	161	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

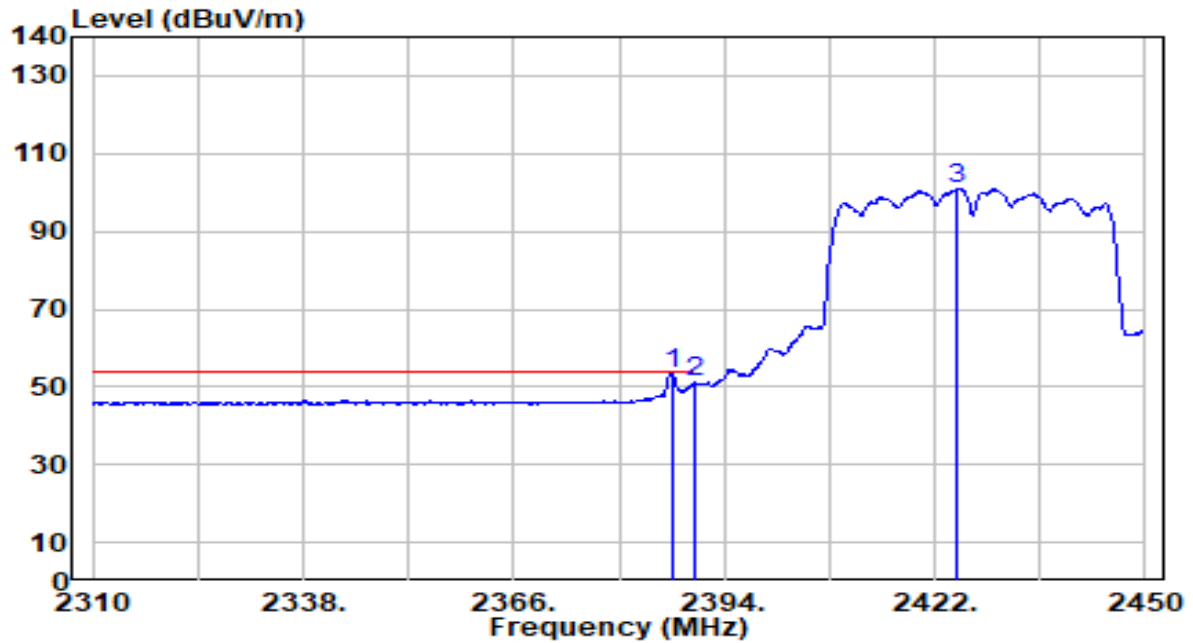


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.000	21.99	31.42	53.41	-0.59	54.00	100	161	Average
2		2390.000	19.58	31.43	51.00	-3.00	54.00	100	161	Average
3		2425.080	69.50	31.53	101.03	N/A	N/A	100	161	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

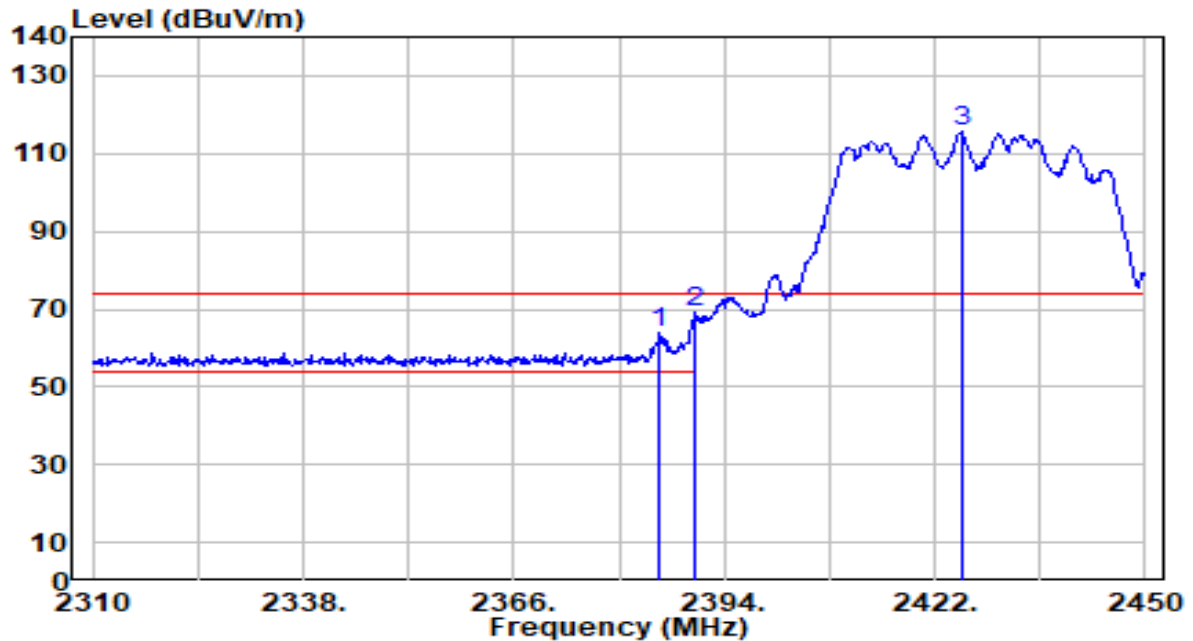


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.460	32.28	31.41	63.69	-10.31	74.00	164	207	Peak
2	*	2390.000	37.70	31.43	69.13	-4.87	74.00	164	207	Peak
3		2425.500	83.91	31.53	115.44	N/A	N/A	164	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

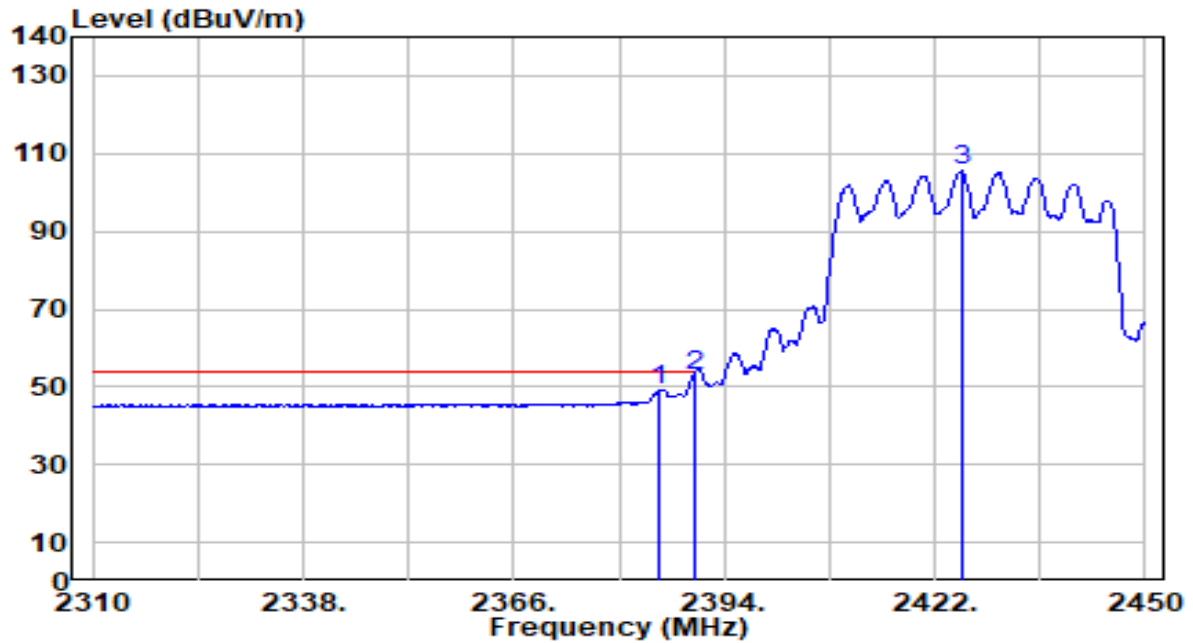


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.320	17.97	31.41	49.38	-4.62	54.00	164	207	Average
2	*	2390.000	21.66	31.43	53.09	-0.91	54.00	164	207	Average
3		2425.500	73.97	31.53	105.51	N/A	N/A	164	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

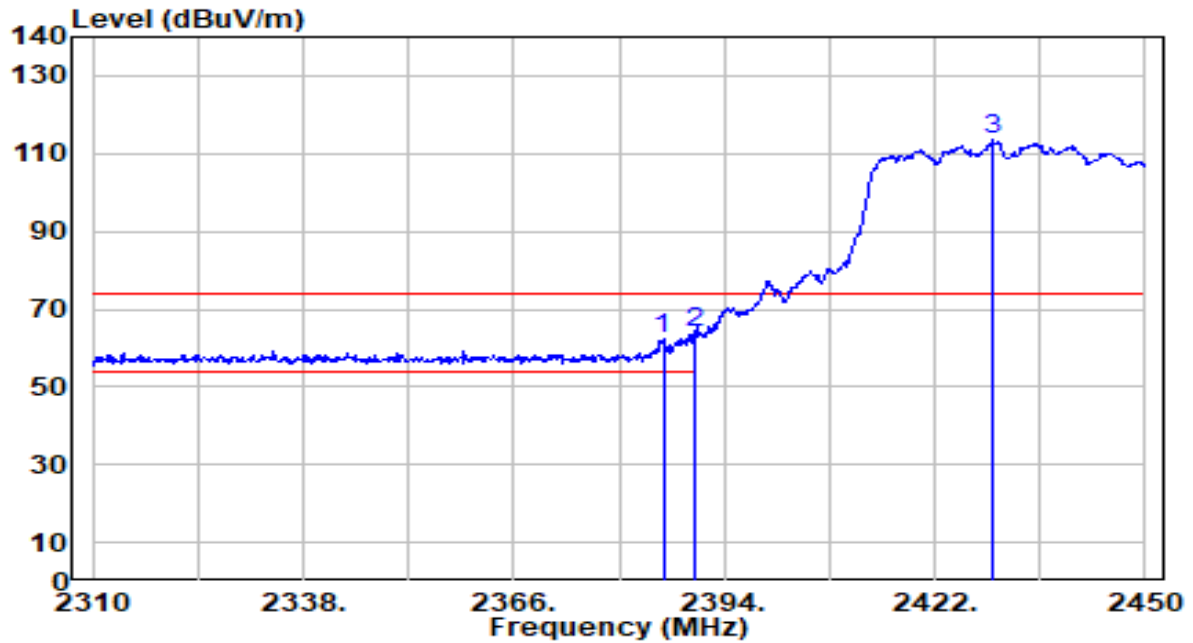


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.880	31.04	31.41	62.46	-11.54	74.00	100	161	Peak
2	* 2390.000	32.29	31.43	63.71	-10.29	74.00	100	161	Peak
3	2429.700	81.83	31.55	113.38	N/A	N/A	100	161	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

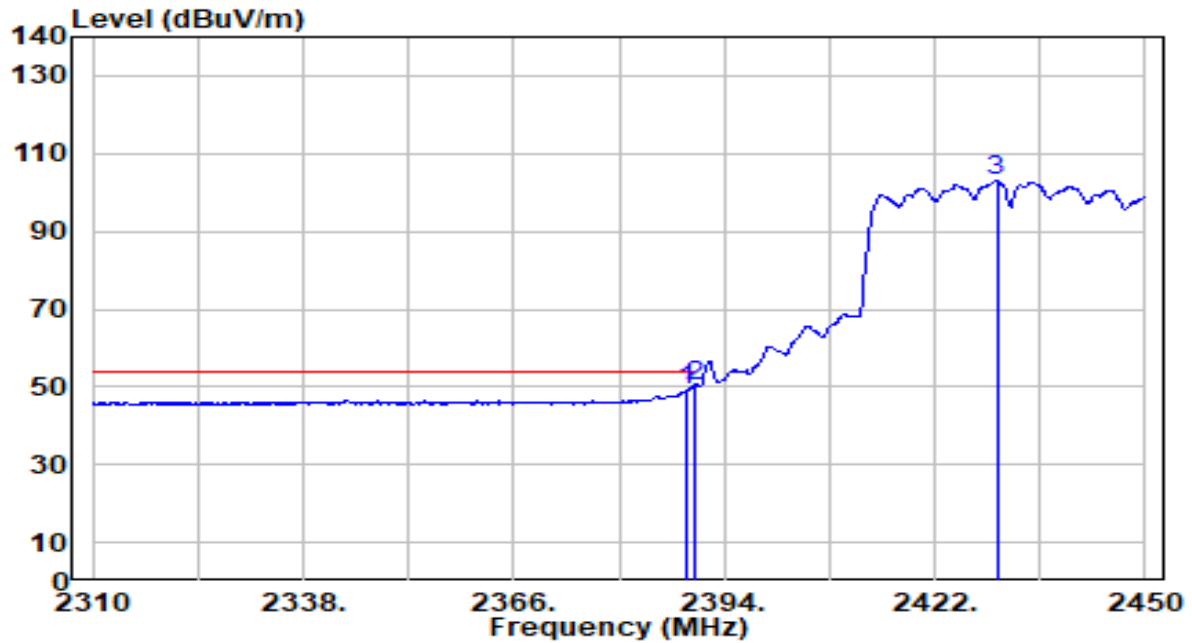


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.960	17.46	31.42	48.89	-5.11	54.00	100	161	Average
2	*	2390.000	18.68	31.43	50.10	-3.90	54.00	100	161	Average
3		2430.260	71.26	31.55	102.81	N/A	N/A	100	161	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

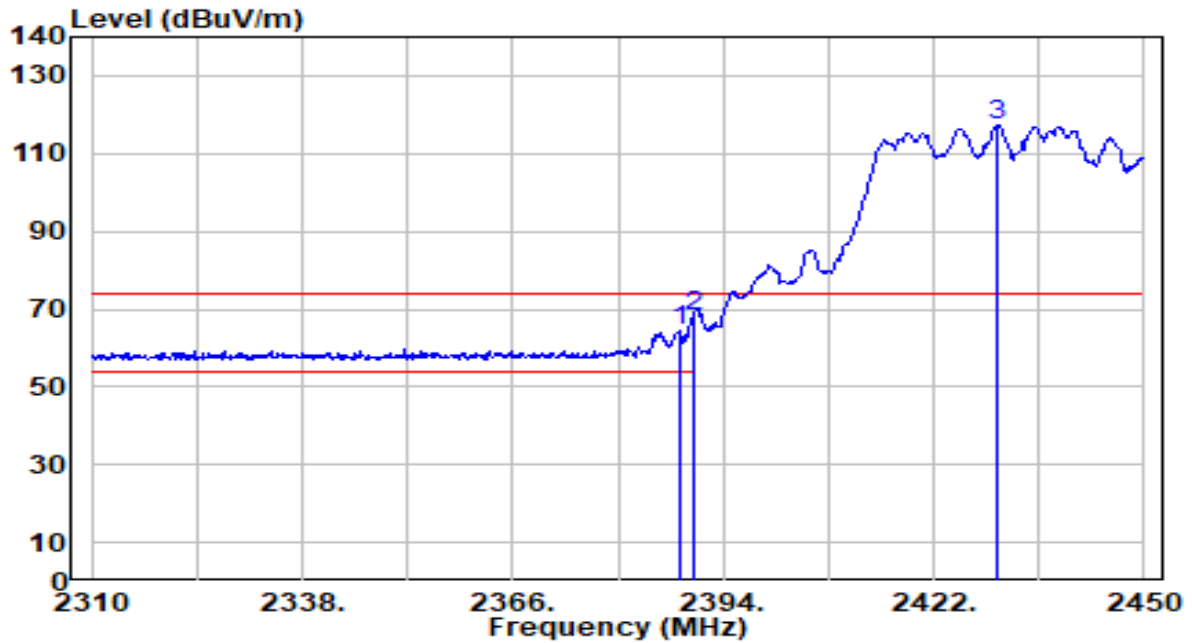


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.120	32.98	31.42	64.40	-9.60	74.00	164	207	Peak
2	* 2390.000	36.69	31.43	68.12	-5.88	74.00	164	207	Peak
3	2430.540	85.94	31.55	117.49	N/A	N/A	164	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

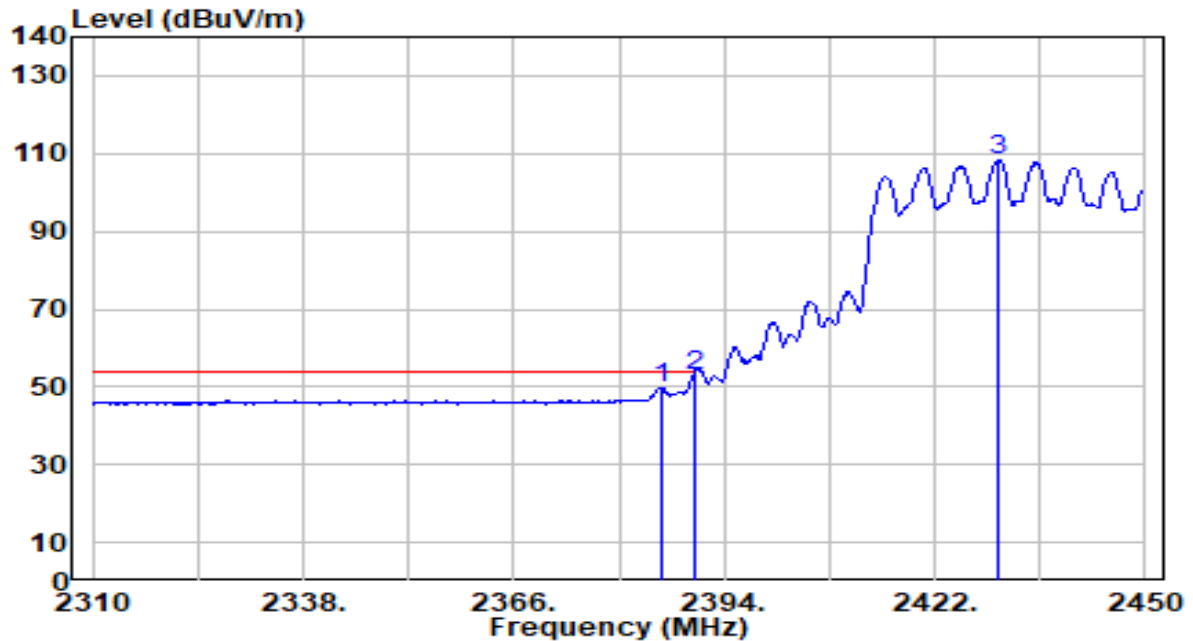


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.740	18.27	31.41	49.68	-4.32	54.00	164	207	Average
2	*	2390.000	21.59	31.43	53.02	-0.98	54.00	164	207	Average
3		2430.540	76.89	31.55	108.44	N/A	N/A	164	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

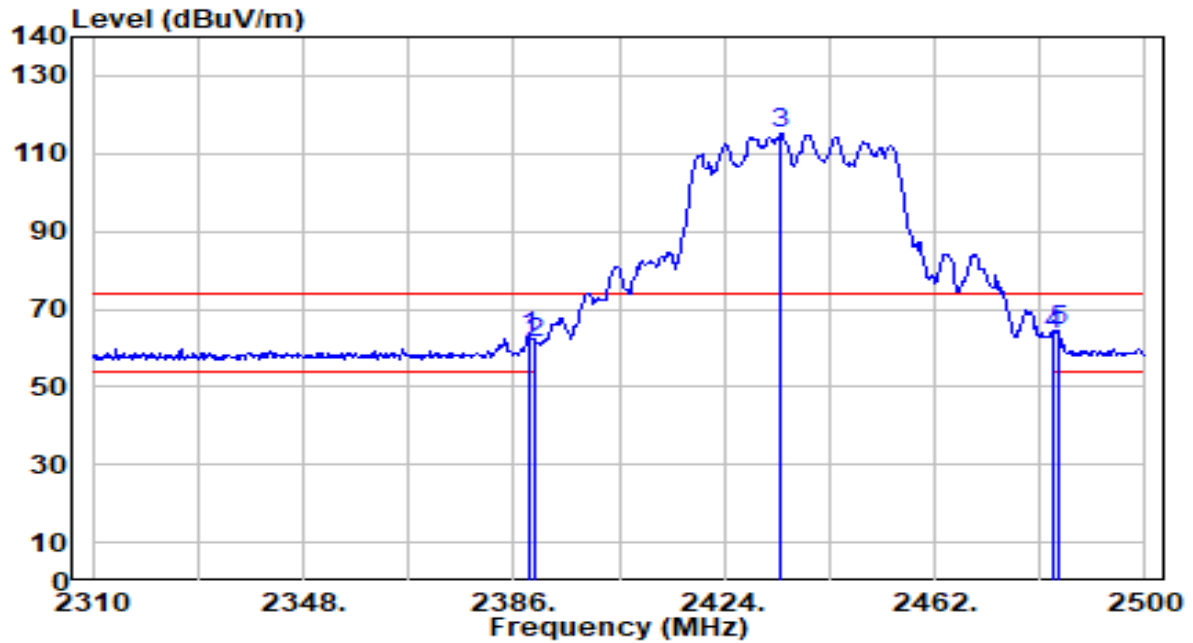


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	31.46	31.42	62.88	-11.12	74.00	169	131	Peak
2	2390.000	30.03	31.43	61.46	-12.54	74.00	169	131	Peak
3	2434.260	83.57	31.56	115.13	N/A	N/A	169	131	Peak
4	2483.500	31.90	31.71	63.61	-10.39	74.00	169	131	Peak
5	* 2484.230	32.77	31.71	64.48	-9.52	74.00	169	131	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

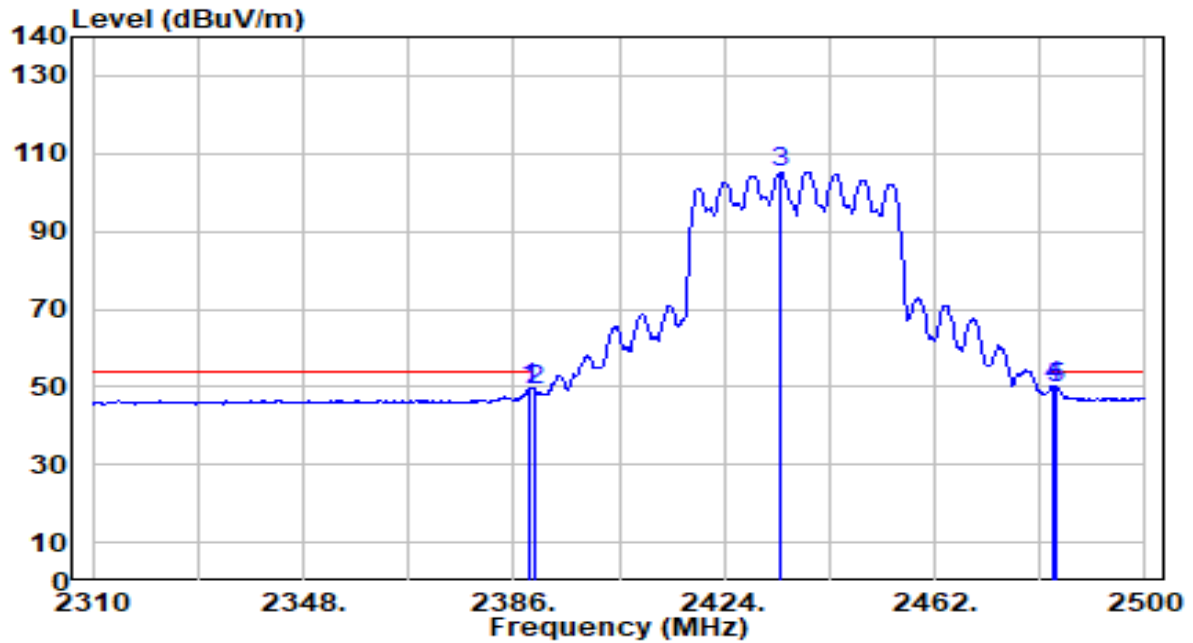


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	18.47	31.42	49.90	-4.10	54.00	169	131	Average
2	2390.000	17.81	31.43	49.23	-4.77	54.00	169	131	Average
3	2434.070	73.78	31.56	105.34	N/A	N/A	169	131	Average
4	* 2483.500	18.63	31.71	50.34	-3.66	54.00	169	131	Average
5	2484.040	18.07	31.71	49.79	-4.21	54.00	169	131	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

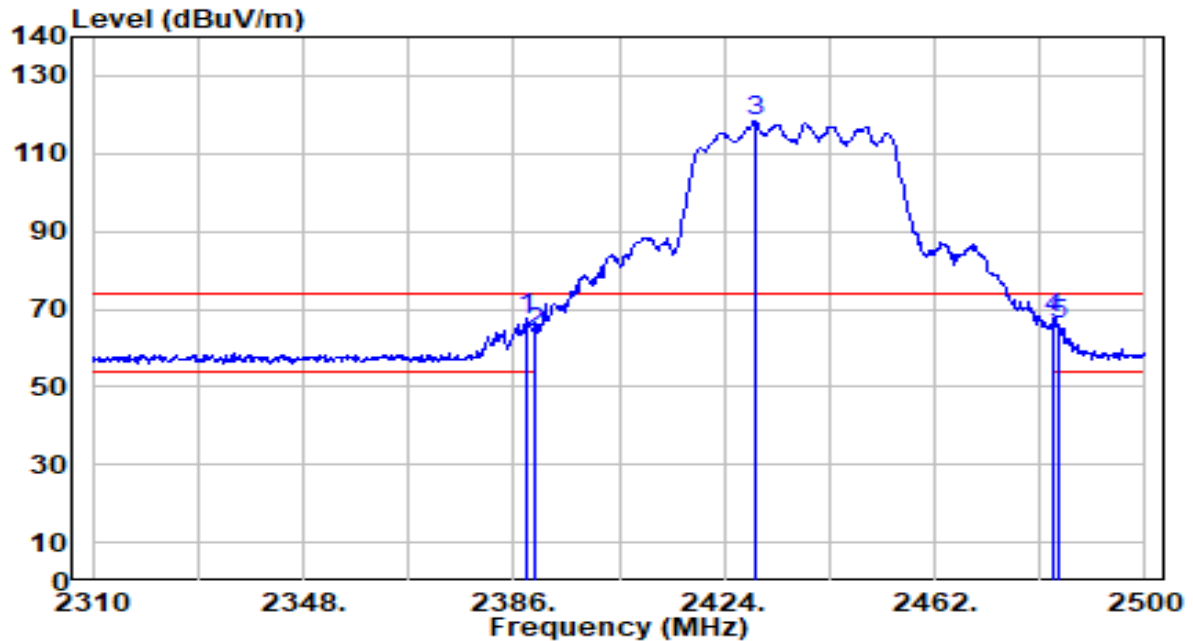


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.280	36.44	31.42	67.86	-6.14	74.00	150	230	Peak
2		2390.000	32.44	31.43	63.86	-10.14	74.00	150	230	Peak
3		2429.700	86.72	31.55	118.27	N/A	N/A	150	230	Peak
4		2483.500	35.88	31.71	67.59	-6.41	74.00	150	230	Peak
5		2484.420	34.40	31.71	66.11	-7.89	74.00	150	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

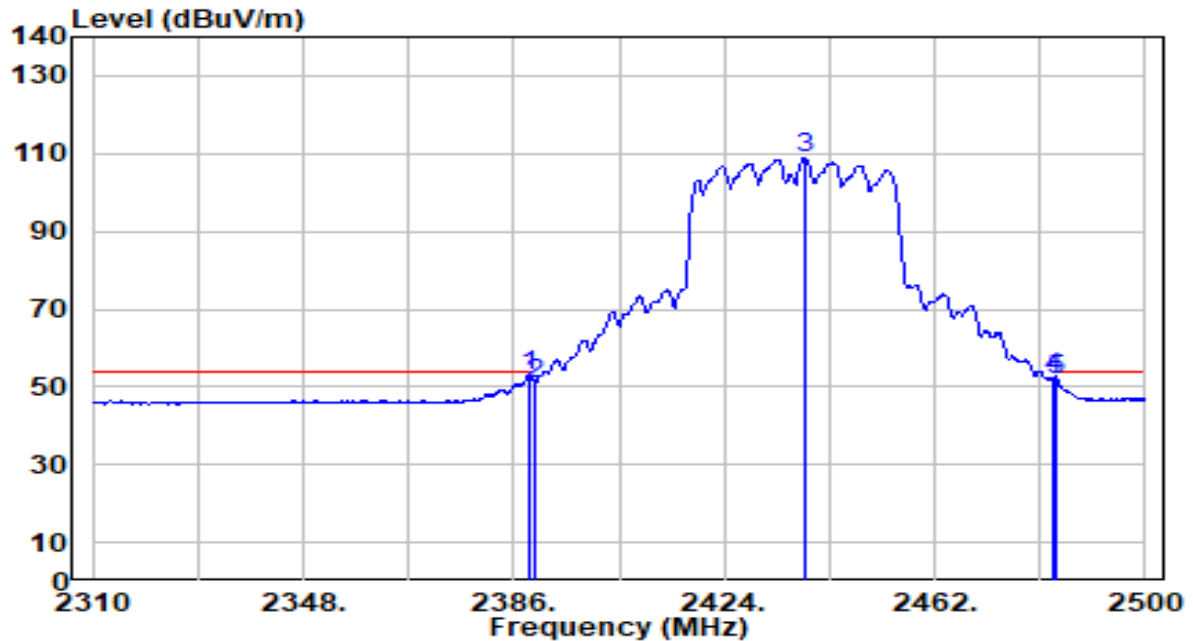


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	21.67	31.42	53.09	-0.91	54.00	150	230	Average
2		2390.000	19.37	31.43	50.79	-3.21	54.00	150	230	Average
3		2438.630	77.52	31.57	109.09	N/A	N/A	150	230	Average
4		2483.500	20.69	31.71	52.40	-1.60	54.00	150	230	Average
5		2484.040	20.17	31.71	51.88	-2.12	54.00	150	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

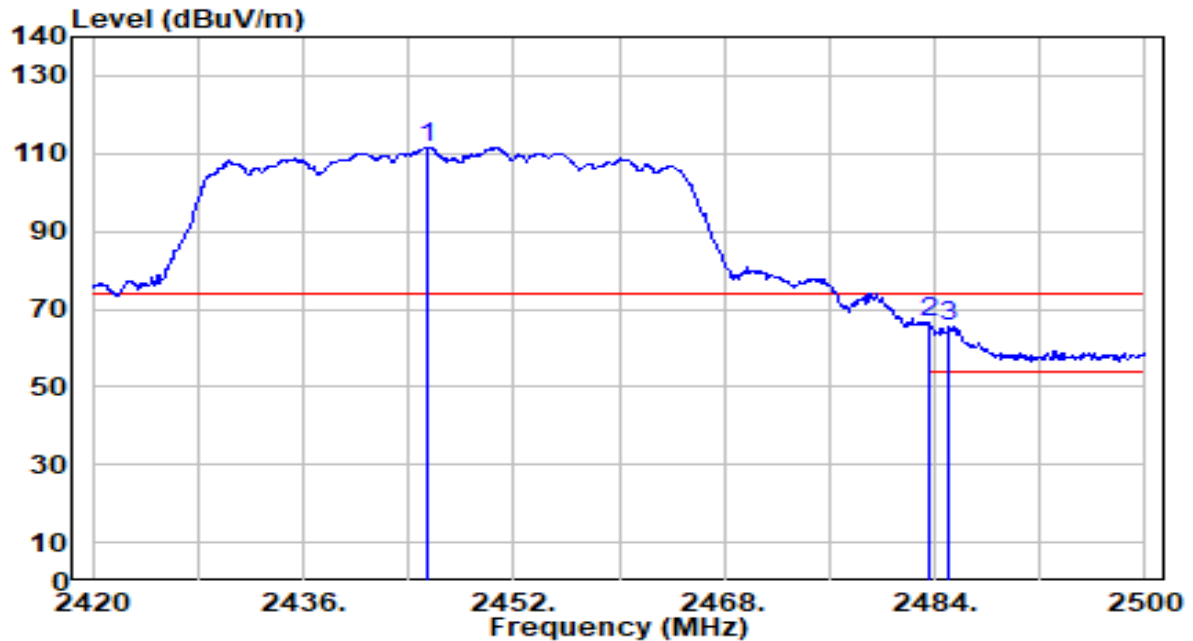


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.440	80.05	31.59	111.65	N/A	N/A	100	151	Peak
2	* 2483.500	35.04	31.71	66.75	-7.25	74.00	100	151	Peak
3	2485.040	34.04	31.71	65.76	-8.24	74.00	100	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

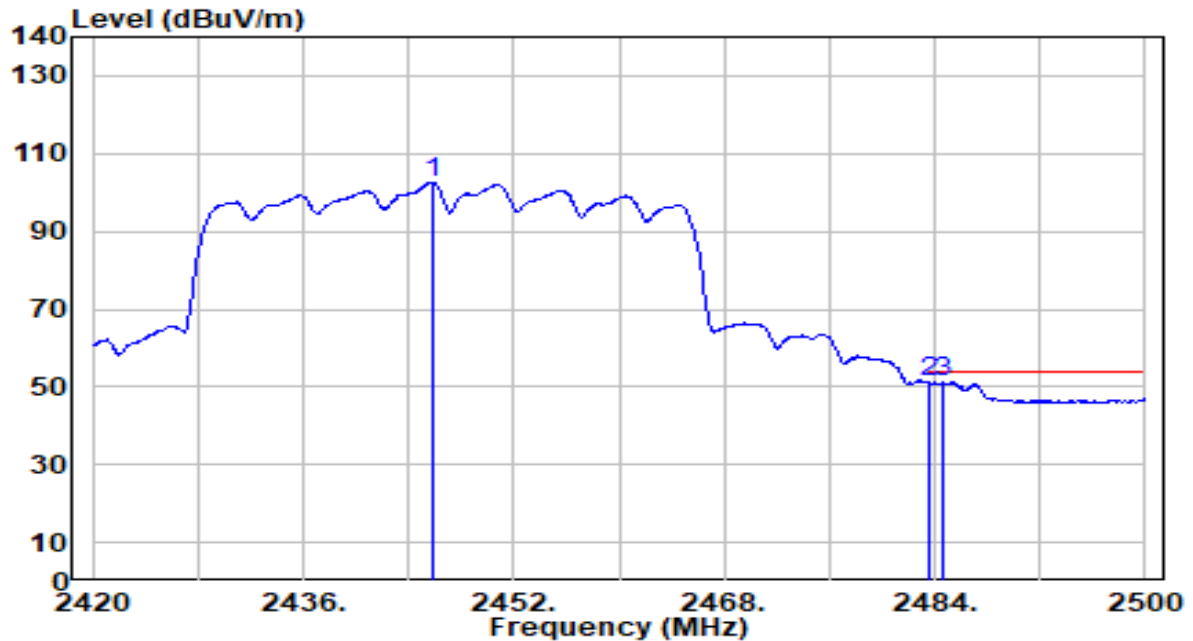


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2445.760	70.92	31.60	102.52	N/A	N/A	100	151	Average
2	*	2483.500	19.62	31.71	51.33	-2.67	54.00	100	151	Average
3		2484.720	19.41	31.71	51.12	-2.88	54.00	100	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

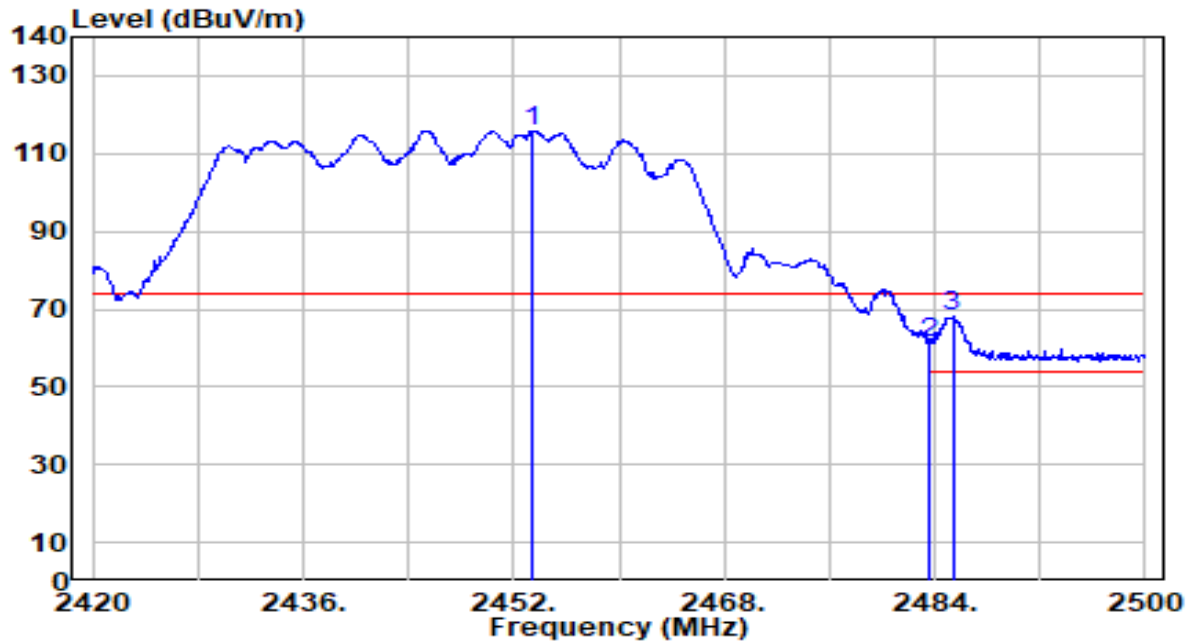


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.440	84.24	31.62	115.85	N/A	N/A	156	204	Peak
2	2483.500	29.66	31.71	61.37	-12.63	74.00	156	204	Peak
3	* 2485.360	36.29	31.72	68.01	-5.99	74.00	156	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 8_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

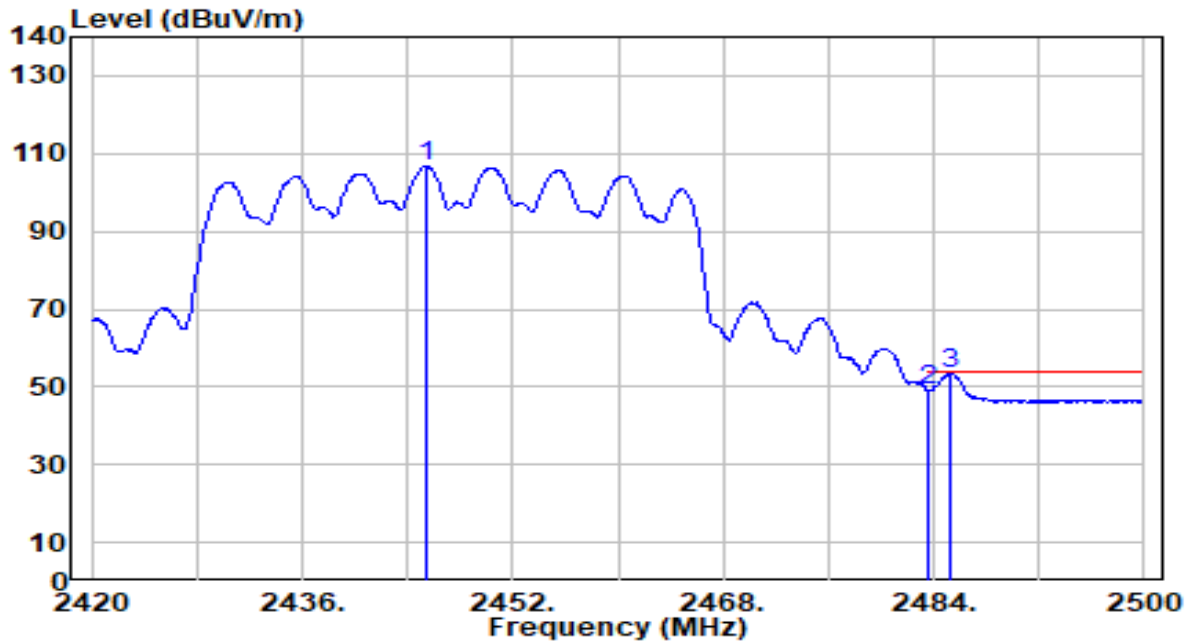


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2445.440	75.01	31.59	106.61	N/A	N/A	156	204	Average
2	2483.500	17.68	31.71	49.39	-4.61	54.00	156	204	Average
3	* 2485.200	21.70	31.72	53.41	-0.59	54.00	156	204	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

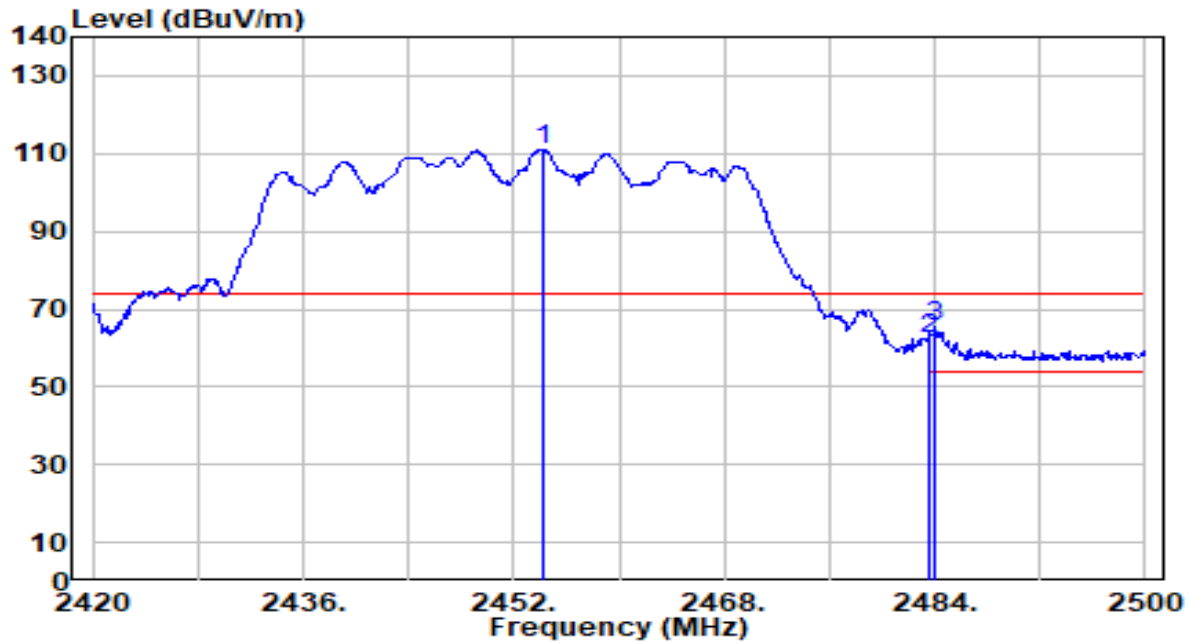


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.320	79.31	31.62	110.94	N/A	N/A	174	126	Peak
2		2483.500	30.79	31.71	62.50	-11.50	74.00	174	126	Peak
3	*	2484.000	33.70	31.71	65.41	-8.59	74.00	174	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

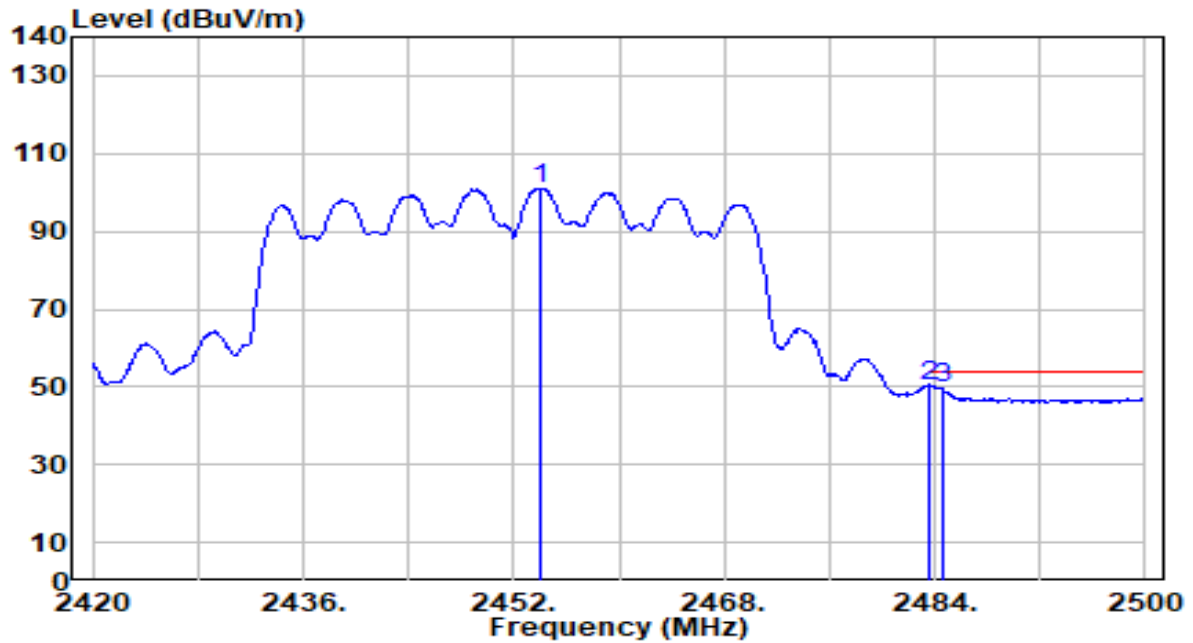


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.080	69.55	31.62	101.17	N/A	N/A	174	126	Average
2	*	2483.500	18.43	31.71	50.14	-3.86	54.00	174	126	Average
3		2484.560	17.75	31.71	49.46	-4.54	54.00	174	126	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

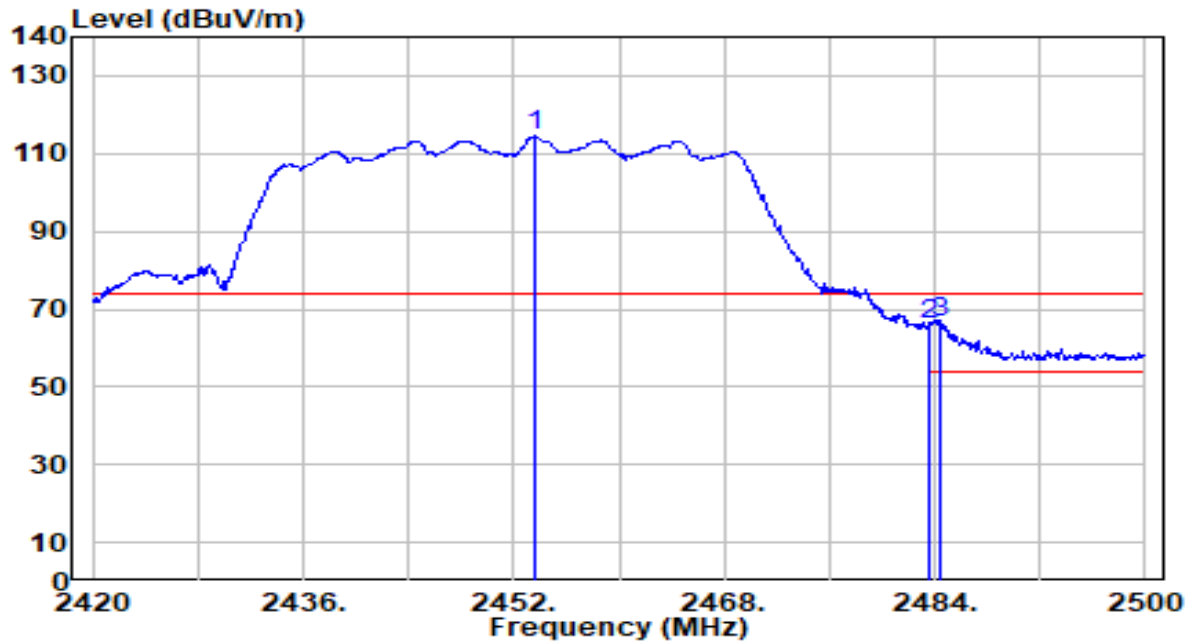


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.520	82.82	31.62	114.44	N/A	N/A	159	232	Peak
2	2483.500	34.27	31.71	65.98	-8.02	74.00	159	232	Peak
3	* 2484.480	35.02	31.71	66.74	-7.26	74.00	159	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11n-40MHz_TX_CH 9_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

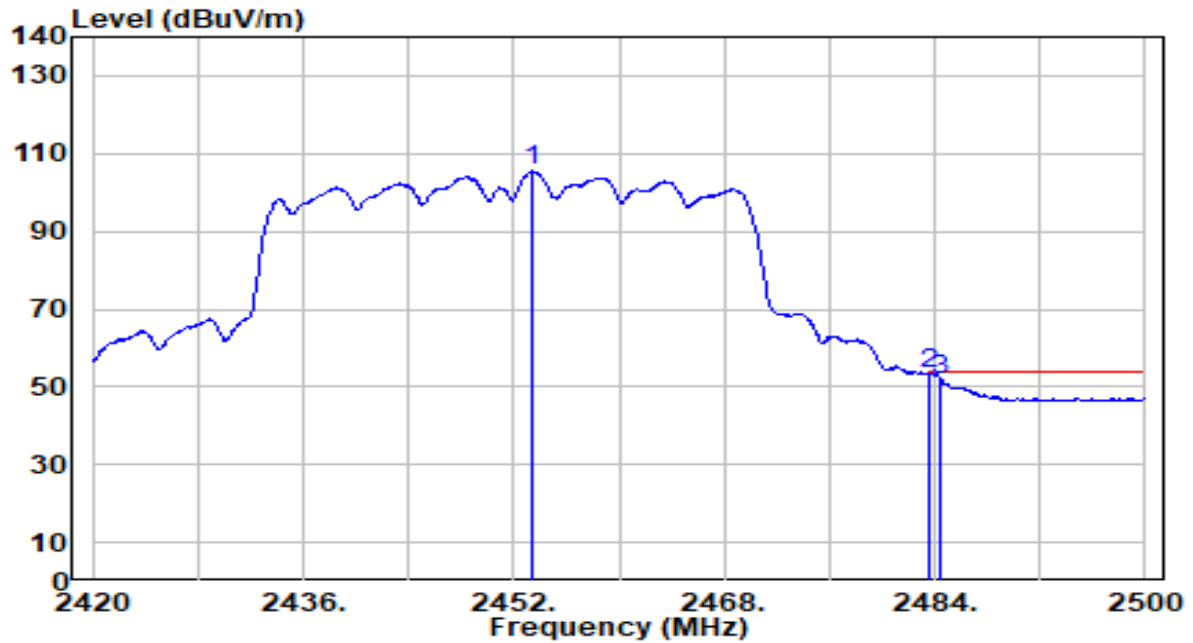


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.360	73.82	31.62	105.44	N/A	N/A	159	232	Average
2	*	2483.500	21.40	31.71	53.11	-0.89	54.00	159	232	Average
3		2484.480	20.28	31.71	52.00	-2.00	54.00	159	232	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

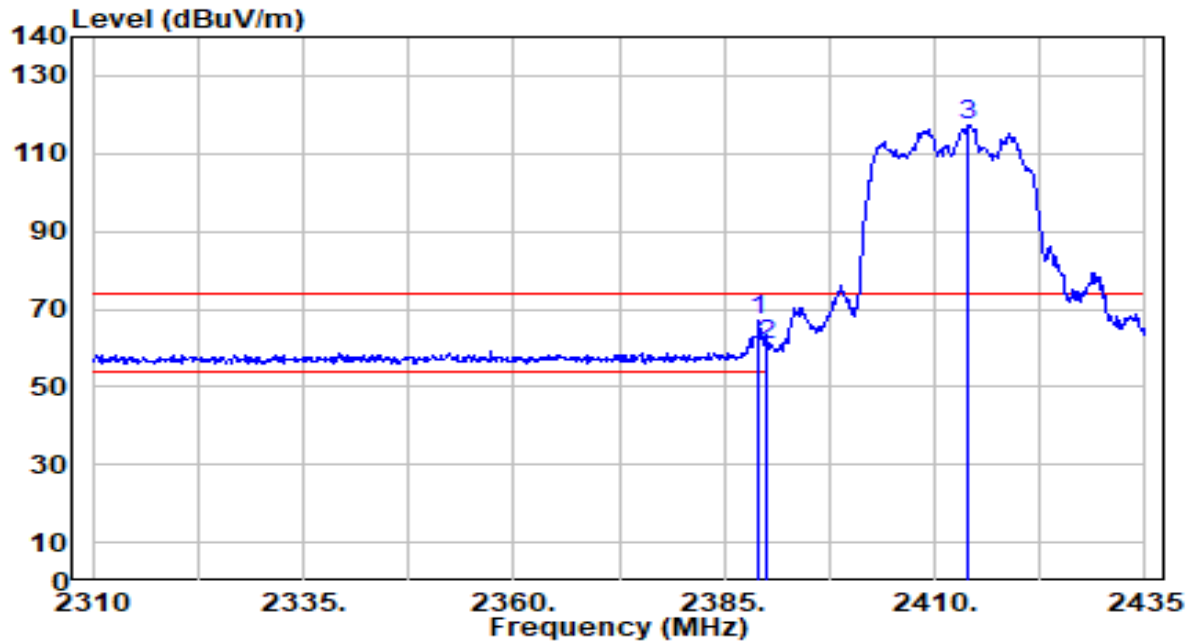


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	35.68	31.42	67.10	-6.90	74.00	200	132	Peak
2		2390.000	29.25	31.43	60.67	-13.33	74.00	200	132	Peak
3		2414.000	85.82	31.50	117.32	N/A	N/A	200	132	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

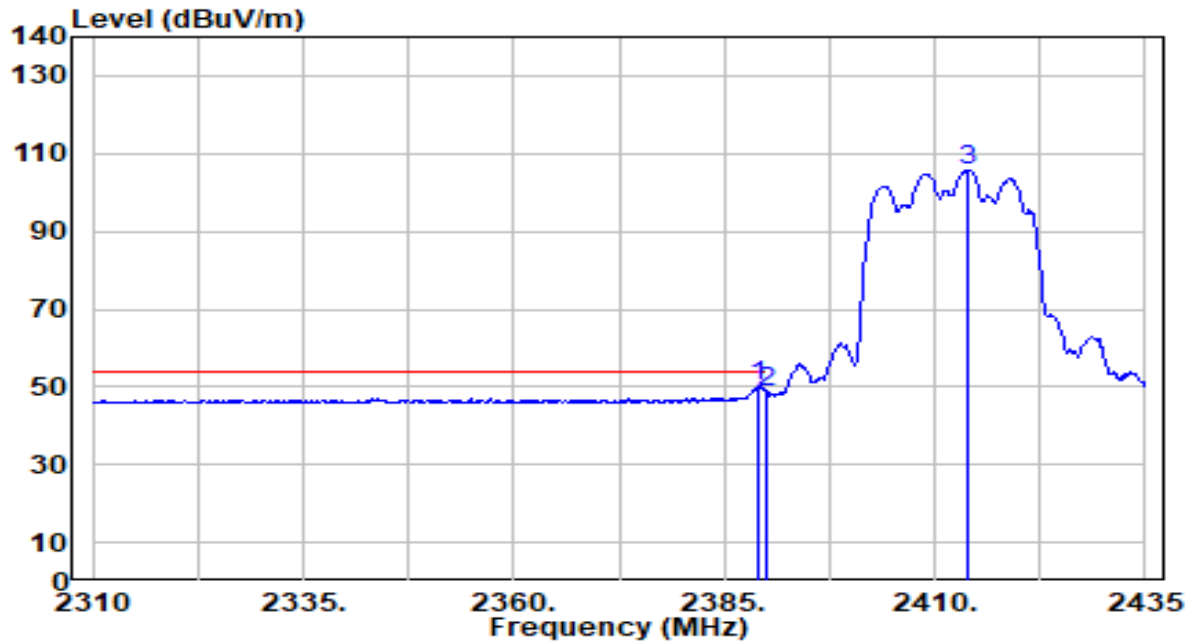


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.000	18.60	31.42	50.03	-3.97	54.00	200	132	Average
2		2390.000	17.29	31.43	48.72	-5.28	54.00	200	132	Average
3		2414.000	74.38	31.50	105.88	N/A	N/A	200	132	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

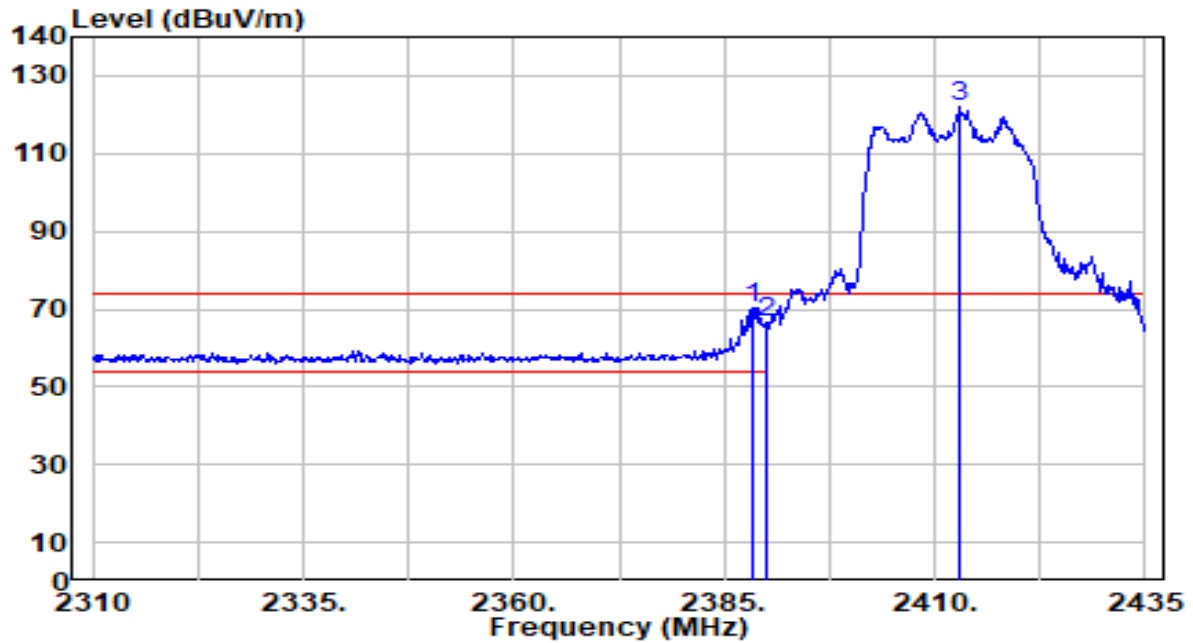


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.250	39.00	31.42	70.42	-3.58	74.00	123	111	Peak
2		2390.000	35.07	31.43	66.49	-7.51	74.00	123	111	Peak
3		2413.000	90.46	31.50	121.95	N/A	N/A	123	111	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 1_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

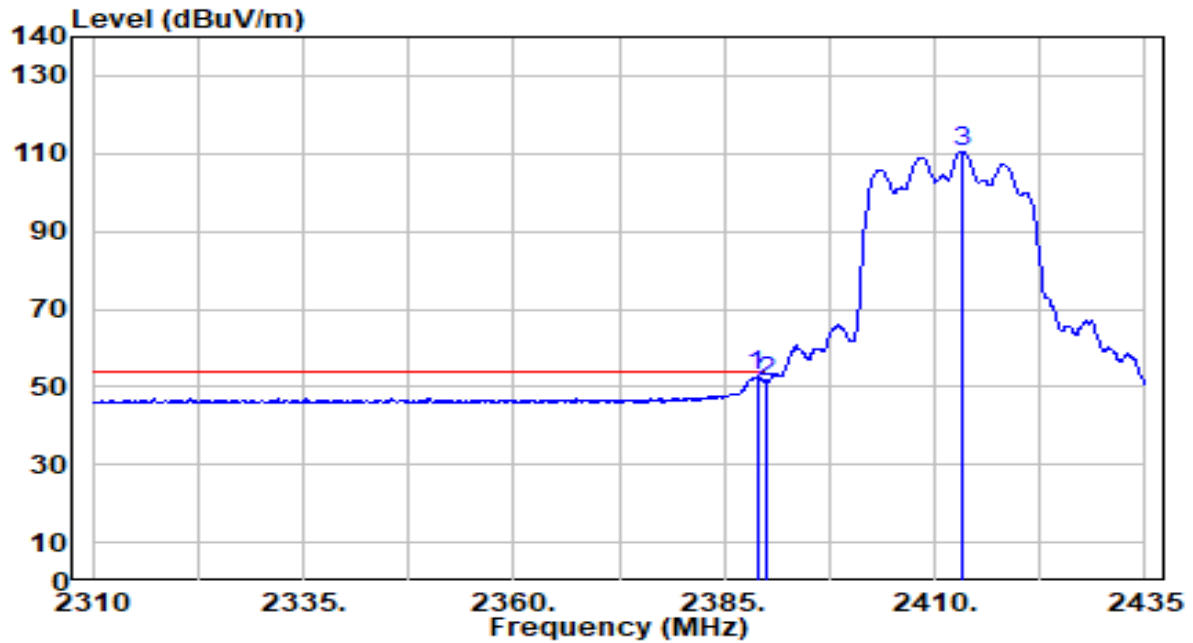


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.875	21.60	31.42	53.02	-0.98	54.00	123	111	Average
2		2390.000	19.82	31.43	51.25	-2.75	54.00	123	111	Average
3		2413.250	79.07	31.50	110.57	N/A	N/A	123	111	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

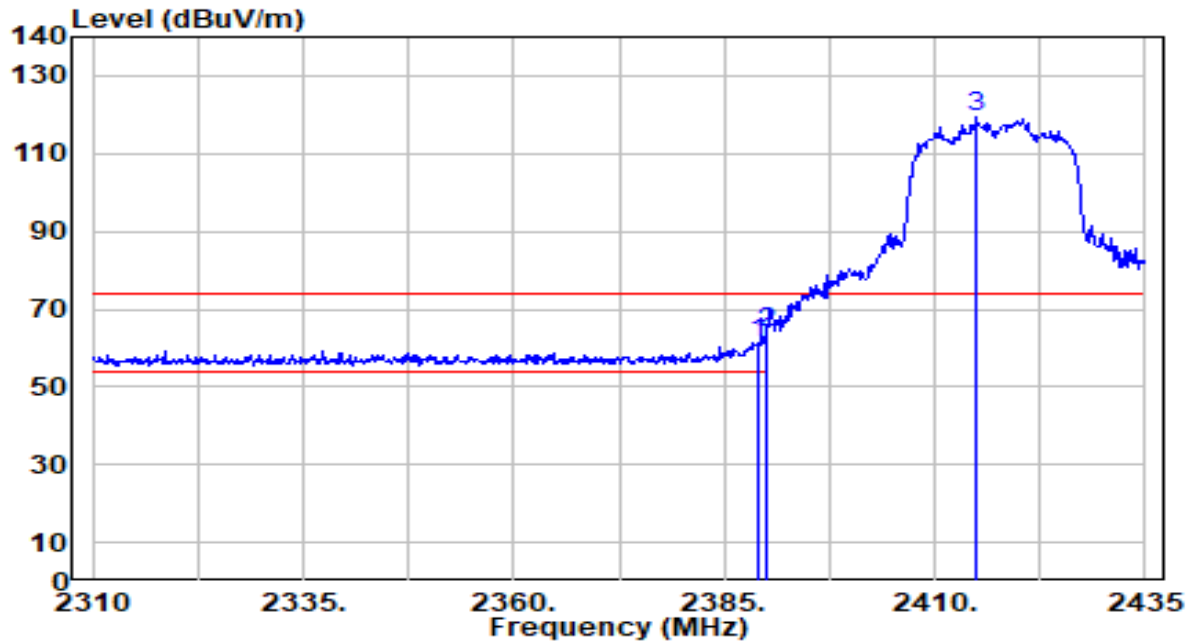


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	29.70	31.42	61.13	-12.87	74.00	100	161	Peak
2	*	2390.000	32.27	31.43	63.69	-10.31	74.00	100	161	Peak
3		2414.875	87.76	31.50	119.26	N/A	N/A	100	161	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

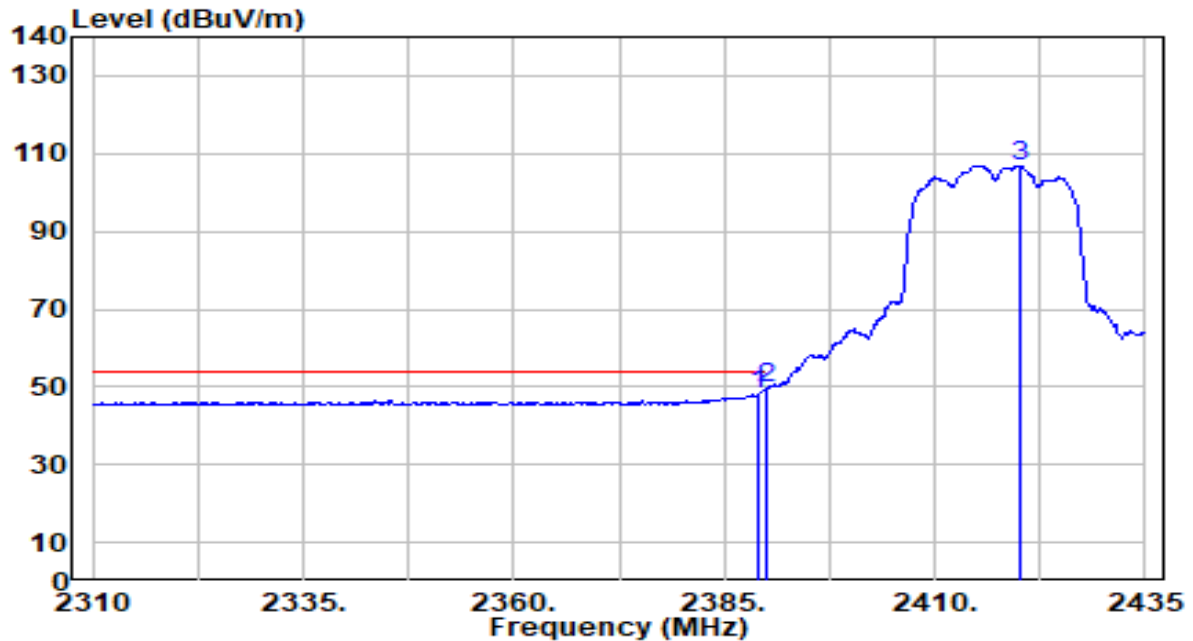


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.000	16.77	31.42	48.19	-5.81	54.00	100	161	Average
2	*	2390.000	18.34	31.43	49.77	-4.23	54.00	100	161	Average
3		2420.000	75.39	31.52	106.90	N/A	N/A	100	161	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

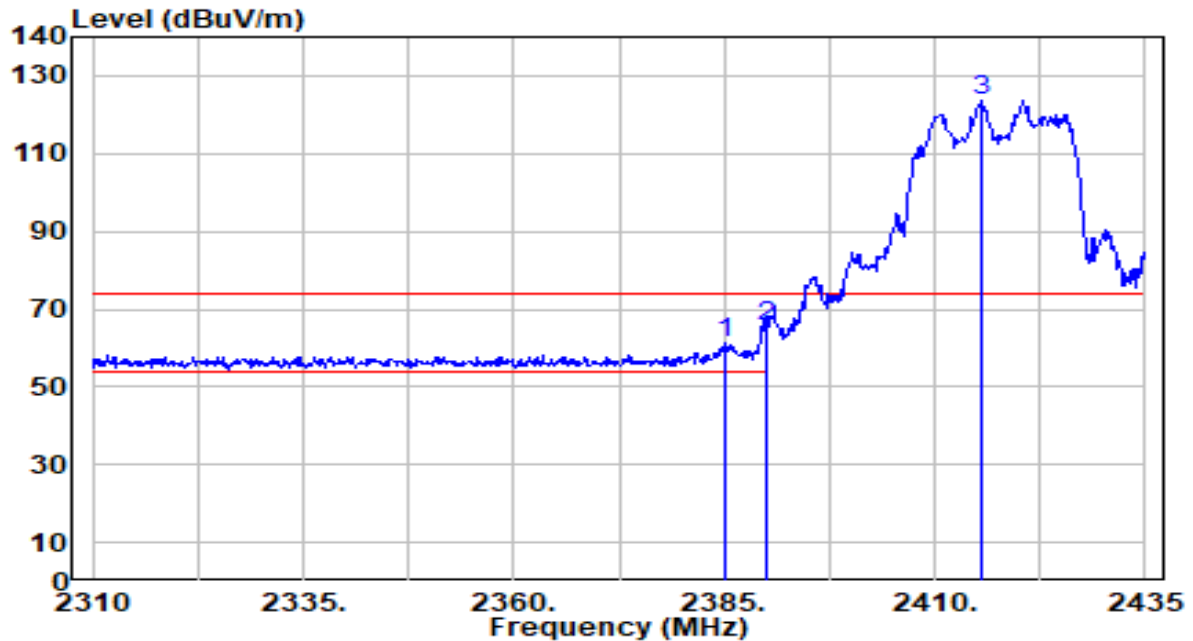


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.250	29.73	31.41	61.15	-12.85	74.00	164	207	Peak
2	*	2390.000	34.25	31.43	65.68	-8.32	74.00	164	207	Peak
3		2415.500	91.94	31.50	123.44	N/A	N/A	164	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 2_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

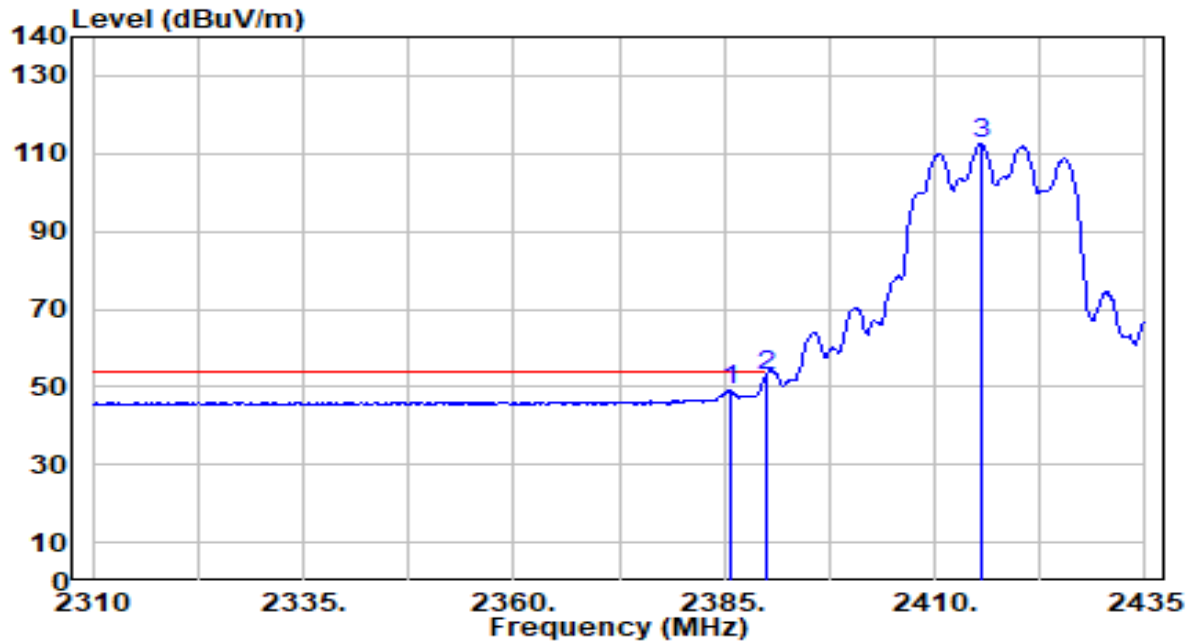


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.625	17.56	31.41	48.98	-5.02	54.00	164	207	Average
2	*	2390.000	21.62	31.43	53.05	-0.95	54.00	164	207	Average
3		2415.625	80.98	31.50	112.49	N/A	N/A	164	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

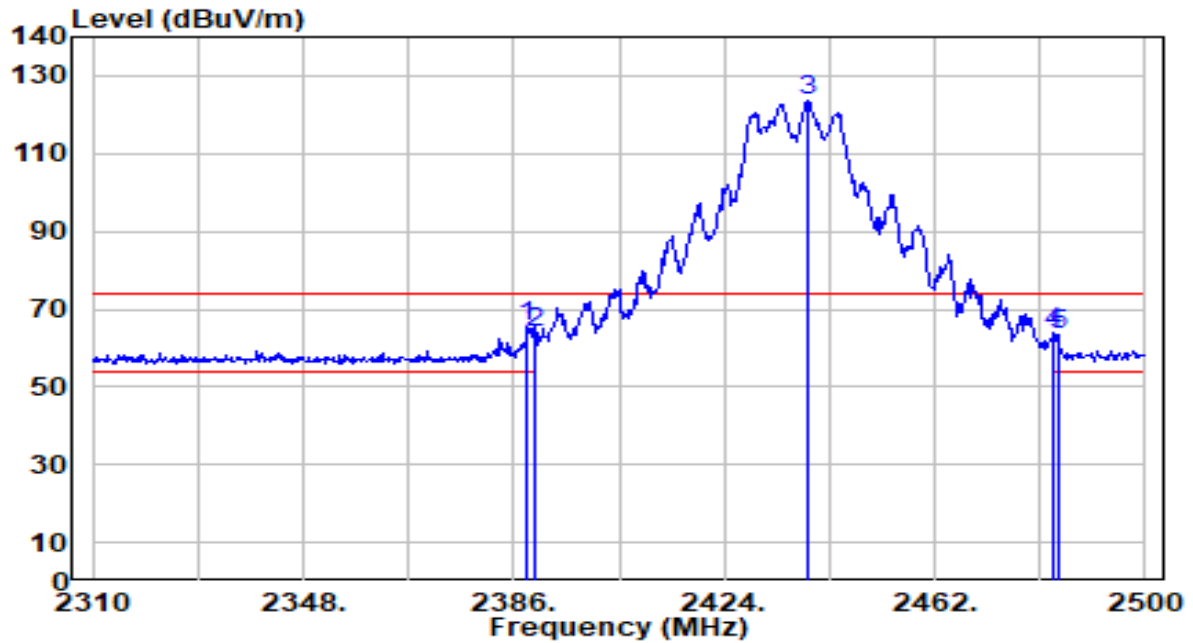


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.470	34.29	31.42	65.71	-8.29	74.00	181	119	Peak
2		2390.000	32.43	31.43	63.86	-10.14	74.00	181	119	Peak
3		2439.010	92.00	31.57	123.58	N/A	N/A	181	119	Peak
4		2483.500	32.03	31.71	63.74	-10.26	74.00	181	119	Peak
5		2484.230	31.93	31.71	63.64	-10.36	74.00	181	119	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

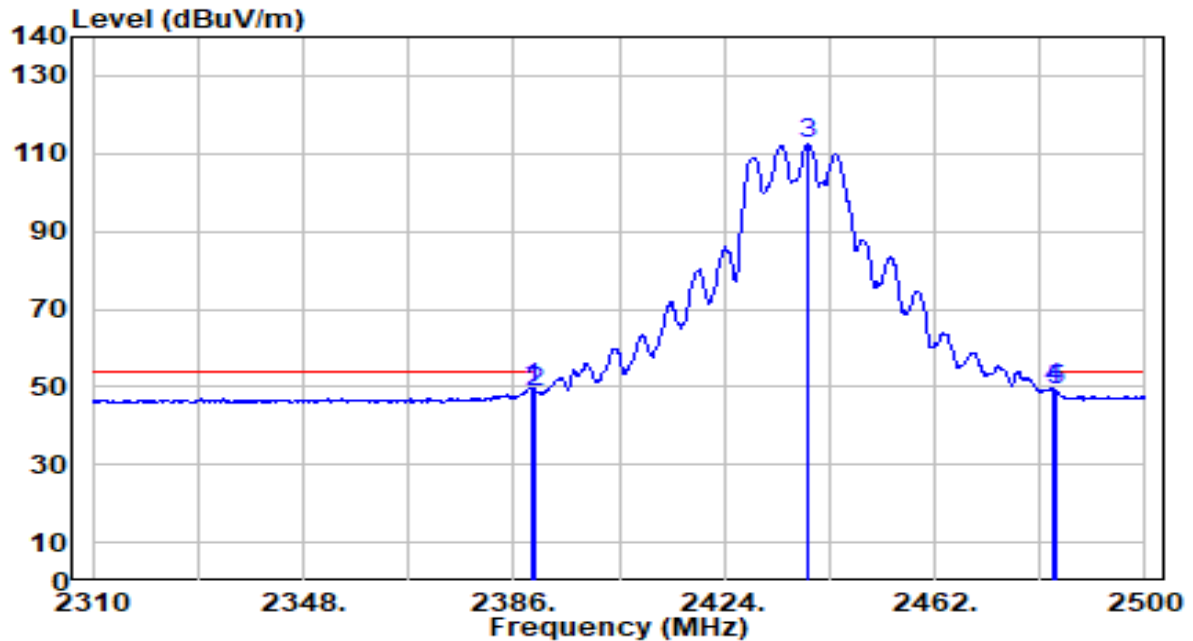


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2389.230	18.48	31.42	49.91	-4.09	54.00	181	119	Average
2		2390.000	17.36	31.43	48.78	-5.22	54.00	181	119	Average
3		2439.200	80.83	31.58	112.40	N/A	N/A	181	119	Average
4	*	2483.500	17.86	31.71	49.57	-4.43	54.00	181	119	Average
5		2484.040	17.38	31.71	49.10	-4.90	54.00	181	119	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

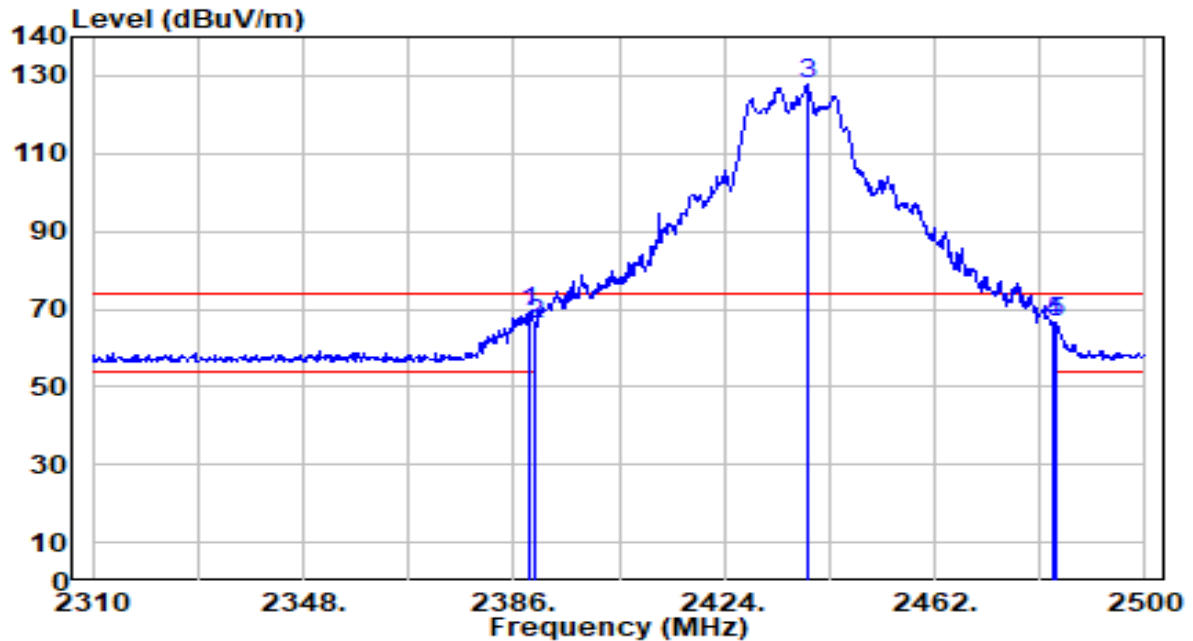


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	37.97	31.42	69.40	-4.60	74.00	112	235	Peak
2		2390.000	34.71	31.43	66.14	-7.86	74.00	112	235	Peak
3		2439.010	96.14	31.57	127.72	N/A	N/A	112	235	Peak
4		2483.500	34.63	31.71	66.34	-7.66	74.00	112	235	Peak
5		2484.040	34.62	31.71	66.34	-7.66	74.00	112	235	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

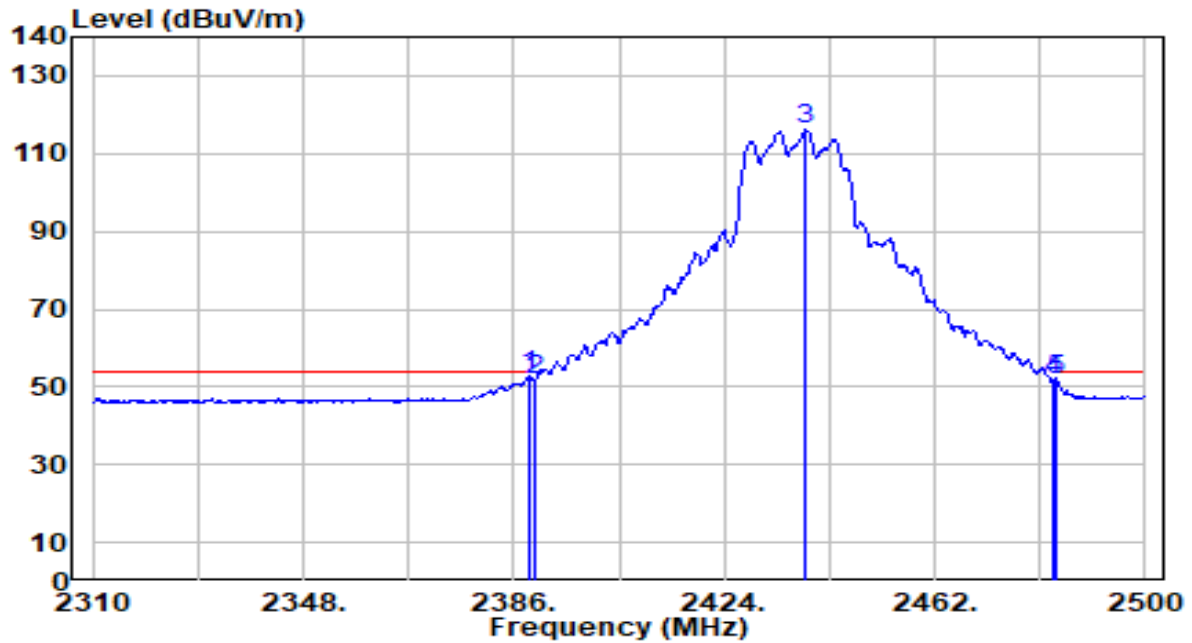


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.040	21.57	31.42	53.00	-1.00	54.00	112	235	Average
2		2390.000	20.42	31.43	51.84	-2.16	54.00	112	235	Average
3		2438.630	84.40	31.57	115.98	N/A	N/A	112	235	Average
4		2483.500	20.26	31.71	51.97	-2.03	54.00	112	235	Average
5		2484.040	20.05	31.71	51.76	-2.24	54.00	112	235	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

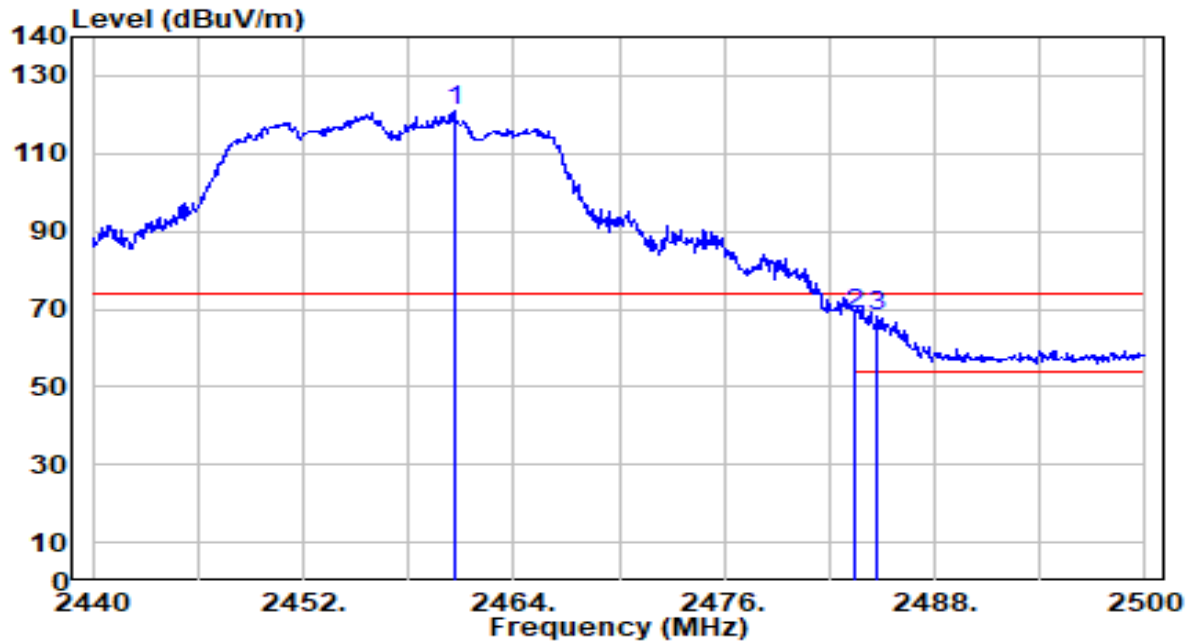


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.580	89.09	31.64	120.73	N/A	N/A	100	151	Peak
2	*	2483.500	36.93	31.71	68.64	-5.36	74.00	100	151	Peak
3		2484.700	36.62	31.71	68.34	-5.66	74.00	100	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

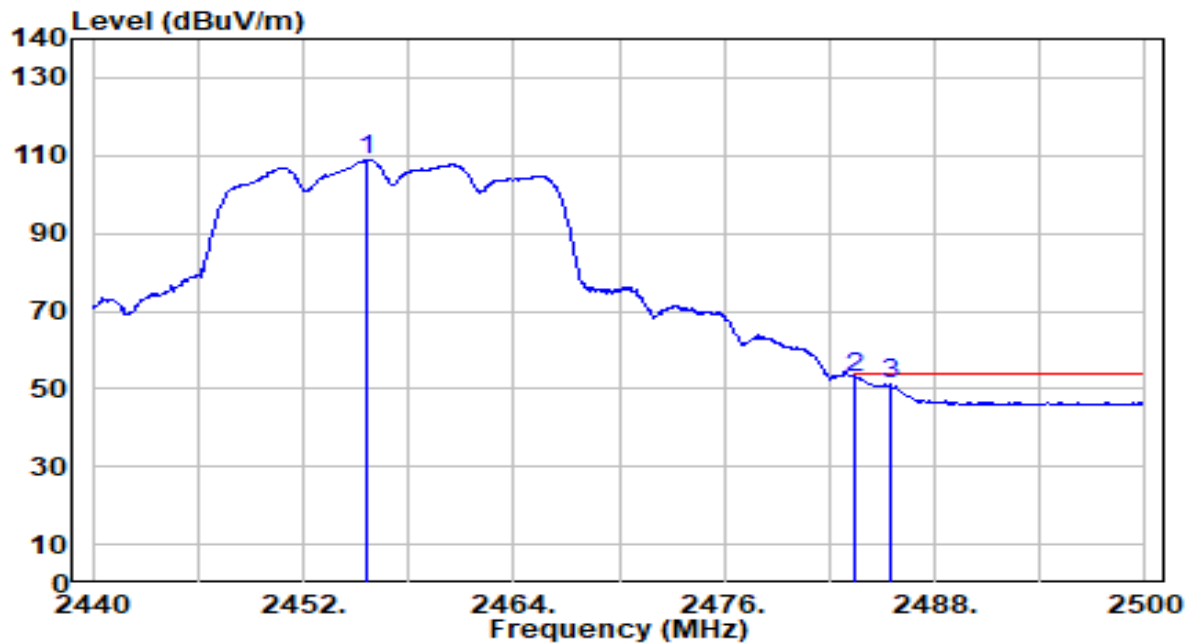


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.660	77.32	31.63	108.95	N/A	N/A	100	151	Average
2	*	2483.500	21.21	31.71	52.92	-1.08	54.00	100	151	Average
3		2485.480	19.33	31.72	51.04	-2.96	54.00	100	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

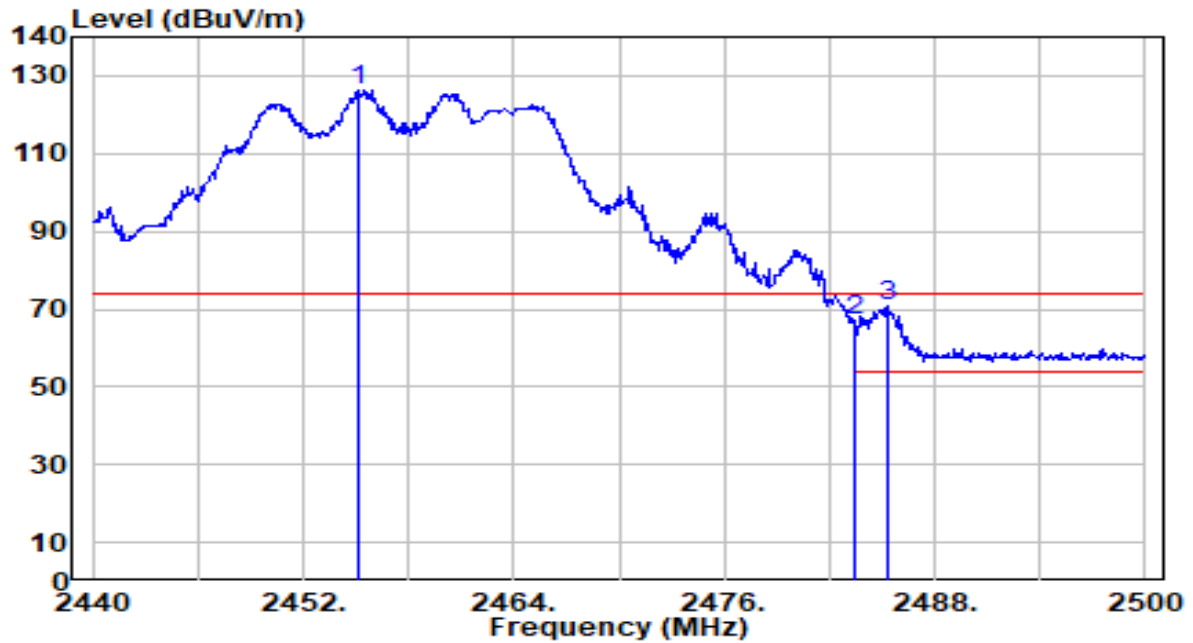


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.120	94.51	31.62	126.14	N/A	N/A	156	204	Peak
2	2483.500	35.52	31.71	67.23	-6.77	74.00	156	204	Peak
3	* 2485.360	38.84	31.72	70.56	-3.44	74.00	156	204	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 10_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

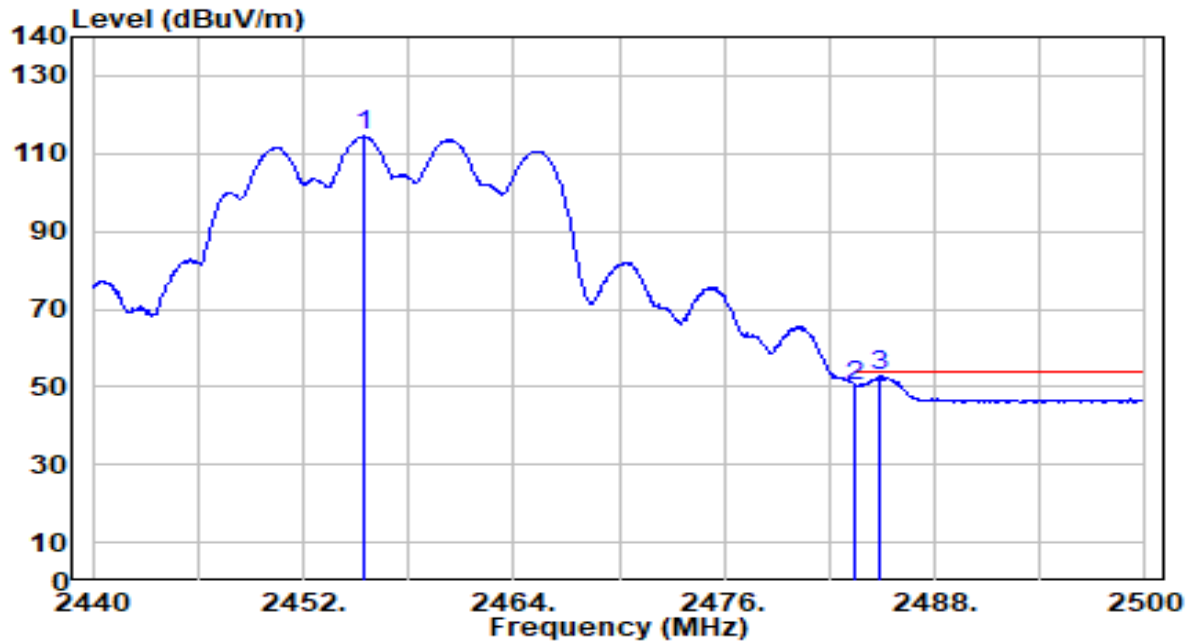


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.480	82.83	31.62	114.46	N/A	N/A	156	204	Average
2	2483.500	18.72	31.71	50.43	-3.57	54.00	156	204	Average
3	* 2484.880	21.33	31.71	53.04	-0.96	54.00	156	204	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

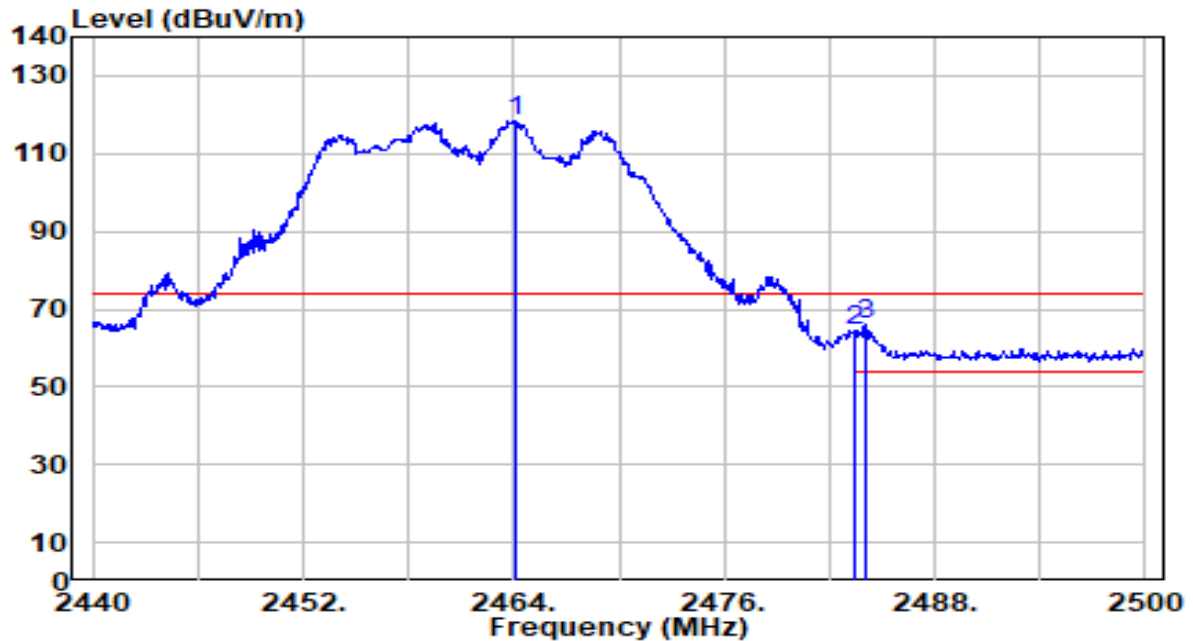


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.060	86.93	31.65	118.58	N/A	N/A	169	131	Peak
2	2483.500	32.99	31.71	64.70	-9.30	74.00	169	131	Peak
3	* 2484.040	34.07	31.71	65.79	-8.21	74.00	169	131	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

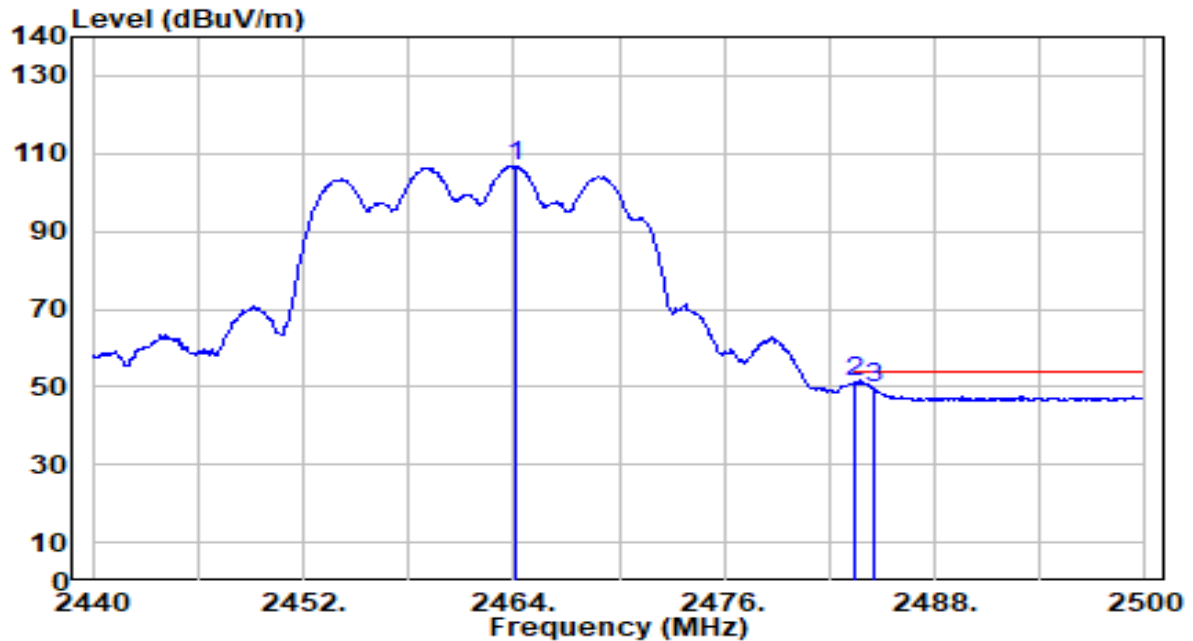


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.120	75.13	31.65	106.78	N/A	N/A	169	131	Average
2	*	2483.500	19.47	31.71	51.18	-2.82	54.00	169	131	Average
3		2484.520	18.11	31.71	49.82	-4.18	54.00	169	131	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

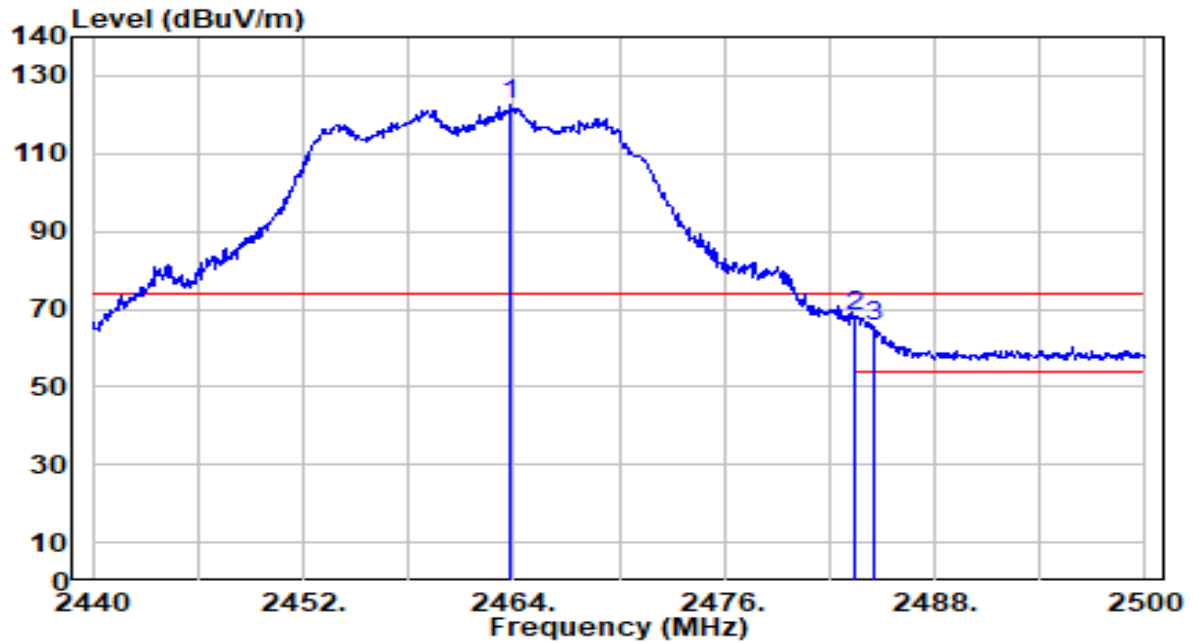


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2463.820	90.72	31.65	122.37	N/A	N/A	100	237	Peak
2	*	2483.500	36.24	31.71	67.95	-6.05	74.00	100	237	Peak
3		2484.520	33.58	31.71	65.30	-8.70	74.00	100	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_CH 11_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

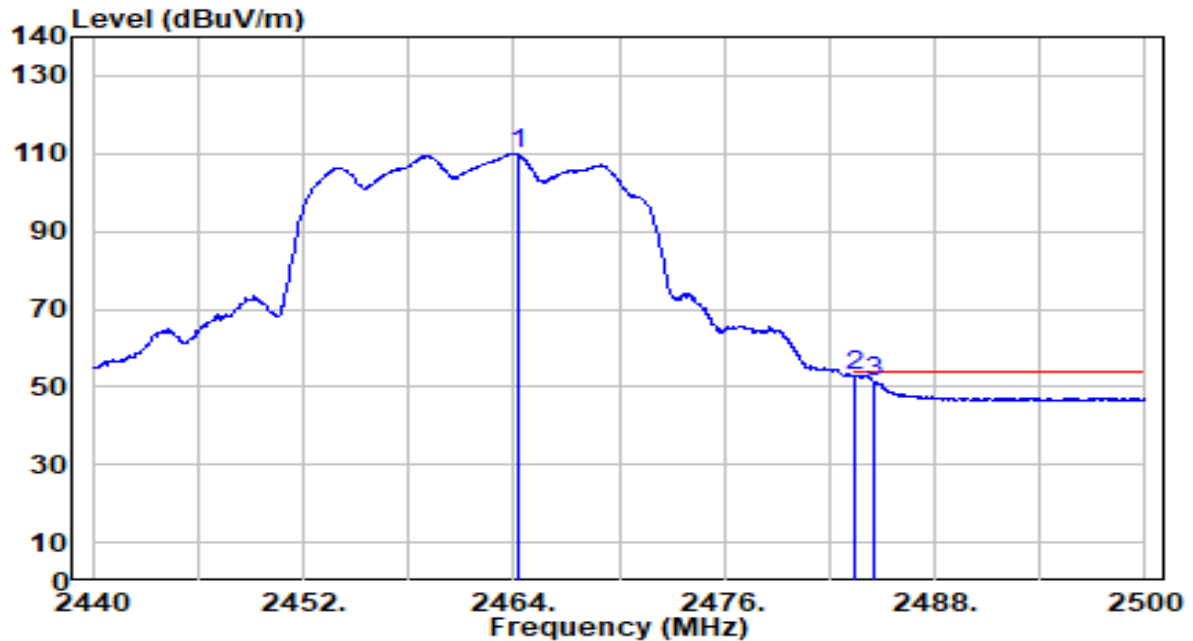


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.240	78.33	31.65	109.99	N/A	N/A	100	237	Average
2	*	2483.500	21.36	31.71	53.07	-0.93	54.00	100	237	Average
3		2484.580	19.69	31.71	51.40	-2.60	54.00	100	237	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

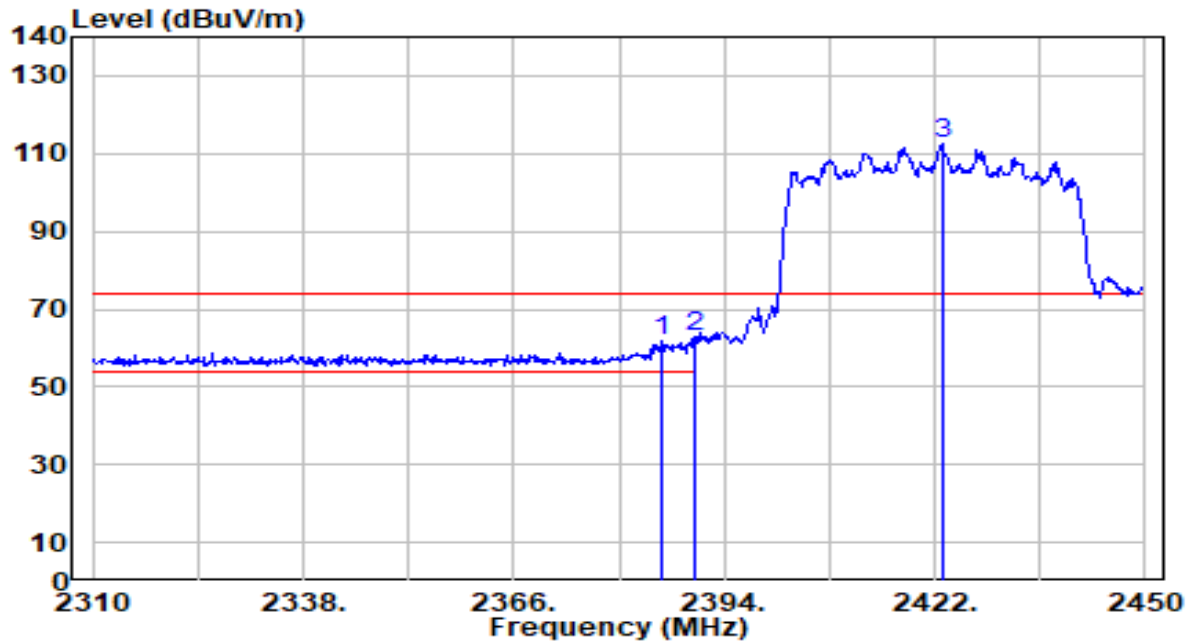


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.740	30.24	31.41	61.65	-12.35	74.00	172	194	Peak
2	*	2390.000	31.27	31.43	62.70	-11.30	74.00	172	194	Peak
3		2422.980	81.07	31.53	112.59	N/A	N/A	172	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

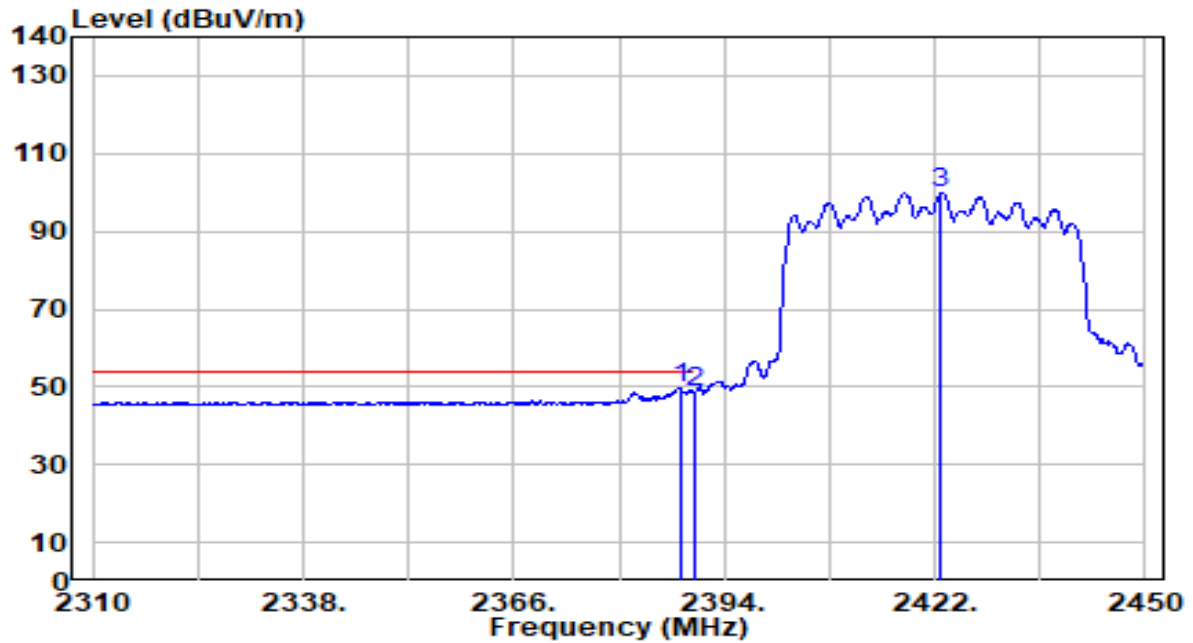


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.120	18.32	31.42	49.74	-4.26	54.00	172	194	Average
2		2390.000	17.42	31.43	48.85	-5.15	54.00	172	194	Average
3		2422.840	68.42	31.53	99.95	N/A	N/A	172	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

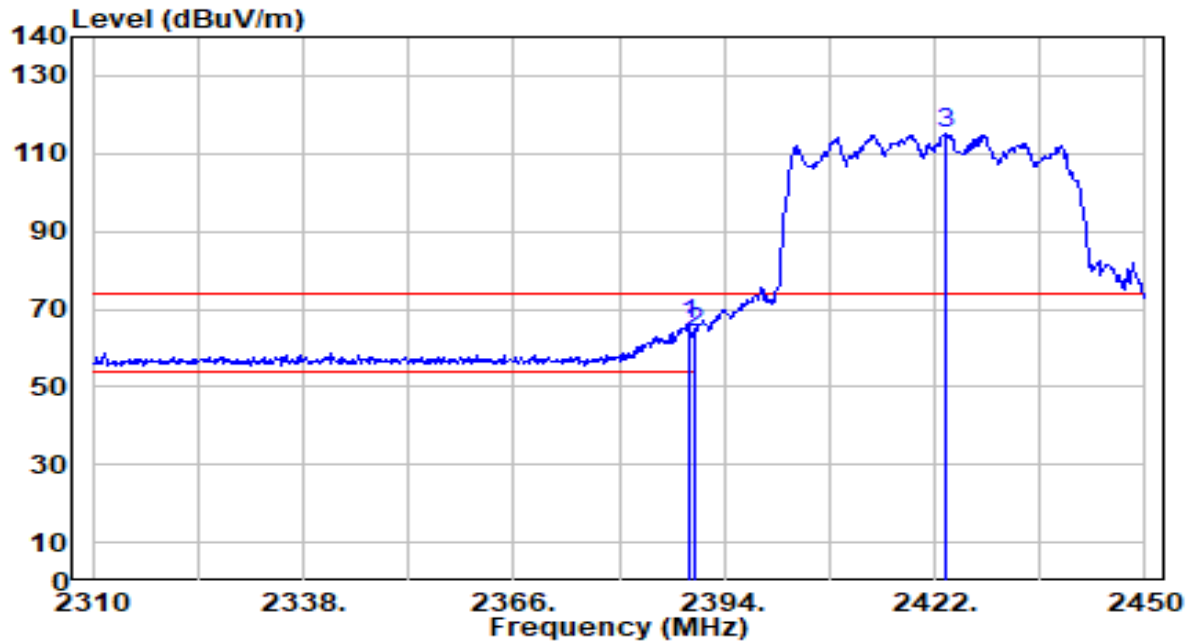


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.380	34.76	31.42	66.19	-7.81	74.00	143	229	Peak
2		2390.000	32.25	31.43	63.67	-10.33	74.00	143	229	Peak
3		2423.540	83.78	31.53	115.31	N/A	N/A	143	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_CH 3_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

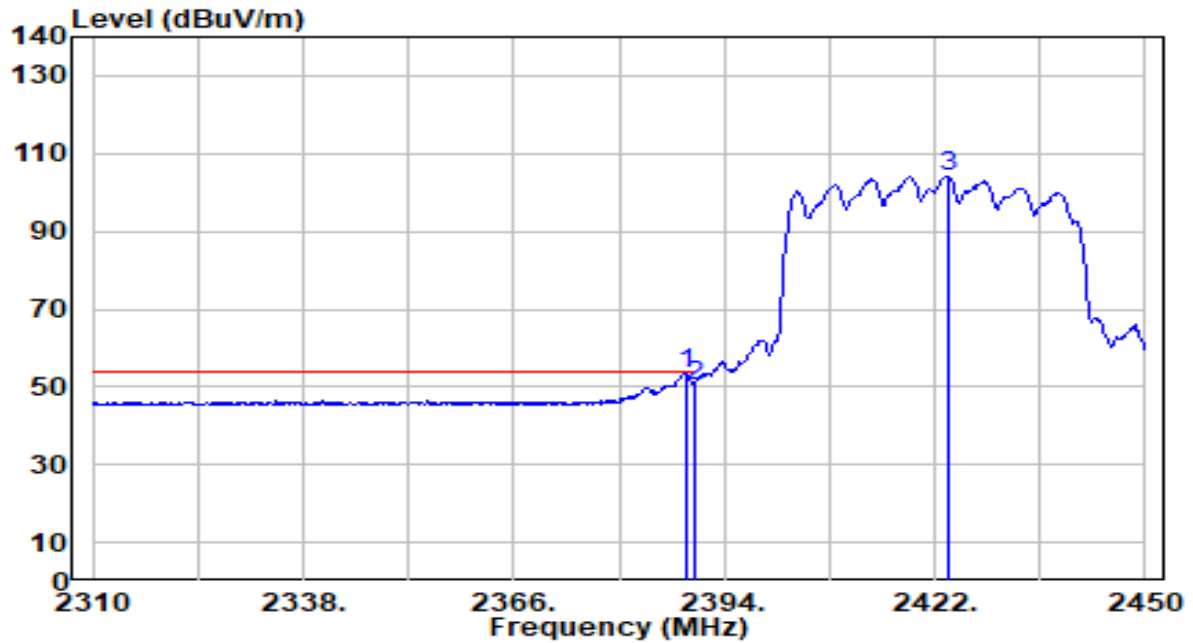


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	21.90	31.42	53.33	-0.67	54.00	143	229	Average
2		2390.000	19.01	31.43	50.44	-3.56	54.00	143	229	Average
3		2423.680	72.50	31.53	104.03	N/A	N/A	143	229	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

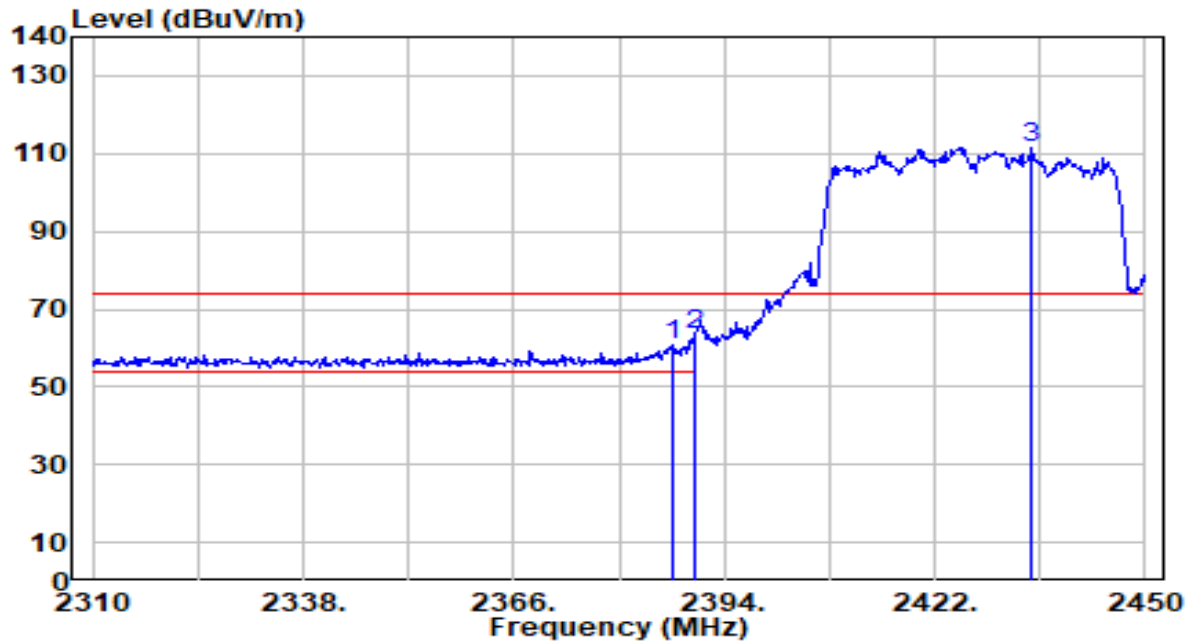


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.280	29.17	31.42	60.59	-13.41	74.00	100	161	Peak
2	* 2390.000	31.87	31.43	63.29	-10.71	74.00	100	161	Peak
3	2434.880	79.91	31.56	111.47	N/A	N/A	100	161	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

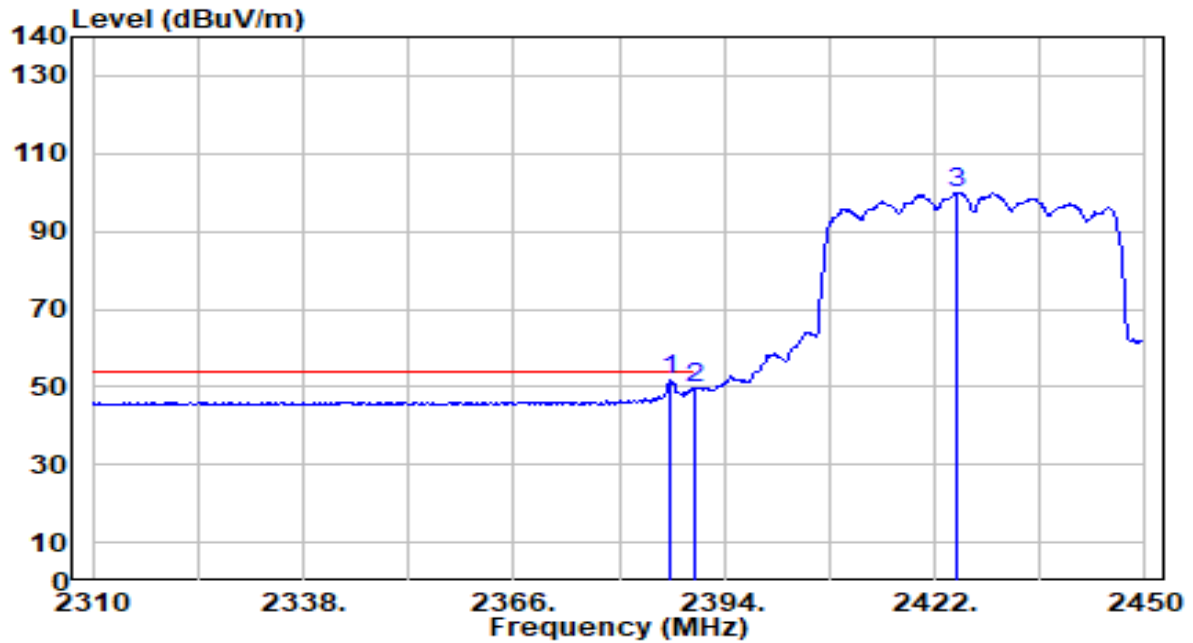


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.860	20.43	31.42	51.85	-2.15	54.00	100	161	Average
2		2390.000	18.50	31.43	49.92	-4.08	54.00	100	161	Average
3		2425.080	68.53	31.53	100.06	N/A	N/A	100	161	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

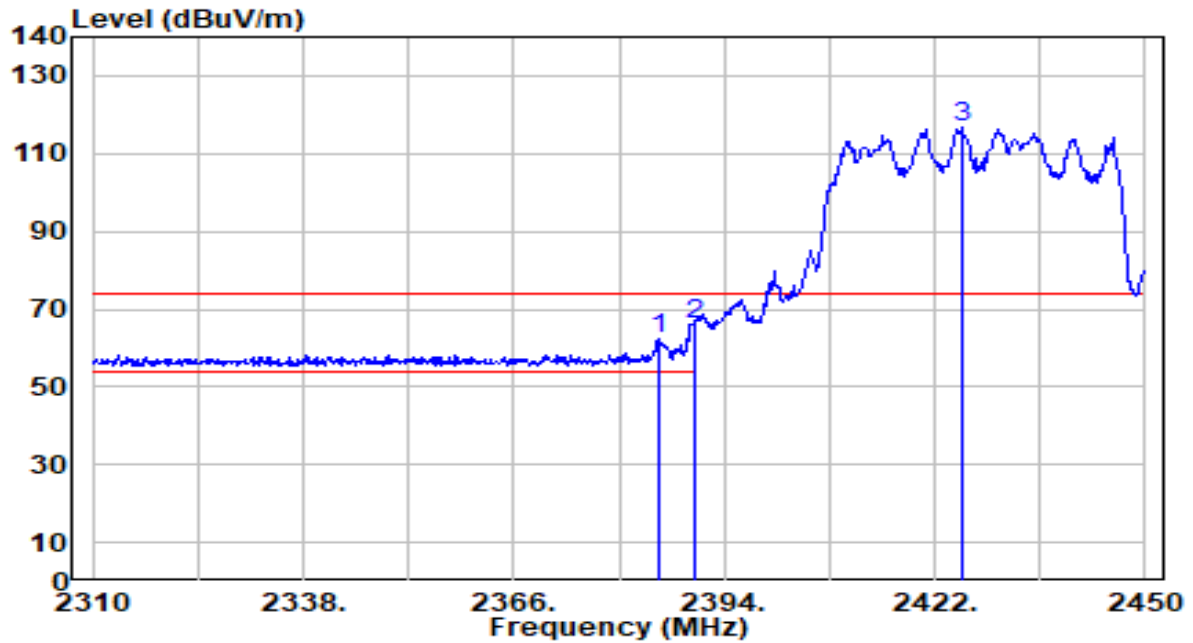


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.320	31.03	31.41	62.44	-11.56	74.00	164	207	Peak
2	2390.000	34.53	31.43	65.95	-8.05	74.00	164	207	Peak
3	* 2425.500	85.45	31.53	116.99	N/A	N/A	164	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 4_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

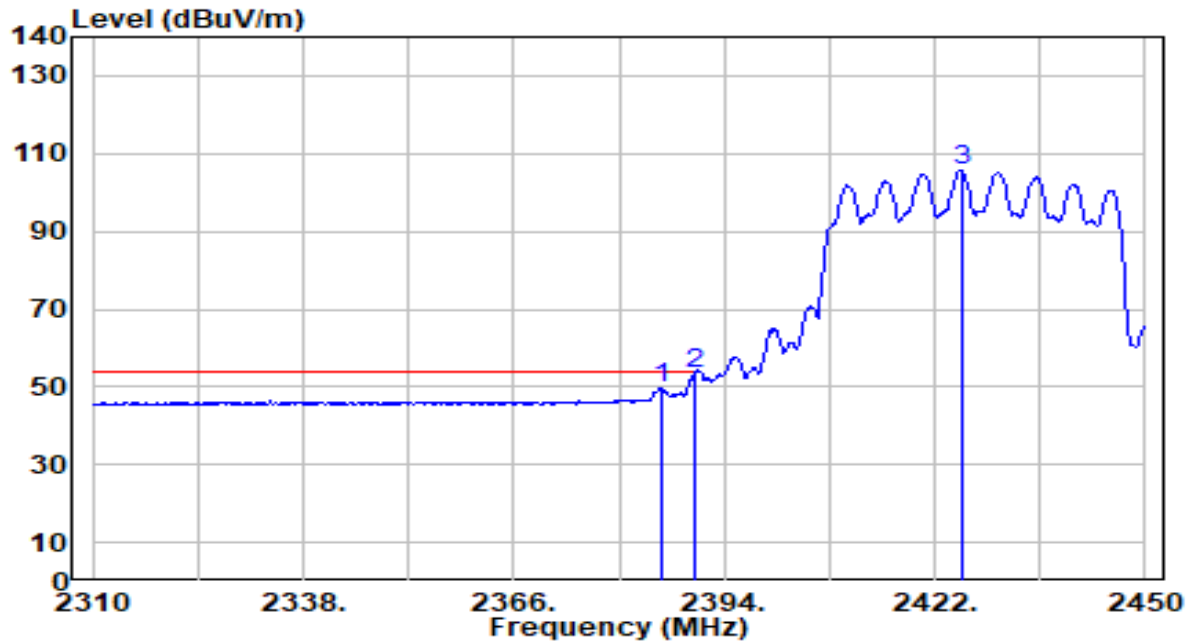


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.600	18.44	31.41	49.85	-4.15	54.00	164	207	Average
2	*	2390.000	21.94	31.43	53.37	-0.63	54.00	164	207	Average
3		2425.500	73.94	31.53	105.47	N/A	N/A	164	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

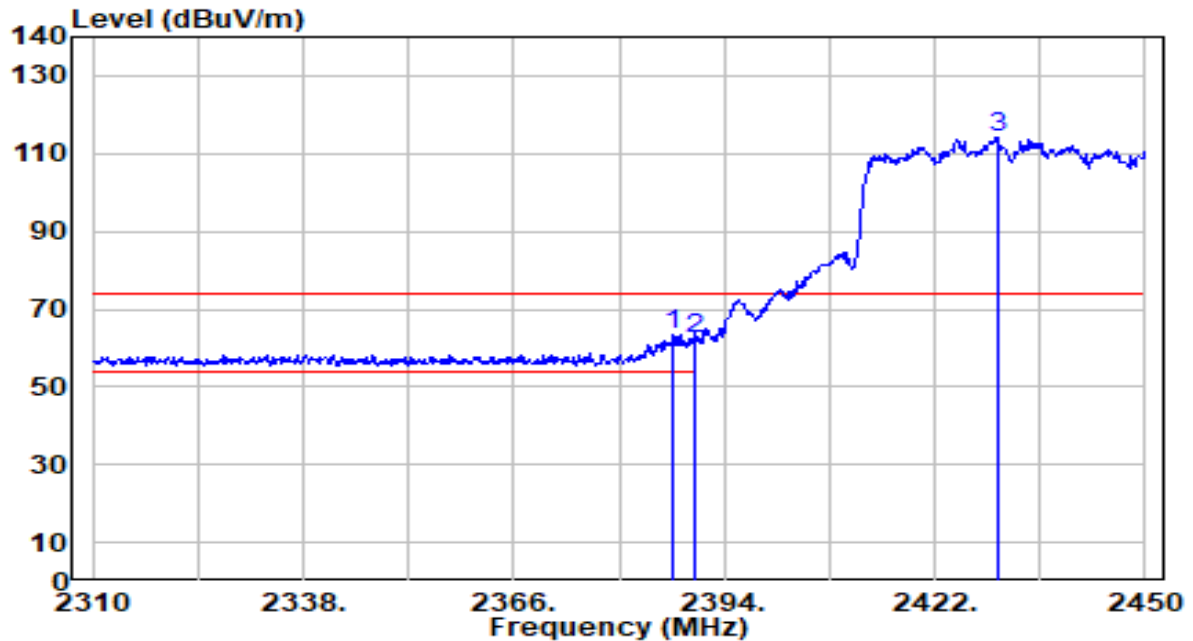


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.140	32.13	31.42	63.54	-10.46	74.00	100	161	Peak
2		2390.000	30.91	31.43	62.34	-11.66	74.00	100	161	Peak
3		2430.400	82.45	31.55	114.00	N/A	N/A	100	161	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

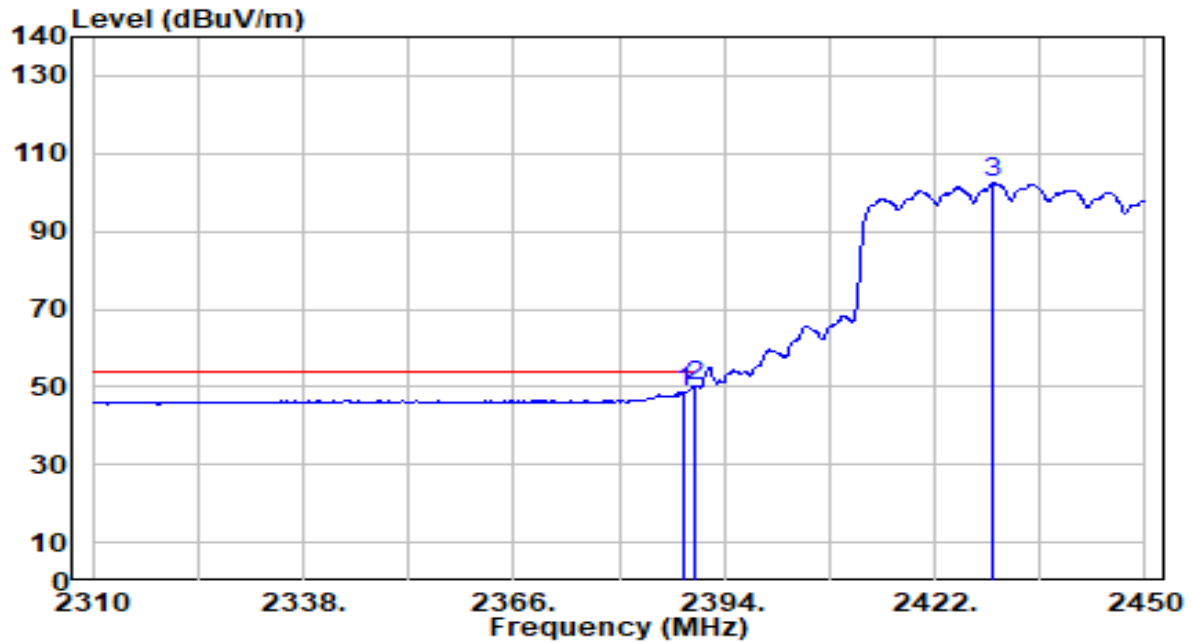


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.680	17.22	31.42	48.65	-5.35	54.00	100	161	Average
2	*	2390.000	18.79	31.43	50.21	-3.79	54.00	100	161	Average
3		2429.840	70.83	31.55	102.38	N/A	N/A	100	161	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

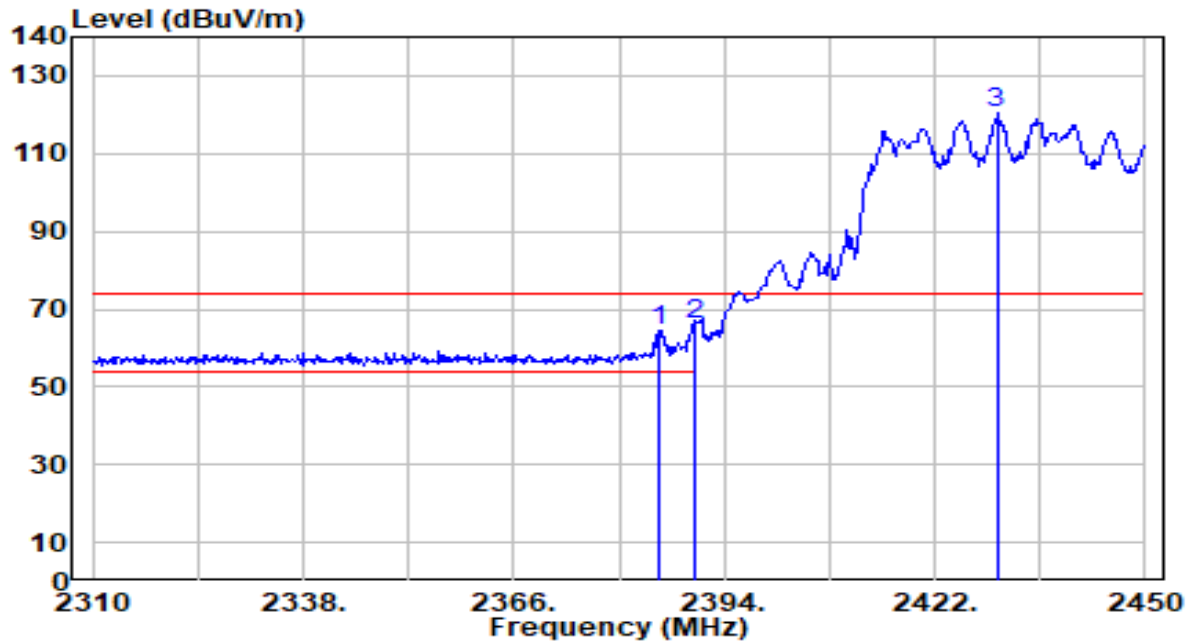


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.460	32.86	31.41	64.27	-9.73	74.00	164	207	Peak
2	*	2390.000	34.61	31.43	66.04	-7.96	74.00	164	207	Peak
3		2430.260	88.73	31.55	120.28	N/A	N/A	164	207	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-05-24
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 5_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

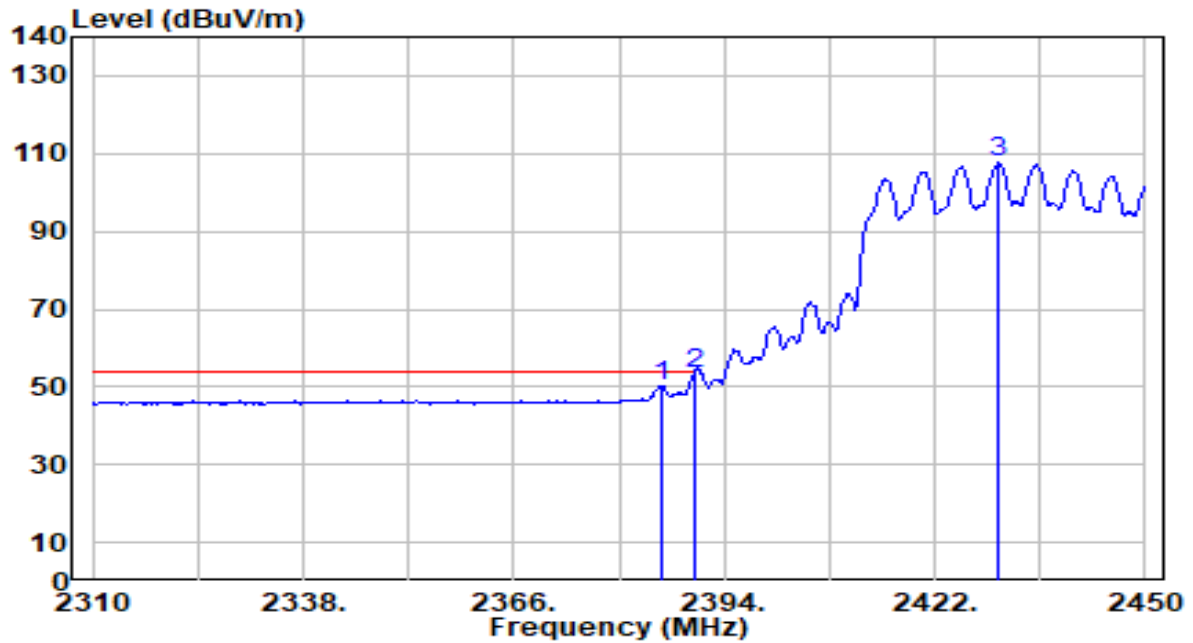


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.740	18.81	31.41	50.23	-3.77	54.00	164	207	Average
2	*	2390.000	21.88	31.43	53.31	-0.69	54.00	164	207	Average
3		2430.400	76.04	31.55	107.59	N/A	N/A	164	207	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

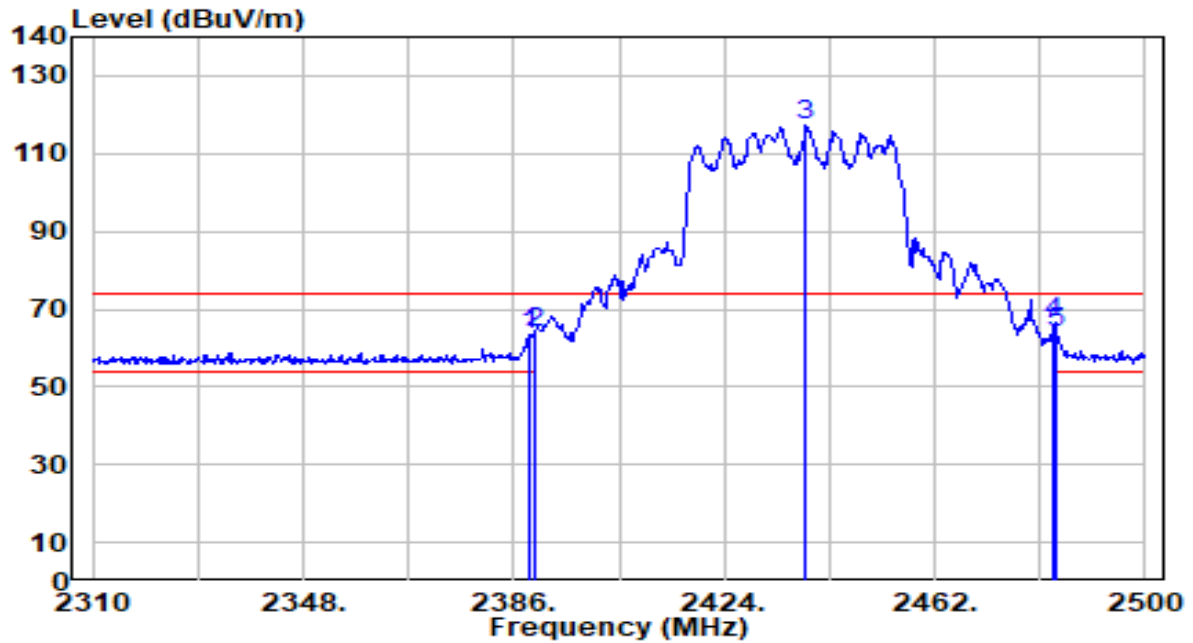


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	31.78	31.42	63.21	-10.79	74.00	169	131	Peak
2	2390.000	32.45	31.43	63.88	-10.12	74.00	169	131	Peak
3	2438.820	85.77	31.57	117.34	N/A	N/A	169	131	Peak
4	* 2483.500	34.60	31.71	66.31	-7.69	74.00	169	131	Peak
5	2484.040	32.24	31.71	63.95	-10.05	74.00	169	131	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

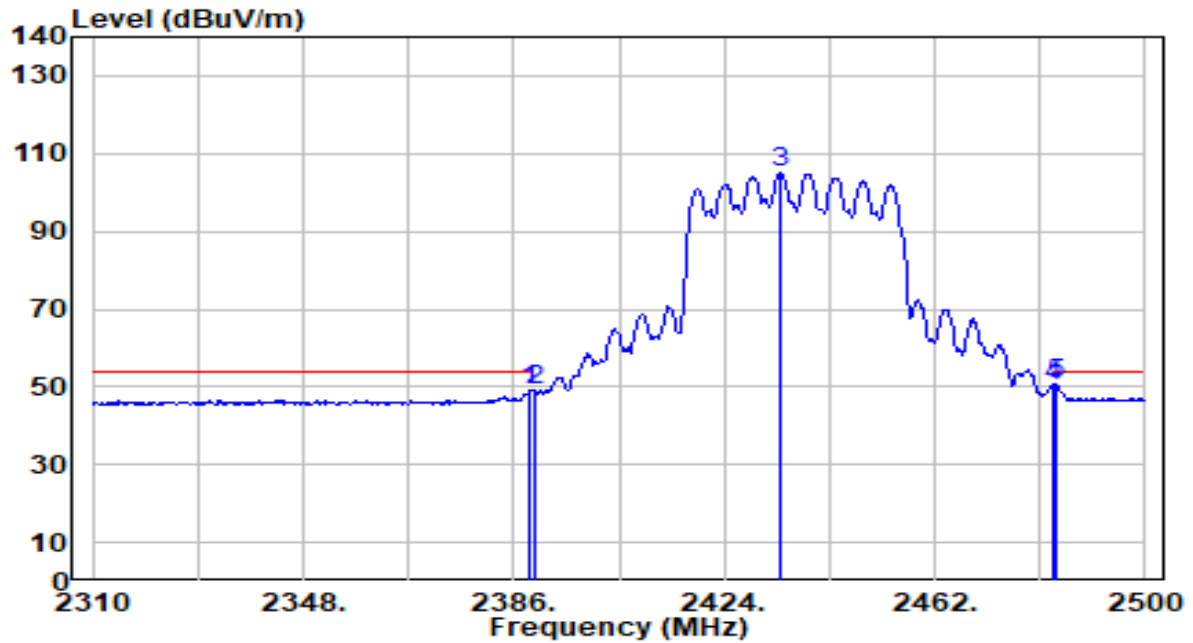


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	17.68	31.42	49.10	-4.90	54.00	169	131	Average
2	2390.000	17.75	31.43	49.17	-4.83	54.00	169	131	Average
3	2434.260	73.53	31.56	105.09	N/A	N/A	169	131	Average
4	2483.500	18.61	31.71	50.32	-3.68	54.00	169	131	Average
5	* 2484.040	18.74	31.71	50.45	-3.55	54.00	169	131	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX6000 Wi-Fi 6 SOHO Router	Date of Test	2025-03-31
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_CH 6_Ant 0+1+2+3	Test Voltage	AC 120V/60Hz

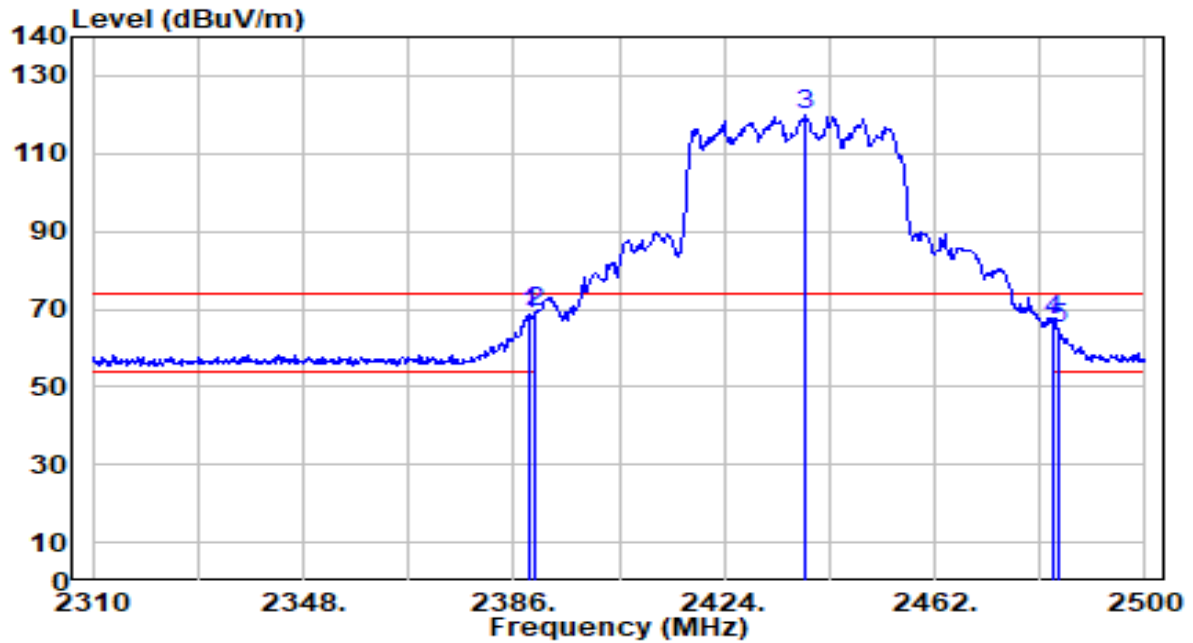

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.660	37.17	31.42	68.59	-5.41	74.00	150	230	Peak
2	*	2390.000	37.87	31.43	69.29	-4.71	74.00	150	230	Peak
3		2438.630	88.22	31.57	119.80	N/A	N/A	150	230	Peak
4		2483.500	35.36	31.71	67.07	-6.93	74.00	150	230	Peak
5		2484.610	33.48	31.71	65.19	-8.81	74.00	150	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.