



802.11 n40 CH03 (2422MHz)




802.11 n40 CH03 (2422MHz)

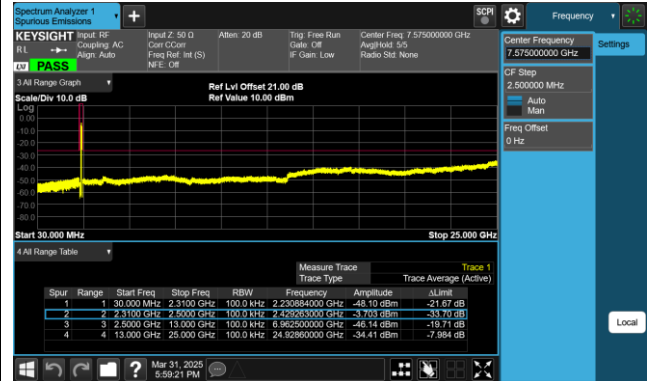

802.11 n40 CH06 (2437MHz)

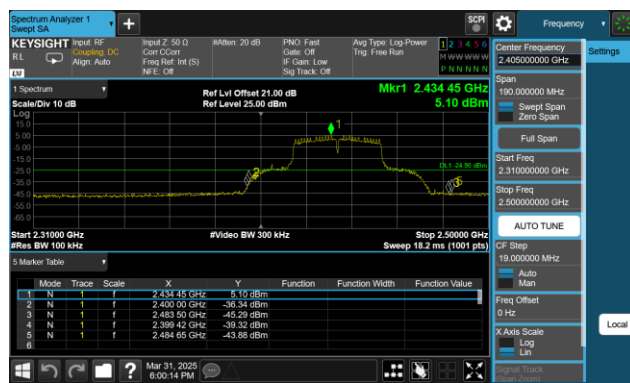


802.11 n40 CH06 (2437MHz)

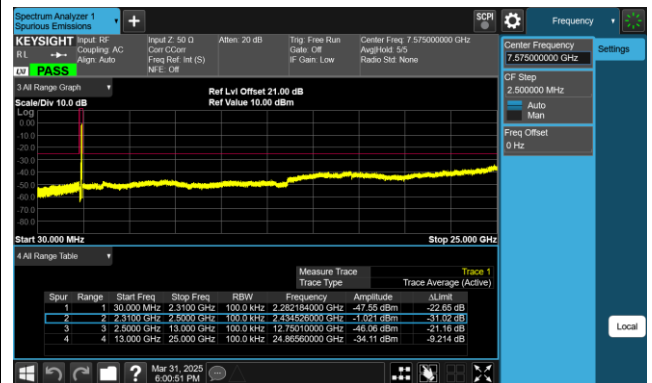



802.11 n40 CH09 (2452MHz)



802.11 n40 CH09 (2452MHz)

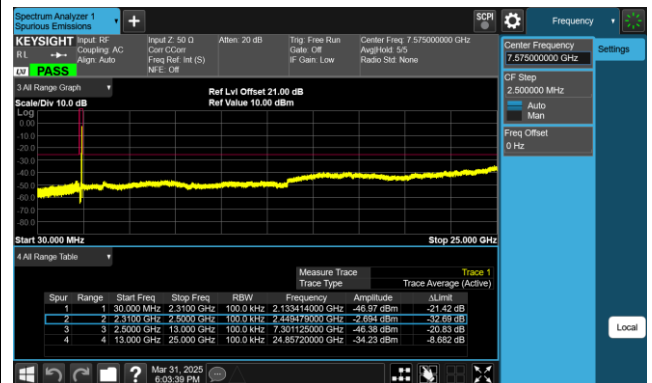


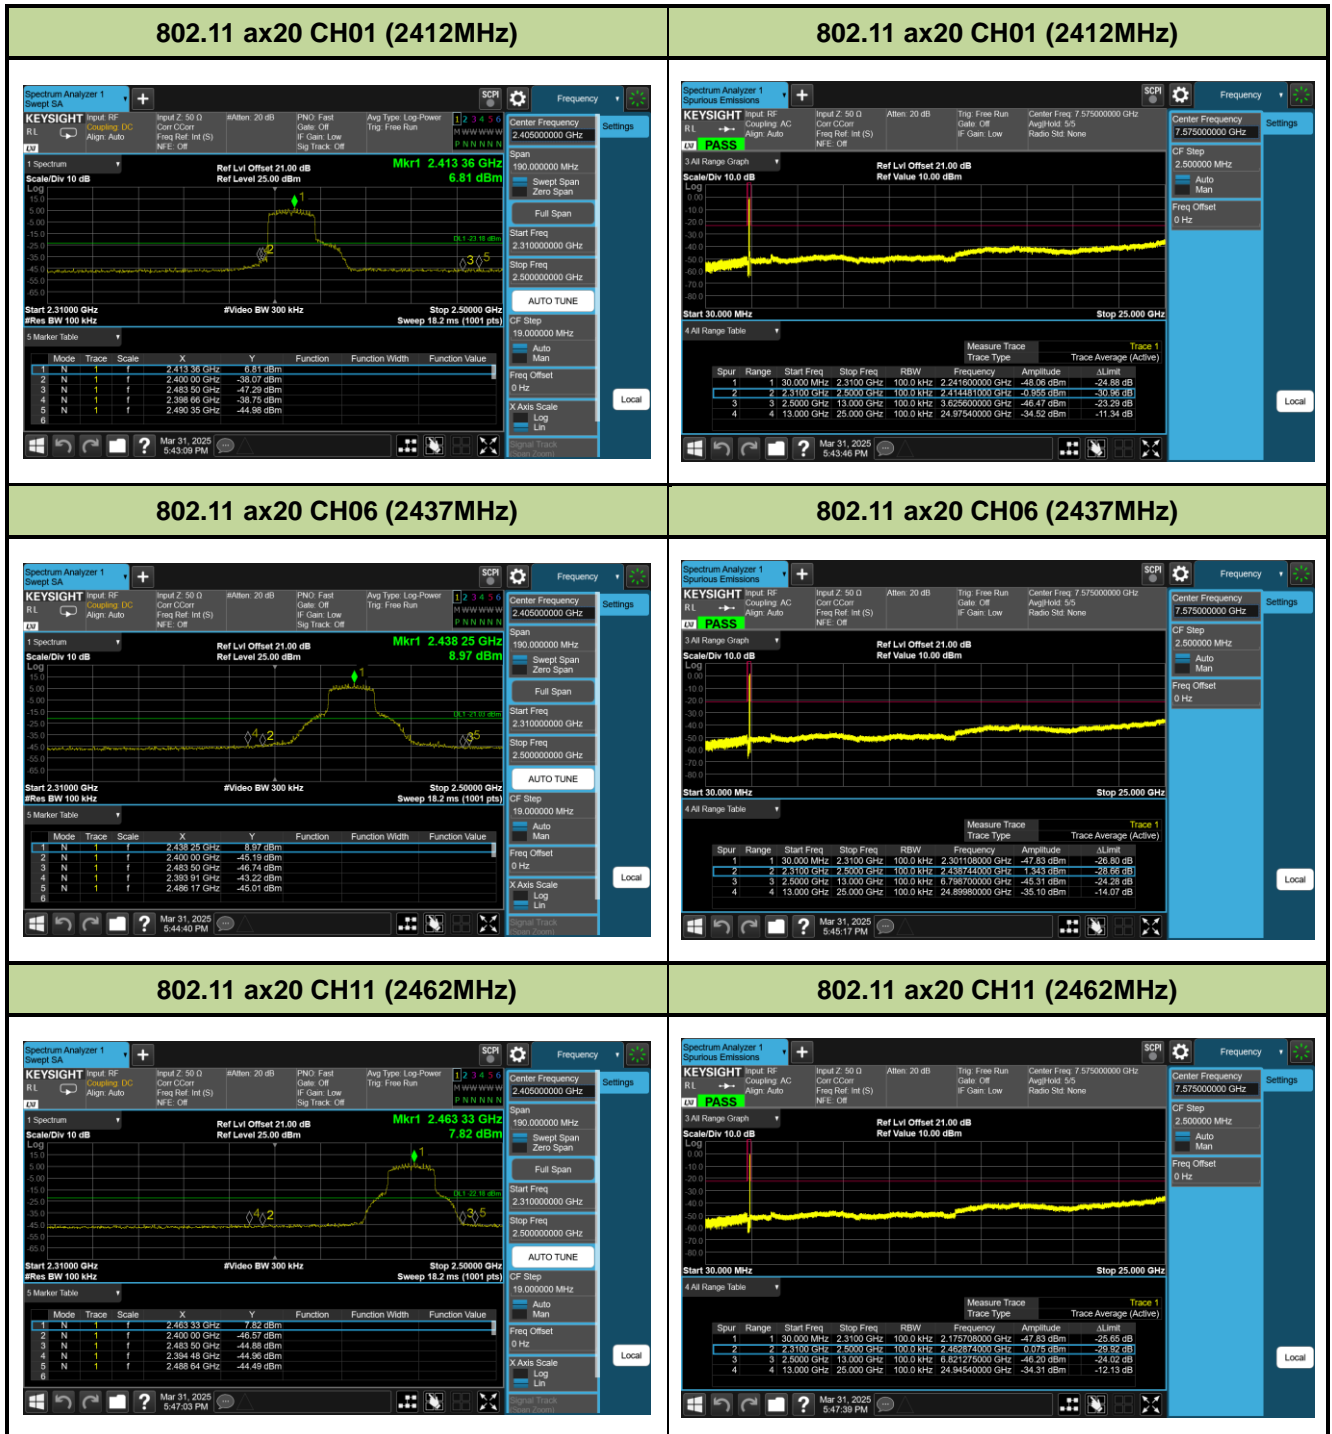

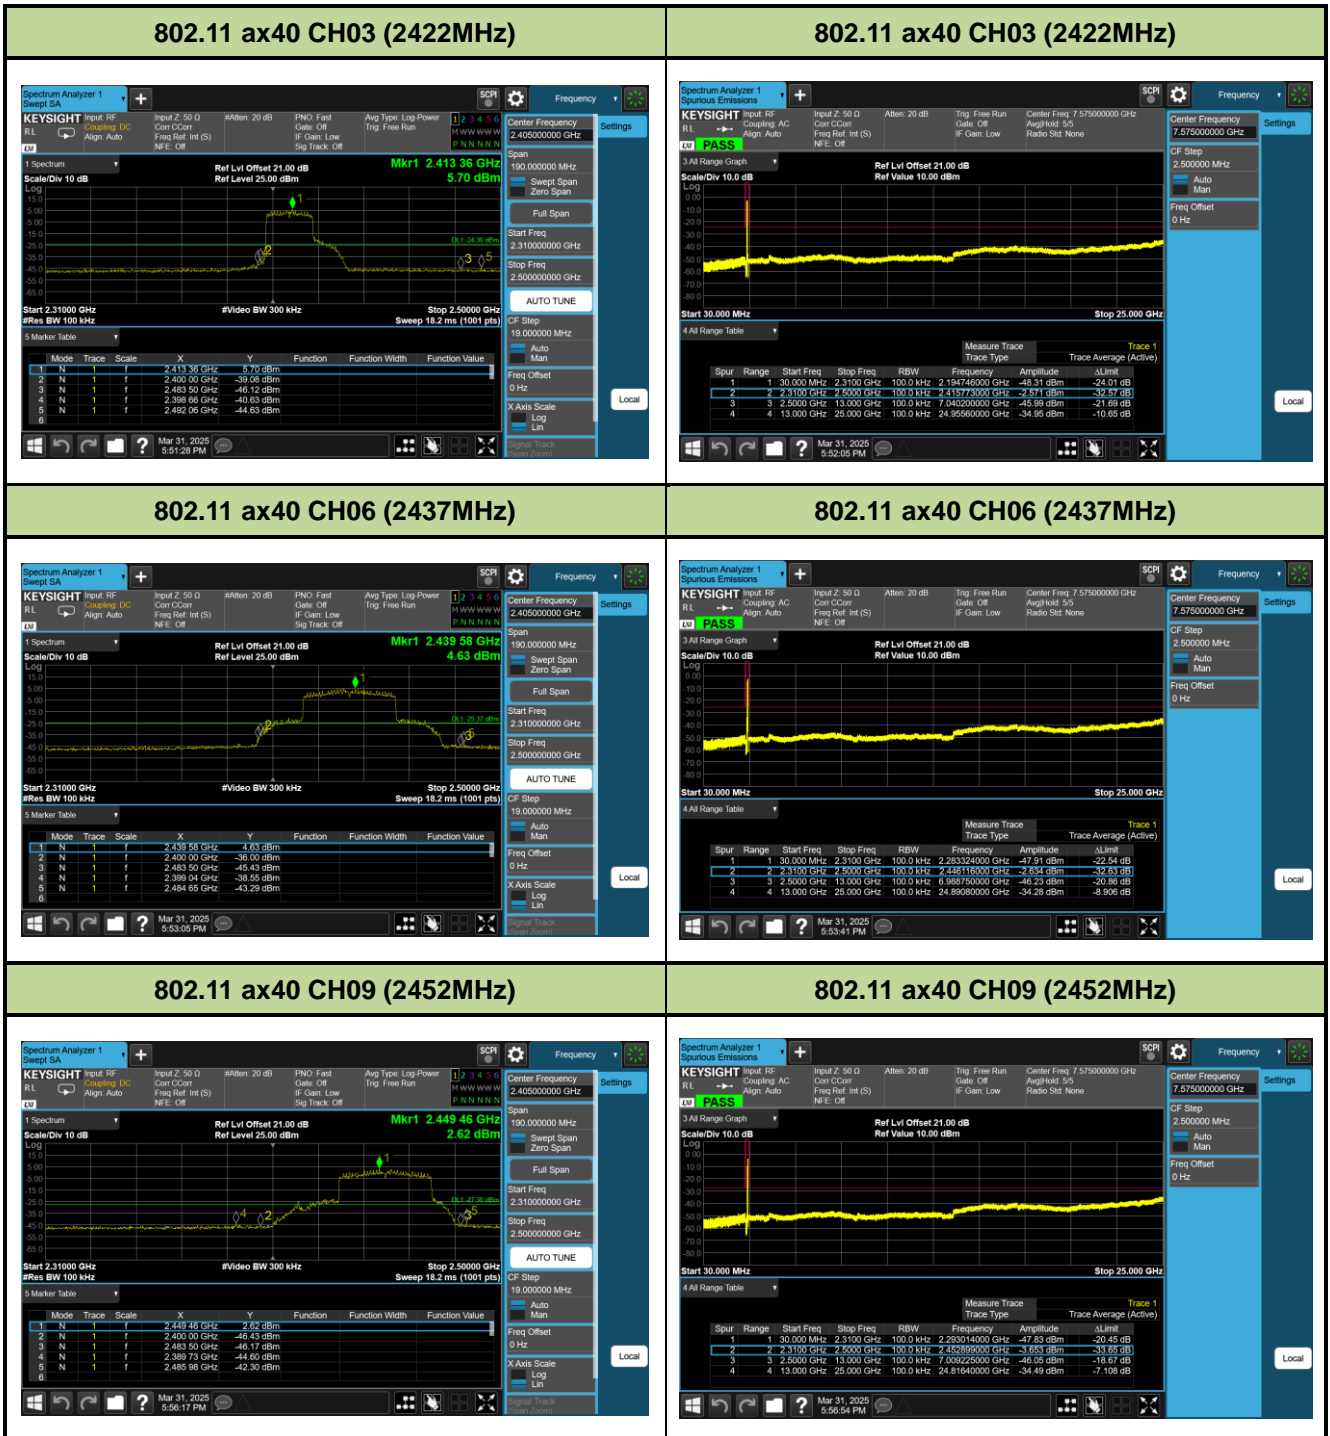


Ant 1


802.11 b CH01 (2412MHz)

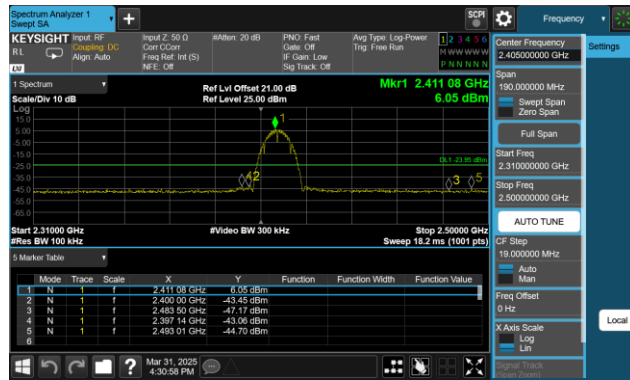


802.11 b CH01 (2412MHz)

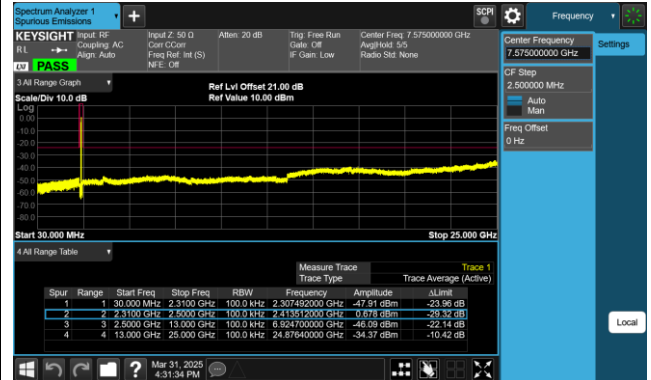


802.11 b CH06 (2437MHz)

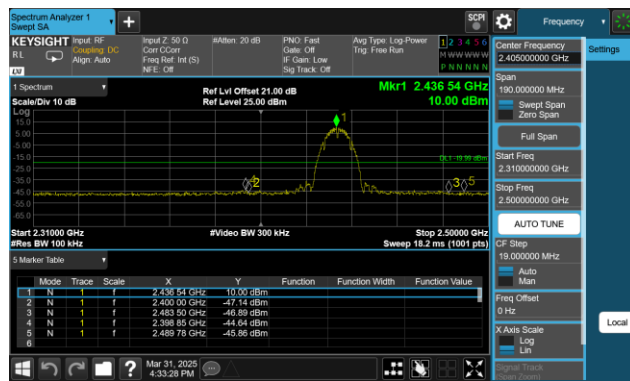


802.11 b CH06 (2437MHz)

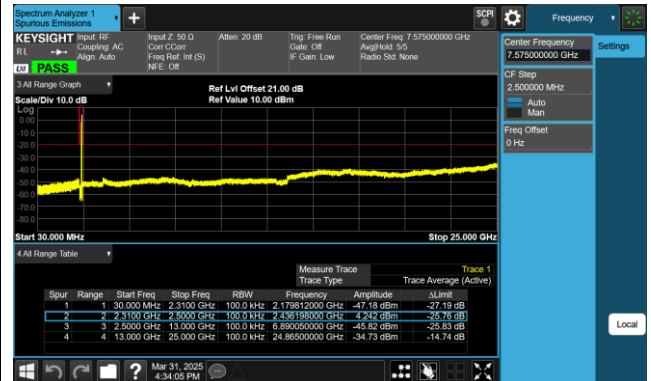


802.11 b CH11 (2462MHz)

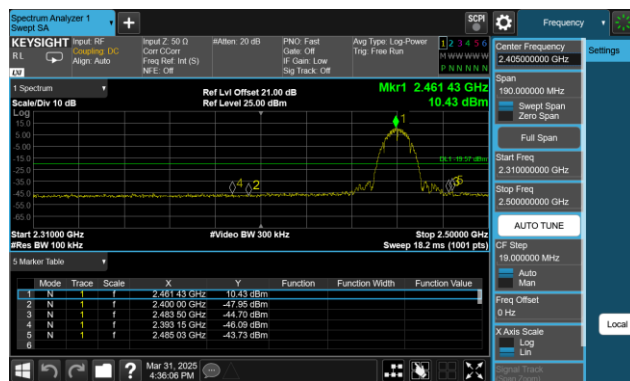






802.11 b CH11 (2462MHz)

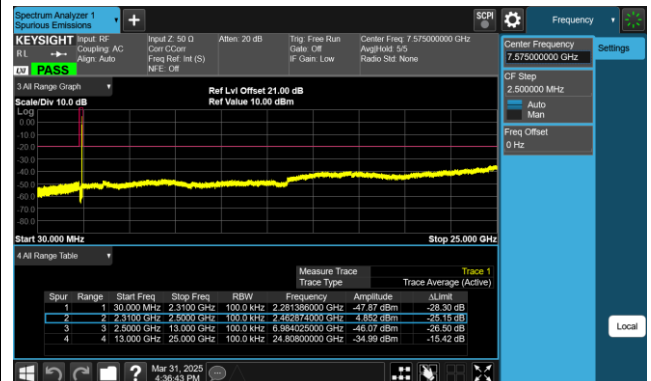

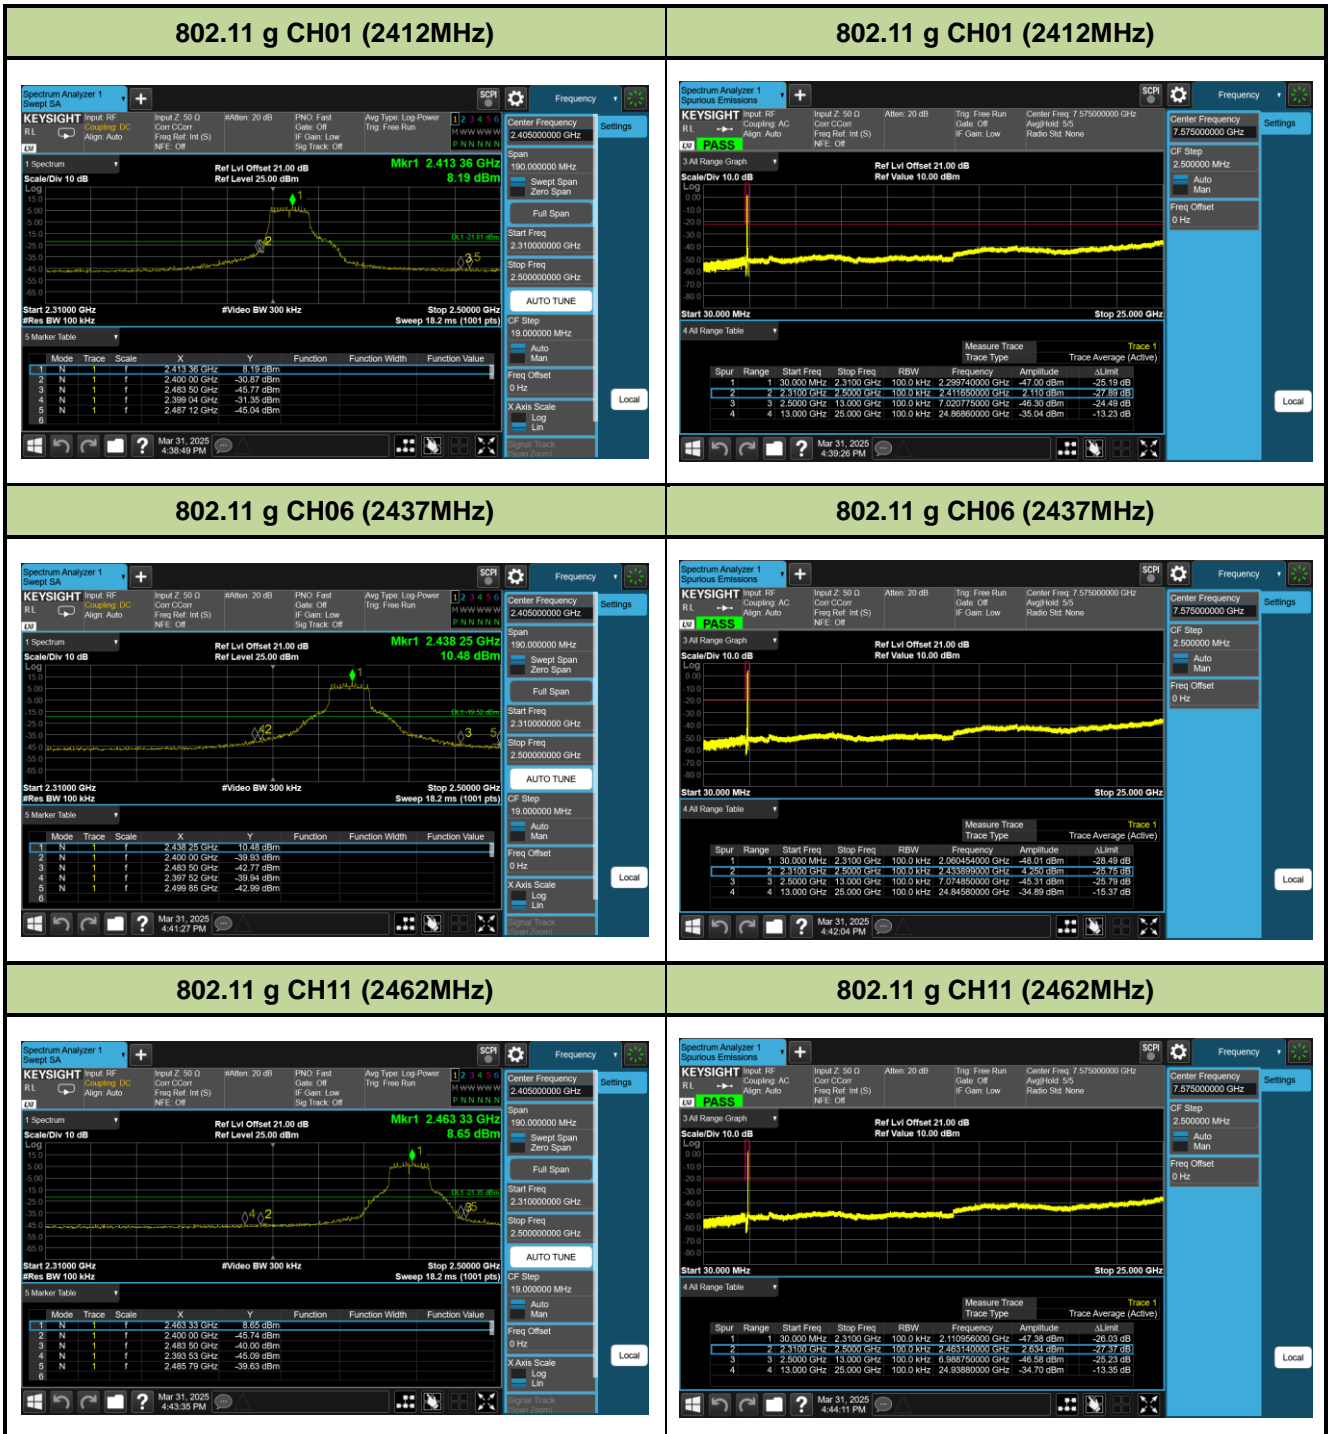




802.11 n40 CH03 (2422MHz)

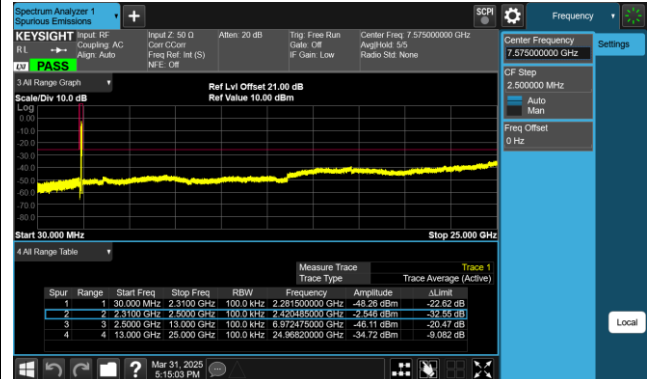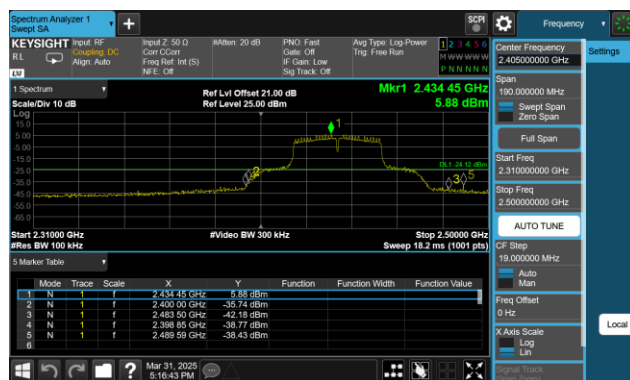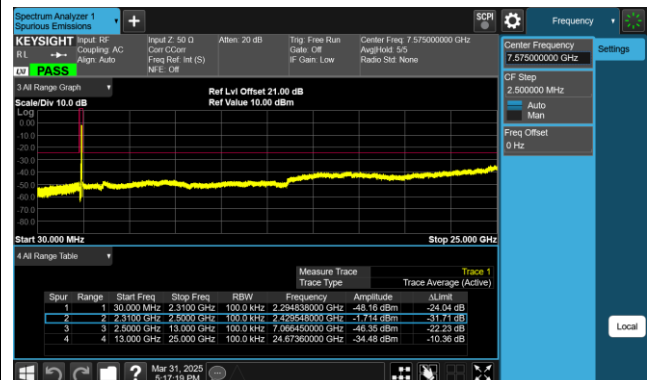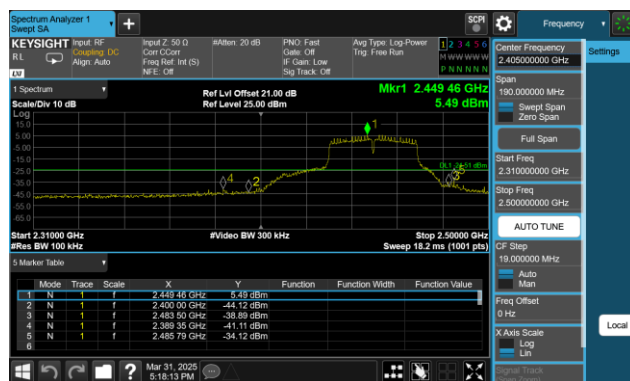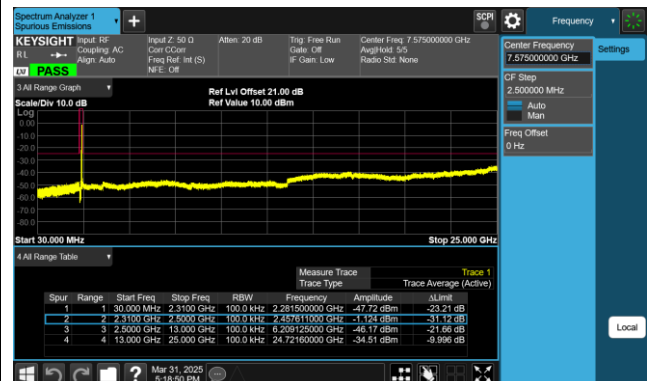802.11 n40 CH03 (2422MHz)

802.11 n40 CH06 (2437MHz)

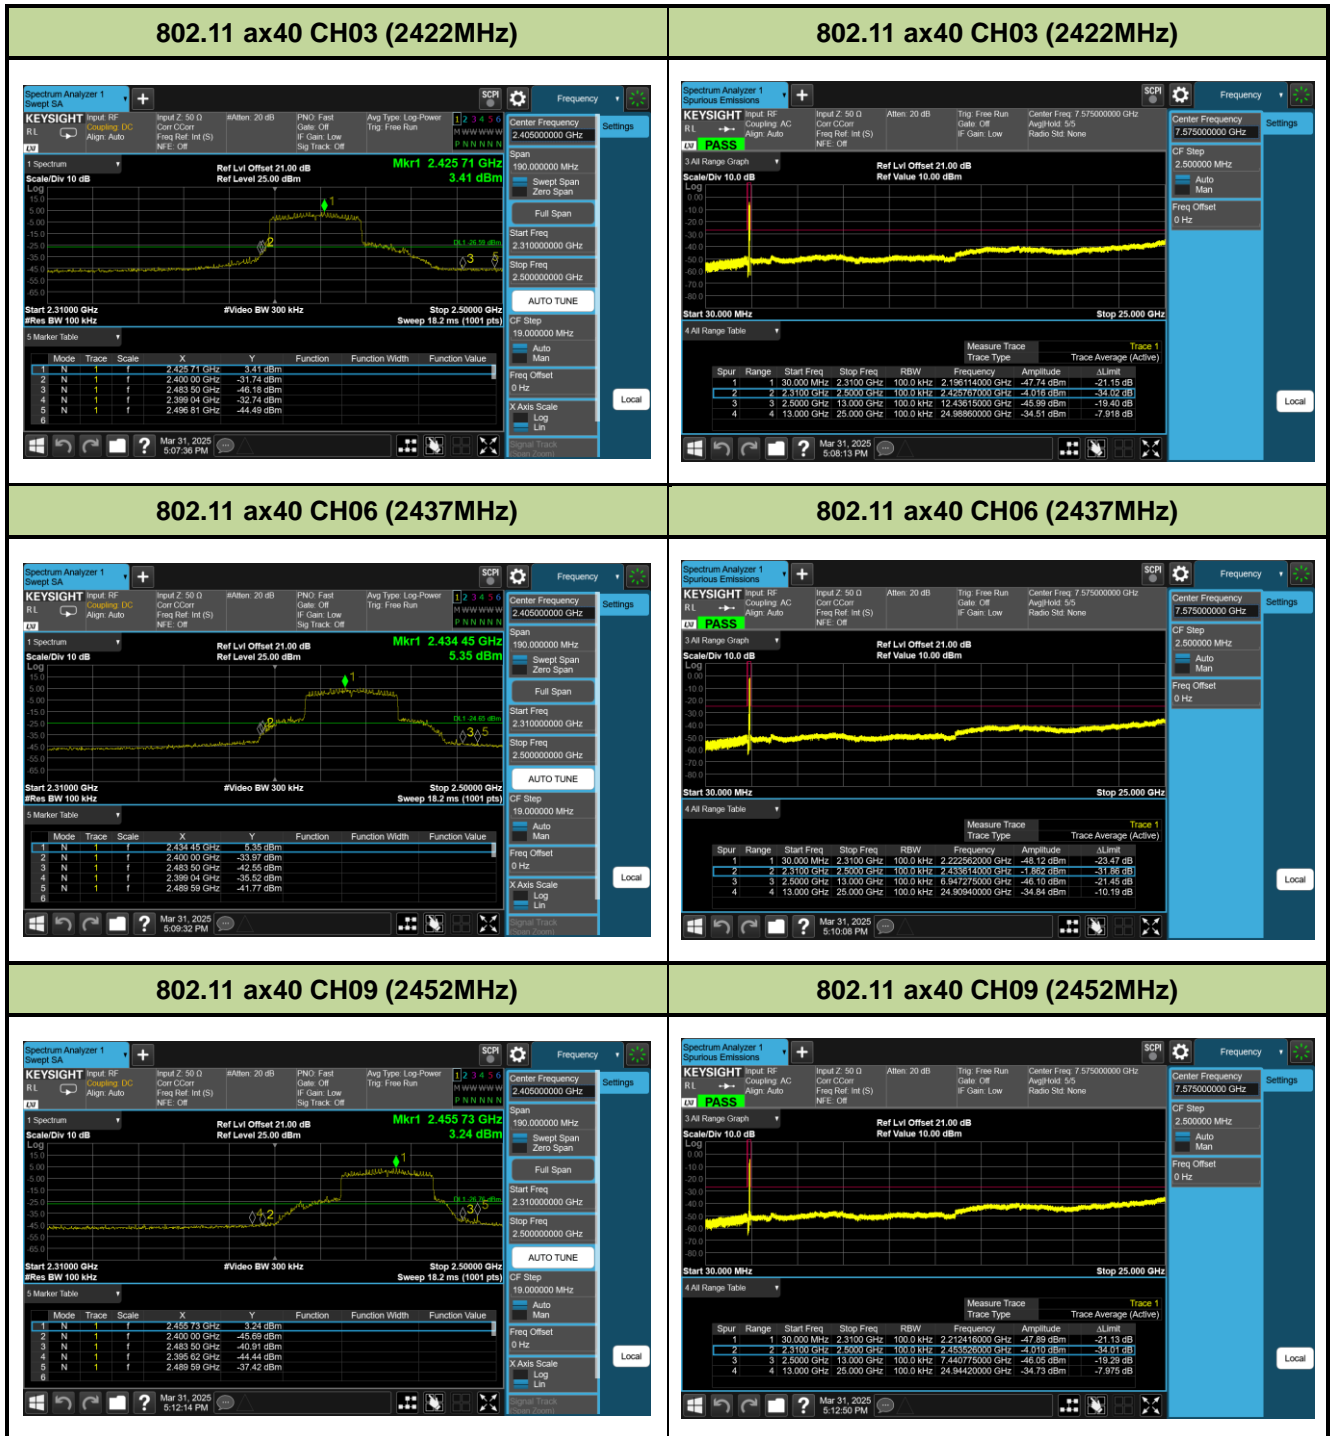802.11 n40 CH06 (2437MHz)

802.11 n40 CH09 (2452MHz)

802.11 n40 CH09 (2452MHz)






7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

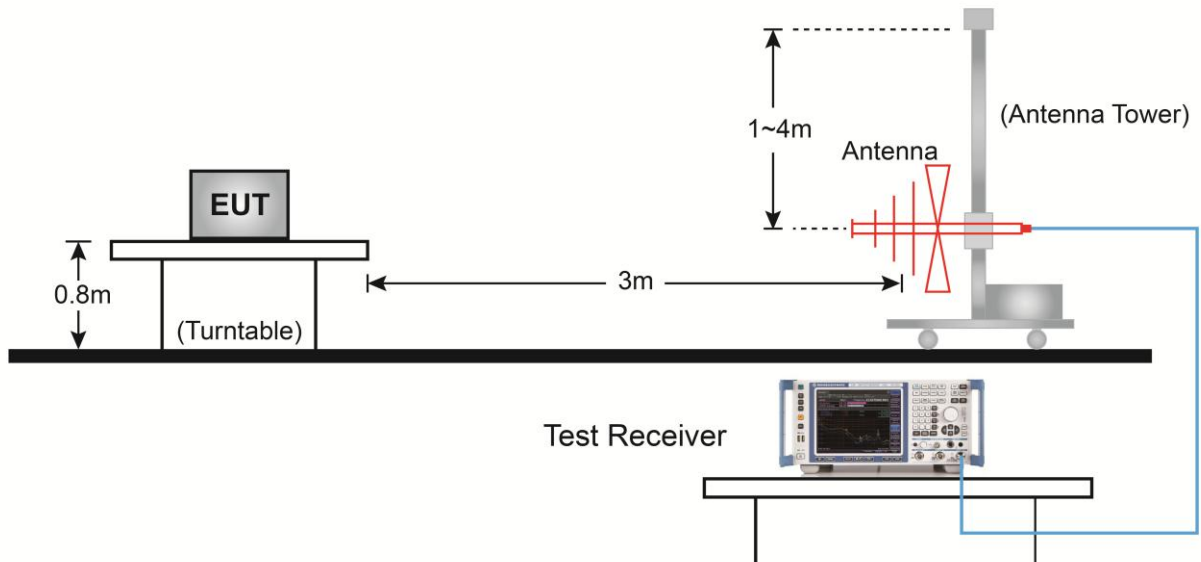


Above 1GHz Test Setup:

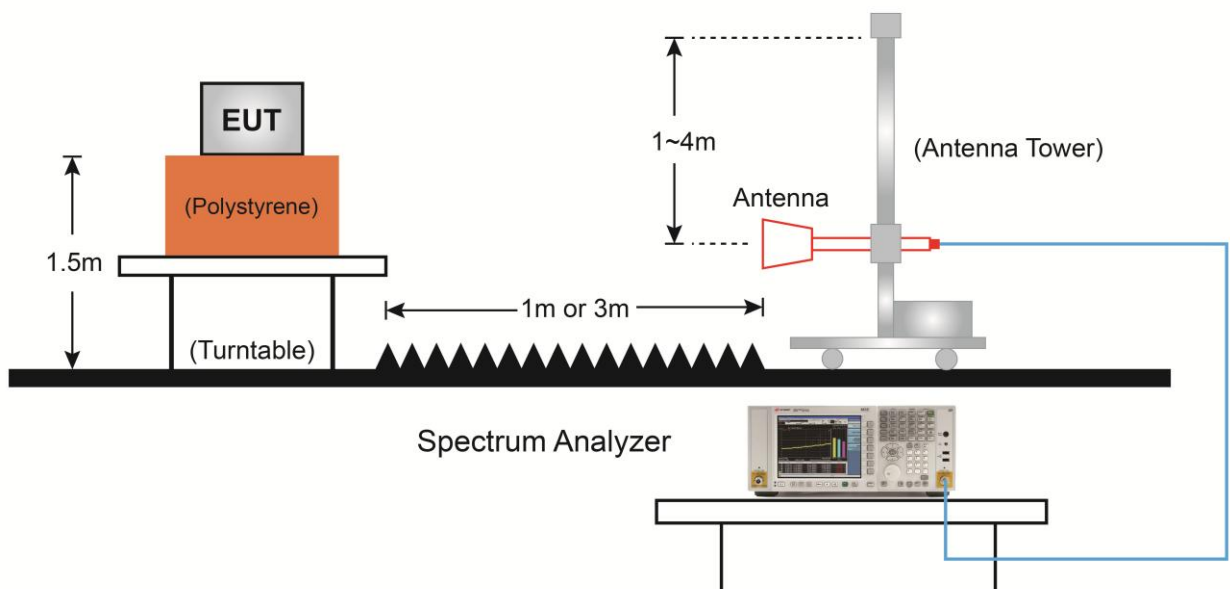

7.6.5. Test Result

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-25
Factor	VULB 9162	Temp. / Humidity	22°C /50%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

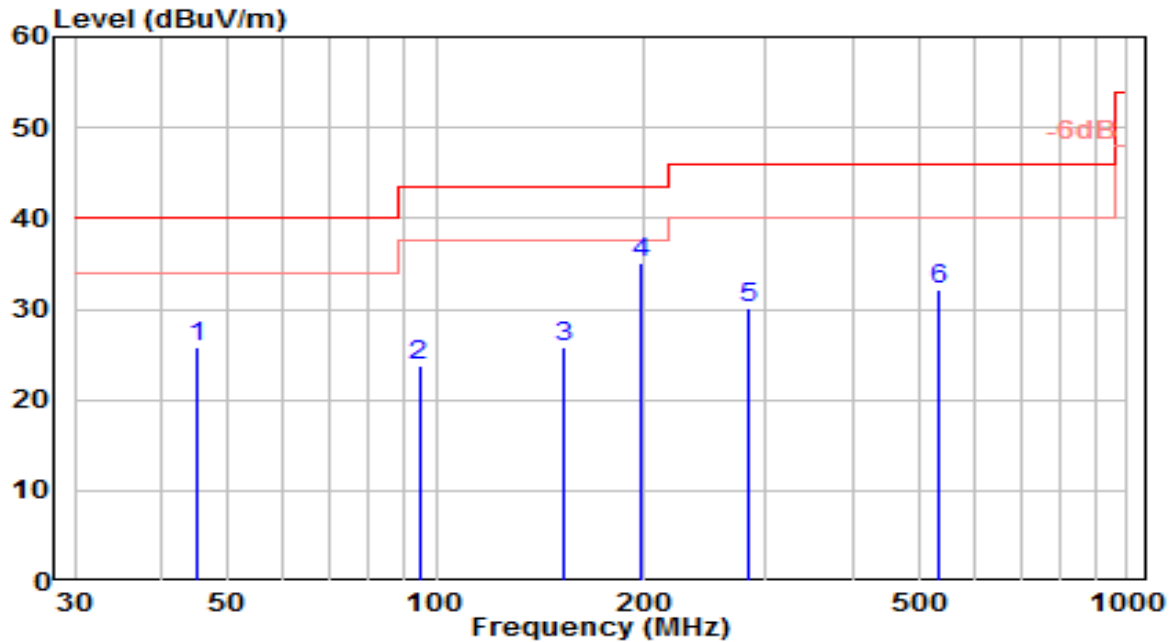


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	44.915	4.87	21.00	25.87	-14.13	40.00	100	130	QP
2	94.484	5.75	17.93	23.68	-19.82	43.50	100	20	QP
3	152.918	10.16	15.72	25.88	-17.62	43.50	150	65	QP
4	* 198.004	16.62	18.47	35.09	-8.41	43.50	150	40	QP
5	282.119	9.38	20.77	30.15	-15.85	46.00	100	280	QP
6	531.756	6.17	25.87	32.04	-13.96	46.00	150	350	QP

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-25
Factor	VULB 9162	Temp. / Humidity	22°C /50%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

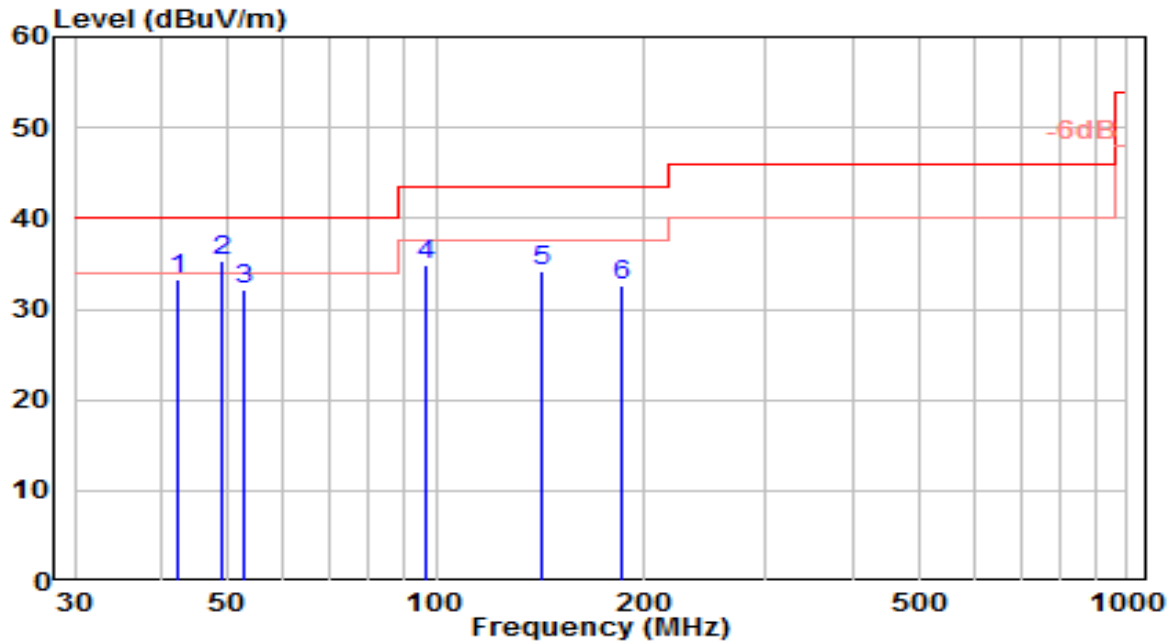


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	42.128	12.80	20.48	33.28	-6.72	40.00	100	75	QP
2	* 49.127	14.01	21.20	35.21	-4.79	40.00	100	40	QP
3	52.851	11.39	20.86	32.25	-7.75	40.00	100	355	QP
4	96.447	16.71	18.27	34.98	-8.52	43.50	100	180	QP
5	142.115	18.91	15.32	34.23	-9.27	43.50	100	340	QP
6	185.604	15.06	17.54	32.60	-10.90	43.50	100	100	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

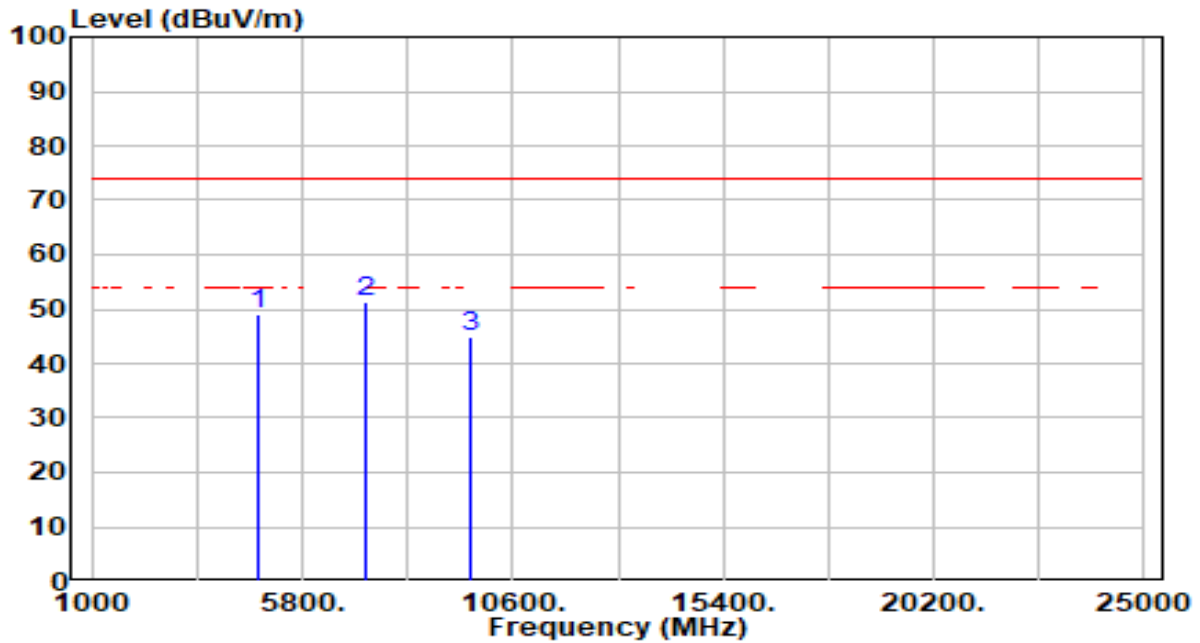


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	48.88	0.15	49.03	-24.97	74.00	200	300	Peak
2	* 7236.000	45.57	5.81	51.38	-22.62	74.00	200	115	Peak
3	9648.000	39.84	5.16	45.00	-29.00	74.00	200	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

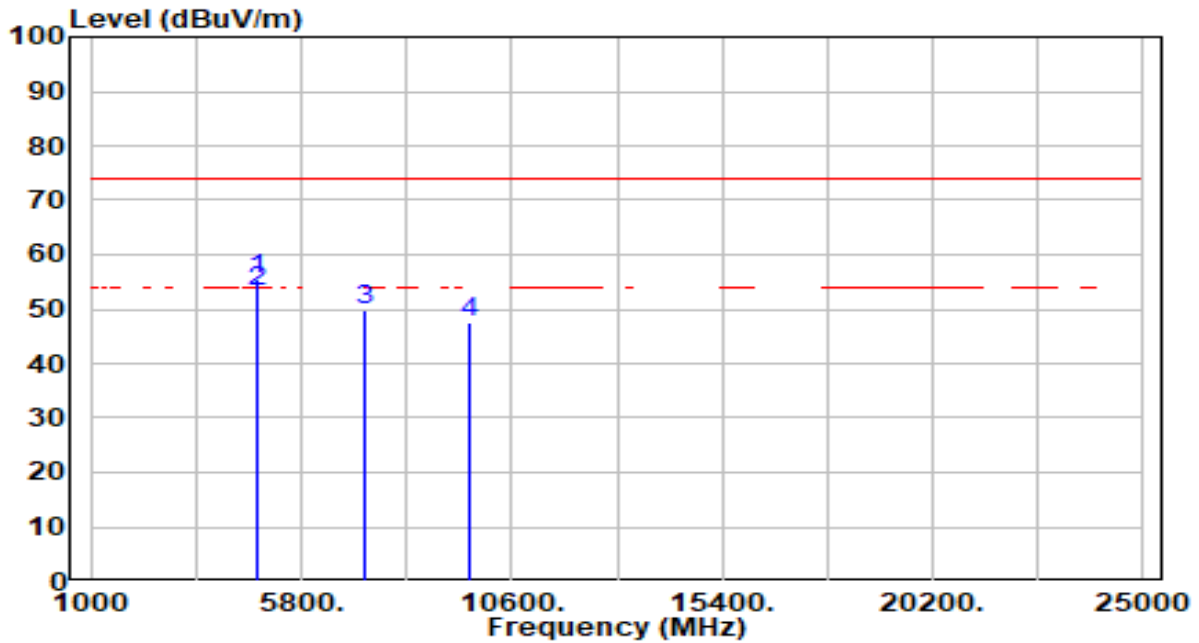


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4824.000	55.34	0.15	55.49	-18.51	74.00	100	346	Peak
2	* 4824.000	53.07	0.15	53.22	-0.78	54.00	100	346	Average
3	7236.000	44.11	5.81	49.93	-24.07	74.00	100	0	Peak
4	9648.000	42.29	5.16	47.45	-26.55	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

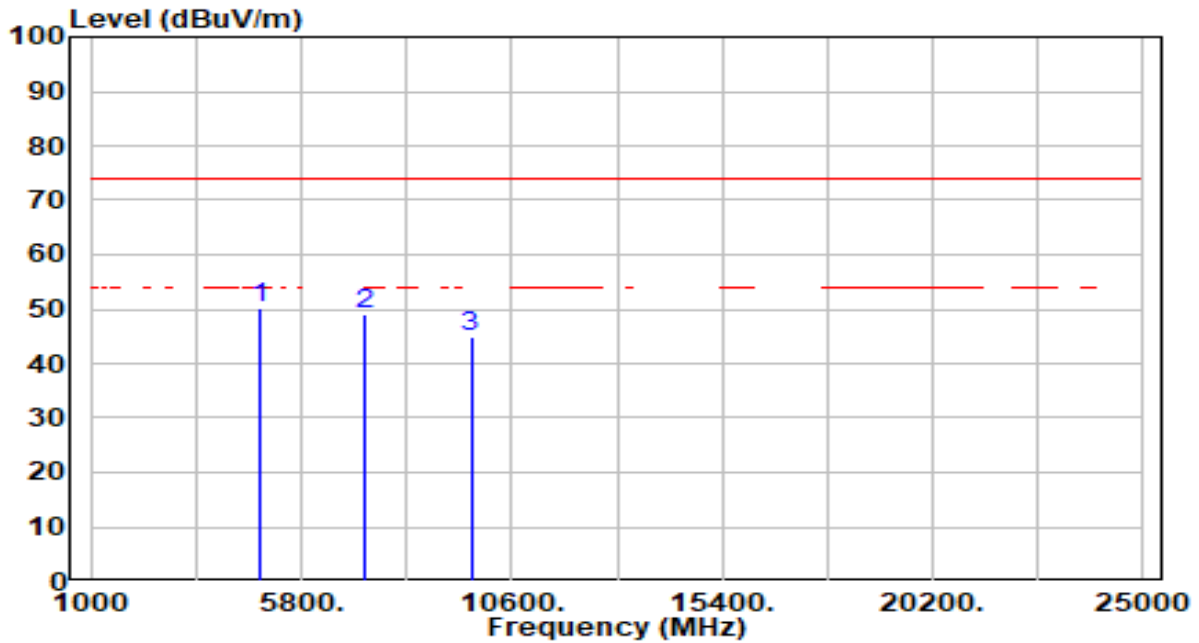


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4834.000	50.06	0.17	50.24	-23.76	74.00	200	310	Peak
2		7251.000	43.41	5.81	49.23	-24.77	74.00	200	112	Peak
3		9668.000	39.71	5.17	44.88	-29.12	74.00	200	189	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

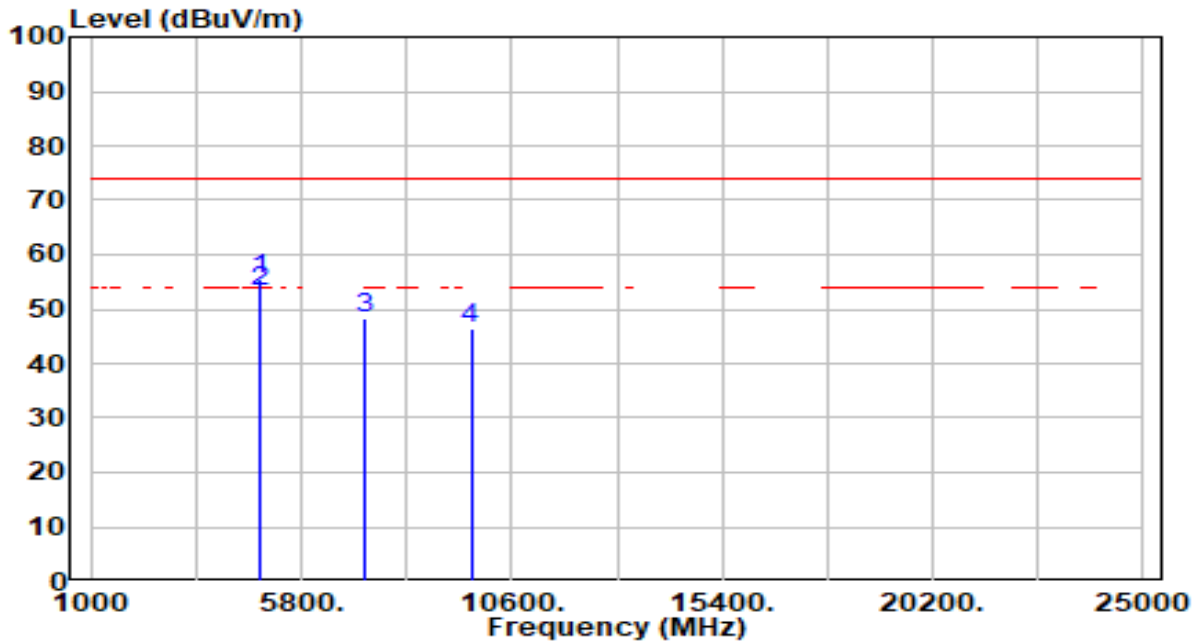


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4834.000	55.43	0.17	55.60	-18.40	74.00	100	35	Peak
2	* 4834.000	53.20	0.17	53.37	-0.63	54.00	100	35	Average
3	7251.000	42.62	5.81	48.43	-25.57	74.00	100	25	Peak
4	9668.000	41.12	5.17	46.29	-27.71	74.00	100	251	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

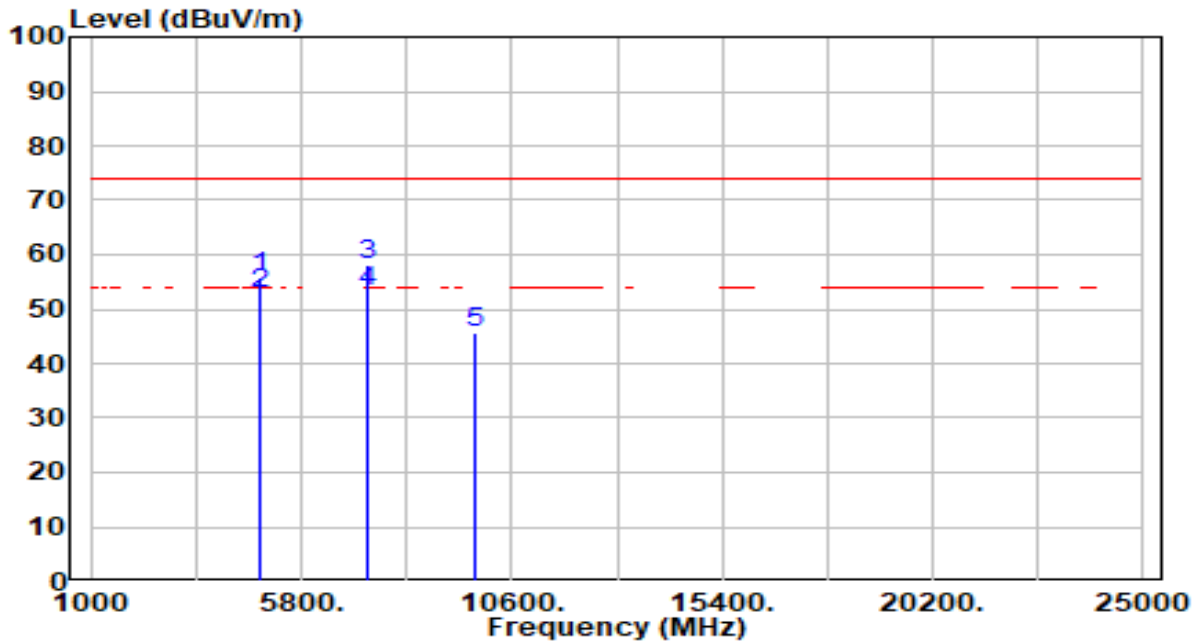


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	55.77	0.25	56.02	-17.98	74.00	200	333	Peak
2	4874.000	52.52	0.25	52.77	-1.23	54.00	200	333	Average
3 *	7311.000	52.13	5.82	57.95	-16.05	74.00	200	114	Peak
4 *	7311.000	47.26	5.82	53.08	-0.92	54.00	200	114	Average
5	9748.000	40.38	5.19	45.58	-28.42	74.00	200	351	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

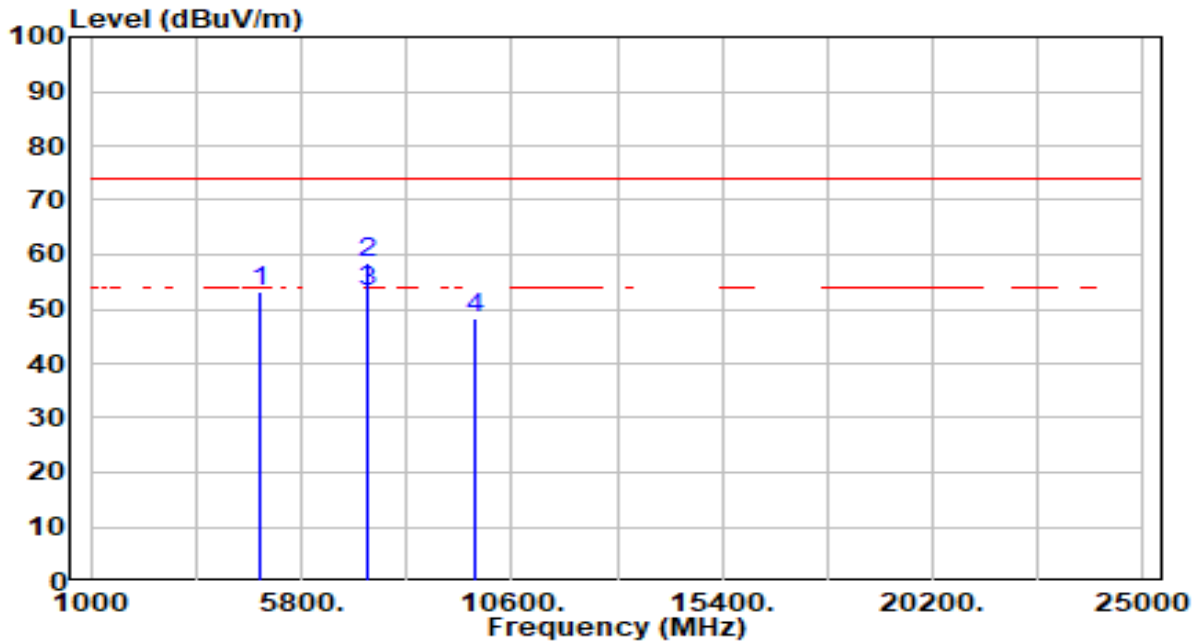


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	52.95	0.25	53.20	-20.80	74.00	336	342	Peak
2	* 7311.000	52.69	5.82	58.51	-15.49	74.00	336	342	Peak
3	* 7311.000	47.34	5.82	53.16	-0.84	54.00	336	342	Average
4	9748.000	43.18	5.19	48.38	-25.62	74.00	336	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

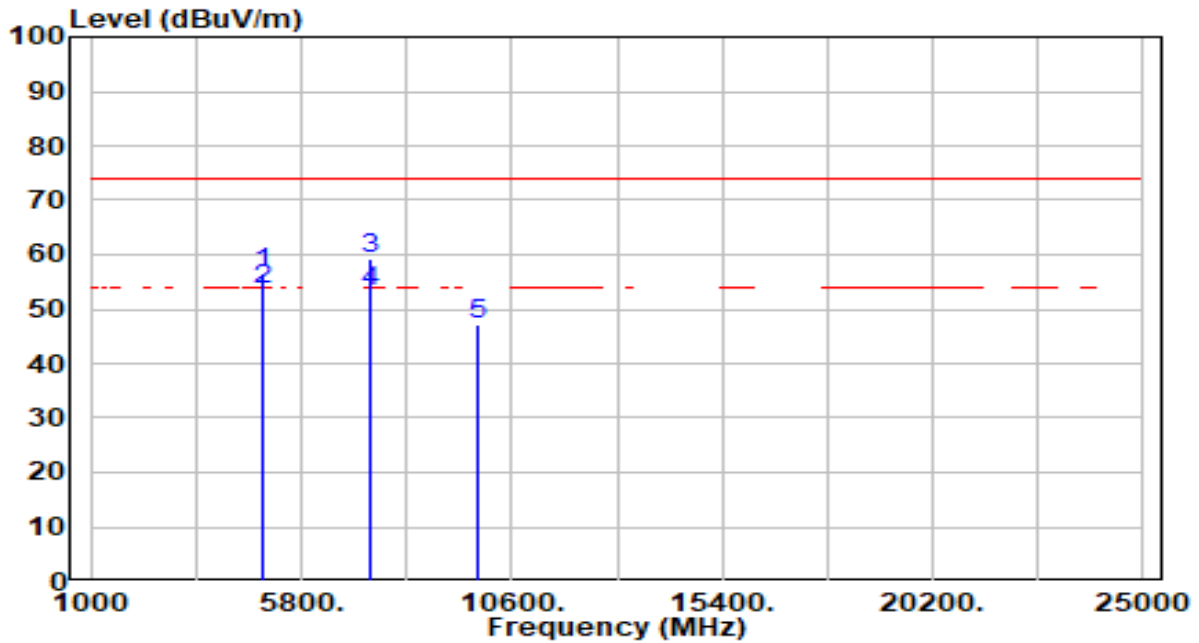


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	56.43	0.35	56.79	-17.21	74.00	200	340	Peak
2	* 4924.000	53.11	0.35	53.46	-0.54	54.00	200	340	Average
3	* 7386.000	53.40	5.82	59.23	-14.77	74.00	200	115	Peak
4	7386.000	47.23	5.82	53.05	-0.95	54.00	200	115	Average
5	9848.000	41.96	5.22	47.19	-26.81	74.00	200	136	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

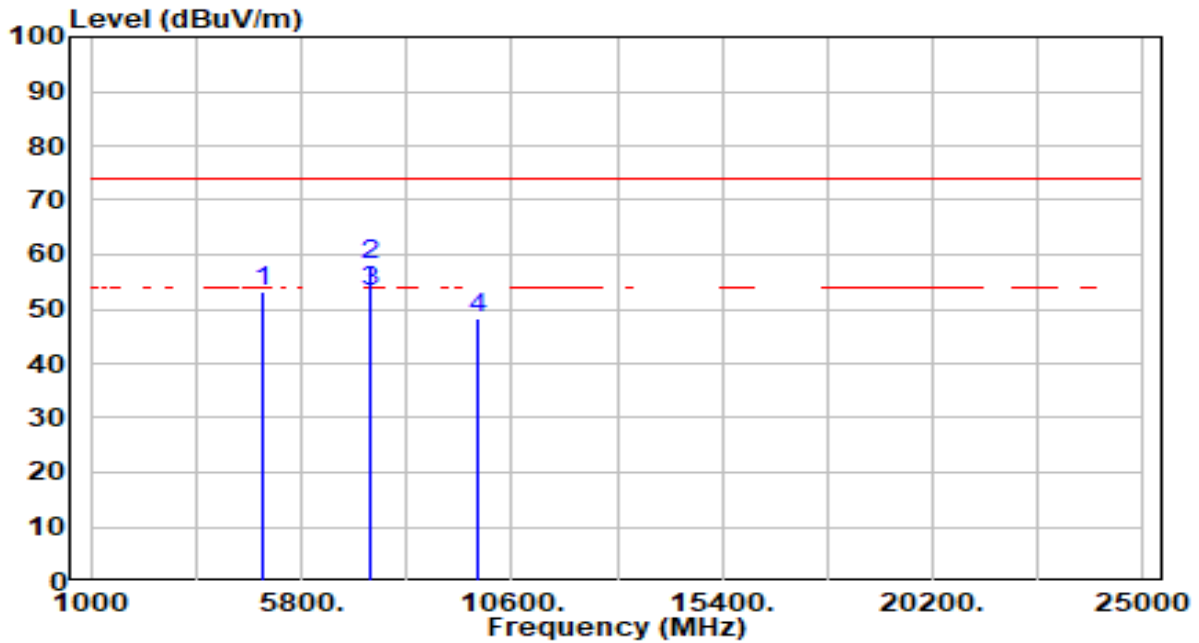


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	52.97	0.35	53.32	-20.68	74.00	336	343	Peak
2	* 7386.000	52.19	5.82	58.01	-15.99	74.00	336	336	Peak
3	* 7386.000	47.22	5.82	53.04	-0.96	54.00	336	336	Average
4	9848.000	43.26	5.22	48.49	-25.51	74.00	336	286	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not shown in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

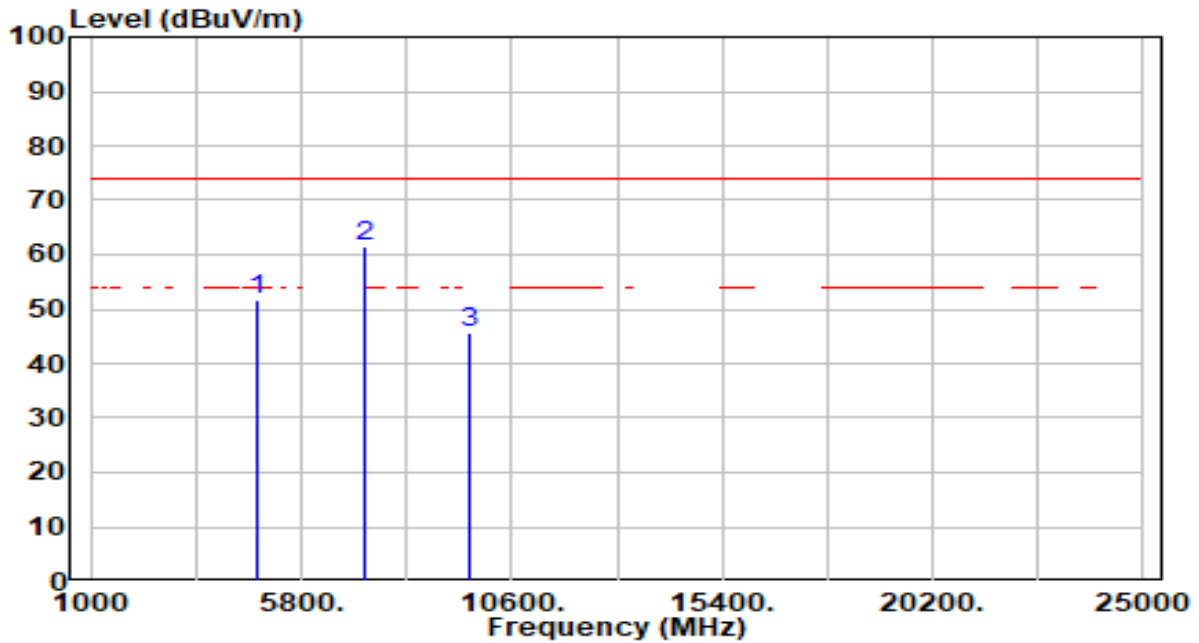


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	51.66	0.15	51.81	-22.19	74.00	200	304	Peak
2	* 7236.000	55.74	5.81	61.55	-12.45	74.00	200	184	Peak
3	9648.000	40.60	5.16	45.76	-28.24	74.00	200	208	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

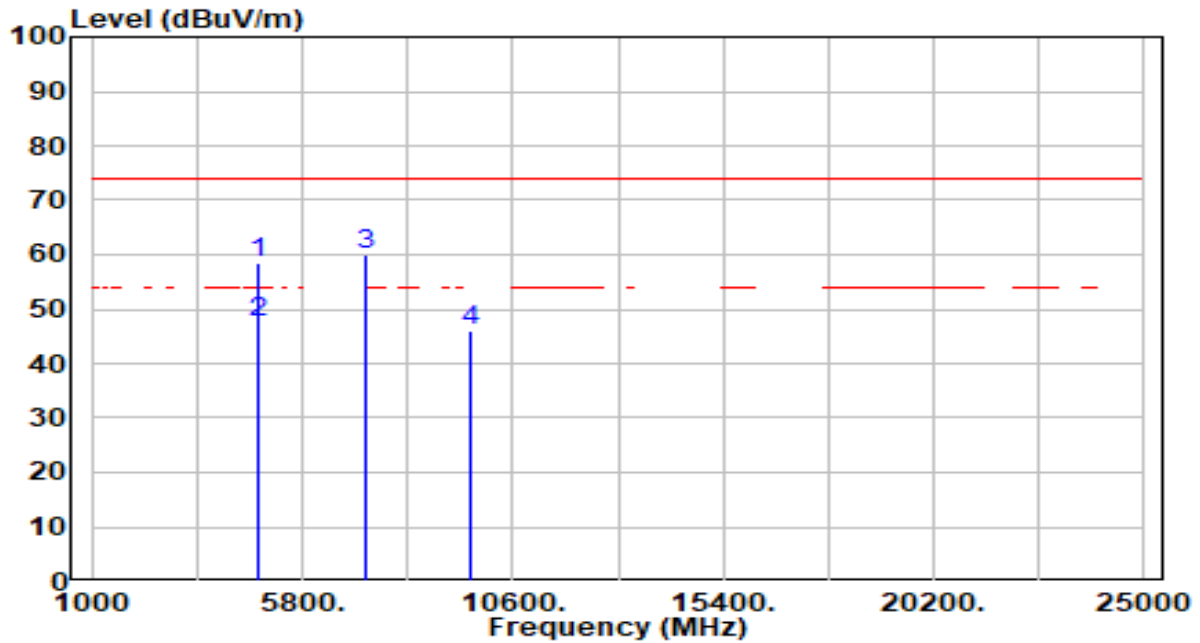


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	58.46	0.15	58.61	-15.39	74.00	100	347	Peak
2	* 4824.000	47.46	0.15	47.61	-6.39	54.00	100	347	Average
3	* 7236.000	54.07	5.81	59.88	-14.12	74.00	100	9	Peak
4	9648.000	40.76	5.16	45.92	-28.08	74.00	100	276	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

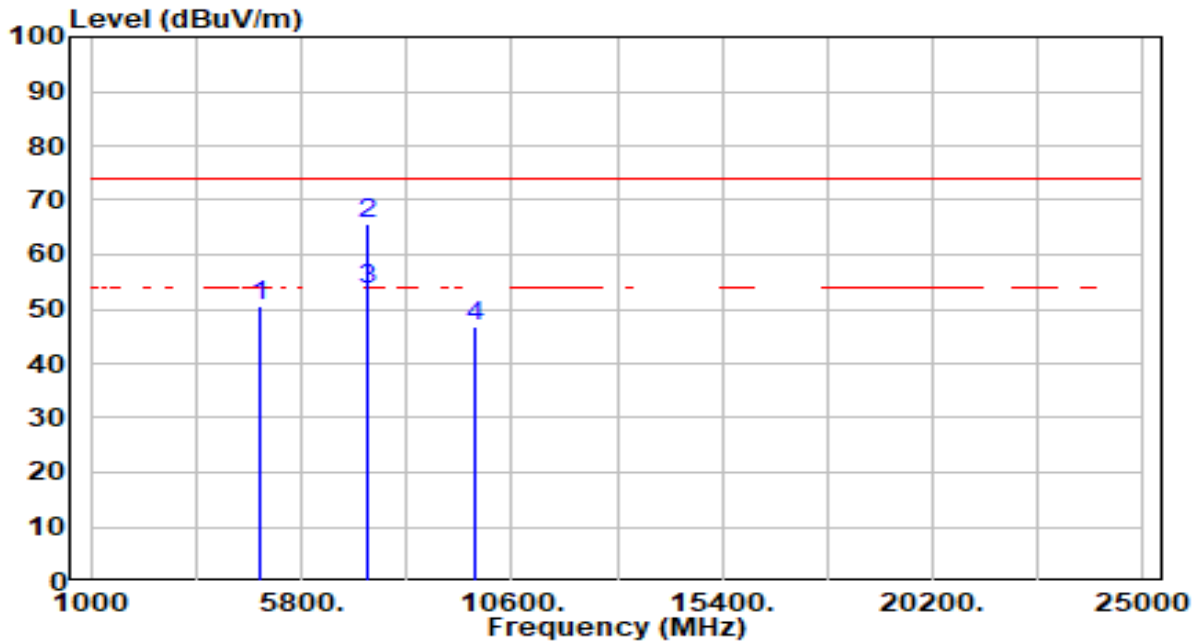


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.50	0.25	50.75	-23.25	74.00	200	337	Peak
2	* 7311.000	59.93	5.82	65.75	-8.25	74.00	200	122	Peak
3	* 7311.000	47.60	5.82	53.42	-0.58	54.00	200	122	Average
4	9748.000	41.45	5.19	46.65	-27.35	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

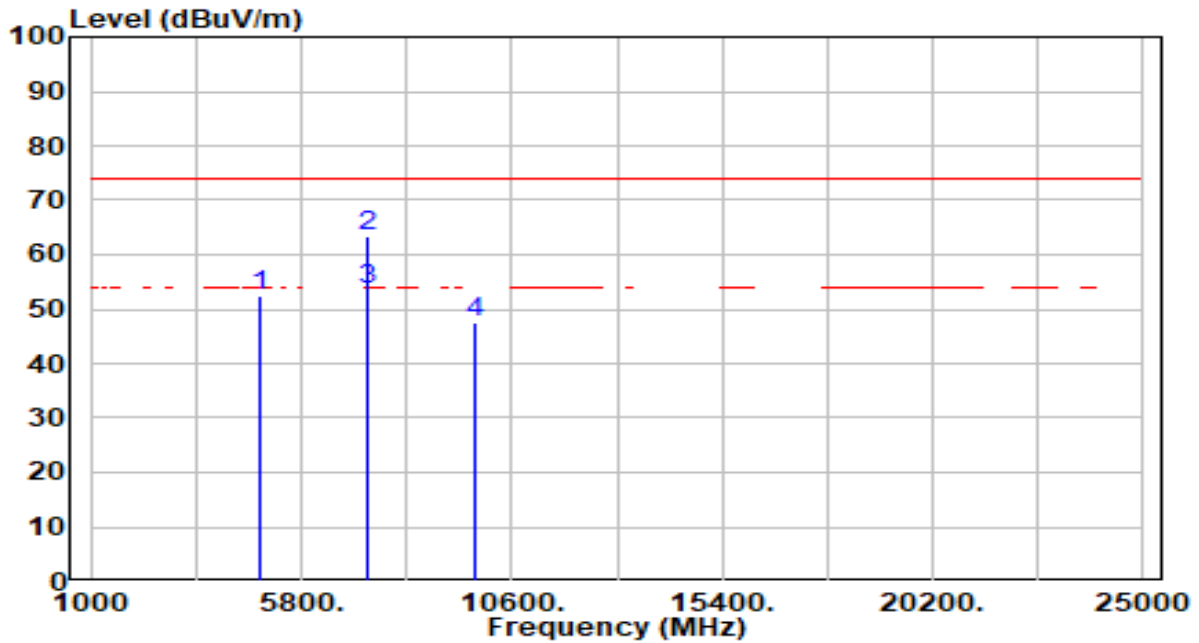


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	52.17	0.25	52.43	-21.57	74.00	336	325	Peak
2	* 7311.000	57.48	5.82	63.30	-10.70	74.00	336	167	Peak
3	* 7311.000	47.58	5.82	53.40	-0.60	54.00	336	167	Average
4	9748.000	42.22	5.19	47.42	-26.58	74.00	336	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

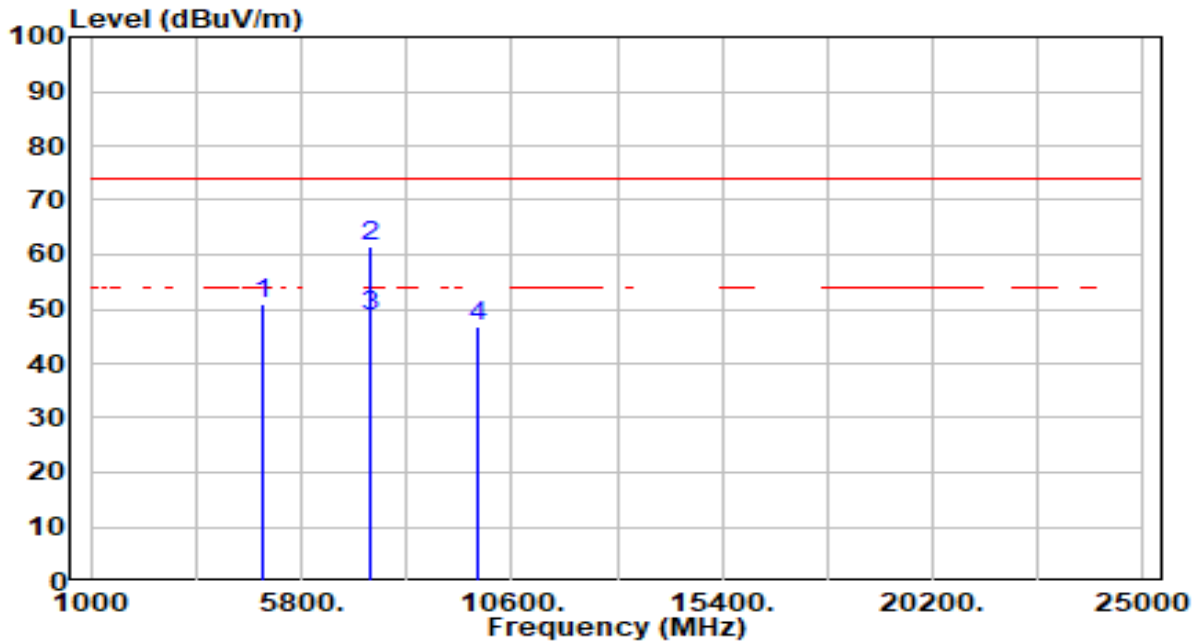


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	50.58	0.35	50.94	-23.06	74.00	200	301	Peak
2	* 7386.000	55.71	5.82	61.54	-12.46	74.00	200	112	Peak
3	* 7386.000	43.00	5.82	48.82	-5.18	54.00	200	112	Average
4	9848.000	41.43	5.22	46.65	-27.35	74.00	200	301	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

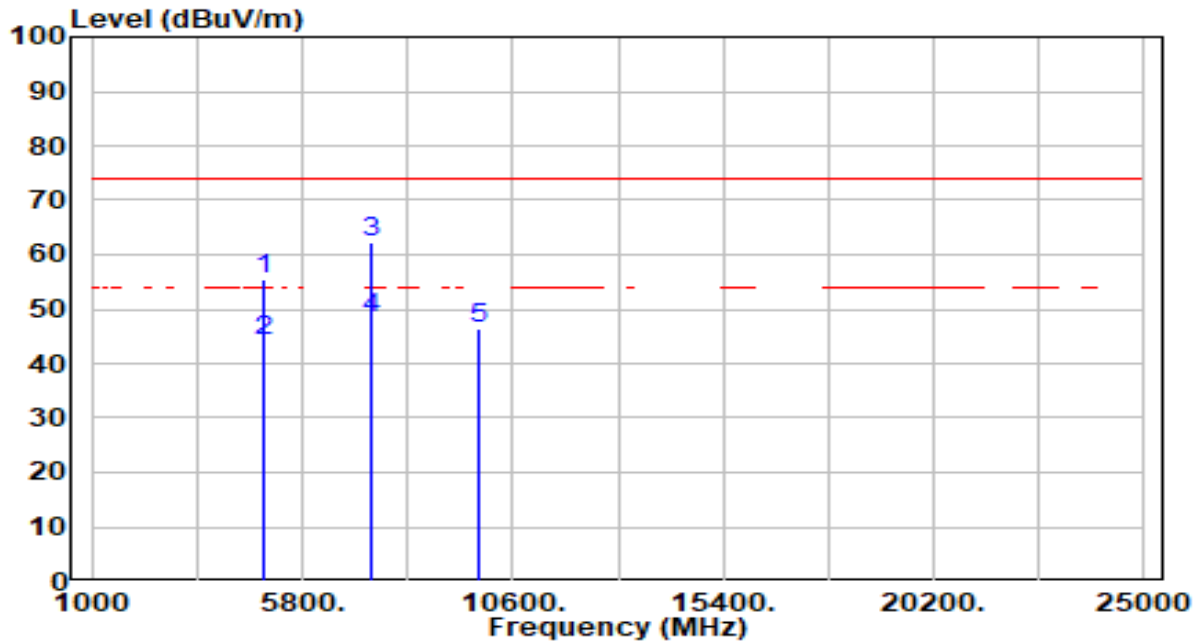


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	54.94	0.35	55.30	-18.70	74.00	336	330	Peak
2	4924.000	43.94	0.35	44.30	-9.70	54.00	336	330	Average
3	* 7386.000	56.42	5.82	62.25	-11.75	74.00	336	351	Peak
4	* 7386.000	42.30	5.82	48.12	-5.88	54.00	336	351	Average
5	9848.000	41.35	5.22	46.57	-27.43	74.00	336	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

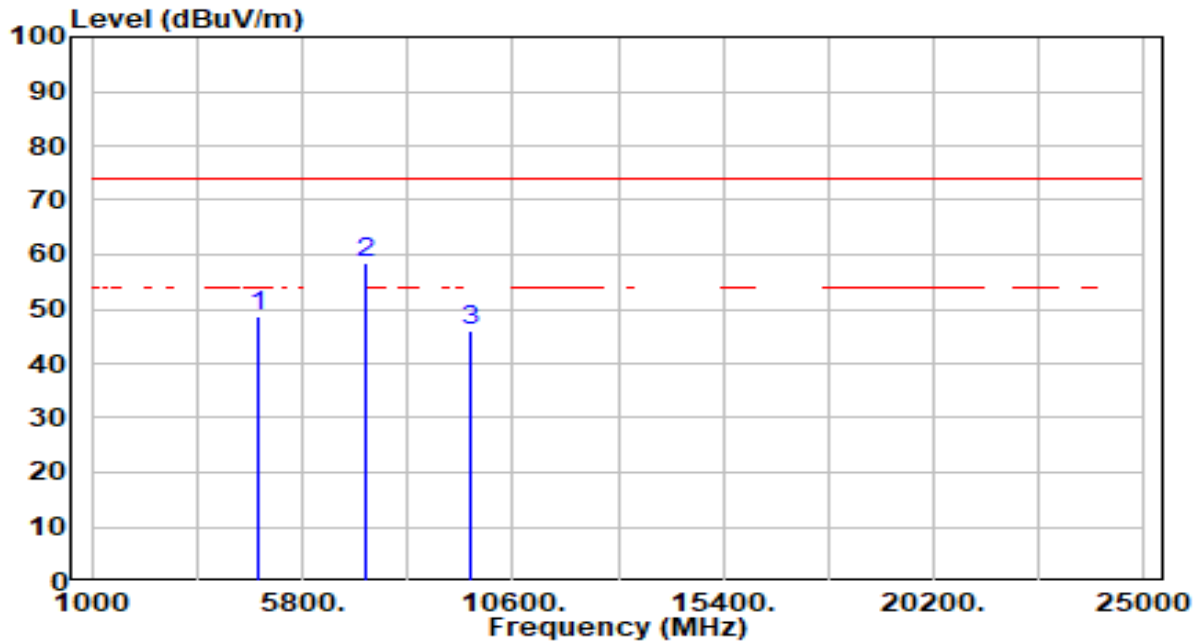


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	48.60	0.15	48.76	-25.24	74.00	200	314	Peak
2	* 7236.000	52.85	5.81	58.66	-15.34	74.00	200	119	Peak
3	9648.000	40.88	5.16	46.05	-27.95	74.00	200	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

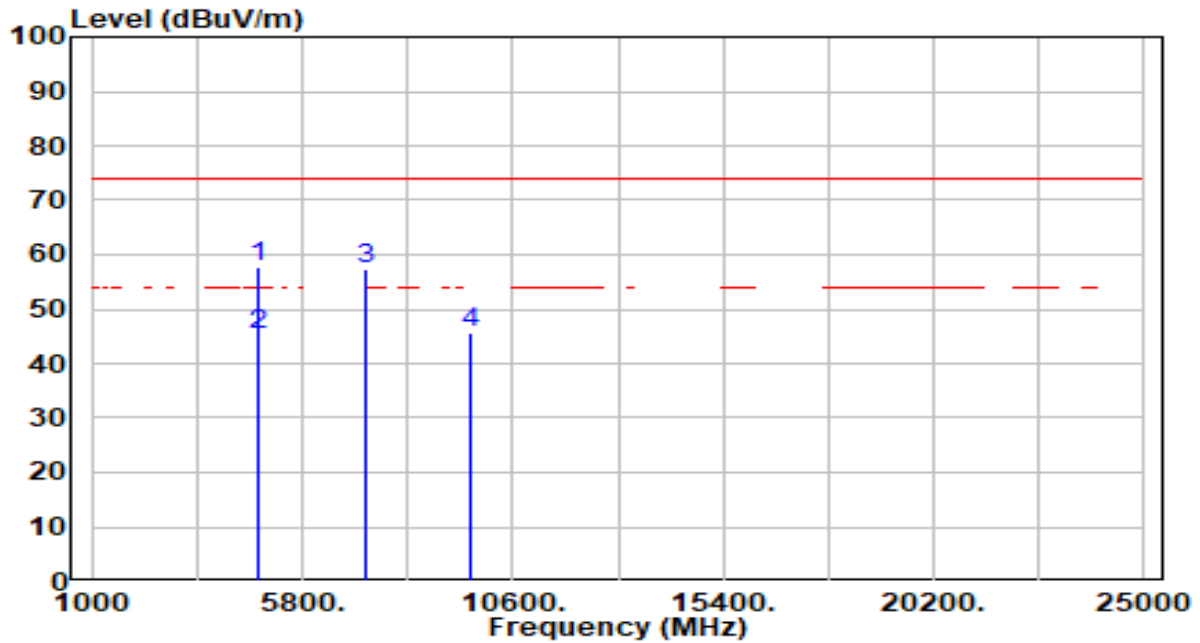


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 4824.000	57.71	0.15	57.86	-16.14	74.00	100	352	Peak
2	* 4824.000	45.32	0.15	45.47	-8.53	54.00	100	352	Average
3	7236.000	51.53	5.81	57.34	-16.66	74.00	100	20	Peak
4	9648.000	40.62	5.16	45.78	-28.22	74.00	100	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

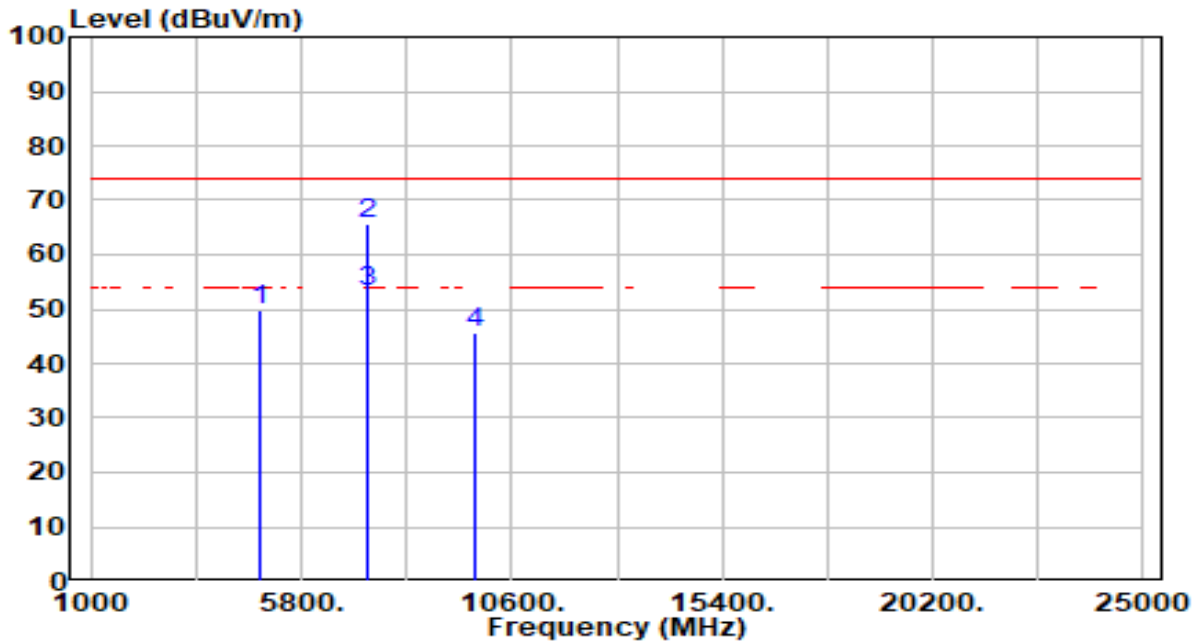


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.53	0.25	49.78	-24.22	74.00	200	313	Peak
2	* 7311.000	59.74	5.82	65.56	-8.44	74.00	200	103	Peak
3	* 7311.000	47.23	5.82	53.05	-0.95	54.00	200	103	Average
4	9748.000	40.50	5.19	45.69	-28.31	74.00	200	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

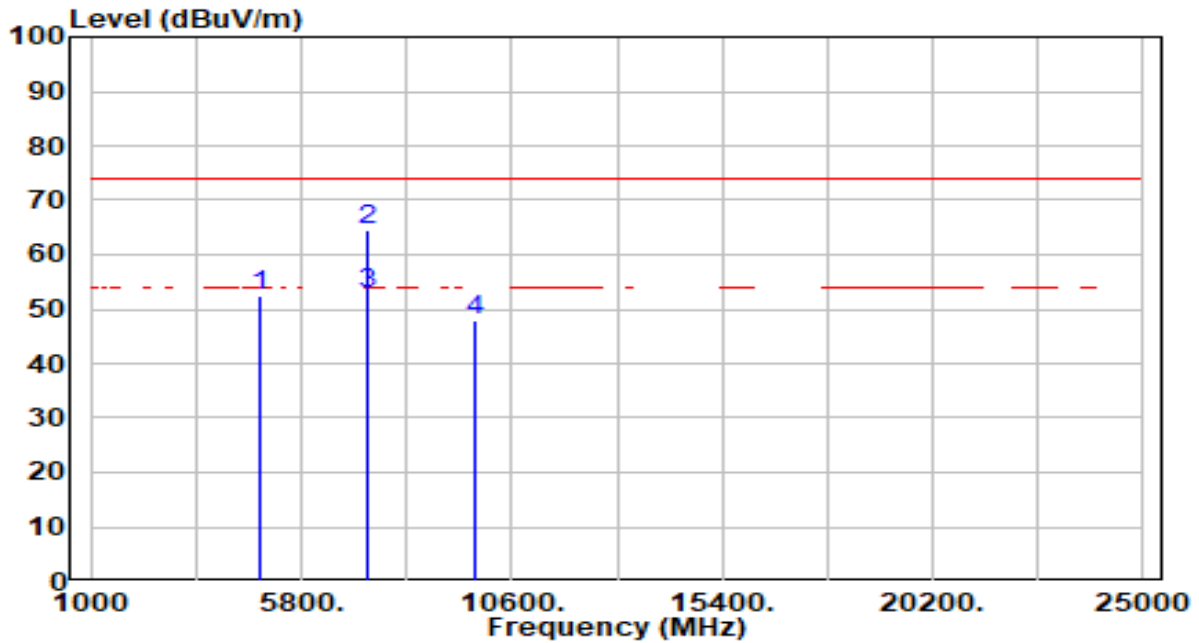


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	52.22	0.25	52.47	-21.53	74.00	336	343	Peak
2	* 7311.000	58.90	5.82	64.72	-9.28	74.00	336	166	Peak
3	* 7311.000	47.14	5.82	52.96	-1.04	54.00	336	166	Average
4	9748.000	42.67	5.19	47.86	-26.14	74.00	336	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not shown in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

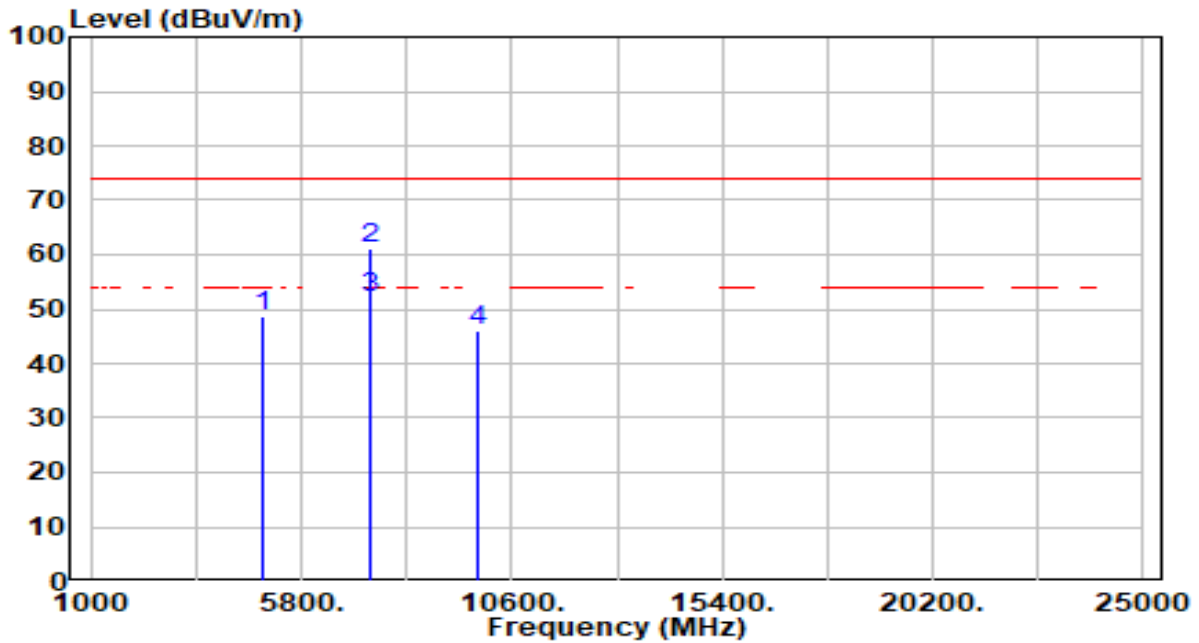


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	48.31	0.35	48.66	-25.34	74.00	200	319	Peak
2	* 7386.000	55.27	5.82	61.10	-12.90	74.00	200	272	Peak
3	* 7386.000	46.27	5.82	52.10	-1.90	54.00	200	272	Average
4	9848.000	40.85	5.22	46.08	-27.92	74.00	200	5	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

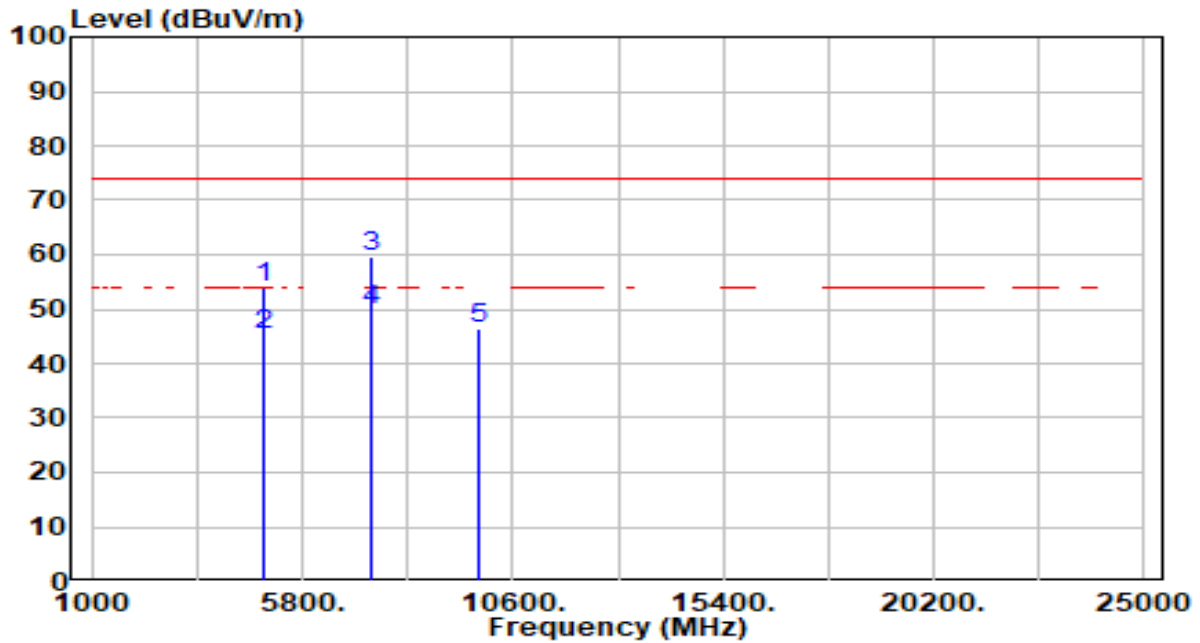


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	53.74	0.35	54.09	-19.91	74.00	336	328	Peak
2	4924.000	44.74	0.35	45.09	-8.91	54.00	336	328	Average
3	* 7386.000	53.88	5.82	59.71	-14.29	74.00	336	138	Peak
4	* 7386.000	43.88	5.82	49.71	-4.29	54.00	336	138	Average
5	9848.000	41.19	5.22	46.41	-27.59	74.00	336	112	Peak

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

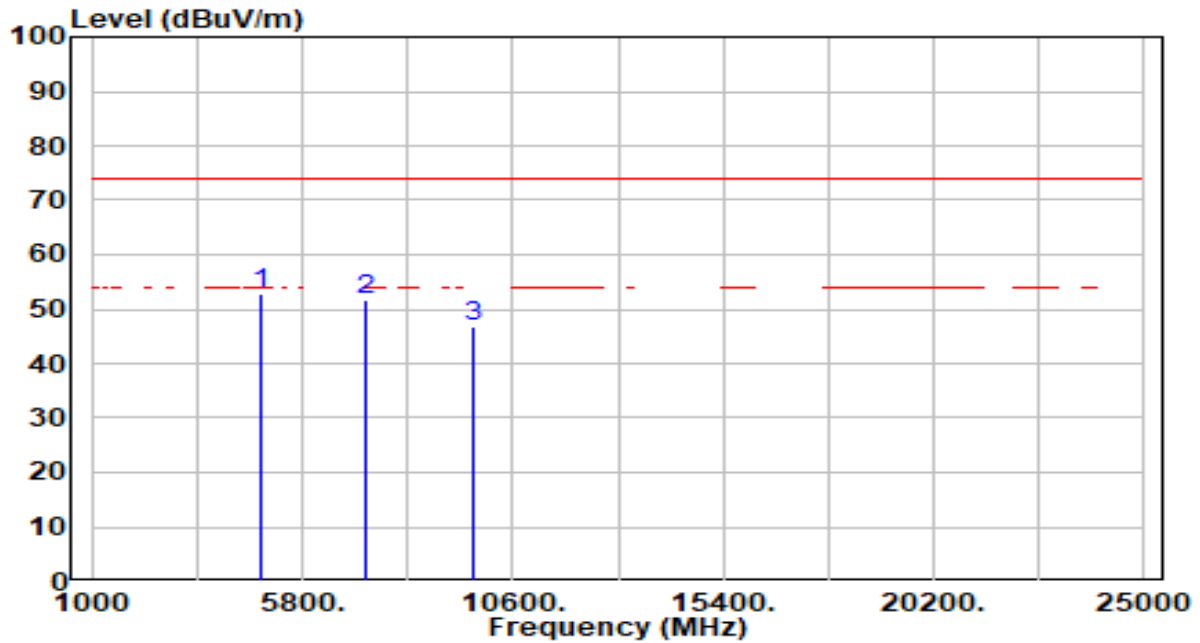


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4844.000	52.75	0.19	52.94	-21.06	74.00	200	360	Peak
2		7266.000	46.00	5.81	51.82	-22.18	74.00	200	28	Peak
3		9688.000	41.59	5.18	46.76	-27.24	74.00	200	98	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

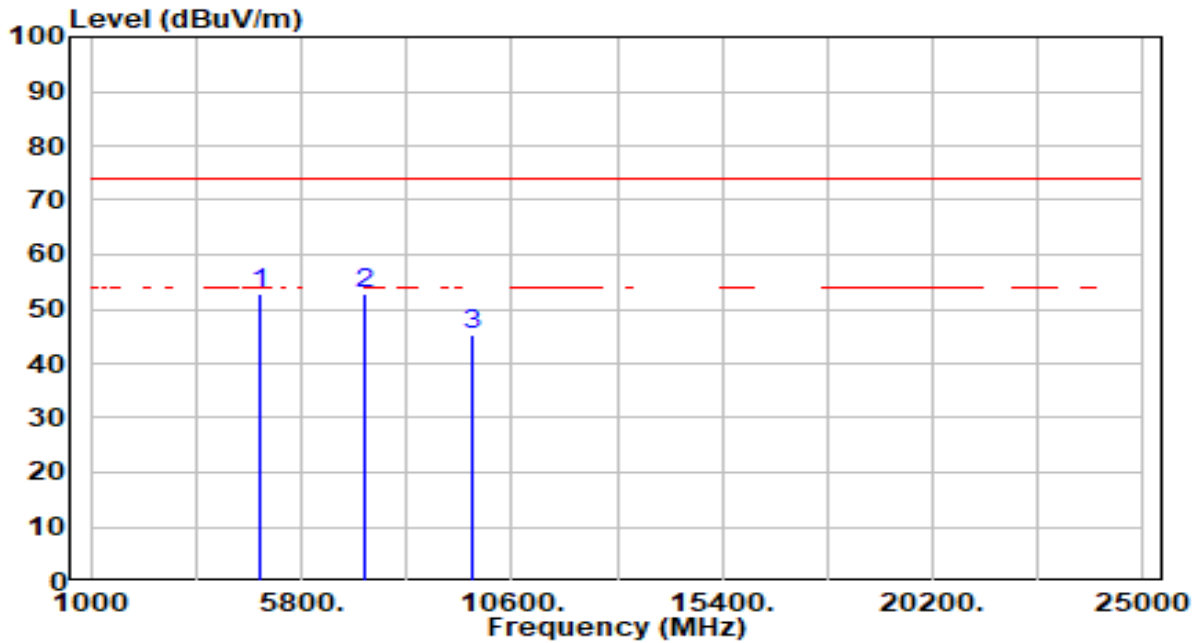


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	52.64	0.19	52.83	-21.17	74.00	100	0	Peak
2	* 7266.000	47.12	5.81	52.93	-21.07	74.00	100	36	Peak
3	9688.000	40.05	5.18	45.23	-28.77	74.00	100	334	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

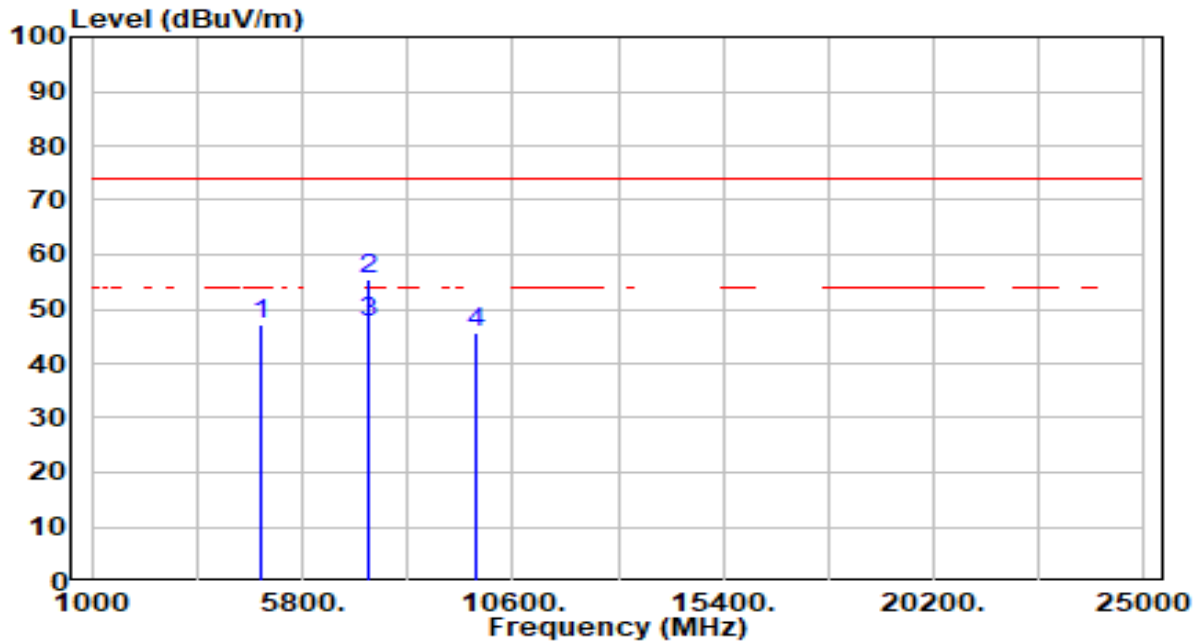


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	46.82	0.25	47.07	-26.93	74.00	200	63	Peak
2	* 7311.000	49.74	5.82	55.56	-18.44	74.00	200	120	Peak
3	* 7311.000	41.74	5.82	47.56	-6.44	54.00	200	120	Average
4	9748.000	40.45	5.19	45.64	-28.36	74.00	200	338	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

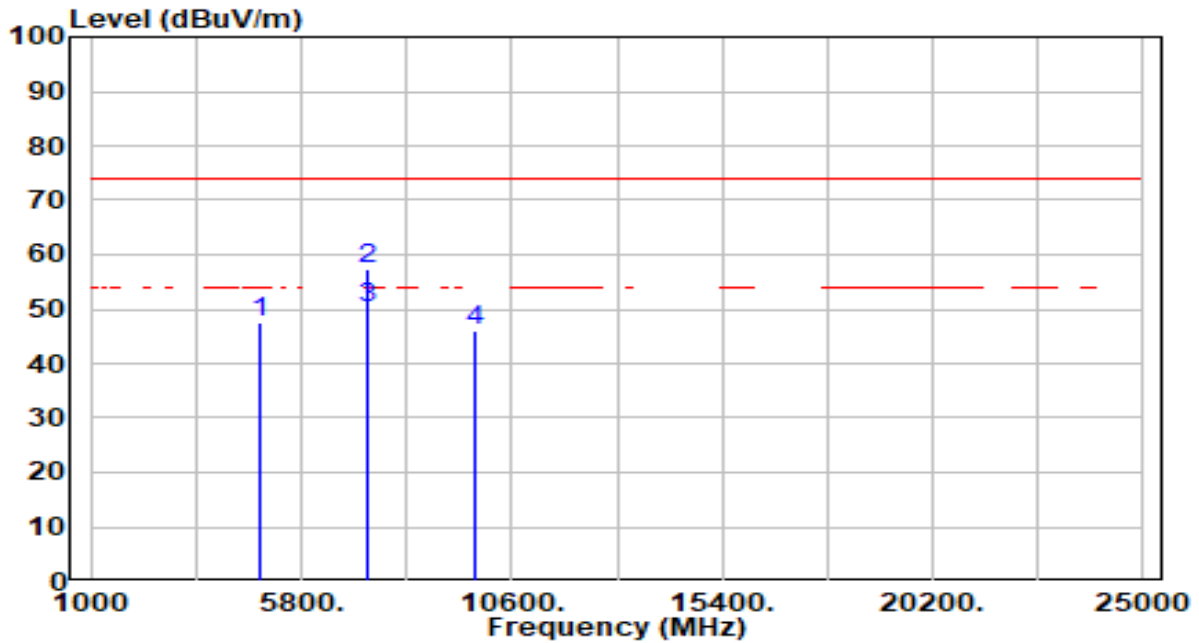


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	47.24	0.25	47.49	-26.51	74.00	336	351	Peak
2	* 7311.000	51.48	5.82	57.30	-16.70	74.00	336	168	Peak
3	* 7311.000	44.48	5.82	50.30	-3.70	54.00	336	168	Average
4	9748.000	40.90	5.19	46.09	-27.91	74.00	336	295	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

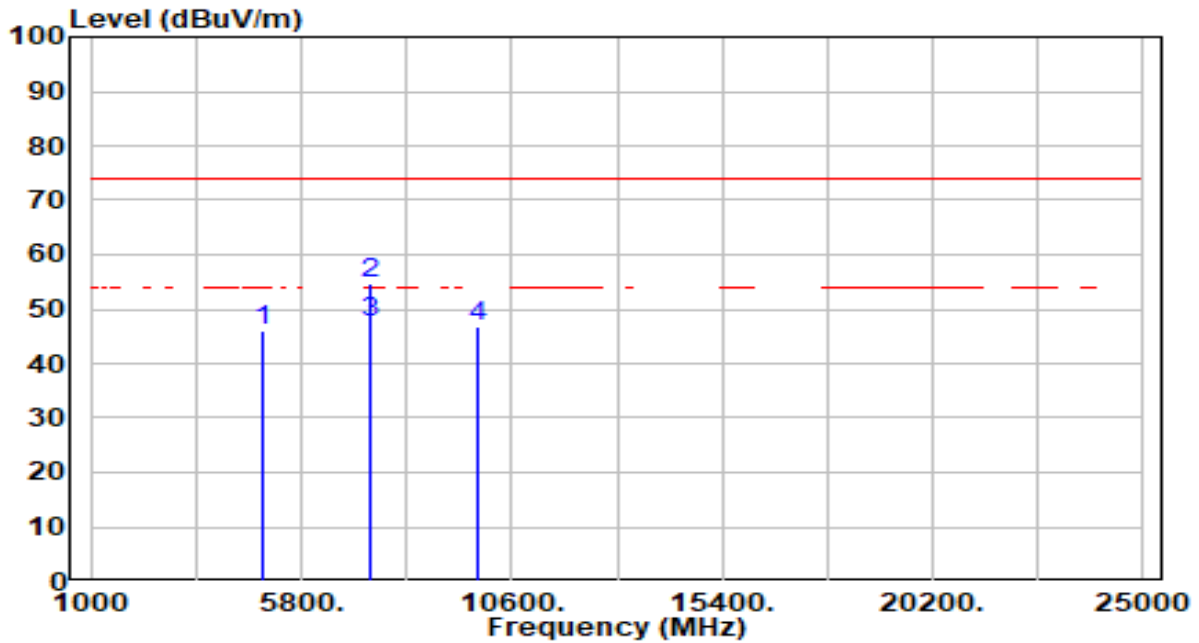


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	45.74	0.31	46.05	-27.95	74.00	200	338	Peak
2	* 7356.000	48.75	5.82	54.57	-19.43	74.00	200	248	Peak
3	* 7356.000	41.75	5.82	47.57	-6.43	54.00	200	248	Average
4	9808.000	41.65	5.21	46.87	-27.13	74.00	200	231	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

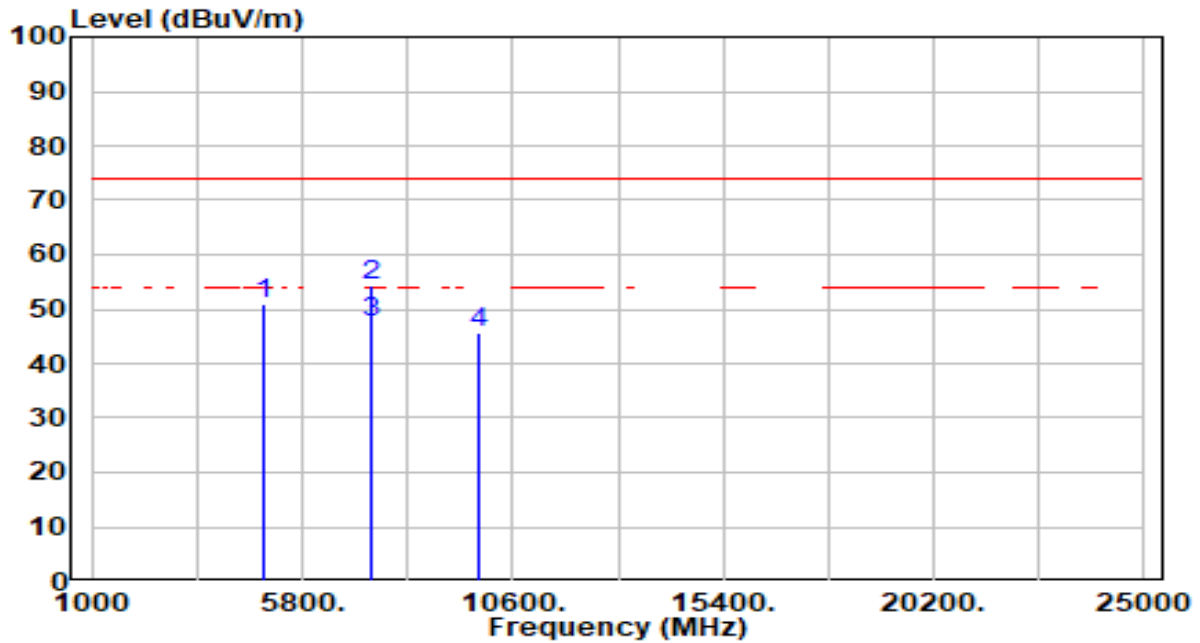


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	50.77	0.31	51.09	-22.91	74.00	336	344	Peak
2	* 7356.000	48.61	5.82	54.43	-19.57	74.00	336	173	Peak
3	* 7356.000	41.61	5.82	47.43	-6.57	54.00	336	173	Average
4	9808.000	40.53	5.21	45.74	-28.26	74.00	336	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

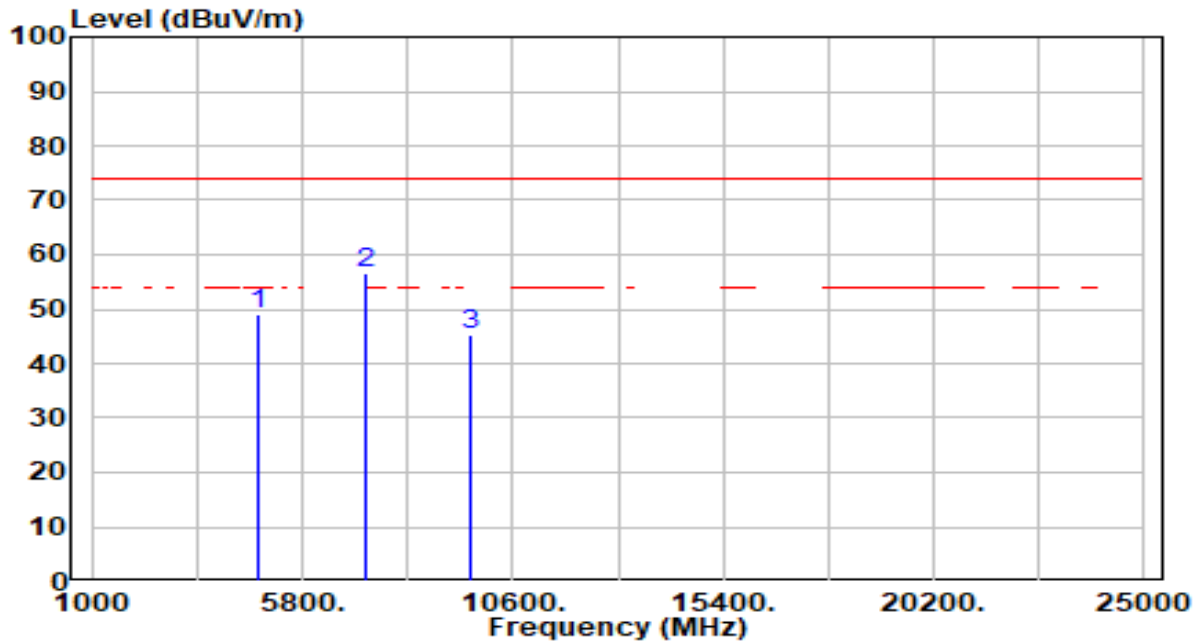


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	49.07	0.15	49.22	-24.78	74.00	200	311	Peak
2	* 7236.000	50.71	5.81	56.52	-17.48	74.00	200	120	Peak
3	9648.000	40.22	5.16	45.39	-28.61	74.00	200	40	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

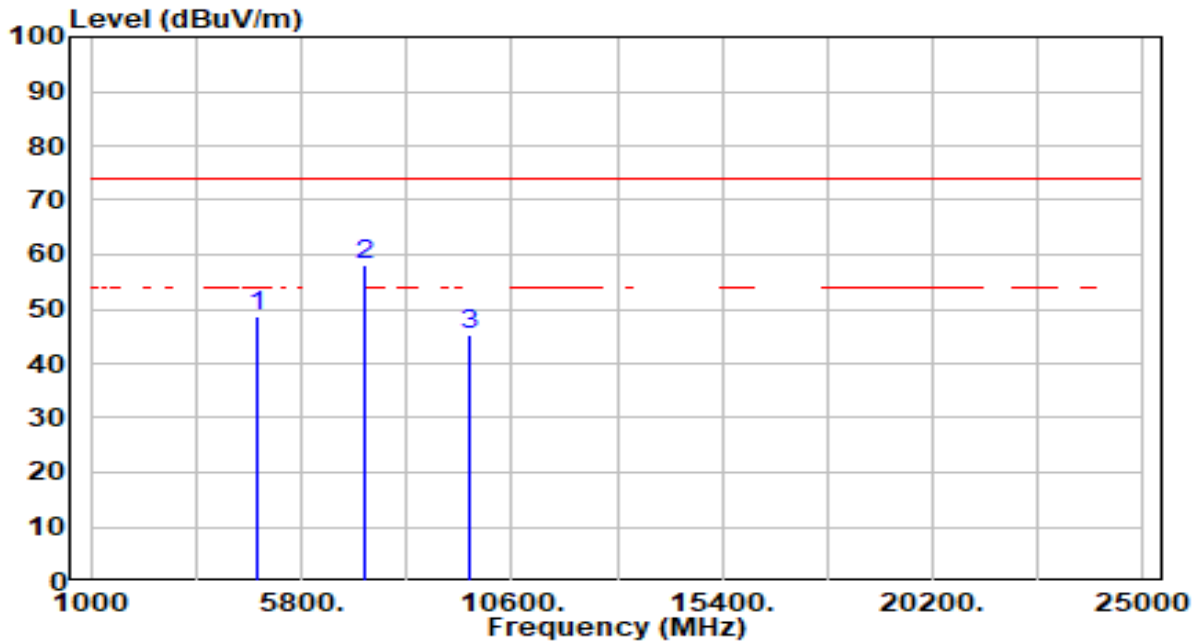


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	48.59	0.15	48.74	-25.26	74.00	100	304	Peak
2	* 7236.000	52.27	5.81	58.08	-15.92	74.00	100	245	Peak
3	9648.000	40.19	5.16	45.36	-28.64	74.00	100	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

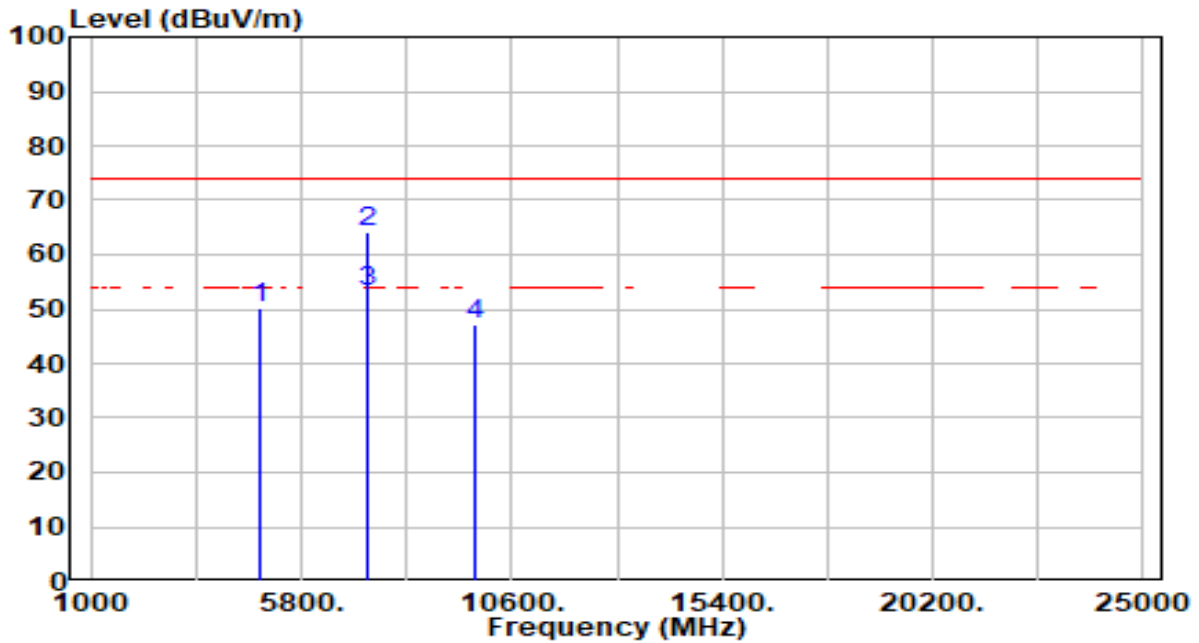


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	49.82	0.25	50.08	-23.92	74.00	200	294	Peak
2	* 7311.000	58.49	5.82	64.31	-9.69	74.00	200	116	Peak
3	* 7311.000	47.43	5.82	53.25	-0.75	54.00	200	116	Average
4	9748.000	41.99	5.19	47.18	-26.82	74.00	200	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

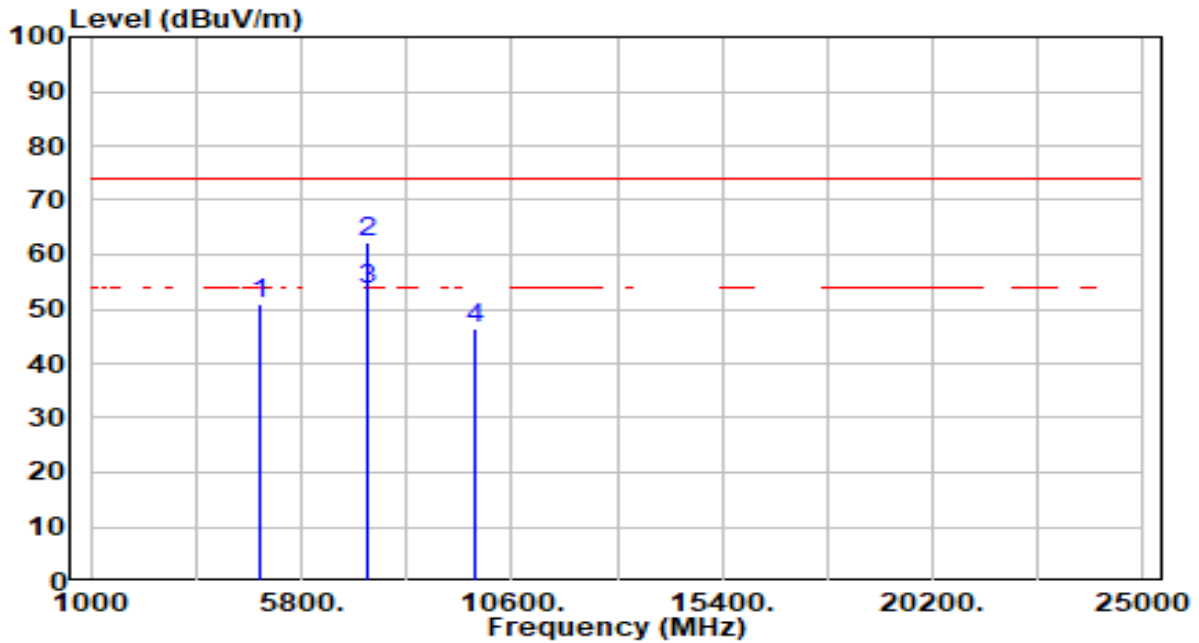


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	50.64	0.25	50.89	-23.11	74.00	336	342	Peak
2	* 7311.000	56.53	5.82	62.35	-11.65	74.00	336	169	Peak
3	* 7311.000	47.58	5.82	53.40	-0.60	54.00	336	169	Average
4	9748.000	41.10	5.19	46.30	-27.70	74.00	336	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

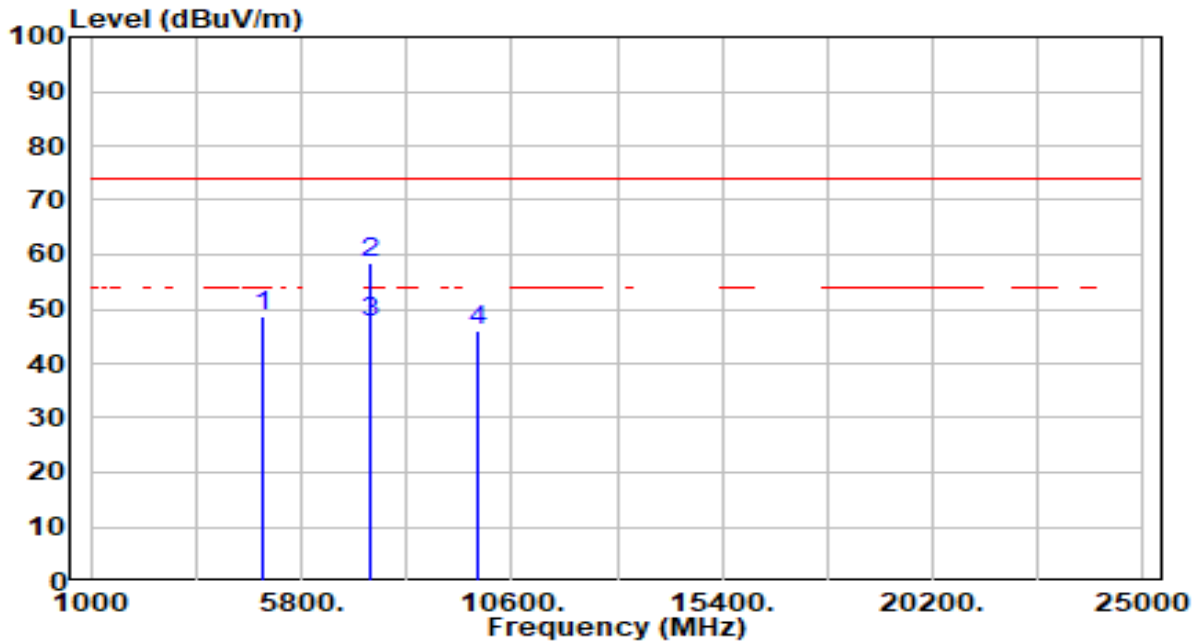


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	48.42	0.35	48.78	-25.22	74.00	200	68	Peak
2	* 7386.000	52.78	5.82	58.60	-15.40	74.00	200	154	Peak
3	* 7386.000	41.78	5.82	47.60	-6.40	54.00	200	154	Average
4	9848.000	40.68	5.22	45.90	-28.10	74.00	200	23	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

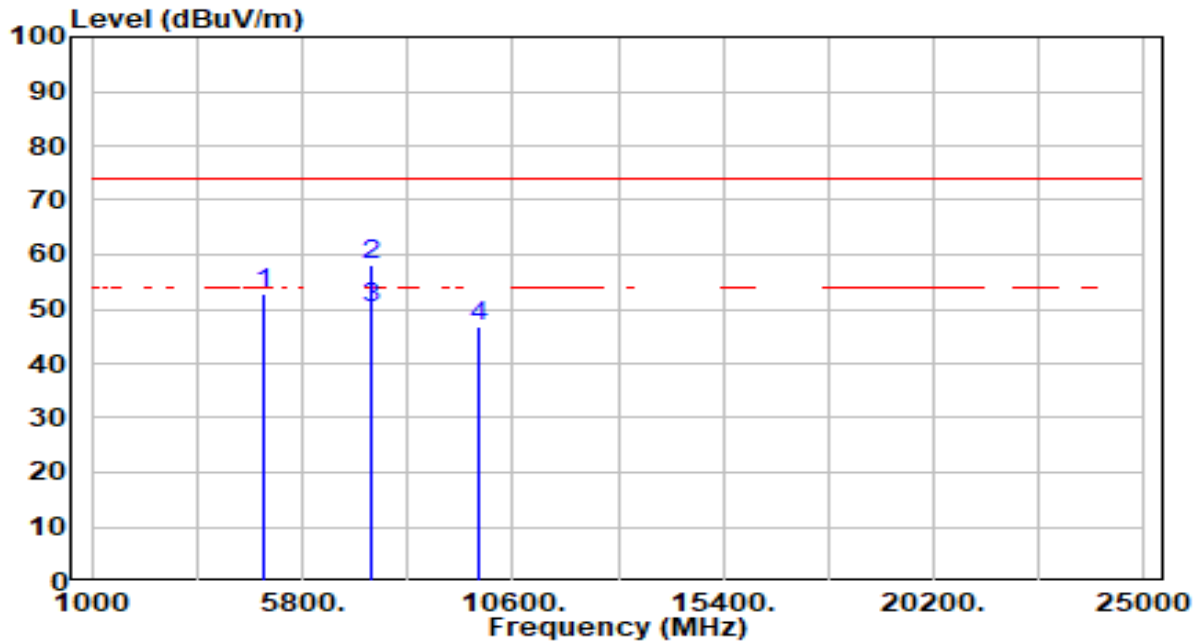


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	52.40	0.35	52.75	-21.25	74.00	336	339	Peak
2	* 7386.000	52.31	5.82	58.14	-15.86	74.00	336	175	Peak
3	* 7386.000	44.31	5.82	50.14	-3.86	54.00	336	175	Average
4	9848.000	41.51	5.22	46.73	-27.27	74.00	336	313	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

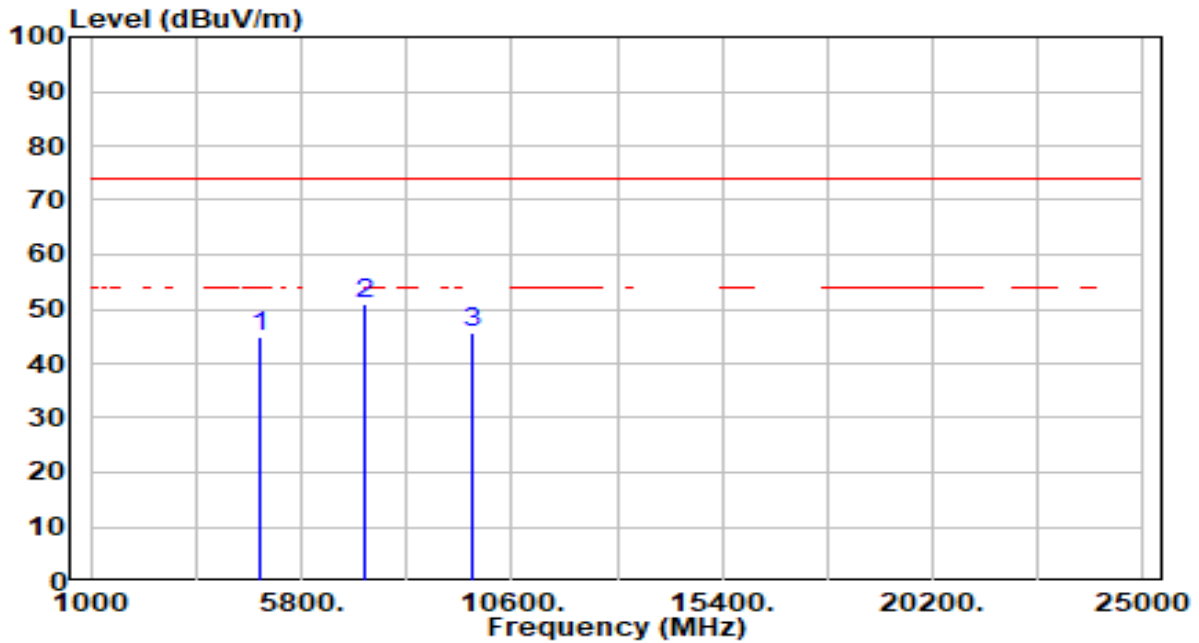


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	44.85	0.19	45.04	-28.96	74.00	200	315	Peak
2	* 7266.000	45.03	5.81	50.84	-23.16	74.00	200	114	Peak
3	9688.000	40.40	5.18	45.57	-28.43	74.00	200	123	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

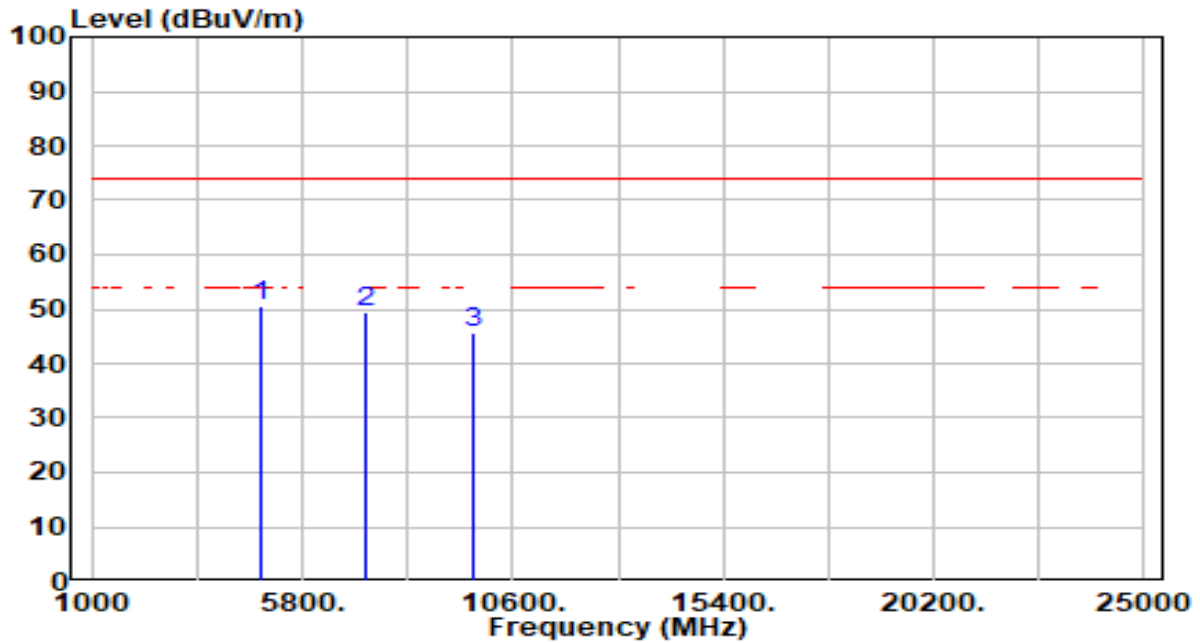


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	4844.000	50.29	0.19	50.48	-23.52	74.00	100	353	Peak
2		7266.000	43.77	5.81	49.58	-24.42	74.00	100	23	Peak
3		9688.000	40.33	5.18	45.50	-28.50	74.00	100	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

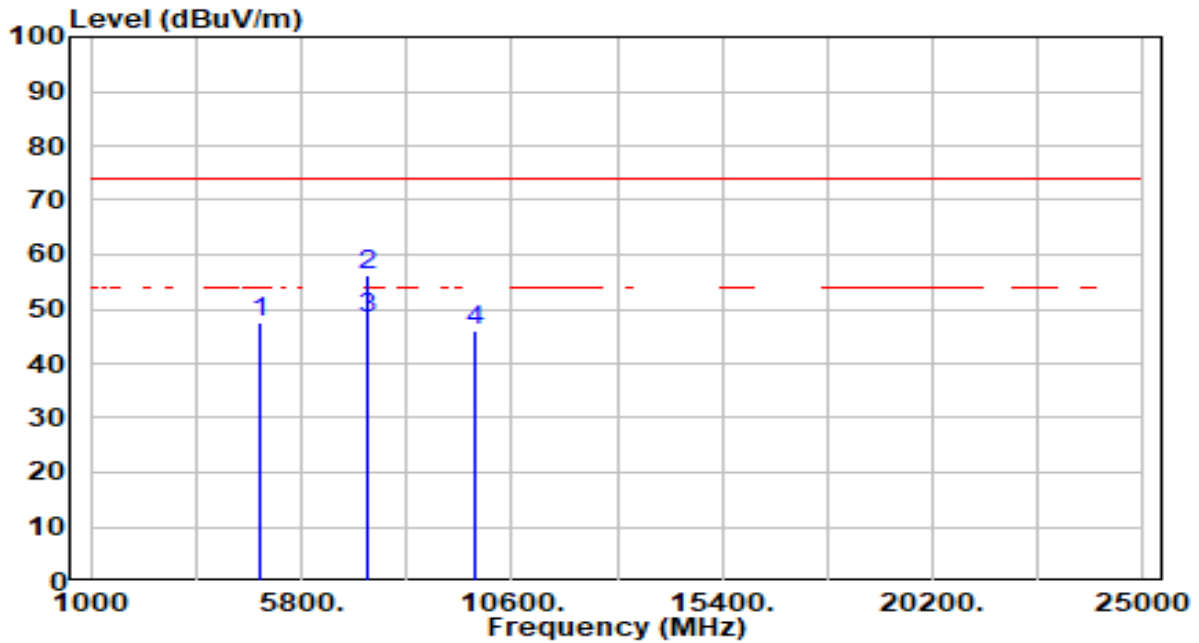


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	47.33	0.25	47.58	-26.42	74.00	200	299	Peak
2	* 7311.000	50.31	5.82	56.13	-17.87	74.00	200	112	Peak
3	* 7311.000	42.31	5.82	48.13	-5.87	54.00	200	112	Average
4	9748.000	40.76	5.19	45.95	-28.05	74.00	200	133	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

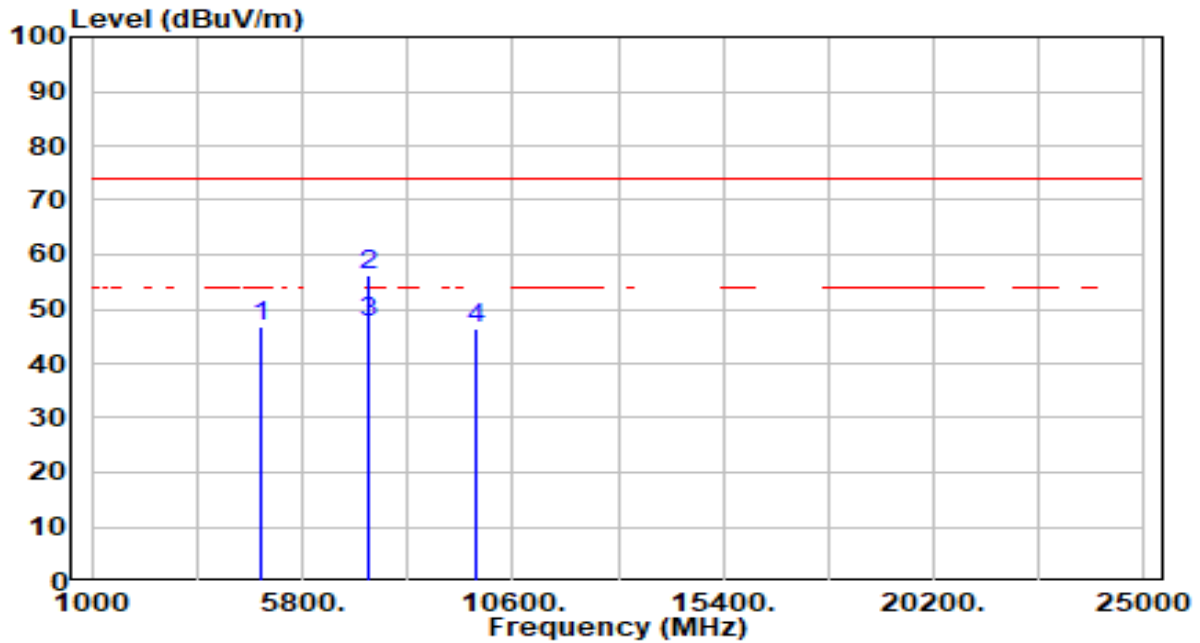


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	46.54	0.25	46.79	-27.21	74.00	336	326	Peak
2	* 7311.000	50.56	5.82	56.38	-17.62	74.00	336	350	Peak
3	* 7311.000	41.56	5.82	47.38	-6.62	54.00	336	350	Average
4	9748.000	41.26	5.19	46.45	-27.55	74.00	336	238	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

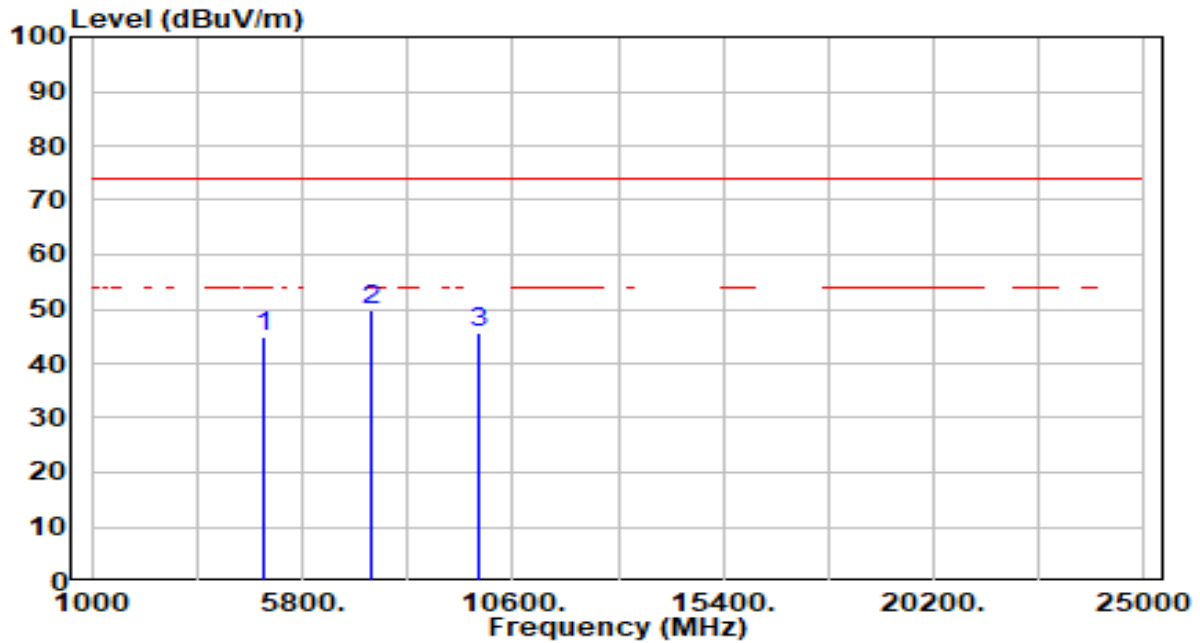


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	44.41	0.31	44.72	-29.28	74.00	200	306	Peak
2	* 7356.000	43.84	5.82	49.66	-24.34	74.00	200	268	Peak
3	9808.000	40.28	5.21	45.50	-28.50	74.00	200	87	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

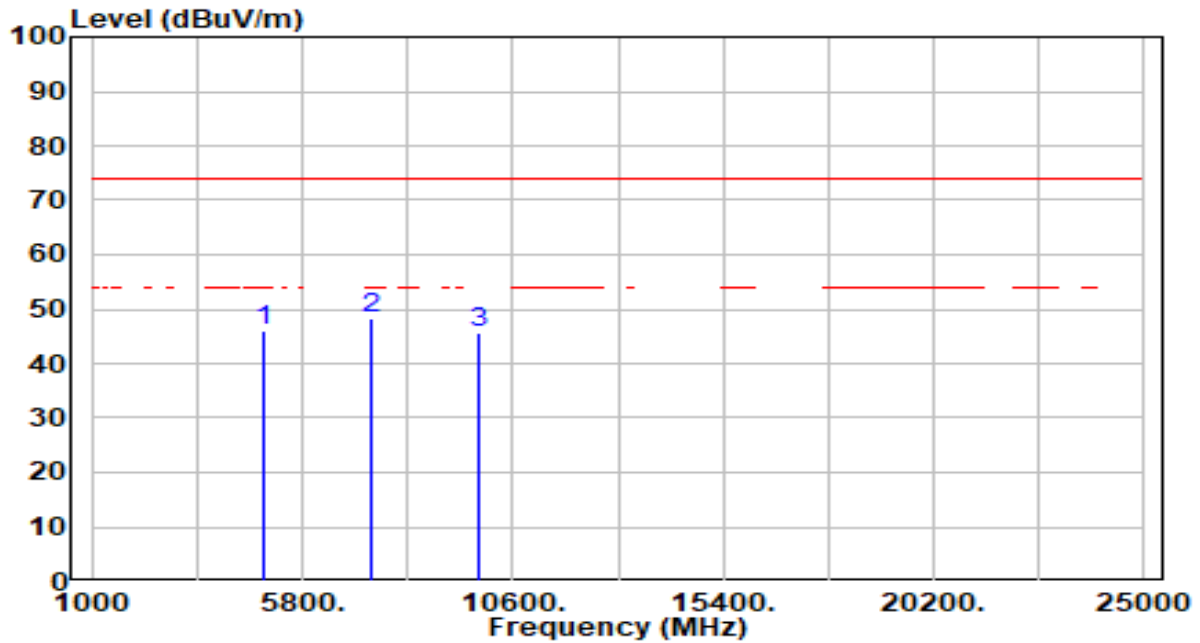

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	45.72	0.31	46.03	-27.97	74.00	336	324	Peak
2	* 7356.000	42.49	5.82	48.31	-25.69	74.00	336	138	Peak
3	9808.000	40.56	5.21	45.77	-28.23	74.00	336	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Radiated Restricted Band Edge Measurement

7.6.6. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.7. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.8. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.9. Test Setup

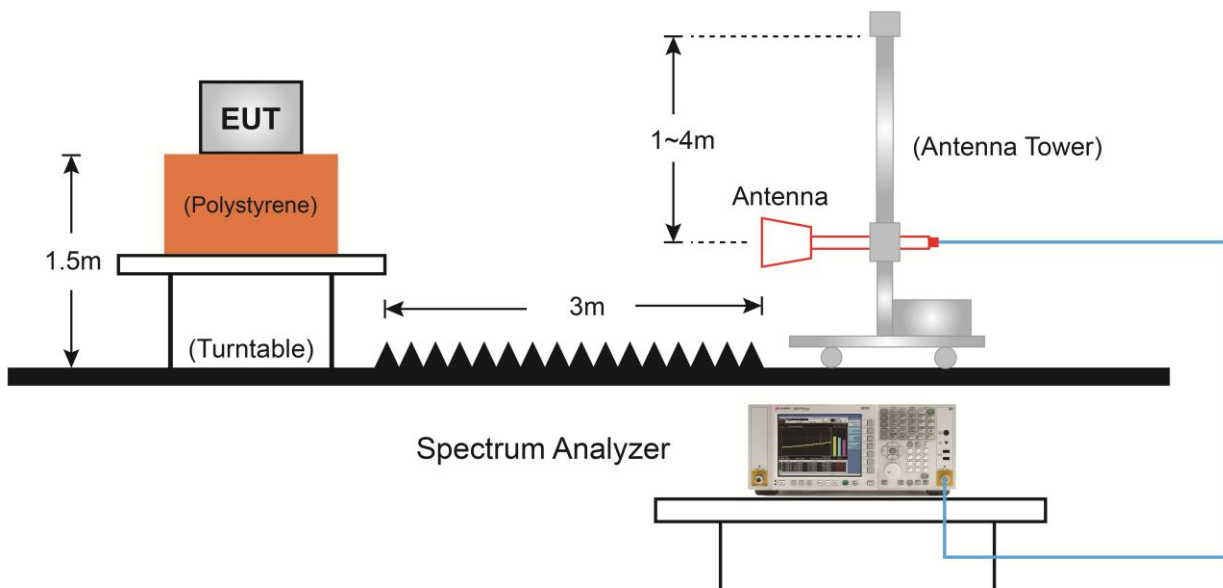

7.6.10. Test Result

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

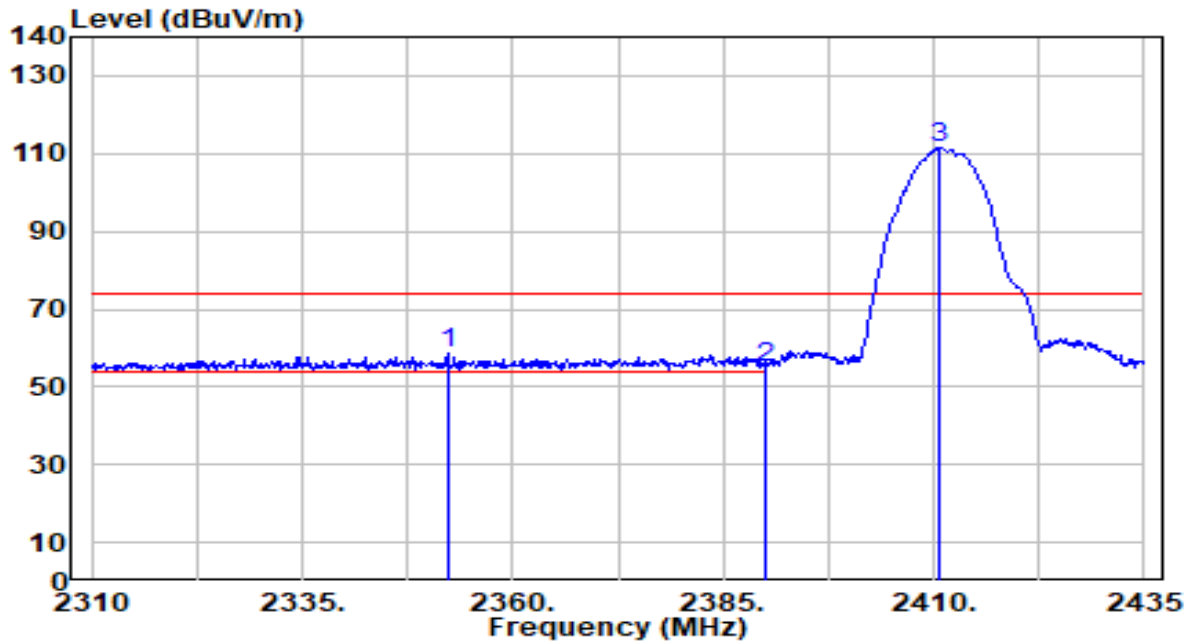


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2352.375	28.10	30.44	58.54	-15.46	74.00	199	226	Peak
2	2390.000	24.56	30.55	55.10	-18.90	74.00	199	226	Peak
3	2410.750	80.88	30.61	111.48	N/A	N/A	199	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

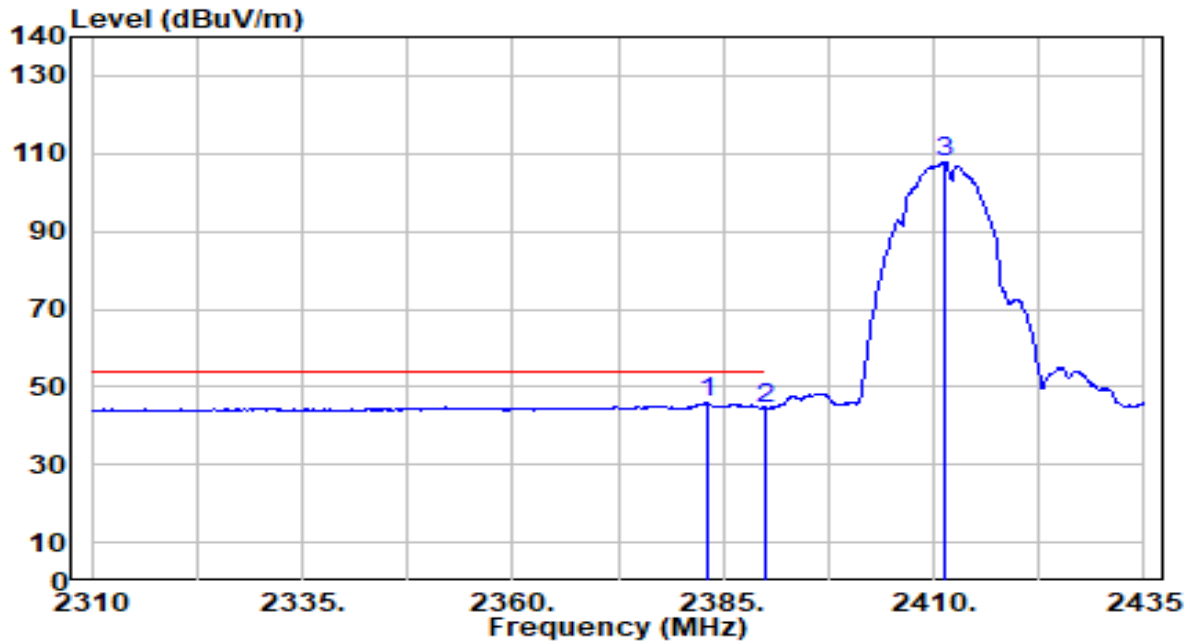


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2383.000	15.29	30.53	45.81	-8.19	54.00	199	226	Average
2		2390.000	13.92	30.55	44.46	-9.54	54.00	199	226	Average
3		2411.375	77.23	30.61	107.83	N/A	N/A	199	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

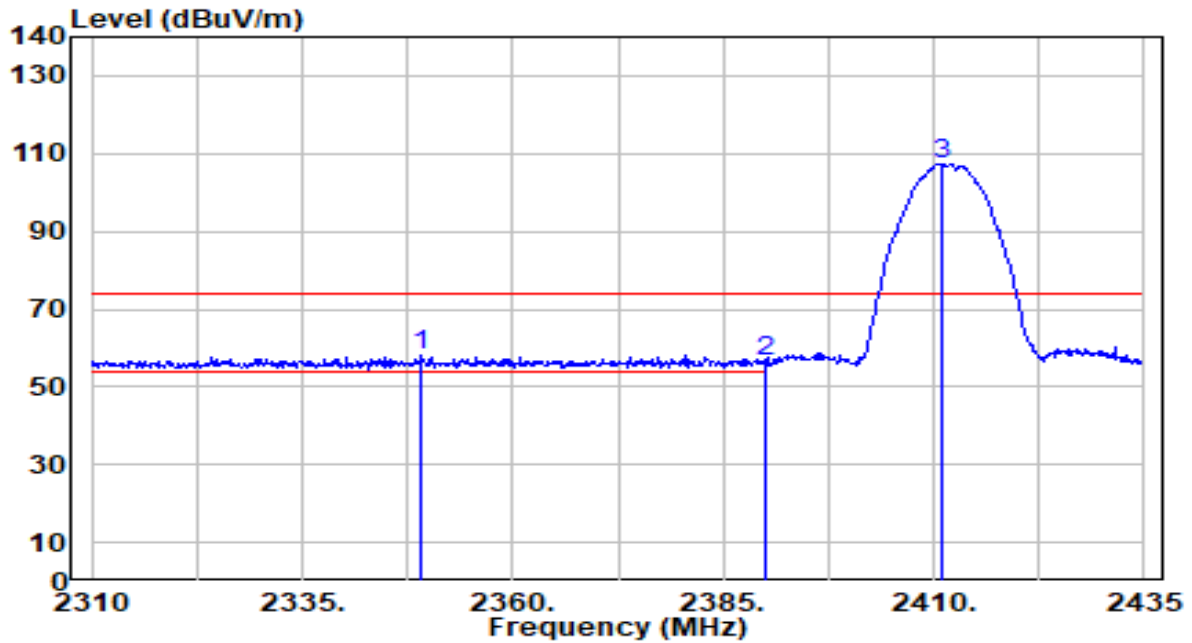


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2349.250	27.56	30.43	57.99	-16.01	74.00	212	200	Peak
2		2390.000	25.86	30.55	56.41	-17.59	74.00	212	200	Peak
3		2410.875	76.90	30.61	107.50	N/A	N/A	212	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

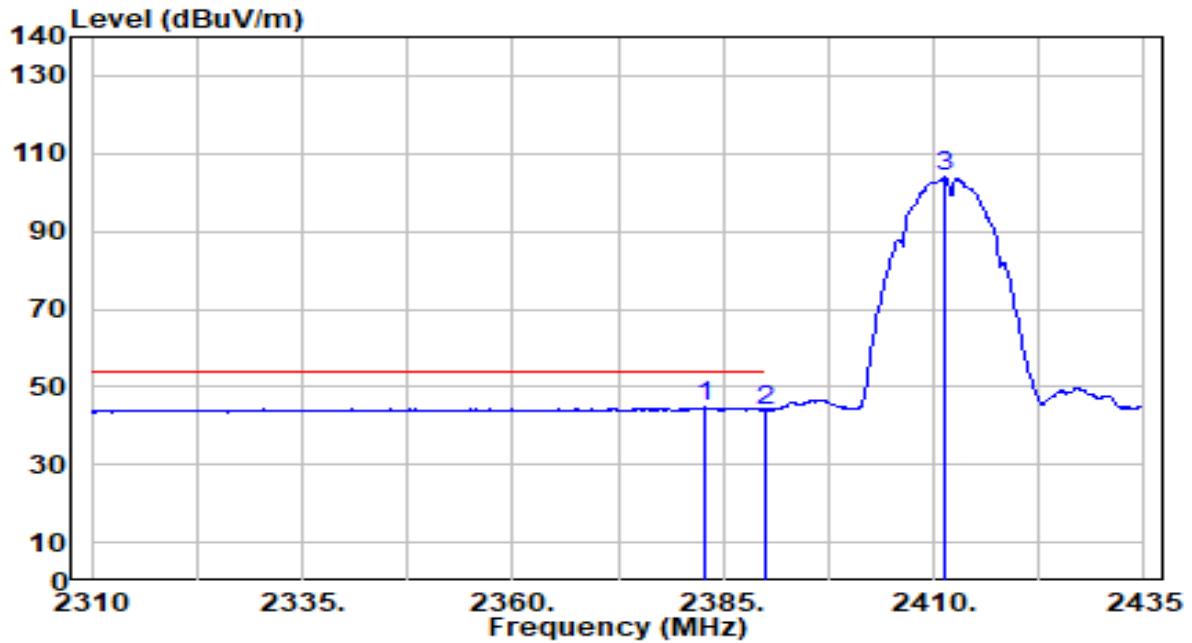


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2382.750	14.13	30.53	44.66	-9.34	54.00	212	200	Average
2		2390.000	13.47	30.55	44.02	-9.98	54.00	212	200	Average
3		2411.250	73.38	30.61	103.99	N/A	N/A	212	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

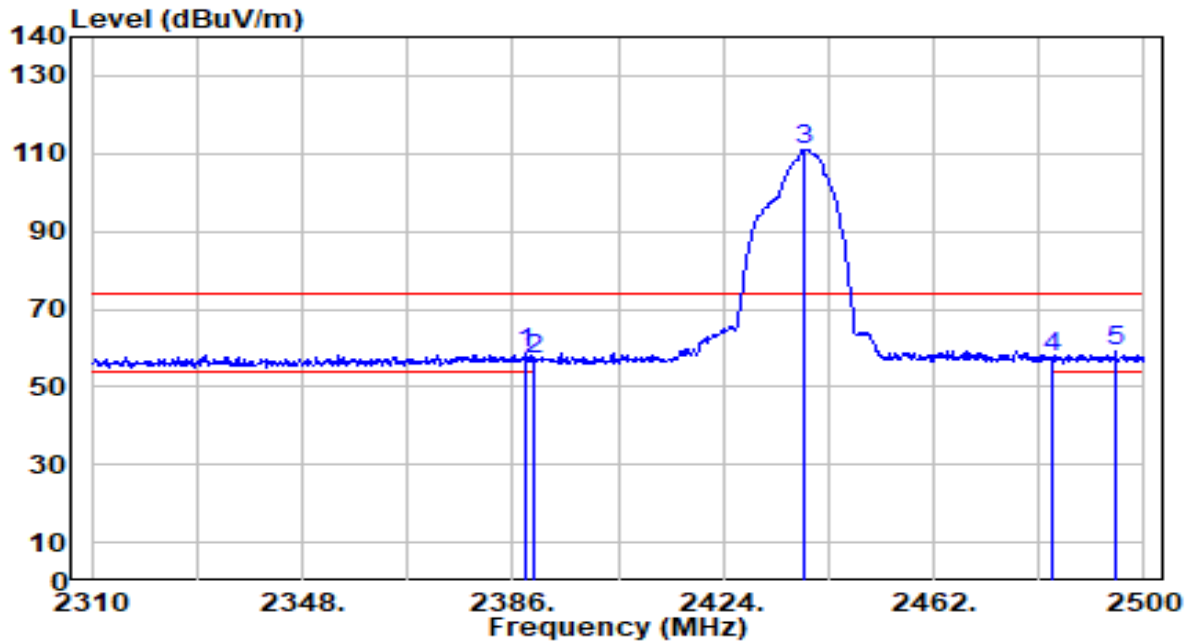


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.280	27.95	30.54	58.50	-15.50	74.00	200	228	Peak
2	2390.000	26.65	30.55	57.20	-16.80	74.00	200	228	Peak
3	2438.630	80.40	30.69	111.08	N/A	N/A	200	228	Peak
4	2483.500	26.84	30.81	57.66	-16.34	74.00	200	228	Peak
5	* 2494.870	28.40	30.85	59.24	-14.76	74.00	200	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

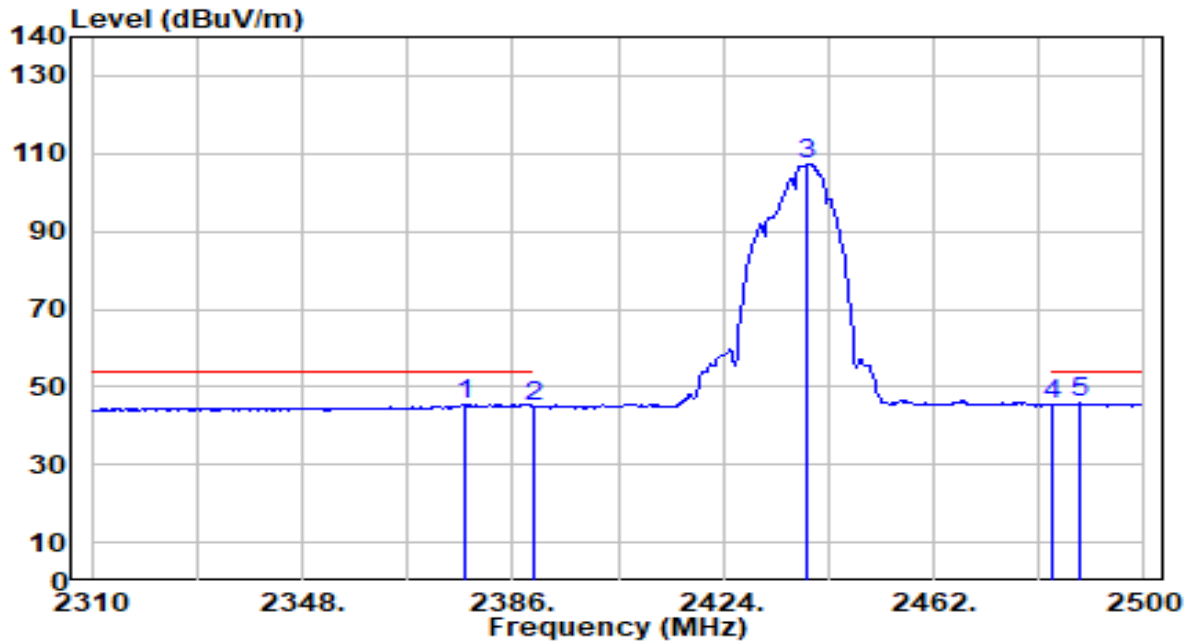


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2377.450	14.92	30.51	45.43	-8.57	54.00	200	228	Average
2	2390.000	14.61	30.55	45.16	-8.84	54.00	200	228	Average
3	2439.200	76.63	30.69	107.31	N/A	N/A	200	228	Average
4	2483.500	14.73	30.81	45.55	-8.45	54.00	200	228	Average
5	* 2488.410	14.87	30.83	45.70	-8.30	54.00	200	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

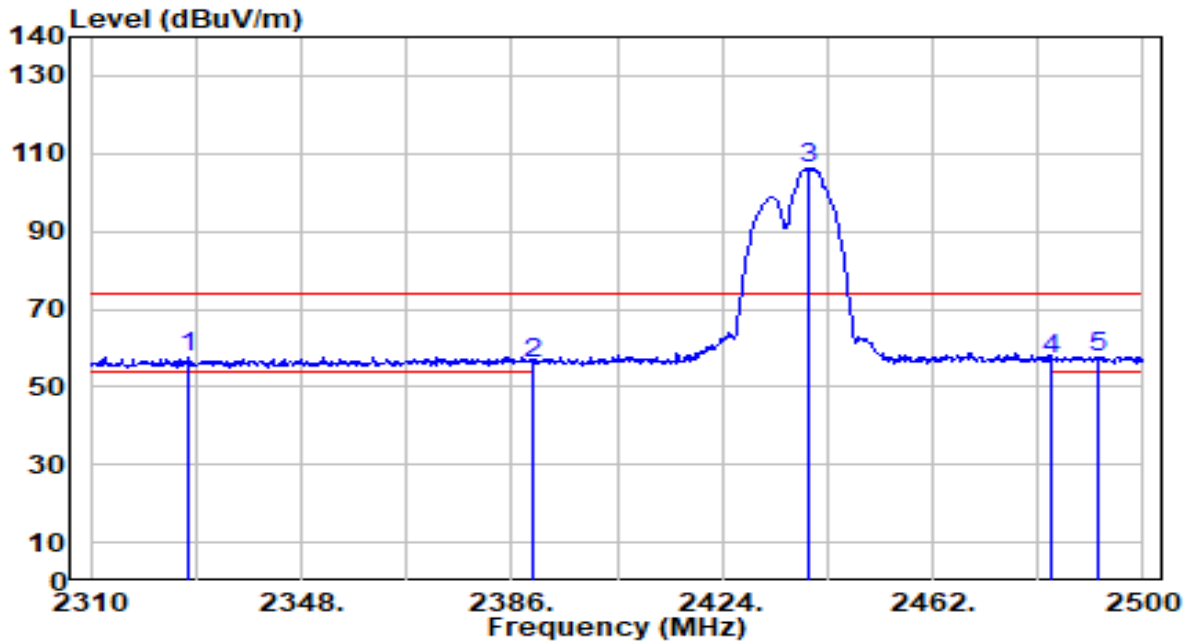


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	27.48	30.37	57.85	-16.15	74.00	215	200	Peak
2		25.42	30.55	55.96	-18.04	74.00	215	200	Peak
3		75.37	30.69	106.06	N/A	N/A	215	200	Peak
4		26.37	30.81	57.18	-16.82	74.00	215	200	Peak
5		26.97	30.84	57.81	-16.19	74.00	215	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

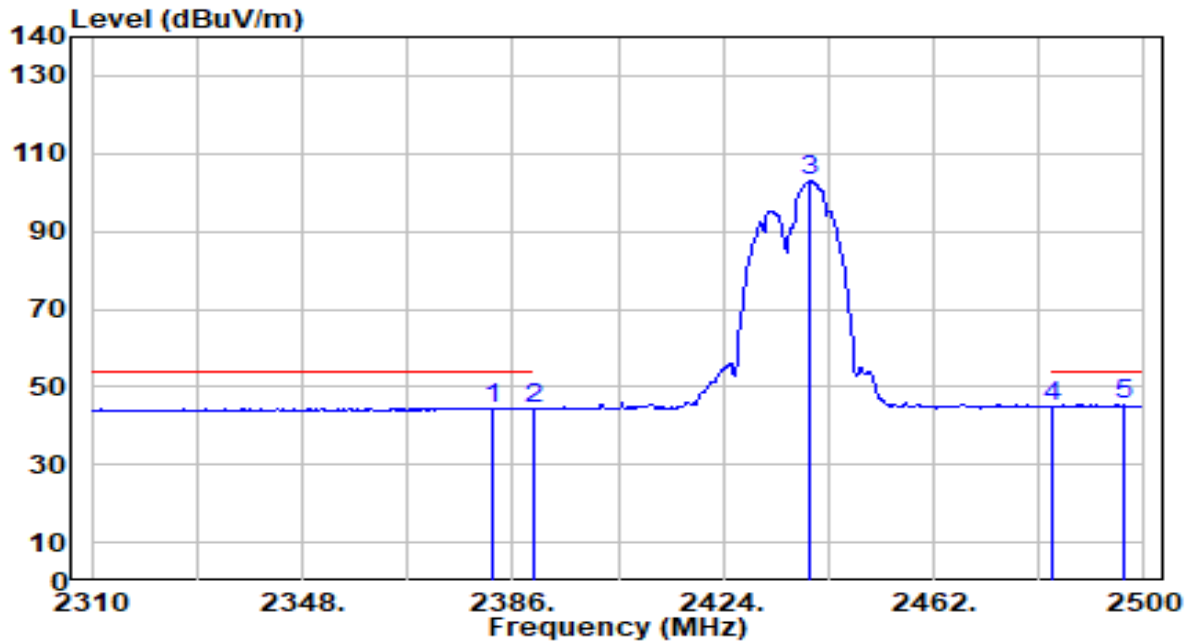


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.200	14.07	30.53	44.59	-9.41	54.00	215	200	Average
2	2390.000	14.02	30.55	44.56	-9.44	54.00	215	200	Average
3	2439.770	72.34	30.69	103.03	N/A	N/A	215	200	Average
4	2483.500	14.33	30.81	45.15	-8.85	54.00	215	200	Average
5	* 2496.390	14.46	30.85	45.31	-8.69	54.00	215	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

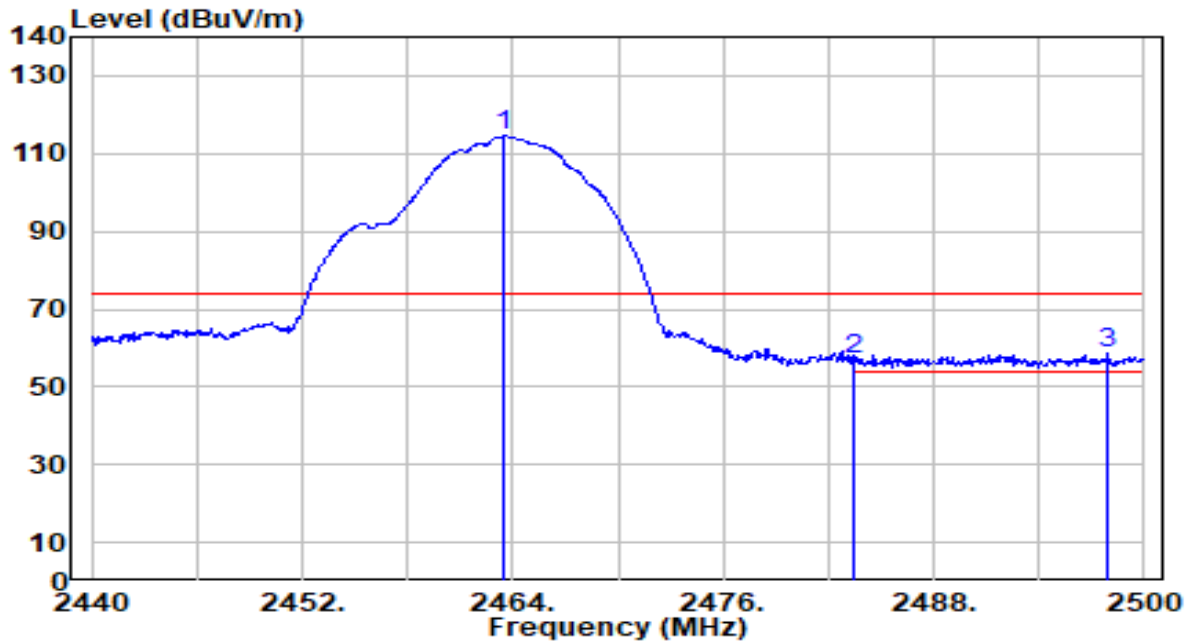


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.520	83.69	30.76	114.45	N/A	N/A	200	226	Peak
2	2483.500	26.49	30.81	57.31	-16.69	74.00	200	226	Peak
3	* 2497.960	27.78	30.85	58.63	-15.37	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

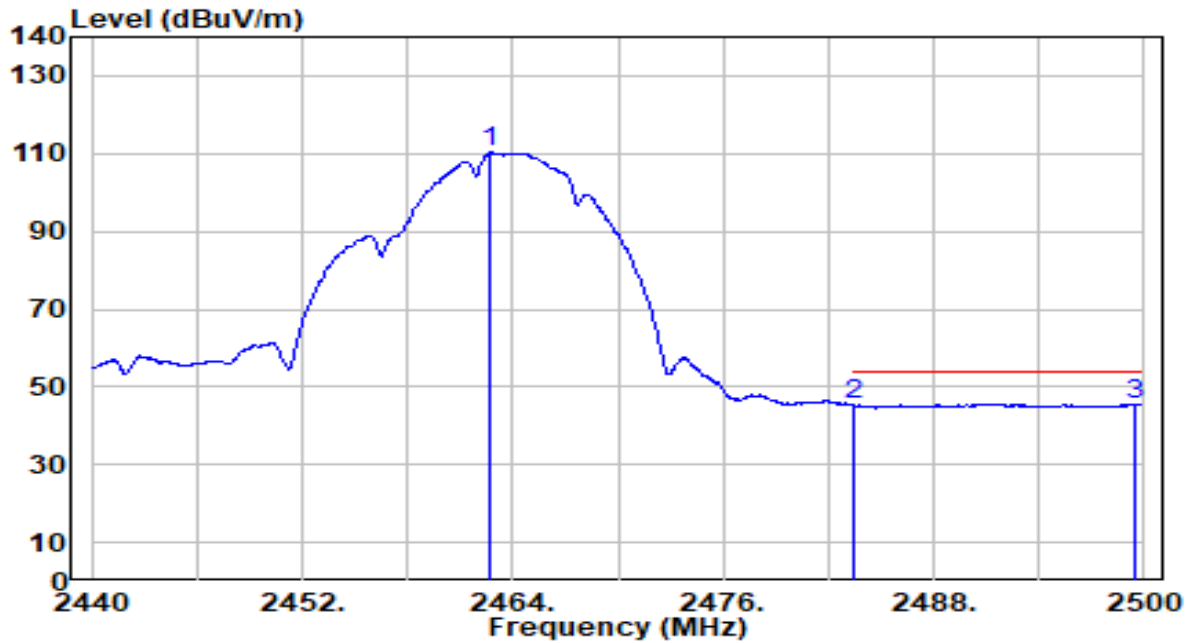


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.740	79.51	30.75	110.26	N/A	N/A	200	226	Average
2	2483.500	14.40	30.81	45.21	-8.79	54.00	200	226	Average
3	* 2499.400	14.74	30.86	45.60	-8.40	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

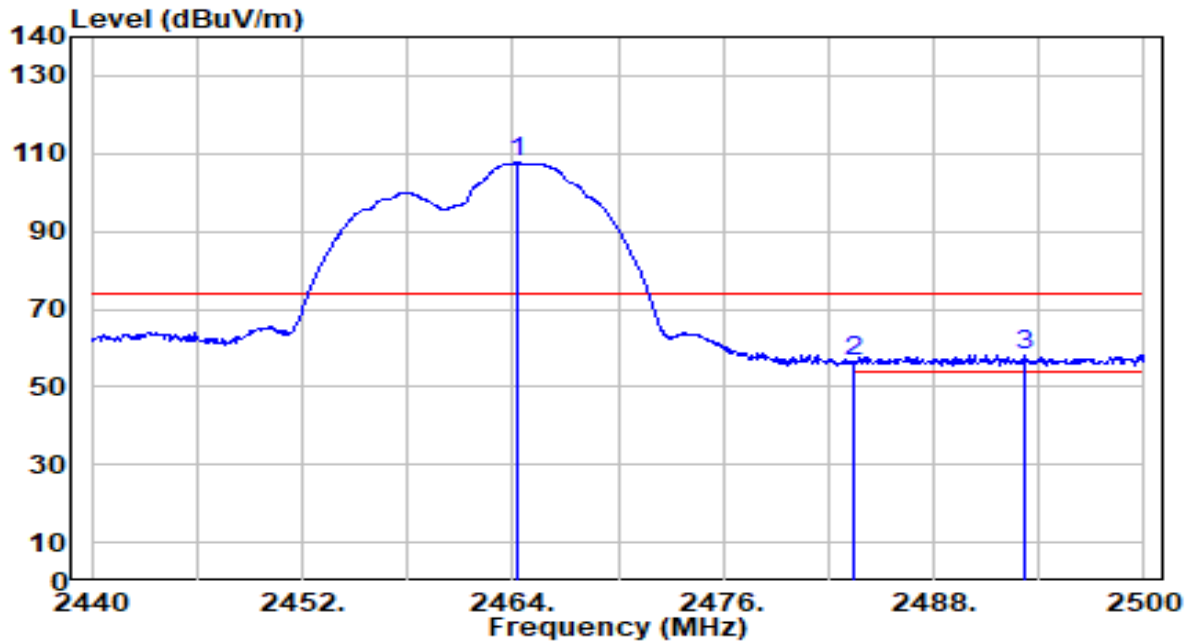


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.300	76.79	30.76	107.55	N/A	N/A	211	202	Peak
2	2483.500	25.66	30.81	56.47	-17.53	74.00	211	202	Peak
3	* 2493.220	27.51	30.84	58.35	-15.65	74.00	211	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

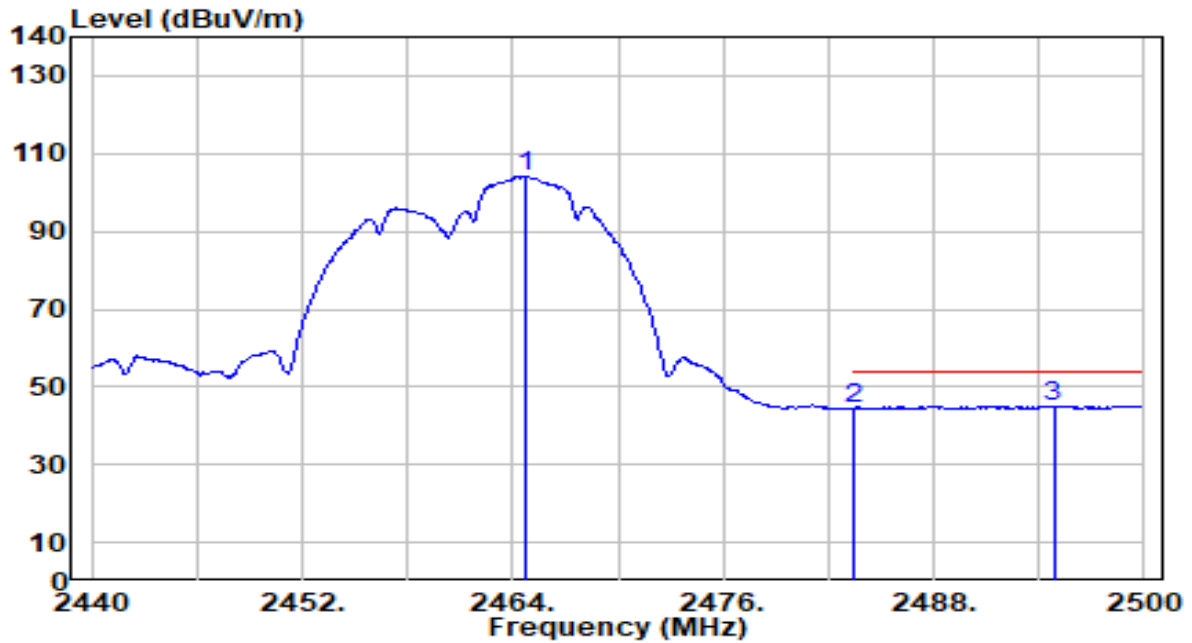


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2464.780	73.45	30.76	104.21	N/A	N/A	211	202	Average
2	2483.500	13.63	30.81	44.45	-9.55	54.00	211	202	Average
3	* 2494.840	14.30	30.85	45.14	-8.86	54.00	211	202	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

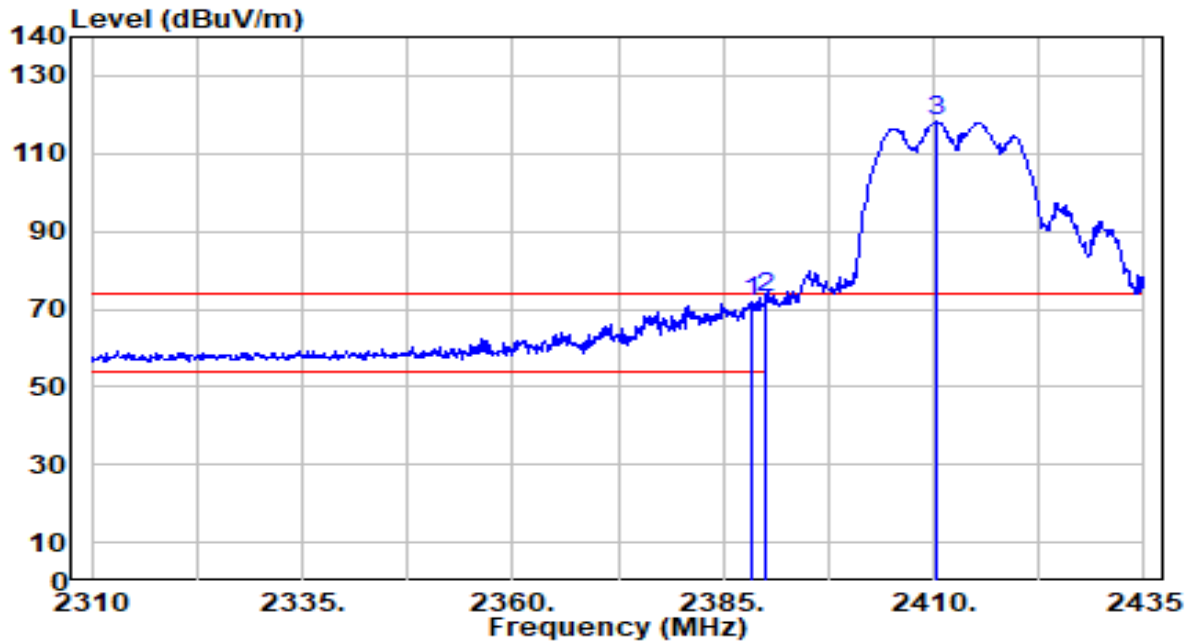


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.250	41.07	30.54	71.61	-2.39	74.00	199	226	Peak
2	* 2390.000	42.54	30.55	73.09	-0.91	74.00	199	226	Peak
3	2410.375	87.78	30.61	118.38	N/A	N/A	199	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

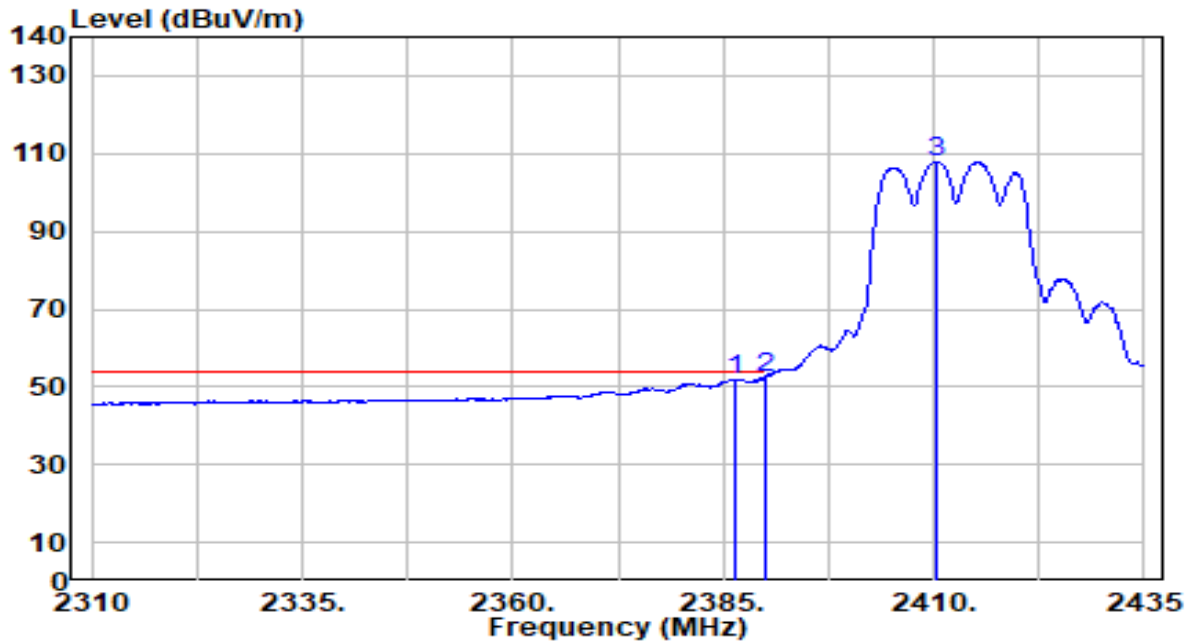


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.500	21.41	30.54	51.95	-2.05	54.00	199	226	Average
2	* 2390.000	21.86	30.55	52.41	-1.59	54.00	199	226	Average
3	2410.375	77.34	30.61	107.94	N/A	N/A	199	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

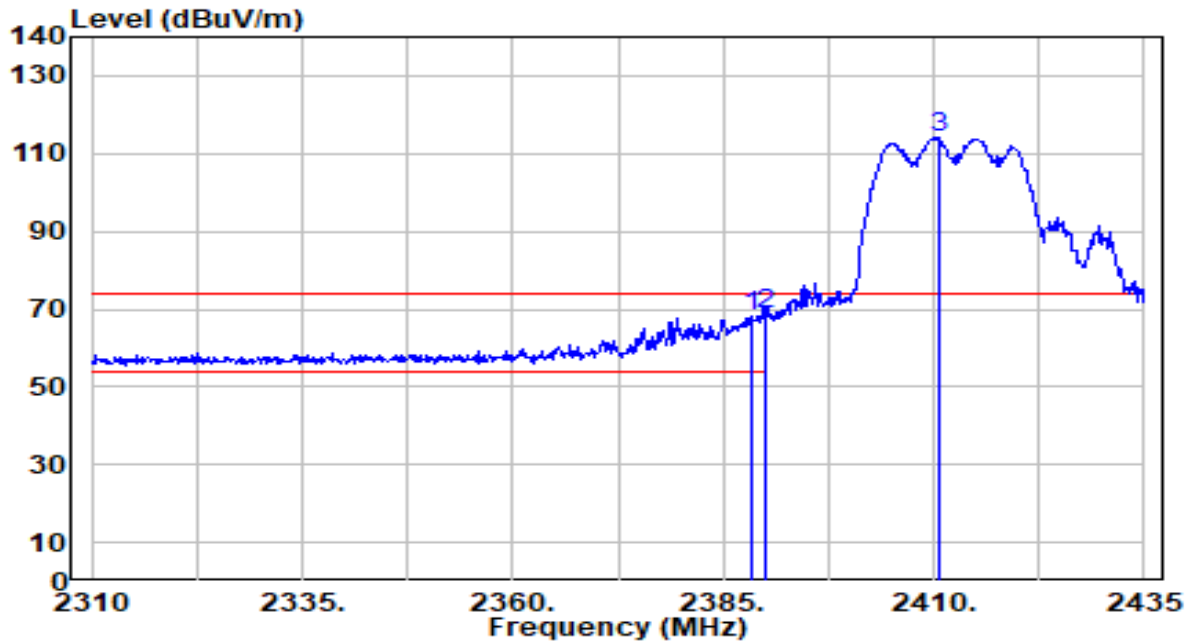


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.500	37.48	30.54	68.03	-5.97	74.00	212	200	Peak
2	* 2390.000	38.09	30.55	68.64	-5.36	74.00	212	200	Peak
3	2410.500	83.61	30.61	114.21	N/A	N/A	212	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

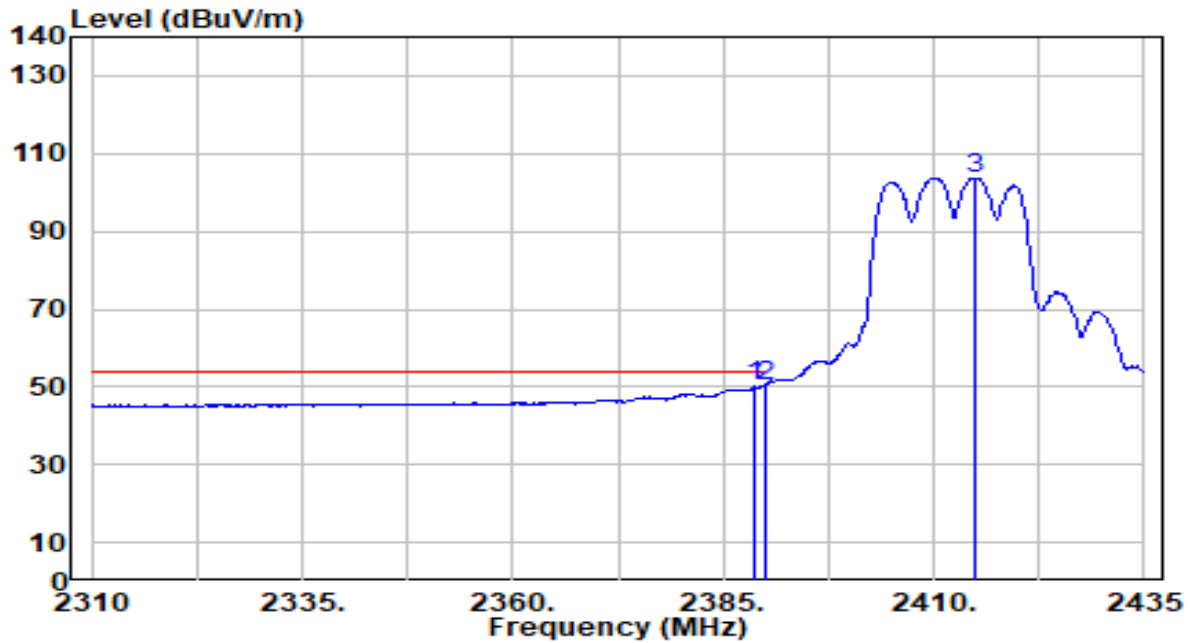


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.750	19.49	30.54	50.03	-3.97	54.00	212	200	Average
2	* 2390.000	19.87	30.55	50.42	-3.58	54.00	212	200	Average
3	2415.000	73.17	30.62	103.79	N/A	N/A	212	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

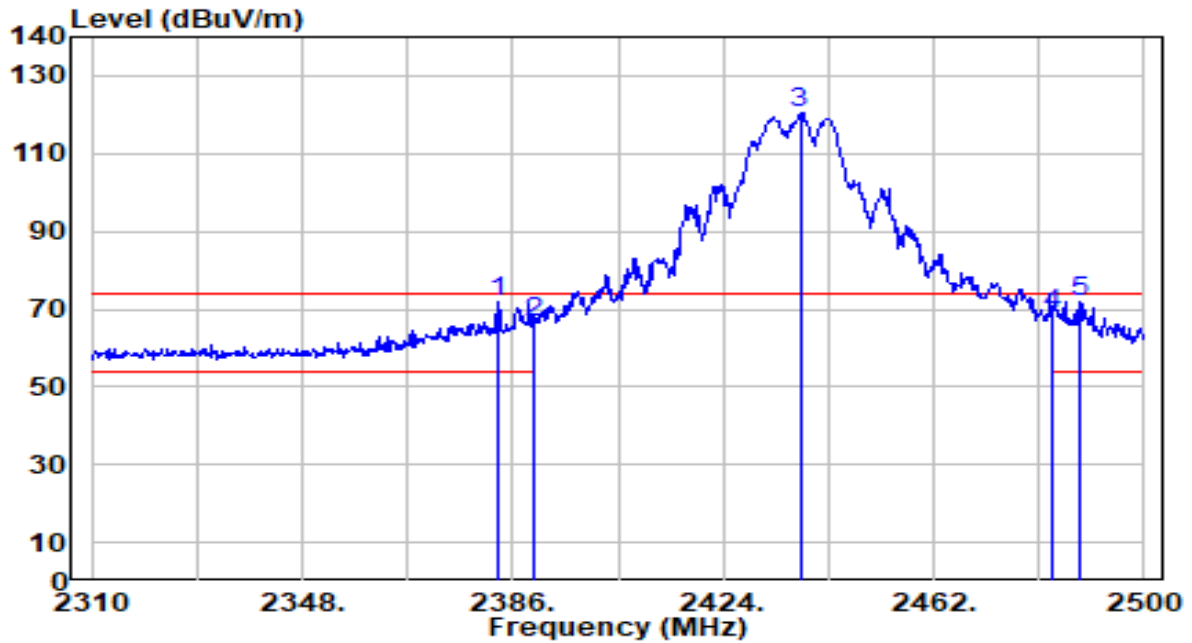


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.150	41.51	30.53	72.04	-1.96	74.00	200	228	Peak
2	2390.000	35.90	30.55	66.44	-7.56	74.00	200	228	Peak
3	2437.870	89.74	30.68	120.42	N/A	N/A	200	228	Peak
4	2483.500	37.77	30.81	68.59	-5.41	74.00	200	228	Peak
5	* 2488.600	41.25	30.83	72.07	-1.93	74.00	200	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

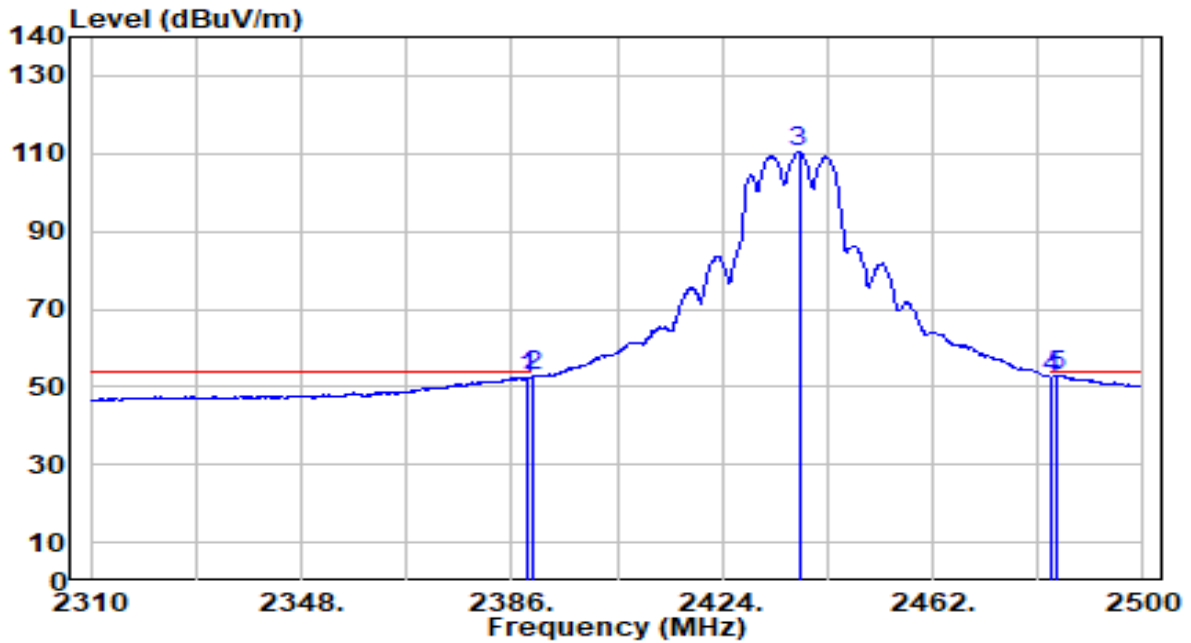


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	21.76	30.54	52.31	-1.69	54.00	200	228	Average
2	2390.000	22.06	30.55	52.61	-1.39	54.00	200	228	Average
3	2437.870	79.96	30.68	110.65	N/A	N/A	200	228	Average
4	2483.500	21.72	30.81	52.53	-1.47	54.00	200	228	Average
5	* 2484.610	22.24	30.82	53.06	-0.94	54.00	200	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

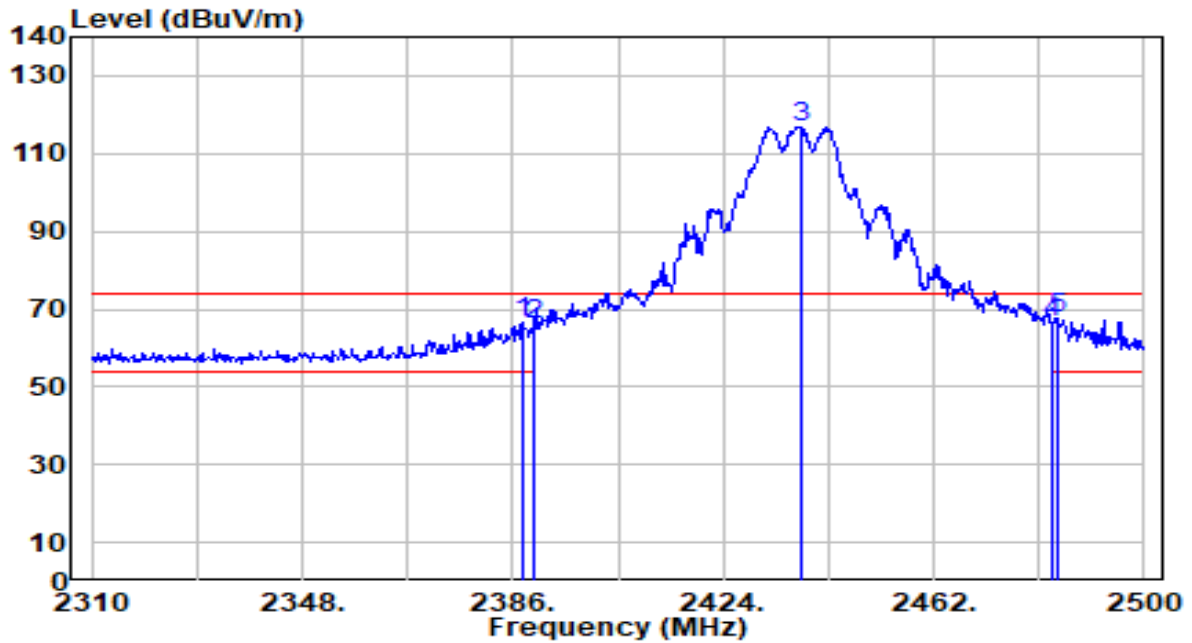


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	36.13	30.54	66.67	-7.33	74.00	215	200	Peak
2	2390.000	35.53	30.55	66.08	-7.92	74.00	215	200	Peak
3	2438.060	86.23	30.68	116.91	N/A	N/A	215	200	Peak
4	2483.500	35.73	30.81	66.54	-7.46	74.00	215	200	Peak
5	* 2484.610	36.75	30.82	67.57	-6.43	74.00	215	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

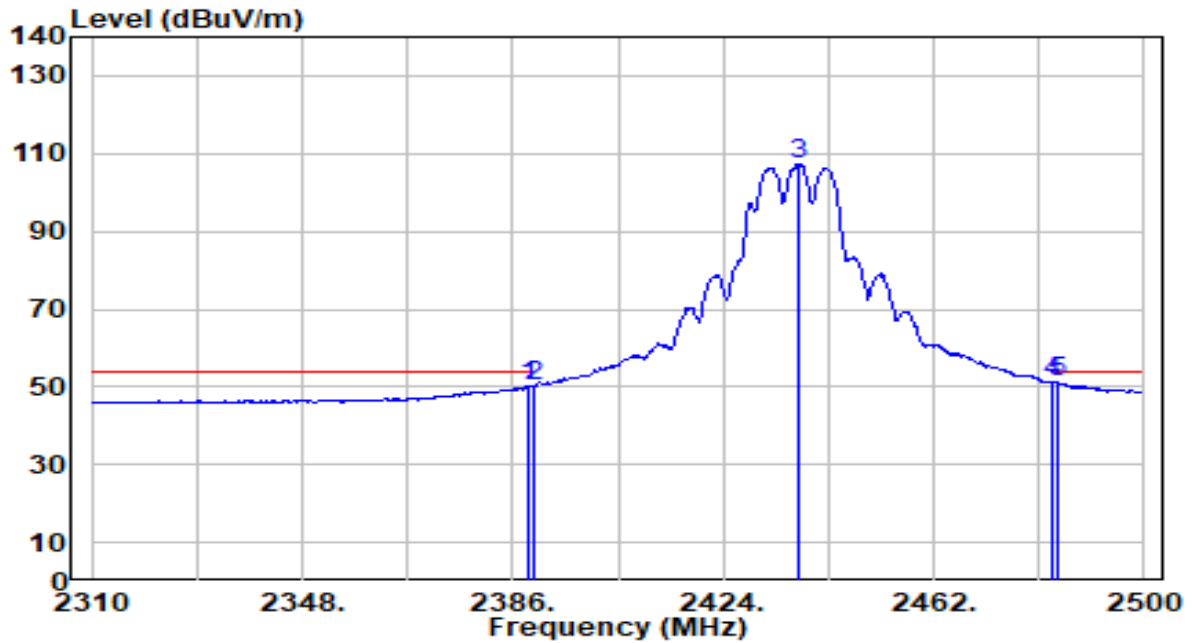


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	19.65	30.54	50.20	-3.80	54.00	215	200	Average
2	2390.000	19.80	30.55	50.35	-3.65	54.00	215	200	Average
3	2437.680	76.82	30.68	107.50	N/A	N/A	215	200	Average
4	2483.500	20.24	30.81	51.05	-2.95	54.00	215	200	Average
5	* 2484.420	20.53	30.82	51.34	-2.66	54.00	215	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

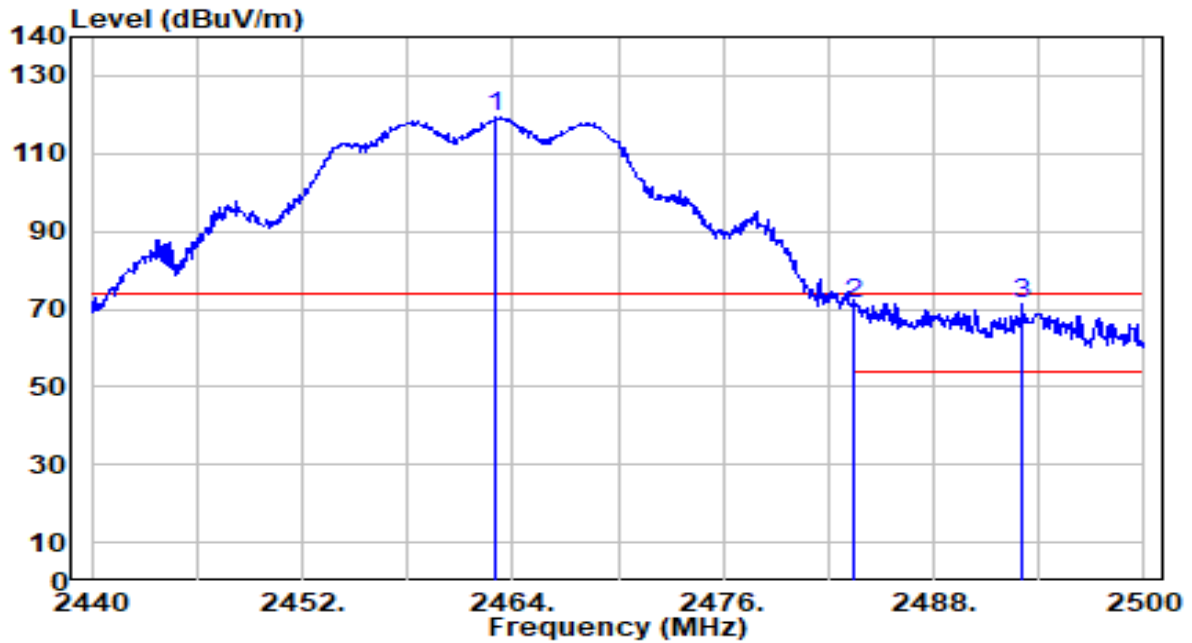


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.040	88.53	30.76	119.28	N/A	N/A	200	226	Peak
2	2483.500	40.47	30.81	71.28	-2.72	74.00	200	226	Peak
3	* 2493.100	40.74	30.84	71.58	-2.42	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

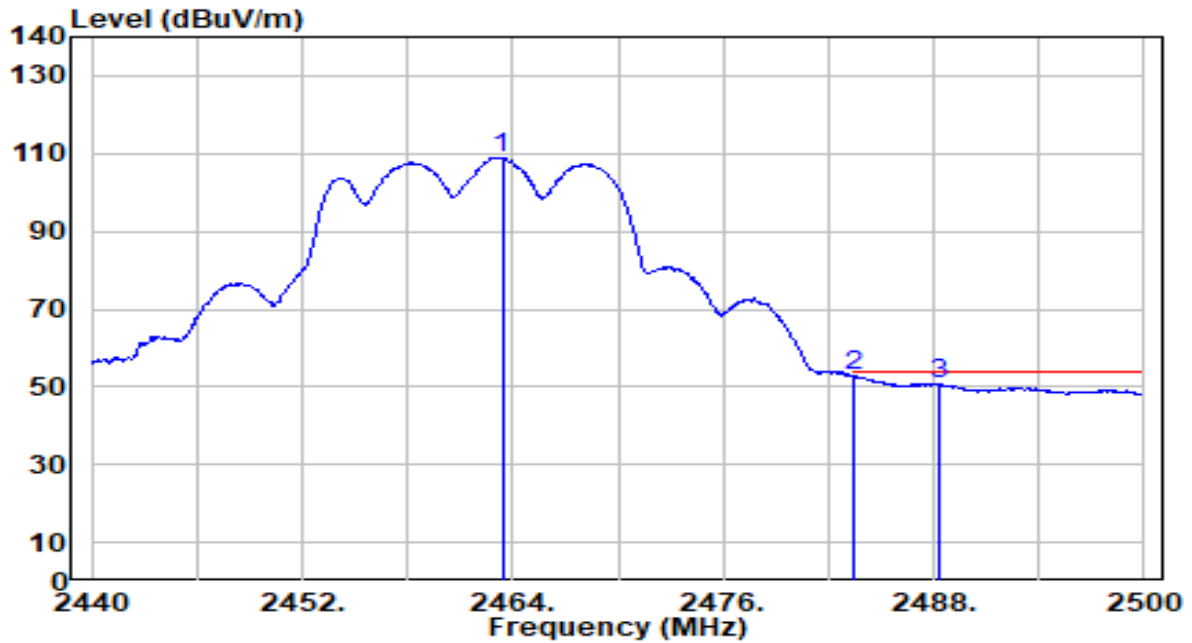


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.400	78.22	30.76	108.98	N/A	N/A	200	226	Average
2	* 2483.500	22.28	30.81	53.09	-0.91	54.00	200	226	Average
3	2488.240	19.93	30.83	50.76	-3.24	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

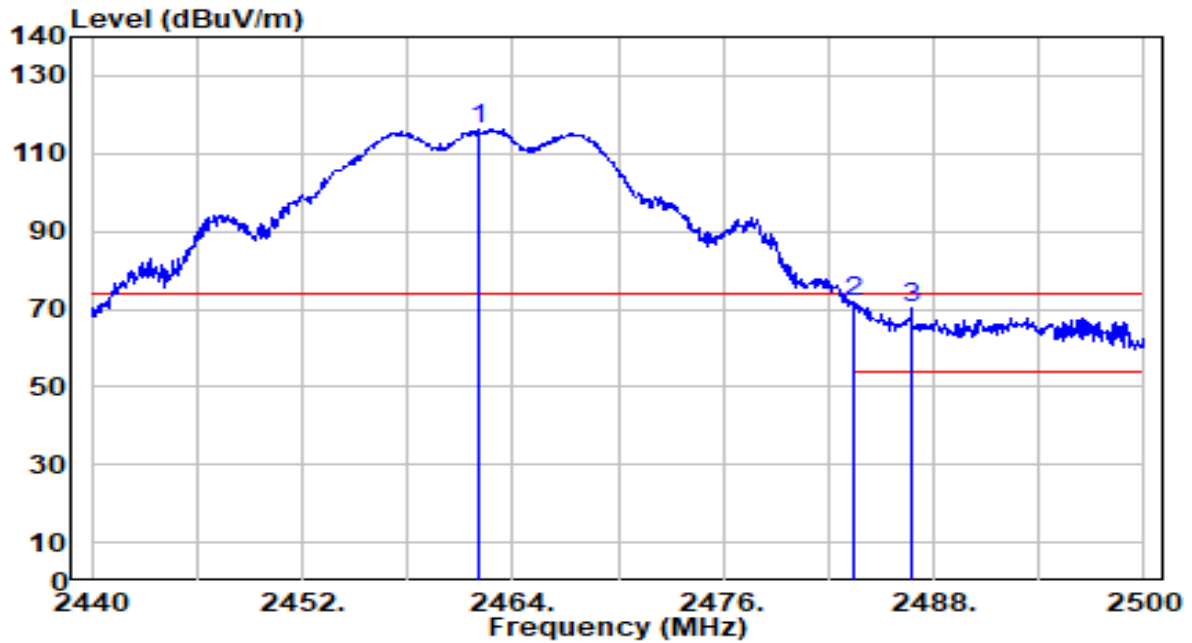


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.080	85.27	30.75	116.03	N/A	N/A	211	202	Peak
2	* 2483.500	41.25	30.81	72.06	-1.94	74.00	211	202	Peak
3	2486.740	39.27	30.82	70.09	-3.91	74.00	211	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

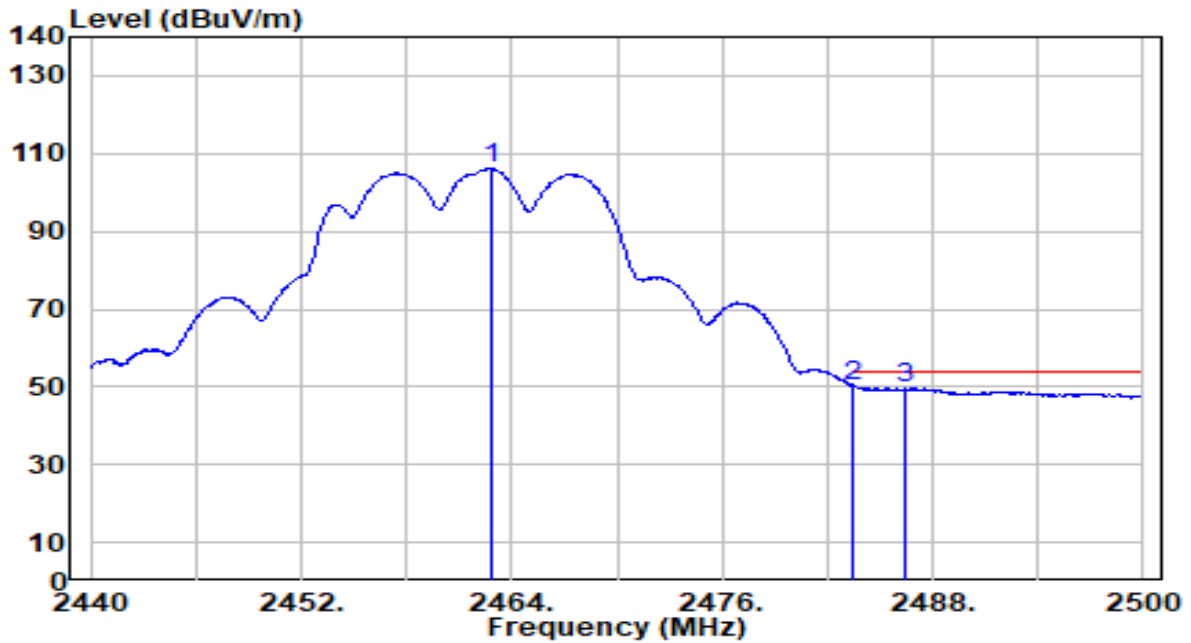


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.860	75.38	30.75	106.14	N/A	N/A	211	202	Average
2	* 2483.500	19.20	30.81	50.01	-3.99	54.00	211	202	Average
3	2486.440	18.91	30.82	49.73	-4.27	54.00	211	202	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

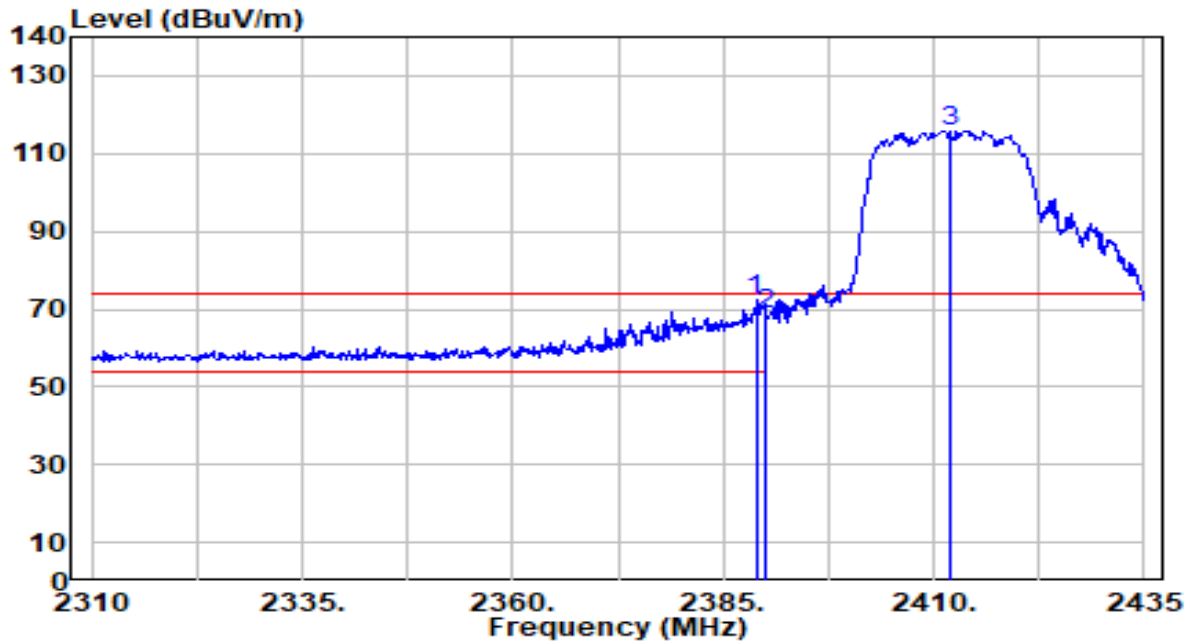


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.875	41.86	30.54	72.41	-1.59	74.00	199	226	Peak
2		2390.000	38.05	30.55	68.60	-5.40	74.00	199	226	Peak
3		2411.875	85.31	30.61	115.92	N/A	N/A	199	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

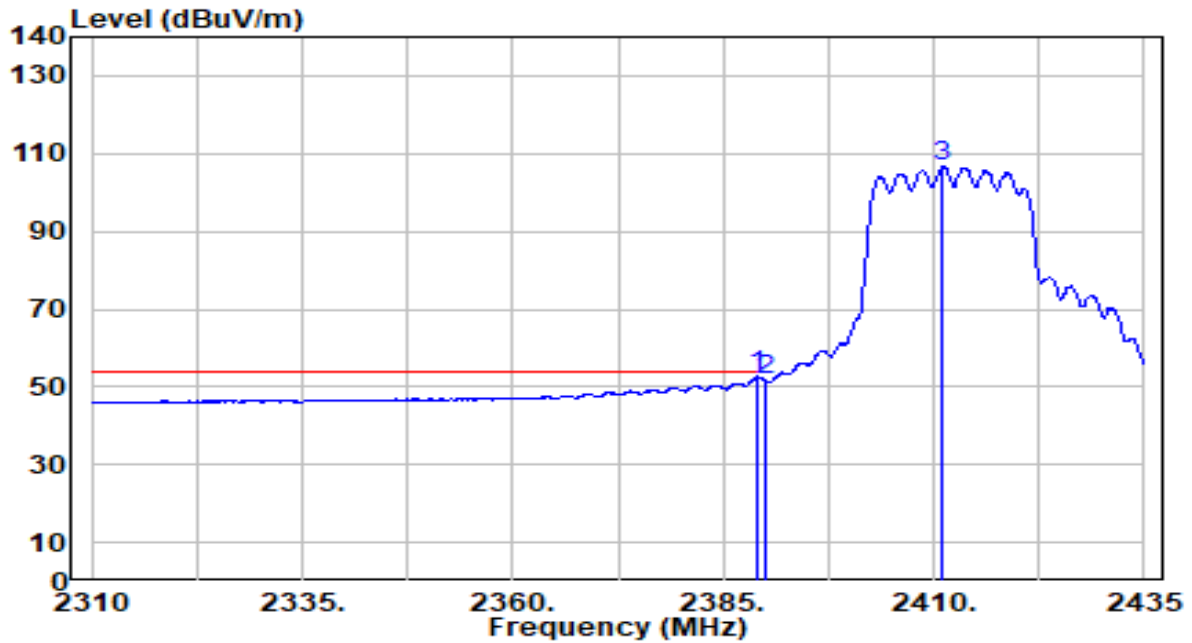


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	22.51	30.54	53.06	-0.94	54.00	199	226	Average
2		21.12	30.55	51.67	-2.33	54.00	199	226	Average
3		75.90	30.61	106.51	N/A	N/A	199	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

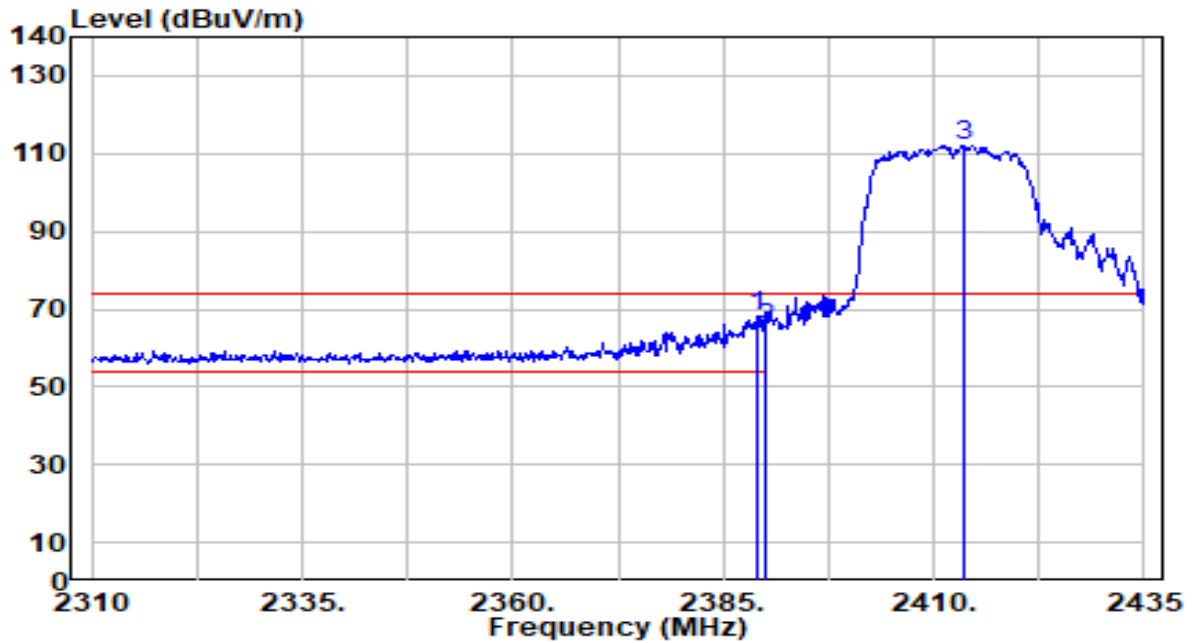


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	37.71	30.54	68.26	-5.74	74.00	212	200	Peak
2		2390.000	34.32	30.55	64.87	-9.13	74.00	212	200	Peak
3		2413.625	81.41	30.61	112.03	N/A	N/A	212	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

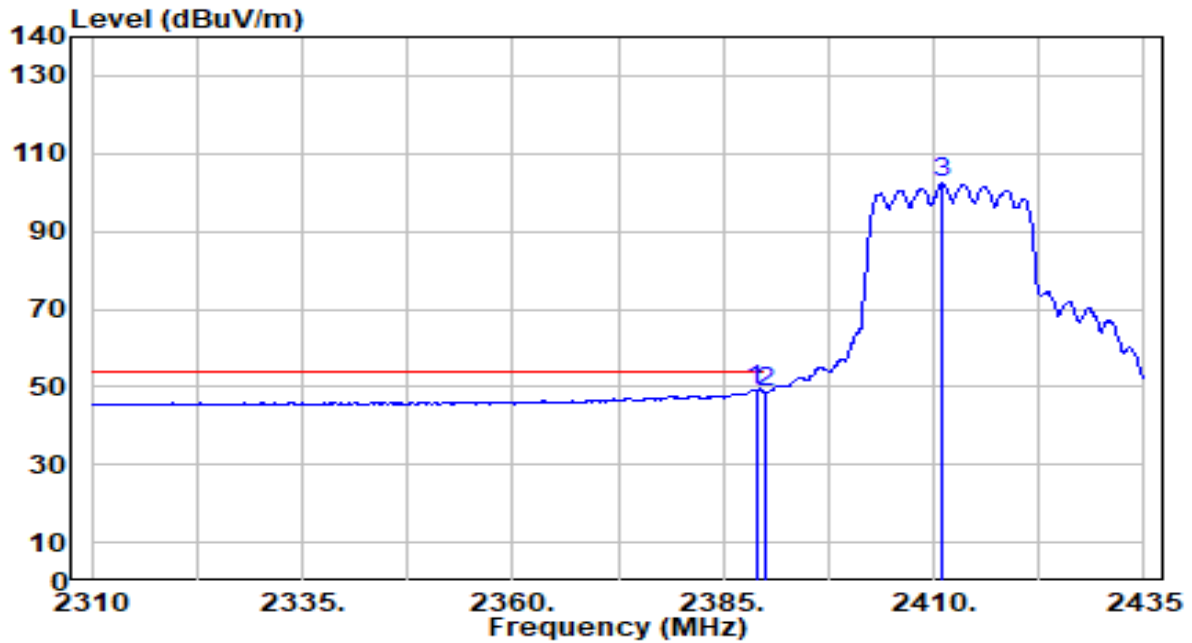


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.875	18.74	30.54	49.29	-4.71	54.00	212	200	Average
2		2390.000	17.95	30.55	48.50	-5.50	54.00	212	200	Average
3		2411.125	71.86	30.61	102.47	N/A	N/A	212	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

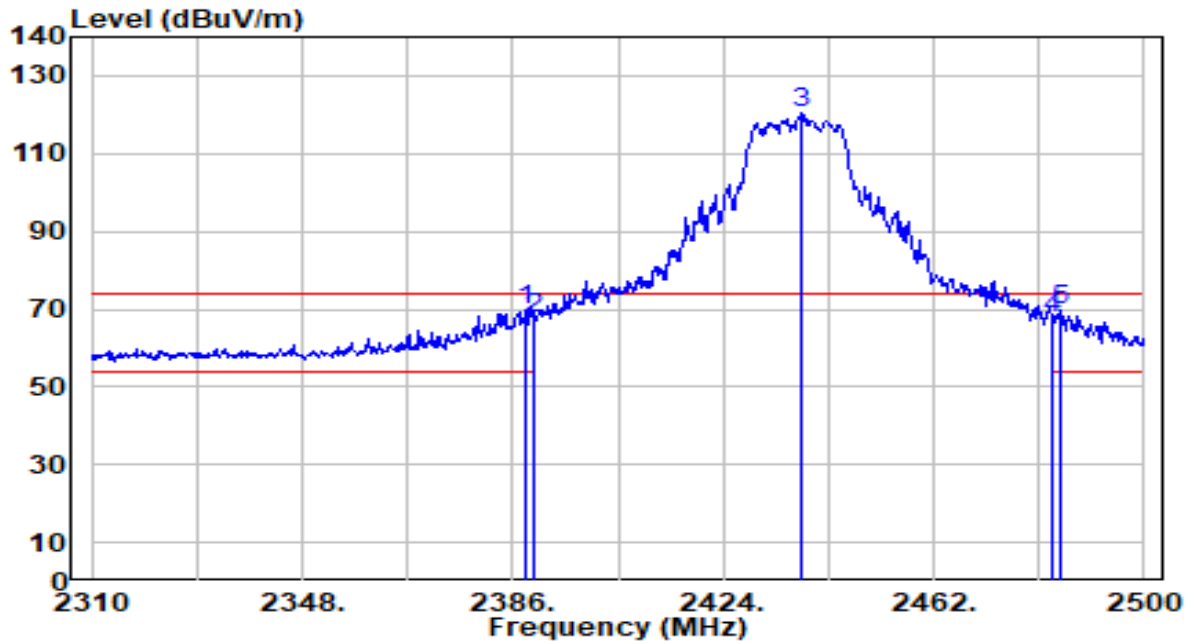


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	38.96	30.54	69.50	-4.50	74.00	220	228	Peak
2	2390.000	37.18	30.55	67.72	-6.28	74.00	220	228	Peak
3	2438.250	89.54	30.68	120.23	N/A	N/A	220	228	Peak
4	2483.500	36.57	30.81	67.38	-6.62	74.00	220	228	Peak
5	* 2484.800	38.82	30.82	69.63	-4.37	74.00	220	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

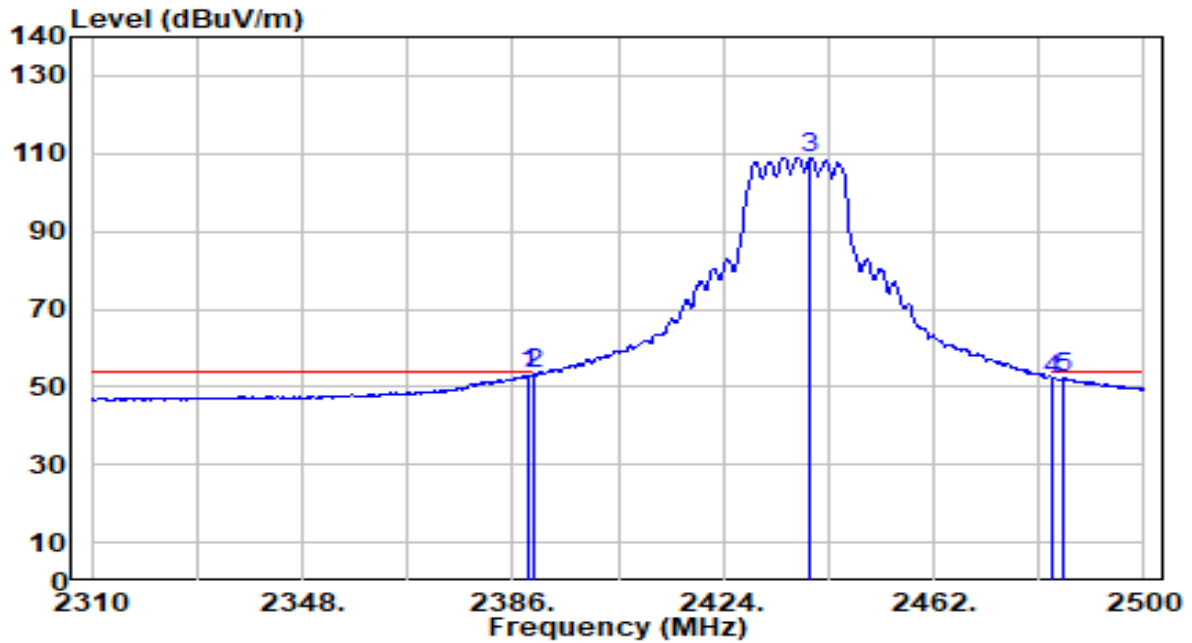


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.040	22.64	30.54	53.18	-0.82	54.00	220	228	Average
2		2390.000	22.61	30.55	53.16	-0.84	54.00	220	228	Average
3		2439.770	78.38	30.69	109.07	N/A	N/A	220	228	Average
4		2483.500	21.10	30.81	51.92	-2.08	54.00	220	228	Average
5		2485.370	21.36	30.82	52.18	-1.82	54.00	220	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

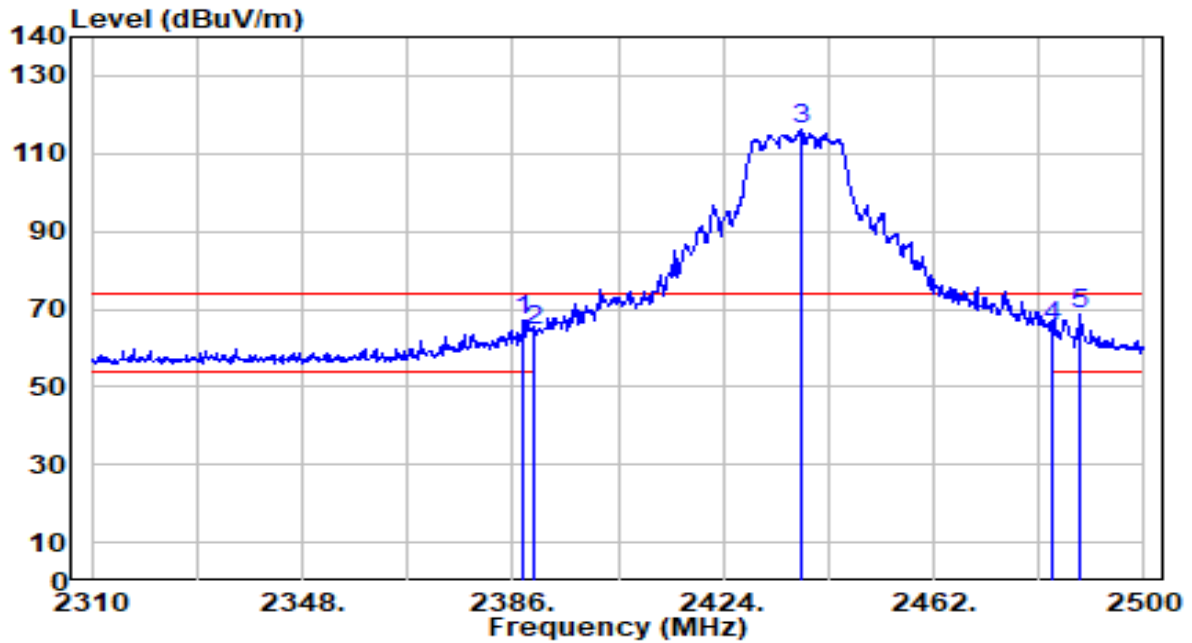


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	36.72	30.54	67.27	-6.73	74.00	215	200	Peak
2	2390.000	33.75	30.55	64.30	-9.70	74.00	215	200	Peak
3	2438.060	85.56	30.68	116.25	N/A	N/A	215	200	Peak
4	2483.500	34.65	30.81	65.46	-8.54	74.00	215	200	Peak
5	* 2488.410	37.87	30.83	68.70	-5.30	74.00	215	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

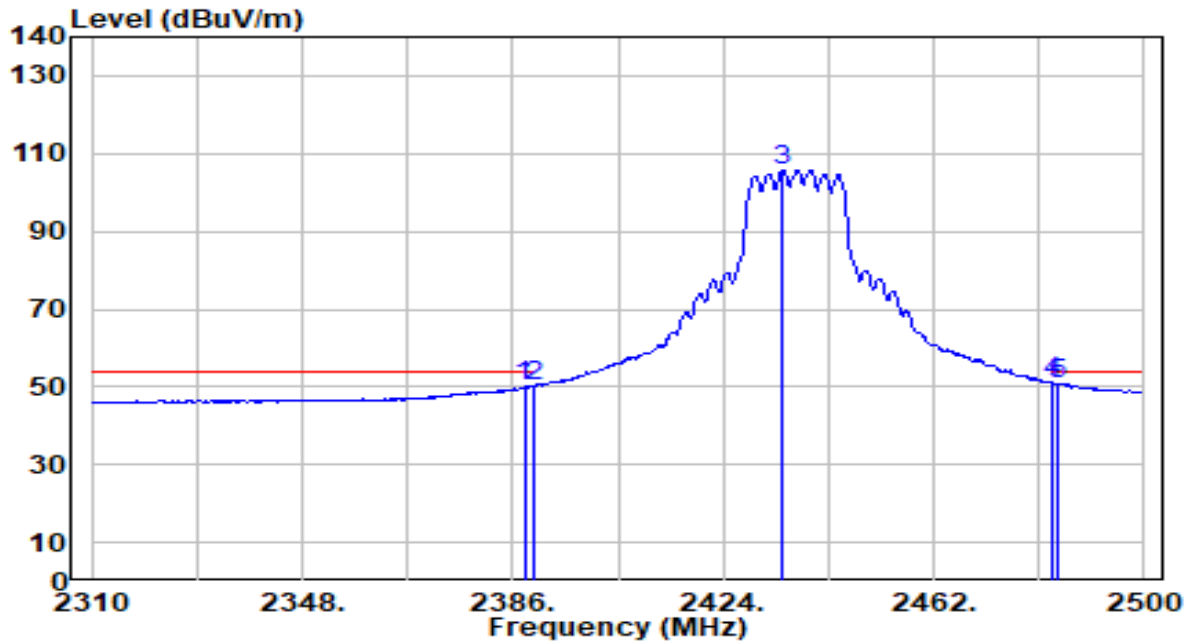


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.090	19.73	30.54	50.27	-3.73	54.00	215	200	Average
2	2390.000	19.71	30.55	50.26	-3.74	54.00	215	200	Average
3	2434.830	74.96	30.67	105.63	N/A	N/A	215	200	Average
4	* 2483.500	20.34	30.81	51.16	-2.84	54.00	215	200	Average
5	2484.420	19.94	30.82	50.76	-3.24	54.00	215	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

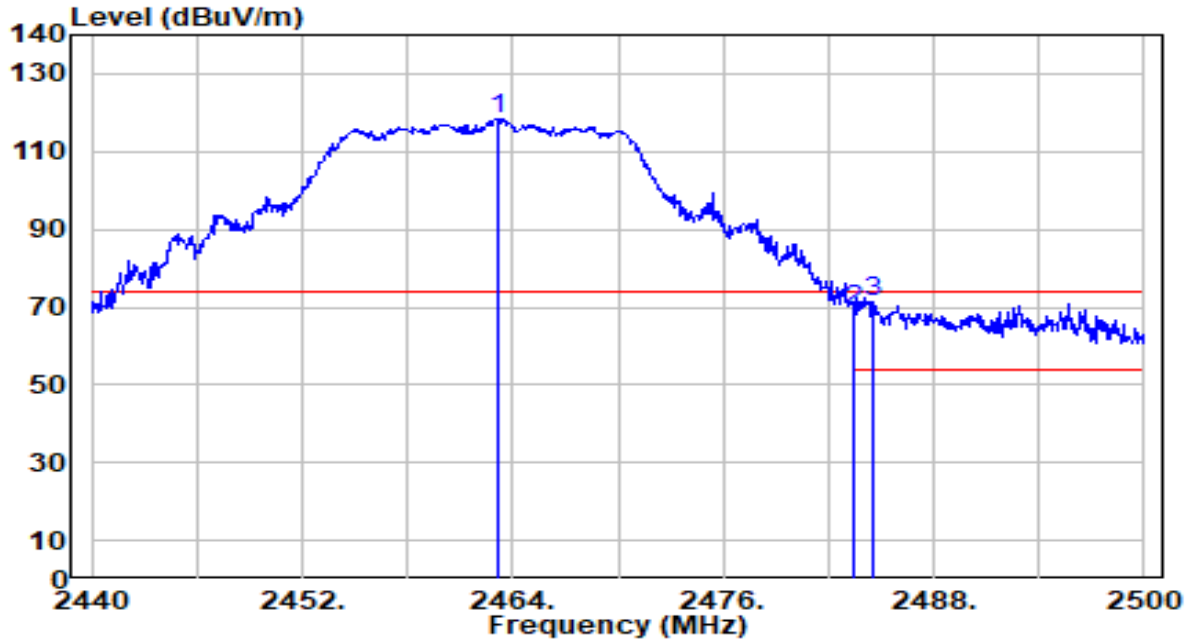


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.100	87.76	30.76	118.52	N/A	N/A	200	226	Peak
2	2483.500	38.66	30.81	69.47	-4.53	74.00	200	226	Peak
3	* 2484.520	40.36	30.82	71.17	-2.83	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

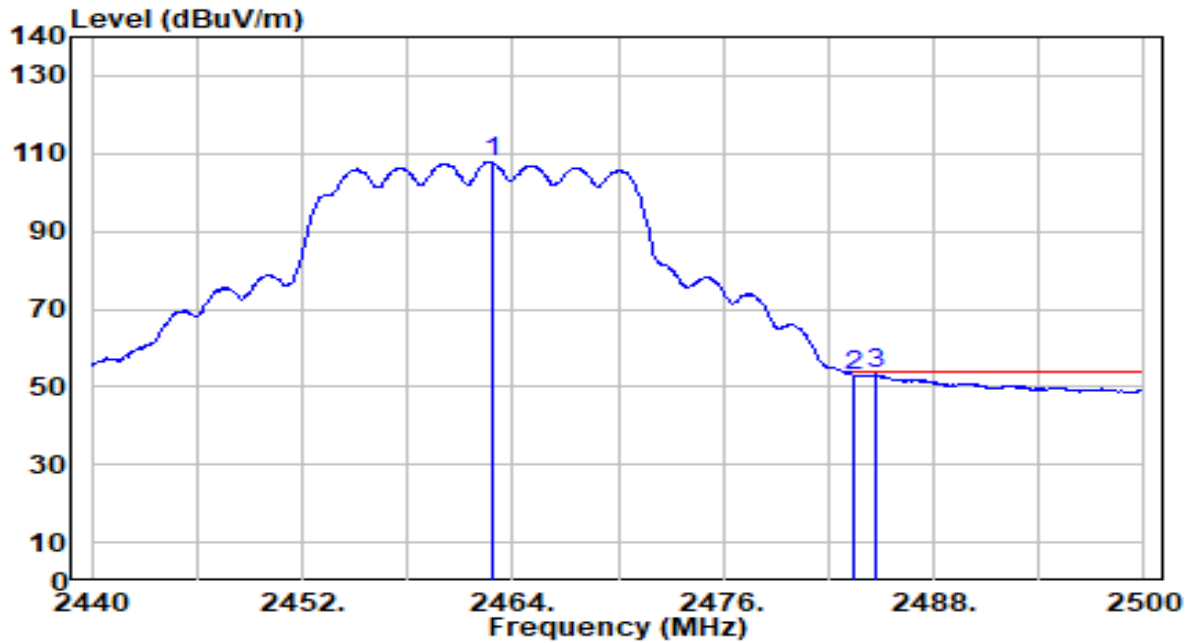


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.860	77.07	30.75	107.82	N/A	N/A	200	226	Average
2	2483.500	22.15	30.81	52.97	-1.03	54.00	200	226	Average
3	* 2484.700	22.40	30.82	53.22	-0.78	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

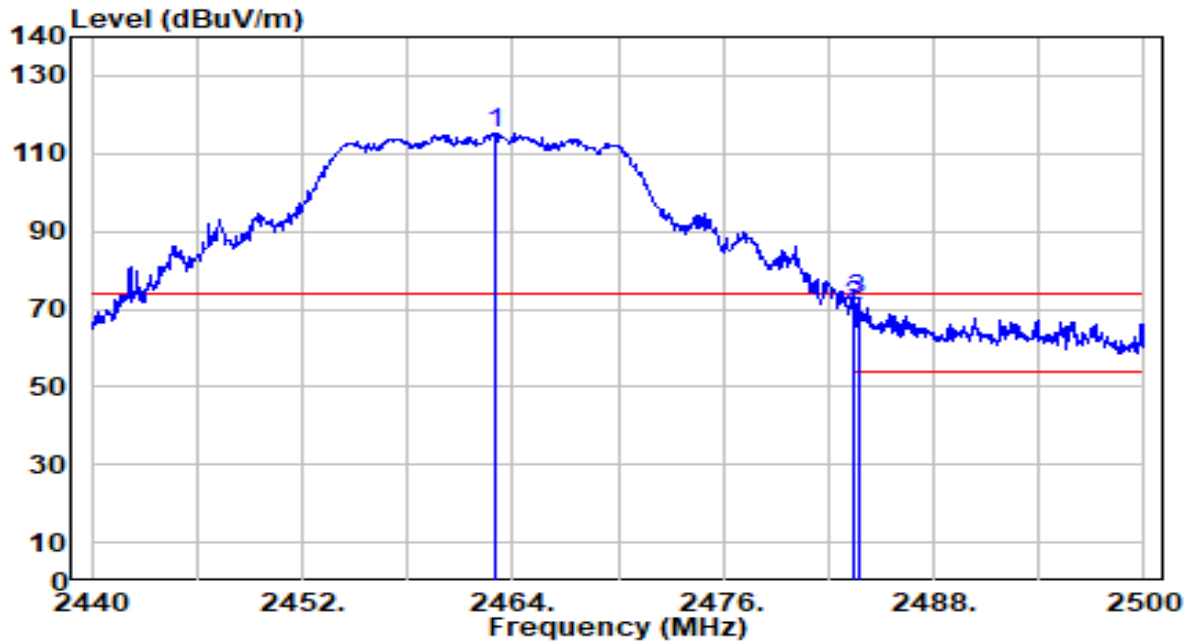

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.980	84.52	30.75	115.27	N/A	N/A	211	202	Peak
2	2483.500	40.00	30.81	70.82	-3.18	74.00	211	202	Peak
3	* 2483.680	41.81	30.81	72.62	-1.38	74.00	211	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.