


EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

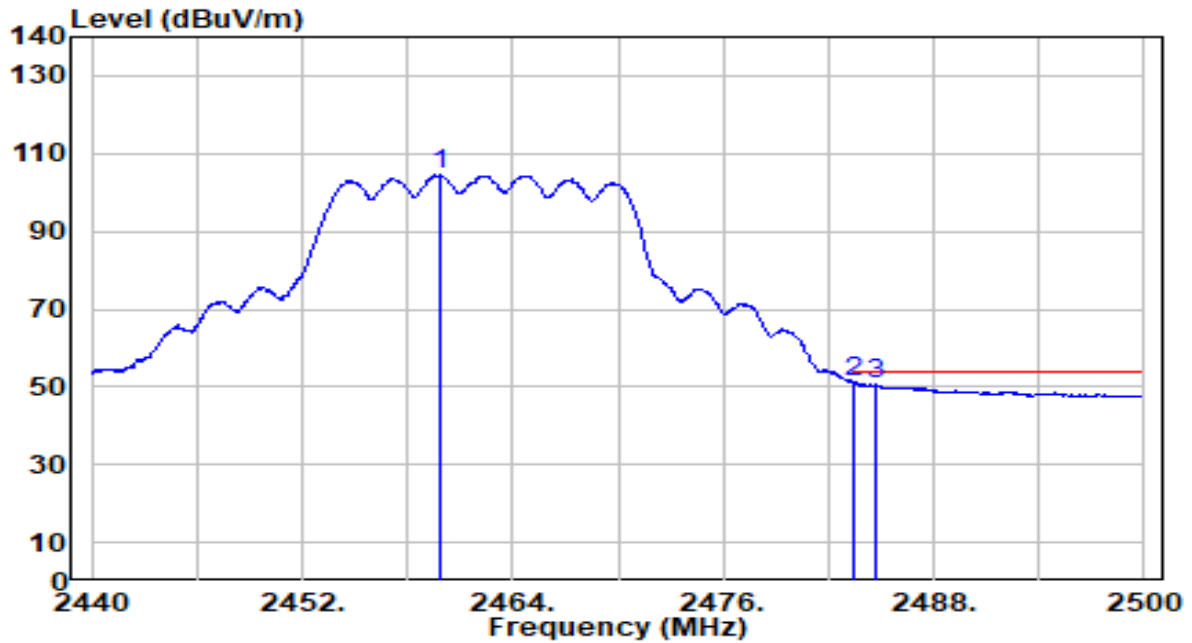


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.920	73.65	30.75	104.40	N/A	N/A	211	202	Average
2	* 2483.500	20.39	30.81	51.21	-2.79	54.00	211	202	Average
3	2484.640	19.68	30.82	50.49	-3.51	54.00	211	202	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

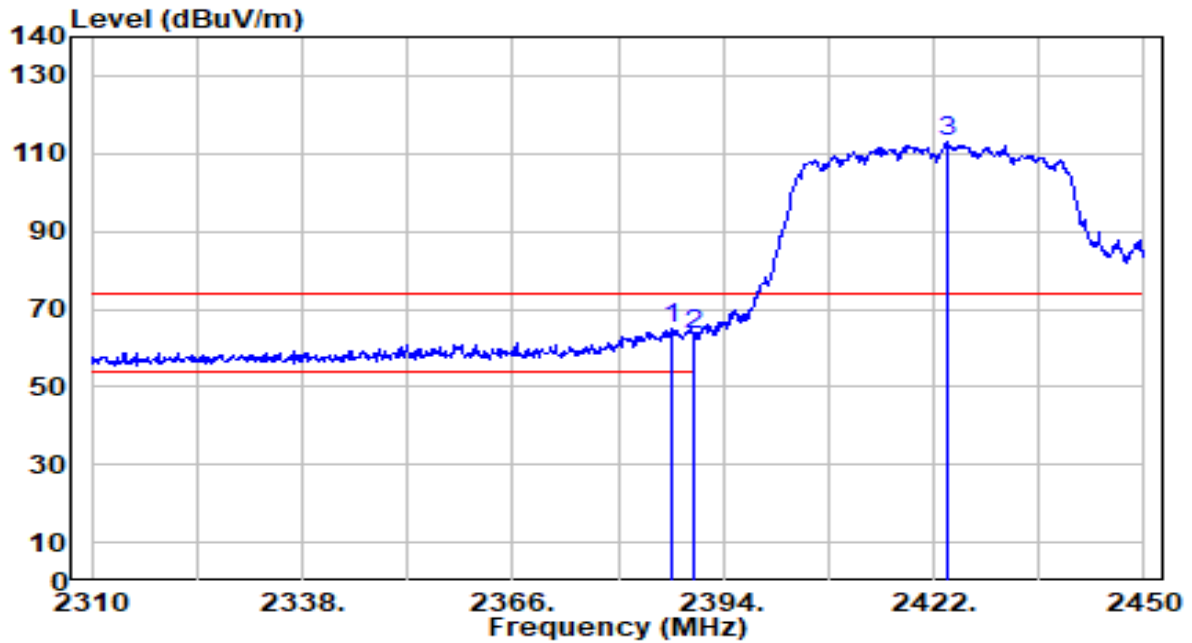


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	34.52	30.54	65.06	-8.94	74.00	199	226	Peak
2		32.74	30.55	63.28	-10.72	74.00	199	226	Peak
3		82.62	30.64	113.27	N/A	N/A	199	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

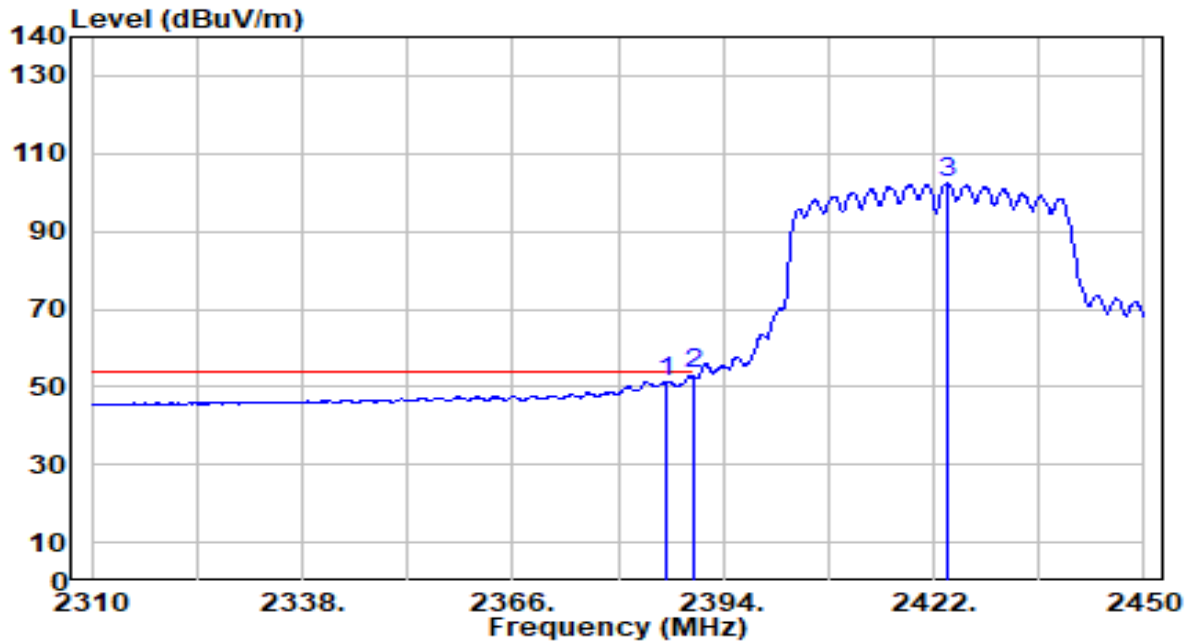


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.440	20.88	30.54	51.42	-2.58	54.00	199	226	Average
2	* 2390.000	22.56	30.55	53.10	-0.90	54.00	199	226	Average
3	2423.820	71.79	30.64	102.43	N/A	N/A	199	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

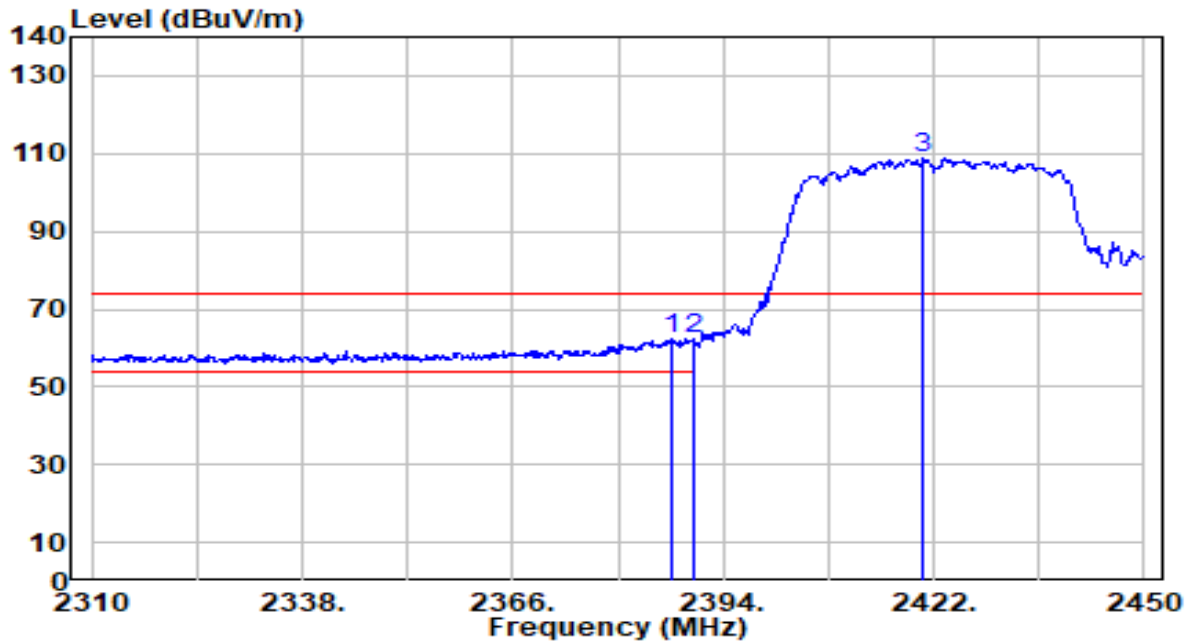


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2387.280	31.97	30.54	62.51	-11.49	74.00	212	200	Peak
2		2390.000	31.73	30.55	62.28	-11.72	74.00	212	200	Peak
3		2420.600	78.05	30.63	108.68	N/A	N/A	212	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

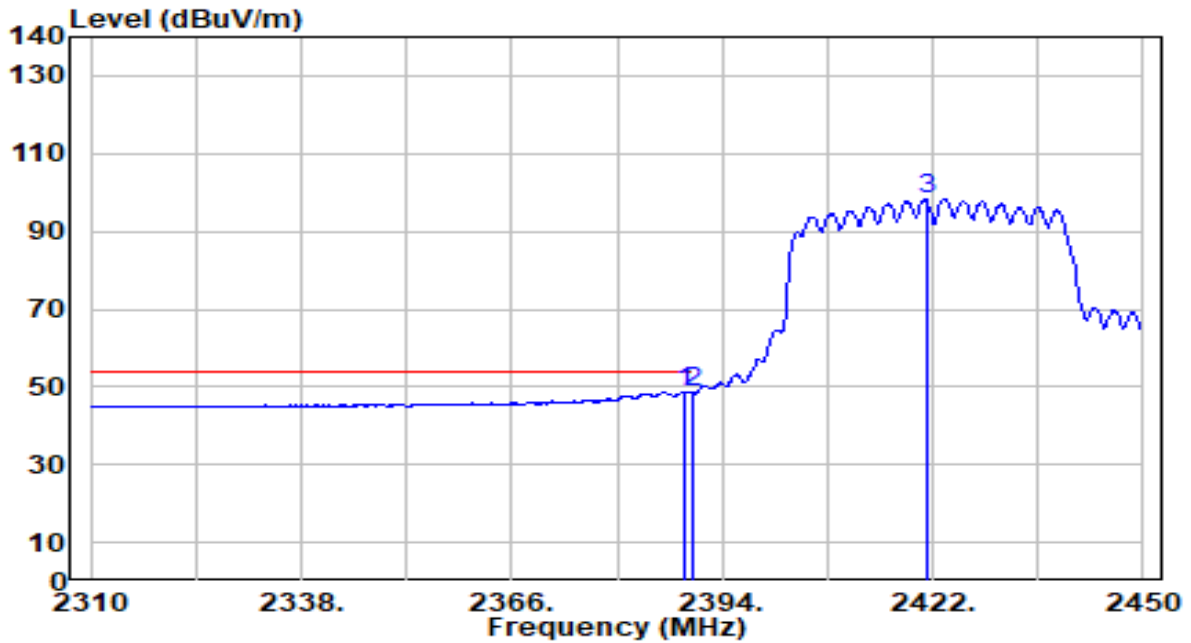


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2388.960	18.26	30.54	48.81	-5.19	54.00	212	200	Average
2	2390.000	17.94	30.55	48.49	-5.51	54.00	212	200	Average
3	2421.160	67.52	30.64	98.16	N/A	N/A	212	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

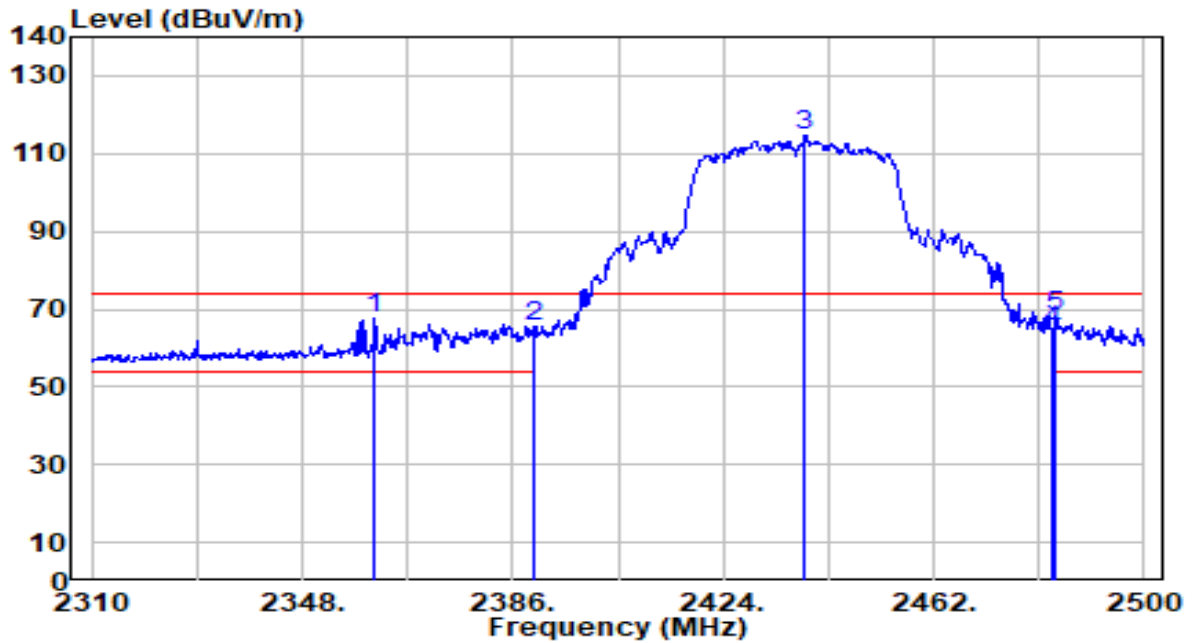


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2360.920	36.91	30.47	67.37	-6.63	74.00	220	228	Peak
2	2390.000	34.95	30.55	65.49	-8.51	74.00	220	228	Peak
3	2438.820	83.86	30.69	114.55	N/A	N/A	220	228	Peak
4	2483.500	33.50	30.81	64.32	-9.68	74.00	220	228	Peak
5	* 2484.040	37.17	30.81	67.99	-6.01	74.00	220	228	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

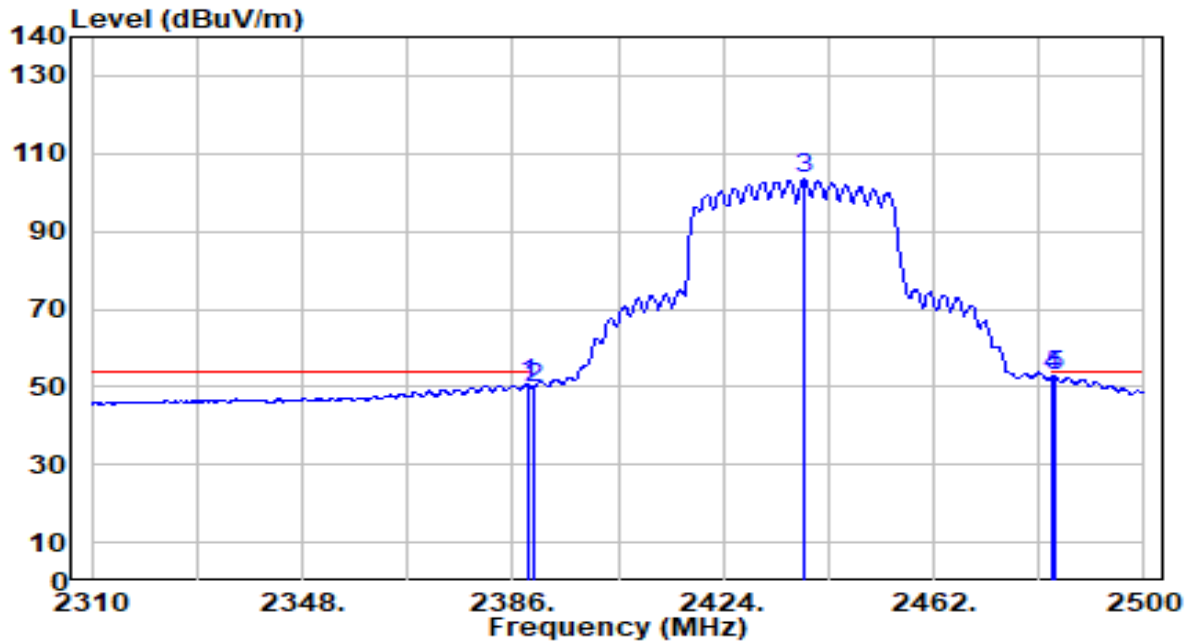


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	20.21	30.54	50.75	-3.25	54.00	220	228	Average
2	2390.000	19.33	30.55	49.88	-4.12	54.00	220	228	Average
3	2438.440	72.65	30.69	103.33	N/A	N/A	220	228	Average
4	* 2483.500	22.20	30.81	53.01	-0.99	54.00	220	228	Average
5	2484.040	22.07	30.81	52.88	-1.12	54.00	220	228	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

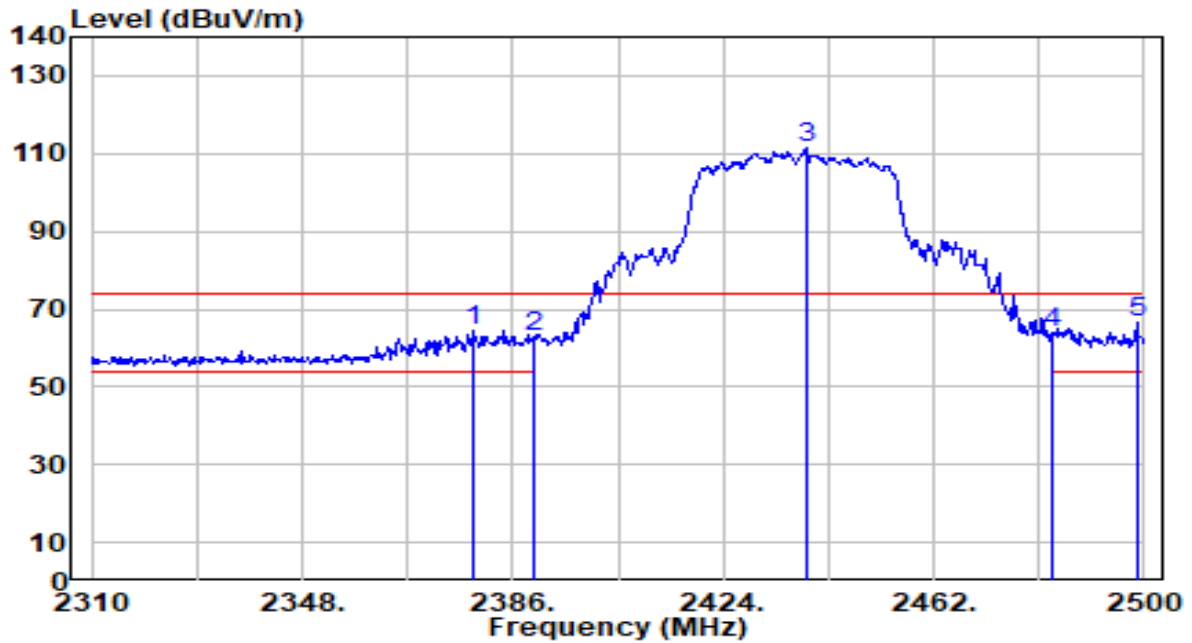


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2378.780	33.99	30.52	64.51	-9.49	74.00	215	200	Peak
2	2390.000	32.24	30.55	62.78	-11.22	74.00	215	200	Peak
3	2439.200	80.53	30.69	111.22	N/A	N/A	215	200	Peak
4	2483.500	33.15	30.81	63.96	-10.04	74.00	215	200	Peak
5	* 2498.860	35.63	30.86	66.49	-7.51	74.00	215	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

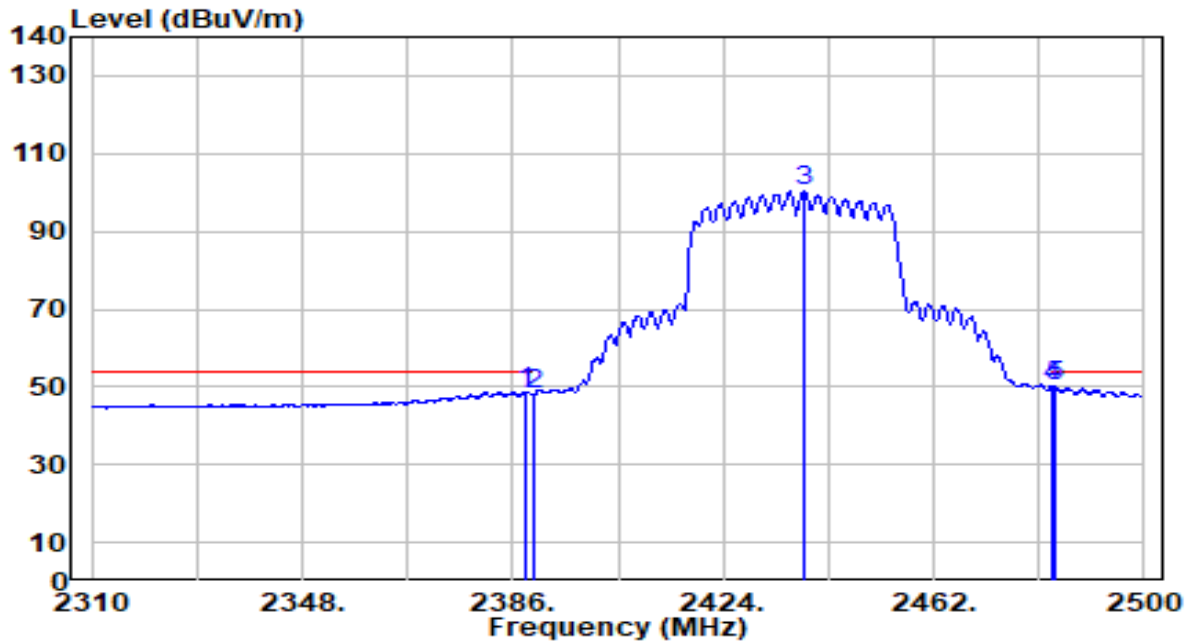


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.470	18.26	30.54	48.80	-5.20	54.00	215	200	Average
2	2390.000	17.66	30.55	48.20	-5.80	54.00	215	200	Average
3	2438.630	69.50	30.69	100.18	N/A	N/A	215	200	Average
4	* 2483.500	19.40	30.81	50.22	-3.78	54.00	215	200	Average
5	2484.040	19.22	30.81	50.04	-3.96	54.00	215	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

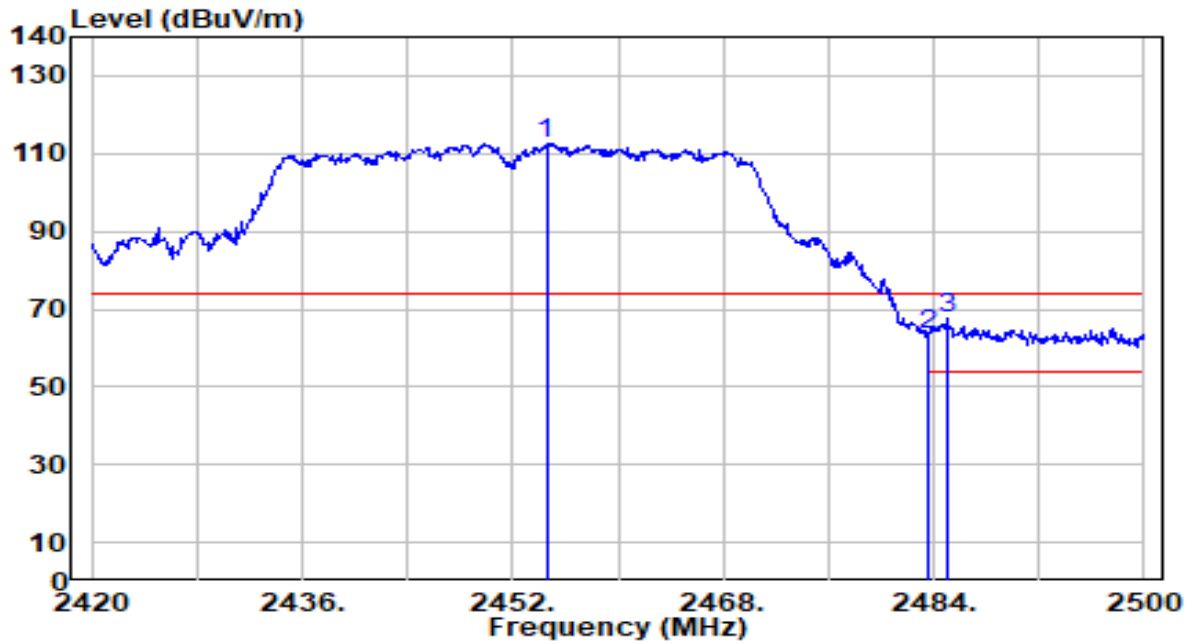


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.560	81.76	30.73	112.49	N/A	N/A	200	226	Peak
2	2483.500	32.78	30.81	63.59	-10.41	74.00	200	226	Peak
3	* 2485.040	36.72	30.82	67.54	-6.46	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

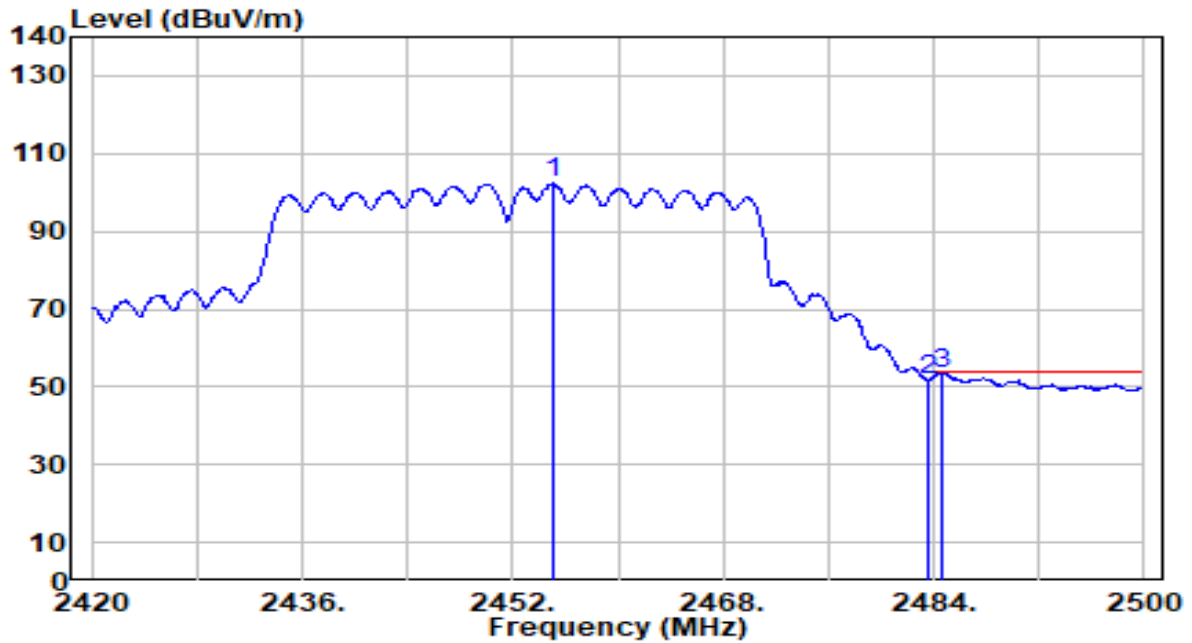


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.040	71.64	30.73	102.37	N/A	N/A	200	226	Average
2	2483.500	20.82	30.81	51.63	-2.37	54.00	200	226	Average
3	* 2484.560	22.69	30.82	53.50	-0.50	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

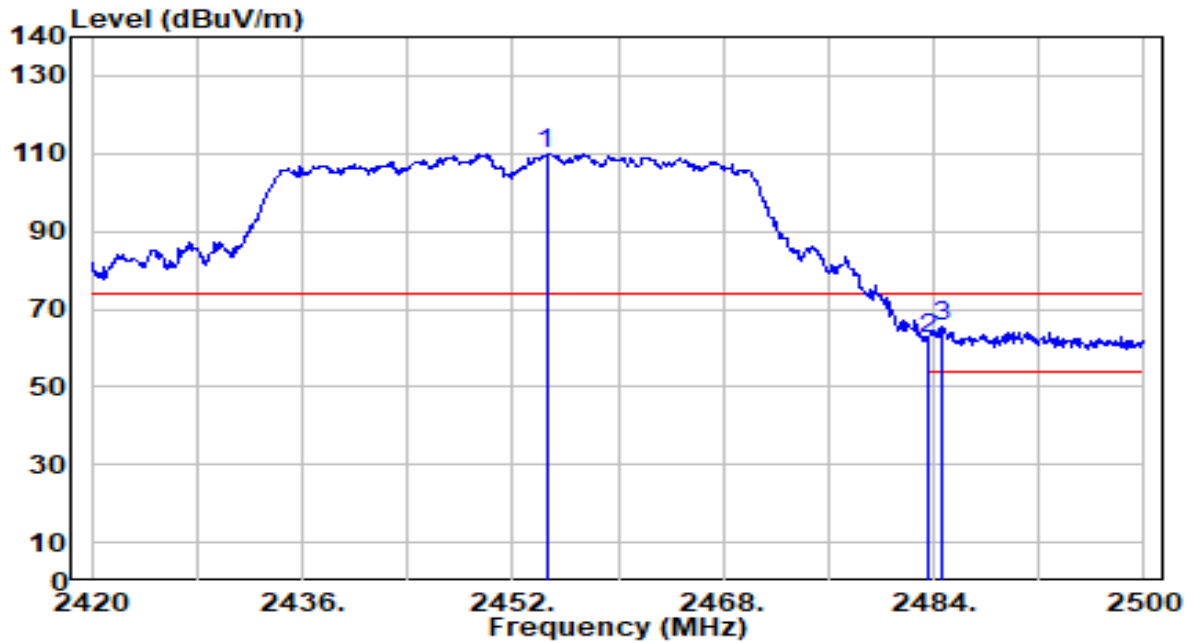


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.560	79.14	30.73	109.87	N/A	N/A	211	202	Peak
2	2483.500	31.77	30.81	62.58	-11.42	74.00	211	202	Peak
3	* 2484.560	34.62	30.82	65.44	-8.56	74.00	211	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

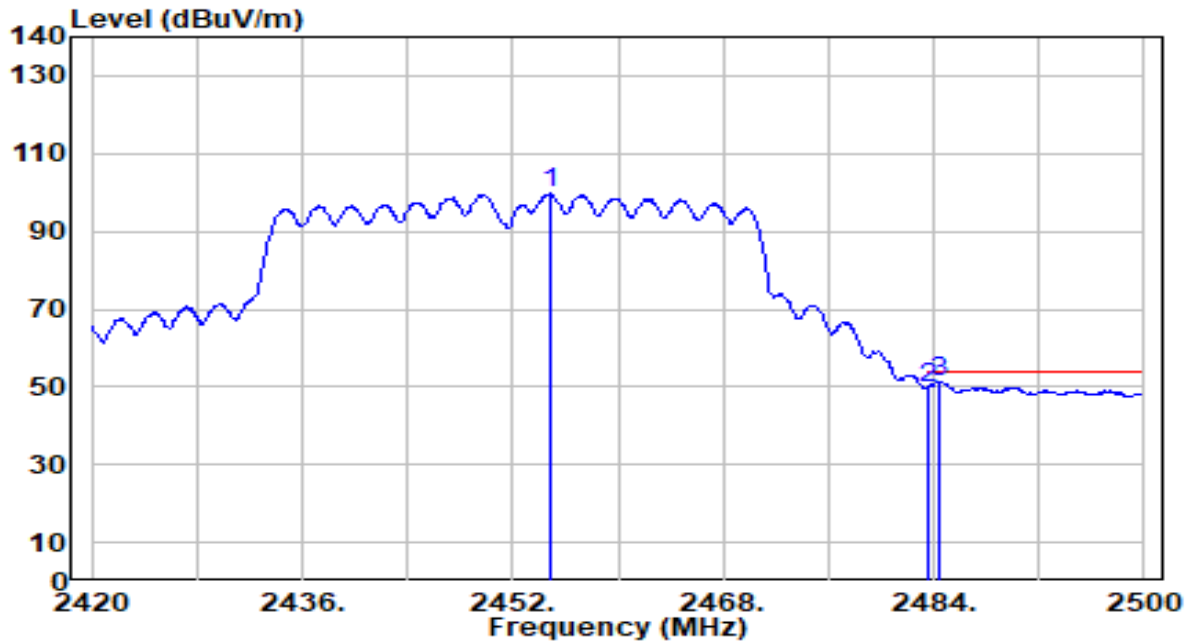


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.800	68.89	30.73	99.63	N/A	N/A	211	202	Average
2	2483.500	18.86	30.81	49.67	-4.33	54.00	211	202	Average
3	* 2484.480	20.53	30.82	51.35	-2.65	54.00	211	202	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

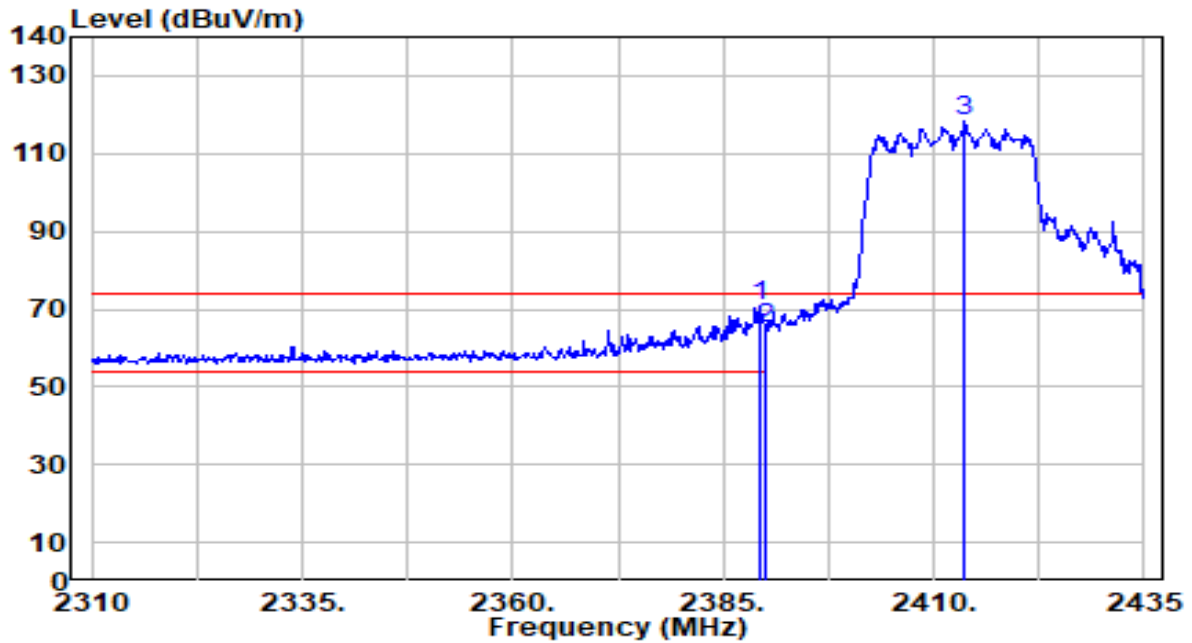


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.375	40.14	30.55	70.68	-3.32	74.00	199	226	Peak
2		2390.000	34.52	30.55	65.07	-8.93	74.00	199	226	Peak
3		2413.750	87.51	30.62	118.12	N/A	N/A	199	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

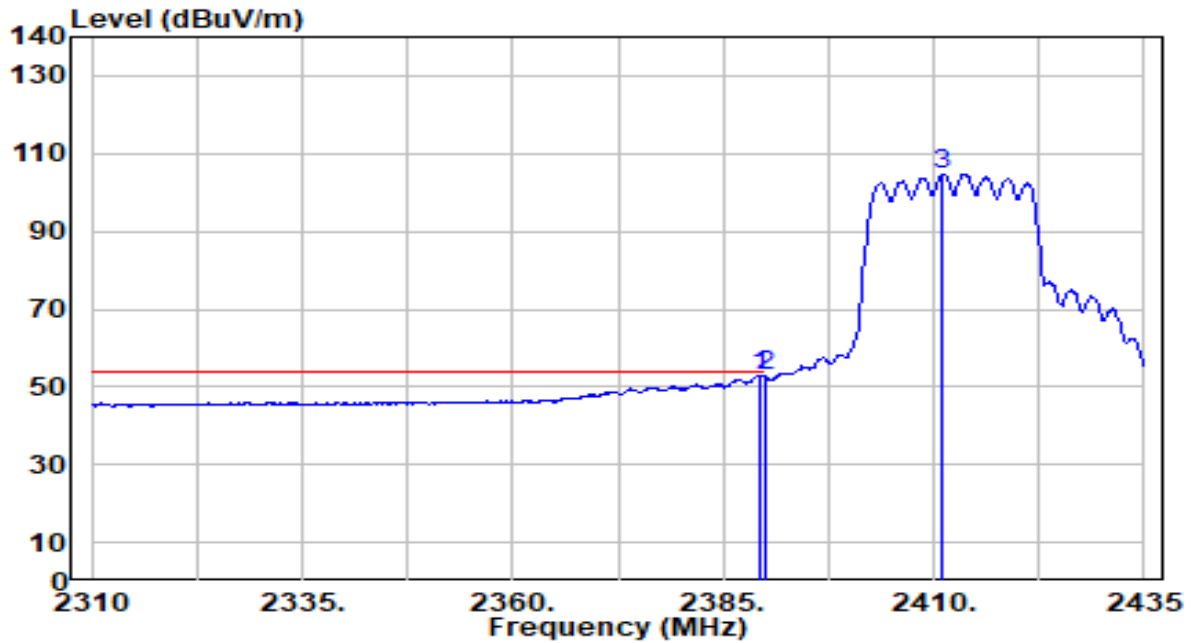


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.375	22.53	30.55	53.07	-0.93	54.00	199	226	Average
2		2390.000	22.25	30.55	52.79	-1.21	54.00	199	226	Average
3		2411.125	74.09	30.61	104.70	N/A	N/A	199	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

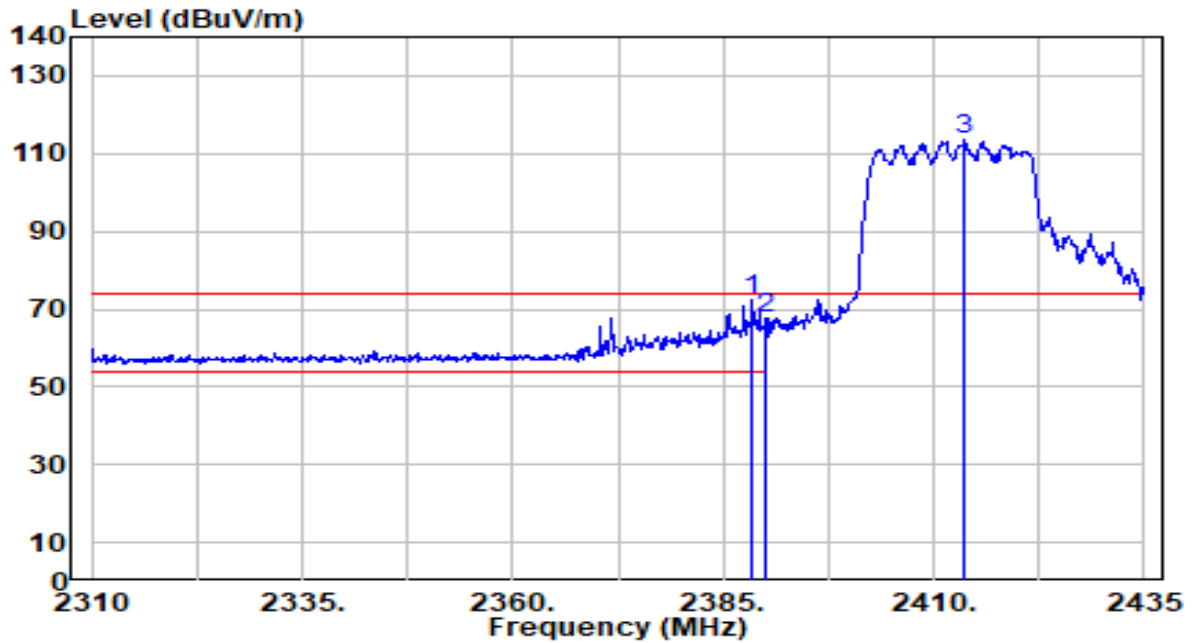


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.375	41.59	30.54	72.13	-1.87	74.00	212	200	Peak
2		2390.000	36.83	30.55	67.38	-6.62	74.00	212	200	Peak
3		2413.625	83.05	30.61	113.66	N/A	N/A	212	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

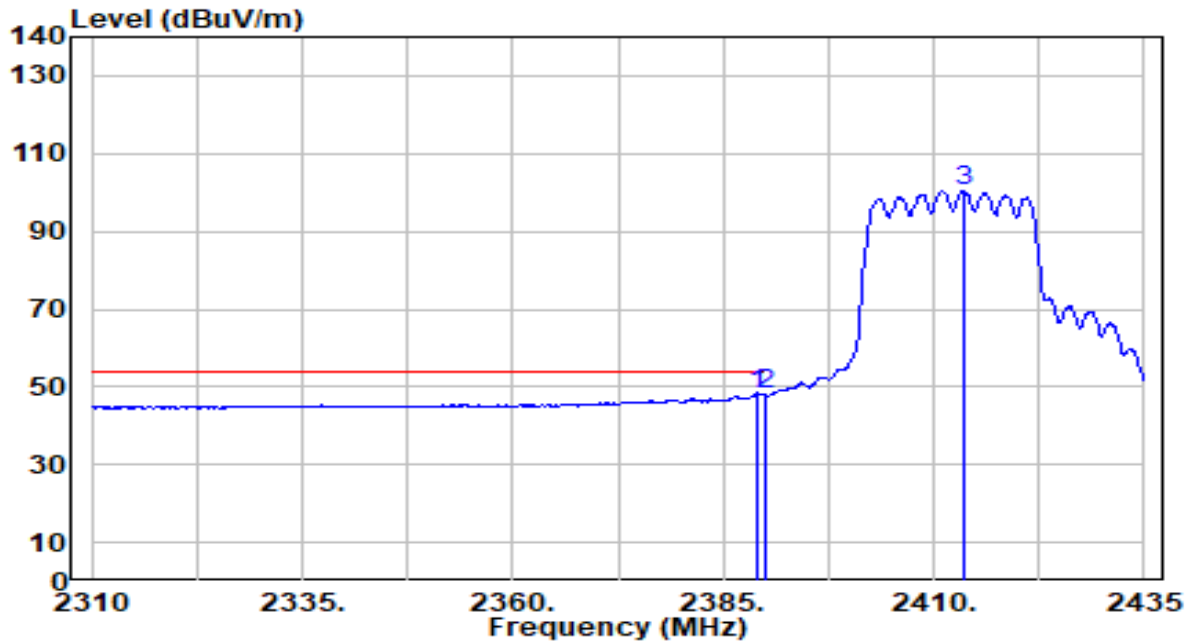


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2389.000	17.66	30.54	48.21	-5.79	54.00	212	200	Average
2		2390.000	17.30	30.55	47.85	-6.15	54.00	212	200	Average
3		2413.750	69.81	30.62	100.42	N/A	N/A	212	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

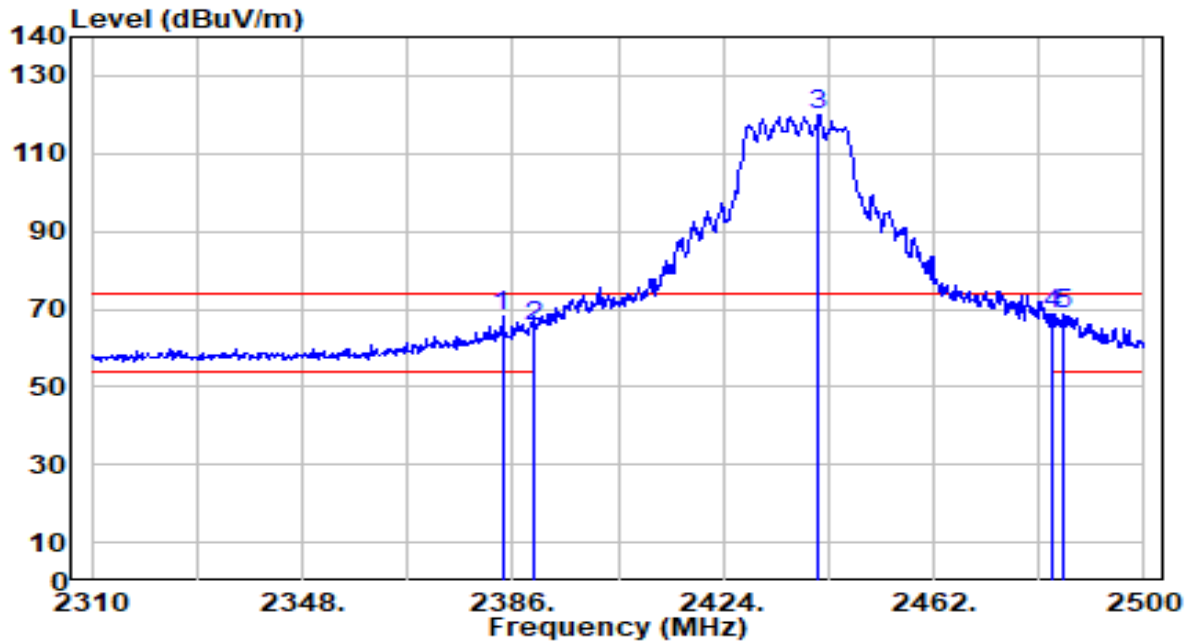


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.100	37.80	30.53	68.33	-5.67	74.00	220	228	Peak
2	2390.000	35.03	30.55	65.57	-8.43	74.00	220	228	Peak
3	2441.290	89.46	30.69	120.16	N/A	N/A	220	228	Peak
4	* 2483.500	37.91	30.81	68.73	-5.27	74.00	220	228	Peak
5	2485.180	37.73	30.82	68.55	-5.45	74.00	220	228	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

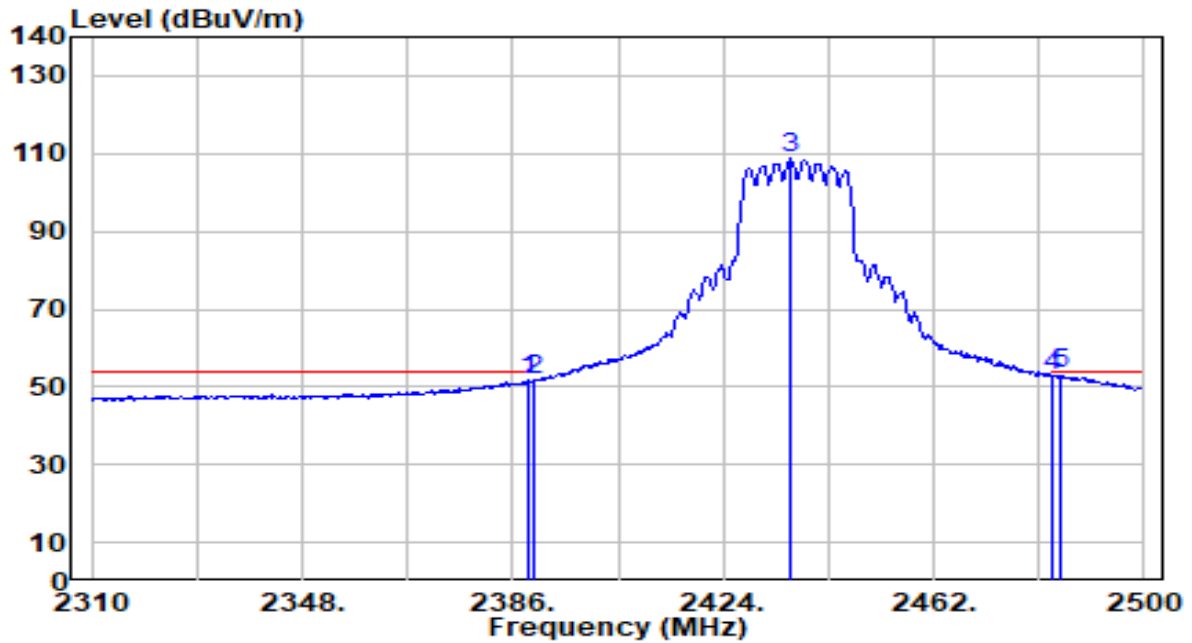


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.040	21.07	30.54	51.61	-2.39	54.00	220	228	Average
2	2390.000	21.12	30.55	51.67	-2.33	54.00	220	228	Average
3	2436.160	77.90	30.68	108.57	N/A	N/A	220	228	Average
4	2483.500	22.14	30.81	52.95	-1.05	54.00	220	228	Average
5	* 2484.800	22.35	30.82	53.16	-0.84	54.00	220	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

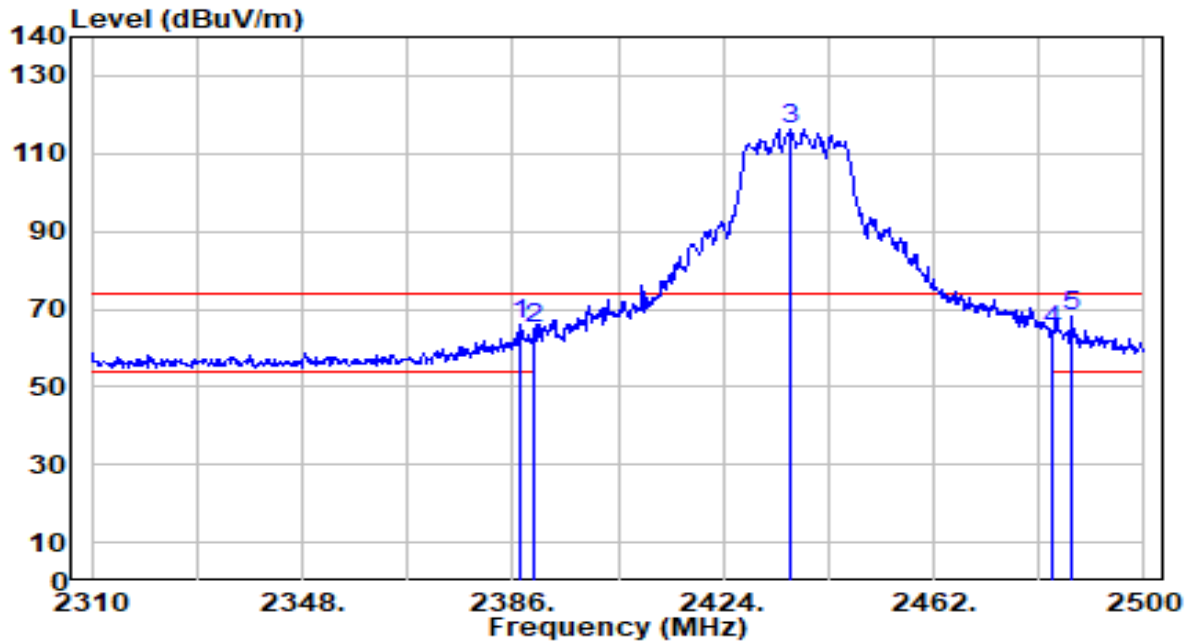


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	35.32	30.54	65.85	-8.15	74.00	215	200	Peak
2	2390.000	34.65	30.55	65.20	-8.80	74.00	215	200	Peak
3	2436.350	85.74	30.68	116.41	N/A	N/A	215	200	Peak
4	2483.500	33.60	30.81	64.41	-9.59	74.00	215	200	Peak
5	* 2486.700	37.26	30.82	68.08	-5.92	74.00	215	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

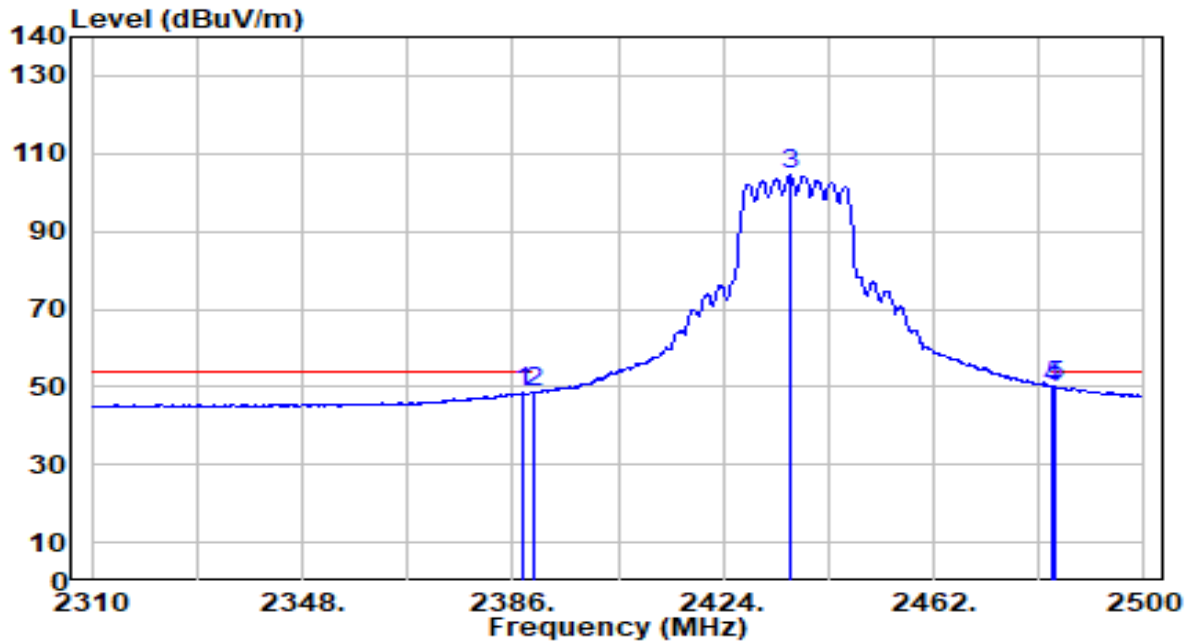


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.900	17.80	30.54	48.34	-5.66	54.00	215	200	Average
2	2390.000	18.10	30.55	48.65	-5.35	54.00	215	200	Average
3	2435.970	73.68	30.68	104.36	N/A	N/A	215	200	Average
4	2483.500	19.05	30.81	49.86	-4.14	54.00	215	200	Average
5	* 2484.040	19.15	30.81	49.97	-4.03	54.00	215	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

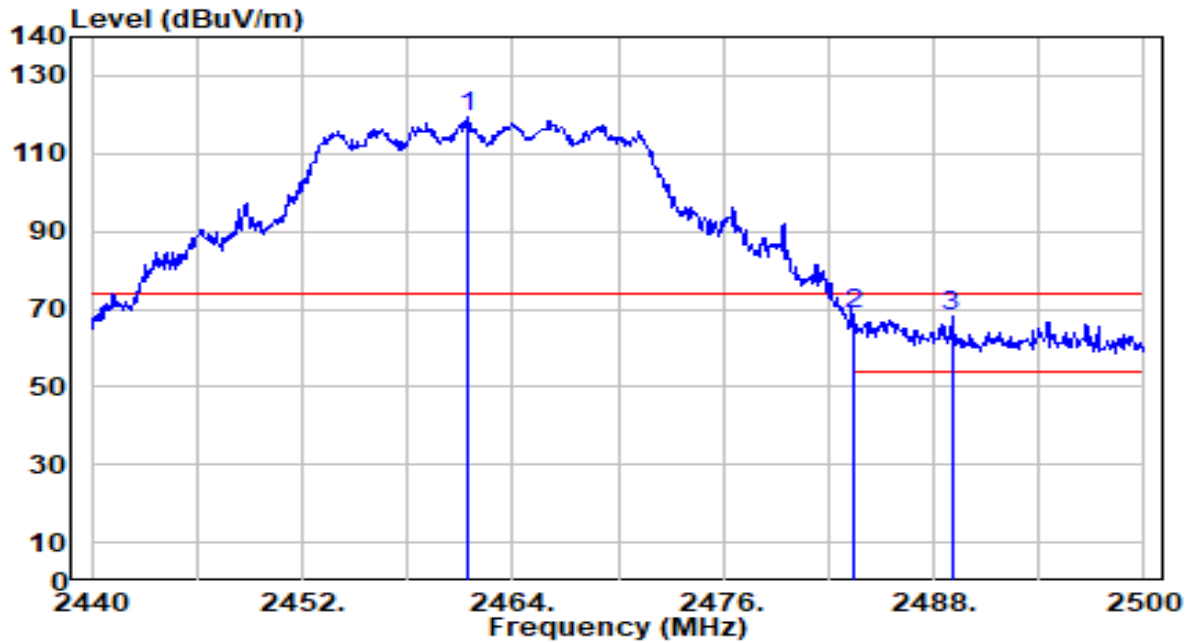


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.420	88.43	30.75	119.18	N/A	N/A	200	226	Peak
2	* 2483.500	37.83	30.81	68.65	-5.35	74.00	200	226	Peak
3	2489.020	37.43	30.83	68.26	-5.74	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

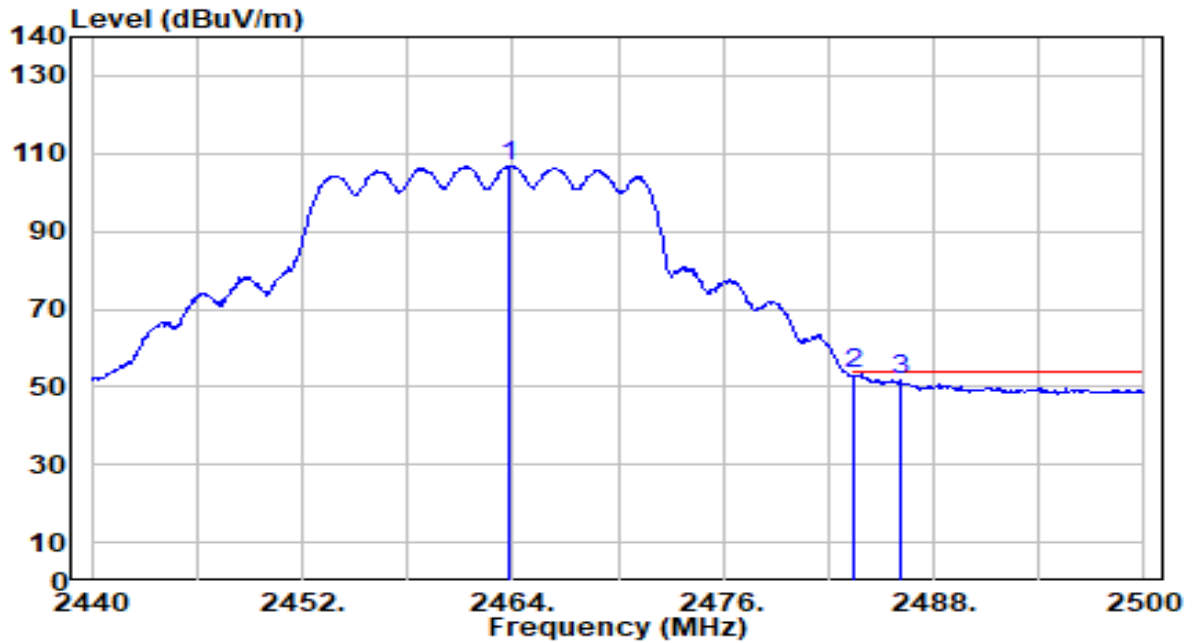


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.760	76.12	30.76	106.87	N/A	N/A	200	226	Average
2	* 2483.500	22.35	30.81	53.16	-0.84	54.00	200	226	Average
3	2486.140	20.91	30.82	51.73	-2.27	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

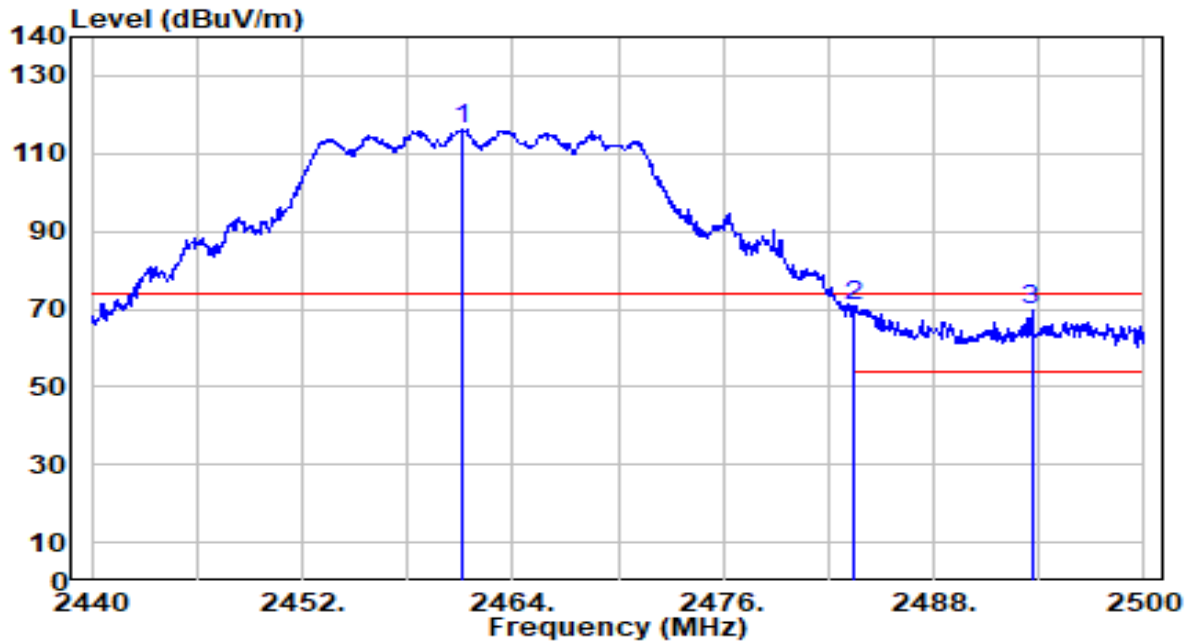


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	85.46	30.75	116.21	N/A	N/A	211	202	Peak
2	* 2483.500	40.12	30.81	70.93	-3.07	74.00	211	202	Peak
3	2493.580	39.01	30.84	69.85	-4.15	74.00	211	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

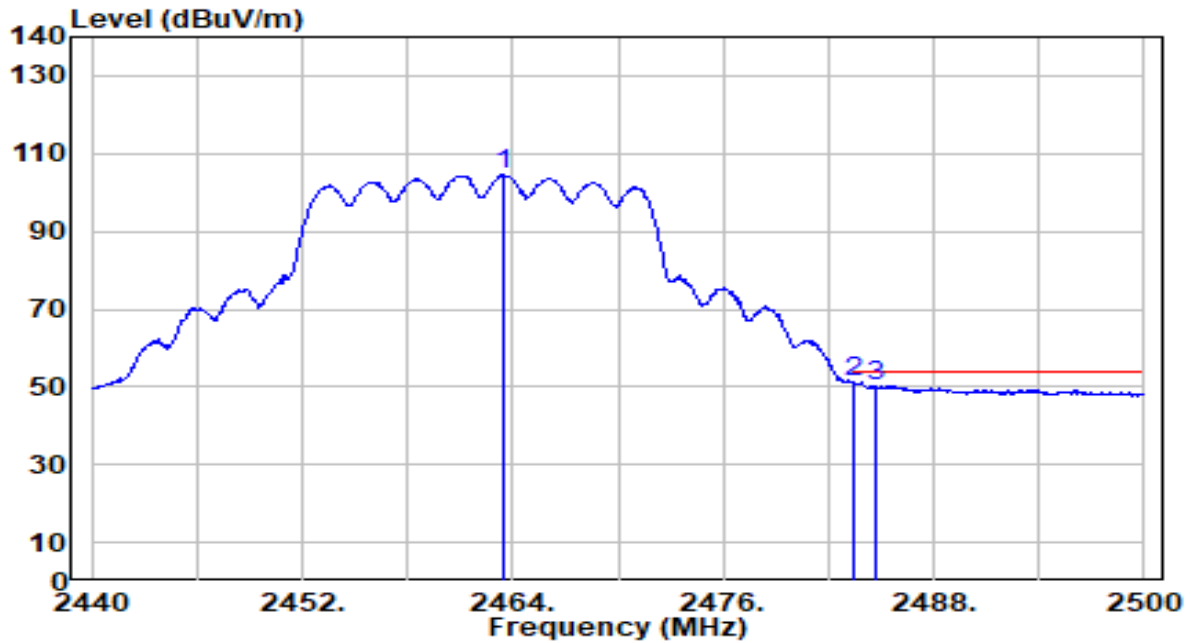


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.460	73.68	30.76	104.43	N/A	N/A	211	202	Average
2	* 2483.500	20.41	30.81	51.23	-2.77	54.00	211	202	Average
3	2484.760	19.32	30.82	50.13	-3.87	54.00	211	202	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

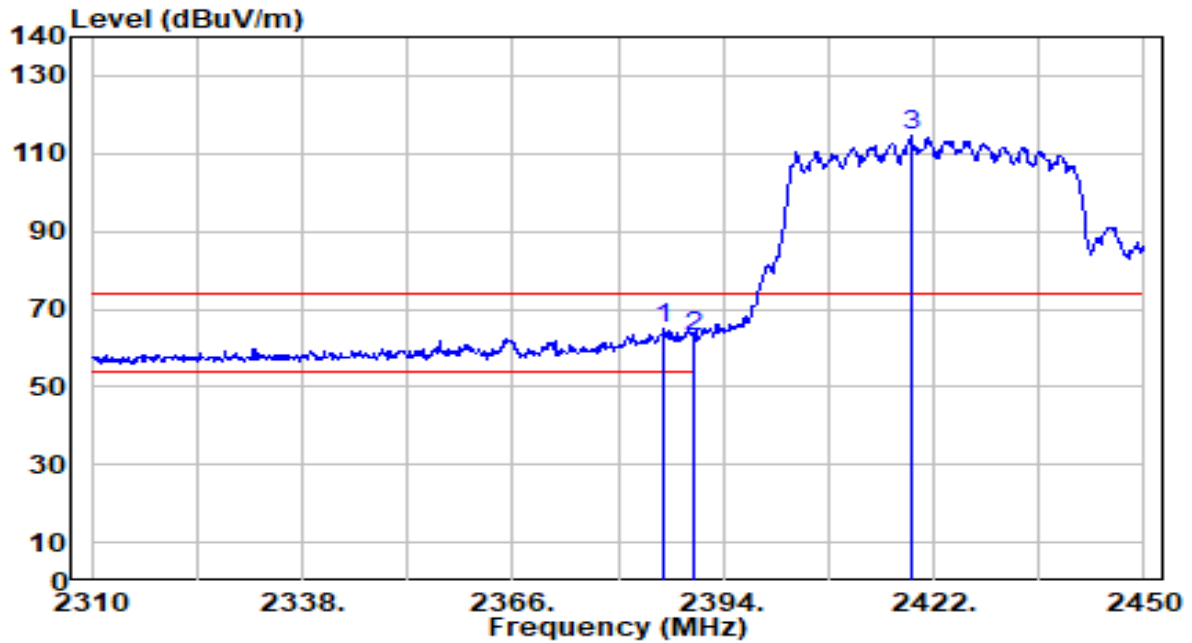


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2386.160	34.25	30.54	64.79	-9.21	74.00	199	226	Peak
2		2390.000	32.24	30.55	62.79	-11.21	74.00	199	226	Peak
3		2419.060	83.79	30.63	114.42	N/A	N/A	199	226	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

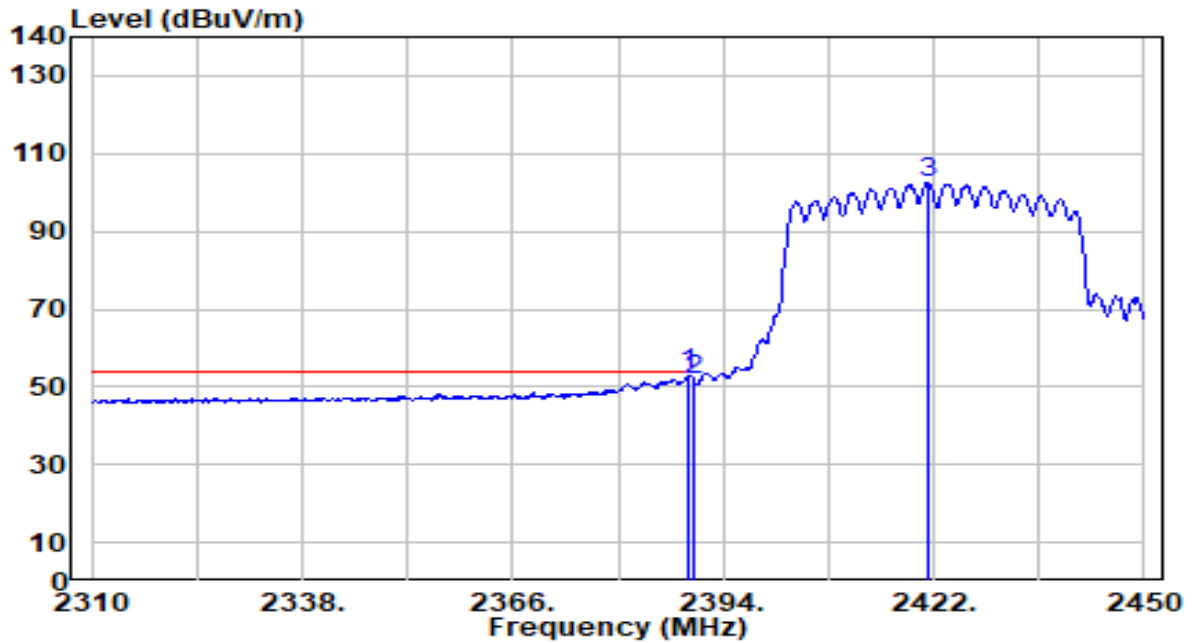


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2389.520	22.66	30.55	53.21	-0.79	54.00	199	226	Average
2	2390.000	21.34	30.55	51.89	-2.11	54.00	199	226	Average
3	2421.160	71.86	30.64	102.49	N/A	N/A	199	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

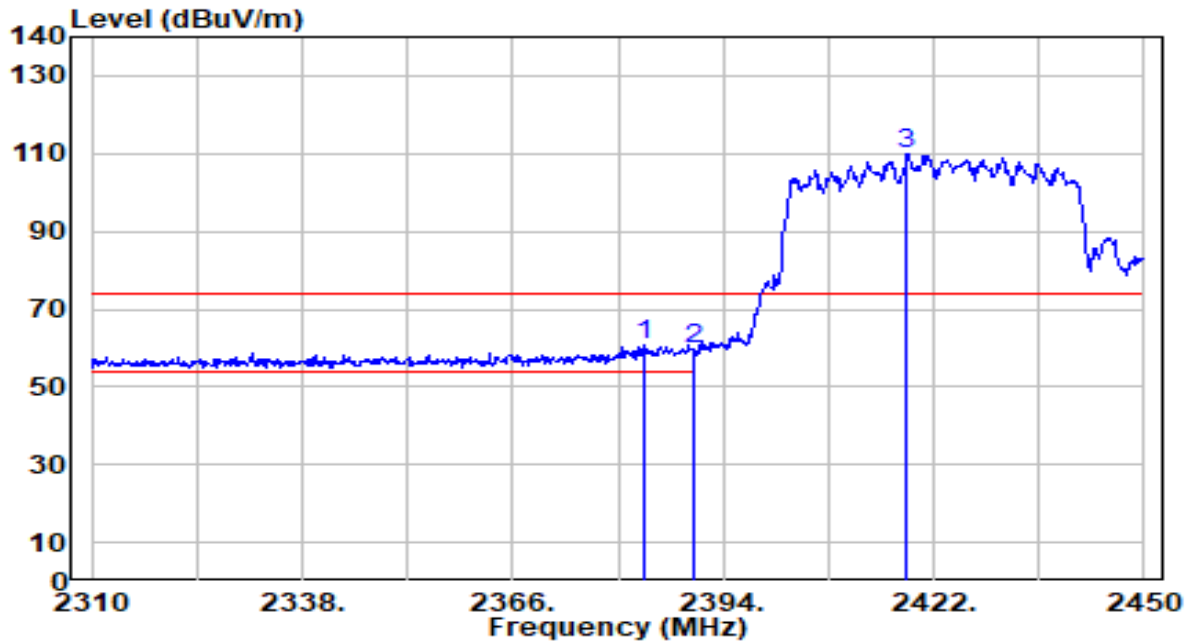


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2383.360	30.05	30.53	60.58	-13.42	74.00	212	200	Peak
2		2390.000	29.06	30.55	59.61	-14.39	74.00	212	200	Peak
3		2418.500	79.22	30.63	109.85	N/A	N/A	212	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

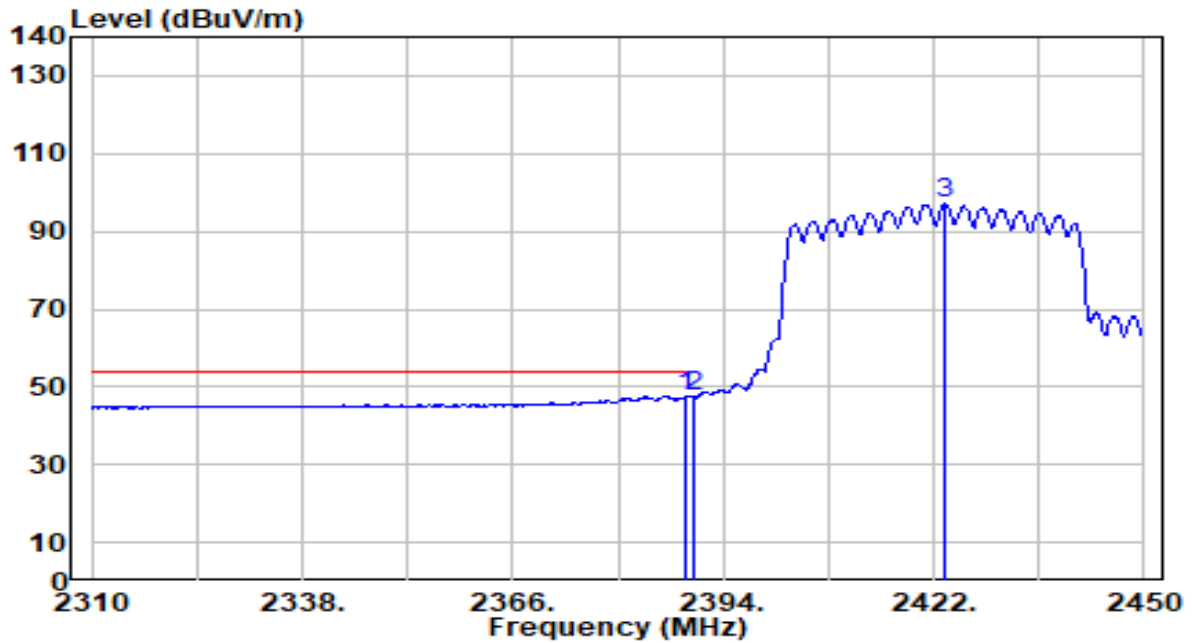


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	2388.960	17.20	30.54	47.74	-6.26	54.00	212	200	Average
2		2390.000	16.82	30.55	47.37	-6.63	54.00	212	200	Average
3		2423.540	66.32	30.64	96.96	N/A	N/A	212	200	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

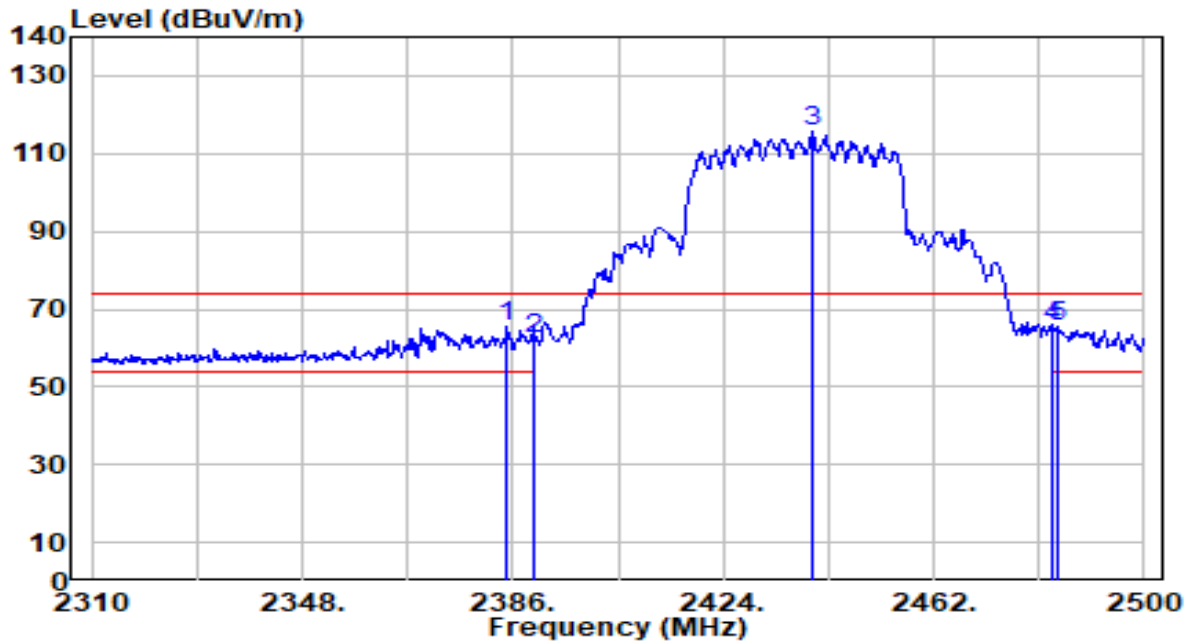


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2385.050	35.12	30.53	65.66	-8.34	74.00	220	228	Peak
2	2390.000	32.03	30.55	62.58	-11.42	74.00	220	228	Peak
3	2440.150	84.81	30.69	115.50	N/A	N/A	220	228	Peak
4	2483.500	34.83	30.81	65.65	-8.35	74.00	220	228	Peak
5	2484.230	34.62	30.82	65.43	-8.57	74.00	220	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

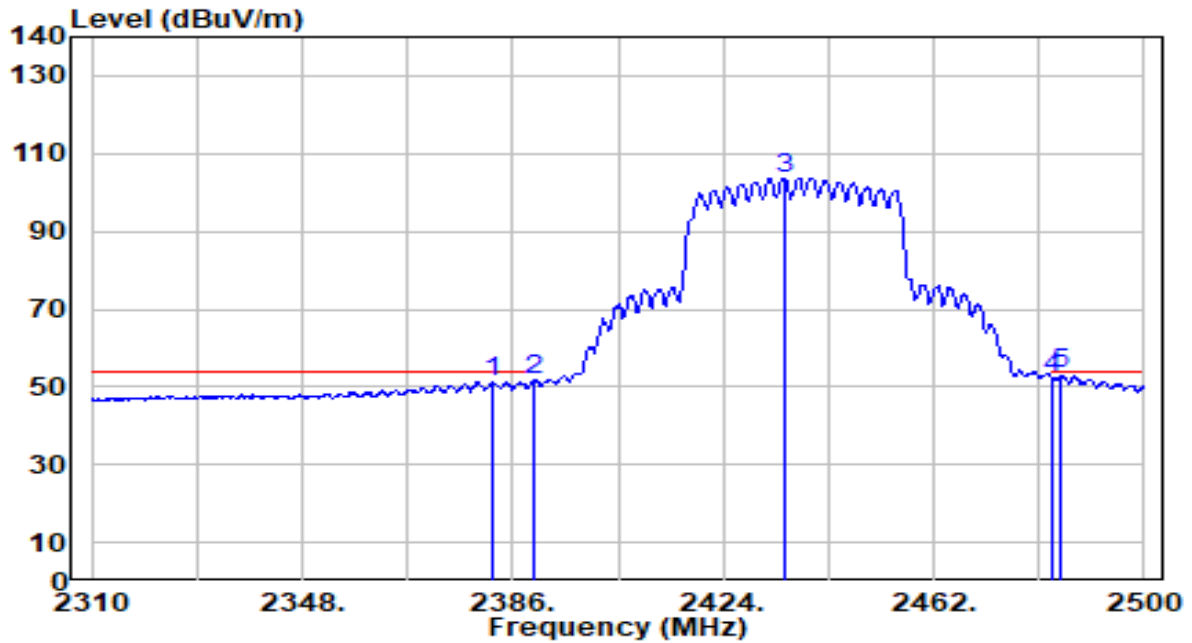


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2382.580	20.64	30.53	51.17	-2.83	54.00	220	228	Average
2	2390.000	21.14	30.55	51.69	-2.31	54.00	220	228	Average
3	2435.210	73.11	30.68	103.78	N/A	N/A	220	228	Average
4	2483.500	21.25	30.81	52.06	-1.94	54.00	220	228	Average
5	* 2484.990	22.30	30.82	53.12	-0.88	54.00	220	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

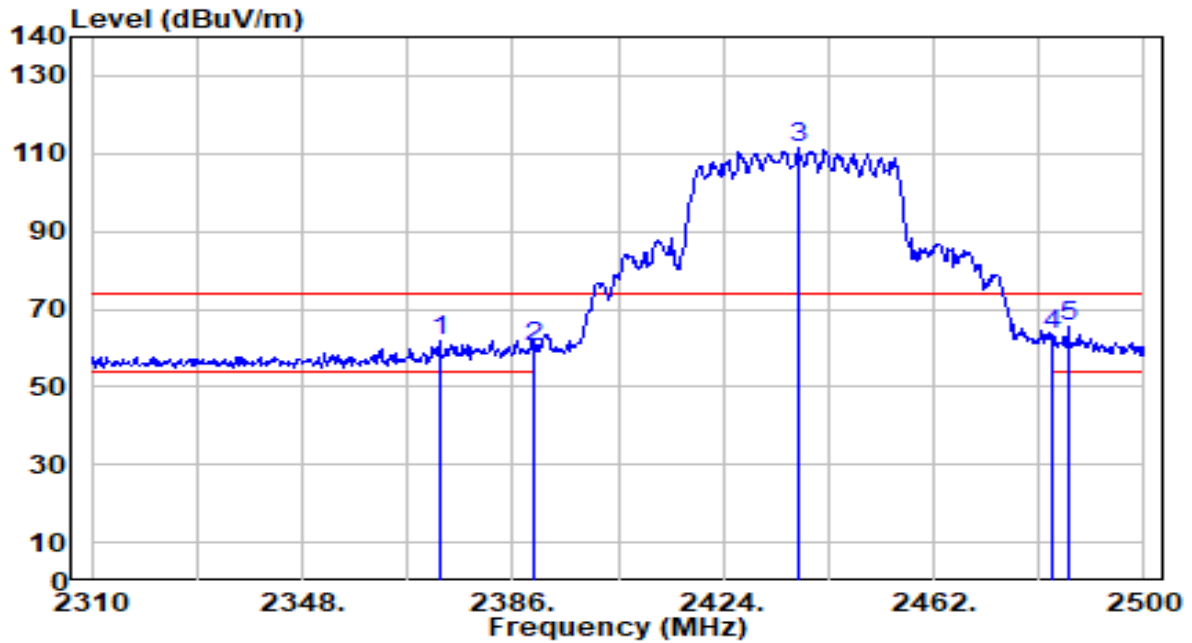


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2372.700	31.54	30.50	62.04	-11.96	74.00	215	200	Peak
2	2390.000	29.65	30.55	60.20	-13.80	74.00	215	200	Peak
3	2437.490	80.64	30.68	111.32	N/A	N/A	215	200	Peak
4	2483.500	32.39	30.81	63.20	-10.80	74.00	215	200	Peak
5	* 2486.320	34.72	30.82	65.54	-8.46	74.00	215	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

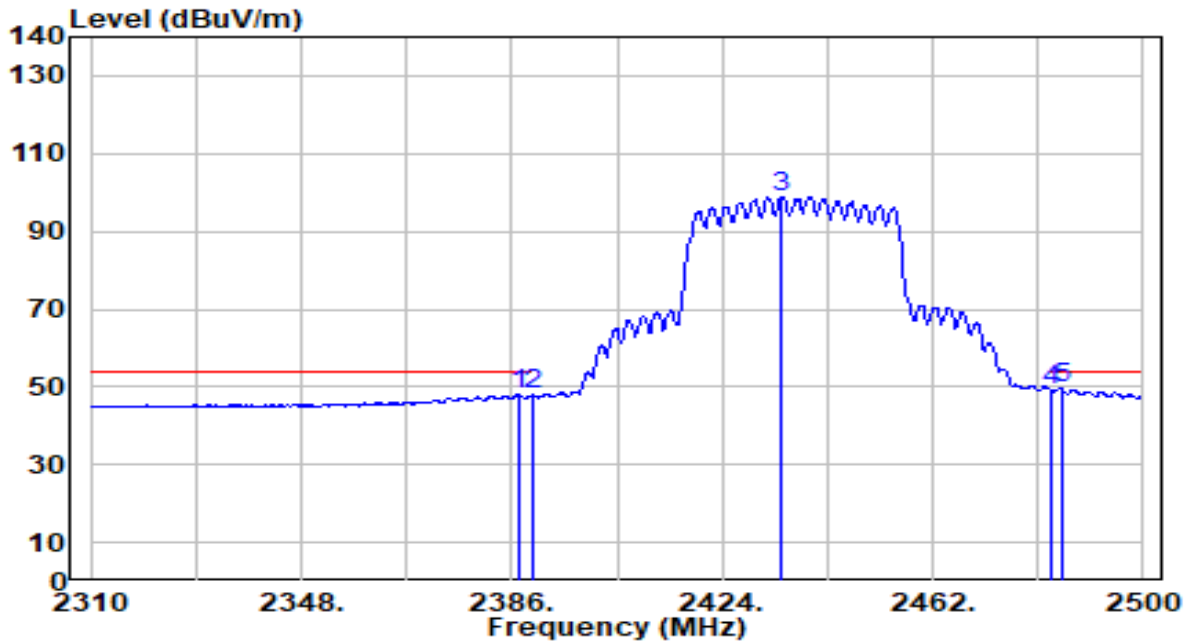


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.520	17.41	30.54	47.96	-6.04	54.00	215	200	Average
2	2390.000	17.32	30.55	47.87	-6.13	54.00	215	200	Average
3	2434.640	68.32	30.67	98.99	N/A	N/A	215	200	Average
4	2483.500	18.18	30.81	49.00	-5.00	54.00	215	200	Average
5	* 2485.180	18.73	30.82	49.55	-4.45	54.00	215	200	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

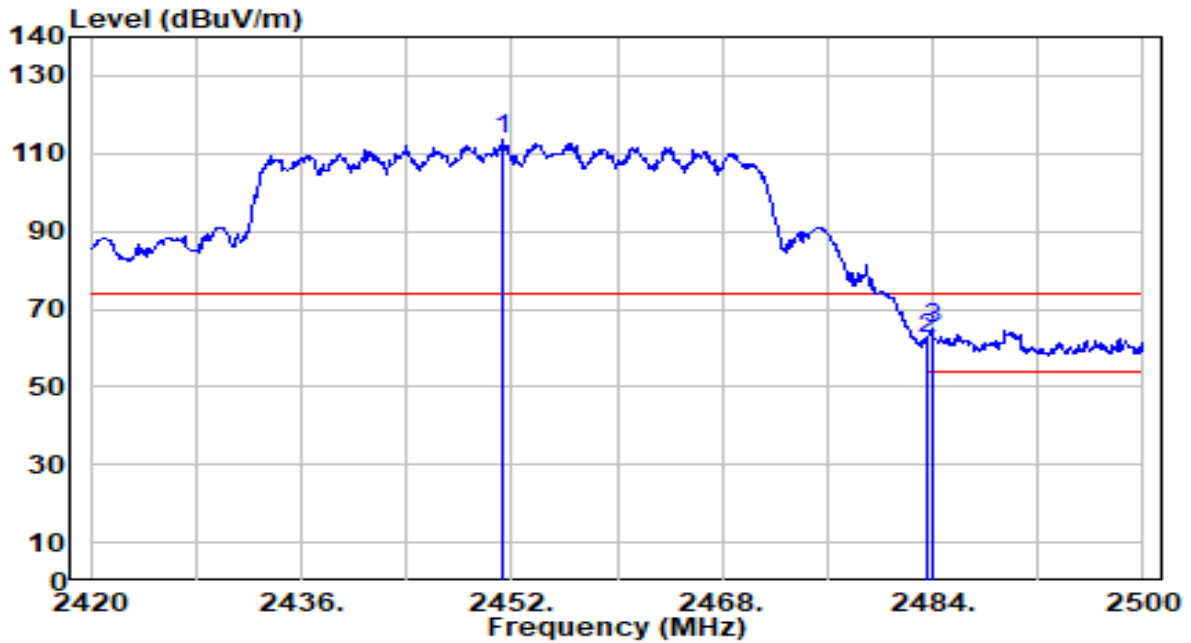


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.280	82.83	30.72	113.55	N/A	N/A	200	226	Peak
2	2483.500	31.42	30.81	62.23	-11.77	74.00	200	226	Peak
3	* 2483.920	33.96	30.81	64.77	-9.23	74.00	200	226	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

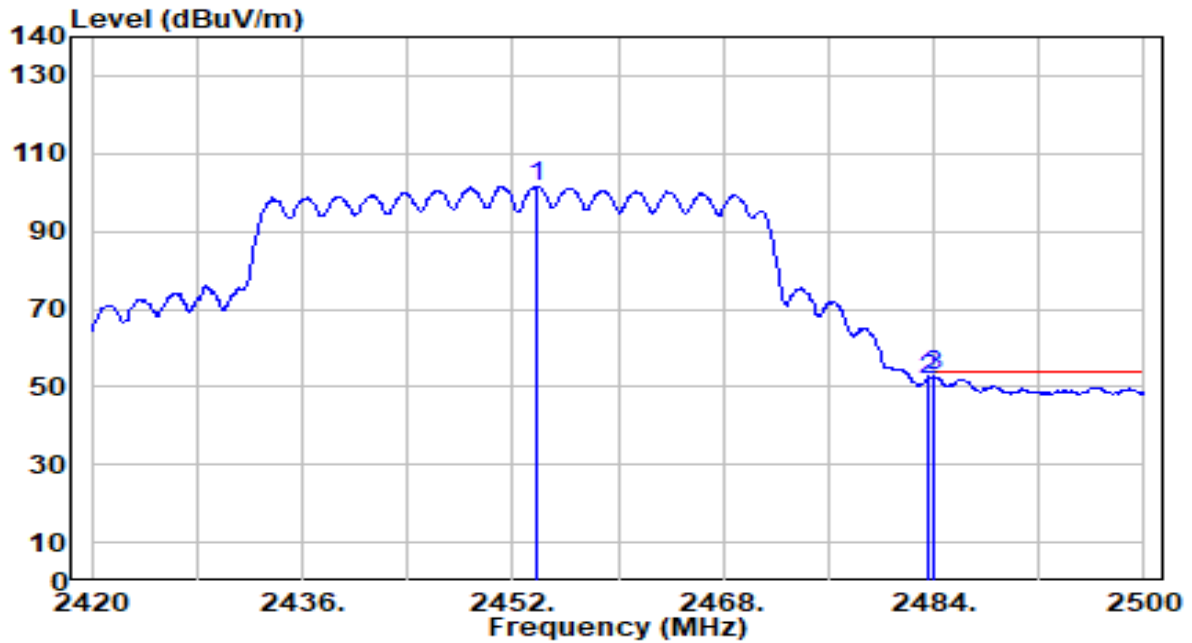


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.760	70.88	30.73	101.61	N/A	N/A	200	226	Average
2	2483.500	21.01	30.81	51.82	-2.18	54.00	200	226	Average
3	* 2483.920	22.24	30.81	53.05	-0.95	54.00	200	226	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

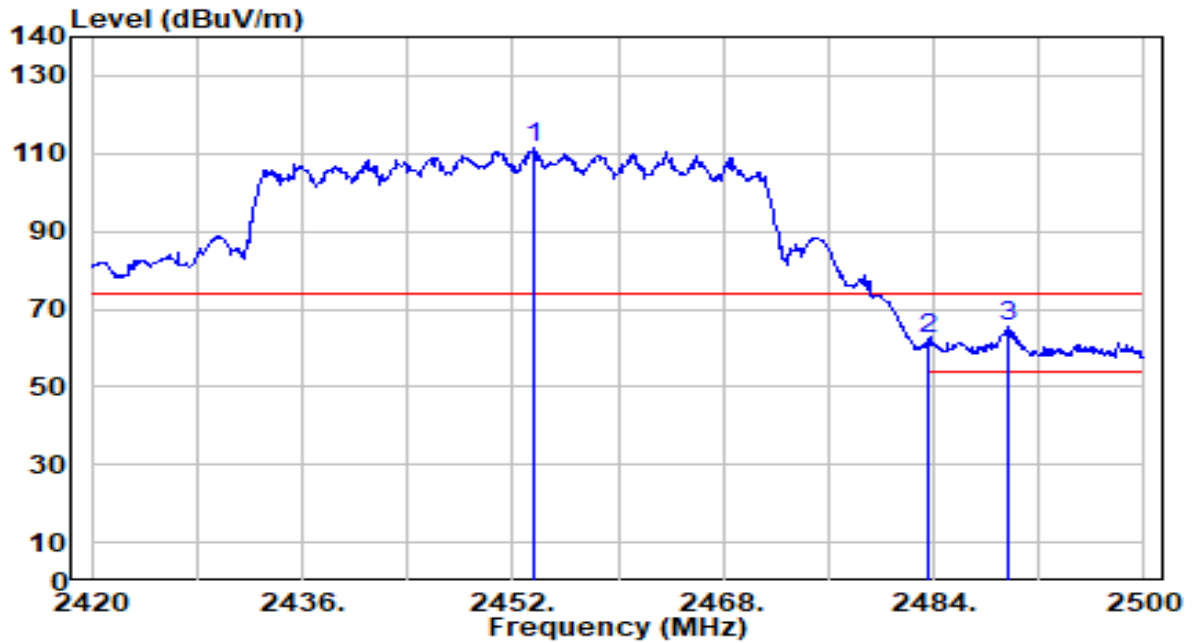


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.680	80.70	30.73	111.43	N/A	N/A	211	202	Peak
2	2483.500	31.27	30.81	62.08	-11.92	74.00	211	202	Peak
3	* 2489.680	34.68	30.83	65.52	-8.48	74.00	211	202	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-26
Factor	DRH18-E	Temp. / Humidity	24°C /59%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

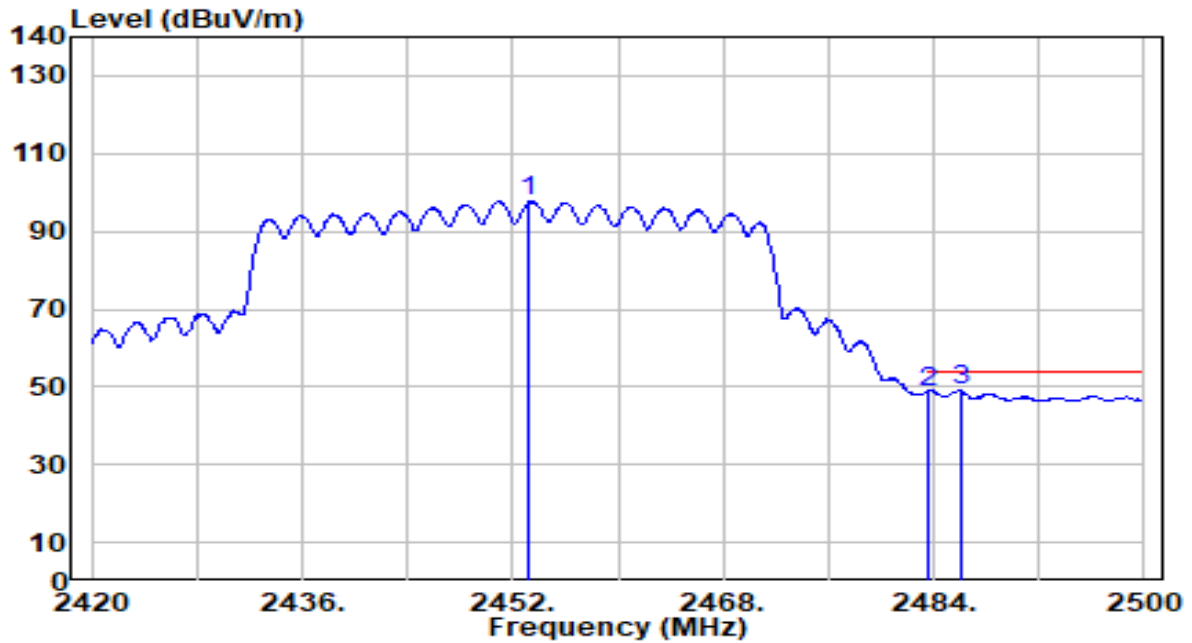

No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.280	66.93	30.73	97.66	N/A	N/A	211	202	Average
2	2483.500	17.79	30.81	48.60	-5.40	54.00	211	202	Average
3	* 2486.000	18.19	30.82	49.01	-4.99	54.00	211	202	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. AC Conducted Emissions Measurement


7.7.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.7.2. Test Setup

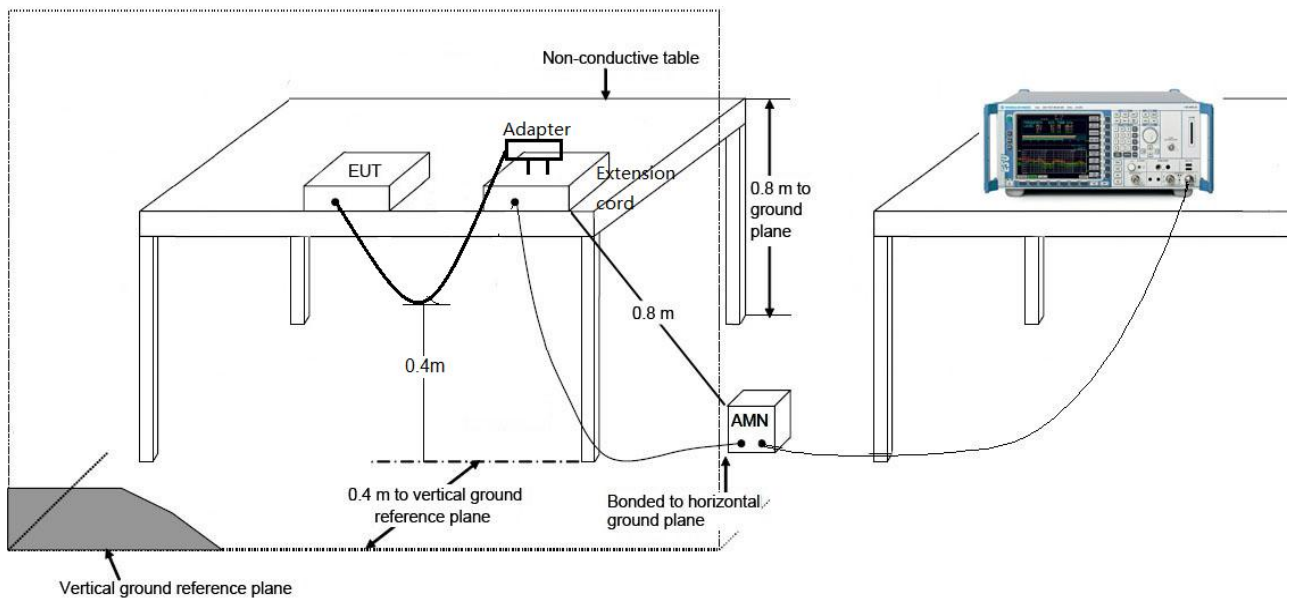

7.7.3. Test Result

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-28
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.5°C /59%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0++1	Test Voltage	AC 120V/60Hz

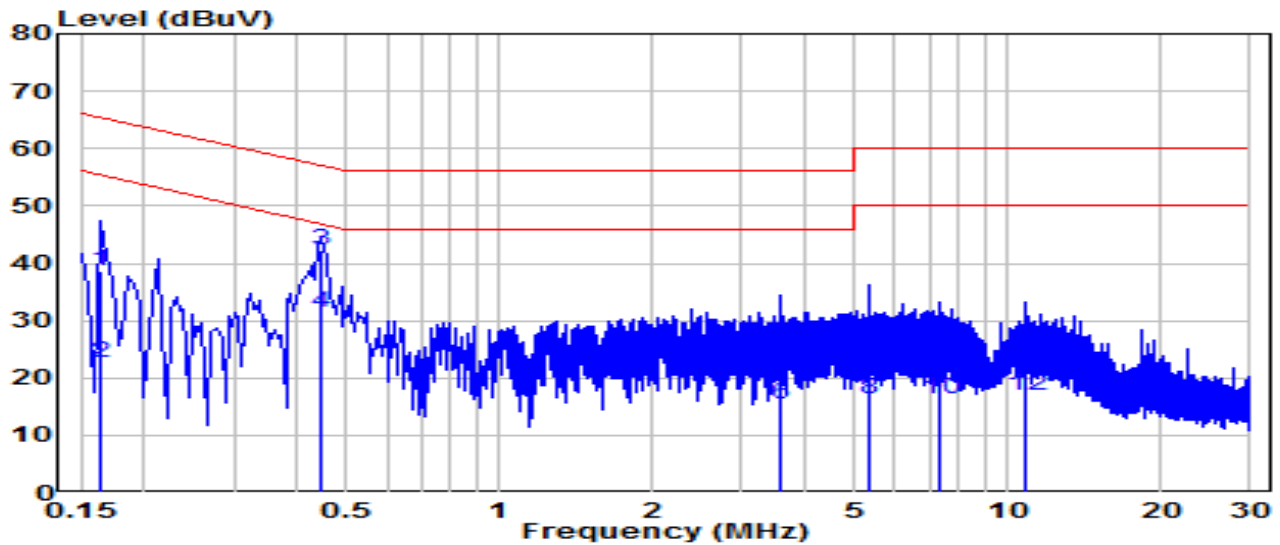


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	29.10	9.63	38.73	-26.56	65.28	QP
2	0.163	12.98	9.63	22.60	-32.68	55.28	Average
3	* 0.442	32.65	9.64	42.29	-14.73	57.02	QP
4	* 0.442	21.90	9.64	31.54	-15.48	47.02	Average
5	3.556	16.18	9.72	25.90	-30.10	56.00	QP
6	3.556	5.71	9.72	15.44	-30.56	46.00	Average
7	5.365	16.31	9.76	26.07	-33.93	60.00	QP
8	5.365	6.51	9.76	16.26	-33.74	50.00	Average
9	7.345	16.65	9.80	26.45	-33.55	60.00	QP
10	7.345	6.61	9.80	16.42	-33.58	50.00	Average
11	10.791	14.49	9.87	24.36	-35.64	60.00	QP
12	10.791	7.02	9.87	16.89	-33.11	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Wi-Fi 6 Smart Access Point	Date of Test	2025-03-28
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.5°C /59%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0++1	Test Voltage	AC 120V/60Hz

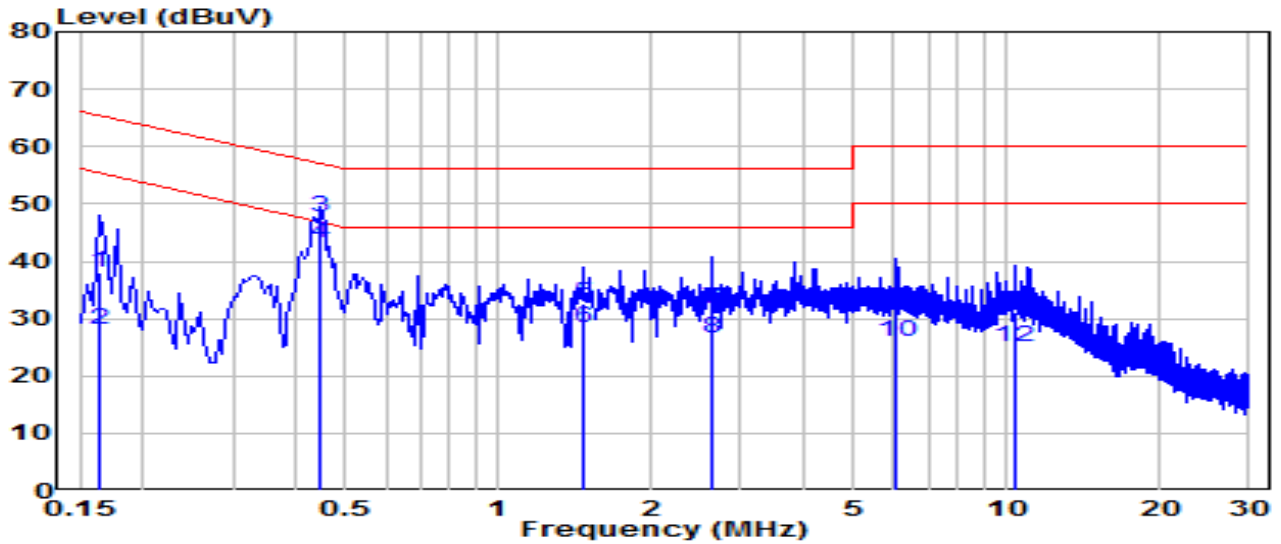

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	28.36	9.63	37.99	-27.29	65.28	QP
2	0.163	18.59	9.63	28.22	-27.06	55.28	Average
3	* 0.447	38.06	9.64	47.70	-9.23	56.93	QP
4	* 0.447	33.39	9.64	43.03	-3.90	46.93	Average
5	1.468	22.97	9.68	32.65	-23.35	56.00	QP
6	1.468	18.83	9.68	28.51	-17.49	46.00	Average
7	2.625	21.86	9.71	31.57	-24.43	56.00	QP
8	2.625	16.96	9.71	26.67	-19.33	46.00	Average
9	6.089	22.01	9.77	31.78	-28.22	60.00	QP
10	6.089	16.09	9.77	25.86	-24.14	50.00	Average
11	10.328	21.08	9.87	30.95	-29.05	60.00	QP
12	10.328	15.23	9.87	25.10	-24.90	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2502TWL804-UT” file.

Appendix B : External Photograph

Refer to “2502TWL804-UE” file.

Appendix C : Internal Photograph

Refer to “2502TWL804-UI” file.

————— The End —————